

Note: In later production, R23 was changed from 9,100 ohms to 11,000 ohms and R24 from 100 ohms to 270 ohms shunted by a 350 ohms negative temperature coefficient resistor R24A.

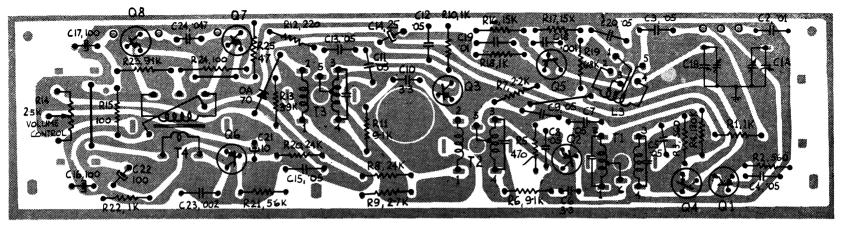


Figure 6. View of Printed Wiring Board. NOTE: White area represents printed wiring, black symbols and lines represent components and wiring of opposite side.

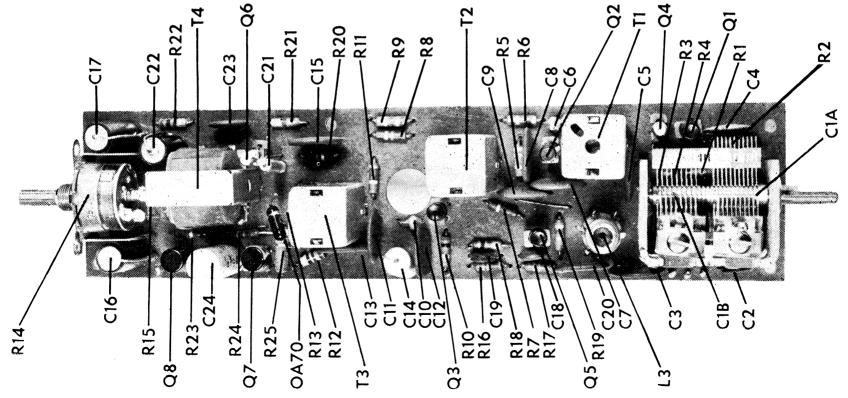


Figure 7. Top View of Chassis Showing Parts Locations.