


# aiwa



## NSX-AV95

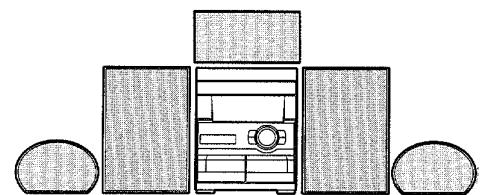

COMPACT DISC STEREO  
CASSETTE RECEIVER

- BASIC TAPE MECHANISM: 2ZM-3MK2 PR4NM
- BASIC CD MECHANISM: 4ZG-1 Z2DNM
- TYPE: HR,LH,K,G

SYSTEM	SPEAKER	CD - CASSEIVER
NSX-AV95 (TYPE : HR, K, G)	SX - NAV95 SX - CR423	CX-NAV95
NSX-AV95 (TYPE : LH)	SX - NAV95 SX - C600 SX - R270	

- If requiring information about the CD mechanism, see Service Manual of 4ZG-1.  
(S/M Code No.09-974-187-50T)

S E R V I C E M A N U A L

## TABLE OF CONTENTS


PROTECTION OF EYES FROM LASER BEAM DURING SERVICING .....	3
PRECAUTION TO REPLACE OPTICAL BLOCK .....	3
SPECIFICATIONS .....	4
ELECTRICAL MAIN PARTS LIST .....	5
CHIP RESISTOR PART CODE .....	10
TRANSISTOR ILLUSTRATION .....	10
BLOCK DIAGRAM - 1 (TUNER : HR, LH) .....	11
BLOCK DIAGRAM - 2 (TUNER : K, G) .....	12
BLOCK DIAGRAM - 3 (MAIN / FRONT) .....	13
WIRING - 1 (MAIN : HR, LH) .....	15
SCHEMATIC DIAGRAM - 1 (MAIN : HR) .....	17
SCHEMATIC DIAGRAM - 2 (MAIN : LH) .....	20
SCHEMATIC DIAGRAM - 3 (TUNER : 7ZA - 2 / FAN) .....	23
BLOCK DIAGRAM - 4 (PRO - LOGIC) .....	24
WIRING - 2 (MAIN : K, G) .....	25
SCHEMATIC DIAGRAM - 4 (MAIN : K, G) .....	27
SCHEMATIC DIAGRAM - 5 (FRONT) .....	30
WIRING - 3 (FRONT) .....	33
SCHEMATIC DIAGRAM - 6 (PRO - LOGIC : HR, LH) .....	35
WIRING - 4 (PRO - LOGIC : HR, LH) .....	37
SCHEMATIC DIAGRAM - 7 (PRO - LOGIC : K, G) .....	39
WIRING - 5 (PRO - LOGIC : K, G) .....	41
WIRING - 6 (AC / PT) .....	43
WIRING - 7 (DECK) .....	44
FL (BJ529GK) GRID ASSIGNMENT / ANODE CONNECTION .....	45
IC BLOCK DIAGRAM .....	46
IC DESCRIPTION .....	51
ADJUSTMENT .....	54
PRACTICAL SERVICE FIGURE .....	56
MECHANICAL EXPLODED VIEW 1 / 1 .....	57
MECHANICAL PARTS LIST 1 / 1 .....	59
TAPE MECHANISM EXPLODED VIEW 1 / 1 .....	60
TAPE MECHANISM PARTS LIST 1 / 1 .....	62
SPRING APPLICATION POSITION .....	63
SPEAKER DISASSEMBLY INSTRUCTIONS .....	64
SPEAKER PARTS LIST (SX - NAV95) .....	64
SPEAKER PARTS LIST (SX - C400 / C600 / R230 / R270) .....	65
ACCESSORIES / PACKAGE LIST .....	66
REFERENCE NAME LIST .....	67

# PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs laser. Therefore, be sure to follow carefully the instructions below when servicing.

## WARNING!!

WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION. BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 30cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.



- Caution: Invisible laser radiation when open and interlocks defeated avoid exposure to beam.
- Advarsel: Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

## VAROITUS!

Laiteen Käyttäminen muulla kuin tässä käytöohjeessa mainitulla tavalla saattaa altistaa käyt-täjän turvallisuusluokan 1 ylittäville näkymättömälle lasersäteilylle.

## VARNING!

Om apparaten används på annat sätt än vad som specificeras i denna bruksanvisning, kan användaren utsättas för osynlig laserstrålning, som överskrider gränsen för laserklass 1.

## CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

## ATTENTION

L'utilisation de commandes, réglages ou procédures autres que ceux spécifiés peut entraîner une dangereuse exposition aux radiations.

## ADVARSEL

Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

This Compact Disc player is classified as a CLASS 1 LASER product.

The CLASS 1 LASER PRODUCT label is located on the rear exterior.

CLASS 1	LASER PRODUCT
KLASSE 1	LASER PRODUKT
LUOKAN 1	LASER LAITE
KLASS 1	LASER APPARAT


## Precaution to replace Optical block

### (KSS-213B)

Body or clothes electrostatic potential could ruin laser diode in the optical block. Be sure ground body and workbench, and use the clothes do not touch the diode.

- 1) After the connection, remove solder shown in right figure.

PICK – UP Assy P.C.B.

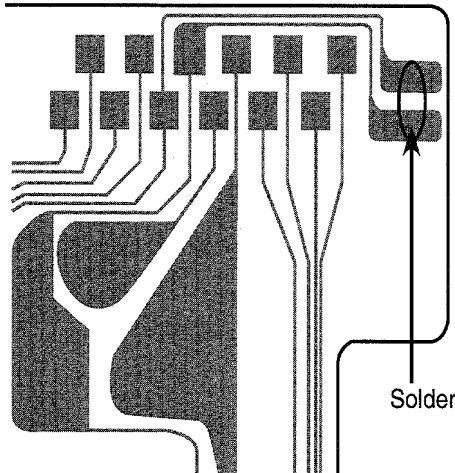

# SPECIFICATIONS

<b>&lt;FM Tuner section&gt;</b>		<b>&lt;Cassette deck section&gt;</b>	
Tuning range	87.5 MHz to 108 MHz	Track format	4 tracks, 2 channels stereo
Usable sensitivity (IHF)	13.2 dBf	Frequency response	CrO2 tape: 50 Hz - 16000 Hz
Antenna terminals	75 ohms (unbalanced)	Normal tape: 50 Hz - 15000 Hz	60 dB (Dolby B NR ON, CrO2 tape peak level)
<b>&lt;AM/MW Tuner section&gt;</b>		<b>&lt;Recording system&gt;</b>	
Tuning range	531 kHz to 1602 kHz (9 kHz step)	Heads	AC bias
	530 kHz to 1710 kHz (10 kHz step)		Deck 1: Playback head x 1
Usable sensitivity	350 µV/m		Deck 2: Recording/playback/erase head x 1
Antenna	Loop antenna		
<b>&lt;LW Tuner section&gt;(K, G only)</b>		<b>&lt;Compact disc player section&gt;</b>	
Tuning range	144 kHz to 290 kHz	Laser	Semiconductor laser ( $\lambda = 780$ nm)
Usable sensitivity	1400 µV/m	D-A converter	1 bit dual
Antenna	Loop antenna	Signal-to-noise ratio	90 dB (1 kHz, 0 dB)
<b>&lt;SW Tuner section&gt;(HR only)</b>		Harmonic distortion	0.03% (1 kHz, 0 dB)
Tuning range	5.900 MHz to 17.900 MHz	Wow and flutter	Unmeasurable
Antenna	Wire antenna		
<b>&lt;Amplifier section&gt;</b>		<b>&lt;General&gt;</b>	
Power output	<b>Front</b> LH : 180 W + 180 W (6 ohms, T.H.D. 10 %, 1 kHz) HR, K, G : Rated: 145 W + 145 W (6 ohms, T.H.D. 1 %, 1 kHz) Reference: 180 W + 180 W (6 ohms, T.H.D. 10 %, 1 kHz) <b>Rear (Surround)</b> LH : 12.5 W + 12.5 W (16 ohms, T.H.D. 10 %, 1 kHz) HR, K, G : Rated: 10 W + 10 W (16 ohms, T.H.D. 1 %, 1 kHz) Reference: 12.5 W + 12.5 W (16 ohms, T.H.D. 10 %, 1 kHz) <b>Center</b> LH : 25 W (8 ohms, T.H.D. 10 %, 1 kHz) K.G, HR: Rated: 20 W (8 ohms, T.H.D. 1 %, 1 kHz) Reference: 25 W (8 ohms, T.H.D. 10 %, 1 kHz) 0.05 % (120 W, 1 kHz, 6 ohms, DIN AUDIO)	Power requirements	LH, HR : 120 V/220 - 230 V/240 V AC, switchable, 50/60 Hz K, G : 230 V AC, 50Hz
Total harmonic distortion		Power consumption	LH, HR : 205 W K, G : 215 W
Inputs		Dimensions of main unit	260 x 309 x 370 mm
Outputs		Weight of main unit	10.6 kg (19 lbs 13 oz.)
<b>&lt;Speaker system SX-NAV95&gt;</b>		<b>&lt;Speaker system SX-NAV95&gt;</b>	
		Cabinet type	2 way, bass reflex (magnetic shielded type)
		Speakers	Woofers: 160 mm (6 $\frac{3}{8}$ in.) cone type Tweeter: 80 mm (3 $\frac{1}{4}$ in.) cone type
		Impedance	6 ohms
		Output sound pressure level	87 dB/W/m
		Dimensions (W x H x D)	235 x 304 x 250 mm
		Weight	4.4kg

- Design and specifications are subject to change without notice.
- Manufactured under license from Dolby Laboratories Licensing Corporation.
- "DOLBY", the double-D symbol  and "PRO LOGIC" are trademarks of Dolby Laboratories Licensing Corporation.
- The word "BBE" and the "BBE symbol" are trademarks of BBE Sound, Inc.
- Under license from BBE Sound, Inc.

# ELECTRICAL MAIN PARTS LIST

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
<b>IC</b>							
87-020-454-010	IC, DN6851			C101	87-A10-231-090	CAP, E 3300-80	
87-NF4-642-010	IC, LC866548V-5E54			C102	87-A10-231-090	CAP, E 3300-80	
87-070-083-010	IC, GP1U281X<HR>			C103	87-016-658-090	CAP, E 4700-35 M SMG	
87-A20-448-010	IC, PIC-21043TE3<EXCEPT HR>			C104	87-016-658-090	CAP, E 4700-35 M SMG	
87-070-289-040	C-IC, BU2092F			C105	87-012-368-080	C-CAP, S 0.1-50 ZF	
87-A20-455-010	IC, HA12211			C106	87-012-368-080	C-CAP, S 0.1-50 ZF	
87-A20-355-010	IC, CXA1553P			C107	87-012-368-080	C-CAP, S 0.1-50 ZF	
87-A20-083-010	IC, BA3835S			C108	87-012-368-080	C-CAP, S 0.1-50 ZF	
87-A20-450-040	C-IC, BH3864F			C109	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	
87-A20-056-010	IC, BA3880S			C110	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	
87-A20-613-040	C-IC, BU9262AFS			C111	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	
87-A20-561-040	C-IC, M65847AFP<HR>			C112	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	
87-A20-456-040	C-IC, BH3810FS			C113	87-010-247-080	CAP, E 100-50 M SME	
87-017-888-080	C-IC, NJW4558MD			C114	87-010-385-080	CAP, E 220-25 M SME	
86-NFZ-655-010	IC, LC72131D(Z)			C115	87-010-385-080	CAP, E 220-25 M SME	
87-A20-438-010	IC, LA1837			C116	87-010-247-080	CAP, E 100-50 M SME	
87-A20-560-040	IC, M65849BFP			C117	87-010-430-080	CAP, E 100-63	
87-A20-453-010	C-IC, NJW1102B			C118	87-010-263-080	CAP, E 100-10 SME	
87-A20-452-040	C-IC, TC9260FS			C119	87-010-260-080	CAP, E 47-25 SME	
				C120	87-010-403-080	CAP, E 3.3-50 M SME	
<b>TRANSISTOR</b>							
87-026-463-080	TR, 2A933S			C121	87-012-140-080	C-CAP, S 470P-50 J CH	
87-026-263-080	C-TR, RN1410			C123	87-010-247-080	CAP, E 100-50 M SME	
89-213-702-010	TR, 2SB1370E			C124	87-010-112-080	CAP, E 100-16 M SME	
87-A30-076-080	C-TR, 2SC3052F			C125	87-010-235-080	CAP, E 470-16 SME	
87-A30-075-080	C-TR, 2SA1235F			C126	87-012-368-080	C-CAP, S 0.1-50 ZF<K,G>	
87-026-610-080	TR, KTC3198GR			C127	87-012-368-080	C-CAP, S 0.1-50 ZF<K,G>	
87-A30-073-080	C-TR, RT1N 141C			C129	87-010-393-080	CAP, E 100-35 M SME	
87-A30-085-070	C-TR, CSA1362GR			C201	87-010-400-080	CAP, E 0.47-50 M SME	
87-A30-083-080	TR, CSD1489B			C202	87-010-400-080	CAP, E 0.47-50 M SME	
87-A30-084-080	TR, CSB1058B			C205	87-010-184-080	C-CAP, S 3300P-50 KB	
87-A30-071-080	C-TR, RT1N 144C			C206	87-010-184-080	C-CAP, S 3300P-50 KB	
87-026-211-080	C-TR, DTA144EK			C207	87-010-404-080	CAP, E 4.7-50 M SME	
87-026-609-080	TR, KTA1266GR			C208	87-010-404-080	CAP, E 4.7-50 M SME	
87-A30-086-070	C-TR, CSD1306E			C209	87-010-404-080	CAP, E 4.7-50 M SME	
87-A30-106-070	C-TR, CMBT5551			C210	87-010-404-080	CAP, E 4.7-50 M SME	
87-A30-111-080	TR, C2N5401			C211	87-010-186-080	C-CAP, S 4700P-50 KB	
87-A30-097-010	TR, FN1016			C212	87-010-186-080	C-CAP, S 4700P-50 KB	
87-A30-098-010	TR, FP1016			C213	87-010-260-080	CAP, E 47-25 SME	
87-A30-089-010	FET, 2SK2723			C214	87-010-260-080	CAP, E 47-25 SME	
87-A30-072-080	C-TR, RT1P 144C			C215	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	
87-A30-087-080	C-FET, 2SK2158			C219	87-012-368-080	C-CAP, S 0.1-50 ZF	
87-A30-074-080	C-TR, RT1P 141C			C220	87-012-368-080	C-CAP, S 0.1-50 ZF	
89-327-143-080	C-TR, 2SC2714(O)			C221	87-012-368-080	C-CAP, S 0.1-50 ZF	
89-505-434-540	C-FET, 2SK543-TB(4/5)<EXCEPT LH>			C222	87-012-368-080	C-CAP, S 0.1-50 ZF	
87-A30-112-080	TR, C2N5511			C223	87-010-194-080	C-CAP, S 0.047-25 ZF<EXCEPT K,G>	
89-420-612-080	TR, 2SD2061 (2W)			C225	87-A10-516-080	C-CAP, S 100P-200 JC	
87-026-232-080	TR, DTA144WK			C226	87-A10-516-080	C-CAP, S 100P-200 JC	
				C227	87-010-197-080	C-CAP, S 0.01-25 KB<K,G>	
				C228	87-010-178-080	C-CAP, S 1000P-50 KB<K,G>	
				C229	87-016-461-080	C-CAP, S 0.47-16 ZF	
<b>DIODE</b>							
87-A40-246-080	DIODE, IN4148T-72			C230	87-016-461-080	C-CAP, S 0.47-16 ZF	
87-A40-116-060	DIODE, RS403L-B-D-51			C231	87-010-176-080	C-CAP, S 680P-50 SL<K,G>	
87-017-654-060	DIODE, GBU6JL6131			C232	87-010-176-080	C-CAP, S 680P-50 SL<K,G>	
87-017-437-080	DIODE, IN4148M			C235	87-012-368-080	C-CAP, S 0.015-50 ZF<K,G>	
87-A40-269-080	C-DIODE, MC2836			C236	87-012-368-080	C-CAP, S 0.015-50 ZF<K,G>	
87-A40-270-080	C-DIODE, MC2838			C237	87-010-197-080	C-CAP, S 0.01-25 KB<K,G>	
87-070-274-080	DIODE, IN4003 SEM			C238	87-010-197-080	C-CAP, S 0.01-25 KB<K,G>	
87-A40-205-080	ZENER, UZ6.2BSC<EXCEPT LH>			C239	87-010-318-080	C-CAP, S 47P-50 J CH<K,G>	
87-A40-211-080	ZENER, UZ36BSA			C240	87-010-318-080	C-CAP, S 47P-50 J CH<K,G>	
87-A40-206-080	ZENER, UZ10BSC			C241	87-010-405-080	CAP, E 10-50 M SME	
87-A40-004-080	ZENER, MTZJ16A			C242	87-010-406-080	CAP, E 22-50 M SME	
87-A40-274-010	DIODE, FMB-G16L			C243	87-010-197-080	C-CAP, S 0.01-25 KB	
87-A40-202-080	ZENER, UZ5.1BSB			C244	87-010-406-080	CAP, E 22-50 M SME	
87-017-481-080	ZENER, UZ-5.6BSB			C250	87-010-196-080	C-CAP, S 0.1-25 ZF C2012<K,G>	
87-A40-192-080	ZENER, UZ4.3BSA			C301	87-010-318-080	C-CAP, S 47P-50 J CH	
87-A40-239-080	ZENER, UZ5.6BSA			C302	87-010-318-080	C-CAP, S 47P-50 J CH	
				C303	87-012-157-080	C-CAP, S 330P-50 J CH GRM	
				C304	87-012-157-080	C-CAP, S 330P-50 J CH GRM	
				C305	87-012-145-080	C-CAP, S 270P-50 J CH	

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
C306	87-012-145-080	C-CAP,S 270P-50 J CH		C504	87-012-154-080	C-CAP,S 150P-50 J CH GRM<HR>	
C307	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C505	87-012-145-080	C-CAP,S 270P-50 J CH<HR>	
C311	87-010-198-080	C-CAP,S 0.022-25 KB		C506	87-012-145-080	C-CAP,S 270P-50 J CH<HR>	
C312	87-010-198-080	C-CAP,S 0.022-25 KB		C507	87-010-183-080	C-CAP,S 2700P-50 KB<HR>	
C313	87-010-180-080	C-CAP,S 1500P-50 KB		C509	87-010-196-080	C-CAP,S 0.1-25 ZF C2012<HR>	
C314	87-010-180-080	C-CAP,S 1500P-50 KB		C510	87-010-177-080	C-CAP,S 820P-50 J SL<HR>	
C315	87-010-178-080	C-CAP,S 1000P-50 KB		C511	87-010-177-080	C-CAP,S 820P-50 J SL<HR>	
C316	87-010-178-080	C-CAP,S 1000P-50 KB		C512	87-010-196-080	C-CAP,S 0.1-25 ZF C2012<HR>	
C317	87-012-142-080	C-CAP,S 0.33-16 ZF		C513	87-010-374-080	CAP,E 47-10 M SME<HR>	
C318	87-012-142-080	C-CAP,S 0.33-16 ZF		C514	87-010-196-080	C-CAP,S 0.1-25 ZF C2012<HR>	
C319	87-012-141-080	C-CAP,S 0.22-16 ZF		C515	87-010-263-080	CAP,E 100-10 SME<HR>	
C320	87-012-141-080	C-CAP,S 0.22-16 ZF		C516	87-010-196-080	C-CAP,S 0.1-25 ZF<EXCEPT HR>	
C321	87-012-141-080	C-CAP,S 0.22-16 ZF		C517	87-010-183-080	C-CAP,S 2700P-50 KB<HR>	
C322	87-012-141-080	C-CAP,S 0.22-16 ZF		C527	87-010-196-080	C-CAP,S 0.1-25 ZF C2012<HR>	
C324	87-010-260-080	CAP,E 47-25 SME		C601	87-010-322-080	C-CAP,S 100P-50 J CH<K,G>	
C325	87-010-370-080	CAP,E 330-6.3 M SME		C602	87-010-322-080	C-CAP,S 100P-50 J CH<K,G>	
C327	87-010-404-080	CAP,E 4.7-50 M SME		C605	87-010-180-080	C-CAP,S 1500P-50 KB	
C328	87-010-404-080	CAP,E 4.7-50 M SME		C606	87-010-180-080	C-CAP,S 1500P-50 KB	
C332	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C609	87-010-322-080	C-CAP,S 100P-50 J CH<K,G>	
C335	87-010-401-080	CAP,E 1-50 M SME		C610	87-010-322-080	C-CAP,S 100P-50 J CH<K,G>	
C336	87-010-401-080	CAP,E 1-50 M SME		C611	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C337	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C613	87-010-404-080	CAP,E 4.7-50 M SME	
C339	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C614	87-010-404-080	CAP,E 4.7-50 M SME	
C340	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C615	87-010-183-080	C-CAP,S 2700P-50 KB	
C351	87-012-140-080	C-CAP,S 470P-50 J CH		C619	87-010-263-080	CAP,E 100-10 SME	
C352	87-012-140-080	C-CAP,S 470P-50 J CH		C620	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C354	87-010-175-080	C-CAP,S 560P-50 J SL		C621	87-010-263-080	CAP,E 100-10 SME	
C355	87-010-178-080	C-CAP,S 1000P-50 KB		C622	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C356	87-010-260-080	CAP,E 47-25 SME		C623	87-010-194-080	C-CAP,S 0.047-25 ZF	
C357	87-010-197-080	C-CAP,S 0.01-25 KB		C629	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C358	87-010-183-080	C-CAP,S 2700P-50 KB		C630	87-010-196-080	C-CAP,S 0.1-25 ZF C2012<K,G>	
C359	87-010-183-080	C-CAP,S 2700P-50 KB		C631	87-010-785-080	C-CAP,S 0.1-25 ZF<K,G>	
C360	87-010-183-080	C-CAP,S 2700P-50 KB		C632	87-010-196-080	C-CAP,S 0.1-25 ZF C2012<K,G>	
C370	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C633	87-010-197-080	C-CAP,S 0.01-25 KB<K,G>	
C371	87-010-179-080	C-CAP,S 1200P-50 KB		C636	87-010-322-080	C-CAP,S 100P-50 J CH<K,G>	
C372	87-010-179-080	C-CAP,S 1200P-50 KB		C637	87-010-322-080	C-CAP,S 100P-50 J CH<K,G>	
C373	87-010-179-080	C-CAP,S 1200P-50 KB		C646	87-010-322-080	C-CAP,S 100P-50 J CH	
C374	87-010-179-080	C-CAP,S 1200P-50 KB		C647	87-010-322-080	C-CAP,S 100P-50 J CH	
C375	87-010-545-080	CAP,E 0.22-50 M SME		C701	87-010-381-080	CAP,E 330-16 SME	
C376	87-010-545-080	CAP,E 0.22-50 M SME		C702	87-010-404-080	CAP,E 4.7-50 M SME	
C378	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C703	87-010-197-080	C-CAP,S 0.01-25 KB	
C381	87-010-197-080	C-CAP,S 0.01-25 KB		C704	87-010-197-080	C-CAP,S 0.01-25 KB	
C382	87-010-318-080	C-CAP,S 47P-50 J CH		C711	87-010-263-080	CAP,E 100-10 SME	
C383	87-010-197-080	C-CAP,S 0.01-25 KB		C712	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C384	87-010-402-080	CAP,E 2.2-50 M SME		C713	87-010-197-080	C-CAP,S 0.01-25 KB	
C385	87-010-184-080	C-CAP,S 3300P-50 KB		C714	87-010-197-080	C-CAP,S 0.01-25 KB	
C386	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		C715	87-010-322-080	C-CAP,S 100P-50 J CH<K,G>	
C388	87-010-154-080	C-CAP,S 10P-50 D CH		C721	87-010-312-080	C-CAP,S 15P-50 J CH	
C401	87-010-187-080	C-CAP,S 5600P-50 KB		C722	87-010-312-080	C-CAP,S 15P-50 J CH	
C402	87-010-187-080	C-CAP,S 5600P-50 KB		C723	87-010-178-080	C-CAP,S 1000P-50 KB	
C403	87-010-405-080	CAP,E 10-50 M SME		C725	87-010-178-080	C-CAP,S 1000P-50 KB	
C404	87-010-405-080	CAP,E 10-50 M SME		C727	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C405	87-010-260-080	CAP,E 47-25 SME		C728	87-010-248-080	CAP,E 220-10 SME	
C406	87-010-101-080	CAP,E 220-16 SME		C755	87-010-197-080	C-CAP,S 0.01-25 KB	
C407	87-010-188-080	C-CAP,S 6800P-50 KB		C756	87-010-197-080	C-CAP,S 0.01-25 KB	
C408	87-010-188-080	C-CAP,S 6800P-50 KB		C757	87-010-318-080	C-CAP,S 47P-50 J CH	
C409	87-012-140-080	C-CAP,S 470P-50 J CH		C758	87-010-149-080	C-CAP,S 5P-50 CH	
C410	87-012-140-080	C-CAP,S 470P-50 J CH		C761	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C411	87-010-197-080	C-CAP,S 0.01-25 KB		C762	87-010-197-080	C-CAP,S 0.01-25 KB	
C412	87-010-197-080	C-CAP,S 0.01-25 KB		C763	87-010-194-080	C-CAP,S 0.047-25 ZF	
C413	87-010-195-080	C-CAP,S 0.068-25 ZF C2012		C765	87-010-197-080	C-CAP,S 0.01-25 KB	
C414	87-010-195-080	C-CAP,S 0.068-25 ZF C2012		C766	87-010-197-080	C-CAP,S 0.01-25 KB	
C415	87-010-404-080	CAP,E 4.7-50 M SME		C767	87-010-405-080	CAP,E 10-50 M SME	
C416	87-010-404-080	CAP,E 4.7-50 M SME		C768	87-010-197-080	C-CAP,S 0.01-25 KB	
C417	87-010-404-080	CAP,E 4.7-50 M SME		C769	87-010-408-080	CAP,E 47-50 SME	
C418	87-010-404-080	CAP,E 4.7-50 M SME		C770	87-015-821-080	C-CAP, 0.047-50 ZF GR	
C420	87-010-197-080	C-CAP,S 0.01-25 KB<K,G>		C771	87-010-407-080	CAP,E 33-50 SME	
C421	87-010-401-080	CAP,E 1-50 M SME		C772	87-010-194-080	C-CAP,S 0.047-25 ZF	
C422	87-010-401-080	CAP,E 1-50 M SME		C773	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	
C503	87-012-154-080	C-CAP,S 150P-50 J CH GRM<HR>		C774	87-010-263-080	CAP,E 100-10 SME	




REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
C775	87-010-404-080	CAP,E 4.7-50 M SME	L202	87-003-383-010	COIL,1UH K		
C776	87-010-197-080	C-CAP,S 0.01-25 KB<EXCEPT HR>	L301	87-A50-049-010	COIL,TRAP 85K(COI)		
C777	87-010-400-080	CAP,E 0.47-50 M SME	L302	87-A50-049-010	COIL,TRAP 85K(COI)		
C778	87-010-401-080	CAP,E 1-50 M SME	L351	87-007-342-010	COIL,OSC 85KHZ BIAS		
C779	87-010-401-080	CAP,E 1-50 M SME	L601	87-003-231-080	C-COIL,2125 1UH K ML		
C780	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	L770	87-005-849-080	COIL,10UH K CECS		
C781	87-010-405-080	CAP,E 10-50 M SME	L771	87-A50-165-010	COIL,FM DET-N(TOK)		
C782	87-010-405-080	CAP,E 10-50 M SME	L772	87-A90-245-010	FLTR,CRAZH-450 (TOK)<LH>		
C783	87-015-819-080	C-CAP,S 0.01-50 K B	L772	87-A90-052-010	FLTR,CFMT-450A(TOK)<HR>		
C784	87-010-197-080	C-CAP,S 0.01-25 KB	L791	87-A50-027-010	COIL,1 POLE MPX(TOK)<HR,K,G>		
C785	87-010-400-080	CAP,E 0.47-50 M SME	L791	87-003-293-010	COIL,TRAP MPX<LH>		
C786	87-010-400-080	CAP,E 0.47-50 M SME	L792	87-A50-027-010	COIL,1 POLE MPX(TOK)<HR,K,G>		
C787	87-010-184-080	C-CAP,S 3300P-50 KB	L792	87-003-293-010	COIL,TRAP MPX<LH>		
C788	87-010-184-080	C-CAP,S 3300P-50 KB	L832	87-005-847-080	COIL,2.2UH K CECS		
C789	87-010-179-080	C-CAP,S 1200P-50 KB	L941	87-A50-022-010	COIL,ANT SW(COI) 7.96MHZ<HR>		
C790	87-010-179-080	C-CAP,S 1200P-50 KB	L941	87-A50-020-010	COIL,ANT LW(COI) 252KHZ<HR>		
C791	87-010-405-080	CAP,E 10-50 M SME	L942	87-A50-173-010	COIL,OSC SW-N(COI)<HR>		
C793	87-010-178-080	C-CAP,S 1000P-50 KB	L942	87-A50-019-010	COIL,OSC LW(COI) 856KHZ<HR>		
C794	87-010-406-080	CAP,E 22-50 M SME	L943	87-005-372-080	COIL,1MH K LAL03<HR>		
C795	87-010-596-080	C-CAP,S 0.047-16 KR	L944	87-A50-159-010	COIL,10MH K C2B<HR>		
C796	87-010-403-080	CAP,E 3.3-50 M SME	L981	86-NF4-666-010	COIL,AM PACK 3(TOK)<HR>		
C797	87-010-180-080	C-CAP,S 1500P-50 KB<HR>	L981	87-NF4-650-010	COIL,AM PACK4N(TOK)<LH>		
C797	87-010-182-080	C-CAP,S 2200P-50 KB<EXCEPT HR>	L981	86-NF4-668-010	COIL,AM PACK 2(TOM)<K,G>		
C798	87-010-180-080	C-CAP,S 1500P-50 KB<HR>	PR201	87-026-682-080	PROTECTOR,10A 491SERIES 60V		
C798	87-010-182-080	C-CAP,S 2200P-50 KB<EXCEPT HR>	PR202	87-026-682-080	PROTECTOR,10A 491SERIES 60V		
C799	87-010-194-080	C-CAP,S 0.047-25 ZF	R231	87-A00-262-080	RES,M/F 0.15-2W J		
C812	87-010-197-080	C-CAP,S 0.01-25 KB	R232	87-A00-262-080	RES,M/F 0.15-2W J		
C814	87-010-197-080	C-CAP,S 0.01-25 KB	RY101	87-045-389-010	RELAY,12V OSA-SS-212DM5		
C820	87-010-408-080	CAP,E 47-50 SME	SFR301	87-024-435-080	SFR,33K H RH063MC		
C821	87-010-197-080	C-CAP,S 0.01-25 KB	SFR302	87-024-435-080	SFR,33K H RH063MC		
C822	87-010-197-080	C-CAP,S 0.01-25 KB	SFR303	87-024-435-080	SFR,33K H RH063MC		
C823	87-010-197-080	C-CAP,S 0.01-25 KB	SFR304	87-024-435-080	SFR,33K H RH063MC		
C828	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	SFR305	87-024-436-080	SFR,47K H RH063MC		
C829	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	SFR306	87-024-436-080	SFR,47K H RH063MC		
C940	87-010-197-080	C-CAP,S 0.01-25 KB<HR,K,G>	SFR351	87-024-436-080	SFR,47K H RH063MC		
C941	87-010-314-080	C-CAP,S 22P-50 J CH<HR>	SFR352	87-024-436-080	SFR,47K H RH063MC		
C942	87-010-151-080	C-CAP,S 7P-50 J CH<K,G>	TC941	87-011-220-080	TRIMMER,CER 20P 6.15X5.9VCT51<HR>		
C943	87-010-197-080	C-CAP,S 0.01-25 KB<HR>	TC942	87-011-221-080	TRIMMER,CER 30P<HR,K,G>		
C944	87-014-051-080	CAP,PP 560P-100 J<HR>	TH201	87-A90-221-080	C-THMS,100K		
C945	87-010-197-080	C-CAP,S 0.01-25 KB<HR>	TH202	87-A90-221-080	C-THMS,100K		
C947	87-010-197-080	C-CAP,S 0.01-25 KB<HR,K,G>	W1	85-NF5-628-010	F-CABLE,7P-2.5		
C949	87-014-049-080	CAP,PP 470P-100 J<K,G>	X721	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309		
C950	87-014-073-080	CAP,PP 4700P-100 J<HR>	X771	87-030-354-010	VIB,CER 450.0KHZ BFU C<HR>		
C952	87-010-197-080	C-CAP,S 0.01-25 KB<HR,K,G>					
C953	87-010-197-080	C-CAP,S 0.01-25 KB<HR>					
C954	87-010-400-080	CAP,E 0.47-50 M SME<HR>	FRONT C.B				
C957	87-010-311-080	C-CAP,S 12P-50 J CH<K,G>	C101	87-010-198-080	C-CAP,S 0.022-25 KB		
C958	87-010-197-080	C-CAP,S 0.01-25 KB<HR>	C102	87-010-198-080	C-CAP,S 0.022-25 KB		
C959	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	C103	87-010-197-080	C-CAP,S 0.01-25 KB		
C960	87-010-196-080	C-CAP,S 0.1-25 ZF C2012	C104	87-010-312-080	C-CAP,S 15P-50 J CH		
C961	87-010-152-080	C-CAP,S 8P-50 D CH<LH>	C105	87-010-316-080	C-CAP,S 33P-50 J CH		
C962	87-010-401-080	CAP,E 1-50 M SME<HR,K,G>	C106	87-010-320-080	C-CAP,S 68P-50 J CH		
CF801	87-008-261-010	FLTR,CFSFE10.7MA5<HR,LH>	C107	87-012-157-080	C-CAP,S 330P-50 J CH GRM		
CF801	87-008-423-010	FLTR,IF SFE10.7MS3G-A<K,G>	C108	87-010-405-040	CAP,E 10-50 M SME		
CF802	87-008-261-010	FLTR,CFSFE10.7MA5<HR,LH>	C109	87-010-494-040	CAP,E 1-50 5L SRE		
CF802	82-785-747-010	CF,MS2 GHY,R<K,G>	C110	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		
FC602	88-906-241-110	FF-CABLE, 6P 1.25	C111	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		
FFE801	A8-6ZA-191-030	6ZA-1 FEENM-K,G>	C112	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		
FFE801	A8-7ZA-290-030	7ZA-2 FEUNM<LH,HR>	C113	87-A10-189-040	CAP,E 220-10 M		
J252	87-A60-031-010	JACK,6.3 BLK ST W/SW KM	C114	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		
J253	87-A60-413-010	JACK,PIN 1P BLK YKC2<K>	C115	87-010-178-080	C-CAP,S 1000P-50 KB		
J253	87-A60-399-010	JACK,PIN 1P BLK HSP-241V<HR,LH,G>	C116	87-010-494-040	CAP,E 1-50 5L SRE		
J254	87-A60-238-010	TERMINAL,SP 4P(MSC)	C117	87-010-555-040	CAP,E 100-10 5L SRE		
J601	87-A60-426-010	JACK,PIN 6P YKC21-3835<K>	C118	87-010-194-080	C-CAP,S 0.047-25 ZF		
J601	87-A60-402-010	JACK,PIN R/W HSP-246V<HR,LH,G>	C119	87-010-408-040	CAP,E 47-50 M SME		
J253	87-033-239-010	TERMINAL,4P HSP-154<HR,LH>	C120	87-010-404-040	CAP,E 4.7-50 SME		
J801	87-A60-403-010	TERMINAL,ANT PAL 2P<G>	C121	87-010-404-040	CAP,E 4.7-50 SME		
J801	87-A60-427-010	TERMINAL,ANT PAL 2P<K>	C122	87-010-194-080	C-CAP,S 0.047-25 ZF		
J940	81-754-629-010	CONNECTOR,XH 2P (UL)<HR>	C123	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		
L201	87-003-383-010	COIL,1UH K	C124	87-018-209-080	CAP,TC U 0.1-50 ZF UP050		
			C125	87-010-196-080	C-CAP,S 0.1-25 ZF C2012		

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
C127	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED225	87-A40-266-080	LED, SLH-56VCT31 RED		
C130	87-010-178-080	C-CAP, S 1000P-50 KB<HR>	LED226	87-A40-266-080	LED, SLH-56VCT31 RED		
C130	87-018-131-010	CAP, TC U 1000P-50 KB<EXCEPT HR>	LED227	87-A40-266-080	LED, SLH-56VCT31 RED		
C201	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED228	87-A40-266-080	LED, SLH-56VCT31 RED		
C351	87-012-158-080	C-CAP, S 390P-50 J CH GRM	LED229	87-A40-266-080	LED, SLH-56VCT31 RED		
C352	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED233	87-A40-265-010	LED, SLH-56PCL GRN		
C353	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED234	87-A40-265-010	LED, SLH-56PCL GRN		
C354	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED235	87-A40-267-010	LED, SLH-56VCL RED		
C355	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED236	87-A40-267-010	LED, SLH-56VCL RED		
C356	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED237	87-A40-265-010	LED, SLH-56PCL GRN		
C357	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	LED238	87-A40-265-010	LED, SLH-56PCL GRN		
C403	87-010-992-080	C-CAP, S 0.047-25 KB MK212	LED239	87-A40-266-080	LED, SLH-56VCT31 RED		
C404	87-010-992-080	C-CAP, S 0.047-25 KB MK212	S300	87-A90-095-080	SW, TACT EVQ11G04M		
C405	87-010-401-040	CAP, E 1-50 M SME	S302	87-A90-095-080	SW, TACT EVQ11G04M		
C406	87-010-494-040	CAP, E 1-50 5L SRE	S303	87-A90-095-080	SW, TACT EVQ11G04M		
C407	87-010-184-080	C-CAP, S 3300P-50 KB	S304	87-A90-095-080	SW, TACT EVQ11G04M		
C408	87-010-184-080	C-CAP, S 3300P-50 KBB	S305	87-A90-095-080	SW, TACT EVQ11G04M		
C409	87-010-592-080	C-CAP, S 0.022-16 KR GRM	S306	87-A90-095-080	SW, TACT EVQ11G04M		
C410	87-010-592-080	C-CAP, S 0.022-16 KR GRM	S307	87-A90-095-080	SW, TACT EVQ11G04M		
C411	87-A10-201-080	C-CAP, S 0.33-16 KB	S308	87-A90-095-080	SW, TACT EVQ11G04M		
C412	87-A10-201-080	C-CAP, S 0.33-16 KB	S314	87-A90-095-080	SW, TACT EVQ11G04M		
C413	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	S315	87-A90-095-080	SW, TACT EVQ11G04M		
C414	87-010-374-040	CAP, E 47-10 SME	S316	87-A90-095-080	SW, TACT EVQ11G04M		
C415	87-010-374-040	CAP, E 47-10 SME	S317	87-A90-095-080	SW, TACT EVQ11G04M		
C416	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	S318	87-A90-095-080	SW, TACT EVQ11G04M		
C417	87-016-081-080	C-CAP, S 0.1-16 KR	S319	87-A90-095-080	SW, TACT EVQ11G04M		
C418	87-010-405-040	CAP, E 10-50 M SME	S320	87-A90-095-080	SW, TACT EVQ11G04M		
C519	87-010-264-010	CAP, E 100-10 M 5L SR<HR>	S321	87-A90-095-080	SW, TACT EVQ11G04M		
C519	87-010-263-040	CAP, E 100-10 M SME<EXCEPT HR>	S322	87-A90-095-080	SW, TACT EVQ11G04M		
C601	87-010-405-040	CAP, E 10-50 M SME	S326	87-A90-095-080	SW, TACT EVQ11G04M		
C602	87-010-186-080	C-CAP, S 4700P-50 KB	S327	87-A90-095-080	SW, TACT EVQ11G04M		
C603	87-010-405-040	CAP, E 10-50 M SME	S328	87-A90-095-080	SW, TACT EVQ11G04M		
C604	87-010-382-040	CAP, E 22-25 SME	S329	87-A90-095-080	SW, TACT EVQ11G04M		
C605	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	S330	87-A90-095-080	SW, TACT EVQ11G04M		
C607	87-010-321-080	C-CAP, S 82P-50 J CH	S331	87-A90-095-080	SW, TACT EVQ11G04M		
C608	87-010-196-080	C-CAP, S 0.1-25 ZF C2012	S332	87-A90-095-080	SW, TACT EVQ11G04M		
C609	87-010-545-040	CAP, E 0.22-50 M SME	S339	87-A90-095-080	SW, TACT EVQ11G04M<HR>		
C611	87-010-177-080	C-CAP, S 820P-50 J SL	S340	87-A90-095-080	SW, TACT EVQ11G04M<HR>		
C614	87-010-248-040	CAP, E 220-10 M SME	S341	87-A90-095-080	SW, TACT EVQ11G04M		
FB601	87-008-372-080	FLTR, EMIBL01 RN1	SW101	87-A90-471-010	SW, RTRY EC16B24304-25 NON		
FC102	85-NF5-618-010	CABLE, FFC 13P-1.25	X101	87-A70-070-080	VIB, CER 5.76MHZ CRHF		
FC104	85-NF5-615-010	CABLE, FFC 15P-1.25					
FC301	85-NF5-617-010	CABLE, FFC 6P-1.25	KEY C.B				
FL101	87-NF4-640-010	FL, BJ529GK	LED230	87-A40-317-080	LED, SLR-342VCT31 RED		
J601	82-NF7-630-010	JACK, 3.5MO	LED231	87-A40-317-080	LED, SLR-342VCT31 RED		
J602	82-NF7-630-010	JACK, 3.5MO	LED232	87-A40-317-080	LED, SLR-342VCT31 RED		
LED201	87-A40-317-080	LED, SLR-342VCT31 RED	S309	87-A90-095-080	SW, TACT EVQ11G04M		
LED202	87-A40-317-080	LED, SLR-342VCT31 RED	S310	87-A90-095-080	SW, TACT EVQ11G04M		
LED203	87-A40-317-080	LED, SLR-342VCT31 RED					
LED204	87-A40-317-080	LED, SLR-342VCT31 RED	S311	87-A90-095-080	SW, TACT EVQ11G04M		
LED205	87-A40-317-080	LED, SLR-342VCT31 RED	S312	87-A90-095-080	SW, TACT EVQ11G04M		
LED206	87-A40-316-080	LED, SLR-56PCT31 GRN	S313	87-A90-095-080	SW, TACT EVQ11G04M		
LED207	87-A40-316-080	LED, SLR-56PCT31 GRN					
LED208	87-A40-316-080	LED, SLR-56PCT31 GRN	FAN C.B				
LED209	87-A40-316-080	LED, SLR-56PCT31 GRN	C130	87-010-401-080	CAP, E 1-50 M SME		
LED210	87-A40-316-080	LED, SLR-56PCT31 GRN	C131	87-010-263-080	CAP, E 100-10 SME		
LED211	87-A40-316-080	LED, SLR-56PCT31 GRN	C132	87-010-380-080	CAP, E 47-16 M SME		
LED212	87-A40-316-080	LED, SLR-56PCT31 GRN	AC1 C.B<K,G>				
LED213	87-A40-316-080	LED, SLR-56PCT31 GRN	▲F101	87-035-370-010	FUSE, 6.3A 250V T		
LED214	87-A40-316-080	LED, SLR-56PCT31 GRN	▲FC1	87-A90-505-010	FUSE CLAMP, TP00351-5		
LED215	87-A40-316-080	LED, SLR-56PCT31 GRN	▲FC2	87-A90-505-010	FUSE CLAMP, TP00351-5		
LED216	87-A40-264-080	LED, SLH-56PCTE7 GRN	▲PT101	87-NFR-632-010	PT, 7NF-R EZK		
LED217	87-A40-264-080	LED, SLH-56PCTE7 GRN	PT C.B<HR, LH>				
LED218	87-A40-264-080	LED, SLH-56PCTE7 GRN	▲F101	87-035-369-010	FUSE, 5A 250V T		
LED219	87-A40-264-080	LED, SLH-56PCTE7 GRN	▲F102	87-035-369-010	FUSE, 5A 250V T		
LED220	87-A40-264-080	LED, SLH-56PCTE7 GRN	▲FC1	87-033-147-010	FUSE CLAMP, MT-20		
LED221	87-A40-264-080	LED, SLH-56PCTE7 GRN	▲FC2	87-033-147-010	FUSE CLAMP, MT-20		
LED222	87-A40-266-080	LED, SLH-56VCT31 RED	▲FC3	87-033-147-010	FUSE CLAMP, MT-20		
LED223	87-A40-266-080	LED, SLH-56VCT31 RED					
LED224	87-A40-266-080	LED, SLH-56VCT31 RED					

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
▲ FC4	87-033-147-010		FUSE CLAMP,MT-20	C302	87-010-402-080		CAP, ELECT 2.2-50V
▲ PT101	87-NFR-630-010		PT,7NF-R HR<HR>	C303	87-010-322-080		C-CAP,S 100P-50 J CH<K,G>
▲ PT101	87-NFR-633-010		PT,7NF-R LH<LH>	C304	87-010-382-080		CAP, ELECT 22-25V
▲ SW101	87-A90-165-010		SW,SL 1-2-3 SWS2301	C305	87-A10-596-080		C-CAP,S 100P-100 J CH
▲ T1	87-A60-317-010		TERMINAL,1P MSC	C308	87-010-260-080		CAP, ELECT 47-25V
▲ T2	87-A60-317-010		TERMINAL,1P MSC	C309	87-010-993-080		C-CAP,S 0.056-25 B
AC2 C.B				C310	87-010-196-080		CHIP CAPACITOR,0.1-25
▲ C1	87-010-196-080		C-CAP,S 0.1-25 FZ C2012<K,G>	C311	87-010-197-080		CAP, CHIP 0.01 DM
▲ PR1	87-026-682-080		PROTECTOR,10A 491SERIES 60V<LH,HR>	C312	87-010-196-080		CHIP CAPACITOR,0.1-25
▲ PR2	87-026-682-080		PROTECTOR,10A 491SERIES 60V<LH,HR>	C313	87-010-406-080		CAP, ELECT 22-50
▲ PR3	87-026-681-080		PROTECTOR,5A 491SERIES 60V	C314	87-010-197-080		C-CAP,S 0.01-25 BK<K,G>
▲ PR4	87-026-681-080		PROTECTOR,5A 491SERIES 60V	C315	87-012-368-080		C-CAP,S 0.1-50 F<K,G>
▲ PR5	87-026-682-080		PROTECTOR,10A 491SERIES 60V<LH,HR>	C316	87-012-368-080		C-CAP,S 0.1-50 F<K,G>
▲ PR6	87-026-682-080		PROTECTOR,10A 491SERIES 60V<LH,HR>	C501	87-010-176-080		C-CAP,S 680P-50 SL
DECK C.B				C502	87-010-176-080		C-CAP,S 680P-50 SL
CON502	87-099-756-010		CONN,15P 9604S F	C507	87-016-456-080		CAP,E 22-16 LLA
SFR1	87-024-581-010		SFR,3.3K DIA 6H	C508	87-010-196-080		CHIP CAPACITOR,0.1-25
SOL1	82-ZM1-618-310		SOL ASSY,27	C509	87-010-112-080		CAP, ELECT 100-16V
SOL2	82-ZM1-618-310		SOL ASSY,27	C510	87-010-380-080		CAP, ELECT 47-16V
SW1	87-036-110-010		SW,MICRO SPPB62	C512	87-016-472-080		CAP,E 22-16 SME(K)
SW2	87-036-110-010		SW,MICRO SPPB62	C513	87-010-196-080		CHIP CAPACITOR,0.1-25
SW3	87-036-110-010		SW,MICRO SPPB62	C514	87-010-263-080		CAP, ELECT 100-10V
SW4	87-036-110-010		SW,MICRO SPPB62	C517	87-010-314-080		C-CAP,S 22P-50 J CH
SW5	87-A90-248-010		SW,MICRO ESE11SH2CXQ	C518	87-010-378-080		CAP, ELECT 10-16V
SW6	87-A90-248-010		SW,MICRO ESE11SH2CXQ	C519	87-010-404-080		CAP, ELECT 4.7-50V<HR,LH>
SW8	87-A90-248-010		SW,MICRO ESE11SH2CXQ	C519	87-010-378-080		CAP, ELECT 10-16V<K,G>
SW9	87-A90-248-010		SW,MICRO ESE11SH2CXQ	C520	87-010-404-080		CAP, ELECT 4.7-50V<HR,LH>
W1	82-ZM3-601-010		RBN-CORD,4P-75	C520	87-010-378-080		CAP, ELECT 10-16V<K,G>
HEAD-1 C.B				C521	87-010-805-080		C-CAP,S 1-16 FZ<K,G>
				C522	87-010-378-080		CAP, ELECT 10-16V
				C523	87-010-400-080		CAP, ELECT 0.47-50V
				C524	87-016-081-080		C-CAP,S 0.1-16 RK
				C525	87-010-248-080		CAP, ELECT 220-10V
				C526	87-012-140-080		CAP CHIP 470P
				C527	87-010-186-080		CAP,CHIP 4700P
HEAD-2 C.B				C528	87-010-186-080		CAP,CHIP 4700P
				C529	87-010-404-080		CAP, ELECT 4.7-50V
				C532	87-A10-229-080		C-CAP,S 0.68-10 K W5
				C533	87-012-393-080		C-CAP,S 0.22-16 R K
				C534	87-012-393-080		C-CAP,S 0.22-16 R K
PRO C.B				C535	87-010-404-080		CAP, ELECT 4.7-50V
				C536	87-010-404-080		CAP, ELECT 4.7-50V
				C537	87-012-393-080		C-CAP,S 0.22-16 R K
				C538	87-012-393-080		C-CAP,S 0.22-16 R K
				C539	87-016-081-080		C-CAP,S 0.1-16 RK
C101				C542	87-016-081-080		C-CAP,S 0.1-16 RK
C102				C543	87-016-081-080		C-CAP,S 0.1-16 RK
C103				C546	87-016-081-080		C-CAP,S 0.1-16 RK
C104				C547	87-018-134-080		CAP,TC-U 0.01-16 ZF<K,G>
C105				C548	87-010-178-080		C-CAP,S 1000P-50 BK<K,G>
C106				C549	87-010-178-080		C-CAP,S 1000P-50 BK<K,G>
C107				C550	87-010-314-080		C-CAP,S 22P-50 J CH<K,G>
C108				C602	87-010-314-080		C-CAP,S 22P-50 J CH
C109				C604	87-016-460-080		C-CAP,S 0.22-16 BK
C110				C605	87-016-460-080		C-CAP,S 0.22-16 BK
C112				C606	87-016-526-080		C-CAP,S 0.47-16 BK
C115				C607	87-010-183-080		C-CAP,S 2700P-50 KB
C117				C608	87-010-176-080		C-CAP,S 680P-50 J SL
C201				C609	87-016-552-080		C-CAP,S 0.082-16 KB
C202				C610	87-016-552-080		C-CAP,S 0.082-16 KB
C203				C611	87-010-183-080		C-CAP,S 2700P-50 KB
C204				C612	87-010-176-080		C-CAP,S 680P-50 J SL
C205				C613	87-010-201-080		C-CAP,S 0.33-16 KB
C208				C615	87-010-263-080		CAP, ELECT 100-10V
C209				C616	87-010-404-080		CAP, ELECT 4.7-50V
C210				C618	87-010-263-080		CAP, ELECT 100-10V
C211				C621	87-010-403-080		CAP, ELECT 3.3-50V
C212				C622	87-A10-201-080		C-CAP,S 0.33-16 BK
C213				C623	87-010-196-080		C-CAP,S 0.1-25 ZF
C214				C624	87-010-197-080		C-CAP,S 0.01-25 BK<K,G>
C301							



REF. NO.	PART NO.	KANRI NO.	DESCRIPTION		
C701	87-010-401-080		CAP, ELECT 1-50V		E C B
C702	87-010-401-080		CAP, ELECT 1-50V		E B C
C703	87-010-263-080		CAP, ELECT 100-10V		
C706	87-010-314-080		C-CAP,S 22P-50 J CH		
C707	87-016-526-080		C-CAP,S 0.47-16 BK		
C708	87-016-526-080		C-CAP,S 0.47-16 BK		
C709	87-010-380-080		CAP, ELECT 47-16V		
C710	87-010-197-080		C-CAP,S 0.01-25 BK<K,G>	2SA933	C2N5401
C711	87-018-209-080		CAP, TC-U 0.1-50 ZF<K,G>		
C712	87-010-178-080		C-CAP,S 1000P-50 BK<K,G>		
C713	87-010-178-080		C-CAP,S 1000P-50 BK<K,G>		E C B
C714	87-018-209-080		CAP, TC-U 0.1-50 ZF<K,G>		E C B
C750	87-010-197-080		C-CAP,S 0.01-25 BK<K,G>		
FB101	87-008-372-080		FILTER, EMIBLOI RN1<K,G>		
FB512	87-008-372-080		FILTER, EMIBLOI RN1<K,G>		
FB516	87-008-474-080		F-BEAD, BL02RN1-R52T<K,G>		
FB705	87-008-372-080		FILTER, EMIBLOI RN1<K,G>		
J201	87-A60-380-010		JACK, PIN 3P O/W/R YKC21-3		
L201	87-003-383-010		COIL, 1UH-S		
L301	87-003-383-010		COIL, 1UH-S		
R215	87-A00-257-080		RES, M/F 0.15-1W J	KTA1266	CSD1489
R315	87-A00-257-080		RES, M/F 0.15-1W J	KTC3198	CSB1058
R524	87-022-365-080		C-RES,S 100K-1/10W F<HR,LH>		
R524	87-A00-296-080		C-RES,S 100K-1/8W F<K,G>		

## TRANSISTOR ILLUSTRATION



2SA1235	DTA144EK
2SC2714	RN1410
2SC3052	RT1N141C
CMBT5551	RT1N144C
CSA1362	RT1P141C
CSD1306	RT1P144C

2SB1370  
FN1016  
FP1016




2SK2158

2SK543

## ○チップ抵抗部品コード / CHIP RESISTOR PART CODE


チップ抵抗部品コードの成り立ち  
Chip Resistor Part Coding

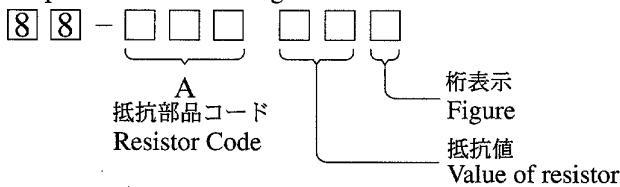


チップ抵抗  
Chip resistor

容量 Wattage	種類 Type	許容誤差 Tolerance	記号 Symbol	寸法 / Dimensions (mm)			抵抗コード : A Resistor Code : A
				外形 / Form	L	W	
1/16W	1608	± 5%	CJ		1.6	0.8	0.45 108
1/10W	2125	± 5%	CJ		2	1.25	0.45 118
1/8W	3216	± 5%	CJ		3.2	1.6	0.55 128

# BLOCK DIAGRAM – 1 (TUNER : HR, LH)

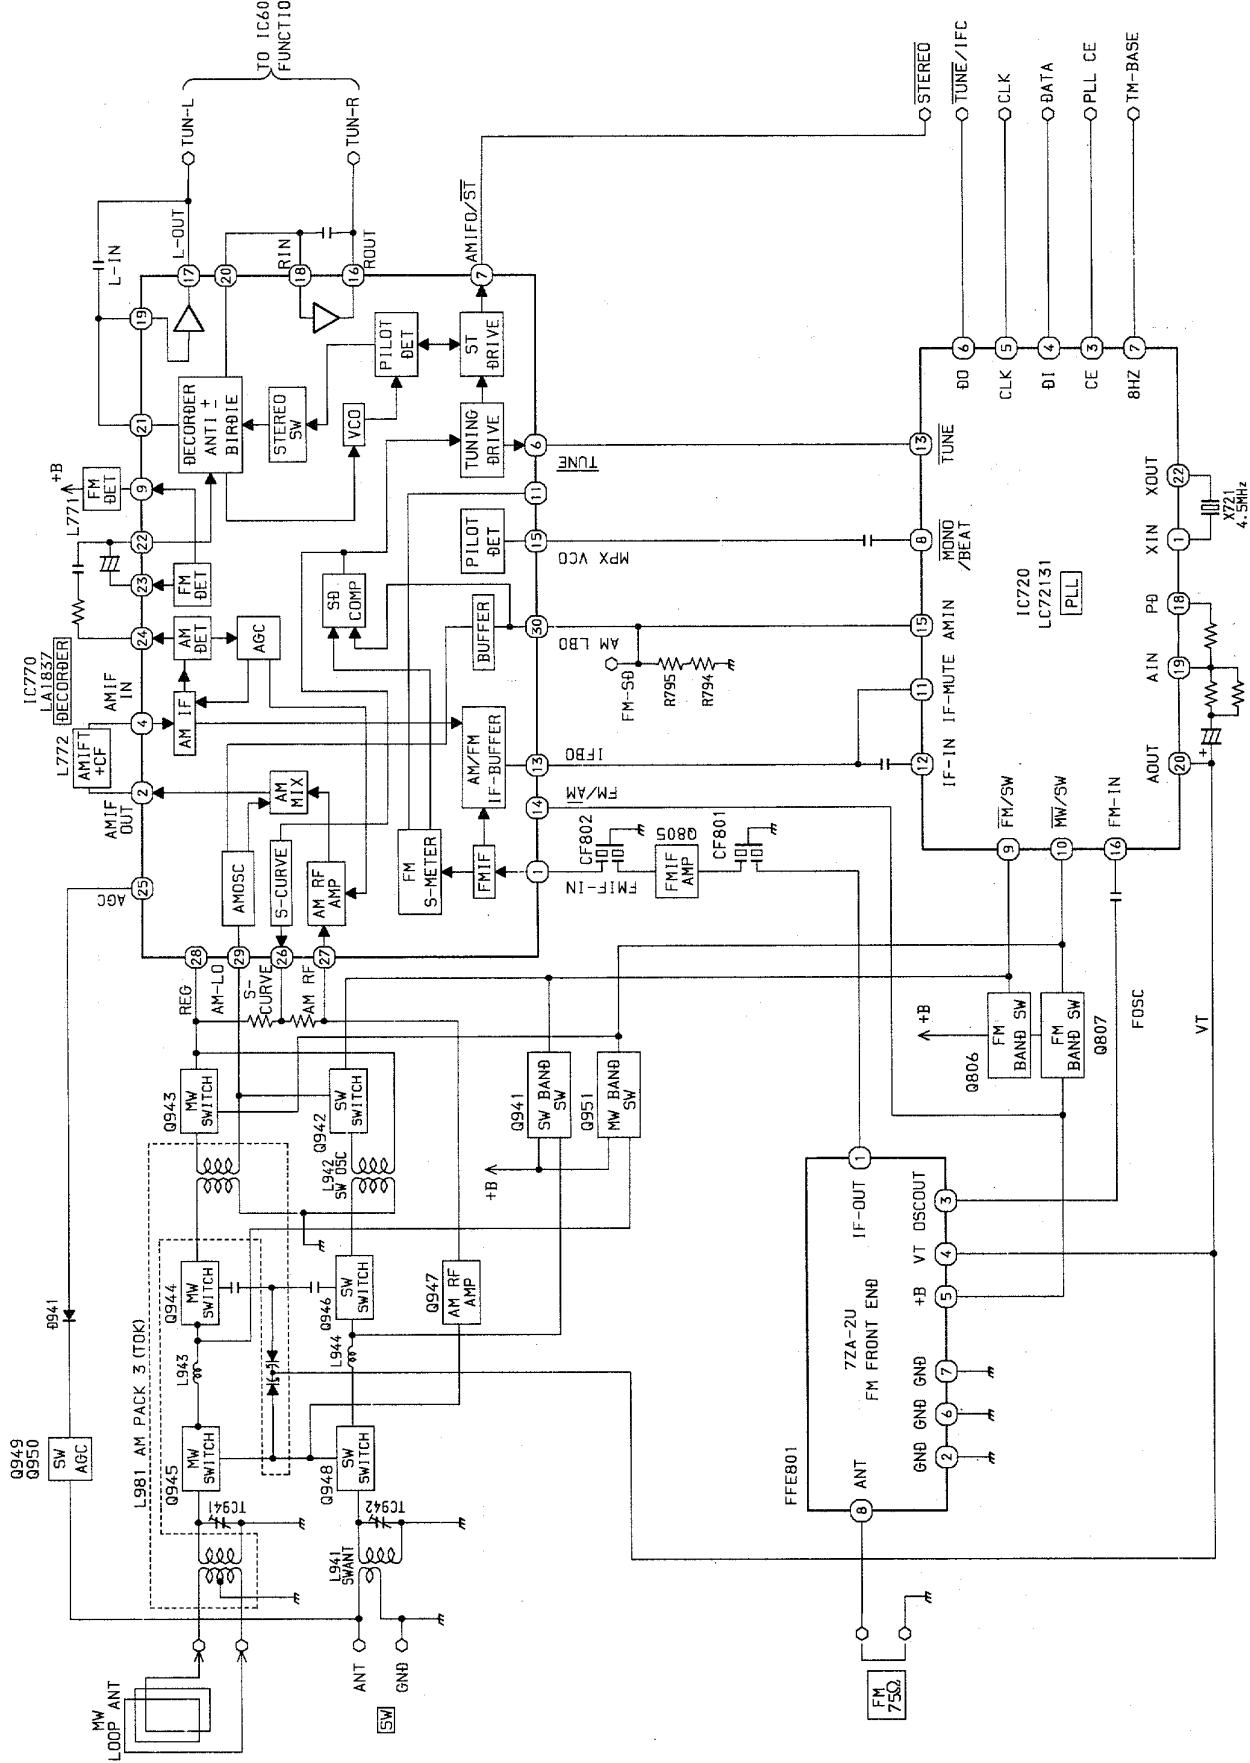


## BLOCK DIAGRAM – 2 (TUNER : K, G)

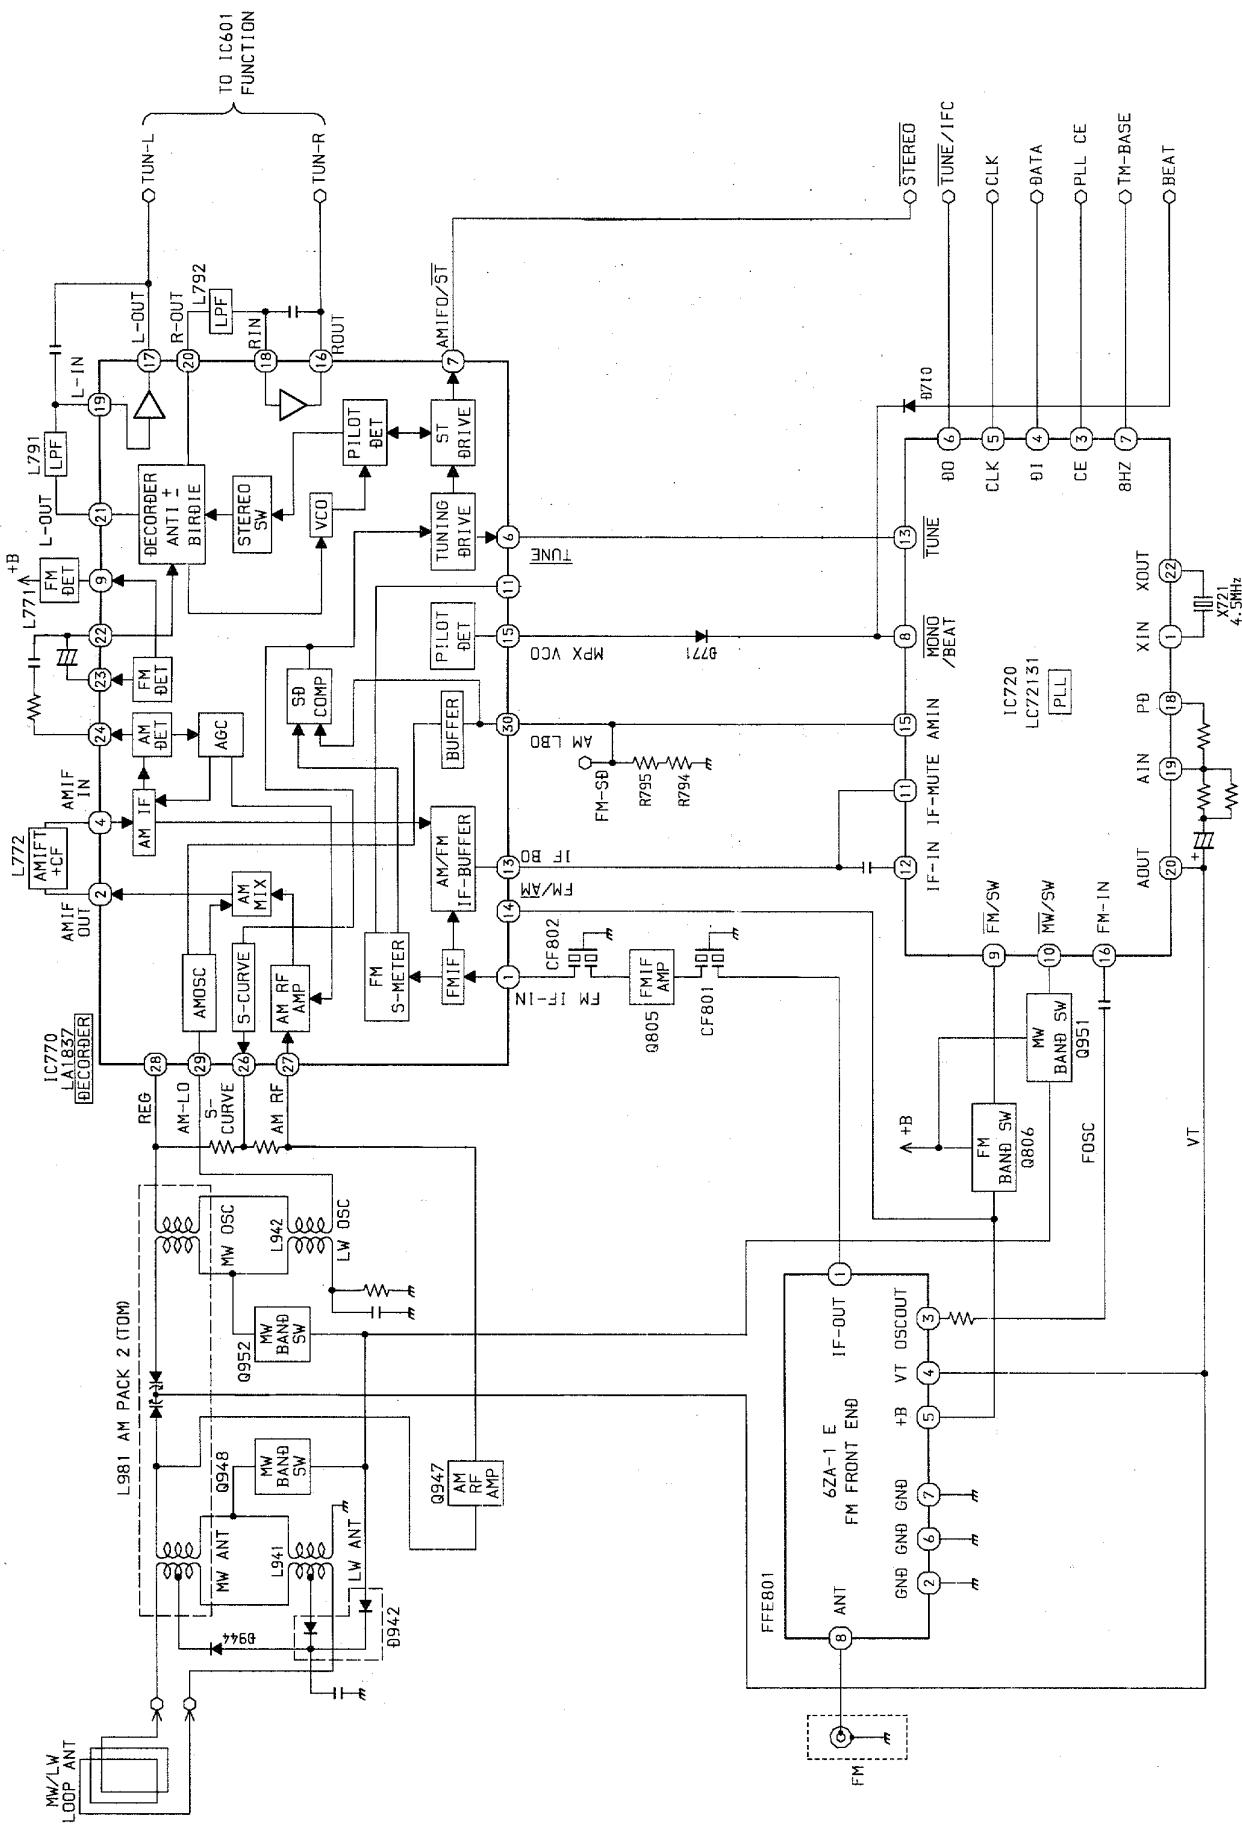

BLOCK DIAGRAM - 3 (MAIN / FRONT)


1

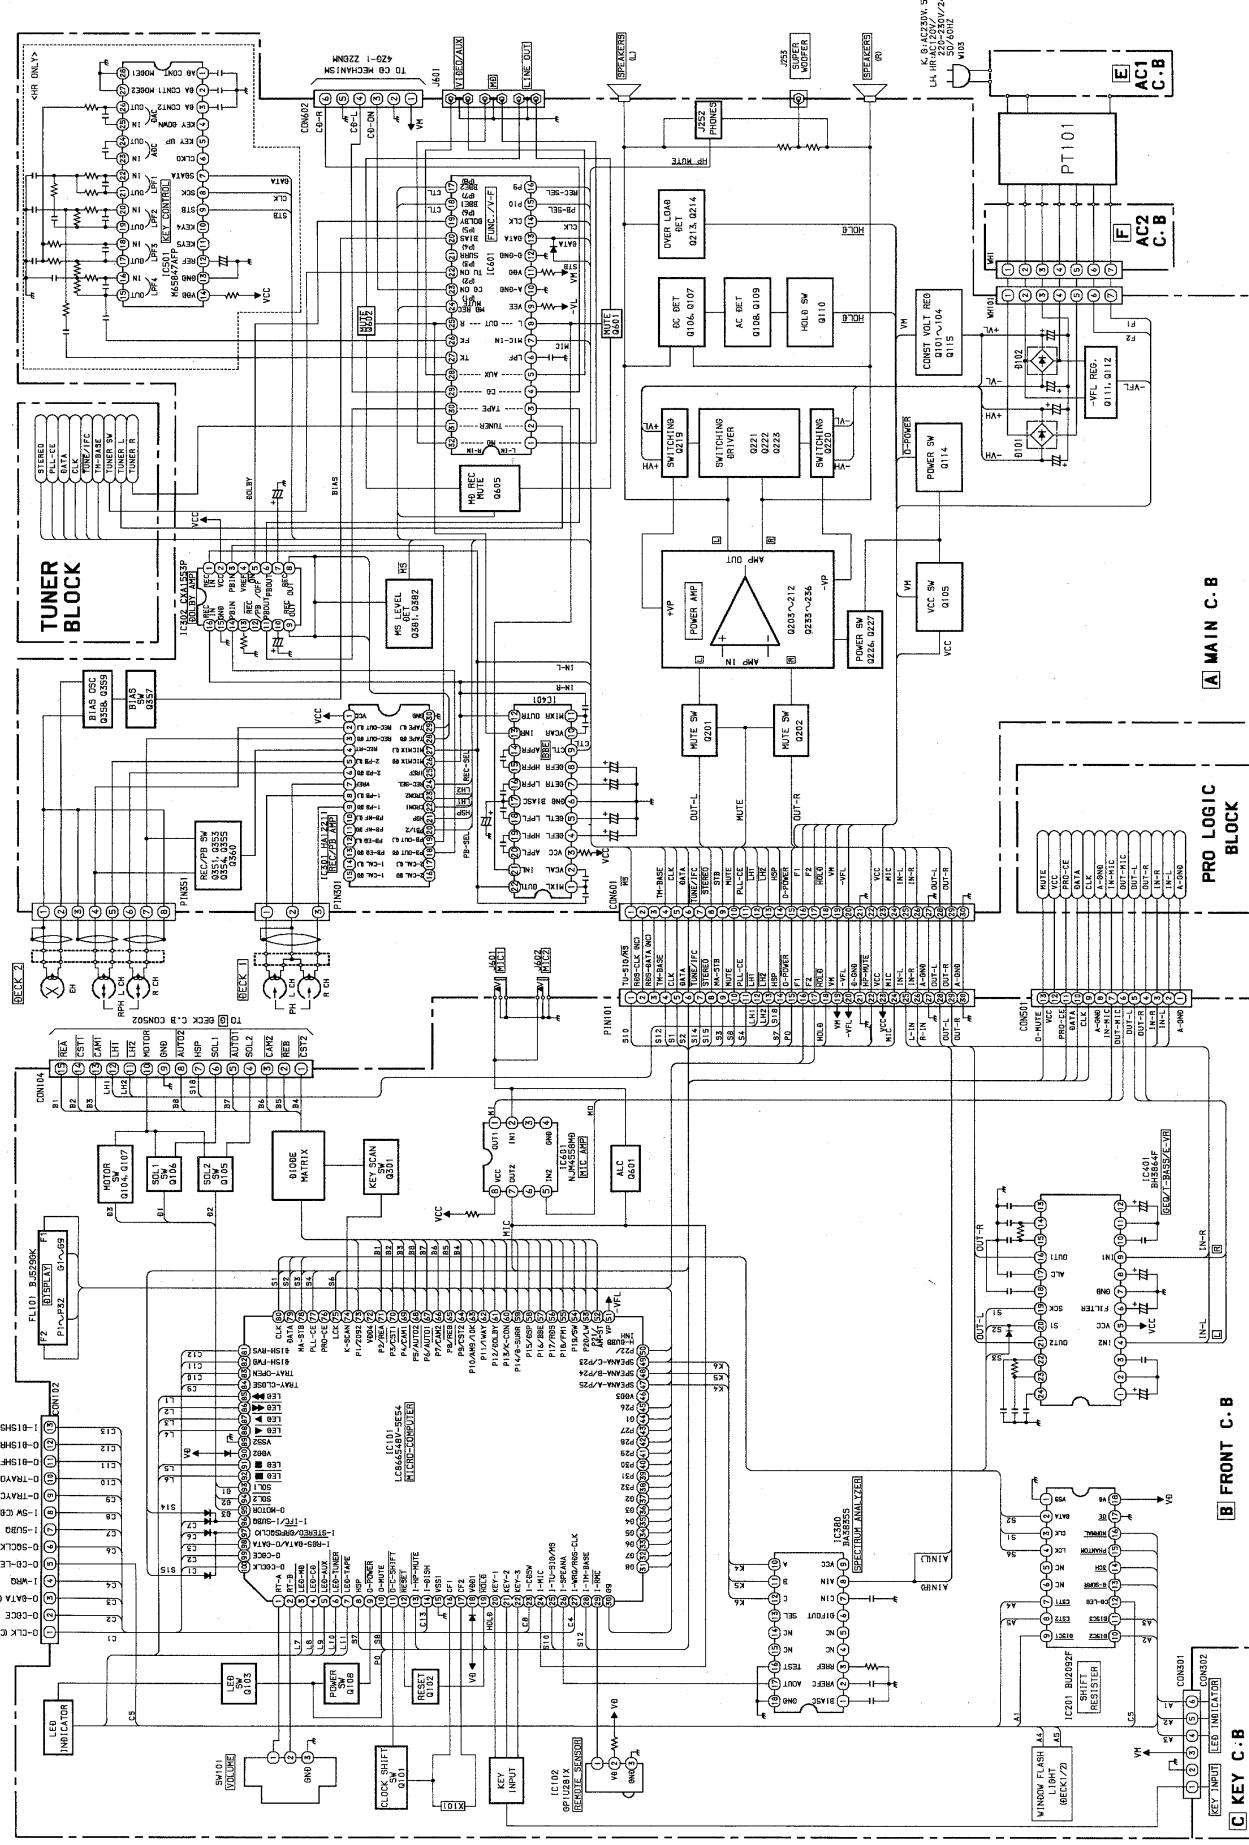

A MAIN C. B

B FRONT C. B


[KEY INPUT] [LED 1]

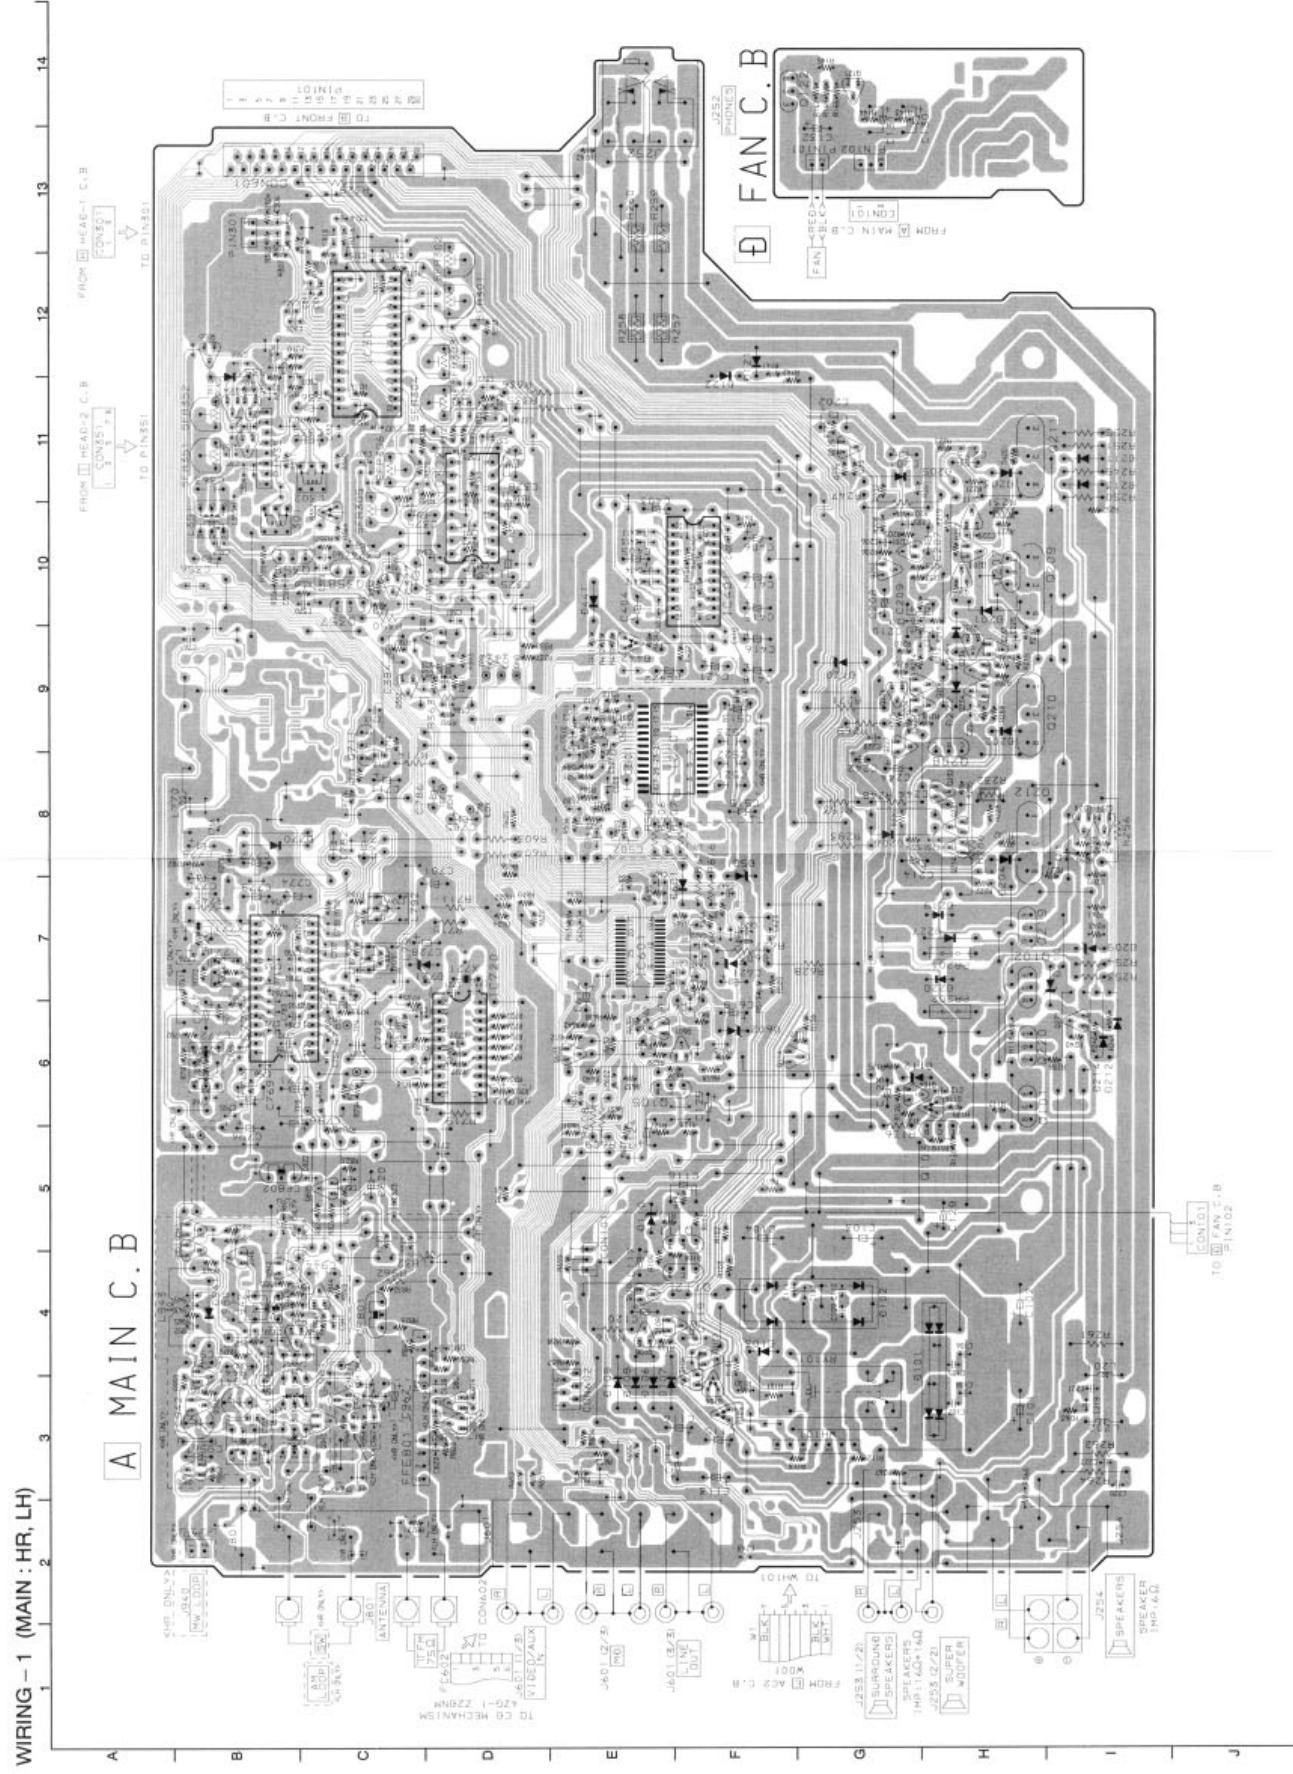



### SCHEMATIC DIAGRAM - 1 (MAIN : HR)




### SCHEMATIC DIAGRAM - 2 (MAIN : LH)

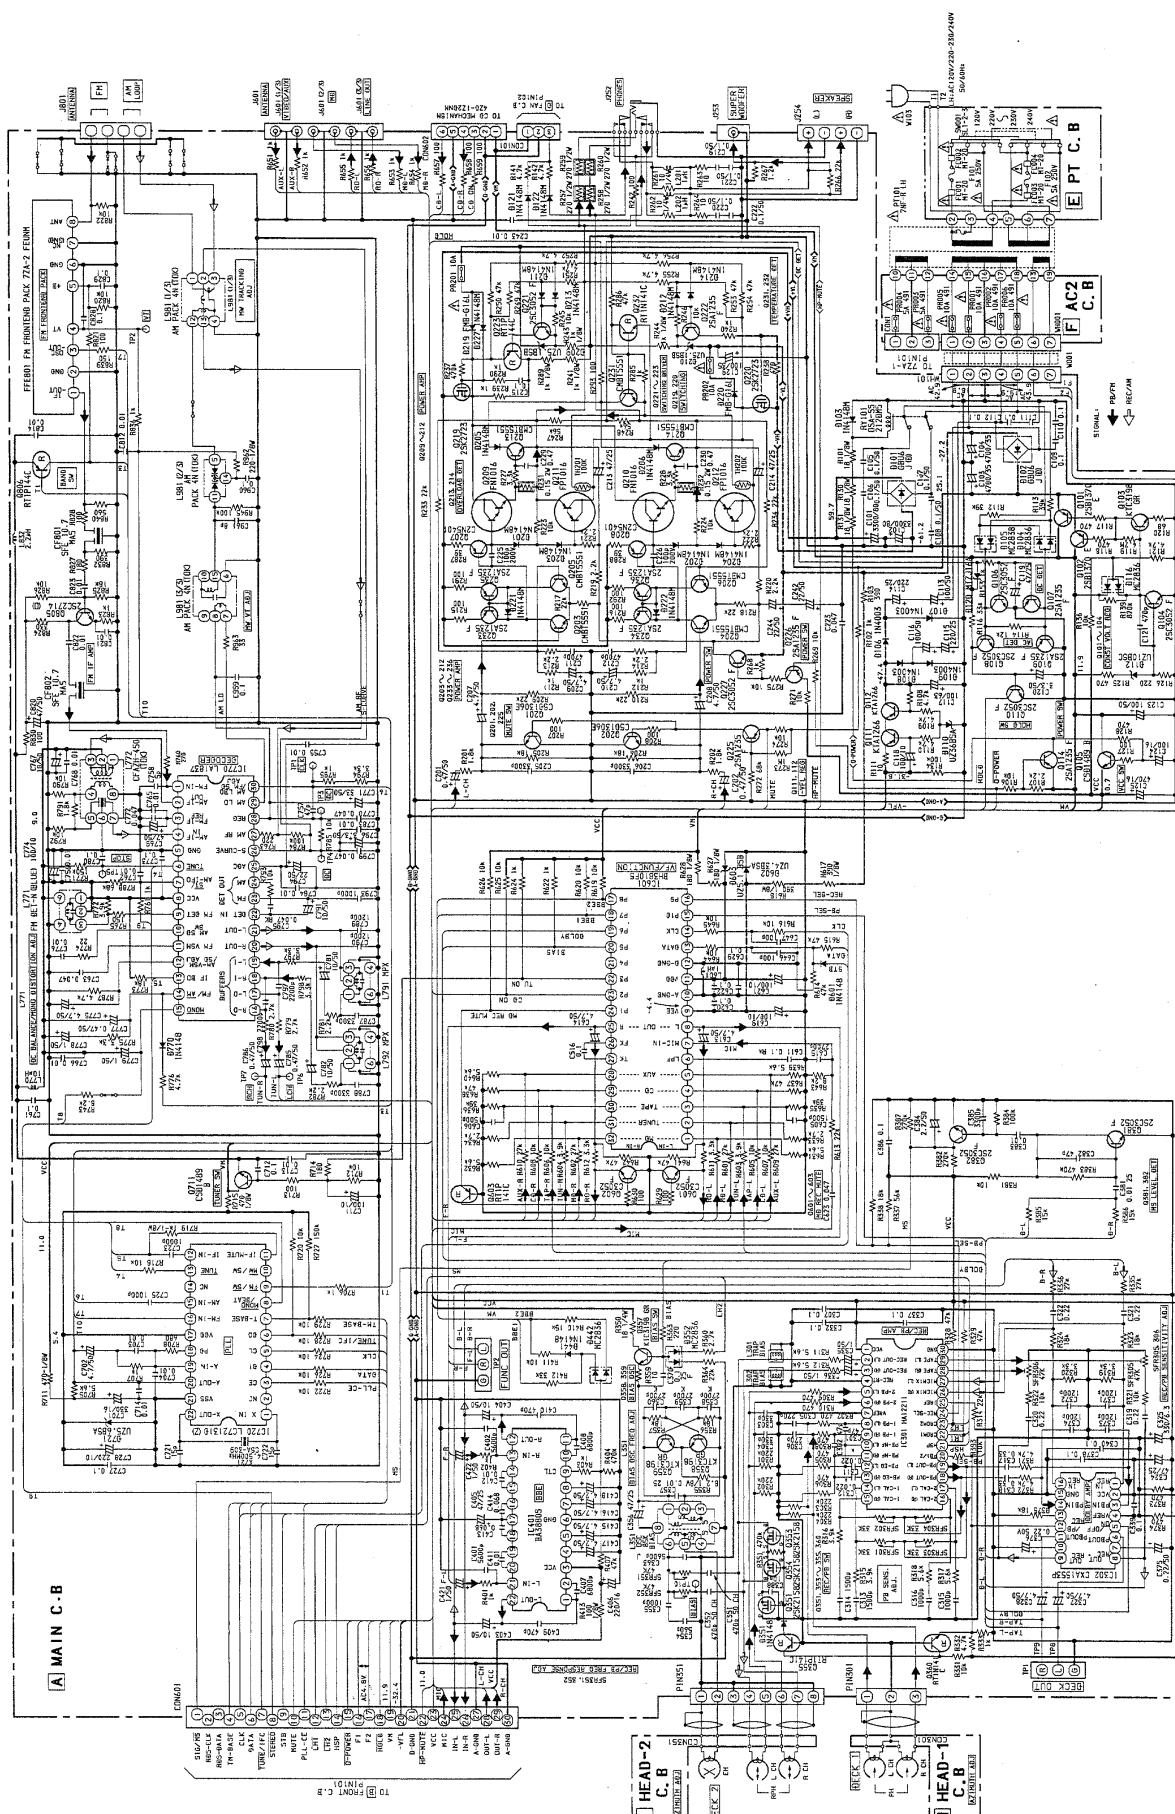


# SCHEMATIC DIAGRAM – 3 (7ZA-2 / FAN)

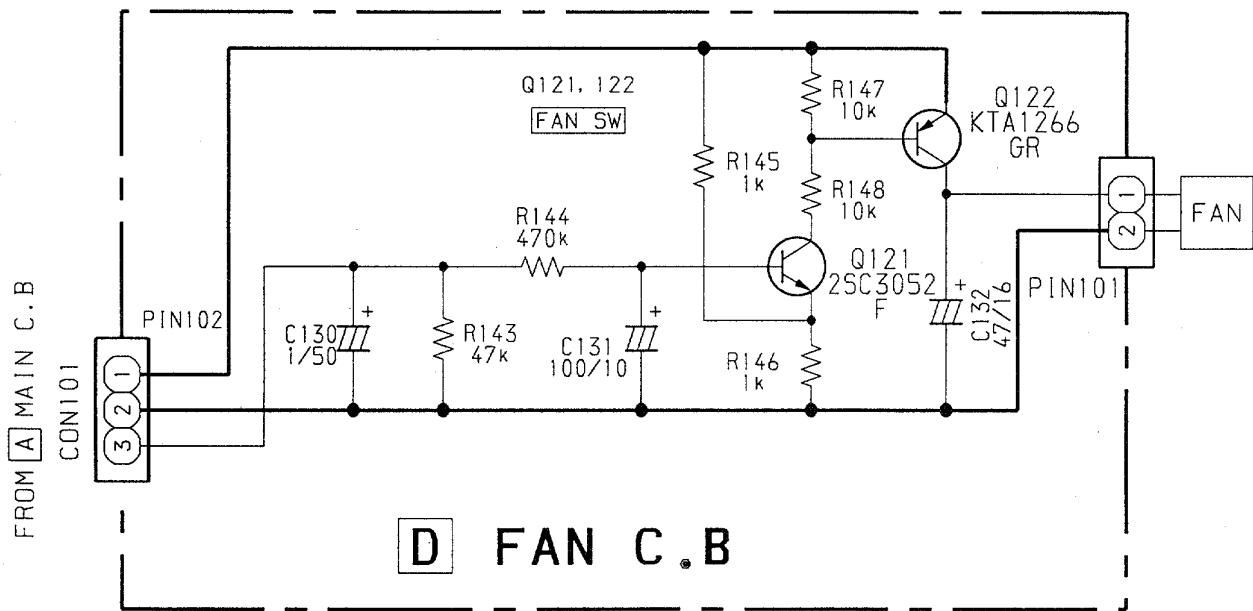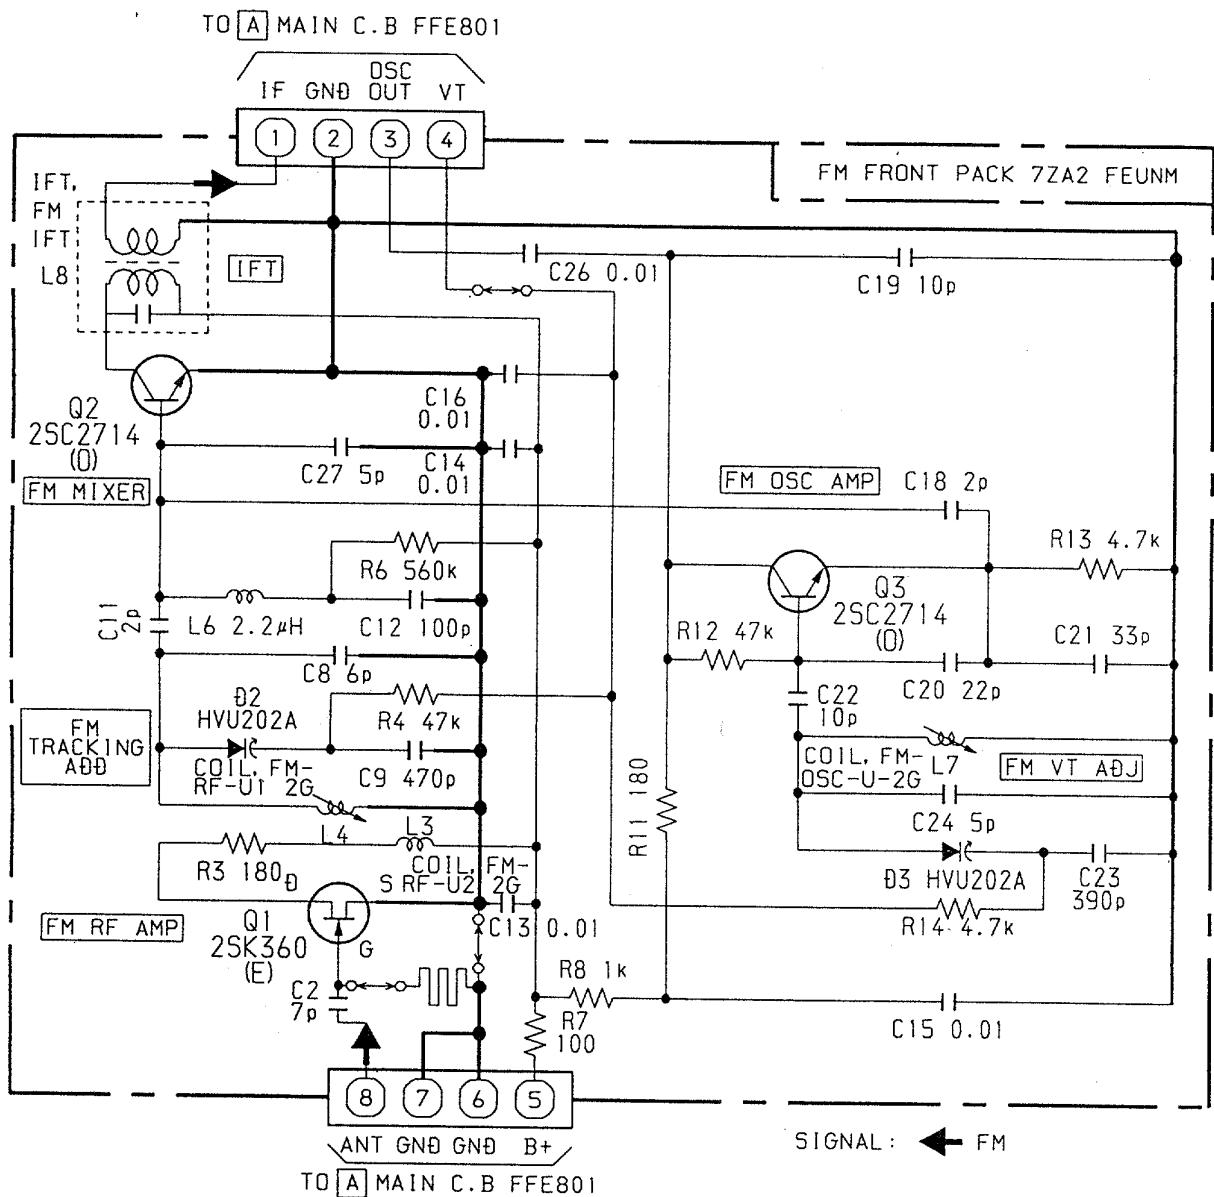


## BLOCK DIAGRAM – 4 (PRO – LOGIC)

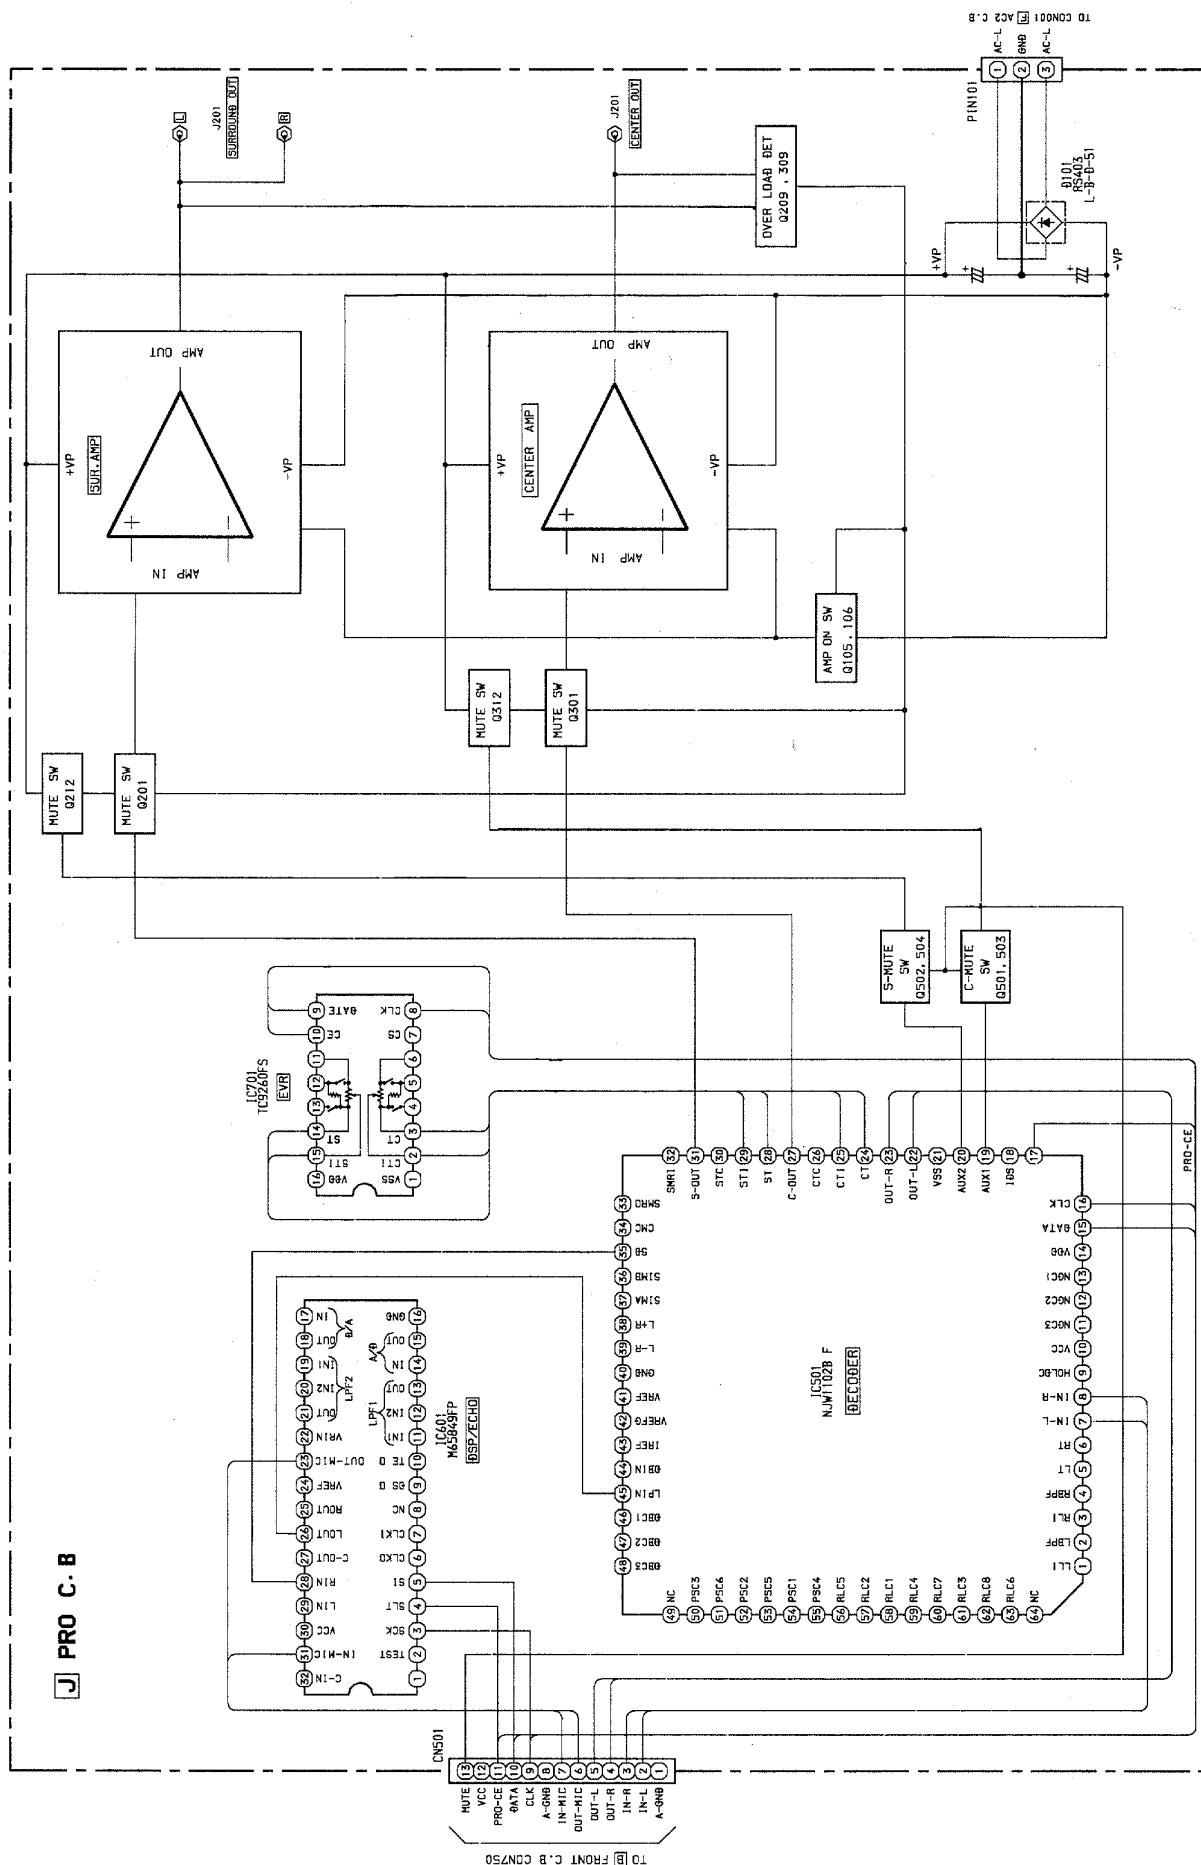


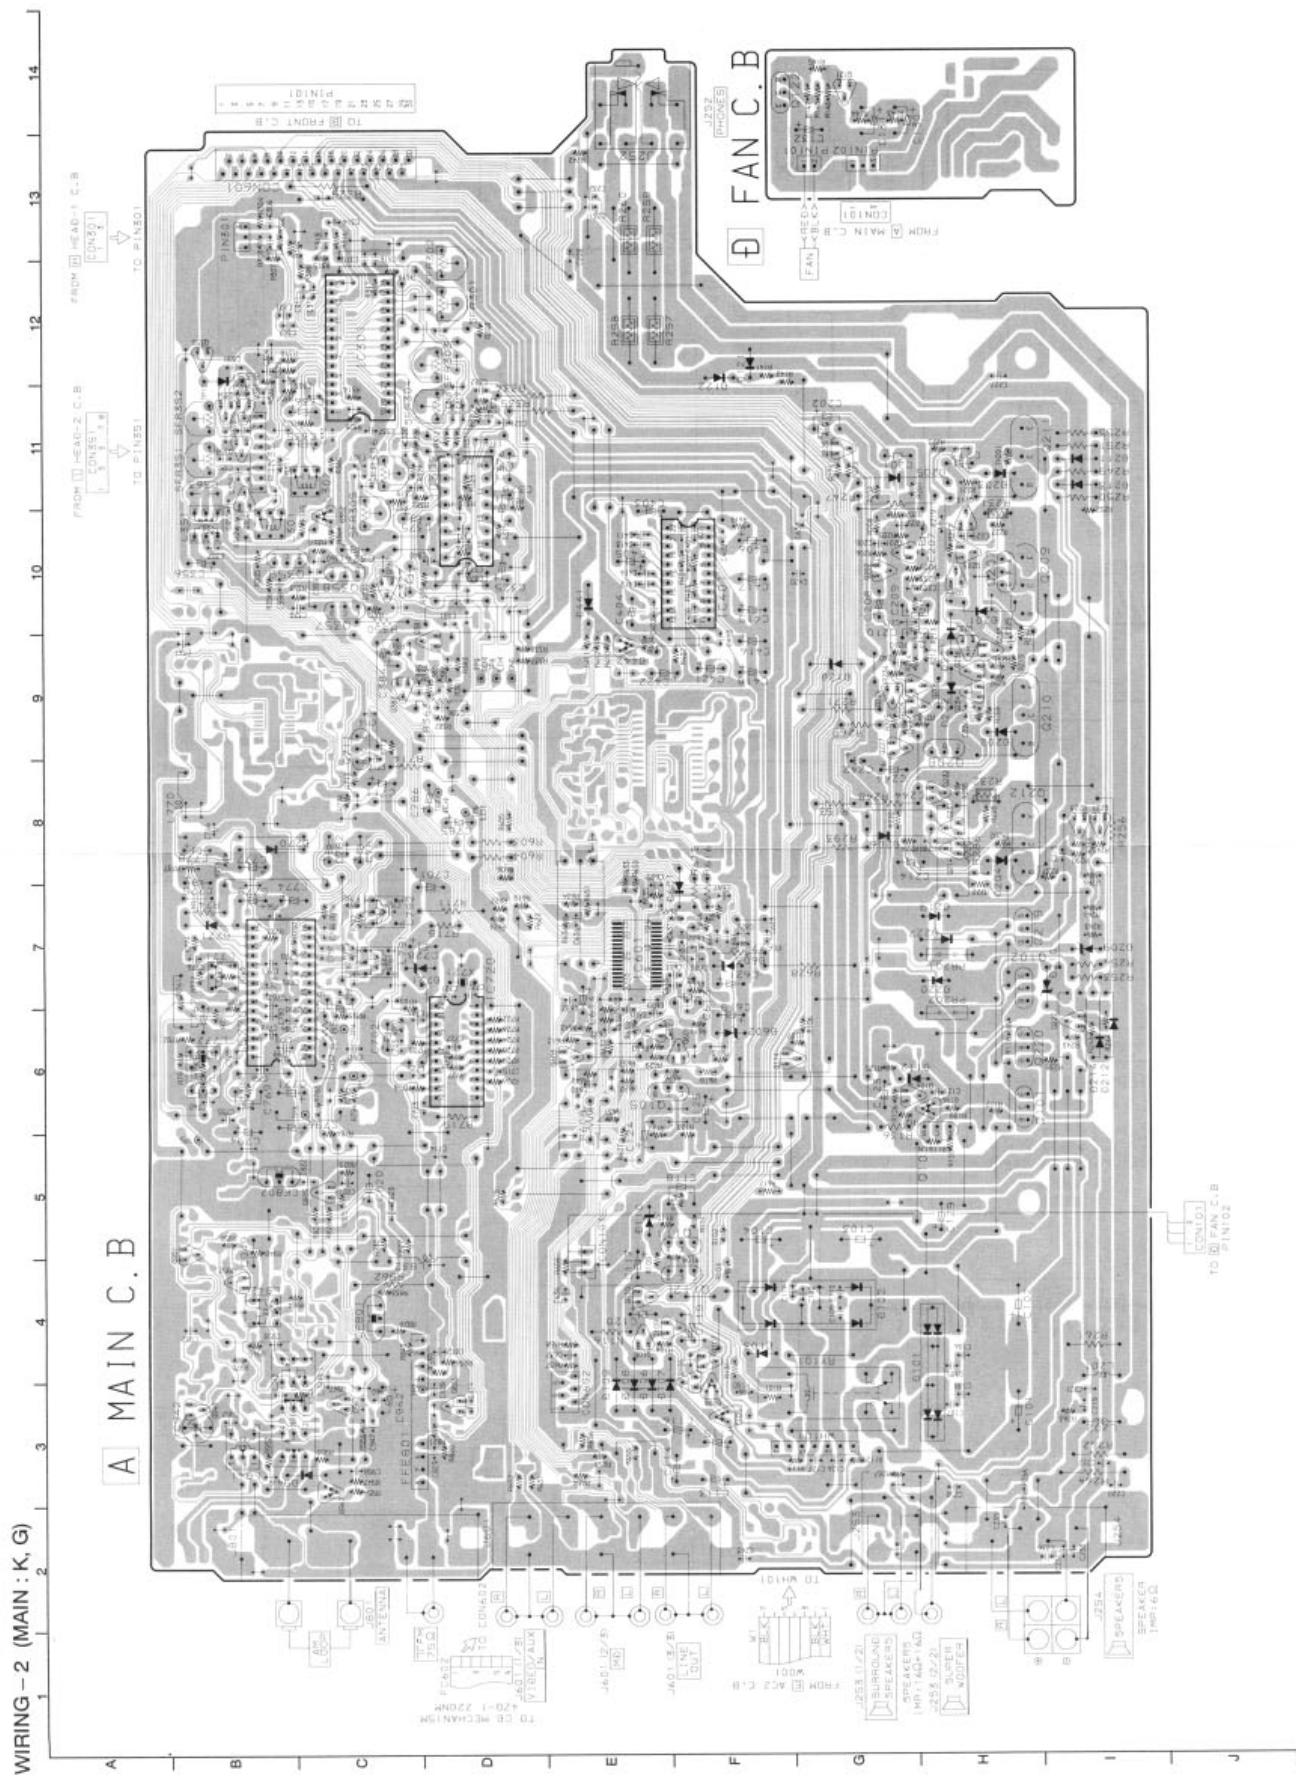


## SCHEMATIC DIAGRAM - 4 (MAIN : K, G)

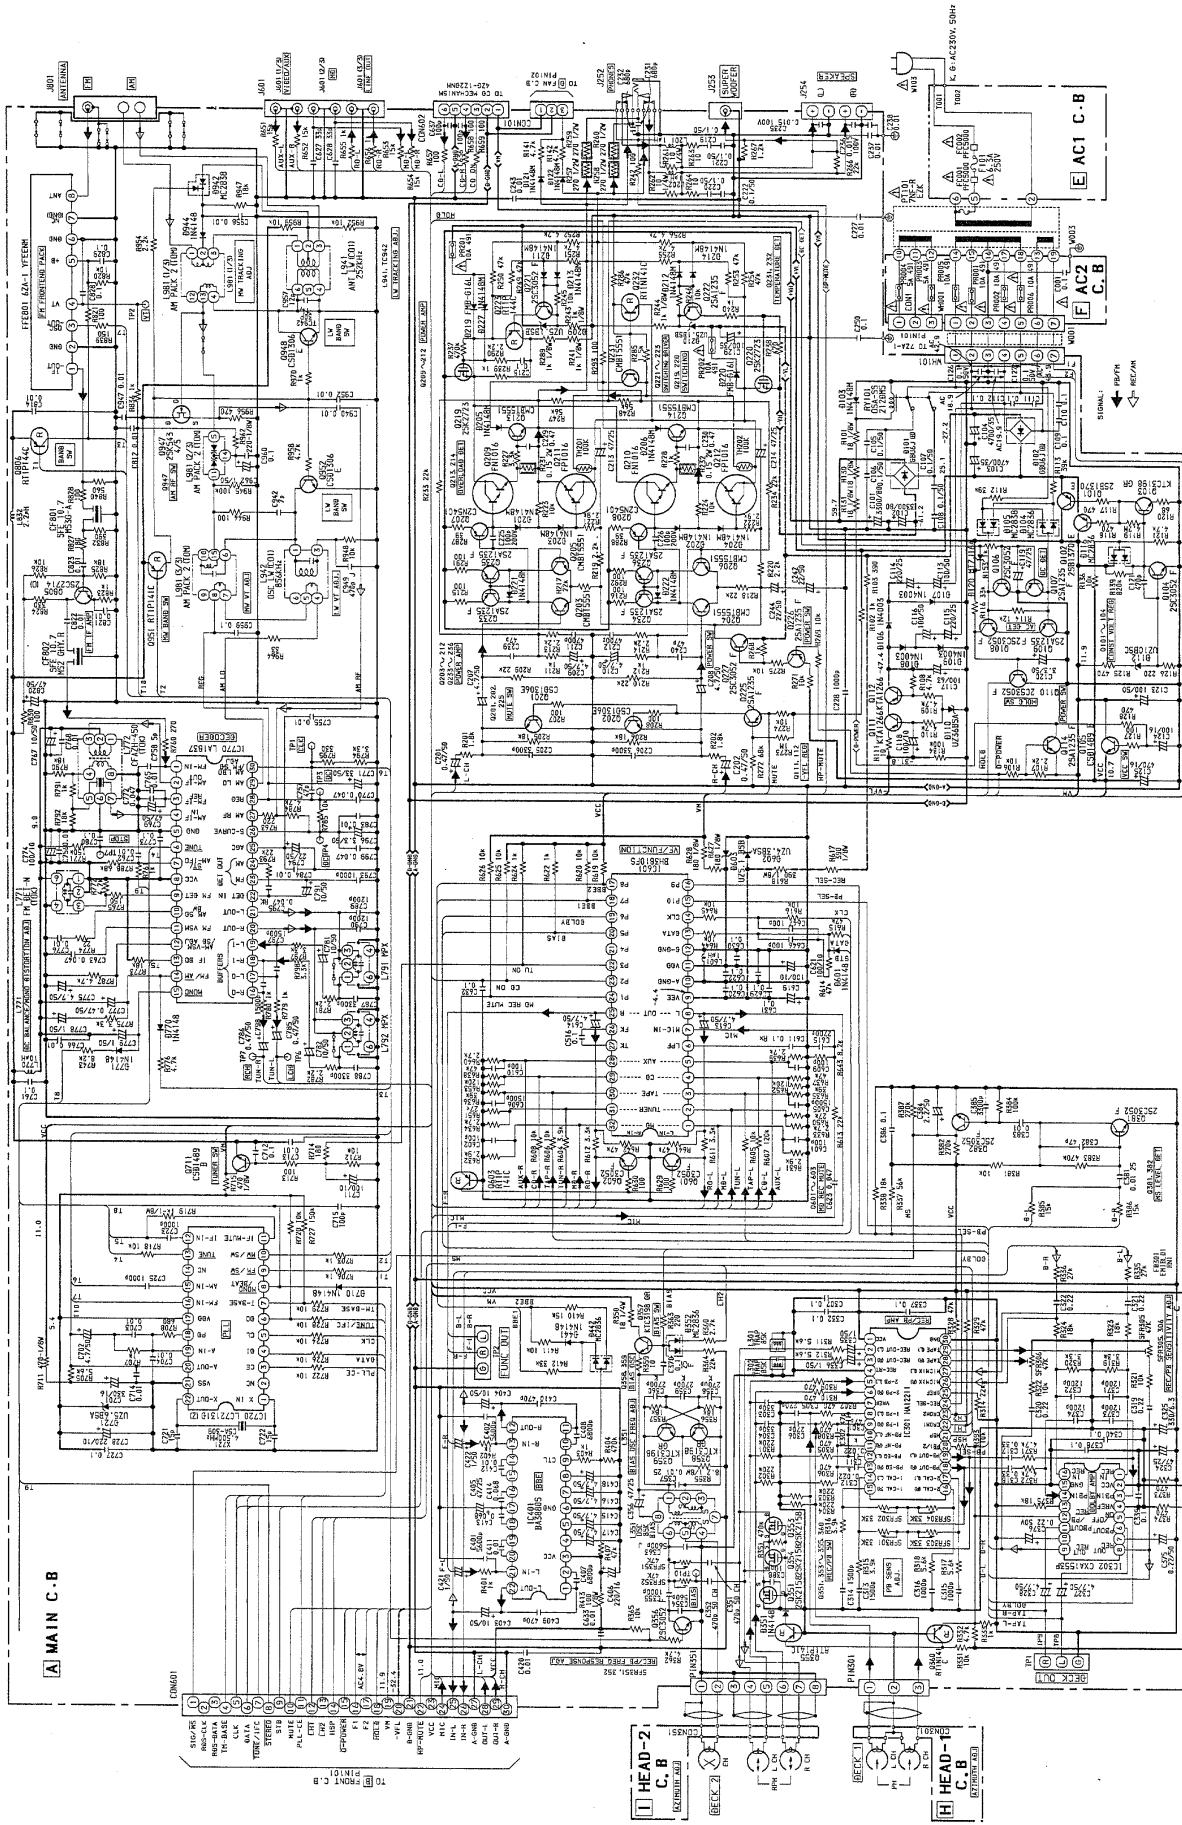



### SCHEMATIC DIAGRAM - 5 (FRONT)

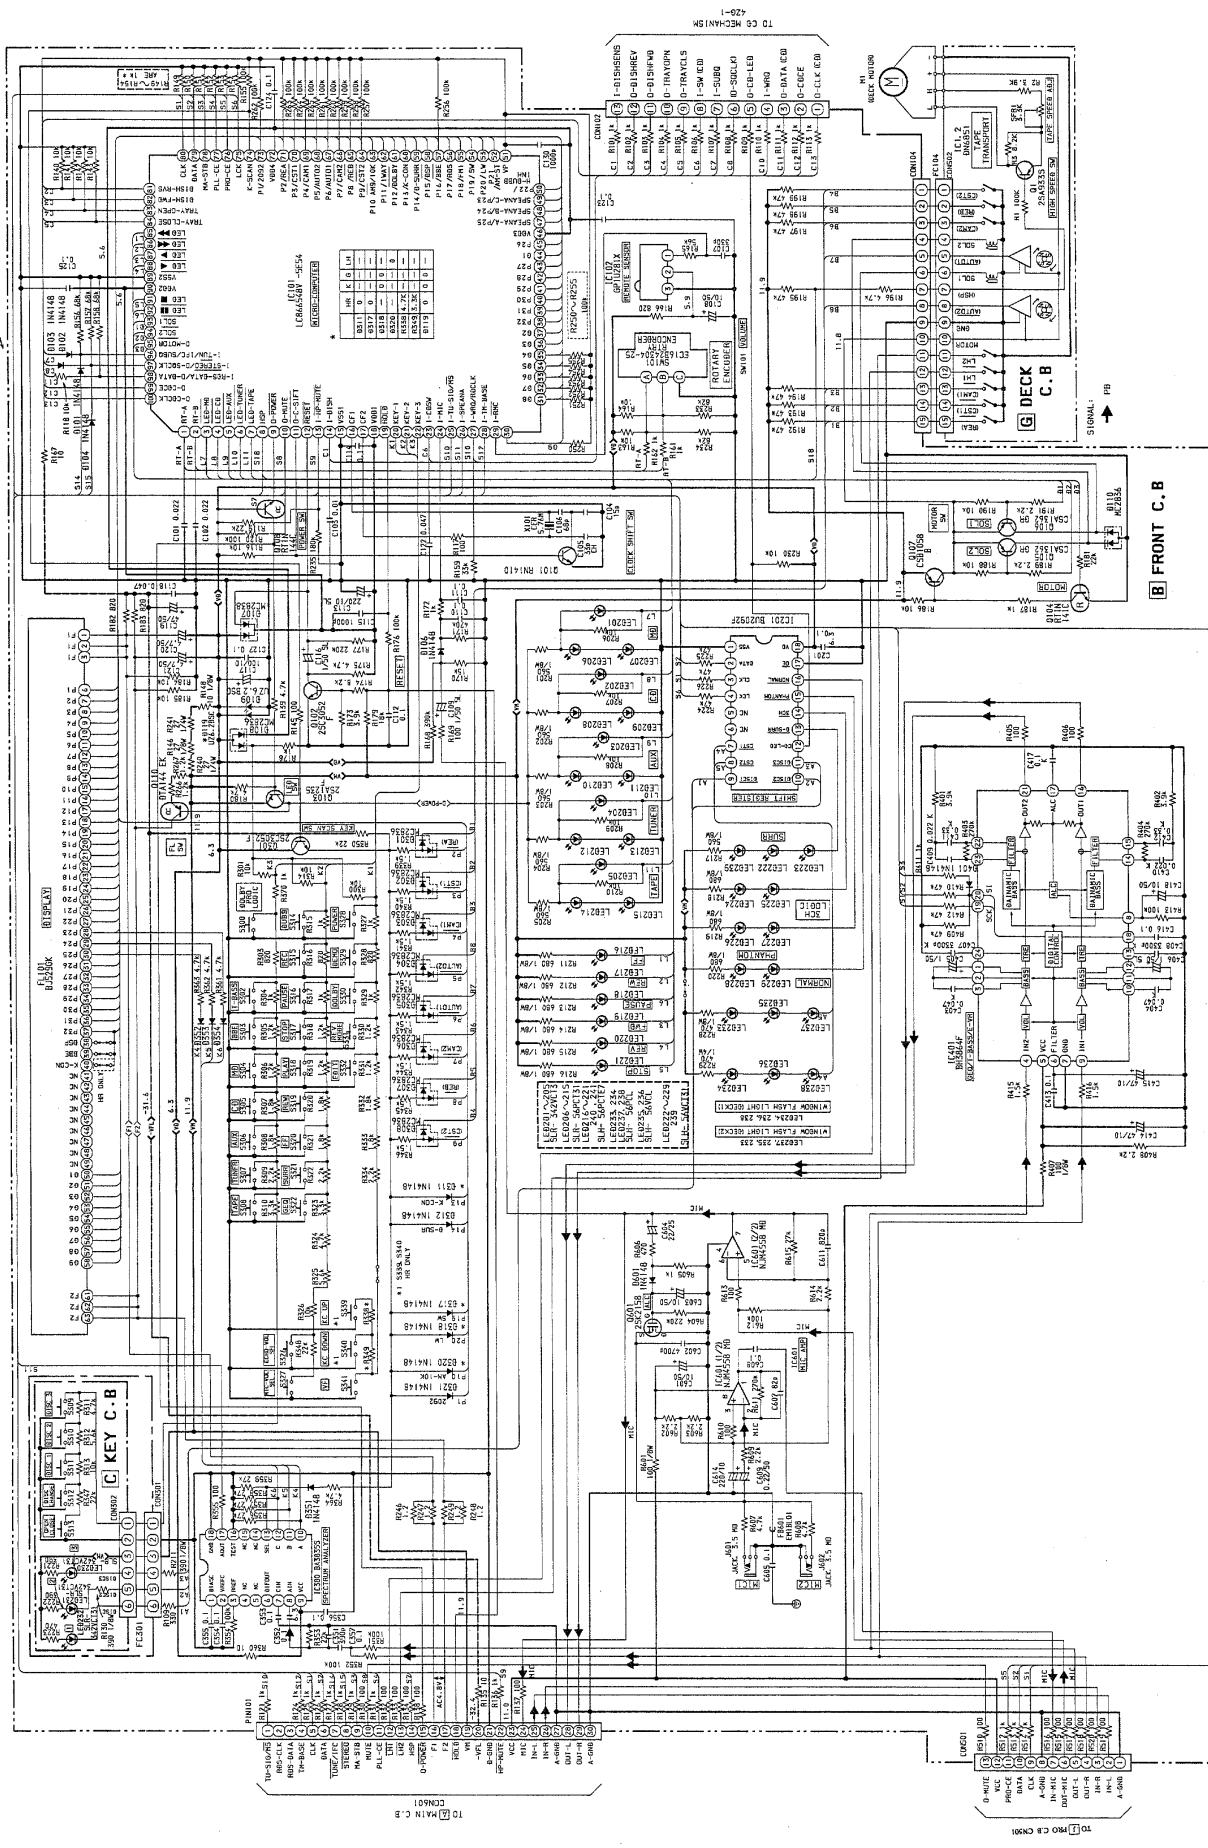

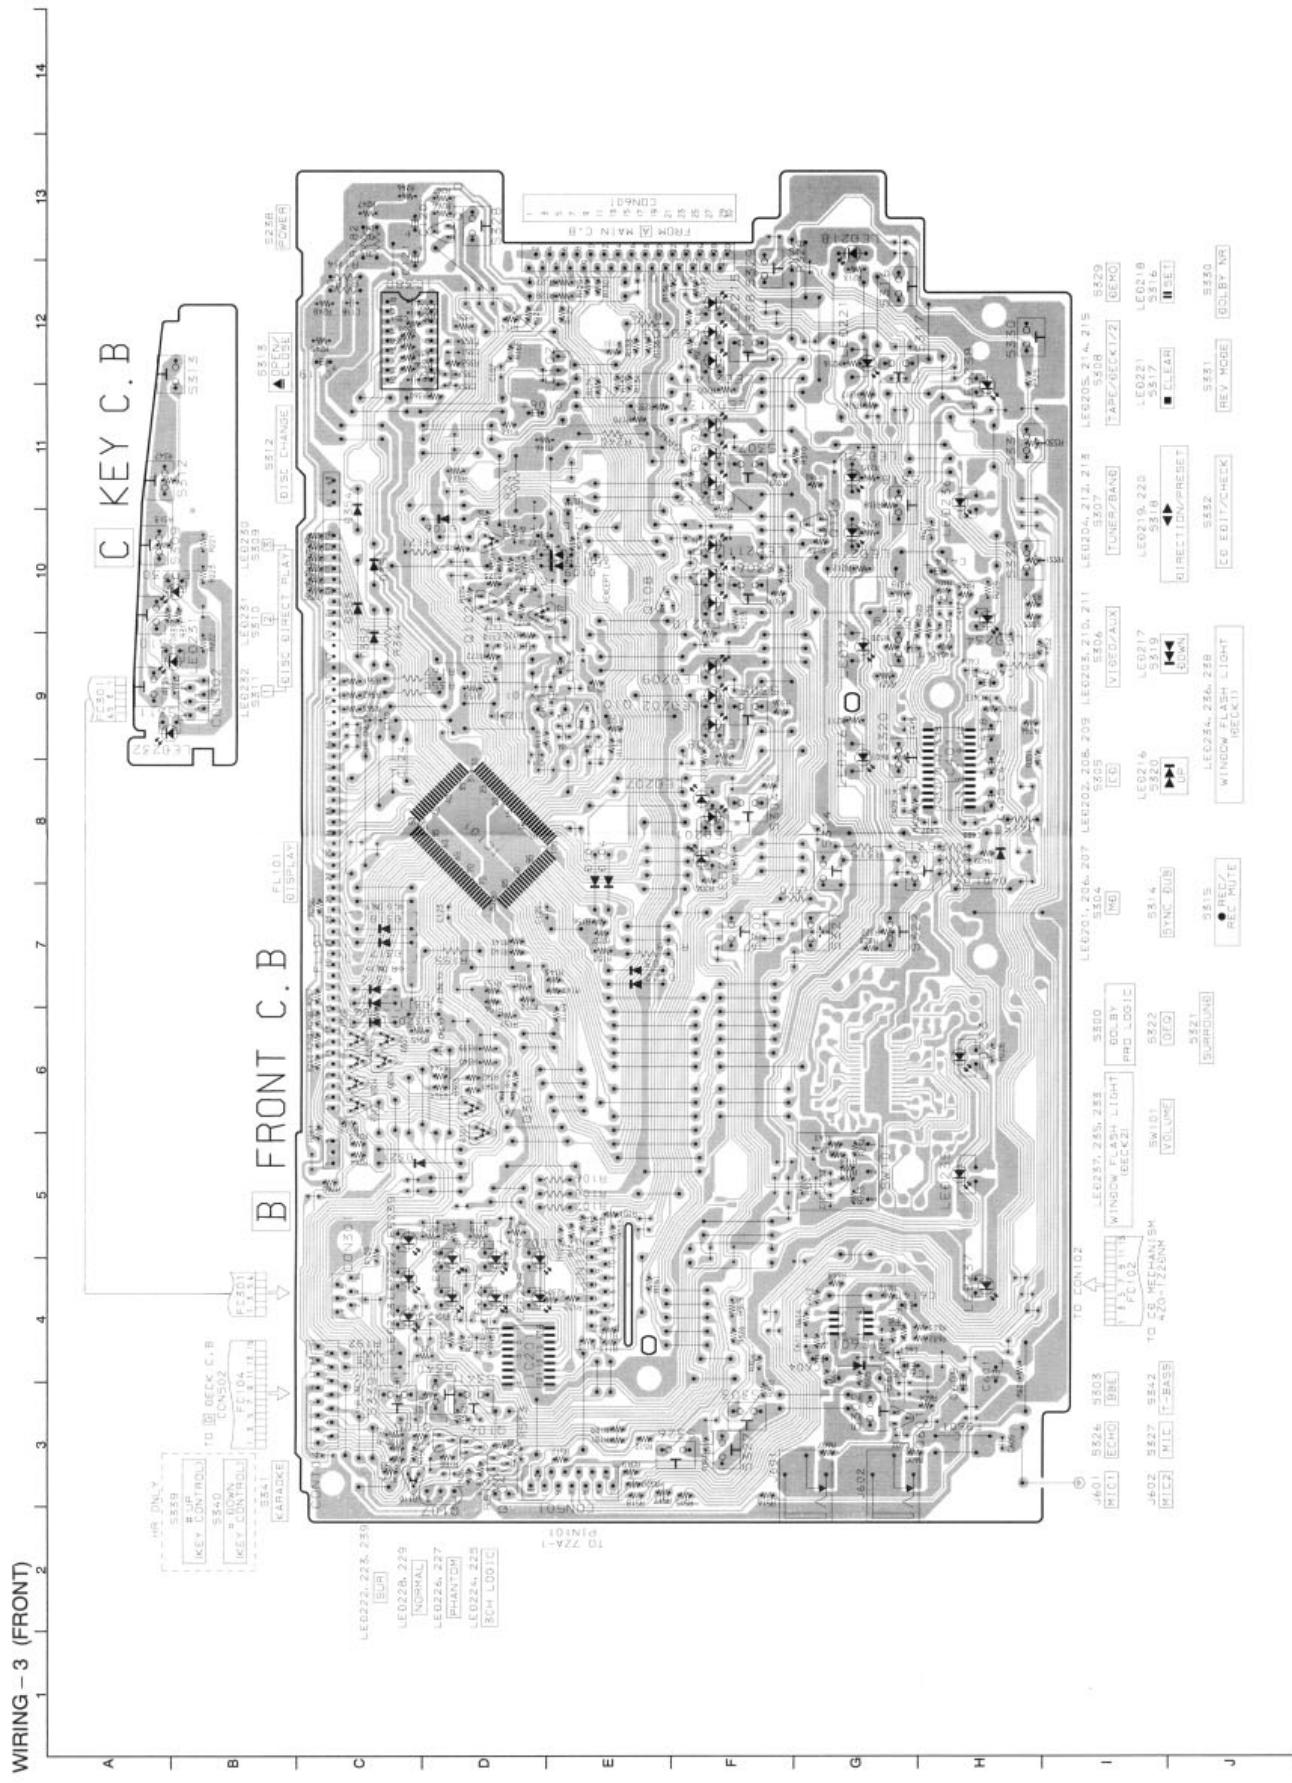


## SCHEMATIC DIAGRAM – 6 (PRO – LOGIC : HR, LH)

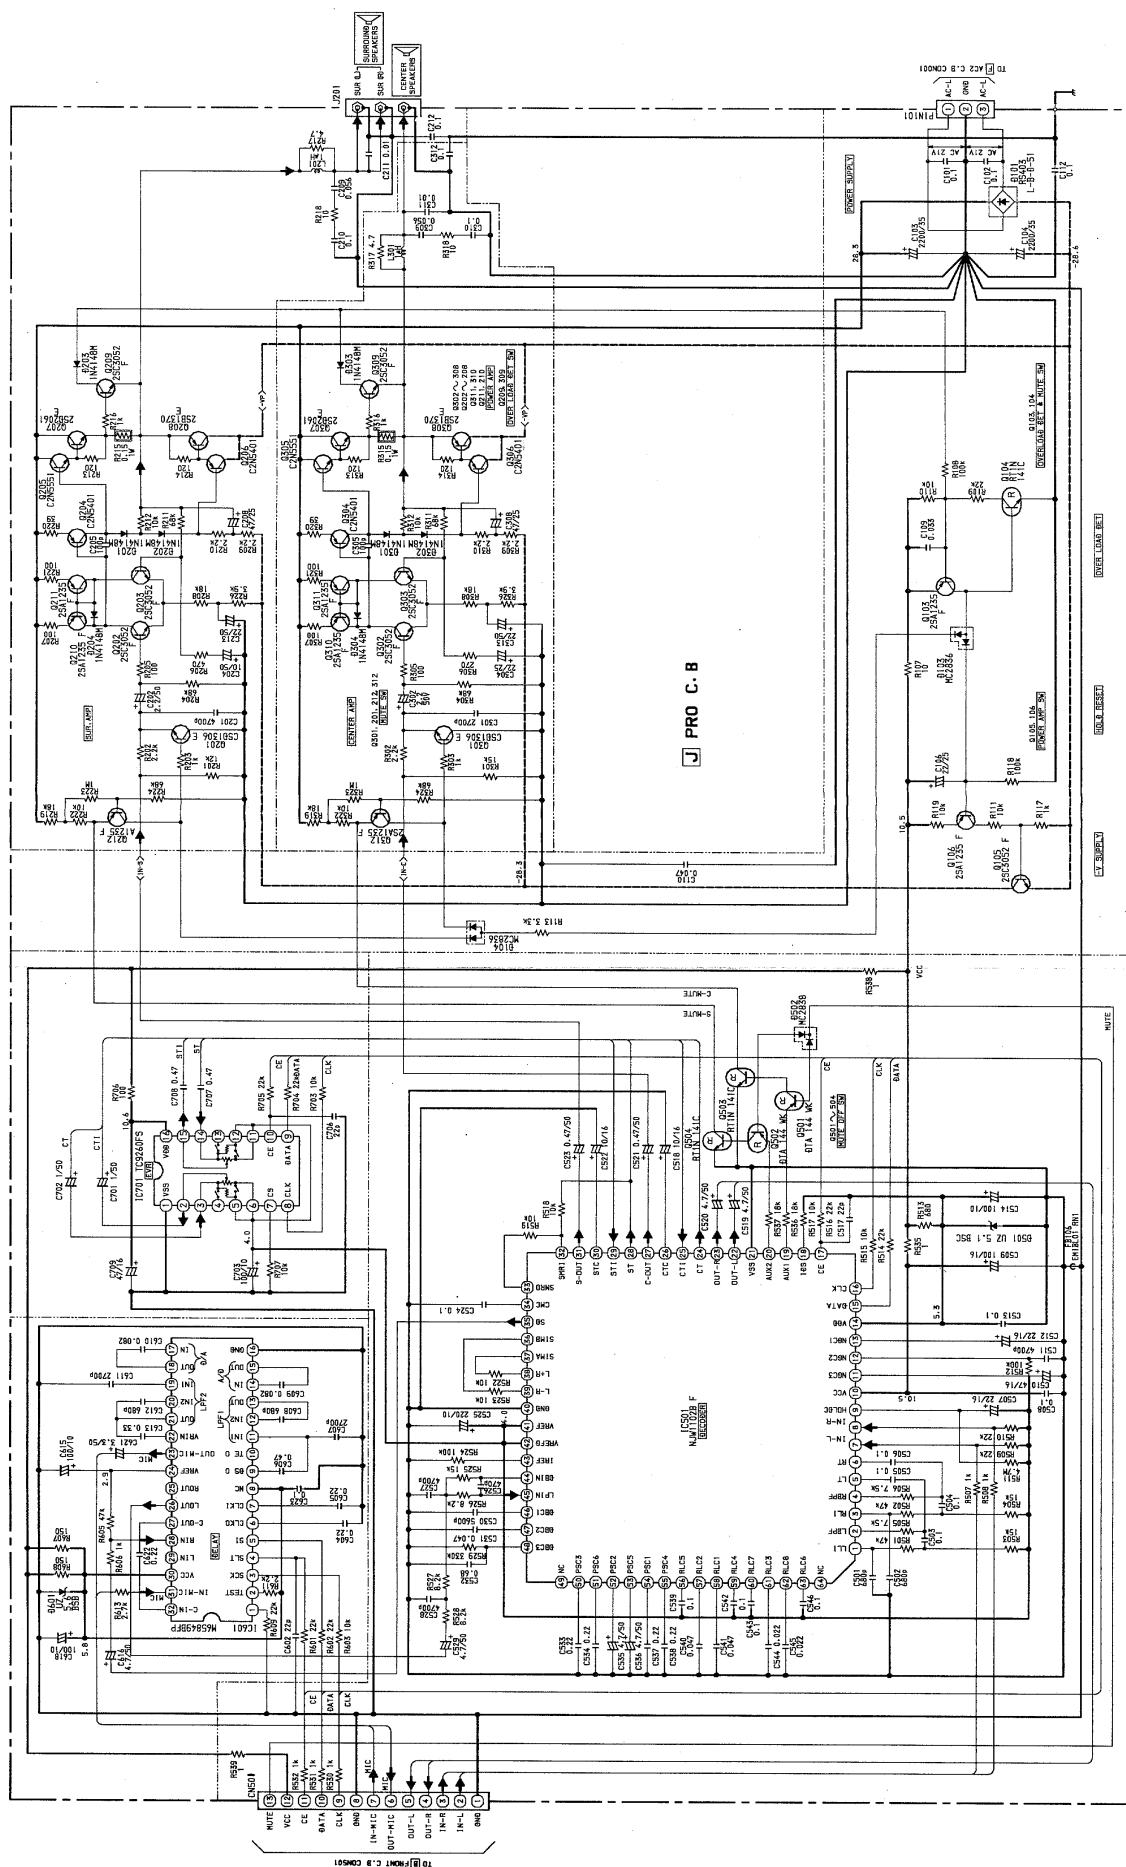


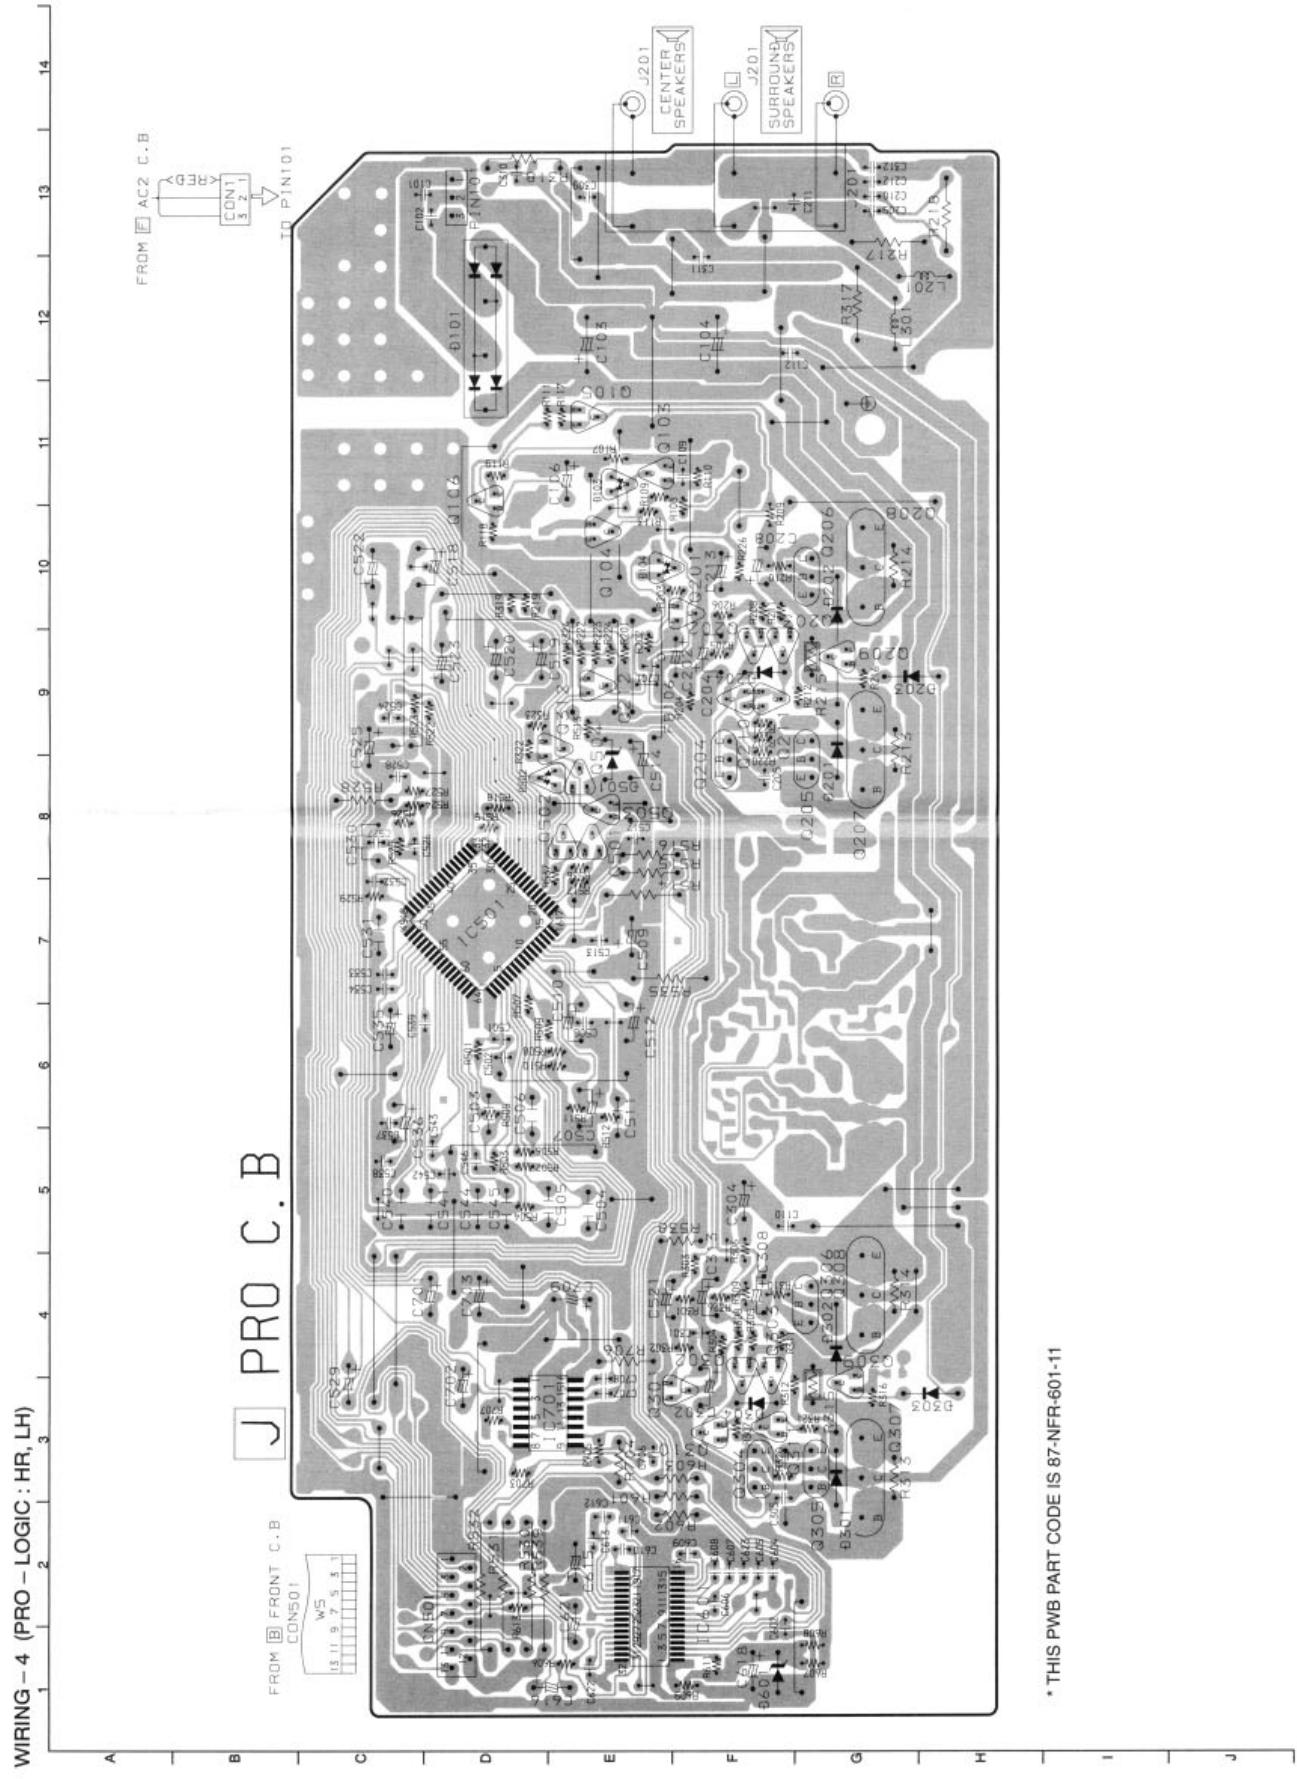

\* THIS PWB PART CODE IS 87-NFR-601-11

## SCHEMATIC DIAGRAM - 7 (PRO - LOGIC : K, G)

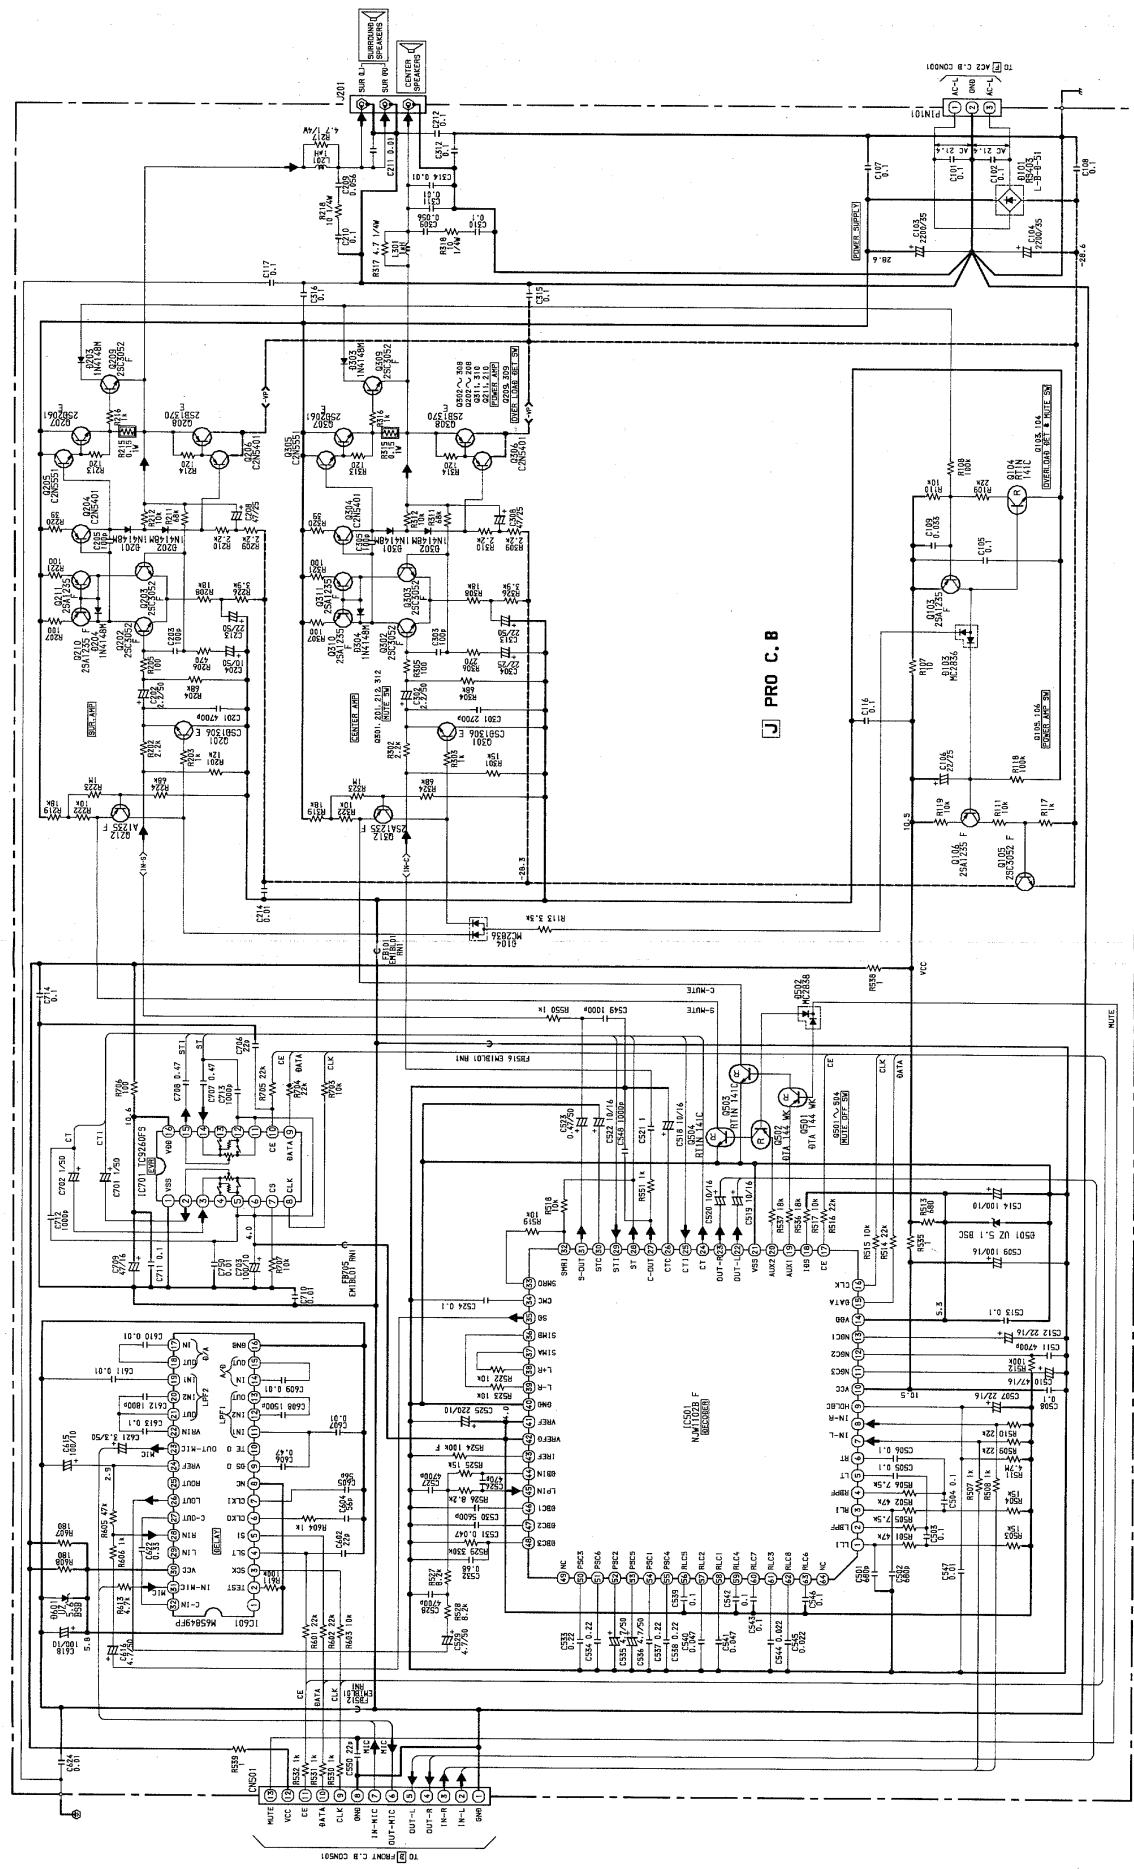

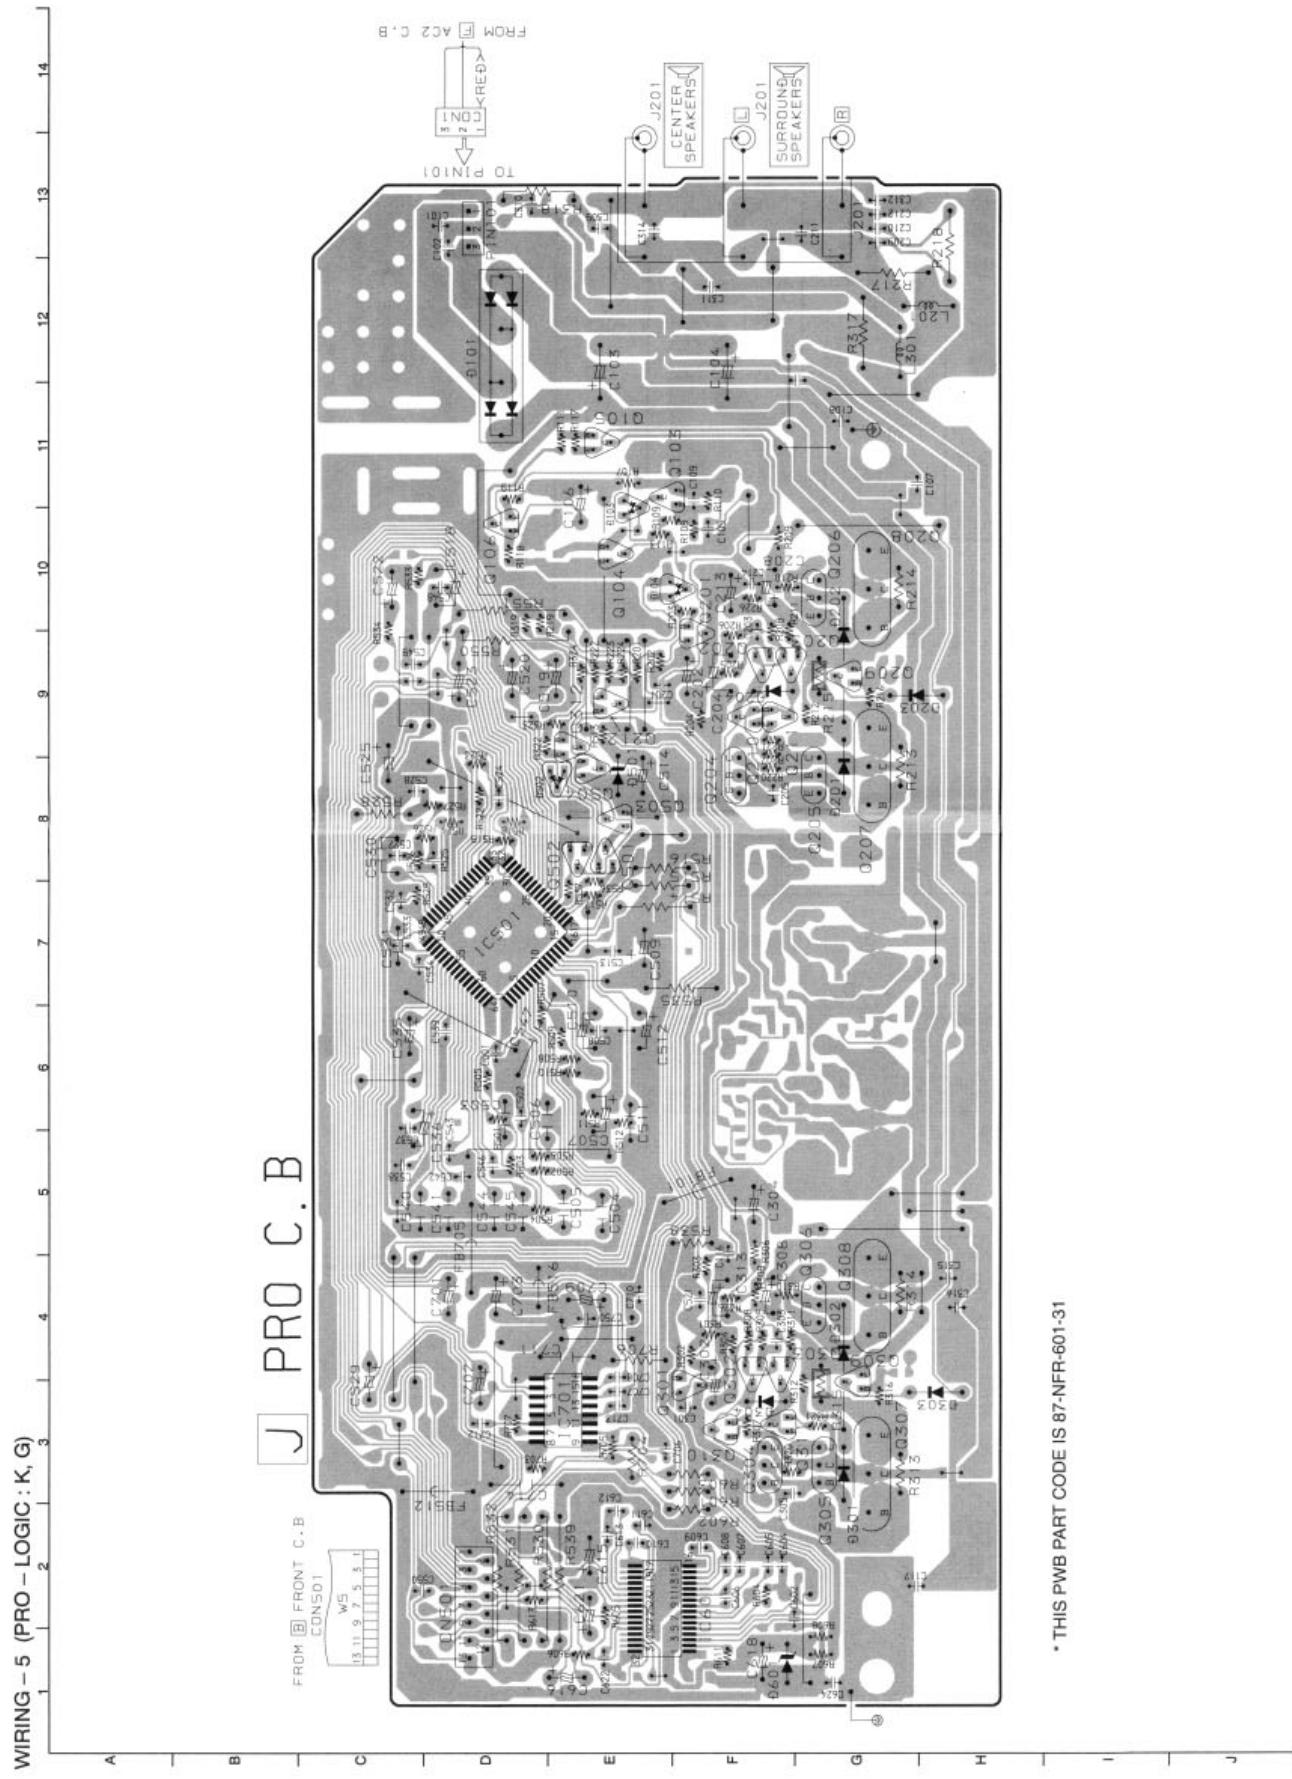


\* THIS PWB PART CODE IS 87-NFR-601-31

## WIRING – 6 (AC / PT)

1 | 1 | 2 | 3 | 4 | 5 | 6 | 7

A

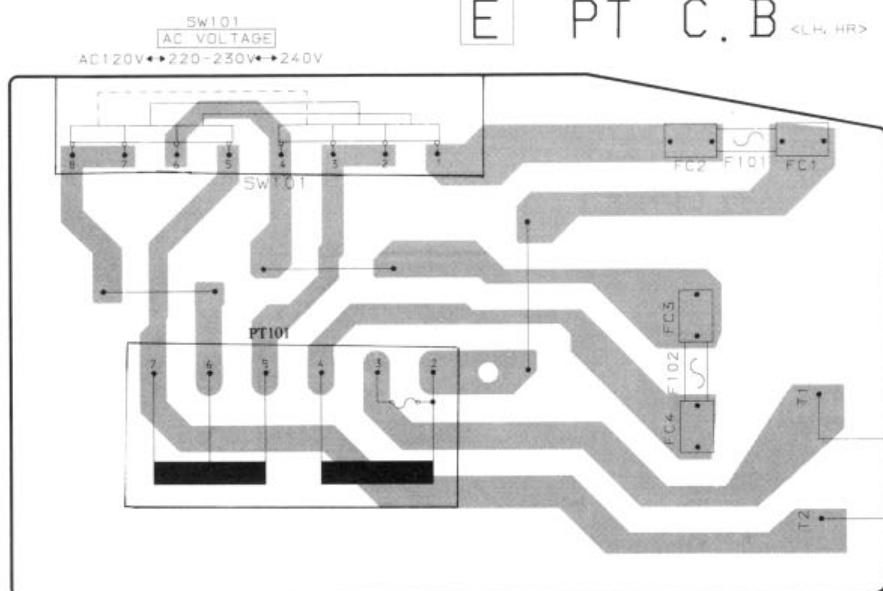

E PT C. B <LH, HR>

B

C

D

E

E AC1 C. B <K, G>

F


G

H


I

J






F AC2 C. B

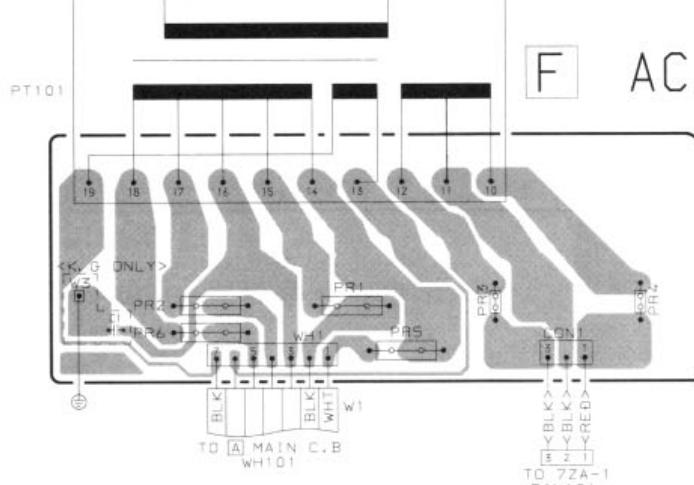

## WIRING – 7 (DECK)

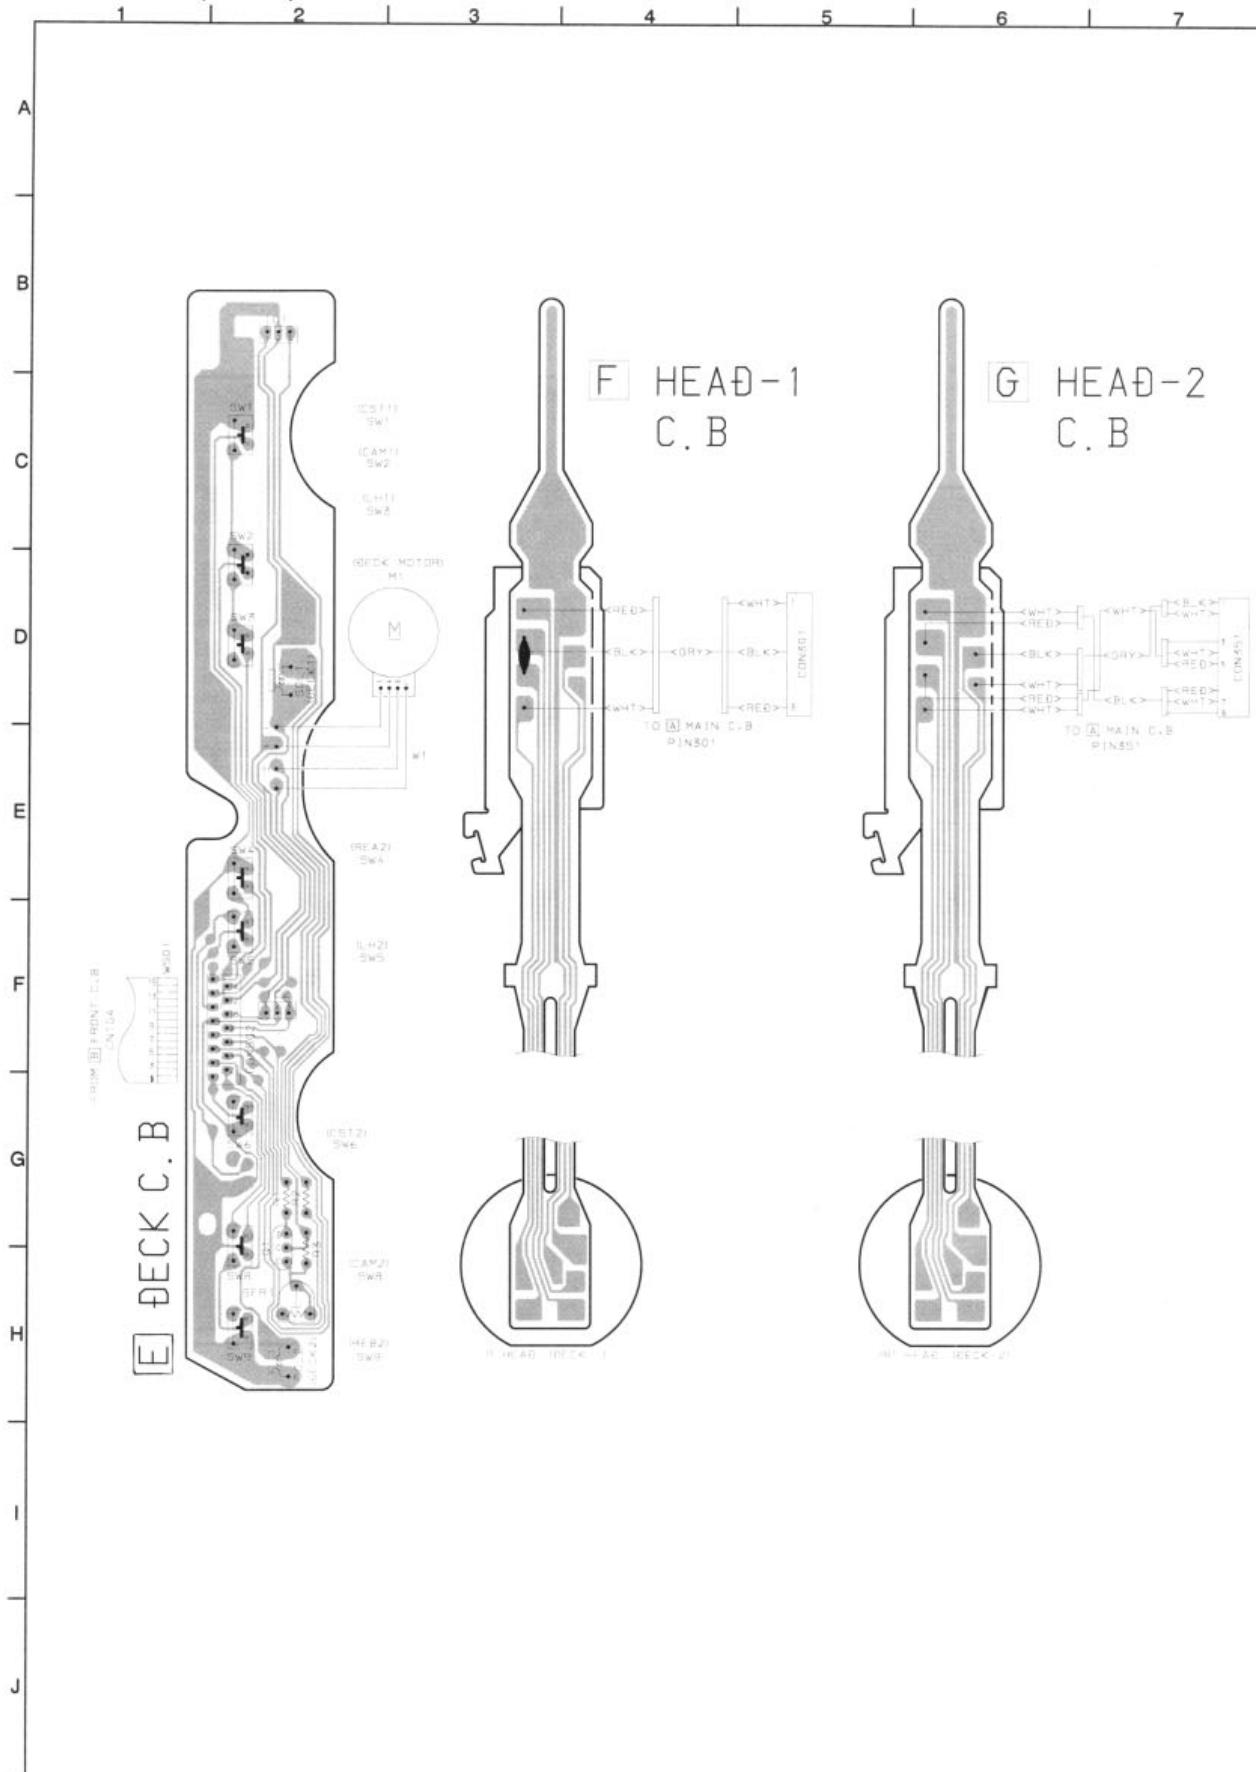

# FL (BJ529GK) GRID ASSIGNMENT & ANODE CONNECTION

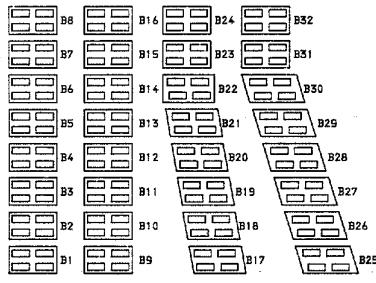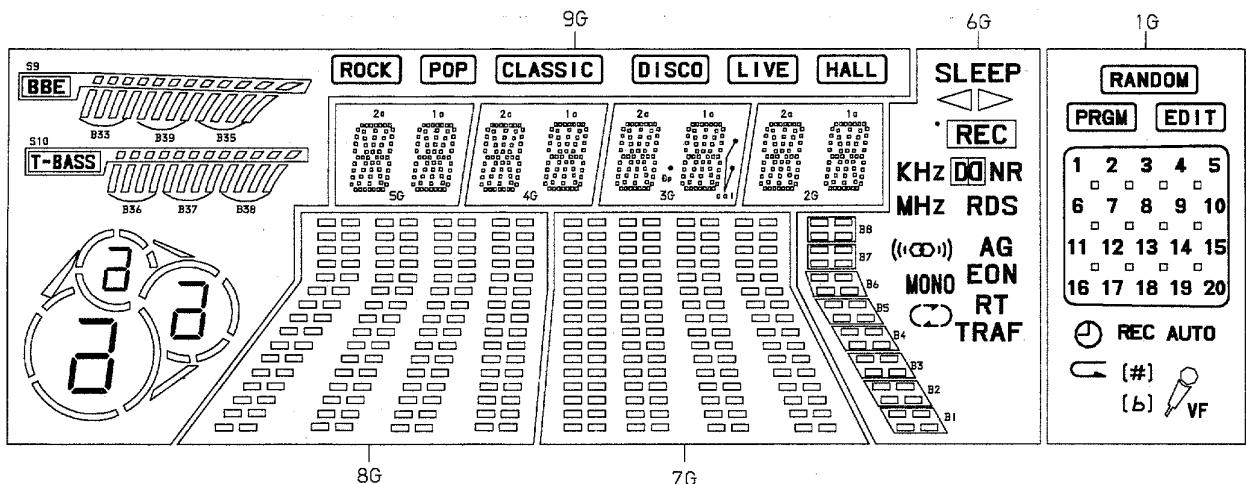

(5G ~ 2G)

(9G)

(8G, 7G)

	9G	8G, 7G	6G	5G, 4G	3G	2G	1G
P1	S8	B32	►	-	CQ DOWN	-	(RANDOM)
P2	S2	B24	◀	1d	1d	1d	-
P3	1b	B16	SLEEP	1n	1n	1n	PRGM
P4	1c	B8	B8	1p	1p	1p	EDIT
P5	1e	B31	O	1r	1r	1r	1
P6	1a, 1d, 1g	B23	REC	1e	1e	1s	2
P7	2b	B15	KHz	1c	1c	1c	3
P8	2c	B7	37	1g	1g	1g	4
P9	2e	B30	MHz	1m	1m	1m	5
P10	2a, 2d, 2g	B22	-	1t	1t	1f	6
P11	3b	B14	DO NR	1b	1b	1b	7
P12	3c	B6	86	1k	1k	1k	8
P13	3e	B29	RDS	1j	1j	1j	9
P14	3a, 3d, 3g	B21	-	1h	1h	1h	10
P15	S3	B13	-	1a	1a	1a	11
P16	S5	B5	B5	-	c1 (WF)	-	12
P17	S7	B28	-	-	8p	-	13
P18	S4	B20	-	2d	2d	2d	14

P19	S6	B12	-	2n	2n	2n	15
P20	(HALL)	B4	B4	2p	2p	2p	16
P21	(LIVE)	B27	AG	2r	2r	2r	17
P22	(DISCO)	B19	((CD))	2e	2e	2e	18
P23	(CLASSIC)	B11	EON	2c	2c	2c	19
P24	(POP)	B3	B3	2g	2g	2g	20
P25	(ROCK)	B26	RT	2n	2n	2n	AUTO
P26	B36	B18	MONO	2f	2f	2f	VF
P27	B37	B10	TRAF	2b	2b	2b	REC
P28	B38	B2	B2	2k	2k	2k	REC
P29	B33	B25	-	2j	2j	2j	REC
P30	B34	B17	-	2h	2h	2h	(( )) (#)
P31	B35	B9	C	2o	2o	2o	(( )) (b)
P32	ROCK POP CLASSIC S10	B1	B1	-	-	-	S1
P33	DISCO LIVE HALL	-	-	-	-	-	-
P34	S9	-	-	-	-	-	-
P35	-	-	-	-	-	-	b #

## PIN CONNECTION


PIN NO.	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31
CONNECTION	F2	F2	F2	NP	NP	9G	8G	7G	6G	5G	4G	3G	2G	1G	NC	P35	P34	P33	P32	P31	P30	P29	P28	P27	P26								

PIN NO.	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8-	7	6	5	4	3	2	1
CONNECTION	P25	P24	P23	P22	P21	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	NP	NP	F1	F1	F1


NOTE 1) F1, F2-----FILAMENT  
2) NP-----NO PIN  
3) NC-----NO CONNECTION  
4) 1G~9G-----GRID

## IC BLOCK DIAGRAM


IC, BU2092F

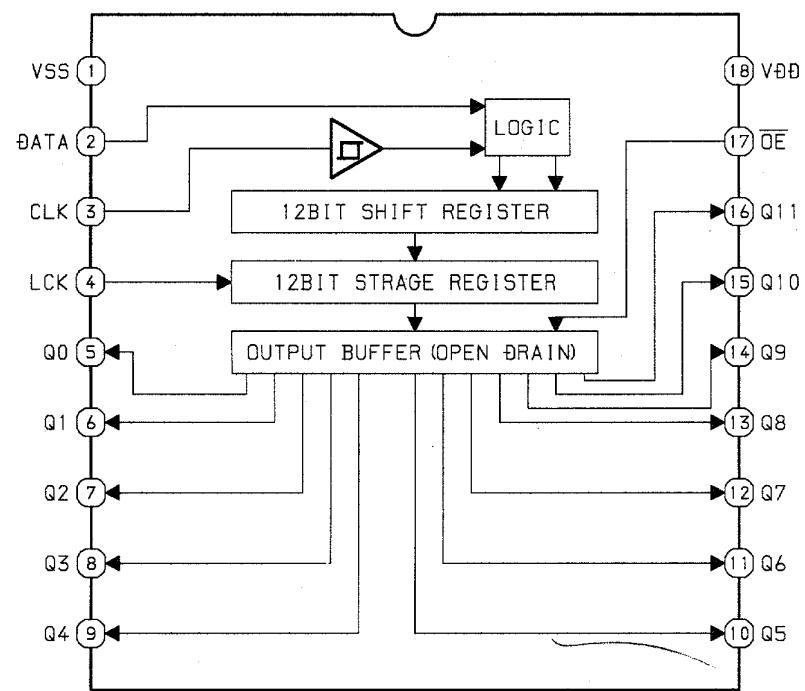


## IC, BA3835S

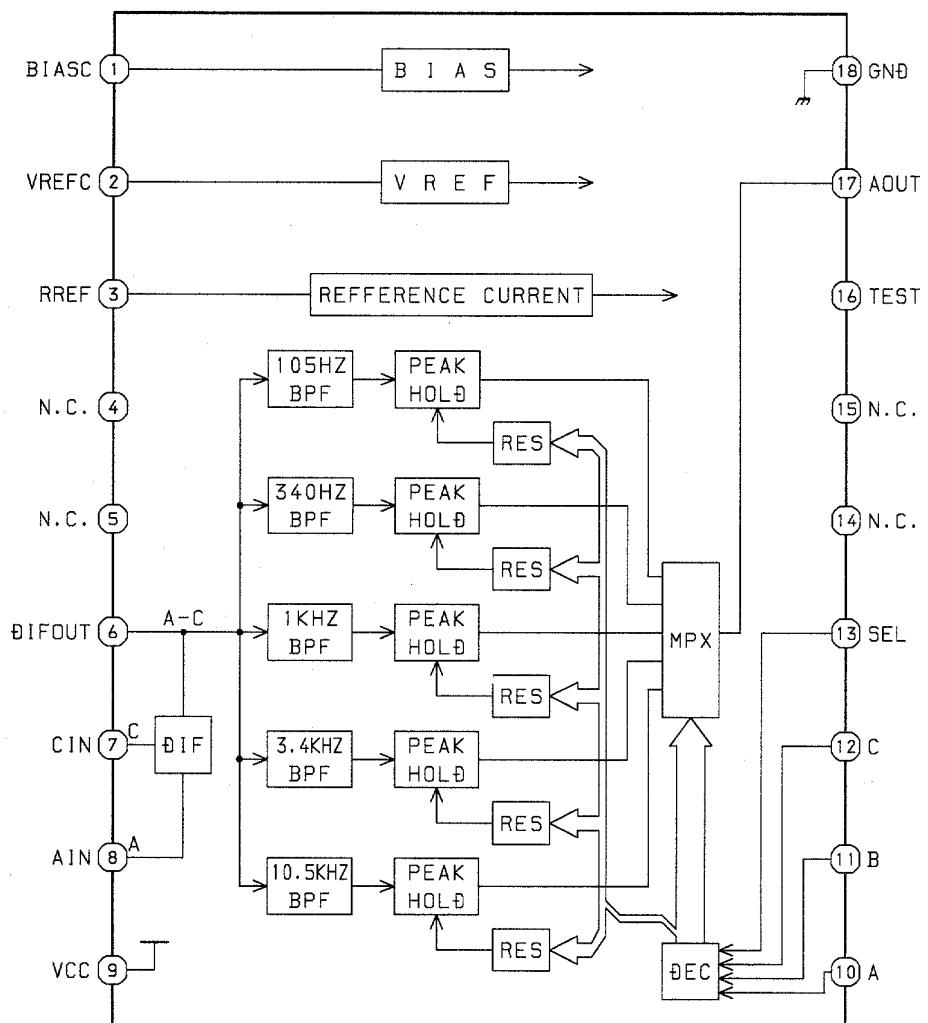


IC, BH3810FS

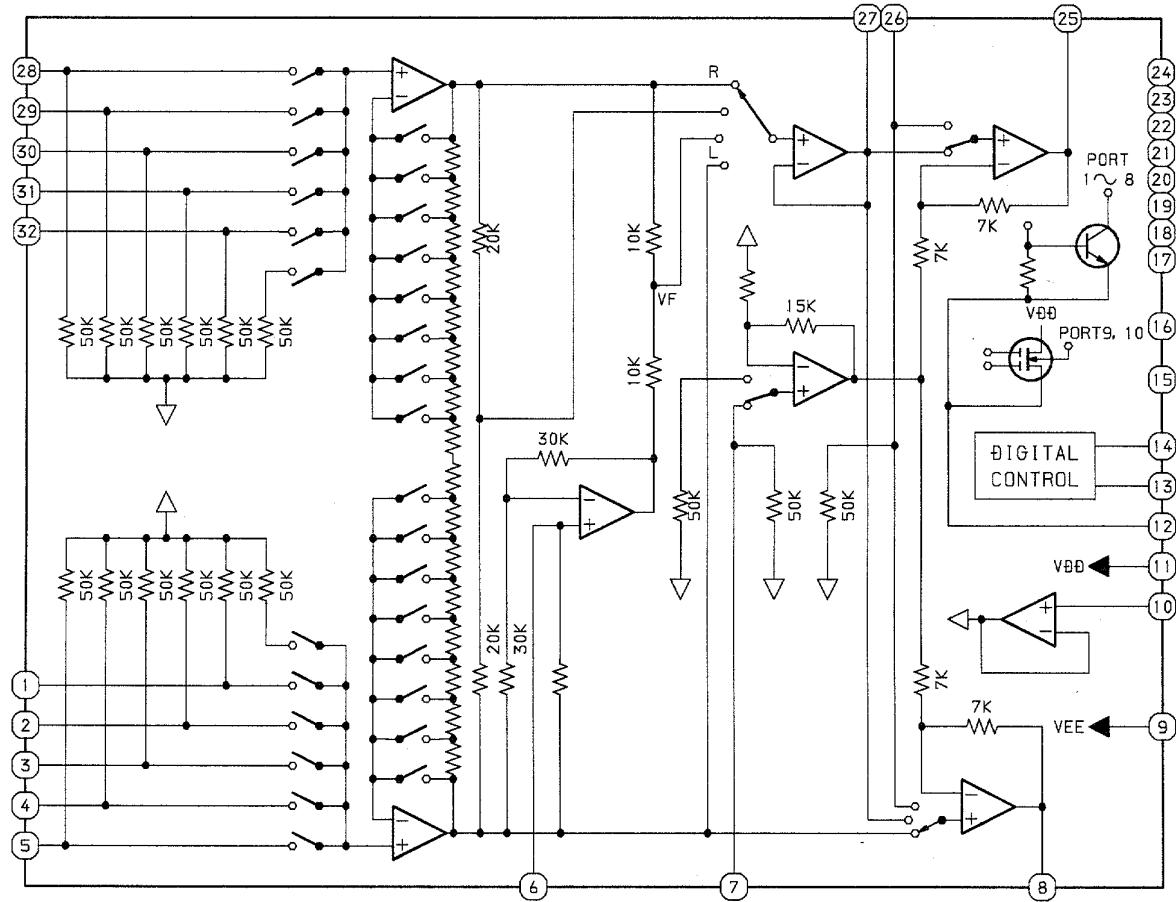


IC, HA12211

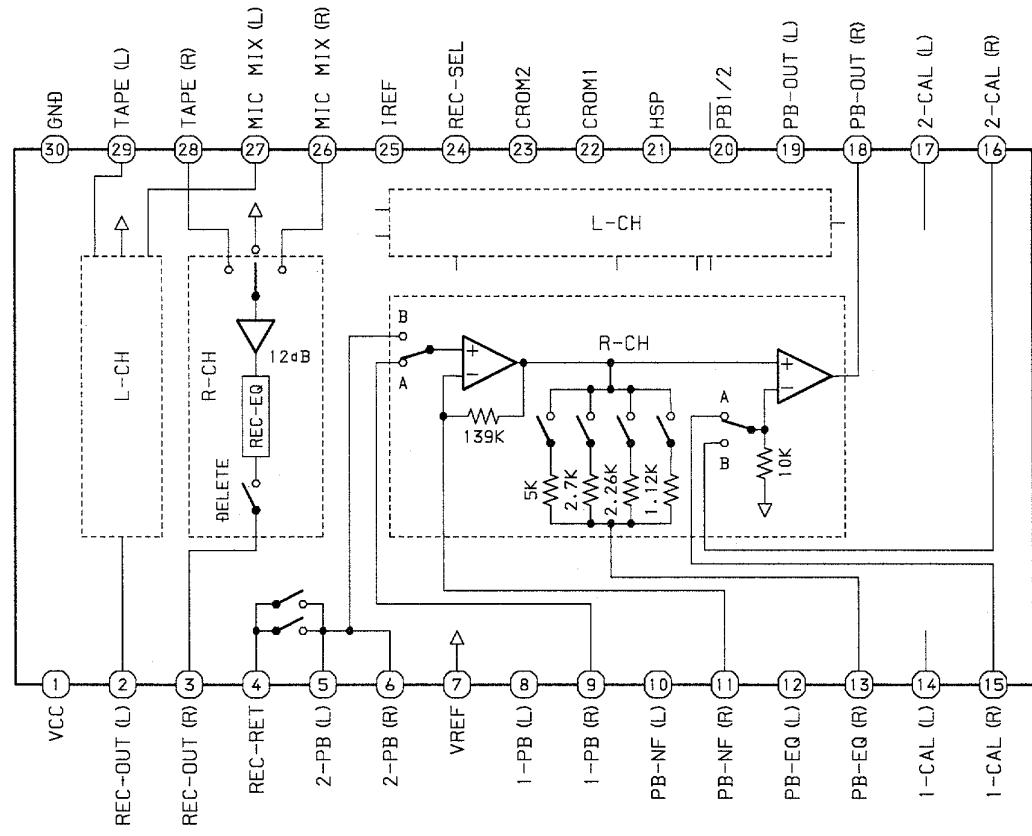


IC, BA3880S

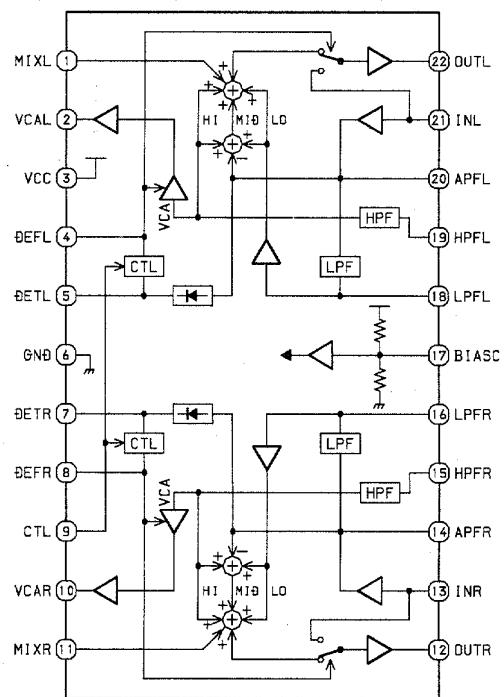


IC, LA1837

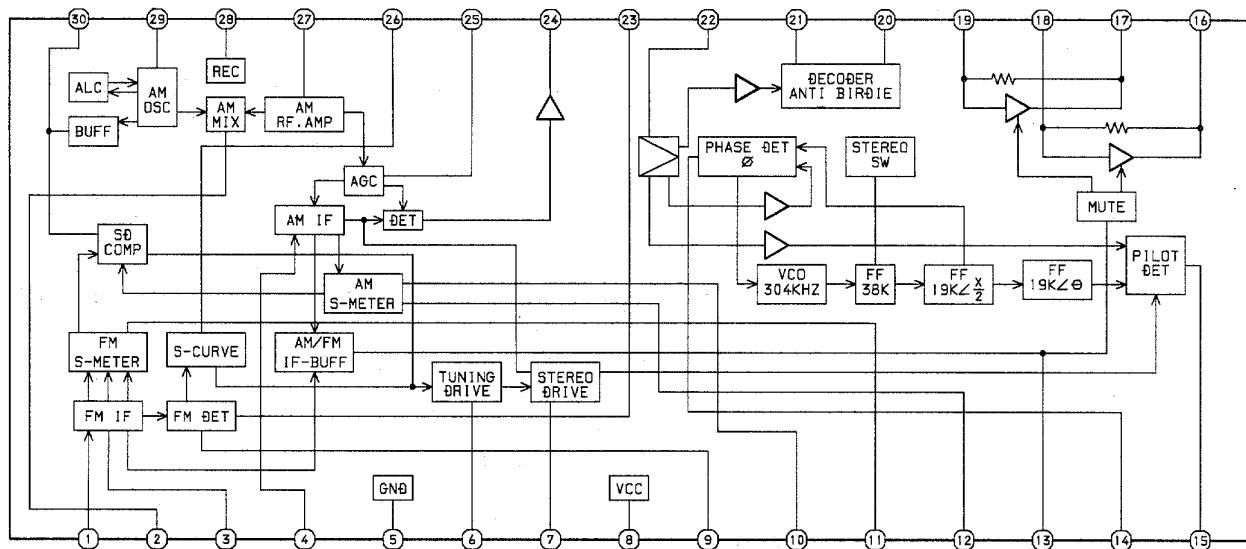


IC, CXA1553P

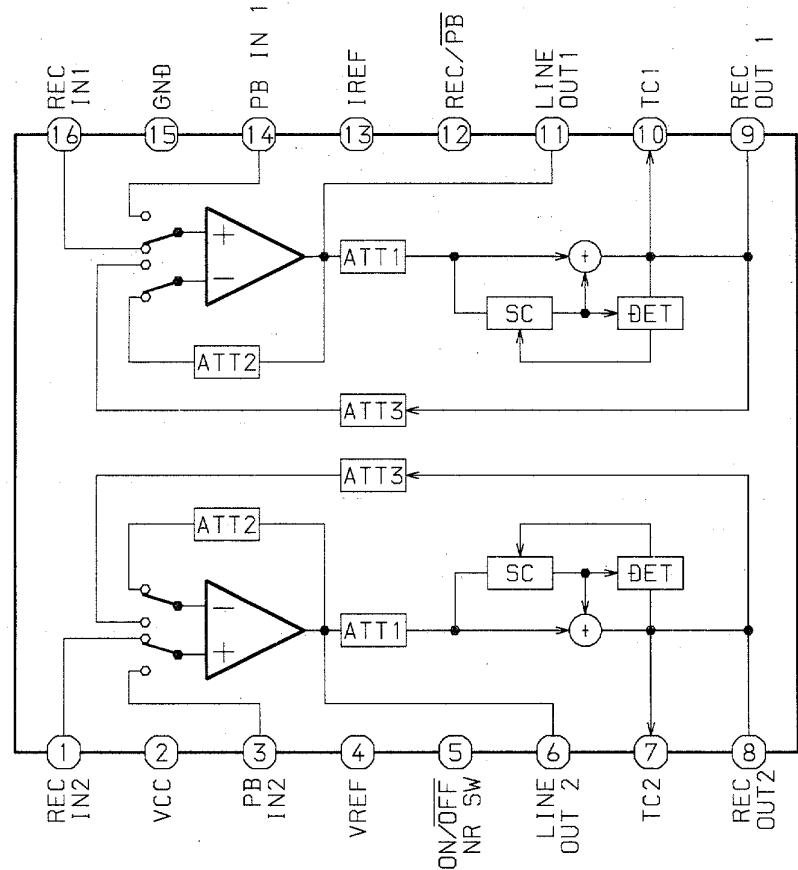

IC, M65847AFP <HR ONLY>

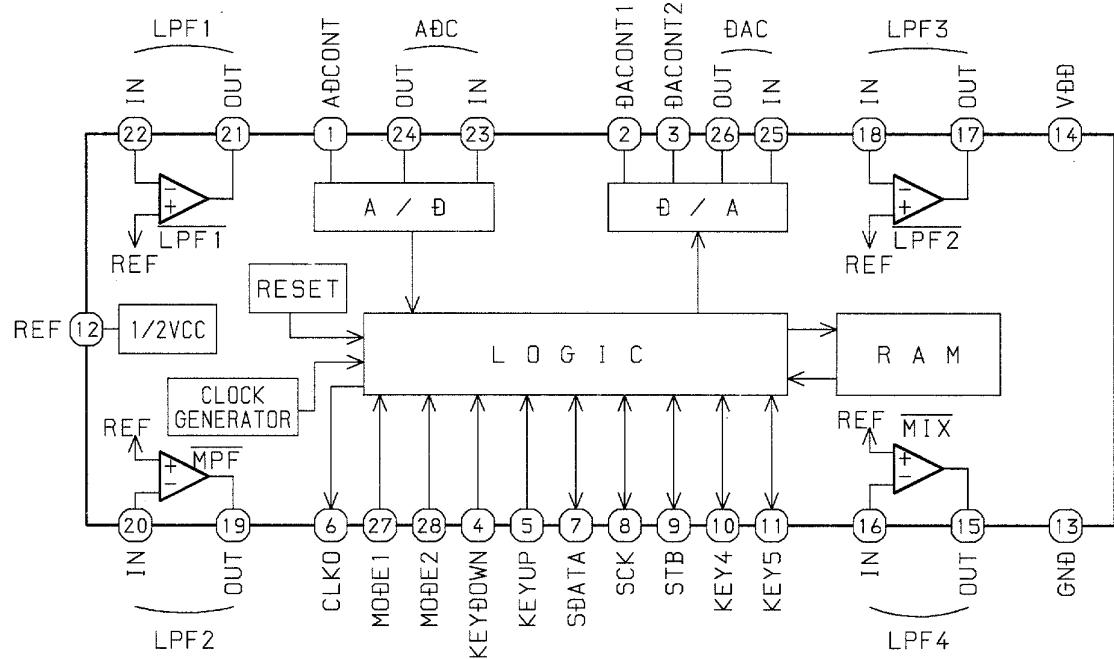

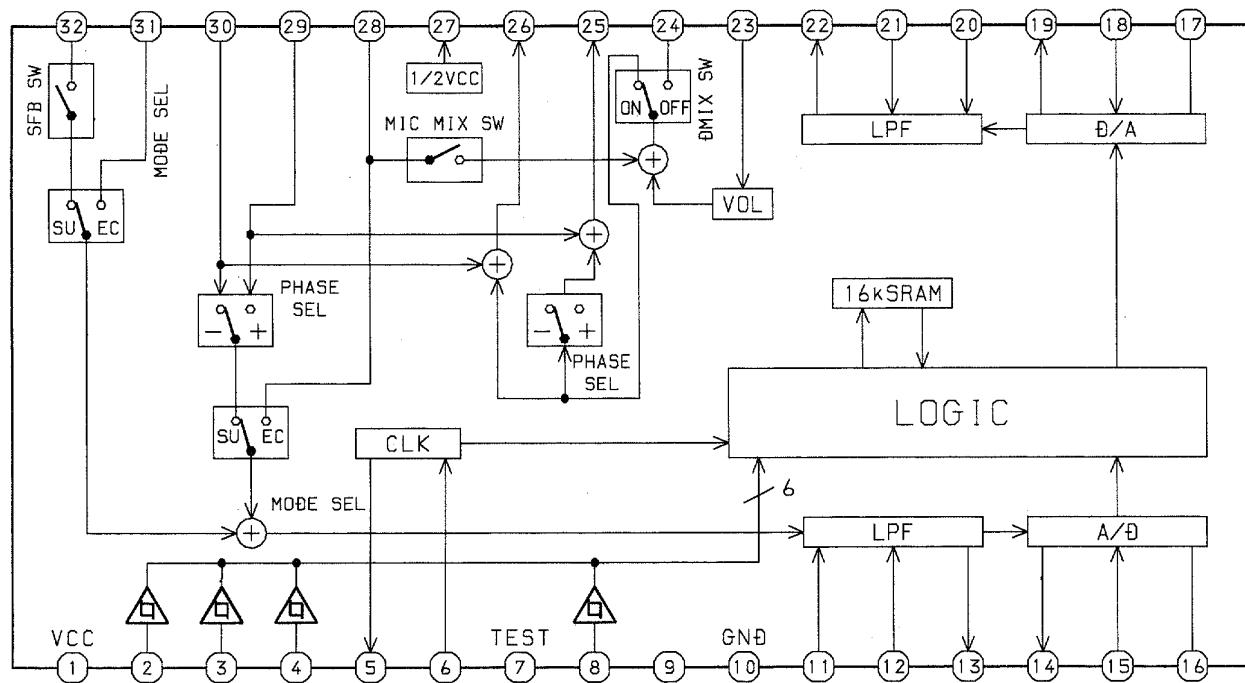

## IC DESCRIPTION

IC, LC866548V

Pin No.	Pin Name	I/O	Description
1	RT-A	I	Rotary encoder A input.
2	RT-B	I	Rotary encoder B input.
3	LED-MD	O	"MD" LED ON/OFF output.
4	LED-CD	O	"CD" LED ON/OFF output.
5	LED-AUX	O	"AUX" LED ON/OFF output.
6	LED-TUNER	O	"TUNER" LED ON/OFF output.
7	LED-TAPE	O	"TAPE" LED ON/OFF output.
8	HSP	O	Tape deck motor high speed ON/OFF output.
9	O-POWER	O	System power supply ON/OFF output.
10	O-MUTE	O	System mute ON/OFF output.
11	O-CLK-SHIFT	O	U-COM clock shift output.
12	RESET	I	Reset input.
13	I-HP-MUTE	-	Not connected.
14	I-DISH	I	CD turntable photo sensor A/D converter input.
15	VSS 1	-	GND.
16	CF 1	-	5.76MHz oscillator circuit.
17	CF 2		
18	VDD 1	-	Power supply input.
19	HOLD	I	Power failure detected input "1" to stop clock and main memory.
20	KEY-1	I	KEY input. (A/D)
21	KEY-2		
22	KEY-3		
23	I-CD SW	I	CD mechanical switch A/D converter input.
24	I-MIC	I	Microphone input for AUTO VF display.
25	I-TU-SIG/MS	I	Tuner signal and deck music sensor signal input.
26	I-SPEANA	I	A/D input for spectrum analyzer display.
27	I-WRQ/RDS-CLK	I	CD WRQ input . TUNER RDS CLOCK input.
28	I-TM-BASE	I	REFERENCE CLOCK input for timer watch.
29	I-RMC	I	System remote control signal input.
30 ~ 37	G9 ~ G2	O	FL GRID output G2~G9.
38 ~ 43	P32 ~ P27	O	FL SEGMENT output P27~P32.
44	G1	O	FL grid output G1.
45	P26	-	FL SEGMENT output P26.
46	VDD3	-	Power supply input.
47	SPEANA-A/P25	O	Spectrum analyzer band switching output /FL segment P25 output.
48	SPEANA-B/P24	O	Spectrum analyzer band switching output /FL segment P24 output.
49	SPEANA-C/P23	O	Spectrum analyzer band switching output /FL segment P23 output.
50	P22/H-DUBB INH	I/O	FL segment P22 output / high dubbing inhibit input to diode.
51	VP	-	Power supply input for FL display.
52	P21/AM-ST	I/O	FL segment P21 output / AM stereo input to diode.
53	P20/LW	I/O	FL segment P20 output / LW mode data input to diode.


Pin No.	Pin Name	I/O	Description
54	P19/SW	I/O	FL segment P19 output / SW mode data input to diode.
55	P18/FM 1	I/O	FL segment P18 output / FM1 (OIRT) data input to diode.
56	P17/RDS	I/O	FL segment P17 output / RDS data input to diode.
57	P16/BBE	I/O	FL segment P16 output / BBE data input to diode.
58	P15/DSP	I/O	FL segment P15 output / DSP data input to diode.
59	P14/DOLBY-SURR	I/O	FL segment P14 output / DOLBY-SURR data input to diode.
60	P13/K-CON	I/O	FL segment P13 output / K-CON data input to diode.
61	P12/DOLBY	I/O	FL segment P12 output / DOLBY data input to diode.
62	P11/WAY	I/O	FL segment P11 output / DECK/WAY MECHA data input to diode.
63	P10/AM-9K/10K	I/O	FL segment P10 output / INITIAL AM 10 kHz step data input to diode.
64	P9/CST 2	I/O	FL segment P9 output / DECK2 cassette detect switch data input.
65	P8/REB	I/O	FL segment P8 output / DECK2 side-B record OK switch data input.
66	P7/CAM 2	I/O	FL segment P7 output / DECK2 CAM switch data input.
67	P6/AUTO 1	I/O	FL segment P6 output / DECK1 AUTO stop signal input.
68	P5/AUTO 2	I/O	FL segment P5 output / DECK2 AUTO stop signal input.
69	P4/CAM 1	I/O	FL segment P4 output / DECK1 CAM switch data input.
70	P3/CST 1	I/O	FL segment P3 output / DECK1 cassette detect switch data input.
71	P2/REA	I/O	FL segment P2 output / DECK2 side A record OK switch data input.
72	VDD 4	-	Power supply input.
73	P1/2092	I/O	FL segment P1 output / SHIFT resistor IC 2092 data input to diode.
74	K-SCAN	O	Switch SCAN timing output.
75	L CK	O	Latch clock output for front shift resistor.
76	PRO-CE	O	PRO LOGIC IC chip enable output.
77	PLL-CE	O	PLL IC chip enable output.
78	MA-STB	O	Latch strobe output for MAIN PWB.
79	DATA	O	DATA output for MAIN, FORNT, PROLOGIC PWB.
80	CLK	O	CLOCK output for MAIN, FORNT, PROLOGIC PWB.
81	DISH-RVS	O	CD turntable reverse rotation output.
82	DISH-FWD	O	CD turntable forward rotation output.
83	TRAY-OPEN	O	CD TRAY OPEN data output.
84	TRAY-CLOSE	O	CD TRAY CLOSE data output.
85	LED ►►	O	►► LED ON/OFF output.
86	LED ◀◀	O	◀◀ LED ON/OFF output.
87	LED ►	O	► LED ON/OFF output.
88	LED ◀	O	◀ LED ON/OFF output.
89	VSS 2	-	GND.
90	VDD 2	-	Power supply input.
91	LED ■	O	■ LED ON/OFF output.
92	LED II	O	II LED ON/OFF output.
93	SOL 1	O	DECK 1 Solenoid output.
94	SOL 2	O	DECK 2 Solenoid output.

Pin No.	Pin Name	I/O	Description
95	O-MOTOR	O	DECK MOTOR ON/OFF output.
96	I-TUNE/IFC/SUBQ	I	Tune IF count serial data input /CD SUB Q data input.
97	I-Stereo/O-SQCLK	I/O	Tuner stereo detected input/CD SQ CLOCK output.
98	I-RDS-DATA/O-DATA	I/O	RDS data input/CD data output.
99	O-CD CE	O	CD CE output.
100	O-CD CLK	O	CD CLOCK output.

IC, LC72131D

Pin No.	Pin Name	I/O	Description																								
1	X IN	I/O	A crystal oscillator (7.2MHz) is connected between these pins.																								
22	X OUT																										
2	NC	-	Not used.																								
3	CE	I	To enable the IC. Active "H".																								
4	DI	I	Digital data input from CPU(LC866548V) when relevant key is operated. Active "H".																								
5	CL	I	To clock in the data DI.																								
6	DO	O	Digital data output to CPU (LC866548V).																								
7	T-BASE	O	Outputs a reference clock signal (8Hz) for the clock.																								
8	MONO / BEAT	O	Outputs "H" when MONO / BEAT is switched.																								
9	FM / SW	O	Output "L" or "H" as follows: <table border="1"> <tr> <th colspan="2">2 BAND</th> <th colspan="3">3 BAND</th> <th colspan="3">3 BAND</th> </tr> <tr> <td>AM</td> <td>FM</td> <td>LW</td> <td>MW</td> <td>FM</td> <td>MW</td> <td>SW</td> <td>FM</td> </tr> <tr> <td>H</td> <td>L</td> <td>H</td> <td>H</td> <td>L</td> <td>H</td> <td>L</td> <td>L</td> </tr> </table>	2 BAND		3 BAND			3 BAND			AM	FM	LW	MW	FM	MW	SW	FM	H	L	H	H	L	H	L	L
2 BAND		3 BAND			3 BAND																						
AM	FM	LW	MW	FM	MW	SW	FM																				
H	L	H	H	L	H	L	L																				
10	MW / SW	Outputs "L" or "H" as follows: <table border="1"> <tr> <th colspan="2">2 BAND</th> <th colspan="3">3 BAND</th> <th colspan="3">3 BAND</th> </tr> <tr> <td>AM</td> <td>FM</td> <td>LW</td> <td>MW</td> <td>FM</td> <td>MW</td> <td>SW</td> <td>FM</td> </tr> <tr> <td>L</td> <td>L</td> <td>H</td> <td>L</td> <td>L</td> <td>L</td> <td>H</td> <td>L</td> </tr> </table>	2 BAND		3 BAND			3 BAND			AM	FM	LW	MW	FM	MW	SW	FM	L	L	H	L	L	L	H	L	
2 BAND		3 BAND			3 BAND																						
AM	FM	LW	MW	FM	MW	SW	FM																				
L	L	H	L	L	L	H	L																				
11	IF-MUTE	O	To control internal counter.																								
12	IF-IN	I	General purpose counter input.																								
13	TUNE	I	Receives "L" when station is tuned.																								
14	NC	-	Not used.																								
15	AM-IN	I	Receives the AM local oscillator frequency signal.																								
16	FM-IN	I	Receives the FM local oscillator frequency signal.																								
17	VDD	-	Supply power to IC (+5V).																								
18	PD	O	PLL charge pump output.																								
19	A-IN	I	The MOS transistor for PLL active low pass filter.																								
20	A-OUT	O																									
21	VSS	-	Ground.																								

## ADJUSTMENT < TUNER / DECK >

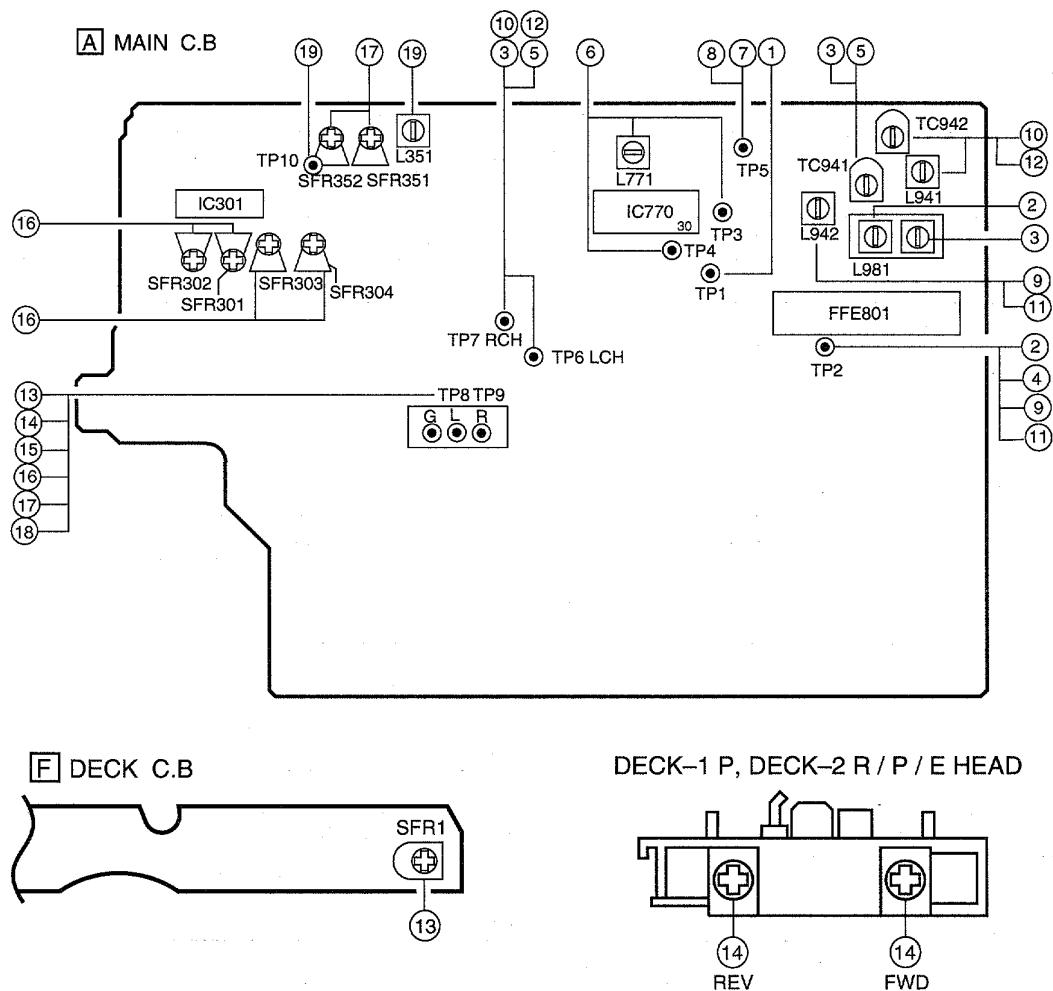

### < TUNER SECTION >

#### 1. Clock Frequency Check

Settings : • Test point : TP1

Method : Set to MW 1710kHz and check that the test point is 2160kHz ± 45Hz.< LH, HR >

Set to MW 1602kHz and check that the test point is 2052kHz ± 45Hz.< K, G >

#### 2. MW VT Adjustment<HR>

Settings : • Test point : TP2 (VT)

Method : Set to MW 1710kHz and adjust L981 so that the test point is 8.5V ± 0.05V.

Then, set to MW 530kHz and check that the test point is more than 0.3V.

#### 2. MW VT Adjustment<LH,K,G>

Settings : • Test point : TP2 (VT)

Method : Set to MW 1602kHz and check that the test point is less than 8.5V.< K, G >

Set to MW 1710kHz and check that the test point is 6.0 ± 1.0V.< LH >

#### 3. MW Tracking Adjustment<HR>

Settings : • Test point : TP2 (VT)

• Adjustment location :

L981 ..... 600kHz

TC941 ..... 1400kHz

Method : Set up TC941 to center before adjustment. The level at 600kHz is adjusted to MAX by L981. Then, the level at 1400kHz is adjusted to MAX by TC941.

#### 3. MW Tracking Adjustment<LH,K,G>

Settings : • Test point : TP6, TP7

• Adjustment location :

L981 ..... 999kHz< K, G >

L981 ..... 1000kHz< LH >

#### 4. FM VT Check

Settings : • Test point : TP2 (VT)

Method : Set to FM 108.0MHz and check that the test point is less than 8.5V. Set to FM 87.5MHz and check that the test point is more than 1.5V.

#### 5. FM Tracking Check

Settings : • Test point : TP6, TP7

Method : • Set to FM 98.0MHz and check that the test point is 2 ± 6dB< LH, HR >, 6 ± 6dB< K, G >.

#### 6. DC Balance / Mono Distortion Adjustment

Settings : • Test point : TP3, TP4

• Adjustment location : L771

• Input level : 54dB

Method : Set to FM 98.0MHz and adjust L771 so that the voltage between TP3 and TP4 becomes  $0V \pm 0.04V$ .  
Next, check that the distortion is less than 1.3%

7. Auto Stop Level Check

Settings : • Test point : TP5  
• Input level : adjustable

Method : Set to FM 98.0 MHz and check that the voltage low about 0.1V. After that voltage high about 7.0V out by 2dB down.

8. Auto Stop Level Check

FM

Settings : • Test point : TP5  
• Input level : adjustable

Method : Set to FM 98.0MHz and check that the test point is  $25dB \pm 10dB$ .

MW

Settings : • Test point : TP5  
• Input level : adjustable

Method : Set to MW 999kHz<HR,K,G>, MW 1000kHz<LH> and check that the test point is  $35 \sim 60dB$ .

SW<HR>

Settings : • Test point : TP5  
• Input level : adjustable

Method : Set to SW 12MHz and check that the test point is less than 60dB.

9. SW VT Adjustment <HR>

Settings : • Test point : TP2 (VT)

Method : Set to SW 17.9MHz and adjust L942 so that the test point is  $7.0V \pm 0.05V$ .

10. SW Tracking Adjustment<HR>

Settings : • Test point : TP6, TP7  
• Adjustment location :

L941 ..... 5.9MHz  
TC942 ..... 17.9MHz

Method : Set up TC941 to center before adjustment. The level at 5.9MHz is adjusted to MAX by L941. Then, the level at 17.9MHz is adjusted to MAX by TC942.

11. LW VT Adjustment <K,G>

Settings : • Test point : TP2 (VT)

Method : Set to LW 144kHz and adjust L942 so that the test point is  $1.3V \pm 0.05V$ .

12. LW Tracking Adjustment<K,G>

Settings : • Test point : TP6, TP7  
• Adjustment location :

L941 ..... 144kHz  
TC942 ..... 290kHz

Method : Set up TC941 to center before adjustment. The level at 144MHz is adjusted to MAX by L941. Then, the level at 290MHz is adjusted to MAX by TC942.

< DECK SECTION >

13. Tape Speed Adjustment

Settings : • Test tape : TTA-100  
• Test point : TP8, TP9  
• Adjustment location : SFR1

Method : Play back the test tape and adjust SFR1 so that the frequency counter reads  $3000Hz \pm 5Hz$ .

14. Head Azimuth Adjustment

Settings : • Test tape : TTA-300  
• Test point : TP8, TP9  
• Adjustment location : Head azimuth adjustment screw

Method : Play back the 10kHz signal of the test tape and adjust screw so that the output becomes maximum. Next, perform on each FWD PLAY and REV PLAY mode.

15. PB Frequency Response Check (DECK 1, DECK 2)

Settings : • Test tape : TTA-300  
• Test point : TP8, TP9

Method : Play back the 315Hz and 10kHz signals of the test tape and check that the output ratio of the 10kHz signal with respect to that of the 315Hz signal is within 2dB.

16. PB Sensitivity Adjustment (DECK 1, DECK 2)

Settings : • Test tape : TTA-200

• Test point : TP8, TP9

• Adjustment location :

SFR301 (DECK 1, Lch)  
SFR302 (DECK 1, Rch)  
SFR303 (DECK 2, Lch)  
SFR304 (DECK 2, Rch)

Method : Play back the test tape and adjust SFRs so that the output level of the test point becomes 245mV.

17. REC/PB Frequency Response Adjustment

Settings : • Test tape : TTA-602

• Test point : TP8, TP9

• Input signal : 1kHz / 10kHz (LINE IN)

• Adjustment location : SFR351 (Lch)  
SFR352 (Rch)

Method : Apply a 1kHz signal and REC mode.

Then adjust OSC attenuator so that the output level at the TP8, TP9 becomes 170mV. Record and play back the 1kHz and 10kHz signals and adjust SFRs so that the output of the 10kHz signals becomes  $0dB \pm 0.5dB$  with respect to that of the 1kHz signal.

18. REC/PB Sensitivity Adjustment

Settings : • Test tape : TTA-602

• Test point : TP8, TP9

• Input signal : 1kHz / 10kHz (LINE IN)

• Adjustment location : SFR351 (Lch)  
SFR352 (Rch)

Method : Apply a 1kHz signal and REC mode.

Then adjust OSC attenuator so that the output level at the TP8, TP9 becomes 17mV. Record and play back the 1kHz signals and adjust SFRs so that the output is  $17mV \pm 0.5dB$ .

19. Bias OSC Frequency Adjustment

Settings : • Test tape : TTA-601

• Test point : TP10

• Adjustment location : L351

Method : Set to the REC mode. Adjust L351 so that the frequency counter of the test point is  $85kHz \pm 1kHz$ .

# PRACTICAL SERVICE FIGURE

## <TUNER SECTION>

### <FM SECTION>

IHF Sensitivity : LH, HR :  
 (THD 3%) 6dB ± 4dB [at 87.5MHz]  
 5dB ± 4dB [at 98.0 / 108.0MHz]  
 K, G : 8dB ± 4dB  
 [at 87.5 / 98.0 / 108.0MHz]

S/N 50dB Quieting sensitivity :

LH, HR : 30dB ± 6dB  
 [at 87.5 / 98.0 / 108.0MHz]  
 K, G : 34dB ± 6dB  
 [at 87.5 / 98.0 / 108.0MHz]

Signal to noise ratio :

LH, HR :  
 More than 65dB  
 K, G :  
 More than 60dB  
 [at 98.0MHz]<MONO>  
 LH, HR :  
 More than 64dB  
 K, G :  
 Less than 59dB

[at 98.0MHz]<STEREO>

Distortion : 1.3% [at 98.0MHz]<MONO>

Less than 2.0%

[at 98.0MHz]<STEREO>

Stereo separation :

LH, HR :  
 More than 25dB [at 98.0MHz]  
 K, G :  
 More than 22dB [at 98.0MHz]

Intermediate frequency : 10.7MHz

### <LW SECTION>[K, G]

Sensitivity : 66dB ± 5dB [at 144kHz]  
 (S/N 20 dB) 63dB ± 5dB [at 198 / 290kHz]  
 Distortion : Less than 1.2% [at 198kHz]  
 Intermediate frequency : 450kHz

### <MW SECTION>

Sensitivity : 55dB ± 5dB [at 600kHz <LH> / 603kHz <EXCEPT LH>]  
 (S/N 20 dB) 53dB ± 5dB [at 1000 / 1400kHz <LH>]  
 Distortion : [at 999 / 1404kHz <EXCEPT LH>]  
 Intermediate frequency : Less than 1.5% [at 1000kHz <LH> / 999kHz <EXCEPT LH>]

### <SW SECTION>[HR]


Sensitivity : 38dB ± 5dB [at 5.9MHz]  
 (S/N 20 dB) 33dB ± 5dB [at 12.0MHz]  
 30dB ± 8dB [at 17.9MHz]  
 Distortion : Less than 2.0% [at 12.0MHz]  
 Intermediate frequency : 450kHz

## <DECK SECTION>

### <2ZM-3MK2>

Tape speed : 3000Hz ± 45Hz  
 Wow & flutter : Less than 0.15% (R.M.S)  
 Take-up torque : 30 ~ 55g-cm (FWD, REV)  
 F.F & REW torque : 75 ~ 180g-cm  
 Back tension : 2 ~ 7g-cm (FWD, REV)

PB Output level : 300mV ± 1dB (SP OUT 2V)  
 REC/PB Output level : 180mV ± 2dB (SP OUT 2V)  
 Distortion (REC/PB) : Less than 2.0% (NORM, CrO2)  
 Noise level (PB) : Less than 1.8mV  
 (DOLBY NR ON / OFF  
 NORM. Vol MAX.)  
 Noise level (REC/PB) : Less than 2.2mV  
 (DOLBY NR ON / OFF NORM.)  
 Crosstalk : More than 60dB (1kHz, 0VU)  
 Channel separation : More than 30dB (1kHz, 0VU)  
 Erasing ratio : More than 60dB (at 125Hz)  
 Test tape : NORMAL : TTA-602  
 CrO2 : TTA-615

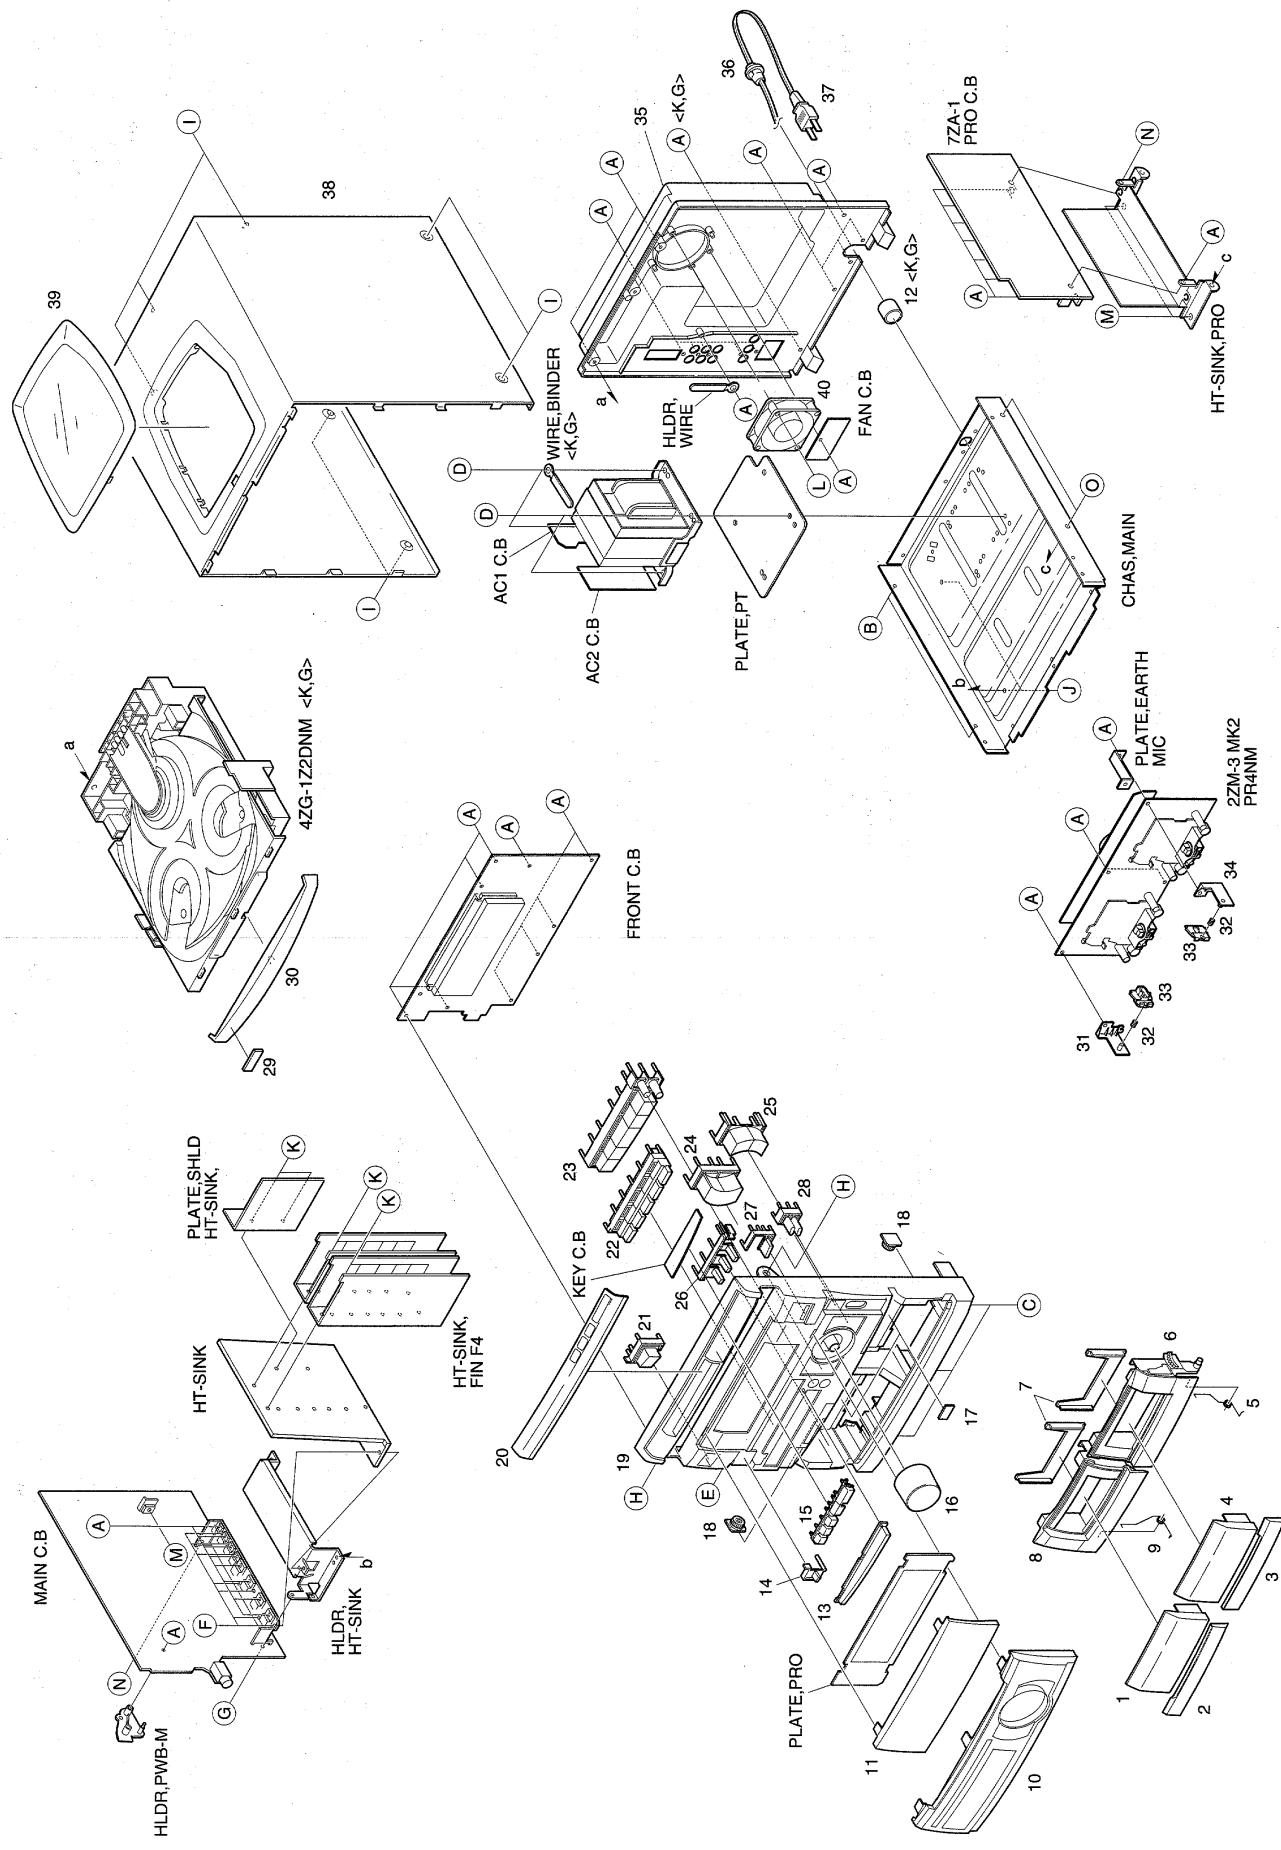



# MECHANICAL PARTS LIST 1 / 1

If can't understand for Description please kindly refer to " REFERENCE NAME LIST ".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-NF4-034-010		WINDOW,CASS 1	32	82-NF5-228-010		SPR-C,LOCK
2	87-NF4-032-010		PANEL,CASS 1H	33	82-NF5-229-010		PLATE,LOCK
3	87-NF4-033-010		PANEL,CASS 2H	34	87-NF4-217-010		HLDL,LOCK 2
4	87-NF4-035-010		WINDOW,CASS 2	35	87-NFR-021-010		CABI,REAR GSTNM<G>
5	82-NF5-219-010		SPR-T,EJECT 2 (SIN)	35	87-NFR-018-110		CABI,REAR HRST<HR>
6	87-NF4-005-110		BOX,CASS 2	35	87-NFR-020-110		CABI,REAR KSTNM<K>
7	86-NF6-061-010		REFLECTOR,CASS	35	87-NFR-019-110		CABI,REAR LHST<LH>
8	87-NF4-004-110		BOX,CASS 1	36	87-085-185-010		BUSHING, AC CORD (E)
9	82-NF5-218-010		SPR-T,EJECT 1 (SIN)	37	87-050-081-110		AC CORD ASSY,G<G>
10	87-NF4-031-110		PANEL,FR H	37	87-A80-007-110		AC CORD ASSY,K BLK<K>
11	87-NFR-003-010		WINDOW,DISPLAY H<HR,LH>	37	87-050-079-010		AC-CORD ASSY,E<HR,LH>
11	87-NFR-034-010		WINDOW,DISPLAY K<K,G>	38	86-NH6-029-110		CABI,STEEL H-J TS<HR,LH>
12	87-003-317-010		F-BEAD,F0H2515-LG7<K,G>	38	86-NFT-005-110		CABI,STEEL TS<K,G>
13	87-NF4-042-010		PANEL,OPE	39	86-NF6-007-010		WINDOW, TOP
14	87-NF4-036-010		KEY,DEMO	40	87-A90-463-010		FAN,2408NL
15	87-NF4-007-110		KEY,CD	A	87-067-703-010		TAPPING SCREW, BVT2+3-10
16	87-NF4-028-010		KNOB,RTRY VOL	B	87-591-094-410		TAPPING SCREW, QIT+3-6
17	81-532-080-010		LABEL, CASS. COMPT	C	87-067-688-010		BVTM+3-6
18	87-063-165-010		OIL-DMPR 150	D	87-078-191-010		S-SCREW, IT+4-10
19	87-NFR-008-110		CABI,FR H<HR>	E	87-723-096-410		QT2+3-10W/O SLOT BL
19	87-NFR-033-110		CABI,FR K<K,G>	F	87-067-758-010		BVT2+3-12 W/O SLOT
19	87-NFR-032-110		CABI,FR LH<LH>	G	87-067-633-010		TAPPING SCREW, BVT2+3-8
20	87-NF4-037-110		WINDOW,CD	H	87-721-097-410		QT2+3-12 GLD
21	87-NF4-008-010		KEY,POWER	I	87-067-641-010		UTT2+3-8(W/O SLOT)BL
22	87-NF4-020-010		KEY,ASSY FUN	J	87-067-584-010		TAPPING SCREW, BVT2+3-6
23	87-NF4-027-010		KEY,ASSY OPE	K	87-B10-090-010		BVIT3B+3-12 GOLD
24	87-NFR-001-210		KEY,PRO	L	87-751-104-410		VT2+3-30
25	87-NF4-010-010		KEY,BBE	M	87-067-579-010		TAPPING SCREW, BVT2+3-8
26	87-NF4-012-010		KEY,DOLBY	N	87-NF4-224-010		S-SCREW,IT3B+3-8 CU
27	87-NF4-045-010		KEY,KARACKE<HR>	O	87-721-096-410		QT2+3-10 GLD
27	87-NF4-046-010		KEY,VF U<LH,K,G>				
28	87-NF4-011-010		KEY,VOL				
29	82-NF6-067-010		BADGE,AIWA 3ON				
30	87-NF4-029-010		PANEL,TRAY H				
31	87-NF4-216-010		HLDL,LOCK 1				

# TAPE MECHANISM EXPLODED VIEW 1 / 1

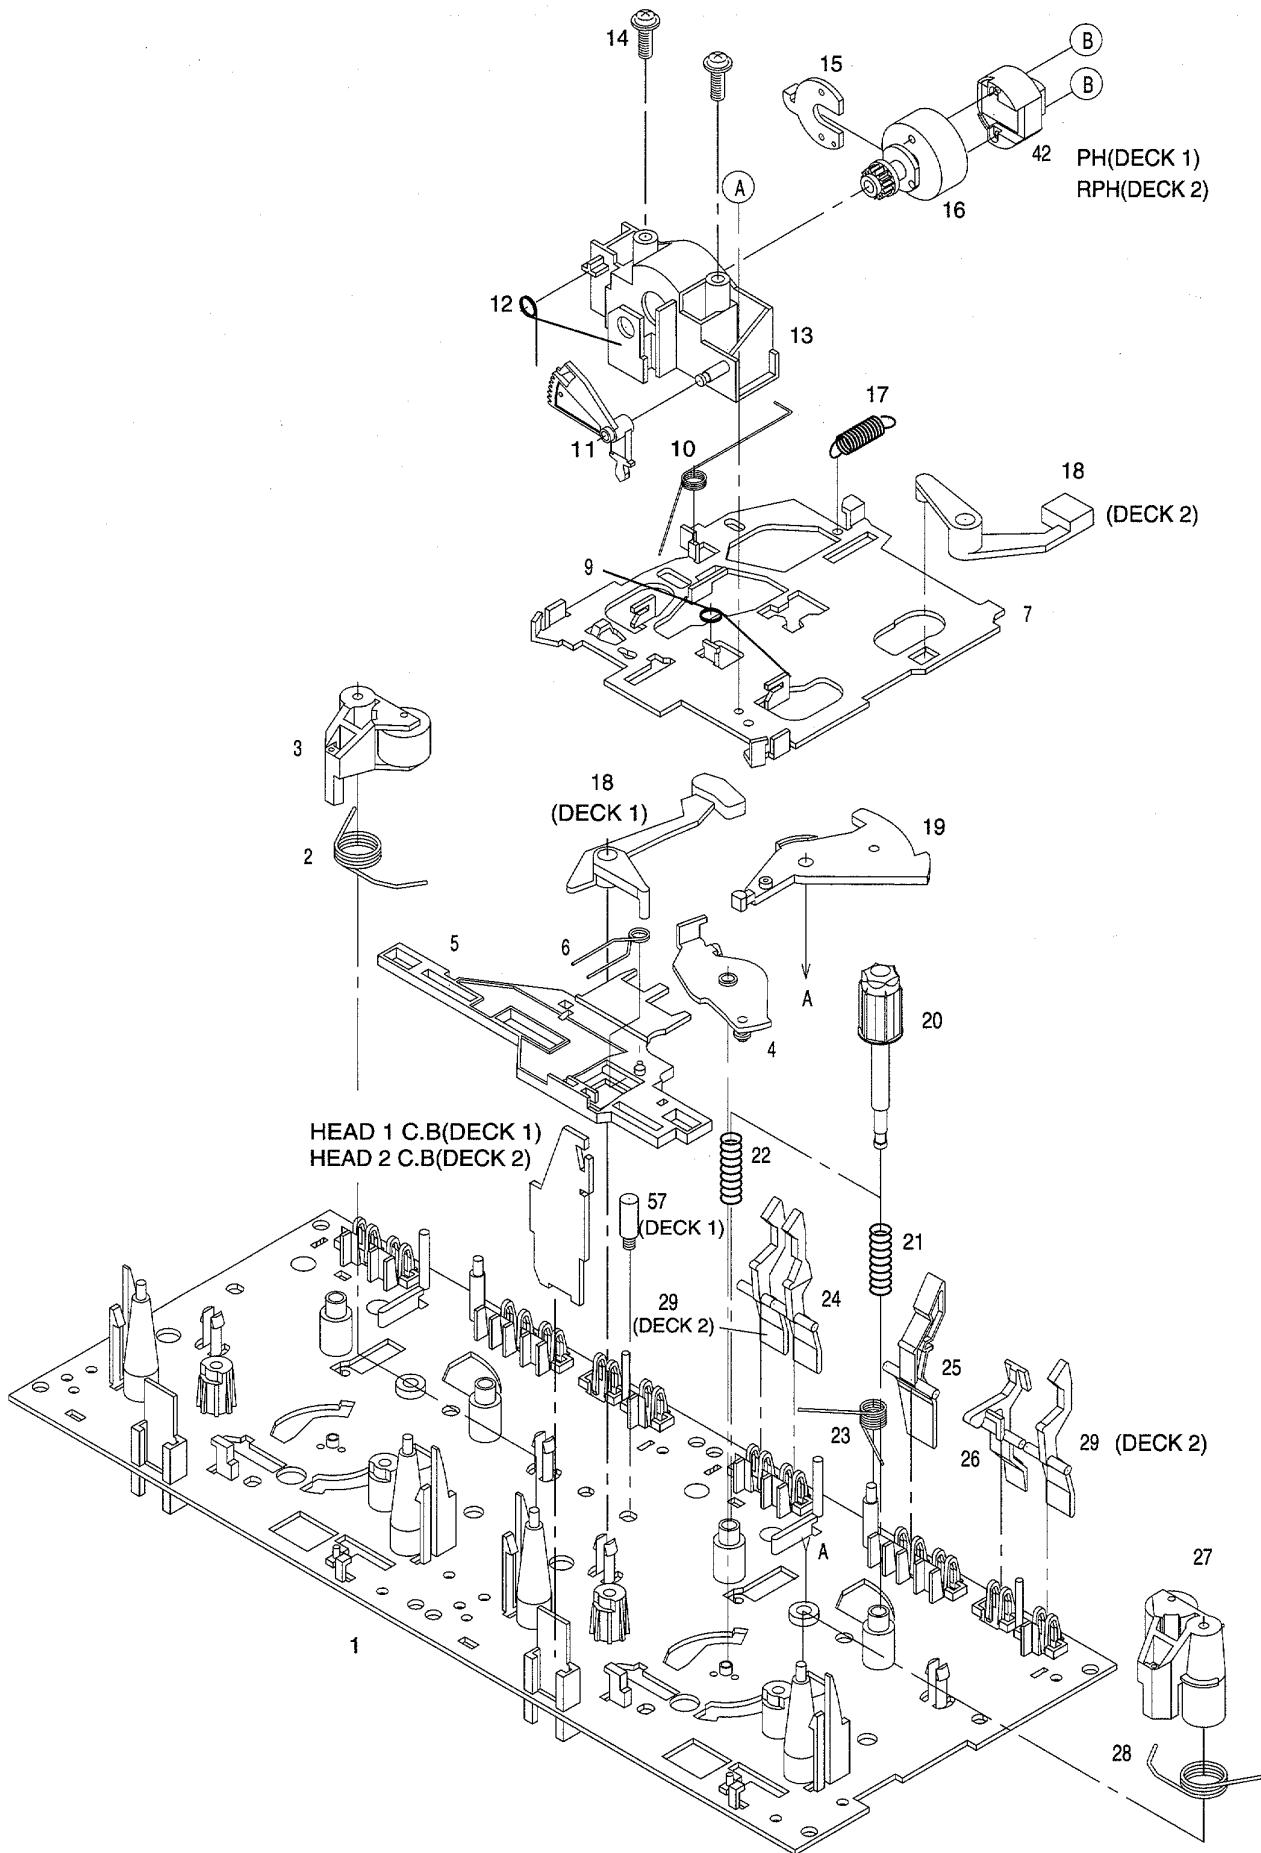


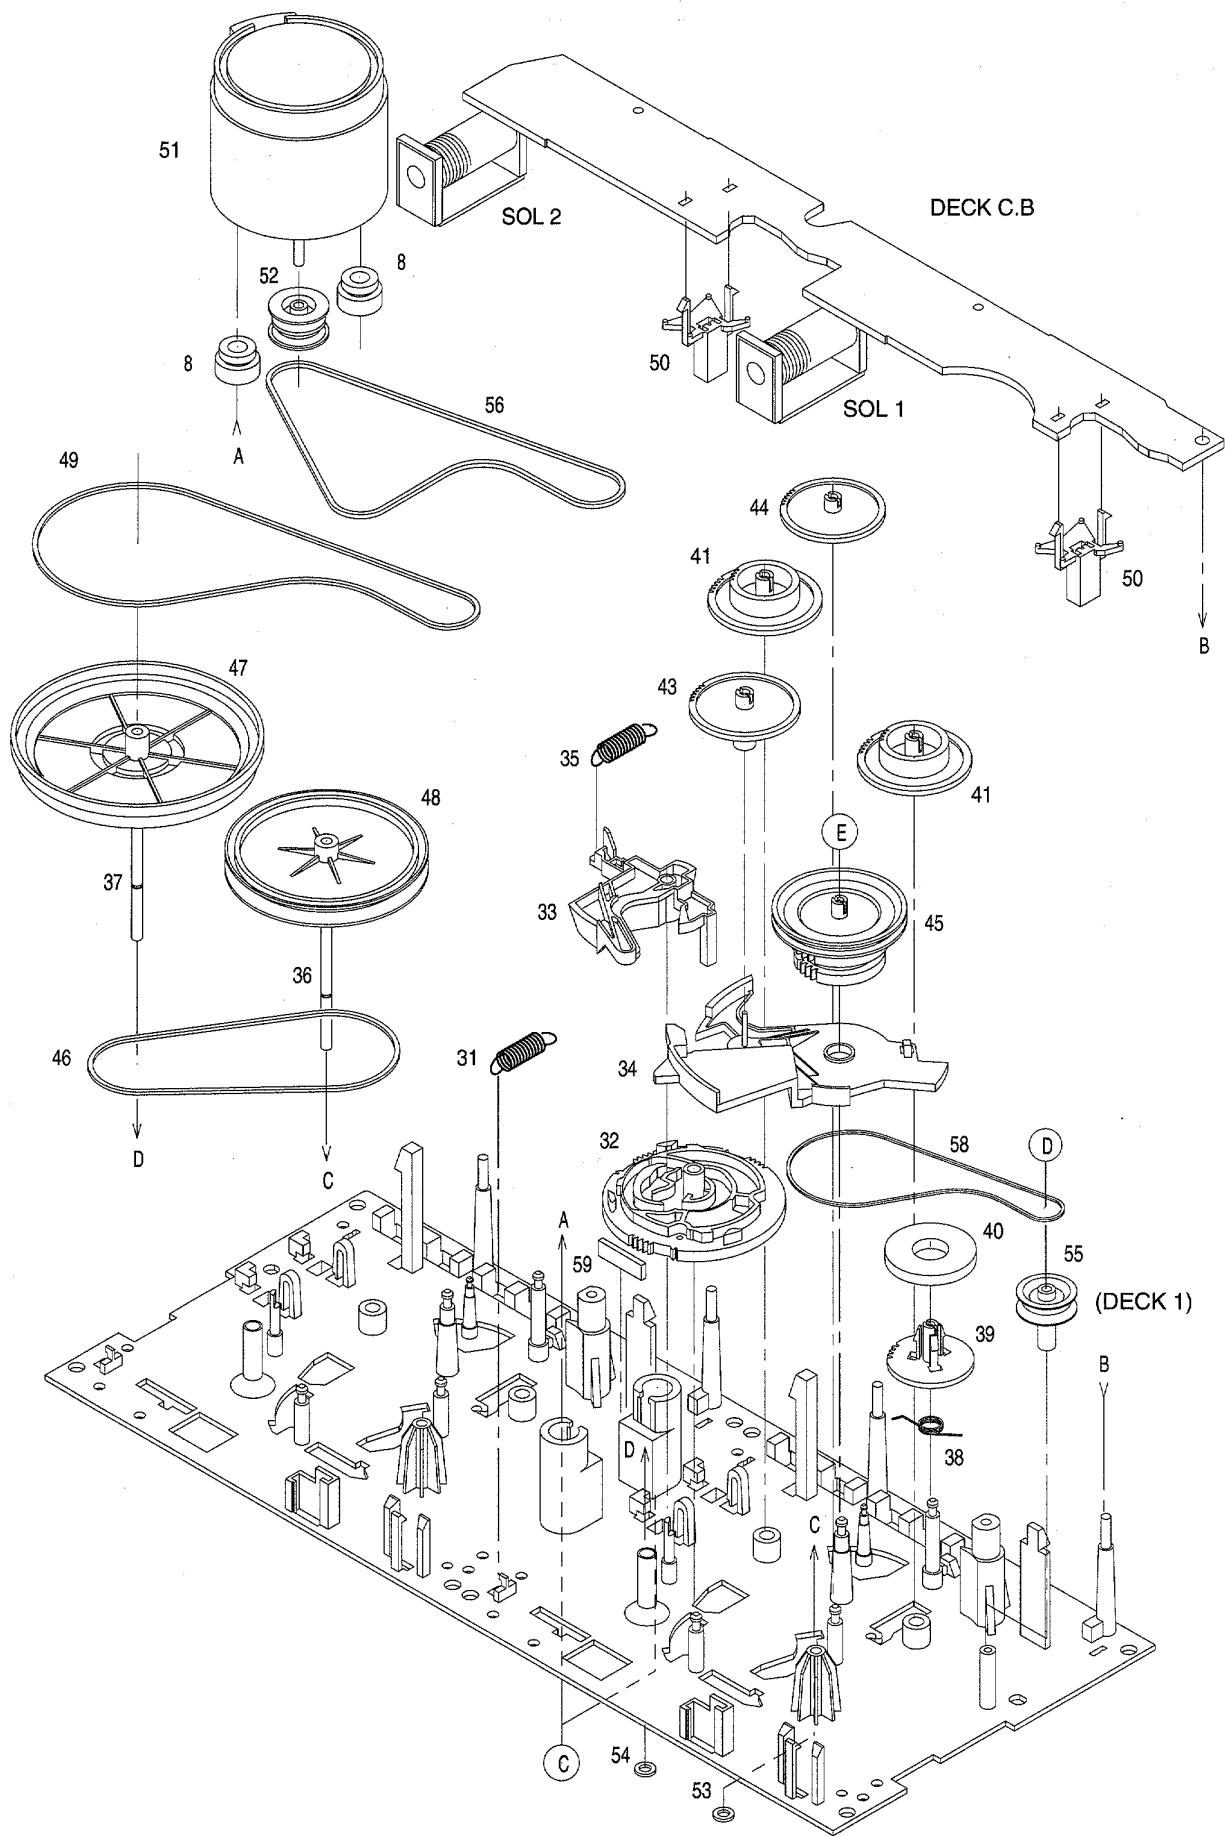


# TAPE MECHANISM PARTS LIST 1 / 1

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	82-ZM3-301-519		CHAS ASSY,M2	36	82-ZM1-236-019		CAPSTAN N 2-41.5
2	82-ZM1-258-110		SPR-T,PINCH L	37	82-ZM1-239-019		CAPSTAN N 2.2-41.7
3	82-ZM1-341-110		LVR ASSY,PINCH L2	38	82-ZM1-322-019		SPR-T,FR60
4	82-ZM1-333-010		PLATE,LINK 2	39	82-ZM1-220-219		GEAR, IDLER
5	82-ZM1-266-11K		LVR,DIR	40	82-ZM3-616-019		RING MAGNET 4
6	82-ZM1-214-010		SPR-T,DIR	41	82-ZM1-216-31K		GEAR, REEL
7	82-ZM1-206-81K		CHAS,HEAD	42	87-A90-319-010		HEAD, PH HADKH2 FPC
8	82-ZM3-307-019		CUSH-G,DIA3.7-8-3.2	42	87-A90-320-010		HEAD,RPH HADKH5 FPC
9	82-ZM1-269-219		SPR-T,BRG	43	82-ZM1-225-21K		GEAR, FR
10	82-ZM1-219-119		SPR-T,LINK	44	82-ZM1-226-019		GEAR,REW
11	82-ZM1-210-119		GEAR,H T	45	82-ZM3-333-310		SLIP DISK ASSY 2
12	82-ZM1-213-019		SPR-T,HEAD	46	82-ZM1-338-010		BELT, FR4
13	82-ZM1-207-619		GUIDE,TAPE	47	82-ZM1-349-110		FLY-WHL,R W(DECK 2)
14	86-ZM4-206-010		S-SCREW,AZIMUTH	47	82-ZM3-338-110		FLY-WHL,R3 W(DECK 1)
15	82-ZM1-314-119		PLATE,HEAD	48	82-ZM1-348-010		FLY-WHL,L W(DECK 2)
16	82-ZM1-208-119		HLDR,HEAD	48	82-ZM1-348-010		FLY-WHL,L W(DECK 1)
17	82-ZM1-218-019		SPR-E,HB	49	82-ZM3-329-210		BELT, SBU R2
18	82-ZM1-263-110		LVR,EJECT L (DECK 1)	50	82-ZM1-245-210		HLDR, IC
18	82-ZM1-264-010		LVR,EJECT R (DECK 2)	51	87-045-347-019		MOT,SHU2L 70(M1)
19	82-ZM1-222-21K		LVR,PLAY	52	82-ZM3-221-010		PULLEY,MOT 2M
20	82-ZM1-217-319		REEL TABLE	53	82-ZM1-288-019		SH,1.63-3.2-0.5 SLT
21	82-ZM1-244-510		SPR-C,BT	54	80-ZM6-243-019		SH,1.75-3.6-0.5 SLT
22	82-ZM1-285-310		SPR-C,BT L	55	82-ZM3-335-210		PULLEY,COUPLER M3(DECK 1)
23	82-ZM1-257-019		SPR-T,CAS	56	82-ZM3-337-010		BELT,SBU MOT 2
24	82-ZM1-241-319		LVR,MC	57	82-ZM3-339-010		SHAFT,COUPLER N3(DECK 1)
25	82-ZM1-242-019		LVR,CAS	58	86-ZM1-206-010		BELT,MAIN L
26	82-ZM1-243-019		LVR,STOP	59	82-ZM3-340-010		SH,BELT D2
27	82-ZM1-344-110		LVR ASSY,PINCH R2	A	85-ZM3-202-010		S-SCREW,TG
28	82-ZM1-259-110		SPR-T,PINCH R	B	80-ZM6-207-019		V+1.6-7
29	82-ZM1-240-11K		LVR,REC (DECK 2)	C	82-ZM3-318-019		S-SCRW MOTOR M2
31	82-ZM1-255-319		SPR-E,LVR DIR	D	87-B10-043-010		W-P,0.99-4-0.25 SLT
32	82-ZM3-305-01K		GEAR,CAM M2	E	82-ZM3-334-010		PW,2.16-6-0.4
33	82-ZM1-227-21K		LVR,TRIG				
34	82-ZM3-306-11K		LVR,FR M2				
35	82-ZM1-265-119		SPR-E,TRIG				

## SPRING APPLICATION POSITION

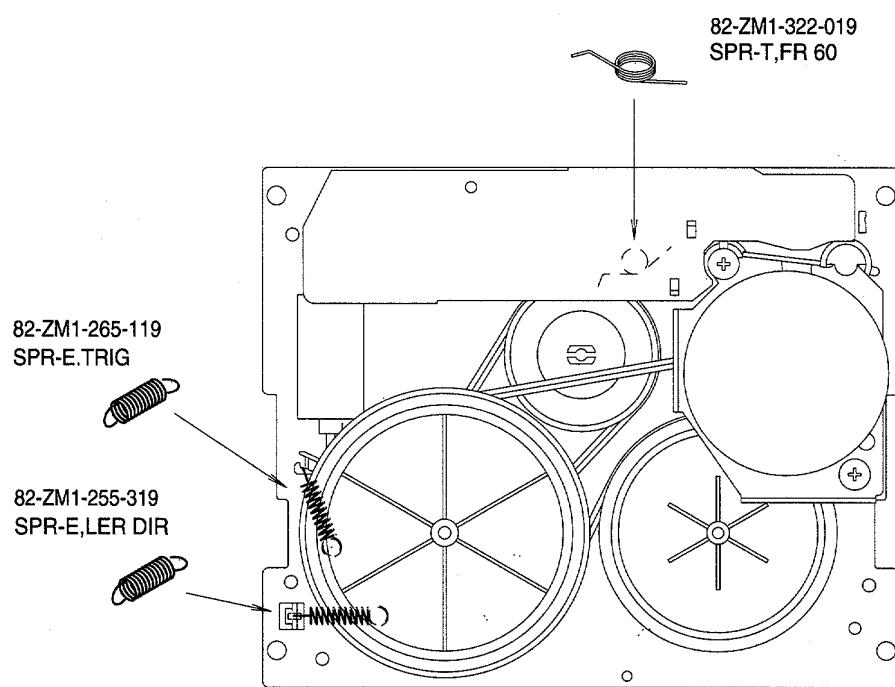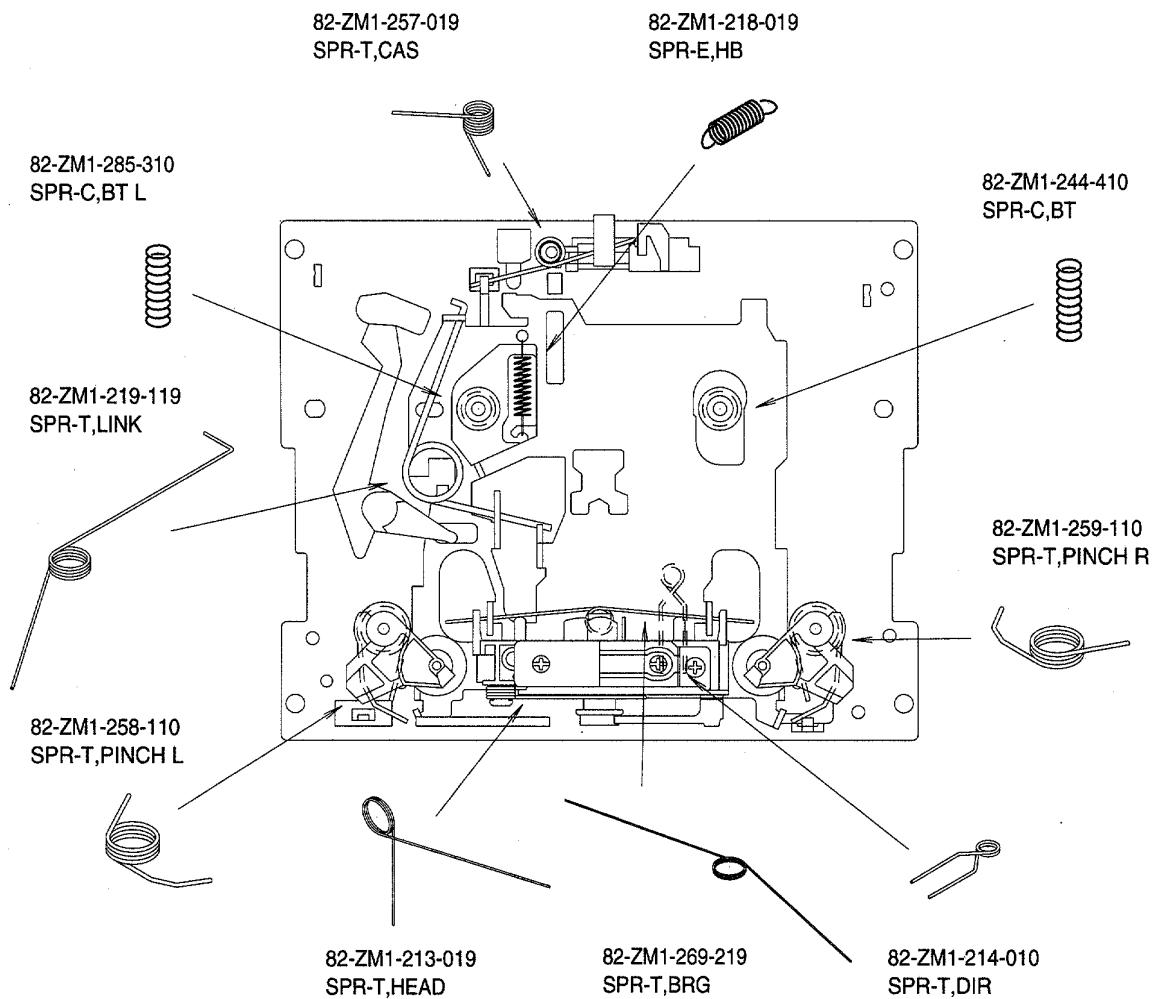


## SPEAKER DISASSEMBLY INSTRUCTIONS

### Type.1

矢印の位置にマイナスドライバーを差し込んで、パネルを外します。各々のスピーカーユニットのビスを取り、スピーカーユニットを外してください。


Insert a flat-bladed screwdriver into the position indicated by the arrows and remove the panel. remove the screws of each speaker unit and then remove the speaker units.



### Type.2

グリルフレームを外し、4個のゴムキャップをマイナスドライバーで端の方から持ち上げて外すと中にビスが有りますので、ビスを取り外します。矢印の位置にマイナスドライバーを差し込んで、パネルを外します。各々のスピーカーユニットのビスを取り、スピーカーユニットを外してください。


Remove the grill frame and four pieces fo rubber caps by pulling out with a flat-bladed screwdriver. Remove the screws from hole where installed rubber caps. Insert a flat-bladed screwdriver into the position indicated by the arrows and remove the panel. Remove the screws of each speaker unit and then remove the speaker units.



### Type.3

矢印の位置にマイナスドライバーを差し込んで、パネルを外します。各々のスピーカーユニットの凹にマイナスドライバーを差し込んで、反時計方向に回転させスピーカーユニットを外してください。スピーカーユニット交換後は時計方向にクリック音がするまで、回転させて取り付けます。

Insert a flat-bladed screwdriver into the position indicated by the arrows and remove the panel. Turn the speaker unit to counter-clockwise direction while inserting a flat-bladed screwdriver into one of the hollows around speaker unit, and then remove the speaker unit. After replacing the speaker unit, install it turning to clockwise direction until "click" sound comes out.

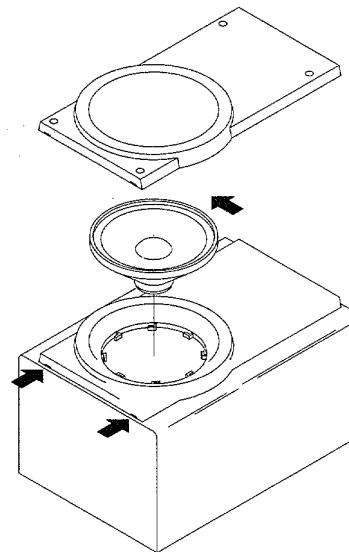

## SPEAKER PARTS LIST (SX-NAV95)

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-NSR-001-019		PANEL, FR R
2	87-NSR-002-019		PANEL, FR L
3	87-NSR-003-019		PANEL, TW
4	87-NS4-602-019		SPKR, W 160
5	87-NSR-604-019		SPKR, W 80
6	83-096-614-019		SPEAKER, CORD
7	87-NSR-009-019		GRILLE, FRAME ASSY
8	86-NSW-610-019		TERMINAL ASSY

## SPEAKER PARTS LIST (\*SX-R230 -> YSTNC1)

If can't understand for Description please kindly refer to " REFERENCE NAME LIST ".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	85-NSX-005-019		GRILLE, FRAME ASSY
2	85-NSX-601-019		SPEAKER
3	81-VSA-010-019		SPEAKER CODE
4	85-NSX-009-019		PANEL FR

## SPEAKER PARTS LIST (\*SX-C400 -> YSTNC1)

If can't understand for Description please kindly refer to " REFERENCE NAME LIST ".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	85-NSY-010-019		GRILLE, FRAME ASSY
2	85-NSY-602-019		SPEAKER
3	83-NSM-010-019		SPEAKER CODE

\* SX-CR423 is the combination of SX-R230 and SX-C400.

## SPEAKER PARTS LIST (SX-C600 <YU>)

If can't understand for Description please kindly refer to " REFERENCE NAME LIST ".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-YS3-001-019		PANEL, FR ST
2	87-YS3-002-019		PANEL, REAR ST
3	87-YS3-003-019		GRILLE, FRAME ASSY
4	85-NSY-602-019		SPKR, 10
5	83-NSM-010-019		SPKR, CORD

## SPEAKER PARTS LIST (SX-R270 -> YST)

If can't understand for Description please kindly refer to " REFERENCE NAME LIST ".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-YS1-004-010		GRILLE, FRAME ASSY
2	81-VSA-010-010		SPKR, CORD
3	85-NSX-601-010		SPKR, 100

## ACCESSORIES / PACKAGE LIST

If can't understand for Description please kindly refer to " REFERENCE NAME LIST ".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-NFR-901-010		IB, H(ECA)M<HR>
1	87-NFR-902-010		IB, LH(ES)M<LH>
1	87-NFR-915-010		IB, K(E)M<K,G>
2	87-NFR-640-010		RC UNIT, RC-7AS09
△ 3	87-A90-312-010		PLUG, CONVERSION WTN-1157R1<EXCEPT K,G>
4	87-A90-064-010		FEEDER-ANT, FM (SHS)<EXCEPT K,G>
4	87-043-106-010		ANT, FM 1007AWG<K,G>
5	87-A90-054-010		ANT, LOOP AM-CON C<HR>
5	87-006-225-010		ANT, LOOP ANT NC2<EXCEPT HR>
6	87-043-095-010		ANT, WIRE<HR>

## REFERENCE NAME LIST

ELECTRICAL SECTION		MECHANICAL SECTION	
DESCRIPTION	REFERENCE NAME	DESCRIPTION	REFERENCE NAME
ANT	ANTENNAS	ADHESIVE	SHEET ADHESIVE
C-	CHIP	AZ	AZIMUTH
C-CAP	CAP, CHIP	BAR-ANT	BAR-ANTENNA
C-CAP TN	CAP, CHIP TANTALUM	BAT	BATTERY
C-COIL	COIL, CHIP	BATT	BATTERY
C-DI	DIODE, CHIP	BRG	BEARING
C-DIODE	DIODE, CHIP	BTN	BUTTON
C-FET	FET, CHIP	CAB	CABINET
C-FOTR	FILTER, CHIP	CASS	CASSETTE
C-JACK	JACK, CHIP	CHAS	CHASSIS
C-LED	LED, CHIP	CLR	COLLAR
C-RES	RES, CHIP	CONT	CONTROL
C-SFR	SFR, CHIP	CRSR	CURSOR
C-SLIDE SW	SLIDE SWITCH, CHIP	CU	CUSHION
C-SW	SWITCH, CHIP	CUSH	CUSHION
C-TR	TRANSISTOR, CHIP	DIR	DIRECTION
C-VR	VOLUME, CHIP	DUBB	DUBBING
C-ZENER	ZENER, CHIP	FL	FRONT LOADING
CAP, CER	CAP, CERA-SOL	FLY-WHL	FLYWHEEL
CAP, E	CAP, ELECT	FR	FRONT
CAP, M/F	CAP, FILM	FUN	FUNCTION
CAP, TC	CAP, CERA-SOL	G-CU	G-CUSHION
CAP, TC-U	CAP, CERA-SOL SS	HDL	HANDOL
CAP, TN	CAP, TANTALUM	HIMERON	CLOTH
CERA FIL	FILTER, CERAMIC	HINGE, BAT	HINGE, BATTERY
CF	FILTER, CERAMIC	HLDR	HOLDER
DL	DELAY LINE	HT-SINK	HEAT SINK
E/CAP	CAP, ELECT	IB	INSTRUCTION BOOKLET
FILT	FILTER	IDLE	IDLER
FLTR	FILTER	IND, L-R	INDICATOR, L-R
FUSE RES	RES, FUSE	KEY, CONT	KEY, CONTROL
MOT	MOTOR	KEY, PRGM	KEY, PROGRAM
P-DIODE	PHOTO DIODE	KNOB, SL	KNOB, SLIDE
P-SNSR	PHOTO SENSER	LBL	LABEL
P-TR	PHOTO TRANSISTOR	LID, BATT	LID, BATTERY
POLY VARI	VARIABLE CAPACITOR	LID, CASS	LID, CASSETTE
PPCAP	CAP, PP	LVR	LEVER
PT	POWER TRANSFORMER	P-SP	P-SPRING
PTR, RES	PTR, MEFL	PANEL, CONT	PANEL, CONTROL
RC	REMOTE CONTROLLER	PANEL, FR	PANEL, FRONT
RES NF	RES, NON-FLAMMABLE	PRGM	PROGRAM
RESO	RESONATOR	PULLY, LOAD MO	PULLY, LOAD MOTOR
SHLD	SHIELD	RBN	RIBBON
SOL	SOLENOID	S-	SPECIAL
SPKR	SPEAKER	SEG	SEGMENT
SW, LVR	SWITCH, LEVER	SH	SHEET
SW, RTRY	SWITCH, ROTARY	SHLD-SH	SHIELD-SHEET
SW, SL	SWITCH, SLIDE	SL	SLIDE
TC CAP	CAP, CERA-SOL	SP	SPRING
THMS	THERMISTOR	SP-SCREW	SPECIAL-SCREW
TR	TRANSISTOR	SPACER, BAT	SPACER, BATTERY
TRIMER	CAP, TRIMMER	SPR	SPRING
TUN-CAP	VARIABLE CAPACITOR	SPR-P	P-SPRING
VIB, CER	RESONATOR, CERAMIC	SPR-PC-PUSH	P-SPRING, C-PUSH
VIB, XTAL	RESONATOR, CRYSTAL	T-SP	T-SPRING
VR	VOLUME	TERM	TERMINAL
ZENER	DIODE, ZENER	TRIG	TRIGGER
		TUN	TUNING
		VOL	VOLUME
		W	WASHER
		WHL	WHEEL
		WORM-WHL	WORM-WHEEL

サービス技術ニュース	
番号	連絡内容
G—	—
G—	—
G—	—

**アイワ株式会社  
AIWA CO., LTD.**

〒110 東京都台東区池之端1-2-11 ☎ 03 (3827) 3111 (代表)

9301946, 750038

Tokyo Japan

Printed in Singapore