


# aiwa



## NSX-AVH8

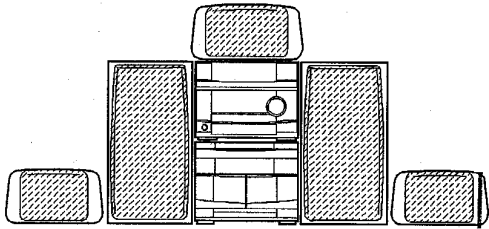

COMPACT DISC STEREO  
CASSETTE RECEIVER

- BASIC TAPE MECHANISM: 2ZM-3MK2 PR4N
- BASIC CD MECHANISM: 4ZG-1WRNM

- TYPE. EZ, K

SYSTEM	AMPLIFIER TUNER	CASSETTE DECK CD PLAYER	REMOTE CONTROLLER	SPEAKERS
NSX-AVH8	RX-NAVH8	FD-NH8	RC-T506	SX-NAVH8

- If requiring information about the mechanism, see Service Manual of 4ZG-1WR (S/M Code No. 09-965-128-10T).

MANUAL  
SERVICE

# TABLE OF CONTENTS

SPECIFICATIONS .....	3
ACCESSORIES / PACKAGE LIST .....	4
<b>MODEL-NO. RX-NAVH8</b>	
ELECTRICAL MAIN PARTS LIST .....	5~8
CHIP RESISTOR PART CODE .....	8
TRANSISTOR ILLUSTRATION .....	9
FL(BJ451GK) GRID ASSIGNMENT/ANODE CONNECTION .....	10
BLOCK DIAGRAM .....	11,12
WIRING-1 .....	13,14
SCHEMATIC DIAGRAM-1 .....	15~17
SCHEMATIC DIAGRAM-2 .....	18~20
WIRING-2 .....	21,22
WIRING-3 .....	23,24
IC DESCRIPTION/IC BLOCK DIAGRAM .....	25~30
ELECTRICAL ADJUSTMENT(TUNER)/PRACTICAL SERVICE FIGURE(TUNER) .....	31,32
MECHANICAL EXPLODED VIEW 1/1 .....	33
MECHANICAL PARTS LIST 1/1 .....	34
<b>MODEL-NO. FD-NH8</b>	
PROTECTION OF EYES FROM LASER BEAM DURING SERVICING .....	35
ELECTRICAL MAIN PARTS LIST .....	36~38
CHIP RESISTOR PART CODE .....	38
TRANSISTOR ILLUSTRATION .....	39
FL (7-ST-27G)GRID ASSIGNMENT/ANODE CONNECTION .....	40
BLOCK DIAGRAM-1 .....	41,42
WIRING-1 .....	43,44
SCHEMATIC DIAGRAM-1 .....	45~47
SCHEMATIC DIAGRAM-2 .....	48~50
WIRING-2 .....	51,52
IC DESCRIPTION/IC BLOCK DIAGRAM .....	53~59
TEST MODE .....	60
ELECTRICAL ADJUSTMENT(TAPE/CD) .....	61~64
PRACTICAL SERVICE FIGURE(TAPE) .....	62
MECHANICAL EXPLODED VIEW 1/1 .....	65
MECHANICAL PARTS LIST 1/1 .....	66
TAPE MECHANISM EXPLODED VIEW 1/1 .....	67,68
TAPE MECHANISM PARTS LIST 1/1 .....	69
SPRING APPLICATION POSITION .....	70
<b>MODEL-NO. SX-NAVH8</b>	
SPEAKER PARTS LIST .....	71
REFERENCE NAME LIST .....	72

## SPECIFICATIONS

### STEREO RECEIVER RX-NAVH8

#### FM tuner section

**Tuning range** 87.5 MHz to 108 MHz  
**Usable sensitivity (IHF)** 16.8 dBf  
**Antenna terminals** 75 ohms (unbalanced)

#### MW tuner section

**Tuning range** 531 kHz to 1602 kHz (9 kHz step)  
 530 kHz to 1710 kHz (10 kHz step)  
**Usable sensitivity** 350 µV/m  
**Antenna** Loop antenna

#### LW tuner section

**Tuning range** 144 kHz to 290 kHz  
**Usable sensitivity** 1400 µV/m  
**Antenna** Loop antenna

#### Amplifier section

**Power output**

**Front** (without connecting to the SURROUND SPEAKERS)  
 Rated: 80 W + 80 W (6 ohms, T.H.D. 1%, 1 kHz/DIN 45500)  
 Reference: 95 W + 95 W (6 ohms, T.H.D. 10%, 1 kHz/DIN 45324)  
 DIN MUSIC POWER: 170 W + 170 W (EZ ONLY)

**Rear (Surround)**  
 Rated: 10 W + 10 W (16 ohms, T.H.D. 1%, 1 kHz/DIN 45500)  
 Reference: 12 W + 12 W (16 ohms, T.H.D. 10%, 1 kHz/DIN 45324)  
 DIN MUSIC POWER: 30 W + 30 W (EZ ONLY)

**Center**  
 Rated: 20 W (8 ohms, T.H.D. 1%, 1 kHz/DIN 45500)  
 Reference: 25 W (8 ohms, T.H.D. 10%, 1 kHz/DIN 45324)  
 DIN MUSIC POWER: 60 W (EZ ONLY)

#### Total harmonic distortion

#### Inputs

VIDEO 1/MD IN: 200mV (adjustable)  
 VIDEO 2/AUX IN: 200 mV (adjustable)  
 MIC 1, MIC 2: 1 mV (10 kohms)

#### Outputs

REC OUT: 200 mV  
 SUPER WOOFER: 2.2 V  
 SPEAKERS: accept speakers of 6 ohms or more  
 SURROUND SPEAKERS: accept speakers of 16 ohms or more  
 CENTER SPEAKER: accepts speakers of 8 ohms or more  
 PHONES (stereo jack): accepts headphones of 32 ohms or more

#### General

**Power requirements** 230 V AC, 50 Hz  
**Power consumption** 450 W (system 470 W)  
**Dimensions of main unit (W × H × D)** 260 × 198 × 333.5 mm  
**Weight of main unit** 6.3 kg

### COMPACT DISC/STEREO CASSETTE DECK FD-NH8

#### Cassette deck section

**Track format** 4 tracks, 2 channels stereo  
**Frequency response** CrO<sub>2</sub> tape: 50 Hz – 16000 Hz  
 Normal tape: 50 Hz – 15000 Hz  
**Signal-to-noise ratio** 65 dB (Dolby B NR ON, CrO<sub>2</sub> tape peak level)  
**Recording system** AC bias  
**Heads** Deck 1: Playback head × 1  
 Deck 2: Recording/playback/erase head × 1

#### Compact disc player section

**Laser** Semiconductor laser (λ = 780 nm)  
**D-A converter** 1 bit dual  
**Signal-to-noise ratio** 85 dB (1 kHz, 0 dB)  
**Harmonic distortion** 0.03 % (1 kHz, 0 dB)  
**Wow and flutter** Unmeasurable

#### General

**Dimensions (W × H × D)** 260 × 203 × 321.5 mm  
**Weight** 3.9 kg

### Speaker system SX-NAVH8

#### Cabinet type

3 way, bass reflex (magnetic sealed type)

#### Speakers

**Woofer:** 140 mm cone type  
**Tweeter:** 60 mm cone type  
**Super tweeter:** 20 mm ceramic type

#### Impedance

6 ohms

#### Output sound pressure level


88 dB/W/m

#### Dimensions (W × H × D)

230 × 396 × 265 mm

#### Weight

4.5 kg

- Design and specifications are subject to change without notice.
- Dolby noise reduction manufactured under license from Dolby Laboratories Licensing Corporation. "DOLBY" and the double-D symbol  and "PRO LOGIC" are trademarks of Dolby Laboratories Licensing Corporation.
- The word "BBE" and the "BBE symbol" are trademarks of BBE Sound, Inc. Under license from BBE Sound, Inc.

## ■ ACCESSORIES / PACKAGE LIST

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。  
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF.NO	PART NO.	カリ NO.	DESCRIPTION
1	86-NTN-905-010		IB, K(E)M<EZ>
2	86-NTN-906-010		IB, E(EGFSI)M<K>
3	85-NT3-661-010		RC UNIT, RC-T506
4	87-006-225-010		ANT, LOOP ANT NC2
5	87-043-106-010		ANT, FM 1007AWG

MODEL NO.

## RX-NAVH8

## ELECTRICAL MAIN PARTS LIST

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。  
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カリ NO.	DESCRIPTION	REF. NO	PART NO.	カリ NO.	DESCRIPTION
IC							
	87-A20-069-049		C-IC, BA3842F		87-A40-116-060		DIODE, RS403L-B-D-51
	87-A20-067-040		C-IC, M65849FP		87-017-148-089		ZENER, HZS6A1L
	87-A20-061-019		IC, STK-419-120		87-001-731-089		ZENER HZS6C2L
	87-A20-082-010		C-IC, NJW1102AFG1		87-001-911-089		ZENER, UTZJ4.7A (TAPG)
	87-017-888-080		C-IC, NJM4558MD	MAIN C.B			
	87-017-888-089		IC, NJM4558MD	C101	87-016-520-090		CAP, E 3300-65 BP SMG
	87-017-915-089		IC, BU4094BCF	C102	87-016-520-090		CAP, E 3300-65 BP SMG
	87-017-804-019		IC, BU4052BC	C104	87-010-235-089		CAP, E 470-16 SME
	87-A20-083-019		IC, BA3835S	C105	87-010-235-089		CAP, E 470-16 SME
	87-A20-107-019		IC, BA3836	C106	87-016-285-089		CAP, E 47-100 SME
	87-017-914-019		IC, BU4094BC	C107	87-010-407-080		CAP, E 33-50 SME
	87-A20-056-019		IC, BA3880S	C108	87-010-407-080		CAP, E 33-50 SME
	87-070-267-010		C-IC, STK405-050	C109	87-010-263-089		CAP, E 100-10 SME 5X11
	87-070-127-119		IC, LC72131D	C112	87-010-382-089		CAP, E 22-25 SME
	87-017-714-119		IC, LA1836L	C113	87-010-403-089		CAP, E 3.3-50 SME
	86-NT1-619-010		IC, LC 866440W-5B44	C116	87-012-140-089		C-CAP, S 470P-50 CH
	87-070-083-019		IC, GP1U281X	C121	87-012-368-089		C-CAP, S 0.1-50 F
	87-A20-105-040		C-IC, BU1921FS	C122	87-012-368-089		C-CAP, S 0.1-50 F
	87-001-792-080		C-IC, NJM2100M	C123	87-012-368-089		C-CAP, S 0.1-50 F
				C124	87-012-368-089		C-CAP, S 0.1-50 F
TRANSISTOR				C125	87-010-263-089		CAP, E 100-10 SME 5X11
	89-213-702-019		TR, 2SB1370E	C126	87-010-189-089		C-CAP, S 8200P-50 KB
	89-109-352-089		TR, 2SA935Q	C127	87-010-189-089		C-CAP, S 8200P-50 KB
	87-026-610-089		TR, KTC3198GR	C131	87-010-186-089		C-CAP, S 4700P-50 B
	89-332-665-089		TR, 2SC3266GR	C132	87-010-186-089		C-CAP, S 4700P-50 B
	89-337-221-389		C-TR, 2SC3722K	C152	87-010-260-089		CAP, E 47-25 SME
	89-324-122-089		C-TR, 2SC2412R	C163	87-018-212-080		CAP, TC U 0.022-50 Z F SA
	89-110-372-089		C-TR, 2SA1037R	C164	87-018-212-080		CAP, TC U 0.022-50 Z F SA
	89-110-373-089		C-TR, 2SA1037S	C165	87-010-197-089		C-CAP, S 0.01-25 B
	87-026-210-089		C-TR, DTC144EK T147	C166	87-010-197-089		C-CAP, S 0.01-25 B
	87-026-235-080		C-TR, DTC114EK	C171	87-010-453-099		CAP, ELECT 4700-25V SME
	89-421-141-289		C-TR, 2SD2114K, UV	C172	87-010-453-099		CAP, ELECT 4700-25V SME
	87-026-609-089		TR, KTA1266GR	C173	87-012-368-089		C-CAP, S 0.1-50F
	89-112-965-089		TR, 2SA1296GR	C174	87-012-368-089		C-CAP, S 0.1-50F
	87-026-228-089		C-TR, DTA124EK	C175	87-012-368-089		C-CAP, S 0.1-50F
	89-113-187-089		TR, 2SA1318TU	C176	87-012-368-089		C-CAP, S 0.1-50F
	89-406-555-089		TR, 2SD655E	C220	87-010-194-089		C-CAP, S 0.047-25 F
	89-333-266-089		C-TR, 2SC3326B	C220	87-010-194-089		C-CAP, S 0.047-25 F
	89-110-155-080		TR, 2SA1015GR	C221	87-010-545-049		CAP, E 0.22-50 SME
	87-026-610-080		TR, KTC3198GR	C222	87-010-545-049		CAP, E 0.22-50 SME
	87-026-609-080		TR, KTA1266GR	C225	87-012-157-089		C-CAP, S 330P-50 CH
	87-026-214-089		TR, DTA114YS	C226	87-012-157-089		C-CAP, S 330P-50 CH
	87-026-211-089		C-TR, DTA144EK T147	C227	87-010-402-089		CAP, E 2.2-50 SME
	87-026-213-089		C-TR, DTC114YK	C228	87-010-402-089		CAP, E 2.2-50 SME
	89-327-125-089		C-TR, 2SC2712GR	C229	87-010-403-089		CAP, E 3.3-50 SME
	89-327-143-089		C-TR, 2SC2714 (O)	C230	87-010-403-089		CAP, E 3.3-50 SME
	87-026-226-089		C-TR, DTA143EK	C231	87-018-099-089		CAP, TC-U 3.9P-50 KSL
	87-026-269-089		TR, DTA114ES	C232	87-018-099-089		CAP, TC-U 3.9P-50 KSL
	89-421-143-089		C-TR, 2SD2114KW	C233	87-010-196-089		C-CAP, S 0.1-25 F
	89-505-434-589		C-FET, 2SK543(4/5)	C234	87-010-196-089		C-CAP, S 0.1-25 F
				C235	87-010-196-089		C-CAP, S 0.1-25 F
				C236	87-010-196-089		C-CAP, S 0.1-25 F
				C240	87-010-197-089		C-CAP, S 0.01-25 B
				C245	87-012-368-089		C-CAP, S 0.1-50 F
				C500	87-010-405-089		CAP, E 10-50 SME
DIODE				C501	87-010-213-089		C-CAP, S 0.015-25 B
	87-A40-116-069		DIODE, RS403L-B-D-51	C502	87-010-213-089		C-CAP, S 0.015-25 B
	87-A40-115-069		DIODE, SA D102	C505	87-010-544-080		CAP, E 0.1-50 SME
	87-070-274-089		DIODE, 1N4003 SEM	C506	87-010-544-080		CAP, E 0.1-50 SME
	87-020-027-089		C-DIODE, 1SS184	C507	87-010-196-089		C-CAP, S 0.1-25 F
	87-020-125-089		C-DIODE, 1SS181				
	87-020-465-089		DIODE, 1SS133				
	87-017-174-089		ZENER, HZS11A3L	C508	87-010-196-089		C-CAP, S 0.1-25 F
	87-017-146-089		ZENER, HZS30-2	C530	87-010-197-089		C-CAP, S 0.01-25 B
	87-001-290-089		ZENER, HZS5C1				

REF. NO	PART NO.	カンリ NO.	DESCRIPTION	REF. NO	PART NO.	カンリ NO.	DESCRIPTION
C531	87-010-183-089		C-CAP, S 2700P-50 B	C792	87-010-182-080		C-CAP, S 2200P-50 K B
C532	87-010-194-089		C-CAP, S 0.047-25 F	C793	87-010-189-089		C-CAP, S 8200P-50 B
C533	87-010-196-089		C-CAP, S 0.1-25 F	C794	87-010-408-089		CAP, E 47-50 SME
C534	87-010-263-089		CAP, E 100-10 SME 5X11	C795	87-010-194-089		C-CAP, S 0.047-25 F
C535	87-010-404-089		CAP, E 4.7-50 SME	C796	87-010-403-089		CAP, E 3.3-50 SME
C536	87-010-404-089		CAP, E 4.7-50 SME	C801	87-018-134-089		CAP, TC-U 0.01-16 Y
C537	87-010-545-089		CAP, E 0.22-50 SME	C802	87-018-134-089		CAP, TC-U 0.01-16 Y
C539	87-010-194-089		C-CAP, S 0.047-25 F	C814	87-010-197-089		C-CAP, S 0.01-25 B
C540	87-010-384-089		CAP, E 100-25 SME	C815	87-018-134-089		CAP, TC-U 0.01-16 Y
C541	87-010-404-089		CAP, E 4.7-50 SME	C816	87-018-134-089		CAP, TC-U 0.01-16 Y
C542	87-010-404-089		CAP, E 4.7-50 SME	C817	87-010-197-089		C-CAP, S 0.01-25 B
C560	87-010-318-080		C-CAP, S 47P-50 J CH	C818	87-010-197-089		C-CAP, S 0.01-25 B
C561	87-010-318-080		C-CAP, S 47P-50 J CH	C819	87-010-197-089		C-CAP, S 0.01-25 B
C562	87-010-318-080		C-CAP, S 47P-50 J CH	C820	87-010-408-089		CAP, E 47-50 SME
C563	87-012-142-089		C-CAP, S 0.33-16 F	C821	87-010-197-089		C-CAP, S 0.01-25 B
C564	87-010-196-089		C-CAP, S 0.1-25 F	C822	87-010-197-089		C-CAP, S 0.01-25 B
C565	87-018-209-089		CAP, TC-U 0.1-50 F	C823	87-010-197-089		C-CAP, S 0.01-25 B
C566	87-010-196-089		C-CAP, S 0.1-25 F	C828	87-010-196-089		C-CAP, S 0.1-25 F
C601	87-010-184-089		C-CAP, S 3300P-50 B	C829	87-010-196-089		C-CAP, S 0.1-25 F
C602	87-010-184-089		C-CAP, S 3300P-50 B	C860	87-010-248-080		CAP, E 220-10 SME
C603	87-010-405-089		CAP, E 10-50 SME	C861	87-010-196-080		C-CAP, S 0.1-25 Z F
C604	87-010-405-089		CAP, E 10-50 SME	C862	87-010-182-080		C-CAP, S 2200P-50 K B
C605	87-010-260-089		CAP, E 47-25 SME	C863	87-018-131-080		CAP, TC U 1000P-50 K B UP050
C606	87-010-101-089		CAP, E 220-16 SME	C864	87-010-315-080		C-CAP, S 27P-50 J CH
C607	87-010-188-089		C-CAP, S 6800P-50 B	C865	87-010-315-080		C-CAP, S 27P-50 J CH
C608	87-010-188-089		C-CAP, S 6800P-50 B	C866	87-010-196-080		C-CAP, S 0.1-25 Z F
C609	87-018-127-089		CAP, TC-U 470P-50 B	C867	87-018-127-080		CAP, TC U 470P-50 K B UP050
C610	87-018-127-089		CAP, TC-U 470P-50 B	C868	87-010-405-080		CAP, E 10-50 SME
C611	87-010-197-089		C-CAP, S 0.01-25 B	C869	87-010-197-080		C-CAP, S 0.01-25 K B
C612	87-010-197-089		C-CAP, S 0.01-25 B	C871	87-010-805-080		C-CAP, S 1-16 Z F
C613	87-010-195-089		C-CAP, S 0.068-25 F	C872	87-010-197-080		C-CAP, S 0.01-25 K B
C614	87-010-195-089		C-CAP, S 0.068-25 F	C940	87-010-197-089		C-CAP, S 0.01-25 B
C615	87-010-404-089		CAP, E 4.7-50 SME	C942	87-010-150-080		C-CAP, S 6P-50 D CH
C616	87-010-404-089		CAP, E 4.7-50 SME	C946	87-010-401-089		CAP, E 1-50 SME
C617	87-010-404-089		CAP, E 4.7-50 SME	C949	87-014-049-080		CAP, PP 470P-100 J
C618	87-010-404-089		CAP, E 4.7-50 SME	C952	87-010-197-089		C-CAP, S 0.01-25 B
C701	87-010-381-089		CAP, E 330-16 SME	C957	87-010-315-080		C-CAP, S 27P-50 J CH
C702	87-010-404-089		CAP, E 4.7-50 SME	C958	87-010-197-080		C-CAP, S 0.01-25 K B
C703	87-010-197-089		C-CAP, S 0.01-25 B	C960	87-010-196-089		C-CAP, S 0.1-25 F
C704	87-010-197-089		C-CAP, S 0.01-25 B	CF801	87-008-423-080		FLTR, SFE10.7MS3GH-A-TF21
C711	87-010-263-089		CAP, E 100-10 SME 5X11	CF802	82-785-747-080		CF, MS2 GHY, R
C712	87-010-196-089		C-CAP, S 0.1-25 F	EMI901	87-008-372-080		FLTR, EMI BL01 RN1
C715	87-010-197-089		C-CAP, S 0.01-25 B	FFE801	A8-6ZA-191-030		6ZA-1 FEENM
C716	87-010-197-089		C-CAP, S 0.01-25 B	J252	87-A60-031-010		JACK, 6.3 BLK ST W/S
C722	87-010-152-089		C-CAP, S 8P-50 CH	J253	87-099-801-010		JACK, PIN 1P BLK
C723	87-010-178-089		C-CAP, S 1000P-50 B	J254	87-033-240-019		TERMINAL, SP 4P32SV1-05
C725	87-010-178-089		C-CAP, S 1000P-50 B	J801	87-033-241-010		TERMINAL, ANT AJ-2039
C727	87-010-196-089		C-CAP, S 0.1-25 F	L101	87-003-383-019		COIL, 1UH-S
C728	87-010-248-089		CAP, E 220-10 SME	L102	87-003-383-019		COIL, 1UH-S
C760	87-010-197-089		C-CAP, S 0.01-25 B	L701	87-003-293-019		COIL, TRAP MPX
C761	87-010-196-089		C-CAP, S 0.1-25 F	L702	87-003-293-019		COIL, TRAP MPX
C770	87-010-405-089		CAP, E 10-50 SME	L741	87-A50-015-019		COIL, FM DET(TOK)
C771	87-010-405-089		CAP, E 10-50 SME	L742	87-A90-051-019		FLTR, CFAZ-450(TOK)
C772	87-010-194-089		C-CAP, S 0.047-25 F	L770	87-003-102-089		COIL, 10UH
C773	87-010-196-089		C-CAP, S 0.1-25 F	L832	87-003-098-089		COIL, 2.2UH
C774	87-010-263-089		CAP, E 100-10 SME 5X11	L850	87-003-098-080		COIL, 2.2UH M LAL02
C775	87-010-405-089		CAP, E 10-50 SME	L941	87-A50-020-010		COIL, ANT LW (COI)
C776	87-010-197-089		C-CAP, S 0.01-25 B	L942	87-A50-019-010		COIL, OSC LW (COI)
C777	87-010-400-089		CAP, E 0.47-50 SME	L981	86-NF4-665-019		AM PACK 1(TOK)
C778	87-010-401-089		CAP, E 1-50 SME	▲PRI106	87-026-689-080		PROTECTOR, 1A 491SERIES 60V
C779	87-010-401-089		CAP, E 1-50 SME	R105	87-022-600-089		RES, M/F 0.1-2W J
C780	87-010-197-089		C-CAP, S 0.01-25 B	R106	87-022-600-089		RES, M/F 0.1-2W J
C781	87-010-405-089		CAP, E 10-50 SME	RY101	87-045-389-019		RELAY, OSA-SS-212DM5
C782	87-010-405-089		CAP, E 10-50 SME	SFR722	87-024-432-080		SFR, 4.7K H RH063MC
C787	87-010-184-089		C-CAP, S 3300P-50 B	TC701	87-011-253-089		TRIMER, 30P LAR
C788	87-010-184-089		C-CAP, S 3300P-50 B	TC942	87-011-253-089		TRIMER, 30P LAR
C789	87-010-179-089		C-CAP, S 1200P-50 B	TH240	87-A90-221-080		C-THMS, 100K
C790	87-010-179-089		C-CAP, S 1200P-50 B	W101	85-NF5-628-019		F-CABLE 7P-2.5
C791	87-010-401-089		CAP, E 1-50 SME	X703	84-508-618-019		VIB, CER CSB 456 F15


X721	87-030-372-019	VIB,XTAL 7.2MHZ	LED410	87-070-199-089	LED,SLP738F-81-S-T1
X850	89-KT1-608-010	X,TAL 4.332MHZ	LED411	87-070-201-089	LED,SLP9118C-51-S-T1
			LED412	87-070-201-089	LED,SLP9118C-51-S-T1
			LED413	87-070-201-089	LED,SLP9118C-51-S-T1
			LED414	87-070-201-089	LED,SLP9118C-51-S-T1
FRONT C.B					
C101	87-010-401-049	CAP,E 1-50 SME	LED415	87-070-201-089	LED,SLP9118C-51-S-T1
C102	87-010-401-049	CAP,E 1-50 SME	LED421	87-A40-188-089	LED,SLZ736A-17-S-T2
C103	87-010-182-089	C-CAP,S 2200P-50 B	LED422	87-A40-188-089	LED,SLZ736A-17-S-T2
C104	87-010-182-089	C-CAP,S 2200P-50 B	LED431	87-A40-188-089	LED,SLZ736A-17-S-T2
C105	87-010-545-049	CAP,E 0.22-50 SME	LED432	87-A40-188-089	LED,SLZ736A-17-S-T2
			LED433	87-A40-188-089	LED,SLZ736A-17-S-T2
C106	87-010-545-049	CAP,E 0.22-50 SME	LED434	87-A40-188-089	LED,SLZ736A-17-S-T2
C107	87-010-993-089	C-CAP,S 0.056-25 B	LED436	87-A40-188-089	LED,SLZ736A-17-S-T2
C108	87-010-993-089	C-CAP,S 0.056-25 B	LED437	87-A40-188-089	LED,SLZ736A-17-S-T2
C109	87-012-393-089	C-CAP,S 0.22-25 RK	LED438	87-070-200-080	LED,SLP-636C-81-S-T1 ORN
C110	87-012-393-089	C-CAP,S 0.22-25 RK			
C111	87-010-401-049	CAP,E 1-50 SME	LED439	87-070-200-080	LED,SLP-636C-81-S-T1 ORN
C112	87-010-553-049	CAP,E 47-16 GAS	LED440	87-070-200-080	LED,SLP-636C-81-S-T1 ORN
C113	87-010-405-049	CAP,E 10-50 SME	LED441	87-070-200-080	LED,SLP-636C-81-S-T1 ORN
			LED442	87-070-200-080	LED,SLP-636C-81-S-T1 ORN
C114	87-010-552-049	CAP,E 22-16 GAS	LED443	87-070-200-080	LED,SLP-636C-81-S-T1 ORN
C115	87-010-196-089	C-CAP,S 0.1-25 B			
C401	87-010-196-089	C-CAP,S 0.1-25 F	△PR459	87-A90-246-080	PROTECTOR,0.25A 60V 491
C402	87-018-209-089	CAP,TC-U 0.1-50 F	S920	87-A90-095-089	SW,TACT EVQ11G04M
C450	87-010-112-049	CAP,E 100-16	S921	87-A90-095-089	SW,TACT EVQ11G04M
			S922	87-A90-095-089	SW,TACT EVQ11G04M
C501	87-010-322-089	C-CAP,S 100P-50 CH	S923	87-A90-095-089	SW,TACT EVQ11G04M
C502	87-010-196-089	C-CAP,S 0.1-25 F			
C503	87-010-196-089	C-CAP,S 0.1-25 F	S924	87-A90-095-089	SW,TACT EVQ11G04M
C504	87-010-196-089	C-CAP,S 0.1-25 F	S925	87-A90-095-089	SW,TACT EVQ11G04M
C505	87-010-196-089	C-CAP,S 0.1-25 F	S926	87-A90-095-089	SW,TACT EVQ11G04M
			S927	87-A90-095-089	SW,TACT EVQ11G04M
C506	87-010-196-089	C-CAP,S 0.1-25 F	S928	87-A90-095-089	SW,TACT EVQ11G04M
C601	87-010-196-089	C-CAP,S 0.1-25 F			
C602	87-010-545-049	CAP,E 0.22-50 SME	S929	87-A90-095-089	SW,TACT EVQ11G04M
C603	87-010-321-089	C-CAP,S 82P-50 CH	S930	87-A90-095-089	SW,TACT EVQ11G04M
C604	87-010-196-089	C-CAP,S 0.1-25 F	S931	87-A90-095-089	SW,TACT EVQ11G04M
			S932	87-A90-095-089	SW,TACT EVQ11G04M
C605	87-010-196-089	C-CAP,S 0.1-25 F	S933	87-A90-095-089	SW,TACT EVQ11G04M
C608	87-010-177-089	C-CAP,S 820P-50 SL			
C609	87-016-251-049	CAP,E220-16 SMG	S934	87-A90-095-089	SW,TACT EVQ11G04M
C610	87-010-405-049	CAP,E 10-50 SME	S935	87-A90-095-089	SW,TACT EVQ11G04M
C611	87-010-560-049	CAP,E 10-50 GAS	S936	87-A90-095-089	SW,TACT EVQ11G04M
			S937	87-A90-095-089	SW,TACT EVQ11G04M
C612	87-010-406-049	CAP,E 22-50 SME	S940	87-A90-095-089	SW,TACT EVQ11G04M
C613	87-010-401-049	CAP,E 1-50 SME			
C615	87-010-186-089	C-CAP,S 4700P-50 B	S941	87-A90-095-089	SW,TACT EVQ11G04M
C801	87-010-555-049	CAP,E 100-10 GAS	S942	87-A90-095-089	SW,TACT EVQ11G04M
C802	87-010-074-080	CAP,E 4.7-35	VR101	86-NT1-634-019	VR,RTRY 100KW-L20
			VR601	87-A90-124-019	VR,RTRY 10KA L20
C803	87-010-494-049	CAP,E 1-50 GAS			
C804	87-A10-189-049	CAP,E 220-10			
C805	87-010-196-089	C-CAP,S 0.1-25 F			
C806	87-018-209-089	CAP,TC-U 0.1-50 F	MVR C.B		
C821	87-010-321-089	C-CAP,S 15P-50 CH			
			C201	87-010-545-040	CAP,E 0.22-50 SME
C822	87-010-180-089	CAP,TC-U 1500P-16 B	C202	87-010-545-040	CAP,E 0.22-50 SME
C823	87-010-498-049	CAP,E 10-16 GAS	C203	87-016-281-040	CAP,E 4.7-50 BP SME
C824	87-010-302-080	C-CAP,S 270P-50 CH	C205	87-010-263-089	CAP,E 100-10 SME 5X11
C825	87-010-322-089	C-CAP,S 100P-50 CH	C206	87-010-263-089	CAP,E 100-10 SME 5X11
C901	87-010-560-049	CAP,E 10-50 GAS	C207	87-010-318-089	C-CAP,S 47P-50 CH
			C208	87-010-318-089	C-CAP,S 47P-50 CH
C902	87-010-560-049	CAP,E 10-50 GAS			
C903	87-010-408-049	CAP,E 47-50 SME	C209	87-A10-229-080	C-CAP,S 0.68-10 K W5R
FL802	86-NT1-636-019	FL,BJ451GK	C210	87-010-197-089	C-CAP,S 0.01-25 B
J601	82-NF7-630-019	JACK,3.5 MO	C211	87-010-179-089	C-CAP,S 1200P-50 B
J602	82-NF7-630-019	JACK,3.5 MO	C212	87-010-196-089	C-CAP,S 0.1-25 F
L801	87-005-165-089	COIL,1UH MLAL03	C215	87-010-196-089	C-CAP,S 0.1-25 F
L820	87-A50-052-019	COIL,CLOCK 5.76MHZ T1	C216	87-010-187-089	C-CAP,S 5600P-50 B
LED401	87-070-199-089	LED,SLP738F-81-S-T1	C217	87-010-182-089	C-CAP,S 2200P-50 B
LED402	87-070-199-089	LED,SLP738F-81-S-T1	C218	87-012-393-089	C-CAP,S 0.22-16,R,K
LED403	87-070-199-089	LED,SLP738F-81-S-T1	C219	87-010-194-089	C-CAP,S 0.047-25 F
LED404	87-070-199-089	LED,SLP738F-81-S-T1	C220	87-010-181-080	C-CAP,S 1800P-50 K B
LED405	87-070-199-089	LED,SLP738F-81-S-T1	C221	87-010-196-089	C-CAP,S 0.1-25 F
LED406	87-070-199-089	LED,SLP738F-81-S-T1	C222	87-010-179-089	C-CAP,S 1200P-50 B
LED407	87-070-199-089	LED,SLP738F-81-S-T1	C223	87-010-177-089	C-CAP,S 820P-50 SL
LED408	87-070-199-089	LED,SLP738F-81-S-T1	C224	87-018-134-080	CAP,TC U 0.01-16 N Y UP050
LED409	87-070-199-089	LED,SLP738F-81-S-T1	C231	87-010-176-080	C-CAP,S 680P-50 J SL

REF. NO	PART NO.	カンリ NO.	DESCRIPTION	REF. NO	PART NO.	カンリ NO.	DESCRIPTION
C232	87-010-176-080		C-CAP,S 680P-50 J SL	AC-2 C.B			
C237	87-016-456-040		CAP,E 22-16 LLA	△PR101	87-026-682-080		PROTECTOR,10A 491SERIES 60V
C238	87-010-384-040		CAP,E 100-25 SME	△PR102	87-026-682-080		PROTECTOR,10A 491SERIES 60V
C239	87-010-196-080		C-CAP,S 0.1-25 Z F	△PR103	87-026-681-080		PROTECTOR,5A 491SERIES 60V
C240	87-010-260-040		CAP,E 47-25 SME	△PR104	87-026-681-080		PROTECTOR,5A 491SERIES 60V
C242	87-016-472-040		CAP,E 22-16 K SME	AC-1 C.B			
C243	87-010-263-040		CAP,E 100-10 SME	△	87-033-213-089		CLAMP FUSE SMK
C244	87-016-081-080		C-CAP,S 0.1-16 K R	△	82-304-743-010		TERMINAL,1P
C245	87-010-405-040		CAP,E 10-50 SME	△F101	87-035-191-010		FUSE,3.15A 250V T 218
C246	87-010-405-040		CAP,E 10-50 SME	△PT103	86-NT2-628-010		PT,6NT2PR-E
C247	87-010-405-040		CAP,E 10-50 SME	R-AMP C.B			
C248	87-010-405-040		CAP,E 10-50 SME	C701	87-012-368-080		C-CAP,S 0.1-50 Z F
C249	87-010-405-040		CAP,E 10-50 SME	C702	87-012-368-080		C-CAP,S 0.1-50 Z F
C250	87-016-251-040		CAP,E 220-16 SMG	C703	87-010-398-090		CAP,E 2200-35 SME
C251	87-012-140-080		C-CAP,S 470P-50 J CH	C704	87-010-398-090		CAP,E 2200-35 SME
C252	87-010-186-080		C-CAP,S 4700P-50 K B	C705	87-010-401-040		CAP,E 1-50 SME
C253	87-010-187-080		C-CAP,S 5600P-50 K B	C706	87-010-194-080		C-CAP,S 0.047-25 K F
C256	87-012-394-080		C-CAP, 0.68-16 K W5R CM/CB	C707	87-012-140-080		C-CAP,S 470P-50 J CH
C257	87-012-393-080		C-CAP,S 0.22-16 K W5R CM/CB	C708	87-012-140-080		C-CAP,S 470P-50 J CH
C258	87-012-393-080		C-CAP,S 0.22-16 K W5R CM/CB	C709	87-010-402-040		CAP,E 2.2-50 SME
C259	87-010-404-040		CAP,E 4.7-50 SME	C710	87-010-402-040		CAP,E 2.2-50 SME
C260	87-010-404-040		CAP,E 4.7-50 SME	C711	87-010-405-040		CAP,E 10-50 SME
C261	87-012-393-080		C-CAP,S 0.22-16 K W5R CM/CB	C712	87-010-405-040		CAP,E 10-50 SME
C262	87-012-393-080		C-CAP,S 0.22-16 K W5R CM/CB	C715	87-010-147-080		C-CAP,S 3P-50 C CH GRM
C263	87-016-081-080		C-CAP,S 0.1-16 K R	C716	87-010-147-080		C-CAP,S 3P-50 C CH GRM
C266	87-016-081-080		C-CAP,S 0.1-16 K R	C717	87-010-993-080		C-CAP,S 0.056-25 J B
C267	87-016-081-080		C-CAP,S 0.1-16 K R	C718	87-010-993-080		C-CAP,S 0.056-25 J B
C270	87-016-081-080		C-CAP,S 0.1-16 K R	C719	87-010-196-080		C-CAP,S 0.1-25 Z F
C280	87-010-196-089		C-CAP,S 0.1-25 F	C720	87-010-196-080		C-CAP,S 0.1-25 Z F
C281	87-010-402-040		CAP,E 2.2-50 SME	C721	87-010-193-080		C-CAP,S 0.033-25 K F
C282	87-010-402-040		CAP,E 2.2-50 SME	C722	87-010-193-080		C-CAP,S 0.033-25 K F
C283	87-010-400-040		CAP,E 0.47-50 SME	C723	87-010-197-080		C-CAP,S 0.01-25 K B
C284	87-010-400-040		CAP,E 0.47-50 SME	FC2	88-906-101-110		FF-CABLE, 6P 1.25
C285	87-010-263-089		CAP,E 100-10 SME 5X11	J701	87-099-803-010		JACK,PIN 3P OWR
C286	87-010-384-089		CAP,E 100-25 SME	L701	87-003-383-010		COIL,1UH K
C287	87-010-322-080		C-CAP,S 100P-50 J CH	L702	87-003-383-010		COIL,1UH K
C288	87-010-322-080		C-CAP,S 100P-50 J CH	R707	87-022-050-080		RES,M/F 0.22-1W J
C301	87-010-402-049		CAP,E 2.2-50 SME	R708	87-022-050-080		RES,M/F 0.22-1W J
C302	87-010-402-049		CAP,E 2.2-50 SME				
C303	87-010-404-049		CAP,E 4.7-50 SME				
C304	87-010-404-049		CAP,E 4.7-50 SME				
L201	87-005-481-089		COIL,47UH J FLR50				
MVR281	86-NT1-632-010		VR,MOT 50KBX4 -L20				
R257	87-025-407-080		RES,M/F 100K-1/8W F				

○ チップ抵抗部品コード/CHIP RESISTOR PART CODE

チップ抵抗部品コードの成り立ち

Chip Resistor Part Coding



A  
抵抗部品コード  
Resistor Code

桁表示  
Figure

抵抗値  
Value of resistor

チップ抵抗  
Chip resistor

容量 Wattage	種類 Type	許容誤差 Tolerance	記号 Symbol	寸法/Dimensions (mm)			抵抗コード : A Resistor Code: A	
				外形/Form	L	W		t
1/16W	1608	±5%	CJ		1.6	0.8	0.45	108
1/10W	2125	±5%	CJ		2	1.25	0.45	118
1/8W	3216	±5%	CJ		3.2	1.6	0.55	128




# TRANSISTOR ILLUSTRATION



ECB

2SA1015  
2SA1296  
2SA1318  
2SC3266  
2SD655  
CSD655  
KTA1266  
KTC3198



2SA1037  
2SA1162  
2SC2412  
2SC2712  
2SC2714  
2SC3326  
2SC3722  
2SD2114  
DTA124EK  
DTA143EK  
DTA144EK  
DTC114EK  
DTC114YK  
DTC144EK




ECB

DTA114ES  
DTA114YS  
DTA143ES




ECB

2SA935



2SK543




BCE

2SB1370

# FL (BJ451GK) GRID ASSIGNMENT / ANODE CONNECTION


## GRID ASSIGNMENT

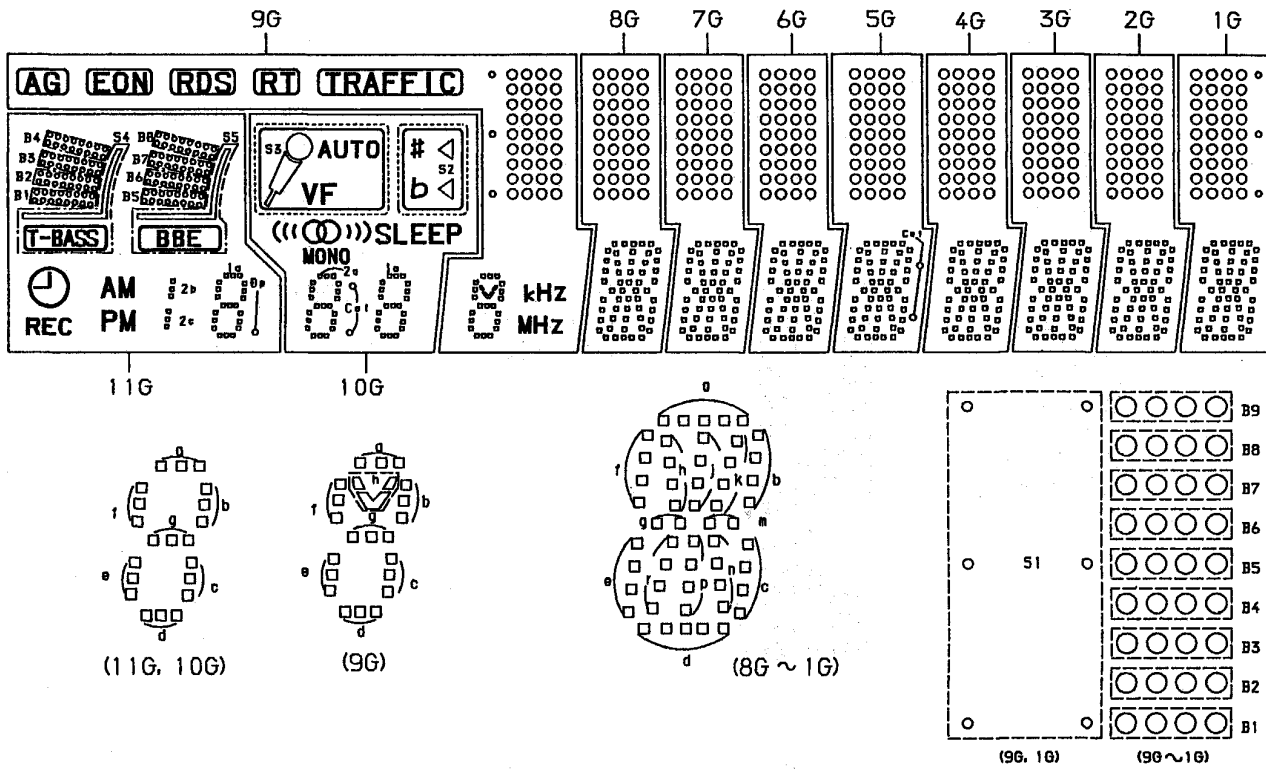

## ANODE CONNECTION


	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G
P1	2b, 2c	S3	B9	B9	B9	B9	B9	B9	B9	B9	B9
P2	1a	AUTO	B8	B8	B8	B8	B8	B8	B8	B8	B8
P3	1b	<(High)	B7	B7	B7	B7	B7	B7	B7	B7	B7
P4	1f	<(Low)	B6	B6	B6	B6	B6	B6	B6	B6	B6
P5	1g	((( )))	B5	B5	B5	B5	B5	B5	B5	B5	B5
P6	1c	SLEEP	B4	B4	B4	B4	B4	B4	B4	B4	B4
P7	1e	MONO	B3	B3	B3	B3	B3	B3	B3	B3	B3
P8	1d	○	B2	B2	B2	B2	B2	B2	B2	B2	B2
P9	-	2a	B1	B1	B1	B1	B1	B1	B1	B1	B1
P10	-	2b	TRAFFIC	a	a	a	a	a	a	a	a
P11	B8	2f	RT	h	h	h	h	h	h	h	h
P12	B7	2g	RDS	j	j	j	j	j	j	j	j
P13	B6	2c	EON	k	k	k	k	k	k	k	k
P14	B5	2e	AG	b	b	b	b	b	b	b	b
P15	B4	2d		h	f	f	f	f	f	f	f
P16	B3	1a		a	m	m	m	m	m	m	m
P17	B2	1b		b	g	g	g	g	g	g	g
P18	B1	1f		f	c	c	c	c	c	c	c
P19	AM	1g		g	e	e	e	e	e	e	e
P20	PM	1c		c	r	r	r	r	r	r	r
P21	Ⓢ	1e		e	p	p	p	p	p	p	p
P22	REC	1d		d	n	n	n	n	n	n	n
P23	-	Col (Low)	KHz	d	d	d	d	d	d	d	d
P24	Ⓢp	Col (High)	MHz	-	-	-	col	-	-	-	-
P25	-	-	S1	-	-	-	-	-	-	-	S1
P26	S4	-	-	-	-	-	-	-	-	-	-
P27	S5	-	-	-	-	-	-	-	-	-	-
P28	-	S2	-	-	-	-	-	-	-	-	-

BLOCK DIAGRAM

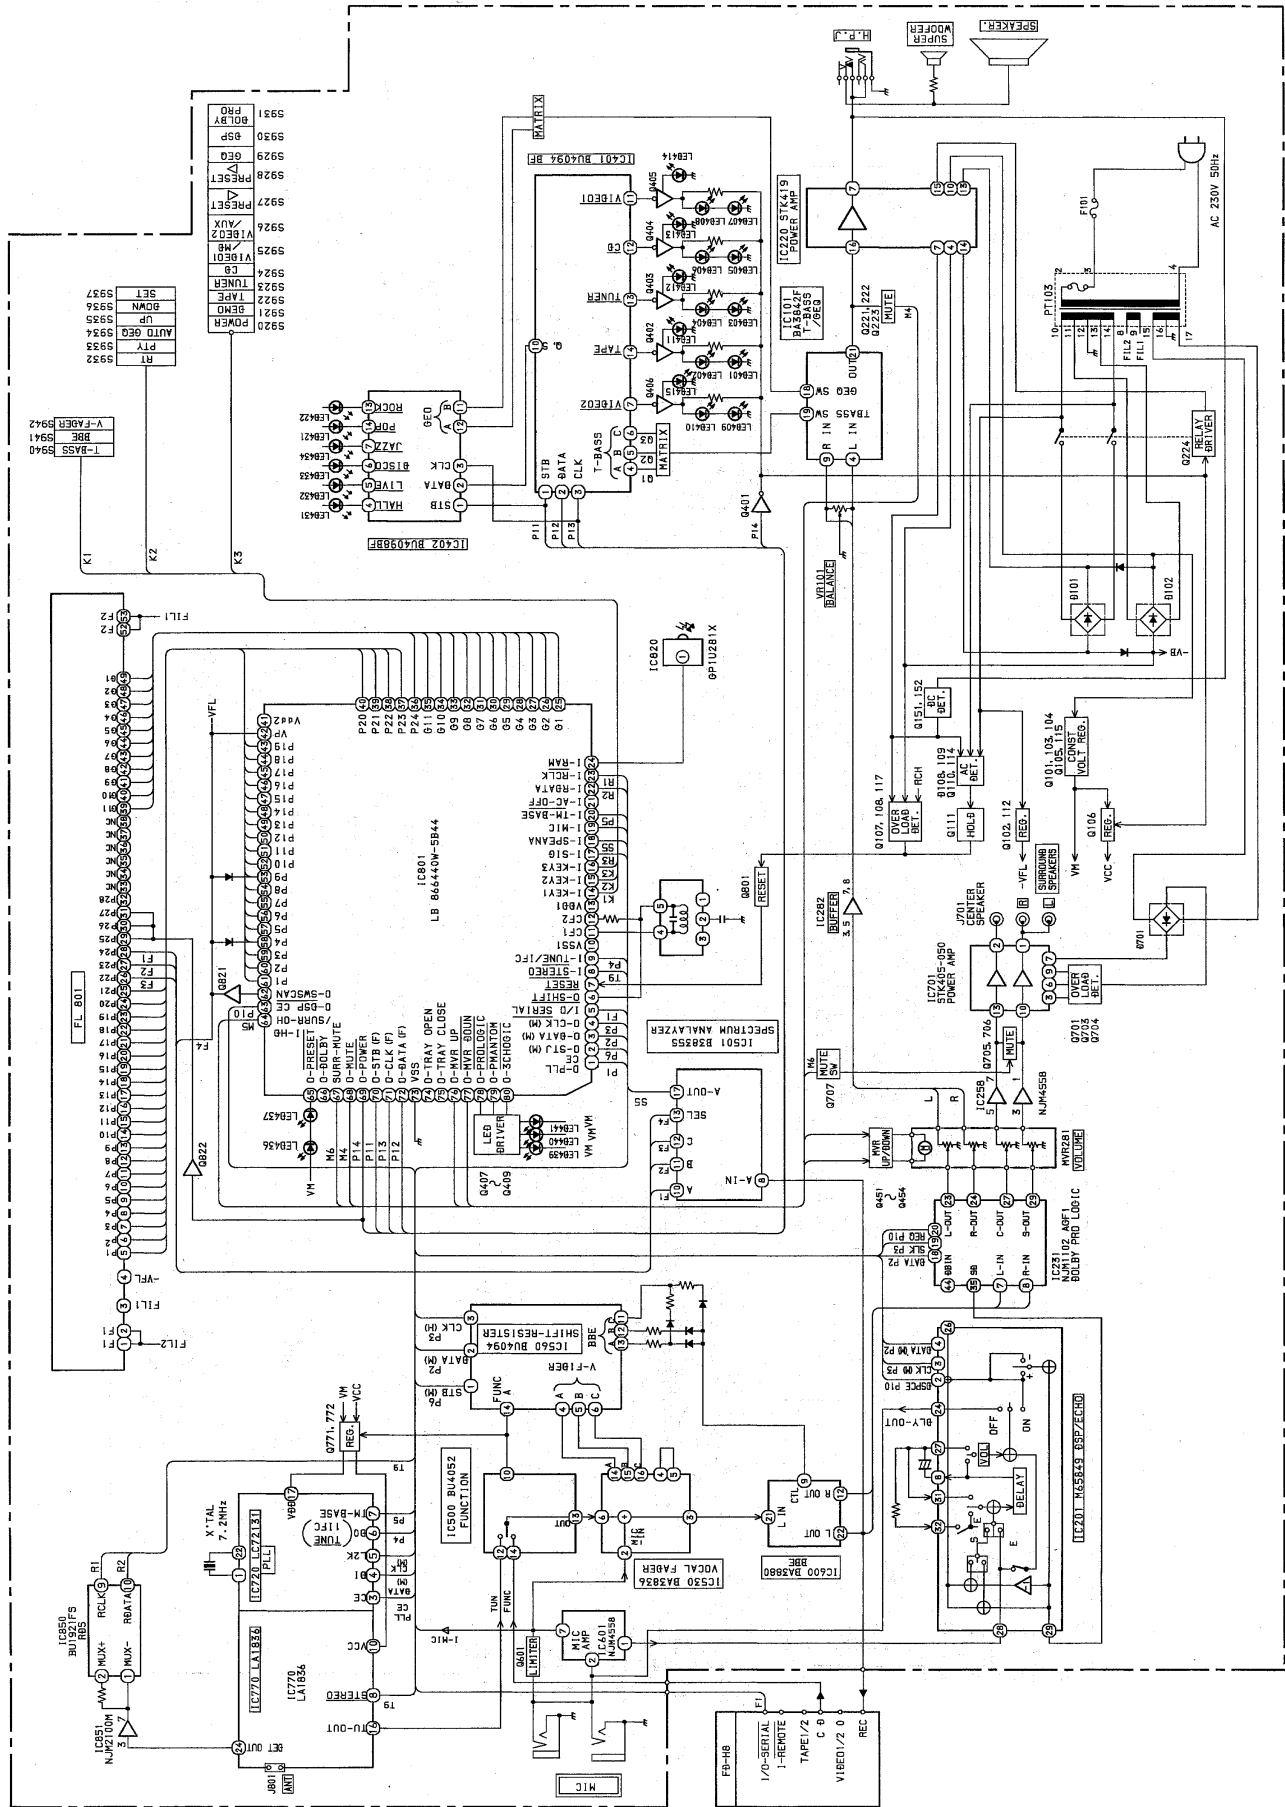



1 2 3 4 5 6 7 8 9 10 11 12 13 14

# A MAIN C.B

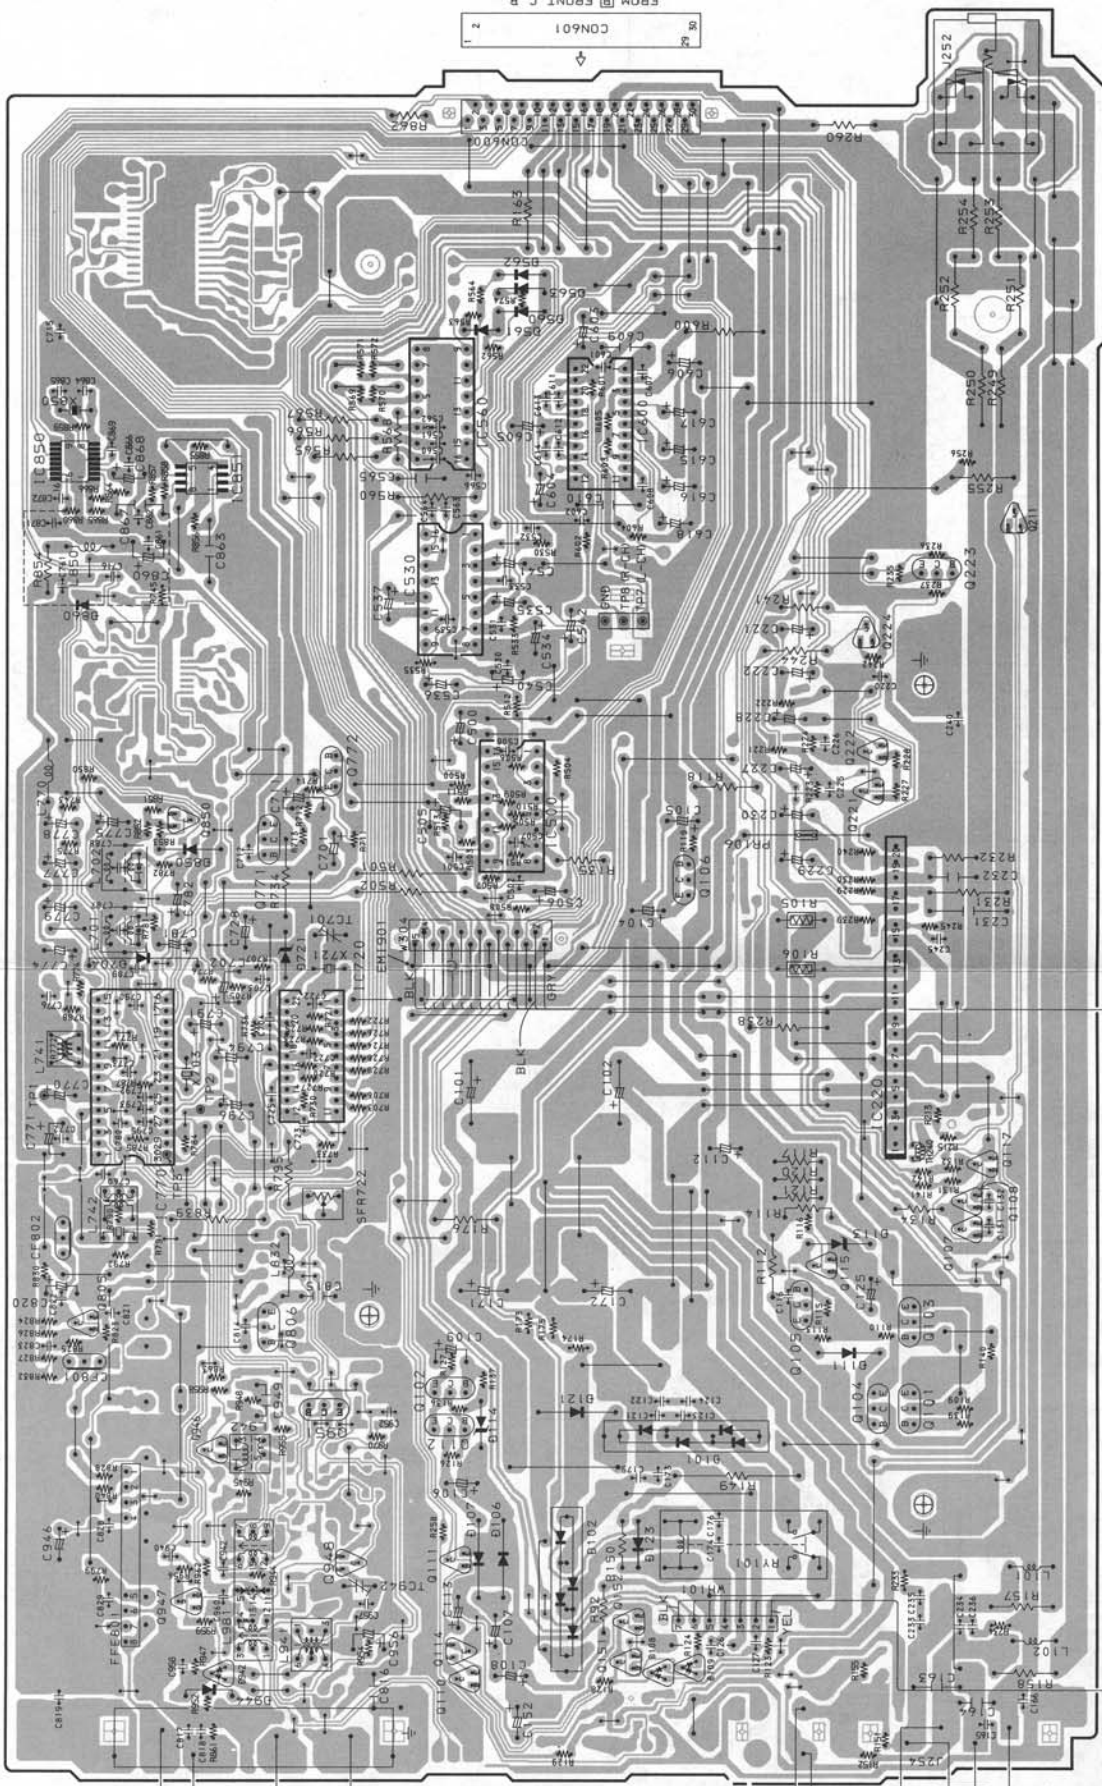



SCHEMATIC DIAGRAM-1

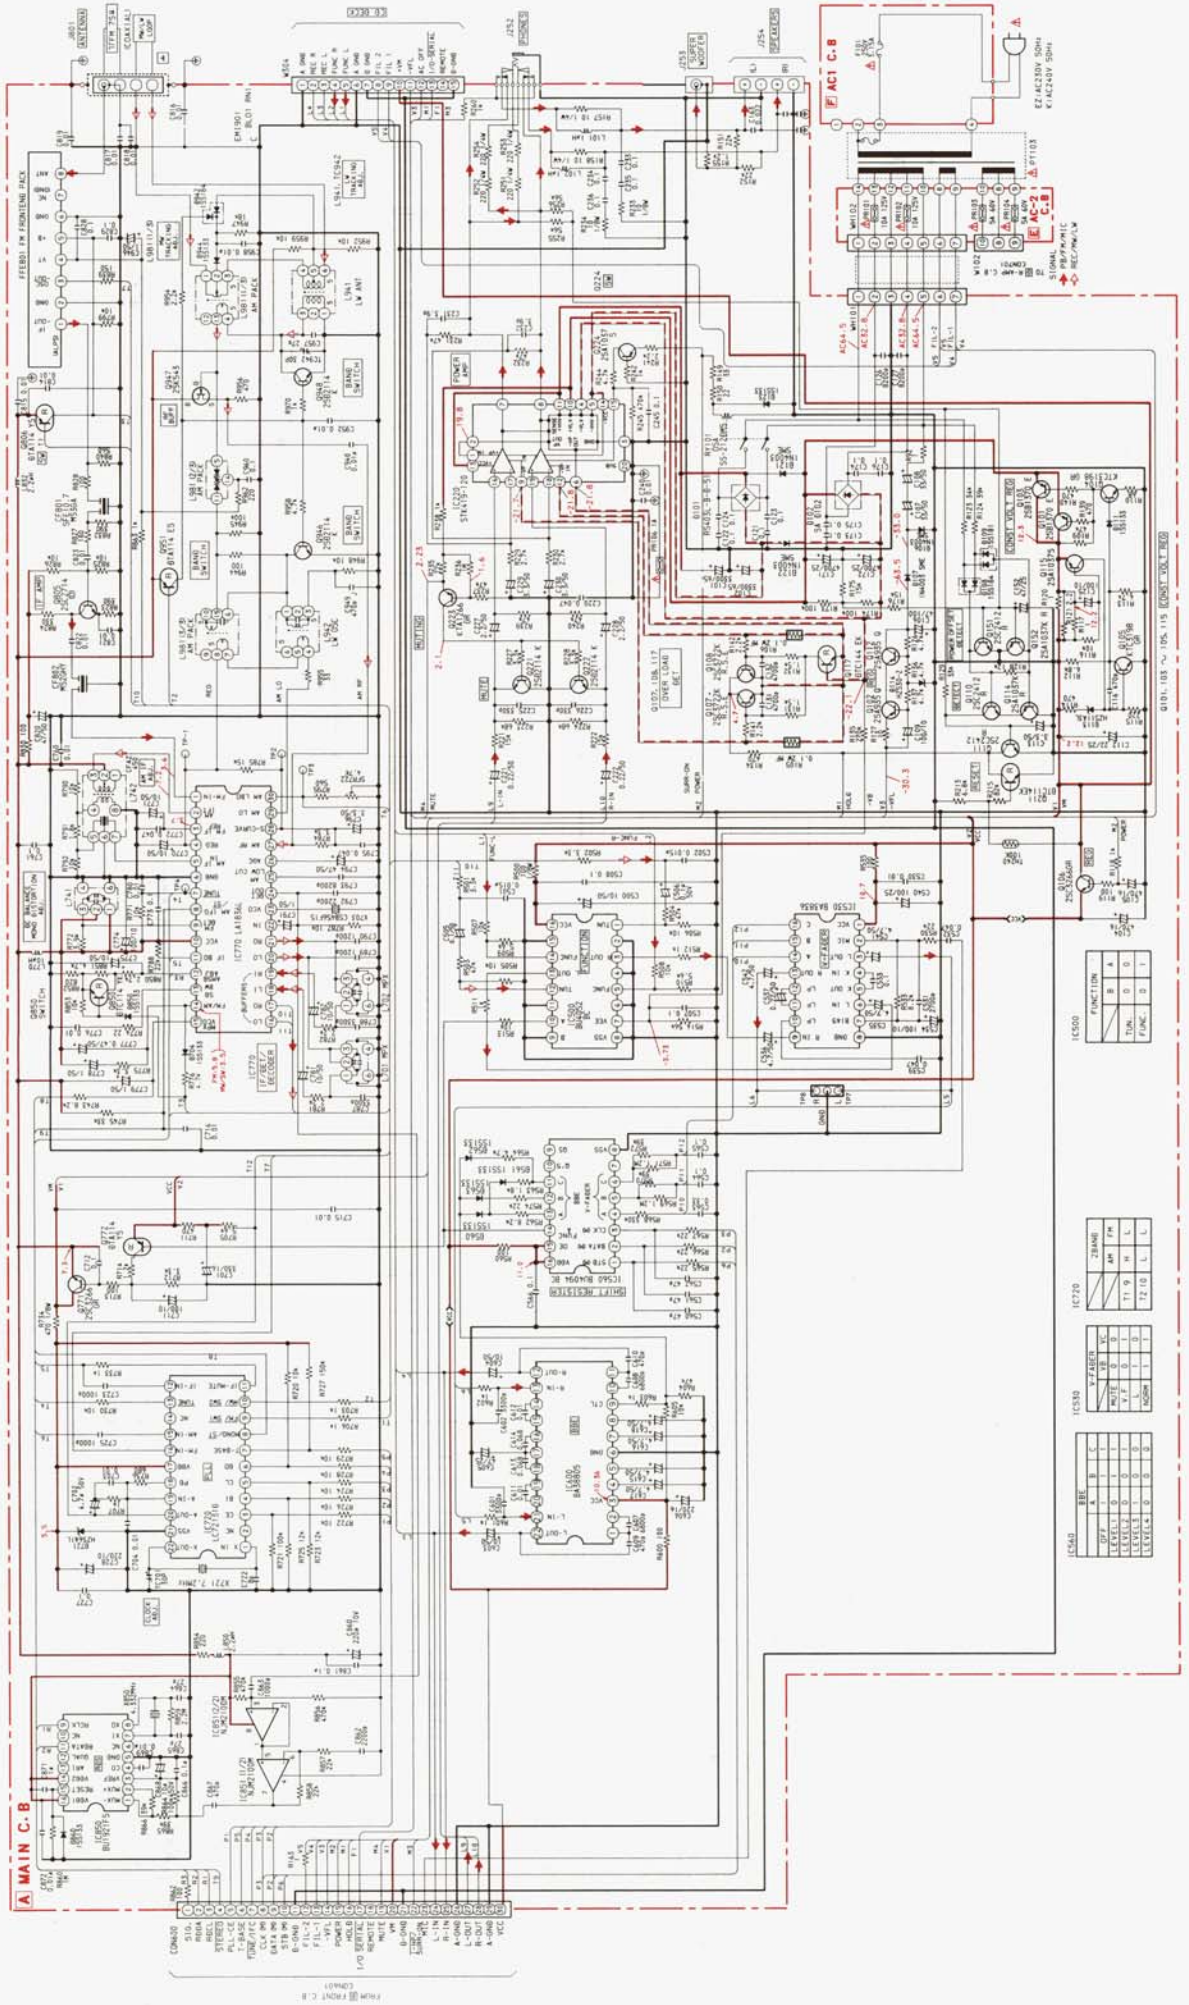

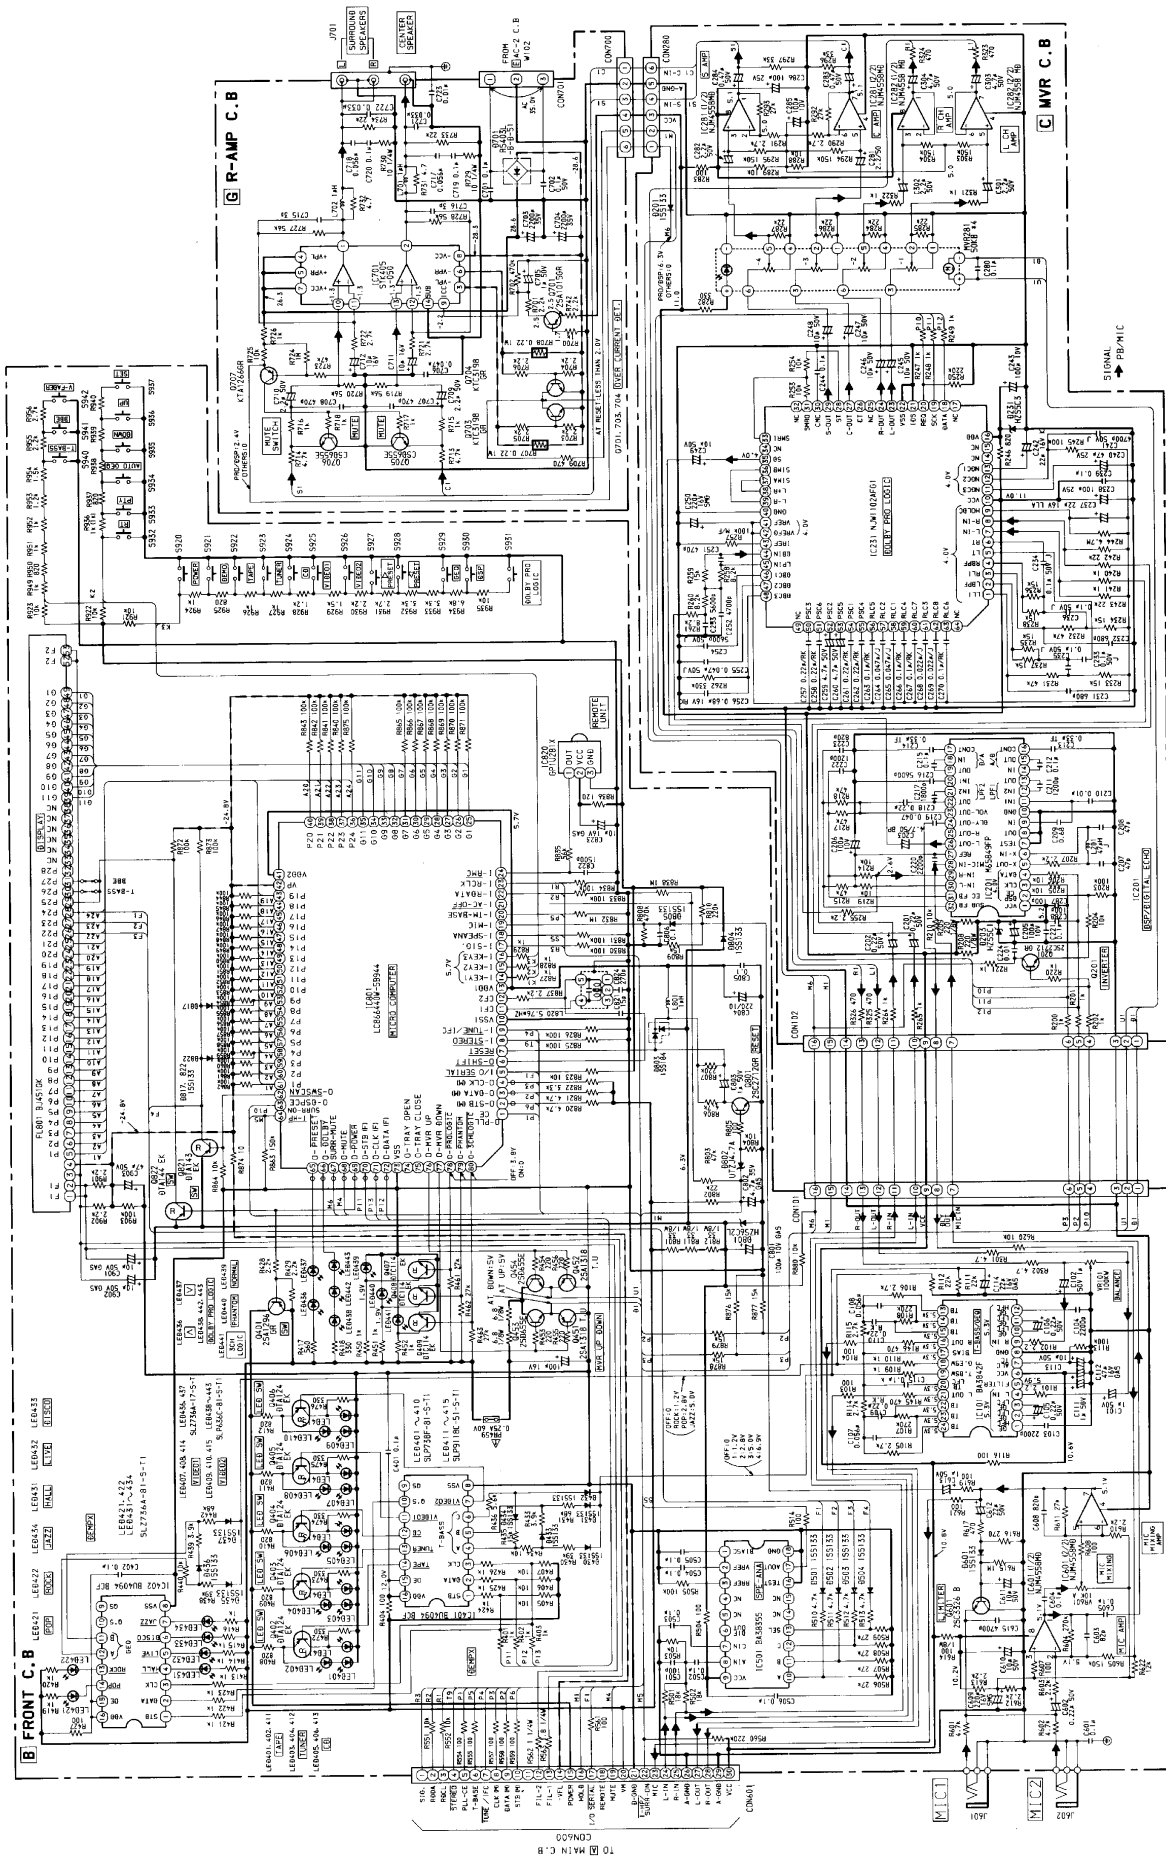

1 2 3 4 5 6 7 8 9 10 11 12 13 14

# B FRONT C.B

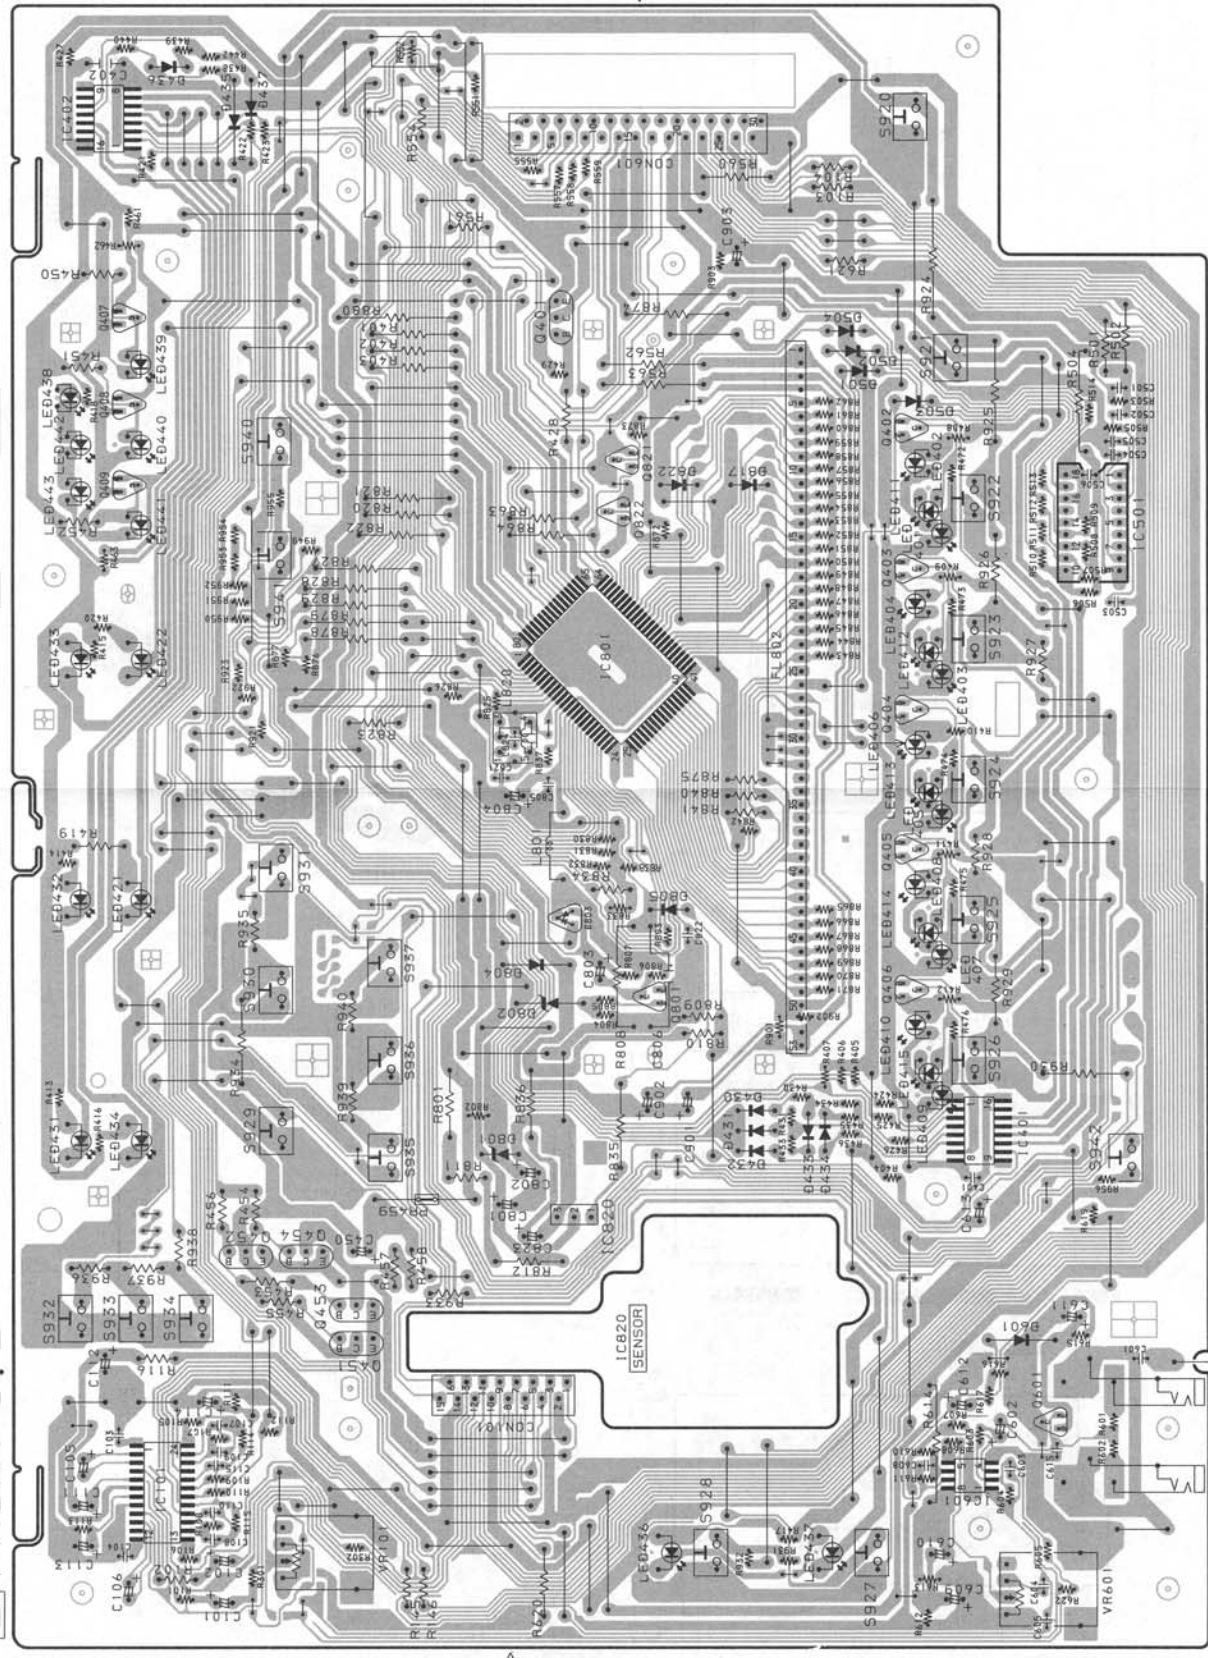

- LEB443, 442, 438
- DOLBY PRO LOGIC
- SURROUND
- LEB440
- LEB439
- PHANTOM
- NORMAL
- LEB441
- SCH LOGIC
- LEB422
- ROCK
- S941
- BBE
- S940
- T-BASS

- LEB435
- DISCO
- LEB422
- ROCK
- S941
- BBE

- LEB432
- LIVE
- LEB421
- POP
- S931
- DOLBY PRO LOGIC
- S937
- SET

- LEB431
- HALL
- LEB434
- JAZZ
- S929
- GEQ
- S935
- TUNING
- S936
- UP
- S937
- DOWN

- S932
- RT
- S933
- PTY
- S934
- AUTO GEQ
- VR101
- BALANCE

- LEB436
- S928
- STATION PRESET
- LEB437
- S927
- VR601
- MIC
- MIXING

- S920
- POWER

- S921
- BEMO

- S922
- TAPE

- LEB403, 404, 412
- LEB401, 402, 411
- S923
- TUNER

- LEB405, 406, 413
- LEB403, 404, 412
- S924
- CD

- LEB409, 410, 415
- S925
- VIBEO2

- S942
- VOCAL FADER/ MULTIPLEX

- CHASSIS
- J601
- MIC1
- J602
- MIC2

- J603
- MIC3


- J604
- MIC4

- J605
- MIC5


- J606
- MIC6

1 2 3 4 5 6 7 8 9 10 11 12 13 14



C MVR C. B

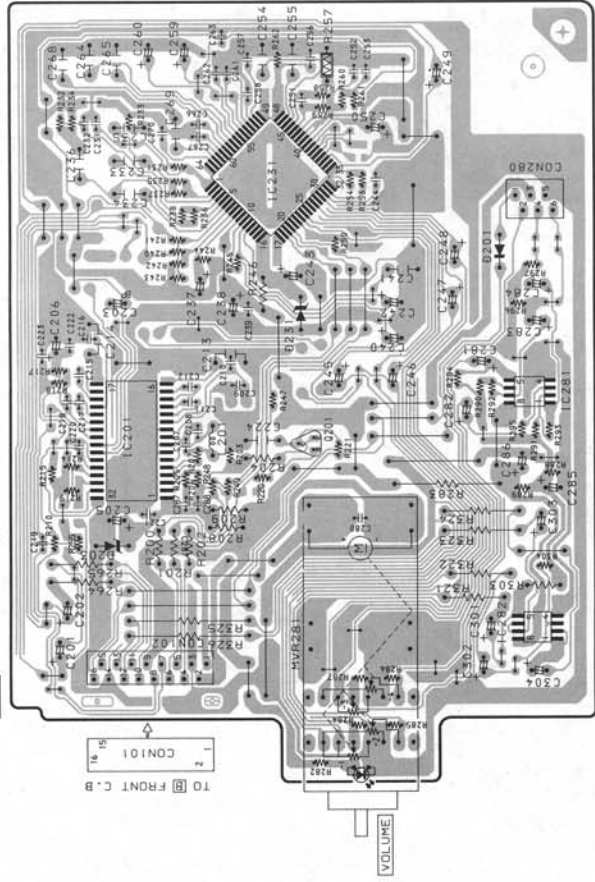

F AC-1 C. B

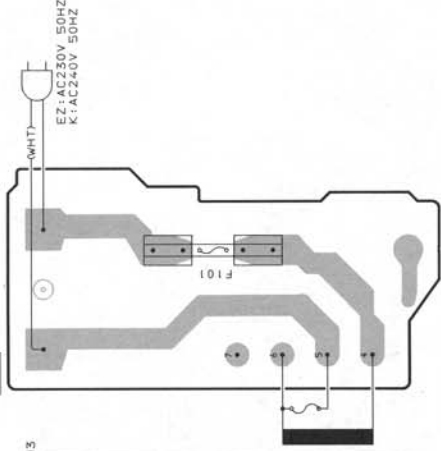

E AC-2 C. B

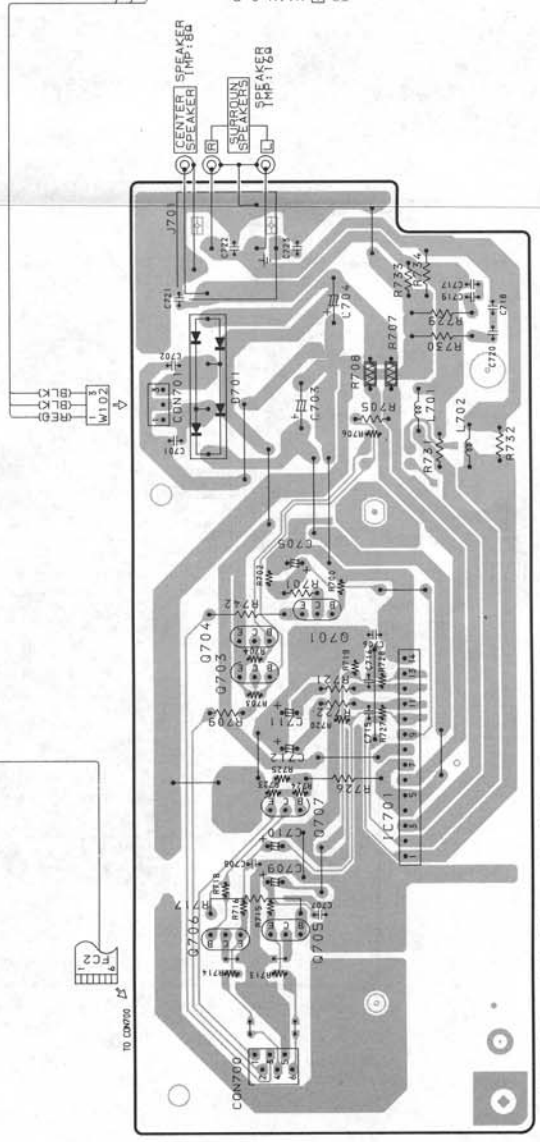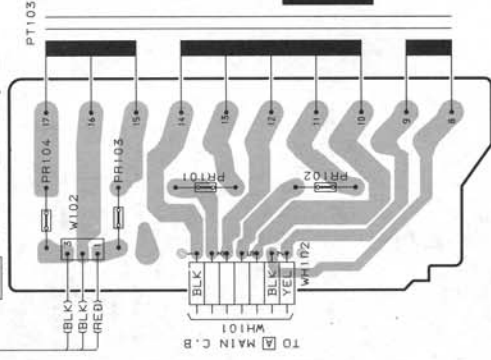

G R-AMP C. B



# IC DESCRIPTION

## IC, LC866424V-5A62

Pin No.	Pin Name	I/O	Description
1	O-PLLCE	O	PLL IC chip enable output.
2	O-STB(M)	O	Main shift register,data latch strobe output.
3	O-DATA(M)	O	Main shift register/PLL/DSP related,data output.
4	O-CLK(M)	O	Main shift register/PLL/DSP related,data transfer clock output.
5	I/O SERIAL	I/O	FD microprocessor,I/O serial.
6	O-SHIFT	O	Microprocessor clock shift output during tuner reception.
7	RESET	I	Reset input(Reset at "L").
8	I-STEREO	I	Tuner stereo sensing input.
9	I-TUNE/IFC	I	Tuner,SD sensing input/IF count serial data input.
10	VSS 1	-	GND.
11	CF 1	-	5.76 MHz oscillator.
12	CF 2	-	5.76 MHz oscillator.
13	VDD 1	-	Power supply input.
14~16	I-KEY 1~3	I	Key 1~Key 3 A/D input.
17	I-SIG	I	Signal level A/D input for RDS.(Not used)
18	I-SPEANA	I	Spectrum analyzer level A/D input.
19	I-MIC	I	Mic level A/D input for auto vocal fader.
20	I-TMBASE	I	Reference clock input for watch(Automatically supporting 8/50/60 Hz).
21	I-AC OFF	I	Power failure sensing input(Hold at"L").
22	I-RSDA	I	Data input for RDS.(Not used)
23	I-RDSC	I	Clock input for RDS.(Not used)
24	I-RMC	I	System remote control input(active Low).
25~35	G11~G1	O	FL grid output(G11~G1).
36~40	S24~S20	O	FL segment output(S24~S20).
41	VDD 2	-	Power supply input.
42	VP	-	Power supply for display.
43~48	S19~S14	O	FL segment output(S19~S14).
49	S13	O	FL segment output/Diode input supporting OIRT.
50	S12	O	FL segment output/Diode input supporting.
51	S11	O	FL segment output/Diode input supporting NTSC.
52	S10	O	FL segment output/Diode input supporting PRO.
53	S9	O	FL segment output/Diode input supporting LW.
54	S8	O	FL segment output/Diode input supporting SW.
55	S7	O	FL segment output/Diode input supporting AM 10K.
56	S6	O	FL segment output/Diode input supporting AM STEREO.
57	S5	O	FL segment output/Diode input supporting FM JPN.
58	S4	O	FL segment output/Diode input supporting RDS.
59	S3	I/O	FL segment output/Diode input supporting BBE.
60	S2	I/O	FL segment output/Diode input supporting DSP.
61	S1	I/O	FL segment output/Diode input supporting K-CON.
62	O-SWSCAN	O	CD turntable reverse direction rotation output/SW scan(timing output).


63	O-DSP CE	O	CD turntable forward direction rotation output/DSP chip enable.
64	SUR ON	O	SUR ON(output at"H").
65	O- $\overline{\text{PRESET LED}}$	O	Preset.
66~67	NC	-	Not used.
68	O-MUTE	O	System Mute ON/OFF output.
69	O- $\overline{\text{POWER}}$	O	System power supply ON/OFF output.
70	O-STB(F)	O	Front shift register,data latch strobe output.
71	O-CLK(F)	O	Front shift register,data clock output.
72	O-DATA(F)	O	Front shift register,data output.
73	VSS	-	GND.
74	O-TRAY OP	O	CD tray open output.
75	O-TRAY CL	O	CD tray close output.
76	O-VR UP	O	Vol up output.
77	O-VR DN	O	Vol down output.
78~80	NC	-	Not used.

IC, NJW1102F


Pin No.	Pin Name	I/O	Description
1	LLI	I	Lch BPF in.
2	LBPF	O	Lch BPF feed back out.
3	RLI	I	Rch BPF in.
4	RBPF	O	Rch BPF feed back out.
5	LT	O	Lch selector #1 out.
6	RT	O	Rch selector #1 out.
7	LIN	I	Lch signal input.
8	RIN	I	Rch signal input.
9	HOLDC	I	Auto input balance control.
10	VCC	-	Power supply.
11~13	NGC 3~1	I	Noise sequencer control.
14,15	NC	-	Not connect.
16	VDD	-	Power supply.
17	NC	-	Not used.
18	DATA	I	Serial data input.
19	SCK	I	Serial clock input.
20	REQ	I	Serial request (strobe) input.
21	IDS	I	IC select sw.
22	VSS	-	GND.
23	LOUT	O	Lch serial output.
24	ROUT	O	Rch serial output.
25	AUX1	O	AUX1 output (serial data change parallel output).
26	CT	O	Cch output (before trimmer).
27	C-OUT	O	Cch output (after trimmer).
28	ST	O	Sch output (before trimmer).
29	S-OUT	O	Sch output (after trimmer).
30	CMC	I	Center mode control.
31	SMRO	O	Sch amp (front L,R mix) output.
32	NC	-	Not used.
33	SMRI	I	Sch amp (front L,R mix) input.
34	AUX2	O	AUX2 output (serial data change parallel output).
35	SD	O	Selector #2 output (to delay IC).
36	SIMBB	I	Selector #2 input B (L-R).
37	SIMBA	I	Selector #2 input A (L+R).
38	L+R	O	L+R ch output.
39	L-R	O	L-R ch output.
40	GND	-	Gnd.
41	VREF	I	VREF in.
42	VREFG	O	Vref out.
43	IREF	I	Iref in.
44	DBIBN	O	Output to modify dolby B IC (included NJW1102).
45	LPIN	I	From delay input.
46~48	DBC 1~3	I	Dolby B NR control.
49	NC	-	Not used.
50~55	PSC 1~6	I	Dual time constant and threshold switches control.
56~63	RLC 1~8	I	Full wave rectifier and log difference amp control.
64	NC	-	Not used.

# IC BLOCK DIAGRAM


## IC, BA3880S

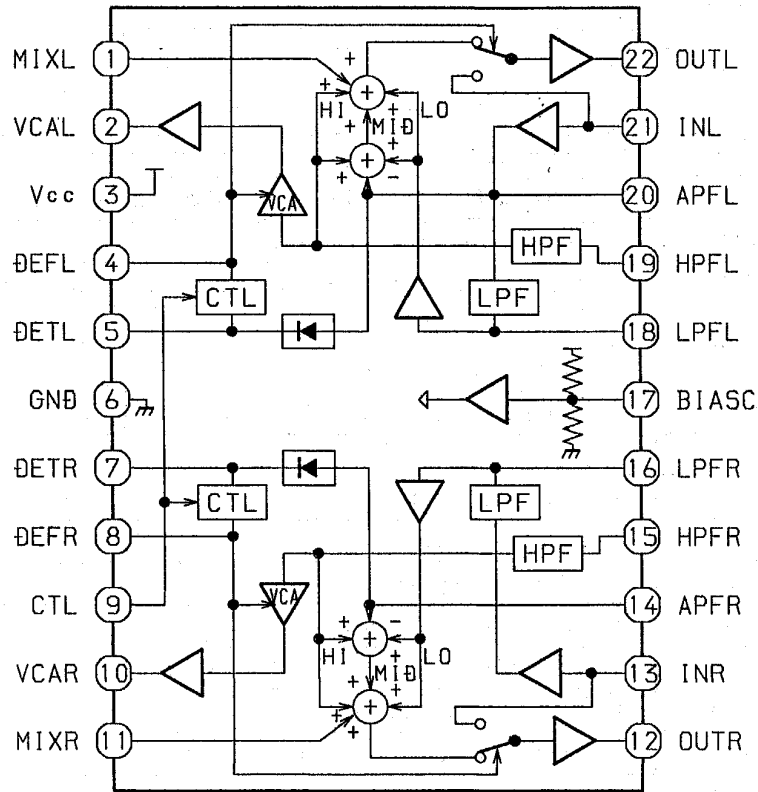


## IC, M65849FP

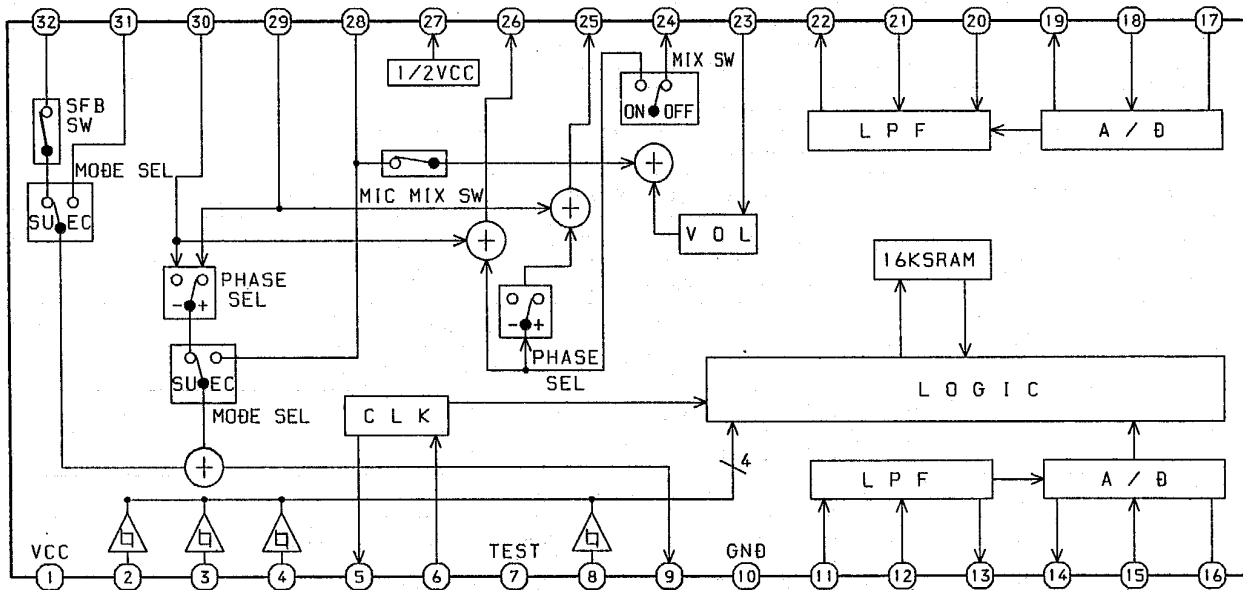


IC, BA3835S

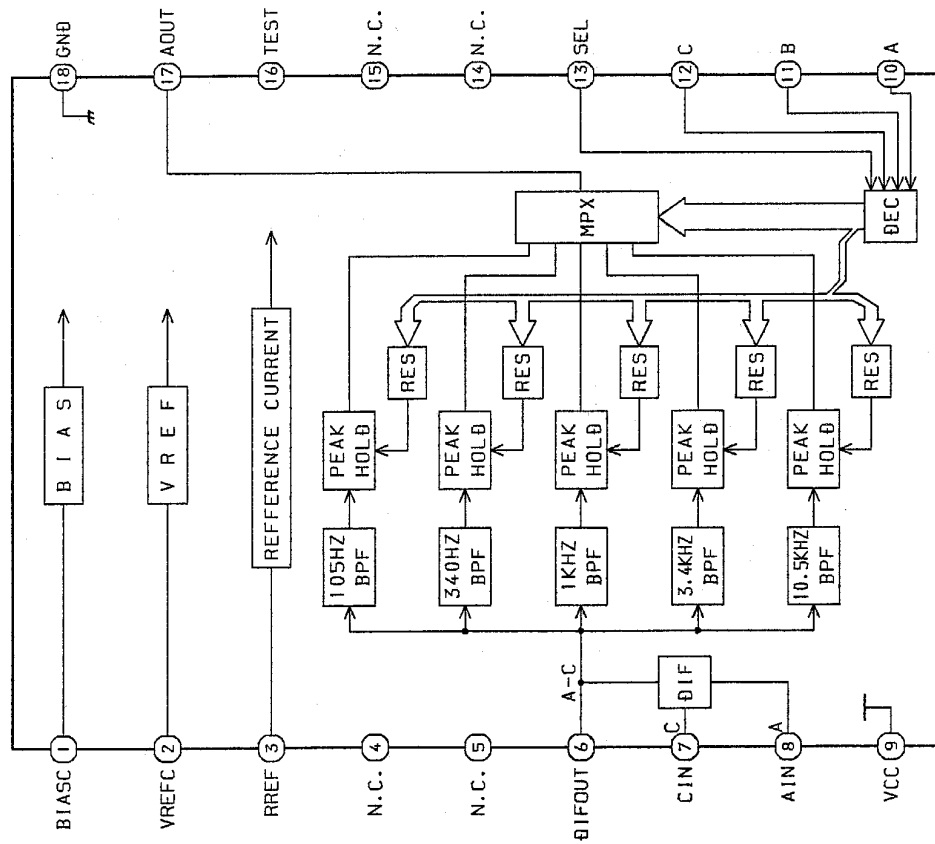


IC, LC72131D

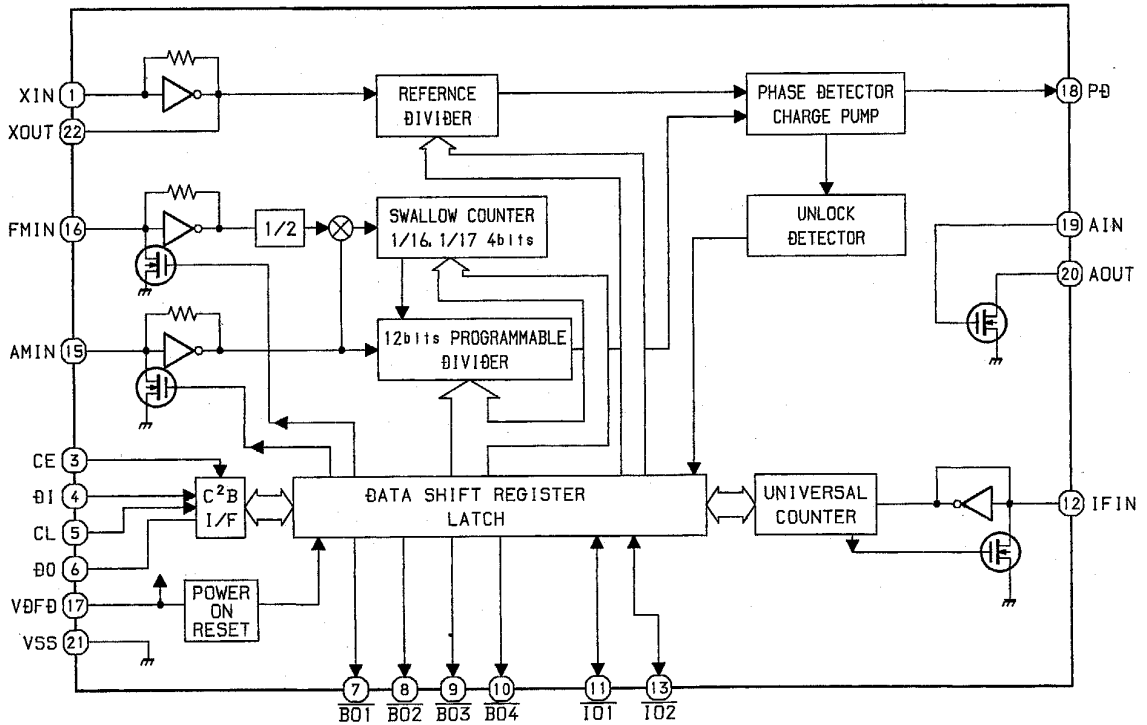


IC, BA3842F

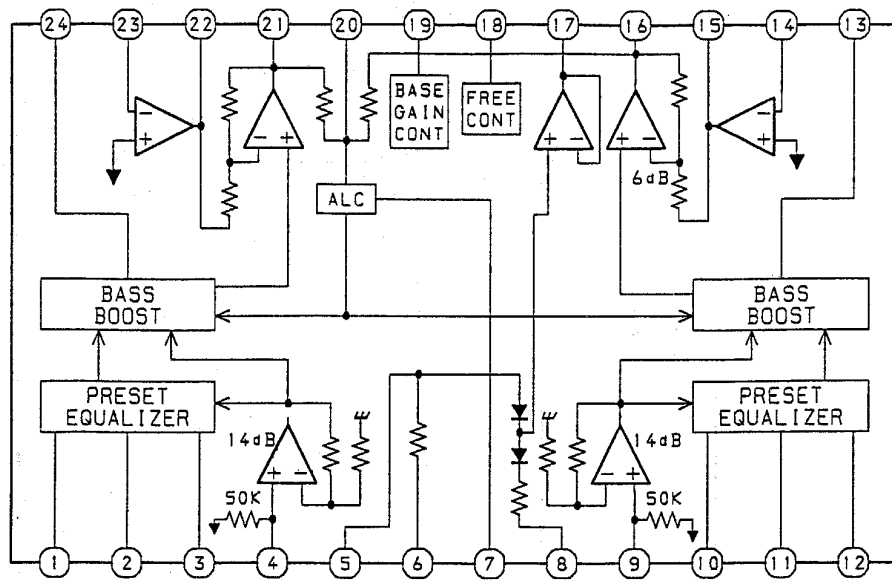

IC, BA3836

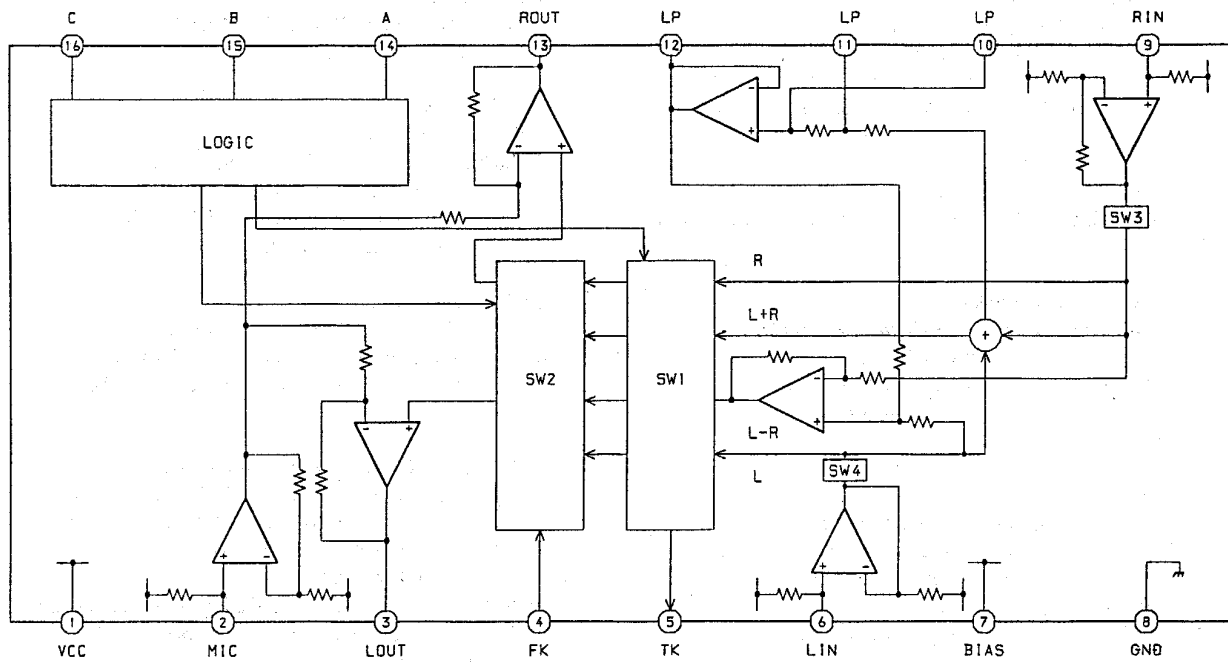

# ELECTRICAL ADJUSTMENT

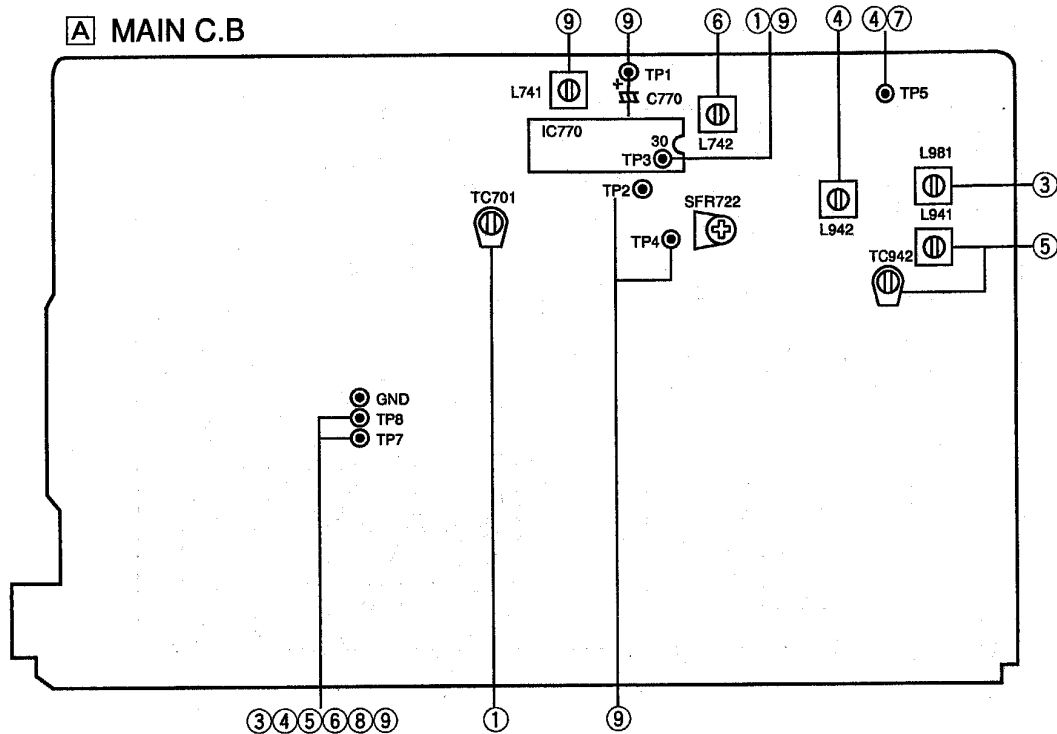

## TUNER SECTION

### 1. Clock Frequency Adjustment

Setting: • Test point : TP3(CLK)  
 • Adjustment location : TC701  
 Method: Set to MW 1602kHz and adjust TC701 so that the test point becomes 2052kHz  $\pm$  0.01kHz.

### 2. MW VT Check

Setting: • Test point : TP5  
 Method: Set to MW 1602kHz and check the test point is  $6.0 \pm 1.0V$ .

### 3. MW Tracking Adjustment

Settings: • Test point : TP7(Lch), TP8(Rch)  
 • Adjustment location : L981  
 Method: Set to MW 999kHz and adjust L981 so that the test point becomes maximum.

### 4. LW VT Adjustment

Settings: • Test point : TP5  
 • Adjustment location : L942  
 Method: Set to LW 144kHz and adjust L942 so that the test point becomes  $1.3 \pm 0.05V$ .

### 5. LW Tracking Adjustment

Settings: • Test point : TP7(Lch), TP8(Rch)  
 • Adjustment location :  
 L941 ..... 144kHz  
 TC942 ..... 290kHz  
 Method: Set up TC942 to center before adjustment. The level at 144kHz is adjusted to MAX by L941. Then the level at 290kHz is adjusted to MAX by TC942.

### 6. AM IF Adjustment

Setting: • Test point : TP7(Lch), TP8(Rch)  
 L742 ..... 450kHz

### 7. FM VT Check

Setting: • Test point : TP5  
 Method: Set to FM 87.5MHz and check that the test point is more than 1.5V. Then set to FM 108MHz and check that the test point is less than 8.2V.

### 8. FM Tracking Check

Setting: • Test point : TP7(Lch), TP8(Rch)  
 Method: Check that the test point is 3 ~ 12dB and distortion is less than 3% at FM98.0MHz.

### 9. DC Balance / MONO Distortion Adjustment

Settings: • Test point : TP1, TP2 (DC Balance)  
 TP7(Lch), TP8(Rch) (Distortion)  
 • Adjustment location : L741  
 • Input level : 54dB  
 Method: Set to FM 98.0MHz and adjust L741 so that the voltage between TP3 and TP4 becomes  $0V \pm 0.04V$ . Next check that the distortion is less than 1.3%.

# PRACTICAL SERVICE FIGURE

## TUNER SECTION

### <FM SECTION>

IHF Sensitivity: 7dB±6dB (at 98.0MHz)  
(DIN Filter at S/N 26dB)  
S/N 50dB Quieting sensitivity: Less than 42dB  
(S/N 46dB) (at 87.5/98.0/108.0MHz)  
Signal to noise ratio: More than 65dB (at 98.0MHz)  
Distortion: Less than 1.2% (at 98.0MHz)  
Stereo separation: More than 20dB (at 98.0MHz)  
Intermediate frequency: 10.7MHz

### <MW SECTION>


Sensitivity: 46dB~58dB (at 603kHz)  
(S/N 20dB) 46dB~58dB (at 999/1401kHz)  
Signal to noise ratio: More than 36dB (at 999kHz)  
(Input 100dB)  
Distortion: Less than 1.5% (at 999kHz)  
Intermediate frequency: 450kHz

### <LW SECTION>

Sensitivity: 66dB±5dB (at 144kHz)  
(S/N 20dB) 63dB±5dB (at 188kHz)  
62dB±5dB (at 290kHz)  
Signal to noise ratio: More than 32dB (at 198kHz)  
Distortion: Less than 1.5% (at 198kHz)  
Intermediate frequency: 450kHz



# MECHANICAL EXPLODED VIEW 1 / 1

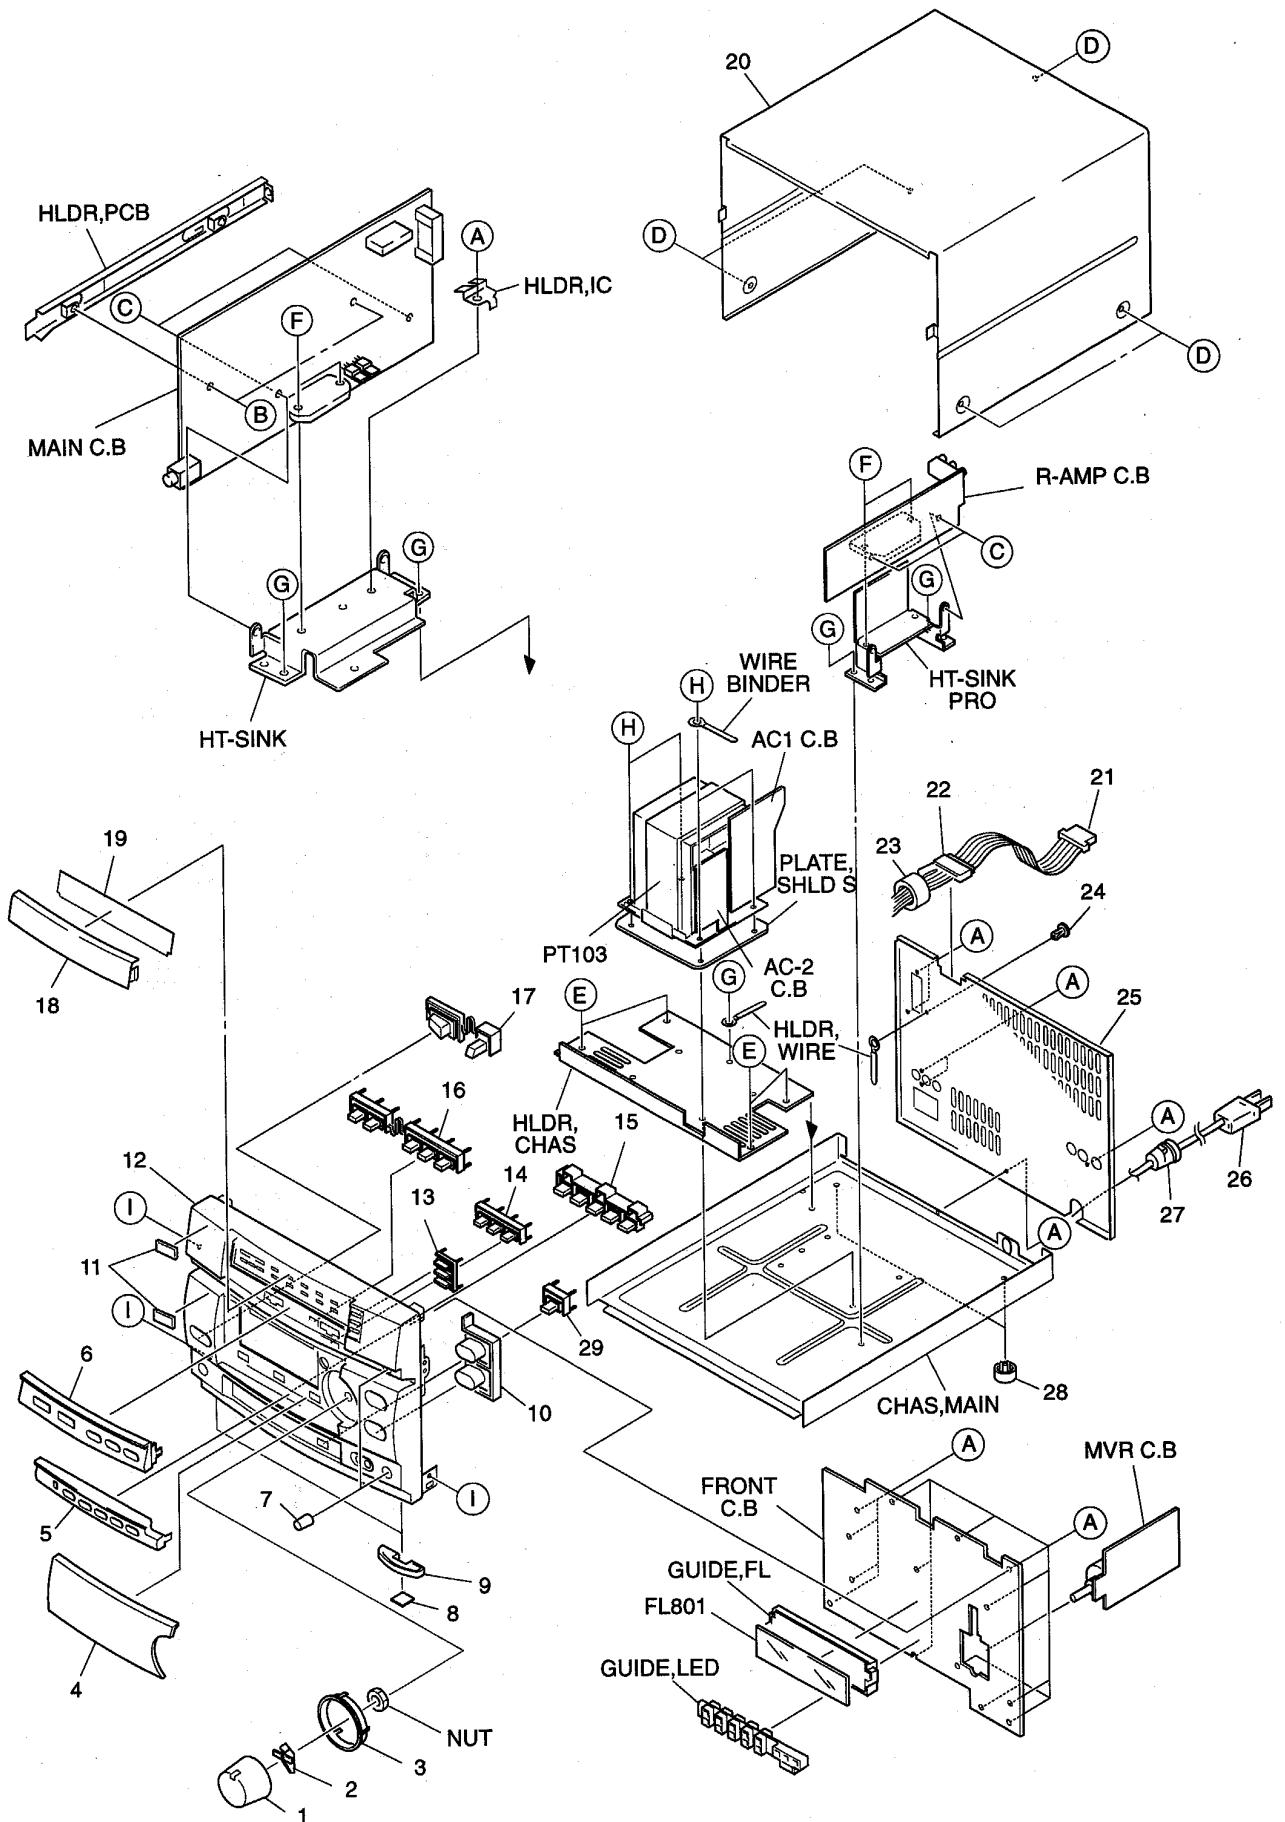

# MECHANICAL PARTS LIST 1 / 1

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。  
 If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF.NO	PART.NO.	カンリ NO.	DESCRIPTION	REF.NO	PART.NO.	カンリ NO.	DESCRIPTION
1	86-NT1-021-010		KNOB,RTRY VOL	21	86-NT2-655-010		CORD,FG15P
2	86-NT1-022-010		REFLECTOR,VOL	22	89-VT5-202-010		BUSHING,CORD
3	86-NT1-026-010		RING,VOL	23	87-003-317-010		F-BEAD,15-25-15 E2515MRT
4	86-NT1-037-010		WINDOW,DISPLAY RDS	24	87-084-077-010		RIVET,NYL3.5-4.5
5	86-NT1-006-010		PANEL,FUN	25	86-NTN-014-010		PANEL,REAR EZBNM<EZ>
6	86-NT2-007-010		PANEL,GEQ 2	25	86-NTN-013-010		PANEL,REAR KBNM<K>
7	86-NT1-023-010		KNOB,RTRY MIC	26	87-050-079-010		AC CORD ASSY,E BLK<EZ>
8	80-VT1-202-010		FELT,12.5-15.5-2	26	87-A80-007-110		AC CORD ASSY,K BLK 3P<K>
9	85-NC1-019-010		RING,FOOT	27	87-085-185-010		BUSHING,AC CORD(E) CM-22B
10	86-NT1-009-010		KEY,UP/DOWN	28	87-085-213-010		FOOT,H 12.5
11	82-NE8-032-010		BADGE,AIWA 27.5 ABS GLD	29	86-NT2-005-010		KEY,VF
12	86-NTN-005-010		CABI,FR EZ	A	87-067-703-010		BVT2+3-10 W/O SLOT
13	86-NT1-011-010		KEY,RDS	B	87-078-084-010		BVTT+3-6 W/CONVEX
14	86-NT1-012-010		KEY,SET	C	87-067-633-010		BVT2+3-8 W/O SLOT W/CONVEX
15	86-NT1-020-010		KEY,ASSY FUN	D	87-067-641-010		UTT2+3-8 W/O SLOT BLK
16	86-NT2-004-010		KEY,DSP	E	87-571-092-410		VIT+3-4
17	86-NT1-008-010		KEY,POWER	F	87-067-581-010		BVT2+3-15 W/O SLOT
18	86-NT1-027-010		WINDOW,GEQ	G	87-067-688-010		BVTT+3-6
19	86-NTN-003-010		PLATE,PRO 22	H	87-067-975-010		S-SCREW,IT+4-8 SWCH12A
20	86-NT1-003-010		CABI,STEEL	I	87-591-094-410		QIT+3-6

**PROTECTION OF EYES FROM LASER BEAM DURING SERVICING**

This set employs laser. Therefore, be sure to follow carefully the instructions below when servicing.

**WARNING!**

WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION, BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 30cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.



- Caution: Invisible laser radiation when open and interlocks defeated avoid exposure to beam.
- Advarsel: Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

**VAROITUS!**

Laiteen Käyttäminen muulla kuin tässä käyttöohjeessa mainitulla tavalla saattaa altistaa käyttäjän turvallisuusluokan 1 ylitävälle näkymättömälle lasersäteilylle.

**VARNING!**

Om apparaten används på annat sätt än vad som specificeras i denna bruksanvisning, kan användaren utsättas för osynlig laserstråling, som överskrider gränsen för laserklass 1.

**CAUTION**

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

**ATTENTION**


L'utilisation de commandes, réglages ou procédures autres que ceux spécifiés peut entraîner une dangereuse exposition aux radiations.

**ADVARSEL!**

Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

This Compact Disc player is classified as a CLASS 1 LASER product.


The CLASS 1 LASER PRODUCT label is located on the rear exterior.

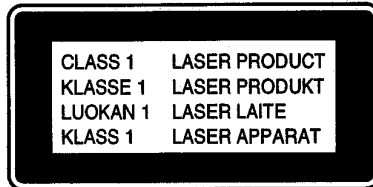**Precaution to replace Optical block (KSS-213B)**

Body or clothes electrostatic potential could ruin laser diode in the optical block. Be sure ground body and workbench, and use care the clothes do not touch the diode.

- 1) After the connection, remove solder shown in the right figure.

PICK-UP Assy P.C.B

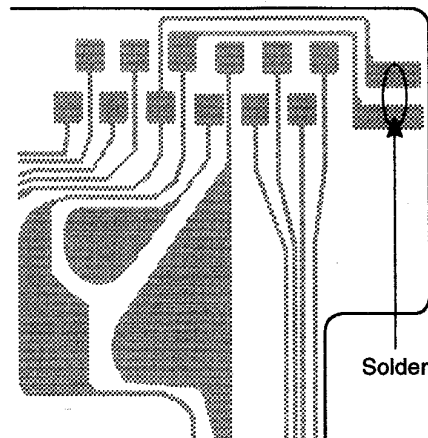

# ELECTRICAL MAIN PARTS LIST

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。  
 If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カリ NO.	DESCRIPTION	REF. NO	PART NO.	カリ NO.	DESCRIPTION
IC				C152	87-012-156-089		C-CAP, S 220P-50 CH
				C153	87-010-322-089		C-CAP, S 100P-50 CH
	87-020-454-010		IC, DN6851	C154	87-010-322-089		C-CAP, S 100P-50 CH
	87-017-022-089		IC, NJM2068M-D(T1)	C155	87-010-197-089		C-CAP, S 0.01-25 B
	87-017-917-089		IC, BU4066BCF	C156	87-010-197-089		C-CAP, S 0.01-25 B
	87-001-607-089		IC, NJM4558M				
	87-002-272-089		IC, TC4052BF	C157	87-012-156-089		C-CAP, S 220P-50 CH
				C158	87-012-156-089		C-CAP, S 220P-50 CH
	87-001-874-010		IC, HA12134A	C159	87-010-318-089		C-CAP, S 47P-50 CH
	87-020-784-089		IC, TC4053BF	C160	87-010-318-089		C-CAP, S 47P-50 CH
	87-017-888-089		IC, NJM4558MD	C181	87-010-805-089		C-CAP, S 1-16 ZF
	87-017-745-019		IC, CXA1782BQ				
	87-070-305-019		IC, BA6897S	C182	87-010-805-089		C-CAP, S 1-16 ZF
				C183	87-010-197-089		C-CAP, S 0.01-25 B
	87-001-982-019		IC, TA7291S	C184	87-010-318-089		C-CAP, S 47P-50 CH
	87-070-294-019		IC, CXD2508AQ	C185	87-010-197-089		C-CAP, S 0.01-25 B
	86-NV1-610-010		IC, LC866424V-5A61	C186	87-010-402-089		CAP, E 2.2-50 SME
	87-017-375-089		IC, TC4094BF				
TRANSISTOR				C187	87-010-184-089		C-CAP, S 3300P-50 B
				C205	87-010-193-089		C-CAP, S 0.033-25 F
	87-026-463-080		TR, 2SA933S	C206	87-010-193-089		C-CAP, S 0.033-25 F
	87-026-218-089		TR, DTC144ES	C303	87-010-183-089		C-CAP, S 2700P-50 B
	87-026-448-089		TR, 2SC1740SS	C304	87-010-183-089		C-CAP, S 2700P-50 B
	87-026-463-089		TR, 2SA933SRS	C305	87-010-404-089		CAP, E 4.7-50 SME
	87-026-219-089		TR, DTA144ES	C306	87-010-404-089		CAP, E 4.7-50 SME
				C323	87-012-157-089		C-CAP, S 330P-50 CH
	89-503-685-089		C-FET, 2SK368GR	C324	87-012-157-089		C-CAP, S 330P-50 CH
	89-113-625-089		C-TR, 2SA1362GR (TAPG)	C341	87-010-196-089		C-CAP, S 0.1-25 F
	87-026-210-089		C-TR, DTC144EK T147				
	89-327-125-089		C-TR, 2SC2712GR	C342	87-010-196-089		C-CAP, S 0.1-25 F
	89-320-011-089		TR, 2SC2001K	C343	87-010-196-089		C-CAP, S 0.1-25 F
				C345	87-010-404-089		CAP, E 4.7-50 SME
	89-109-521-089		TR, 2SA952K	C346	87-010-404-089		CAP, E 4.7-50 SME
	89-318-155-089		TR, 2SC1815GR	C347	87-010-404-089		CAP, E 4.7-50 SME
	89-333-317-889		TR, 2SC3331TU				
	89-333-266-089		C-TR, 2SC3326B	C348	87-010-404-089		CAP, E 4.7-50 SME
	87-026-233-089		C-TR, DTA114TK	C361	87-010-400-089		CAP, E 0.47-50 SME
				C362	87-010-400-089		CAP, E 0.47-50 SME
	87-026-211-089		C-TR, DTA144EK T147	C363	87-010-400-089		CAP, E 0.47-50 SME
	89-110-373-089		C-TR, 2SA1037S	C364	87-010-400-089		CAP, E 0.47-50 SME
	87-026-239-089		C-TR, DTC114TK				
	89-113-187-089		TR, 2SA1318TU	C371	87-010-196-089		C-CAP, S 0.1-25 F
	89-421-722-389		TR, 2SD2172 V/W	C372	87-010-196-089		C-CAP, S 0.1-25 F
				C375	87-010-402-089		CAP, E 2.2-50 SME
	87-026-223-089		C-TR, DTC143TK	C376	87-010-402-089		CAP, E 2.2-50 SME
	87-026-608-089		C-TR, DTC123JK	C377	87-010-247-089		CAP, E 100-50 SME
	87-A30-039-089		C-TR, 2SD1383K				
	89-112-965-089		TR, 2SA1296GR	C378	87-010-401-089		CAP, E 1-50 SME
				C379	87-010-406-089		CAP, E 22-50 SME
DIODE				C381	87-010-402-089		CAP, E 2.2-50 SME
	87-020-465-089		DIODE, 1SS133	C382	87-010-402-089		CAP, E 2.2-50 SME
	87-001-290-089		ZENER, HZS6B1L	C401	87-012-156-089		C-CAP, S 220P-50 CH
	87-017-121-089		ZENER, HZS11A1				
	87-020-123-089		DIODE, DS446-AT (TA)	C402	87-012-156-089		C-CAP, S 220P-50 CH
	87-001-731-089		ZENER, HZS6C2L	C403	87-014-059-089		CAP, PP 1200P-100 J
				C405	87-010-263-089		CAP, E 100-10 SME 5X11
	87-020-331-089		C-DIODE, DAN202K	C409	87-010-402-089		CAP, E 2.2-50 SME
	87-017-091-089		ZENER, HZS5C1	C410	87-010-405-089		CAP, E 10-50 SME
	87-020-339-089		C-DIODE, 1SS226				
	87-017-097-089		ZENER, HZS6B1	C411	87-010-178-089		C-CAP, S 1000P-50 B
	87-020-330-089		C-DIODE, DAP202K	C412	87-010-221-089		CAP, E 470-10 11L
				C414	87-010-196-089		C-CAP, S 0.1-25 F
MAIN C.B				C451	87-010-237-089		CAP, E 1000-16
	C101	87-012-158-089	C-CAP, S 390P-50 CH	C452	87-010-101-089		CAP, E 220-16 SME
	C102	87-012-158-089	C-CAP, S 390P-50 CH				
	C103	87-010-318-089	C-CAP, S 47P-50 CH	C453	87-010-404-089		CAP, E 4.7-50 SME
	C104	87-010-318-089	C-CAP, S 47P-50 CH	C454	87-010-248-049		CAP, E 220-10 SME
	C105	87-010-193-089	C-CAP, S 0.033-25 F	C455	87-010-401-089		CAP, E 1-50 SME
				C456	87-010-401-089		CAP, E 1-50 SME
	C106	87-010-193-089	C-CAP, S 0.033-25 F	C457	87-010-263-089		CAP, E 100-10 SME 5X11
	C109	87-012-154-089	C-CAP, S 150P-50 CH				
	C110	87-012-154-089	C-CAP, S 150P-50 CH	C458	87-010-381-089		CAP, E 330-16 SME
	C111	87-010-197-089	C-CAP, S 0.01-25 B	C459	87-010-196-089		C-CAP, S 0.1-25 F
	C112	87-010-197-089	C-CAP, S 0.01-25 B	C481	87-010-406-089		CAP, E 22-50 SME
				C482	87-010-406-089		CAP, E 22-50 SME
	C113	87-010-196-089	C-CAP, S 0.1-25 F	C483	87-010-263-089		CAP, E 100-10 SME 5X11
	C151	87-012-156-089	C-CAP, S 220P-50 CH				
				C484	87-010-408-089		CAP, E 47-50 SME
				C485	87-010-221-089		CAP, E 470-10 SME
				C486	87-010-221-089		CAP, E 470-10 SME
				C501	87-010-405-049		CAP, E 10-50 11L
				C502	87-010-198-089		C-CAP, S 0.022-25 B

REF. NO	PART NO.	カリ NO.	DESCRIPTION	REF. NO	PART NO.	カリ NO.	DESCRIPTION
C503	87-010-196-089		C-CAP,S 0.1-25 F	C703	87-010-186-089		C-CAP,S 4700P-50 B
C504	87-010-196-089		C-CAP,S 0.1-25 F	C704	87-012-156-089		C-CAP,S 220P-50 CH
C505	87-010-196-089		C-CAP,S 0.1-25 F	C705	87-010-404-089		CAP,E 4.7-50 SME
C506	87-018-209-089		CAP,TC-U 0.1-50 F	C706	87-010-263-089		CAP,E 100-10 SME 5X11
C516	87-010-381-089		CAP,E 330-16 SME	C707	87-010-197-089		C-CAP,S 0.01-25 B
C517	87-010-404-089		CAP,E 4.7-50 SME	C708	87-010-400-089		CAP,E 0.47-50 SME
C518	87-010-404-089		CAP,E 4.7-50 SME	C709	87-010-197-089		C-CAP,S 0.01-25 B
C519	87-010-405-049		CAP,E 10-50 11L	C711	87-010-196-089		C-CAP,S 0.1-25 F
C520	87-010-405-049		CAP,E 10-50 11L	C712	87-010-314-089		C-CAP,S 22P
C521	87-012-154-089		C-CAP,S 150P-50 CH	C713	87-010-263-089		CAP,E 100-10 SME 5X11
C522	87-012-154-089		C-CAP,S 150P-50 CH	C714	87-010-197-089		C-CAP,S 0.01-25 B
C523	87-010-405-049		CAP,E 10-50 11L	C715	87-010-318-089		C-CAP,S 47P-50 CH
C524	87-010-316-089		C-CAP,S 33P-50 CH	C716	87-010-318-089		C-CAP,S 47P-50 CH
C525	87-012-154-089		C-CAP,S 150P-50 CH	C717	87-018-134-089		CAP,TC-U 0.01-16 Y
C526	87-012-154-089		C-CAP,S 150P-50 CH	C741	87-012-153-089		C-CAP,S 120P-50 CH
C527	87-010-387-089		CAP,ELECT 470-25V	C742	87-012-153-089		C-CAP,S 120P-50 CH
C528	87-010-384-089		CAP,E 100-25 SME	C743	87-010-321-089		C-CAP,S 82P-50 CH
C529	87-010-374-089		CAP,E 47-10 11L	C744	87-010-321-089		C-CAP,S 82P-50 CH
C530	87-010-316-089		C-CAP,S 33P-50 CH	C745	87-010-321-089		C-CAP,S 82P-50 CH
C531	87-010-316-089		C-CAP,S 33P-50 CH	C746	87-010-321-089		C-CAP,S 82P-50 CH
C533	87-012-157-089		C-CAP,S 330P-50 CH	C747	87-012-153-089		C-CAP,S 120P-50 CH
C534	87-012-157-089		C-CAP,S 330P-50 CH	C748	87-012-153-089		C-CAP,S 120P-50 CH
C535	87-012-154-089		C-CAP,S 150P-50 CH	C749	87-012-153-089		C-CAP,S 120P-50 CH
C536	87-012-154-089		C-CAP,S 150P-50 CH	C750	87-012-153-089		C-CAP,S 120P-50 CH
C601	87-010-182-089		C-CAP,S 2200P-50 B	C751	87-010-401-089		CAP,E 1-50 SME
C602	87-010-196-089		C-CAP,S 0.1-25 F	C752	87-010-401-089		CAP,E 1-50 SME
C603	87-010-196-089		C-CAP,S 0.1-25 F	C753	87-010-186-089		C-CAP,S 4700P-50 B
C604	87-010-196-089		C-CAP,S 0.1-25 F	C754	87-010-186-089		C-CAP,S 4700P-50 B
C605	87-010-404-089		CAP,E 4.7-50 SME	C755	87-010-381-089		CAP,E 330-16 SME
C606	87-010-193-089		C-CAP,S 0.033-25 F	C756	87-010-263-089		CAP,E 100-10 SME 5X11
C607	87-010-197-089		C-CAP,S 0.01-25 B	C771	87-018-119-089		CAP,TC-U 100P-50 B
C608	87-010-402-089		CAP,E 2.2-50 SME	C772	87-018-119-089		CAP,TC-U 100P-50 B
C609	87-010-265-089		CAP,E 33-16 SME	C773	87-010-318-089		C-CAP,S 47P-50 CH
C610	87-010-213-089		C-CAP,S 0.015-25 B	C774	87-018-131-089		CAP,TC-U 1000P-50 B
C611	87-010-197-089		C-CAP,S 0.01-25 B	C791	87-010-263-089		CAP,E 100-10 SME 5X11
C612	87-010-263-089		CAP,E 100-10 SME 5X11	C792	87-010-197-089		C-CAP,S 0.01-25 B
C613	87-018-134-089		CAP,TC-U 0.01-16 Y	C901	87-018-149-089		CAP,TC-U 15P-50 CH
C614	87-010-193-089		C-CAP,S 0.033-25 F	C902	87-012-155-089		C-CAP,S 270P
C615	87-010-197-089		C-CAP,S 0.01-25 B	C941	87-010-196-089		C-CAP,S 0.1-25 F
C616	87-010-193-089		C-CAP,S 0.033-25 F	C942	87-010-196-089		C-CAP,S 0.1-25 F
C617	87-010-197-089		C-CAP,S 0.01-25 B	C943	87-010-384-089		CAP,E 100-25 SME
C618	87-010-146-089		C-CAP,S 2P-50 CH	C944	87-010-322-089		C-CAP,S 100P-50 CH
C619	87-010-154-089		C-CAP,S 10P-50 CH	C945	87-010-322-089		C-CAP,S 100P-50 CH
C620	87-010-263-089		CAP,E 100-10 SME 5X11	C946	87-010-322-089		C-CAP,S 100P-50 CH
C621	87-010-178-089		C-CAP,S 1000P-50 B	CON903	86-NV1-613-019		CONN ASSY,4P CST
C622	87-010-198-089		C-CAP,S 0.022-25 B	CON910	87-009-065-019		CONN,15P FG
C623	87-010-196-089		C-CAP,S 0.1-25 F	EMI803	87-008-372-089		FLTR,EMI BL01RN1
C624	87-010-197-089		C-CAP,S 0.01-25 B	EMI804	87-008-372-089		FLTR,EMI BL01RN1
C625	87-010-263-089		CAP,E 100-10 SME 5X11	EMI805	87-008-372-089		FLTR,EMI BL01RN1
C626	87-010-248-089		CAP,E 220-10 SME	EMI806	87-008-372-089		FLTR,EMI BL01RN1
C627	87-010-197-089		C-CAP,S 0.01-25 B	FC1	85-NFT-611-119		FF-CABLE,16P-1.0
C628	87-010-260-089		CAP,E 47-25 SME	FC2	88-916-301-119		FF-CABLE,16P 1.25
C629	87-010-196-089		C-CAP,S 0.1-25 F	FC3	88-909-251-119		FF-CABLE,9P 1.25
C640	87-010-196-089		C-CAP,S 0.1-25 F	FC4	88-906-201-119		FF-CABLE,6P 1.25
C641	87-010-221-089		CAP,E 470-10 11L	FC5	84-ZG1-630-019		CABLE FFC 6P-1.25
C642	87-010-196-089		C-CAP,S 0.1-25 F	FL901	86-NV1-619-019		FL,7-ST-27G
C643	87-010-197-089		C-CAP,S 0.01-25 B	J901	81-VP1-635-019		JACK,PIN 3P EARTH
C644	87-010-263-089		CAP,E 100-10 SME 5X11	J902	81-VP1-634-019		JACK,PIN 3P
C645	87-010-221-089		CAP,E 470-10 11L	J903	81-VP1-635-019		JACK,PIN 3P EARTH
C646	87-010-197-089		C-CAP,S 0.01-25 B	L301	86-NV1-618-019		COIL,TRAP 108K
C647	87-010-196-089		C-CAP,S 0.1-25 F	L302	86-NV1-618-019		COIL,TRAP 108K
C648	87-010-196-089		C-CAP,S 0.1-25 F	L303	87-003-131-089		COIL,10MH J
C649	87-010-193-089		C-CAP,S 0.033-25 F	L304	87-003-131-089		COIL,10MH J
C661	87-010-196-089		C-CAP,S 0.1-25 F	L305	87-003-123-089		COIL,2.2MH J
C662	87-010-260-089		CAP,E 47-25 SME	L306	87-003-123-089		COIL,2.2MH J
C681	87-010-197-089		C-CAP,S 0.01-25 B	L401	86-NV1-617-019		COIL,OSC BIAS 108K
C692	87-010-381-089		CAP,E 330-16 SME	L402	87-005-447-089		COIL,180UH FLR50
C693	87-010-196-089		C-CAP,S 0.1-25 F	L451	87-005-474-089		COIL,12UH J FLR50
C701	87-010-194-089		C-CAP,S 0.047-25 F	L601	87-003-295-089		COIL,10UH
C702	87-010-188-089		C-CAP,S 6800P-50 B	L901	87-A50-052-019		COIL,CLOCK 5.76MHZ T1

REF. NO	PART NO.	かり NO.	DESCRIPTION	REF. NO	PART NO.	かり NO.	DESCRIPTION
LED791	87-A40-123-019		LED, SLZ-8128A-01-B				
LED910	87-070-108-019		LED, SLF-301C-37				
LED911	87-070-108-019		LED, SLF-301C-37				
SFR101	87-024-238-089		SFR, 1K DIA6 V TP	LED701	87-017-806-010		LED, SEL1810DM
SFR102	87-024-238-089		SFR, 1K DIA6 V TP	LED702	87-017-350-080		LED, SEL1550CM
				LED703	87-017-350-080		LED, SEL1550CM
				LED704	87-017-806-010		LED, SEL1810DM
SFR151	87-024-238-089		SFR, 1K DIA6 V TP				
SFR152	87-024-238-089		SFR, 1K DIA6 V TP				
SFR301	87-024-271-089		SFR, 4.7K DIA6 V				
SFR302	87-024-271-089		SFR, 4.7K DIA6 V				
SFR401	87-024-275-089		SFR, 47K DIA6 V TP				
SFR402	87-024-275-089		SFR, 47K DIA6 V TP				
SFR601	87-024-175-089		SFR, 47K DIA6 V				
SFR602	87-024-176-089		SFR, 100K DIA6 V				
SFR603	87-024-176-089		SFR, 100K DIA6 V				
SW731	87-036-109-019		SW, PUSH SPPB 61				
SW732	87-036-109-019		SW, PUSH SPPB 61				
VR501	86-NV1-616-019		VR, RTRY 50KEX2 H RK14K12A0L30				
VR502	81-MX4-636-019		VR, 50KEX2 RK14K12A0				
X701	87-030-270-089		VIB, XTAL 16.9344MHZ				

KEY1 C.B

FC6	88-909-251-119		FF-CABLE, 9P 1.25
LED901	87-001-161-019		LED, SEL 2410 E GR
LED902	87-001-161-019		LED, SEL 2410 E GR
LED903	87-001-161-019		LED, SEL 2410 E GR
LED904	87-001-161-019		LED, SEL 2410 E GR
LED905	87-001-161-019		LED, SEL 2410 E GR
LED906	87-001-161-019		LED, SEL 2410 E GR
S901	87-A90-095-089		SW, TACT EVQ11G04M
S902	87-A90-095-089		SW, TACT EVQ11G04M
S903	87-A90-095-089		SW, TACT EVQ11G04M
S904	87-A90-095-089		SW, TACT EVQ11G04M
S905	87-A90-095-089		SW, TACT EVQ11G04M
S906	87-A90-095-089		SW, TACT EVQ11G04M
S907	87-A90-095-089		SW, TACT EVQ11G04M
S908	87-A90-095-089		SW, TACT EVQ11G04M
S909	87-A90-095-089		SW, TACT EVQ11G04M
S910	87-A90-095-089		SW, TACT EVQ11G04M

KEY2 C.B

LED907	87-002-817-019		LED, SEL 2215 S RED
LED908	87-002-817-019		LED, SEL 2215 S RED
LED909	87-002-817-019		LED, SEL 2215 S RED
S912	87-A90-095-089		SW, TACT EVQ11G04M
S913	87-A90-095-089		SW, TACT EVQ11G04M
S914	87-A90-095-089		SW, TACT EVQ11G04M
S915	87-A90-095-089		SW, TACT EVQ11G04M
S916	87-A90-095-089		SW, TACT EVQ11G04M

LED C.B

LED701	87-017-806-010		LED, SEL1810DM
LED702	87-017-350-080		LED, SEL1550CM
LED703	87-017-350-080		LED, SEL1550CM
LED704	87-017-806-010		LED, SEL1810DM

VIDEO2 C.B

C1	87-010-112-089		CAP, E 100-16 SME
C2	87-010-405-089		CAP, E 10-50 SME
C3	87-010-405-089		CAP, E 10-50 SME
C4	87-010-405-089		CAP, E 10-50 SME
C5	87-010-405-089		CAP, E 10-50 SME
C6	87-010-112-089		CAP, E 100-16 SME

T-T C.B

C401	87-018-214-089		CAP, TC U 0.1-50 F
FC401	84-ZG1-614-119		CABLE FFC 5P-1.25
M401	87-045-364-019		MOTOR, (BCH3B14)
PS401	87-026-573-019		P-SNSR, GP1S53V

DECK C.B

CON501	82-ZM1-625-019		RBN-CORD, 4P-55
SFR1	87-099-756-019		CONN, 15P 9604S F
SOL1	87-024-581-010		SFR, 3.3K DIA 6H
SOL2	82-ZM1-618-310		SOL ASSY, 27
	82-ZM1-626-010		SOL ASSY, 27K
SW1	87-036-378-010		SW, PUSH 1-1-1 SH2
SW2	87-036-378-010		SW, PUSH 1-1-1 SH2
SW3	87-036-378-010		SW, PUSH 1-1-1 SH2
SW4	87-036-378-010		SW, PUSH 1-1-1 SH2
SW5	87-036-378-010		SW, PUSH 1-1-1 SH2
SW6	87-036-378-010		SW, PUSH 1-1-1 SH2
SW8	87-036-378-010		SW, PUSH 1-1-1 SH2
SW9	87-036-378-010		SW, PUSH 1-1-1 SH2

HEAD-1 C.B

W106	86-NV1-611-019		CONN ASSY, 3P DECK1
------	----------------	--	---------------------

HEAD-2 C.B


W105	86-NV1-612-019		CONN ASSY, 8P DECK2
------	----------------	--	---------------------

DRIVE C.B

M1	87-045-358-019		MOT, RF-310TA 43
M2	87-045-356-019		MOT, RF-310TA 30
SW1	87-A90-042-019		SW, LEAF MSW 17310 MVPO

○チップ抵抗部品コード/CHIP RESISTOR PART CODE

チップ抵抗部品コードの成り立ち  
Chip Resistor Part Coding

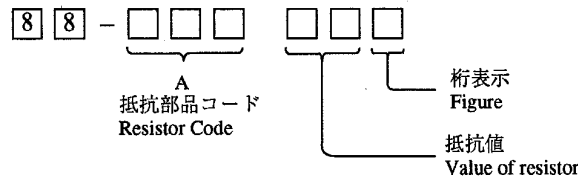

チップ抵抗  
Chip resistor

容量 Wattage	種類 Type	許容誤差 Tolerance	記号 Symbol	寸法/Dimensions (mm)			抵抗コード : A Resistor Code: A	
				外形/Form	L	W		t
1/16W	1608	±5%	CJ		1.6	0.8	0.45	108
1/10W	2125	±5%	CJ		2	1.25	0.45	118
1/8W	3216	±5%	CJ		3.2	1.6	0.55	128

# TRANSISTOR ILLUSTRATION




ECB

2SA933S  
2SC1740S  
DTA144ES  
DTC144ES




ECB

2SA952  
2SA1296  
2SA1318  
2SC1815  
2SC2001  
2SC3331  
2SD2172



2SA1037  
2SA1362  
2SC2712  
2SC3326  
2SD1383  
DTA114TK


DTA124EK  
DTA144EK  
DTC114TK  
DTC123JK  
DTC143TK  
DTC144EK



2SK368

# FL (7-ST-27G) GRID ASSIGNMENT / ANODE CONNECTION

## GRID ASSIGNMENT

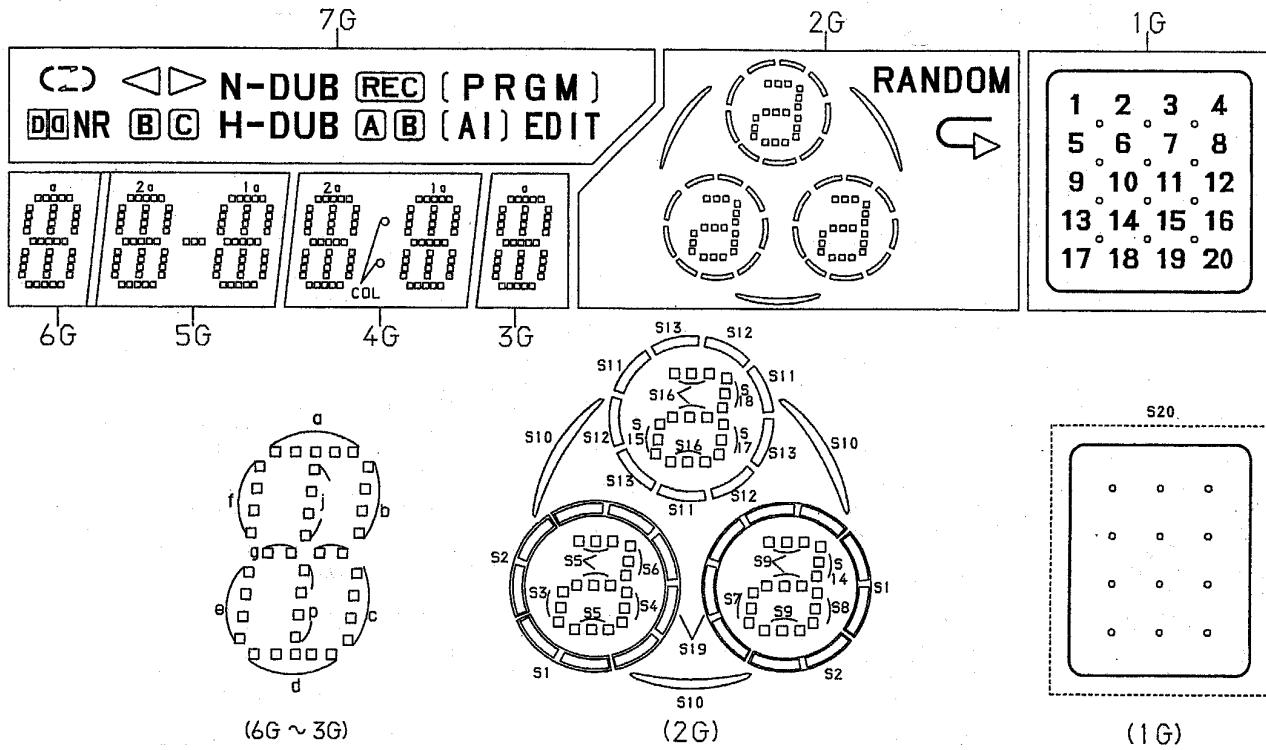


## ANODE CONNECTION

	7G	6G	5G	4G	3G	2G	1G
P1	NR	d	1d	1d	d	S1	20
P2	(C)	p	1p	1p	p	S2	19
P3	(Z)	e	1e	1e	e	S3	18
P4	(C)	c	1c	1c	c	S4	17
P5	B (LEFT)	g	1g	1g	g	S5	16
P6	C	f	1f	1f	f	S6	15
P7	(L)	b	1b	1b	b	S7	14
P8	(R)	j	1j	1j	j	S8	13
P9	N-DUB	a	1a	1a	a	S9	12
P10	H-DUB	—	2d	2d	—	S10	11
P11	REC	—	2p	2p	—	S11	10
P12	A	—	2e	2e	—	S12	9
P13	B (RIGHT)	—	2c	2c	—	S13	8
P14	PRGM	—	2g	2g	—	S14	7
P15	AI	—	2f	2f	—	S15	6
P16	EDIT	—	2b	2b	—	S16	5
P17	(PRGM)	—	2j	2j	—	S17	4
P18	(AI)	—	2a	2a	—	S18	3
P19	—	—	COL (HIGH)	—	—	S19	2
P20	—	—	COL (LOW)	—	—	(RANDOM)	1
P21	—	—	—	—	—	RANDOM	S20




BLOCK DIAGRAM

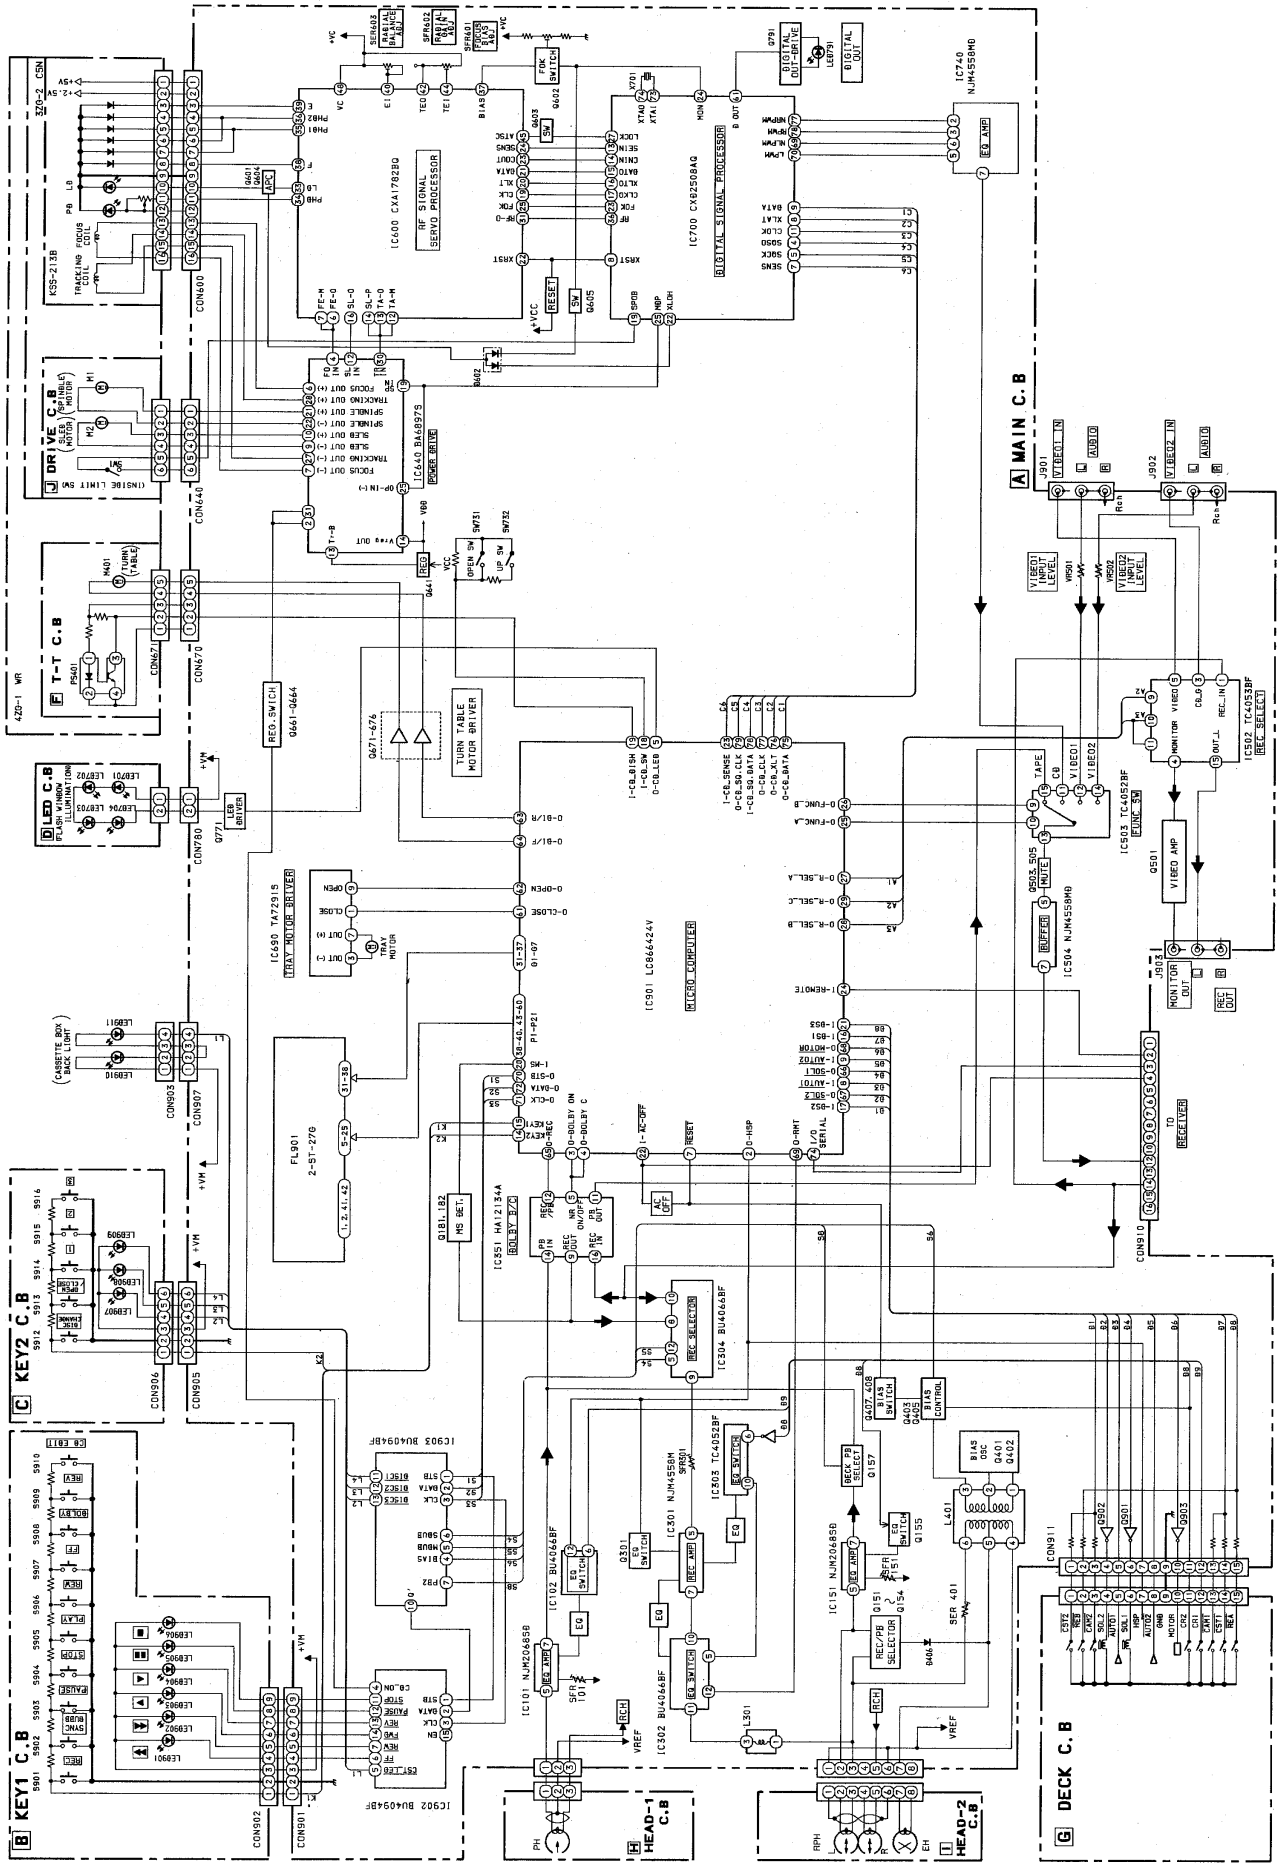


1 2 3 4 5 6 7 8 9 10 11 12 13 14


A MAIN C.B

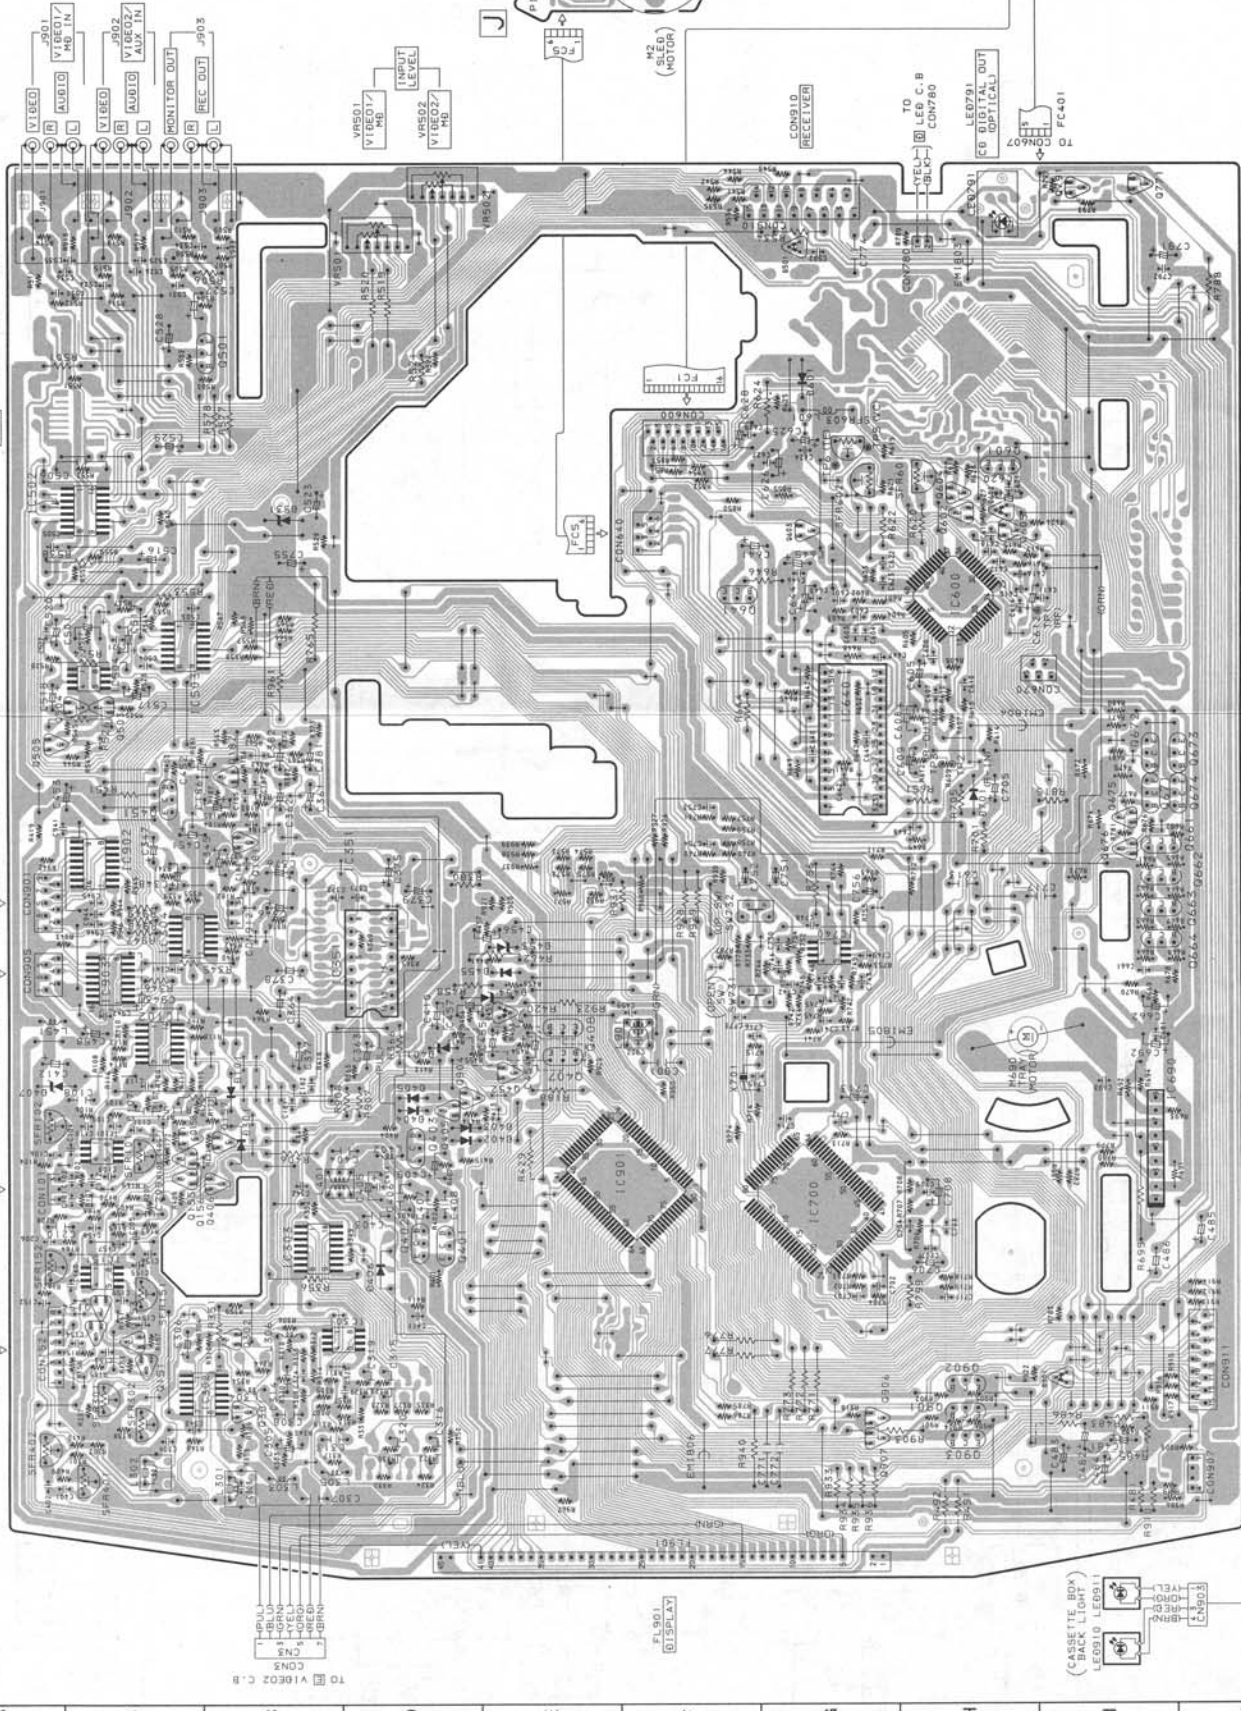


J DRIVE C.B

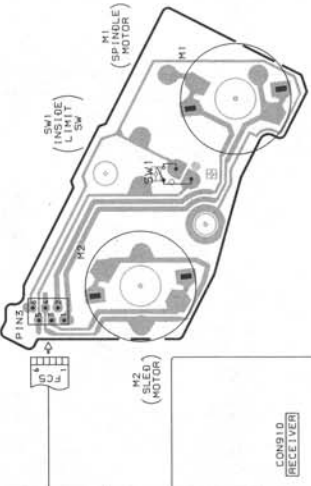


F T-T C.B




SCHEMATIC DIAGRAM-1

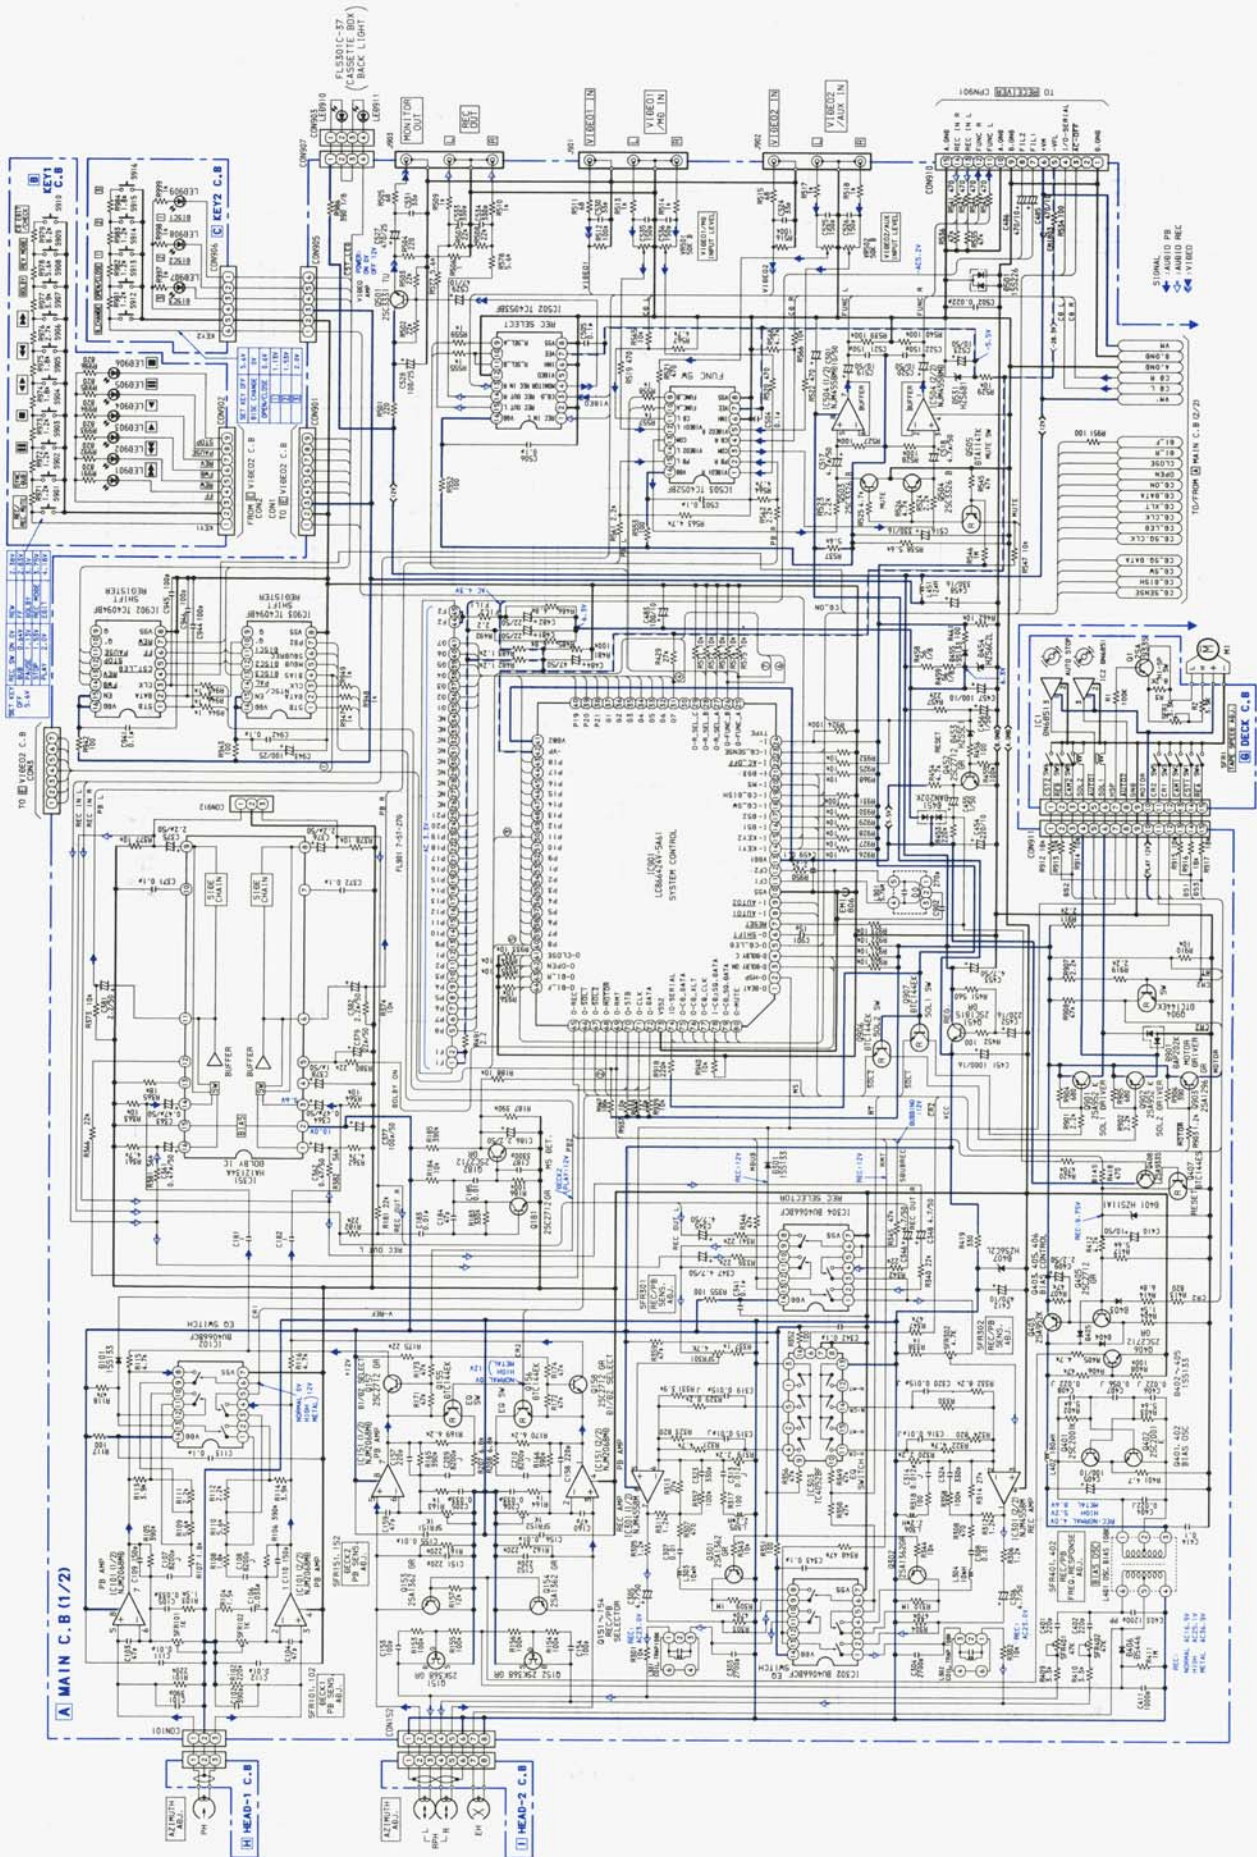

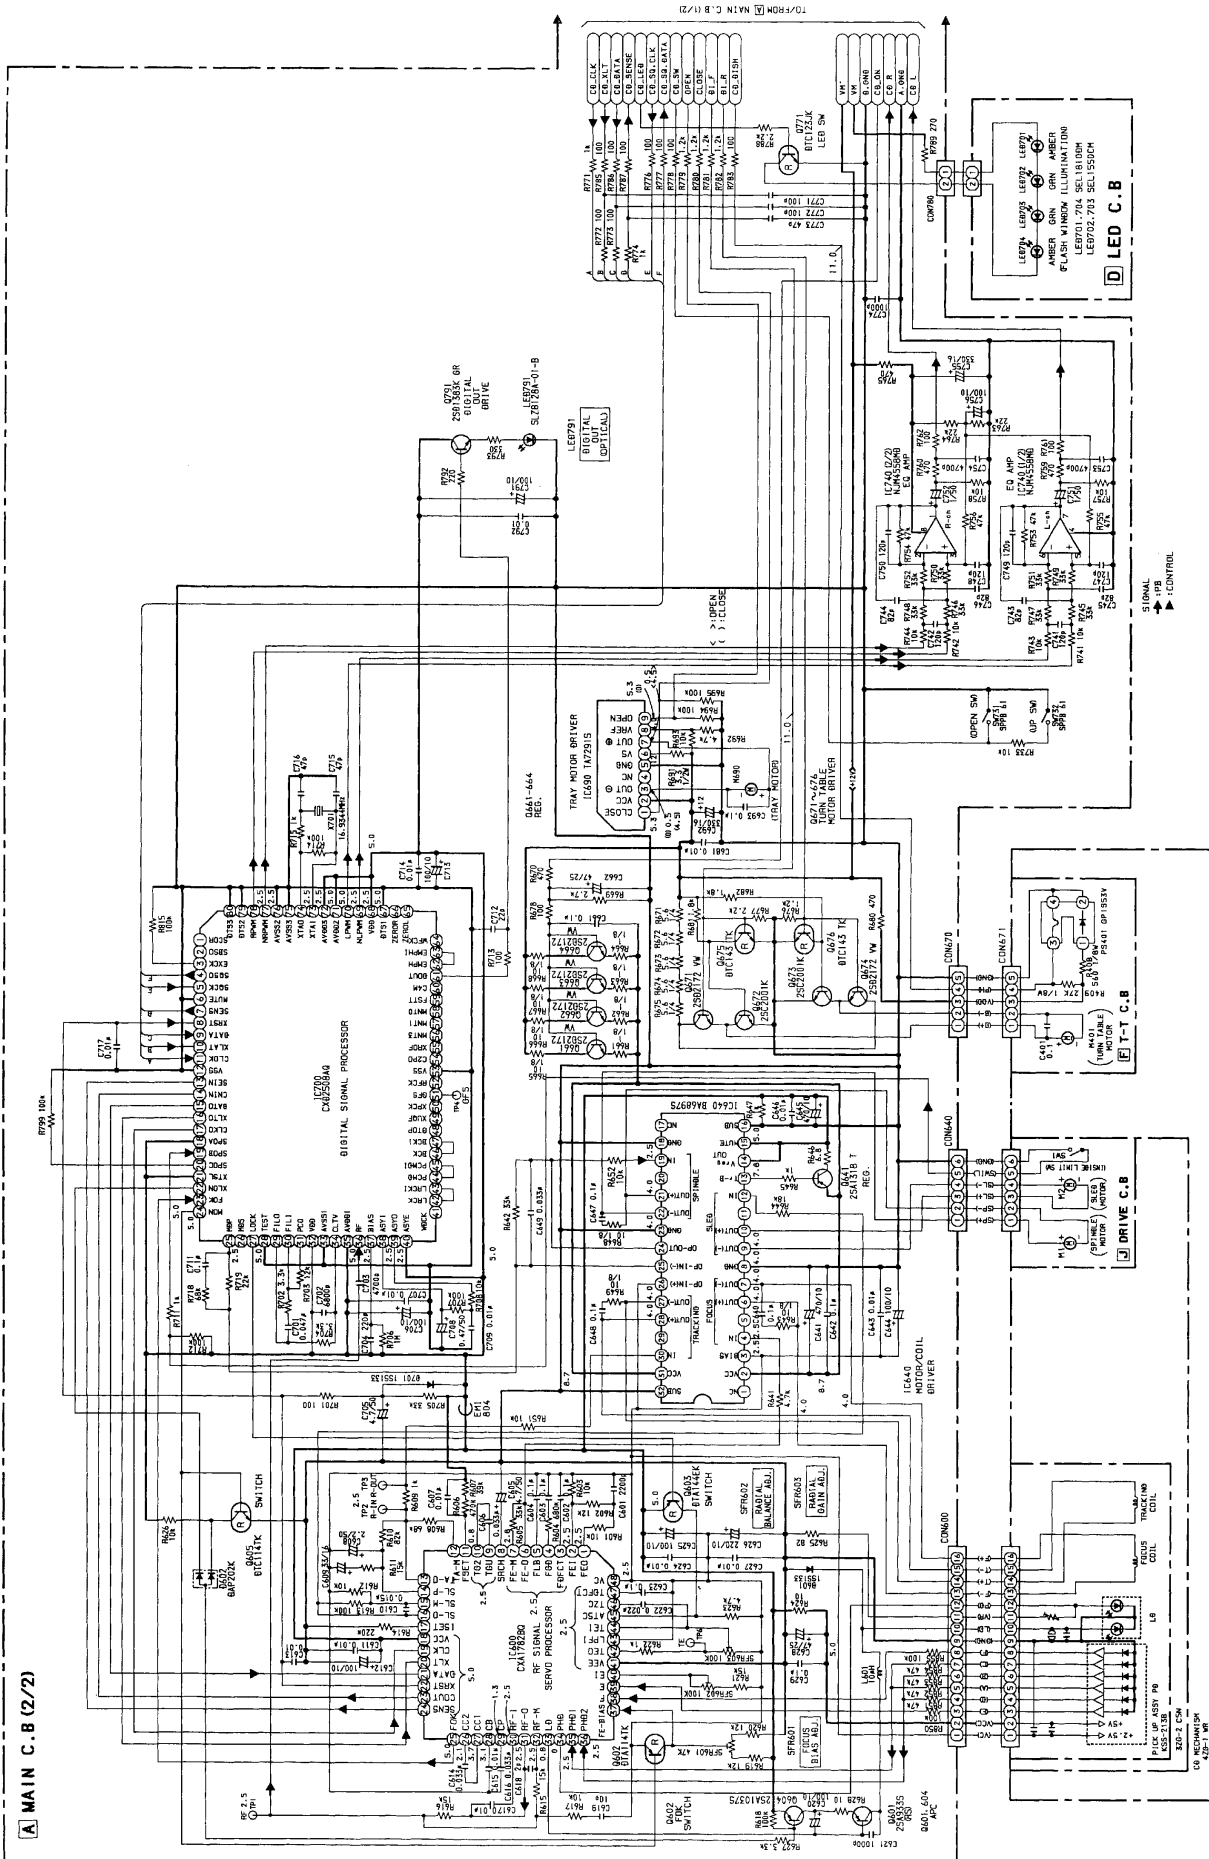


1 2 3 4 5 6 7 8 9 10 11 12 13 14


G DECK C.B

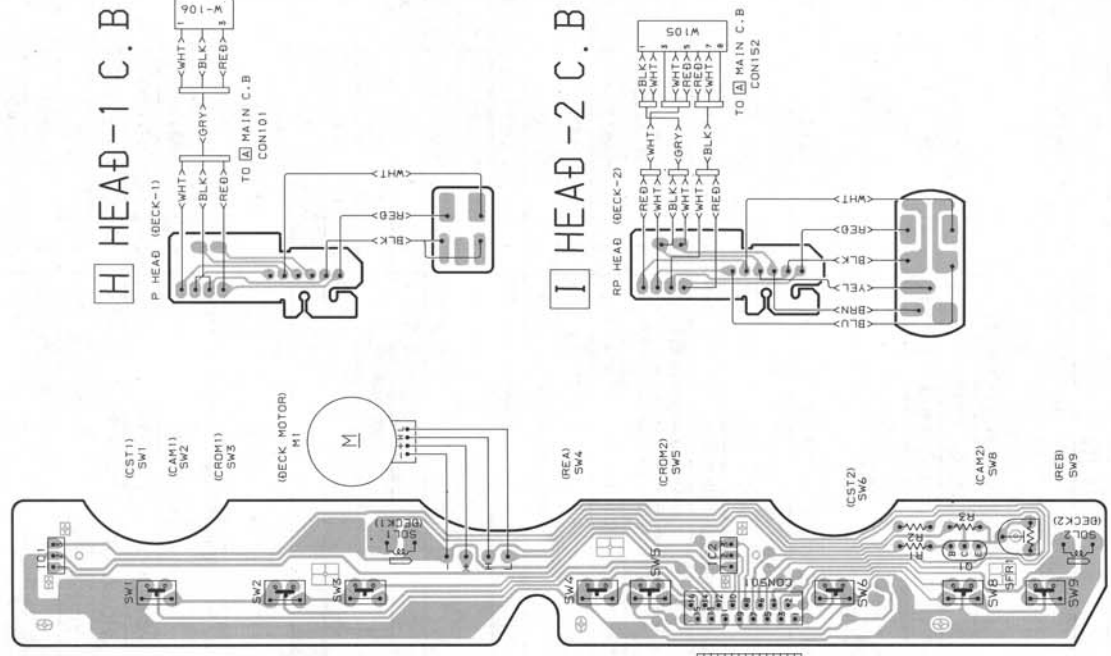


D LED C.B

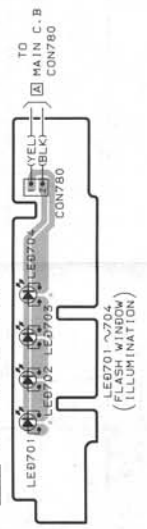


C KEY2 C.B

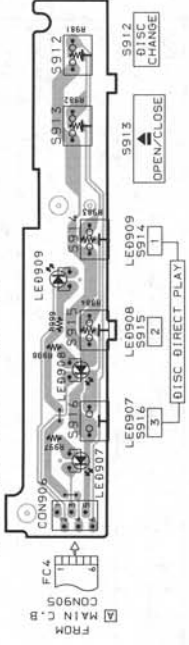

B KEY1 C.B

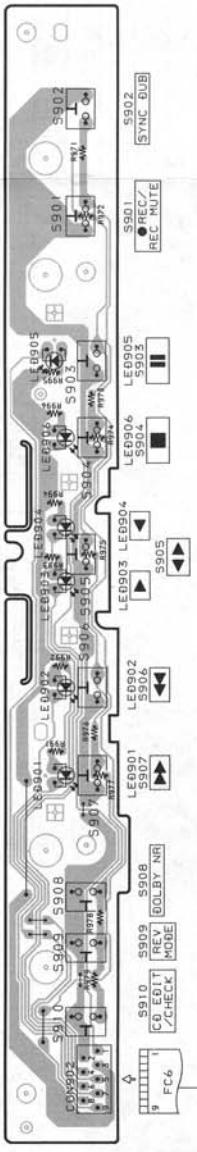

E VIDEO2 C.B

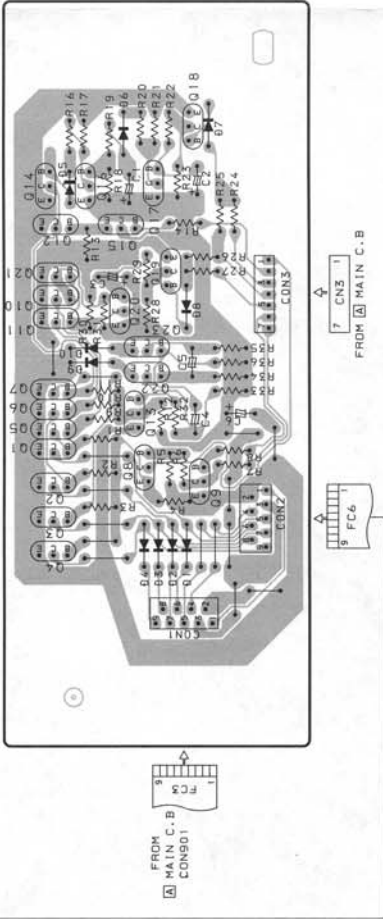

# IC DESCRIPTION

## IC, LC866424V-5A61

Pin No.	Pin Name	I/O	Description															
1	O-BEAT	O	REC beat output. (ON/OFF)															
2	O-HSP	O	High speed dubbing switch. (HIGH/NORMAL)															
3	O-DOLBY/ON	O	DOLBY IC switch output. (DOLBY ON/OFF)															
4	O-DOLBY/C	O	DOLBY IC mode switch output. (DOLBY B/C)															
5	O-CD/LED	O	Flash window output. (ON/OFF)															
6	O-SHIFT	O	Microprocessor clock shift out during tuner reception.															
7	RESET	I	Reset input (Reset at "L").															
8	I-AUTO 1	I	Deck 1 auto stop input.															
9	I-AUTO 2	I	Deck 2 auto stop input.															
10	VSS 1	-	GND.															
11	CF 1	I	5.76 MHz oscillator.															
12	CF 2	O	5.76 MHz oscillator.															
13	VDD 1	-	Power supply input.															
14	I-KEY 1	I	Key 1 A/D input.															
15	I-KEY 2	I	Key 2 A/D input.															
16	I-DS 1	I	Deck 1 mechanism switch input.															
17	I-DS 2	I	Deck 2 mechanism switch input.															
18	I-CD/SW	I	CD mechanism switch A/D input.															
19	I-CD/DISH	I	CD turntable photo sensor A/D input.															
20	I-MS	I	Deck MS detection A/D input.															
21	I-DS 3	I	Deck mechanism switch input (REC enable A/D input).															
22	I-AC/OFF	I	HOLD input.															
23	I-CD/SENSE	I	CD microprocessor control SENSE input.															
24	I-TYPE	I	TYPE select A/D input. (H : DOLBY C / L : DOLBY B)															
25~26	O-FUNC/A~B	O	FUNCTION switch output. <table border="1" style="display: inline-table; vertical-align: middle;"> <thead> <tr> <th></th> <th>AUX1</th> <th>AUX2</th> <th>TAPE</th> <th>CD</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0</td> <td>1</td> <td>0</td> <td>1</td> </tr> <tr> <td>B</td> <td>0</td> <td>0</td> <td>1</td> <td>1</td> </tr> </tbody> </table>		AUX1	AUX2	TAPE	CD	A	0	1	0	1	B	0	0	1	1
	AUX1	AUX2	TAPE	CD														
A	0	1	0	1														
B	0	0	1	1														
27	O-R-SEL/A	O	Video signal switch. (VIDEO 1/2)															
28	O-R-SEL/B	O	REC output switch. (ON/MUTE)															
29	O-R-SEL/C	O	Monitor output switch. (VIDEO/CDG)															
30	-	-	Not used.															
31~37	G7~G1	O	FL grid output (G7~G1).															
38~40	P21~P19	O	FL segment output P21~P19.															
41	VDD2	-	Power supply input.															
42	-VP	-	Power supply for FL display .															
43~60	P18~P8	O	FL segment output P18~P8.															
61	O-CLOSE	O	CD tray close data output.															
62	O-OPEN	O	CD tray open data output.															
63	O-DI/R	O	CD turntable reverse rotation output.															
64	O-DI/F	O	CD turntable forward rotation output.															
65	O-REC	O	Deck REC switch output.															
66	O-SOL1	O	Deck 1 plunger ON/OFF output.															

67	O-SOL2	O	Deck 2 plunger $\overline{\text{ON}}$ /OFF output.
68	O-MOTOR	O	Deck motor $\overline{\text{ON}}$ /OFF output.
69	O-RMT	O	REC mute $\overline{\text{ON}}$ /OFF output.
70	O-STB	O	Front shift register, data latch strobe output.
71	O-CLK	O	Front shift register, data transfer clock output.
72	O-DATA	O	Front shift register, data output.
73	VSS2	-	GND.
74	I/O/SERIAL	I/O	Command input / output with the CD microprocessor.
75	O-CD/DATA	O	CD microprocessor control data output.
76	O-CD/XLT	O	CD microprocessor control latch output.
77	O-CD/CLK	O	CD microprocessor control clock output.
78	I-CD/SQ,DATA	I	CD SUB-Q data input.
79	O-CD/SQ,DATA	O	CD SUB-Q clock output.
80	O-MUTE	O	System mute $\overline{\text{ON}}$ /OFF output.

## IC, CXD2508AQ

Pin No.	Pin Name	I/O	Description
1	SCOR	O	1H when the subcode sync S0 or S1 is detected.
2	SBSO	O	SUBP ~ W serial output.
3	EXCK	I	Clock input for SBSO read out.
4	SQSO	O	SUBQ 80-bit serial output.
5	SQCK	I	Clock input for SQSO read out.
6	MUTE	I	H to mute. L to cancel. (Connected to GND)
7	SENS	O	SENS signal output to MAIN CPU.
8	XRST	I	System reset. L to reset.
9	DATA	I	Serial data input from MAIN CPU.
10	XLAT	I	Latch input from MAIN CPU. Latching serial data at fall down.
11	CLOK	I	Clock input from MAIN CPU to transfer serial data.
12	VSS	-	GND.
13	SEIN	I	SENS input from SSP.
14	CNIN	I	Numbers of track jump are counted and input.
15	DATO	O	Serial data output to SSP.
16	XLTO	O	Serial data latched output to SSP. Latched at fall down edge.
17	CLKO	O	Clock input from SSP to transfer serial data.
18	TEST2	I	TEST. (Connected to +5V)
19~21	SPOB-D	I	Input from INSIDE LIMIT switch (SW1).
22	XLON	O	Mute control output.
23	FOK	I	Focus OK input pin. Used for SENS output and servo auto sequencer.
24	MON	O	Spindle motor ON/OFF control output.
25	MDP	O	Spindle motor servo control output.
26	MDS	O	Spindle motor servo control output.
27	LOCK	O	GFS is sampled by 460Hz. H output when GFS is H. L output when GFS is L for 8 consecutive times.
18	TEST1	I	TEST. (Connected to GND)
19	FILO	O	Filter output to master PLL. (Slave = digital PLL)
30	FILI	I	Filter input to master PLL.
31	PCO	O	Charge-pump output to master PLL.
32	VDD	-	Power supply input. (+5V)
33	AVSS1	-	GND.
34	CLTV	I	VCO control voltage input to master PLL.
35	AVDD1	-	Power supply input. (+5V)
36	RF	I	EFM signal input.
37	BIAS	I	Constant current input to asymmetry correction circuit.
38	ASYI	I	Comparator voltage input to asymmetry correction circuit.
39	ASYO	O	EFM full swing output. (L = VSS, H = VDD)
40	ASYE	I	L: asymmetry correction OFF. H: asymmetry correction ON. (Connected to +5V)
41	WCDK	O	D/A interface, word clock (2Fs) for 48-bit slot.



Pin No.	Pin Name	I/O	Description
42	LRCK	O	D/A interface, LR clock (FS) for 48-bit slot.
43	LRCKI	I	LR clock input to DAC. (48-bit slot)
44	PCMD	O	D/A interface, serial data. (2's complement, MSB first)
45	PCMDI	I	Audio data input to DAC. (48-bit slot)
46	BCK	O	D/A interface, bit clock.
47	BCK1	I	Bit clock input to DAC. (48-bit slot)
48	GTOP	O	GTOP output.
49	XUGF	O	XUGF output.
50	XPCK	O	XPLCK output.
51	GFS	O	GFS output.
52	RFCK	O	RFCK output.
53	VSS	-	GND.
54	C2PO	O	C2PO output.
55	XROF	O	XRAOF output.
56	MNT3	O	MNT3 output.
57	MNT1	O	MNT1 output.
58	MNT0	O	MNT0 output.
59	FSTT	O	Pins-73 and -74 divided-by 2/3 output.
60	C4M	O	4.2336MHz output.
61	DOUT	O	Digital Out connector output signal.
62	EMPH	O	H when the play back disk has emphasis. L when it does not.
63	EMPHI	I	DAC emphasis ON/OFF. H when ON. L when OFF.
64	WFCK	O	WFCK (WRITE FRAME CLOCK) output.
65	ZEROL	O	Not sound data detection output. H (L-ch) when no sound data is detected.
66	ZEROR	O	Not sound data detection output. H (L-ch) when no sound data is detected.
67	DTSI	I	TEST for DAC. (Connected to GND)
68	VDD	-	Power supply input. (+5V)
69	NLPWM	O	L-ch PWM output. (Reversed polarity)
70	LPWM	O	L-ch PWM output. (Normal polarity)
71	AVDD2	-	Power supply input to L-ch PWM driver. (Connected to +5V)
72	AVDD3	-	Power supply input to X'tal. (Connected to +5V)
73	XTAI	I	X'tal input to 33.8688MHz oscillator circuit.
74	XTAO	O	33.8688MHz X'tal oscillator circuit output.
75	AVSS1	-	Power supply input to X'tal. (Connected to GND)
76	AVSS2	-	Power supply input to PWM driver. (Connected to GND)
77	NRPWM	O	R-ch PWM output. (Reversed phase)
78	RPWM	O	R-ch PWM output. (Normal phase)
79	DTS2	I	TEST-2 for DAC. (Connected to GND)
80	DTS3	I	TEST-3 for DAC. (Connected to GND)


IC, CXA1782BQ

Pin No.	Pin Name	I/O	Description
1	FEO	O	Focus error amplifier output pin. This pin is connected to the FZC comparator input internally.
2	FEI	I	Focus error input pin.
3	FDFCT	I	Capacitor connection pin for time constant used when there is defect.
4	FGD	I	Corrects the focus servo high frequency gain.
5	FLB	I	This is a pin where the time constant is externally connected to raise the low frequency gain of the focus servo.
6	FEO	O	Focus drive output.
7	FEM	I	Focus amplifier inverted input pin.
8	SRCH	I	This is a pin where the time constant is externally connected to generate the focus search waveform.
9	TGU	I	This is a pin where the selection time constant is externally connected to set the tracking servo the high frequency gain.
10	TG2	I	This is a pin where the selection time constant is externally connected to set the tracking high frequency gain.
11	FSET	I	Pin for setting peak of the phase compensator of the focus tracking.
12	TAM	I	Tracking amplifier inverted input pin.
13	TAO	O	Tracking drive output.
14	SLP	I	Sled amplifier non-inverted input pin.
15	SLM	I	Sled amplifier inverted input pin.
16	SLO	O	Sled drove output.
17	ISET	I	The current which determines height of the focus search, track jump and sled kick is input.
18	VCC	-	+5V power supply pin.
19	CLK	I	Serial data transfer clock input from DSP.
20	XLT	I	Latch input from DSP.
21	DATA	I	Serial data input from DSP.
22	XRST	I	Reset input pin. Reset at L.
23	COUT	O	Signal output to count the number of tracks.
24	SENS	O	FZC, DFCT, TZC, Gain or BAL is output depending on the command to DSP.
25	FOK	O	Output pin of the focus OK comparator.
26	CC2	O	Input pin where the DEFECT bottom hold output is capacitance coupled.
27	CC1	I	DEFECT bottom hold output pin.
28	CB	I	This is a pin where the DEFECT bottom hold capacitor is connected.
29	CP	I	This is a pin where the MIRR hold capacitor is connected and MIRR comparator non-inverted signal is input.
30	RFI	I	Input pin where the RF summing amplifier output is capacitance coupled.
31	RFO	O	RF summing amplifier output pin. (TP1)
32	RFM	I	RF summing amplifier inverted input pin. Gain of RF amplifier is determined by the resistor connected between RFO and this pin.

Pin No.	Pin Name	I/O	Description
33	LD	O	APC amplifier output pin.
34	PHD	I	APC amplifier input pin.
35~36	PHD1~2	I	RF I-V amplifier inverted input pin. These pins are connected to the A+C and B+D pins of the optical pickup.
37	BIAS	I	Bias adjustment pin of the non-inverted side of the focus error amplifier.
38~39	F~E	I	F and E IV amplifier non-inverted input pins. These pins are connected to the F and E of the optical pickup.
40	EI	-	Gain adjustment pin of the I-V amplifier E.
41	VEE	-	GND connection pin.
42	TEO	O	Tracking error amplifier output pin.
43	LPFI	I	BAL adjustment comparator input pin.
44	TEI	I	Tracking error input pin.
45	ATSC	I	Window comparator input pin for detecting ATSC.
46	TZC	I	Tracking zero-cross comparator input pin.
47	TDFCT	I	Capacitor connection pin for the time constant used when there is defect.
48	VC	O	DC voltage output pin of VREF. (VDD/2)

# IC BLOCK DIAGRAM

IC, TA7291S

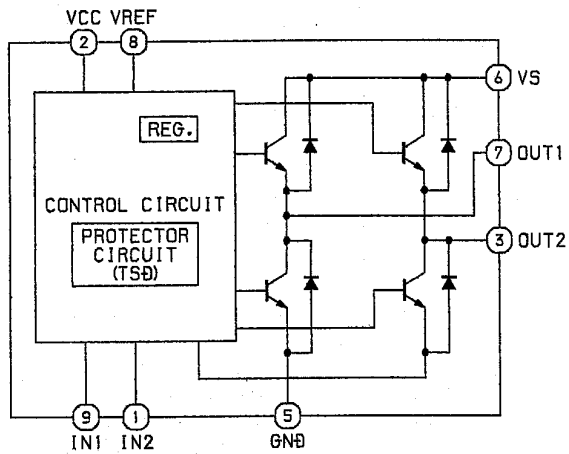


# TRUTH TABLE

INPUT		OUTPUT		MODE
IN1	IN2	OUT1	OUT2	
0	0	∞	∞	STOP
1	0	H	L	CW/CCW
0	1	L	H	CCW/CW
1	1	L	L	BRAKE

∞ : HIGH IMPEDANCE  
INPUT IS "H" ACTIVE

IC, BA6897S

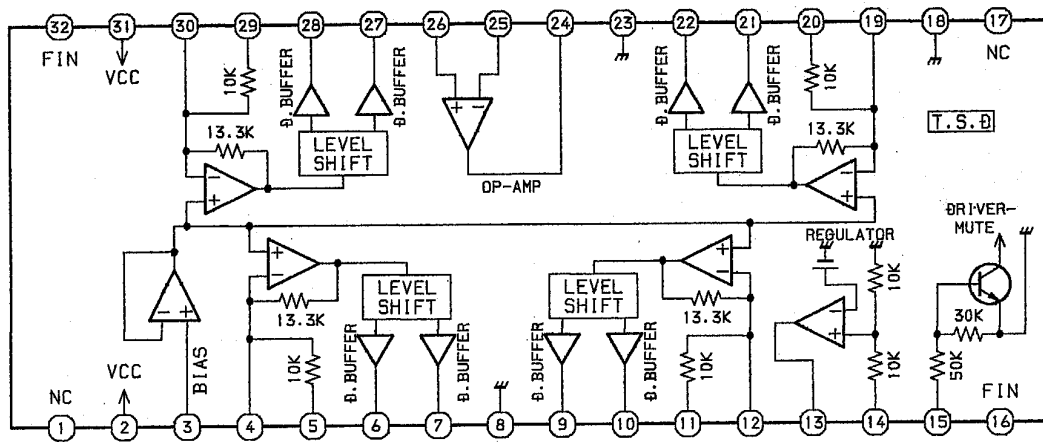

T.S.D: Thermal shift down circuit  
D.BUFFER: Drive Buffer

# TEST MODE

- How to Activate CD Test Mode  
Insert the AC plug while pressing the CD EDIT/CHECK/button. All FL display tubes will light up, and the test mode will be activated.
- How to cancel CD Test Mode  
Either one of the following operations will cancel the CD test mode.
  - Press the power switch button.
  - Disconnect the AC plug.
- CD Test Mode Functions  
When test mode is activated, the following mode functions can be used by pressing the operation keys.


Mode	Operation	FL display	Operation	Contents
Start mode	Test mode activation	All FL light up	<ul style="list-style-type: none"> <li>Laser diode illuminated under normal circumstances (CD block power supply ON)</li> </ul>	Displays the machine mode that it is a test mode. All FL displays light up
Search mode	■ key	— —	<ul style="list-style-type: none"> <li>Continual focus search * NOTE 1 (The pickup lens repeats the full-swing up-down motion.)</li> <li>* Avoid continual searches that last for more than 10 minutes.</li> </ul>	FOCUS SERVO <ul style="list-style-type: none"> <li>Laser current measurement (Across R628 resistor)</li> <li>Check focus search waveform</li> <li>Check focus error waveform</li> <li>* FOK / FZC are not monitored in the search mode.</li> </ul>
Play mode	▶ key	/ —	<ul style="list-style-type: none"> <li>Normal playback</li> <li>Focus search is continued if TOC cannot be read * NOTE 1</li> </ul>	FOCUS SERVO / TRACKING SERVO CLV SERVO / SLED SERVO Check FOK / FZC
Traverse mode	key	/ —	<ul style="list-style-type: none"> <li>During normal disc playback Press once; tracking servo OFF Press twice; tracking servo ON * NOTE 2</li> </ul>	TRACKING SERVO ON / OFF Tracking balance (traverse) adjustment TP6(SFR602)
Sled mode	◀◀ key ▶▶ key	All FL light up	<ul style="list-style-type: none"> <li>Pickup moves to the outermost track</li> <li>Pickup moves to the innermost track * NOTE 3</li> </ul> <p>(During playback, machine operates normally.)</p>	SLED SERVO Check SLED mechanism operation

\* NOTE 1: There are cases when the tracking servo cannot be locked owing to the protection circuit being operated when heat builds up in the driver IC if the focus search is operated continually for more than 10 minutes. In these cases, the power supply should be switched off for 10 minutes until heat has been reduced and then re-started.

\* NOTE 2: Do not press the ◀◀ or ▶▶ keys when the machine is in the || status is active. If they are pressed, playback will not be possible after the || status has been canceled. If the ◀◀ or ▶▶ keys are pressed in the || status, press the ■ key and return to start mode (No. 1).


\* NOTE 3: When pressing the ◀◀ or ▶▶ keys, take care to avoid damage to the gears. Because the sled motor is activated when the ◀◀ or ▶▶ keys are pressed, even when the pick-up is at the outermost or innermost track.

- Operation Outline  
The operation of each mode is carried out in the direction of the arrows from the start mode as indicated in the following illustration.

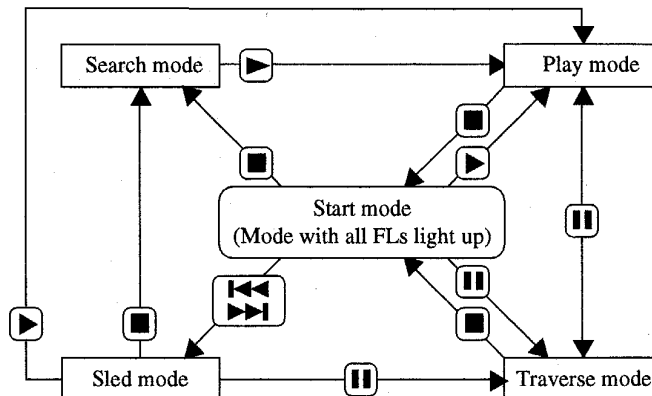


# ELECTRICAL ADJUSTMENT


## A MAIN C.B

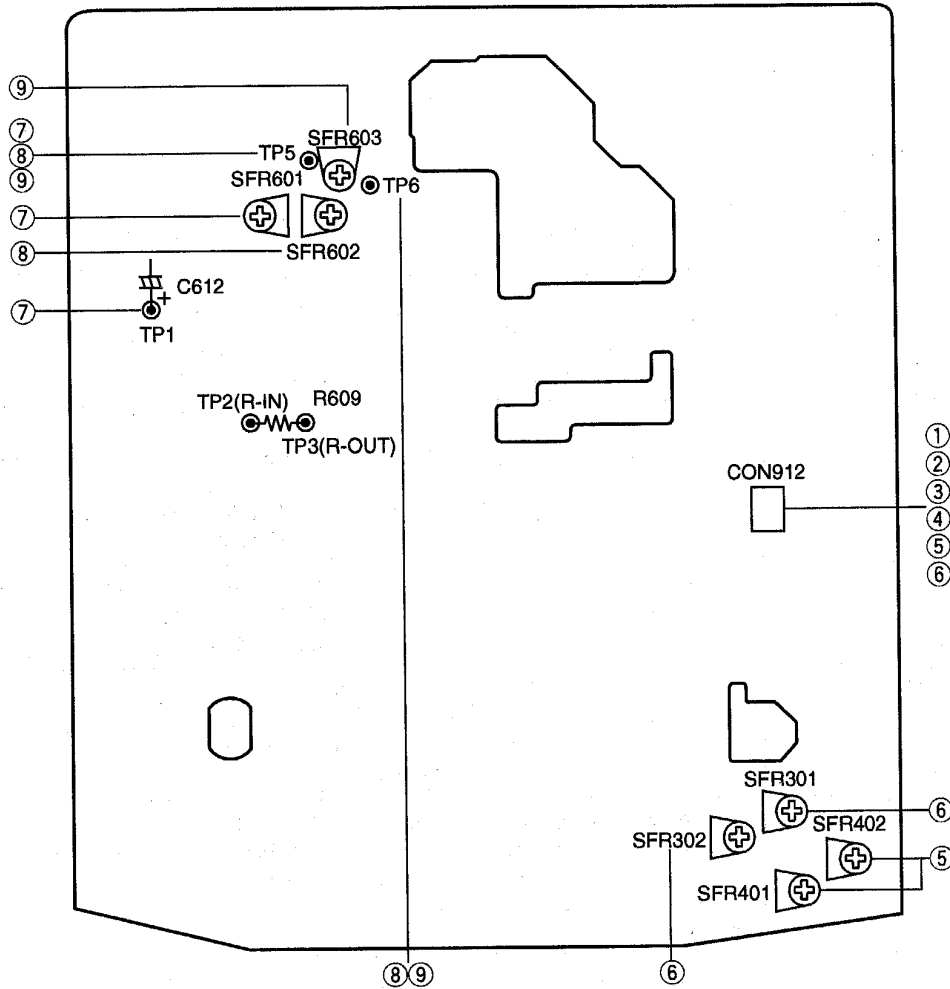

## G DECK C.B

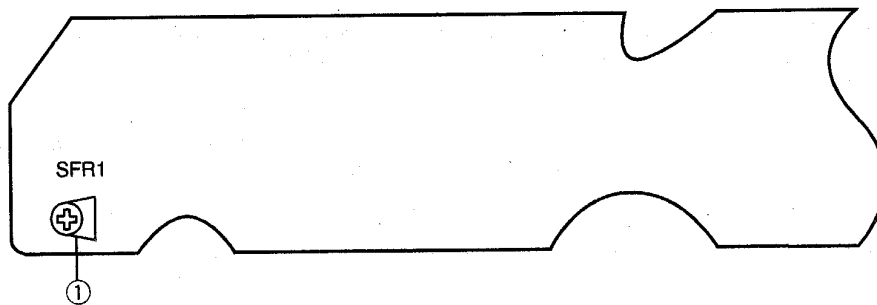

## DECK R/P E HEAD

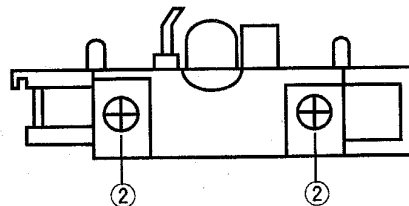

### < DECK SECTION >

#### 1. Tape Speed Check

- Settings : • Test tape : TTA-100  
 • Test point : TP CONN 3P (CON 912)  
 • Adjustment location : SFR1

Method : Play back the test tape and check for  
 3000Hz  $\pm$  5Hz.

(NOTE) : RVS SIDE SPEED SPECIFICATION  
 FWD SIDE SPECIFICATION  $\pm$ 45Hz

2. Head Azimuth Adjustment (DECK 1,2)

- Settings : • Test tape : TTA-300  
 • Test point : TP CONN 3P (CON 912)  
 • Adjustment location : Head azimuth adjustment screw

Method : Play back the 10kHz signal of the test tape and adjust screw so that the output becomes maximum. Next, perform on each FWD PLAY and REV PLAY mode.

3. PB Sensitivity Check (DECK 1,2)

- Settings : • Test tape : TTA-200  
 • Test point : TP CONN 3P (CON 912)

Method : Playback the test tape and check for output level becomes  $300\text{mV} \pm 5\text{mV}$ .

4. PB Frequency Response Check

- Settings : • Test tape : TTA-300  
 • Test point : TP CONN 3P (CON 912)

Method : Play back the 315Hz and 10kHz signals of the test tape and check output difference to within  $0\text{dB} \pm 2\text{dB}$ , and the 10kHz signal with respect to that of the 315Hz signal is 2dB.

5. REC / PB Frequency Response Adjustment

- Settings : • Test tape : TTA-602  
 • Test point : TP CONN 3P (CON 912)  
 • Input signal : 1kHz/10kHz (VIDEO2/AUX IN)  
 • Adjustment location : SFR401(Lch)  
 SFR402(Rch)

Method : Establish the record mode. Adjust the CON 912 signal to 210mV and attenuate to -20dB. Record and playback 1kHz and 10kHz. Adjust SFR so that level difference between 1kHz and 10kHz is  $0\text{dB} \pm 0.3\text{dB}$ .

6. REC/PB Sensitivity Adjustment (DECK 2)

- Settings : • Test tape : TTA-602  
 • Test point : TP CONN 3P (CON 912)  
 • Input signal : 1kHz/10kHz (VIDEO2/AUX IN)  
 • Adjustment location : SFR301 (Lch)  
 SFR302 (Rch)

Method : Apply a 1kHz signal and REC mode. Then adjust OSC attenuator so that the output level at the TP CONN 3P(CON 912) becomes 21mV. Record and playback the 1kHz signal and adjust SFRs so that the output is  $21\text{mV} \pm 0.5\text{dB}$ .

PRACTICAL SERVICE FIGURE

<DECK SECTION>

Tape speed :	3000Hz $\pm$ 45Hz
Wow & flutter :	Less than 0.35% (R.M.S)
Take-up torque :	30 ~ 55g-cm (FWD, REV)
F.F & REW torque :	75 ~ 180g-cm
Back tension :	2 ~ 7g-cm (FWD, REV)
Distortion :	Less than 2.0% (PB, AC) Less than 3.0% (REC/PB, AC)
Noise level :	Less than 50mV (PB, AC) Less than 50mV (REC/PB, AC)
Signal to noise ratio :	More than 40dB (PB, AC) More than 38dB (REC/PB, AC)
Erasing ratio :	More than 60dB (at 125Hz)
Test tape :	TTA-602


<CD SECTION>

Note :

Connect a probe (10:1) of the oscilloscope or the frequency counter to a test point.

7. Focus Bias Adjustment


Make the focus bias adjustment when replacing and repairing the optical block.

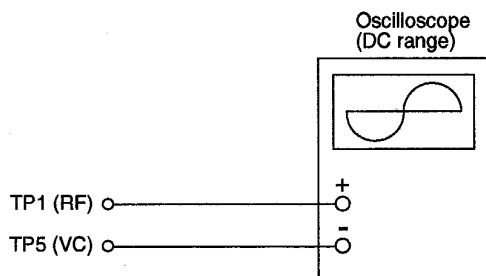

- 1) Connect an oscilloscope to the test points TP1 (RF) and TP5 (VC).
- 2) Turn on the power switch.
- 3) Insert test disc TCD-782 (YEDS-18) and play back the second composition.


- 4) Adjust SFR601 so that RF signal of the test point TP1 (RF) is MAX and CLEARREST.

RF signal waveform

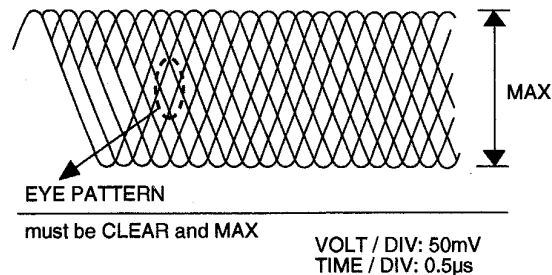


Note:

The current of the laser signal can be checked with the voltages on both sides of R628 (10Ω). The difference for the specified value shown on the level must be within ± 6.0mA.




$$\text{Laser current } I_{op} = \frac{\text{Voltage across R628}}{10}$$

### 8. Tracking Balance Adjustment

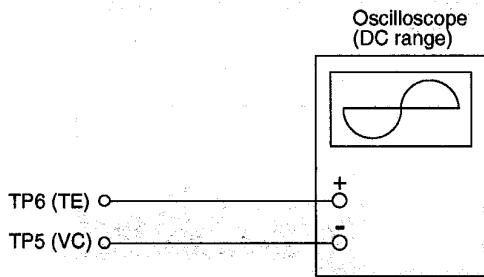

- 1) Connect an oscilloscope to the test points TP6 (TE) and TP5 (VC).
- 2) Start the CD test mode.
- 3) Insert test disc TCD-782 (YEDS-18) and become traverse mode of CD test mode.
- 4) Adjust SFR602 so that the traverse waveform on the oscilloscope is vertically symmetrical as shown in the figure below.
- 5) After the adjustment is completed, remove the connected lead wires from the terminals.
- 6) Cansel the CD test mode.

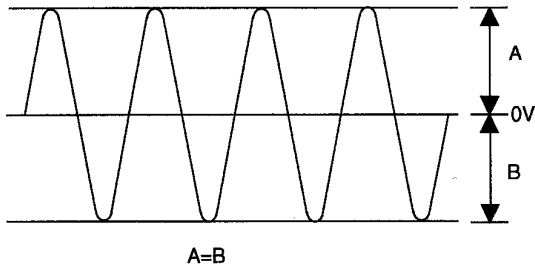

VOLT / DIV: 20mV  
TIME / DIV: 1mS

### 9. Tracking Gain Adjustment

A servo analyzer is necessary in order to perform this adjustment exactly. However, this gain has a margin, so even if it is slightly off, there is no problem. Therefore, do not perform this adjustment. Focus/tracking gain determines the pick-up follow-up (vertical and horizontal) relative to mechanical noise and mechanical shock when 2-axis device operates. However, as these gains are reciprocate, the adjustment is performed at the point where both gains are satisfied.

- When gain is raised, the noise increases when the 2-axis device operates increases.
- When gain is lowered, it is more susceptible to mechanical shock and skipping occurs more easily.

When the gain adjustment is not satisfied, the symptoms below appear.

Symptoms	Gain	(Focus)	Tracking
• The time until music starts becomes longer for STOP → -PLAY or automatic selection (◀, ▶ buttons pressed.) (Normally takes about 2 seconds.)		low	low or high
• Music does not start and disc continues to rotate for STOP → -PLAY or automatic selection (◀, ▶ buttons pressed.)		-	low
• Disc stops to rotate shortly after STOP → -PLAY.		low or high	-
• Sound is interrupted during PLAY. Or time counter display stops.		-	low
• More noises during the 2-axis device operation.		high	high




The following is simple adjustment method.

– Simple adjustment –


Note: Since exact adjustment cannot be performed, remember the positions of the controls before performing the adjustment.

If the positions after the simple adjustment are only a little different, return the controls to the original position.

Procedure:

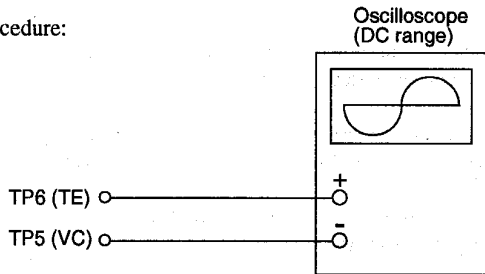


- 1) Keep the set horizontal. (If the set is not kept horizontally, this adjustment cannot be performed due to the gravity against the 2-axis device.)
- 2) Insert test disc TCD-782 (YEDS-18) and play back the second composition.
- 3) Connect an oscilloscope to TP6 (TE) of the MAIN C.B.
- 4) Adjust SFR603 so that the waveform appears as shown in the figure below. (tracking gain adjustment)

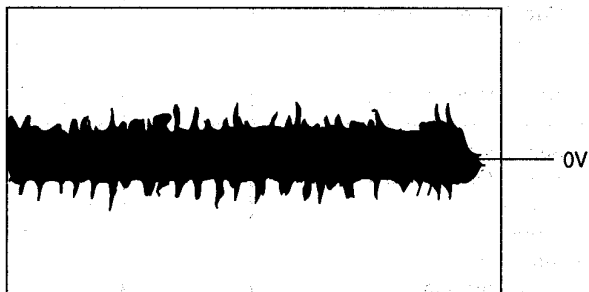

VOLT / DIV: 50mV  
TIME / DIV: 1mS


• Incorrect example

Low tracking gain  
(The fundamental wave appears as compared with the waveform adjusted)

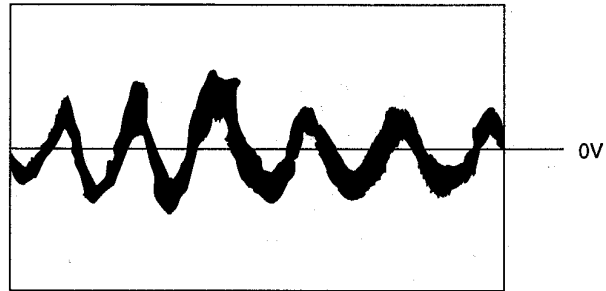


VOLT / DIV: 50mV  
TIME / DIV: 1mS

High tracking gain  
(The frequency of the fundamental wave is higher than in low gain)

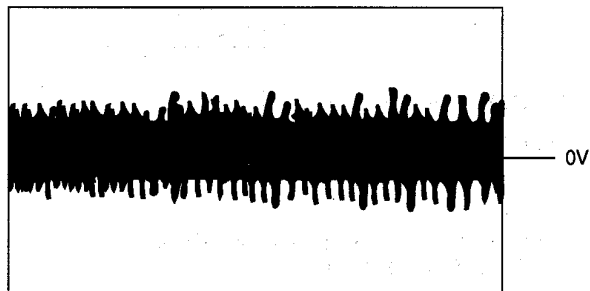

VOLT / DIV: 50mV  
TIME / DIV: 1mS

# MECHANICAL EXPLODED VIEW 1 / 1

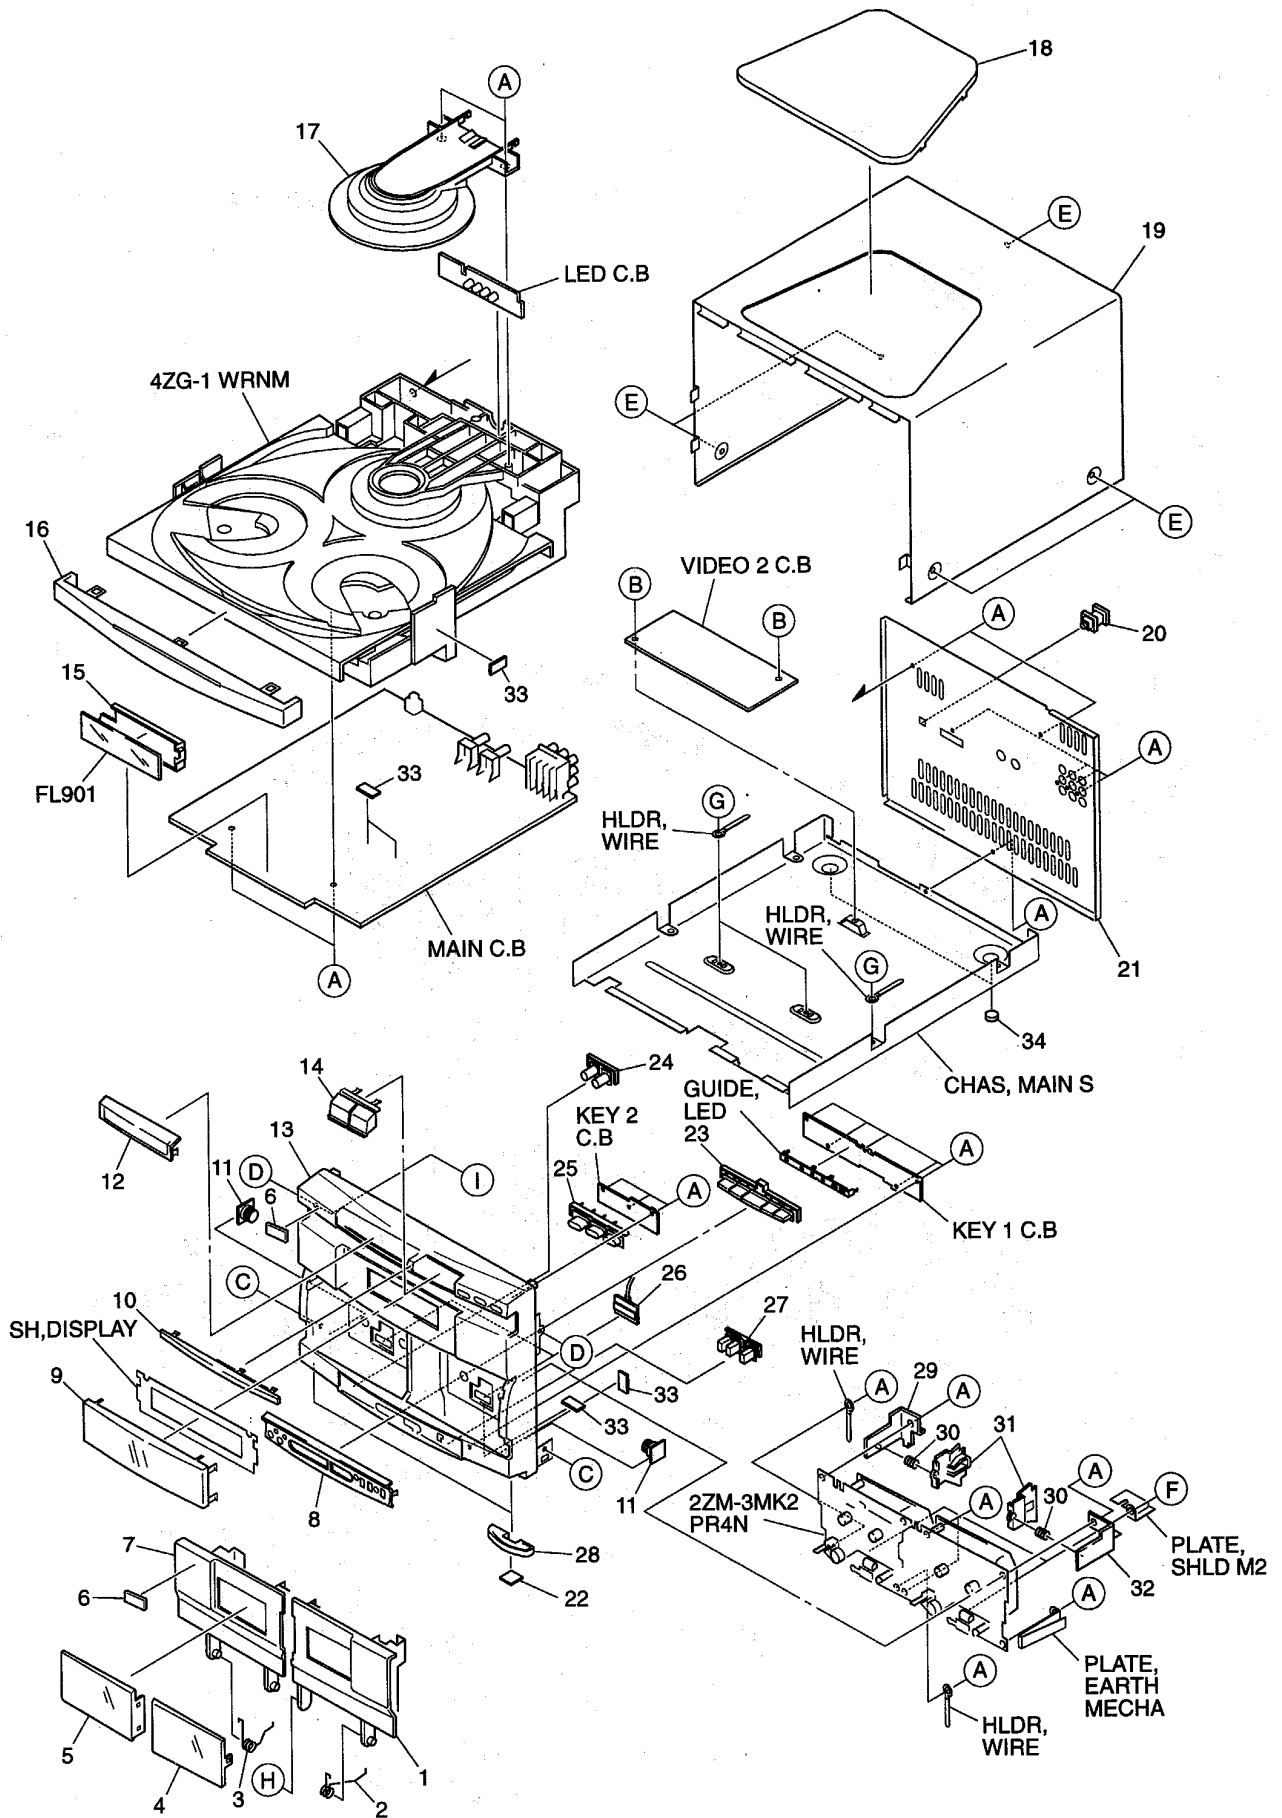



# MECHANICAL PARTS LIST 1 / 1

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。  
 If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF.NO	PART NO.	カリ NO.	DESCRIPTION	REF.NO	PART NO.	カリ NO.	DESCRIPTION
1	86-NV1-004-110		BOX, CASS 2	26	87-070-108-010		LED, SLF-301C-37 YGRN
2	83-NV4-202-110		SPR-T, EJECT 2	27	86-NV1-014-010		KEY, DOLBY
3	83-NV4-201-110		SPR-T, EJECT 1	28	85-NC1-019-010		RING, FOOT
4	86-NV1-009-010		WINDOW, CASS 2	29	82-NF5-226-010		HLDR, LOCK 1N(*)
5	86-NV1-008-010		WINDOW, CASS 1	30	82-NF5-228-010		SPR-C, LOCK
6	82-NE8-032-010		BADGE, AIWA 27.5 ABS GLD	31	82-NF5-229-010		PLATE, LOCK(*)
7	86-NV1-003-110		BOX, CASS 1	32	82-NF5-227-010		HLDR, LOCK 2N(*)
8	86-NV1-015-010		PANEL, CONTROL	33	80-MQ1-209-010		CLOTH, 20-7
9	86-NV1-006-010		WINDOW, DISPLAY	34	82-NV1-213-010		FELT, DIA12-2
10	86-NV1-016-010		PANEL, CD	A	87-067-703-010		BVT2+3-10 W/O SLOT
11	87-063-165-010		OIL-DMPR, 150	B	87-067-584-019		BVT2+3-6 W/O SLOT
12	86-NV1-007-010		WINDOW, CD	C	87-591-094-410		QIT+3-6
13	86-NV2-001-210		CABI, FR	D	87-721-097-410		QT2+3-12 W/O SLOT
14	86-NV1-011-010		KEY, OPEN	E	87-067-641-010		UTT2+3-8 W/O SLOT BLK
15	86-NV1-201-019		GUIDE, FL	F	87-571-032-410		VIT+2-3
16	86-NV1-005-110		PANEL, TRAY	G	87-571-092-410		VIT+3-4
17	84-ZG1-011-010		REFLECTOR, CD	H	82-NE8-215-010		W, 4.2-6.8-0.18
18	86-NF6-007-010		WINDOW, TOP	I	85-NF7-599-010		PV CW 3.2-8-0.3
19	86-NV1-017-110		CABI, STEEL				
20	84-ZG1-245-110		CAP, OPTICAL				
21	86-NV2-003-010		PANEL, REAR YBNM				
22	80-VF1-202-010		FELT, 12.5-15.5-2				
23	86-NV1-010-010		KEY, PLAY				
24	86-NV1-013-010		KEY, REC				
25	86-NV1-012-010		KEY, DISC				

TAPE MECHANISM EXPLODED VIEW 1 / 1

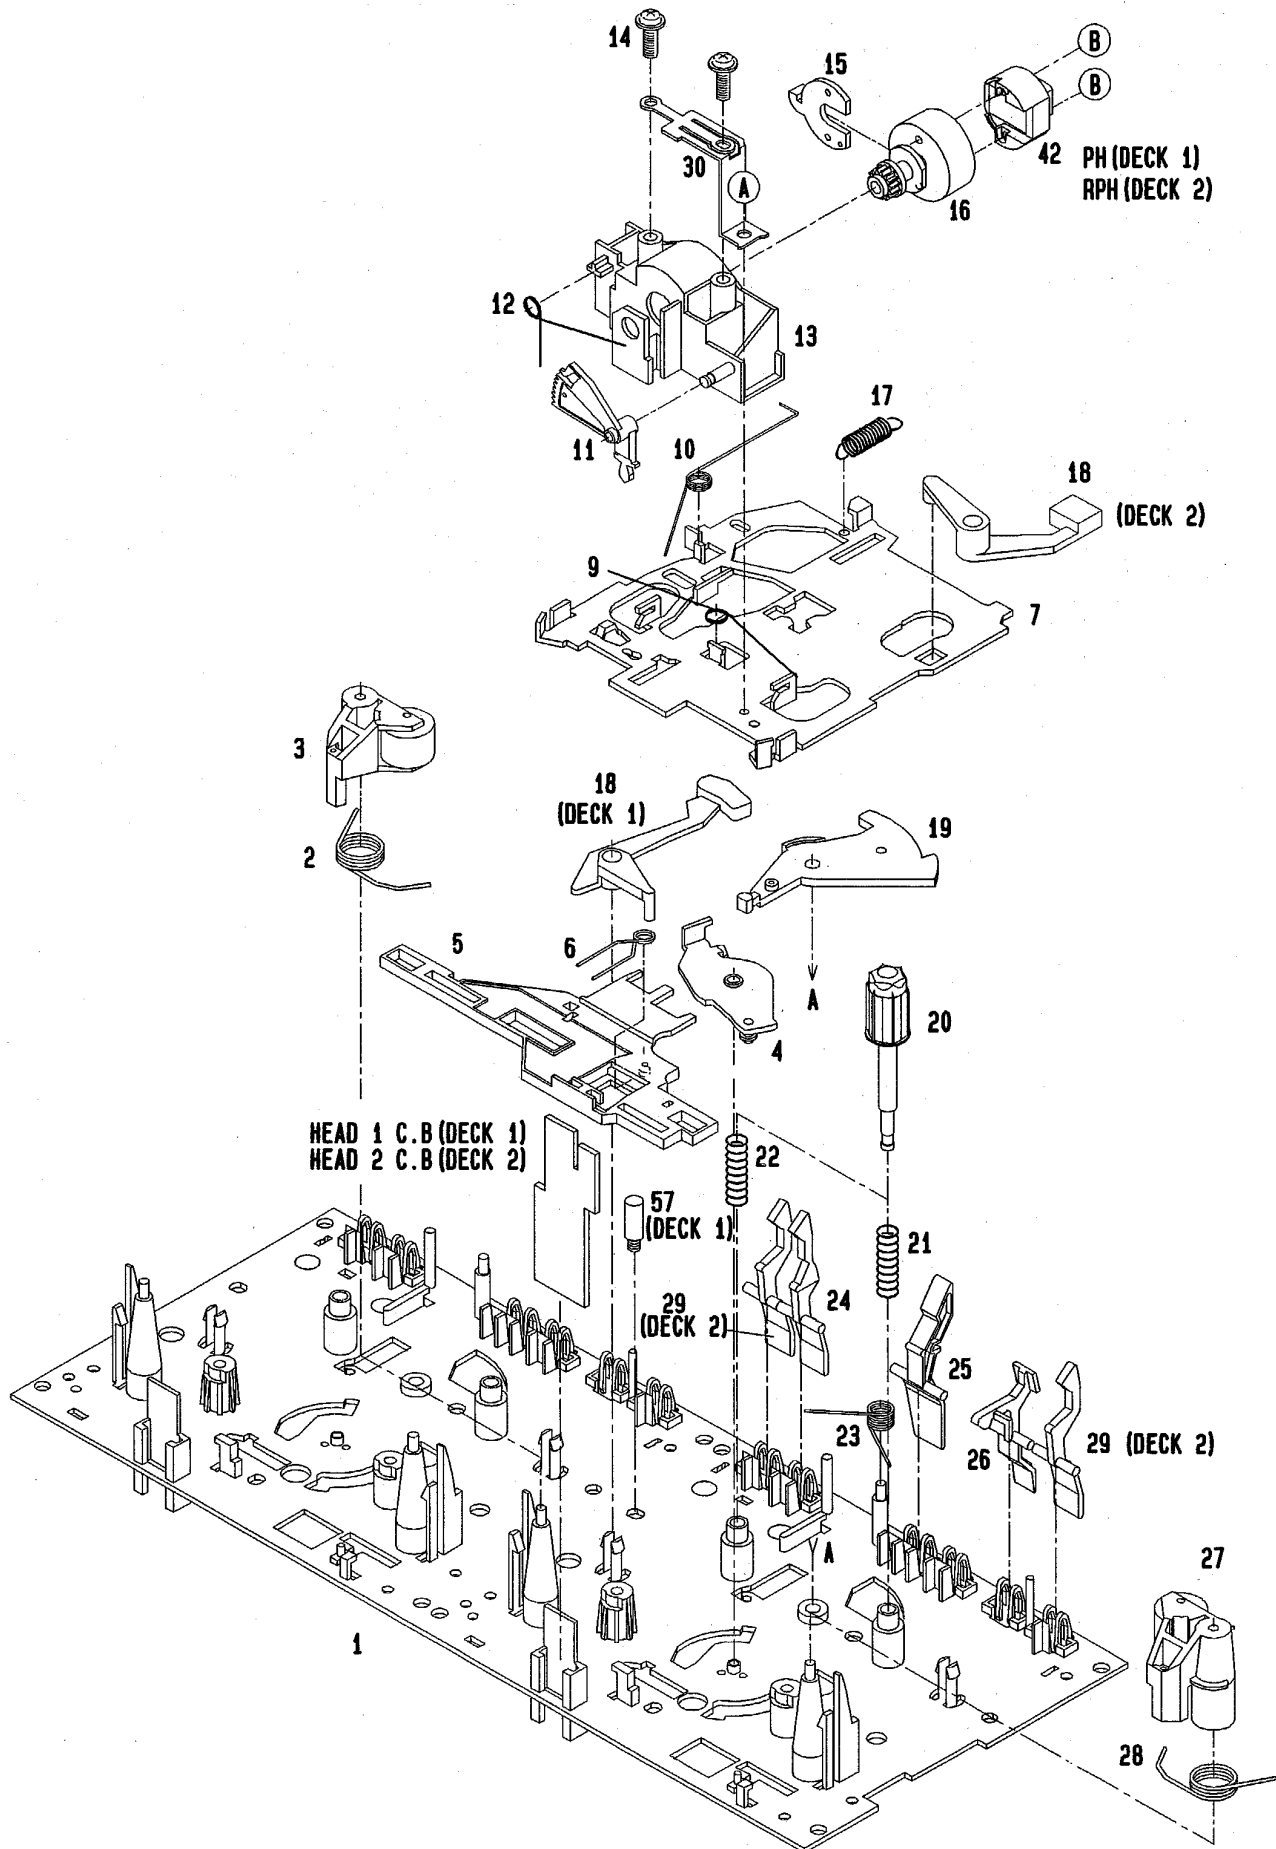


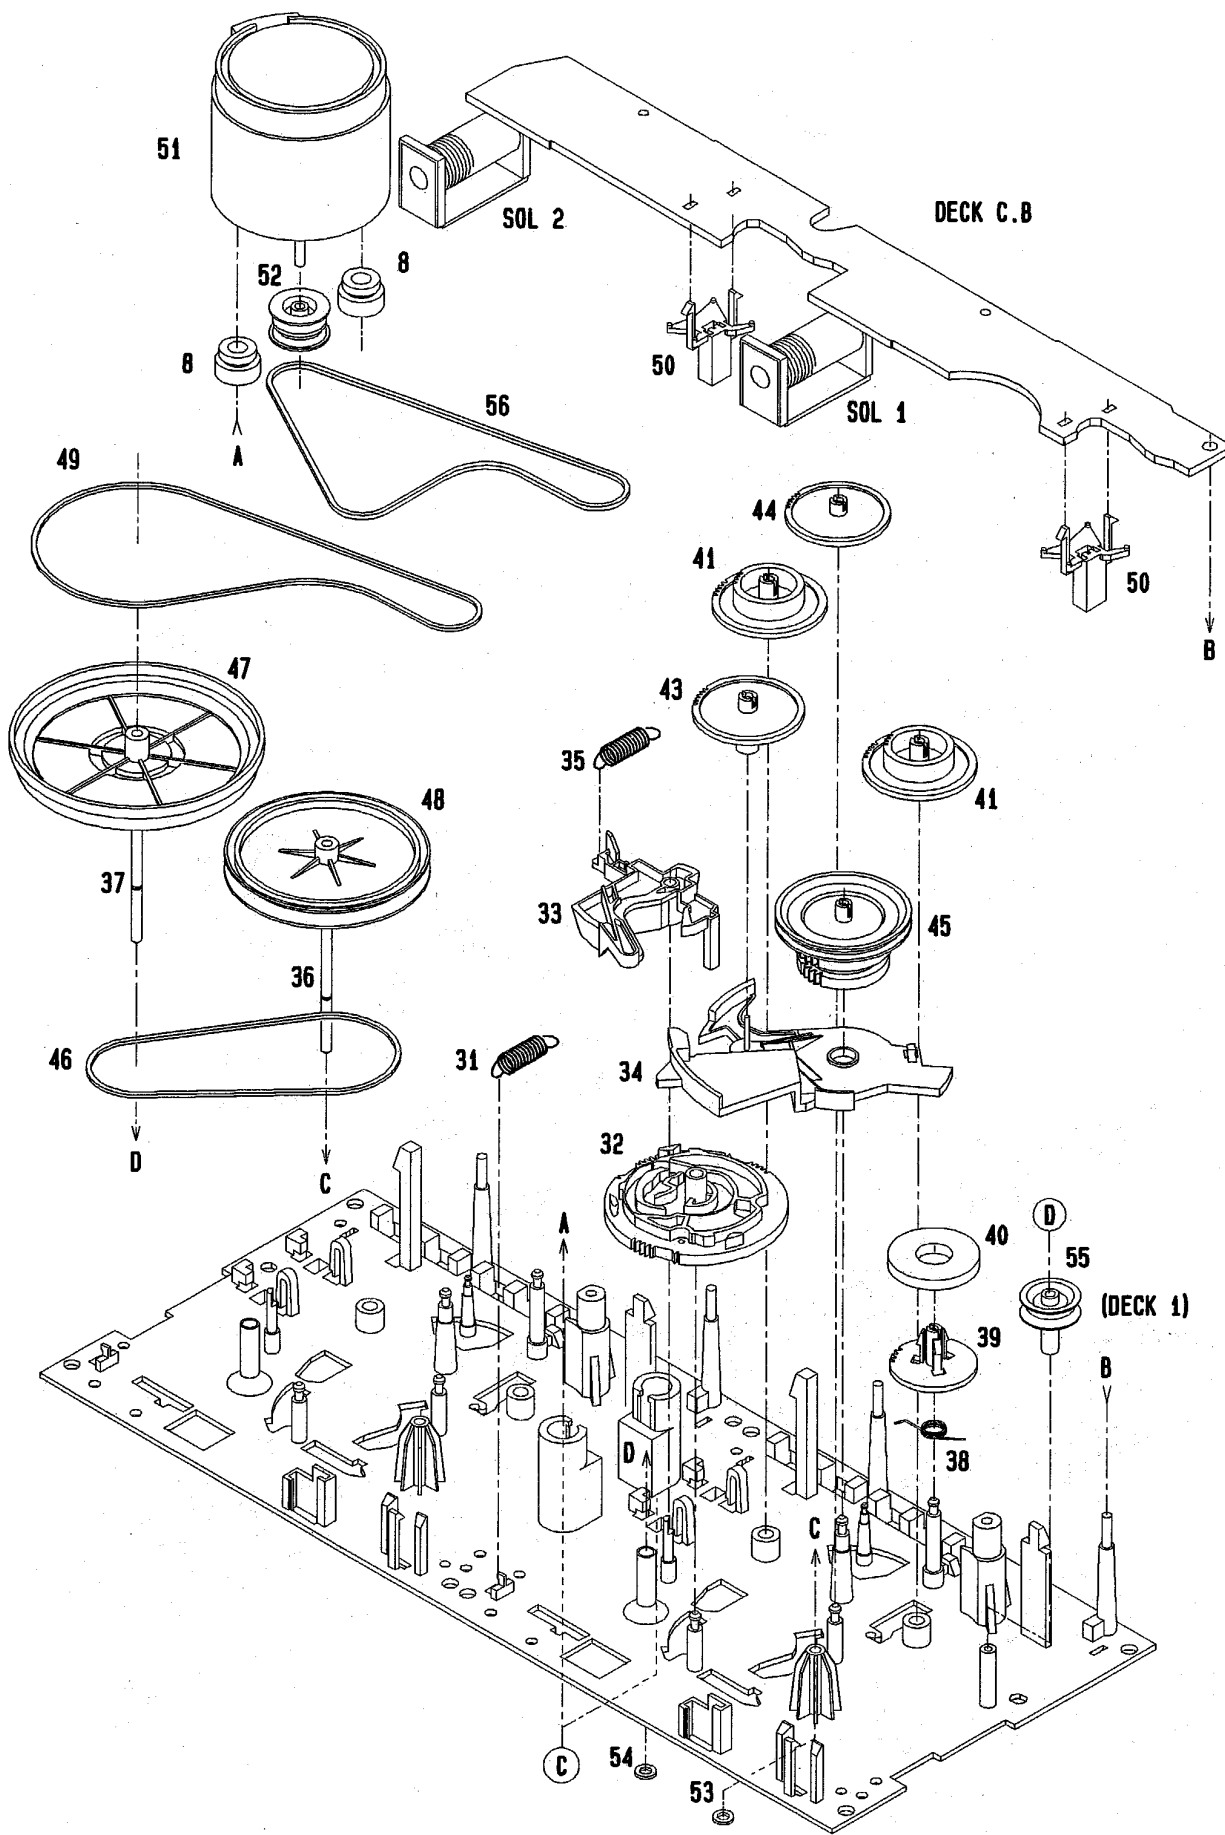


# TAPE MECHANISM PARTS LIST 1 / 1

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。  
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カリ NO.	DESCRIPTION	REF. NO	PART NO.	カリ NO.	DESCRIPTION
1	82-ZM3-301-519		CHAS ASSY, M2	35	82-ZM1-265-119		SPR-E, TRIG
2	82-ZM1-258-110		SPR-T, PINCH L	36	82-ZM1-236-019		CAPSTAN N 2-41.5
3	82-ZM1-345-019		LVR ASSY, PINCH L W	37	82-ZM1-239-019		CAPSTAN N 2.2-41.7
4	82-ZM1-333-010		PLATE, LINK 2	38	82-ZM1-322-019		SPR-T, FR60
5	82-ZM1-266-11K		LVR, DIR	39	82-ZM1-220-219		GEAR, IDLER
6	82-ZM1-214-010		SPR-T, DIR	40	82-ZM3-616-019		RING MAGNET 4
7	82-ZM1-206-81K		CHAS, HEAD	41	82-ZM1-216-31K		GEAR, REEL
8	82-ZM3-307-019		CUSH-G, DIA3.7-8-3.2	42	87-046-355-019		HEAD, PH HADKH2529B(PH)
9	82-ZM1-269-219		SPR-T, BRG	42	87-046-356-019		HEAD, RPH HADKH5581B(RPH)
10	82-ZM1-219-119		SPR-T, LINK	43	82-ZM1-225-21K		GEAR, FR
11	82-ZM1-210-119		GEAR, H T	44	82-ZM1-226-019		GEAR, REW
12	82-ZM1-213-019		SPR-T, HEAD	45	82-ZM1-228-810		SLIP DISK ASSY
13	82-ZM1-207-619		GUIDE, TAPE	46	82-ZM1-338-010		BELT FR4
14	82-ZM1-283-310		S-SCREW, AZIMUTH	47	82-ZM1-238-81K		FLY-WHL ASSY, R (DECK 2)
15	82-ZM1-314-119		PLATE, HEAD	47	82-ZM3-210-71K		FLY-WHL ASSY, R2 (DECK 1)
16	82-ZM1-208-119		HLDR, HEAD	48	82-ZM1-235-51K		FLY-WHL ASSY, L (DECK 2)
17	82-ZM1-218-019		SPR-E, HB	48	82-ZM3-208-61K		FLY-WHL ASSY, L2 (DECK 1)
18	82-ZM1-263-110		LVR, EJECT L (DECK 1)	49	82-ZM3-329-210		BELT, SBU R2
18	82-ZM1-264-010		LVR, EJECT R (DECK 2)	50	82-ZM1-245-210		HLDR, IC
19	82-ZM1-222-21K		LVR, PLAY	51	87-045-347-019		MOT, SHU2L 70 (M1)
20	82-ZM1-217-319		REEL TABLE	52	82-ZM3-221-010		PULLEY, MOT 2M
21	82-ZM1-244-510		SPR-C, BT	53	82-ZM1-288-019		SH, 1.63-3.2-0.5 SLT
22	82-ZM1-285-310		SPR-C, BT L	54	80-ZM6-243-019		SH, 1.75-3.6-0.5 SLT
23	82-ZM1-257-019		SPR-T, CAS	55	82-ZM3-304-110		PULLEY, COUPLER (DECK 1)
24	82-ZM1-241-319		LVR, MC	56	82-ZM3-328-110		BELT, SBU P2
25	82-ZM1-242-019		LVR, CAS	57	82-ZM3-216-019		SHAFT, COUPLER N (DECK 1)
26	82-ZM1-243-019		LVR, STOP	A	82-ZM1-315-010		S-SCREW, GVIDE TAPE
27	82-ZM1-346-019		LVR ASSY, PINCH R W	B	80-ZM6-207-019		V+1.6-7
28	82-ZM1-259-110		SPR-T, PINCH R	C	82-ZM3-318-019		S-SCRW MOTOR M2
29	82-ZM1-240-11K		LVR, REC (DECK 2)	D	87-067-972-019		PW, 1.05-3-0.25 SLT
30	82-ZM1-298-010		SPR-P, EARTH				
31	82-ZM1-255-319		SPR-E, LVR DIR				
32	82-ZM3-305-01K		GEAR, CAM M2				
33	82-ZM1-227-21K		LVR, TRIG				
34	82-ZM3-306-11K		LVR, FR M2				

**SPRING APPLICATION POSITION**

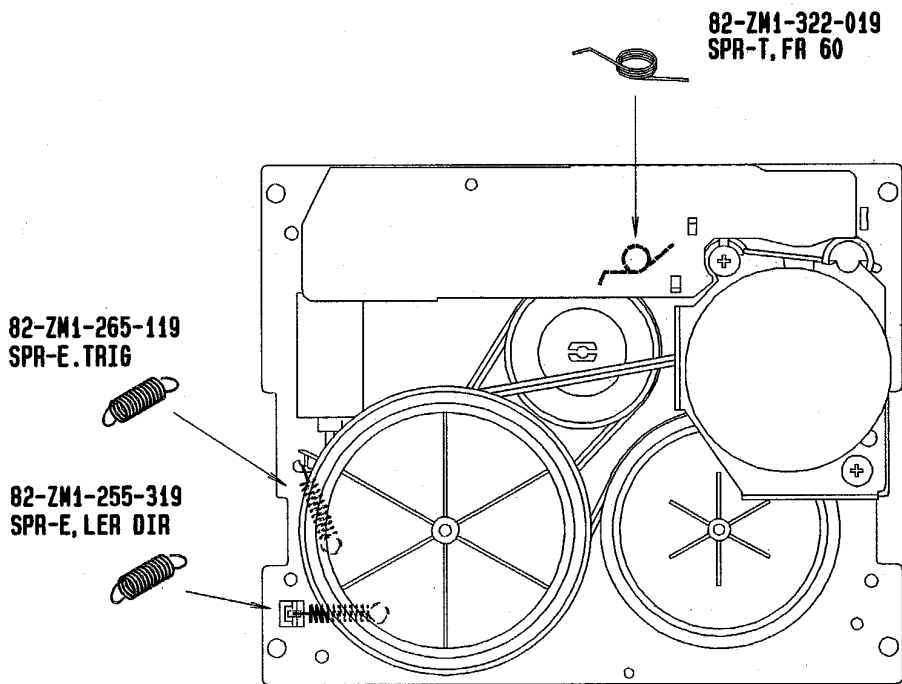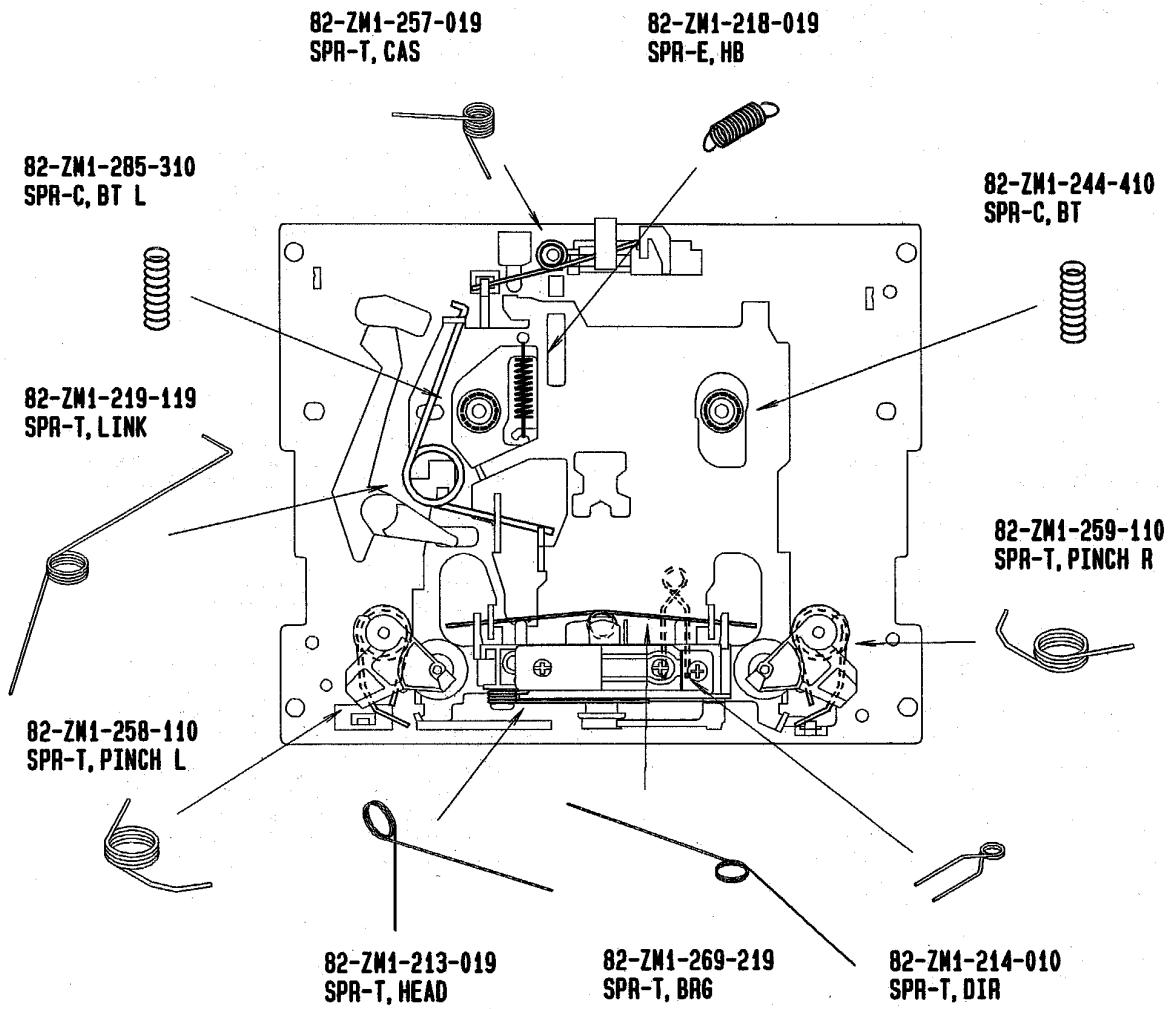

MODEL NO.

# SX-NAVH8

## SPEAKER PARTS LIST 1 / 1

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。  
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カリ NO.	DESCRIPTION
1	86-NSM-001-010		PANEL FR
2	86-NSM-004-010		GRILL FRAME ASSY
3	86-096-614-010		SPEAKER CORD
4	86-NS2-602-010		SPEAKER W 140
5	86-MS2-603-010		SPEAKER TW 60
6	83-NSN-610-010		TERMINAL



# REFERENCE NAME LIST

## ELECTRICAL SECTION

DESCRIPTION	REFERENCE NAME
ANT	ANTENNAS
C-	CHIP
C-CAP	CAP, CHIP
C-CAP TN	CAP, CHIP TANTALUM
C-COIL	COIL, CHIP
C-DI	DIODE, CHIP
C-DIODE	DIODE, CHIP
C-FET	FET, CHIP
C-FOTR	FILTER, CHIP
C-JACK	JACK, CHIP
C-LED	LED, CHIP
C-RES	RES, CHIP
C-SFR	SFR, CHIP
C-SLIDE SW	SLIDE SWITCH, CHIP
C-SW	SWITCH, CHIP
C-TR	TRANSISTOR, CHIP
C-VR	VOLUME, CHIP
C-ZENER	ZENER, CHIP
CAP, CER	CAP, CERA-SOL
CAP, E	CAP, ELECT
CAP, M/F	CAP, FILM
CAP, TC	CAP, CERA-SOL
CAP, TC-U	CAP, CERA-SOL SS
CAP, TN	CAP, TANTALUM
CERA FIL	FILTER, CERAMIC
CF	FILTER, CERAMIC
DL	DELAY LINE
E/CAP	CAP, ELECT
FILT	FILTER
FLTR	FILTER
FUSE RES	RES, FUSE
MOT	MOTOR
P-DIODE	PHOTO DIODE
P-SNSR	PHOTO SENSER
P-TR	PHOTO TRANSISTOR
POLY VARI	VARIABLE CAPACITOR
PPCAP	CAP, PP
PT	POWER TRANSFORMER
PTR, RES	PTR, MELF
RC	REMOTE CONTROLLER
RES NF	RES, NON-FLAMMABLE
RESO	RESONATOR
SHLD	SHIELD
SOL	SOLENOID
SPKR	SPEAKER
SW, LVR	SWITCH, LEVER
SW, RTRY	SWITCH, ROTARY
SW, SL	SWITCH, SLIDE
TC CAP	CAP, CERA-SOL
THMS	THERMISTOR
TR	TRANSISTOR
TRIMMER	CAP, TRIMMER
TUN-CAP	VARIABLE CAPACITOR
VIB, CER	RESONATOR, CERAMIC
VIB, XTAL	RESONATOR, CRYSTAL
VR	VOLUME
ZENER	DIODE, ZENER
サージサプレッサ	SERGESUPPRESSOR
セラコン	CAP,CERA

## MECHANICAL SECTION

DESCRIPTION	REFERENCE NAME
ADHESHIVE	SHEET ADHESHIVE
AZ	AZIMUTH
BAR-ANT	BAR-ANTENNA
BAT	BATTERY
BATT	BATTERY
BRG	BEARING
BTN	BUTTON
CAB	CABINET
CASS	CASSETTE
CHAS	CHASSIS
CLR	COLLAR
CONT	CONTROL
CRSR	CURSOR
CU	CUSHION
CUSH	CUSHION
DIR	DIRECTION
DUBB	DUBBING
FL	FRONT LOADING
FLY-WHL	FLYWHEEL
FR	FRONT
FUN	FUNCTION
G-CU	G-CUSHION
HDL	HANDOL
HIMERON	CLOTH
HINGE, BAT	HINGE, BATTERY
HLDR	HOLDER
HT-SINK	HEAT SINK
IB	INSTRUCTION BOOKLET
IDLE	IDLER
IND, L-R	INDICATOR, L-R
KEY, CONT	KEY, CONTROL
KEY, PRGM	KEY, PROGRAM
KNOB, SL	KNOB, SLIDE
LBL	LABEL
LID, BATT	LID, BATTERY
LID, CASS	LID, CASSETTE
LVR	LEVER
P-SP	P-SPRING
PANEL, CONT	PANEL, CONTROL
PANEL, FR	PANEL, FRONT
PRGM	PROGRAM
PULLY, LOAD MO	PULLY, LOAD MOTOR
RBN	RIBBON
S-	SPECIAL
SEG	SEGMENT
SH	SHEET
SHLD-SH	SHIELD-SHEET
SL	SLIDE
SP	SPRING
SP-SCREW	SPECIAL-SCREW
SPACER, BAT	SPACER, BATTERY
SPR	SPRING
SPR-P	P-SPRING
SPR-PC-PUSH	P-SPRING, C-PUSH
T-SP	T-SPRING
TERM	TERMINAL
TRIG	TRIGGER
TUN	TUNING
VOL	VOLUME
W	WASHER
WHL	WHEEL
WORM-WHL	WORM-WHEEL
ジグアーム	ARM, SHAFT
ジグガイド	GUIDE, SHAFT
ストラップ	STRAP
トクナベ	S-SCREW
ヒンジ	HINGE
ヒンジビス	S-SCREW
ビスセレート	SCREW, SERRART

サービス技術ニュース	
番号	連絡内容
G - -	
G - -	
G - -	

**アイワ株式会社**  
**AIWA CO., LTD.**

921502, 750038

Tokyo Japan