


aiwa

NSX - D707

SERVICE MANUAL

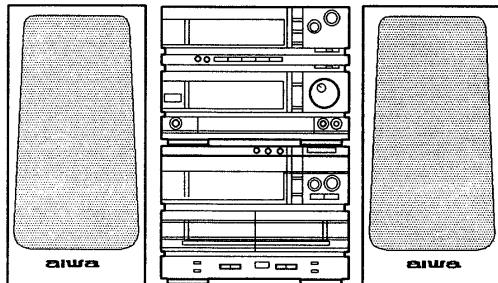

COMPACT DISC STEREO SYSTEM

- BASIC TAPE MECHANISM : 2ZM - 3PR2N
- BASIC CD MECHANISM : KSM - 2101ABM
- TYPE. HE,LH,HR,E,K,Z,U

SYSTEM	AMPLIFIER TUNER	CASSETTE DECK CD PLAYER	REMOTE CONTROLLER	SPEAKER
NSX - D707 (TYPE : HE,HR,LH)	RX - N707	FD - N909	RC - TN707	SX - N707
_____ (TYPE : E,K,Z)	RX - N707	FD - N909	RC - TN707	SX - N707
_____ (TYPE : U)	RX - N707	FD - N707	RC - TN707	SX - N707

TABLE OF CONTENTS

SPECIFICATIONS	3
MODEL - NO. RX-N 707	
ELECTRICAL MAIN PARTS LIST.....	4~8
TRANSISTOR ILLUSTRATION	8
SCHEMATIC DIAGRAM - 1 (MAIN : HE,LH,HR,U)	9,10
WIRING - 1 (MAIN : HE,LH,HR,U)	11,12
SCHEMATIC DIAGRAM - 2 (MAIN : E,K)	13,14
WIRING - 2 (MAIN : E,K)	15,16
SCHEMATIC DIAGRAM - 3 (MAIN : Z)	17,18
WIRING - 3 (MAIN : Z)	19,20
SCHEMATIC DIAGRAM - 4 (FRONT)	21,22
WIRING - 4 (FRONT)	23,24
WIRING - 5 (POWER).....	25
FL GRID ASSIGNMENT/ANODE CONNECTION	26
IC DISCRIPTION.....	27
IC BLOCK DIAGRAM	28,29
ELECTRICAL ADJUSTMENT (TUNER)	30,31
PRACTICAL SERVICE FIGURE (TUNER)	31
MECHANICAL EXPLODED VIEW 1/1.....	32
MECHANICAL PARTS LIST 1/1.....	33
MODEL - NO. FD-N 707/N 909	
PROTECTION OFF EYES FROM LASER BEAM DURING SERVICING.....	34
PRECAUTION TO REPLACE OPTICAL BLOCK.....	34
ELECTRICAL MAIN PARTS LIST.....	35~37
TRANSISTOR ILLUSTRATION	38
SCHEMATIC DIAGRAM - 1 (CD)	39,40
WIRING - 1 (CD)	41,42
SCHEMATIC DIAGRAM - 2 (DECK)	43,44
WIRING - 2 (DECK)	45,46
FL GRID ASSIGNMENT/ANODE CONNECTION	47
IC DISCRIPTION.....	48,49
ELECTRICAL ADJUSTMENT (DECK).....	50~51
PRACTICAL SERVICE FIGURE (DECK)	51
ELECTRICAL ADJUSTMENT (CD).....	52~54
MECHANICAL EXPLODED VIEW 1/2.....	55
MECHANICAL PARTS LIST 1/2.....	56
MECHANICAL EXPLODED VIEW 2/2.....	57
MECHANICAL PARTS LIST 2/2.....	58
TAPE MECHANISM EXPLODED VIEW 1/1	59,60
TAPE MECHANISM PARTS LIST 1/1	61
CD MECHANISM EXPLODED VIEW . PARTS LIST 1/1	62
SPRING APPLICATION POSITION.....	63
MODEL - NO. SX-N 707	
DISASSEMBLY INSTRUCTIONS . SPEAKER LIST	64
ACCESSORIES/PACKAGE LIST	65
REFERENCE NAME LIST.....	66

SPECIFICATIONS

TUNER/AMPLIFIER RX-N707

<FM section>	
Frequency range	87.5 MHz to 108 MHz
Usable sensitivity (IHF)	1.8 µV (75 ohms) 16.2 dBf
Alternate channel selectivity	50 dB (± 400 kHz)
Signal-to-noise ratio	68 dB (STEREO), 72 dB (MONO)
Harmonic distortion	0.3% (MONO), 1 kHz 0.8% (STEREO), 1 kHz
Frequency response	20 Hz to 15 kHz (+0.5 dB, -3 dB)
Stereo separation	35 dB at 1 kHz
Antenna	75 ohms (unbalanced)
<AM section>	
Frequency range	531 (530) kHz to 1,602 (1,710) kHz
Usable sensitivity	400 µV/m
Selectivity	23 dB (9 kHz)
Signal-to-noise ratio	53 dB (100 dB input)
Antenna	Loop antenna
<MW section E, K, Z>	
Frequency range	531 kHz to 1,602 kHz
Usable sensitivity	400 µV/m
Selectivity	23 dB (9 kHz)
Signal-to-noise ratio	53 dB (100 dB input)
Antenna	Loop antenna
<LW section E, K, Z>	
Frequency range	144 kHz to 290 kHz
Usable sensitivity	1,000 µV/m
Antenna	Loop antenna
<Timer section and general>	
Program timer	"Once" and/or "every" (independent setting)
Sleep timer	Capable of setting in 10 minute increments, 99 minutes maximum
<Amplifier section>	
Power output	35 W + 35 W (6 ohms, T.H.D. 1%, 1 kHz)
Harmonic distortion	0.1% (25 W, 1 kHz, 6 ohms)
Input sensitivity (load impedance)	VIDEO 1/DAT: 300 mV (47 kohms with volume) VIDEO 2/AUX: 500 mV (47 kohms)
Power requirements	HE, LH, HR: 120/220/240 V AC selectable, 50/60 Hz U: 120 V AC, 60 Hz E, Z: 230 V AC, 50 Hz K: 240 V AC, 50 Hz
Power consumption	100 W
Dimensions (W × H × D)	HE, LH, HR, U: 260 × 198 × 330.5 mm (10 $\frac{1}{4}$ × 7 $\frac{7}{8}$ × 13 $\frac{1}{8}$ in.) E, K, Z: 260 × 198 × 333.5 mm (10 $\frac{1}{4}$ × 7 $\frac{7}{8}$ × 13 $\frac{1}{4}$ in.)
Weight	6.0 kg (13.23 lbs.)

CASSETTE DECK/COMPACT DISC PLAYER FD-N909, N707

<Cassette deck section>	
Track format	4 tracks, 2 channels
Frequency response	Metal tape: 20 – 17,000 Hz CrO ₂ tape: 20 – 16,000 Hz Normal tape: 20 – 15,000 Hz
Signal-to-noise ratio	73 dB (Dolby C NR ON, metal tape peak level above 5 kHz)
Wow and flutter	0.4% (RMS) 0.25% (WRMS)
Tape speed	4.8 cm/sec. (1 $\frac{7}{8}$ ips) 9.5 cm/sec. (double speed)
Recording system	AC bias
Erase system	AC erase
Motor	DC servomotor × 1
Heads	Playback head × 1 (deck 1) Record/playback/erase head × 1 (deck 2)

<Compact disc player section>

Disc	Compact disc
Scanning method	Non-contact optical scanner (with semi-conductor laser)
Laser	Semi-conductor laser ($\lambda = 780$ nm)
Rotation speed	Approx. 500 rpm – 200 rpm (CLV)
Error correction	Cross Interleave, Reed Solomon code
D-A conversion	1-bit DAC
Signal-to-noise ratio	90 dB (1 kHz)
Harmonic distortion	0.07% (1 kHz)
Wow/flutter	Unmeasurable
Dimensions (W × H × D)	260 × 198 × 328 mm (10 $\frac{1}{4}$ × 7 $\frac{7}{8}$ × 13 in.)
Weight	4.5 kg (9.9 lbs.)

SPEAKER SX-N707

Cabinet type	3-way, bass reflex (EIAJ magnetically shielded)
Impedance	6 ohms
Music power	70 W
Speaker	130 mm cone type woofer 60 mm cone type tweeter 30 mm ceramic type super tweeter
Output sound pressure level	87 dB/W/m
Dimensions (W × H × D)	198 × 396 × 230 mm (7 $\frac{7}{8}$ × 15 $\frac{5}{8}$ × 9 $\frac{1}{8}$ in.)
Weight	4.0 kg (8.8 lbs.)

COMMON SECTION

Power requirements	HE, LH, HR: 120/220/240 V AC selectable, 50/60 Hz U: 120 V AC, 60 Hz E, Z: 230 V AC, 50 Hz K: 240 V AC, 50 Hz Power consumption
Dimensions (W × H × D)	System total 120 W Vertical placement HE, LH, HR, U: 656 × 396 × 330.5 mm (25 $\frac{7}{8}$ × 15 $\frac{5}{8}$ × 13 $\frac{1}{8}$ in.) E, K, Z: 656 × 396 × 333.5 mm (25 $\frac{7}{8}$ × 15 $\frac{5}{8}$ × 13 $\frac{1}{4}$ in.) Horizontal placement HE, LH, HR, U: 916 × 396 × 330.5 mm (36 $\frac{1}{8}$ × 15 $\frac{5}{8}$ × 13 $\frac{1}{8}$ in.) E, K, Z: 916 × 396 × 333.5 mm (36 $\frac{1}{8}$ × 15 $\frac{5}{8}$ × 13 $\frac{1}{4}$ in.)
Weight	18.5 kg (40.7 lbs.)

- Design and specifications are subject to change without notice.
- Dolby noise reduction manufactured under license from Dolby Laboratories Licensing Corporation.
- "DOLBY" and the double-D symbol  are trademarks of Dolby Laboratories Licensing Corporation.
- The word "BBE" and the "BBE symbol" are trademarks of BBE Sound, Inc.
Under license from BBE Sound, Inc.

MODEL NO.

RX-N707



ELECTRICAL MAIN PARTS LIST

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.


REF. NO	PART NO.	カソリ NO.	DESCRIPTION	REF. NO	PART NO.	カソリ NO.	DESCRIPTION		
IC									
82-NT2-630-110	IC, CXP82324-141Q			87-001-919-080	ZENER, UTZJ27C				
82-NE6-617-010	IC, GP1U581X			87-001-916-080	ZENER, UTZJ10B				
87-002-950-010	IC, BA3826S			87-001-915-080	ZENER, UTZJ6.8A				
87-002-727-010	IC, NJM4558L			87-017-091-080	ZENER, HZS5C1				
87-017-311-080	IC, M65831FP (HE, HR)			87-020-465-080	DIODE, 1SS133 T-72				
87-002-444-010	IC, BU4094B			87-017-097-080	ZENER, HZS6B1				
87-001-607-080	IC, NJM4558M			87-017-121-080	ZENER, HZS11A1				
87-002-967-080	IC, BU4052BF			MAIN C. B					
87-020-982-010	IC, STK-4162MK-2 (EXCEPT K, EE)			C109	81-794-643-090	CAP, E 4700-50V			
87-001-582-010	IC, STK4152-2 (K, EE)			C110	81-794-643-090	CAP, E 4700-50V			
87-002-218-010	IC, XRC5451AP			C111	87-010-101-080	CAP, E 220-16 SME			
87-017-294-010	IC, NJM2120L			C112	87-010-405-080	CAP, E 10-50 SME			
87-017-298-010	IC, NJU9701D			C113	87-010-263-080	CAP, E 100-10			
87-002-429-010	IC, NJU7305L			C114	87-015-914-080	CAP, E 47-100			
87-001-530-010	IC, LA3607			C115	87-010-384-080	CAP, E 100-25 SME			
87-002-872-080	IC, MC14053BF			C116	87-010-384-080	CAP, E 100-25 SME			
87-002-901-080	IC, BU4094BF			C117	87-010-400-080	CAP, E 0.47-50 SME			
87-017-296-080	IC, LA1831M			C118	87-010-401-080	CAP, E 1-50 SME			
87-001-927-080	IC, LCT218M			C119	87-010-544-080	CAP, E 0.1-50			
TRANSISTOR									
89-420-052-080	TR, 2SD20050			C120	87-010-235-080	CAP, E 470-16 SME			
87-026-235-080	C-TR, DTC114EK			C121	87-010-101-080	CAP, E 220-16 SME			
89-112-965-080	TR, 2SA1296GR			C122	87-010-374-080	CAP, E 47-10			
89-327-125-080	C-TR, 2SC2712GR			C123	87-010-374-080	CAP, E 47-10			
89-320-011-080	TR, 2SC2001K			C124	87-010-260-080	CAP, E 47-25 SME			
89-213-702-010	TR, 2SB1370E			C125	87-010-405-080	CAP, E 10-50 SME			
89-213-542-380	TR, 2SB1354E, F (HE, LH)			C126	87-012-140-080	C-CAP, S 470P-50 CH			
89-111-625-080	C-TR, 2SA1162GR			C127	87-016-110-090	CAP, E 5600-25SME			
89-332-665-080	TR, 2SC3266GR			C128	87-010-374-080	CAP, E 47-10			
89-110-155-080	TR, 2SA1015GR			C129	87-010-405-080	CAP, E 10-50 SME (HE, LH)			
87-026-462-080	TR, 2SC1740S (RS)			C130	87-010-404-080	CAP, E 4.7-50 SME (HR, K, EE, E, Z)			
89-318-155-080	TR, 2SC1815GR			C201	87-010-400-080	CAP, TG-U 1000P-50 B (EXCEPT Z)			
87-026-227-080	C-TR, DTA114EK			C202	87-010-400-080	CAP, E 0.47-50 SME			
89-333-265-080	C-TR, 2SC3326A			C203	87-010-400-080	CAP, E 0.47-50 SME			
87-026-213-080	C-TR, DTC114YK			C204	87-010-400-080	CAP, E 0.47-50 SME			
89-113-187-880	TR, 2SA1318TU			C205	87-010-401-080	CAP, E 1-50 SME			
89-333-317-880	TR, 2SC3331TU			C206	87-010-401-080	CAP, E 1-50 SME			
87-026-230-080	C-TR, DTA114YK			C207	87-010-380-080	CAP, E 47-16 SME			
89-503-025-080	C-FET, 2SK302GR			C208	87-010-380-080	CAP, E 47-16 SME			
89-327-143-080	C-TR, 2SC2714(O)			C209	87-010-401-080	CAP, E 1-50 SME			
89-502-115-080	C-FET, 2SK211GR (Z)			C210	87-010-401-080	CAP, E 1-50 SME			
89-503-602-080	C-FET, 2SK360E			C211	87-010-401-080	CAP, E 1-50 SME			
89-333-266-080	C-TR, 2SC3326B (K, EE, E, Z)			C212	87-010-401-080	CAP, E 1-50 SME			
87-026-233-080	TR, DTA114TK			C213	87-010-402-080	CAP, E 2.2-50 SME			
89-502-094-080	FET, 2SK209Y			C214	87-010-402-080	CAP, E 2.2-50 SME			
87-026-229-080	C-TR, DTA143KK			C215	87-010-178-080	C-CAP, S 1000P-50 B			
DIODE									
87-020-691-080	DIODE, 1SS132			C216	87-010-178-080	C-CAP, S 1000P-50 B			
87-027-652-080	ZENER, HZ9A1L			C217	87-010-403-080	CAP, E 3.3-50 SME			
87-017-101-080	ZENER, HZS6C2			C218	87-010-403-080	CAP, E 3.3-50 SME			
87-001-911-080	ZENER, UTZJ 4.7A			C219	87-010-405-080	CAP, E 10-50 SME			
87-027-332-080	ZENER, HZ6B1L			C220	87-010-405-080	CAP, E 10-50 SME			
87-002-430-080	ZENER, UTZJ8.2C			C221	87-010-374-080	CAP, E 47-10			
87-002-225-010	DIODE, DBF 40C-K10			C222	87-010-374-080	CAP, E 47-10			
87-001-912-080	ZENER, UTZJ 5.18			C223	87-010-315-080	C-CAP, S 27P-50 CH			
87-020-125-080	C-DIODE, 1SS181			C224	87-010-315-080	C-CAP, S 27P-50 CH			
87-020-027-080	C-DIODE, 1SS184			C225	87-010-260-080	CAP, E 47-25 SME			
87-001-820-010	DIODE, GP15B(F)			C226	87-010-260-080	CAP, E 47-25 SME			
87-001-574-080	DIODE, 1SR139-200			C227	87-016-247-080	C-CAP, O.1-50F			
				C228	87-010-403-080	CAP, E 3.3-50 SME			
				C229	87-010-405-080	CAP, E 10-50 SME			
				C230	87-016-247-080	C-CAP, O.1-50F			
				C231	87-010-184-080	C-CAP, S 3300P-50 B (Z)			
				C232	87-010-184-080	C-CAP, S 3300P-50 B (Z)			
				C233	87-010-197-080	C-CAP, S 0.01-25 B (Z)			
				C234	87-010-197-080	C-CAP, S 0.01-25 B (Z)			

REF. NO	PART NO.	カソリ NO.	DESCRIPTION	REF. NO	PART NO.	カソリ NO.	DESCRIPTION
△	87-033-213-080		CLAMP, FUSE, SMK (HE, LH)		MISCELLANEOUS		
	82-304-743-010		TERMINAL, 1P	△	87-050-034-010		AC CORD ASSY, E (HE, HR, E)
△F1	87-035-364-010		FUSE, 1. 6A 250V (HE, LH)	△	87-050-016-010		AC CORD ASSY, E (EE, Z)
△F1	87-035-366-010		FUSE, 2. 5A 250V T E/K (HE, LH, HR)	△	87-050-029-010		AC CORD ASSY, K 3P(K)
PT-2 C. B				△	87-034-749-010		AC CORD, H W/PLUG (LH)
R998	87-022-184-080		RES, METAL 0.33-1W (HE, LH)	△	87-085-184-010		BUSHING, AC CORD D (LH)
R998	87-022-050-080		RES, METAL 1W-0.22J (HR, K, EE, E, Z)	△	87-085-185-010		BUSHING, AC CORD E (EXCEPT LH)
SW C. B (HE, LH, HR)				FC1	89-VT5-202-010		BUSHING, CORD
△SW901	87-036-173-010		SW, SL 2-2-4 SDKG (HE, LH, HR)	△PT1	82-NT1-641-010		F-CABLE 5P-1.25
				△PT1	82-NT2-608-010		PT, 2NT-2 EKZ (K, EE, E, Z)
				△PT1	82-NT2-606-010		PT, 2NT-2 H (HE, LH)
				△PT1	82-NT2-609-010		PT, 2NT-2 HR (HR)

TRANSISTOR ILLUSTRATION

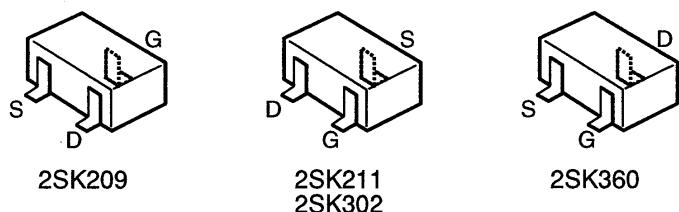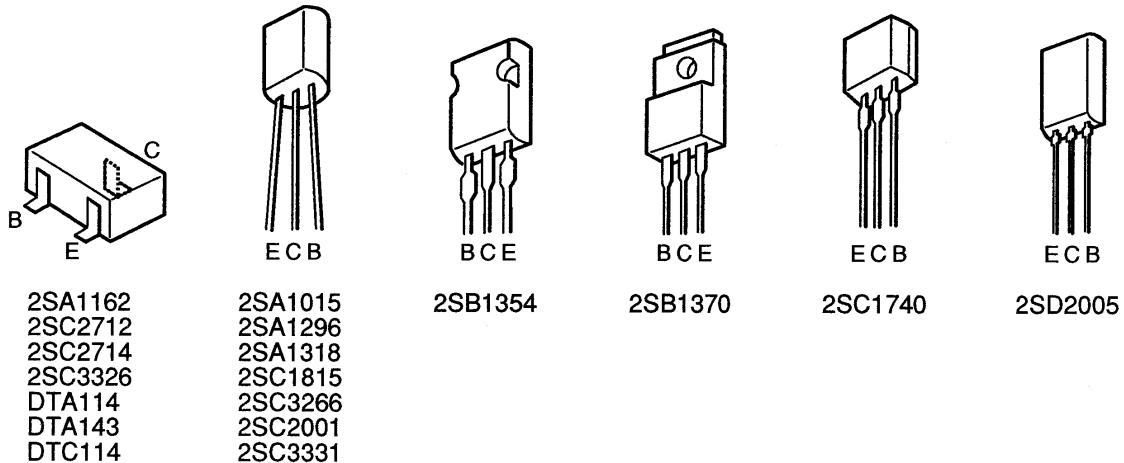


○ チップ抵抗部品コード／CHIP RESISTOR PART CODE

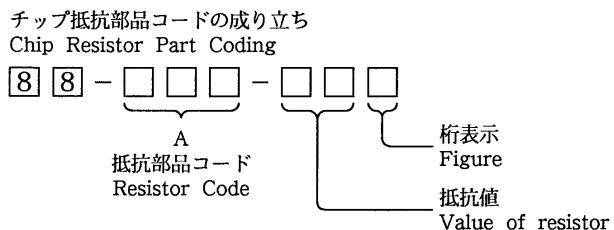

チップ抵抗
Chip resistor


Wattage 容量	Type 種類	Tolerance 許容誤差	Symbol 記号	Dimensions / 尺寸 (mm)			Resistor Code : A 抵抗コード : A
				Form / 外形	L	W	
1/32W	1608	± 5 %	CJ		1.6	0.8	0.35
1/10W	2125	± 5 %	CJ		2	1.25	1.45
1/8W	3126	± 5 %	CJ		3.2	1.6	0.5 ~0.7

SCHMATIC DIAGRAM – 1 (MAIN : HE, LH, HR, U)

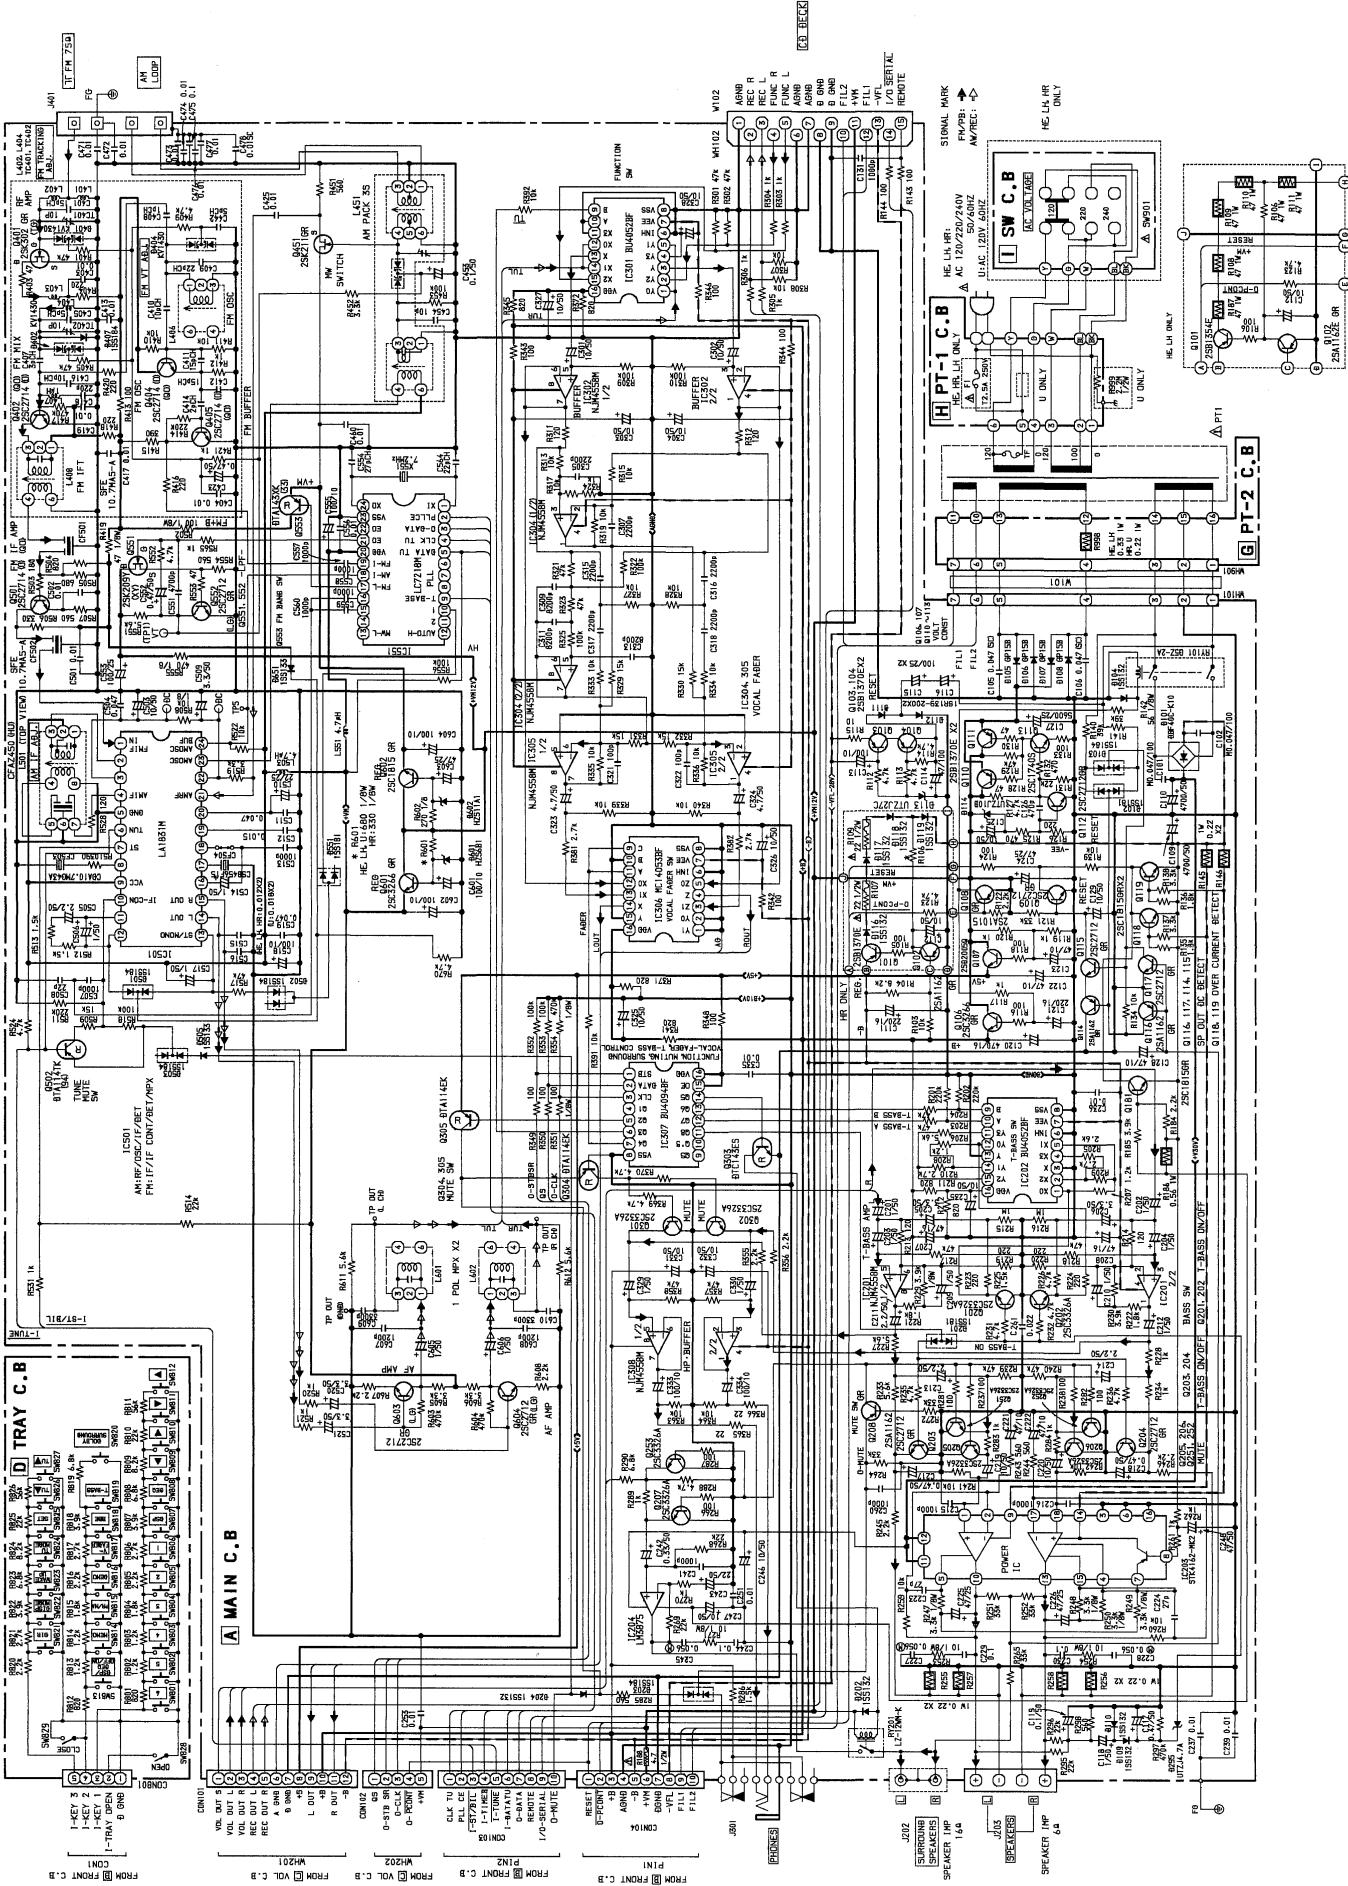


WIRING - 1 (MAIN : HE, LH, HR, U) 1 2 3 4 5 6 7 8 9 10 11 12 13 14

A B C D E F G H I J K
 A MAIN C. B C. B

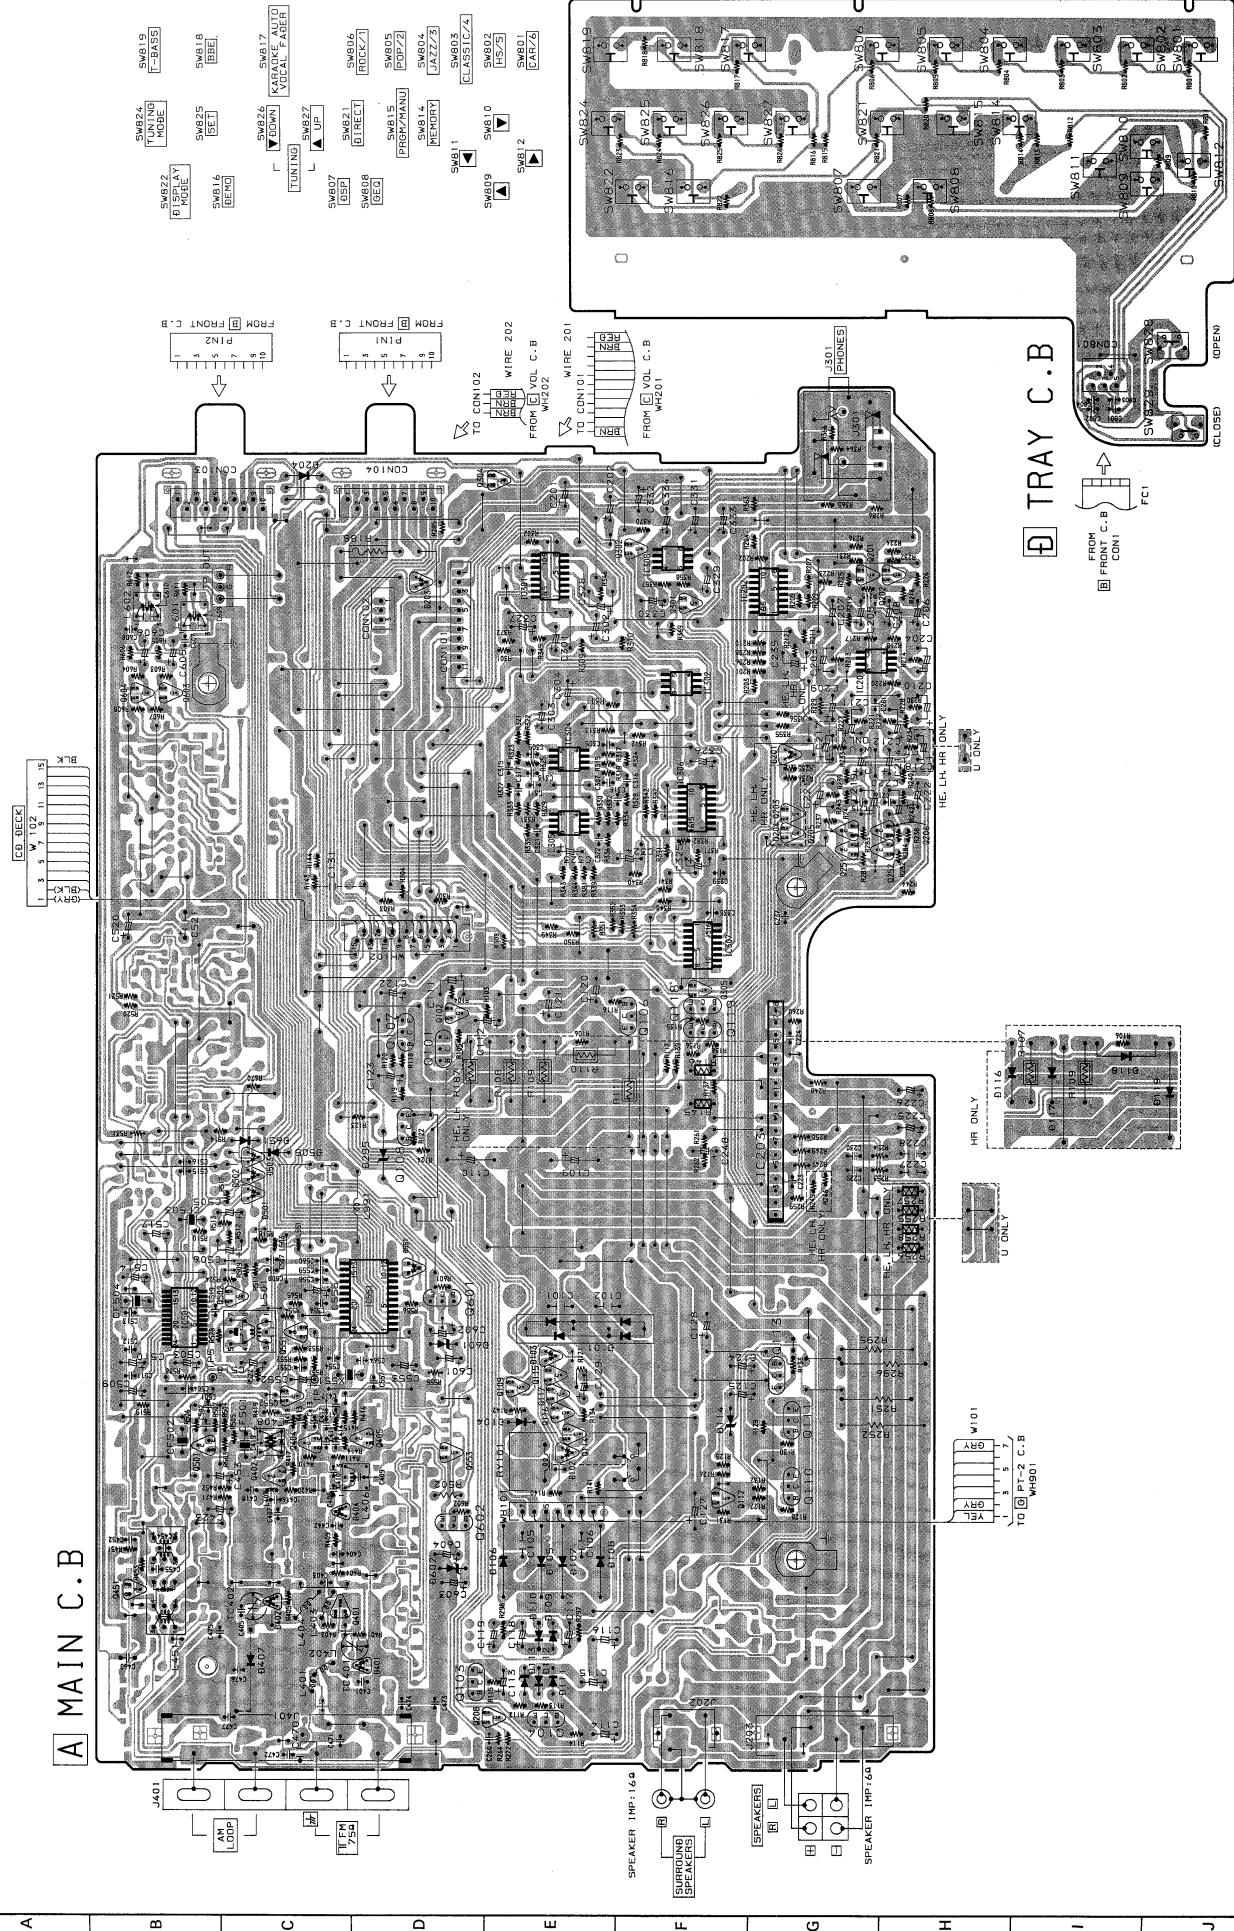

11 12

SCHEMATIC DIAGRAM – 2 (MAIN : E, K)

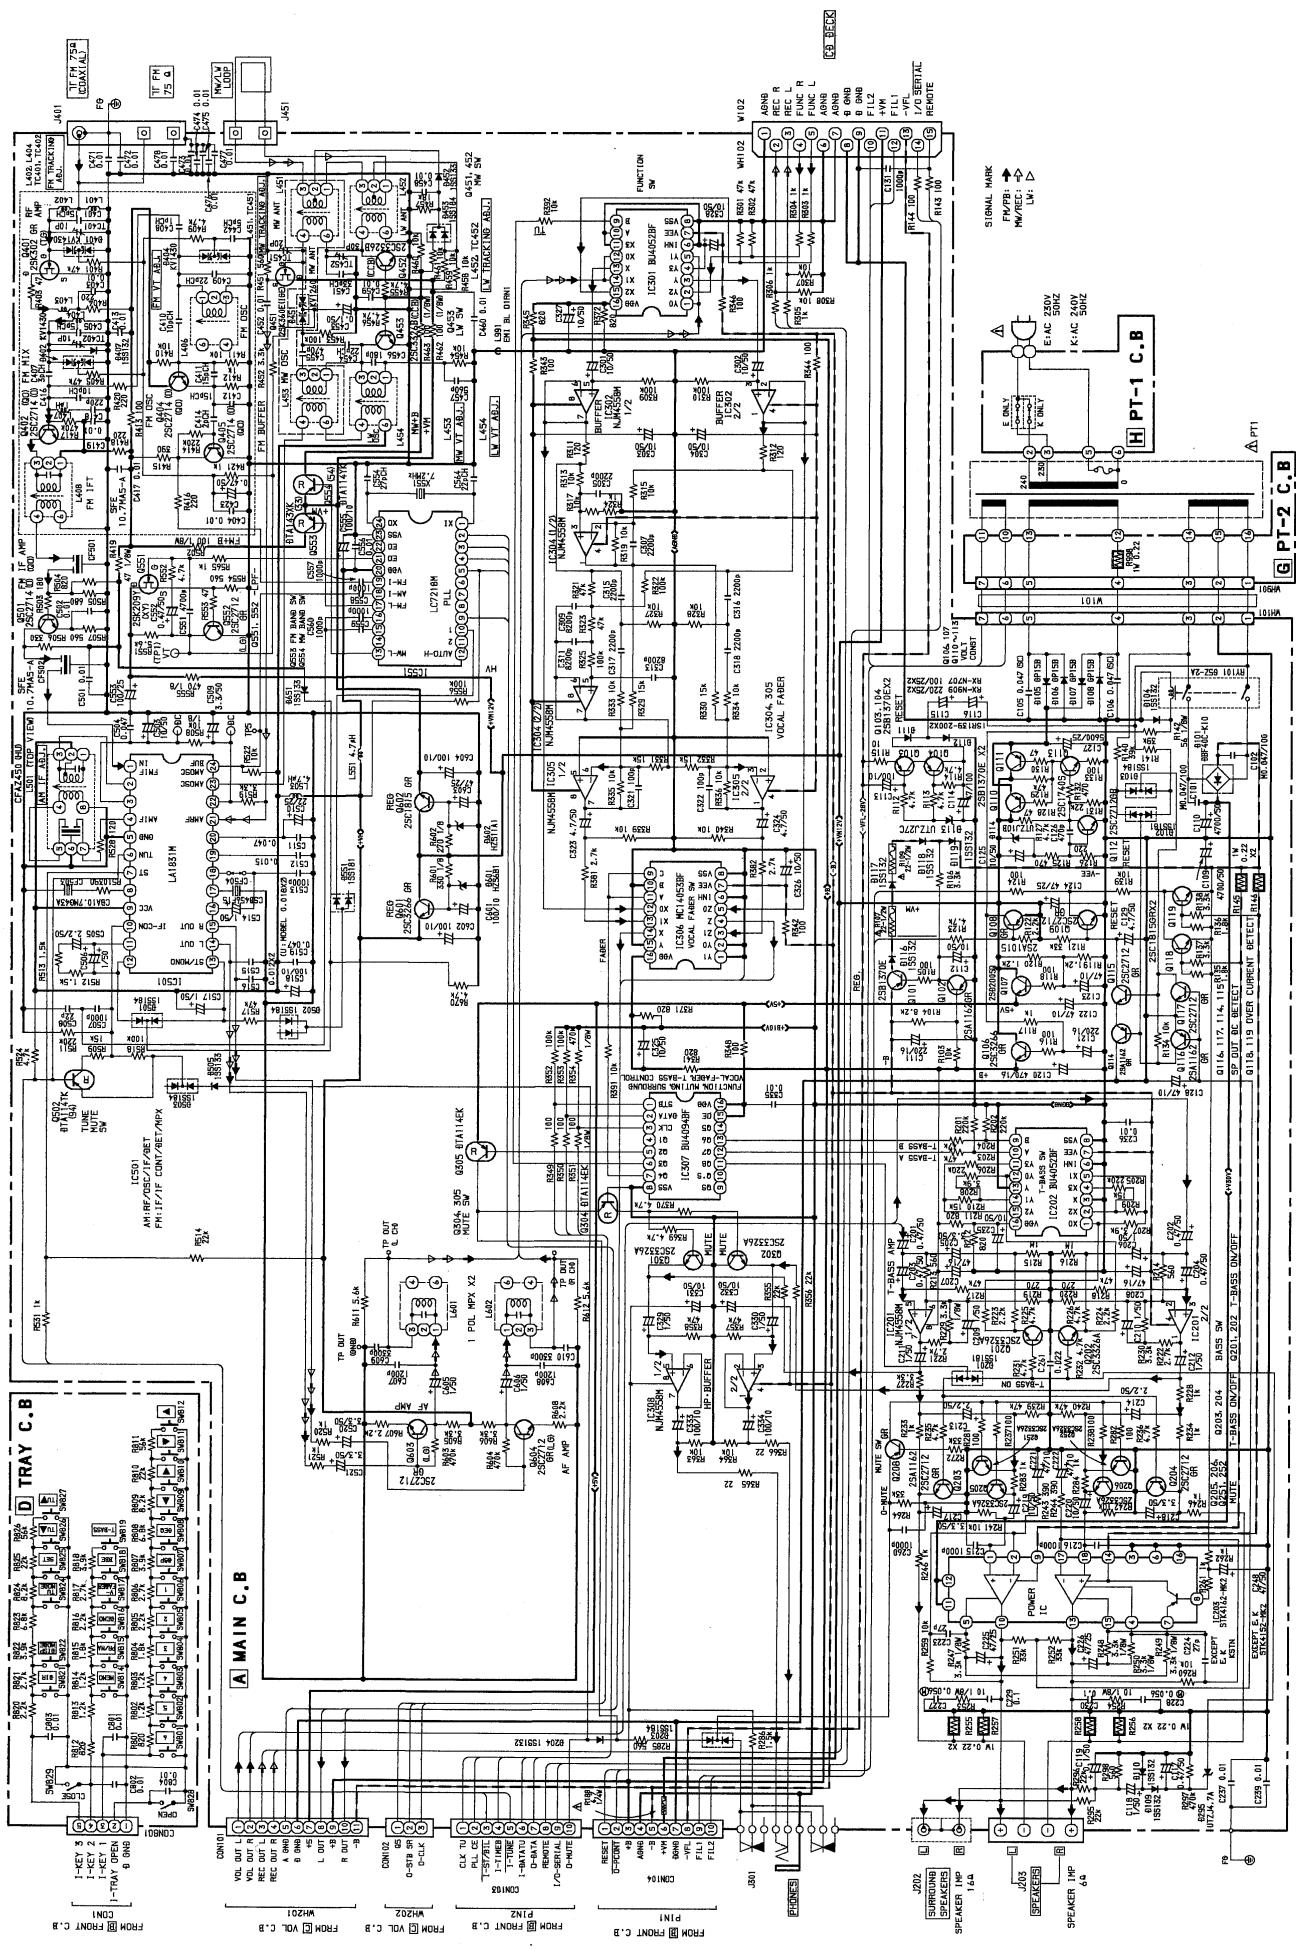


WIRING_1


MAIN C. B 2 (MAN : E, K)
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14




A MAIN C. B

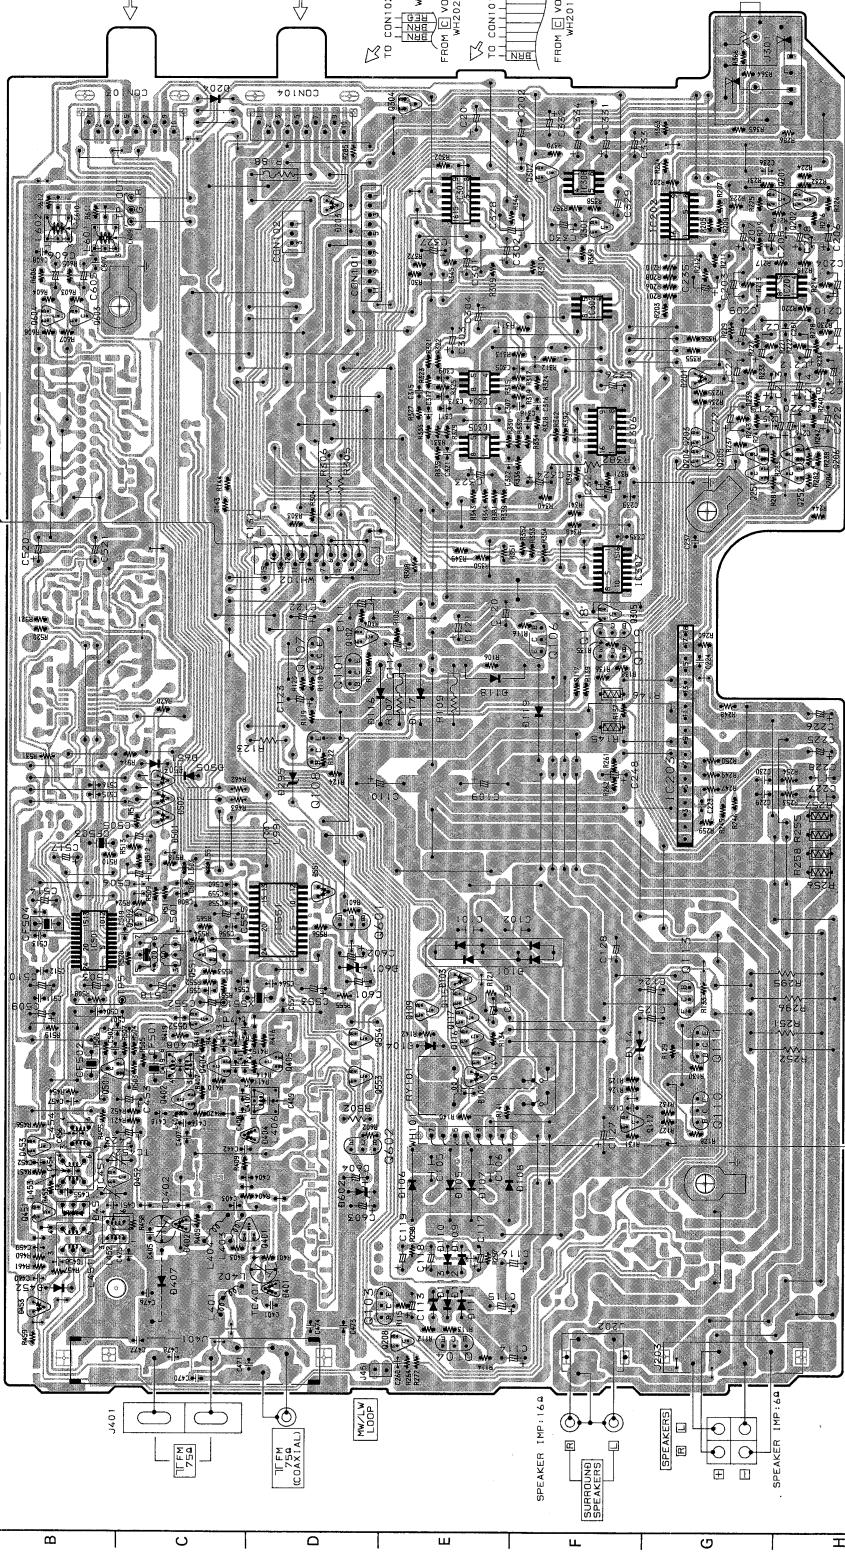


B BECK

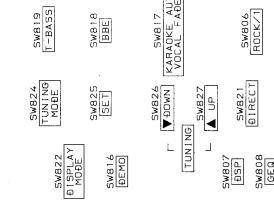

SWB1 (BEMO)
 SWB2 (DISPLAY MODE)
 SWB3 (SE)
 SWB4 (DIRECT)
 SWB5 (POP2)
 SWB6 (GND)
 SWB7 (BYP)
 SWB8 (GND)
 SWB9 (H/S)
 SWB10 (L)
 SWB11 (CLASS C)
 SWB12 (L)
 SWB13 (H/S)
 SWB14 (MEMORY)
 SWB15 (PROM/MANU)
 SWB16 (BYP)
 SWB17 (KAROKE/AUTO VOCAL/FABER)
 SWB18 (BYP)
 SWB19 (TUNING MODE)
 SWB20 (TUNING)
 SWB21 (L)
 SWB22 (DISPLAY MODE)
 SWB23 (L)
 SWB24 (OPEN)
 SWB25 (CLOSE)
 SWB26 (DOWN)
 SWB27 (UP)
 SWB28 (H/S)
 SWB29 (L)
 SWB30 (L)

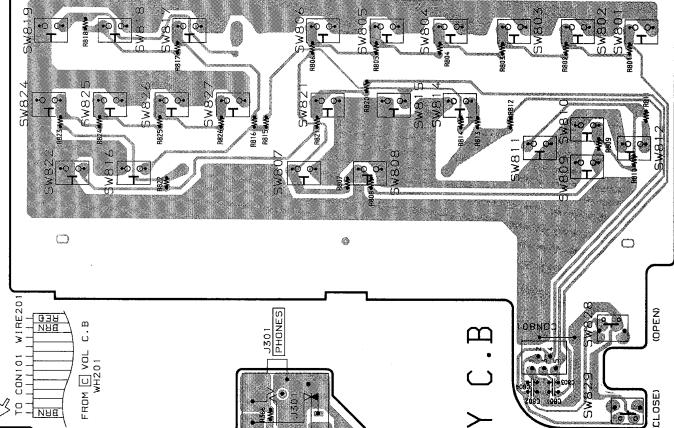


D TRAY C. B




E CON1

SCHEMATIC DIAGRAM – 3 (MAIN : Z)

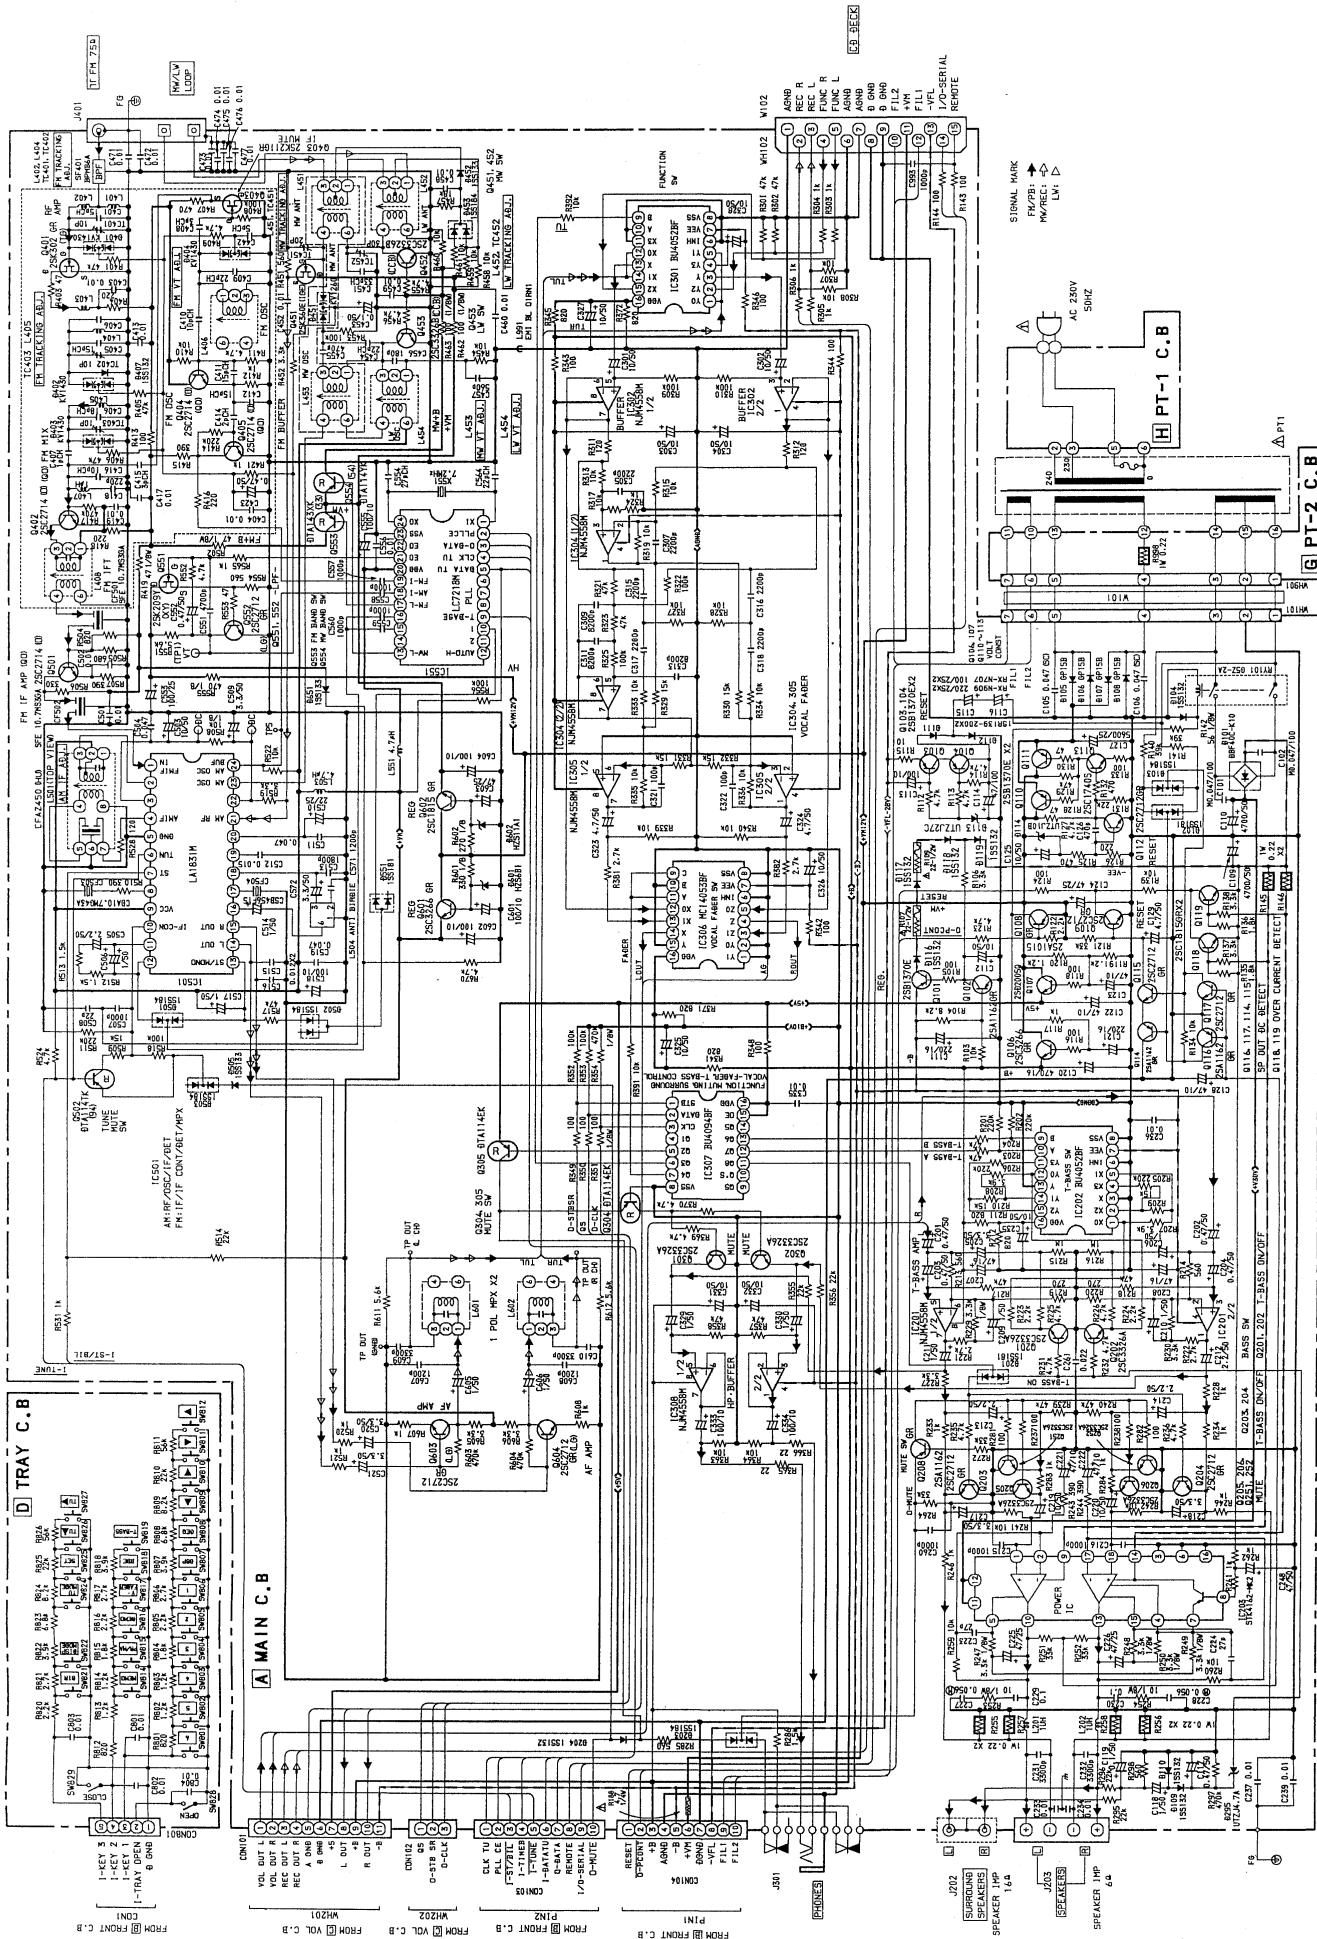


WIRING₁ – 3 (MAIN ; Z) 3 4 5 6 7 8 9 10 11 12 13 14


A MAIN C. B

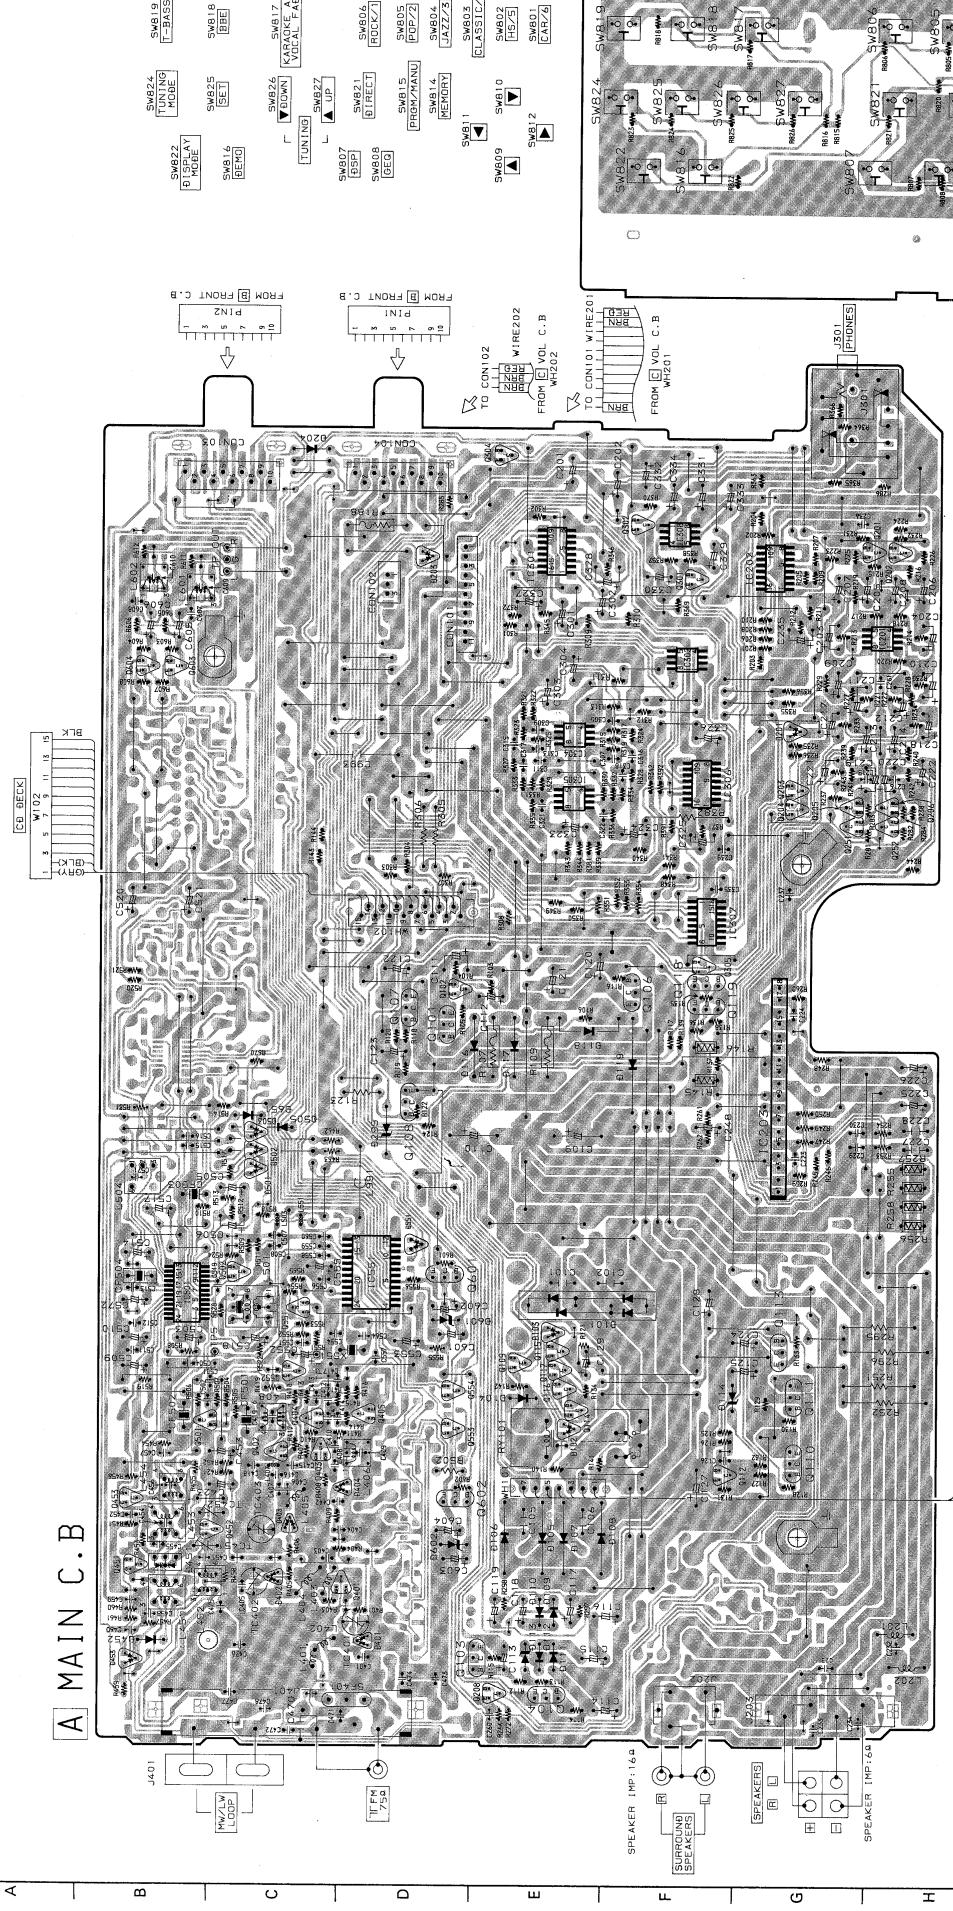

B TRAY C. B


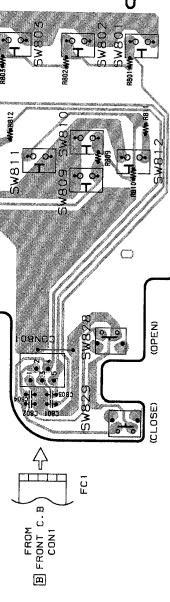


SCHEMATIC DIAGRAM – 4 (FRONT)


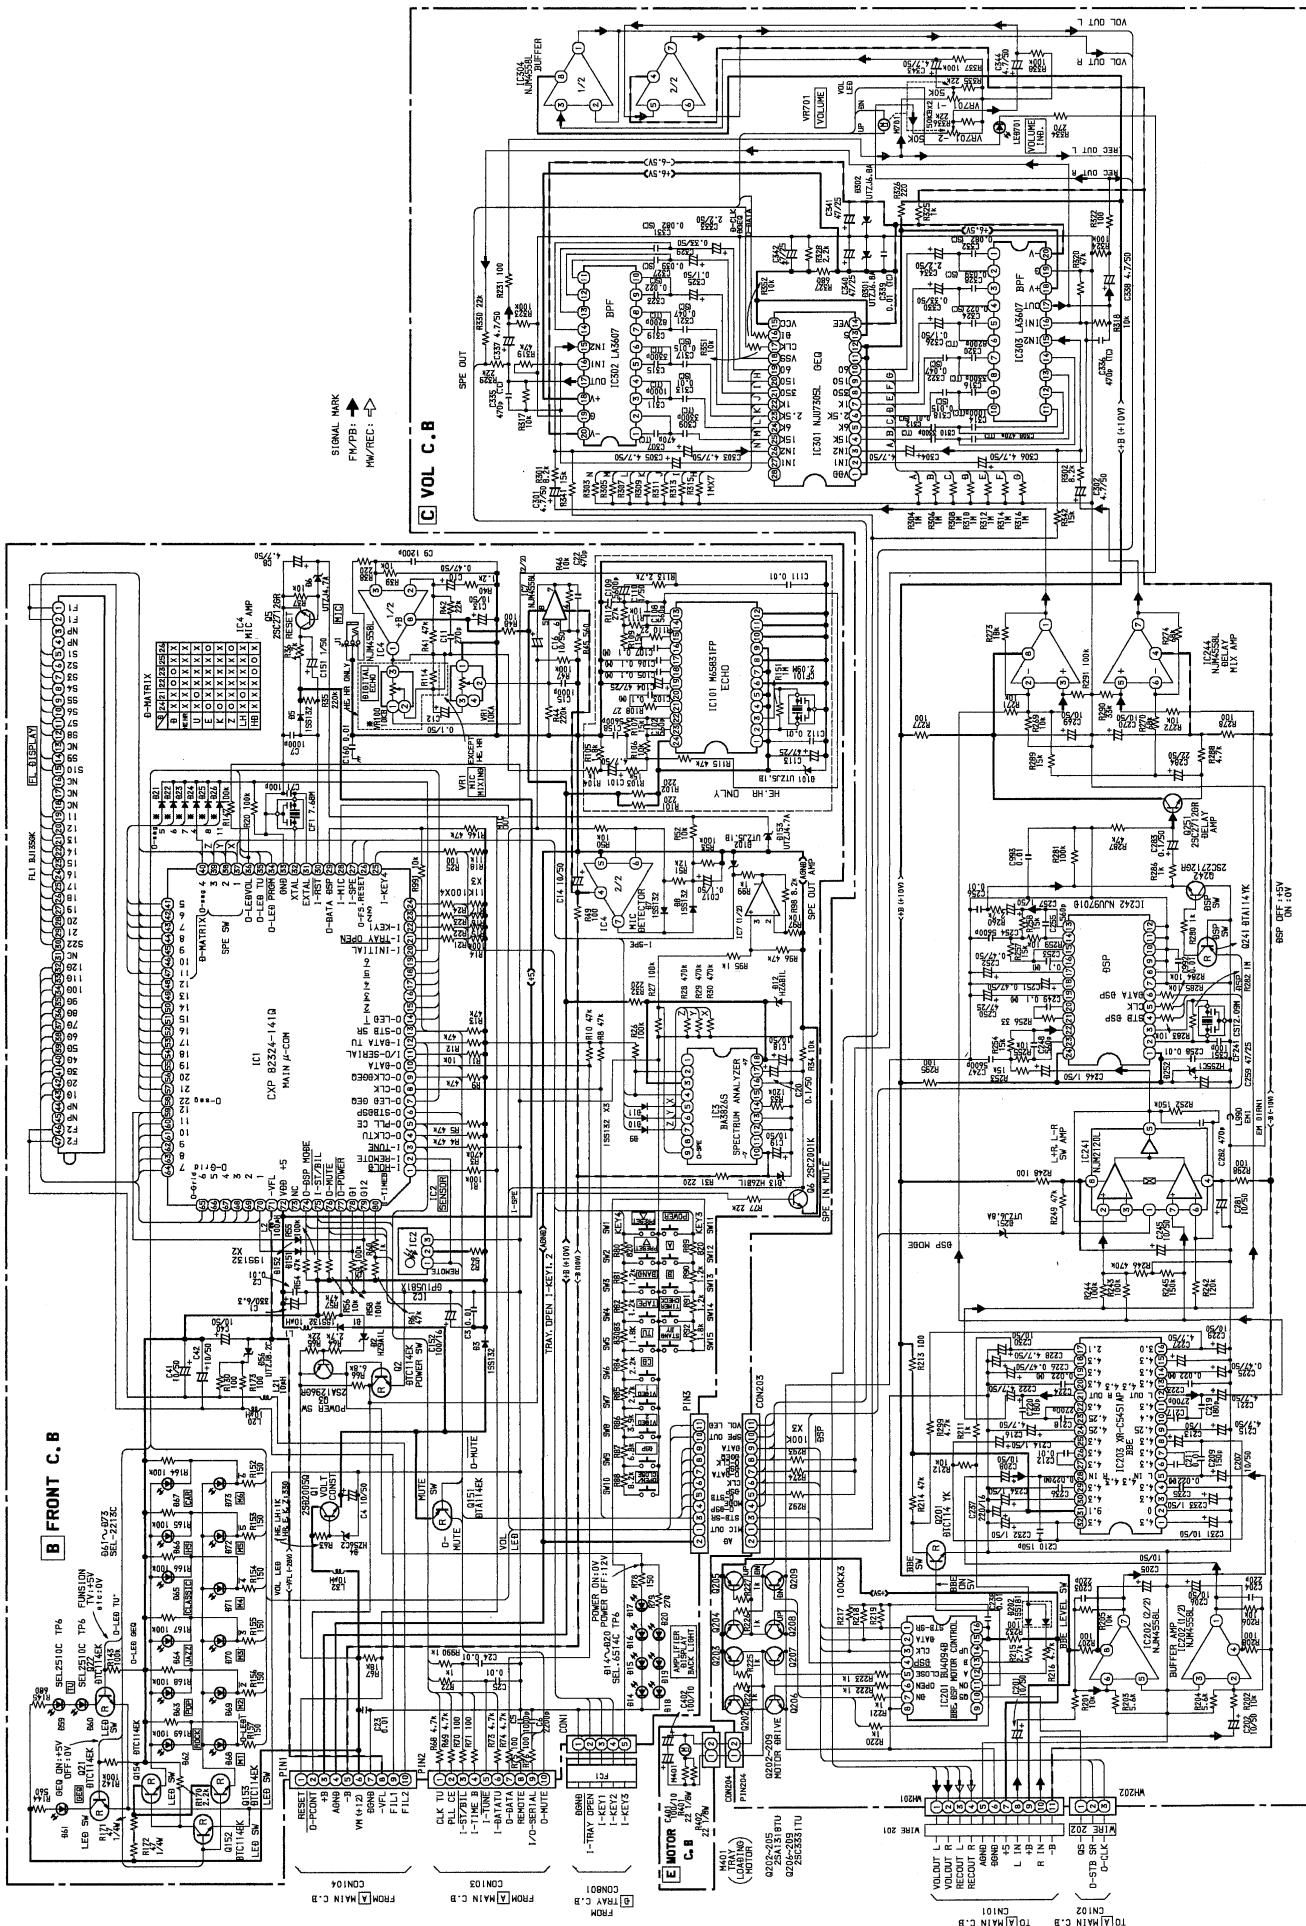


WIRING 1 - 4 (FRONT) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |

B FRONT C.B

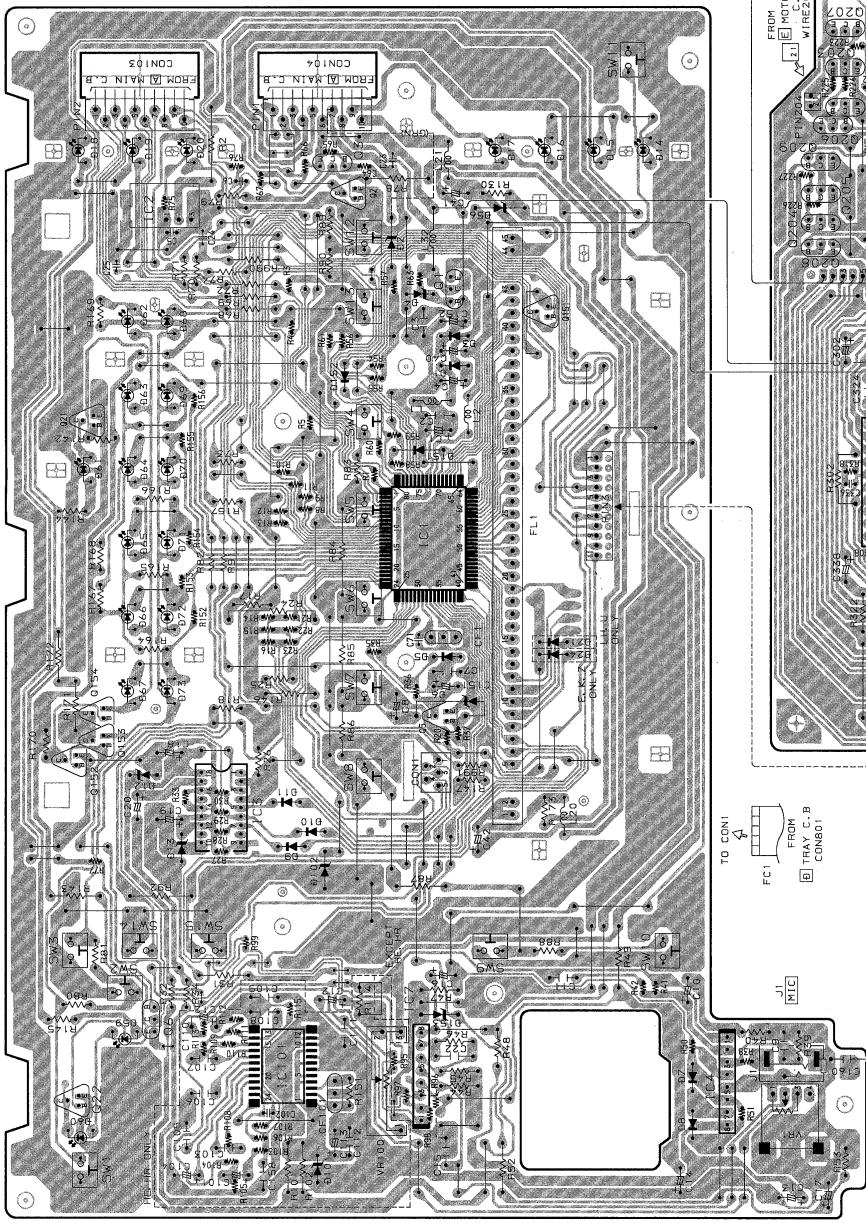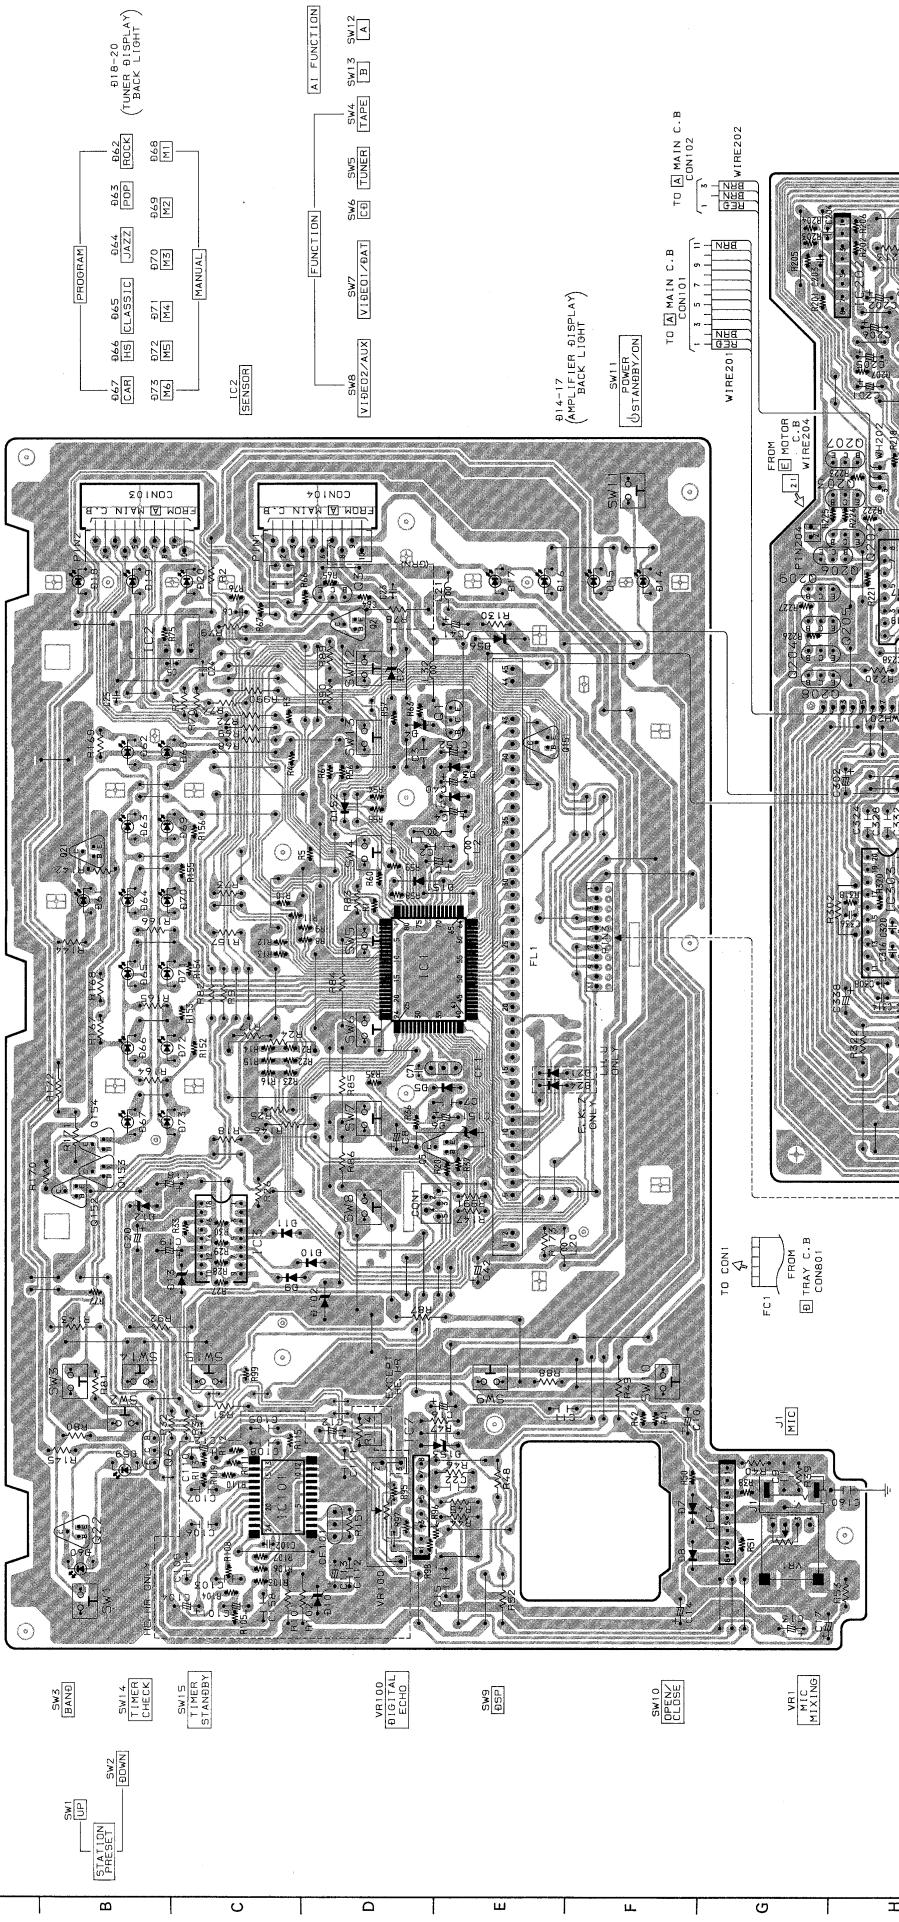


E MOTOR C.B

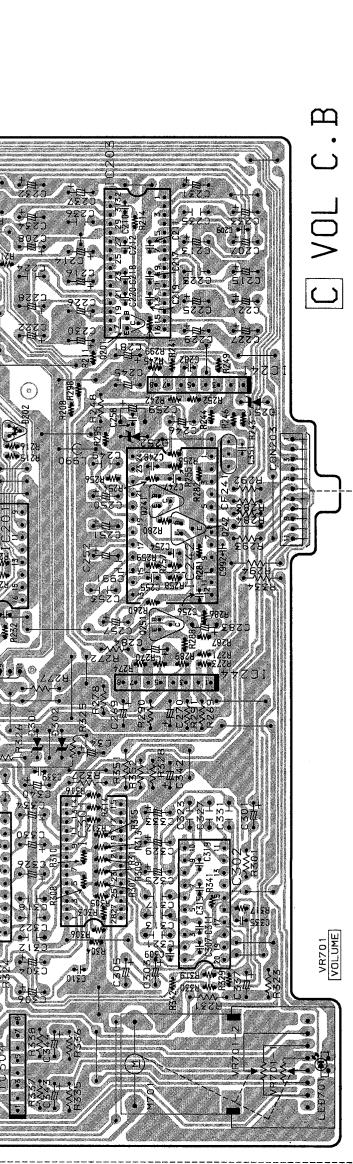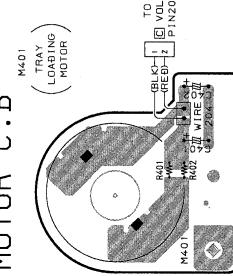


C VOL C.B

WIRING - 5 (POWER)

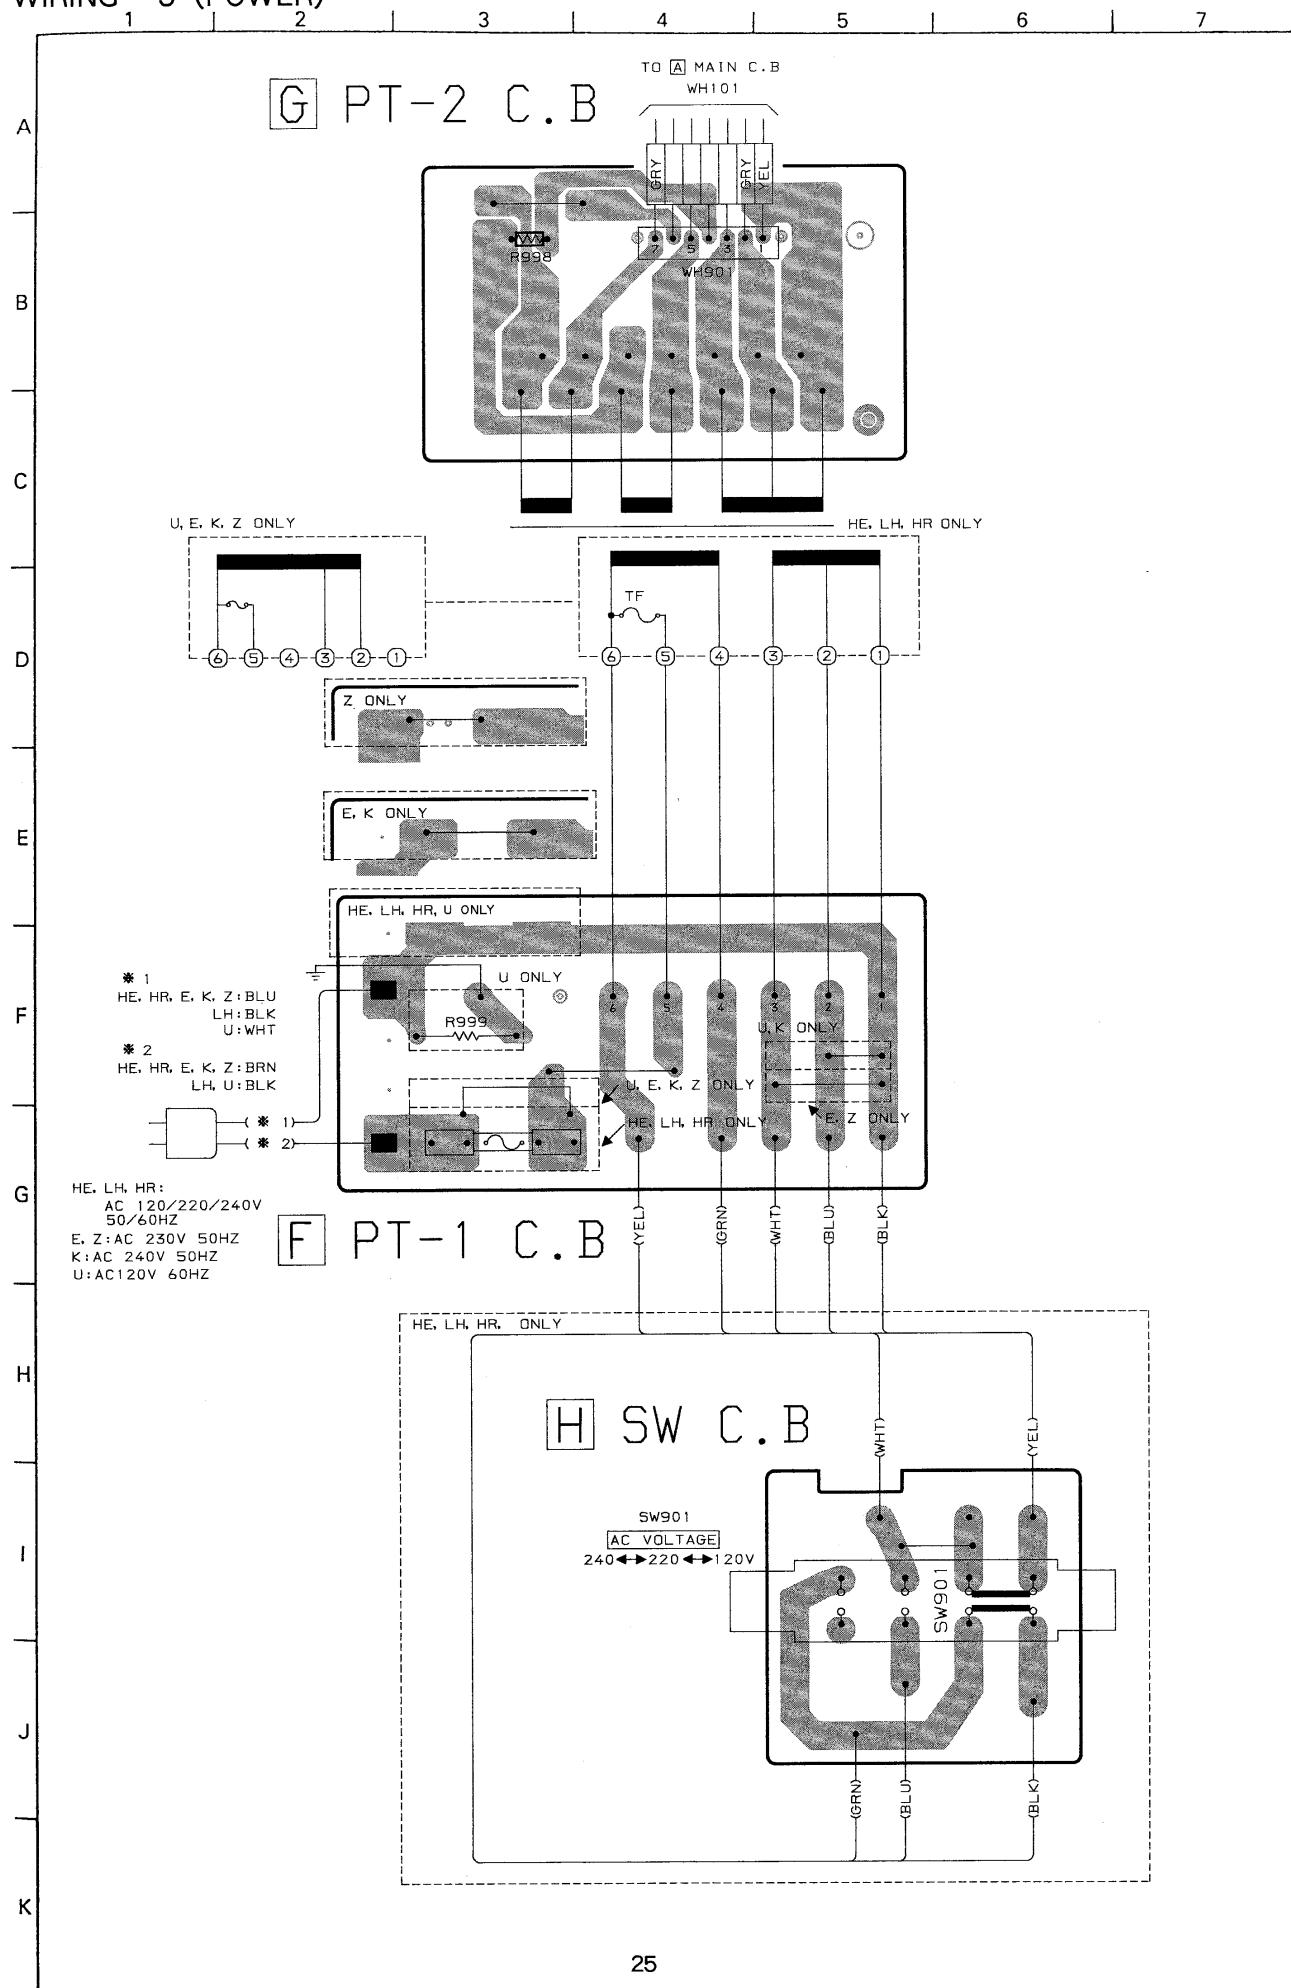

FL (BJ135GK) GRID ASSIGNMENT / ANODE CONNECTION

GRID ASSIGNMENT

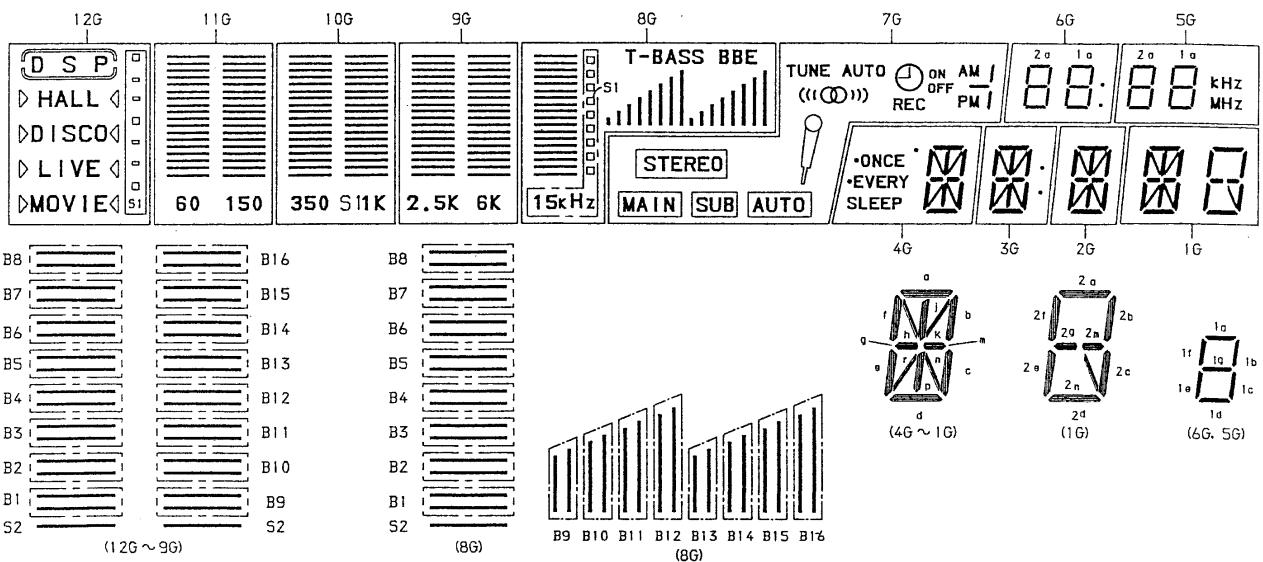

ANODE CONNECTION

	12G	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G
S1	MOVIE	B1	B1	B1	B1	/	-	-	ONCE	-	-	2g, 2m
S2	MOVIE	B2	B2	B2	B2	-	2f	2f	n	n	n	n
S3	LIVE	B3	B3	B3	B3	-	2c	2c	r	r	r	r
S4	DISCO	B4	B4	B4	B4	o (F)	MHz	c	c	c	c	c
S5	HALL	B5	B5	B5	B5	PM	2d	2d	m	m	m	m
S6	DSP	B6	B6	B6	B6	o	1b	1b	b	b	b	b
S7	HALL	B7	B7	B7	B7	AUTO	1c	1c	j	j	j	j
S8	HALL	B8	B8	B8	B8	((∞))	1d	1d	a	a	a	a
S9	DSP	B9	B9	B9	B9	STEREO	-	-	o (ONCE)	-	-	2a
S10	DSP	B10	B10	B10	B10	-	2a	2a	d	d	d	d
S11	-	B11	B11	B11	B11	-	2g	2g	p	p	p	p
S12	-	B12	B12	B12	B12	/	o (L)	KHz	e	e	e	e
S13	-	B13	B13	B13	B13	AM	2e	2e	g	g	g	g
S14	-	B14	B14	B14	B14	OFF	1f	1f	f	f	f	f
S15	-	B15	B15	B15	B15	REC	1g	1g	k	k	k	k
S16	-	B16	B16	B16	B16	TUNE	1e	1e	h	h	h	h
S17	S1	S1	S1	S1	S1	MAIN	-	-	SLEEP	-	-	2b
S18	-	S2	S2	S2	S2	AUTO	-	-	o (EVERY)	-	-	2n
S19	-	S3	S3	S3	-	SUB	-	-	EVERY	-	-	2d
S20	-	-	-	-	T-BASS	ON	1a	1a	o	o (L)	-	2f
S21	-	-	-	-	BBE	-	2b	2b	-	o (F)	-	2e
S22	-	-	-	-	-	-	-	-	-	-	-	2c

IC, DESCRIPTION

IC,CXP82324 – 141Q


Pin No.	Pin Name	I/O	Description
1	I-HOLD	I	The present state is backed up when "L" is input.
2	I-REMOTE	I	Remote control signal input.
3	I-TUNE	I	Frequency display and sending data to PLL are stopped during tuner reception (when "L" is input).
4	O-CLK TU	O	TU PLL clock.
5	O-PLL CE	O	TU PLL chip enable.
6	O-STB DSP	O	DSP chip enable.
7	O-LED GEQ	O	Output to light GEQ LEDs. "H" to light.
8	O-CLK	O	CLK for shift register and DSP.
9	O-CLKDGEQ	O	CLK for electronic GEQ.
10	O-DATA	O	Data for shift register, TU and electronic GEQ.
11	I/O-SERIAL	I/O	I/O for FD communication.
12	I-DATA TU	I	Data input from TU PLL.
13	O-STB SR	O	Shift register chip enable.
14~19	O-LED T~6	O	Output to light GEQ LEDs. "L" to light.
20	I-INITIAL	I	Input to initially set the micro-computer shipment destination.
21	I-TRAY OPEN	I	CONTROL TRAY OPEN detect switch input. "L" when TRAY OPEN.
22~25	I-KEY 1~4	I	KEY A/D input.
26	O-FS•RESET	O	SPECTRUM ANALYZER IC RESET output.
27	I-SPE	I	SPECTRUM ANALYZER IC OUT input.
28	I-MIC	I	MIC LEVEL input.
29	O-DATA DSP	O	DSP DATA.
30	I-RST	I	RESET input. Reset when "L".
31	EXTAL	O	Oscillation crystal connection pin.
32	XTAL	I	Oscillation crystal connection pin.
33	GND	—	GND.
34	O-LED PRGM	O	Signal output to light electronic GEQ PRESET LED. "L" when PRESET PRGM lights.
35	O-LED TU	O	Signal output to light TU PRESET LED. "H" when TUNER functions.
36	O-LED VOL	O	Signal output to light VOL LED. "H" when VOL LED lights.
37~39	S1/SPESN X S3/SPESN Z	O	Segment output and SPECTRUM ANALYZER IC CONTROL output to light FL.
40~44	S4~8	O	Segment output and the initial set D-MATRIX output to light FL.
45~46	S9~10	O	Segment output to light FL.
47	S11	O	Segment output and the initial set D-MATRIX output to light FL.
48~58	S12~22	O	Segment output to light FL.
59~70	Grid 12~1	O	Grid output to light FL.
71	-VFL	I	-VFL input for FL (-28V).
72	VDD	I	+5V micro-computer power supply.
73	NC	I	Not used.
74	O-DSP MODE	O	"H" or "L" output depending up on DSP mode.
75	I-ST/BILL	I	FL stereo bilingual mark lights when "L" is input.
76	O-MUTE	O	Muting output.
77	O-POWER	O	"L" output during power ON.
78	G1	I	Timing-1 input to light FL.
79	G12	I	Timing-2 input to light FL.
80	I-TIME B	I	CLK (8Hz) input for clock.

See the NSX - D55 (RX - N55) for the IC description below.


	RX - N707	NSX - D55 (RX - N55)
①	IC,LC7218M	IC,LC7218

IC BLOCK DIAGRAM


IC,LA1831M

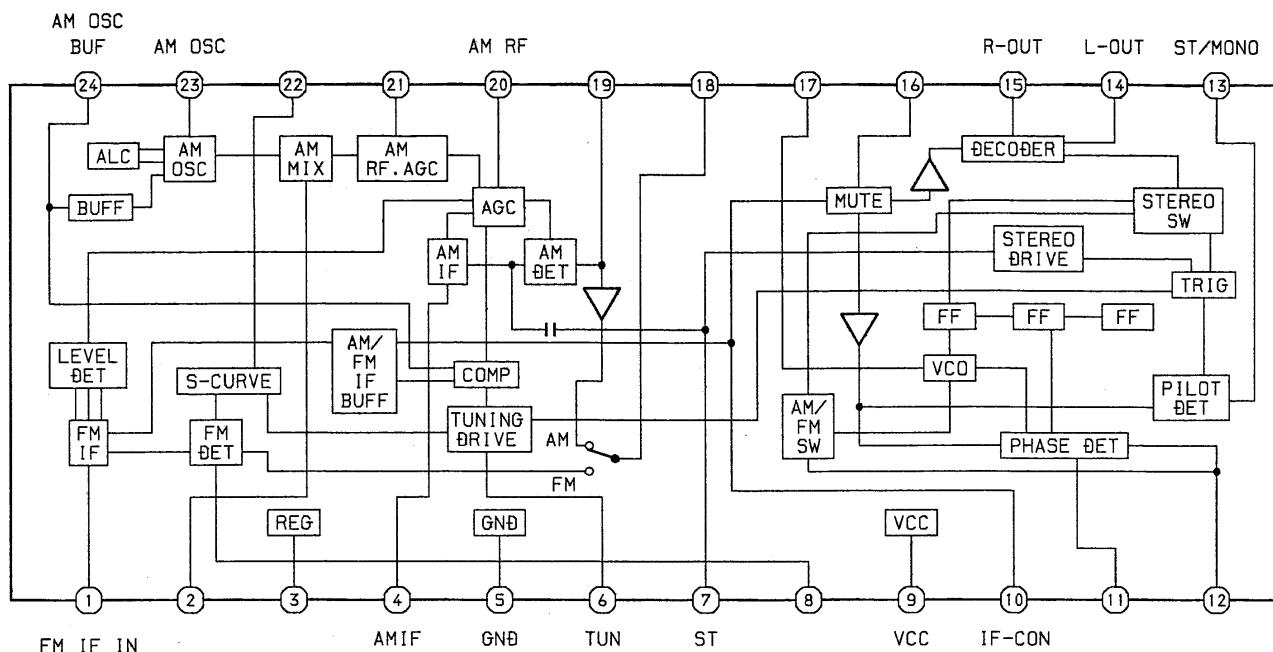


IC,LA3607

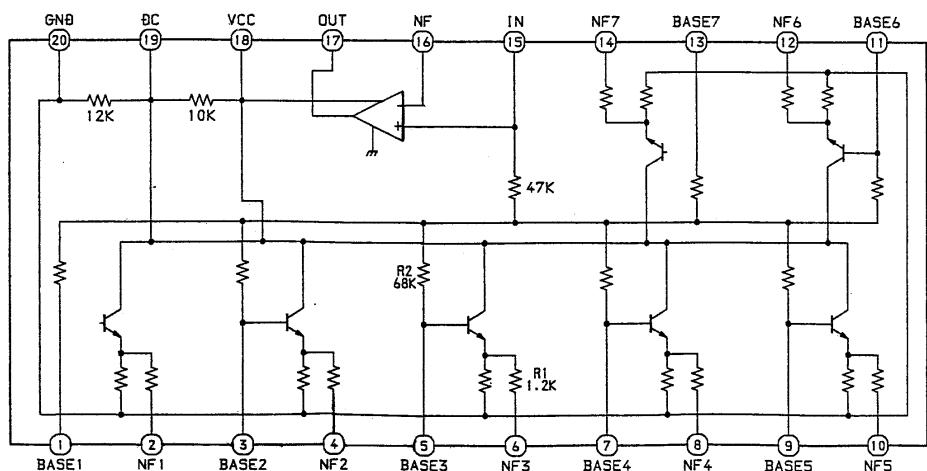

IC,NJU9701D

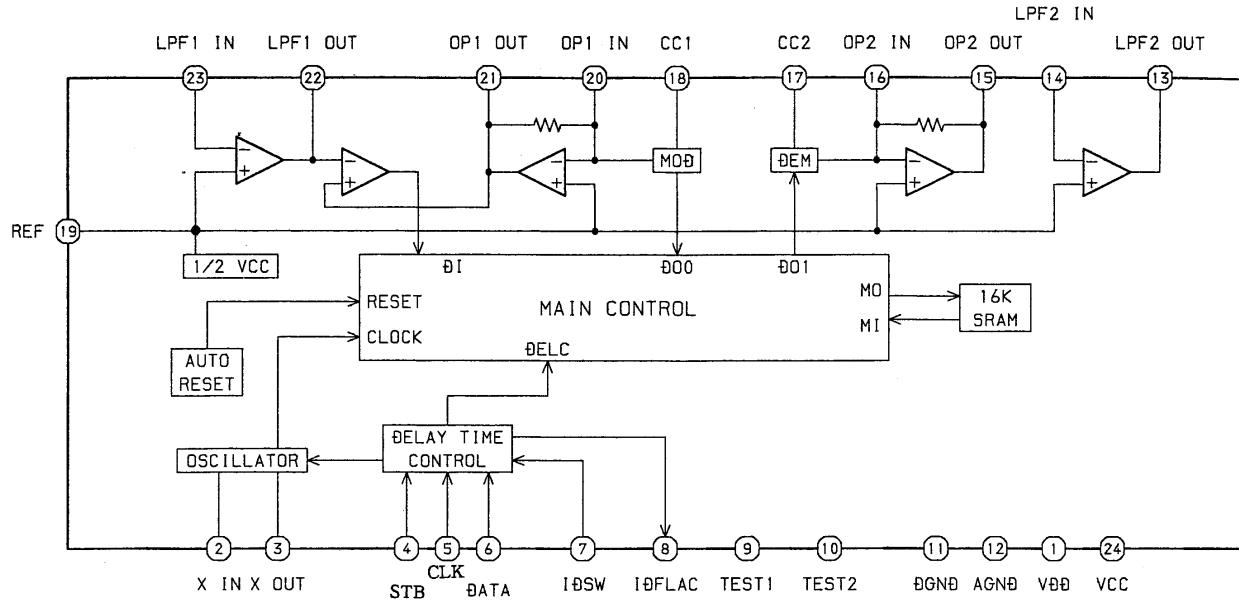


IC,NJU7305

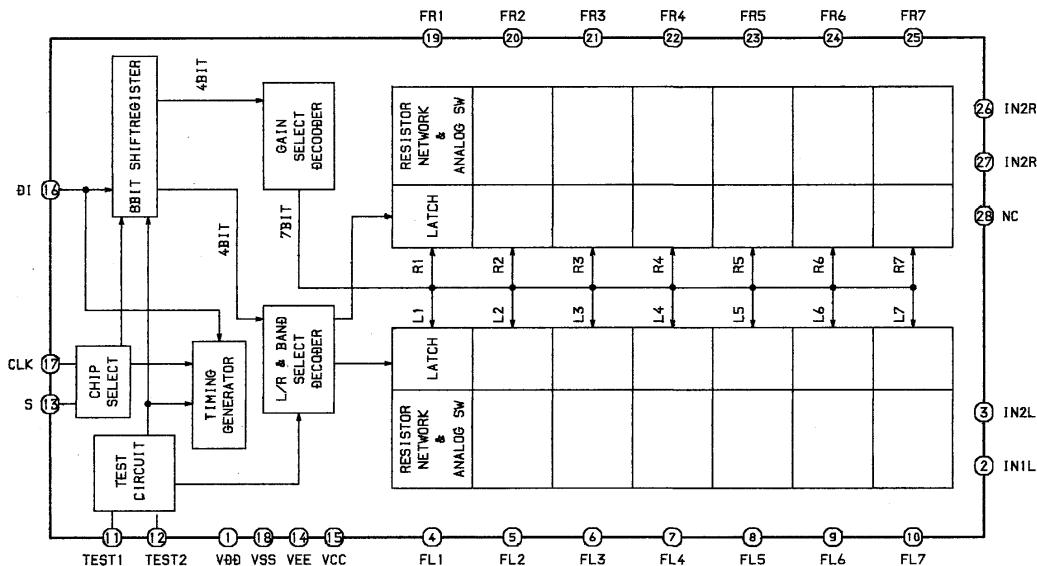

See the NSX - D55 (RX - N55) for the IC Block Diagram below.

	RX - N707	NSX - D55 (RX - N55)
①	IC,BU4052BF	IC,BU4052B
②	IC,BU4094B	IC,BU4094B
③	IC,BU4094BF	IC,BU4094B

ELECTRICAL ADJUSTMENT (TUNER)

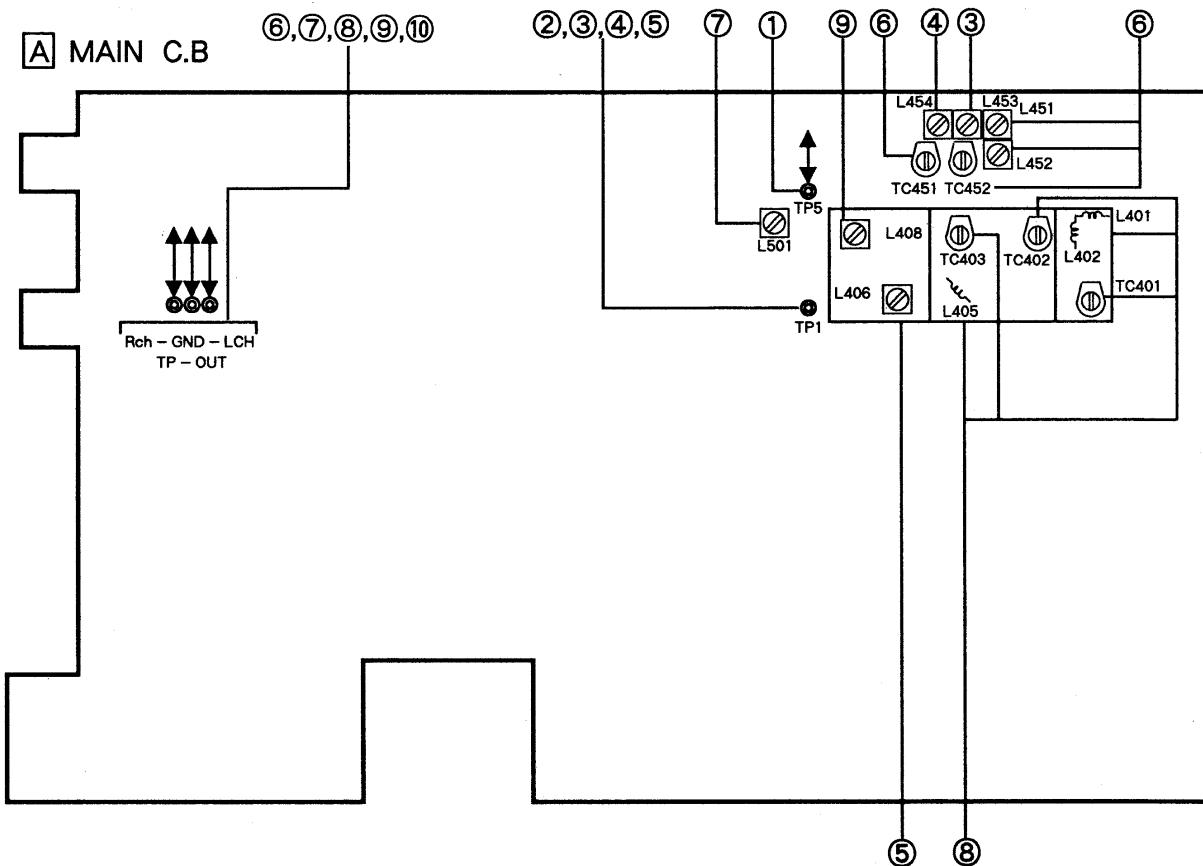

<TUNER SECTION>

Initialized condition

GEQ VR : OFF
BBE SW : OFF
MIC VR : Minimum
BALANCE : Center
MAIN VR : Variable
DOLBY NR SW : OFF
T - BASS : OFF

1. Clock Check

Settings : • Test point : TP5
Method : Set to MW 1602kHz (HE,HR,E,K,Z),
1710kHz (LH,U) and adjust so that
the test point becomes $2052\text{kHz} \pm 0.05\text{kHz}$
(HE,HR,E,K,Z), $2160\text{kHz} \pm 0.05\text{kHz}$
(LH,U).

2. MW VT Check (HE,LH,U ONLY)

Settings : • Test point : TP1
Method : Set to MW 531kHz and check so that
the test point becomes $1.1V \pm 0.2V$.

3. MW VT Adjustment (E,K,Z ONLY)

Settings : • Test point : TP1
• Adjustment location : L453
Method : Set to MW 531kHz and adjust so that
the test point becomes $1.1V \pm 0.05V$.

4. LW VT Adjustment (E,K,Z ONLY)

Settings : • Test point : TP1
• Adjustment location : L454

Method : Set to LW 144kHz and adjust so that the
test point becomes $1.3V \pm 0.05V$.

5. FM VT Adjustment

Settings : • Test point : TP1
• Adjustment location : L406

Method : Set to FM 108MHz and adjust L406
so that the test point becomes
 $9.4V \pm 0.05V$.

6. MW, LW Tracking Adjustment (E,K,Z ONLY)

Settings : • Test point : TP - OUT

MW	L451	603kHz
LW	TC451	1404kHz
LW	L452	144kHz
LW	TC452	290kHz

7. MW/LW IF Adjustment

Settings : • Test point : TP - IF
L501 450kHz

8. FM Tracking Adjustment

Settings : • Test point : TP - OUT
TC401,TC402 108MHz
TC403 108MHz (Z)
L401,L402 87.5MHz
L405 87.5MHz (Z)

9. FM IF Adjustment

Settings : • Test point : TP - OUT
L408 10.7MHz

10. FM Separation Check

Settings : • Test point : TP - OUT
Method : Set to FM 98.0MHz and check the separation at TP - OUT becomes more than 27dB.

PRACTICAL SERVICE FIGRE (TUNER)

TUNER SECTION

< FM SECTION >

IHF Sensitivity : 4dB ± 4dB (87.5MHz)
8dB ± 4dB (87.5MHz) (Z model)
(THD 3%) 4dB ± 4dB (98.0MHz)
6dB ± 4dB (98.0MHz) (Z model)
4dB ± 3dB (108.0MHz)
6dB ± 4dB (108.0MHz)
(Z model)

S/N 50dB Quieting sensitivity :

36dB ± 5dB
(87.5/98.0/108.0MHz)
(46dB Z MODEL) Less than 44dB
(87.5/90.0/108.0MHz)

Signal to noise ratio : (MONO) More than 78dB
(98.0MHz)
(STEREO) More than 64dB
(98.0MHz)

Distortion : (MONO) Less than 0.6%
(98.0MHz)
(STEREO) Less than 0.8%
(98.0MHz)

Stereo separation : More than 27dB (98.0MHz)
Intermediate frequency : 10.7MHz


< AM (MW) SECTION >

Sensitivity : 56dB ± 6dB (603kHz)
(S/N 20dB) 52dB ± 6dB (999kHz)
51dB ± 6dB (1404kHz)
Distortion : Less than 1.5% (999kHz)
Stereo separation : More than 25dB (1kHz)
Intermediate frequency : 450kHz

< LW SECTION > (E,K,Z)

Sensitivity : 63dB ± 5dB (144kHz)
(S/N 20dB) 60dB ± 5dB (198kHz)
60dB ± 5dB (290kHz)
Distortion : Less than 1.5% (198kHz)
Intermediate frequency : 450kHz

MECHANICAL EXPLODED VIEW 1/1

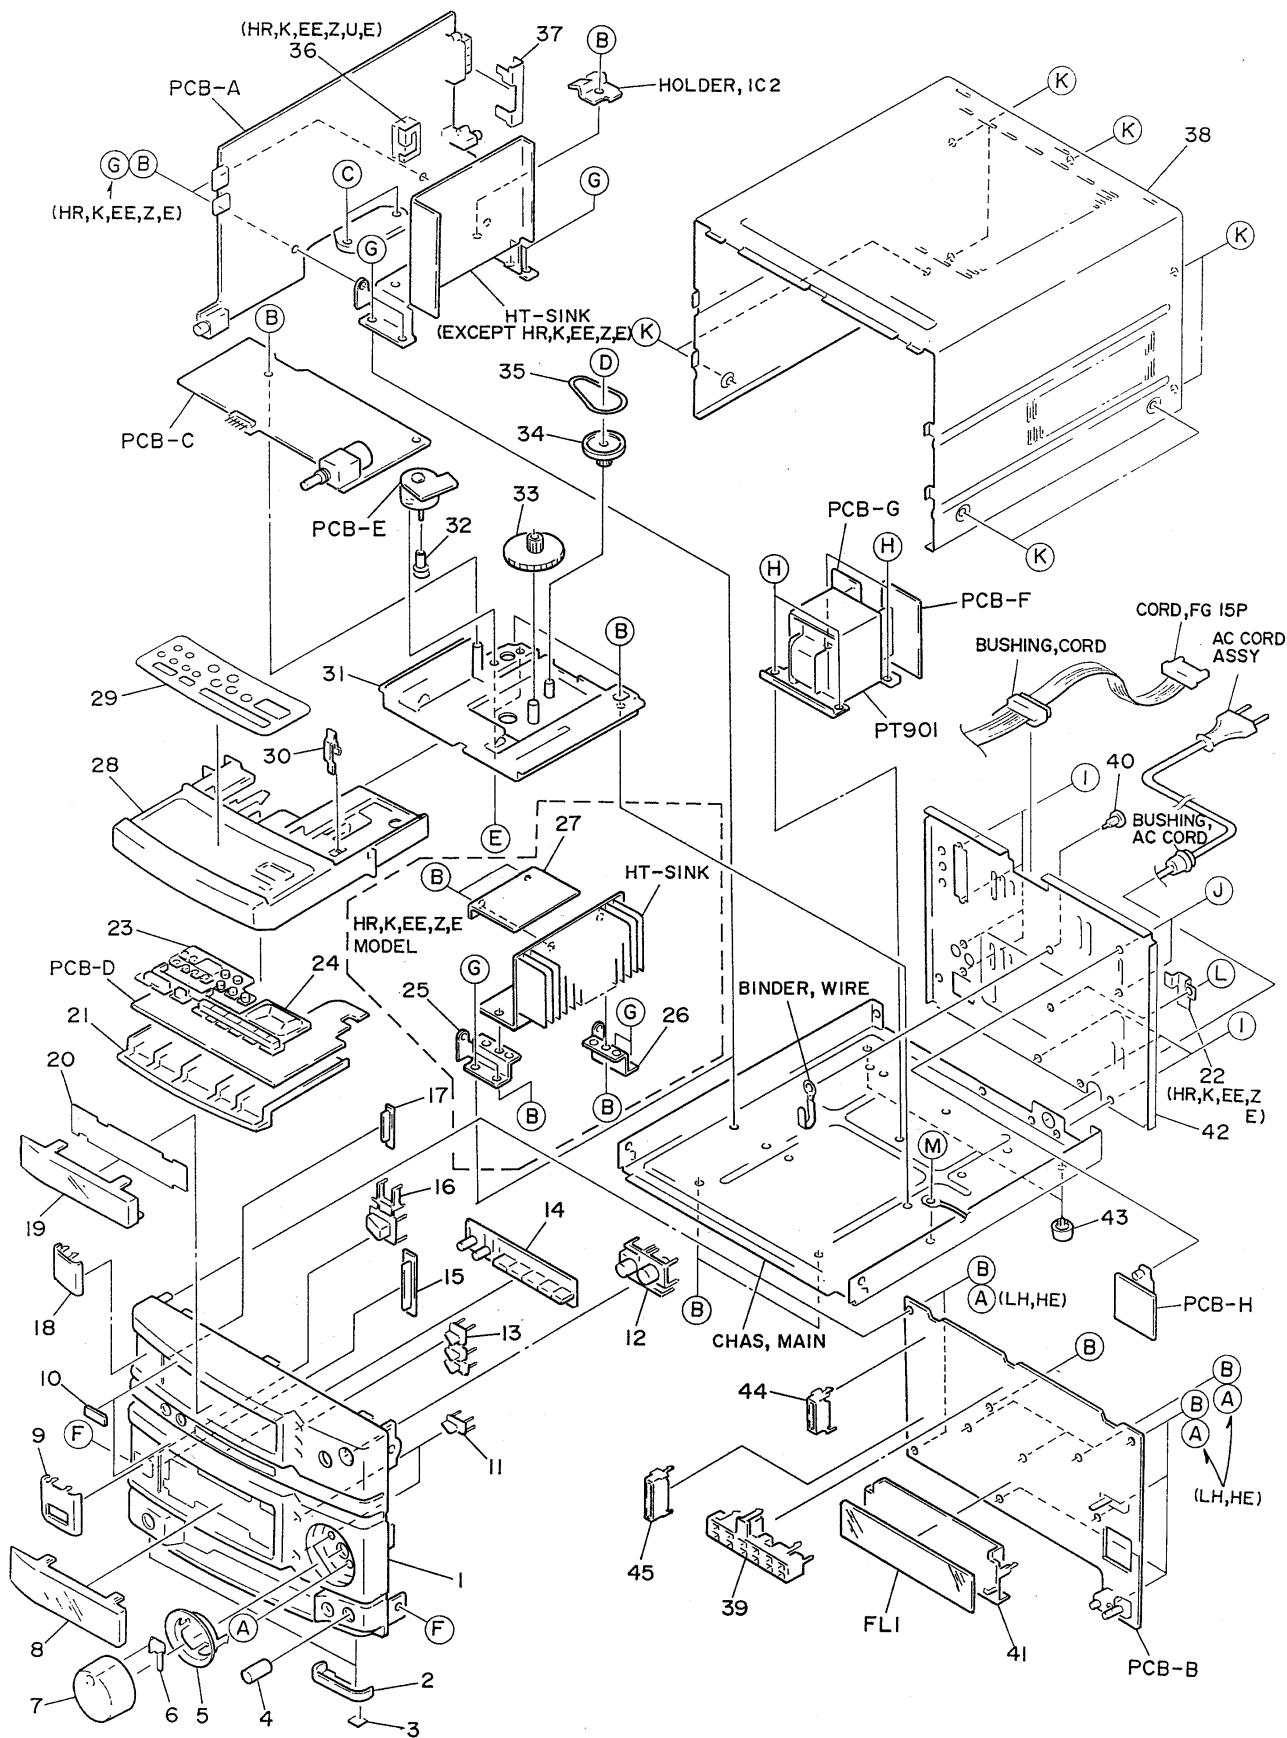

MECHANICAL PARTS LIST 1/1

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カソリ NO.	DESCRIPTION	REF. NO	PART NO.	カソリ NO.	DESCRIPTION
1	82-NT2-056-010	CAB, FR 2[N] (HE)		29	82-NT2-014-110	PLATE, TRAY 2[B]	
1	82-NT2-043-010	CAB, FR 2[ST] (K, E, Z)		29	82-NT2-063-010	PLATE, TRAY 2[N]	
1	82-NT2-002-010	CAB, FR[B] (HE, HR)		29	82-NT2-050-010	PLATE, TRAY 2[ST]	
1	82-NT2-004-010	CAB, FR[B] (U)		30	81-MT3-211-010	LEVER, OPEN	
1	82-NT2-001-010	CAB, FR[B] (LH, K, EE, Z, E)		31	82-NT1-203-110	HLDR, TRAY	
2	82-NT2-064-010	RING, FOOT 2[N]		32	89-VW5-206-010	PULLEY MOTOR	
2	82-NT1-036-010	RING, FOOT[B, ST]		33	82-NT1-204-010	GEAR, LOADING	
3	80-VT1-202-010	FELT, 12.5-15.5-2		34	82-NT1-205-010	PULLEY, LOADING	
4	80-MT3-014-010	KNOB MIC		35	80-WV1-217-010	BELT, SQ 1.5	
5	82-NT2-048-010	RING, VOL 2[N, ST]		36	82-NT2-208-010	WIRE CLAMP[B, ST] (HR, K, EE, Z, U, E)	
5	82-NT1-030-010	RING, VOL[B]		37	81-653-648-010	ANT TERM EARTH[B, ST] (K, EE, Z, E)	
6	82-NE6-016-010	IND, MAIN		37	81-653-638-110	ANT TERM EARTH[B, N] (HE, HR, U, LH)	
7	82-NT1-051-010	KNOB, MAIN[B]		38	82-NT1-063-010	CAB, STEEL[B] (K, EE, Z, E)	
7	82-NT2-060-010	KNOB, VOL 2[N]		38	82-NT1-006-010	CAB, STEEL[B] (HE, HR, U, LH)	
7	82-NT2-047-010	KNOB, VOL 2[ST]		38	82-NT2-057-010	CAB, STEEL[N] (HE)	
8	82-NT1-028-010	WINDOW, AMP		38	82-NT2-070-010	CAB, STEEL[ST] (K, E, Z)	
9	82-NT1-045-010	DUMMY, POWER		39	82-NT2-201-010	GUIDE, LED	
10	81-MX4-032-010	BADGE, AIWA N		40	87-084-077-010	RIVET, NYLON 3.5-4.5	
11	82-NT1-037-010	KEY, DSP		41	81-DS2-204-210	GUIDE, FL	
12	82-NT1-018-010	KEY, UP/DOWN		42	82-NT2-007-010	PANEL, REAR[B, N] (HEJ)	
13	82-NT1-019-010	KEY, TU		42	82-NT2-037-010	PANEL, REAR[B, N] (HE)	
14	82-NT1-020-010	KEY, FUN		42	82-NT2-011-010	PANEL, REAR[B, ST] (K)	
15	82-NT1-026-010	IND, AMP		42	82-NT2-012-010	PANEL, REAR[B, ST] (Z)	
16	82-NT1-015-010	KEY, POWER		42	82-NT2-010-010	PANEL, REAR[B, ST] (EE, E)	
17	82-NT1-027-010	IND, TU		42	82-NT2-009-010	PANEL, REAR[B] (U)	
18	82-NT1-017-010	DUMMY		42	82-NT2-031-010	PANEL, REAR[B] (HR)	
19	82-NT2-016-010	WINDOW, TU 2		42	82-NT2-008-010	PANEL, REAR[B] (LHJ)	
20	82-NT2-015-010	PLATE, DISPLAY		42	82-NT2-038-010	PANEL, REAR[B] (LH)	
21	82-NT2-203-010	PLATE, BOTTOM 2[N]		43	87-085-213-010	FOOT, H12.5	
21	82-NT2-202-010	PLATE, BOTTOM 2[ST]		44	82-NT1-219-010	GUIDE, LED 2	
21	82-NT1-202-010	PLATE, BOTTOM[B]		45	82-NT1-207-010	GUIDE, LED	
22	82-NT1-230-010	HLDR, EIRE[B, ST] (HR, K, EE, Z, E)		A	87-067-703-010	BVT2+3-10	
23	82-NT2-018-010	KEY, GE 2[B]		B	87-067-579-010	BVT2+3-8W/0 SLOT	
23	82-NT2-046-010	KEY, GE 2[N, ST]		C	87-067-581-010	BVT2+3-15W/0 SLOT	
24	82-NT2-017-010	KEY, T-BASS[B]		D	87-861-095-410	VFT2+3-8 CUT	
24	82-NT2-045-010	KEY, T-BASS 2[N, ST]		E	87-261-073-410	V+2, 6-6	
25	82-NT1-209-010	HLDR, MAIN 1[B] (HR)		F	87-591-094-410	QIT+3-6	
25	82-NT1-228-010	HLDR, MAIN1[B, ST] (K, EE, Z, E)		G	87-067-688-010	BVTT+3-6	
26	82-NT1-210-010	HLDR, MAIN 2[B] (HR)		H	87-078-019-010	S-SCREW, IT+4-6	
26	82-NT1-229-010	HLDR, MAIN2[B, ST] (K, EE, Z, E)		I	87-067-660-010	BVT2+3-8W/0 SLOT BLK	
27	82-NT1-226-010	COVER, HT-SINK[B, ST] (HR, K, EE, Z, E)		J	80-VP2-202-010	S-SCREW, VT2BLK[B, N] (HE, LH, HR)	
28	82-NT2-030-010	CAB, TRAY 2[B] (K, EE, Z, U, E)		K	87-067-641-010	UTT+3-8 W/O SLOT	
28	82-NT2-029-010	CAB, TRAY 2[B] (HE, LH, HR)		L	87-253-094-410	U+3-6 BLK[B, ST] (HR, K, EE, Z, E)	
28	82-NT2-062-010	CAB, TRAY 2[N] (HE)		M	87-571-093-410	VTT+3-5	
28	82-NT2-049-010	CAB, TRAY 2[ST] (K, E, Z)					

MODEL NO.


FD-N707/N909

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs laser. Therefore, be sure to follow carefully the instructions below when servicing.

WARNING!!

WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION. BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 30cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.



- Caution: Invisible laser radiation when open and interlocks defeated avoid exposure to beam.
- Advarsel: Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

VAROITUS!

Laiteen Käyttäminen muulla kuin tässä käyttöohjeessa mainitulla tavalla saattaa altistaa käytäjän turvallisuusluokan 1 ylitävälle näkymättömälle lasersäteilylle.

VARNING!

Om apparaten används på annat sätt än vad som specificeras i denna bruksanvisning, kan användaren utsättas för osynlig laserstrålning, som överskrider gränsen för laserklass 1.

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

ATTENTION


L'utilisation de commandes, réglages ou procédures autres que ceux spécifiés peut entraîner une dangereuse exposition aux radiations.

ADVARSEL!

Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

This Compact Disc player is classified as a CLASS 1 LASER product.


The CLASS 1 LASER PRODUCT label is located on the rear exterior.

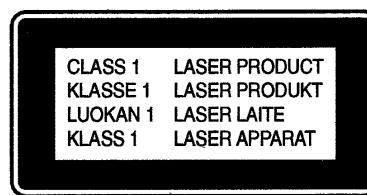

Precaution to replace Optical block (KSS - 210A)

Body or clothes electrostatic potential could ruin laser diode in the optical block. Be sure to ground body and workbench, and make sure the clothes do not touch the diode.

- 1) After the connection, remove the solder shown in the right figure.

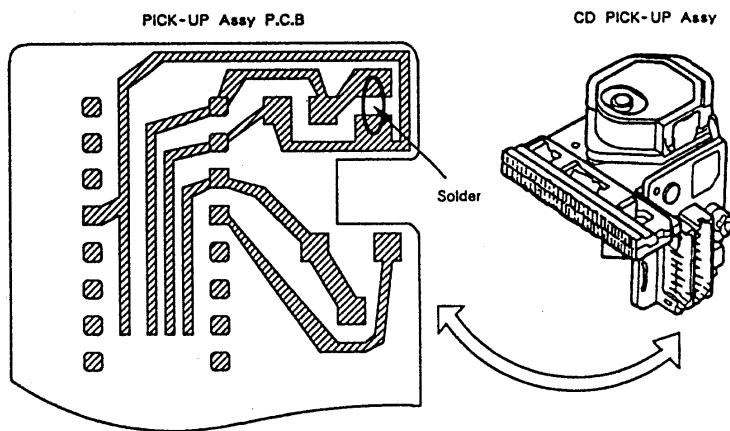

ELECTRICAL MAIN PARTS LIST

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カソリ NO.	DESCRIPTION	REF. NO	PART NO.	カソリ NO.	DESCRIPTION
IC				C21	87-010-382-089	CAP, E 22-25 SME	
87-020-793-089	IC, CXA-1081M	C22	87-010-401-089	C24	87-010-197-089	CAP, E 1-50 SME	
87-020-794-110	IC, CXA-1082BQ	C25	87-010-263-089	C-CAP, S 0.01-25 B			
87-001-944-010	IC, CXD-1167Q	C26	87-010-197-089	CAP, E 100-10			
87-002-639-089	IC, BA6296FA	C27	87-010-263-089	C-CAP, S 0.01-25 B			
87-017-194-010	IC, PLT104	C28	87-010-197-089	CAP, E 100-10			
87-017-022-089	IC, NJM2068M-D(T1)	C29	87-010-404-089	C-CAP, S 0.01-25 B			
87-002-881-089	IC, SM5871AS	C30	87-010-374-089	CAP, E 4.7-50 SME			
87-001-607-089	IC, NJM4558M	C31	87-010-178-089	CAP, E 47-10			
87-001-224-089	IC, NJU4066BM	C32	87-012-157-089	C-CAP, S 1000P-50 B			
82-NV1-625-110	IC, UPDT8043GF-032	C33	87-010-193-089	C-CAP, S 0.033-25 F			
87-002-394-019	IC, LB1641	C34	87-010-400-089	CAP, E 0.47-50 SME			
87-017-023-089	IC, NJU4052BM	C35	87-010-197-089	C-CAP, S 0.01-25 B			
87-001-908-019	IC, CXA1332S	C36	87-010-197-089	C-CAP, S 0.01-25 B			
87-002-872-089	IC, MC14053BF	C37	87-010-404-089	CAP, E 4.7-50 SME			
87-020-730-089	IC, TC4069 UBF	C38	87-010-263-089	CAP, E 100-10			
87-002-901-089	IC, BU4094 BF	C39	87-010-197-089	C-CAP, S 0.01-25 B			
87-001-334-010	IC, LB9051A	C40	87-010-193-089	C-CAP, S 0.033-25 F			
		C41	87-010-221-089	CAP, E 470-10			
TRANSISTOR				C42	87-010-197-089	C-CAP, S 0.01-25 B	
87-026-463-010	TR, 2SA933S	C43	87-010-221-089	CAP, E 470-10			
89-109-521-089	TR, 2SA952K	C44	87-010-197-089	C-CAP, S 0.01-25 B			
89-327-125-089	C-TR, 2SC2712GR	C45	87-010-248-089	CAP, E 220-10 SME			
87-026-210-089	C-TR, DTC144EK T147	C46	87-010-197-089	C-CAP, S 0.01-25 B			
87-026-238-089	C-TR, DTC144WK	C47	87-010-196-089	C-CAP, S 0.1-25 F			
89-113-625-089	C-TR, 2SA1362GR (TAPG)	C48	87-010-196-089	C-CAP, S 0.1-25 F			
89-213-702-019	TR, 2SB1370E	C49	87-010-196-089	C-CAP, S 0.1-25 F			
89-333-317-889	TR, 2SC3331TU	C50	87-010-196-089	C-CAP, S 0.1-25 F			
89-320-011-089	TR, 2SC2001K	C51	87-010-197-089	C-CAP, S 0.01-25 B			
87-026-235-089	C-TR, DTC114EK	C52	87-010-263-089	CAP, E 100-10			
89-503-685-089	C-FET, 2SK368GR	C53	87-010-197-089	C-CAP, S 0.01-25 B			
87-026-233-089	TR, DTA114TK	C54	87-010-314-089	C-CAP, S 22P-50 CH			
89-328-785-089	TR, 2SC2878-A (E2-M)	C55	87-010-314-089	C-CAP, S 22P-50 CH			
87-026-228-089	C-TR, DTA124EK	C56	87-010-316-089	C-CAP, S 33P-50 CH			
89-318-155-089	TR, 2SC1815GR	C101	87-010-263-089	CAP, E 100-10			
		C102	87-010-197-089	C-CAP, S 0.01-25 B			
		C103	87-010-263-089	CAP, E 100-10			
		C104	87-010-263-089	CAP, E 100-10			
		C105	87-010-196-089	C-CAP, S 0.1-25 F			
DIODE				C106	87-010-316-089	C-CAP, S 33P-50 CH	
87-002-564-089	DIODE, 1SS133 RA	C107	87-010-316-089	C-CAP, S 33P-50 CH			
87-020-465-089	DIODE, 1SS133 T-72	C108	87-010-197-089	C-CAP, S 0.01-25 B			
87-017-097-059	ZENER, HZS6B1 RA	C109	87-012-154-089	C-CAP, S 150P-50 CH			
87-002-836-089	DIODE, 1A3-J	C110	87-012-154-089	C-CAP, S 150P-50 CH			
87-017-121-089	ZENER, HZS11A1	C111	87-012-157-089	C-CAP, S 330P-50 CH			
87-020-123-089	DIODE, DS446-AT (TA)	C112	87-012-157-089	C-CAP, S 330P-50 CH			
87-001-290-089	ZENER, HZS6B1L	C113	87-012-157-089	C-CAP, S 330P-50 CH			
87-017-097-089	ZENER, HZS6B1	C114	87-012-157-089	C-CAP, S 330P-50 CH			
87-001-559-089	DIODE, ISS131 T-72	C115	87-010-405-089	CAP, E 10-50 SME			
CD C. B				C116	87-010-405-089	CAP, E 10-50 SME	
C1	87-010-184-089	C-CAP, S 3300P-50 B	C117	87-010-178-089	C-CAP, S 1000P-50 B		
C2	87-010-263-089	CAP, E 100-10	C118	87-010-178-089	C-CAP, S 1000P-50 B		
C3	87-010-178-089	C-CAP, S 1000P-50 B	C119	87-010-248-089	CAP, E 220-10 SME		
C4	87-010-374-089	CAP, E 47-10	C120	87-010-248-089	CAP, E 220-10 SME		
C5	87-010-248-089	CAP, E 220-10 SME	C121	87-012-157-089	C-CAP, S 330P-50 CH		
C6	87-010-197-089	C-CAP, S 0.01-25 B	C122	87-012-157-089	C-CAP, S 330P-50 CH		
C7	87-010-193-089	C-CAP, S 0.033-25 F	C123	87-012-157-089	C-CAP, S 330P-50 CH		
C8	87-010-193-089	C-CAP, S 0.033-25 F	C124	87-012-157-089	C-CAP, S 330P-50 CH		
C9	87-010-197-089	C-CAP, S 0.01-25 B	C201	87-010-263-089	CAP, E 100-10		
C10	87-010-400-089	CAP, E 0.47-50 SME	C202	87-010-196-089	C-CAP, S 0.1-25 F		
C11	87-010-248-089	CAP, E 220-10 SME	C203	87-010-401-089	CAP, E 1-50 SME		
C13	87-010-197-089	C-CAP, S 0.01-25 B	C204	87-010-405-089	CAP, E 10-50 SME		
C14	87-010-193-089	C-CAP, S 0.033-25 F	C205	87-010-405-089	CAP, E 10-50 SME		
C15	87-010-197-089	C-CAP, S 0.01-25 B	C206	87-010-405-089	CAP, E 10-50 SME		
C16	87-010-184-089	C-CAP, S 3300P-50 B	C207	87-010-196-089	C-CAP, S 0.1-25 F		
C17	87-010-196-089	C-CAP, S 0.1-25 F	C208	87-010-197-089	C-CAP, S 0.01-25 B		
C18	87-010-193-089	C-CAP, S 0.033-25 F	C209	87-010-178-089	C-CAP, S 1000P-50 B		
C19	87-010-405-089	CAP, E 10-50 SME	C211	87-010-235-089	CAP, E 470-16 SME		
C20	87-010-196-089	C-CAP, S 0.1-25 F	C212	87-010-197-089	C-CAP, S 0.01-25 B		

REF. NO	PART NO.	カソリ NO.	DESCRIPTION	REF. NO	PART NO.	カソリ NO.	DESCRIPTION
C805	87-010-198-089		C-CAP, S 0.022-25 B	D608	87-017-369-080		LED, SEL 2510C TP-6
C902	87-010-405-089		CAP, E 10-50 SME	D609	87-017-369-080		LED, SEL 2510C TP-6
L301	87-005-525-089		COIL, 22MH-J	D610	87-017-369-080		LED, SEL 2510C TP-6
L302	87-005-525-089		COIL, 22MH-J	D611	87-017-369-080		LED, SEL 2510C TP-6
L303	87-003-131-089		COIL, 10MH J	SW512	87-036-215-089		SW, TACT EVQ21404M
L304	87-003-131-089		COIL, 10MH J	SW513	87-036-215-089		SW, TACT EVQ21404M
L305	87-003-123-089		COIL, 2.2MH J	SW514	87-036-215-089		SW, TACT EVQ21404M
L306	87-003-123-089		COIL, 2.2MH J	SW515	87-036-215-089		SW, TACT EVQ21404M
L401	80-VW1-605-119		COIL, OSC BIAS 108K	SW516	87-036-215-089		SW, TACT EVQ21404M
L801	87-005-474-089		COIL, 12UH J FLR50	SW517	87-036-215-089		SW, TACT EVQ21404M
PIN301	87-009-035-019		CONN, 7P PH V	KEY-3 C. B			
PIN501	87-009-038-019		CONN, 10P PH	SW518	87-036-215-089		SW, TACT EVQ21404M
R913	87-025-470-089		RES, NF3, 3-1/4W J	SW519	87-036-215-089		SW, TACT EVQ21404M
SFR101	87-024-349-089		SFR, 1K DIA6 H	SW520	87-036-215-089		SW, TACT EVQ21404M
SFR102	87-024-349-089		SFR, 1K DIA6 H	SW521	87-036-215-089		SW, TACT EVQ21404M
SFR201	87-024-349-089		SFR, 1K DIA6 H	SW522	87-036-215-089		SW, TACT EVQ21404M
SFR202	87-024-349-089		SFR, 1K DIA6 H	LED-1 C. B			
SFR301	87-024-352-089		SFR, 4.7K DIA6 H	D615	87-017-369-080		LED, SEL 2510C TP-6
SFR302	87-024-352-089		SFR, 4.7K DIA6 H	D616	87-017-369-080		LED, SEL 2510C TP-6
SFR401	87-024-356-089		SFR, 47K DIA6 H	LED-2 C. B			
SFR402	87-024-356-089		SFR, 47K DIA6 H	D617	87-017-369-080		LED, SEL 2510C TP-6
D601	87-001-123-089		LED, SLZ 981C-02T1	D618	87-017-369-080		LED, SEL 2510C TP-6
D602	87-017-369-080		LED, SEL 2510C TP-6	LED-3 C. B			
D603	87-017-369-080		LED, SEL 2510C TP-6	D612	87-017-369-080		LED, SEL 2510C TP-6
D604	87-017-369-080		LED, SEL 2510C TP-6	D613	87-017-369-080		LED, SEL 2510C TP-6
D605	87-017-369-080		LED, SEL 2510C TP-6	D614	87-017-369-080		LED, SEL 2510C TP-6
D606	87-017-369-080		LED, SEL 2510C TP-6	MOTOR C. B			
D607	87-017-369-080		LED, SEL 2510C TP-6	PIN703	91-564-722-110		CONNECTOR 6P
SW501	87-036-215-089		SW, TACT EVQ21404M	M701	9X-262-513-210		SLED MOTOR ASSY
SW502	87-036-215-089		SW, TACT EVQ21404M	M702	9X-262-513-310		T.T CHASSIS ASSY W/MOTOR
SW503	87-036-215-089		SW, TACT EVQ21404M	SW701	91-572-085-110		LEAF SW
SW504	87-036-215-089		SW, TACT EVQ21404M	D-MO C. B			
SW505	87-036-215-089		SW, TACT EVQ21404M	C215	87-010-196-089		C-CAP, S 0.1-25 F
SW506	87-036-215-089		SW, TACT EVQ21404M	M402	87-045-305-019		MOTOR, RF-500TB
SW507	87-036-215-089		SW, TACT EVQ21404M	PHOTO C. B			
SW508	87-036-215-089		SW, TACT EVQ21404M	PH401	87-026-573-010		P-SNSR GP1S53V (*)
SW509	87-036-215-089		SW, TACT EVQ21404M	SW-CL C. B			
SW510	87-036-215-089		SW, TACT EVQ21404M	SW403	87-036-109-019		SW, PUSH SPPB 61
SW511	87-036-215-089		SW, TACT EVQ21404M	SW U/D C. B			
DECK-1 C. B				SW401	87-036-271-019		SW, LVR 1-2-2 (*)
PIN901	87-009-350-019		CONN, 7P PH H	SW OP C. B			
SOL1	82-ZM1-618-010		SOL ASSY, 27	SW402	87-036-271-019		SW, LVR 1-2-2 (*)
SW4	87-036-110-010		SW, PUSH SPPB 62	MISCELLANEOUS			
SW5	87-036-110-010		SW, PUSH SPPB 62	98-848-127-110			PICK UP KSS-210A
SW6	87-036-110-010		SW, PUSH SPPB 62	PH	87-046-355-010		HEAD, PH HADKH2529B(D1)
DECK-2 C. B				RPH	87-046-356-010		HEAD, RPH HADKH5581B(D2)
M1	87-045-348-010		MOT, SHW 2L 70	W711	82-NV1-619-019		CABLE, FFC16P-1.25
PIN902	87-009-353-019		CONN, 10P PH H WHT				
SFR1	87-024-170-080		SFR, 3.3K DIA 6V				
SOL1	82-ZM1-618-010		SOL ASSY, 27				
SW1	87-036-110-010		SW, PUSH SPBB 62				
SW2	87-036-110-010		SW, PUSH SPBB 62				
SW3	87-036-110-010		SW, PUSH SPBB 62				
SW4	87-036-110-010		SW, PUSH SPBB 62				
SW5	87-036-110-010		SW, PUSH SPBB 62				
RELAY-1 C. B							
RELAY-2 C. B							
KEY-2 C. B							


TRANSISTOR ILLUSTRATION




2SA933




2SA952
2SC1815
2SC2001
2SC2878
2SC3331



2SA1362
2SC2712
DTA114
DTA124
DTC114
DTC144




2SB1370



2SK368

○ チップ抵抗部品コード／CHIP RESISTOR PART CODE


チップ抵抗部品コードの成り立ち
Chip Resistor Part Coding

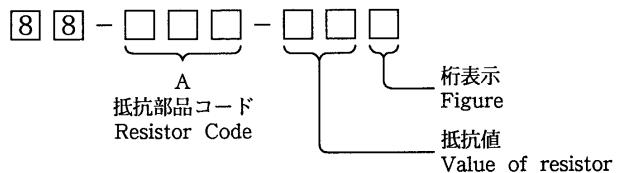


チップ抵抗
Chip resistor


Wattage 容量	Type 種類	Tolerance 許容誤差	Symbol 記号	Dimensions / 尺寸 (mm)			Resistor Code : A 抵抗コード : A	
				Form / 外形	L	W		
1/32W	1608	± 5 %	CJ		1.6	0.8	0.35	108
1/10W	2125	± 5 %	CJ		2	1.25	1.45	118
1/8W	3126	± 5 %	CJ		3.2	1.6	0.5 ~0.7	128

SCHEMATIC DIAGRAM – 1 (CD)

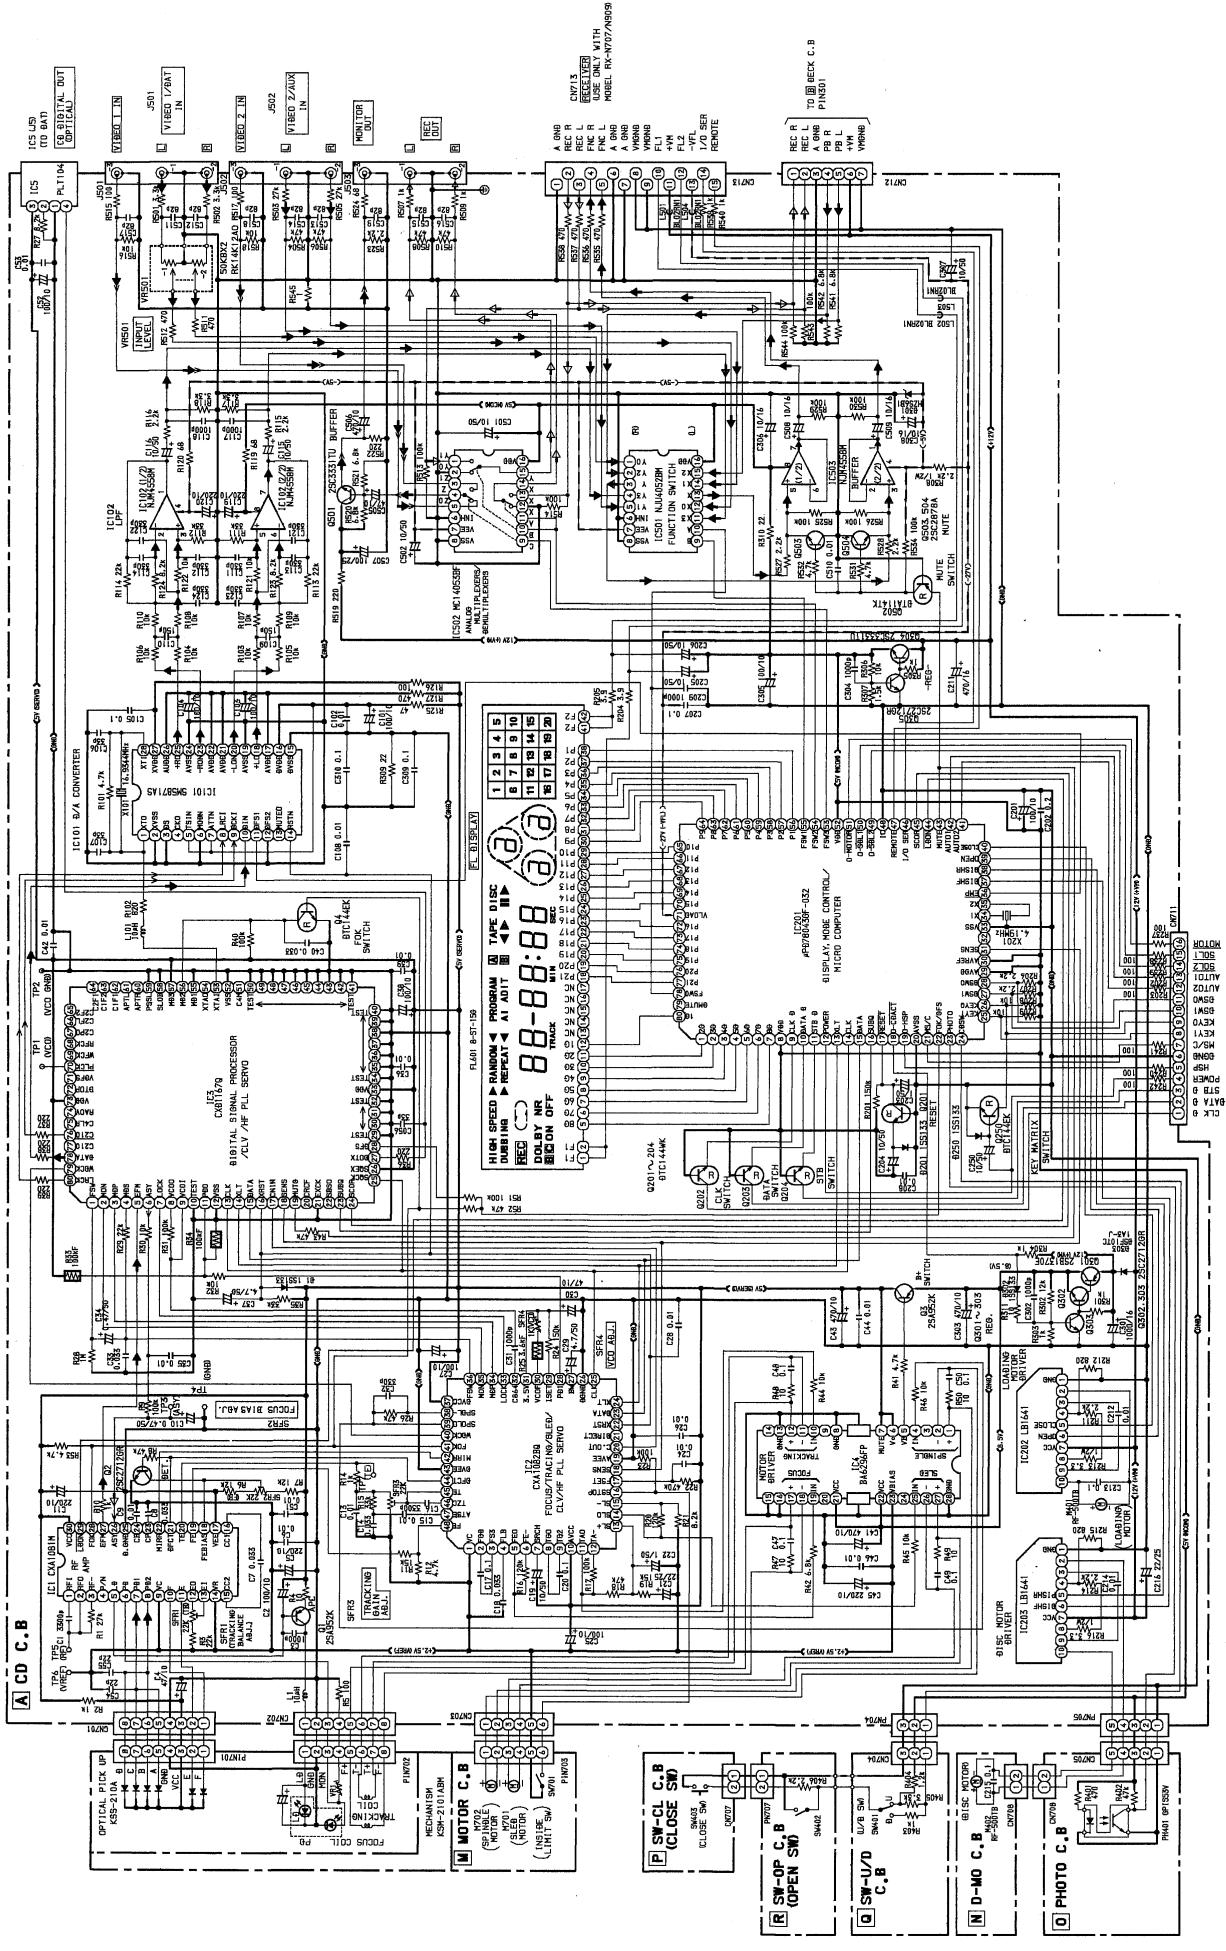


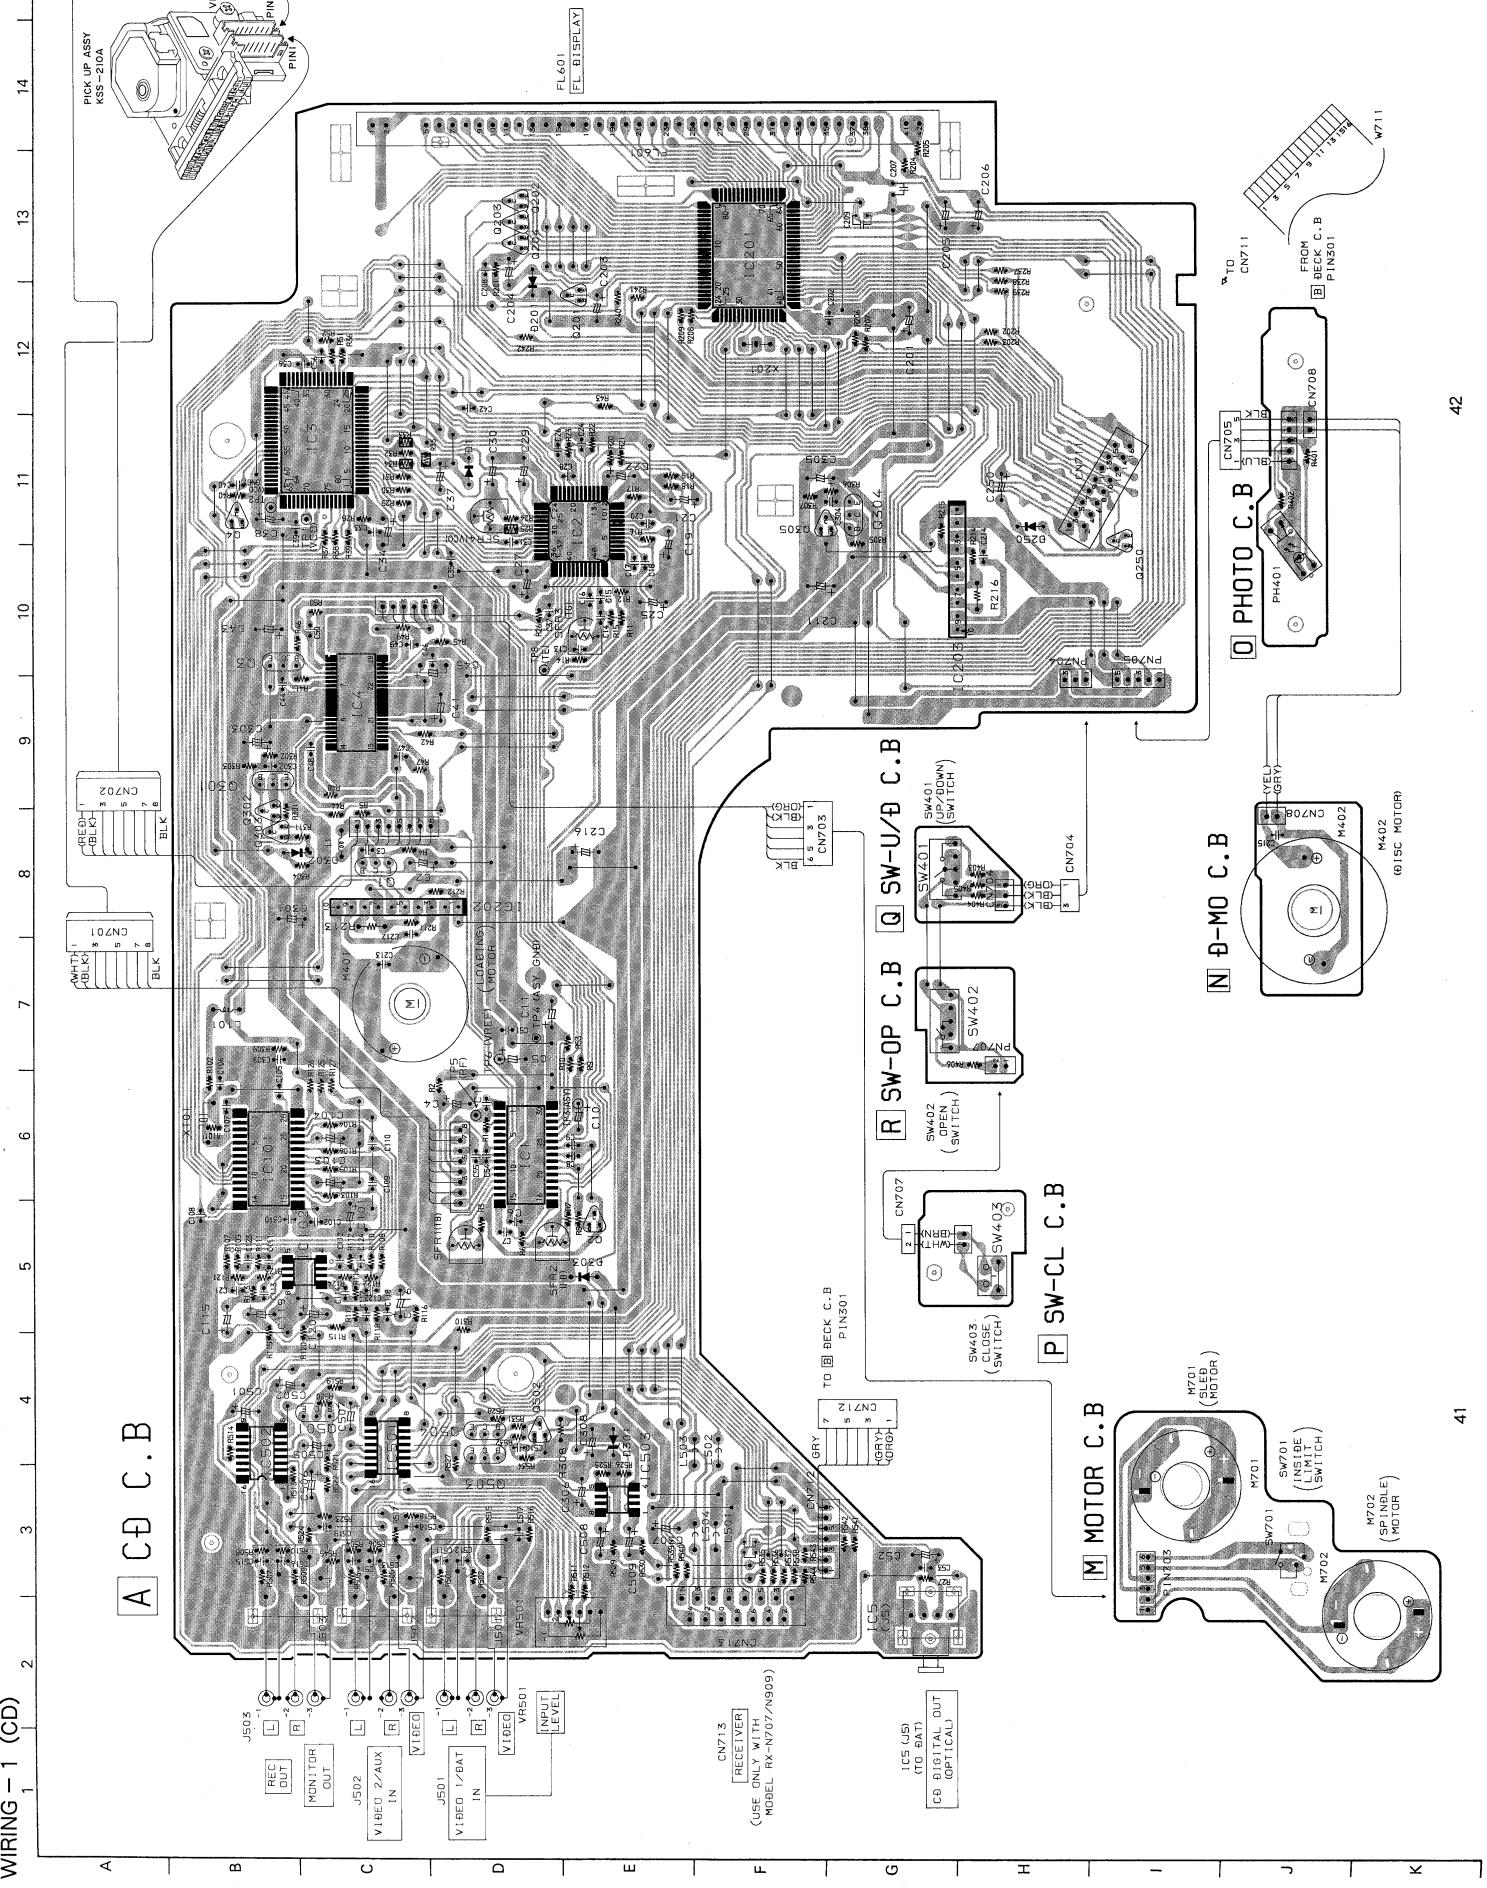

SCHEMATIC DIAGRAM – 2 (DECK)

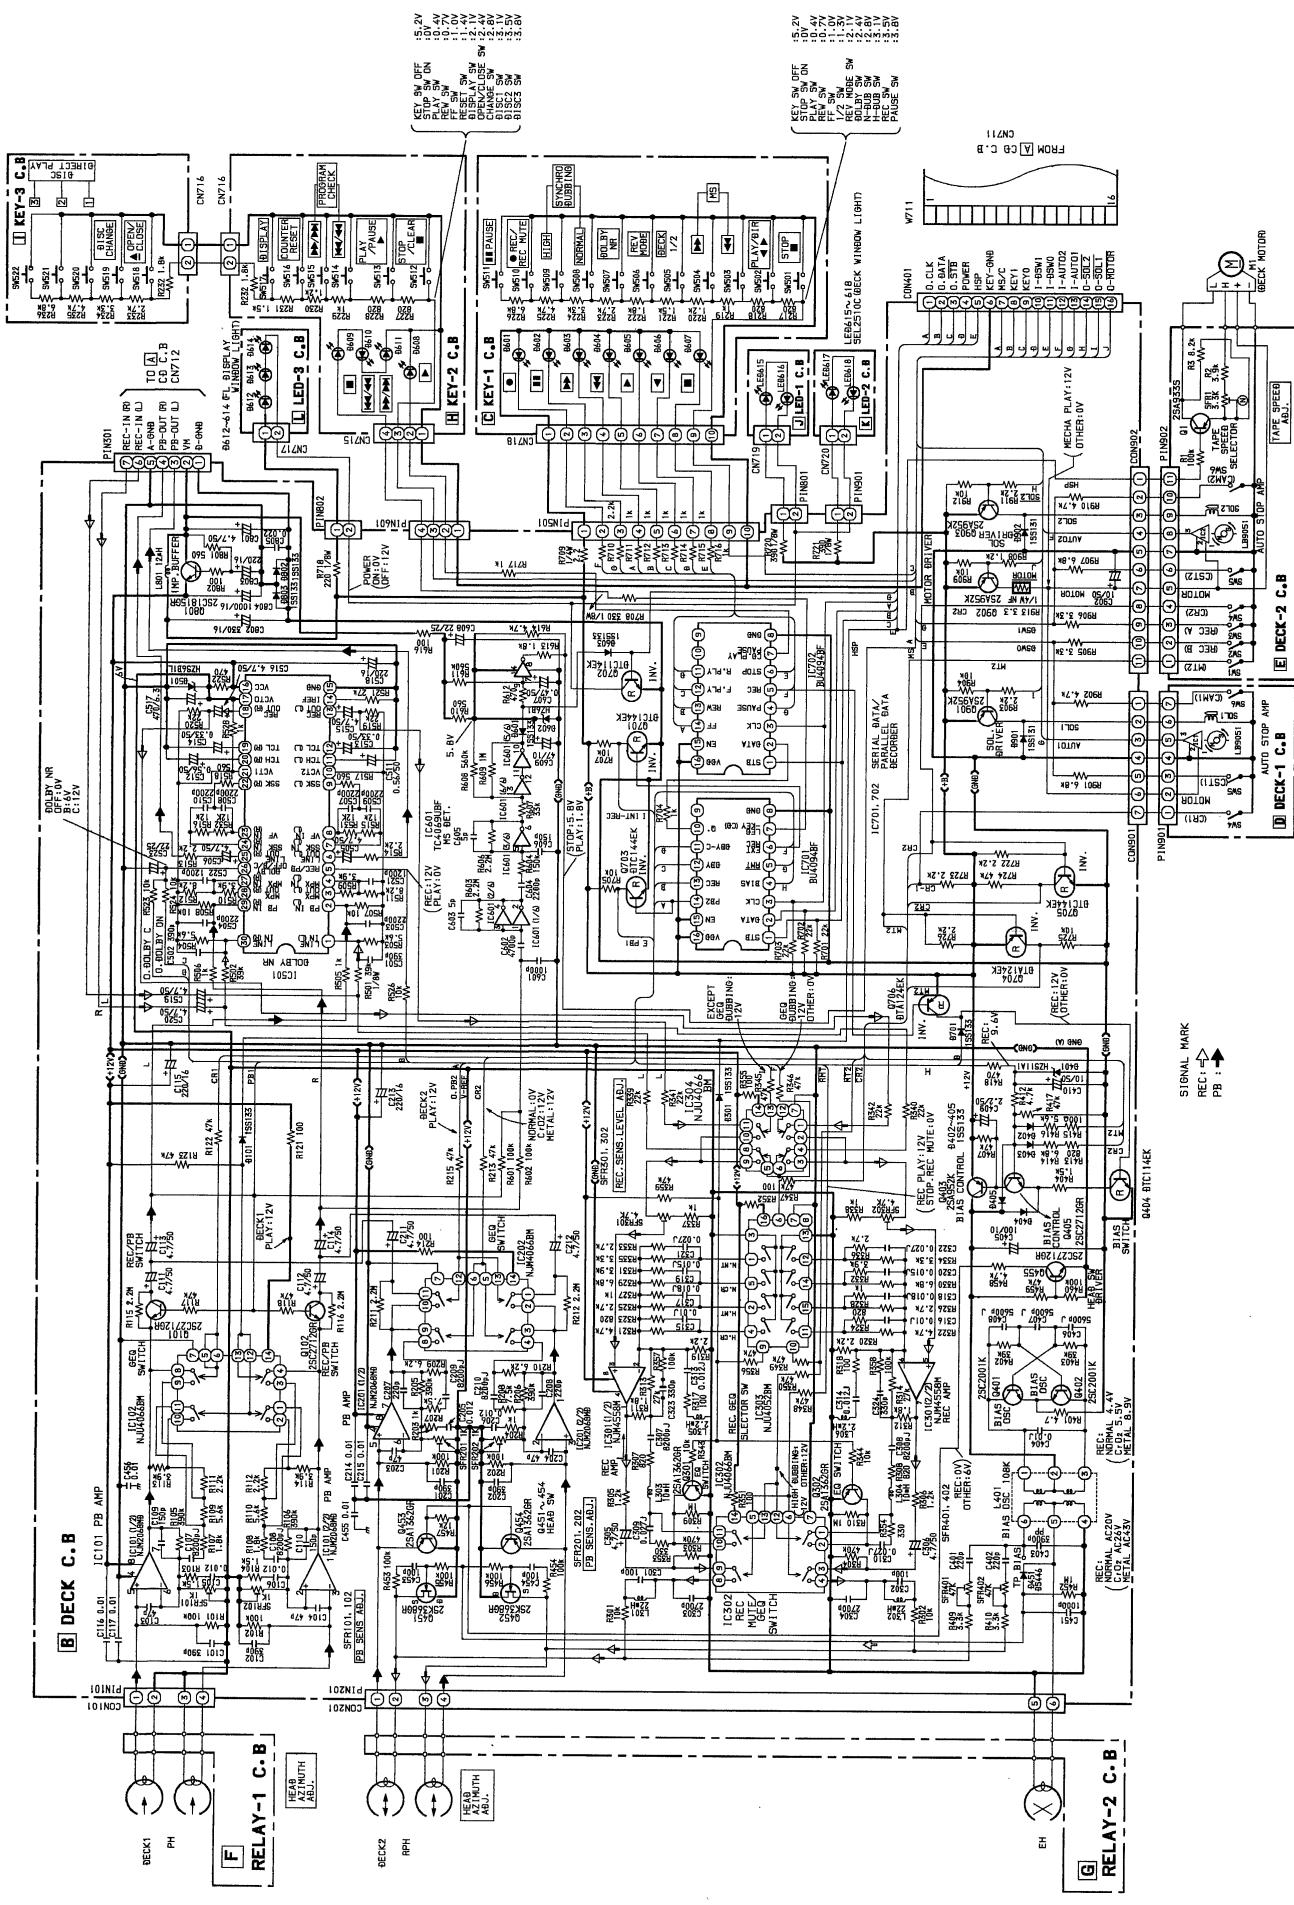


WIRING 1 2 (DECK) 2
3 4 5 6 7 8 9 10 11 12 13 14

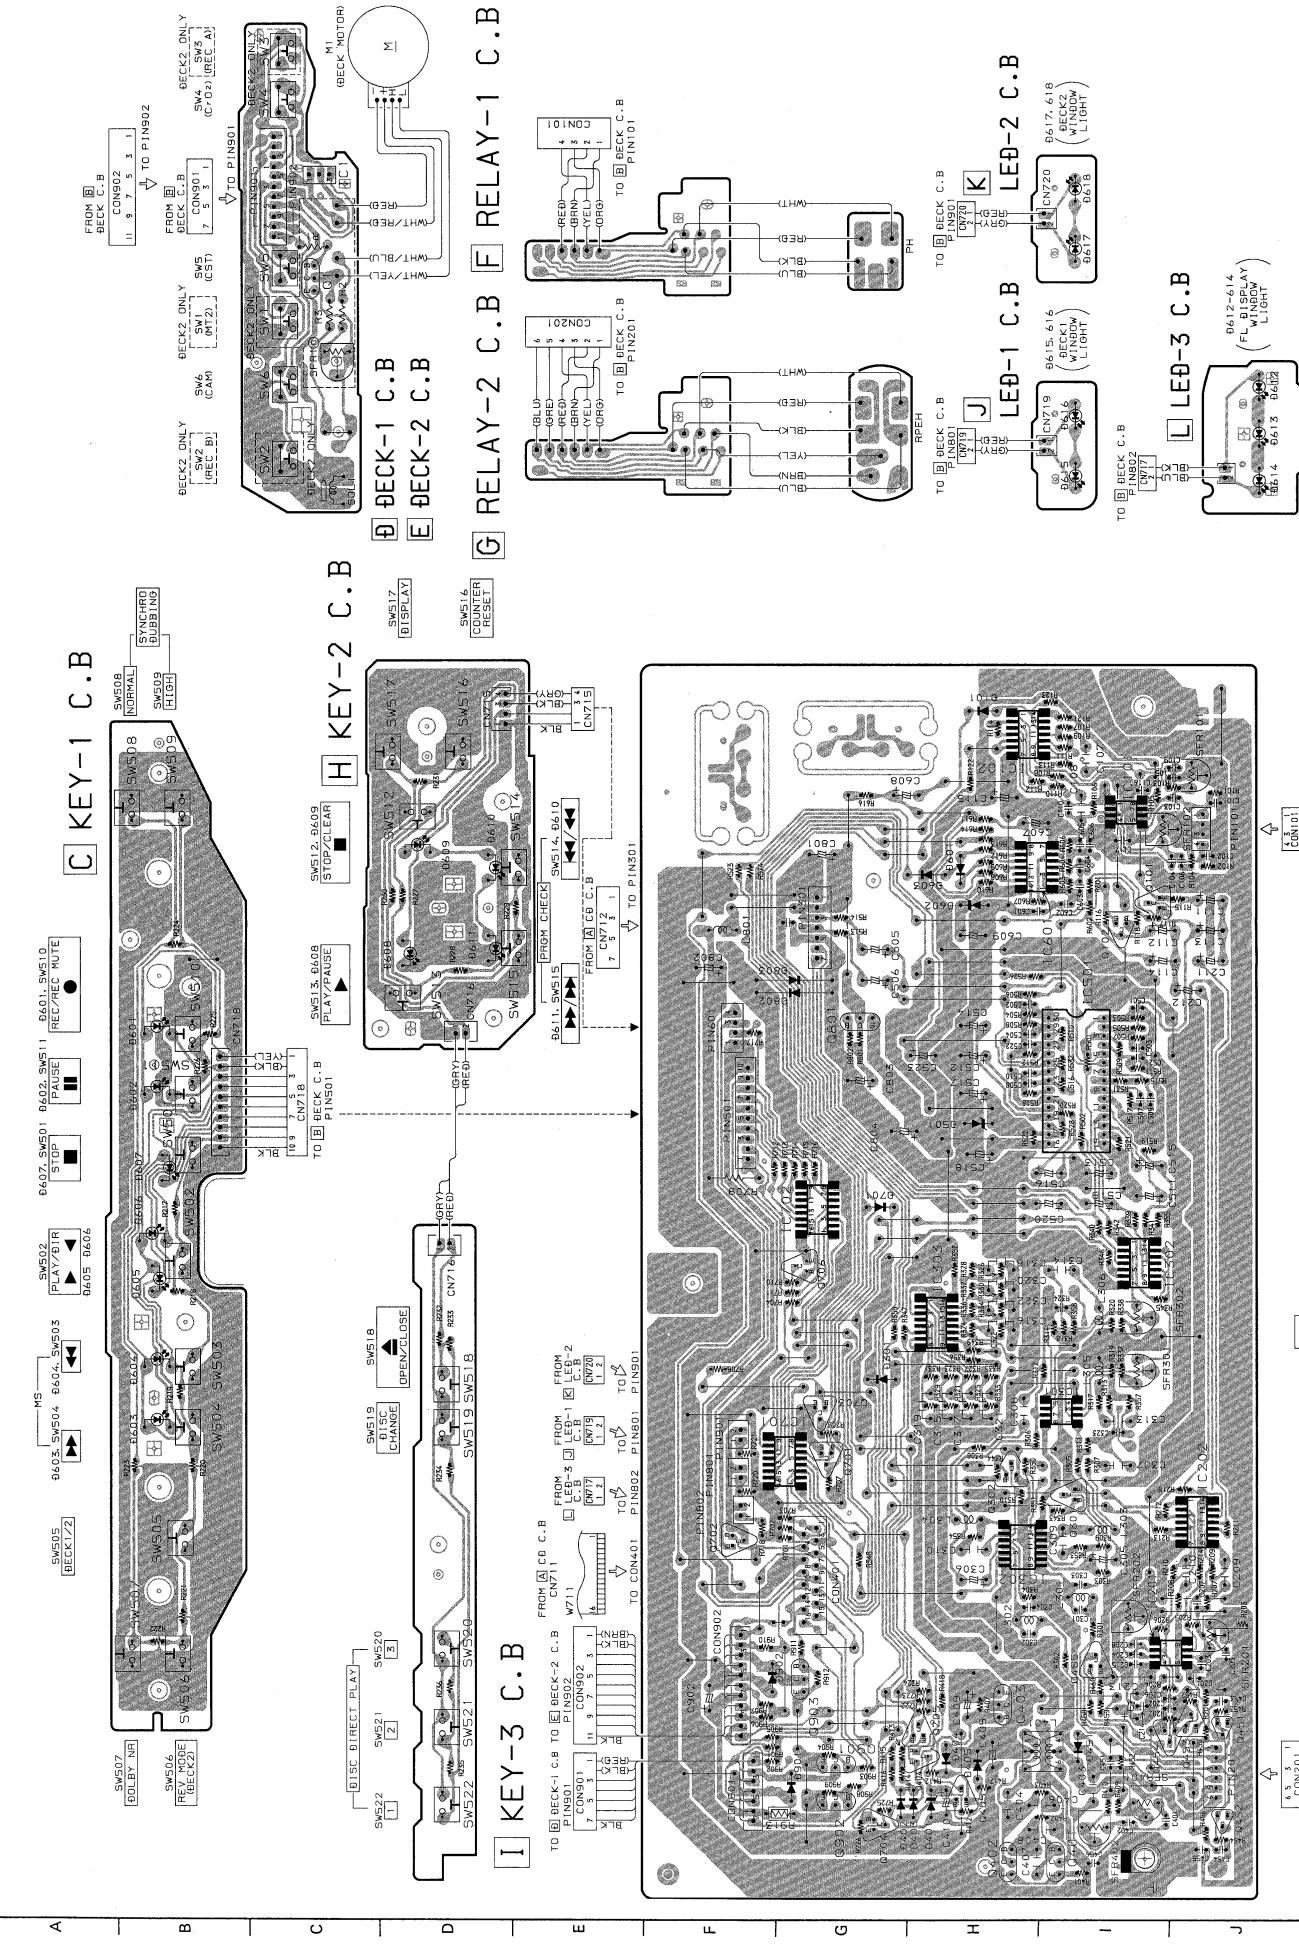

FL (8 – ST – 15G) GRID ASSIGNMENT / ANODE CONNECTION

GRID ASSIGNMENT

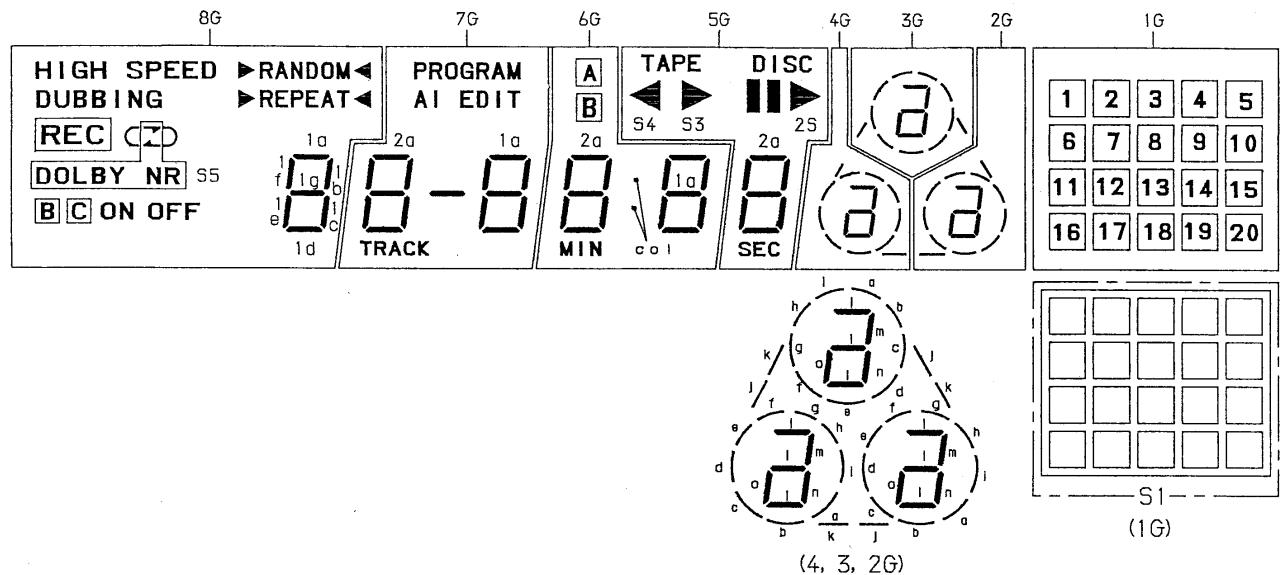

ANODE CONNECTION

	8G	7G	6G	5G	4G	3G	2G	1G
P1	1a	1a	1a	TAPE	j	K	K	1
P2	1b	1b	1b	DISC	f	g	g	2
P3	1c	1c	1c	■■■	l	o	m	5
P4	1d	1d	1d	—	m	m	l	7
P5	1e	1e	1e	S2	o	l	n	6
P6	1f	1f	1f	S4	e	h	h	3
P7	1g	1g	1g	S3	g	f	f	4
P8	RANDOM	—	c o l	—	n	n	o	8
P9	RANDOM	2a	2a	2a	d	i	e	9
P10	REPEAT	2b	2b	2b	c	a	i	10
P11	DUBBING	2c	2c	2c	i	c	b	13
P12	—	2d	2d	2d	k	d	j	15
P13	REC	2e	2e	2e	a	e	a	14
P14	REPEAT	2f	2f	2f	h	b	d	11
P15	HIGH SPEED	2g	2g	2g	b	j	c	12
P16	C	TRACK	MIN	SEC	—	—	—	16
P17	S5	AI	B	—	—	—	—	17
P18	OFF	EDIT	A	—	—	—	—	18
P19	ON	PROGRAM	—	—	—	—	—	19
P20	C	—	—	—	—	—	—	20
P21	B	—	—	—	—	—	—	S1

IC DESCRIPTION (FD - N707/909)

IC, μPD78043GF - 032

Pin No.	Pin Name	I/O	Description
1 ~ 7	2 G~8 G	O	Digit output for FL display.
8	VDD	—	+5V power supply.
9	CLK D		
10	DATA D	O	Serial data output to control the output port expansion IC (4094).
11	STB D		
12	POWER	O	"H" during POWER ON of the unit.
13	XLT		
14	CLK	O	Serial data output to control the signal processing IC for CD.
15	DATA		
16	SUBQ	I	Sub-code Q input.
17	RESET	I	System reset input.
18	O-CDACT	O	Output to control the power of CD circuit. "L" during CD function. Open-drain.
19	O-HSP	O	High speed control output to DECK. "H" during high speed dubbing. Open-drain.
20	AVSS	—	GND for A/D converter input.
21	MS/C	ADI	A/D input of MS signal and Dolby-B or B/C select detector from DECK.
22	FOK/GFS	ADI	A/D input of the focus OK signal and frame sync lock state display signal from CD.
23	PHOTO	ADI	Mechanism-3 disc table position detect photo sensor signal input from CD.
24	CDSW	ADI	A/D input of mechanism tray and base unit position detect switches from CD.
25	KEY1	ADI	A/D input of the key data from CD.
26	KEY0	ADI	A/D input of key data from DECK.
27	DSW1	ADI	A/D input of mechanism status detect switch from DECK (connected to +5V).
28	DSW0	ADI	A/D input of mechanism status detect switch from DECK (connected to +AVDD).
29	AVDD	—	Analog power supply to A/D converter.
30	AVREF	I	Reference voltage input to A/D converter (connected to +5V).
31	SENS	I	Internal state of CD signal processing IC (connected to +AVDD).
32	—	—	—
33	VSS	—	GND.
34	X1	I	4.19MHz clock oscillator input.
35	X2	—	4.19MHz clock oscillator input.
36	EMP	O	De-emphasis control output for CD output signal. "L" when ON.
37	DISH F	O	Mechanism-3 disc table drive control output to IC203. "H" during forward rotation.
38	DISH R	O	Mechanism-3 disc table drive control output to IC203. "H" during reverse rotation.
39	OPEN	O	Mechanism tray drive control output to IC202. "H" during open.
40	CLOSE	O	Mechanism tray drive control output to IC202. "H" during close.
41	AUTO 2	I	Mechanism reel table rotation detect signal input from DECK 2.
42	AUTO 1	I	Mechanism reel table rotation detect signal input from DECK 1.
43	MUTE	O	Output signal to mute the signal output. "H" during muting.
44	LDON	O	Output signal which controls ON/OFF of CD pickup laser diode. "L" when ON.
45	SCOR	I	CD sub-code sync S0 + SI input.
46	I/O SER	I/O	Serial data input/output to and from RX.
47	REMOTE	I	Remote control unit received signal input from RX.
48	IC	—	Internal connection (connected to GND).
49	O-SOL2	O	Mechanism solenoid drive control output to DECK 2. "L" when ON. Open drain.
50	O-SOL1	O	Mechanism solenoid drive control output to DECK 1. "L" when ON. Open drain.
51	O-MOTOR	O	Mechanism main motor drive control output to DECKs. "L" when ON. Open drain.
52	VDD	—	+5V power supply.
53	FSW3	O	Function selector control output (video select).
54	FSW2	O	Function selector control output (REC MUTE).
55	FSW1	O	Function selector control output (Function B).
56~70	P1~15	O	Segment output for FL display.
71	VLOAD	—	-27V power supply for FL pull-down.
72~77	P16~21	O	Segment output for FL display.
78	FSW0	O	Function selector control output (Function A).
79	GMUTE	O	Output signal to mute graphic of CDG. "H" during muting (Not used).
80	1G	O	Digit output for FL display.


See the NSX – D55 (FD – N55) for the IC description below.

	FD – N707/N909	NSX – D55 (FD – N55)
①	IC,CXD1167Q	IC,CXD1167Q
②	IC,CXA1081M	IC,CXA1081S
③	IC,CXA1082BQ	IC,CXA1082S
④	IC,SM5871AS	IC,SM5870BS
⑤	IC,LB1641	IC,LB1641


See the NSX – D55 (FD – N55) for the IC Block Diagram below.

	FD – N707/N909	NSX – D55 (FD – N55)
①	IC,BA6296FA	IC,BA6296FP
②	IC,CXA1332S	IC,CXA1332S
③	IC,BU4094BF	IC,BU4094B


ELECTRICAL ADJUSTMENT (DECK)

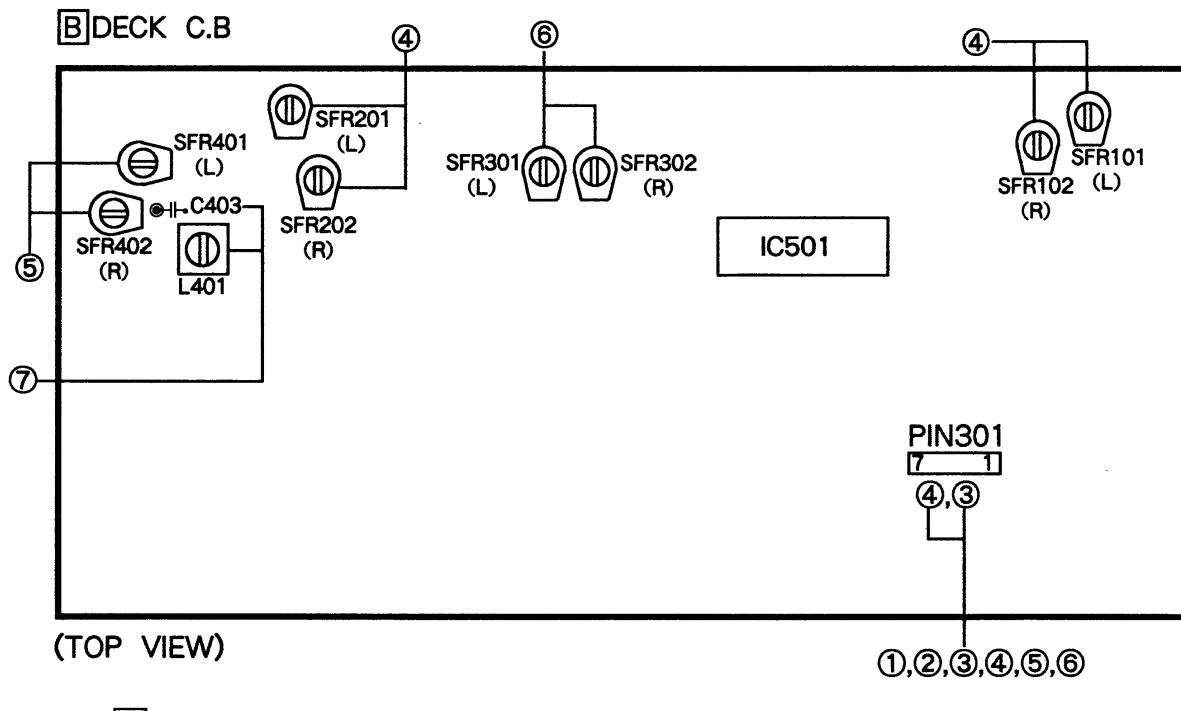

E DECK - 2 C.B

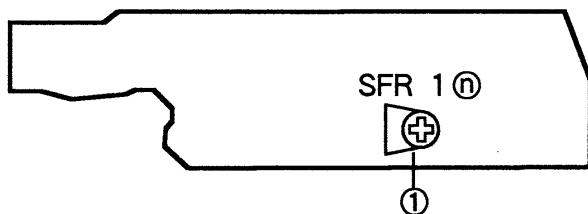

DECK 1P, DECK 2R/P/E HEAD

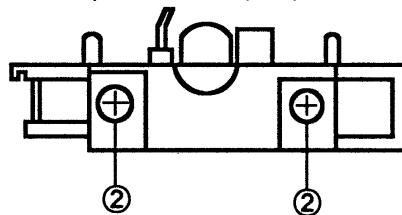

1. Tape Speed Adjustment

- Settings : • Test tape : TTA-100
• Test point : TP CONN 7P (PIN301) ③,④
• Adjustment location : SFR 1①

Method : Play back the test tape II DECK and adjust SFR 1① so that the frequency counter reads $3000\text{Hz} \pm 5\text{Hz}$.

2. Head Azimuth Adjustment

- Settings : • Test tape : TTA-310
• Test point : TP CONN 7P (PIN301) ③,④
• Adjustment location : Head azimuth adjustment screw

Method : Play back the 10kHz signal of the test tape and adjust so that the output becomes maximum. Next, perform on each FWD PLAY and REV PLAY mode.

3. PB Frequency Response Check

- Settings : • Test tape : TTA-310
• Test point : TP CONN 7P (PIN301) ③,④

Method : Play back the 315Hz and 10kHz signals of the test tape and check that the output ratio of the 10kHz signal is with respect to that of the 315Hz signal is $\pm 2\text{dB}$.

4. PB Sensitivity Adjustment

- Settings : • Test tape : TTA-200
• Test point : TP CONN 7P (PIN301) ③,④ (load $47\text{K}\Omega$)
• Adjustment location :
(I DECK) SFR101 (Lch)
SFR102 (Rch)
(II DECK) SFR201 (Lch)
SFR202 (Rch)

Method : Play back the test tape and adjust SFRs so that the output level of the test point is $280\text{mV} \pm 0.3\text{dB}$.

5. REC/PB Frequency Response Adjustment

- Settings : • Test tape : TTA-601
• Test point : TP CONN 7P (PIN301) ③,④
• Input signal : $1\text{kHz}/10\text{kHz}$ (LINE IN)
• Adjustment location : SFR401 (Lch)
SFR402 (Rch)

Method : Apply a 1kHz signal and REC mode. Then adjust OSC attenuator so that the output level at the TP CONN 7P (PIN301) ③,④ is 28mV . Record and play back the 1kHz and 10kHz signals and adjust SFRs so that the output

of the 10kHz signal is $+0.5\text{dB} \pm 0.5\text{dB}$ with respect to that of the 1kHz signal.

6. REC/PB Sensitivity Adjustment

- Settings : • Test tape : TTA-601
(TTA - 600)
• Test point : TP CONN 7P (PIN301) ③,④
• Input signal : 400Hz (LINE IN)
• Adjustment location : SFR301 (Lch)
SFR302 (Rch)

Method : Apply a 400Hz signal and REC mode. Then adjust OSC attenuator so that the output level at the TP CONN 7P (PIN301) ③,④ is 28mV.
Record and play back the 400Hz signal and adjust SFRs so that the output is 28mV $\pm 0.5\text{dB}$.

7. Bias OSC Frequency Adjustment

- Settings : • Test tape : TTA-601
• Test point : TP BIAS CHECK (C403)
• Adjustment Location : L401


Method : Set to the REC mode. Adjust L401 so that the frequency counter of the test point reads $106\text{kHz} \pm 2\text{kHz}$.

PRACTICAL SERVICE FIGRE (DECK)

DECK SECTION

Tape speed :	3000Hz $\pm 1.5\%$	Less than 1.3mV/1.8mV
Wow & flutter :	Less than 0.4 % (R.M.S)	(DOLBY B NR ON/OFF
Take-up torque :	30~60g-cm (FWD, REV)	NORM)
F.F torque :	75~140g-cm	Noise level (REC/PB) :
Rew torque :	75~140g-cm	Less than 1.3mV/2.0mV
Back tension :	2~6g-cm	(DOLBY B,C NR ON/OFF
PB Output level :	250mV $\pm 50\text{mV}$ (REC OUT)	NORM)
REC/PB Output level :	190mV $\pm 1\text{dB}$ (REC OUT)	Less than 1.2mV/1.5mV
Distortion (REC/PB) :	Less than 2.5 % (CrO ₂)	(DOLBY B,C NR ON/OFF)
	Less than 2.0 % (NORMAL)	CrO ₂ ,METAL)
Noise level (PB) :	Less than 2.0mV/1.4mV (DOLBY B NR ON/OFF	Erasing ratio : More than 60dB (125Hz)
	CrO ₂)	REC bias frequency : 106kHz
		Test tape : NORMAL TTA - 601/600
		CrO ₂ TTA - 610
		METAL TTA - 630

ELECTRICAL ADJUSTMENT (CD)

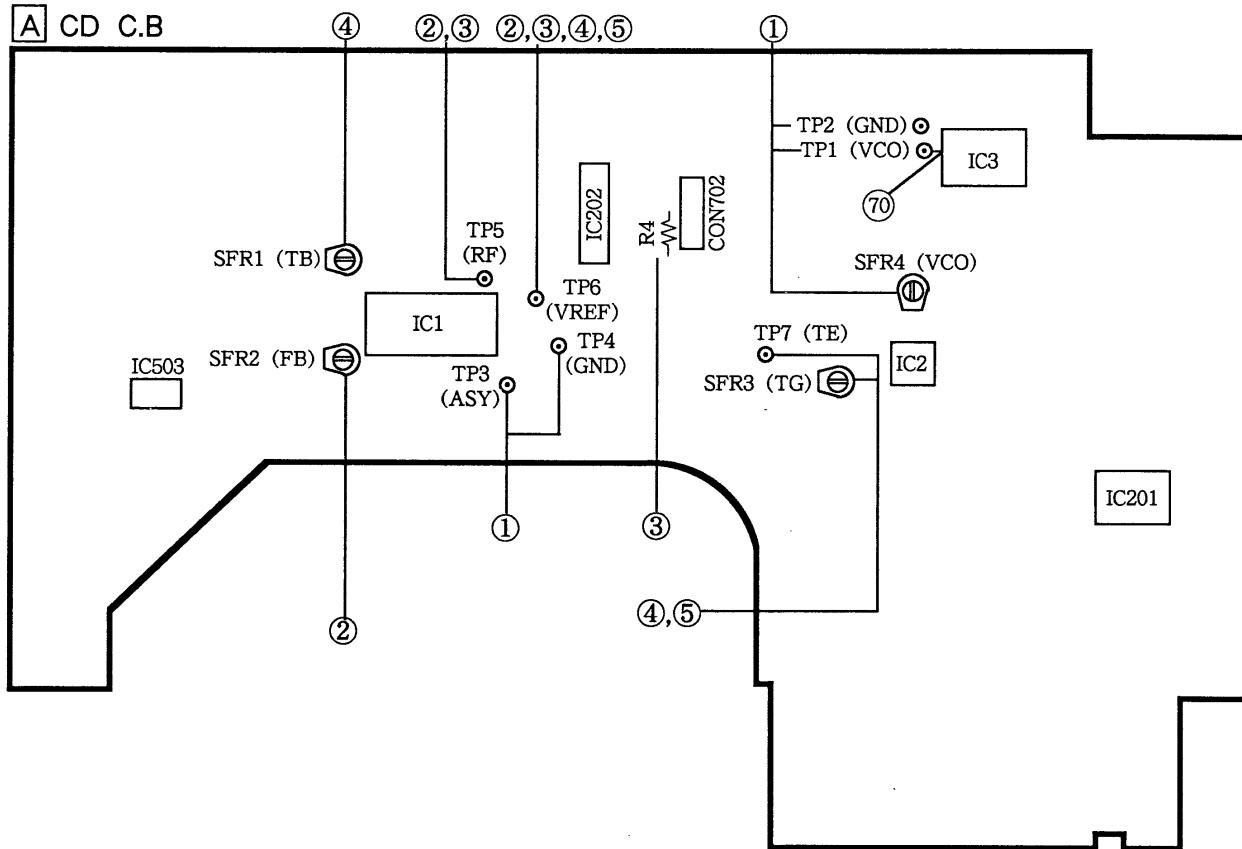


Note : Connect a probe (10 : 1) of the oscilloscope and the counter to a test point.

1. VCO Frequency Adjustment

- 1) Connect the frequency counter to test points TP1 (VCO) and TP2 (VCO GND).
- 2) Set test disc and PLAY mode.
- 3) Connect and short between TP3 (ASY) and TP4 (GND).
- 4) Adjust SFR4 so that the frequency counter reading is $4.27\text{MHz} \pm 0.02\text{MHz}$.
- 5) After the adjustment is completed, disconnect the short lead wire.


2. Focus Bias Adjustment

Make the focus bias adjustment when replacing and repairing the optical block.

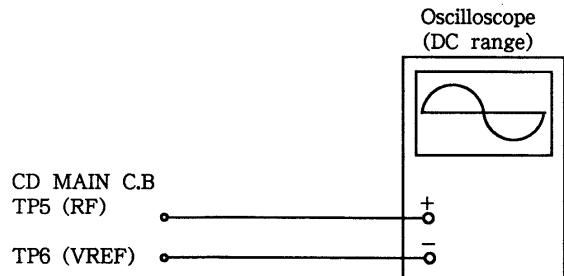

- 1) Connect an oscilloscope to test points TP5 (RF) and TP6 (VREF).

- 2) Turn on the power switch.
- 3) Insert test disc TCD-782 (YEDS-18) and play back the second composition.
- 4) Adjust SFR2 (FB) so that the RF waveform must be maximum and clear.

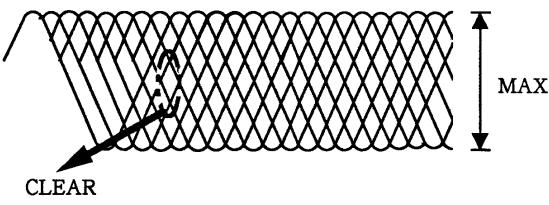


VOLT/DIV : 0.5V
TIME/DIV : 0.5 μ S

3. RF Waveform Check


This check should be performed whenever the optical block is replaced in repair.

- 1) Connect an oscilloscope to test points TP5 (RF) and TP6 (VREF).
- 2) Turn on the power switch.
- 3) Insert test disc TCD-782 (YEDS-18) and play back the second composition.
- 4) Check that the waveform appears as shown in the figure.

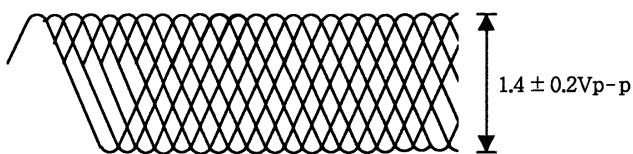


VOLT/DIV : 0.5V
TIME/DIV : 0.5 μS

Note : The current of the laser signal can be checked with the voltages on both sides of R4 (10Ω). The difference for the specified value shown on the label must be within $\pm 6.0\text{mA}$.




$$\text{Laser current } I_{op} = \frac{\text{Voltage across R4}}{10\Omega}$$

4. Tracking Balance Adjustment

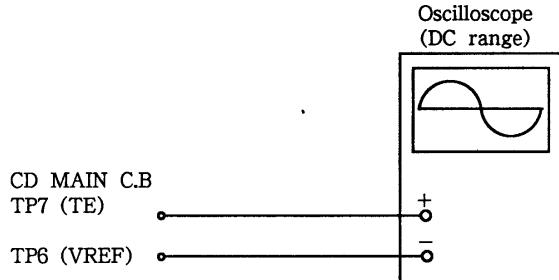

- 1) Connect an oscilloscope to test points TP7 (TE) and TP6 (VREF).
- 2) Connect center pin of SFR3 (TG) to TP6 (VREF).
- 3) Turn on the power switch.
- 4) Insert test disc TCD-782 (YEDS-18) and play back the second composition.
- 5) Adjust SFR1 (TB) so that the waveform on the oscilloscope is vertically symmetrical as figure shown in the figure below.
- 6) After the adjustment is completed, remove the ground lead wire.

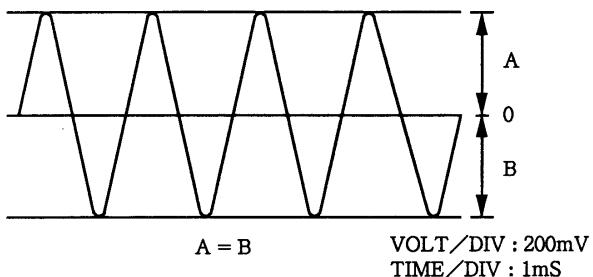

5. Tracking Gain Adjustment

A servo analyzer is necessary in order to perform this adjustment exactly. However, this gain has a margin, so even if it is slightly off, there is no problem. Therefore, do not perform this adjustment.

Focus/tracking gain determines the pick-up follow-up (vertical and horizontal) relative to mechanical noise and mechanical shock when 2-axis device operates. However, as these reciprocate, the adjustment is at the point where both are satisfied.

- When gain is raised, the noise increases when the 2-axis device operates increases.
- When gain is lowered, it is more susceptible to mechanical shock and skipping occurs more easily.


When gain adjustment is off, the symptoms below appear.

Gain Symptoms	(Focus)	Tracking
● The time until music starts becomes longer for STOP→PLAY or automatic selection (◀▶ buttons pressed.) (Normally takes about 2 seconds.)	low	low or high
● Music does not start and disc continues to rotate for STOP→PLAY or automatic selection (◀▶ buttons pressed.)	—	low
● Disc stops to rotate shortly after STOP→PLAY.	low or high	—
● Sound is interrupted during PLAY, or time counter display stops.	—	low
● More noises during the 2-axis device operation.	high	high


The following is simple adjustment method.

– Simple adjustment –

Note : Since exact adjustment cannot be performed, remember the positions of the controls before the performing the adjustment. If the positions after the simple adjustment are only a little different, return the controls to the original position.

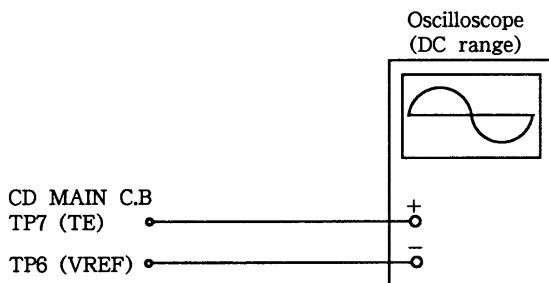


- 1) Keep the set horizontal.(If the set is not kept horizontally, this adjustment cannot be performed due to the gravity against the 2 – axis device.)
- 2) Insert test disc TCD-782 (YEDS-18) and play back the second composition.
- 3) Connect an oscilloscope to TP7 (TE) and TP6 (VREF).
- 5) Adjust SFR3 (TG) so that the waveform appears as shown in the figure below.
(tracking gain adjustment)

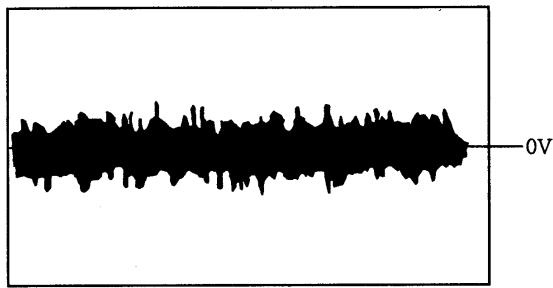

VOLT/DIV : 100mV
TIME/DIV : 1mS


- Incorrect example (The fundamental wave appears as compared with the waveform adjusted)

Low tracking gain

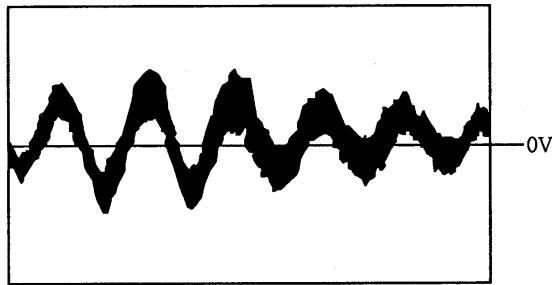


VOLT/DIV : 100mV
TIME/DIV : 1mS

High tracking gain (The frequency of the fundamental wave is higher than in low gain.)

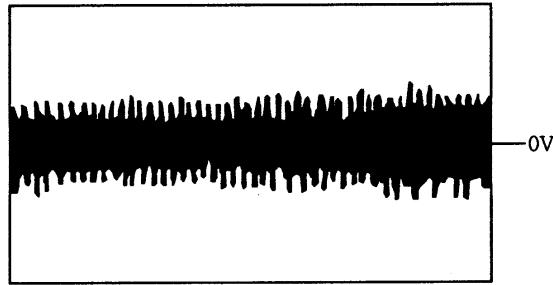

VOLT/DIV : 100mV
TIME/DIV : 1mS

MECHANICAL EXPLODED VIEW 1/2

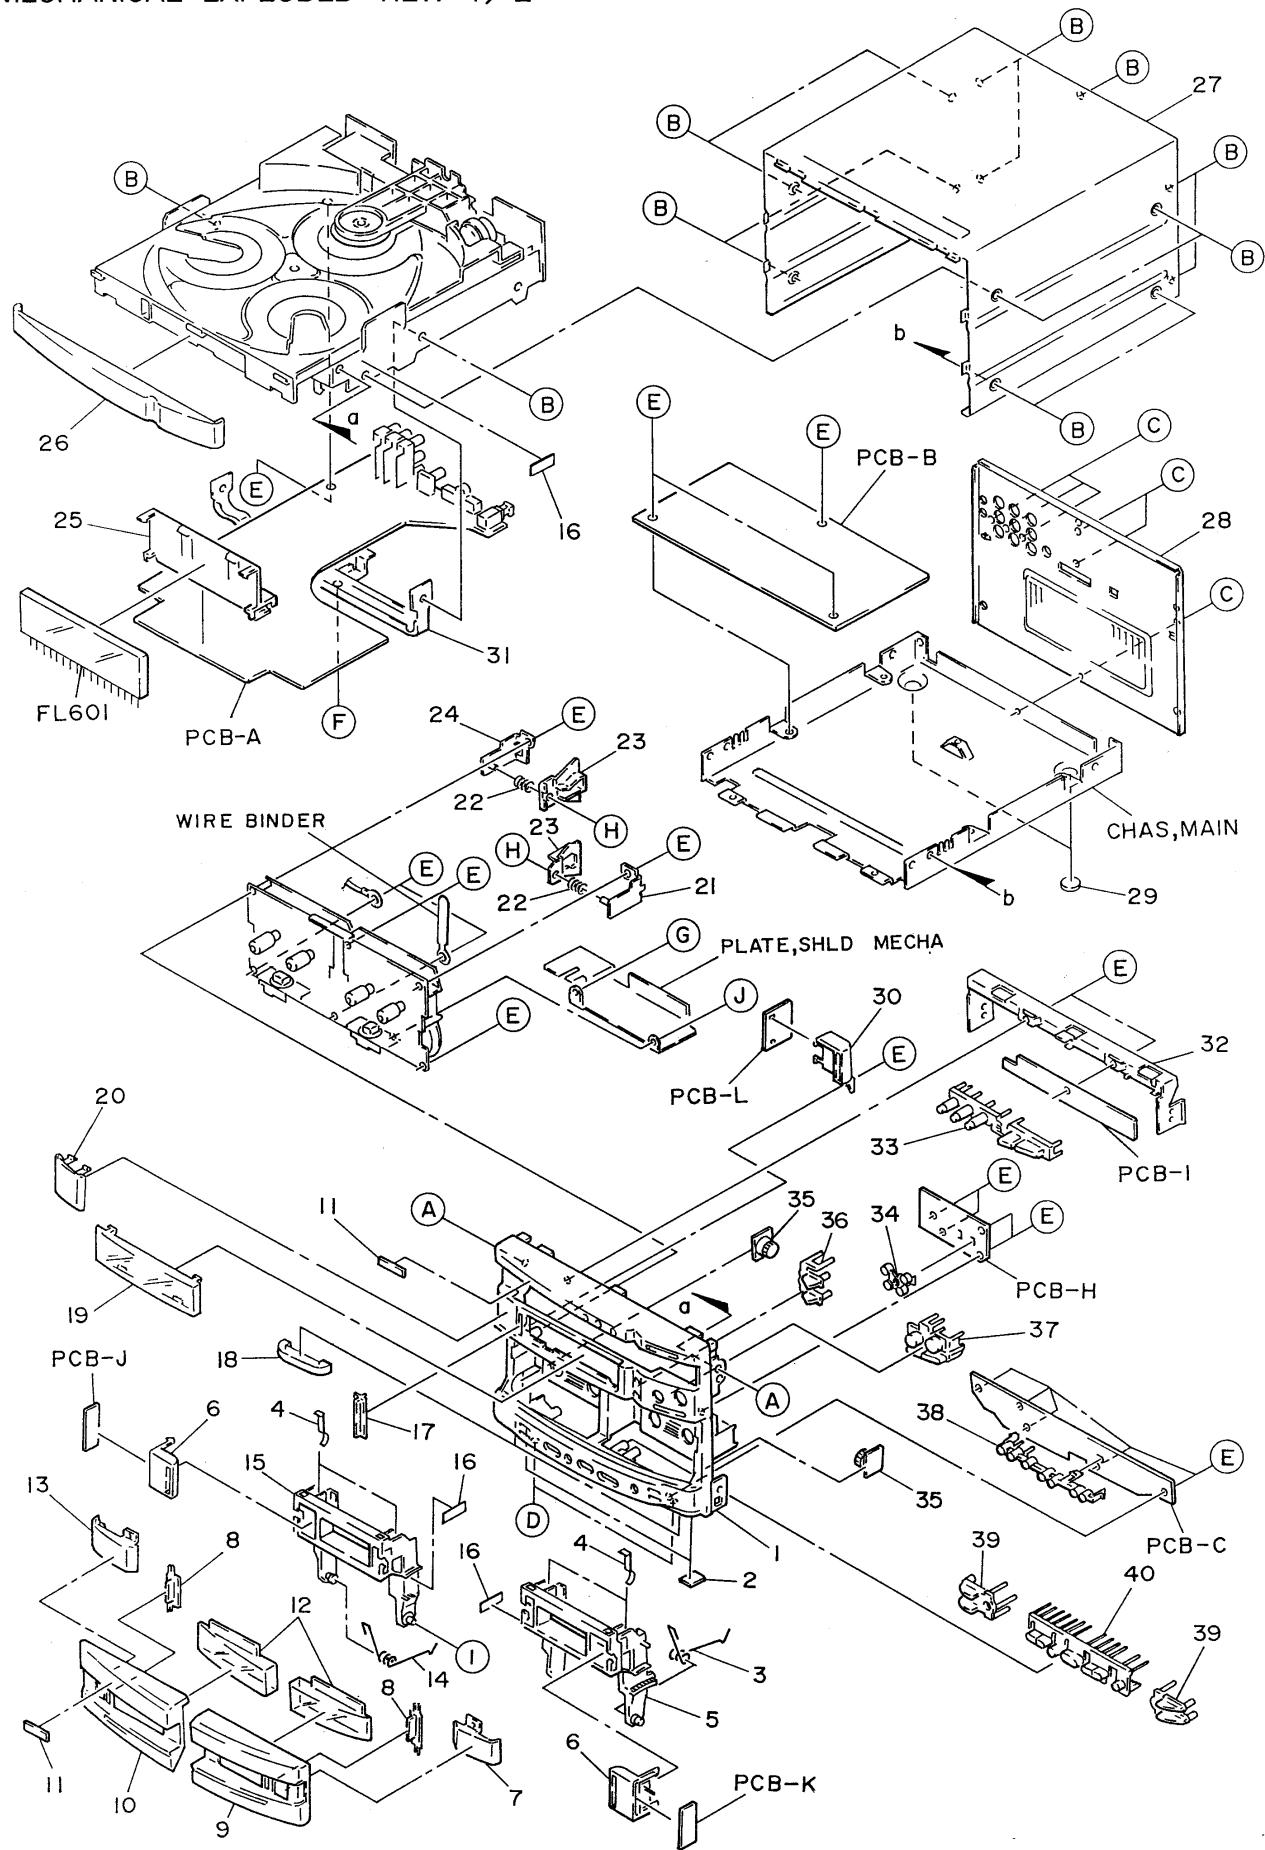


MECHANICAL PARTS LIST 1/2

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カソリ NO.	DESCRIPTION	REF. NO	PART NO.	カソリ NO.	DESCRIPTION
1	82-NV2-004-019		CAB, FR 2[B] <707YU>	26	82-NV1-015-010		PANEL, TRAY EX[B]
1	82-NV1-001-010		CAB, FR EX[B] <YJ, Y>	26	82-NV1-054-010		PANEL, TRAY[N]
1	82-NV1-048-010		CAB, FR[N] <YJ, Y>	26	82-NV1-047-010		PANEL, TRAY[ST]
1	82-NV1-041-010		CAB, FR[ST] <Y>	27	82-NV1-002-010		CAB, STEEL[B]
2	80-VT1-202-010		FELT, 12.5-15.5-2	27	82-NV1-058-010		CAB, STEEL[ST]
3	82-NV1-215-010		SPR-T, EJECT R[B, N] <Y>	27	82-NV1-049-010		CAB, STEEL[N]
3	82-NV1-217-010		SPR-T, EJECT R[B, N] <EXCEPT Y>	28	82-NV1-038-010		PANEL, REAR[B, N] <Y>
4	80-CD3-218-110		SPR-P CASS	28	82-NV1-028-010		PANEL, REAR[ST] <Y>
5	82-NV1-004-010		BOX, CASS R[B]	28	82-NV1-031-010		PANEL, REAR[B, N] <YJ>
5	82-NV1-051-010		BOX, CASS R[N]	28	82-NV2-005-019		PANEL, REAR[B] <707YU>
5	82-NV1-044-010		BOX, CASS R[ST]	29	82-NV1-213-010		FELT, DIA12-2
6	82-NV1-204-010		GUIDE, LED CASS	30	82-NV1-205-010		GUIDE, LED WIND
7	82-NV1-024-010		DUMMY, CASS R	31	82-NF5-217-110		HLDR, BOTTOM
8	82-NV1-019-010		IND, CASS	32	82-NV1-201-010		HLDR, FR
9	82-NV1-030-010		PANEL, CASS R EX[B]	33	82-NV1-008-010		KEY, OPEN
9	82-NV1-053-010		PANEL, CASS R[N]	34	82-NV1-202-010		GUIDE, LED CD
9	82-NV1-046-010		PANEL, CASS R[ST]	35	87-063-165-010		OIL-DMPR 150
10	82-NV1-029-010		PANEL, CASS L EX[B]	36	82-NV1-013-010		KEY, DISPLAY
10	82-NV1-052-010		PANEL, CASS L[N]	37	82-NV1-009-010		KEY, CD
10	82-NV1-045-010		PANEL, CASS L[ST]	38	82-NV1-203-010		GUIDE, LED DECK
11	81-MX4-032-010		BADGE, AIWA N	39	82-NV1-011-010		KEY, DUBB
12	82-NV1-017-010		WINDOW, CASS	40	82-NV1-010-010		KEY, DECK
13	82-NV1-023-010		DUMMY, CASS L	A	87-721-096-410		QT2+3-10 GLD
14	82-NV1-214-010		SPR-T, EJECT L[B, N] <Y>	B	87-067-641-010		UTT2+3-8(W/O SLOT)BL
14	82-NV1-216-010		SPR-T, EJECT L[B, N] <EXCEPT Y>	C	87-067-660-010		BVT2+3-8W/O SLOT BLK
15	82-NV1-003-010		BOX, CASS L[B]	D	87-067-689-010		BVT2+3-8
15	82-NV1-050-010		BOX, CASS L[N]	E	87-067-579-010		BVT2+3-8W/O SLOT
15	82-NV1-043-010		BOX, CASS L[ST]	F	87-067-716-010		BVT2+3-6 BLK
16	80-MQ1-209-010		CLOTH, 20-7	G	87-571-032-410		VIT2+3
17	82-NV1-018-010		IND, CD	H	87-081-808-010		PW, 1.7-3.5-0.25
18	82-NT1-036-010		RING, FOOT[B, ST]	I	82-NE8-215-010		W, 4.2-6.8-0.18
18	82-NT2-064-010		RING, FOOT 2[N]	J	87-067-178-019		VTT2+2.6-3
19	82-NV1-016-010		WINDOW, CD				
20	82-NV1-022-010		DUMMY, CD				
21	82-NF5-205-010		HLDR ASSY, LOCK 2				
22	80-MV3-210-110		SPR-C, LOCK[B, N] <Y>				
22	80-MV3-218-010		SPR-C, LOCK[B, N] <EXCEPT Y>				
23	80-CD3-233-010		PLATE, LOCK				
24	82-NF5-204-010		HLDR ASSY, LOCK 1				
25	81-VM1-203-019		GUIDE, FL				


MECHANICAL EXPLODED VIEW 2/2

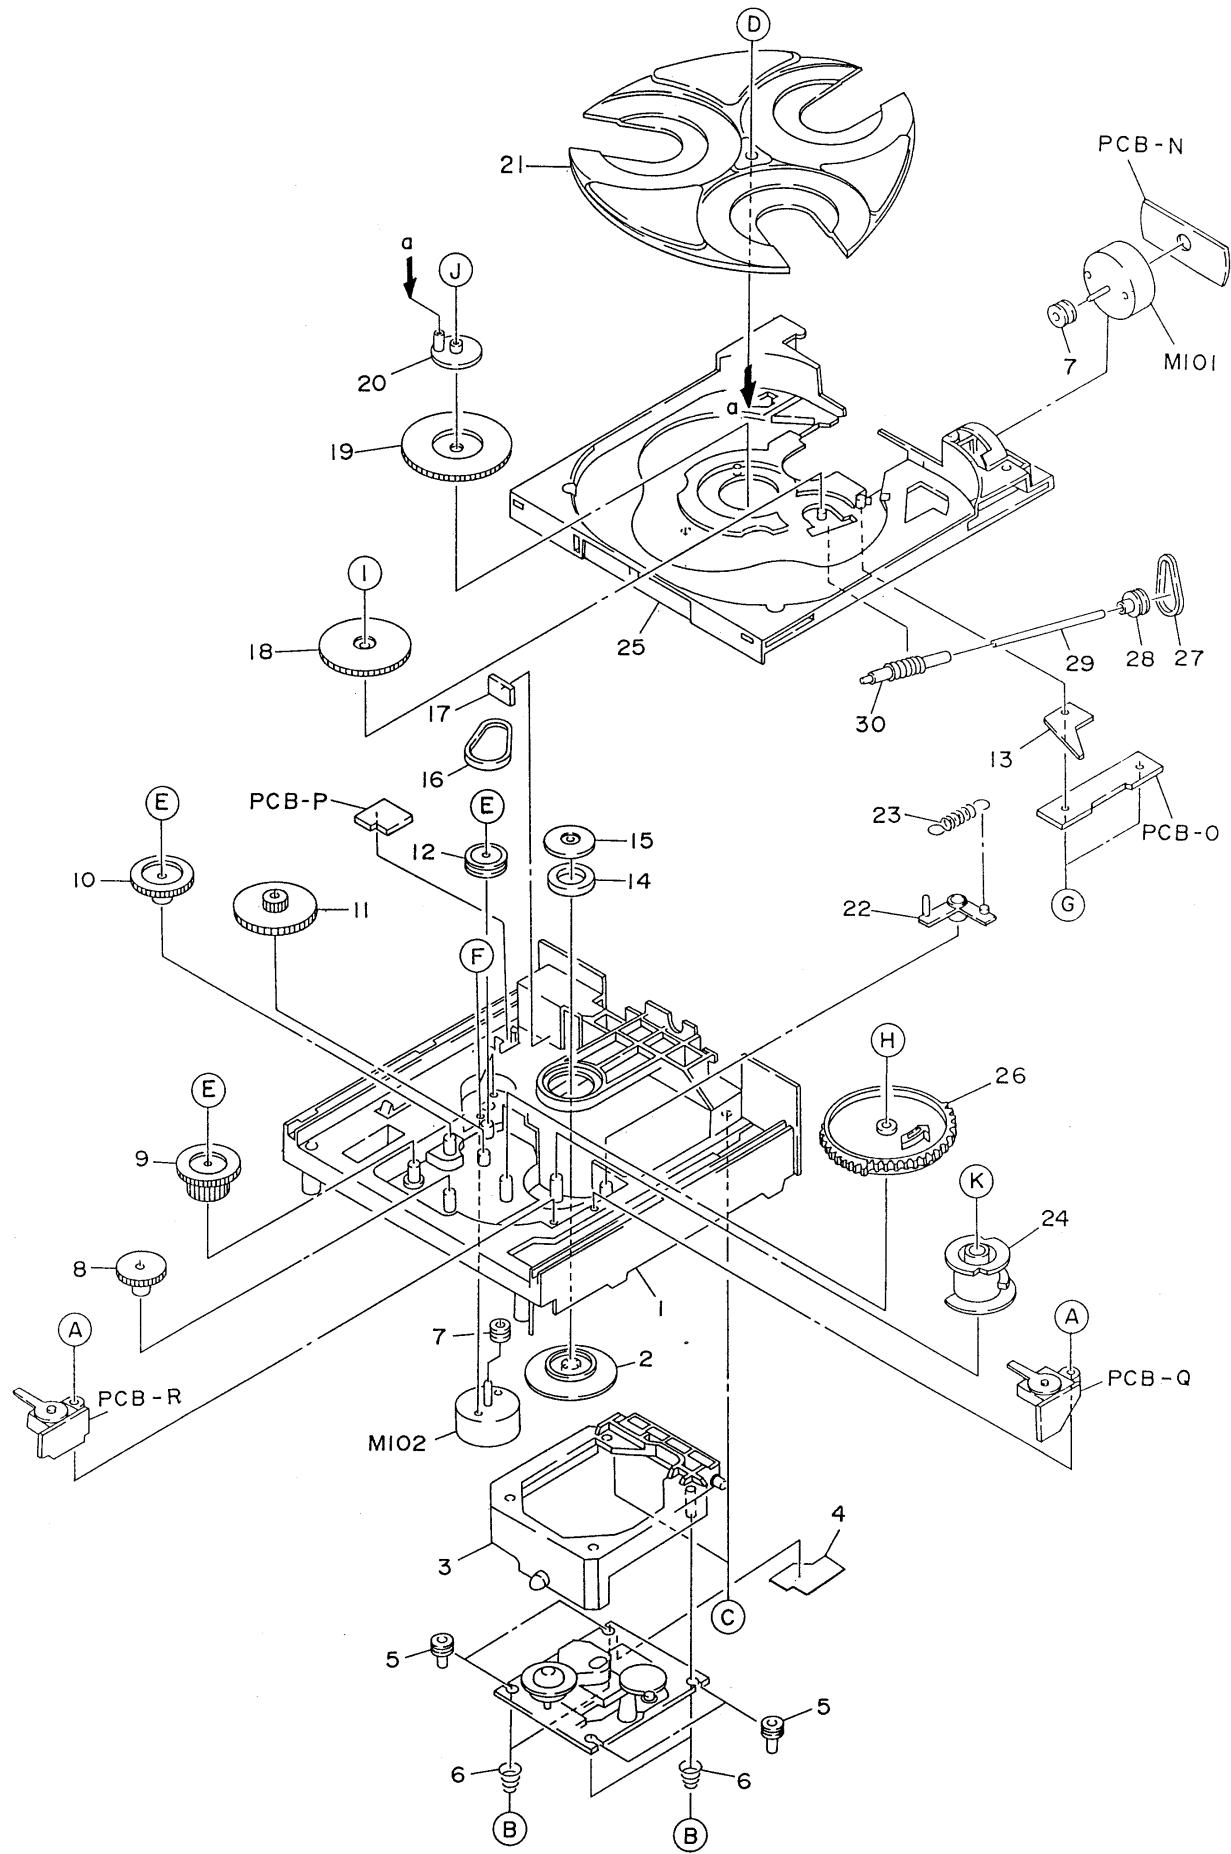


MECHANICAL PARTS LIST 2/2

REF. NO	PART NO.	DESCRIPTION NO.	REF. NO	PART NO.	DESCRIPTION NO.
1	81-ZG1-246-110	CHAS, MECH M[B, N] (EXCEPT Y)	24	81-ZG1-206-110	GEAR, MECH CAM
1	81-ZG1-261-010	CHAS, MECH M[B, N] (Y)	25	81-ZG1-001-310	TRAY[B, N] (Y)
2	81-ZG1-228-110	HLDL, MAGNET	25	81-ZG1-011-110	TRAY, MK2[B, N] (EXCEPT Y)
3	81-ZG1-253-110	HLDL, MECH MK2	26	81-ZG1-205-210	GEAR, TRAY CAM
4	81-ZG1-241-210	SH, CD MECH	27	81-ZG1-233-110	BELT, TT
5	81-ZG1-230-010	G-CUSH, MECH	28	81-ZG1-236-010	PULLY, TT MO
6	81-ZG1-231-010	SPR-C, MECH	29	81-ZG1-260-010	SHAFT, WORM S
7	81-ZG1-212-010	PULLY, LOAD MO	30	81-ZG1-221-010	WORM GEAR, TT
8	81-ZG1-250-010	GEAR, TRAY RELAY MK2	A	81-653-215-010	SPECIAL SCREW VT2
9	81-ZG1-257-010	GEAR, TRAY B MK2	B	81-ZG1-254-010	S-SCREW, MECH HLDL
10	81-ZG1-256-010	GEAR, TRAY A MK2	C	87-561-096-210	VFT1+3-10
11	81-ZG1-251-010	GEAR, RELAY MK2	D	81-ZG1-239-010	S-SCREW, TT
12	81-ZG1-211-010	PULLY, RELAY	E	87-067-945-110	VFT2+3-12(F10)
13	81-ZG1-240-010	SPR-P, WORM	F	87-251-071-410	U+2, 6-4
14	86-531-219-010	MAGNET, CLAMPER	G	87-067-579-010	BVT2+3-8W/O SLOT
15	81-ZG1-255-010	PLATE, MAGNET MK2	H	81-ZG1-264-010	S-SCREW, CAM
16	81-ZG1-232-010	BELT, TRAY	I	87-761-095-410	VFT2+3-8
17	81-ZG1-238-110	CUSH, TRAY IN	J	87-078-029-010	VFT2+3-13(F8)
18	81-ZG1-222-010	WORM WHEEL, TT	K	87-067-828-010	VFT2+3-15DIA10, GLD
19	81-ZG1-202-010	GEAR MAIN			
20	81-ZG1-252-010	LEVER, TT MK2			
21	81-ZG1-002-110	TURNTABLE[B, N] (Y)			
21	81-ZG1-008-110	TURNTABLE NO2[B, N] (EXCEPT Y)			
22	81-ZG1-213-110	PLATE, CAM			
23	81-ZG1-262-010	SPR-E, CAM S			

TAPE MECHANISM EXPLODED VIEW 1/1

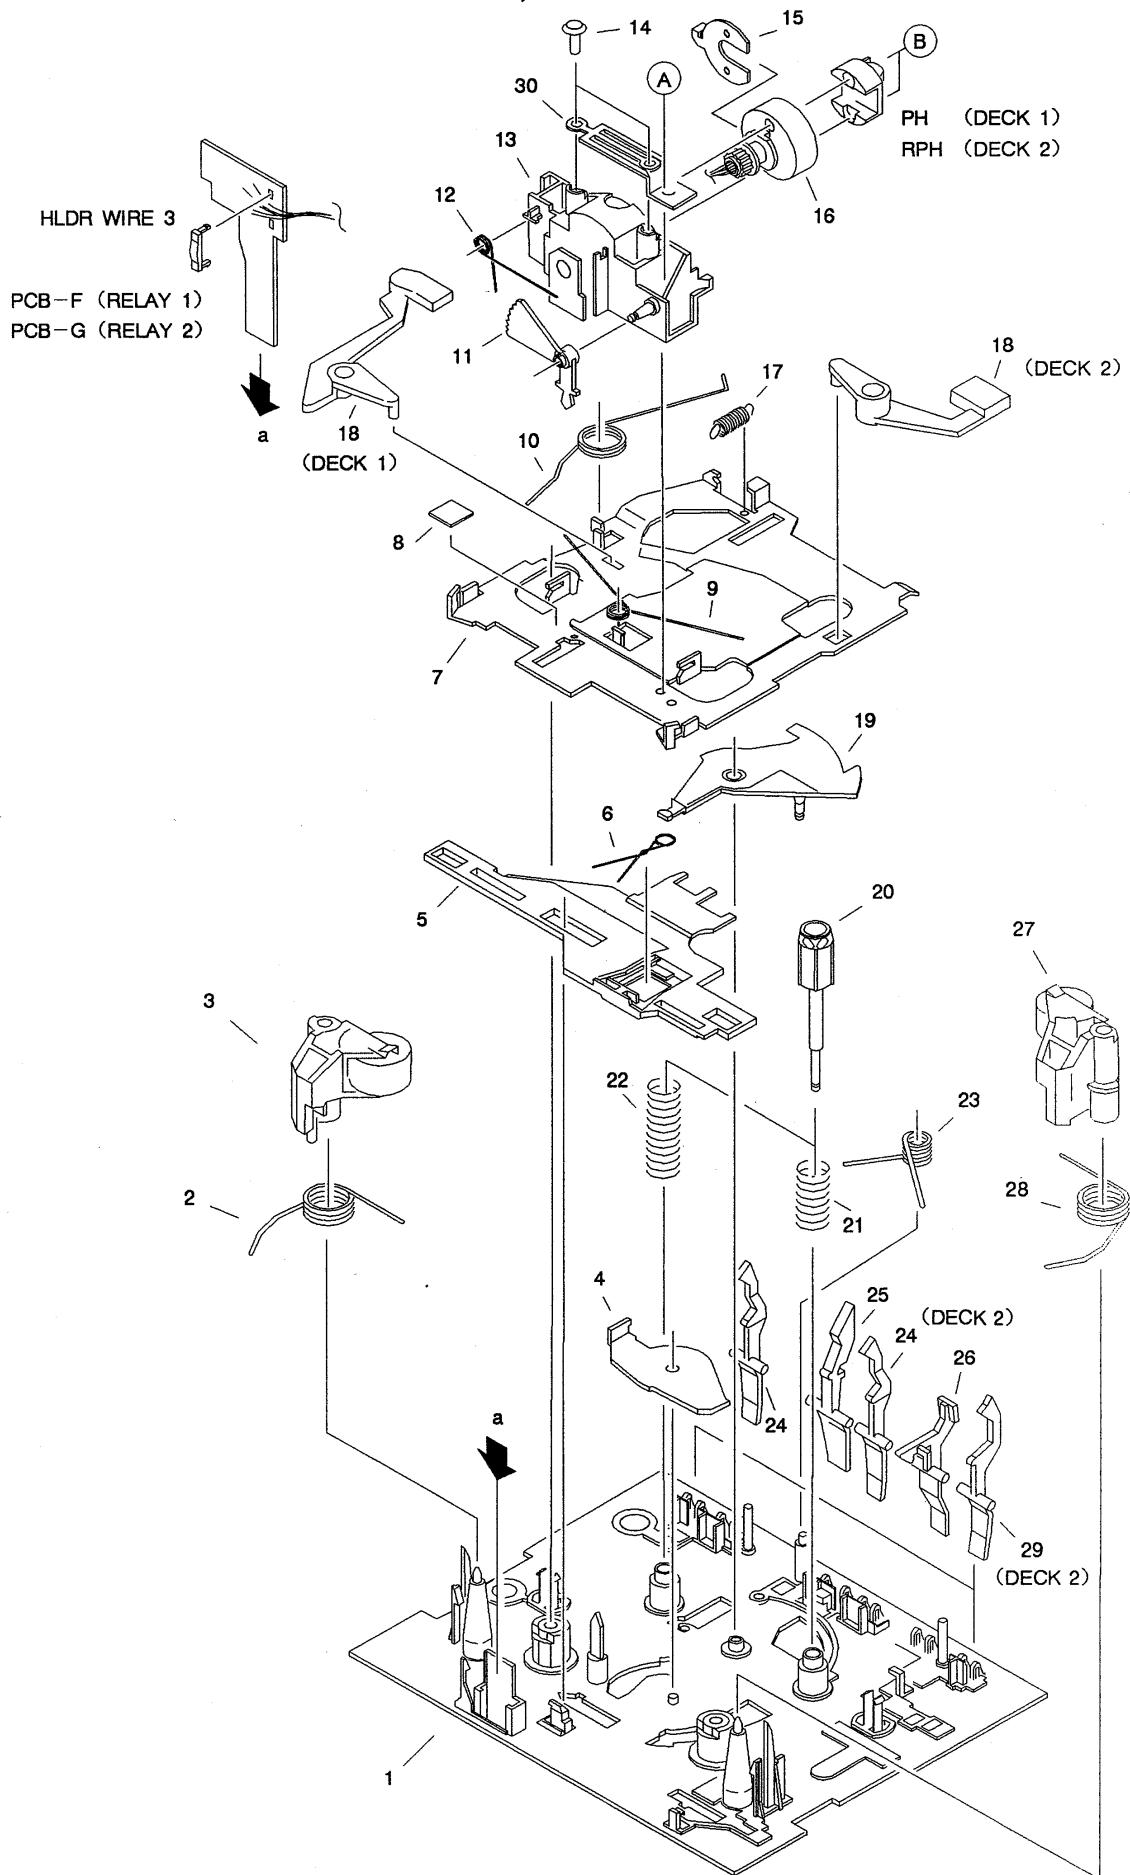


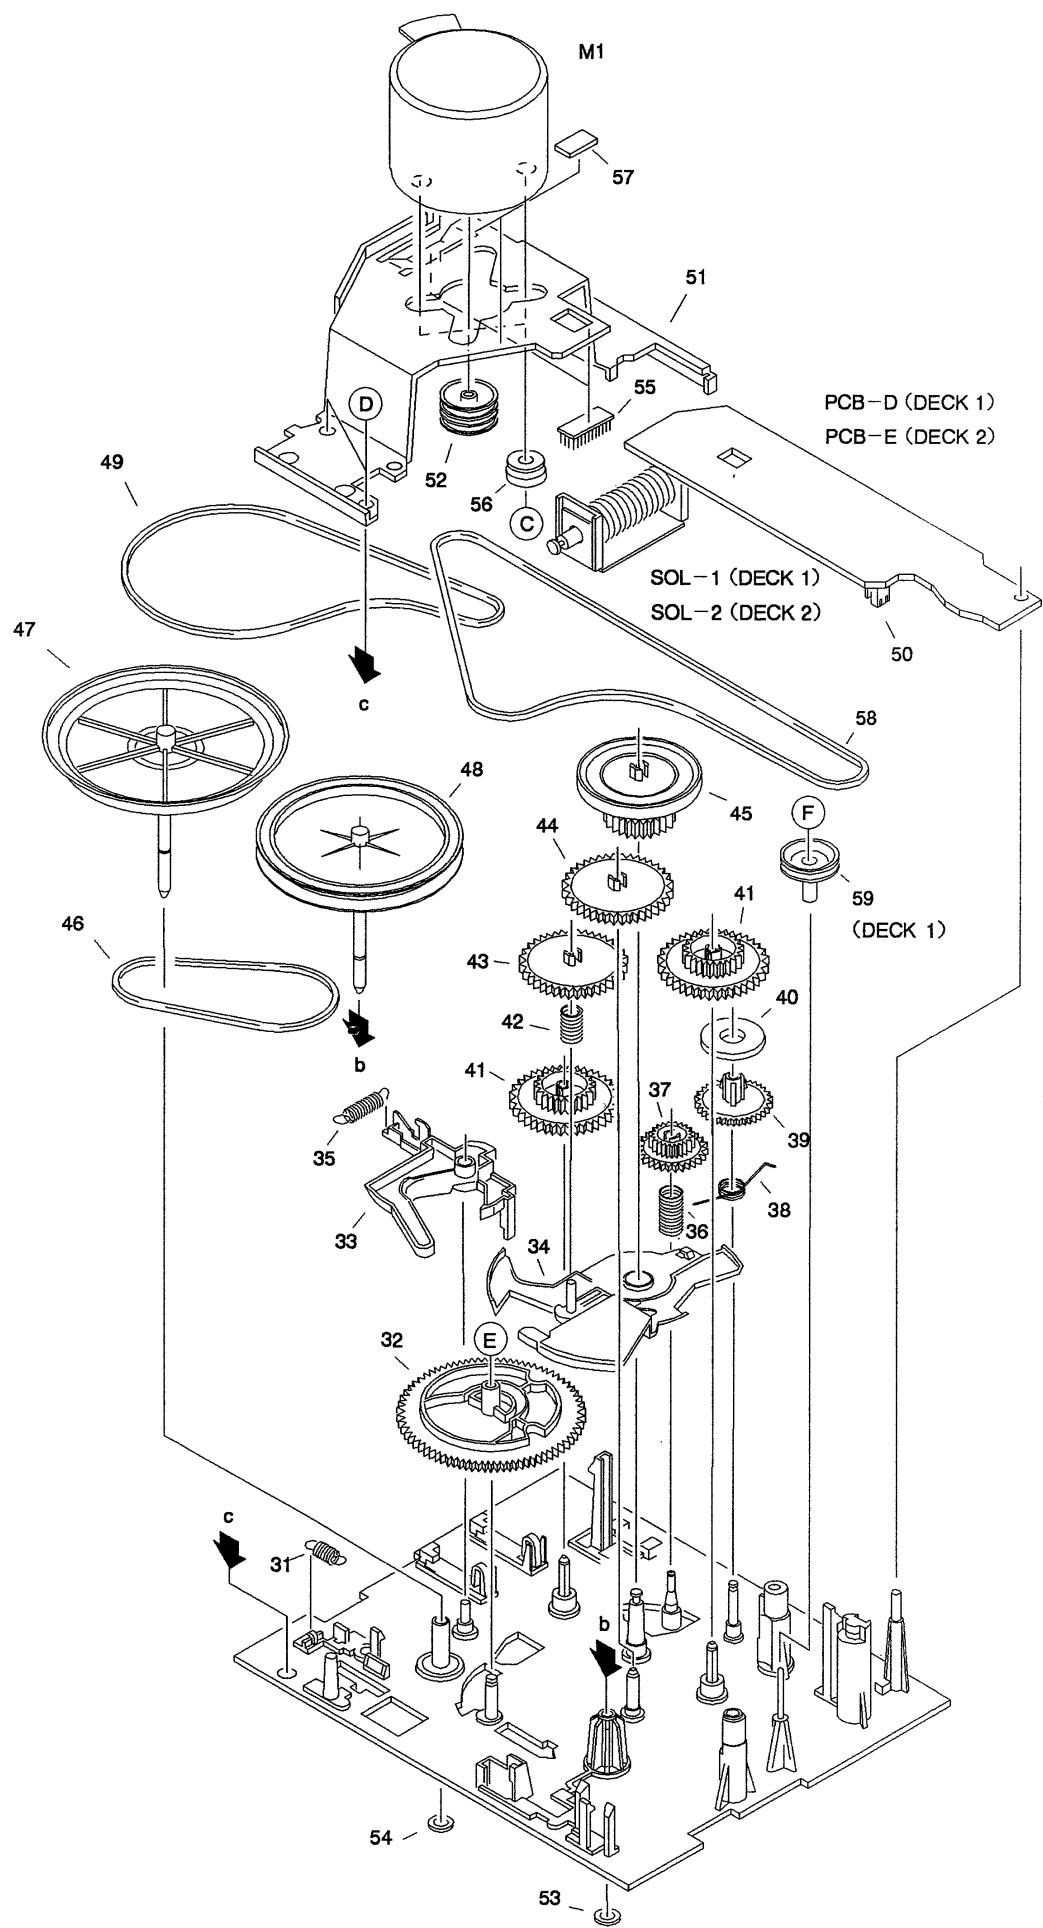

TAPE MECHANISM PARTS LIST 1/1

REF. NO	PART NO.	DESCRIPTION	REF. NO	PART NO.	DESCRIPTION
	NO.			NO.	
1	82-ZM1-214-110	CHAS ASSY, P (DECK 1)	34	82-ZM1-224-110	LVR, FR
1	82-ZM1-299-010	CHAS ASSY, R (DECK 2)	35	82-ZM1-305-010	SPR-E, TRIG 2
2	82-ZM1-258-010	SPR-T, PINCH L	36	82-ZM1-277-010	SPR-C, PLAY
3	82-ZM1-248-110	LVR ASSY, PINCH L	37	82-ZM1-223-010	GEAR, PLAY
4	82-ZM1-295-210	PLATE ASSY, L/INK	38	82-ZM1-256-110	SPR-T, FR
5	82-ZM1-266-010	LVR, DIR	39	82-ZM1-220-210	GEAR, IDLER
6	82-ZM1-214-010	SPR-T, DIR	40	80-ZM6-217-010	RING MAGNET 2
7	82-ZM1-206-210	CHAS, HEAD	41	82-ZM1-216-210	GEAR, REEL
8	87-078-014-010	SH, 5-5-0.05	42	82-ZM1-276-010	SPR-C, FR
9	82-ZM1-269-010	SPR-T, BRG	43	82-ZM1-225-010	GEAR, FR
10	82-ZM1-219-010	SPR-T, L/INK	44	82-ZM1-226-010	GEAR, REW
11	82-ZM1-210-010	GEAR, H/T	45	82-ZM1-228-210	SLIP DISK ASSY
12	82-ZM1-213-010	SPR-T, HEAD	46	82-ZM1-261-110	BELT, FR
13	82-ZM1-207-010	GUIDE, TAPE	47	82-ZM1-237-210	FLY-WHL ASSY, R (DECK 2)
14	82-ZM1-283-210	S-SCREW, AZIMUTH	47	82-ZM3-209-110	FLY-WHL ASSY, R2 (DECK 1)
15	82-ZM1-209-010	PLATE, HEAD	48	82-ZM1-234-110	FLY-WHL ASSY, L (DECK 2)
16	82-ZM1-208-010	HLDR, HEAD	48	82-ZM3-207-210	FLY-WHL ASSY, L2 (DECK 1)
17	82-ZM1-218-010	SPR-E, HB	49	82-ZM3-206-010	BELT, R
18	82-ZM1-263-110	LVR, EJECT L (DECK 1)	50	82-ZM1-245-210	HLDR, IC
18	82-ZM1-264-010	LVR, EJECT R (DECK 2)	51	82-ZM3-201-010	HLDR, MC
19	82-ZM1-222-010	LVR, PLAY	52	82-ZM3-202-010	PULLEY, MOT 2M
20	82-ZM1-217-110	REEL TABLE	53	82-ZM1-288-010	SH, 1. 63-3. 2-0. 5 SLT
21	82-ZM1-244-110	SPR-C, BT	54	80-ZM6-243-010	SH, 1. 75-3. 6-0. 5 SLT
22	82-ZM1-285-110	SPR-C, BT L	55	80-ZM6-230-010	SH, BELT
23	82-ZM1-257-010	SPR-T, CAS	56	86-575-242-010	CUSH-G, DIA3. 7-9-3. 2
24	82-ZM1-241-110	LVR, MC	57	86-575-361-010	CUSH-G, 6-8-0. 8
25	82-ZM1-242-010	LVR, CAS	58	82-ZM3-205-010	BELT, L
26	82-ZM1-243-010	LVR, STOP	59	82-ZM3-204-010	PULLEY, COUPLER (DECK 1)
27	82-ZM1-253-110	LVR ASSY, PINCH R	A	87-585-036-410	UIT+2-8
28	82-ZM1-259-010	SPR-T, PINCH R	B	80-ZM6-207-010	V+1. 6-7
29	82-ZM1-240-110	LVR, REC (DECK 2)	C	82-ZM1-309-010	S-SCRW, MOTOR
30	82-ZM1-298-010	SPR-P, EARTH	D	87-067-178-010	VTT+2. 6-3
31	82-ZM1-255-110	SPR-E, LVR DIR	E	87-067-932-010	PW, 2. 15-6. 8-0. 5 SLT
32	82-ZM1-221-110	GEAR, CAM	F	87-067-972-010	PW, 1. 05-3-0. 25 SLT
33	82-ZM1-227-110	LVR, TRIG			



CD MECHANISM EXPLODED VIEW 1/1

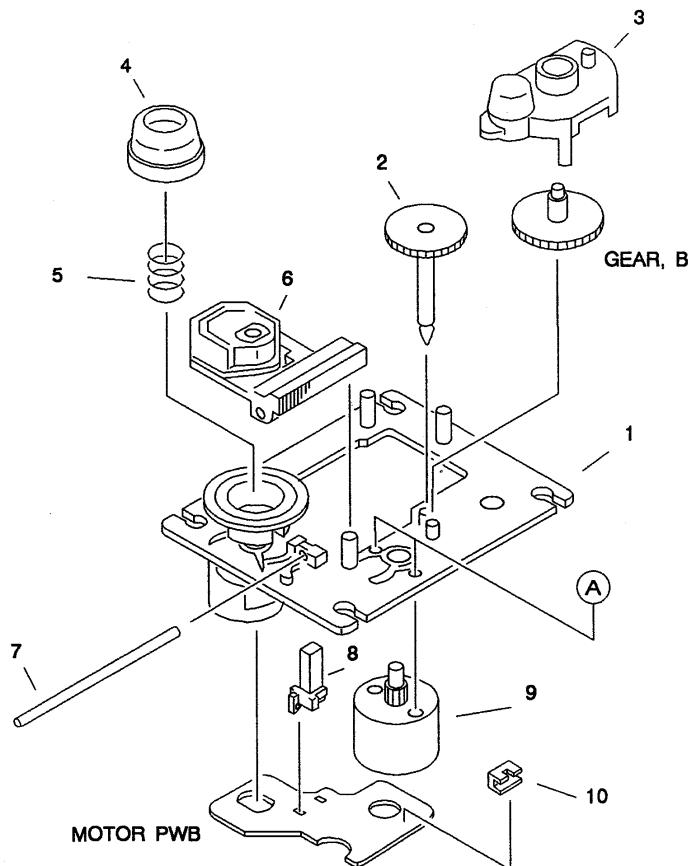

CD MECHANISM PARTS LIST 1/1

REF. NO	PART NO.	カツリ NO.	DESCRIPTION	REF. NO	PART NO.	カツリ NO.	DESCRIPTION
1	9X-262-513-310		T.T CHASS ASSY W/MOTOR	6	98-848-127-110		PICK UP KSS-210A
2	92-625-188-020		GEAR A	7	94-917-565-010		SHAFT SLED
3	92-625-544-010		COVER	8	91-572-085-110		LEAF SW (LIMIT)
4	92-625-187-010		RING, CENTER	9	9X-262-513-210		SLED MOTOR ASSY
5	92-625-191-010		SPRING COMPRESSION	10	91-564-722-110		CONNECTOR 6P
				A	87-261-032-210		V+2-3

SPRING APPLICATION POSITION

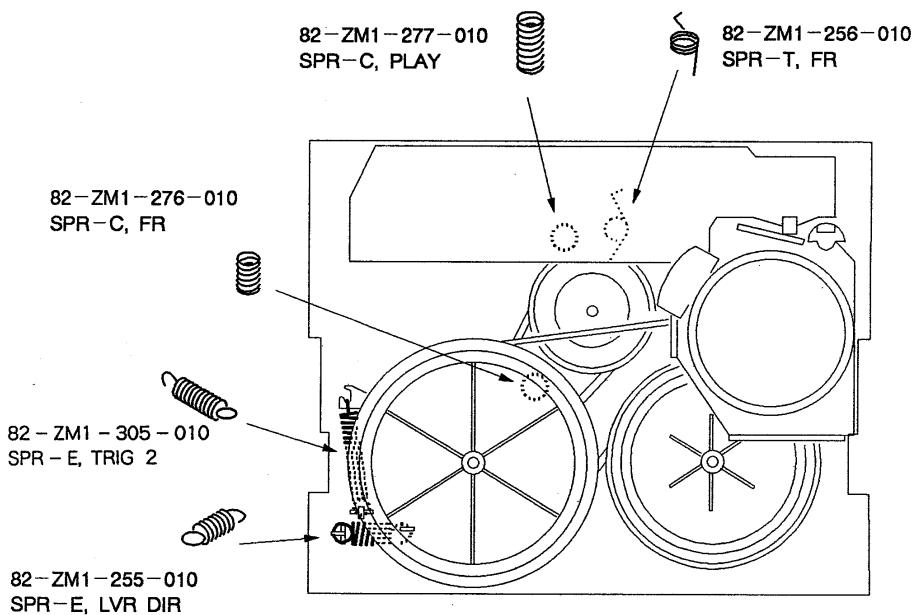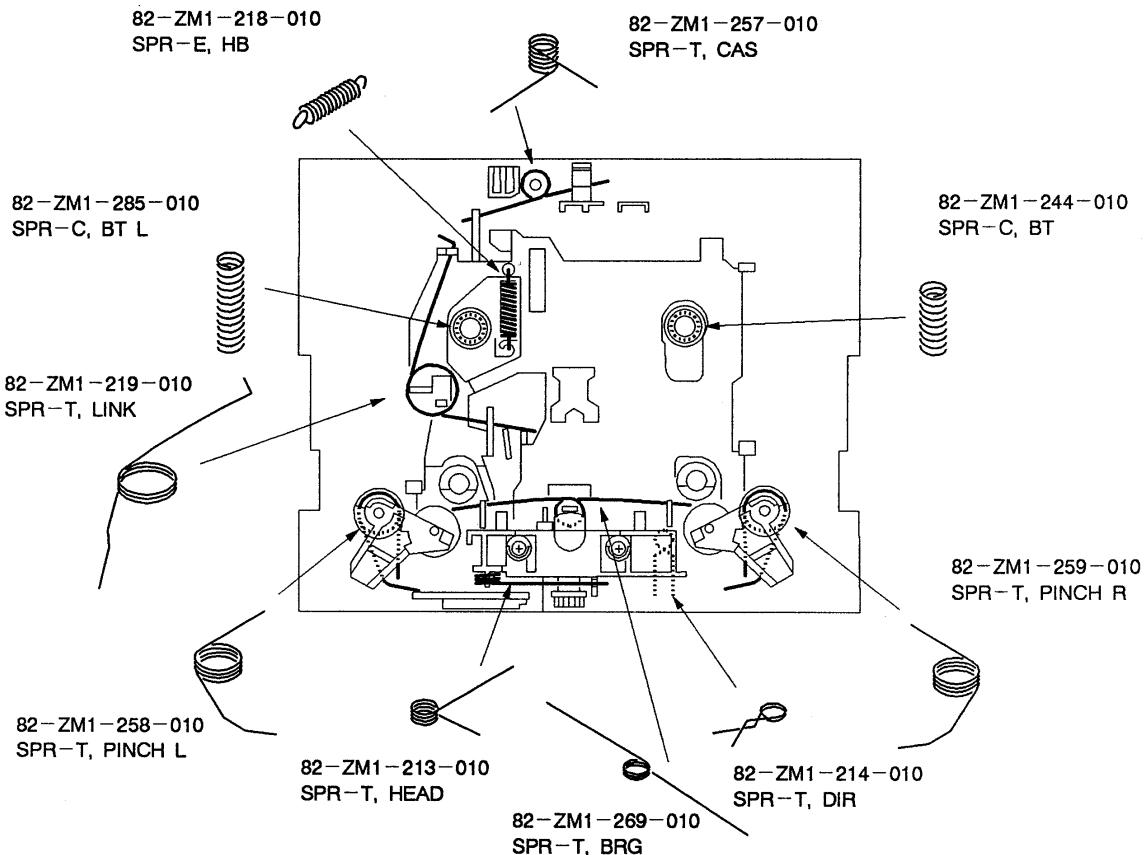

MODEL NO.

SX-N707



■ SPEAKER LIST

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	DESCRIPTION	REF. NO	PART NO.	DESCRIPTION
	NO.			NO.	
82-NS2-001-010		PANEL FR(YJB)	82-NS2-010-010		RING TW ASSY(YJN)
82-NS2-002-010		PANEL FR(YB, YUB)	82-NS2-602-010		SPEAKER WOOFER
82-NS2-007-010		PANEL FR(YJN)	82-VS1-603-010		SPEAKER TWEETER
82-NS2-008-010		PANEL FR ST(YST)	83-096-614-010		SPEAKER CORD
82-NS1-004-010		RING W(EXCEPT YJN)	82-NS2-610-010		TERMINAL ASSY
82-NS2-009-010		RING W(YJN)	82-NS1-008-010		GRILL FRAME ASSY
82-NS2-006-010		RING TW ASSY(EXCEPT YJN)			

■ DISASSEMBLY INSTRUCTIONS

- Insert a flat-bladed screwdriver into the position indicated by the arrows (shown in the below figure) and remove the front panel and tweeter. Remove the screws of each speaker unit and then remove the speaker units.
- SX-N707 (3 WAY SPEAKER SYSTEM)

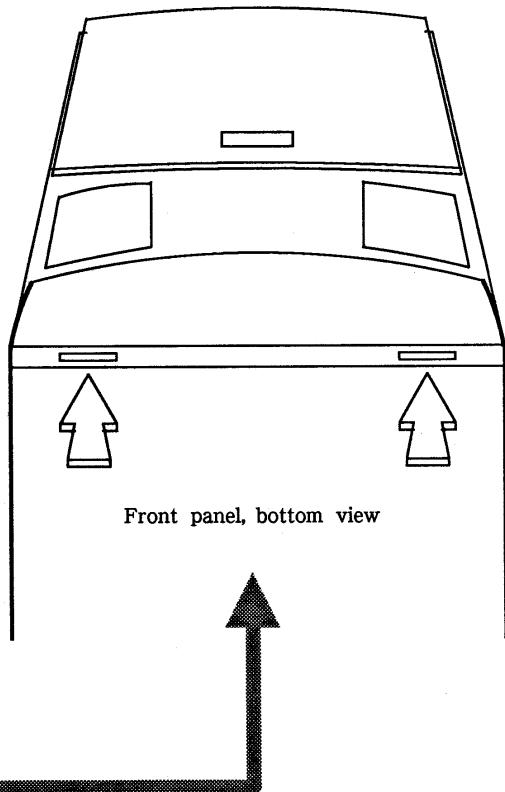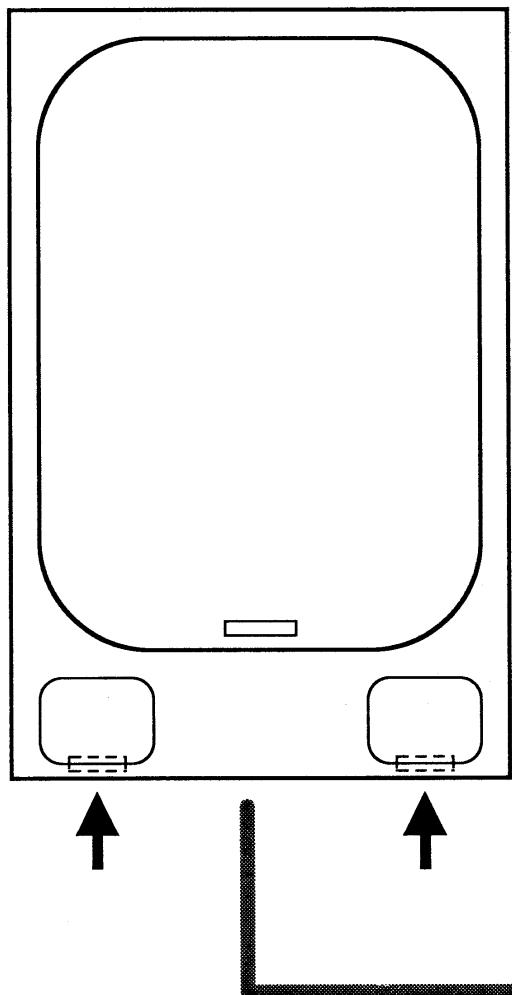

Front panel, bottom view

■ ACCESSORIES／PACKAGE LIST

DESCRIPTIONで判断できない物は“REFERENCE NAME LIST”を参照してください。
If can't understand for Description please kindly refer to “REFERENCE NAME LIST”.

REF. NO	PART NO.	カソリ NO.	DESCRIPTION
1	82-NT2-904-010		IB, E(G)〈E, Z〉
2	82-NT2-905-010		IB, H(G)〈E, K, Z〉
3	82-NT2-903-010		IB, H(S)〈HE, LH, HR, U〉
4	82-NT2-906-110		IB, H(B)〈HE, LH〉
5	82-NT2-022-010		RC-TN707 (EXCEPT HE)
6	82-NT2-053-010		RC-TN707 (N)〈HE〉
7	87-006-226-010		AM LOOP ANT CON2(E, K)
8	87-006-225-010		AM LOOP ANT NC2 (EXCEPT E, K)
9	81-748-632-010		FEEDER-ANT, FM N (EXCEPT Z)
10	87-043-106-010		FM, WIRE ANT (Z)
11	87-042-062-010		PLUG, ADPTR S-16115 (HR, HE)
12	87-009-724-010		PLUG, ADPTR IR39 (LH)
13	87-009-725-010		PLUG, ADPTR IR40 (HE)

REFERENCE NAME LIST

ELECTRICAL SECTION

DESCRIPTION	REFERENCE NAME
ANT	ANTENNAS
C-	CHIP
C-CAP	CAP, CHIP
C-CAP TN	CAP, CHIP TANTALUM
C-COIL	COIL, CHIP
C-DI	DIODE, CHIP
C-DIODE	DIODE, CHIP
C-FET	FET, CHIP
C-FOTR	FILTER, CHIP
C-JACK	JACK, CHIP
C-LED	LED, CHIP
C-RES	RES, CHIP
C-SFR	SFR, CHIP
C-SLIDE SW	SLIDE SWITCH, CHIP
C-SW	SWITCH, CHIP
C-TR	TRANSISTOR, CHIP
C-VR	VOLUME, CHIP
C-ZENER	ZENER, CHIP
CAP, CER	CAP, CERA-SOL
CAP, E	CAP, ELECT
CAP, M/F	CAP, FILM
CAP, TC	CAP, CERA-SOL
CAP, TC-U	CAP, CERA-SOL SS
CAP, TN	CAP, TANTALUM
CERA FIL	FILTER, CERAMIC
CF	FILTER, CERAMIC
DL	DELAY LINE
E/CAP	CAP, ELECT
FILT	FILTER
FLTR	FILTER
FUSE RES	RES, FUSE
MOT	MOTOR
P-DIODE	PHOTO DIODE
P-SNSR	PHOTO SENSER
P-TR	PHOTO TRANSISTOR
POLY VARI	VARIABLE CAPACITOR
PPCAP	CAP, PP
PT	POWER TRANSFORMER
PTR, RES	PTR, MELF
RC	REMOTE CONTROLLER
RES NF	RES, NON-FLAMMABLE
RESO	RESONATOR
SHLD	SHIELD
SOL	SOLENOID
SPKR	SPEAKER
SW, LVR	SWITCH, LEVER
SW, RTRY	SWITCH, ROTARY
SW, SL	SWITCH, SLIDE
TC CAP	CAP, CERA-SOL
THMS	THERMISTOR
TR	TRANSISTOR
TRIMMER	CAP, TRIMMER
TUN-CAP	VARIABLE CAPACITOR
VIB, CER	RESONATOR, CERAMIC
VIB, XTAL	RESONATOR, CRYSTAL
VR	VOLUME
ZENER	DIODE, ZENER
サージブレーカ セラコン	SERGE SUPPRESSOR CAP, CERA

サービス技術ニュース	
番号	連絡内容
G - -	
G - -	
G - -	

MECHANICAL SECTION

DESCRIPTION	REFERENCE NAME
ADHESIVE	SHEET ADHESIVE
AZ	AZIMUTH
BAR-ANT	BAR-ANTENNA
BAT	BATTERY
BAT, CONTACT ASSY	BATTERY CONTACT ASSY
BATT	BATTERY
BRG	BEARING
BTN	BUTTON
CAB	CABINET
CASS	CASSETTE
CHAS	CHASSIS
CLR	COLLAR
CONT	CONTROL
CRSR	CURSOR
CU	CUSHION
CUSH	CUSHION
DIR	DIRECTION
DUBB	DUBBING
FL	FRONT LOADING
FLY-WHL	FLYWHEEL
FR	FRONT
FUN	FUNCTION
G-CU	G-CUSHION
HDL	HANDL
HIMERON	CLOTH
HINGE, BAT	HINGE, BATTERY
HLDR	HOLDER
HT-SINK	HEAT SINK
IB	INSTRUCTION BOOKLET
IDLE	IDLER
IND, L-R	INDICATOR, L-R
KEY, CONT	KEY, CONTROL
KEY, PRGM	KEY, PROGRAM
KNOB, SL	KNOB, SLIDE
KNOB, VOL REV	KNOB, VOLUME REV
LBL	LABEL
LID, BATT	LID, BATTERY
LID, CASS	LID, CASSETTE
LVR	LEVER
P-SP	P-SPRING
PANEL, CONT	PANEL, CONTROL
PANEL, FR	PANEL, FRONT
PRGM	PROGRAM
PULLY, LOAD MO	PULLY, LOADING MOTOR
RBN	RIBBON
S-	SPECIAL
SEG	SEGMENT
SH	SHEET
SHLD-SH	SHIELD-SHEET
SL	SLIDE
SP	SPRING
SP-SCREW	SPECIAL-SCREW
SPACER, BAT	SPACER, BATTERY
SPR	SPRING
SPR-P	P-SPRING
SPR-PC-PUSH	P-SPRING, C-PUSH
SW	SWITCH
T-SP	T-SPRING
TERM	TERMINAL
TRIG	TRIGGER
TUN	TUNING
VOL	VOLUME
W	WASHER
WHL	WHEEL
WORM-WHL	WORM-WHEEL
ジアーム	ARM, SHAFT
ジグガイド	GUIDE, SHAFT
ストラップ	STRAP
ビンジ	HINGE

アイワ株式会社
AIWA CO., LTD.