



NSX-DP15

K

SERVICE MANUAL

COMPACT DISC
STEREO SYSTEM

BASIC TAPE MECHANISM : ZZM-3 PR1NM
BASIC CD MECHANISM : AZG-1 ZD3RDM

- Replace this Service manual with "Revision Publishing" when it is issued.

aiwa
S/M Code No. 09-006-428-0T4

SIMPLE

DATA

ELECTRICAL MAIN PARTS LIST - 1/7

NOTE: The characters in the suffix column indicate the part usage.

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX	
K	XX	C		
		KANRI		
		NO.		
C	1	87-010-387-080	CAP,E 470-25 SME	ABC
C	7	87-A10-627-090	CAP,E 2200-50 M SMG	ABC
C	6	87-A10-627-090	CAP,E 2200-50 M SMG	ABC
C	8	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
C	9	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
C	5	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
C	4	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
C	16	87-010-403-080	CAP, ELECT 3.3-50V	ABC
C	12	87-A10-627-000	CAP,E 2200-50 M SMG	ABC
C	13	87-A10-627-000	CAP,E 2200-50 M SMG	ABC
C	15	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
C	10	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
C	11	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
C	14	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC
CN	2	87-A61-108-010	CONN,5P V TID-A	ABC
CN	1	87-A61-110-010	CONN,9P V TID-A	ABC
D	1	87-017-447-010	DIODE,GBU4DL	ABC
D	2	87-017-447-010	DIODE,GBU4DL	ABC
D	14	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	19	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	15	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	17	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	18	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	16	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	20	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	21	87-020-465-080	DIODE,1SS133 (110MA)	ABC
PT	2	8A-NF8-661-010	PT,SUB ANF-8 (U)	.B
PT	2	8A-NF8-662-010	PT,SUB ANF-8 (E)	.C
PT	2	8A-NF8-673-010	PT,SUB ANF-8 (H) KAMI	A
Q	1	87-026-245-080	TR,DTC114ES	ABC
Q	2	87-A30-198-080	TR,KTC3199GR	ABC
RY	1	87-A91-339-010	RELAY,AC DC12V G5PA-2	A
RY	2	87-A91-418-010	RELAY,AC12V G5PA-1-M	.BC
S	1	87-A90-165-010	SW,SL 1-2-3 SWS2301	A
T	1	87-A60-317-010	TERMINAL, 1P MSC	ABC
T	2	87-A60-317-010	TERMINAL, 1P MSC	ABC
C	101	87-010-185-080	C-CAP,S 3900P-50 B	ABC
C	102	87-010-185-080	C-CAP,S 3900P-50 B	ABC
C	105	87-010-188-080	CAP,CHIP 6800P	ABC
C	106	87-010-188-080	CAP,CHIP 6800P	ABC
C	108	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	107	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	104	87-010-545-080	CAP, ELECT 0.22-50V	ABC
C	103	87-010-545-080	CAP, ELECT 0.22-50V	ABC
C	112	87-010-179-080	CAP,CHIP S B1200P	ABC
C	111	87-010-179-080	CAP,CHIP S B1200P	ABC
C	117	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	119	87-010-197-080	CAP, CHIP 0.01 DM	ABC
C	113	87-010-405-080	CAP, ELECT 10-50V	ABC
C	116	87-010-405-080	CAP, ELECT 10-50V	ABC
C	115	87-010-405-080	CAP, ELECT 10-50V	ABC
C	114	87-010-405-080	CAP, ELECT 10-50V	ABC
C	120	87-010-197-080	CAP, CHIP 0.01 DM	ABC
C	133	87-010-197-080	CAP, CHIP 0.01 DM	ABC
C	153	87-010-188-080	CAP,CHIP 6800P	ABC
C	209	87-010-178-080	CHIP CAP 1000P	ABC
C	205	87-010-183-080	C-CAP,S 2700P-50 B	ABC
C	206	87-010-183-080	C-CAP,S 2700P-50 B	ABC
C	208	87-010-545-080	CAP, ELECT 0.22-50V	ABC
C	207	87-010-545-080	CAP, ELECT 0.22-50V	ABC
C	210	87-010-178-080	CHIP CAP 1000P	ABC
C	215	87-010-179-080	CAP,CHIP S B1200P	ABC
C	216	87-010-179-080	CAP,CHIP S B1200P	ABC
C	212	87-010-403-080	CAP, ELECT 3.3-50V	ABC
C	211	87-010-403-080	CAP, ELECT 3.3-50V	ABC
C	218	87-010-405-080	CAP, ELECT 10-50V	ABC
C	217	87-010-405-080	CAP, ELECT 10-50V	ABC
C	223	87-010-197-080	CAP, CHIP 0.01 DM	ABC
C	224	87-010-197-080	CAP, CHIP 0.01 DM	ABC
C	221	87-010-405-080	CAP, ELECT 10-50V	ABC
C	222	87-010-405-080	CAP, ELECT 10-50V	ABC
C	257	87-010-190-080	S CHIP F 0.01	.C
C	258	87-010-190-080	S CHIP F 0.01	.C
C	255	87-010-190-080	S CHIP F 0.01	.C
C	256	87-010-190-080	S CHIP F 0.01	.C
C	251	87-010-993-080	C-CAP,S 0.056-25 B	ABC
C	401	87-010-260-080	CAP, ELECT 47-25V	ABC
CN	101	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	ABC
CN	102	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	ABC
CNA	101	8A-NF8-656-010	CONN ASSY,5P TID-A 400	ABC
D	101	87-A40-269-080	C-DIODE,MC2836	ABC

ELECTRICAL MAIN PARTS LIST - 2/7

D	103	87-A40-313-080	C-DIODE,MC 2840	ABC.....
D	150	87-A40-270-080	C-DIODE,MC2838	ABC.....
D	204	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	201	87-A40-269-080	C-DIODE,MC2836	ABC.....
D	202	87-A40-270-080	C-DIODE,MC2838	ABC.....
D	203	87-A40-313-080	C-DIODE,MC 2840	ABC.....
D	402	87-A40-553-080	DIODE,1N4003 LES	ABC.....
D	403	87-A40-553-080	DIODE,1N4003 LES	ABC.....
IC	101	87-A21-398-010	IC,STK490-110	ABC.....
IC	201	87-A21-398-010	IC,STK490-110	ABC.....
J	201	87-A61-159-010	JACK,PIN 4P R/W/B/0 KM	ABC.....
L	251	87-A50-610-010	COIL,1UH K(MDEC)	ABC.....
L	252	87-A50-610-010	COIL,1UH K(MDEC)	ABC.....
Q	102	87-A30-107-070	C-TR,CMBT5401	ABC.....
Q	101	87-A30-107-070	C-TR,CMBT5401	ABC.....
Q	151	87-A30-106-080	C-TR,CMBT5551	ABC.....
Q	150	87-A30-107-070	C-TR,CMBT5401	ABC.....
Q	204	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	203	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	202	87-A30-107-070	C-TR,CMBT5401	ABC.....
Q	201	87-A30-107-070	C-TR,CMBT5401	ABC.....
Q	401	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	402	87-A30-075-080	C-TR,2SA1235F	ABC.....
R	181	87-A00-669-080	RES,M/F 0.22-2W J RA	ABC.....
R	182	87-A00-669-080	RES,M/F 0.22-2W J RA	ABC.....
R	232	87-A00-257-080	RES,M/F 0.15-1W J	ABC.....
R	231	87-A00-258-080	RES,M/F 0.22-1W J	ABC.....
WH	101	87-A90-459-010	HLDR,WIRE 2.5-5P	ABC.....
C	102	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	104	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	101	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	107	87-010-493-040	CAP,E 0.47-50 GAS	ABC.....
C	103	87-010-498-040	CAP,E 10-16 GAS	ABC.....
C	108	87-012-393-080	C-CAP,S 0.22-16 R K	ABC.....
C	153	87-010-198-080	CAP,CHIP 0.022	ABC.....
C	154	87-010-246-040	CAP,E 47-35 SME	ABC.....
C	156	87-010-404-040	CAP,E 4.7-50 SME	ABC.....
C	155	87-010-404-040	CAP,E 4.7-50 SME	ABC.....
C	361	87-010-178-080	CHIP CAP 1000P	ABC.....
C	362	87-010-178-080	CHIP CAP 1000P	ABC.....
C	372	87-010-178-080	CHIP CAP 1000P	ABC.....
C	371	87-010-178-080	CHIP CAP 1000P	ABC.....
C	601	87-010-382-040	CAP,E 22-25 SME	ABC.....
C	801	87-010-195-080	C-CAP,S 0.068-25 F	ABC.....
C	802	87-010-195-080	C-CAP,S 0.068-25 F	ABC.....
C	806	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	805	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	803	87-010-402-040	CAP,E 2.2-50 SME	ABC.....
C	804	87-010-402-040	CAP,E 2.2-50 SME	ABC.....
C	810	87-010-379-040	CAP,E 22-16 M SME	ABC.....
C	908	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	909	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	907	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	901	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	904	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	903	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	906	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	905	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	902	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	911	87-010-178-080	CHIP CAP 1000P	ABC.....
C	915	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	912	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	917	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	916	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	919	87-010-197-080	CAP,CHIP 0.01 DM	ABC.....
C	914	87-010-248-040	CAP,E 220-10 SME	ABC.....
C	913	87-010-248-040	CAP,E 220-10 SME	ABC.....
C	910	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	921	87-010-186-080	CAP,CHIP 4700P	ABC.....
C	920	87-012-369-080	C-CAP,S 0.047-50F	ABC.....
C	951	87-010-312-080	C-CAP,S 15P-50 CH	ABC.....
C	953	87-012-140-080	CAP 470P	ABC.....
C	952	87-012-155-080	C-CAP 180P-50CH	ABC.....
C	963	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	961	87-010-378-040	CAP,E 10-16	ABC.....
C	962	87-012-157-080	C-CAP,S 330P-50 CH	ABC.....
CN	104	87-A60-057-010	CONN,11P V 9604S-11C	ABC.....
CN	701	87-099-720-010	CONN,30P TYK-B(P)	ABC.....
CN	731	87-099-015-010	CONN,13P 6216V	ABC.....
D	102	87-A40-752-080	ZENER,UZ6.2BSC	ABC.....
D	601	87-A40-269-080	C-DIODE,MC2836	ABC.....
D	652	87-A40-269-080	C-DIODE,MC2836	ABC.....
D	651	87-A40-269-080	C-DIODE,MC2836	ABC.....
D	653	87-A40-269-080	C-DIODE,MC2836	ABC.....
D	654	87-A40-269-080	C-DIODE,MC2836	ABC.....
D	981	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
FL	901	8A-NF9-605-010	FL,HNA-10SS12	ABC.....

ELECTRICAL MAIN PARTS LIST - 3/7

IC	901	8A-NFW-602-010	C-IC,UPD780228-***-3BA	ABC.....
IC	961	87-A21-482-010	IC,RPM6938-H4	ABC.....
L	951	87-A50-434-010	COIL,CLK 4.19M(TOKO)	ABC.....
LED	207	87-A40-266-080	LED,SLH-56VCT31 RED	ABC.....
LED	208	87-A40-266-080	LED,SLH-56VCT31 RED	ABC.....
LED	209	87-A40-317-080	LED,SLR-342VCT31 RED	ABC.....
LED	210	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABC.....
Q	101	87-026-610-080	TR,KTC3198GR	ABC.....
Q	104	87-A30-074-080	C-TR,RT1P 141C	ABC.....
Q	103	87-A30-074-080	C-TR,RT1P 141C	ABC.....
Q	102	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	105	87-A30-468-080	C-TR,KRC102S-RTK	ABC.....
Q	201	87-A30-087-080	C-FET,2SK2158	ABC.....
Q	601	87-A30-318-080	TR,CSA952K	ABC.....
Q	602	87-A30-318-080	TR,CSA952K	ABC.....
Q	603	87-A30-329-080	TR,CD1585BC	ABC.....
Q	806	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	805	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	803	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	804	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	801	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	802	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	901	87-A30-074-080	C-TR,RT1P 141C	ABC.....
Q	902	87-A30-468-080	C-TR,KRC102S-RTK	ABC.....
Q	951	87-A30-087-080	C-FET,2SK2158	ABC.....
S	327	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	328	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	329	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	361	87-A91-633-010	SW,RTRY XRE012103PVB25FINA 1-2	ABC.....
S	371	87-A91-632-010	SW,RTRY XRE012103PVB25FINB 1-2	ABC.....
C	309	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	307	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	301	87-010-318-080	C-CAP,S 47P-50 CH	ABC.....
C	302	87-010-318-080	C-CAP,S 47P-50 CH	ABC.....
C	304	87-012-157-080	C-CAP,S 330P-50 CH	ABC.....
C	306	87-012-157-080	C-CAP,S 330P-50 CH	ABC.....
C	305	87-012-157-080	C-CAP,S 330P-50 CH	ABC.....
C	303	87-012-157-080	C-CAP,S 330P-50 CH	ABC.....
C	314	87-010-180-080	C-CER 1500P	ABC.....
C	313	87-010-180-080	C-CER 1500P	ABC.....
C	316	87-010-182-080	C-CAP,S 2200P-50 B	ABC.....
C	315	87-010-182-080	C-CAP,S 2200P-50 B	ABC.....
C	310	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	311	87-010-198-080	CAP,CHIP 0.022	ABC.....
C	312	87-010-198-080	CAP,CHIP 0.022	ABC.....
C	324	87-010-260-080	CAP,ELECT 47-25V	ABC.....
C	325	87-010-370-080	CAP,E 330-6.3 SME	ABC.....
C	328	87-010-404-080	CAP,ELECT 4.7-50V	ABC.....
C	327	87-010-404-080	CAP,ELECT 4.7-50V	ABC.....
C	322	87-012-142-080	CAP,S 0.33-16	ABC.....
C	321	87-012-142-080	CAP,S 0.33-16	ABC.....
C	339	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	337	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	332	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	336	87-010-401-080	CAP,ELECT 1-50V	ABC.....
C	335	87-010-401-080	CAP,ELECT 1-50V	ABC.....
C	340	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	354	87-010-175-080	CAP 560P	ABC.....
C	358	87-010-183-080	C-CAP,S 2700P-50 B	ABC.....
C	359	87-010-183-080	C-CAP,S 2700P-50 B	ABC.....
C	357	87-010-197-080	CAP,CHIP 0.01 DM	ABC.....
C	356	87-010-260-080	CAP,ELECT 47-25V	ABC.....
C	352	87-012-140-080	CAP 470P	ABC.....
C	351	87-012-140-080	CAP 470P	ABC.....
C	355	87-012-349-080	C-CAP,S 1000P-50 CH	ABC.....
C	360	87-010-183-080	C-CAP,S 2700P-50 B	ABC.....
C	378	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	370	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	379	87-010-382-080	CAP,ELECT 22-25V	ABC.....
C	374	87-016-083-080	C-CAP,S 0.15-16 RK	ABC.....
C	373	87-016-083-080	C-CAP,S 0.15-16 RK	ABC.....
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	381	87-010-197-080	CAP,CHIP 0.01 DM	ABC.....
C	383	87-010-197-080	CAP,CHIP 0.01 DM	ABC.....
C	382	87-010-312-080	C-CAP,S 15P-50 CH	ABC.....
C	380	87-010-382-080	CAP,ELECT 22-25V	ABC.....
C	384	87-010-402-080	CAP,ELECT 2.2-50V	ABC.....
C	387	87-012-145-080	CAP,CHIP S 270P CH	ABC.....
C	388	87-012-156-080	C-CAP,S 220P-50 CH	ABC.....
C	393	87-010-319-080	C-CAP,S 56P-50 CH	ABC.....
C	394	87-010-319-080	C-CAP,S 56P-50 CH	ABC.....
C	391	87-010-319-080	C-CAP,S 56P-50 CH	ABC.....
C	392	87-010-319-080	C-CAP,S 56P-50 CH	ABC.....
CN	301	87-A60-620-010	CONN,3P V 2MM JMT	ABC.....
CN	351	87-A60-625-010	CONN,8P V 2MM JMT	ABC.....
D	352	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	353	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....

ELECTRICAL MAIN PARTS LIST - 4/7

FB	301	87-008-372-010	FILTER, EMI BL OIRNI	..C.....
IC	303	87-A20-783-040	C-IC,BA7762AFS	ABC.....
L	301	87-A50-625-010	COIL,TRAP 85KHZ (SANWA)	ABC.....
L	302	87-A50-625-010	COIL,TRAP 85KHZ (SANWA)	ABC.....
L	351	87-007-342-010	COIL,OSC 85K BIAS	ABC.....
Q	357	87-026-609-080	TR,KTA1266GR	ABC.....
Q	358	87-026-610-080	TR,KTC3198GR	ABC.....
Q	359	87-026-610-080	TR,KTC3198GR	ABC.....
Q	355	87-A30-063-080	C-TR,KRA104S	ABC.....
Q	356	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	354	87-A30-087-080	C-FET,2SK2158	ABC.....
Q	353	87-A30-087-080	C-FET,2SK2158	ABC.....
Q	351	87-A30-087-080	C-FET,2SK2158	ABC.....
Q	383	87-A30-075-080	C-TR,2SA1235F	ABC.....
SFR	351	87-A90-433-080	SFR,50K H NVZ6TLTA	ABC.....
SFR	352	87-A90-433-080	SFR,50K H NVZ6TLTA	ABC.....
C	116	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	115	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	151	87-010-382-080	CAP, ELECT 22-25V	ABC.....
C	161	87-010-176-080	C-CAP,S 680P-50 SL	..C.....
C	162	87-010-176-080	C-CAP,S 680P-50 SL	..C.....
C	163	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	178	87-010-197-080	CAP, CHIP 0.01 DM	..C.....
C	177	87-010-197-080	CAP, CHIP 0.01 DM	..C.....
C	176	87-010-213-080	C-CAP,S 0.015-50 B	..C.....
C	175	87-010-213-080	C-CAP,S 0.015-50 B	..C.....
C	171	87-012-368-080	C-CAP,S 0.1-50 F	ABC.....
C	173	87-012-368-080	C-CAP,S 0.1-50 F	ABC.....
C	172	87-012-368-080	C-CAP,S 0.1-50 F	ABC.....
C	174	87-012-368-080	C-CAP,S 0.1-50 F	ABC.....
CN	101	87-A60-996-010	CONN,13P V BLK TAC-L13X-A3	ABC.....
D	101	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABC.....
FB	162	87-008-474-080	F-BEAD,EMI BLO2RN1	ABC.....
FB	161	87-008-474-080	F-BEAD,EMI BLO2RN1	ABC.....
J	102	87-A60-238-010	TERMINAL,SP 4P (MSC)	ABC.....
J	103	87-A60-483-010	JACK,DIA6.3 BLK ST W/S KM	ABC.....
L	102	87-A50-610-010	COIL,1UH K(MDEC)	ABC.....
L	101	87-A50-610-010	COIL,1UH K(MDEC)	ABC.....
Q	113	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	112	87-A30-086-040	C-TR,CSD1306E	ABC.....
Q	111	87-A30-086-040	C-TR,CSD1306E	ABC.....
R	163	87-A00-440-050	RES,220-1/2W J RP	ABC.....
R	164	87-A00-440-050	RES,220-1/2W J RP	ABC.....
R	161	87-A00-440-050	RES,220-1/2W J RP	ABC.....
R	162	87-A00-440-050	RES,220-1/2W J RP	ABC.....
C	971	87-010-381-080	CAP, ELECT 330-16V	ABC.....
C	972	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	982	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	989	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	981	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	993	87-010-178-080	CHIP CAP 1000P	ABC.....
C	995	87-010-178-080	CHIP CAP 1000P	ABC.....
C	997	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	998	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	991	87-010-312-080	C-CAP,S 15P-50 CH	ABC.....
C	992	87-010-312-080	C-CAP,S 15P-50 CH	ABC.....
C	999	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
D	991	87-017-149-080	ZENER,HZS6A2L	ABC.....
D	992	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
IC	991	87-070-127-110	IC,LC72131 D	ABC.....
Q	981	87-A30-234-080	TR,CSC4115BC	ABC.....
R	993	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
R	991	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
R	995	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
X	991	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	ABC.....
C	779	87-010-188-080	CAP,CHIP 6800P	..C.....
C	771	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	779	87-010-426-080	C-CAP,S 0.012-25 B	AB.....
C	788	87-010-149-080	C-CAP,S 5P-50 CH	ABC.....
C	780	87-010-188-080	CAP,CHIP 6800P	..C.....
C	780	87-010-426-080	C-CAP,S 0.012-25 B	AB.....
C	789	87-A10-592-080	C-CAP,S 0.015-50 J B	ABC.....
C	791	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	793	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	797	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	799	87-010-407-080	CAP, ELECT 33-50V	ABC.....
C	794	87-012-155-080	C-CAP 180P-50CH	..C.....
C	790	87-A10-592-080	C-CAP,S 0.015-50 J B	ABC.....
C	802	87-010-194-080	CAP, CHIP 0.047	ABC.....
C	800	87-010-194-080	CAP, CHIP 0.047	ABC.....
C	803	87-010-198-080	CAP, CHIP 0.022	ABC.....
C	804	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	807	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	808	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	809	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	801	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	818	87-010-180-080	C-CER 1500P	..C.....

ELECTRICAL MAIN PARTS LIST - 5/7

C	810	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	815	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	816	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	812	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	811	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	823	87-010-177-080	C-CAP,S 820P-50 SL	AB.....
C	824	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	821	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	825	87-010-596-080	CAP, S 0.047-16	ABC.....
C	823	87-012-349-080	C-CAP,S 1000P-50 CH	..C.....
D	801	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
IC	801	87-A21-560-010	IC,LA1844L-A	ABC.....
L	801	87-A50-608-010	COIL,FM DET-N(TOK)	ABC.....
L	802	87-A91-551-010	FLTR,PCFJZH-450 L(TOK)	ABC.....
L	811	87-005-847-080	COIL,2.2UH(CECS)	ABC.....
Q	801	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	802	87-A30-076-080	C-TR,2SC3052F	ABC.....
R	790	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	869	87-010-197-080	CAP, CHIP 0.01 DM	..C.....
C	875	87-010-196-080	CHIP CAPACITOR,0.1-25	..C.....
C	877	87-010-197-080	CAP, CHIP 0.01 DM	..C.....
C	879	87-010-314-080	C-CAP,S 22P-50V	..C.....
C	878	87-010-316-080	C-CAP,S 33P-50 CH	..C.....
C	874	87-010-405-080	CAP, ELECT 10-50V	..C.....
C	876	87-010-405-080	CAP, ELECT 10-50V	..C.....
C	873	87-012-140-080	CAP 470P	..C.....
C	872	87-012-156-080	C-CAP,S 220P-50 CH	..C.....
C	871	87-012-156-080	C-CAP,S 220P-50 CH	..C.....
IC	861	87-A20-440-040	C-IC,BU1920FS	..C.....
L	861	87-005-847-080	COIL,2.2UH(CECS)	..C.....
Q	861	87-A30-076-080	C-TR,2SC3052F	..C.....
Q	863	87-A30-076-080	C-TR,2SC3052F	..C.....
X	861	87-A70-091-010	VIB,XTAL 4.332MHZ CSA-309	..C.....
C	831	87-010-406-080	CAP, ELECT 22-50	..C.....
C	850	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	942	87-010-149-080	C-CAP,S 5P-50 CH	..C.....
C	948	87-012-140-080	CAP 470P	..C.....
C	958	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	957	87-010-311-080	CAP 12P	..C.....
C	961	87-010-152-080	C-CAP,S 8P-50 CH	AB.....
C	960	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	962	87-010-401-080	CAP, ELECT 1-50V	..C.....
C	963	87-015-785-080	CHIP CAPACITOR, 0.1FZ-25Z	ABC.....
CF	832	82-785-747-010	CF MS2 GHY R	..C.....
CF	831	87-008-261-010	FILTER, SFE10.7MA5-A	AB.....
CF	832	87-008-261-010	FILTER, SFE10.7MA5-A	AB.....
CF	831	87-008-423-010	CERAMIC FILTER, SFE10.7	..C.....
D	944	87-020-465-080	DIODE,1SS133 (110MA)	..C.....
D	942	87-A40-270-080	C-DIODE,MC2838	..C.....
FFE	831	A8-6ZA-191-130	6ZA-1 FEENM	..C.....
FFE	831	A8-6ZA-19C-170	6ZA-1 YFEENC	..C.....
FFE	831	A8-8ZA-190-030	8ZA-1 FEUNM	AB.....
FFE	831	A8-8ZA-193-070	8ZA-1 YFEUNC	..C.....
J	831	87-A60-202-010	TERMINAL,ANT 4P MSP-154V-02	AB.....
J	832	87-A60-403-010	TERMINAL,ANT PAL 2P HSP-312V05	..C.....
L	832	87-005-847-080	COIL,2.2UH(CECS)	ABC.....
L	942	87-A50-019-010	COIL,OSC LW(COI)	..C.....
L	941	87-A50-020-010	COIL,ANT LW(COI)	..C.....
L	951	8Z-ZA1-650-010	COIL,AM PACK4C (TOK)	AB.....
L	951	8Z-ZA1-665-010	COIL,AM PACK 2 (TOK)	..C.....
Q	836	87-A30-072-080	C-TR,RT1P 144C	ABC.....
Q	835	89-327-143-080	TR,2SC2714 (0.1W)	ABC.....
Q	948	87-A30-086-040	C-TR,CSD1306E	..C.....
Q	951	87-A30-074-080	C-TR,RT1P 141C	..C.....
Q	952	87-A30-086-040	C-TR,CSD1306E	..C.....
Q	953	89-503-602-080	C-FET,2SK360E	..C.....
TC	942	87-011-253-080	TRIMER,30P LAR	..C.....
C	3	87-012-368-080	C-CAP,S 0.1-50 F	ABC.....
C	4	87-012-368-080	C-CAP,S 0.1-50 F	ABC.....
C	27	87-010-382-080	CAP, ELECT 22-25V	ABC.....
C	28	87-010-382-080	CAP, ELECT 22-25V	ABC.....
C	25	87-010-382-080	CAP, ELECT 22-25V	ABC.....
C	26	87-010-382-080	CAP, ELECT 22-25V	ABC.....
C	22	87-016-495-000	CAP,E 3300-25 M SMG	ABC.....
C	21	87-016-495-000	CAP,E 3300-25 M SMG	ABC.....
C	32	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	34	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	33	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	36	87-010-381-080	CAP, ELECT 330-16V	ABC.....
C	39	87-010-384-080	CAP, ELECT 100-25V	ABC.....
C	38	87-010-384-080	CAP, ELECT 100-25V	ABC.....
C	35	87-010-406-080	CAP, ELECT 22-50	ABC.....
C	40	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	60	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
CN	1	87-A60-996-010	CONN,13P V BLK TAC-L13X-A3	ABC.....
CNA	1	8A-NF8-653-010	CONN ASSY,9P TID-A(480)	ABC.....
D	1	87-A40-548-090	DIODE,D3SBA20	ABC.....

ELECTRICAL MAIN PARTS LIST - 6/7

D	25	87-A40-553-080	DIODE,1N4003 LES	ABC.....
D	26	87-A40-553-080	DIODE,1N4003 LES	ABC.....
D	27	87-A40-553-080	DIODE,1N4003 LES	ABC.....
D	28	87-A40-553-080	DIODE,1N4003 LES	ABC.....
D	29	87-A40-776-080	ZENER,UZ27BSD	ABC.....
D	34	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	30	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	35	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	32	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	33	87-070-274-080	DIODE,1N4003 SEM	ABC.....
D	31	87-A40-764-080	ZENER,UZ10BSC	ABC.....
D	60	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	64	87-A40-269-080	C-DIODE,MC2836	ABC.....
D	63	87-A40-270-080	C-DIODE,MC2838	ABC.....
D	61	87-A40-313-080	C-DIODE,MC 2840	ABC.....
D	62	87-A40-313-080	C-DIODE,MC 2840	ABC.....
D	65	87-A40-854-080	ZENER,UZ15BSA	ABC.....
Q	2	87-026-609-080	TR,KTA1266GR	ABC.....
Q	1	87-026-609-080	TR,KTA1266GR	ABC.....
Q	5	87-026-610-080	TR,KTC3198GR	ABC.....
Q	7	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	6	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	9	87-A30-318-080	TR,CSA952K	ABC.....
Q	4	89-213-702-010	TR,2SB1370 (1.8W)	ABC.....
Q	3	89-213-702-010	TR,2SB1370 (1.8W)	ABC.....
Q	10	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	60	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	62	87-A30-076-080	C-TR,2SC3052F	ABC.....
Q	64	87-A30-076-080	C-TR,2SC3052F	ABC.....
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	ABC.....
C	401	87-010-176-080	C-CAP,S 680P-50 SL	ABC.....
C	402	87-010-176-080	C-CAP,S 680P-50 SL	ABC.....
C	409	87-010-190-080	S CHIP F 0.01	..C.....
C	407	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	408	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	404	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABC.....
C	406	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABC.....
C	405	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABC.....
C	403	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABC.....
C	410	87-010-112-080	CAP, ELECT 100-16V	ABC.....
C	417	87-010-221-080	CAP, ELECT 470-10V	ABC.....
C	412	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	411	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	413	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	414	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	419	87-A10-800-080	C-CAP,S 6800P-16 J B CM	ABC.....
C	418	87-A10-891-080	CAP,E 4.7-25 SME(K)	ABC.....
C	421	87-010-190-080	S CHIP F 0.01	..C.....
C	425	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	424	87-010-374-080	CAP, ELECT 47-10V	ABC.....
C	420	87-010-374-080	CAP, ELECT 47-10V	ABC.....
C	428	87-012-156-080	C-CAP,S 220P-50 CH	ABC.....
C	422	87-A10-804-080	C-CAP,S 0.1-25 J B	ABC.....
C	431	87-010-971-080	C-CAP,S 4700P-50 B J	ABC.....
C	437	87-010-971-080	C-CAP,S 4700P-50 B J	ABC.....
C	438	87-012-349-080	C-CAP,S 1000P-50 CH	ABC.....
C	432	87-012-349-080	C-CAP,S 1000P-50 CH	ABC.....
C	430	87-A10-201-080	C-CAP,S0.33-16 KB	ABC.....
C	434	87-A11-182-080	C-CAP,S 0.27-16 J B	ABC.....
C	435	87-A11-182-080	C-CAP,S 0.27-16 J B	ABC.....
C	436	87-A11-183-080	C-CAP,S 0.12-16 J B	ABC.....
C	433	87-A11-183-080	C-CAP,S 0.12-16 J B	ABC.....
C	439	87-A11-733-080	C-CAP,S 1-16 Z F	ABC.....
C	440	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	446	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	447	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	445	87-012-393-080	C-CAP,S 0.22-16 R K	ABC.....
C	449	87-012-393-080	C-CAP,S 0.22-16 R K	ABC.....
C	448	87-012-393-080	C-CAP,S 0.22-16 R K	ABC.....
C	444	87-012-393-080	C-CAP,S 0.22-16 R K	ABC.....
C	443	87-A10-229-080	C-CAP,S 0.68-10 K W5	ABC.....
C	441	87-A10-799-080	C-CAP,S 5600P-16 J B CM	ABC.....
C	442	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABC.....
C	454	87-016-669-080	C-CAP,S 0.1-25 K B	ABC.....
C	450	87-016-669-080	C-CAP,S 0.1-25 K B	ABC.....
C	457	87-016-669-080	C-CAP,S 0.1-25 K B	ABC.....
C	453	87-016-669-080	C-CAP,S 0.1-25 K B	ABC.....
C	455	87-A10-801-080	C-CAP,S 0.022-16 J B CM	ABC.....
C	456	87-A10-801-080	C-CAP,S 0.022-16 J B CM	ABC.....
C	451	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABC.....
C	452	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABC.....
C	489	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	492	87-010-402-080	CAP, ELECT 2.2-50V	ABC.....
D	402	87-A40-747-080	ZENER,UZ5.1BSB	ABC.....
D	401	87-A40-760-080	ZENER,UZ9.1BSA	ABC.....
D	410	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
IC	401	87-A21-097-040	C-IC,M62463AFP	ABC.....

ELECTRICAL MAIN PARTS LIST - 7/7

JW	416	87-008-372-080	FILTER, EMI BL OIRNI	ABC.....
Q	403	87-A30-063-080	C-TR,KRA104S	ABC.....
Q	401	87-A30-086-040	C-TR,CSD1306E	ABC.....
Q	404	87-A30-086-040	C-TR,CSD1306E	ABC.....
R	407	87-022-214-080	C-RES S100K-1/10WF	ABC.....
C	609	87-010-181-080	CAP,CHIP S 1800P	ABC.....
C	610	87-010-181-080	CAP,CHIP S 1800P	ABC.....
C	613	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	619	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	618	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	611	87-010-598-080	C-CAP,S 0.068-16VRK	ABC.....
C	612	87-016-369-080	C-CAP,S 0.033-25 B K	ABC.....
C	614	87-016-669-080	C-CAP,S 0.1-25 K B	ABC.....
C	621	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	628	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	627	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	623	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	624	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	629	87-010-596-080	CAP, S 0.047-16	ABC.....
C	626	87-010-596-080	CAP, S 0.047-16	ABC.....
C	620	87-016-669-080	C-CAP,S 0.1-25 K B	ABC.....
C	632	87-010-185-080	C-CAP,S 3900P-50 B	ABC.....
C	631	87-010-185-080	C-CAP,S 3900P-50 B	ABC.....
C	630	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	639	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	636	87-A10-307-080	CAP,M 0.1-50 J	ABC.....
C	637	87-A10-307-080	CAP,M 0.1-50 J	ABC.....
C	638	87-A10-307-080	CAP,M 0.1-50 J	ABC.....
C	635	87-A10-307-080	CAP,M 0.1-50 J	ABC.....
C	643	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	644	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	673	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
C	671	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	672	87-010-322-080	C-CAP,S 100P-50 CH	ABC.....
C	675	87-016-669-080	C-CAP,S 0.1-25 K B	ABC.....
C	680	87-010-197-080	CAP, CHIP 0.01 DM	ABC.....
CN	601	87-099-719-010	CONN,30P TYK-B(X)	ABC.....
CN	602	87-A60-131-010	CONN,6P V FE	ABC.....
D	603	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	602	87-A40-745-080	ZENER,UZ4.7BSA	ABC.....
IC	601	87-A21-452-030	C-IC,BD3876KS2	ABC.....
J	604	87-A60-881-010	JACK,PIN 2P MSP 242V05 PBSN	ABC.....
Q	601	87-026-610-080	TR,KTC3198GR	ABC.....
Q	607	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	608	87-A30-075-080	C-TR,2SA1235F	ABC.....
Q	609	87-A30-075-080	C-TR,2SA1235F	ABC.....

MECHANICAL PARTS LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.


REF.NO	PARTS NO.	DESCRIPTION	SUFFIX
K	87-CE3-023-010	BADGE,AIWA 30N SILV	ABC
	8A-NF7-112-010	PANEL,RIGHT V-2	ABC
	8A-NF8-005-010	PANEL, TOP	ABC
	8A-NF8-007-010	PANEL,LEFT V-2	ABC
	8A-NF9-003-010	BOX,CASS 1	ABC
	8A-NF9-004-010	BOX,CASS 2	ABC
	8A-NF9-014-010	PANEL, TRAY	ABC
	8A-NF9-017-010	PANEL, JOG	ABC
	8A-NFW-001-010	CABI, FR U	AB
	8A-NFW-013-010	CABI, FR K R	.C
	8A-NFW-018-010	PANEL, REAR KSM 15	.C
	8A-NHU-053-010	COVER, REAR H	A.C
	8A-NF9-008-010	KEY, POWER	ABC
	8A-NF9-010-110	KEY, ASSY OPE 1 WAY	ABC
	8A-NF9-016-010	KNOB, RTRY VOL	ABC
	8A-NF9-018-010	KNOB, RTRY JOG	ABC
	8A-NF9-019-010	KEY, SYNC	AB
	8A-NF9-020-010	KEY, CD	ABC
	8A-NF9-022-010	REFLECTOR, ECO	ABC
	8A-NF9-026-110	KEY, ENTER	ABC
	8A-NF9-050-010	KEY, RDS	.C
	8A-NFW-003-010	KEY, PRO	ABC
	81-532-080-010	LABEL, CASS. COMPT	ABC
	8A-NF8-006-010	WINDOW, TOP	ABC
	8A-NF9-006-010	WINDOW, CASS 1	ABC
	8A-NF9-007-010	WINDOW, CASS 2	ABC
	8A-NF9-039-010	WINDOW, CD	ABC
	8A-NFW-002-010	WINDOW, DISP U	.B
	8A-NFW-005-010	WINDOW, DISP K15	.C
	8A-NFW-017-010	WINDOW, DISP H	A.
	84-ZG1-245-210	CAP, OPTICAL	ABC
	82-NF5-229-010	PLATE, LOCK	ABC
	86-NF9-224-010	SPR-C, LOCK	ABC
	87-085-221-010	FOOT, H13.5	ABC
	87-NF4-216-010	HLDR, LOCK 1	ABC
	87-NF4-217-110	HLDR, LOCK 2	ABC
	87-NF4-221-010	HLDR, CABLE	ABC
	8A-NF7-251-010	W, 3.2-8-0.45	ABC
	8A-NF8-207-010	SPR-T, EJECT 1	ABC
	8A-NF8-208-010	SPR-T, EJECT 2	ABC
	8A-NF8-209-010	OIL-DMPR, 120	ABC
	8A-NFW-250-110	HLDR, PLATE	ABC
	8Z-NB8-240-010	COVER, PL	ABC
	8Z-NB8-254-010	COVER, PL M3	ABC
*	8A-NF6-217-010	HLDR, PWB PT	ABC
*	8A-NF7-207-010	HLDR, HT L	ABC
*	8A-NF7-208-010	HLDR, HT R	ABC
*	8A-NF7-209-010	HLDR, PWB-M BTM	ABC
*	8A-NF8-206-010	HLDR, PWB M	ABC
	87-067-581-010	TAPPING SCREW, BVT2+3-15	ABC
	87-067-584-010	TAPPING SCREW, BVT2+3-6	ABC
	87-067-641-010	UTT2+3-8 (W/O SLOT) BL	ABC
	87-067-689-010	TAPPING SCREW, BVT2+3-8	ABC
	87-067-703-010	TAPPING SCREW, BVT2+3-10	ABC
	87-078-191-010	S-SCREW, IT+4-10	ABC
	87-721-097-410	QT2+3-12 GLD	ABC
	87-723-096-410	QT2+3-10W/O SLOT BL	ABC
	87-NF4-224-010	S-SCREW, IT3B+3-8 CU	ABC
*	87-067-001-010	FW, 3.1-5.4-1	.C
	82-NF7-210-110	GUIDE, FL (*)	ABC
	8A-NF9-201-010	GUIDE, OPE 1 WAY	ABC
	87-067-703-010	TAPPING SCREW, BVT2+3-10	ABC
*	87-067-001-010	FW, 3.1-5.4-1	ABC
	87-010-404-080	CAP, ELECT 4.7-50V	A.C
	87-085-185-010	BUSHING, AC CORD (E)	A.C
	87-085-189-010	BUSHING, CORD (U)	.B
	87-099-811-010	PLUG, ADPTR CONV(K)	.C
	87-A11-132-080	CAP, TC U 0.01-50 K B	.C
	87-A11-148-080	CAP, TC U 0.1-50 Z F	ABC
	88-906-251-110	FF-CABLE, 6P 1.25	ABC
	88-911-101-110	FF-CABLE, 11P 1.25	ABC
	88-913-301-110	FF-CABLE, 13P-1.25	ABC
C	87-018-131-080	CAP, CER 1000P-50V	.C
PT	1 8A-NFW-612-010	PT, ANF-29 U	.B
PT	1 8A-NFW-615-010	PT, ANF-29 LH	A.
PT	1 8A-NFW-617-010	PT, ANF-29 EZ	.C
W	1 87-A80-110-010	AC CORD ASSY, U SPT-2W	.B
W	1 87-A80-157-010	AC CORD ASSY, E BLK CC	A.C
WH	101 87-A90-459-010	HLDR, WIRE 2.5-5P	ABC
WH	1 87-A90-510-010	HLDR, WIRE 2.5-9P	ABC

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
K		XX		C
		KANRI		
	8A-NFW-902-010		IB, LH (ESP) M	A
	8A-NFW-903-010		IB, U (ESF) M	.B
	8A-NFW-905-010		IB, K (E) M	
	8A-NFW-906-010		IB, EZ (9L) M	
	8A-NFW-912-010		IB, LH (ESP) FM	
	8A-NFW-913-010		IB, U (ESF) FM	
	8A-NFW-914-010		IB, K (E) M -DP15	.C
	8A-NFW-915-010		IB, K (E) E	
	8A-NFW-916-010		IB, EZ (9L) E	
	87-006-225-010		AM LOOP ANT NC2	ABC
	87-043-115-010		ANT, FEEDER FM	AB
	87-A90-030-010		ANT, LOOP AM-NC C	
	87-A90-118-010		ANT, WIRE FM (Z)	.C
	87-A91-017-010		PLUG, CONVERSION JT-0476	A
	8Z-NFW-702-010		RC UNIT, ZAS10	ABC

SCHEMATIC DIAGRAM - 1 (MAIN : AMP)

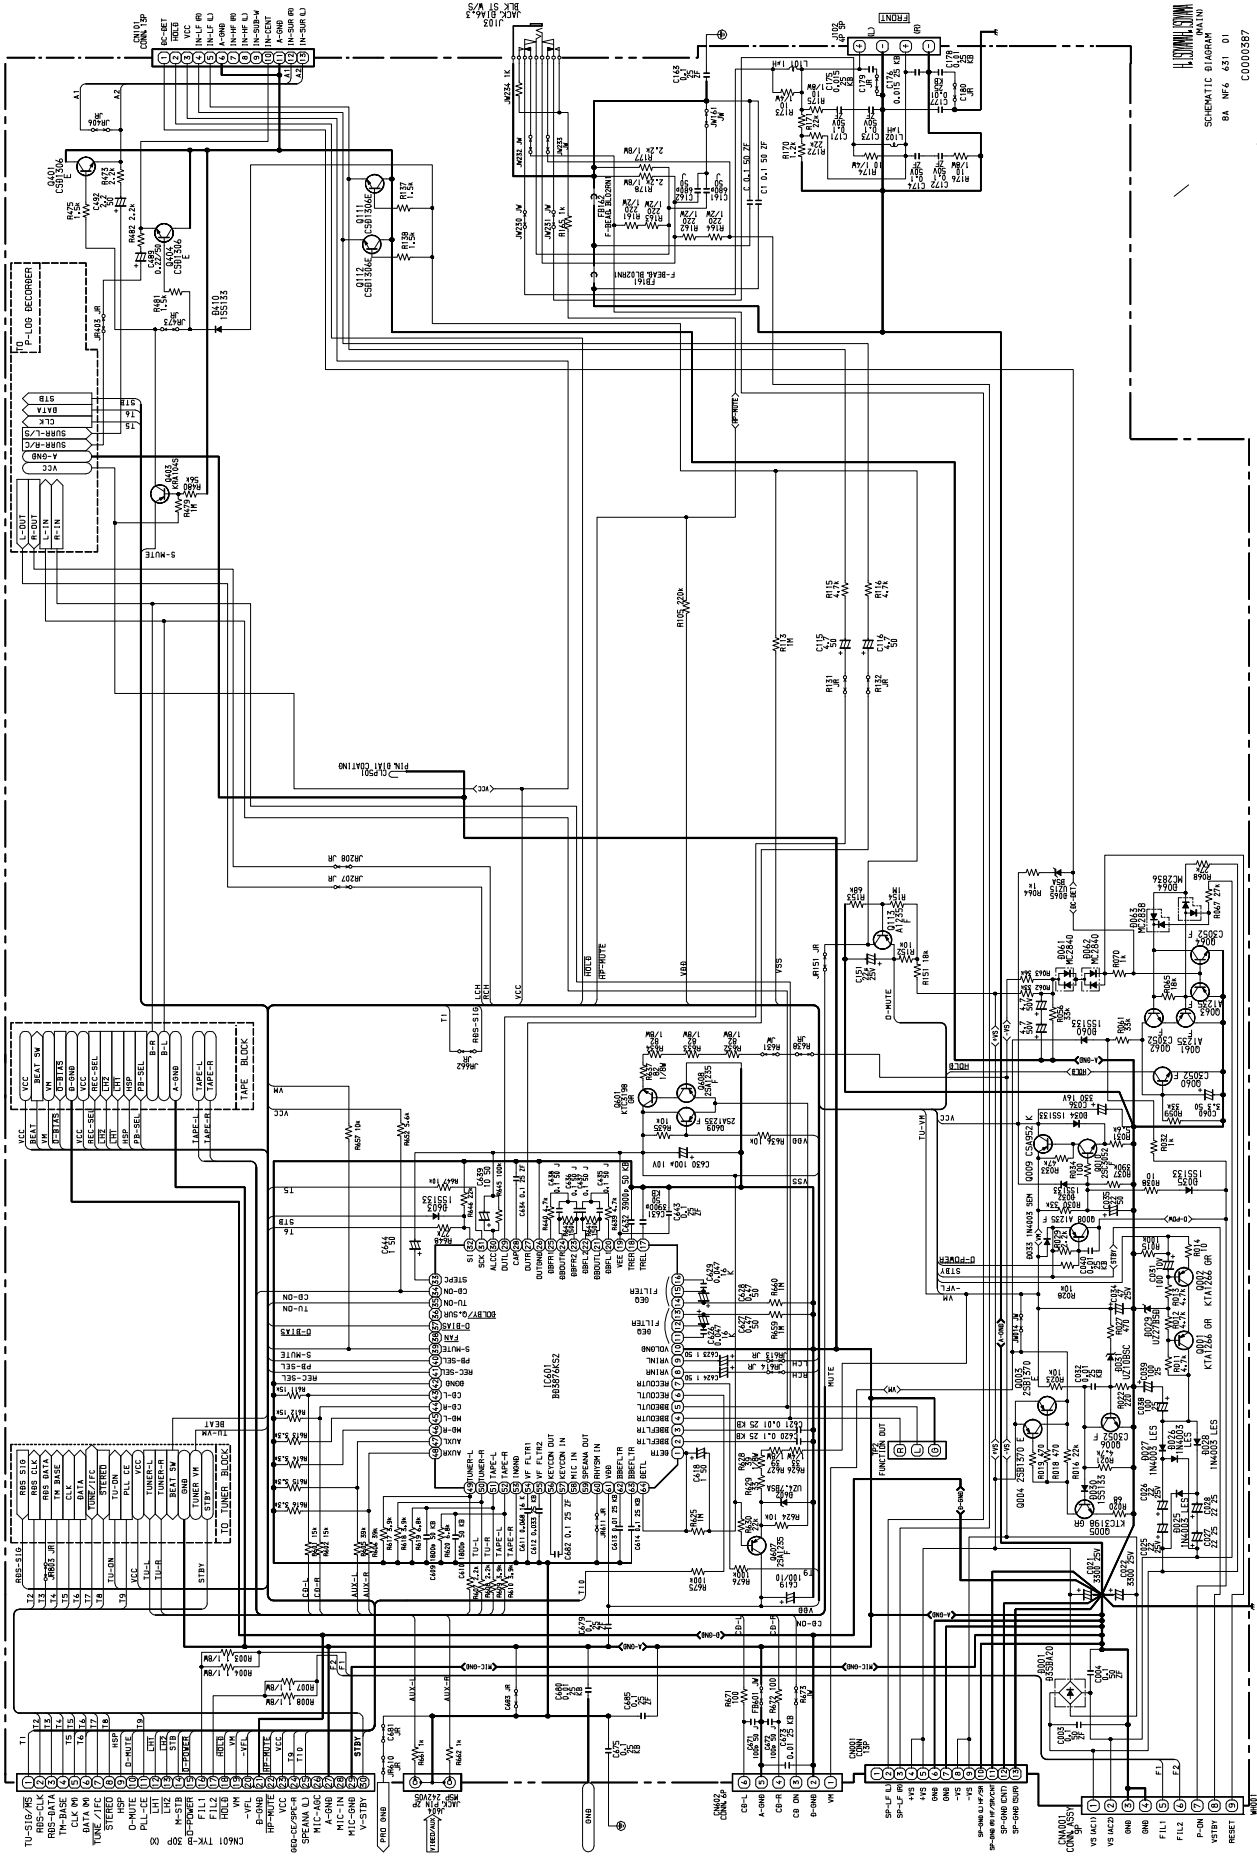


SCHEMATIC DIAGRAM
8A. INF. 431. 01
C0000387
CA-MP25
07 MAR 2000

ANF 29 EZK

8-AZ-ZSRHIN-EZ-201

SCHEMATIC DIAGRAM - 2 (MAIN : DECK)

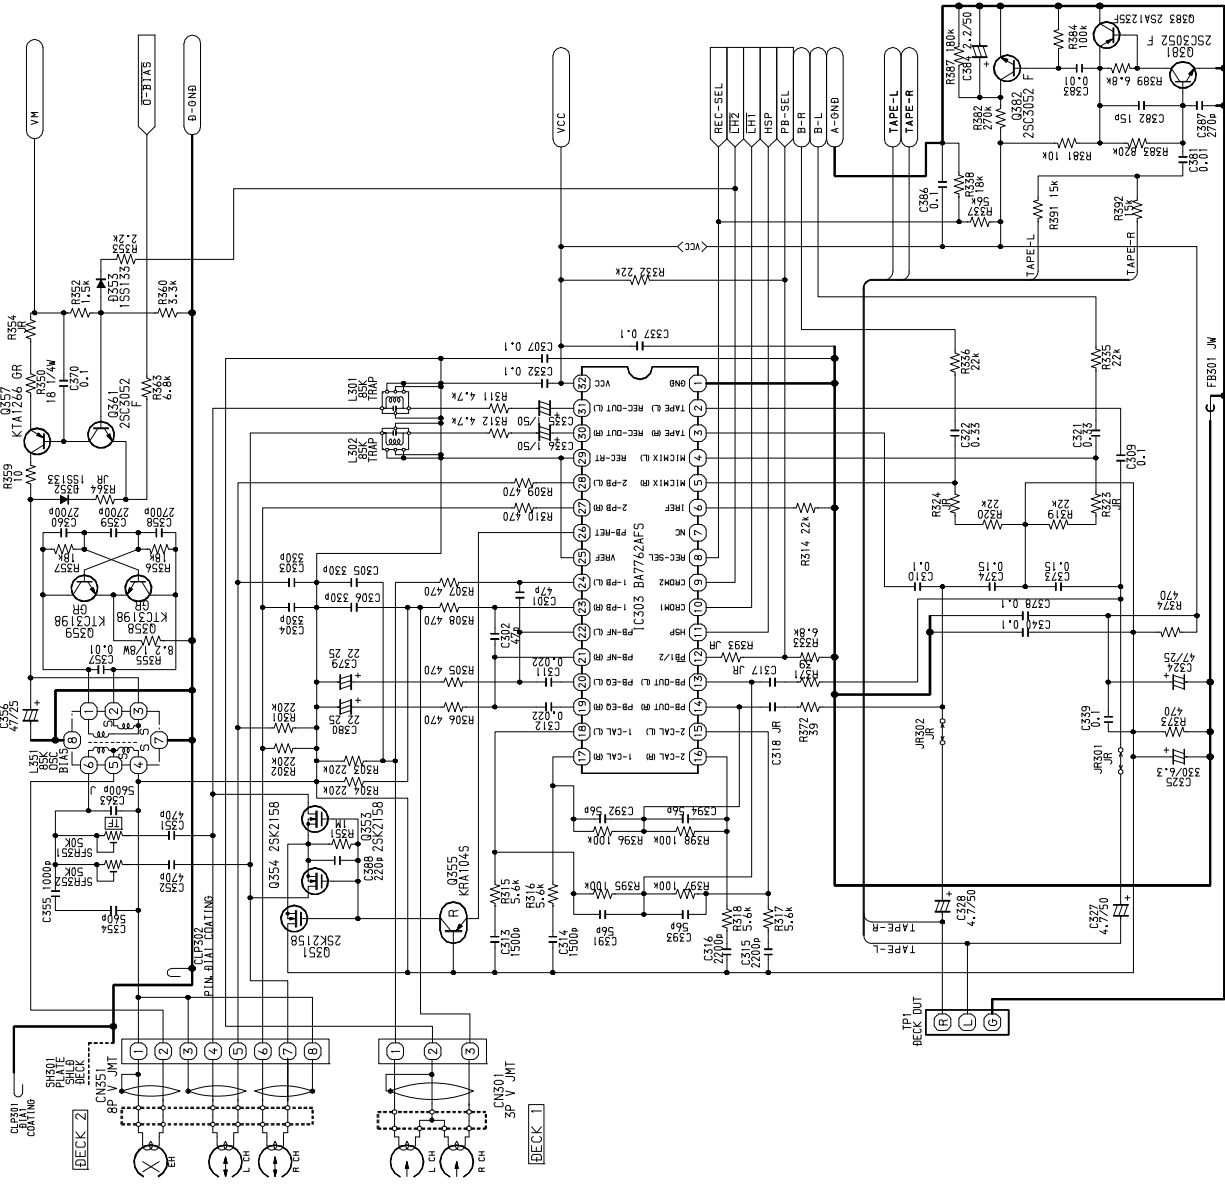

	WITH DOLBY	W/O DOLBY (PH-L+H)
JR303	C-JR	X
JR304	C-JR	X
C379	X	22/25 22/50
C380	X	22/50 22/50
C313	1200P	1000P 1500P
C314	1200P	1000P 1500P
R315	4.7K	5.6K 5.6K
R316	4.7K	5.6K 5.6K
C315	1000P	1000P 2200P
C316	1000P	1000P 2200P
R317	5.6K	5.6K 5.6K
R318	5.6K	5.6K 5.6K
C391	270P	56P 56P
C392	270P	56P 56P
C393	270P	56P 56P
C394	270P	56P 56P
R395	X	100K 100K
R396	X	100K 100K
R397	X	100K 100K
R398	X	100K 100K
SFR301	39K	X
SFR302	39K	X
SFR303	39K	X
SFR304	39K	X
C317	0.33 BK	C-JR C-JR
C318	0.33 BK	C-JR C-JR
R371	4.7K	39 39
R372	4.7K	39 39
C375	0.22/50	X
C376	0.22/50	X
R375	18K	X
JR301	X	C-JR C-JR
JR302	X	C-JR C-JR


	WITH DOLBY	W/O DOLBY (PH-L+H)
IC302	XA1555P	X
C309	X	0.1
C310	X	0.1
C319	0.22	X
C320	0.22	X
R321	4.7K	X
R322	4.7K	X
SFR305	50K	X
SFR306	50K	X
C371	820P	X
C372	820P	X
C373	1200P	0.15
C374	1200P	0.15
R319	4.7K	22K
R320	4.7K	22K
R323	22K	C-JR
R324	22K	C-JR
C321	0.22	0.33
C322	0.22	0.33
R355	27K	22K
R336	27K	22K
R391	X	15K
R392	X	15K
R386	15K	X
R383	470K	820K
C387	X	270P
C382	47P	15P
R389	C-JR	6.8K
Q383	X	25A1235
C385	3500P	X

USE	USE
BA7762AF5	HA12211
Q360	25C2158
R350	C-JR
R351	39K
JR356	C-JR

EZ K	EXCEPT
Q356	25C3052F
R362	4.7K
R365	10K
	EXCEPT
	MODEL
	EM1BL01RN
	JW

S.TAKE
SCHEMATIC DIAGRAM (BECK)
8A NF6 651 01

SCHEMATIC DIAGRAM - 3 (MAIN : PROLOGIC)

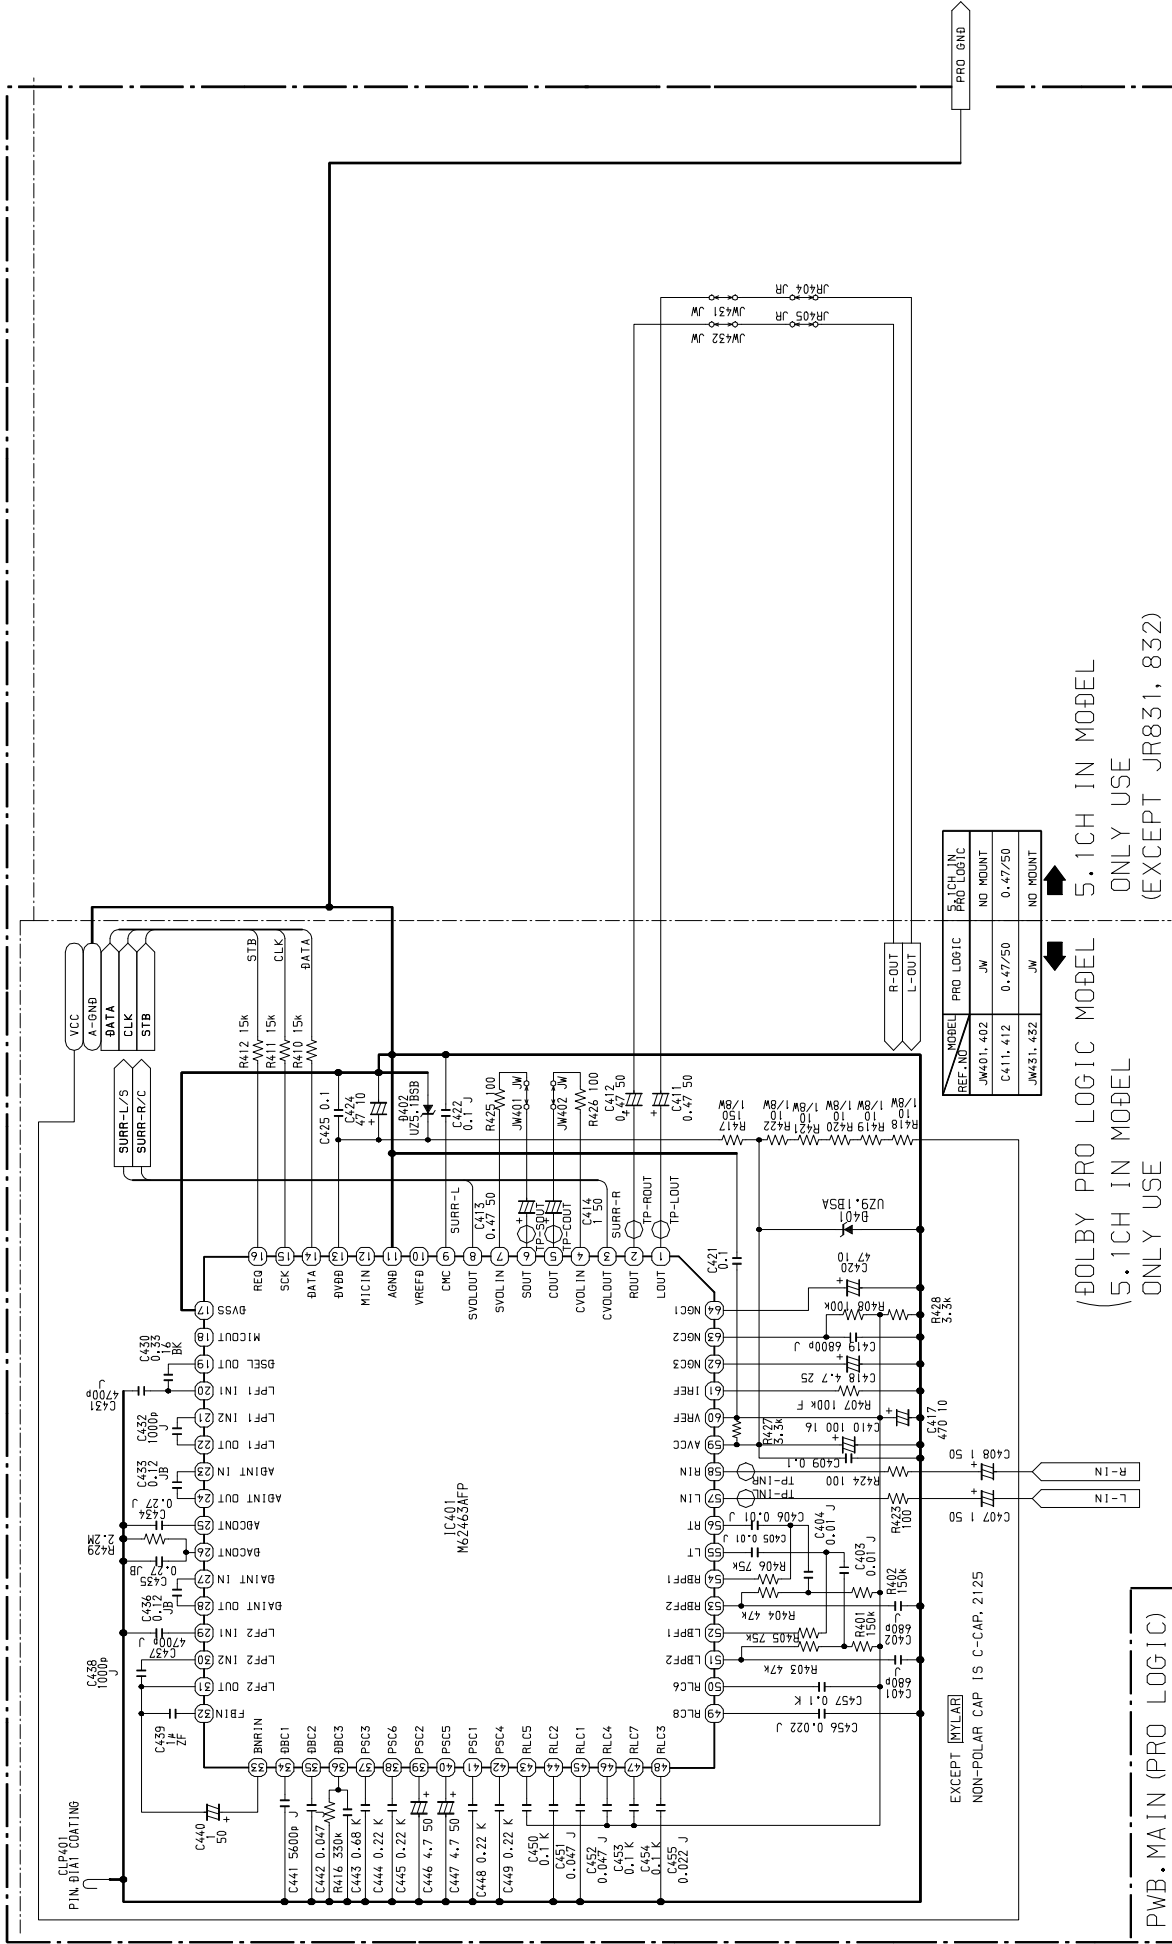


← DOLBY PRO LOGIC MODEL ONLY USE (EXCEPT JR831, 832)

→ 5.1CH IN MODEL ONLY USE (EXCEPT JR831, 832)

PWB. MAIN (PRO LOGIC)


SCHEMATIC DIAGRAM - 4 (MAIN : TUNER)

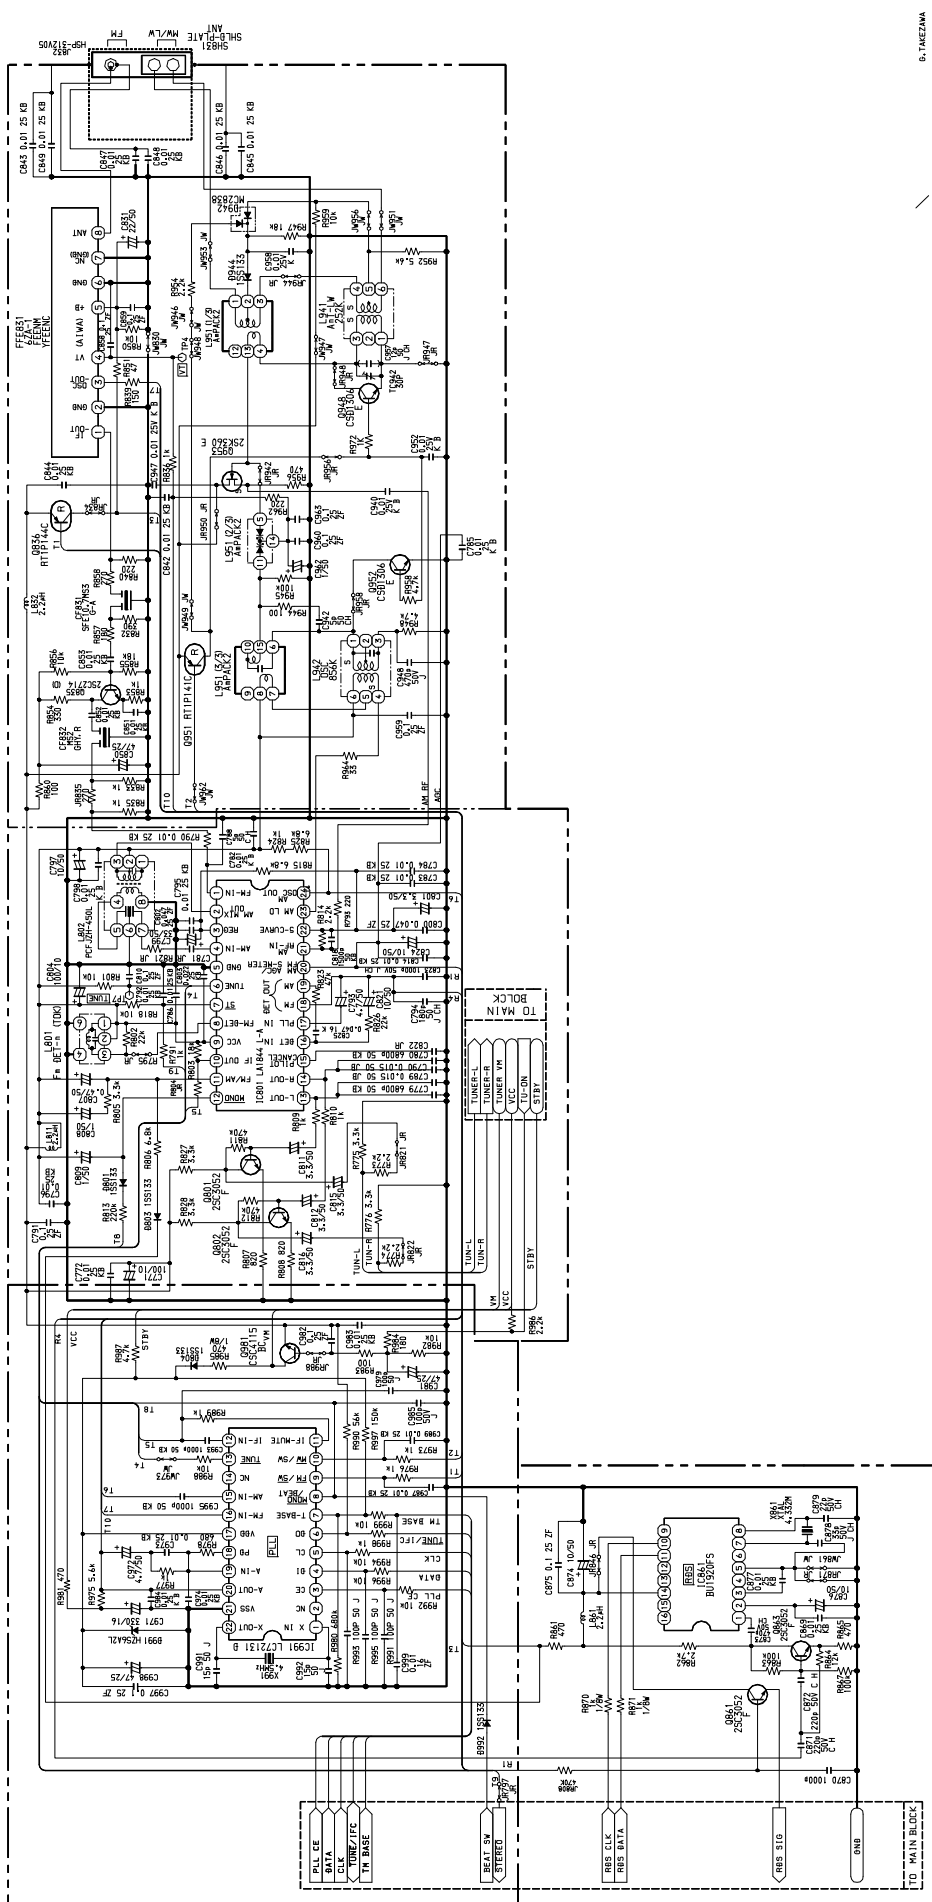


6. TIMEZAMA
 (TUNER)
 SCHEMATIC DI ABRAH
 BA NF6 A51 01
 C0003285
 CK-WP55 EZK
 ANF-29 EZK R05
 07/MAR 2000

85-ANF-29MAINCEZ (P21)

SCHEMATIC DIAGRAM - 5 (FRONT)

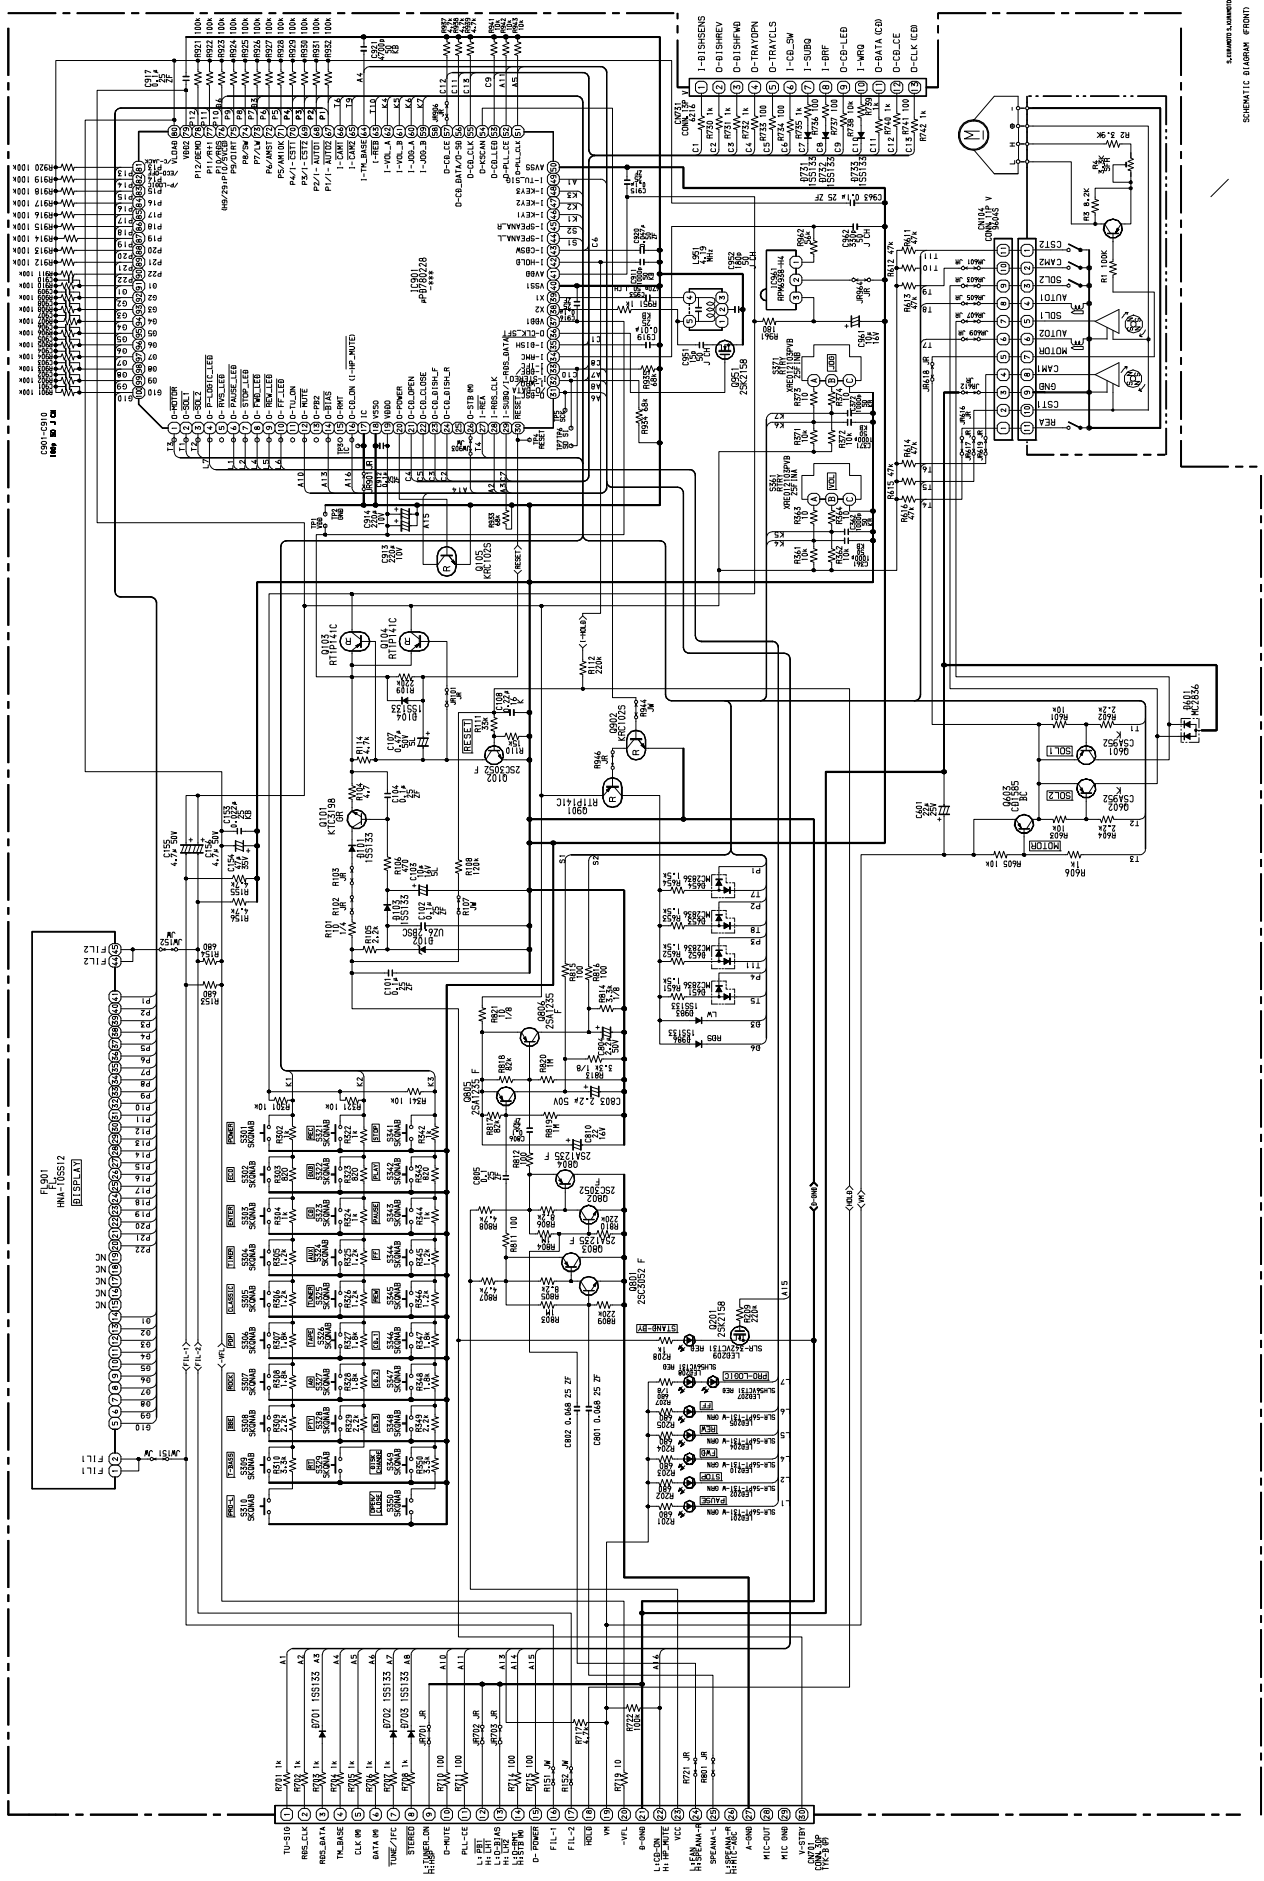


SCHEMATIC DIAGRAM - 6 (AMP 1F)

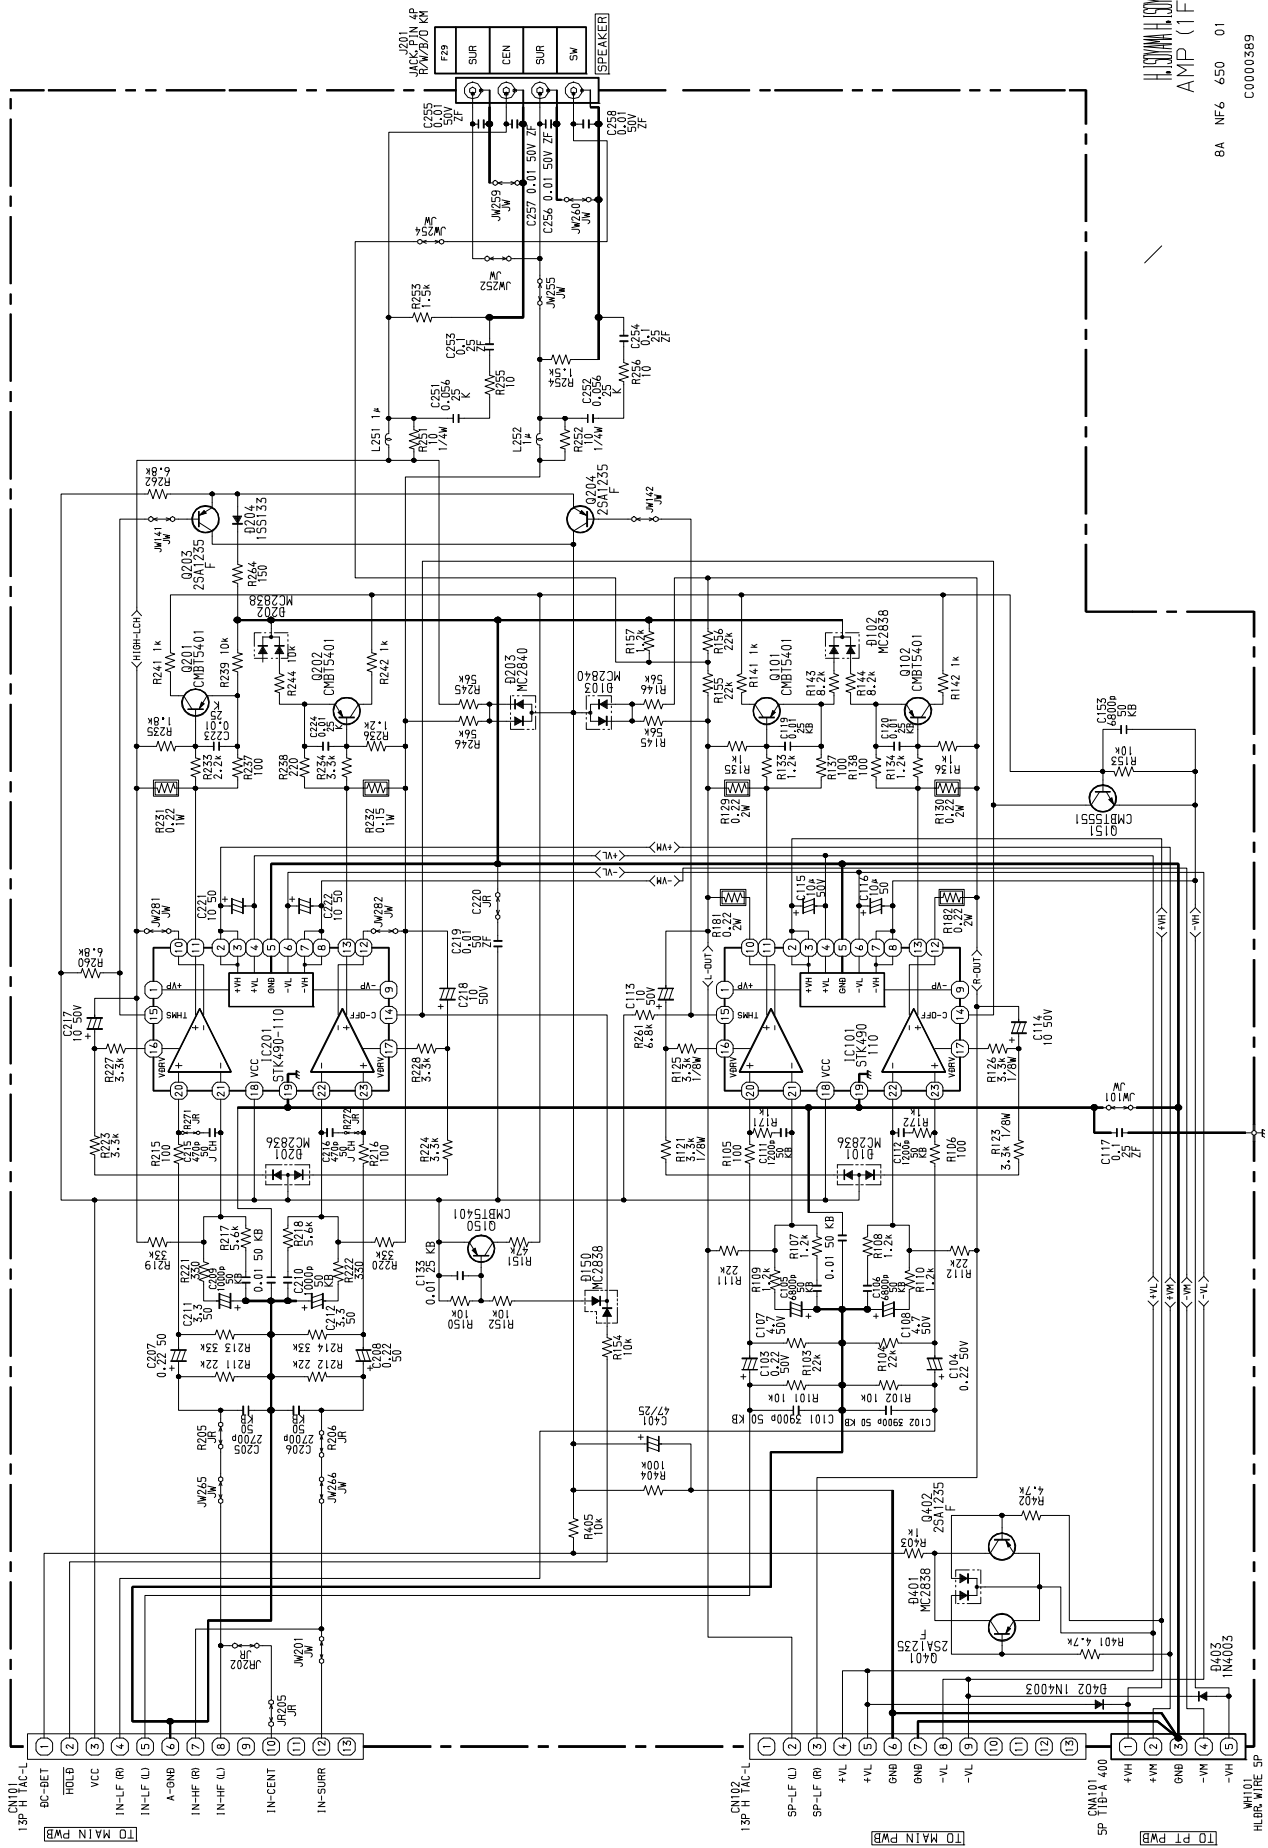

BA NF6 650 01
C0000389

SCHEMATIC DIAGRAM - 7 (PT)

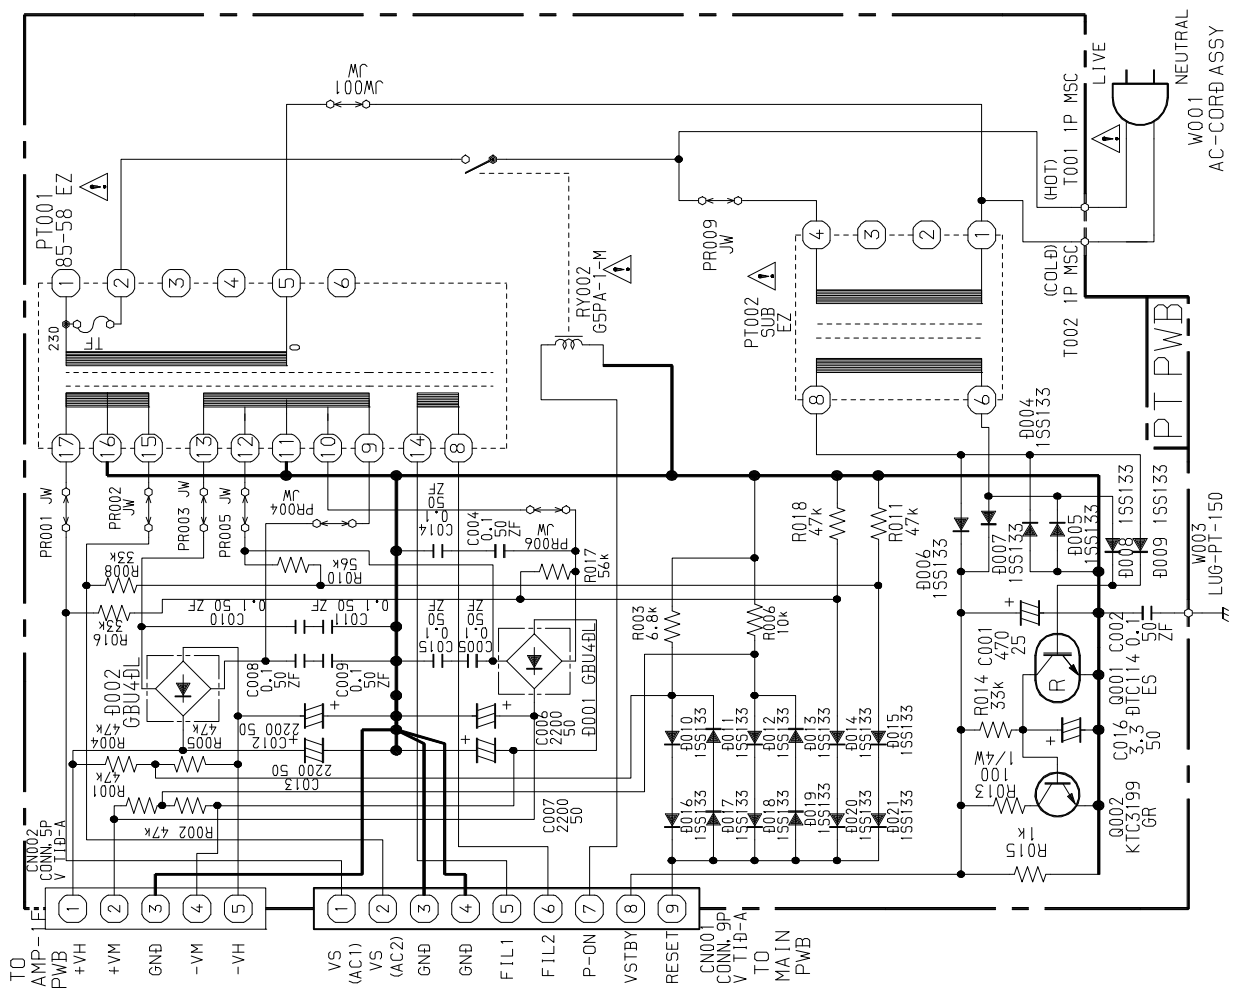



アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111