


aiwa



NSX-K750

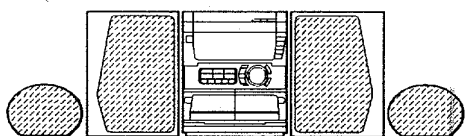

COMPACT DISC STEREO
CASSETTE RECEIVER

- BASIC TAPE MECHANISM : 2ZM-3MK2 PR4NM
- BASIC CD MECHANISM : 4ZG-1 VSGD
- TYPE : HC,HR

SYSTEM	CD CASSEIVER	SPEAKER	REMOTE CONTROLLER
NSX-K750	CX-NK750	SX-NS74	RC - 7AS07

- If requiring information about the CD mechanism, see Service Manual of 4ZG-1, S/M Code No. 09-977-206-10T.

SPECIFICATIONS

<FM Tuner section>

Tuning range 87.5 MHz to 108 MHz
Usable sensitivity(IHF) 15.8 dBf
Antenna terminals 75 ohms (unbalanced)

<MW Tuner section>

Tuning range 531 kHz to 1602 kHz (9 kHz step)
 530 kHz to 1710 kHz (10 kHz step)
Usable sensitivity 350 uV/m
Antenna Loop antenna

<SW Tuner section>

Tuning range 5.900 MHz to 17.900 MHz
Antenna Wire antenna

<Amplifier section>

Power output Rated 120 W + 120 W
 (6 ohms, T.H.D.1%, 1 kHz)
 Reference : 150 W + 150 W
 (6 ohms, T.H.D.10%, 1 kHz)
 *without connecting to the SURROUND SPEAKERS
Total harmonic distortion 0.05% (110 W, 1 kHz, 6 ohms, DIN AUDIO)
Inputs VIDEO/AUX : 210 mV(adjustable)
 MD : 210mV (adjustable)
 MIC 1, MIC 2 : 1.4mV (10 kohms)
Outputs LINE OUT : 200mV
 VIDEO OUT : 1.0 Vp-p (75 ohms)
 SUPER WOOFER : 2.7 V
 SPEAKERS : accept speakers of 6 ohms or more
 SURROUND SPEAKERS: accept speakers of 16 ohms or more
 PHONES (stereo jack) : accepts headphones of 32 ohms or more

<Cassette deck section>

Track format 4 tracks, 2 channels stereo
Frequency response CrO₂ tape: 50 Hz – 16000 Hz
 Normal tape: 50 Hz – 15000 Hz
Signal-to noise ratio 60 dB (Dolby B NR ON, CrO₂ tape peak level)
Recording system AC bias
Heads Deck 1 : playback head x 1
 Deck 2 : Recording/Playback/erase head x 1

<Compact disc player section>

Laser Semiconductor laser ($\lambda = 780 \text{ nm}$)
D-A converter 1 bit dual
Signal-to-noise ratio 90 dB (1 kHz, 0 dB)
Harmonic distortion 0.03 % (1 kHz, 0 dB)
Wow and flutter Unmeasurable
Video signal NTSC/PAL color format (selectable)
Video data MPEG 1
Audio data MPEG 1, LAYER 2

<Speaker system SX-NS74

Cabinet type 3 way, bass reflex (magnetic shielded type)
Speakers Woofer :

160 mm cone type

Tweeter :

80 mm cone type

Super tweeter:

20 mm ceramic type

6 ohms

Impedance

Output sound pressure level 87 dB/W/m

Dimensions (W x H x D) 243 x 304 x 255mm

Weight 4.2 kg


<General>

Power requirements 120 V/220-230V/240 V
 AC switchable, 50/60 Hz

Power consumption 170 W

Dimensions of main unit 260 x 309 x 363 mm

(W x H x D)
Weight of main unit 9.0 kg


- Design and specifications are subject to change without notice.
- Dolby noise reduction manufactured under license from Dolby Laboratories Licensing Corporation.
 "DOLBY" and the double-D symbol  are trademarks of Dolby Laboratories Licensing Corporation.
- The word "BBE" and the "BBE symbol" are trademarks of BBE Sound, Inc.
 Under license from BBE Sound, Inc.

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs laser. Therefore, be sure to follow carefully the instructions below when servicing.

WARNING!!

WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION. BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 30cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.



- Caution: Invisible laser radiation when open and interlocks defeated avoid exposure to beam.
- Advarsel: Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

VAROITUS!

Laiteen Käyttäminen muulla kuin tässä käyttöohjeessa mainitulla tavalla saattaa altistaa käyt-täjän turvallisuusluokan 1 ylittävälle näkymättömälle lasersäteilylle.

WARNING!

Om apparaten används på annat sätt än vad som specificeras i denna bruksanvisning, kan användaren utsättas för osynlig laserstråling, som överskrider gränsen för laserklass 1.

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

ATTENTION


L'utilisation de commandes, réglages ou procédures autres que ceux spécifiés peut entraîner une dangereuse exposition aux radiations.

ADVARSEL

Usynlig laserstråling ved åbning, når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

This Compact Disc player is classified as a CLASS 1 LASER product.

The CLASS 1 LASER PRODUCT label is located on the rear exterior.

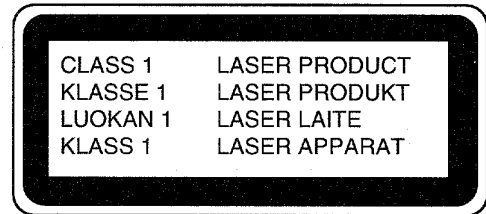


Precaution to replace Optical block

(KSS-213B)

Body or clothes electrostatic potential could ruin laser diode in the optical block. Be sure ground body and workbench, and use the clothes do not touch the diode.

- 1) After the connection, remove solder shown in right figure.

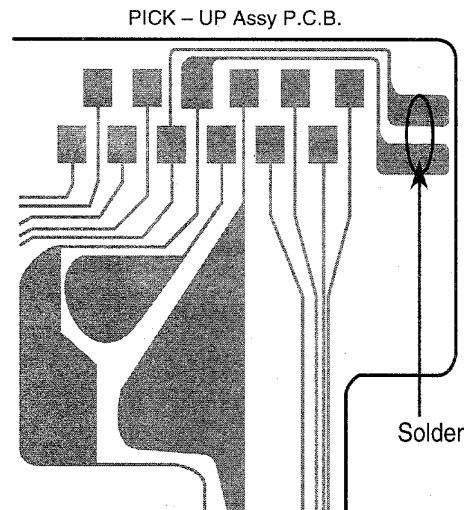

ELECTRICAL MAIN PARTS LIST

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
IC				C111	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
	87-020-454-010	IC, DN6851		C112	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
	87-NH4-610-010	IC, LC866548A-5E56		C113	87-010-408-080		CAP,E 47-50 SME
	87-A20-650-010	IC, RPM6938-V11		C116	87-010-408-080		CAP,E 47-50 SME
	87-A20-455-010	IC, HA12211		C117	87-010-430-080		CAP,E 100-63
	87-A20-355-010	IC, CXA1553P		C118	87-010-263-080		CAP,E 100-10 SME
	87-A20-083-010	IC, BA3835S		C119	87-010-260-080		CAP,E 47-25 SME
	87-A20-450-040	C-IC, BH3864F		C120	87-010-403-080		CAP,E 3.3-50 M SME
	87-A20-056-010	IC, BA3880S		C121	87-012-140-080		C-CAP,S 470P-50 J CH
	87-A20-613-040	C-IC, BU9262AFS		C123	87-010-247-080		CAP,E 100-50 M SME
	87-A20-456-040	C-IC, BH3810FS		C124	87-010-112-080		CAP,E 100-16 M SME
	87-017-888-080	C-IC, NJM4558MD		C125	87-010-235-080		CAP,E 470-16 SME
	86-NFZ-655-010	IC, LC72131D(Z)		C129	87-010-393-080		CAP,E 100-35 M SME
	87-A20-438-010	IC, LA1837		C201	87-010-400-080		CAP,E 0.47-50 M SME
	87-A20-561-040	IC, M65847AFP		C202	87-010-400-080		CAP,E 0.47-50 M SME
TRANSISTOR				C205	87-010-181-080		C-CAP,S 1800P-50 K B
	87-026-263-080	C-TR, RN1410		C206	87-010-181-080		C-CAP,S 1800P-50 K B
	89-213-702-010	TR, 2SB1370E		C207	87-010-404-080		CAP,E 4.7-50 M SME
	87-A30-076-080	C-TR, 2SC3052F		C208	87-010-404-080		CAP,E 4.7-50 M SME
	87-A30-075-080	C-TR, 2SA1235F		C209	87-010-404-080		CAP,E 4.7-50 M SME
	87-026-610-080	TR, KTC3198GR		C210	87-010-404-080		CAP,E 4.7-50 M SME
	87-A30-073-080	C-TR, RT1N 141C		C211	87-010-186-080		C-CAP,S 4700P-50 K B
	87-A30-085-070	C-TR, CSA1362GR		C212	87-010-186-080		C-CAP,S 4700P-50 K B
	87-A30-083-080	TR, CSD1489B		C213	87-010-260-080		CAP,E 47-25 SME
	87-A30-084-080	TR, CSB1058B		C214	87-010-260-080		CAP,E 47-25 SME
	87-A30-071-080	C-TR, RT1N 144C		C215	87-010-196-080		C-CAP,S 0.1-25 Z F
	87-026-609-080	TR, KTA1266GR		C219	87-012-368-080		C-CAP,S 0.1-50 FZ
	87-A30-086-070	C-TR, CSD1306E		C220	87-012-368-080		C-CAP,S 0.1-50 FZ
	87-A30-106-070	C-TR, CMBT5551		C221	87-012-368-080		C-CAP,S 0.1-50 FZ
	87-A30-111-080	TR, C2N5401		C222	87-012-368-080		C-CAP,S 0.1-50 FZ
	87-A30-097-010	TR, FN1016		C223	87-010-194-080		C-CAP,S 0.047-25 Z F
	87-A30-098-010	TR, FP1016		C225	87-A10-516-080		C-CAP,S 100P-200 J CH
	87-A30-089-010	FET, 2SK2723		C226	87-A10-516-080		C-CAP,S 100P-200 J CH
	87-A30-072-080	C-TR, RT1P 144C		C229	87-016-461-080		C-CAP,S 0.47-16 ZF
	87-A30-087-080	C-FET, 2SK2158		C230	87-016-461-080		C-CAP,S 0.47-16 ZF
	87-A30-074-080	C-TR, RT1P 141C		C242	87-010-406-080		CAP,E 22-50 M SME
	89-327-143-080	C-TR, 2SC2714(O)		C243	87-010-197-080		C-CAP,S 0.01-25 K B
DIODE				C244	87-010-406-080		CAP,E 22-50 M SME
	87-017-654-060	DIODE, GBU6JL6131		C301	87-010-318-080		C-CAP,S 47P-50 J CH
	87-017-437-080	DIODE, 1N4148M		C302	87-010-318-080		C-CAP,S 47P-50 J CH
	87-A40-269-080	C-DIODE, MC2836		C303	87-012-157-080		C-CAP,S 330P-50 J CH GRM
	87-A40-270-080	C-DIODE, MC2838		C304	87-012-157-080		C-CAP,S 330P-50 J CH GRM
	87-070-274-080	DIODE, 1N4003 SEM		C305	87-012-145-080		C-CAP,S 270P-50 J CH
	87-A40-205-080	ZENER, UZ6.2BSC		C306	87-012-145-080		C-CAP,S 270P-50 J CH
	87-A40-211-080	ZENER, UZ36BSA		C307	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
	87-A40-206-080	ZENER, UZ10BSC		C311	87-010-198-080		C-CAP,S 0.022-25 K B
	87-A40-202-080	ZENER, UZ5.1BSB		C312	87-010-198-080		C-CAP,S 0.022-25 K B
	87-A40-184-090	DIODE, RK34(F)		C313	87-010-180-080		C-CAP,S 1500P-50 K B
	87-A40-246-080	DIODE, 1N4148T-72		C314	87-010-180-080		C-CAP,S 1500P-50 K B
	87-017-481-080	ZENER, UZ-5.6BSE		C315	87-010-178-080		C-CAP,S 1000P-50 K B
	87-A40-192-080	ZENER, UZ4.3BSA		C316	87-010-178-080		C-CAP,S 1000P-50 K B
	87-A40-239-080	ZENER, UZ5.6BSA		C317	87-012-142-080		C-CAP,S 0.33-16 Z F
	87-A40-004-080	ZENER, MTZJ16A		C318	87-012-142-080		C-CAP,S 0.33-16 Z F
MAIN C.B				C319	87-012-141-080		C-CAP,S 0.22-16 Z F
	C101	87-A10-059-090	CAP,E 3300-75	C320	87-012-141-080		C-CAP,S 0.22-16 Z F
	C102	87-A10-059-090	CAP,E 3300-75	C321	87-012-141-080		C-CAP,S 0.22-16 Z F
	C103	87-016-658-090	CAP,E 4700-35 M SMG	C322	87-012-141-080		C-CAP,S 0.22-16 Z F
	C104	87-016-658-090	CAP,E 4700-35 M SMG	C324	87-010-260-080		CAP,E 47-25 SME
	C105	87-012-368-080	C-CAP,S 0.1-50 Z F	C325	87-010-370-080		CAP,E 330-6.3 M SME
	C106	87-012-368-080	C-CAP,S 0.1-50 Z F	C327	87-010-404-080		CAP,E 4.7-50 M SME
	C107	87-012-368-080	C-CAP,S 0.1-50 Z F	C328	87-010-404-080		CAP,E 4.7-50 M SME
	C108	87-012-368-080	C-CAP,S 0.1-50 Z F	C332	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
	C109	87-010-196-080	C-CAP,S 0.1-25 Z F C2012	C335	87-010-401-080		CAP,E 1-50 M SME
	C110	87-010-196-080	C-CAP,S 0.1-25 Z F C2012	C336	87-010-401-080		CAP,E 1-50 M SME
				C337	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
				C339	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
				C340	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
				C351	87-012-140-080		C-CAP,S 470P-50 J CH
				C352	87-012-140-080		C-CAP,S 470P-50 J CH
				C354	87-010-175-080		C-CAP,S 560P-50 J SL

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
C355	87-010-178-080		C-CAP,S 1000P-50 K B	C650	87-010-381-080		CAP,E 330-16 SME
C356	87-010-260-080		CAP,E 47-25 SME	C701	87-010-381-080		CAP,E 330-16 SME
C357	87-010-197-080		C-CAP,S 0.01-25 K B	C702	87-010-404-080		CAP,E 4.7-50 M SME
C358	87-010-183-080		C-CAP,S 2700P-50 K B	C703	87-010-197-080		C-CAP,S 0.01-25 K B
C359	87-010-183-080		C-CAP,S 2700P-50 K B	C704	87-010-197-080		C-CAP,S 0.01-25 K B
C360	87-010-183-080		C-CAP,S 2700P-50 K B	C711	87-010-263-080		CAP,E 100-10 SME
C370	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C712	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C371	87-010-179-080		C-CAP,S 1200P-50 K B	C713	87-010-197-080		C-CAP,S 0.01-25 K B
C372	87-010-179-080		C-CAP,S 1200P-50 K B	C714	87-010-197-080		C-CAP,S 0.01-25 K B
C373	87-010-179-080		C-CAP,S 1200P-50 K B	C721	87-010-312-080		C-CAP,S 15P-50 J CH
C374	87-010-179-080		C-CAP,S 1200P-50 K B	C722	87-010-312-080		C-CAP,S 15P-50 J CH
C375	87-010-545-080		CAP,E 0.22-50 M SME	C723	87-010-178-080		C-CAP,S 1000P-50 K B
C376	87-010-545-080		CAP,E 0.22-50 M SME	C725	87-010-178-080		C-CAP,S 1000P-50 K B
C378	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C727	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C381	87-010-197-080		C-CAP,S 0.01-25 K B	C728	87-010-248-080		CAP,E 220-10 SME
C382	87-010-318-080		C-CAP,S 47P-50 J CH	C755	87-010-197-080		C-CAP,S 0.01-25 K B
C383	87-010-197-080		C-CAP,S 0.01-25 K B	C756	87-010-197-080		C-CAP,S 0.01-25 K B
C384	87-010-402-080		CAP,E 2.2-50 M SME	C757	87-010-318-080		C-CAP,S 47P-50 J CH
C385	87-010-184-080		C-CAP,S 3300P-50 K B	C758	87-010-149-080		C-CAP,S 5P-50 CH
C386	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C761	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C388	87-010-154-080		C-CAP,S 10P-50 D CH	C762	87-010-197-080		C-CAP,S 0.01-25 K B
C401	87-010-187-080		C-CAP,S 5600P-50 K B	C763	87-010-194-080		C-CAP,S 0.047-25 Z F
C402	87-010-187-080		C-CAP,S 5600P-50 K B	C765	87-010-197-080		C-CAP,S 0.01-25 K B
C403	87-010-405-080		CAP,E 10-50 M SME	C766	87-010-197-080		C-CAP,S 0.01-25 K B
C404	87-010-405-080		CAP,E 10-50 M SME	C767	87-010-405-080		CAP,E 10-50 M SME
C405	87-010-260-080		CAP,E 47-25 SME	C768	87-010-197-080		C-CAP,S 0.01-25 K B
C406	87-010-101-080		CAP,E 220-16 SME	C769	87-010-408-080		CAP,E 47-50 SME
C407	87-010-188-080		C-CAP,S 6800P-50 K B	C770	87-015-821-080		C-CAP, 0.047-50 Z F GR
C408	87-010-188-080		C-CAP,S 6800P-50 K B	C771	87-010-407-080		CAP,E 33-50 SME
C409	87-012-140-080		C-CAP,S 470P-50 J CH	C772	87-010-194-080		C-CAP,S 0.047-25 Z F
C410	87-012-140-080		C-CAP,S 470P-50 J CH	C773	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C411	87-010-197-080		C-CAP,S 0.01-25 K B	C774	87-010-263-080		CAP,E 100-10 SME
C412	87-010-197-080		C-CAP,S 0.01-25 K B	C775	87-010-404-080		CAP,E 4.7-50 M SME
C413	87-010-195-080		C-CAP,S 0.068-25 Z F C2012	C777	87-010-400-080		CAP,E 0.47-50 M SME
C414	87-010-195-080		C-CAP,S 0.068-25 Z F C2012	C778	87-010-401-080		CAP,E 1-50 M SME
C415	87-010-404-080		CAP,E 4.7-50 M SME	C779	87-010-401-080		CAP,E 1-50 M SME
C416	87-010-404-080		CAP,E 4.7-50 M SME	C780	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C417	87-010-404-080		CAP,E 4.7-50 M SME	C781	87-010-405-080		CAP,E 10-50 M SME
C418	87-010-404-080		CAP,E 4.7-50 M SME	C782	87-010-405-080		CAP,E 10-50 M SME
C421	87-010-401-080		CAP,E 1-50 M SME	C783	87-015-819-080		C-CAP,0.01-50 K B
C422	87-010-401-080		CAP,E 1-50 M SME	C784	87-010-197-080		C-CAP,S 0.01-25 K B
C503	87-012-154-080		C-CAP,S 150P-50 CH	C785	87-010-400-080		CAP,E 0.47-50 M SME
C504	87-012-154-080		C-CAP,S 150P-50 CH	C786	87-010-400-080		CAP,E 0.47-50 M SME
C505	87-012-145-080		C-CAP,S 270P CH	C787	87-010-184-080		C-CAP,S 3300P-50 K B
C506	87-012-145-080		C-CAP,S 270P CH	C788	87-010-184-080		C-CAP,S 3300P-50 K B
C507	87-010-183-080		C-CAP,S 2700P-50 B	C789	87-010-179-080		C-CAP,S 1200P-50 K B
C509	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C790	87-010-179-080		C-CAP,S 1200P-50 K B
C510	87-010-177-080		C-CAP,S 820P-50 SL	C791	87-010-405-080		CAP,E 10-50 M SME
C511	87-010-177-080		C-CAP,S 820P-50 SL	C793	87-010-178-080		C-CAP,S 1000P-50 KB
C512	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C794	87-010-406-080		CAP,E 22-50 M SME
C513	87-010-374-080		CAP,E 47-10V	C795	87-010-596-080		C-CAP,S 0.047-16 K R
C514	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C796	87-010-403-080		CAP,E 3.3-50 M SME
C515	87-010-263-080		CAP,E 100-10 SME	C797	87-010-180-080		C-CAP,S 1500P-50 K B
C516	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C798	87-010-180-080		C-CAP,S 1500P-50 K B
C517	87-010-183-080		C-CAP,S 2700P-50 B	C799	87-010-194-080		C-CAP,S 0.047-25 Z F
C527	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C812	87-010-197-080		C-CAP,S 0.01-25 K B
C605	87-010-180-080		C-CAP,S 1500P-50 K B	C814	87-010-197-080		C-CAP,S 0.01-25 K B
C606	87-010-180-080		C-CAP,S 1500P-50 K B	C820	87-010-408-080		CAP,E 47-50 SME
C611	87-016-081-080		C-CAP,S 0.1-16 KR	C821	87-010-197-080		C-CAP,S 0.01-25 K B
C613	87-010-404-080		CAP,E 4.7-50 M SME	C822	87-010-197-080		C-CAP,S 0.01-25 K B
C614	87-010-404-080		CAP,E 4.7-50 M SME	C823	87-010-197-080		C-CAP,S 0.01-25 K B
C615	87-010-183-080		C-CAP,S 2700P-50 K B	C828	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C619	87-010-263-080		CAP,E 100-10 SME	C829	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C620	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C940	87-010-197-080		C-CAP,S 0.01-25 K B
C621	87-010-263-080		CAP,E 100-10 SME	C941	87-010-314-080		C-CAP,S 22P-50 J CH
C622	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C943	87-010-197-080		C-CAP,S 0.01-25 K B
C623	87-010-194-080		C-CAP,S 0.047-25 Z F	C944	87-014-051-080		CAP,PP 560P-100 J
C629	87-012-368-080		C-CAP,S 0.1-50 FZ	C945	87-010-197-080		C-CAP,S 0.01-25 K B
C646	87-010-322-080		C-CAP,S 100P-50 J CH	C947	87-010-197-080		C-CAP,S 0.01-25 K B
C647	87-010-322-080		C-CAP,S 100P-50 J CH	C950	87-014-073-080		CAP,PP 4700P-100 J


REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
C952	87-010-197-080		C-CAP,S 0.01-25 K B	C113	87-A10-189-040		CAP,E 220-10 M
C953	87-010-197-080		C-CAP,S 0.01-25 K B	C114	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
C954	87-010-400-080		CAP,E 0.47-50 M SME	C115	87-010-178-080		C-CAP,S 1000P-50 K B
C956	87-010-263-080		CAP,E 100-10 M SME	C116	87-010-494-040		CAP,E 1-50 5L SRE
C959	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C117	87-010-555-040		CAP,E 100-10 5L SRE
C960	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	C118	87-010-194-080		C-CAP,S 0.047-25 Z F
C962	87-010-401-080		CAP,E 1-50 M SME	C119	87-010-408-040		CAP,E 47-50 M SME
CF801	87-008-261-010		FLTR,CFSFE10.7MA5	C120	87-010-404-040		CAP,E 4.7-50 SME
CF802	87-008-261-010		FLTR,CFSFE10.7MA5	C121	87-010-404-040		CAP,E 4.7-50 SME
FFE801	A8-7ZA-290-030		7ZA-2 FEUNM<HRJ7ST,HCSTNM>	C122	87-010-194-080		C-CAP,S 0.047-25 Z F
FFE801	A8-7ZA-293-070		7ZA-2 YFEUNC<HRST,HCST>	C123	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
J252	87-A60-024-010		JACK,DIA6.3 BLK ST W/SW KM	C124	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
J253	87-099-474-010		JACK,PIN 3P BLK W/SW	C125	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
J254	87-A60-238-010		TERMINAL,SP 4P (MSC)	C127	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
J601	87-A60-426-010		JACK,PIN 6P YKC21-3835	C128	87-010-178-080		C-CAP,S 1000P-50 K B
J801	87-A60-202-010		TERMINAL,ANT4PMSP-154V-02	C351	87-012-158-080		C-CAP,S 390P-50 J CH GRM
J940	81-754-629-010		CONNECTOR,XH 2P (UL)	C352	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
L201	87-003-383-010		COIL,1UH K	C353	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
L202	87-003-383-010		COIL,1UH K	C354	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
L301	87-A50-049-010		COIL,TRAP 85K(COI)	C355	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
L302	87-A50-049-010		COIL,TRAP 85K(COI)	C356	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
L351	87-007-342-010		COIL,OSC 85KHZ BIAS	C357	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
L601	87-003-231-080		C-COIL,2125 1UH	C605	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
L770	87-005-849-080		COIL,10UH K CECS	FB601	87-008-372-080		FLTR,EMIBL01 RN1
L771	87-A50-165-010		COIL,FM DET-N(TOK)	FL101	87-NF5-611-010		FL,BJ530GK 7NF-5
L772	87-A90-052-010		FLTR,CFMT-450A (TOK)	J601	82-NF7-630-010		JACK,3.5MO
L832	87-005-847-080		COIL,2.2UH K CECS	J602	82-NF7-630-010		JACK,3.5MO
L791	87-A50-027-010		COIL, 1 POLE MPX (TOK)	LED201	87-A40-317-080		LED,SLR-342VCT31 RED
L792	87-A50-027-010		COIL, 1 POLE MPX (TOK)	LED202	87-A40-317-080		LED,SLR-342VCT31 RED
L941	87-A50-022-010		COIL,ANT SW (COI) 7.96MHZ	LED203	87-A40-317-080		LED,SLR-342VCT31 RED
L942	87-A50-173-010		COIL,OSC SW-N (COI)	LED204	87-A40-317-080		LED,SLR-342VCT31 RED
L943	87-005-372-080		COIL,1UH (K)LAL03	LED205	87-A40-317-080		LED,SLR-342VCT31 RED
L944	87-A50-159-010		COIL,10UH K C2B	LED206	87-A40-316-080		LED,SLR-56PCT31 GRN
L981	86-NF4-666-010		COIL,AM PACK3(TOK)	LED207	87-A40-316-080		LED,SLR-56PCT31 GRN
PR201	87-026-682-080		PROTECTOR,10A 491SERIES 60V	LED208	87-A40-316-080		LED,SLR-56PCT31 GRN
PR202	87-026-682-080		PROTECTOR,10A 491SERIES 60V	LED209	87-A40-316-080		LED,SLR-56PCT31 GRN
R123	87-022-200-080		RES,M/F 0.56-1W J	LED210	87-A40-316-080		LED,SLR-56PCT31 GRN
R231	87-A00-262-080		RES,M/F 0.15-2W J	LED211	87-A40-316-080		LED,SLR-56PCT31 GRN
R232	87-A00-262-080		RES,M/F 0.15-2W J	LED212	87-A40-316-080		LED,SLR-56PCT31 GRN
RY101	87-045-389-010		RELAY,12V OSA-SS-212DM5	LED213	87-A40-316-080		LED,SLR-56PCT31 GRN
RY201	87-045-382-010		RELAY,12V OVAZ-SH-112L	LED214	87-A40-316-080		LED,SLR-56PCT31 GRN
SFR301	87-024-435-080		SFR,33K H RH063MC	LED215	87-A40-316-080		LED,SLR-56PCT31 GRN
SFR302	87-024-435-080		SFR,33K H RH063MC	LED216	87-A40-263-080		LED,SLH-56PCT31 GRN
SFR303	87-024-435-080		SFR,33K H RH063MC	LED217	87-A40-263-080		LED,SLH-56PCT31 GRN
SFR304	87-024-435-080		SFR,33K H RH063MC	LED218	87-A40-263-080		LED,SLH-56PCT31 GRN
SFR305	87-024-436-080		SFR,47K H RH063MC	LED219	87-A40-263-080		LED,SLH-56PCT31 GRN
SFR306	87-024-436-080		SFR,47K H RH063MC	LED220	87-A40-263-080		LED,SLH-56PCT31 GRN
SFR351	87-024-436-080		SFR,47K H RH063MC	LED221	87-A40-263-080		LED,SLH-56PCT31 GRN
SFR352	87-024-436-080		SFR,47K H RH063MC	LED233	87-A40-265-010		LED,SLH-56PCL GRN
TC941	87-011-220-080		TRIMMER,CER 20P 6.15X5.9	LED234	87-A40-265-010		LED,SLH-56PCL GRN
TC942	87-011-221-080		TRIMMER,CER 30P 6.15X5.9	LED235	87-A40-267-010		LED,SLH-56VCL RED
TH201	87-A90-221-080		C-THMS,100K	LED236	87-A40-267-010		LED,SLH-56VCL RED
TH202	87-A90-221-080		C-THMS,100K	LED237	87-A40-265-010		LED,SLH-56PCL GRN
W1	85-NF5-628-010		F-CABLE,7P-2.5	LED238	87-A40-265-010		LED,SLH-56PCL GRN
X721	87-A70-061-010		VIB,XTAL 4.500MHZ CSA-309	S300	87-A90-095-080		SW,TACT EVQ11G04M
X771	87-030-354-010		VIB,CER 450.0KHZ BFU C	S301	87-A90-095-080		SW,TACT EVQ11G04M
				S302	87-A90-095-080		SW,TACT EVQ11G04M
				S303	87-A90-095-080		SW,TACT EVQ11G04M
				S304	87-A90-095-080		SW,TACT EVQ11G04M
				S305	87-A90-095-080		SW,TACT EVQ11G04M
FRONT C.B				S306	87-A90-095-080		SW,TACT EVQ11G04M
C103	87-010-197-080		C-CAP,S 0.01-25 K B	S307	87-A90-095-080		SW,TACT EVQ11G04M
C104	87-010-312-080		C-CAP,S 15P-50 J CH	S308	87-A90-095-080		SW,TACT EVQ11G04M
C105	87-010-316-080		C-CAP,S 33P-50 J CH	S314	87-A90-095-080		SW,TACT EVQ11G04M
C106	87-010-320-080		C-CAP,S 68P-50 J CH	S315	87-A90-095-080		SW,TACT EVQ11G04M
C107	87-012-157-080		C-CAP,S 330P-50 J CH GRM	S316	87-A90-095-080		SW,TACT EVQ11G04M
C108	87-010-560-040		CAP,E 10-50 M 5L MA	S317	87-A90-095-080		SW,TACT EVQ11G04M
C109	87-010-401-040		CAP,E 1-50 M SME	S318	87-A90-095-080		SW,TACT EVQ11G04M
C110	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	S319	87-A90-095-080		SW,TACT EVQ11G04M
C111	87-010-196-080		C-CAP,S 0.1-25 Z F C2012	S320	87-A90-095-080		SW,TACT EVQ11G04M
C112	87-010-196-080		C-CAP,S 0.1-25 Z F C2012				

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
S322	87-A90-095-080		SW,TACT EVQ11G04M	C509	87-010-181-080		C-CAP,S 1800P-50 K B
S328	87-A90-095-080		SW,TACT EVQ11G04M	C510	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
S329	87-A90-095-080		SW,TACT EVQ11G04M	C511	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
S330	87-A90-095-080		SW,TACT EVQ11G04M	C512	87-010-374-040		CAP,E 47-10 SME
S331	87-A90-095-080		SW,TACT EVQ11G04M	C513	87-010-404-040		CAP,E 4.7-50 SME
S332	87-A90-095-080		SW,TACT EVQ11G04M	C514	87-010-404-040		CAP,E 4.7-50 SME
S336	87-A90-095-080		SW,TACT EVQ11G04M	C515	87-010-183-080		C-CAP,S 2700P-50 K B
S337	87-A90-095-080		SW,TACT EVQ11G04M	C516	87-010-183-080		C-CAP,S 2700P-50 K B
S338	87-A90-095-080		SW,TACT EVQ11G04M	C518	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
X101	87-A70-070-080		VIB,CER 5.76MHZ CRHF	C519	87-010-263-040		CAP,E 100-10 M SME
CD KEY C.B				C533	87-010-545-080		CAP,E 0.22-50 M SME
S309	87-A90-095-080		SW,TACT EVQ11G04M	C601	87-010-405-040		CAP,E 10-50 M SME
S310	87-A90-095-080		SW,TACT EVQ11G04M	C602	87-010-186-080		C-CAP,S 4700P-50 K B
S311	87-A90-095-080		SW,TACT EVQ11G04M	C603	87-010-405-040		CAP,E 10-50 M SME
S312	87-A90-095-080		SW,TACT EVQ11G04M	C604	87-010-382-040		CAP,E 22-25 SME
S313	87-A90-095-080		SW,TACT EVQ11G04M	C607	87-010-321-080		C-CAP,S 82P-50 J CH
FAN C.B				C608	87-010-196-080		C-CAP,S 0.1-25 Z F C2012
	87-A90-463-010		FAN,2408 NL	C609	87-010-545-040		CAP,E 0.22-50 M SME
C130	87-010-401-080		CAP,E 1-50 M SME	C611	87-010-177-080		C-CAP,S 820P-50 J SL
C131	87-010-263-080		CAP,E 100-10 SME	C614	87-010-248-040		CAP,E 220-10 M SME
C132	87-010-380-080		CAP,E 47-16 M SME	L501	87-005-212-080		COIL,220UH K EL0606
AC2 C.B				RE C.B			
△ PR1	87-026-682-080		PROTECTOR,10A 491SERIES 60V	C101	87-010-198-080		C-CAP,S 0.022-25 K B
△ PR2	87-026-682-080		PROTECTOR,10A 491SERIES 60V	C102	87-010-198-080		C-CAP,S 0.022-25 K B
△ PR5	87-026-682-080		PROTECTOR,10A 491SERIES 60V	S101	87-A90-535-010		SW,RTRY EC16B24304-W0 NON
△ PR6	87-026-682-080		PROTECTOR,10A 491SERIES 60V	S326	87-A90-095-080		SW,TACT EVQ11G04M
				S327	87-A90-095-080		SW,TACT EVQ11G04M
AC1 C.B				DECK C.B			
△ FC1	87-033-147-010		FUSE CLAMP,MT-20	W001	82-ZM3-601-019		RBN,CORD,4P-75
△ FC2	87-033-147-010		FUSE CLAMP,MT-20	SFR1	87-024-581-019		SFR,3.3K DIA 6H
△ FC3	87-033-147-010		FUSE CLAMP,MT-20	SOL1	82-ZM1-618-010		SOL ASSY, 27
△ FC4	87-033-147-010		FUSE CLAMP,MT-20	SOL2	82-ZM1-618-010		SOL ASSY, 27
△ F101	87-035-457-010		FUSE,3.15A 250V T218	SW1	87-A90-248-019		SW,MICRO ESE11SH2CXQ
△ F102	87-035-457-010		FUSE,3.15A 250V T218	SW2	87-A90-248-019		SW,MICRO ESE11SH2CXQ
△ PT101	87-NF5-604-010		PT,HE EI85-58 7NF-5	SW3	87-A90-248-019		SW,MICRO ESE11SH2CXQ
△ SW101	87-A90-165-010		SW,SL 1-2-3 SWS2301	SW4	87-036-110-010		SW,MICRO SPPB62
△ T1	87-A60-317-010		TERMINAL, 1P MSC	SW5	87-036-110-010		SW,MICRO SPPB62
△ T2	87-A60-317-010		TERMINAL, 1P MSC	SW6	87-036-110-010		SW,MICRO SPPB62
				SW8	87-A90-248-019		SW,MICRO ESE11SH2CXQ
				SW9	87-036-110-010		SW,MICRO SPPB62
				CON502	87-099-756-019		CONN, 15P 9604 S F
AUDIO C.B				HEAD-1 C.B			
C403	87-010-992-080		C-CAP,S 0.047-25 K B MK212				
C404	87-010-992-080		C-CAP,S 0.047-25 K B MK212				
C405	87-010-401-040		CAP,E 1-50 M SME		85-ZM3-602-010		PWB,FLEX A
C406	87-010-401-040		CAP,E 1-50 M SME				
C407	87-010-184-080		C-CAP,S 3300P-50 K B	HEAD-2 C.B			
C408	87-010-184-080		C-CAP,S 3300P-50 K B				
C409	87-010-592-080		C-CAP,S 0.022-16 K R		85-ZM3-602-010		PWB,FLEX A
C410	87-010-592-080		C-CAP,S 0.022-16 K R				
C411	87-016-463-080		C-CAP, 0.33-16 K B C3216				
C412	87-016-463-080		C-CAP, 0.33-16 K B C3216				
C413	87-010-196-080		C-CAP,S 0.1-25 Z F C2012				
C414	87-010-374-040		CAP,E 47-10 SME				
C415	87-010-374-040		CAP,E 47-10 SME				
C416	87-010-196-080		C-CAP,S 0.1-25 Z F C2012				
C417	87-016-081-080		C-CAP,S 0.1-16 K R				
C418	87-010-405-040		CAP,E 10-50 M SME				
C501	87-010-319-080		C-CAP,S 56P-50 J CH				
C502	87-010-319-080		C-CAP,S 56P-50 J CH				
C503	87-012-393-080		C-CAP,S 0.22-16 K W5R CM/CB				
C504	87-010-197-080		C-CAP,S 0.01-25 K B				
C505	87-010-180-080		C-CAP,S 1500P-50 K B				
C506	87-010-213-080		C-CAP,S 0.015-25 K B				
C507	87-010-213-080		C-CAP,S 0.015-25 K B				
C508	87-010-197-080		C-CAP,S 0.01-25 K B				

○チップ抵抗部品コード/CHIP RESISTOR PART CODE

チップ抵抗部品コードの成り立ち

Chip Resistor Part Coding

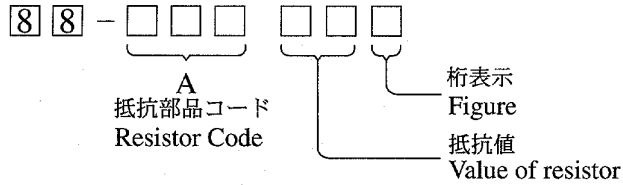

チップ抵抗
Chip resistor

容量 Wattage	種類 Type	許容誤差 Tolerance	記号 Symbol	寸法/Dimensions (mm)			抵抗コード : A Resistor Code : A	
				外形/Form	L	W		t
1/16W	1608	± 5%	CJ		1.6	0.8	0.45	108
1/10W	2125	± 5%	CJ		2	1.25	0.45	118
1/8W	3216	± 5%	CJ		3.2	1.6	0.55	128

TRANSISTOR ILLUSTRATION



E C B

KTA1266GR
KTC3198GR



E C B

CSD1489B
CSB1058B



E B C

C2N5401




B C E

2SB1370
FN1016
FP1016




G D G

2SK2723




2SK2158




2SA1235F RN1404
2SC2714 RT1N141C
2SC3052F RT1N144C
CMBT5551 RT1P141C
CSA1362GR RT1P144C
CSD1306E

BLOCK DIAGRAM (MAIN / FRONT)

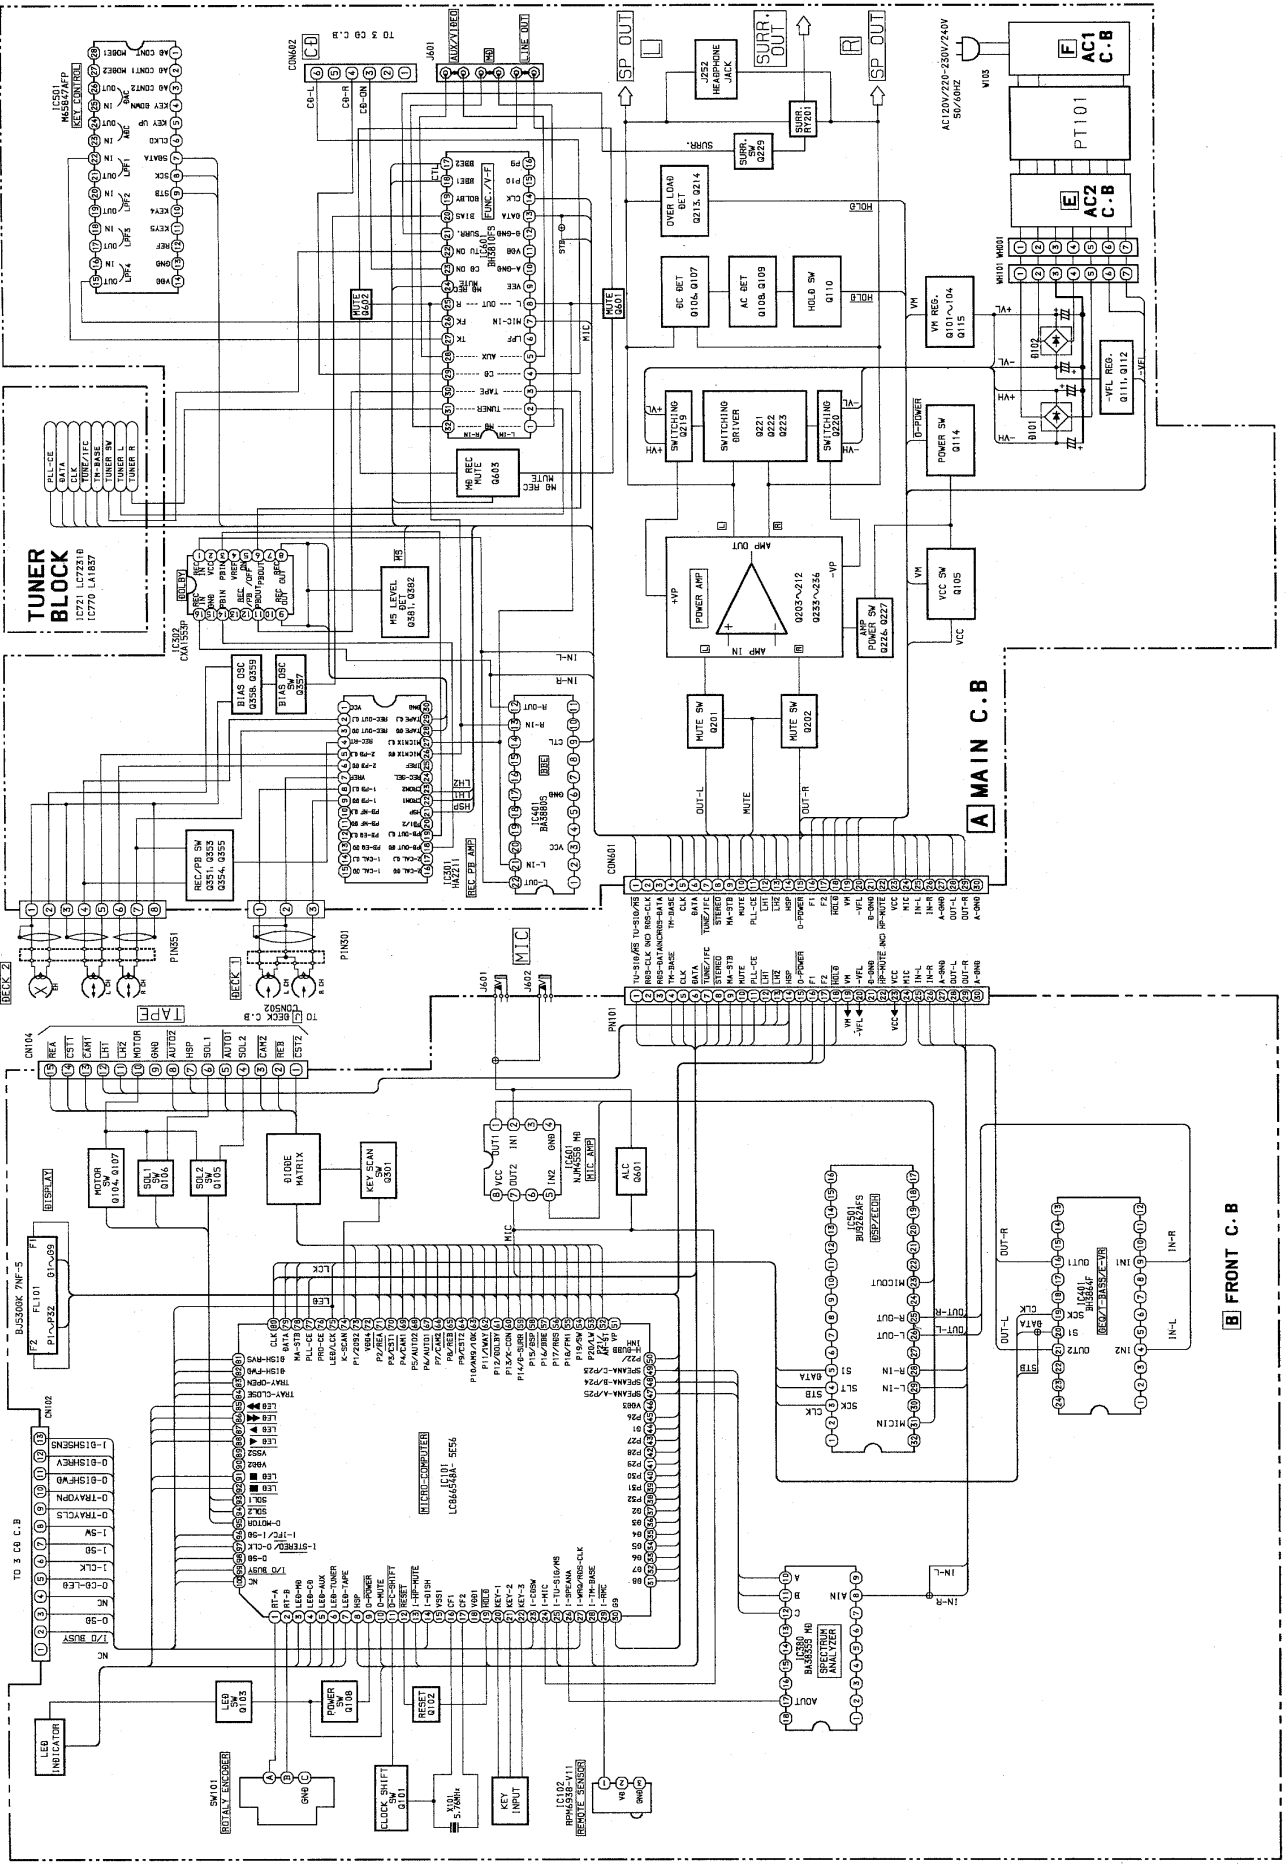

WIRING - 1 (MAIN)

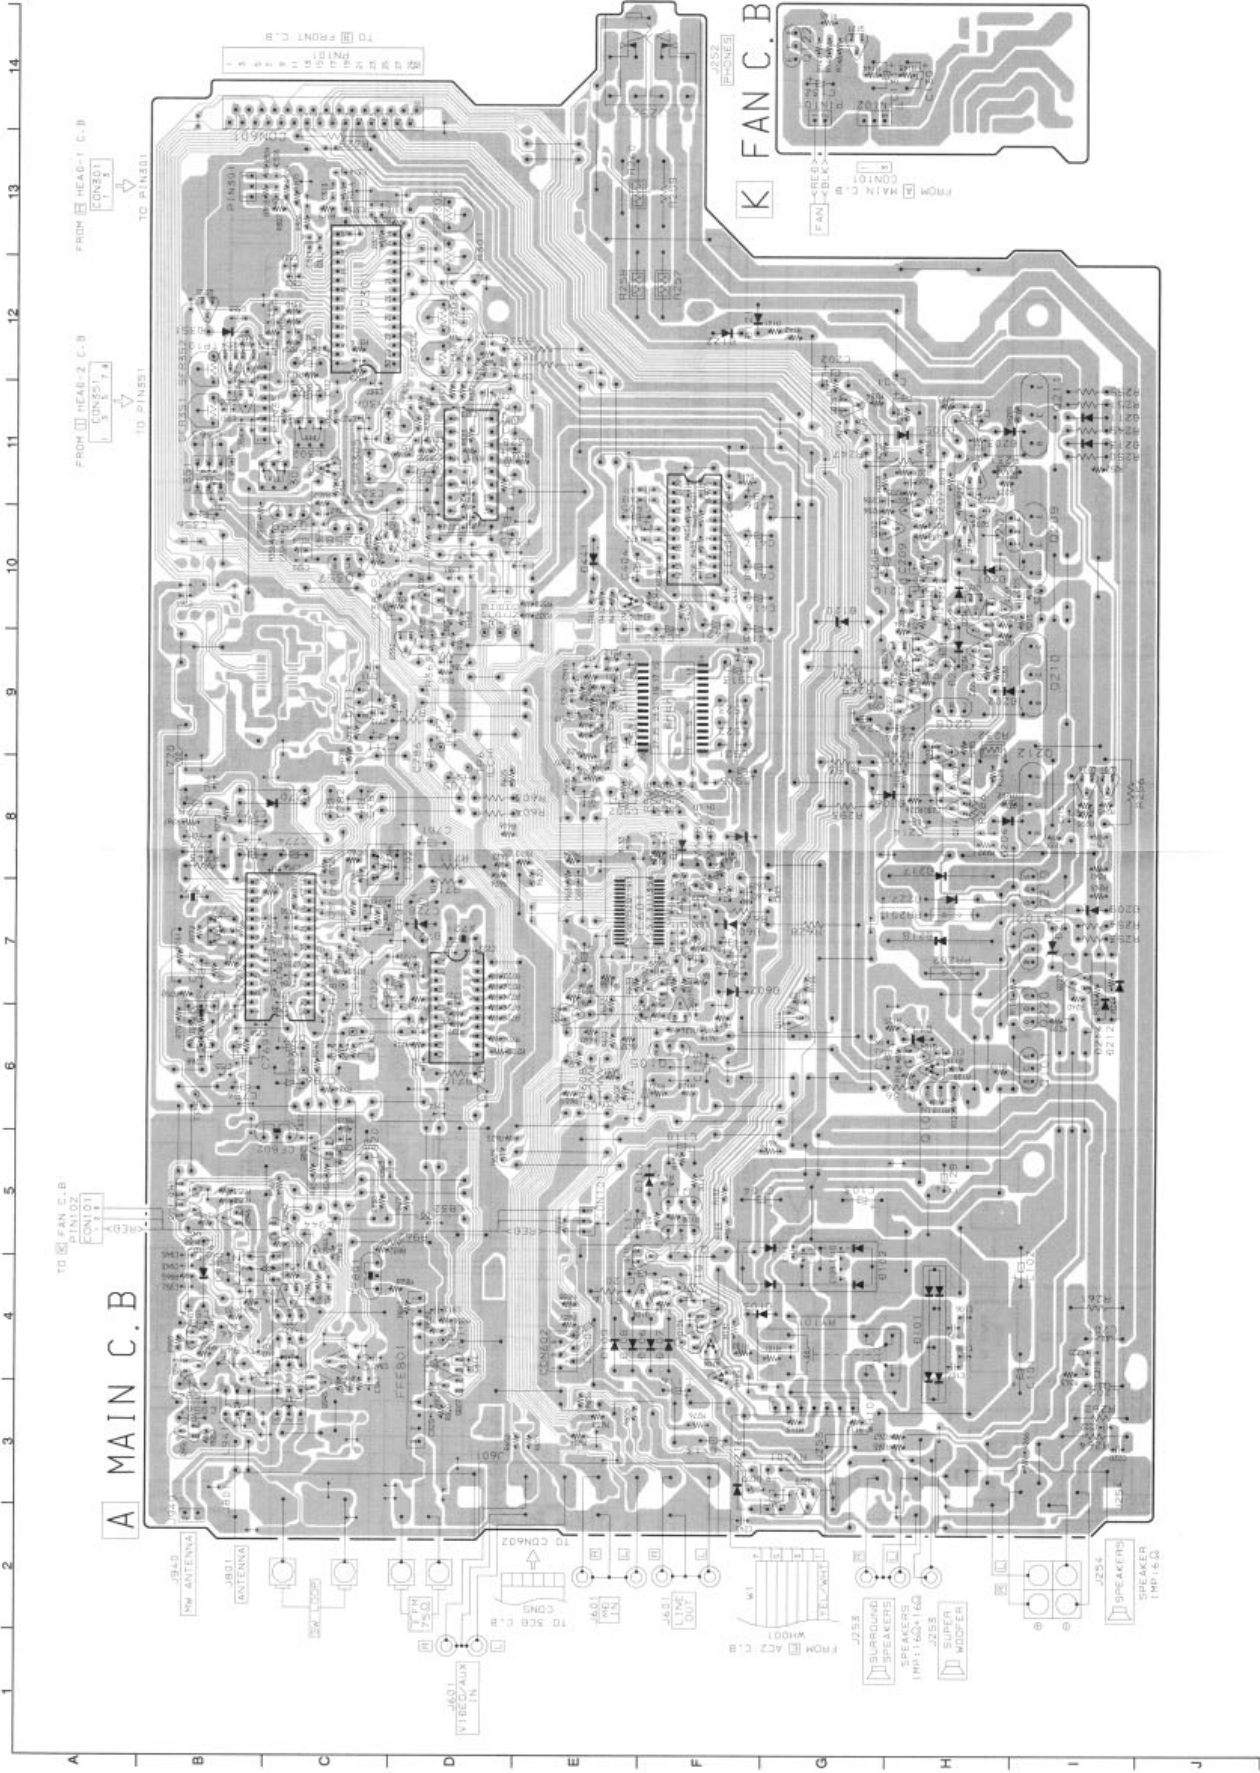


TO FAN C.B.
FAN C.B.
CONTROL

FROM HEAD-2 C.B.
CONTROL

FROM HEAD-1 C.B.
CONTROL


A MAIN C.B.


K FAN C.B.



B FAN C.B.


SCHEMATIC DIAGRAM - 1 (MAIN)

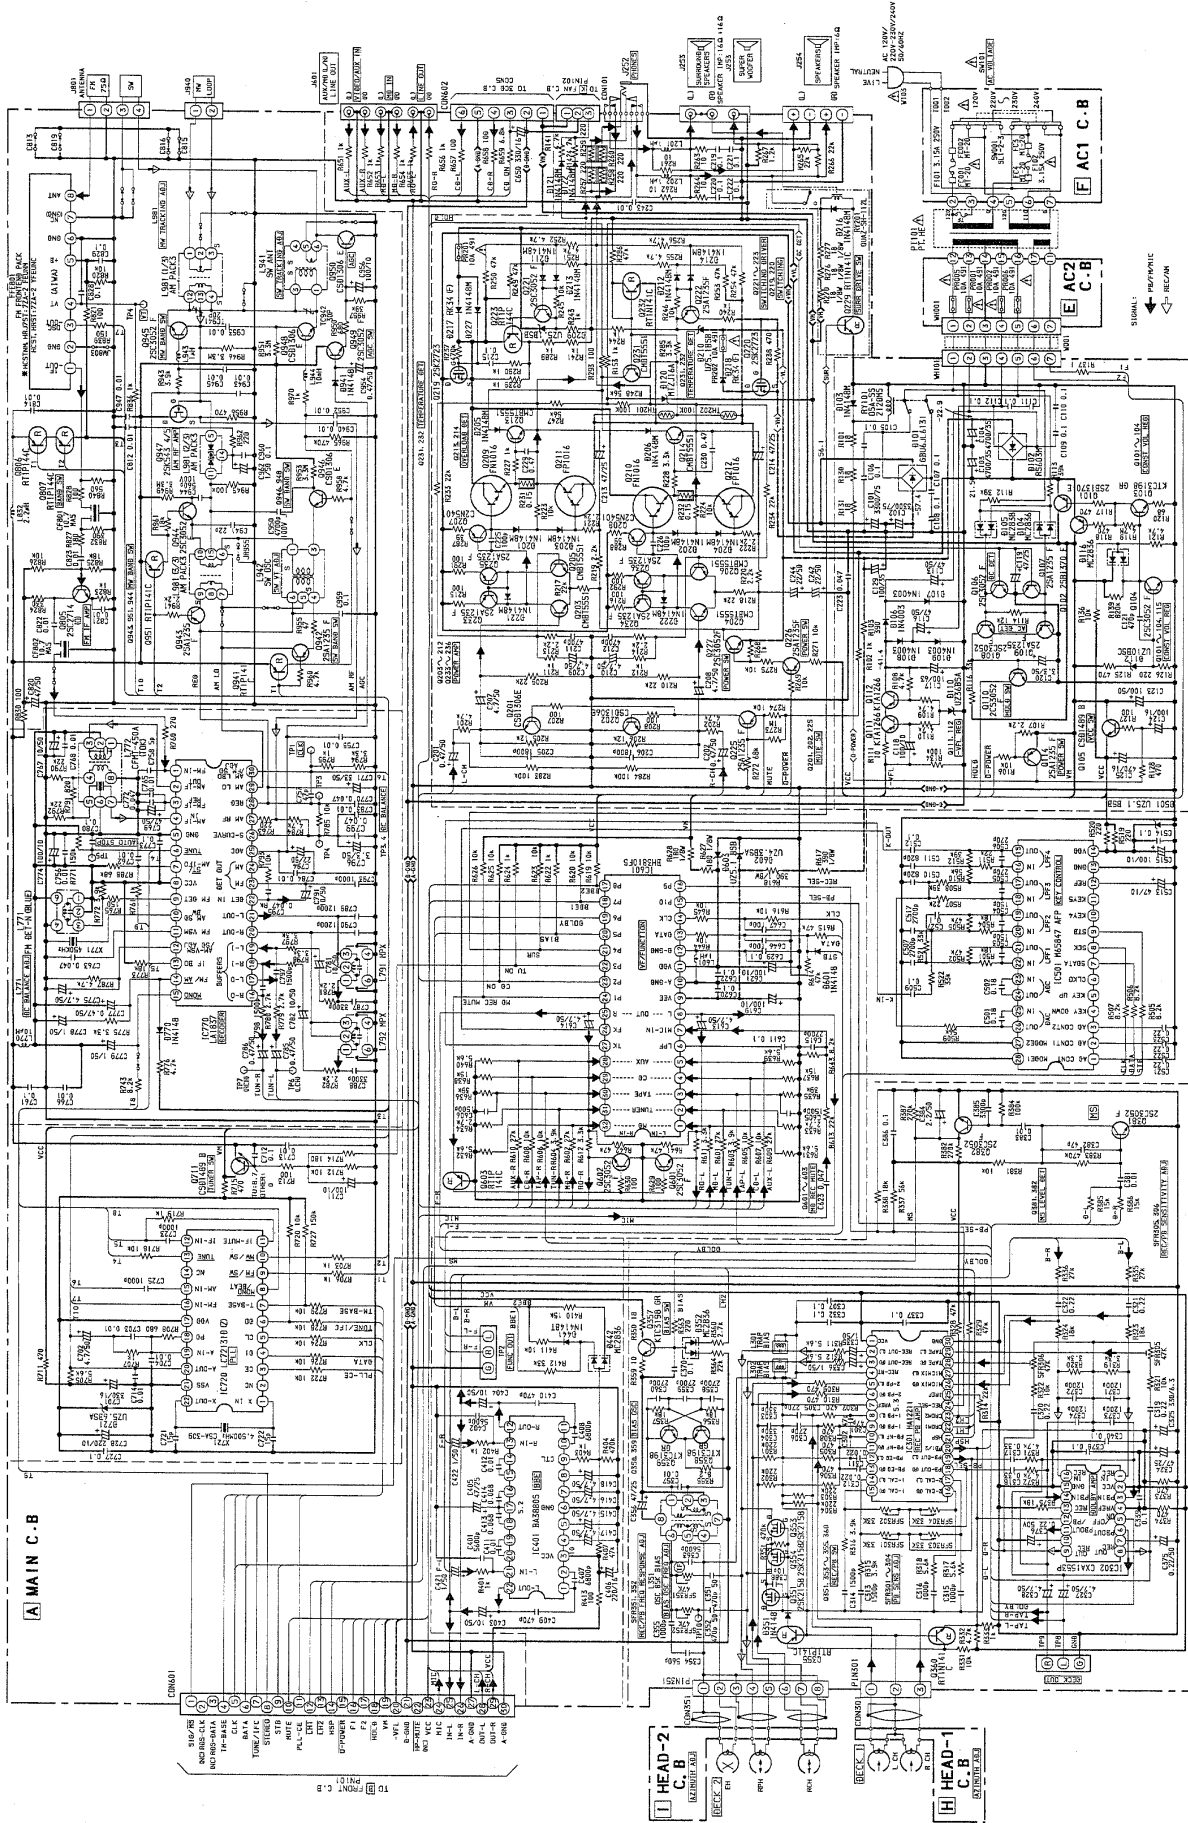

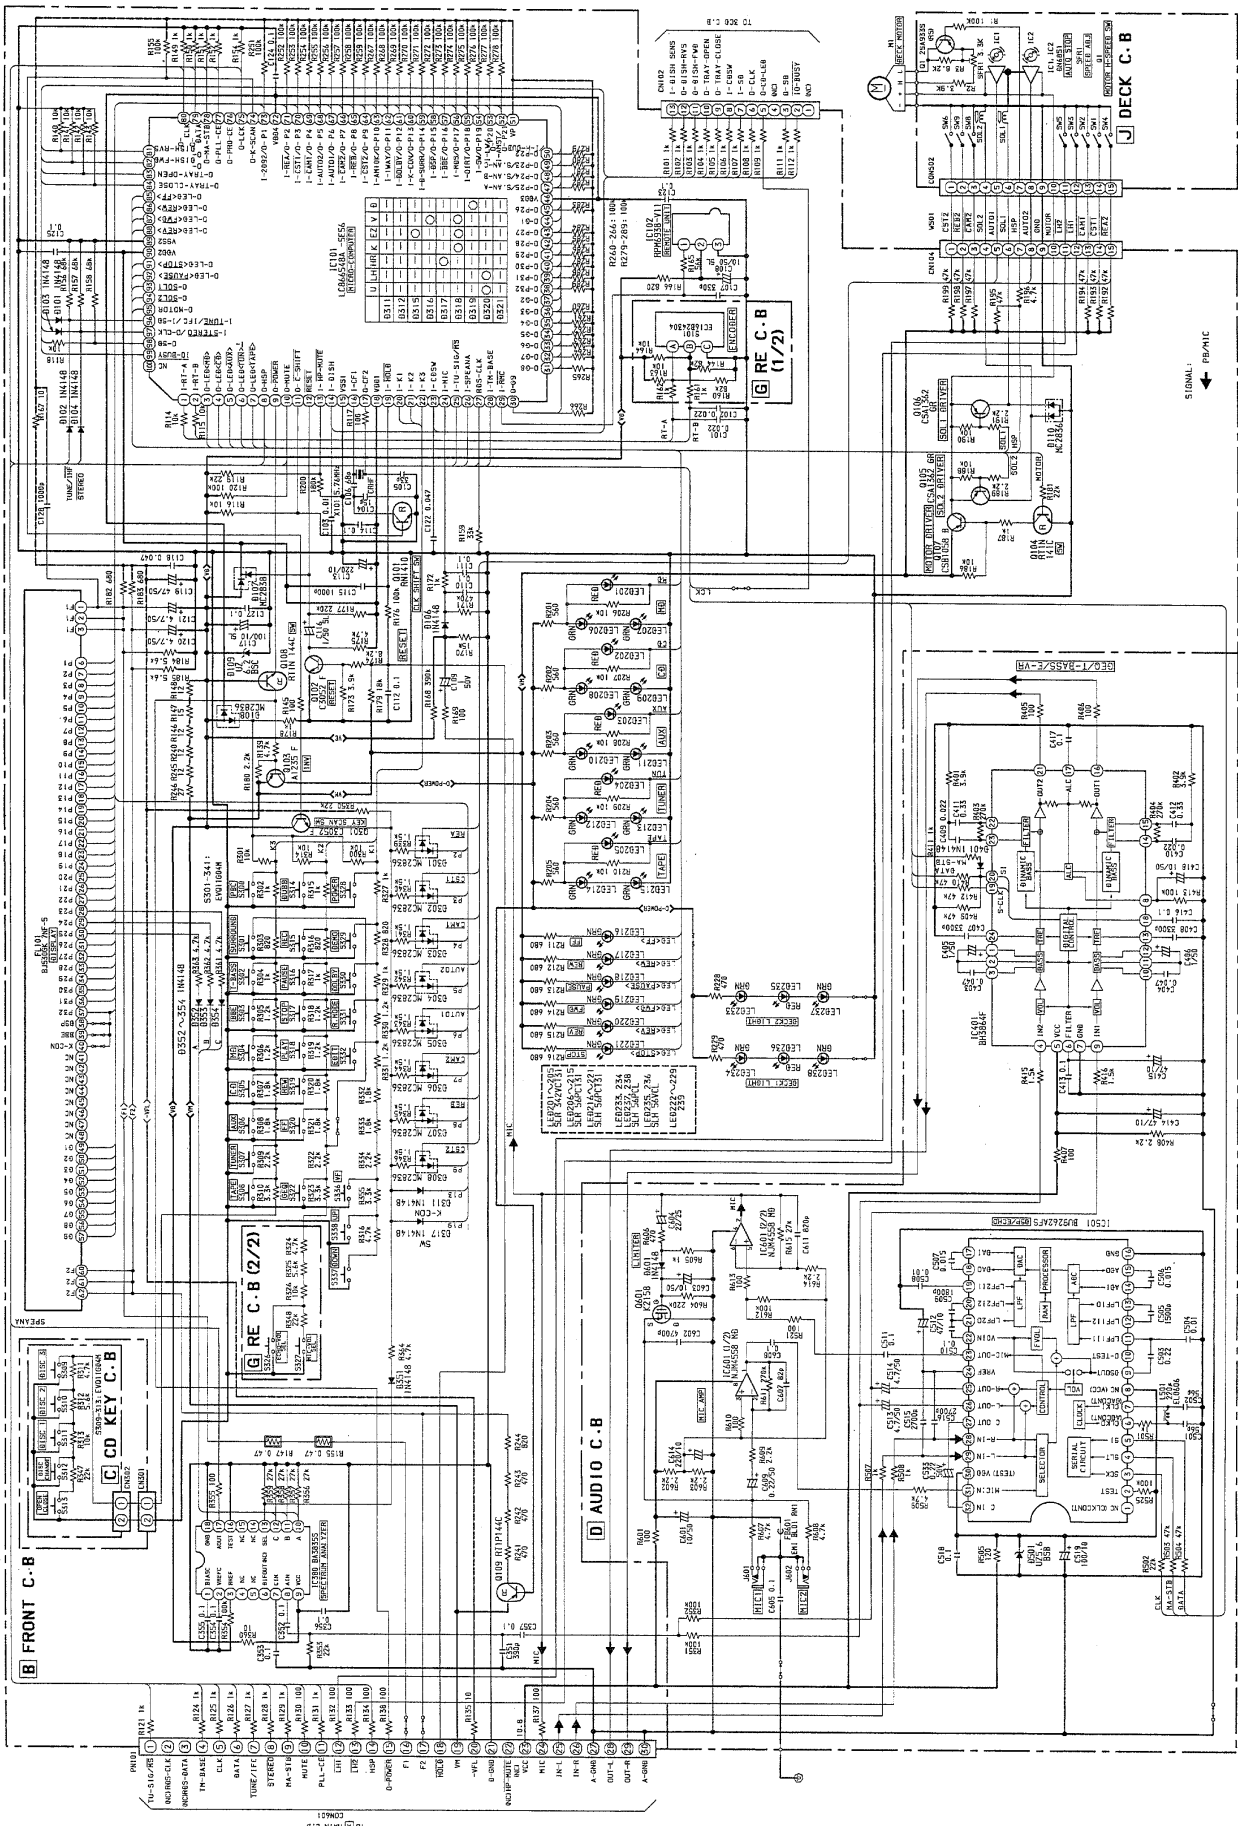


1 2 3 4 5 6 7 8 9 10 11 12 13 14

C CD KEY C.B

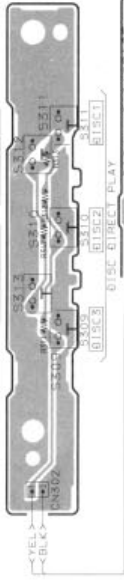


B FRONT C.B

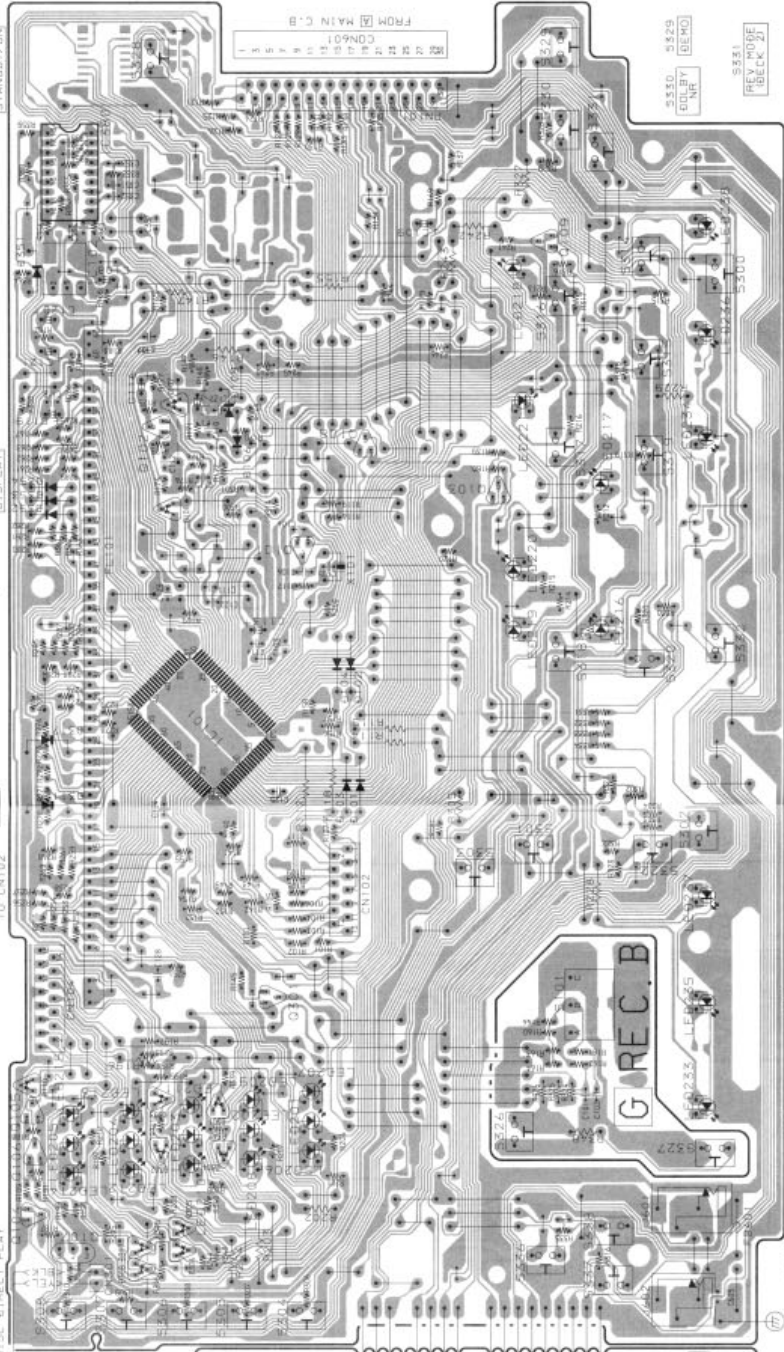


D AUDIO C.B





WIRING - 3 (PT)

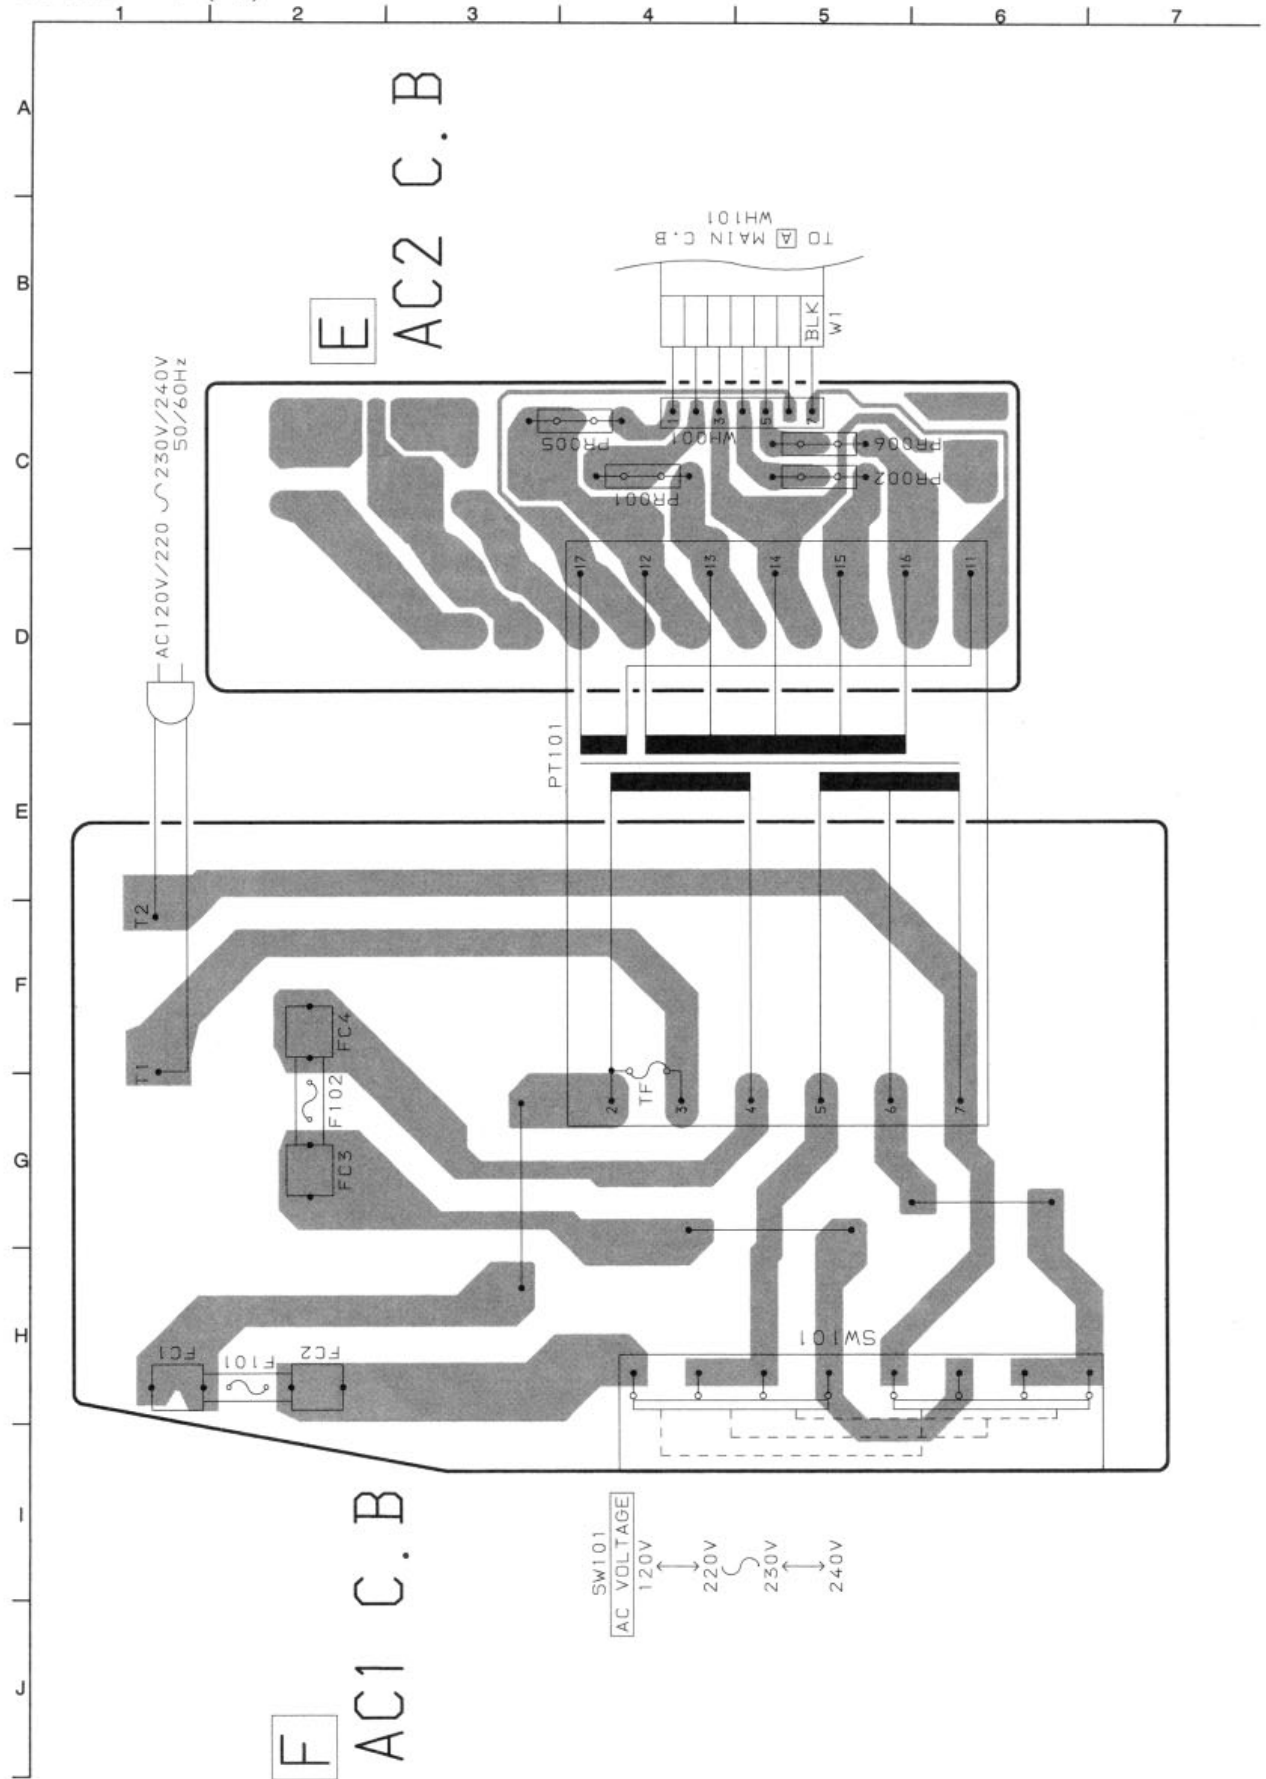

WIRING - 4 (DECK)

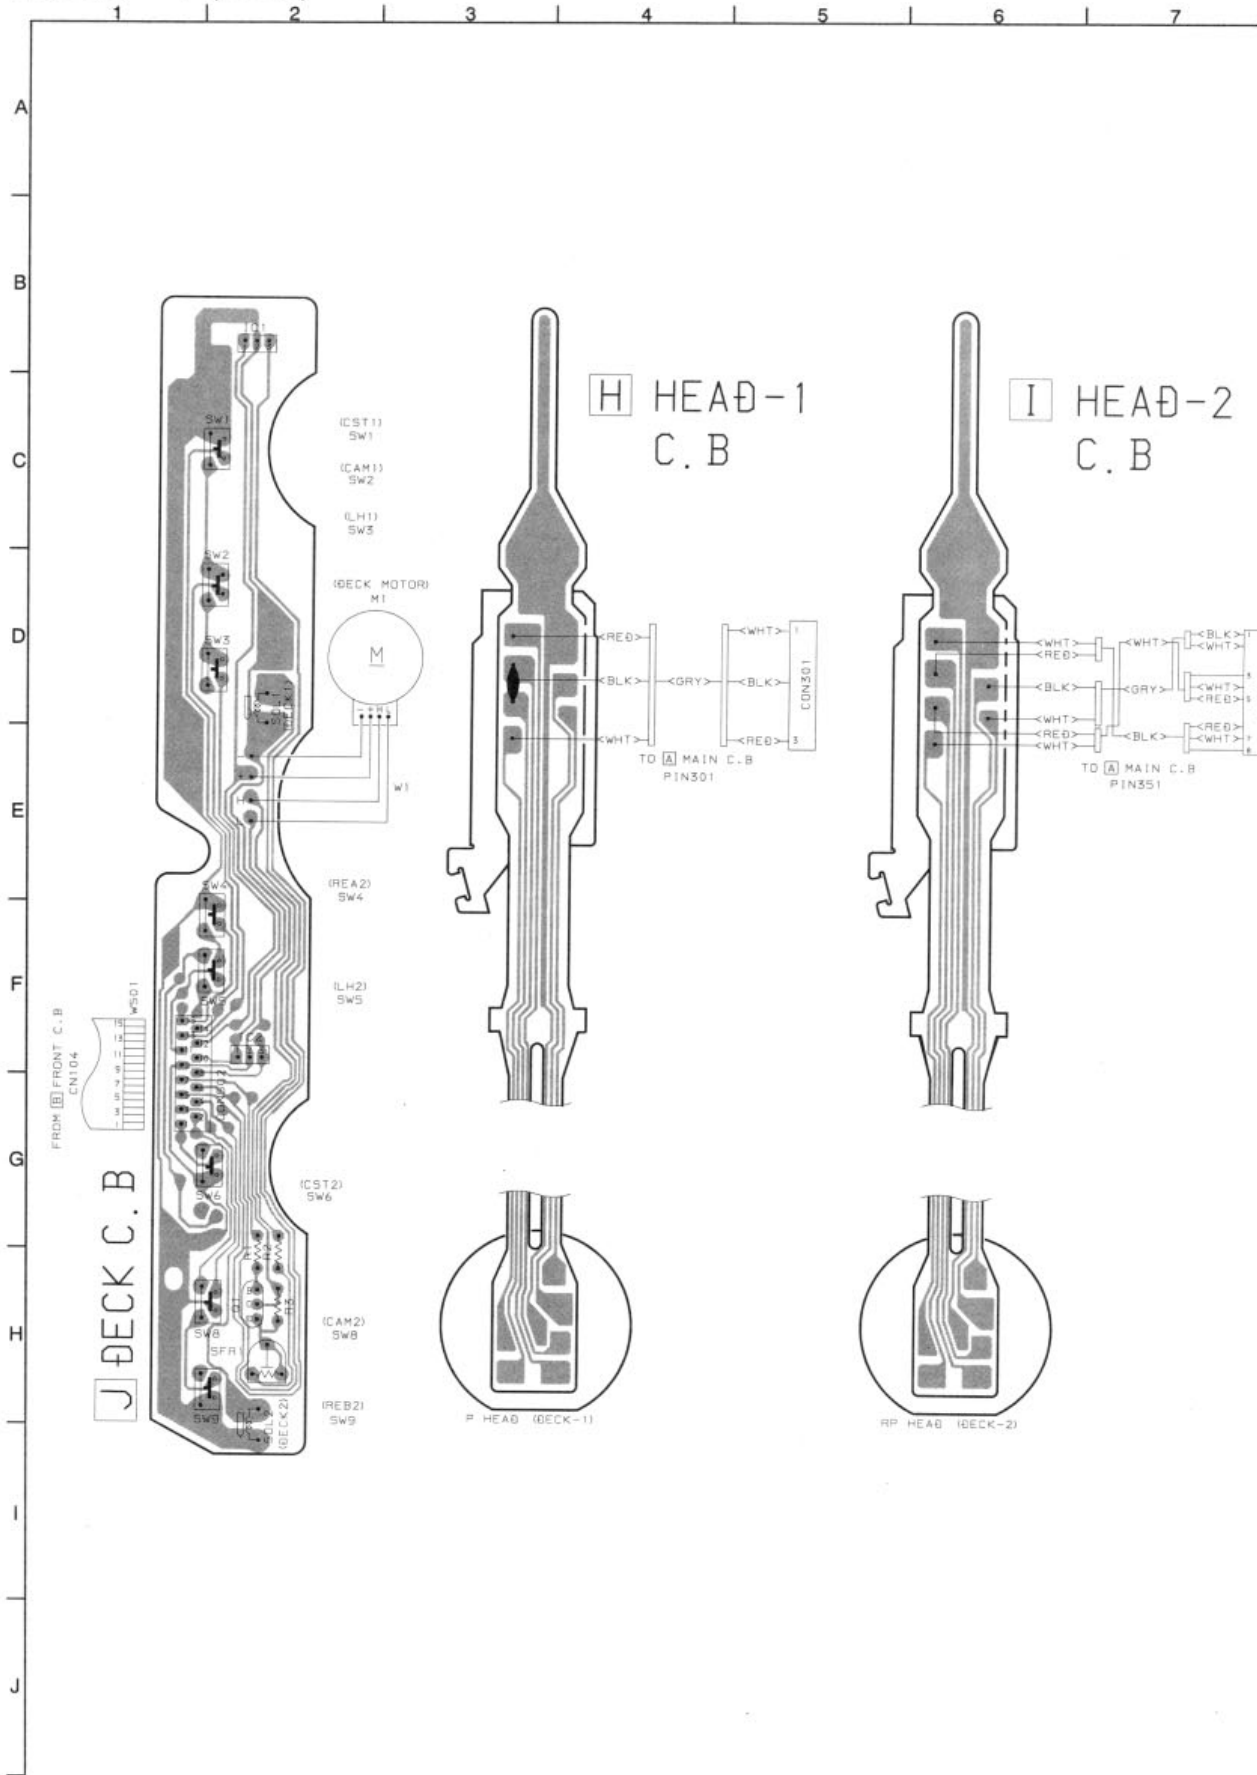








SCHEMATIC DIAGRAM - 3 (TUNER FRONT END / FAN)

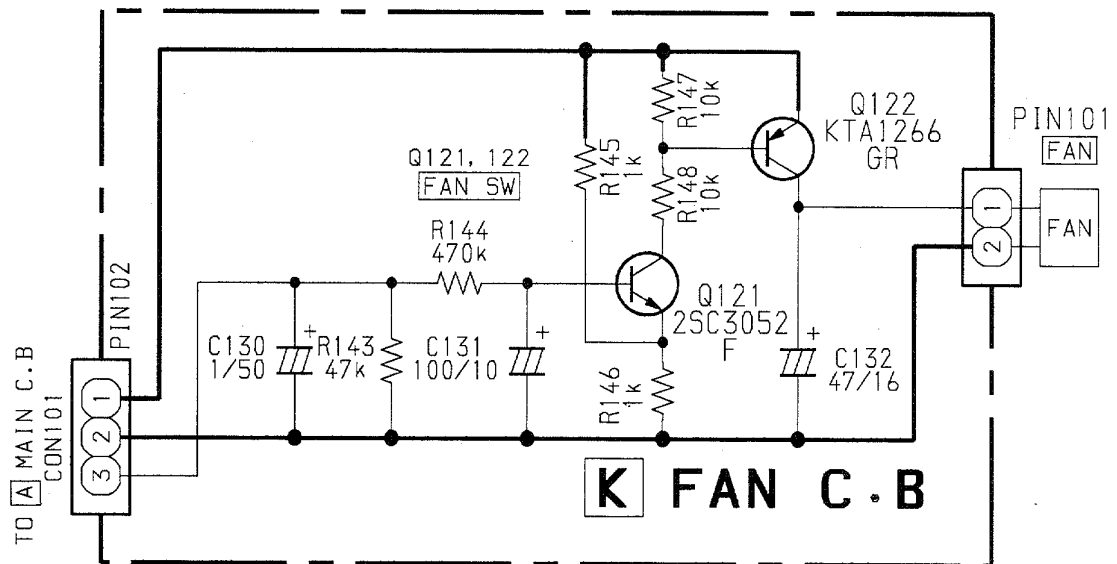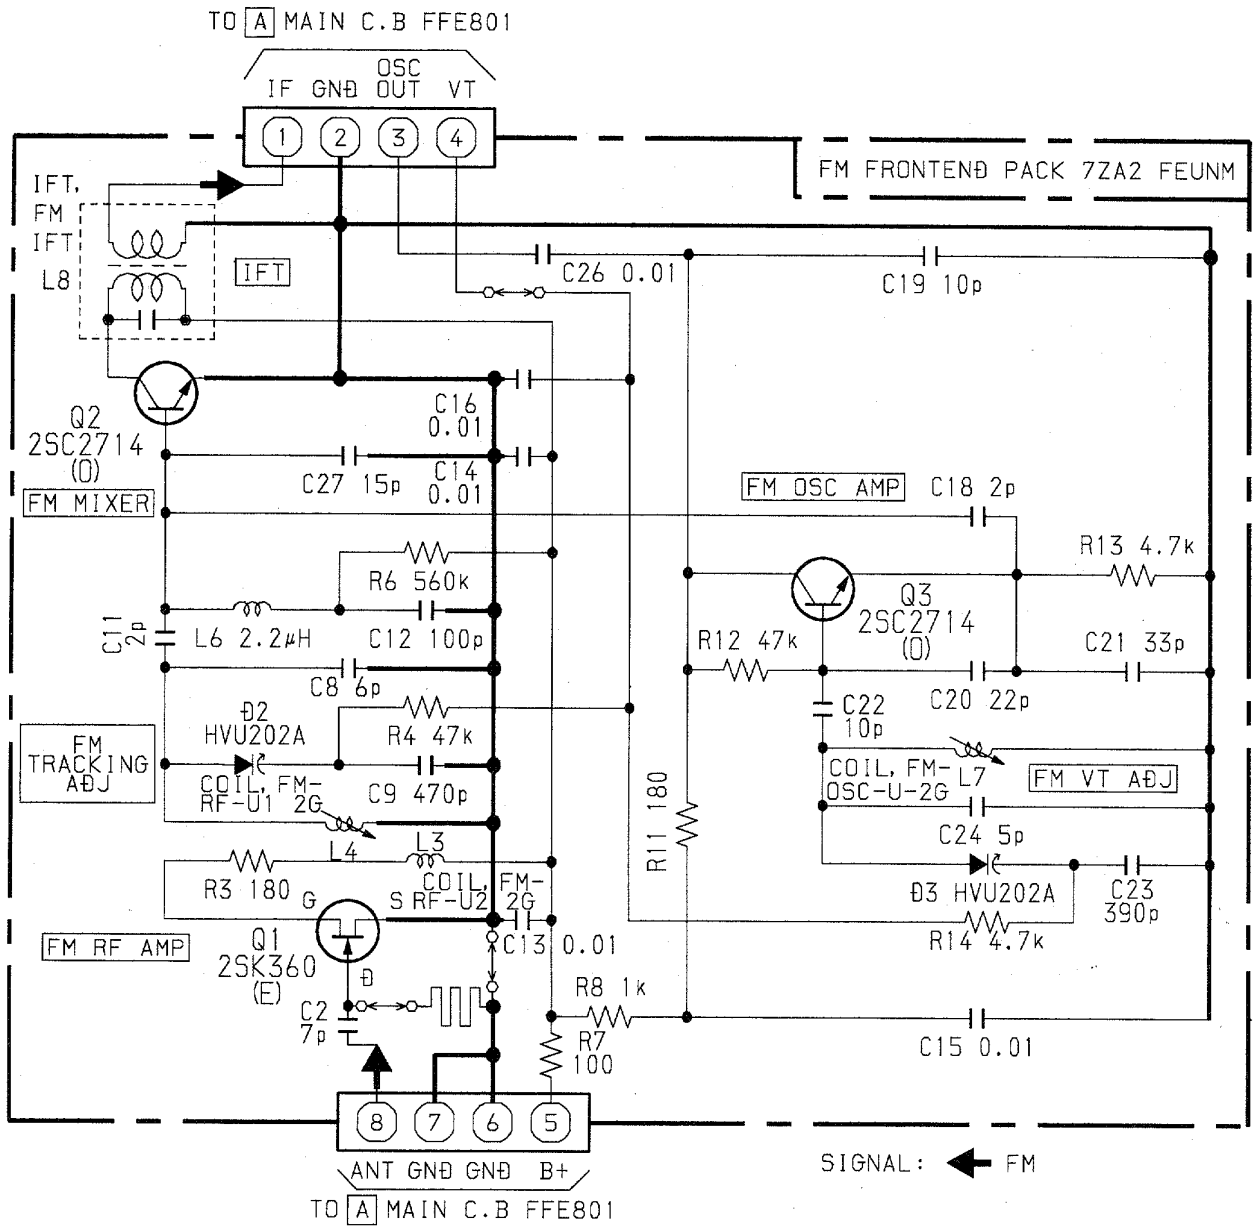

FL GRID ASSIGNMENT & ANODE CONNECTION

GRID ASSIGNMENT

FL, BJ530GK

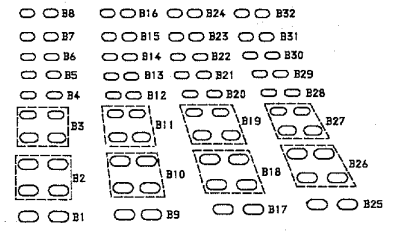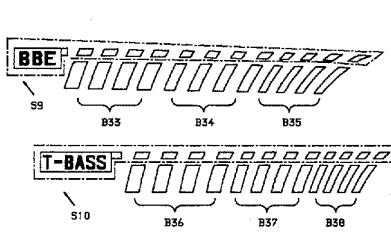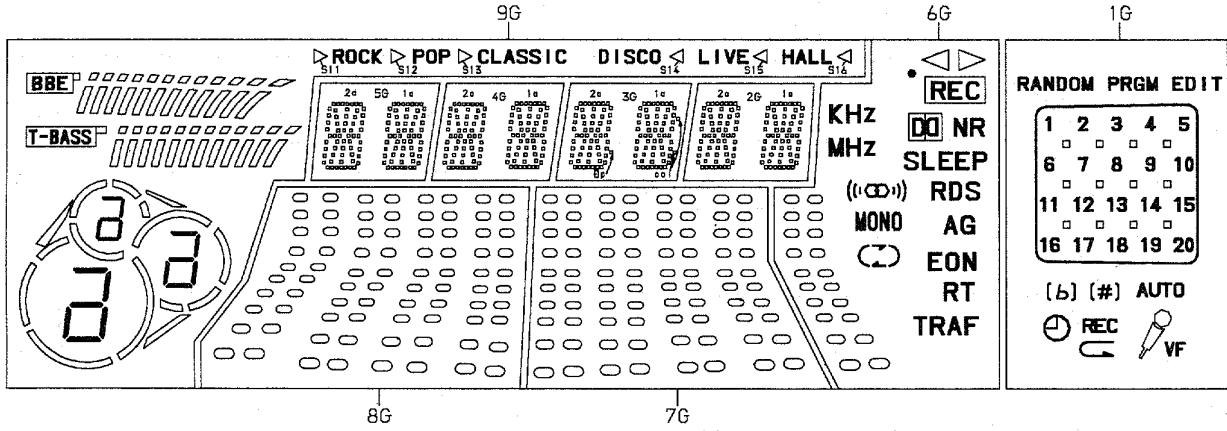


[8G, 7G]


ANODE CONNECTION

	9G	8G, 7G	6G	5G, 4G	3G	2G	1G
P1	S8	B32		-	col (down)	-	RANDOM
P2	S2	B24		1d	1d	1d	-
P3	1b	B16	SLEEP	1n	1n	1n	PRGM
P4	1c	B8	B8	1p	1p	1p	EDIT
P5	1e	B31		1r	1r	1r	1
P6	1a, 1d, 1g	B23	REC	1e	1e	1e	2
P7	2b	B15	KHz	1c	1c	1c	3
P8	2c	B7	B7	1g	1g	1g	4
P9	2e	B30	MHz	1m	1m	1m	5
P10	2a, 2d, 2g	B22	-	1f	1f	1f	6
P11	3b	B14	DO NR	1b	1b	1b	7
P12	3c	B6	B6	1k	1k	1k	8
P13	3e	B29	RDS	1j	1j	1j	9
P14	3a, 3d, 3g	B21	-	1h	1h	1h	10
P15	S3	B13	-	1a	1a	1a	11
P16	S5	B5	B5	-	col (up)	-	12
P17	S7	B28	-	-	0p	-	13
P18	S4	B20	-	2d	2d	2d	14
P19	S6	B12	-	2n	2n	2n	15
P20	S16	B4	B4	2p	2p	2p	16
P21	S15	B27	AG	2r	2r	2r	17
P22	S14	B19		2e	2e	2e	18
P23	S13	B11	EON	2c	2c	2c	19
P24	S12	B3	B3	2g	2g	2g	20
P25	S11	B26	RT	2m	2m	2m	AUTO
P26	B36	B18	MONO	2f	2f	2f	VF
P27	B37	B10	TRAF	2b	2b	2b	
P28	B38	B2	B2	2k	2k	2k	REC
P29	B33	B25		2j	2j	2j	
P30	B34	B17		2h	2h	2h	(#)
P31	B35	B9		2a	2a	2a	(b)
P32	ROCK POP CLASSIC S10	B1	B1	-	-	-	S1
P33	DISCO LIVE HALL	-	-	-	-	-	-
P34	S9	-	-	-	-	-	-
P35	-	-	-	-	-	-	b #


IC BLOCK DIAGRAM
IC, BA3880S

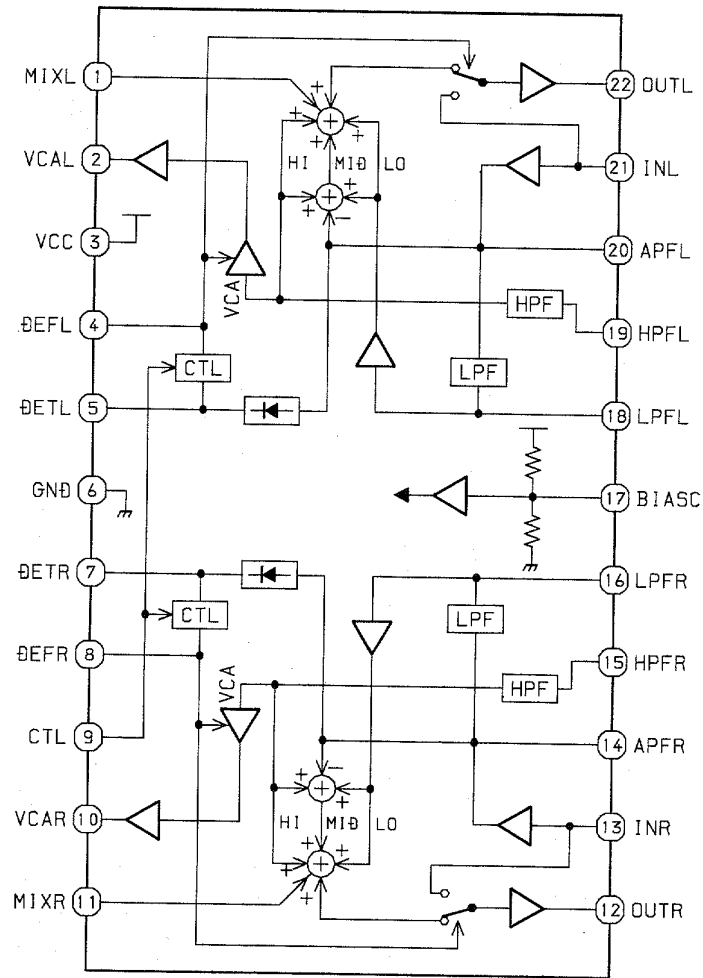


IC, HA12211NT

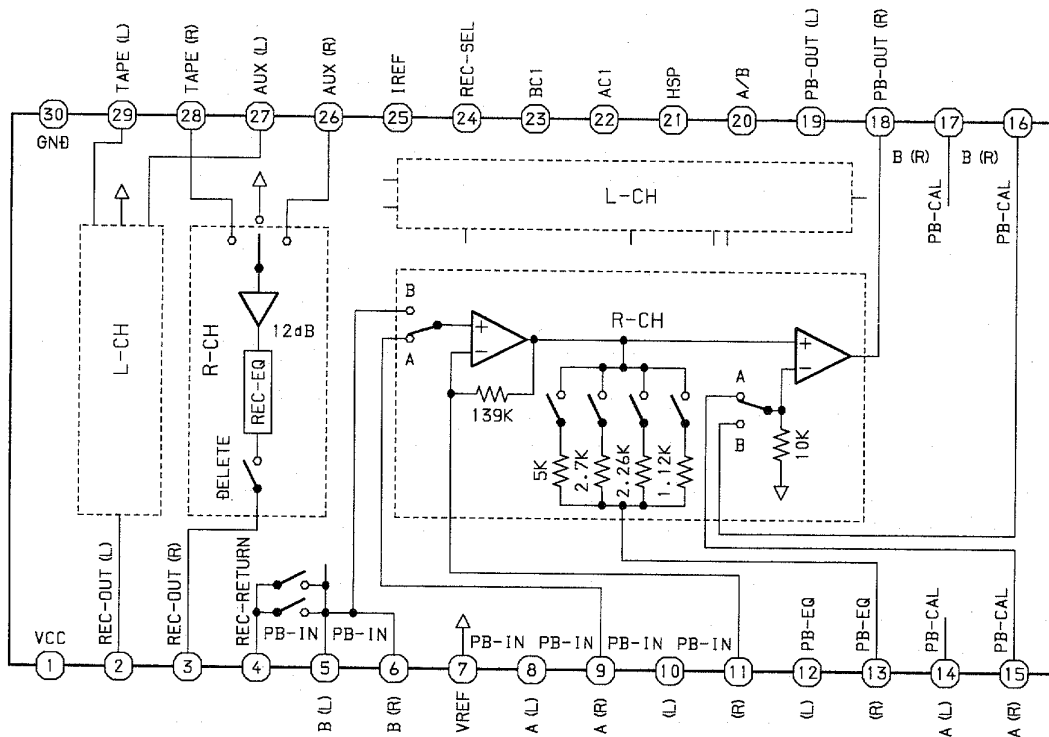


IC, CXA1553P

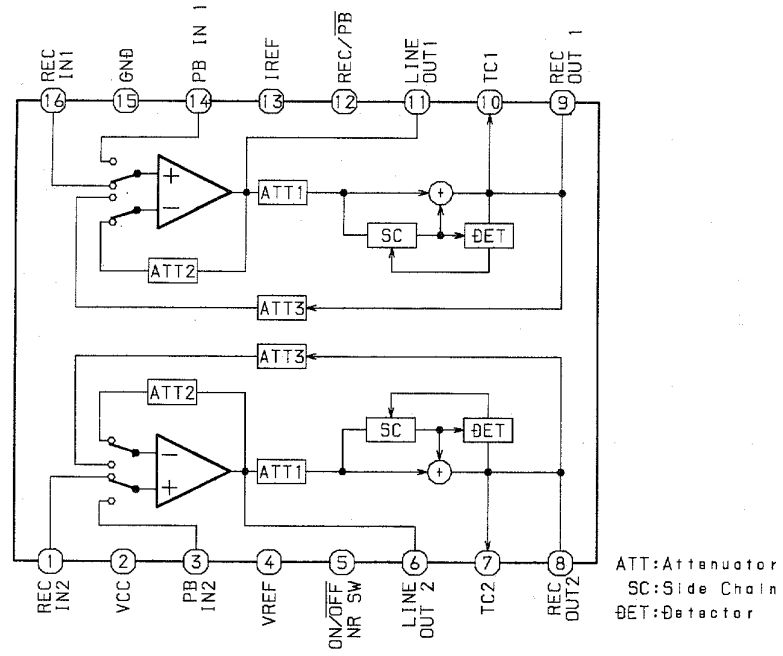


IC, BH3810FS

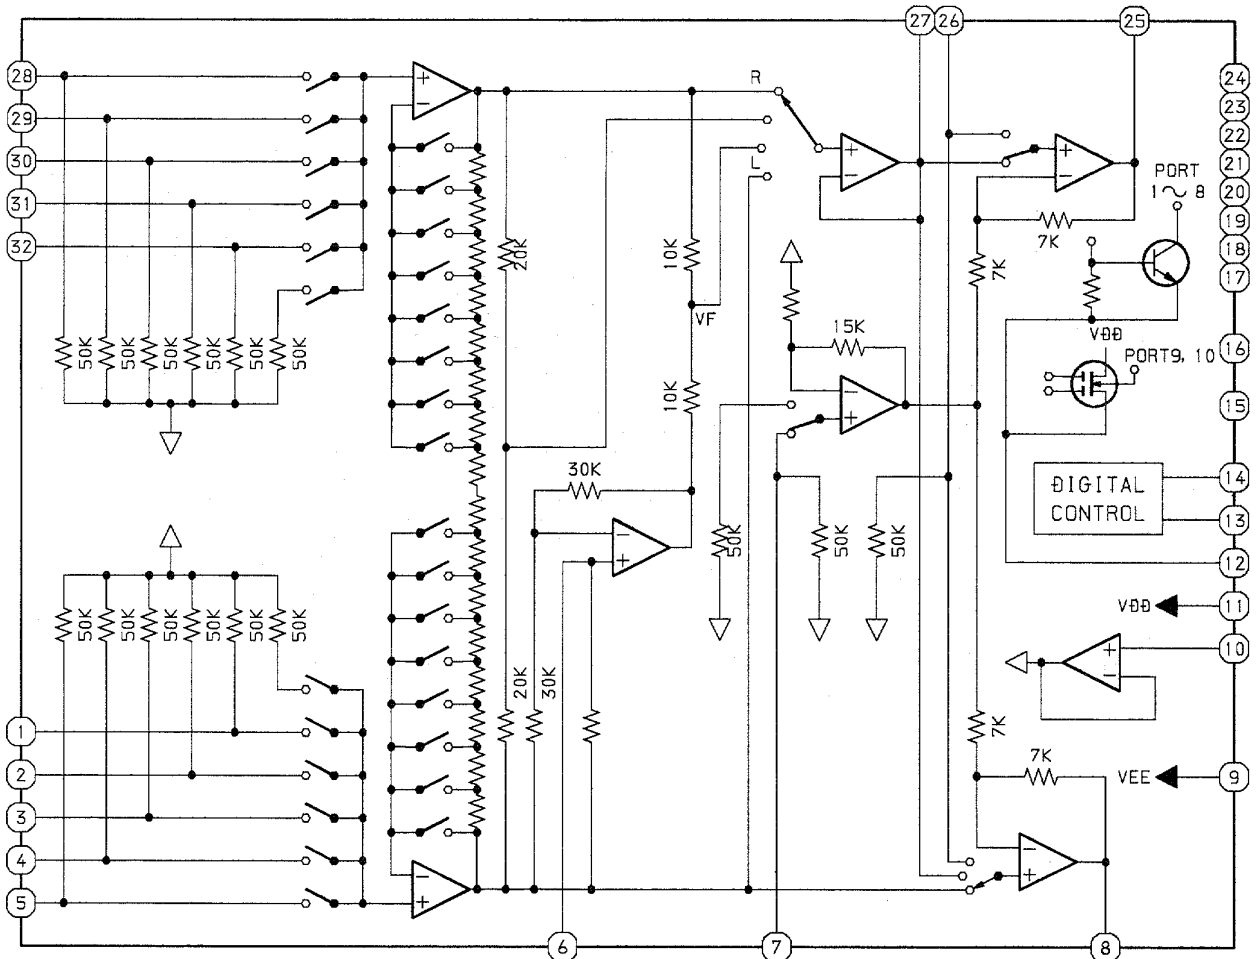


IC, BH3864F

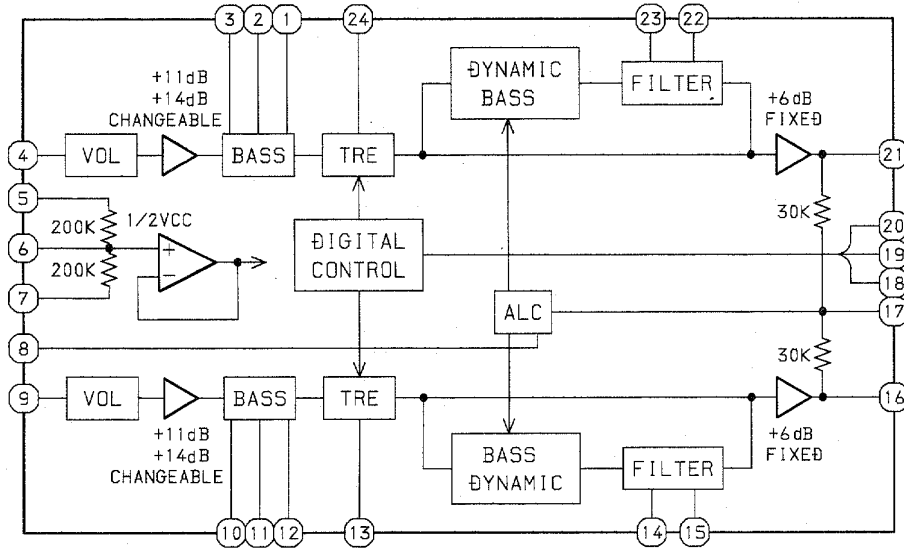


IC, LA1837

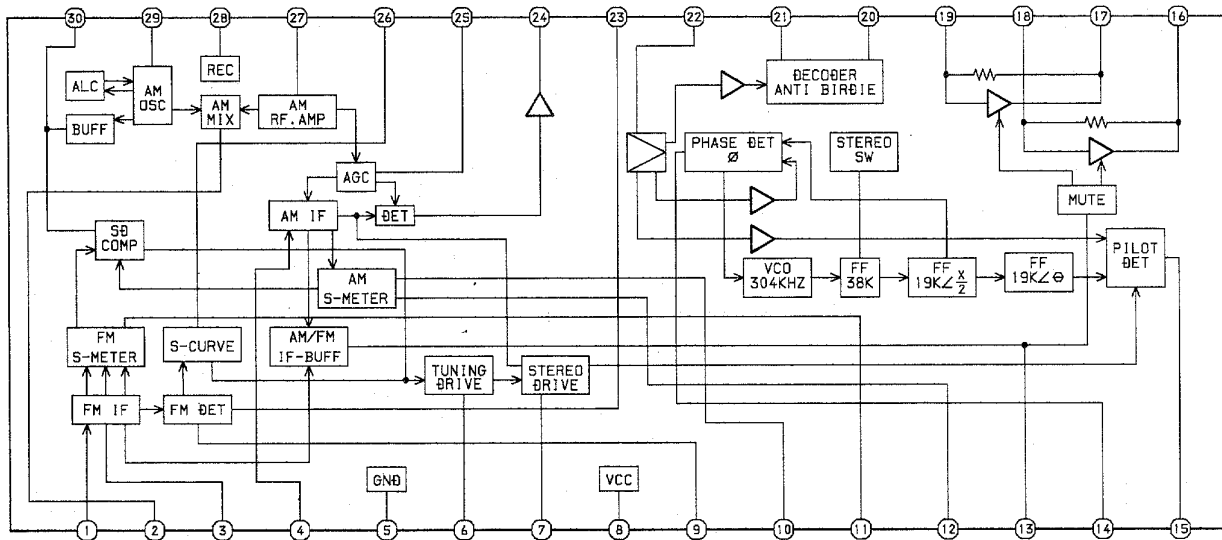


IC, BA3835S

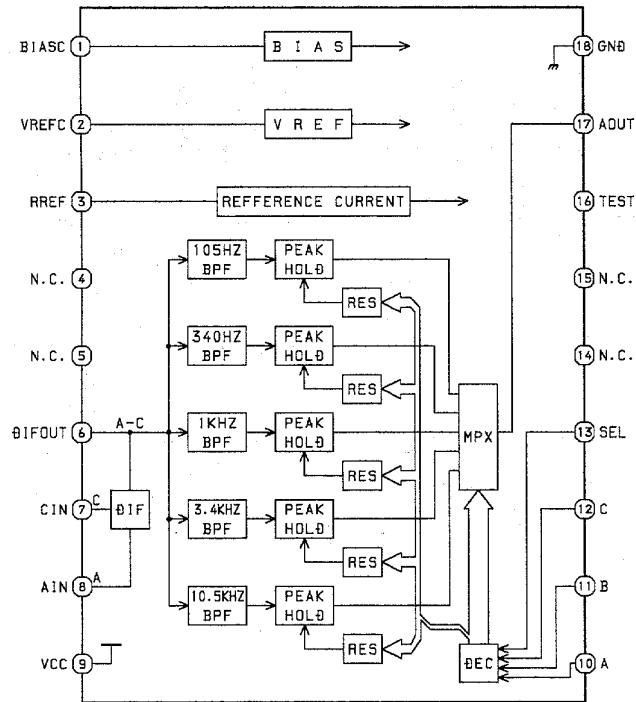

IC, BU9262FS

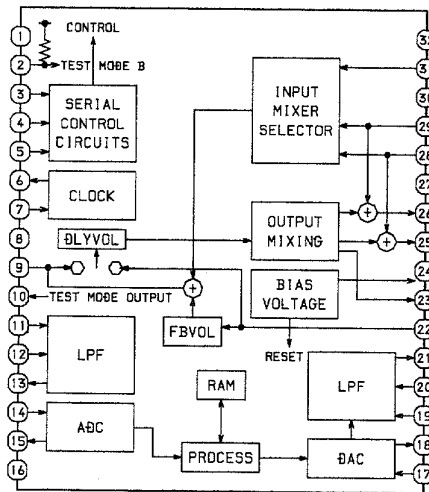

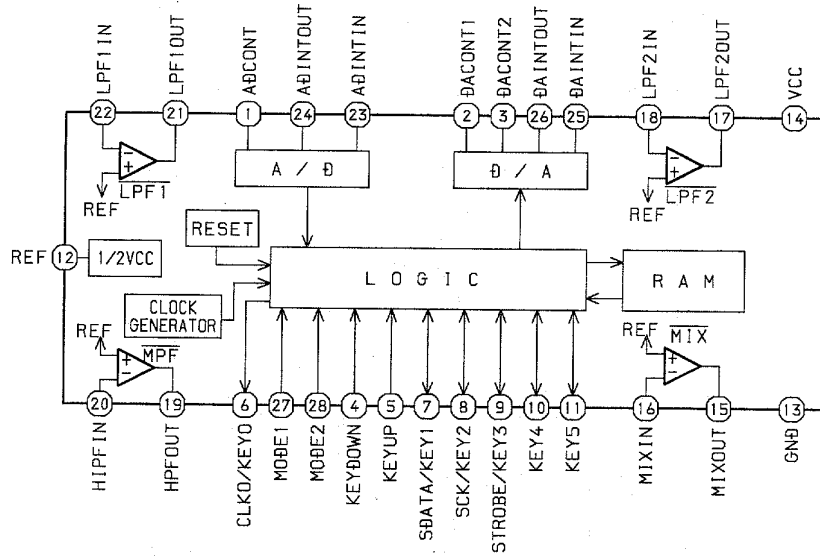

IC DESCRIPTION

IC, LC866548A-5E56

Pin No.	Pin Name	I/O	Description
1	RT-A	I	Rotary encoder A input.
2	RT-B	I	Rotary encoder B input.
3	$\overline{\text{LED-MD}}$	O	"MD" LED $\overline{\text{ON/OFF}}$ output.
4	$\overline{\text{LED-CD}}$	O	"CD " LED $\overline{\text{ON/OFF}}$ output.
5	$\overline{\text{LED-AUX}}$	O	"AUX" LED $\overline{\text{ON/OFF}}$ output.
6	$\overline{\text{LED-TUNER}}$	O	"TUNER" LED $\overline{\text{ON/OFF}}$ output.
7	$\overline{\text{LED-TAPE}}$	O	"TAPE" LED $\overline{\text{ON/OFF}}$ output.
8	HSP	O	Tape deck motor high speed $\overline{\text{ON/OFF}}$ output.
9	$\overline{\text{O-POWER}}$	O	System power supply $\overline{\text{ON/OFF}}$ output.
10	$\overline{\text{O-MUTE}}$	O	System mute $\overline{\text{ON/OFF}}$ output.
11	$\overline{\text{O-CLK-SHIFT}}$	O	U-COM clock shift output.
12	$\overline{\text{RESET}}$	I	Reset input.
13	$\overline{\text{I-HP-MUTE}}$	-	Not connected.
14	I-DISH	I	CD turntable photo sensor A/D converter input.
15	VSS 1	-	GND.
16	CF 1	-	5.76MHz oscillator circuit.
17	CF 2	-	
18	VDD 1	-	Power supply input.
19	$\overline{\text{HOLD}}$	I	Power failure detected input "1" to stop clock and main memory.
20	KEY-1	I	KEY input.(A/D)
21	KEY-2	I	
22	KEY-3	I	
23	I-CD SW	I	CD mechanical switch A/D converter input.
24	I-MIC	I	Microphone input for AUTO VF display.
25	$\overline{\text{I-TU-SIG/MS}}$	I	Tuner signal and deck music sensor signal input.
26	I-SPEANA	I	A/D input for spectrum analyzer display.
27	RDS-CLK	I	TUNER RDS CLOCK input. (Not used)
28	I-TM-BASE	I	REFERENCE CLOCK input for timer watch.
29	$\overline{\text{I-RMC}}$	I	System remote control signal input.
30~37	G9~G2	O	FL GRID output G2~G9.
38~43	P32~P27	O	FL SEGMENT output P27~P32.
44	G1	O	FL grid output G1.
45	P26	-	FL SEGMENT output P26.
46	VDD3	-	Power supply input.
47	SPEANA-A/P25	O	Spectrum analyzer band switching output /FL segment P25 output.
48	SPEANA-B/P24	O	Spectrum analyzer band switching output /FL segment P24 output.
49	SPEANA-C/P23	O	Spectrum analyzer band switching output /FL segment P23 output.
50	P22/H-DUBB INH	I/O	FL segment P22 output / high dubbing inhibit input to diode.
51	VP	-	Power supply input for FL display.
52	P21/AM-ST	I/O	FL segment P21 output / AM stereo input to diode.
53	P20/LW	I/O	FL segment P20 output / LW mode data input to diode.
54	P19/SW	I/O	FL segment P19 output / SW mode data input to diode.


Pin No.	Pin Name	I/O	Description
55	P18/FM 1	I/O	FL segment P18 output / FM1 (OIRT) data input to diode.
56	P17/RDS	I/O	FL segment P17 output / RDS data input to diode.
57	P16/BBE	I/O	FL segment P16 output / BBE data input to diode.
58	P15/DSP	I/O	FL segment P15 output / DSP data input to diode.
59	P14/DOLBY-SURR	I/O	FL segment P14 output / DOLBY-SURR data input to diode.
60	P13/K-CON	I/O	FL segment P13 output / K-CON data input to diode.
61	P12/DOLBY	I/O	FL segment P12 output / DOLBY data input to diode.
62	P11/WAY	I/O	FL segment P11 output / DECK/WAY MECHA data input to diode.
63	P10/AM-9K/10K	I/O	FL segment P10 output / INITIAL AM 10 kHz step data input to diode.
64	P9/CST 2	I/O	FL segment P9 output / DECK2 cassette detect switch data input.
65	P8/REB	I/O	FL segment P8 output / DECK2 side-B record OK switch data input.
66	P7/CAM 2	I/O	FL segment P7 output / DECK2 CAM switch data input.
67	P6/AUTO 1	I/O	FL segment P6 output / DECK1 AUTO stop signal input.
68	P5/AUTO 2	I/O	FL segment P5 output / DECK2 AUTO stop signal input.
69	P4/CAM 1	I/O	FL segment P4 output / DECK1 CAM switch data input.
70	P3/CST 1	I/O	FL segment P3 output / DECK1 cassette detect switch data input.
71	P2/REA	I/O	FL segment P2 output / DECK2 side A record OK switch data input.
72	VDD 4	-	Power supply input.
73	P1/2092	I/O	FL segment P1 output / SHIFT resistor IC 2092 data input to diode.
74	K-SCAN	O	Switch SCAN timing output.
75	L CK	O	Latch clock output for front shift resistor.
76	PRO-CE	O	PRO LOGIC IC chip enable output.
77	PLL-CE	O	PLL IC chip enable output.
78	MA-STB	O	Latch strobe output for MAIN PWB.
79	DATA	O	DATA output for MAIN, FORNT, PROLOGIC PWB.
80	CLK	O	CLOCK output for MAIN, FORNT, PROLOGIC PWB.
81	DISH-RVS	O	CD turntable reverse rotation output.
82	DISH-FWD	O	CD turntable forward rotation output.
83	TRAY-OPEN	O	CD TRAY OPEN data output.
84	TRAY-CLOSE	O	CD TRAY CLOSE data output.
85	$\overline{\text{LED}} \blacktriangleright\blacktriangleright$	O	$\blacktriangleright\blacktriangleright$ LED $\overline{\text{ON}}$ /OFF output.
86	$\overline{\text{LED}} \blacktriangleleft\blacktriangleleft$	O	$\blacktriangleleft\blacktriangleleft$ LED $\overline{\text{ON}}$ /OFF output.
87	$\overline{\text{LED}} \blacktriangleright$	O	\blacktriangleright LED $\overline{\text{ON}}$ /OFF output.
88	$\overline{\text{LED}} \blacktriangleleft$	O	\blacktriangleleft LED $\overline{\text{ON}}$ /OFF output.
89	VSS 2	-	GND.
90	VDD 2	-	Power supply input.
91	$\overline{\text{LED}} \blacksquare$	O	\blacksquare LED $\overline{\text{ON}}$ /OFF output.
92	$\overline{\text{LED}} \blacksquare\blacksquare$	O	$\blacksquare\blacksquare$ LED $\overline{\text{ON}}$ /OFF output.
93	$\overline{\text{SOL}} 1$	O	DECK 1 Solenoid output.
94	$\overline{\text{SOL}} 2$	O	DECK 2 Solenoid output.
95	O-MOTOR	O	DECK MOTOR ON/OFF output.
96	I-IFC/I-SD	I	Tune IF count serial data input / CD serial data input.

Pin No.	Pin Name	I/O	Description
97	I-STEREO/O-CLK	I/O	Tuner stereo detected input/CD IC control data transfer clock output.
98	O-SD	O	RDS data input/CD serial data output.
99	IO-BUSY	I/O	Interface to CD Micon for send and receive serial data.
100	NC	-	No connected.


IC, LC72131

Pin No.	Pin Name	I/O	Description																								
1	XIN	I/O	A crystal oscillator (7.2MHz) is connected between these pins.																								
22	XOUT																										
2	NC	-	Not used.																								
3	CE	I	To enable the IC. Active "H".																								
4	DI	I	Digital data input from CPU (LC866548V-5E15) when relevant key is operated. Active "H".																								
5	CLK	I	To clock in the data DI.																								
6	DO	O	Digital data output to CPU (LC866548V-5E15).																								
7	TM-BASE	O	Outputs a reference clock signal (8Hz) for the clock.																								
8	MONO / BEAT	O	Outputs "H" when MONO / BEAT is switched.																								
9	FM / AM	O	Output "L" or "H" as follows: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th colspan="2">2 BAND</th> <th colspan="3">3 BAND</th> <th colspan="3">3 BAND</th> </tr> <tr> <th>AM</th> <th>FM</th> <th>LW</th> <th>MW</th> <th>FM</th> <th>MW</th> <th>SW</th> <th>FM</th> </tr> </thead> <tbody> <tr> <td>H</td> <td>L</td> <td>H</td> <td>H</td> <td>L</td> <td>H</td> <td>L</td> <td>L</td> </tr> </tbody> </table>	2 BAND		3 BAND			3 BAND			AM	FM	LW	MW	FM	MW	SW	FM	H	L	H	H	L	H	L	L
2 BAND		3 BAND			3 BAND																						
AM	FM	LW	MW	FM	MW	SW	FM																				
H	L	H	H	L	H	L	L																				
10	MW	O	Outputs "L" or "H" as follows: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th colspan="2">2 BAND</th> <th colspan="3">3 BAND</th> <th colspan="3">3 BAND</th> </tr> <tr> <th>AM</th> <th>FM</th> <th>LW</th> <th>MW</th> <th>FM</th> <th>MW</th> <th>SW</th> <th>FM</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>L</td> <td>H</td> <td>L</td> <td>L</td> <td>L</td> <td>H</td> <td>L</td> </tr> </tbody> </table>	2 BAND		3 BAND			3 BAND			AM	FM	LW	MW	FM	MW	SW	FM	L	L	H	L	L	L	H	L
2 BAND		3 BAND			3 BAND																						
AM	FM	LW	MW	FM	MW	SW	FM																				
L	L	H	L	L	L	H	L																				
11	IF-MUTE	O	To control internal counter.																								
12	IFIN	I	General purpose counter input.																								
13	TUNE	I	Receives "L" when station is tuned.																								
14	NC	-	Not used.																								
15	A MIN	I	Receives the AM local oscillator frequency signal.																								
16	F MIN	I	Receives the FM local oscillator frequency signal.																								
17	VDD	-	Supply power to IC (+5V).																								
18	PD	O	PLL charge pump output.																								
19	AIN	I	The MOS transistor for PLL active low pass filter.																								
20	AOUT	O																									
21	VSS	-	Ground.																								


ADJUSTMENT - 1 <TUNER / DECK>

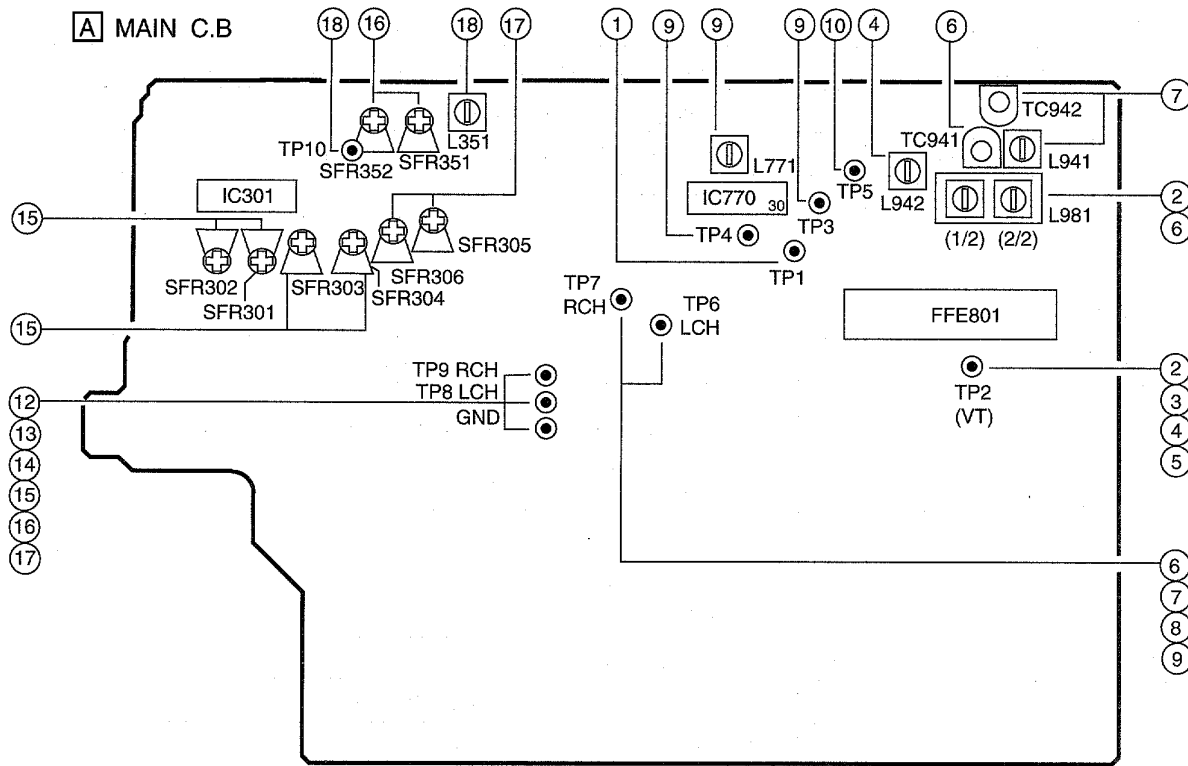

J DECK C.B

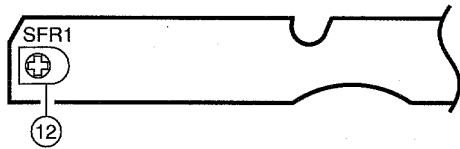

DECK-1 P, DECK-2 R / P / E HEAD



< TUNER SECTION >

1. Clock Frequency Check
 Settings : • Test point : TP1 (CLK IC770 pin30)
 Method : Set to MW 1710kHz, and check that the test point is 2160kHz \pm 45Hz.
2. MW VT Adjustment
 Settings : • Test point : TP2 (VT)
 • Adjustment location : L981 (1/2)
 Method : Set to MW 1710kHz and adjust L981 (1/2) so that the test point is 8.5V \pm 0.05V.
3. MW VT Check
 Settings : • Test point : TP2 (VT)
 Method : Set to MW 530kHz) and check that the test point is more than 0.3V.
4. SW VT Adjustment
 Settings : • Test point : TP2 (VT)
 • Adjustment location : L942
 Method : Set to SW 17.9MHz and adjust L942 so that the test point is 7.0V \pm 0.05V.
5. FM VT Check
 Settings : • Test point : TP2 (VT)
 Method : Set to FM 87.5MHz, 108.0MHz and check that the test point is more than 1.5V (87.5MHz) and less than 8.5V (108.0MHz).
6. MW Tracking Adjustment
 Settings : • Test point : TP6, TP7
 • Adjustment location :
 L981 (2/2) 600kHz
 TC941 1400kHz
 Method : Set up TC941 to center before adjustment, the level at 600kHz is adjust to maximum by L981 (2/2). Then the level at 1400kHz is adjust to maximum by TC941.
7. SW Tracking Adjustment
 Settings : • Test point : TP6, TP7
 • Adjustment location :
 L941 5.9MHz
 TC942 17.9MHz
 Method : Set up TC942 to center before adjustment. The level at 5.9MHz is adjust to maximum by L941. Then the level at 17.9MHz is adjust to maximum by TC942.
8. FM Tracking Check
 Settings : • Test point : TP6, TP7
 Method : Set to FM 98.0MHz and check that the test point is 2 \pm 6dB.

PRACTICAL SERVICE FIGURE

<TUNER SECTION>

<FM SECTION>

IHF Sensitivity : 4dB ± 6dB
(THD 3%) [at 87.5 / 98.0 / 108.0MHz]
S/N 50dB Quieting sensitivity :
30dB ± 6dB
[at 87.5 / 98.0 / 108.0MHz]
Signal to noise ratio : Mono : More than 65dB
Stereo : More than 64dB
[at 98.0MHz]
Distortion : Mono : Less than 1.3%
Stereo : Less than 2.0%
[at 98.0MHz]
Auto stop level : 25dB ± 10dB [at 98.0MHz]
Stereo separation : More than 25dB [at 98.0MHz]
Intermediate frequency : 10.7MHz

<MW SECTION>


Sensitivity : 50 ~ 60dB
(S/N 20 dB) [at 603kHz]
48 ~ 58dB
[at 999kHz]
48 ~ 58dB
[at 1404kHz]
Signal to noise ratio : More than 36dB
[at 999kHz]
Distortion : Less than 1.5%
[at 999kHz]
Auto stop level : 50dB +10/-15dB
[at 999kHz]
Intermediate frequency : 450kHz

<SW SECTION>

Sensitivity : 38 ± 5dB
(S/N 20 dB) [at 5.9MHz]
33 ± 5dB
[at 12.0 MHz]
30 ± 5dB
[at 17.9MHz]
Signal to noise ratio : More than 36dB
[at 12.0MHz]
Distortion : Less than 2.0%
[at 12.0MHz]
Intermediate frequency : 450kHz

<DECK SECTION>

Tape speed : 3000Hz ± 45Hz
Wow & flutter : Less than 0.15%
(W.R.M.S)
Take-up torque : 30 ~ 55g-cm
(FWD, REV)
F.F & REW torque : 75 ~ 180g-cm
Back tension : 2 ~ 7g-cm
(FWD, REV)
PB output level : 300mV ± 1dB
(SP OUT 2V)
REC/PB output level : 180mV ± 1.5dB
(SP OUT 2V)
Distortion (REC/PB) : Less than 2.0%
(NORM, CrO₂)
Noise level (REC/PB) : Less than 1.8mV
(NORM, SP OUT 2V, DOLBY OFF)
Less than 1.1mV
(CrO₂, SP OUT 2V, DOLBY B,C ON)
Crosstalk : More than 60dB
(1kHz, 0VU)
Channel separation : More than 30dB
(1kHz, 0VU)
Erasing ratio : More than 60dB
(at 125Hz)
Test tape : TTA-602 (NORMAL)
TTA-615 (CrO₂)


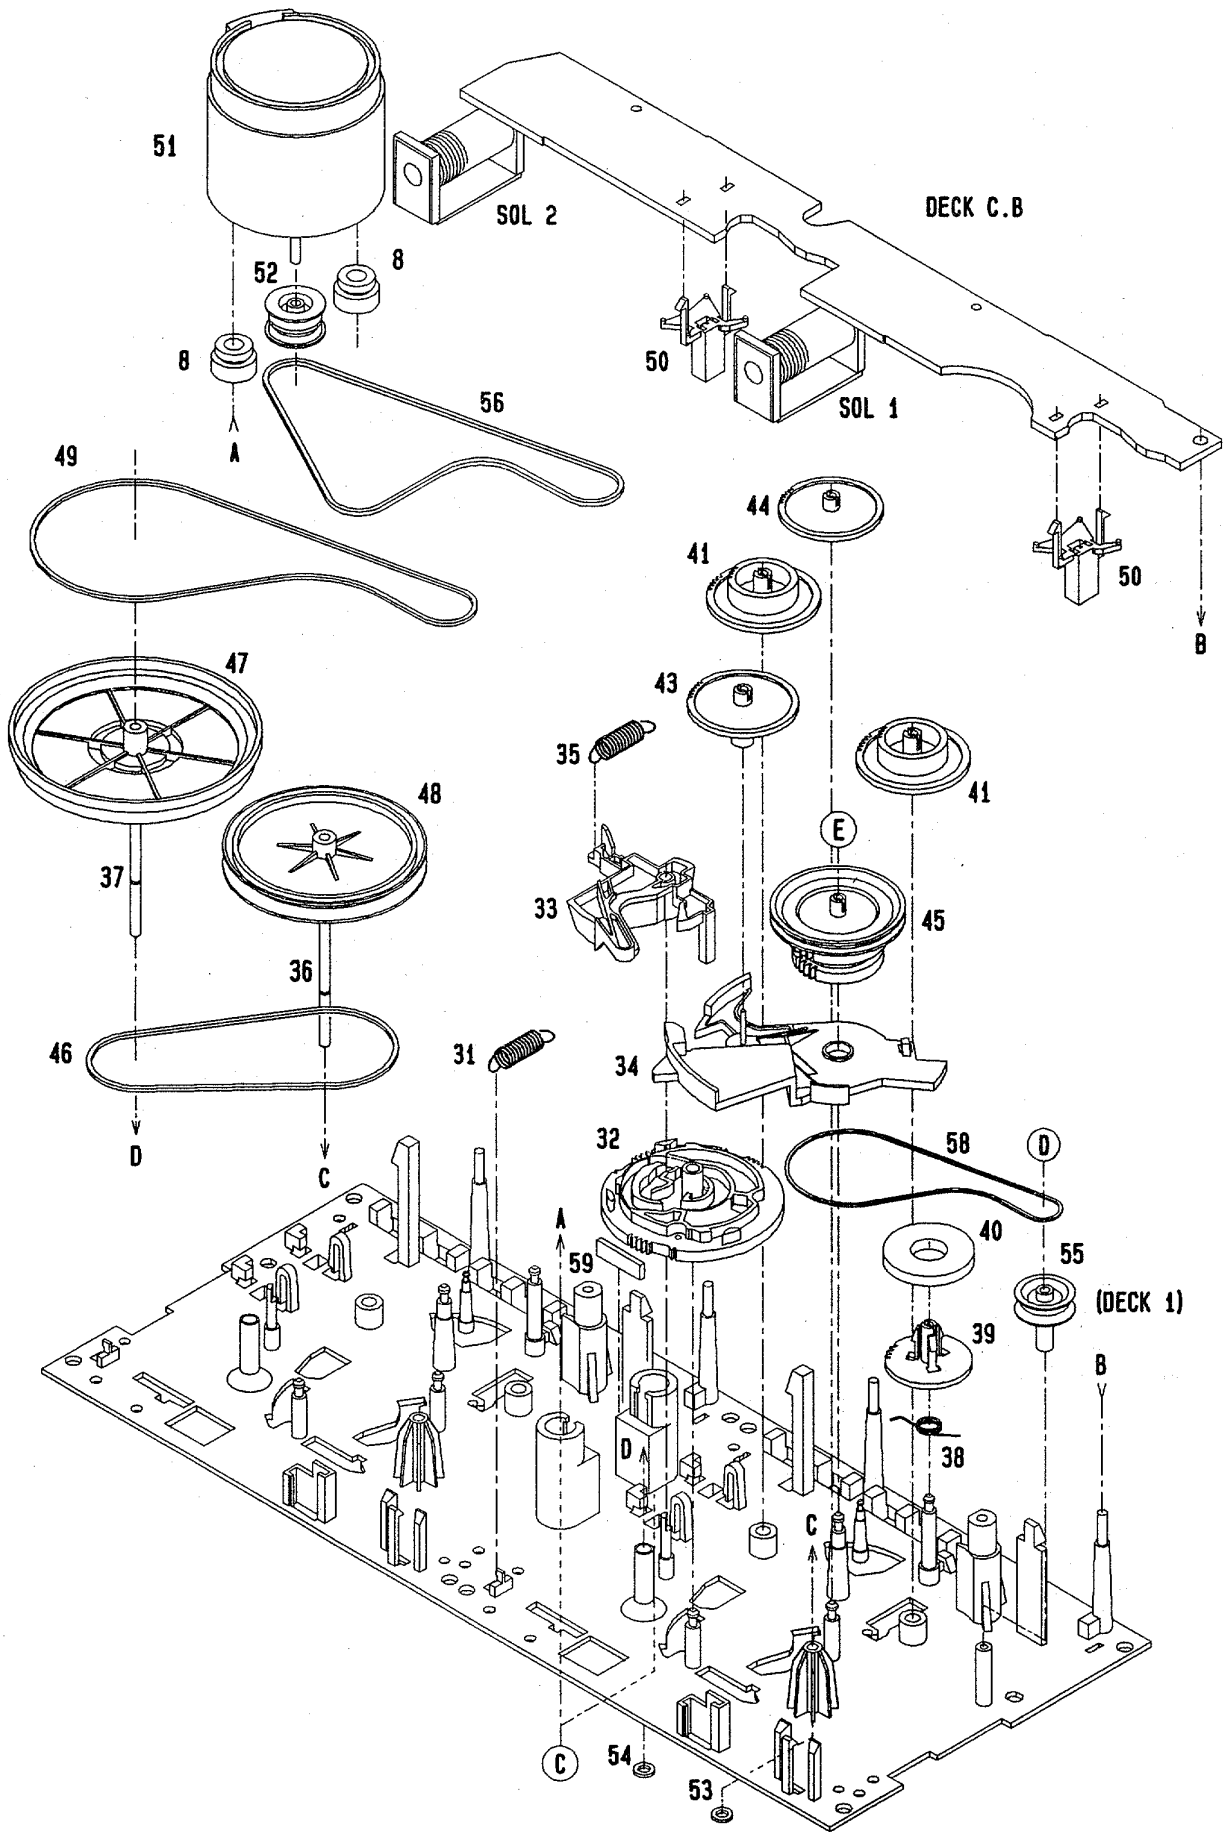


TAPE MECHANISM PARTS LIST 1 / 1


If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	82-ZM3-301-519		CHAS ASSY, M2	36	82-ZM1-236-019		CAPSTAN N 2-41.5
2	82-ZM1-258-110		SPR-T, PINCH L	37	82-ZM1-239-019		CAPSTAN N 2.2-41.7
3	82-ZM1-341-110		LVR ASSY, PINCH L2	38	82-ZM1-322-019		SPR-T, FR60
4	82-ZM1-333-010		PLATE, LINK 2	39	82-ZM1-220-219		GEAR, IDLER
5	82-ZM1-266-11K		LVR, DIR	40	82-ZM3-616-019		RING MAGNET 4
6	82-ZM1-214-010		SPR-T, DIR	41	82-ZM1-216-31K		GEAR, REEL
7	82-ZM1-206-81K		CHAS, HEAD	42	87-A90-319-010		HEAD, PH HADKH2 FPC
8	82-ZM3-307-019		CUSH-G, DIA3.7-8-3.2	42	87-A90-320-010		HEAD, RPH HADKH5 FPC
9	82-ZM1-269-219		SPR-T, BRG	43	82-ZM1-225-21K		GEAR, FR
10	82-ZM1-219-119		SPR-T, LINK	44	82-ZM1-226-019		GEAR, REW
11	82-ZM1-210-119		GEAR, H T	45	82-ZM3-333-310		SLIP DISK ASSY 2
12	82-ZM1-213-019		SPR-T, HEAD	46	82-ZM1-338-010		BELT FR4
13	82-ZM1-207-619		GUIDE, TAPE	47	82-ZM1-349-110		FLY-WHL, R W (DECK 2)
14	86-ZM4-206-010		S-SCREW, AZIMUTH	47	82-ZM3-338-110		FLY-WHL, R3 W (DECK 1)
15	82-ZM1-314-119		PLATE, HEAD	48	82-ZM1-348-010		FLY-WHL, L W (DECK 2)
16	82-ZM1-208-119		HLDR, HEAD	48	82-ZM1-348-010		FLY-WHL, L W (DECK 1)
17	82-ZM1-218-019		SPR-E, HB	49	82-ZM3-329-210		BELT, SBU R2
18	82-ZM1-263-110		LVR, EJECT L (DECK 1)	50	82-ZM1-245-210		HLDR, IC
18	82-ZM1-264-010		LVR, EJECT R (DECK 2)	51	87-045-347-019		MOT, SHU2L 70 (M1)
19	82-ZM1-222-21K		LVR, PLAY	52	82-ZM3-221-010		PULLEY, MOT 2M
20	82-ZM1-217-319		REEL TABLE	53	82-ZM1-288-019		SH, 1.63-3.2-0.5 SLT
21	82-ZM1-244-510		SPR-C, BT	54	80-ZM6-243-019		SH, 1.75-3.6-0.5 SLT
22	82-ZM1-285-310		SPR-C, BT L	55	82-ZM3-335-210		PULLEY, COUPLER M3 (DECK 1)
23	82-ZM1-257-019		SPR-T, CAS	56	82-ZM3-337-010		BELT, SBU MOT 2
24	82-ZM1-241-319		LVR, MC	57	82-ZM3-339-010		SHAFT, COUPLER N3 (DECK 1)
25	82-ZM1-242-019		LVR, CAS	58	86-ZM1-206-010		BELT, MAIN L
26	82-ZM1-243-019		LVR, STOP	59	82-ZM3-340-010		SH, BELT D2
27	82-ZM1-344-110		LVR ASSY, PINCH R2	A	85-ZM3-202-010		S-SCREW, TG
28	82-ZM1-259-110		SPR-T, PINCH R	B	80-ZM6-207-019		V+1.6-7
29	82-ZM1-240-11K		LVR, REC (DECK 2)	C	82-ZM3-318-019		S-SCRW MOTOR M2
31	82-ZM1-255-319		SPR-E, LVR DIR	D	87-B10-043-010		W-P, 0.99-4-0.25 SLT
32	82-ZM3-305-01K		GEAR, CAM M2	E	82-ZM3-334-010		PW, 2.16-6-0.4
33	82-ZM1-227-21K		LVR, TRIG				
34	82-ZM3-306-11K		LVR, FR M2				
35	82-ZM1-265-119		SPR-E, TRIG				

SPRING APPLICATION POSITION

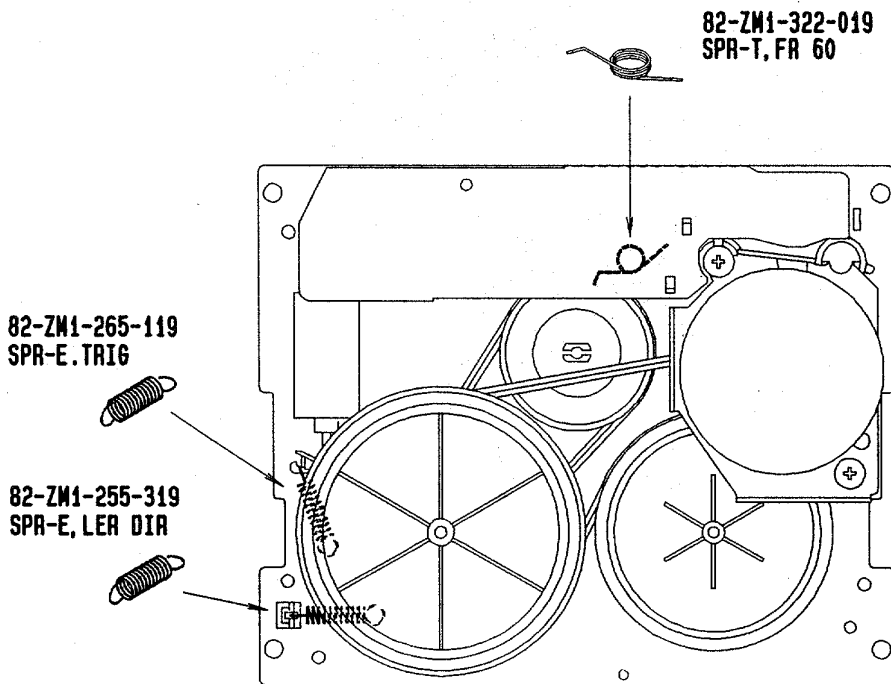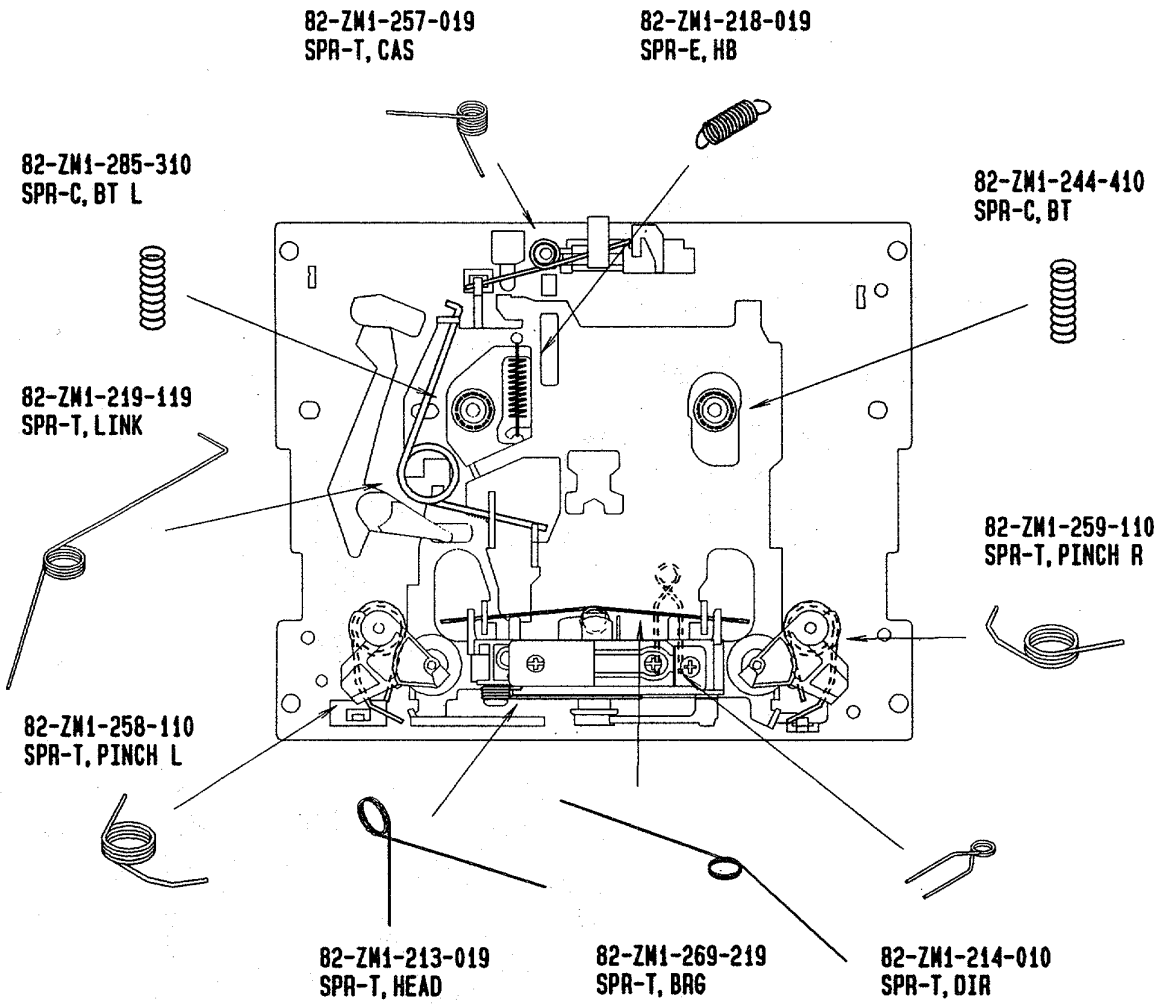

MECHANICAL EXPLODED VIEW 1 / 1

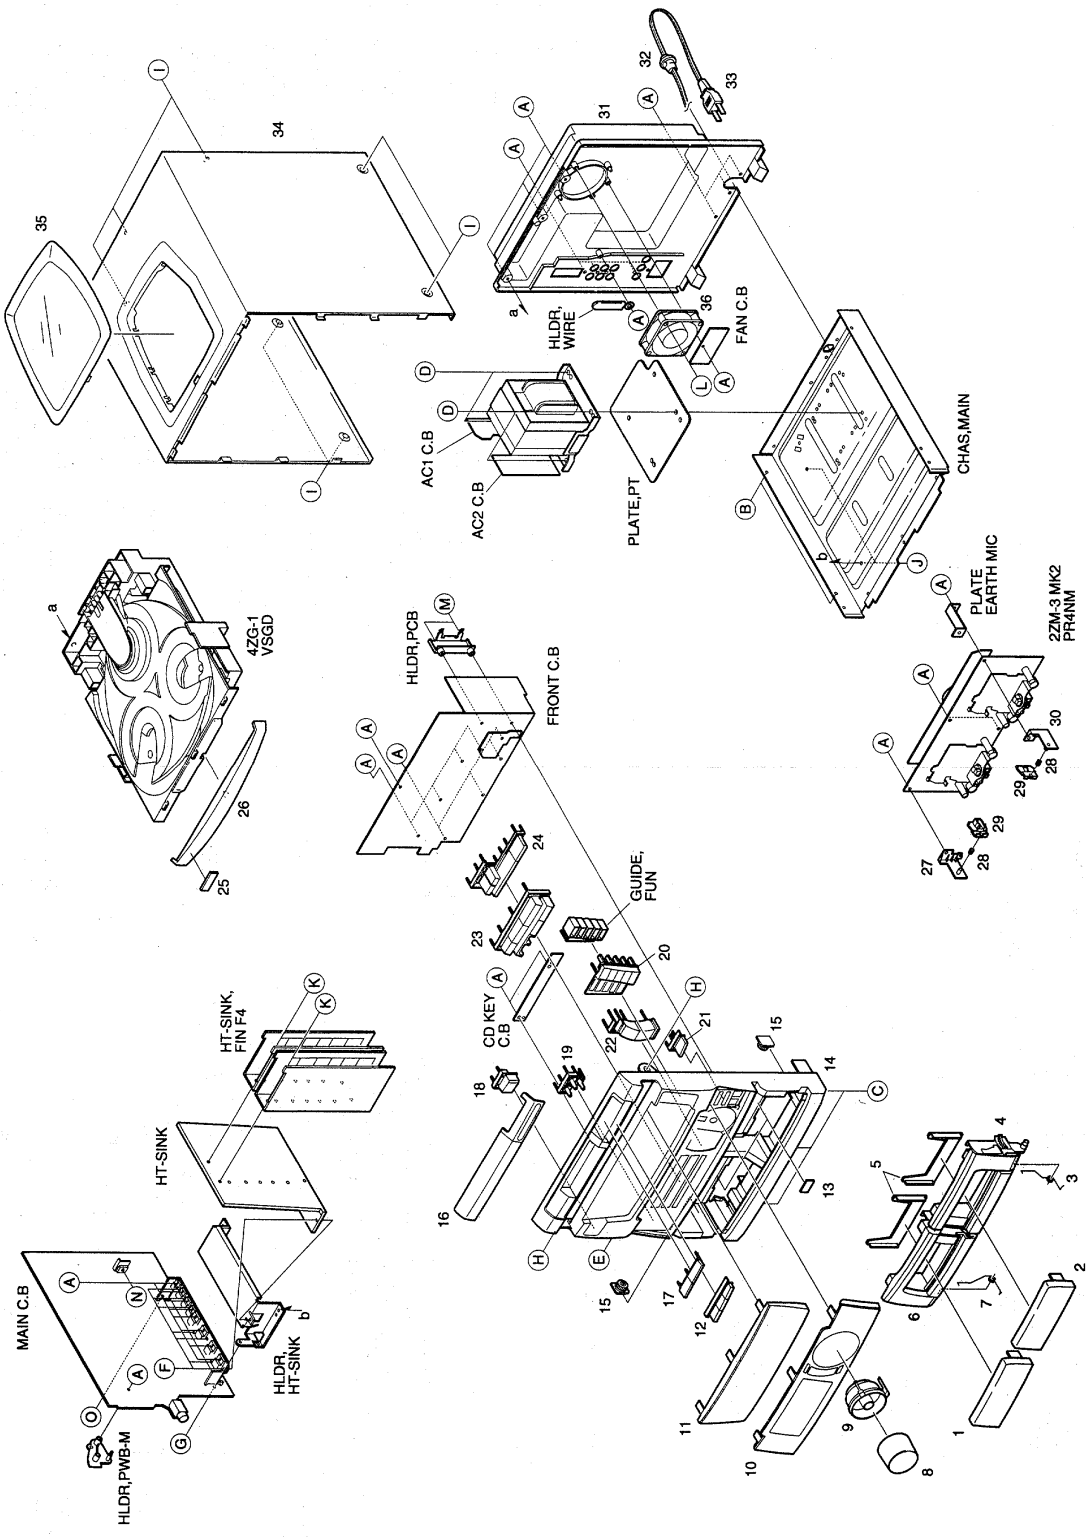

MECHANICAL PARTS LIST 1 / 1

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".


REF. NO.	PART NO.	KANRI NO.	DESCRIPTION	REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-NF5-010-010		WINDOW, CASS 1	31	87-NH5-015-010		CABI, REAR HCST<HC>
2	87-NF5-011-010		WINDOW, CASS 2	31	87-NH5-012-010		CABI, REAR HRJSTNM<HRJ7>
3	82-NF5-219-010		SPR-T, EJECT 2 (SIN)	31	87-NH5-014-010		CABI, REAR HRST<HR>
4	87-NF5-004-010		BOX, CASS 2H	32	87-085-185-010		BUSHING, AC CORD (E)
5	86-NF6-061-010		REFLECTOR, CASS	33	87-050-079-010		AC-CORD ASSY, E
6	87-NF5-003-010		BOX, CASS 1H	34	86-NH6-029-110		CABI, STEEL H-J TS<HR, HC>
7	82-NF5-218-010		SPR-T, EJECT 1 (SIN)	34	86-NFT-005-110		CABI, STEEL TS<HRJ7>
8	87-NF5-023-010		KNOB, RTRY VOL	35	86-NF6-007-010		WINDOW, TOP
9	87-NF5-007-010		RING, VOL	36	87-A90-463-010		FAN, 2408NL
10	87-NH5-002-010		PANEL, FR H	A	87-067-703-010		TAPPING SCREW, BVT2+3-10
11	87-NF5-009-010		WINDOW, DISP H	B	87-591-094-410		TAPPING SCREW, QIT+3-6
12	87-NF5-016-010		KEY, DISC	C	87-067-688-010		BVTT+3-6
13	81-532-080-010		LABEL, CASS. COMPT	D	87-078-191-010		S-SCREW IT+4-10
14	87-NH5-001-010		CABI, FR H	E	87-723-096-410		QT2+3-10W/O SLOT BL
15	87-063-165-010		OIL-DMPR 150	F	87-067-758-010		BVT2+3-12 W/O SLOT
16	87-NF5-008-010		WINDOW, CD	G	87-067-633-010		TAPPING SCREW, BVT2+3-8
17	87-NF5-015-010		KEY, OPEN	H	87-721-097-410		QT2+3-12 GLD
18	87-NF5-017-010		KEY, POWER	I	87-067-641-010		UTT2+3-8(W/O SLOT)BL
19	87-NF5-019-010		KEY, DEMO	J	87-067-584-010		TAPPING SCREW, BVT2+3-6
20	87-NF5-018-010		KEY, FUN	K	87-B10-090-010		BVTT3B+3-12 GOLD
21	87-NF5-014-010		KEY, KARAOKE	L	87-751-104-410		VT2+3-30
22	87-NF5-022-010		KEY, GEQ	M	87-067-581-010		TAPPING SCREW, BVT2+3-15
23	87-NF5-024-010		KEY, ASSY OPE	N	87-067-579-010		TAPPING SCREW, BVT2+3-8
24	87-NH5-005-010		KEY, PBC	O	87-NF4-224-010		S-SCREW, IT3B+3-8 CU
25	82-NE6-067-010		BADGE, AIWA 30N				
26	87-NH5-003-010		PANEL, TRAY H				
27	87-NF4-216-010		HLDL, LOCK 1				
28	82-NF5-228-010		SPR-C, LOCK				
29	82-NF5-229-010		PLATE, LOCK				
30	87-NF4-217-010		HLDL, LOCK 2				

SPEAKER DISASSEMBLY INSTRUCTIONS

Type.1

矢印の位置にマイナスドライバーを差し込んで、パネルを外します。各々のスピーカーユニットのビスを取り、スピーカーユニットを外してください。


Insert a flat-bladed screwdriver into the position indicated by the arrows and remove the panel. Remove the screws of each speaker unit and then remove the speaker units.

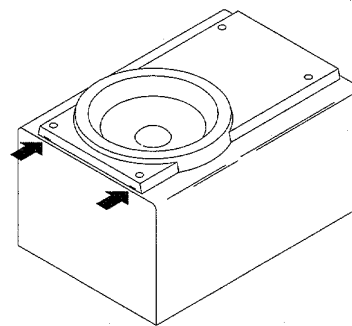

Type.2

グリルフレームを外し、4個のゴムキャップをマイナスドライバーで端の方から持ち上げて外すと中にビスが有りますので、ビスを取り外します。矢印の位置にマイナスドライバーを差し込んで、パネルを外します。各々のスピーカーユニットのビスを取り、スピーカーユニットを外してください。


Remove the grill frame and four pieces of rubber caps by pulling out with a flat-bladed screwdriver. Remove the screws from the hole where the rubber caps are installed. Insert a flat-bladed screwdriver into the position indicated by the arrows and remove the panel. Remove the screws of each speaker unit and then remove the speaker units.

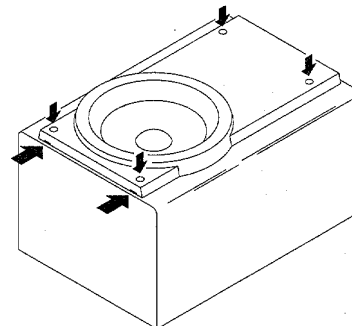

Type.3

矢印の位置にマイナスドライバーを差し込んで、パネルを外します。各々のスピーカーユニットの凹みにマイナスドライバーを差し込んで、反時計方向に回転させスピーカーユニットを外してください。スピーカーユニット交換後は時計方向にクリック音がするまで、回転させて取り付けます。

Insert a flat-bladed screwdriver into the position indicated by the arrows and remove the panel. Turn the speaker unit to counter-clockwise direction while inserting a flat-bladed screwdriver into one of the hollows around the speaker unit, and then remove the speaker unit. After replacing the speaker unit, install it by turning it clockwise until a "click" sound comes out.

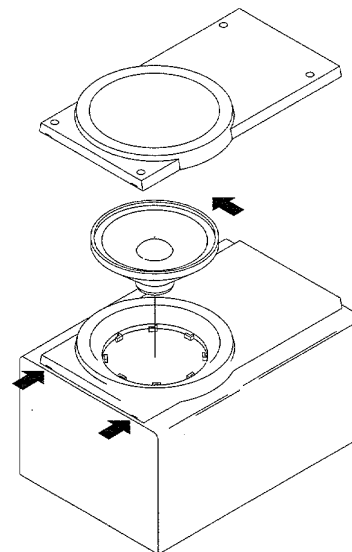

SPEAKER PARTS LIST (SX-NS74 <YJ,YL,YJ7>)

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-NSE-001-010		PANEL, FR R
2	87-NSE-002-010		PANEL, FR L
3	87-NSF-003-010		PANEL, DUCT R
4	87-NSF-004-010		PANEL, DUCT L
5	87-NSE-012-010		GRILLE, FRAME ASSY R
6	87-NSE-014-010		GRILLE, FRAME ASSY L
7	87-NSE-602-019		SPKR, W 160
8	87-NSE-604-019		SPKR, T 80
9	87-NSF-610-019		SPKR, CORD

ACCESSORIES / PACKAGE LIST

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	87-NH5-901-010		IB, HC (EC-K) M <HCSTNM>
1	87-NH5-910-010		IB, (EC-H) I <HRST>
1	87-NH5-911-010		IB, HC (EC-K) I <HCST>
1	87-NH5-909-010		IB, H (EC-H) M <HRJ7STNM>
2	87-NH4-660-010		RC UNIT, RC-7AS07
△	3 87-A90-064-010		FEEDER-ANT, FM (SHS) <HRST, HCSTNM, HCST>
	4 87-A90-312-010		PLUG, CONVERSION WTN-1157R1
	5 87-A90-054-010		ANT, LOOP AM-CON C
	6 87-043-095-010		ANT, WIRE
	7 87-B50-029-010		ENVELOPE, 110-220 (HC) <HCSTNM, HCST>
	8 87-050-050-010		CORD-1.5M PIN-PIN M

REFERENCE NAME LIST

ELECTRICAL SECTION

DESCRIPTION	REFERENCE NAME
ANT	ANTENNAS
C-	CHIP
C-CAP	CAP, CHIP
C-CAP TN	CAP, CHIP TANTALUM
C-COIL	COIL, CHIP
C-DI	DIODE, CHIP
C-DIODE	DIODE, CHIP
C-FET	FET, CHIP
C-FOTR	FILTER, CHIP
C-JACK	JACK, CHIP
C-LED	LED, CHIP
C-RES	RES, CHIP
C-SFR	SFR, CHIP
C-SLIDE SW	SLIDE SWITCH, CHIP
C-SW	SWITCH, CHIP
C-TR	TRANSISTOR, CHIP
C-VR	VOLUME, CHIP
C-ZENER	ZENER, CHIP
CAP, CER	CAP, CERA-SOL
CAP, E	CAP, ELECT
CAP, M/F	CAP, FILM
CAP, TC	CAP, CERA-SOL
CAP, TC-U	CAP, CERA-SOL SS
CAP, TN	CAP, TANTALUM
CERA FIL	FILTER, CERAMIC
CF	FILTER, CERAMIC
DL	DELAY LINE
E/CAP	CAP, ELECT
FILT	FILTER
FLTR	FILTER
FUSE RES	RES, FUSE
MOT	MOTOR
P-DIODE	PHOTO DIODE
P-SNSR	PHOTO SENSER
P-TR	PHOTO TRANSISTOR
POLY VARI	VARIABLE CAPACITOR
PPCAP	CAP, PP
PT	POWER TRANSFORMER
PTR, RES	PTR, MELF
RC	REMOTE CONTROLLER
RES NF	RES, NON-FLAMMABLE
RESO	RESONATOR
SHLD	SHIELD
SOL	SOLENOID
SPKR	SPEAKER
SW, LVR	SWITCH, LEVER
SW, RTRY	SWITCH, ROTARY
SW, SL	SWITCH, SLIDE
TC CAP	CAP, CERA-SOL
THMS	THERMISTOR
TR	TRANSISTOR
TRIMER	CAP, TRIMMER
TUN-CAP	VARIABLE CAPACITOR
VIB, CER	RESONATOR, CERAMIC
VIB, XTAL	RESONATOR, CRYSTAL
VR	VOLUME
ZENER	DIODE, ZENER

MECHANICAL SECTION

DESCRIPTION	REFERENCE NAME
ADHESHIVE	SHEET ADHESHIVE
AZ	AZIMUTH
BAR-ANT	BAR-ANTENNA
BAT	BATTERY
BATT	BATTERY
BRG	BEARING
BTN	BUTTON
CAB	CABINET
CASS	CASSETTE
CHAS	CHASSIS
CLR	COLLAR
CONT	CONTROL
CRSR	CURSOR
CU	CUSHION
CUSH	CUSHION
DIR	DIRECTION
DUBB	DUBBING
FL	FRONT LOADING
FLY-WHL	FLYWHEEL
FR	FRONT
FUN	FUNCTION
G-CU	G-CUSHION
HDL	HANDOL
HIMERON	CLOTH
HINGE, BAT	HINGE, BATTERY
HLDR	HOLDER
HT-SINK	HEAT SINK
IB	INSTRUCTION BOOKLET
IDLE	IDLER
IND, L-R	INDICATOR, L-R
KEY, CONT	KEY, CONTROL
KEY, PRGM	KEY, PROGRAM
KNOB, SL	KNOB, SLIDE
LBL	LABEL
LID, BATT	LID, BATTERY
LID, CASS	LID, CASSETTE
LVR	LEVER
P-SP	P-SPRING
PANEL, CONT	PANEL, CONTROL
PANEL, FR	PANEL, FRONT
PRGM	PROGRAM
PULLY, LOAD MO	PULLY, LOAD MOTOR
RBN	RIBBON
S-	SPECIAL
SEG	SEGMENT
SH	SHEET
SHLD-SH	SHIELD-SHEET
SL	SLIDE
SP	SPRING
SP-SCREW	SPECIAL-SCREW
SPACER, BAT	SPACER, BATTERY
SPR	SPRING
SPR-P	P-SPRING
SPR-PC-PUSH	P-SPRING, C-PUSH
T-SP	T-SPRING
TERM	TERMINAL
TRIG	TRIGGER
TUN	TUNING
VOL	VOLUME
W	WASHER
WHL	WHEEL
WORM-WHL	WORM-WHEEL

サービス技術ニュース	
番号	連絡内容
G-	-
G-	-
G-	-

アイワ株式会社
AIWA CO., LTD.

9301978, 750038

Tokyo Japan