


A 6 9 2



- Convert to 2010-style:
 - V1 to EF86
 ① change 33K R to 0.02 uf/300v cap
 ② change 120K R to 1.5 m R (1/2 watt)
 ③ change 180K R to 220K R (1/2 watt)
 ④ change 0.18 uf to 0.047 uf/300v

Fig. 4. Schematic of the A-692 amplifier-speaker. Note the compensation network and tone control in the feedback circuit.

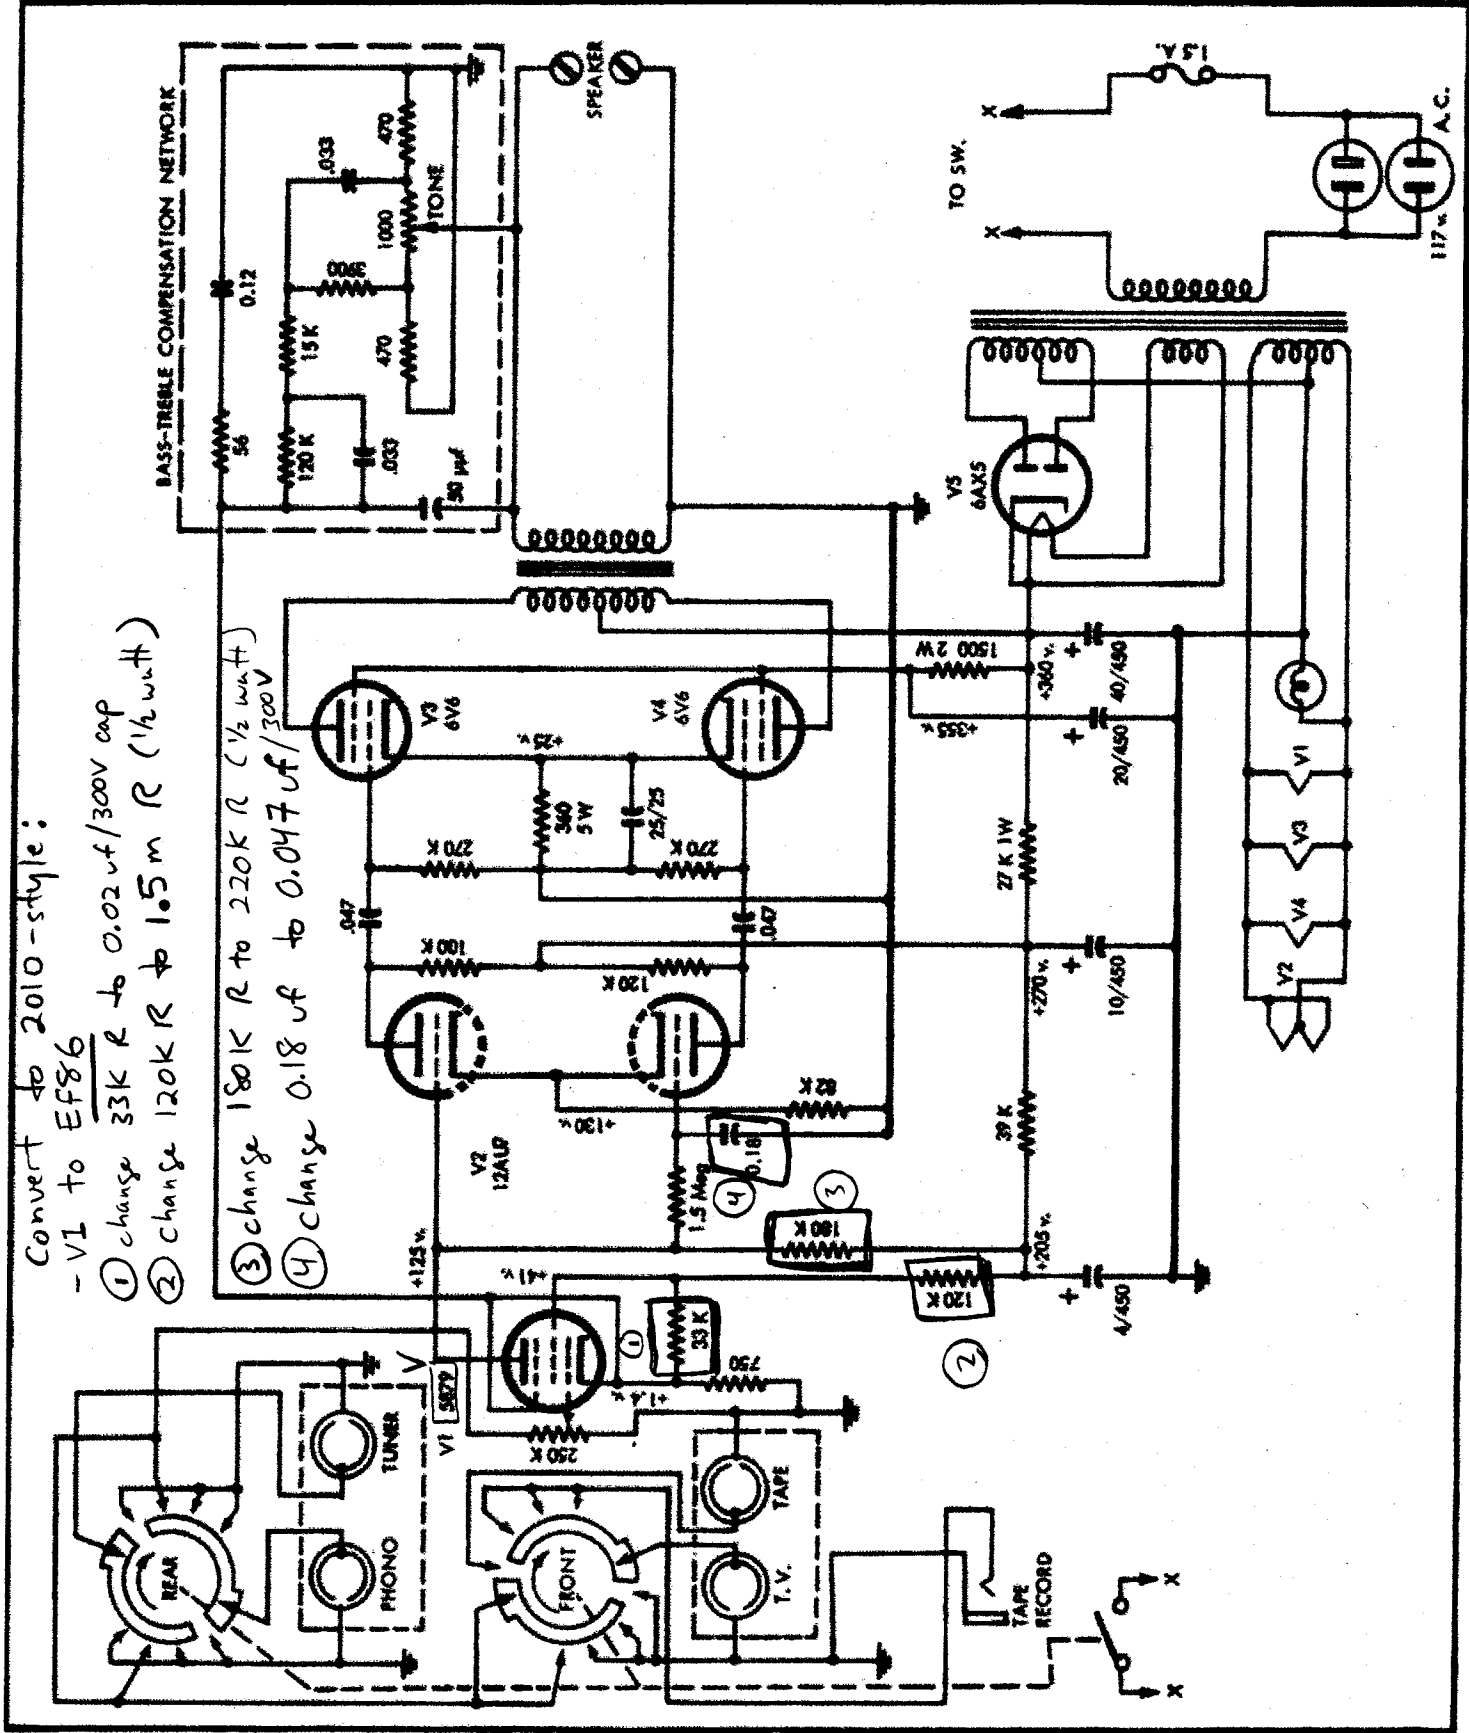