

# DiVA

# Service Manual

**Issue 1.0**

## DV79 DVD Player



**ARCAM**  
Bringing music & movies to life

# DV79

## Contents List

### Circuit Description

#### **Power Supply L959AY**

- CCT diagram
- Component layout diagram
- Parts list

#### **Display Board L961AY**

- CCT diagram
- Component layout diagram
- Parts list

#### **Main Board L967AY (for serial numbers below D79V03175)**

- CCT diagram
- Component layout diagram
- Parts list

#### **Main Board L974AY (for serial numbers above D79V03174)**

- CCT diagram
- Component layout diagram
- Parts list

### **Transformers**

- L924TX
- L925TX

### **Mechanical Assembly**

- Exploded view diagram
- Mechanical and packing part list

## Diva Dv79 Circuit description.

### Overview

The **Diva DV/79** is a completely new design platform and only shares its power supply board and display board with the **DV78**.

The player is based around acclaimed **Zoran Vaddis V** chipset coupled to high specification **Wolfson** D to A converters for all six audio output channels and a extremely **high quality** digital video encoder also featured in this design is a HDMI output digital Video.

### **Power supply board.**

#### Non-switching

Mains power arrives at **IEC** inlet socket **SKT1** and is filtered by EMC choke L1 and Y caps C3 and C4, mains switch SW2a/b switches both Negative and Live phases before the power reaches the mains select switch at location SW1 the switch allows the primary windings of the transformer **TX1** to be wired in either Parallel or Series configuration.

The Bridge rectifying Diode package at location **D1** forms the basis of the conventional power stage and supplies a VN35V6 (-35.6v) to the Switch mode stage, transistor **TR1** is biased by 2v7 Zener diode **DZ1** and allows for the series Zener diodes DZ2, DZ3, DZ3 to supply the VN13V5 and VN19V rails.

We will also see a simple A.C present circuit this is used for delayed output relay operation and fast relay closure under interrupted supply conditions thus preventing power down op-amp offsets from reaching the Audio output sockets.

#### Switch mode

The switch mode supply is formed around the Driver/Control chip **IC1** UC3843 (used in regulating mode). The chip is referenced the -36.5V supply line and the Digital ground DGND, the supply for the chip is formed by the 12v Zener at location **DZ6** and can be seen on Pin 7 as VCC. The power supply allows for the switch-mode to be tied to Audio sampling frequency for any given compatible format **see Fig 1**.

**Fig 1 PSU clock control**

| <b>Fs</b><br><b>Frequency</b><br><b>select</b> | <b>PSUFS1</b><br>Pin 11<br>IC305a | <b>PSUFS0</b><br>Pin 12<br>IC305a | <b>PSUCLK</b><br>Output Pin 5<br>of IC305a |
|--|-----------------------------------|-----------------------------------|--|
| 44.1 kHz                                       | 0                                 | 0                                 | 44.1 kHz                                   |
| 48 kHz   | 0                                 | 0                                 | 48 kHz                                     |
| 88.2 kHz                                       | 0                                 | 1                                 | 44.1kHz                                    |
| 96 kHz   | 0                                 | 1                                 | 48 kHz                                     |
| 176.4 kHz                                      | 1                                 | 0                                 | 44.1 kHz                                   |
| 192 kHz  | 1                                 | 0                                 | 48 kHz                                     |
| Others   | 1                                 | 1                                 | OFF  |

The PSU sync signal is driven into the power supply via Resistor **R9** if no Sync is present the unit is set to free run at xxxx due to the **RT/RC** network attached to Pin 4.

**IC1** is running in regulated mode and monitors the voltage output on the +5V and +3V3 D.C lines, the two voltages are summed by **TR8** and Driven into the VFB and Comp inputs of **IC1**, the Voltage is then regulated by changing the time base of the PWM output at pin 6 (longer the time base the lower the voltage), the PWM switching frequency is driven into the switch-mode transformer by the high speed Nmos device at position **M1**, R5 is used to sense the Current across the gate of the Nmosfet and in the event of a short circuit will safely shut the power supply down. We derive the 12v Mech supply from the output of M1 using the Ultra-fast Diode at location D8 to rectify the **PWM line**.

The D.C outputs from the switch mode have extensive switch mode noise removing filters these are seen as 100n caps down to ground and Wire wound inductors in series with the supply rail.

#### Power supply main board

All the power supply rails are supplied to the main board via the 32 way FFC conector at location **CON1001**.

The **Digital** supplies from the switch mode stage of the power supply arrive as 3V3D, +5VD and +12VD we also see the Display board power supplies arrive as -19V, -9 and -13.5V all of the supplies have a second stage of implemented on the board to remove all traces of ultra-sonic noise.

The 3V3D rail is the main 3V3 rail used to power the digital circuitry; +5VD is used for all 5v Digital/Video supplies the +12VD is used for Scart switching and to power the HDMI circuit.

The 1V8 rail is derived from the 3V3 rail and is regulated by the adjustable regulator at location **REG1003**.

The **Analogue** supply stages arrive at the main board as +15V3 and -15V3 rails these are filtered L1002 and L1015 before being regulated by the adjustable regulators at locations **REG1000** and **REG1002** to provide +/- 12V rails for the Analogue output stage.

Regulator **REG1001** is fed from the +15V3 rail and forms the Audio DAC supply.

The **Display board** requires several supply voltages these are simply passed through the main board, being filtered on the way to prevent transmission of noise through to the surrounding electronics. The display takes the +5V, -19V, -13V5 and -9V the -13V5 and -9V form a floating 4.5V supply biased relative to the -19V grid voltage.

### Display Board

The main component of the Display board is **IC1** this is a Vacuum Florescent Display driver with keyboard scan and a serial data in/out interface.

The Chip receives display drive serial data from the **Vaddis V** chip on the main board via Con1 on pins 12, 13 and 14 these will be seen a **DIN**, **STS** and **CLK** this data is used to drive the VFD a **DOUT** line interfaces with the VADDIS V and supplies Keyboard Scan information. The keyboard scan is a 6 x 4 matrix with the **Key Source** appearing at S3, S4, S5, S6 and the **Keyscan** data returns appearing a K2, K3 and K4.

**Please see:** above for **power supply** information.

The **Infra red** pick-up at location RX1 receives RC5 data and send the data to the Vaddis V on the main board via transistors TR2 and TR3, LED 2 is used to mix the rear panel RC5, this is covered in-depth within the Coms and Video output section of this guide.

### Main Board electronics.

#### Zoran Vaddis V.

The main processor/control chip on the main board is the Zoran Vaddis V at location **IC202**, this is the latest incarnation of the very popular Vaddis range of processors and allows for a much lower component count when compared to our earlier players as many of the playback functions have moved onto the Vaddis V silicon.

Below you will see the **major functions** of the Vaddis V

- **20 Bit digital video output for external Video DAC's and HDMI output stage.**
- **Decoded Analogue Video output (internal DAC) used on the DV78 only.**
- **Digital Audio output 3 data lines 6 channels for internal L + R DAC's and L + R + C + LS + RS for DV79 and DV29 also used for HDMI for the DV79 and DV29.**
- **SPDIF output.**
- **Internal display interface.**
- **Internal ATAPI interface.**
- **Internal IR interface.**
- **Serial in/out for RS232**

A more detailed explanation of the Vaddis V and peripheral components follows.

#### **Vaddis Power**

The Vaddis V is powered by two separate supplies the Vaddis requires a 1.8v supply for the core, this is regulated from the 3.3v rail by **REG1003**, the 3.3v rail is used to supply power to the I/P – O/P ports of the chip.

#### **ATAPI interface**

**CON203** is an ATAPI interface on a 40 way IDE connector. This is decoupled from the Drive via an array of decoupling resistors as required by the ATAPI spec.

## Display Board interface

The display board interface is on the 16 way FFC flexi foil connector at location CON202. Power for the display also travels on the connector. There are 4 – wires to interface with the VFD driver chip these are seen as.

- **XFPDIN - Data to the display board**
- **FPDOUT - Data from the display board**
- **XFPCLK - Clock**
- **XFPSEL - Chip select**

The above control lines are level shifted to 5v logic from 3.3v levels by **IC200** (74HCT125) these are the levels required by the VFD drive chip.

The IR output from the Display board arrives as **IRRCV** this is an open collector signal, which can be wire-Or'd with the re-panel remote input.

## Digital Audio

The Digital audio leaves the chip 3 sets of data lines labelled as.

- **ADAT0 - Left and Right channel data**
- **ADAT1 - Left and Right surround**
- **ADAT2 - Centre and Sub**

Along with the ADAT line we will also see the **ABCLK** and **ALRCK** as required for IS2 data conversion.

The Vaddis V also supplies a direct SPDIF output for interfacing with ancillary processing equipment.

## Digital Video

The Digital Video output from the Vaddis V consists of the following signals:

- **VIDPO to 19 - 20 Bit wide digital video data**
- **CLK\_27M - 27 Mhz Video clock**
- **VSYNC - Vertical sync**
- **Hsync - Horizontal Sync**

The 20 bit wide bus **VIDP0 to 19** provides video data as follows.

**Interlaced video mode:** **VIDP0 to 7** provide multiplexed 8 bit Y, Cb and Cr data with VIDPO being the lsb.

**Progressive scan video mode:** **VIDP0 to 9** provide 10 bit multiplexed Cb, Cr data with VIDP0 being the lsb. **VIDP10 to 19** provide 10 bit Y data with VIDP10 being the lsb.

## Flash/ SDRAM

**IC203** is a 64Mbit (32 bit x 2Meg) SDRAM. It runs at 135MHz

**IC205** is a 16Mbit (16 bit x 1Meg) intel type flash IC for program storage (Player software).

The flash interfaces to the Vaddis V using the SDRAM bus it may appear that the bus connects to the flash in a random manner, however this is simply because the Vaddis bus is multiplexed that way. The Flash will be accessed at power up and the contents are copied to the SDRAM the program will then be run from the SDRAM. Series resistors are employed to isolate the flash bus from the main SDRAM bus.

## EEPROM

**IC204** is a 8kBit (1K x 8) Serial EEPROM. This is used for storage of non-volatile storage of player settings, region settings and bookmark data.

## Clocks

**CLK27MV** is the 27Mhz clock for video. It is used to generate the 135Mhz clock for the Vaddis microprocessor and DSP. The **MCLKV** is the audio master clock for the Vaddis.

We run the Vaddis in **PLL bypass** mode and generate our own master clock (see main clock section of manual) for higher accuracy and improved performance across Audio and Video.

## RESET

**IC201** is a reset generator chip that monitors the +3.3V rail and ensures a reset signal **PWR\_ON\_RESET\*** is generated on power up, or if the mains power dips below an operational level.

This signal is used to reset the Vaddis V and Flash micro only. The Vaddis V line labelled as **RESET\*** resets the remaining circuitry of the player apart from the HDMI chip, this has its own reset line labelled as **HDMI\_RESET** this is necessary if we require to reset the HDMI chip only (for example when the HDMI sink is connected and then disconnected).

## Serial Port

The VADDIS V can interface with the external world via the RS232 connector at location CON900 and the RS232 Transceiver at location IC900, the serial data lines are shown as **SERIAL RX** and **SERIAL TX** these lines allow for direct control over the unit via RS232.

**Fig 2. GPIO control signals from the Vaddis V**

| Single Name     | I/P-O/P | Function   |
|-----------------|---------|--|
| PSUFSO-1        | Output  | Control PSU Clock divider  |
| ENABLE_AV       | Output  | SCART control High in normal operation and low in standby                  |
| 16/9            | Output  | Scart 16/9 anamorphic control line   |
| 9190INT*        | Input   | Interrupt signal from SII9190 HDMI transmitter                             |
| GAIN_SCALING    | Output  | High for HCDI gain scaling   |
| ML_8740_0-2     | Output  | SPI load signal for Audio DACs 0,1 and 2 (see note 1)                      |
| MC              | Output  | SPI clock signal for DAC control   |
| MD              | Output  | SPI data signal for DAC control  |
| FSELE0-1        | Output  | Frequency select generator   |
| MUTE*           | Output  | Active low audio mute signal   |
| DDC_SDA,DDC,SCL | I/O     | 12C bus for DDC channel on HDMI interface                                  |
| PROG_INT*       | Output  | High for Progscan mode, Low for interlaced mode. Controls SII9130 data mux |
| HDMI_RESET*     | Output  | Reset signal for HDMI transmitter  |
| RESET*          | Output  | System reset   |

### Clocks and SPDIF stage.

**IC300** is a **SM8707E** clock generator IC. This IC is sensitive to noise on its power supply, which causes clock jitter for this reason we have an independent Low dropout – low noise **+3v3** power supply for the chip based around the regulator at location **REG300**.

**X300** is a **27Mhz** crystal that **IC300** uses to generate all the video and audio clocks required by the system the crystal sits on the XTI and XTO pins of the chip, the 27Mhz output at Pin 4 (MO2) is used to drive the Vaddis chip directly bypassing the internal PLL.

The frequency of the audio master is dependent on the current audio sample rate (i.e the sample rate required by the format CD=44.1Khz and DVD=48khz etc) and this is set by the system micro via the **FSLO** and **FSEL1** this selects either the **22.5792Mhz** or **24.576Mhz** clock from frequency from IC300 this may then be divided by 2 by the clock divide chip at location IC306 depending on the status of FSEL1. Therefore 4 clock frequencies may be obtained to support all required audio samples rates.

**Nand gate** IC303 is used to gate **FSEL1** with **ENABLE\_AV** (which is low in standby mode) as such when in standby mode the audio clock is disabled.

### **Clock Buffer**

**IC301** us used to buffer the audio master clock. The circuit is arranged so that each device that requires the audio master clock has its own driver these are seen as.

- **MCLK\_DAC0 - Pin 18**
- **MCLK\_DAC1 - Pin 16**
- **MCLK\_DAC2 - Pin 14**
- **MCLK\_VADDIS - Pin 3**
- **MCLK\_HDMI - Pin 9**

We also run the **Mute Line** from the Vaddis V **IC301** this can be seen on Pin 12 and drives transistor **TR401**, the transistor pulls the relays **RLY400**, **RLY500**, **RLY600** to ground and un-mutes the audio outputs.

### **IS2 Audio Data**

**IC302** and **IC309** are buffers for the 12S signals these ensure that the signals travelling to the DAC's are point to point. **IC302** deals with the **ALRCK** and **ABCLK** and **IC309** the **ADATO1,2** all signal are split into three separate lines for the three stereo DACS.

### **PSU Clock Divider**

**IC304** and **IC305** form a clock divide by 1, 2 or 4 to ensure the PSU clock is always either 44.1Khz or 48Khz (**See fig 1** within the power supply description section). This circuit will also switch the **PSUCLK** off when switching between sample rates (the PSU will free run when the PSUCLK is not present).

### **SPDIF Output**

The SPDIF output consists of **IC308** implemented as a inline buffer and parallel output buffer. Gate A buffers the signal so that the SPDIF line from the VADDIS sees fewer loads and form a feed to the Optical output transmitter, gates B,C and D drive the SPDIF in parallel so that we can drive a 75ohm load adequately. The resistors at the output of IC308 are arrange so that the output will be **500mV pk-pk** when the output is terminated with a 75 ohm load at the same time the output impedance of the circuit is 75ohms as required by the Sony Philips Digital Interface specification, C315 provides AC coupling and L301 provides common mode noise rejection for EMC performance.

## Left and Right channel D to A stages

The **Wolfson WM8740** stereo DAC requires +5V(A) and a +3V3 supply along with the Digital Audio data lines already described in this guide.

The **Left channel output only** will be described in this section as all audio output stages are the identical (all six channels of a DV79) apart from the HDCD gain switching for L + R only.

**IC400B** and associated components for a 2<sup>nd</sup> order Bessel filter with a differential input and a gain of 1 this follow by a output buffer **IC401B**, the gain of IC401B is control by the switching chip at location **IC402**, in normal use the Gain of IC401B is set to 1.1 but in **HDCD** mode the **IC402** switches a second 10k resistor in parele with R413 and the gain is set to 2.2 allowing for the higher audio output required by the HDCD standard.

C436 is a A.C coupling capacitor used to remove the few mV of offset that the DAC produces, D400 provides protection against from ESD.

The all **output relays** are under control of the Vaddis V chip but will also mute the outputs instantly under mains failure conditions. Switching drive is provided by TR401 (MUTE\_BUF) and TR400 (AC\_PRES) the relays are in mute mode if either the input to TR401 is Low or if the input to TR400 is high.

**Please note:** The **Scart** left/right audio is fed from the outputs of the left/right audio stages.

## Video Encoder

The video encoder at location **IC703** is an Analogue devices **ADV7310** video encoder, supporting interlaced and progressive scan video. It runs on a 2.5V supply provided by REG700 the voltage reference for the chip of 1.225V is provided by REF700 and should be seen on Pin 46. C730-731 and R736 form an external PLL filter.

The Data lines into the encoder arrive as VIDP0 – 19 from the outputs of the VADDIS V chip.

The external current setting resistors for the internal DACS are seen as R721-R722 and R738-R739 these set the correct output level for the DACS.

The encoder gives out **6 video signals**, for composite, S-Video (Y and C) and shared YUV/RGB signals. The setting of the RGB or YUV mode is select with the Video settings page of the Setup menu.

The **six analogue output** signals are seen as.

- **DAC\_A = Composite**
- **DAC\_B = SVID Y**
- **DAC\_C = SVID C**
- **DAC\_D = Y or Green**
- **DAC\_E = U or Blue**
- **DAC\_F = V or Red**

**Please note:** When the player is in Progressive scan mode the composite and S-Video signals will be switched off.

The Video outputs from **IC703** are filtered by six identical filters. For instance if we look at the Composite stage we will see a very slow roll off filter comprising of C719, C721 with L701 and L703 the **-3dB** point of the filter stage is around **40Mhz**, resistors R700 and R702 form a load for the current output DAC and as such set the relative output level.

The outputs are driven by the Video op-amp at location **IC700A** this has a gain of **2.15** and is terminated by a 75ohm resistor, **D701** forms protection against ESD.

These signals now travel to the COMMS and Video extension card on Con 901. **See description** on page 7.

## SCART Output

RGB and Composite video signals as well as Left and Right audio signals are all present on the SCART output socket. As the RGB and YUV signals share the same output port at the Vaddis V the player must be set to **RGB SCART** operation to have a RGB output on the SCART. **Please note:** When in RGB SCART mode the RGB does not contain a Sync signal and the sync must be taken from the Composite out (4 wire RGB).

Also present at the Scart are a number of control flags for the monitor these include 2 GPIO control lines direct from the Vaddis.

- **ENABLE\_AV**
- **16/9**

These are seen at the SCART output pins as.

- **O/6/12**
- **RGB STAT**

The 0/6/12 line (SCART pin 8) is used to inform the monitor of the screen format being sent by the player as set in the video set-up section of the software.

- **Standby = 0V**
- **16:9 aspect ratio = 6V**
- **4:3 aspect ration = 12V**

The RGB status line (SCART pin 16) will be seen as 0v = no RGB and >1v is RGB present.

## HDMI output stage

**Please note:** Due to the plug and play nature of the HDMI/DVI interface, if presented with a reported no HDMI problem it is worth checking all set-up parameters of both the DVD player and the Plasma/Projector in use before performing component level diagnostics on this product.

HDMI is a system that transmits uncompressed digital video and digital audio over a high speed encrypted interface.

**IC1102** is an **SII9190 HDMI transmitter** IC in essence the chip takes the Digital Video and Audio information and sends the Data out in HDMI format.

**REG1100** is used to generate a clean regulated 3V3 power supply to Pins 18 and 33 of the HDMI chip.

IC1100 –IC1101 are 3 state octal/line drivers these form a multiplex that switches between the 2 groups of signals for the video data input stage of the SII9190 the multiplexer is control by the Signal from the Vaddis V labelled as PROG/INT this will sit at logic 1 for Progressive scan and logic 0 for interlaced.

In **interlaced mode** the 8 bit Y/Cb/Cr video data on **VIDP7-0** are passed to input port pins **D15 – D8** of the SII9190.

In **Progressive scan mode** all 20 bits of the Video data bus are used and get mapped as follow.

**VIDP 19 -12 provide 8 msbits of Y data to pins D15-8**

**VIDP 11 -10 provide 2lsbits of Y data to pins D2-3**

**VIDP 9 - 2 provide 8 msbits of Cb/Cr data to pins D23 – 16**

**VIDP 1 – 0 provide 2 lsbits of Cb/Cr data to pins D7 - 6**

Along with the VIDP video data lines we must also see

**VSYNC – Vertical sync data**

**HSYNC – Horizontal sync**

**CLK27M\_VID – 27Mhz video clock.**

**SPDIF – Digital audio data**

**MCLK\_HDMI – Used to strobe HDMI dig audio**

At the **output** of the HDMI chip we will see the following signals at SKT100.

**TMDS** (Transistion Minimised Differential Signalling) this consists of a clock signal (TXC+/TXC-) and **3 data** signals (**TX0+/TX0-, TX1+/TX1- and TX2+/TX2-**). All signals are differential and use current switching techniques therefore **no signals** will be observed unledd the output is correctly terminated. In this application the clock signal will always be 27MHz and the data signals will be clock X10 so 270Mbit/s.

**DDC Channel** this is a 12C interface on DDC\_SCL and DDC\_SDA. These signals connect to the VADDIS V which is the I2C bus master, The DDC channel is used to read back information from the HDMI sync regarding it's Video and Audio capabilities and is also used for HDCP encryption authentication.

**+5V Power**, the HDMI interface requires a 5V supply capable of delivering around 50mA, the supply is provided by REG 1101 which delivers the required current and will shut down in the event of a short circuit.

**Hotplug.** The HDMI 'Hot plug' signal HDPIN is a +5V to signal the presence of equipment being connected, this converted to 3v3 logic 1 as IC1100 is not +5V tolerant.

**CEC.** The CEC (Consumer Electronics Control) signal is a 1-wire bidirectional control signal. It connects to the Vaddis via an ESD protection circuit D1102 at the moment this line is not used at present and is a optional part of the HDMI specification.

## Comms and Final video output stage


The signals from the main board travel up to the Comms board on connector **CON902**.

The **Video signals** simply travel via an A-C coupling net before exiting the player via the RCA-phono sockets at locations **SKT902** and **SKT903**.


The **RS232** interface is on 9 way "D" type CON900, with IC900 providing the level translation and static protection between the RS232 levels and the **3.3V** CMOS levels required by the VADDIS V, **CON900** also supplies a **+5V** Status level when ever the unit is not in standby this generated from a buffered version of the **AV\_ENABLE** signal as used within the SCART output stage (0V in standby).

We have two remote input bus's on this board, the first can be seen to arrive at **SK901** on a 3.5mm mono jack signal received should be a **36Khz** modulated RC5 signal, the RC5 data then travels to the front panel and is fed to IR led that is sited just behind the front panel **IR Sensor**, we use the sensor to demodulate the and opto-isolate the signal due to the fact that the signal is floating up from ground.

The 3.5mm socket at location **SKT900** is used to receive un-modulated RC5 signals these take the form of a 5V/0V RC5 signal, with 5V representing a mark (equivalent to a burst of 36Khz carrier on infrared) and the 0V representing a space (equivalent to no-infra-red carrier), this input is effectively wire-Or'd with the front panel IR receiver on **IRRCV**.

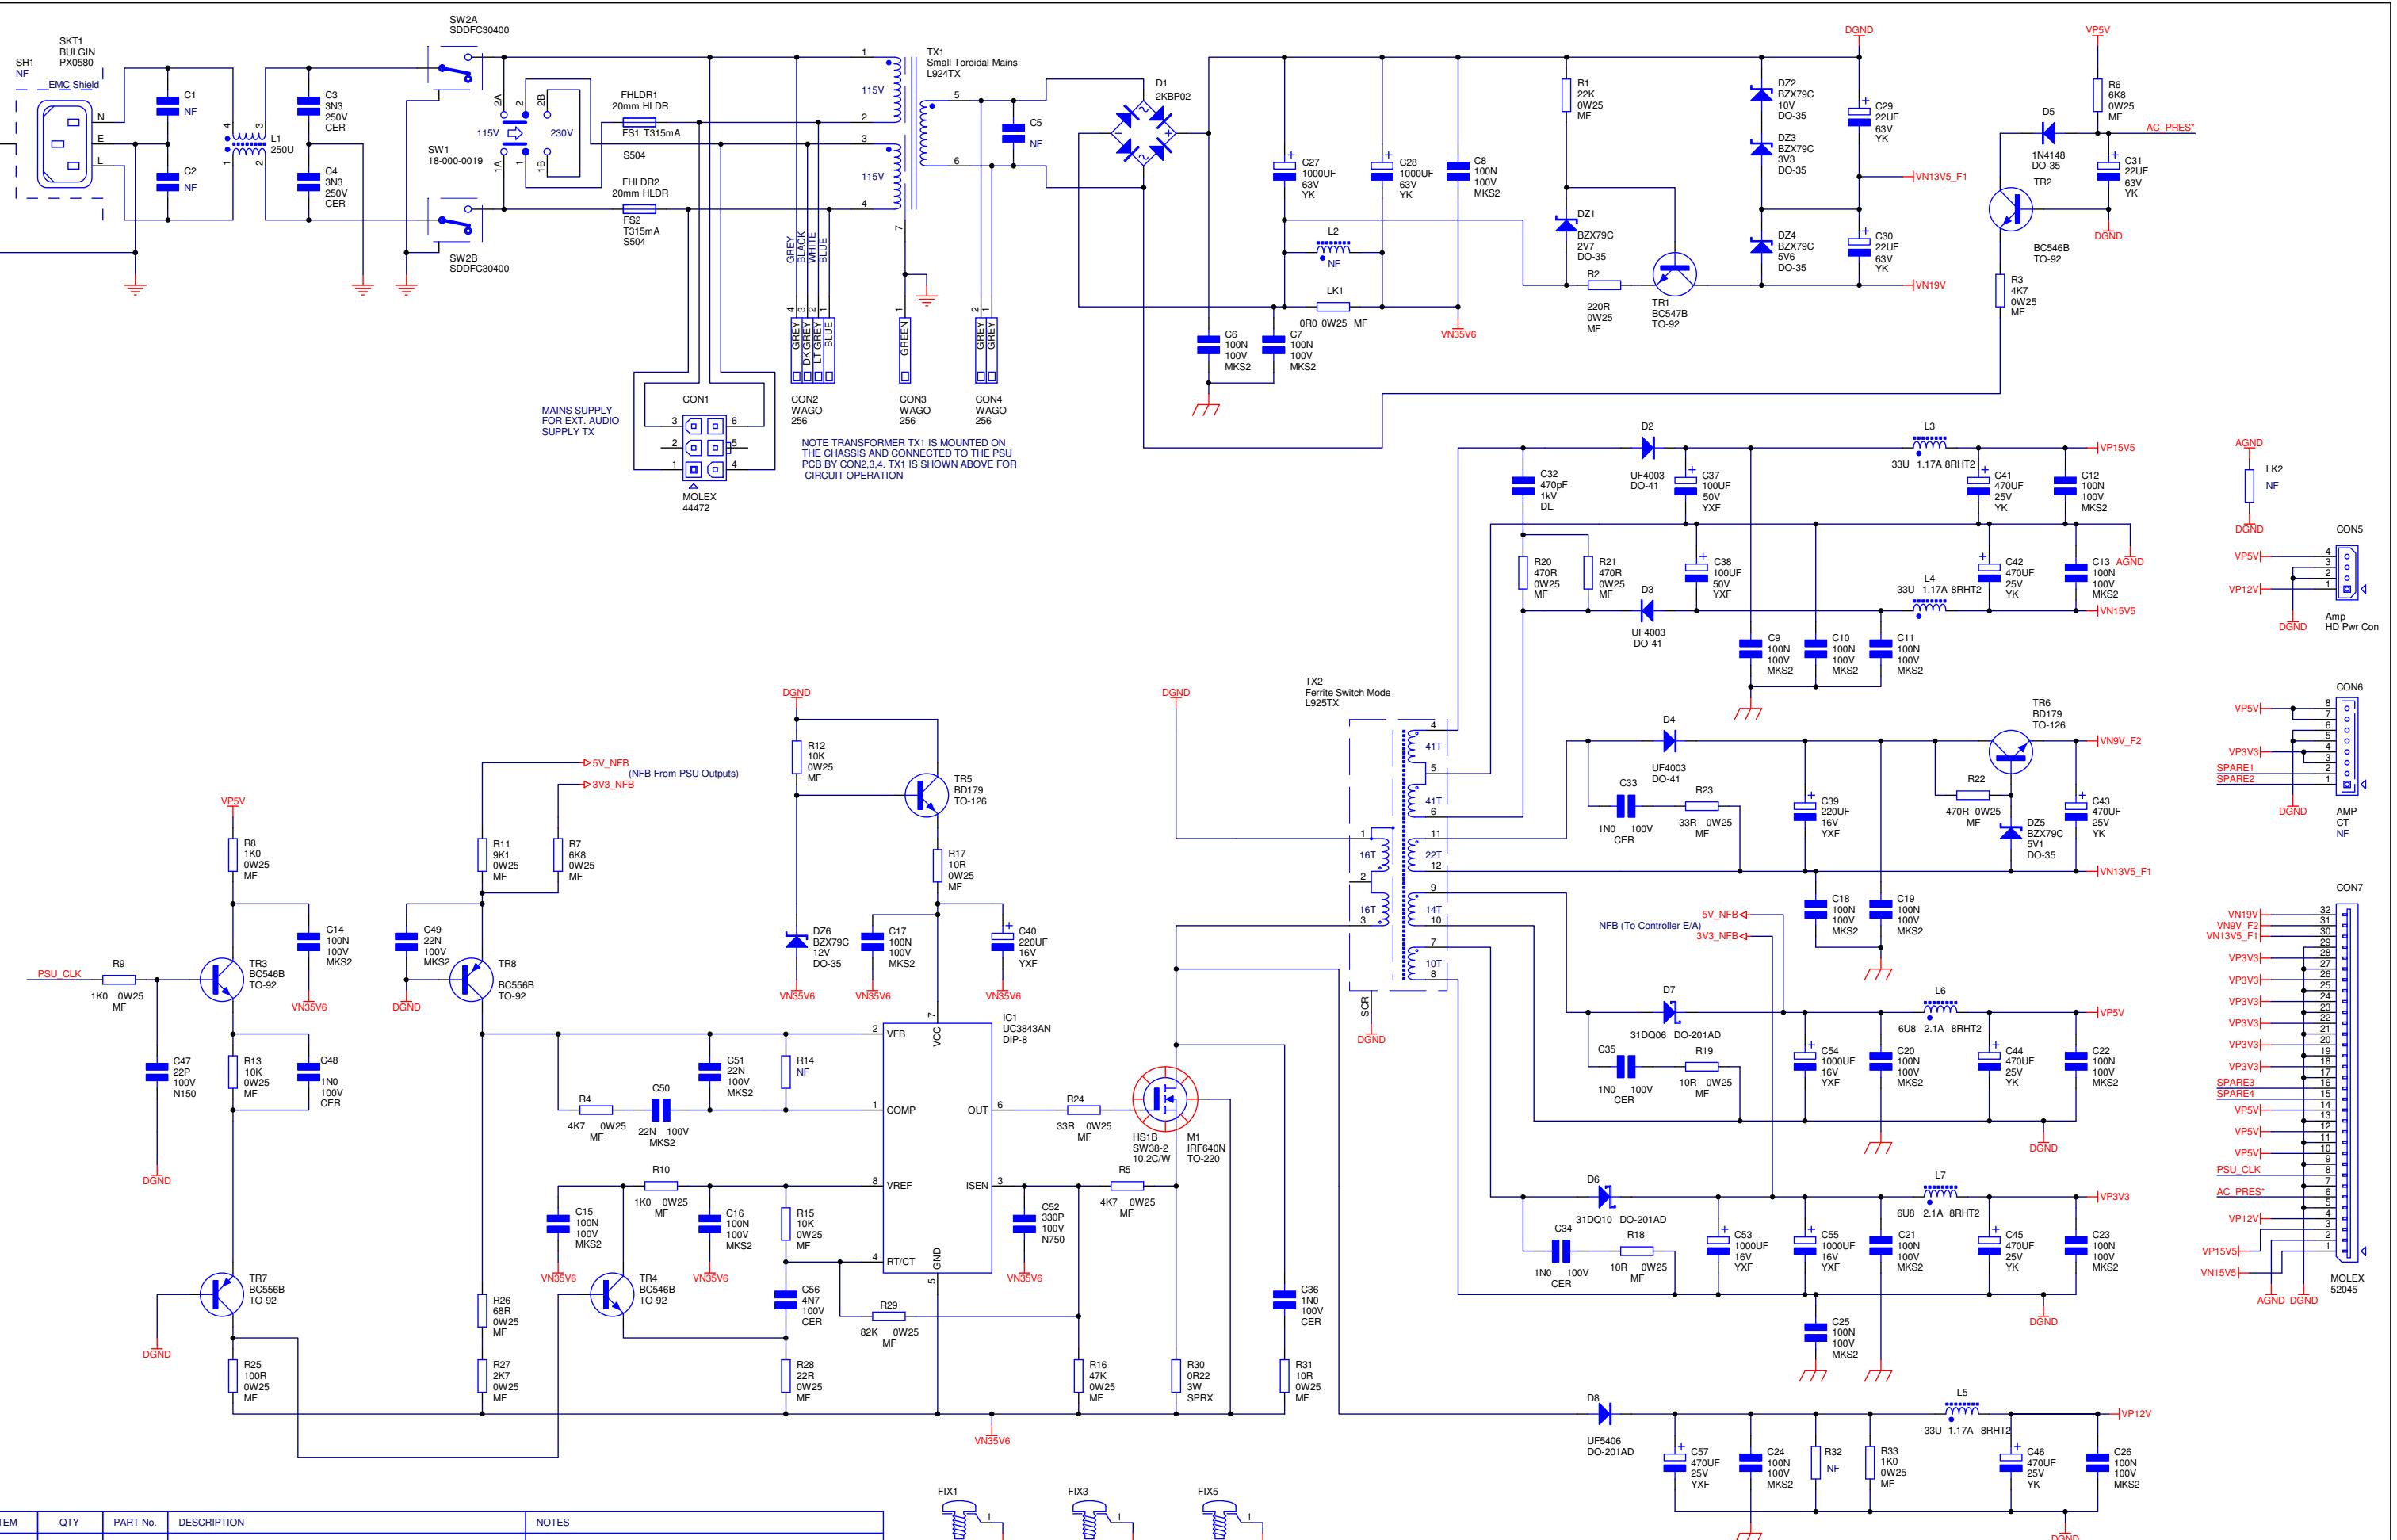

| File Name:        | L959_1.sch | Date:        | 04/04/04           | Page:    | 1           | Issue:             |
|-------------------|------------|--------------|--------------------|----------|-------------|--------------------|
| Notes:            |            |              |                    |          |             |                    |
| 03_E195           | KAL        | 02/07/03     | Production release |          |             | 1.0                |
| Contact Engineer: | Kevin Lamb | Contact Tel: | (01223) 203200     | Printed: | 22-Apr-2004 |                    |
| ECO No.           | INITIALS   | DATE         |                    | Sheet    | 1 of 1      | DRAWING NO. L959CT |

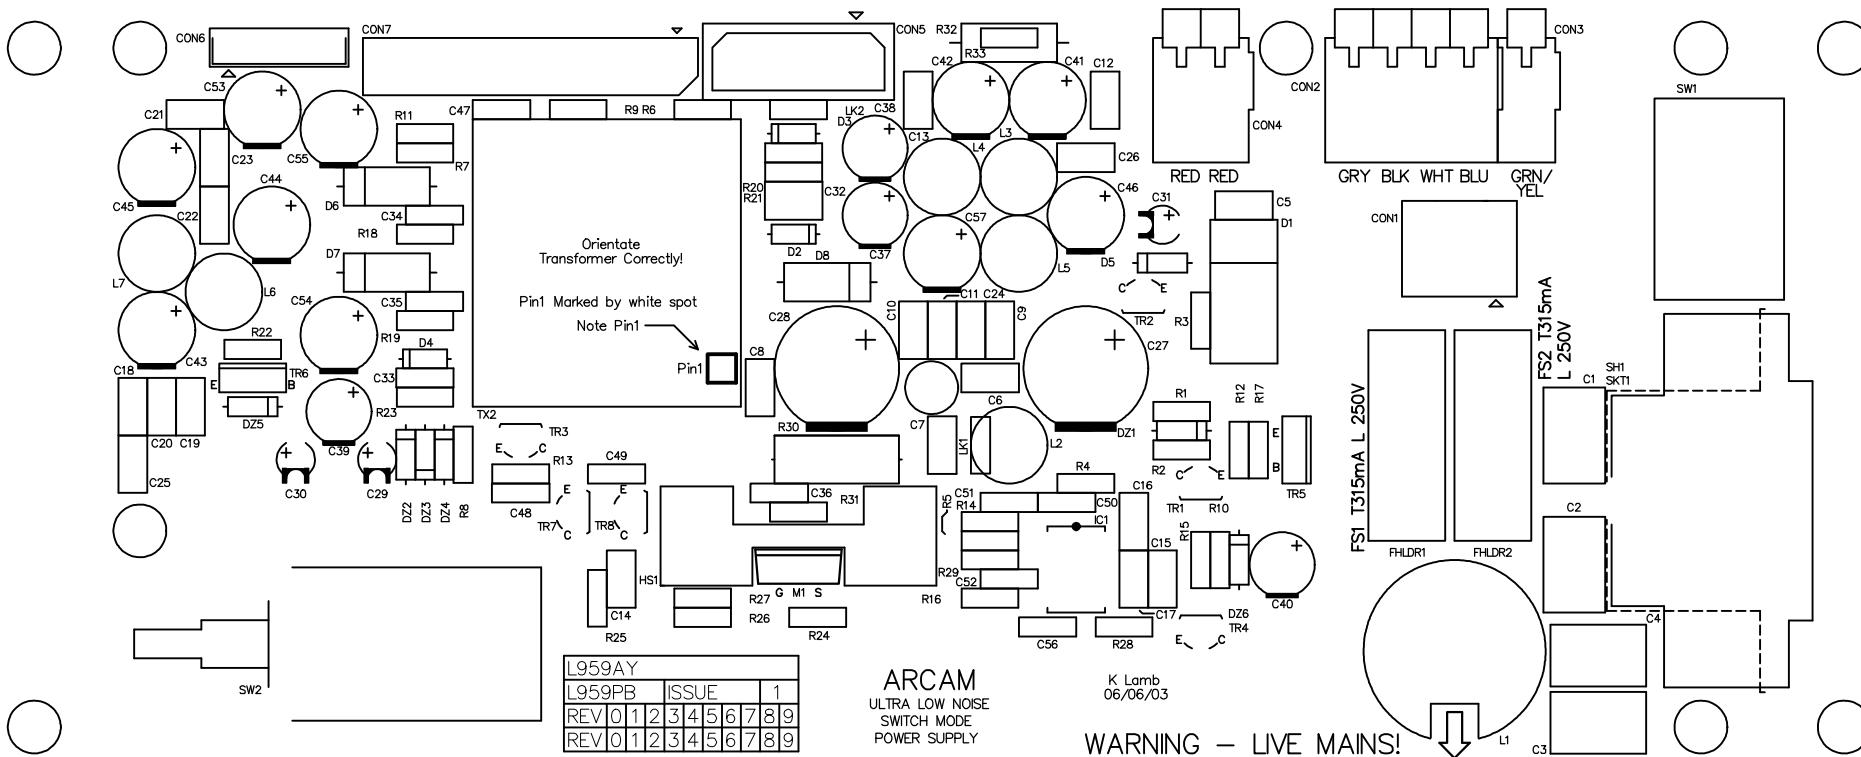

| MECHANICAL DATA      |             |
|----------------------|-------------|
| <b>LAYER STACKUP</b> |             |
| L959PB_1.GTO         | Top Overlay |
|                      |             |
|                      |             |

|               |                       |
|---------------|-----------------------|
| MATERIAL      | FR4 1.6MM THICK       |
| COPPER WEIGHT | 1oz                   |
| HOLE SIZES    | FINISHED (SEE NOTE 2) |
| ROUTING       | SEE NOTE 3            |
| COPPER LAYERS | TWO                   |
| MINIMUM WIDTH | 10 MIL                |
| MINIMUM GAP   | 10 MIL                |
| RESIST        | GREEN                 |
| IDENT         | WHITE                 |
| VENDOR CODES  | SEE NOTE 4            |
| FINISH        | ENTEK OSP             |
| SCORING       | SEE NOTE 5            |

NOTES:-

- 1/ Manufacture in accordance with IPC-A-600F Class 1.
- 2/ Always use NC drill file as reference. NO undersized finished holes.
- 3/ All routing 2.0mm unless otherwise shown on drill drawing.
- 4/ Mark month/year of manufacture on ident layer.
- 5/ Scoring denoted by >>> on drill drawing.



GENERAL TOLERANCES  
PCB Dims. +/- 0.2mm  
Routing +/- 0.1mm  
All holes +0.1/-0mm

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED


| DRAWING TITLE DV78 PSU |            | --      | --                    | --                  | --   | --           |
|------------------------|------------|---------|-----------------------|---------------------|--|--------------|
| Top Overlay            |            | 03_E195 | KAL                   | 02/07/03            | Production Release                           | 1            |
| ARCAM                  |            | 03_E166 | KAL                   | 05/06/03            | Changed panelisation and moved tooling holes | C            |
| DRAWING NO.            | L959PB     | 03_E086 | KAL                   | 28/03/03            | Minor Changes                                | B            |
|                        |            | 02_E336 | KAL                   | 15/01/03            | Prototype Release                            | A            |
| E.C.O. No.             | INITIALS   | DATE    | DESCRIPTION OF CHANGE |                     |  | ISSUE        |
| Contact Engineer:      | Kevin Lamb |         | Contact Tel:          | +44 (0) 1223 203200 | Printed: 14-Jul-2003                         | Sheet 2 of 8 |

**DV79 DVD player PSU board L959AY issue 1.1.1**


| Designator | Part   | Description   |
|------------|--------|---|
| C1         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C2         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C3         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C4         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C5         | 2MA610 | Capacitor Surface Mount Electrolytic 10UF 50V 6.3 X 4.5MM |
| C6         | 2MA610 | Capacitor Surface Mount Electrolytic 10UF 50V 6.3 X 4.5MM |
| C7         | 2MA610 | Capacitor Surface Mount Electrolytic 10UF 50V 6.3 X 4.5MM |
| C8         | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| C9         | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| C10        | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| C11        | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| CON1       | 8K8616 | Con 1.0MM Horiz FFC 16WAY 52807 Series                    |
| D1         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| D2         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| D3         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| D4         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| DISP1      | B1014  | Display DV88  |
| IC1        | 5H6312 | IC VFD Driver PT6312LQ SM LQFP-44 package                 |
| LED1       | 3D007  | LED 3.1mm Green SLR-37MG3T                                |
| LED2       | 3D010  | LED SM Red SML-010LT                                      |
| LED3       | 3D007  | LED 3.1mm Green SLR-37MG3T                                |
| LED5       | 3D006  | LED 3mm Red/Green Tri-Colour L-93WEGW                     |
| R1         | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R                |
| R2         | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R                |
| R3         | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R                |
| R4         | 1M122  | Resistor 0805 Surface Mount 0.125W 1% 220R                |
| R5         | 1M118  | Resistor 0805 Surface Mount 0.125W 1% 180R                |
| R6         | 1M139  | Resistor 0805 Surface Mount 0.125W 1% 390R                |
| R8         | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R9         | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R10        | 1M247  | Resistor 0805 Surface Mount 0.125W 1% 4K7                 |
| R11        | 1M356  | Resistor 0805 Surface Mount 0.125W 1% 56K                 |
| R13        | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R14        | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R15        | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| RX1        | B2109  | IR Receiver Module Kodenshi KSM-902TM1N                   |
| SW1        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW2        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW3        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW4        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW5        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW6        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW7        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW8        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW9        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| TR2        | 4D10KN | Digital Transistor MMUN2211LT1 SOT23 Package              |
| TR3        | 4A849B | Transistor BC849B SOT23 Package                           |
| TR4        | 4A849B | Transistor BC849B SOT23 Package                           |
| TR5        | 4D10KP | Digital Transistor MMUN2111LT1 SOT23 Package              |

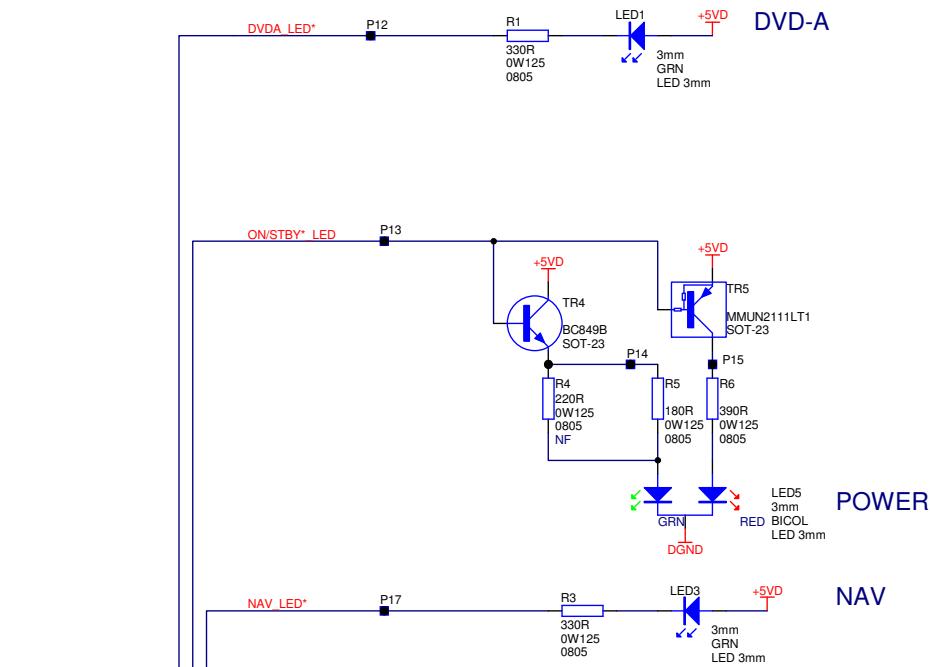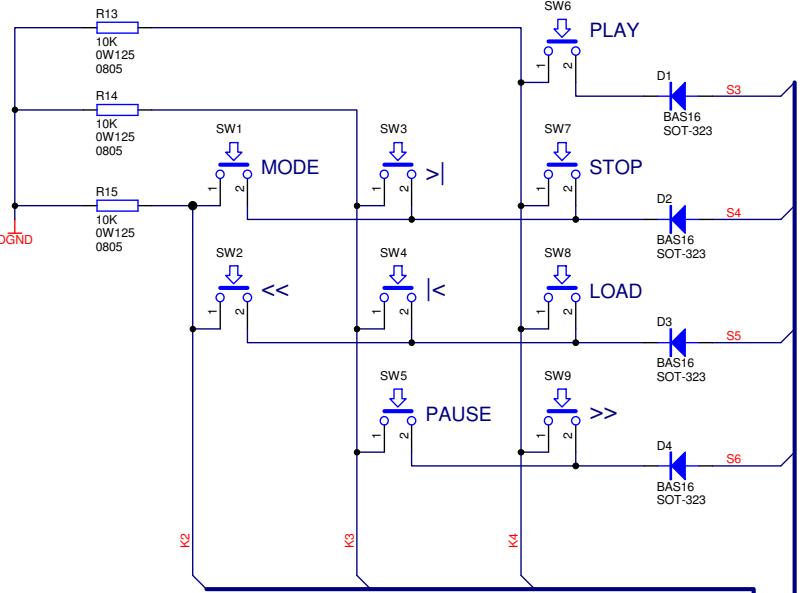

### IR REMOTE SENSOR

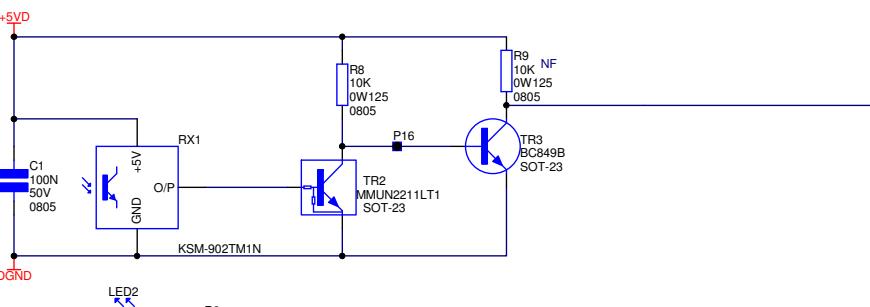


LED2 is underneath infra red receiver. The LED is lit by the remote bus signal, allowing the infra red receiver to demodulate the remote bus signal.

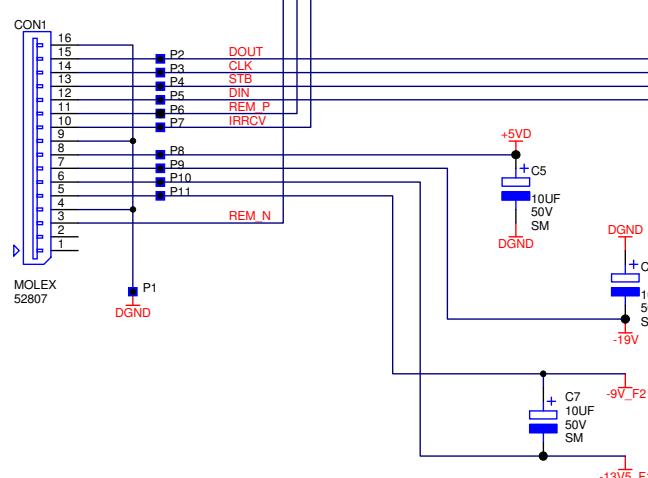

FD1  
TOOL1  
FD2  
TOOL2  
TOOL3  
TOOL4

NOTE TO ENGINEERS:  
When creating BOM, import CSV into database then manually change quantity to 0.07 for ITEM4 (F238)  
(tape)  
This is the only way to ensure it appears as 0.07m on the BOM report

|       |   |        |  |   |
|-------|---|--------|--|---|
| ITEM1 | 1 | L961PB | BLANK PCB DV78 DISPLAY BOARD                     |   |
| ITEM2 | 1 | F231   | VFD CORNER LOCATOR                               |   |
| ITEM3 | 1 | F231   | VFD CORNER LOCATOR                               |   |
| ITEM4 | 1 | F238   | Foam D/S ADH BK 3MM Thk 10MM Wide RA106 10M Reel | 70mm of 10mm wide double sided tape under VFD |

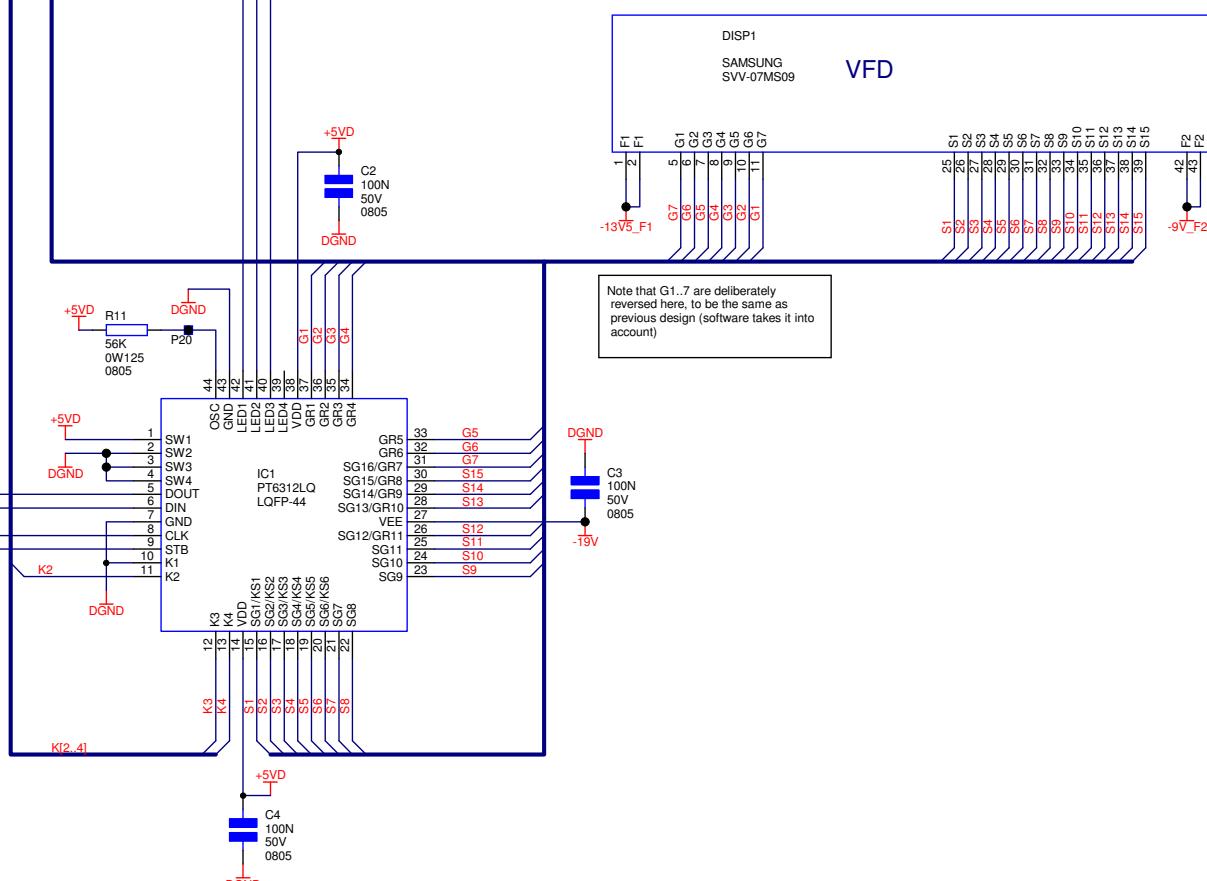


### DRAWING TITLE DV78/DV79 DISPLAY BOARD

|                   |                         |              |                |          |   |                                  |
|-------------------|-------------------------|--------------|----------------|----------|---|----------------------------------|
| ARCAM             | File Name: L961_1.3.Sch | 04_E140      | PG             | 17-09-04 | CHANGE RX1 TO KSM-902TM1N FOR BETTER PERFORMANCE  | 1.3                              |
|                   | Notes:                  | 04_E007      | PG             | 12-01-04 | ADD DVD-A LED FOR DV79                            | 1.2                              |
|                   |                         | 03_E260      | PG             | 02-09-03 | CHANGE FOAM TAPE FROM F163 TO F238 (DOUBLE SIDED) | 1.1                              |
|                   |                         | 03_E202      | PG             | 04-07-03 | INITIAL SCH                                       | 1.0                              |
| Contact Engineer: | Peter Gaggs             | Contact Tel: | (01223) 203270 | Printed: | 17-Sep-2004                                       | Sheet 1 of 1 A2 DRAWING NO. L961 |



## L961AY ASSEMBLY GUIDE

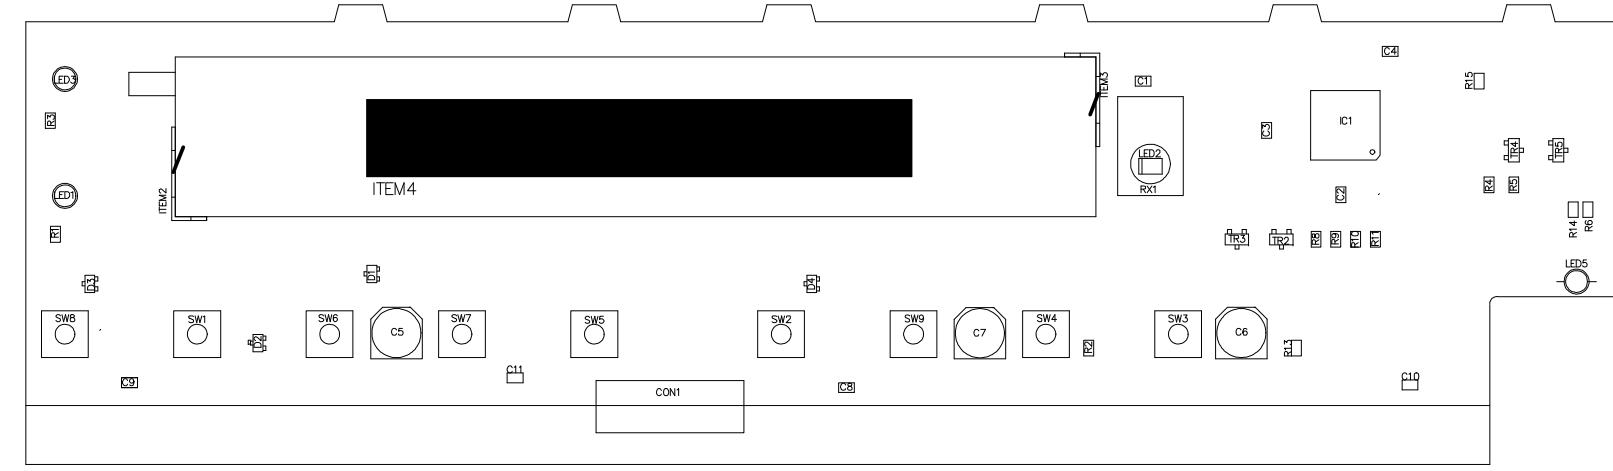

### NOTES

1. PLACE ITEM4 APPROX AS SHOWN UNDER VFD
2. BEND LEG OF ITEM 2 & 3 TO HOLD IN PLACE AS SHOWN
3. ENSURE DISP1 IS FITTED STRAIGHT
4. RX1 IS FITTED ON TOP OF LED2

### MECHANICAL DATA

|                               |  |
|-------------------------------|--|
| L961PB_1.GM1 Assembly Drawing |  |
| LAYER STACKUP                 |  |
|                               |  |
|                               |  |
|                               |  |

|               |                       |
|---------------|-----------------------|
| MATERIAL      | FR4 1.6MM THICK       |
| COPPER WEIGHT | 1oz                   |
| HOLE SIZES    | FINISHED (SEE NOTE 2) |
| ROUTING       | SEE NOTE 3            |
| COPPER LAYERS | TWO                   |
| MINIMUM WIDTH | 10 MIL                |
| MINIMUM GAP   | 10 MIL                |
| RESIST        | GREEN                 |
| IDENT         | WHITE                 |
| VENDOR CODES  | SEE NOTE 4            |
| FINISH        | ENTEK OSP             |
| SCORING       | SEE NOTE 5            |

NOTES:-

1/ Manufacture in accordance with IPC-A-600F Class 1.  
 2/ Always use NC drill file as reference. NO undersized finished holes.  
 3/ All routing 2.0mm unless otherwise shown on drill drawing.  
 4/ Mark month/year of manufacture on ident layer.  
 5/ Scoring denoted by →→→ on drill drawing.


GENERAL TOLERANCES  
 PCB Dims. +/- 0.2mm  
 Routing +/- 0.1mm  
 All holes +0.1/-0mm

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED

|  |                                |                        |                                  |                       |                    |     |     |
|--|--------------------------------|------------------------|----------------------------------|-----------------------|--------------------|-----|-----|
| <b>ARCAM</b><br>A & R Cambridge Ltd.<br>Pembroke Avenue<br>Waterbeach<br>Cambridge CB5 9QR | DRAWING TITLE DV78 DISPLAY PCB |                        |                                  | ---                   | ---                | --- | --- |
|  | Mechanical                     | Filename: L961PB_1.PCB | ---                              | ---                   | ---                | --- | --- |
| L961PB   | DRAWING NO.                    | 03_E202                | PG                               | 04/07/03              | PRODUCTION RELEASE | 1   | --- |
|  | E.C.O. No.                     | INITIALS               | DATE                             | DESCRIPTION OF CHANGE | ISSUE              |     |     |
|  | Contact Engineer:              | Peter Gaggs            | Contact Tel: +44 (0) 1223 203270 | Printed: 8-Jul-2003   | Sheet 8 of 10      |     |     |


**DV79 DVD player Display board L961AY issue 1.3.0**

| Designator | Part   | Description   |
|------------|--------|---|
| C1         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C2         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C3         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C4         | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                |
| C5         | 2MA610 | Capacitor Surface Mount Electrolytic 10UF 50V 6.3 X 4.5MM |
| C6         | 2MA610 | Capacitor Surface Mount Electrolytic 10UF 50V 6.3 X 4.5MM |
| C7         | 2MA610 | Capacitor Surface Mount Electrolytic 10UF 50V 6.3 X 4.5MM |
| C8         | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| C9         | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| C10        | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| C11        | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                 |
| CON1       | 8K8616 | Con 1.0MM Horiz FFC 16WAY 52807 Series                    |
| D1         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| D2         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| D3         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| D4         | 3AS16W | Diode Surface Mount Small Signal BAS16W SOT-23 Package    |
| DISP1      | B1014  | Display DV88  |
| IC1        | 5H6312 | IC VFD Driver PT6312LQ SM LQFP-44 package                 |
| LED1       | 3D007  | LED 3.1mm Green SLR-37MG3T                                |
| LED2       | 3D010  | LED SM Red SML-010LT                                      |
| LED3       | 3D007  | LED 3.1mm Green SLR-37MG3T                                |
| LED5       | 3D006  | LED 3mm Red/Green Tri-Colour L-93WEGW                     |
| R1         | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R                |
| R2         | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R                |
| R3         | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R                |
| R4         | 1M122  | Resistor 0805 Surface Mount 0.125W 1% 220R                |
| R5         | 1M118  | Resistor 0805 Surface Mount 0.125W 1% 180R                |
| R6         | 1M139  | Resistor 0805 Surface Mount 0.125W 1% 390R                |
| R8         | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R9         | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R10        | 1M247  | Resistor 0805 Surface Mount 0.125W 1% 4K7                 |
| R11        | 1M356  | Resistor 0805 Surface Mount 0.125W 1% 56K                 |
| R13        | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R14        | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| R15        | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K                 |
| RX1        | B2109  | IR Receiver Module Kodenshi KSM-902TM1N                   |
| SW1        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW2        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW3        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW4        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW5        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW6        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW7        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW8        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| SW9        | A1511  | Switch Tact Low Profile No Gnd Pin                        |
| TR2        | 4D10KN | Digital Transistor MMUN2211LT1 SOT23 Package              |
| TR3        | 4A849B | Transistor BC849B SOT23 Package                           |
| TR4        | 4A849B | Transistor BC849B SOT23 Package                           |
| TR5        | 4D10KP | Digital Transistor MMUN2111LT1 SOT23 Package              |


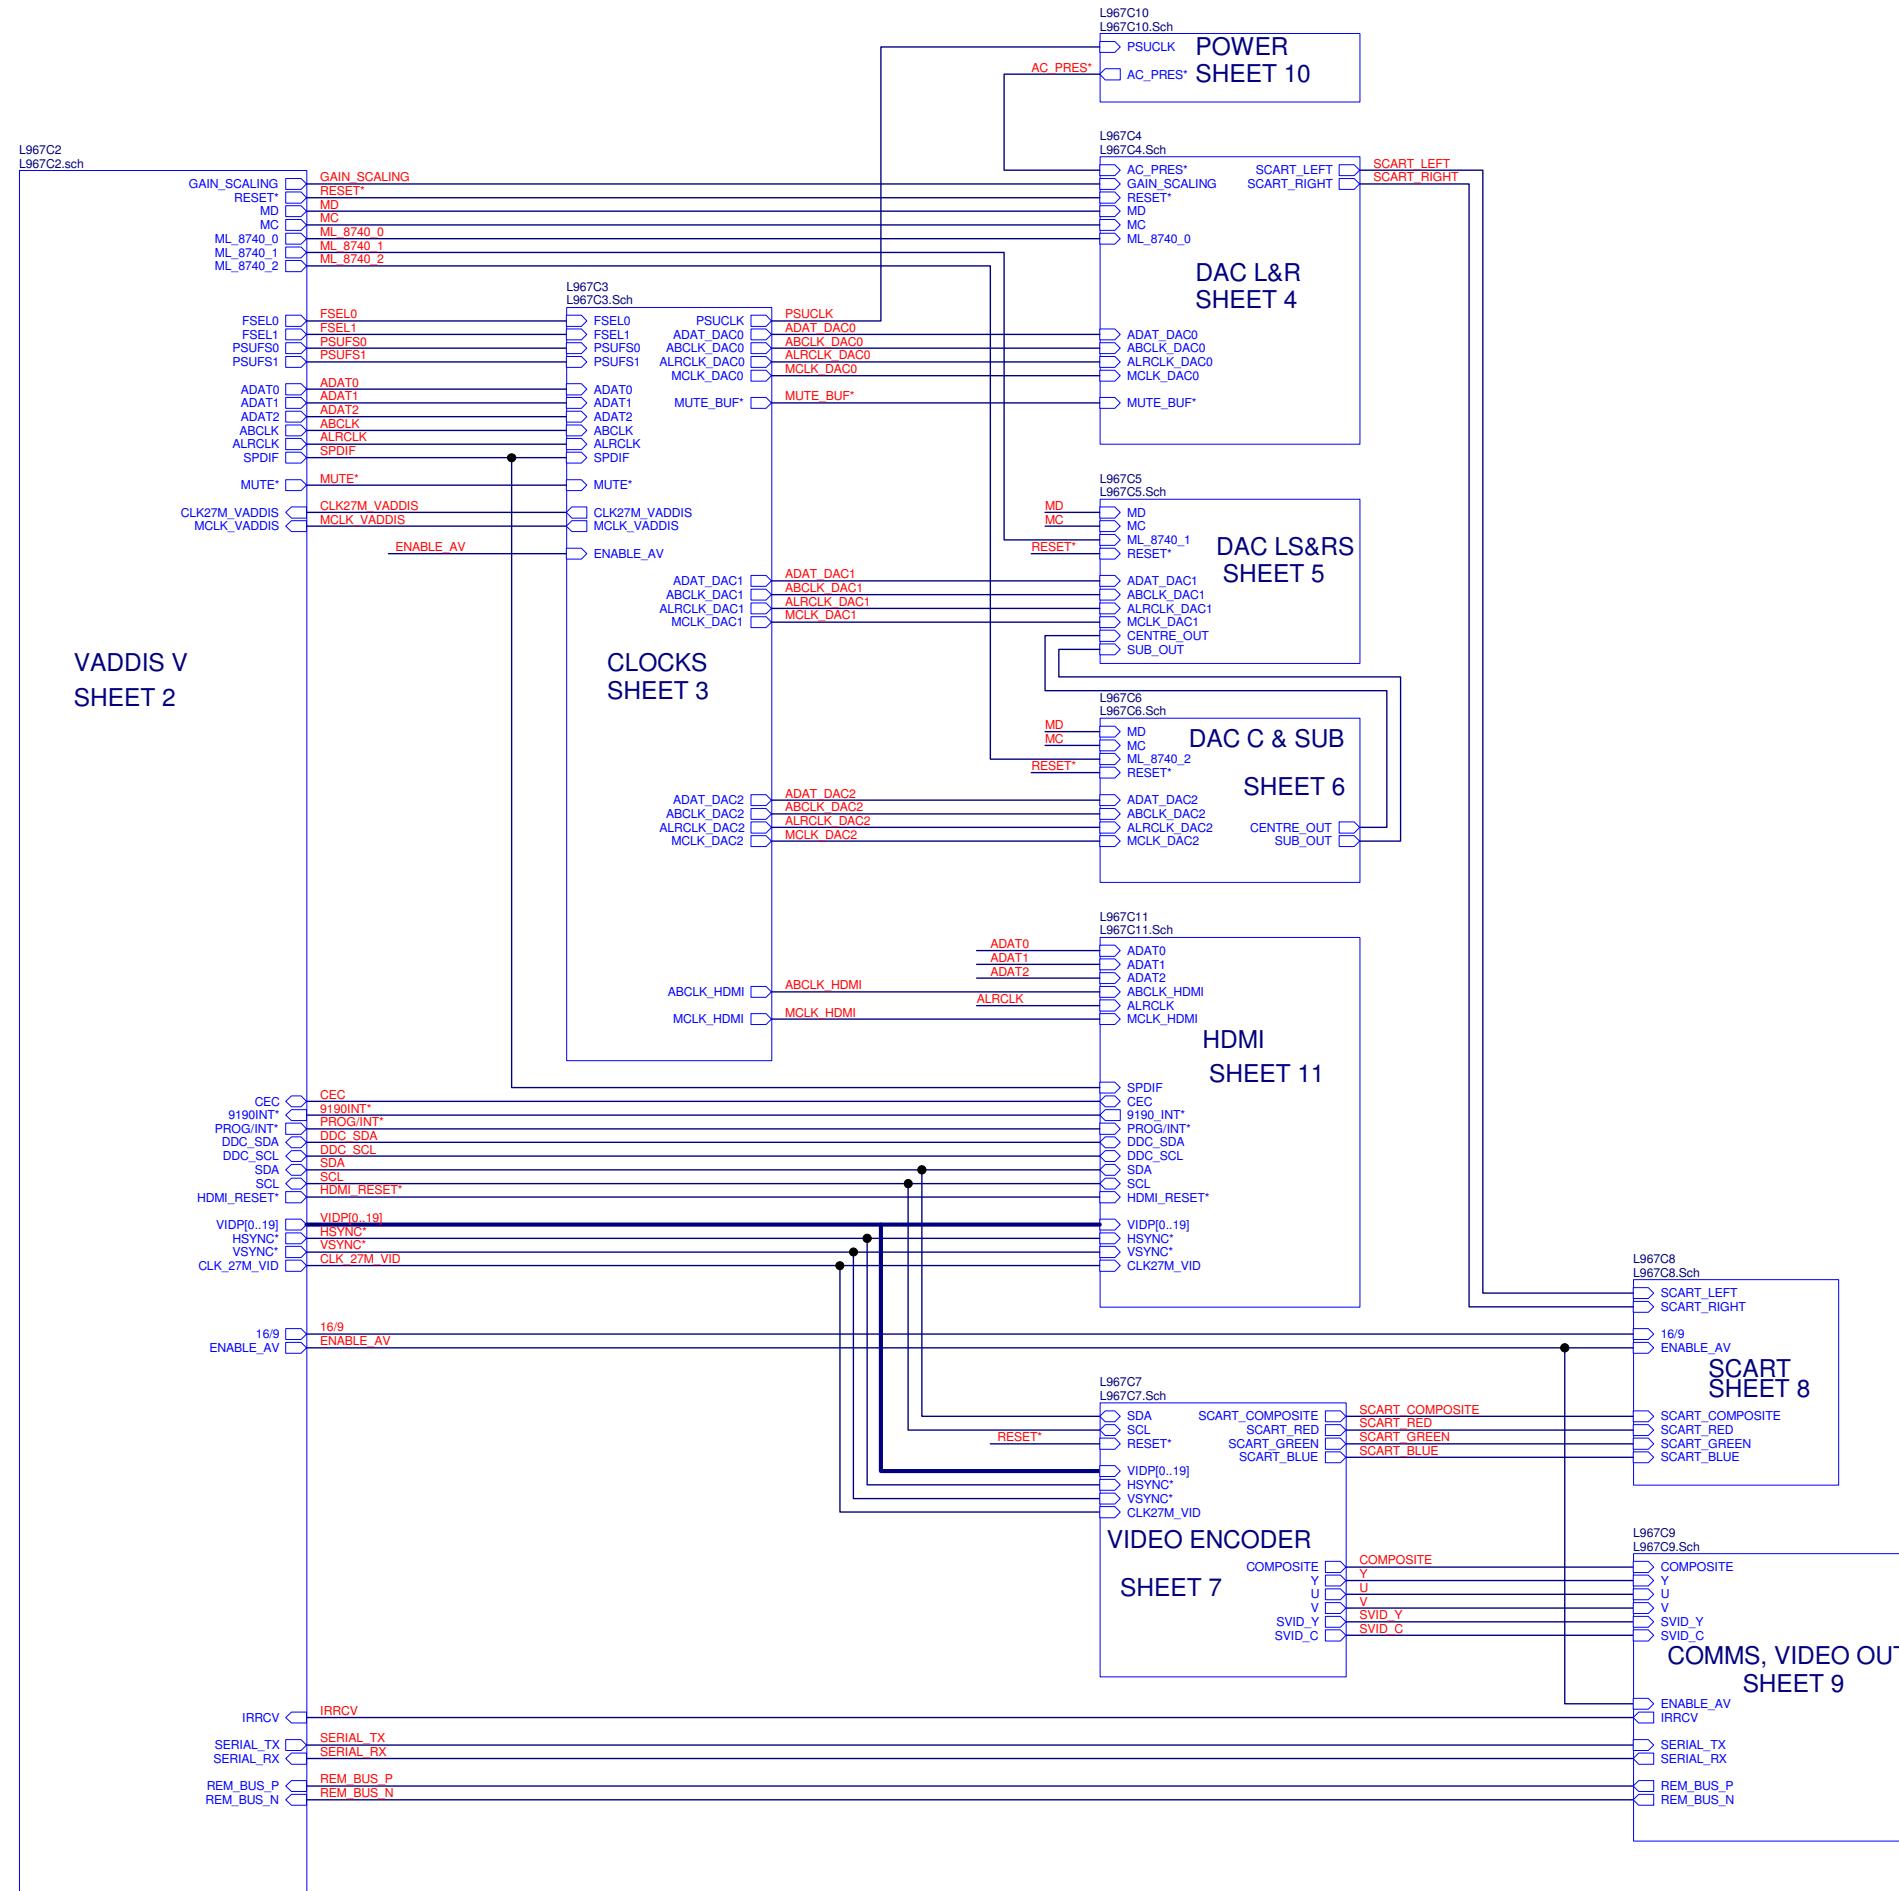


| ITEM100   1   L967PB   Blank PCB DV79 Main Board |                             |                      |                       |                      |                    |
|--|-----------------------------|----------------------|-----------------------|----------------------|--------------------|
| DRAWING TITLE DV79 MAIN BOARD TOP LEVEL          |                             |                      |                       |                      |                    |
| <b>ARCAM</b>                                     |                             |                      |                       | Filename: L967C1.prj |                    |
| Notes:   |                             |                      |                       |                      |                    |
| 03_E020  | PG                          | 19-02-04             | Production release    | 1.0                  |                    |
| ECO No.  | INITIALS                    | DATE                 | DESCRIPTION OF CHANGE |                      | ISSUE              |
| Contact Engineer: Peter Gaggs                    | Contact Tel: (01223) 203270 | Printed: 19-Feb-2004 | Sheet 1 of 11         | A2                   | DRAWING NO. L967C1 |

## FRONT PANEL

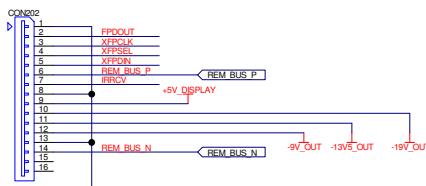

## RESET

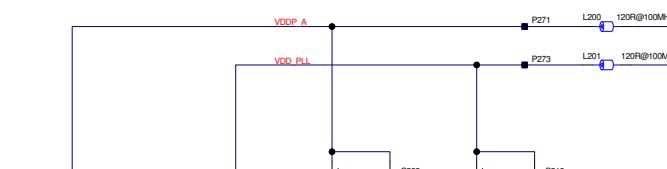

## FRONT PANEL


FPOUT  
100V  
0W125 0805

XFPOLK  
100R  
0W125 0805

XFPSEL  
100R  
0W125 0805

VREF  
100R  
0W125 0805

VREF1\_19  
100R  
0W125 0805

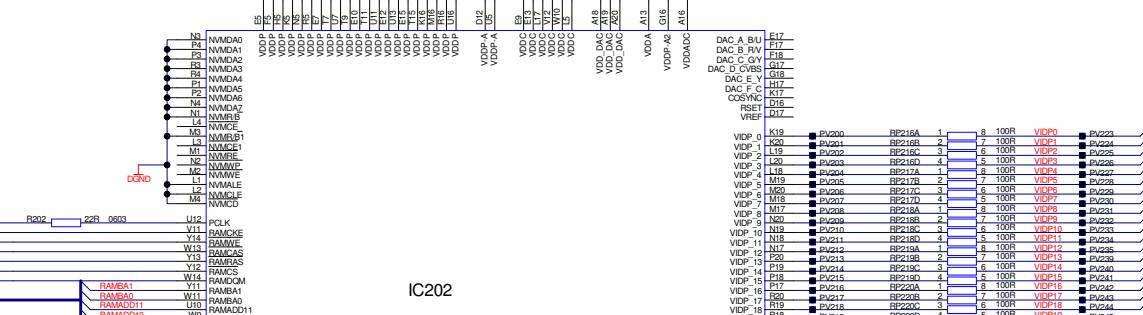

IC202


ZORAN VADDIS V


HS202

31198-T410-01

20.9C.W


31198-T410-01

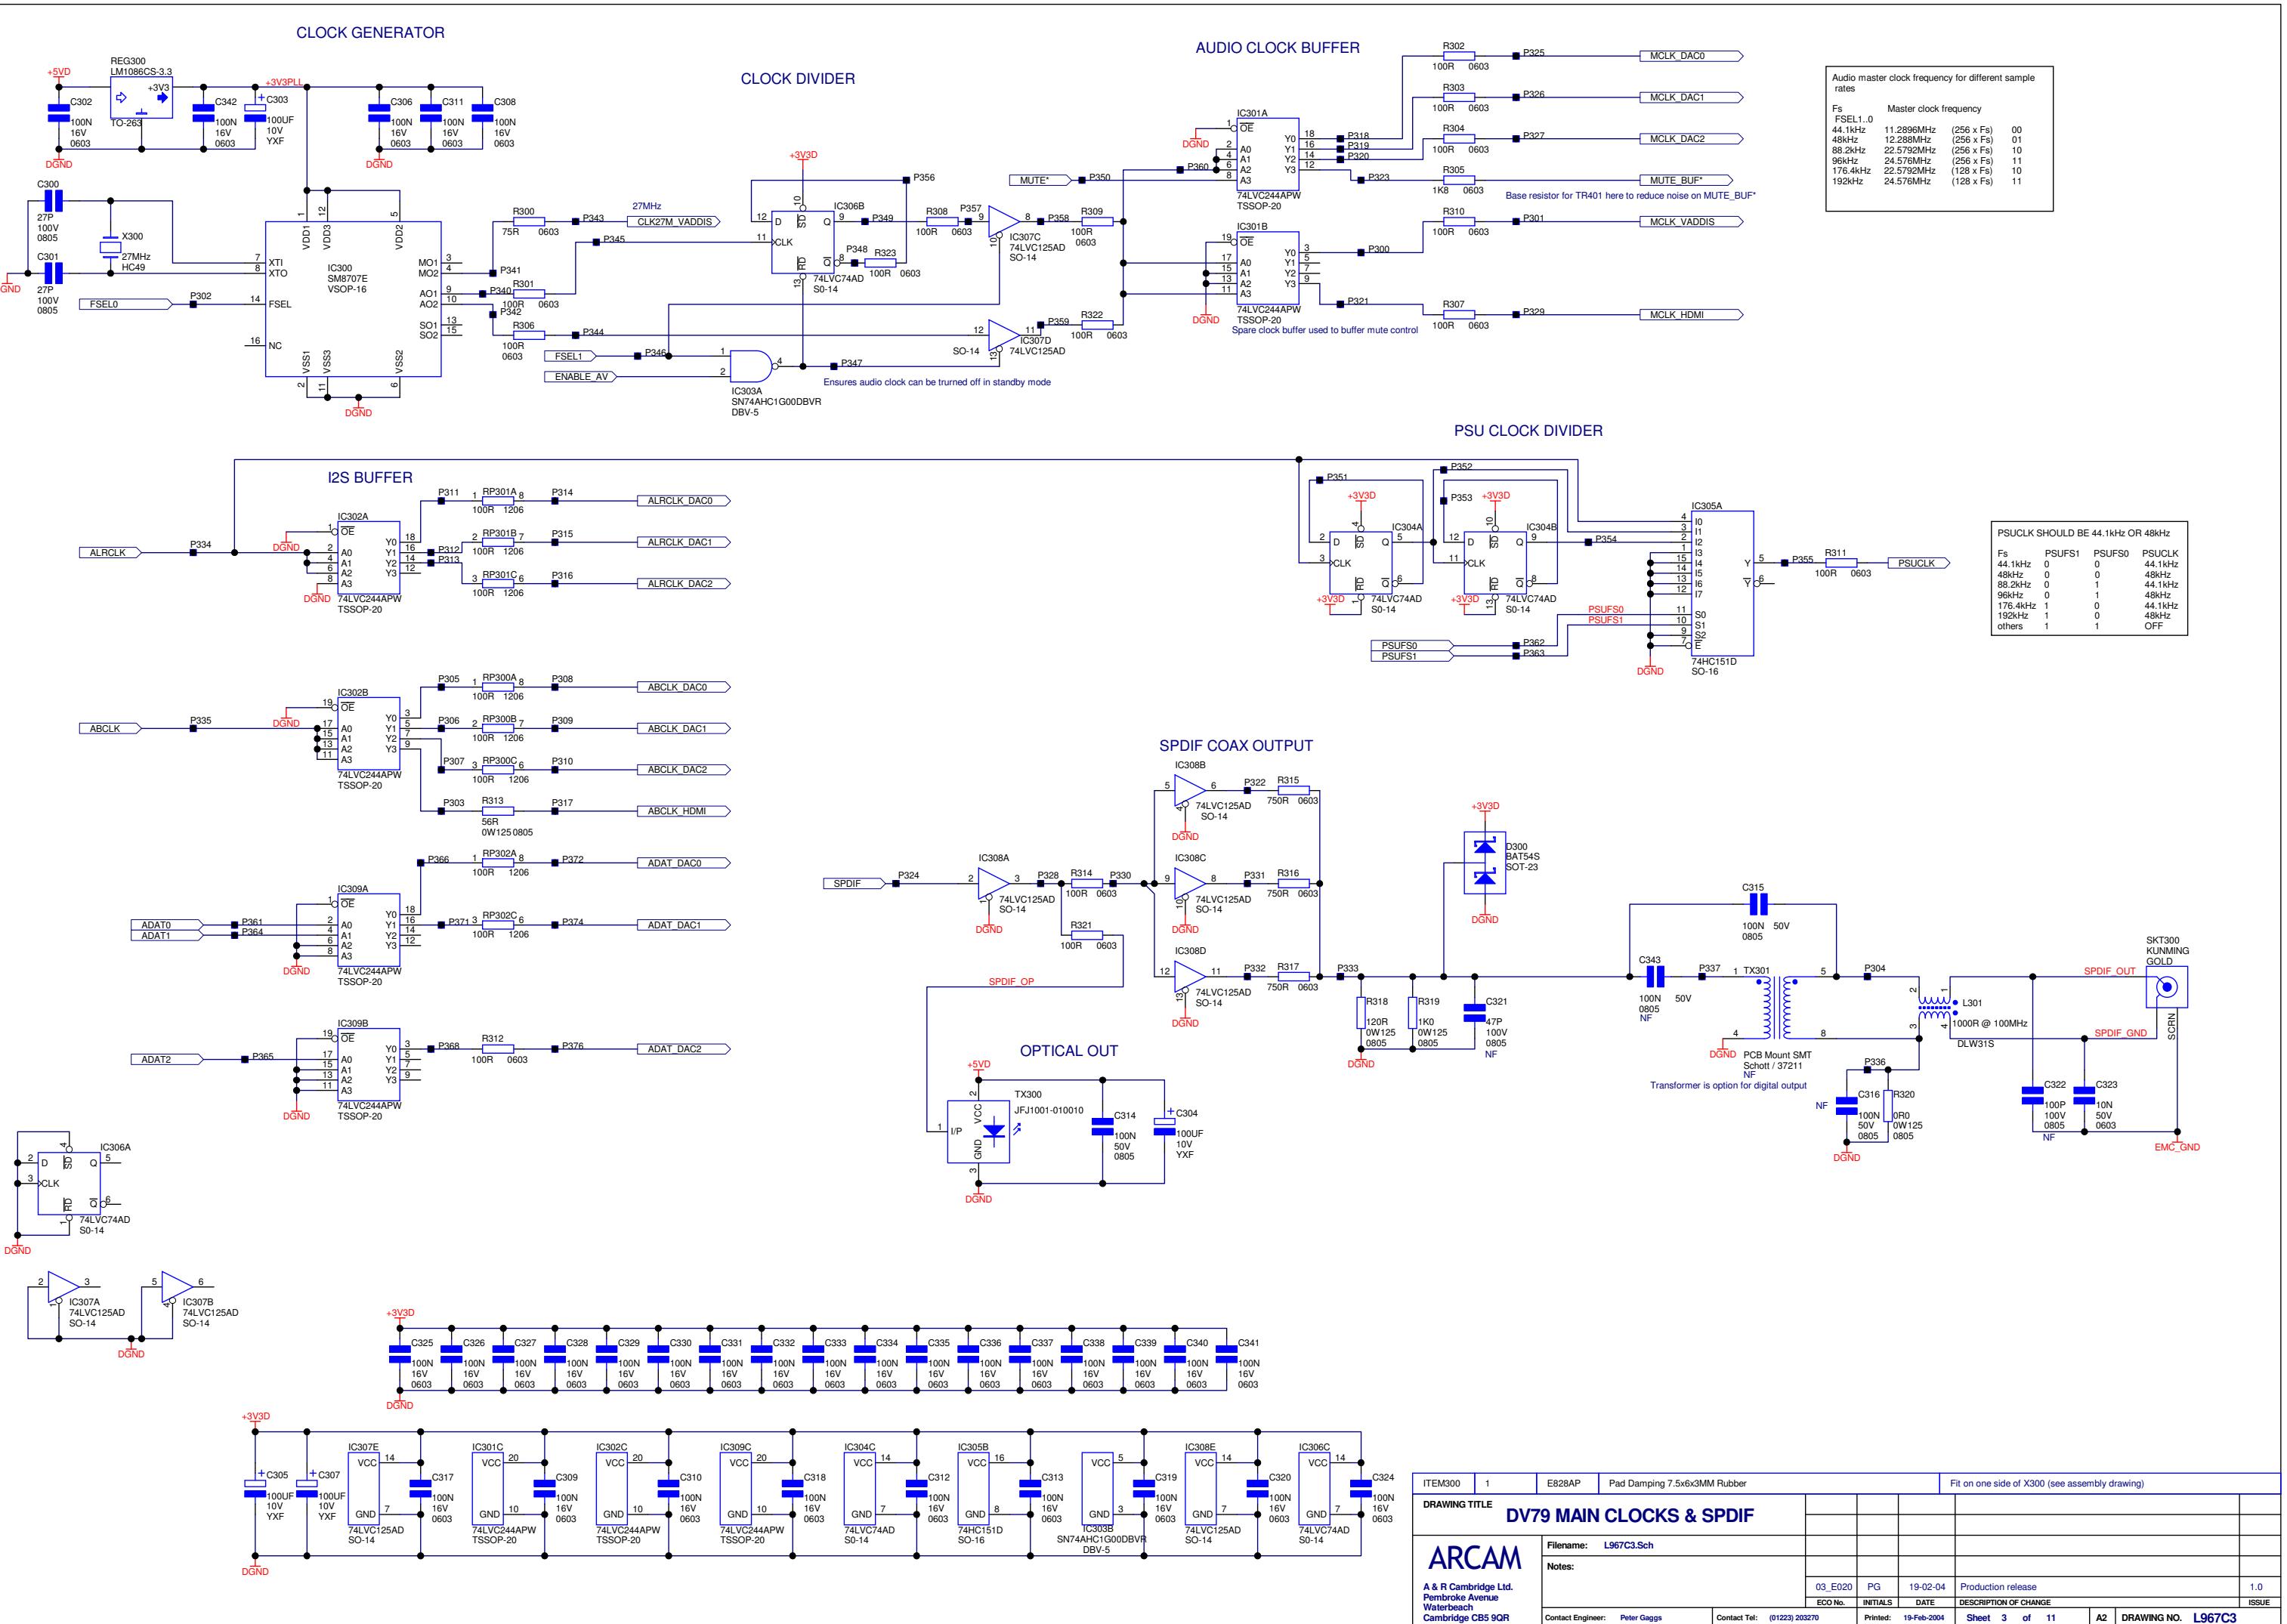

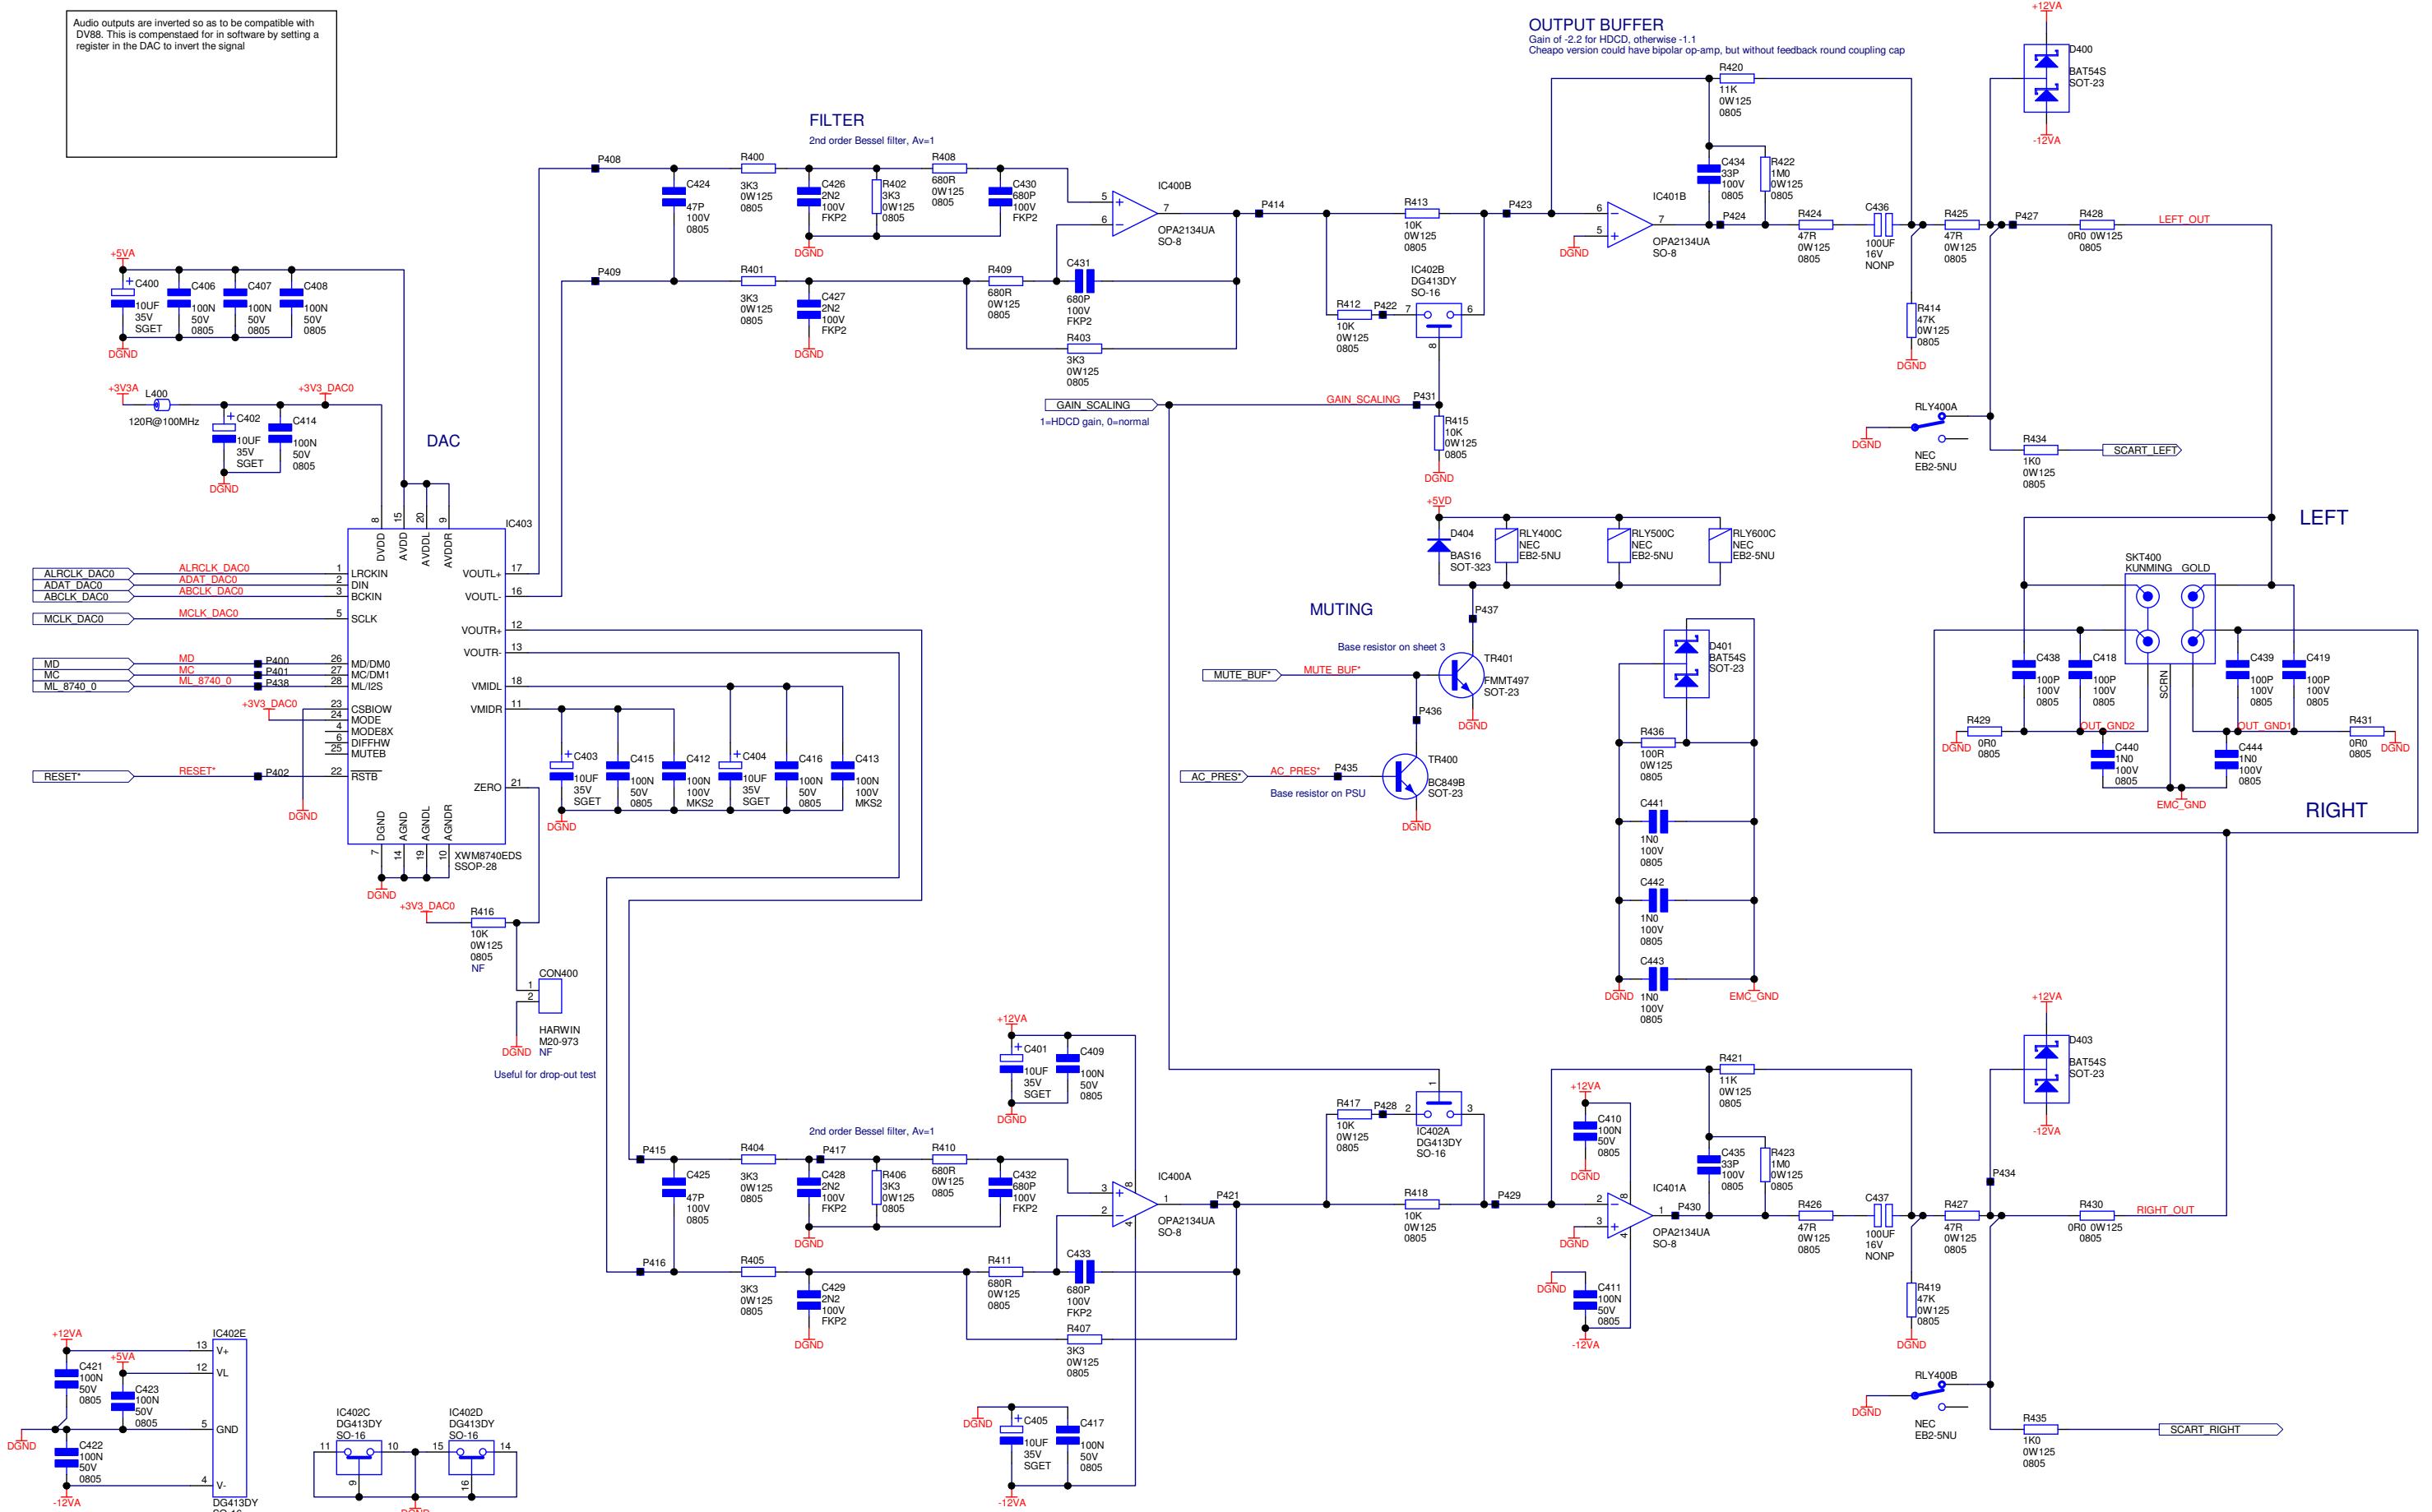


|  |                               |                             |                              |                                     |
|--|-------------------------------|-----------------------------|------------------------------|-------------------------------------|
| ITEM400  | 1                             | E828AP                      | Pad Damping 7.5x6x3MM Rubber | Fit on top of RLY400                |
| <b>DRAWING TITLE</b> DV79 MAIN DAC L & R AUDIO |                               |                             |                              |                                     |
| ARCAM  | Filename: L967C4.Sch          |                             |                              |                                     |
|  | Notes:                        |                             |                              |                                     |
|  | 03_E020                       | PG                          | 19-02-04                     | Production release                  |
|  | ECO No.                       | INITIALS                    | DATE                         | DESCRIPTION OF CHANGE               |
|  | Contact Engineer: Peter Gaggs | Contact Tel: (01223) 203270 | Printed: 19-Feb-2004         | Sheet 4 of 11 A2 DRAWING NO. L967C4 |

Audio outputs are inverted so as to be compatible with DV88. This is compensated for in software by setting a register in the DAC to invert the signal

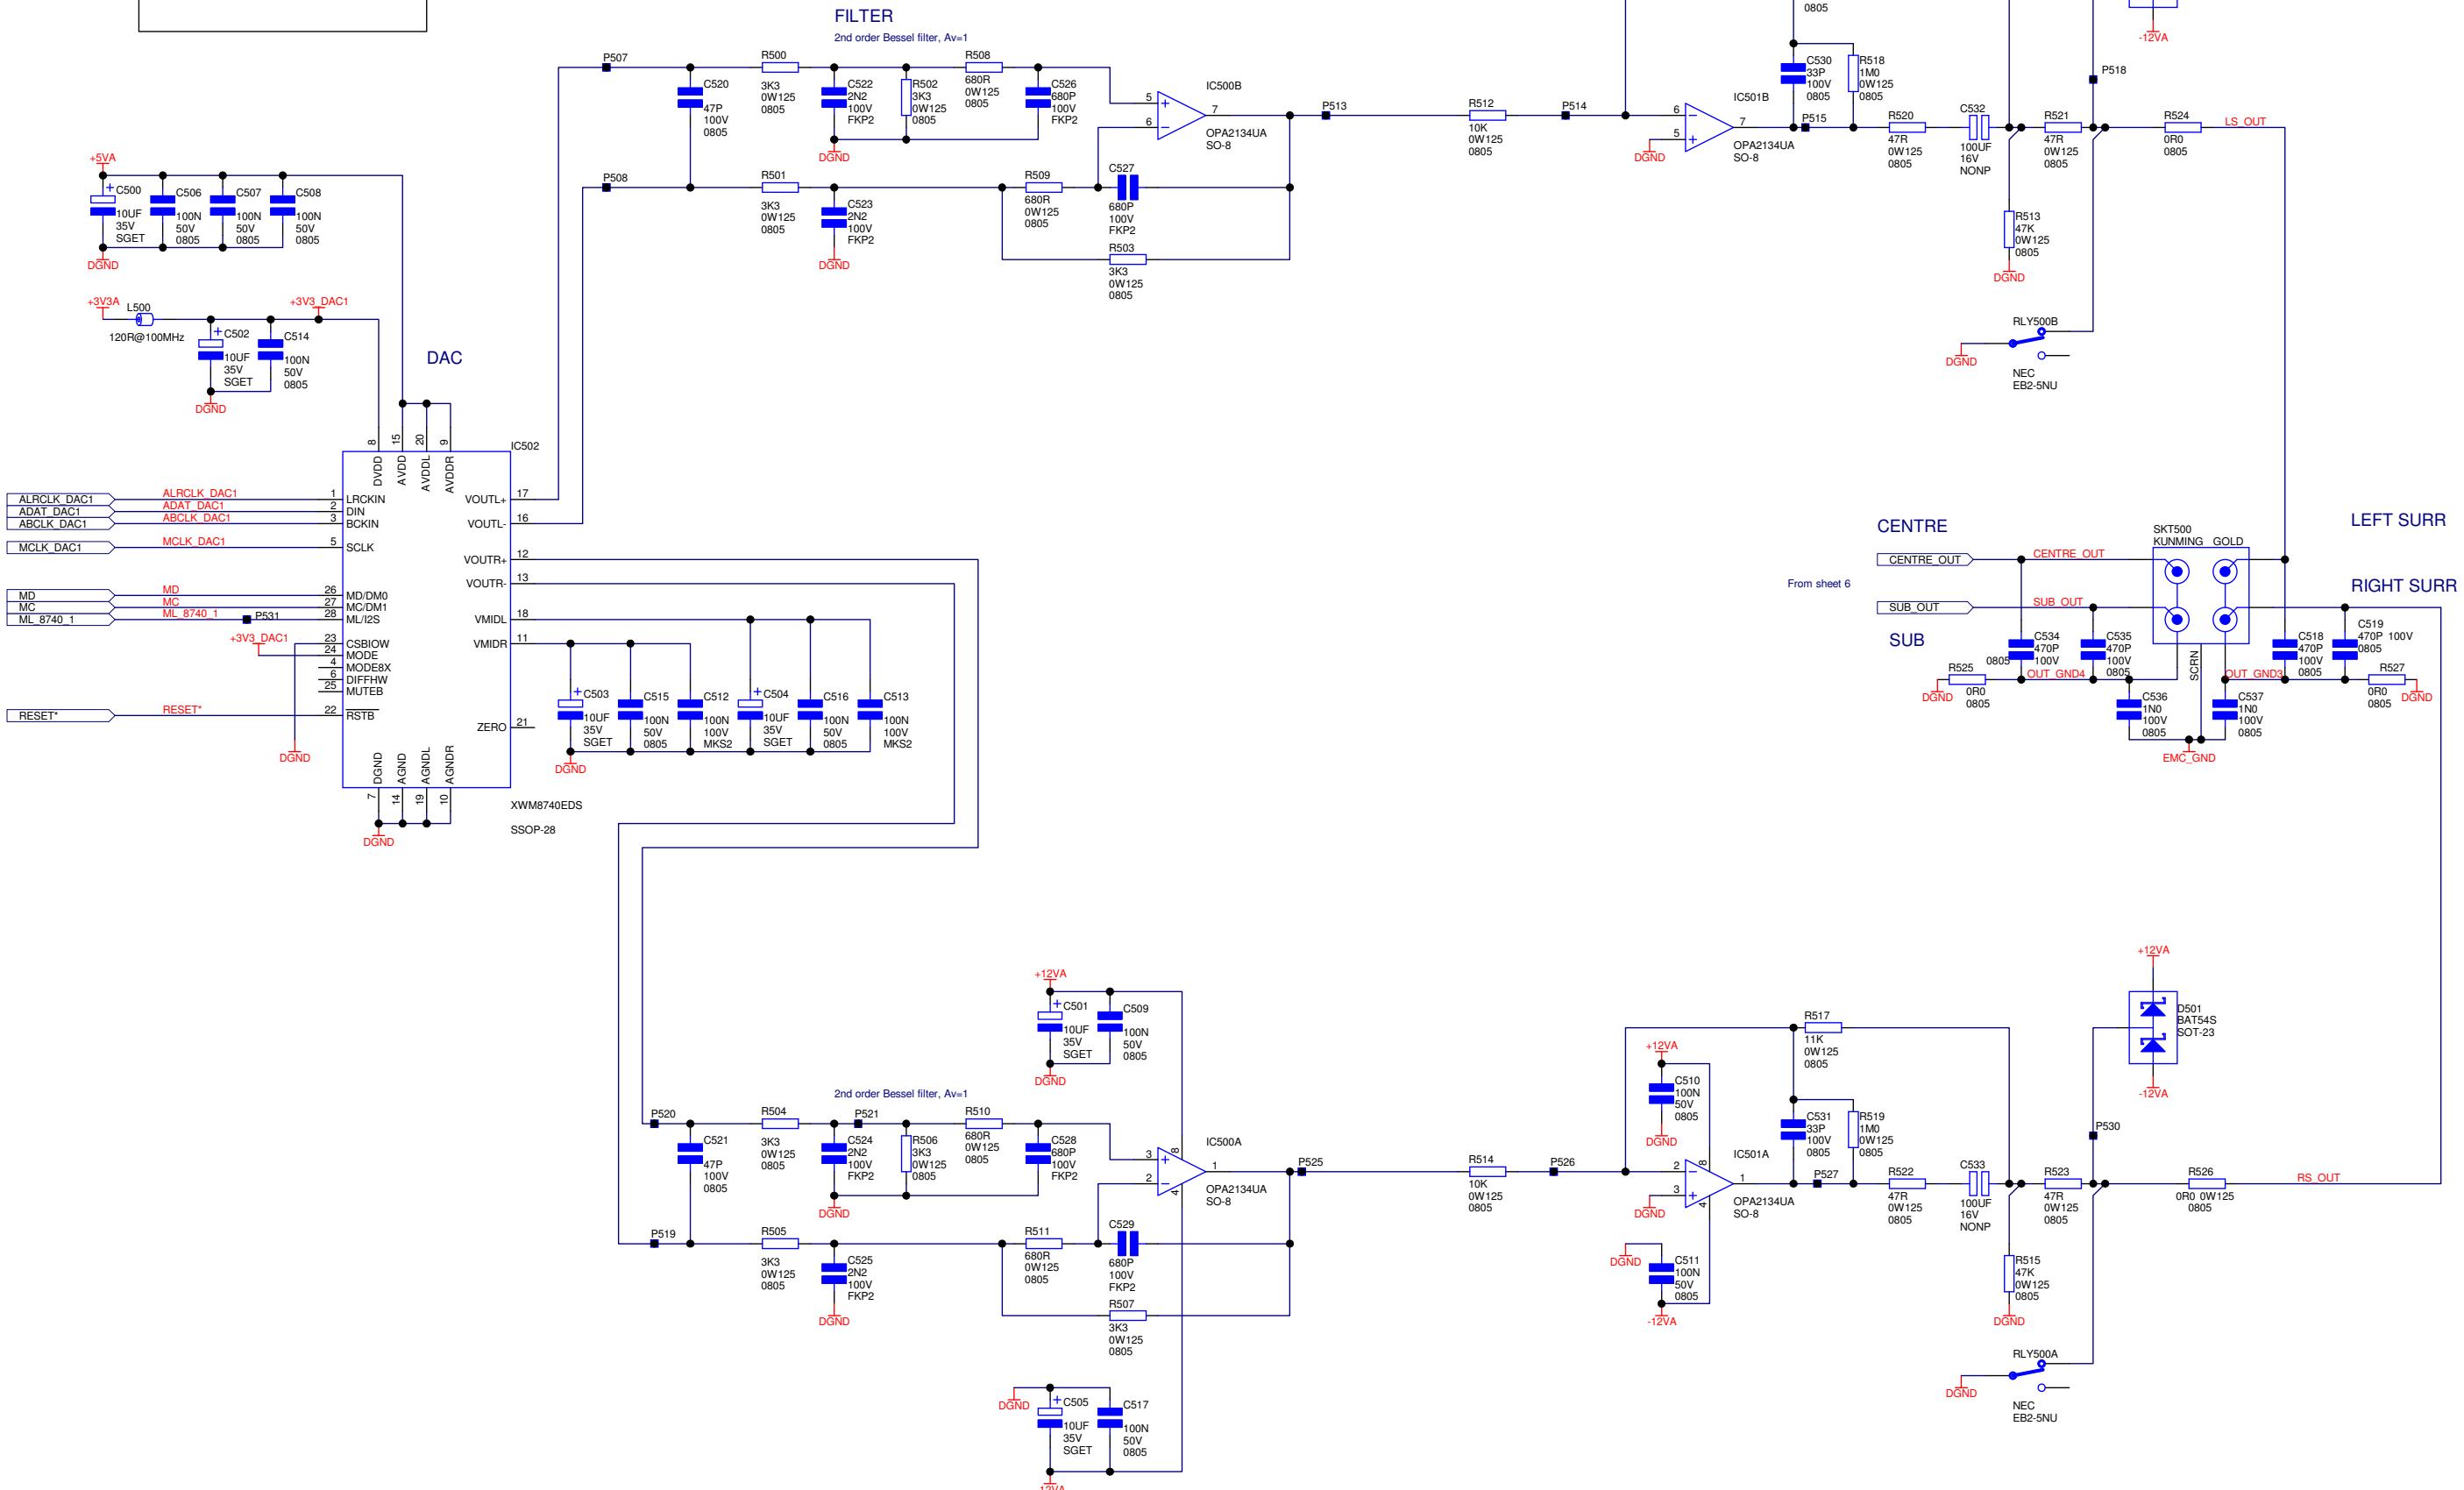


|  |  |                      |                              |    |             |        |  |  |                      |
|--|--|----------------------|------------------------------|----|-------------|--------|--|--|----------------------|
| ITEM500  | 1  | E828AP               | Pad Damping 7.5x6x3MM Rubber |    |             |        |  |  | Fit on top of RLY500 |
| DRAWING TITLE  | <b>DV79 MAIN DAC LS &amp; RS AUDIO</b>               |                      |                              |    |             |        |  |  |                      |
| ARCAM  | Filename: L967C5.Sch                                 |                      |                              |    |             |        |  |  |                      |
| A & R Cambridge Ltd.<br>Pembroke Avenue<br>Waterbeach<br>Cambridge CB5 9QR | Notes:<br><br>03_E020 PG 19-02-04 Production release |                      |                              |    |             |        |  |  | 1.0                  |
|  | ECO No. INITIALS DATE DESCRIPTION OF CHANGE          |                      |                              |    |             |        |  |  | ISSUE                |
| Contact Engineer: Peter Gaggs  | Contact Tel: (01223) 203270                          | Printed: 19-Feb-2004 | Sheet 5 of 11                | A2 | DRAWING NO. | L967C5 |  |  |                      |


Audio outputs are inverted so as to be compatible with DV88. This is compensated for in software by setting a register in the DAC to invert the signal.

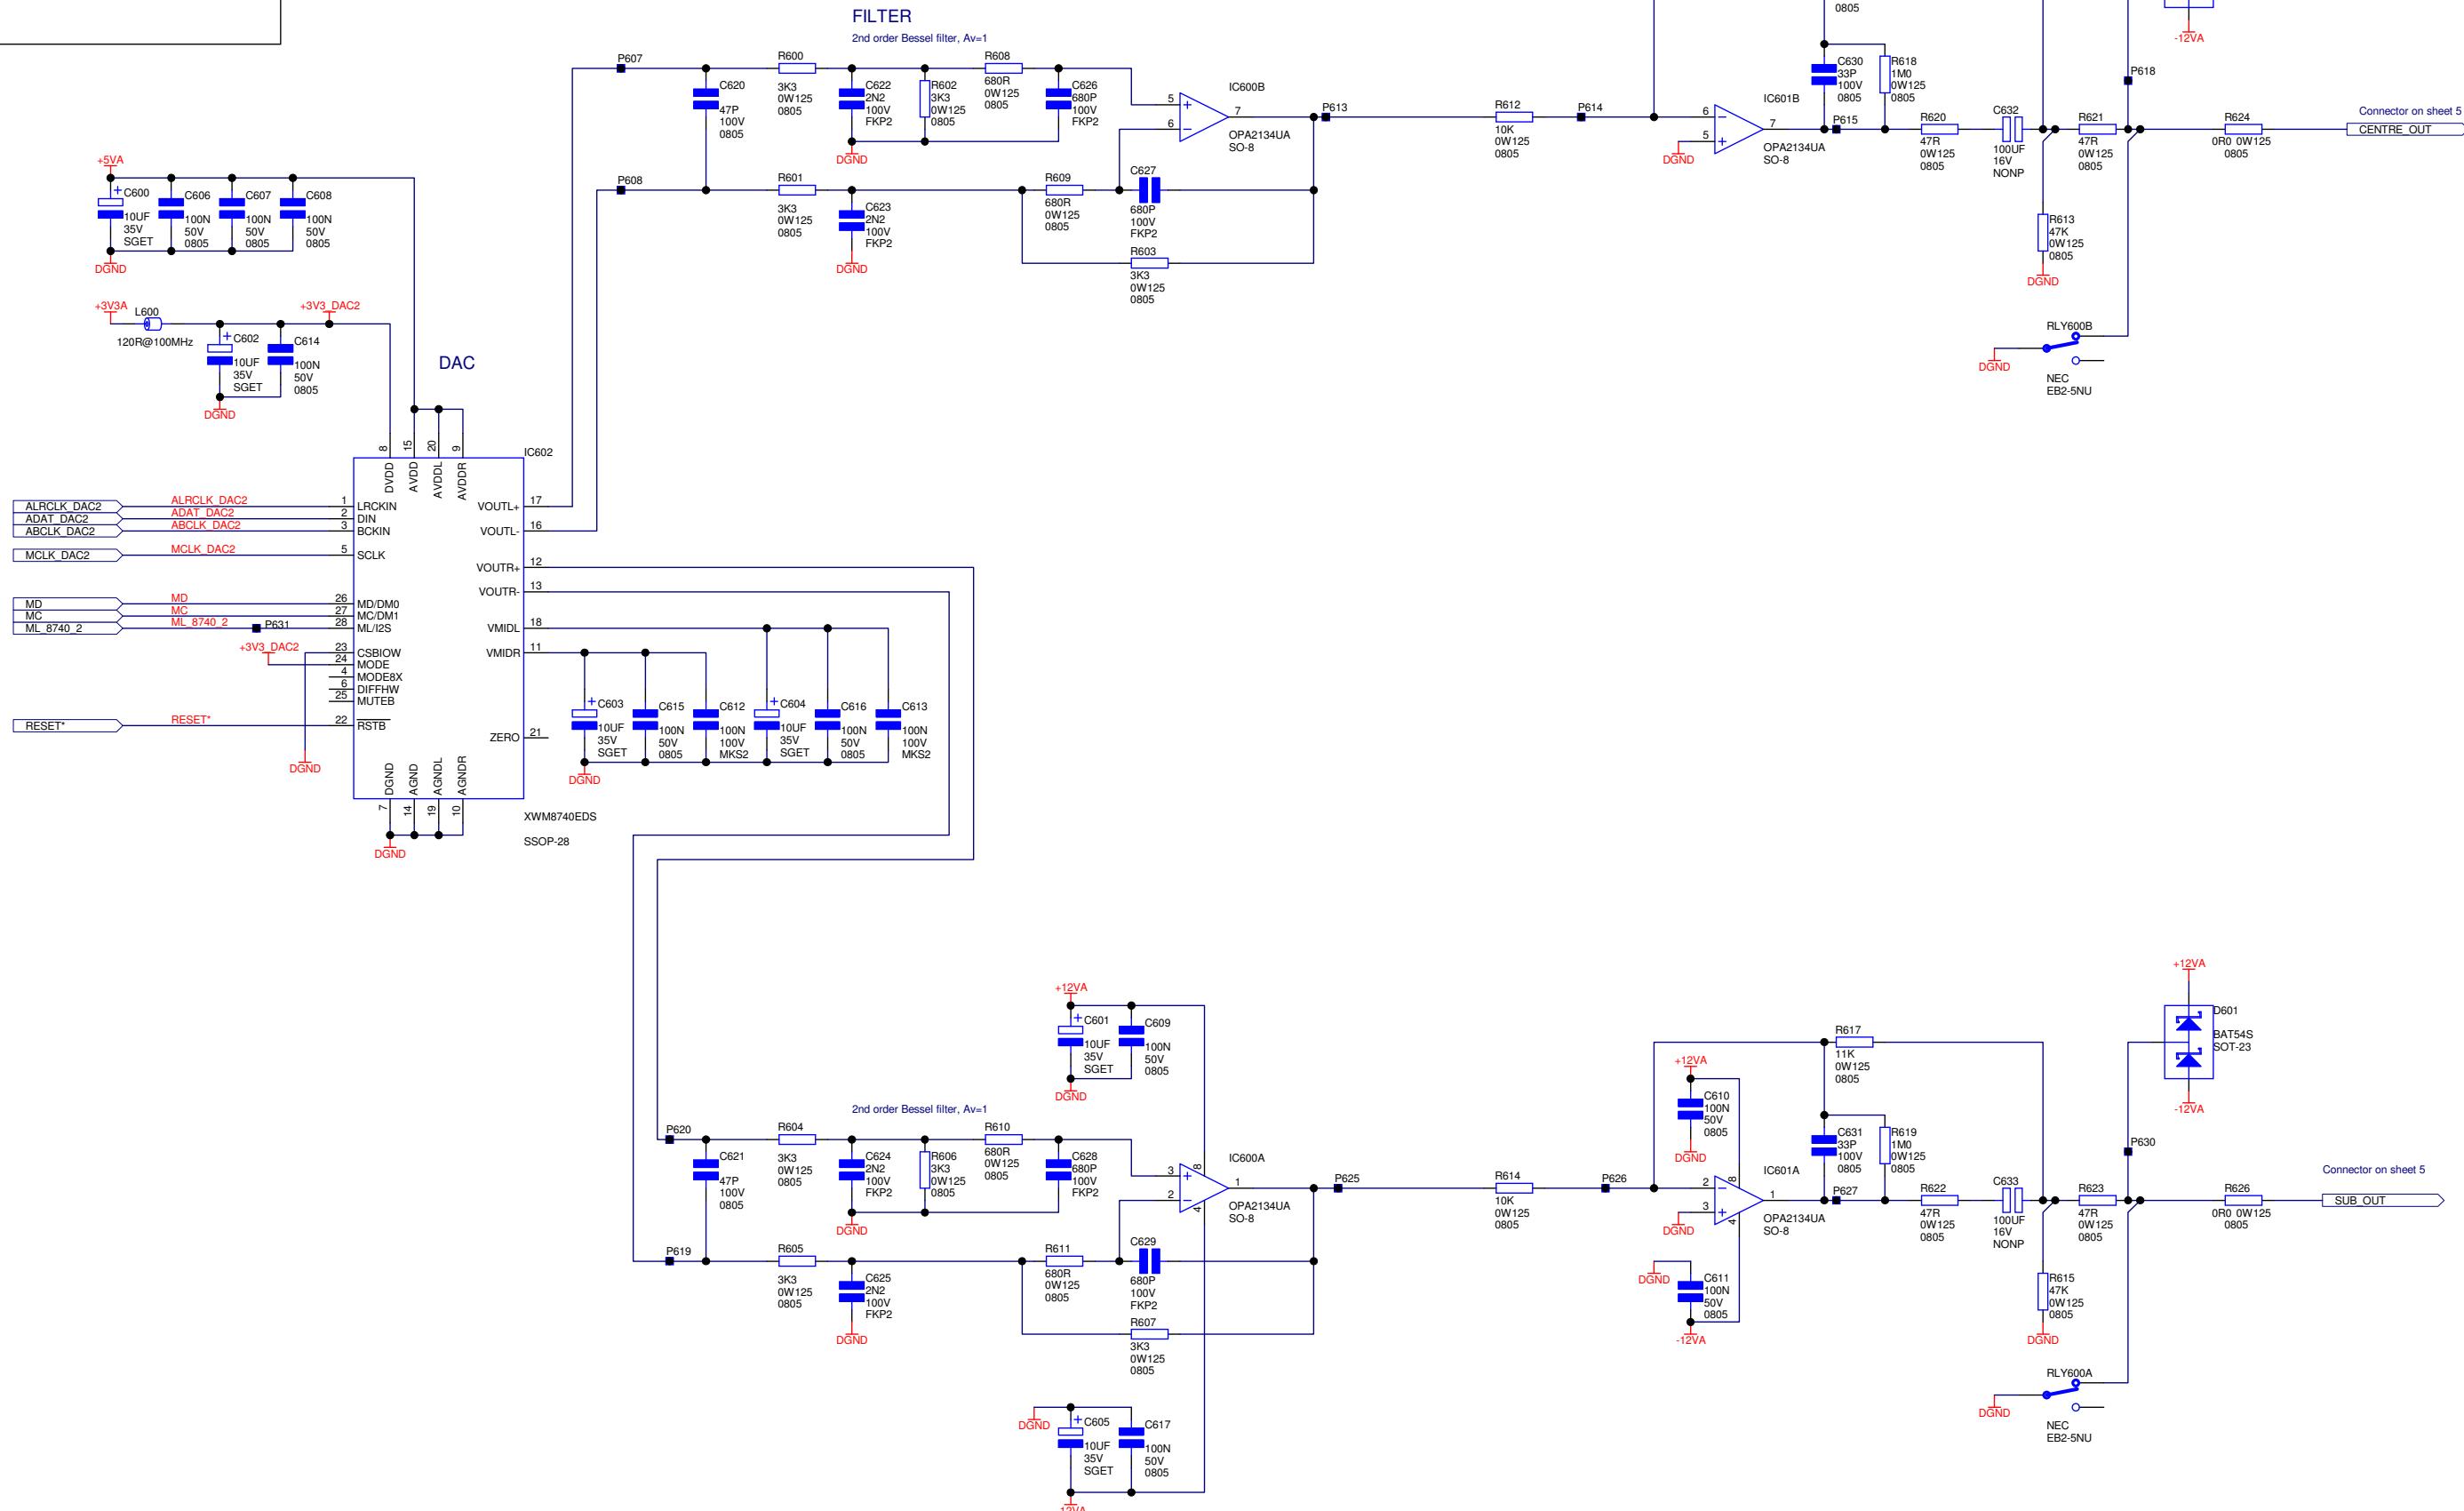


| ITEM600   1   E828AP   Pad Damping 7.5x6x3MM Rubber                        |  |                             |  | Fit on top of RLY600                   |  |               |                       |
|--|--|-----------------------------|--|--|--|---------------|-----------------------|
| DRAWING TITLE DV79 MAIN DAC CENTRE & SUB                                   |  |                             |  |  |  |               |                       |
| ARCAM  |  |                             |  | Notes:                                 |  |               |                       |
| A & R Cambridge Ltd.<br>Pembroke Avenue<br>Waterbeach<br>Cambridge CB5 9QR |  |                             |  | Filename: L967C6.Sch                   |  |               |                       |
| 03_E020  |  |                             |  | 03_E020 PG 19-02-04 Production release |  |               |                       |
| Contact Engineer: Peter Gaggs  |  | Contact Tel: (01223) 203270 |  | Printed: 19-Feb-2004                   |  | Sheet 6 of 11 | A2 DRAWING NO. L967C6 |

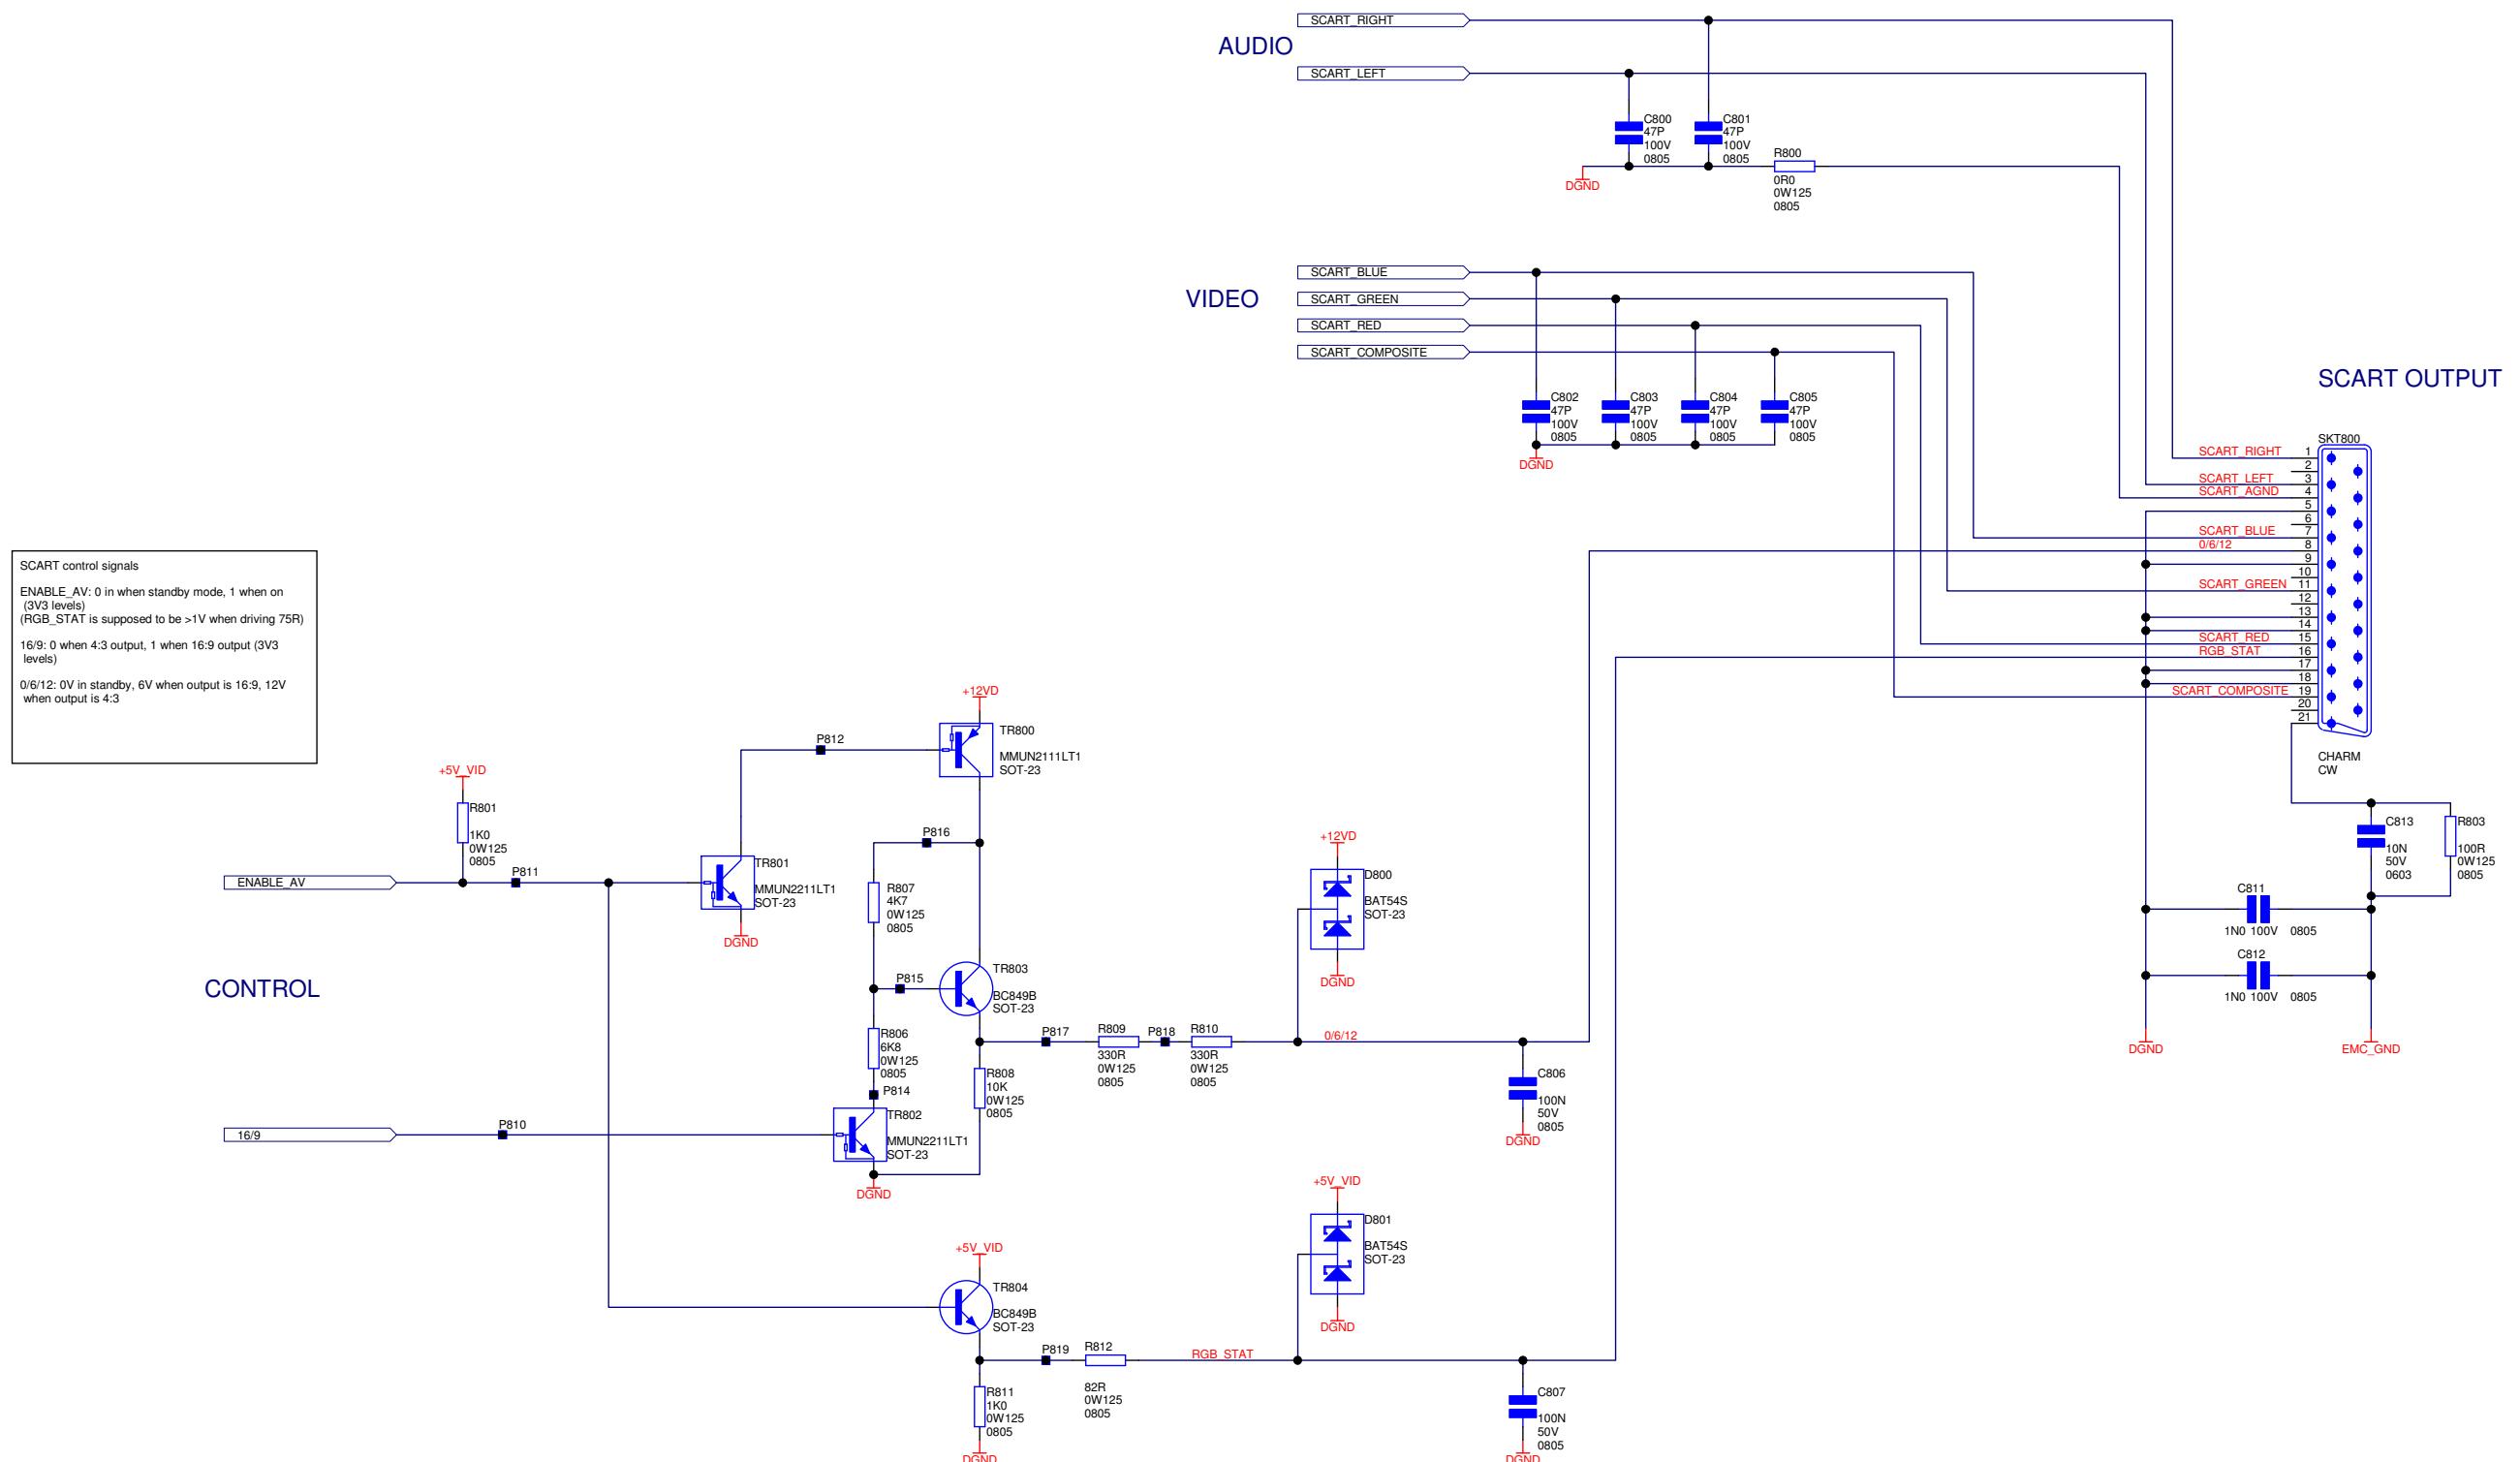



| DRAWING TITLE     |             | DV79 MAIN SCART OUTPUT |                       |          |             |               |                       |
|-------------------|-------------|------------------------|-----------------------|----------|-------------|---------------|-----------------------|
| ARCAM             |             | Filename: L967C8.Sch   |                       |          |             |               |                       |
| Notes:            |             |                        |                       |          |             |               |                       |
| 03_E020           | PG          | 19-02-04               | Production release    |          |             |               | 1.0                   |
| ECO No.           | INITIALS    | DATE                   | DESCRIPTION OF CHANGE |          |             |               | ISSUE                 |
| Contact Engineer: | Peter Gaggs | Contact Tel:           | (01223) 203270        | Printed: | 19-Feb-2004 | Sheet 8 of 11 | A2 DRAWING NO. L967C8 |

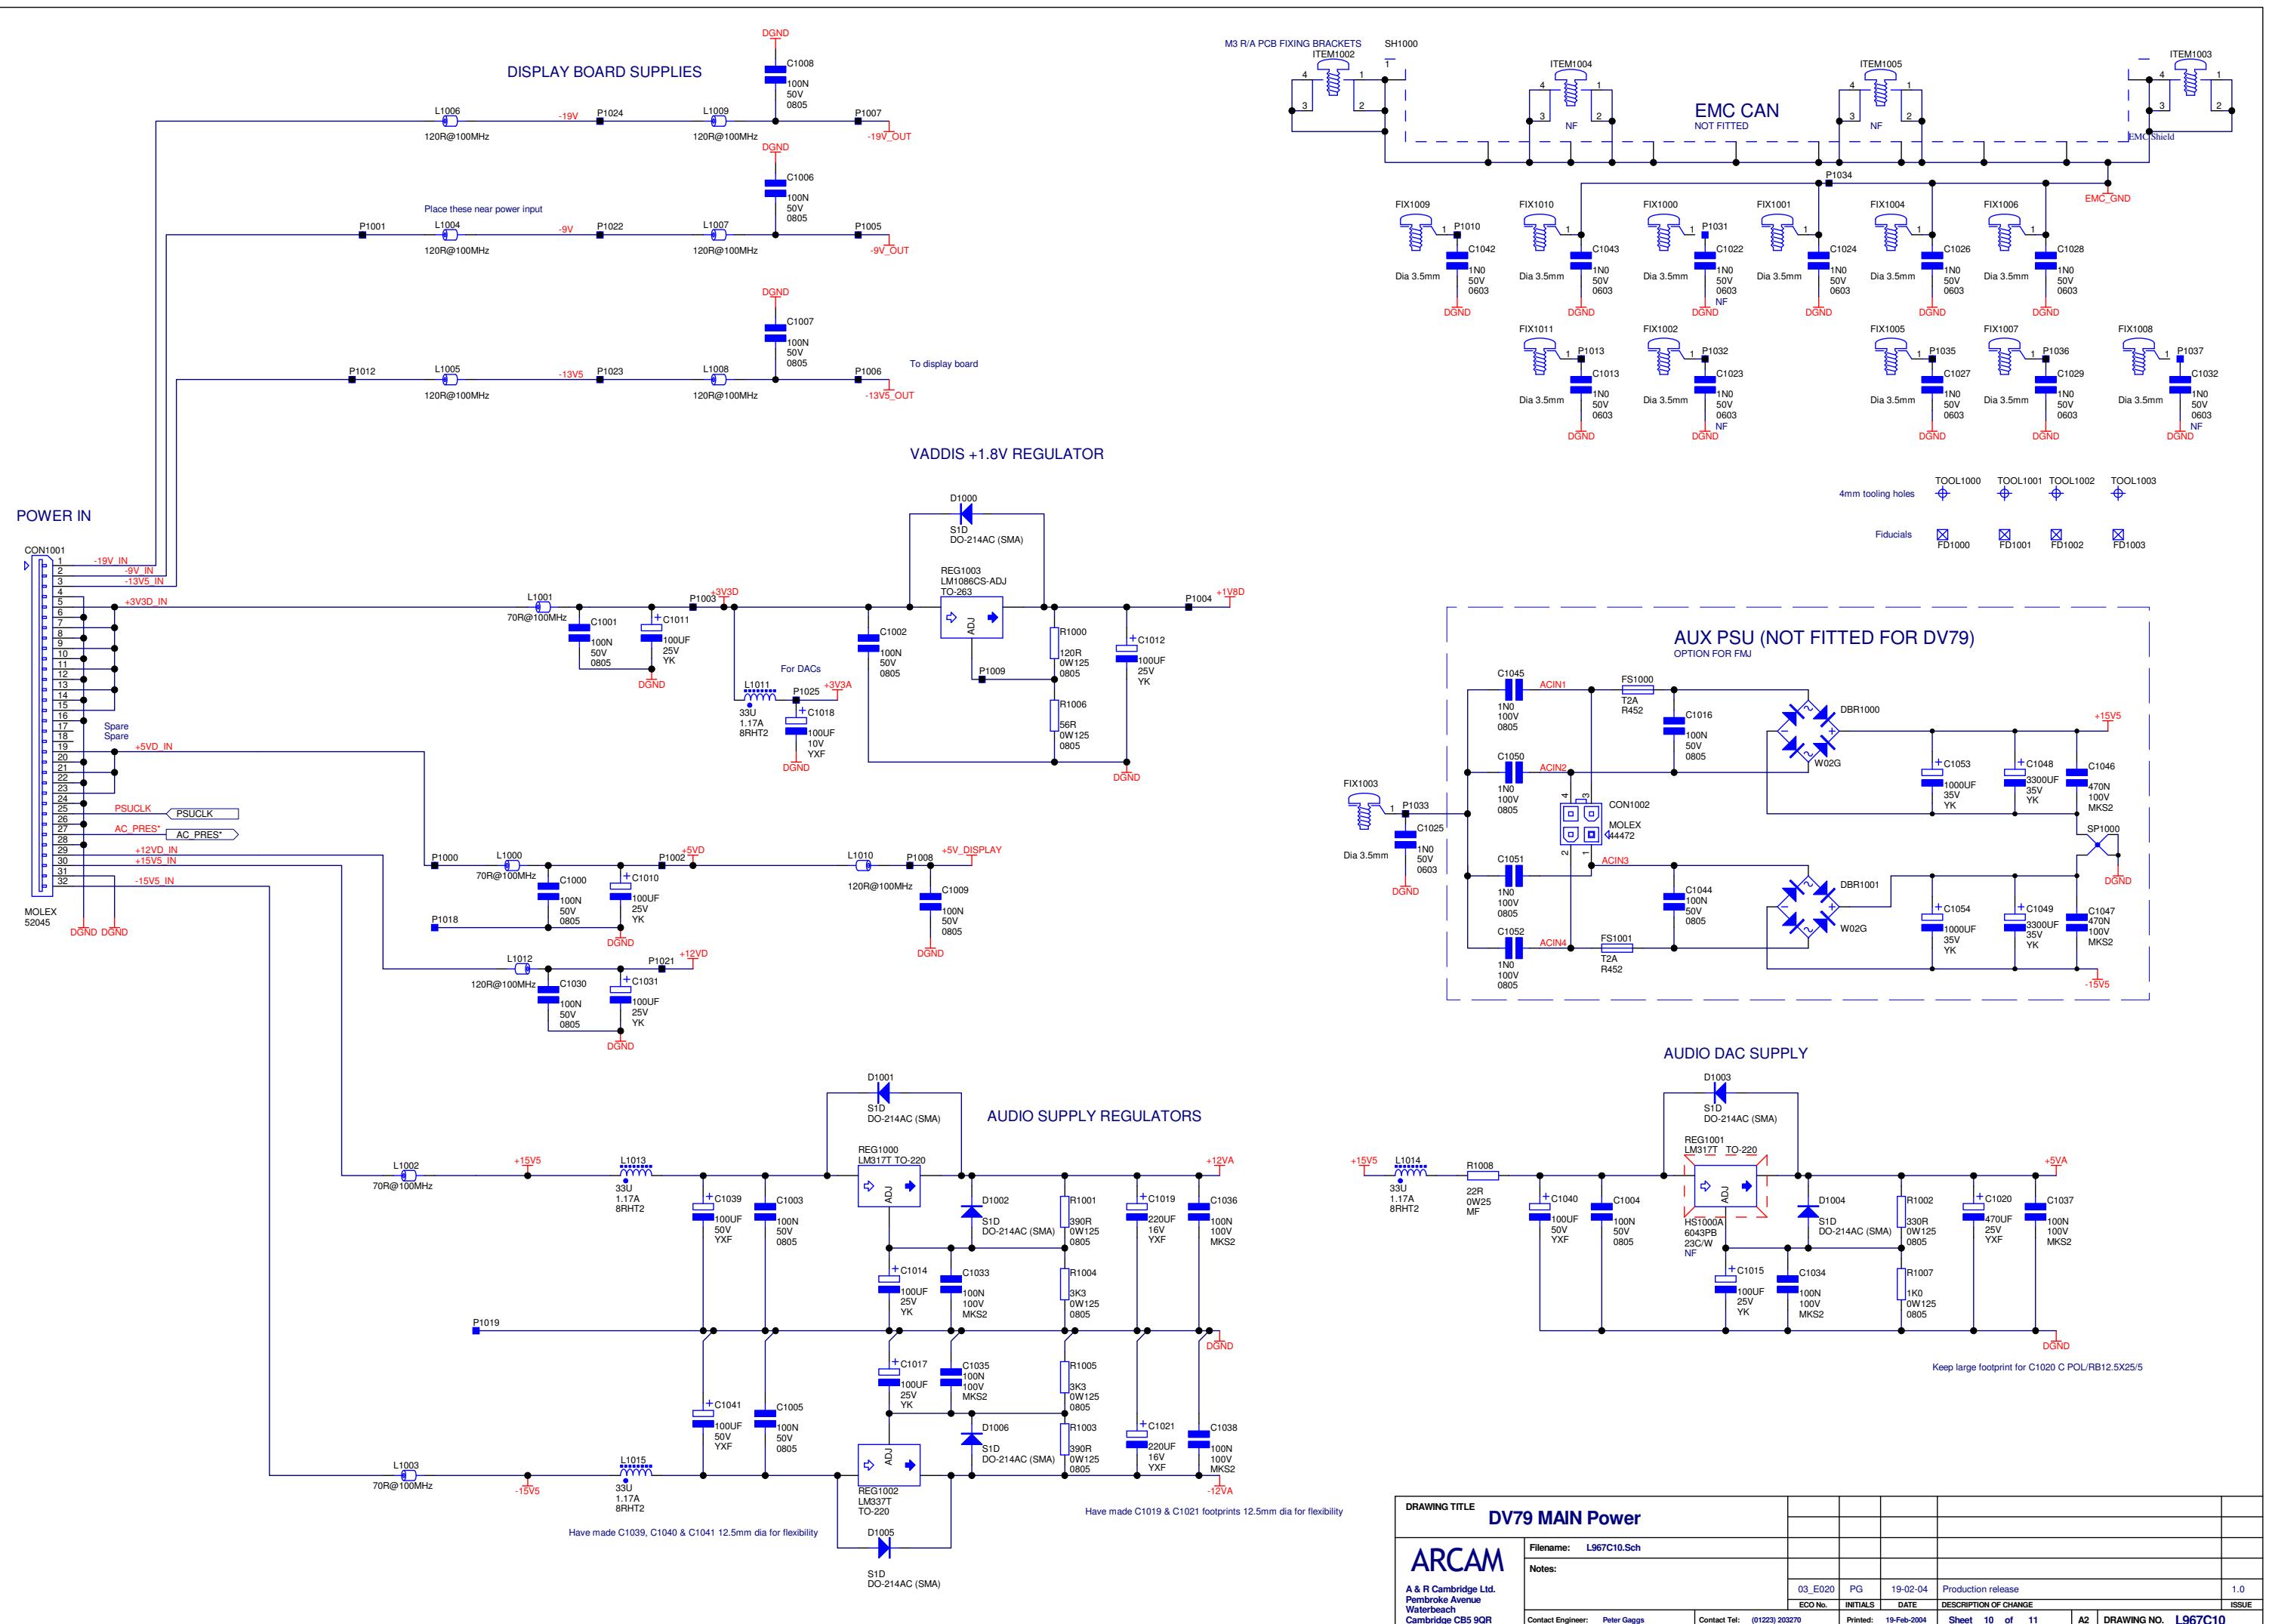

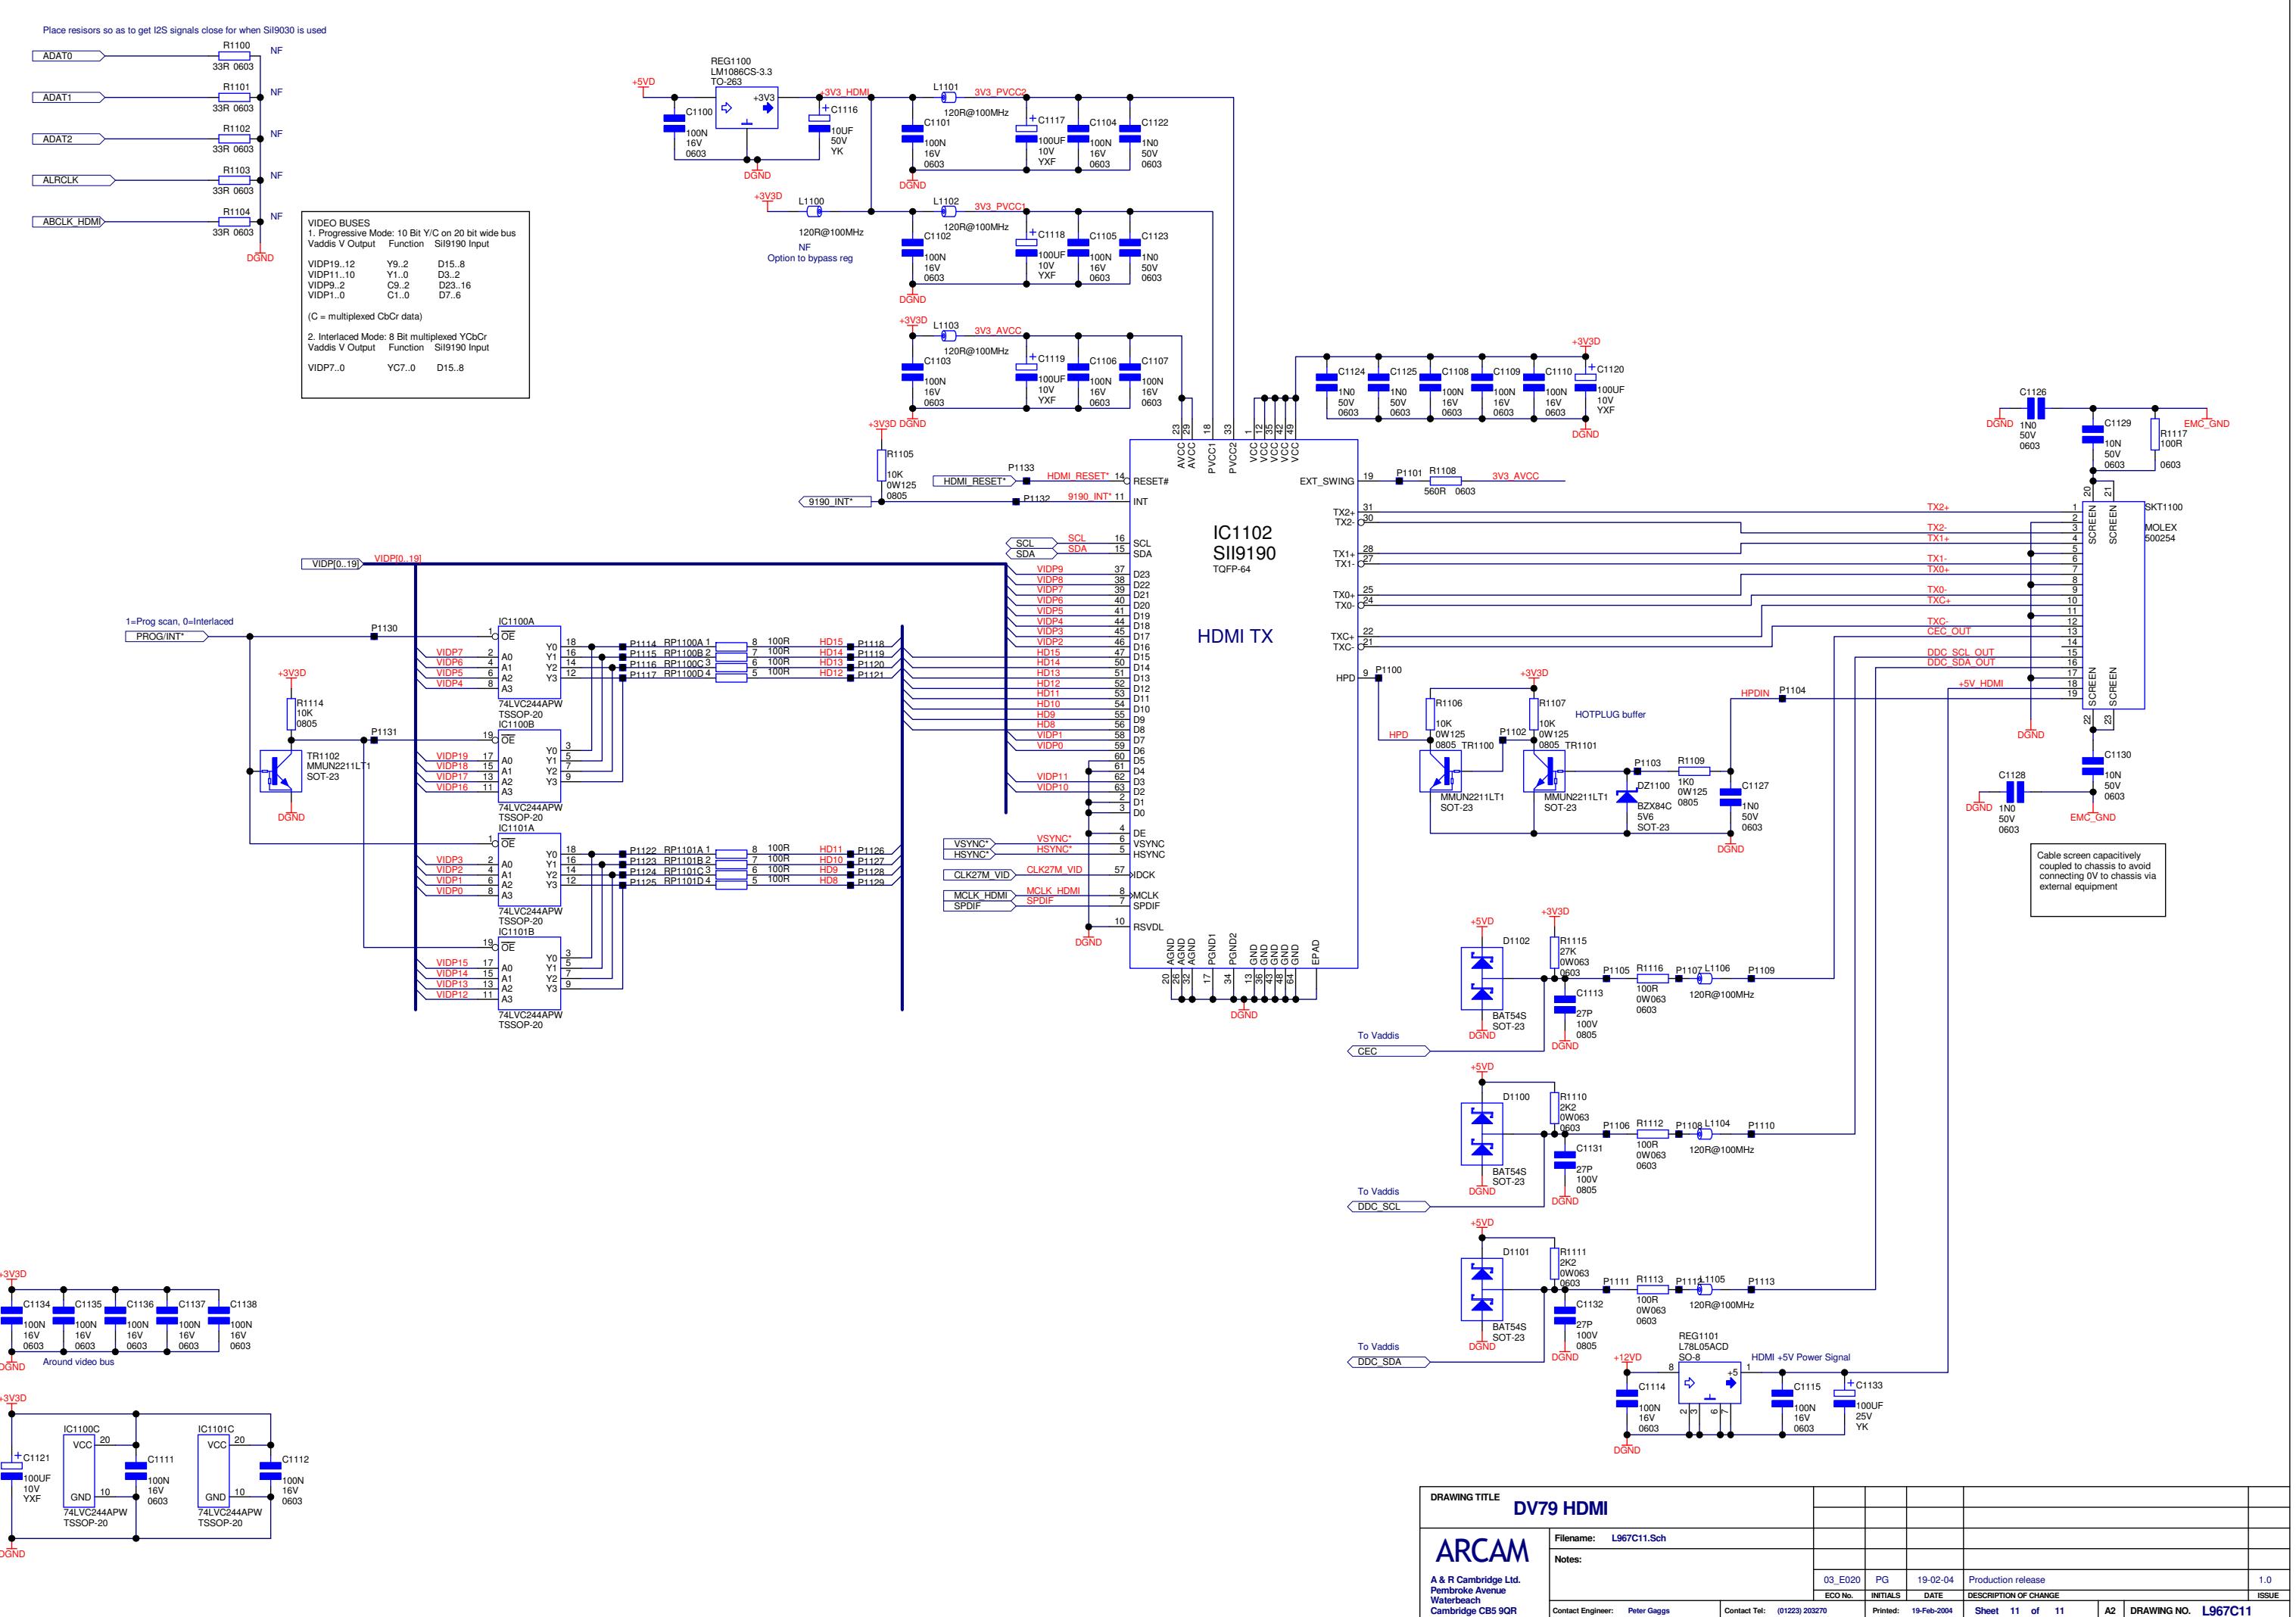

## ON SNAP-OFF PCB

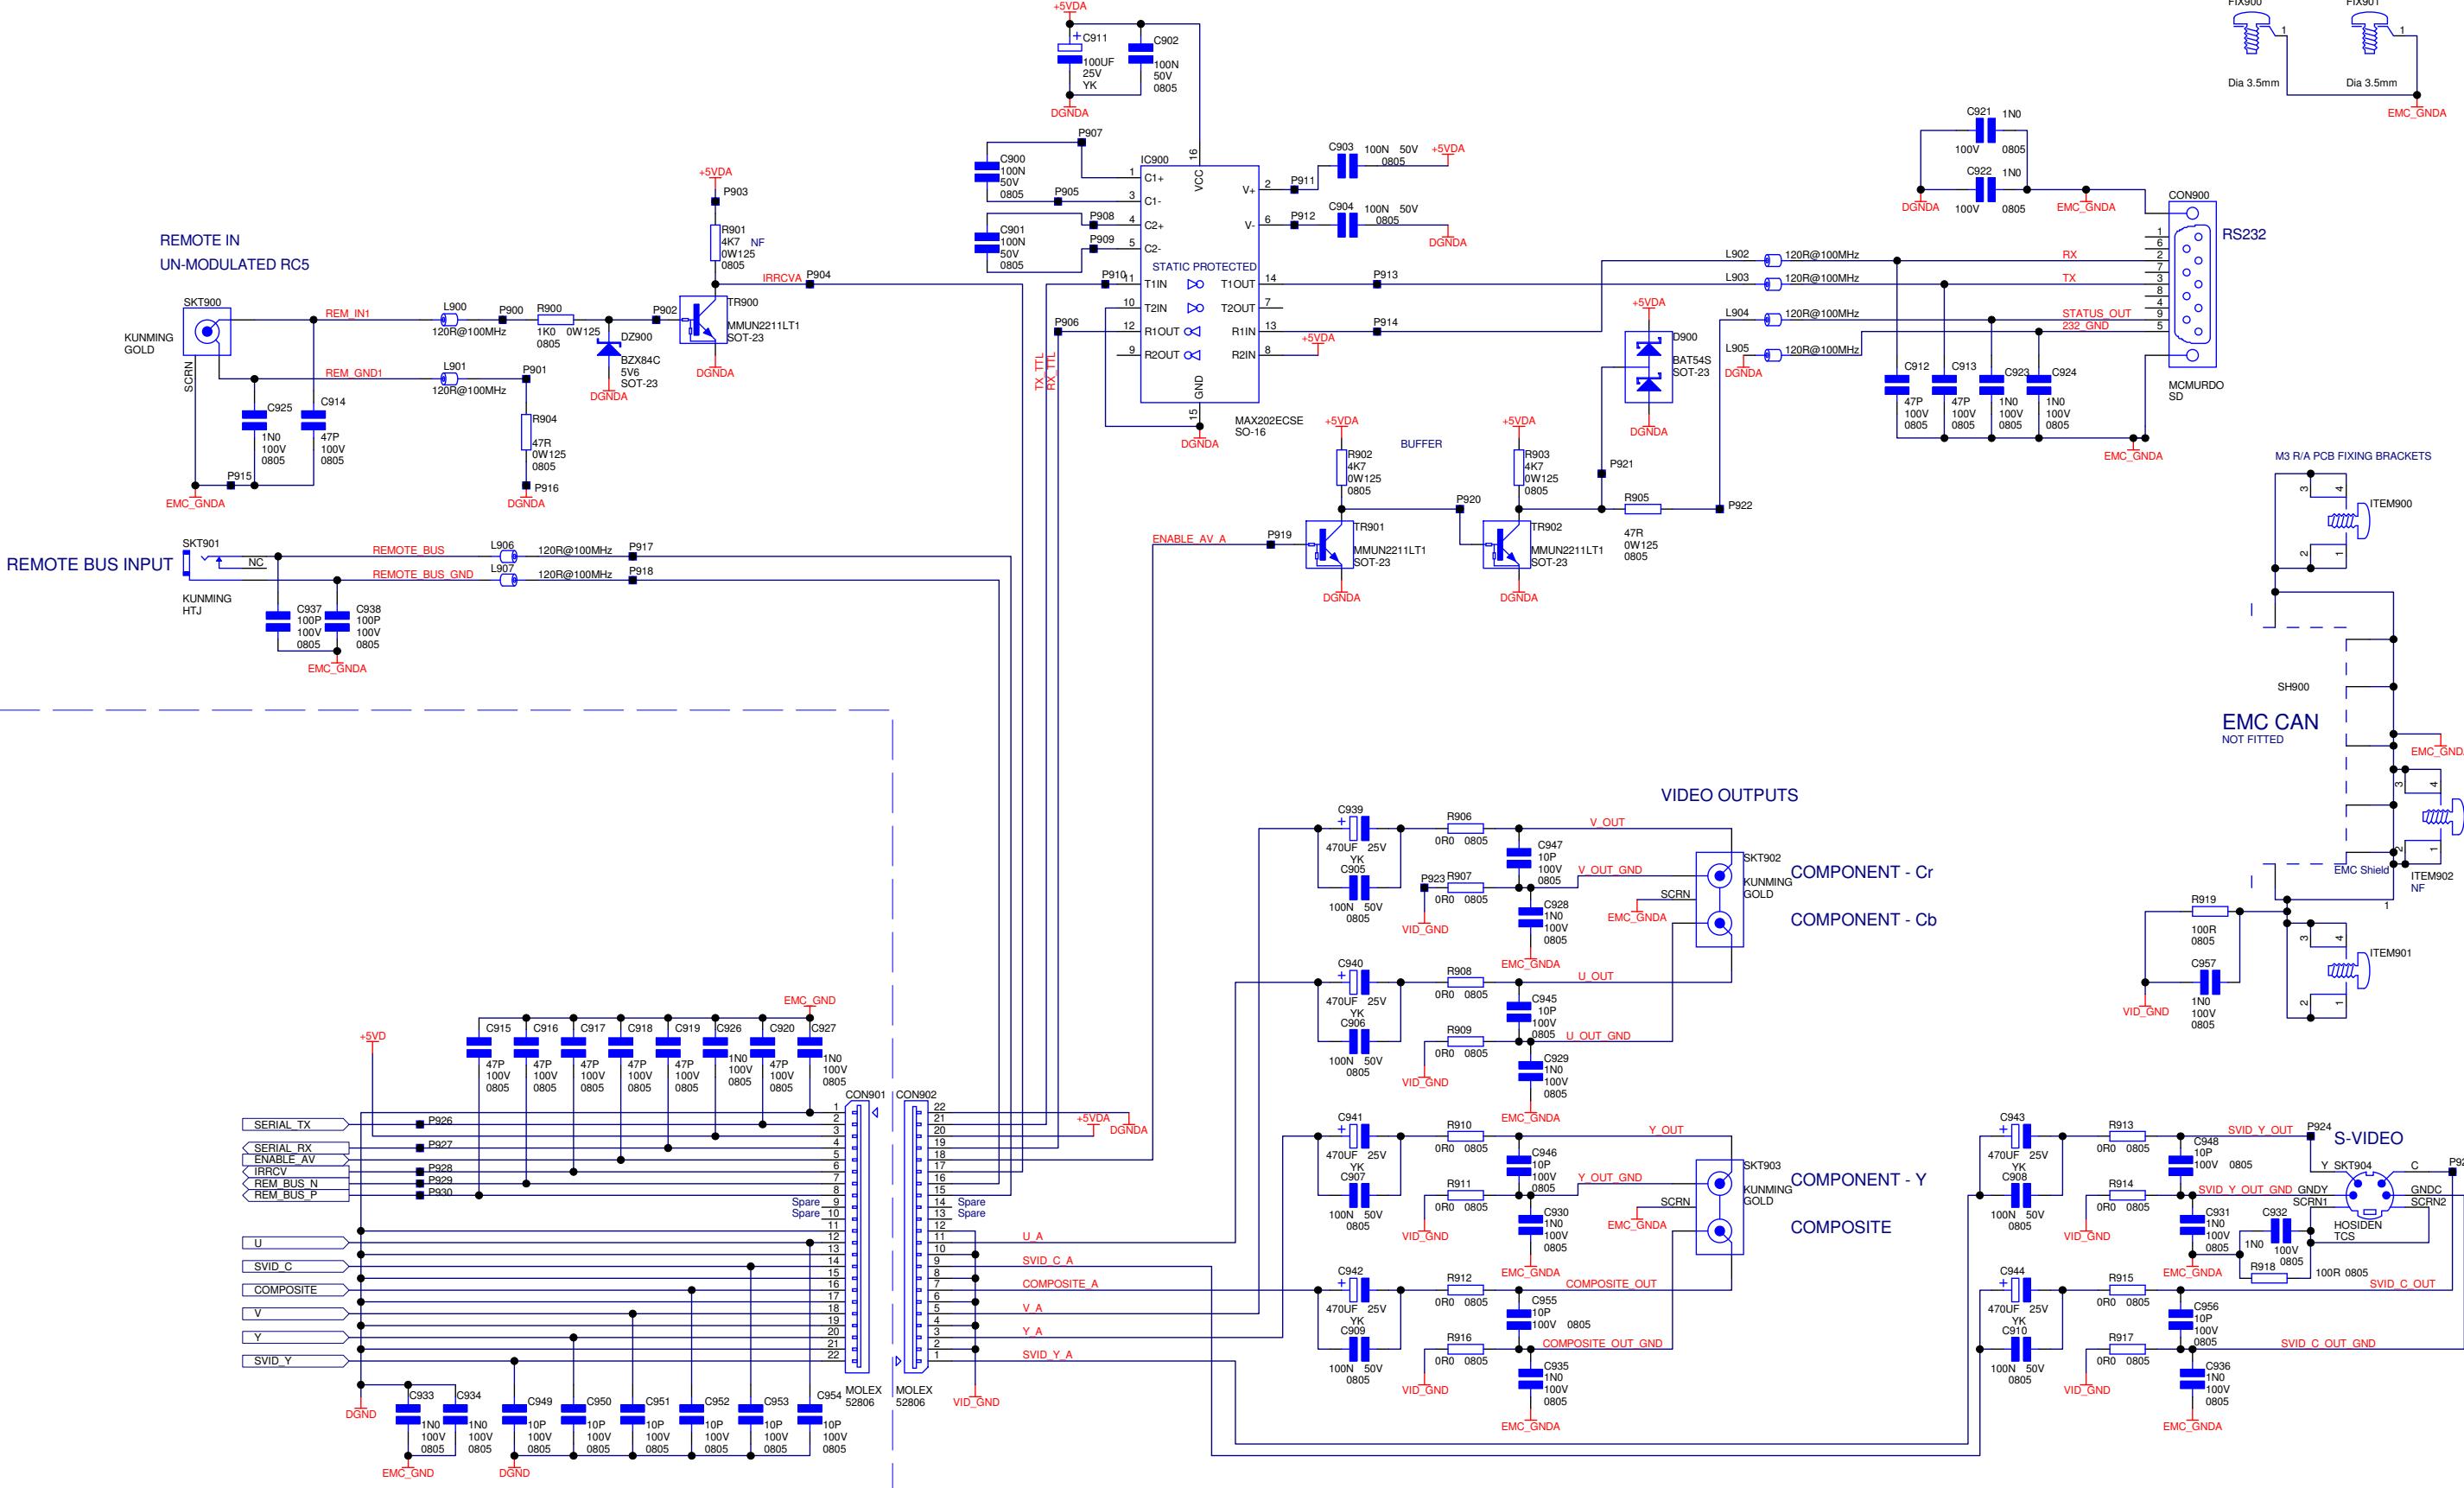

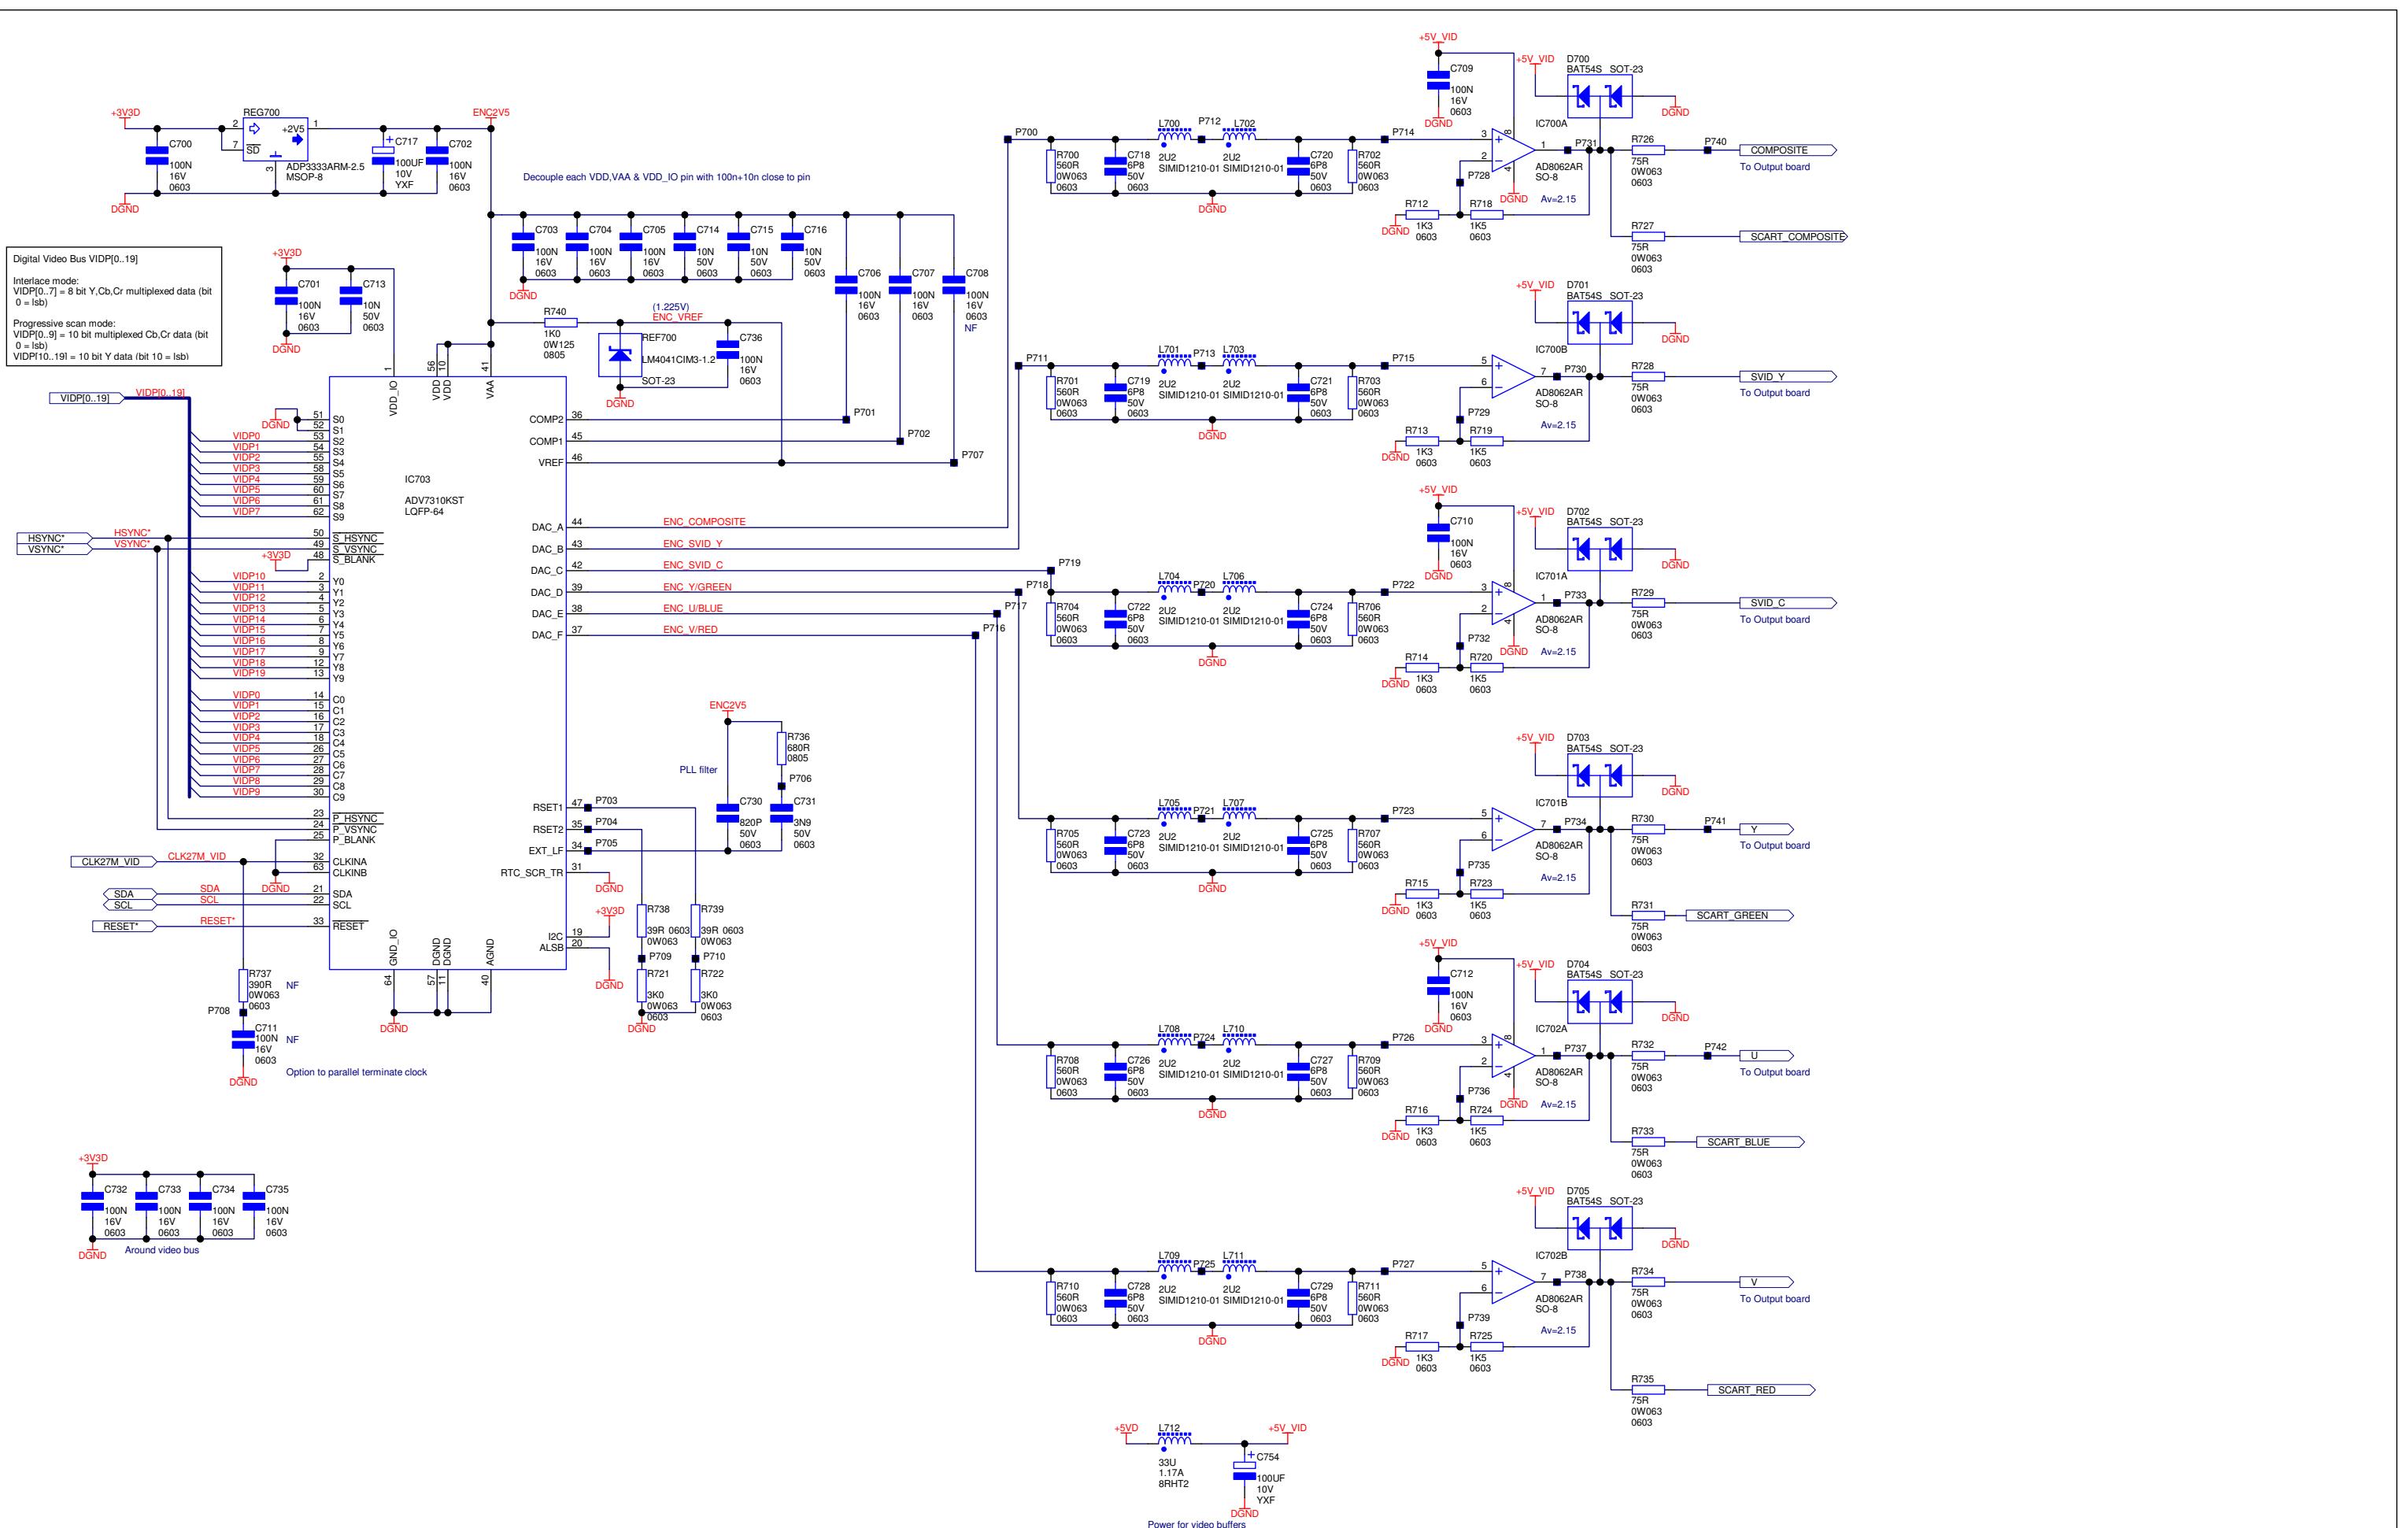

| DRAWING TITLE DV9 VIDEO ENCODER |             |                             |                       |               |                    |
|---------------------------------|-------------|-----------------------------|-----------------------|---------------|--------------------|
| ARCAM                           |             | Filename: L967C7.Sch        |                       |               |                    |
| Notes:                          |             |                             |                       |               |                    |
| 03_E020                         | PG          | 19-02-04                    | Production release    |               | 1.0                |
| ECO No.                         | INITIALS    | DATE                        | DESCRIPTION OF CHANGE |               |                    |
| Contact Engineer:               | Peter Gaggs | Contact Tel: (01223) 203270 | Printed: 19-Feb-2004  | Sheet 7 of 11 | DRAWING NO. L967C7 |



**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part   | Description   |
|------------|--------|---|
| C200       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C201       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C202       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C203       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C204       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C205       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C206       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C207       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C208       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C209       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C210       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C211       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C212       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C213       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C214       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C215       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C216       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C217       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C218       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C219       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C220       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C221       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C222       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C223       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C224       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C225       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C226       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C227       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C228       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C229       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C230       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C231       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C232       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C233       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C234       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C235       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C236       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C237       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C238       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C239       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C240       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C241       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C242       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C243       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C244       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C245       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C246       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C247       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C248       | 2N610  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 10UF 50V                |
| C249       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C250       | 2N610  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 10UF 50V                |
| C251       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C252       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C253       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C254       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C255       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C256       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C257       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C258       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C259       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C260       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C261       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part   | Description   |
|------------|--------|---|
| C262       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C263       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C264       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C300       | 2L027  | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C301       | 2L027  | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C302       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C303       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C304       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C305       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C306       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C307       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C308       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C309       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C310       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C311       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C312       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C313       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C314       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C315       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C316       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C317       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C318       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C319       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C320       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C321       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C322       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P                              |
| C323       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C324       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C325       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C326       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C327       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C328       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C329       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C330       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C331       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C332       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C333       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C334       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C335       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C336       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C337       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C338       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C339       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C340       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C341       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C342       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C343       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C400       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C401       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C402       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C403       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C404       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C405       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C406       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C407       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C408       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C409       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C410       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C411       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C412       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C413       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C414       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part   | Description  |
|------------|--------|--|
| C415       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C416       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C417       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C418       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C419       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C421       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C422       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C423       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C424       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C425       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C426       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C427       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C428       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C429       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C430       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C431       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C432       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C433       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C434       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C435       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C436       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V    |
| C437       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V    |
| C438       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C439       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C440       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C441       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C442       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C443       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C444       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C500       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C501       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C502       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C503       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C504       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C505       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C506       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C507       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C508       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C509       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C510       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C511       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C512       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N   |
| C513       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N   |
| C514       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C515       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C516       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C517       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C518       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P           |
| C519       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P           |
| C520       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C521       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C522       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C523       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C524       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C525       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C526       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C527       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C528       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C529       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C530       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C531       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C532       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V    |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part   | Description   |
|------------|--------|---|
| C533       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V                       |
| C534       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P                              |
| C535       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P                              |
| C536       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C537       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C600       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C601       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C602       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C603       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C604       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C605       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C606       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C607       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C608       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C609       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C610       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C611       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C612       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C613       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C614       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C615       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C616       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C617       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C620       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C621       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C622       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C623       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C624       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C625       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C626       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C627       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C628       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C629       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C630       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P                               |
| C631       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P                               |
| C632       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V                       |
| C633       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V                       |
| C700       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C701       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C702       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C703       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C704       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C705       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C706       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C707       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C708       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C709       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C710       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C711       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C712       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C713       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C714       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C715       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C716       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C717       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C718       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C719       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C720       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C721       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C722       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C723       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C724       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part   | Description   |
|------------|--------|---|
| C725       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C726       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C727       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C728       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C729       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C730       | 2JC182 | Capacitor SM 0603 X7R Ceramic 10% 50V 820P                              |
| C731       | 2JC239 | Capacitor SM 0603 X7R Ceramic 10% 50V 3N9                               |
| C732       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C733       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C734       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C735       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C736       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C754       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C800       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C801       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C802       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C803       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C804       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C805       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C806       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C807       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C811       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C812       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C813       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C900       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C901       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C902       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C903       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C904       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C905       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C906       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C907       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C908       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C909       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C910       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C911       | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V               |
| C912       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C913       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C914       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C915       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C916       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C917       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C918       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C919       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C920       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C921       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C922       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C923       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C924       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C925       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C926       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C927       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C928       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C929       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C930       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C931       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C932       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C933       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C934       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C935       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C936       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C937       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P                              |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part   | Description  |
|------------|--------|--|
| C938       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P                               |
| C939       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C940       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C941       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C942       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C943       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C944       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C945       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C946       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C947       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C948       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C949       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C950       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C951       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C952       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C953       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C954       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C955       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C956       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C957       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                                |
| C1000      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1001      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1002      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1003      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1004      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1005      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1006      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1007      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1008      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1009      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1010      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1011      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1012      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1013      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1014      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1015      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1016      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1017      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1018      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V  |
| C1019      | 2Z722A | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 220UF 16V  |
| C1020      | 2Z747B | Capacitor Low Impedance Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V |
| C1021      | 2Z722A | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 220UF 16V  |
| C1022      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1023      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1024      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1025      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1026      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1027      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1028      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1029      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1030      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1031      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1032      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1033      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1034      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1035      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1036      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1037      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1038      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1039      | 2Z710D | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 100UF 50V  |
| C1040      | 2Z710D | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 100UF 50V  |
| C1041      | 2Z710D | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 100UF 50V  |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part    | Description   |
|------------|---------|---|
| C1042      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1043      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1044      | 2J410   | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C1045      | 2L210   | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1046      | 2KA447  | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 470N                      |
| C1047      | 2KA447  | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 470N                      |
| C1048      | 2N833A  | Capacitor Radial Electrolytic Dia 16mm Pitch 7.5mm 3300UF 35V           |
| C1049      | 2N833A  | Capacitor Radial Electrolytic Dia 16mm Pitch 7.5mm 3300UF 35V           |
| C1050      | 2L210   | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1051      | 2L210   | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1052      | 2L210   | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1053      | 2N810C  | Capacitor Radial Electrolytic Dia 12.5mm Pitch 5mm 1000UF 35V           |
| C1054      | 2N810C  | Capacitor Radial Electrolytic Dia 12.5mm Pitch 5mm 1000UF 35V           |
| C1100      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1101      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1102      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1103      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1104      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1105      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1106      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1107      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1108      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1109      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1110      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1111      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1112      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1113      | 2L027   | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C1114      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1115      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1116      | 2N610   | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 10UF 50V                |
| C1117      | 2Z710B  | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1118      | 2Z710B  | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1119      | 2Z710B  | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1120      | 2Z710B  | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1121      | 2Z710B  | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1122      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1123      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1124      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1125      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1126      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1127      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1128      | 2JC210  | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1129      | 2JC310  | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C1130      | 2JC310  | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C1131      | 2L027   | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C1132      | 2L027   | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C1133      | 2N710   | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V               |
| C1134      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1135      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1136      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1137      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1138      | 2JD410  | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| CON200     | 8K6201  | Con Single ROW Hdr 0.1IN Vertical 2WAY                                  |
| CON201     | 8K6316  | Con Hdr Dual ROW 0.1IN Vertical 16WAY                                   |
| CON202     | 8K8516  | Con 1.00MM Vertical FFC 16WAY 52806 Series                              |
| CON203     | 8KB40   | Con Boxed Header 0.1IN Dual ROW 40WAY                                   |
| CON400     | 8K6201  | Con Single ROW Hdr 0.1IN Vertical 2WAY                                  |
| CON900     | 8K9009M | Con Dtype Horiz 9WAY Male With Boardlock                                |
| CON901     | 8K8022B | Con 1.00MM Vertical FFC 22WAY 52806 Series                              |
| CON902     | 8K8022B | Con 1.00MM Vertical FFC 22WAY 52806 Series                              |
| CON1001    | 8K8032  | Con 1.25MM Vertical FFC 32WAY   |
| CON1002    | 8K2304  | Con Minifit HCS 4WAY  |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part        | Description  |
|------------|-------------|--|
| D300       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D400       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D401       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D403       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D404       | 3AS16W      | Diode Surface Mount Small Signal BAS16W SOT-23 Package   |
| D500       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D501       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D600       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D601       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D700       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D701       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D702       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D703       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D704       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D705       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D800       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D801       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D900       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D1000      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1001      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1002      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1003      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1004      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1005      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1006      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1100      | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D1101      | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D1102      | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| DBR1000    | 3BW02       | Diode Bridge Rectifier W02G Plastic Package              |
| DBR1001    | 3BW02       | Diode Bridge Rectifier W02G Plastic Package              |
| DZ900      | 3CW35V6     | Zener Diode 0.25W Surface Mount BZX84C5V6 SOT-23 Package |
| DZ1100     | 3CW35V6     | Zener Diode 0.25W Surface Mount BZX84C5V6 SOT-23 Package |
| FS1000     | C3202       | Fuse Littelfuse T2A SM                                   |
| FS1001     | C3202       | Fuse Littelfuse T2A SM                                   |
| HS202      | F013        | Heatsink BGA 3319 20.9 Deg C/W                           |
| HS1000     | F007        | Heatsink TO-220 6043PB 23 Degc/W Clip ON                 |
| IC200      | 5K74125T    | IC Quad Buffer 74HCT125D SMT                             |
| IC201      | 5H809263    | IC Micro Reset LM809M3-2.63 SOT-23                       |
| IC202      | 5L36750     | IC Vaddis V DVD ZR36750 BGA-316 Package                  |
| IC203      | 5H6432-7    | IC Sdram 64Mbit K4S643232F-TC70                          |
| IC204      | 5G24LC08    | IC Eeprom 24LC08BT/SN 8K SO-8 Package                    |
| IC205      | L029AY      | Programmed Flash 28F160 For DV79 DVD Player              |
| IC300      | 5A8707E     | IC Clock Generator SM8707E VSOP-16 Package               |
| IC301      | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY      |
| IC302      | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY      |
| IC303      | 5KA100      | IC Single 2-INPUT Nand GATESN74AHC1G00DBVR DBV           |
| IC304      | 5K74LVC74   | IC Dual Flip-Flop 74LVC74AD SMT                          |
| IC305      | 5K151       | IC 8-INPUT Mux 74HC151D SMT                              |
| IC306      | 5K74LVC74   | IC Dual Flip-Flop 74LVC74AD SMT                          |
| IC307      | 5KLVC125    | IC Quad Buffer 5V Tol 74LVC125AD SMT                     |
| IC308      | 5KLVC125    | IC Quad Buffer 5V Tol 74LVC125AD SMT                     |
| IC309      | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY      |
| IC400      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |
| IC401      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |
| IC402      | 5S413DY     | IC Quad Analogue Switch DG413DY SO-16 Package            |
| IC403      | 5A8740      | IC Audio DAC XWM8740EDS SSOP-28 Package                  |
| IC500      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |
| IC501      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |
| IC502      | 5A8740      | IC Audio DAC XWM8740EDS SSOP-28 Package                  |
| IC600      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |
| IC601      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |
| IC602      | 5A8740      | IC Audio DAC XWM8740EDS SSOP-28 Package                  |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part        | Description   |
|------------|-------------|---|
| IC700      | 5B8062      | Opamp AD8062AR SO-8 Package                             |
| IC701      | 5B8062      | Opamp AD8062AR SO-8 Package                             |
| IC702      | 5B8062      | Opamp AD8062AR SO-8 Package                             |
| IC703      | 5V7310      | IC Video Encoder ADV7310KST LQFP-64 Package             |
| IC900      | 5N202E      | IC RS232 Charge Pump Driver MAX202ECSE Static Protected |
| IC1100     | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY     |
| IC1101     | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY     |
| IC1102     | 5V9190      | IC HDMI Transmitter Si9190                              |
| L200       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L201       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L301       | 7E101       | Common Mode Choke 1000R@100MHz                          |
| L400       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L500       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L600       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L700       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L701       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L702       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L703       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L704       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L705       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L706       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L707       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L708       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L709       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L710       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L711       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L712       | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L900       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L901       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L902       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L903       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L904       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L905       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L906       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L907       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1000      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1001      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1002      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1003      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1004      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1005      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1006      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1007      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1008      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1009      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1010      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1011      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1012      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1013      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1014      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1015      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1100      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1101      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1102      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1103      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1104      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1105      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1106      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| R200       | 1M033       | Resistor 0805 Surface Mount 0.125W 1% 33R               |
| R201       | 1M110       | Resistor 0805 Surface Mount 0.125W 1% 100R              |
| R202       | 1N022       | Resistor 0603 Surface Mount 0.063W 1% 22R               |
| R204       | 1M310       | Resistor 0805 Surface Mount 0.125W 1% 10K               |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part  | Description                                |
|------------|-------|--|
| R205       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R206       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R207       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R208       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R209       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R210       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R218       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R219       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R220       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R221       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R222       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R223       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R224       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R225       | 1N210 | Resistor 0603 Surface Mount 0.063W 1% 1K0  |
| R226       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R227       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R228       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R229       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R230       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R231       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R232       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R233       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R234       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R235       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R236       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R237       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R238       | 1M082 | Resistor 0805 Surface Mount 0.125W 1% 82R  |
| R239       | 1M082 | Resistor 0805 Surface Mount 0.125W 1% 82R  |
| R240       | 1M082 | Resistor 0805 Surface Mount 0.125W 1% 82R  |
| R241       | 1M022 | Resistor 0805 Surface Mount 0.125W 1% 22R  |
| R242       | 1M022 | Resistor 0805 Surface Mount 0.125W 1% 22R  |
| R243       | 1M022 | Resistor 0805 Surface Mount 0.125W 1% 22R  |
| R244       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R245       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R246       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R247       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R248       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R249       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R250       | 1M256 | Resistor 0805 Surface Mount 0.125W 1% 5K6  |
| R251       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R252       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R253       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R254       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R255       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R300       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R301       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R302       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R303       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R304       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R305       | 1N218 | Resistor 0603 Surface Mount 0.063W 1% 1K8  |
| R306       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R307       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R308       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R309       | 1N047 | Resistor 0603 Surface Mount 0.063W 1% 47R  |
| R310       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R311       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R312       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R313       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R314       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R315       | 1N175 | Resistor 0603 Surface Mount 0.063W 1% 750R |
| R316       | 1N175 | Resistor 0603 Surface Mount 0.063W 1% 750R |
| R317       | 1N175 | Resistor 0603 Surface Mount 0.063W 1% 750R |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part  | Description                                |
|------------|-------|--|
| R318       | 1M112 | Resistor 0805 Surface Mount 0.125W 1% 120R |
| R319       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R320       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R321       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R322       | 1N047 | Resistor 0603 Surface Mount 0.063W 1% 47R  |
| R323       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R400       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R401       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R402       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R403       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R404       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R405       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R406       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R407       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R408       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R409       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R410       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R411       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R412       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R413       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R414       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R415       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R416       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R417       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R418       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R419       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R420       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R421       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R422       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R423       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R424       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R425       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R426       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R427       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R428       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R429       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R430       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R431       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R434       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R435       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R436       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R500       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R501       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R502       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R503       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R504       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R505       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R506       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R507       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R508       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R509       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R510       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R511       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R512       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R513       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R514       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R515       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R516       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R517       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R518       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R519       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R520       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |

**DV79 DVD player Main board L967AY issue 1.2.3**

| Designator | Part  | Description                                |
|------------|-------|--|
| R521       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R522       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R523       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R524       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R525       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R526       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R527       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R600       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R601       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R602       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R603       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R604       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R605       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R606       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R607       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R608       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R609       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R610       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R611       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R612       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R613       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R614       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R615       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R616       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R617       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R618       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R619       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R620       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R621       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R622       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R623       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R624       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R626       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R700       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R701       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R702       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R703       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R704       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R705       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R706       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R707       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R708       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R709       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R710       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R711       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R712       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R713       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R714       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R715       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R716       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R717       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R718       | 1N215 | Resistor 0603 Surface Mount 0.063W 1% 1K5  |
| R719       | 1N215 | Resistor 0603 Surface Mount 0.063W 1% 1K5  |
| R720       | 1N215 | Resistor 0603 Surface Mount 0.063W 1% 1K5  |
| R721       | 1N230 | Resistor 0603 Surface Mount 0.063W 1% 3K0  |
| R722       | 1N230 | Resistor 0603 Surface Mount 0.063W 1% 3K0  |
| R723       | 1N215 | Resistor 0603 Surface Mount 0.063W 1% 1K5  |
| R724       | 1N215 | Resistor 0603 Surface Mount 0.063W 1% 1K5  |
| R725       | 1N215 | Resistor 0603 Surface Mount 0.063W 1% 1K5  |
| R726       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R727       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R728       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |

**DV79 DVD player Main board L967AY issue 1.2.3**


| Designator | Part  | Description                                |
|------------|-------|--|
| R729       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R730       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R731       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R732       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R733       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R734       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R735       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R736       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R737       | 1N139 | Resistor 0603 Surface Mount 0.063W 1% 390R |
| R738       | 1N039 | Resistor 0603 Surface Mount 0.063W 1% 39R  |
| R739       | 1N039 | Resistor 0603 Surface Mount 0.063W 1% 39R  |
| R740       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R800       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R801       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R803       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R806       | 1M268 | Resistor 0805 Surface Mount 0.125W 1% 6K8  |
| R807       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R808       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R809       | 1M133 | Resistor 0805 Surface Mount 0.125W 1% 330R |
| R810       | 1M133 | Resistor 0805 Surface Mount 0.125W 1% 330R |
| R811       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R812       | 1M082 | Resistor 0805 Surface Mount 0.125W 1% 82R  |
| R900       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R901       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R902       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R903       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R904       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R905       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R906       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R907       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R908       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R909       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R910       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R911       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R912       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R913       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R914       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R915       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R916       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R917       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R918       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R919       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R1000      | 1M112 | Resistor 0805 Surface Mount 0.125W 1% 120R |
| R1001      | 1M139 | Resistor 0805 Surface Mount 0.125W 1% 390R |
| R1002      | 1M133 | Resistor 0805 Surface Mount 0.125W 1% 330R |
| R1003      | 1M139 | Resistor 0805 Surface Mount 0.125W 1% 390R |
| R1004      | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R1005      | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R1006      | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R1007      | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R1008      | 1H022 | Resistor Metal Film 0.25W 1% 22R           |
| R1100      | 1N033 | Resistor 0603 Surface Mount 0.063W 1% 33R  |
| R1101      | 1N033 | Resistor 0603 Surface Mount 0.063W 1% 33R  |
| R1102      | 1N033 | Resistor 0603 Surface Mount 0.063W 1% 33R  |
| R1103      | 1N033 | Resistor 0603 Surface Mount 0.063W 1% 33R  |
| R1104      | 1N033 | Resistor 0603 Surface Mount 0.063W 1% 33R  |
| R1105      | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R1106      | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R1107      | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R1108      | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R1109      | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R1110      | 1N218 | Resistor 0603 Surface Mount 0.063W 1% 1K8  |

**DV79 DVD player Main board L967AY issue 1.2.3**


| Designator | Part      | Description   |
|------------|-----------|---|
| R1111      | 1N218     | Resistor 0603 Surface Mount 0.063W 1% 1K8                   |
| R1112      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| R1113      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| R1114      | 1M310     | Resistor 0805 Surface Mount 0.125W 1% 10K                   |
| R1115      | 1N327     | Resistor 0603 Surface Mount 0.063W 1% 27K                   |
| R1116      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| R1117      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| REF700     | 5D40411V2 | Voltage Reference 1.225V LM4041CIM3-1.2 SOT-23 Package      |
| REG300     | 5D10863S  | IC Voltage Regulator +3.3V LM1086CS-3.3 TO-263 Package      |
| REG700     | 5D33332V5 | IC Voltage Regulator +2.5V ADP3333ARM-2.5 MSOP-8 Package    |
| REG1000    | 5D317T    | IC Voltage Regulator ADJ LM317T TO-220 Package              |
| REG1001    | 5D317T    | IC Voltage Regulator ADJ LM317T TO-220 Package              |
| REG1002    | 5D337     | IC Voltage Regulator Neg ADJ LM337T TO-220 Package          |
| REG1003    | 5D1086AS  | IC Voltage Regulator Adjustable LM1086CS-ADJ TO-263 Package |
| REG1100    | 5D10863S  | IC Voltage Regulator +3.3V LM1086CS-3.3 TO-263 Package      |
| REG1101    | 5D78L05S  | IC Voltage Regulator +5V L78L05ACD SO-8 Package             |
| RLY400     | A216      | Relay 2P2T 5V SM  |
| RLY500     | A216      | Relay 2P2T 5V SM  |
| RLY600     | A216      | Relay 2P2T 5V SM  |
| RP200      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP201      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP202      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP203      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP204      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP205      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP206      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP207      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP208      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP209      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP210      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP211      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP212      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP213      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP214      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP215      | 1V247B    | Resistor Pack Surface Mount 4 Isolated Resistors 4K7        |
| RP216      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP217      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP218      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP219      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP220      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP300      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP301      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP302      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP1100     | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP1101     | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| SH900      | E972MC    | Shield EMC DiVA DV79 Snap-Off PCB                           |
| SH1000     | E971MC    | Shield EMC DiVA DV79 Main PCB                               |
| SKT300     | 8D221     | Phono Skt Single Gold                                       |
| SKT400     | 8D225     | Phono Skt 4-WAY Gold  |
| SKT500     | 8D225     | Phono Skt 4-WAY Gold  |
| SKT800     | 8D300     | Scart Socket PCB Horizontal                                 |
| SKT900     | 8D221     | Phono Skt Single Gold                                       |
| SKT901     | 8D228     | Con Jack 3.5mm Mono   |
| SKT902     | 8D230     | Phono Skt 2-WAY Horiz Gold                                  |
| SKT903     | 8D230     | Phono Skt 2-WAY Horiz Gold                                  |
| SKT904     | 8D2272    | Con Svhs Mini DIN Unscreened                                |
| SKT1100    | 8D500     | HDMI PCB Header R/A SM                                      |
| TR200      | 4D10KN    | Digital Transistor MMUN2211LT1 SOT23 Package                |
| TR400      | 4A849B    | Transistor BC849B SOT23 Package                             |
| TR401      | 4AFMMT497 | Transistor FMMT497 SOT23 Package                            |
| TR800      | 4D10KP    | Digital Transistor MMUN2111LT1 SOT23 Package                |
| TR801      | 4D10KN    | Digital Transistor MMUN2211LT1 SOT23 Package                |


**DV79 DVD player Main board L967AY issue 1.2.3**


| Designator | Part    | Description                                  |
|------------|---------|--|
| TR802      | 4D10KN  | Digital Transistor MMUN2211LT1 SOT23 Package |
| TR803      | 4A849B  | Transistor BC849B SOT23 Package              |
| TR804      | 4A849B  | Transistor BC849B SOT23 Package              |
| TR900      | 4D10KN  | Digital Transistor MMUN2211LT1 SOT23 Package |
| TR901      | 4D10KN  | Digital Transistor MMUN2211LT1 SOT23 Package |
| TR902      | 4D10KN  | Digital Transistor MMUN2211LT1 SOT23 Package |
| TR1100     | 4D10KN  | Digital Transistor MMUN2211LT1 SOT23 Package |
| TR1101     | 4D10KN  | Digital Transistor MMUN2211LT1 SOT23 Package |
| TR1102     | 4D10KN  | Digital Transistor MMUN2211LT1 SOT23 Package |
| TX300      | 5T1001  | SPDIF Optical TX Toslink JFJ1001             |
| TX301      | 7A29398 | Transformer Digital Audio TX 37211           |
| X300       | 7X046   | Crystal 27MHz HC49                           |

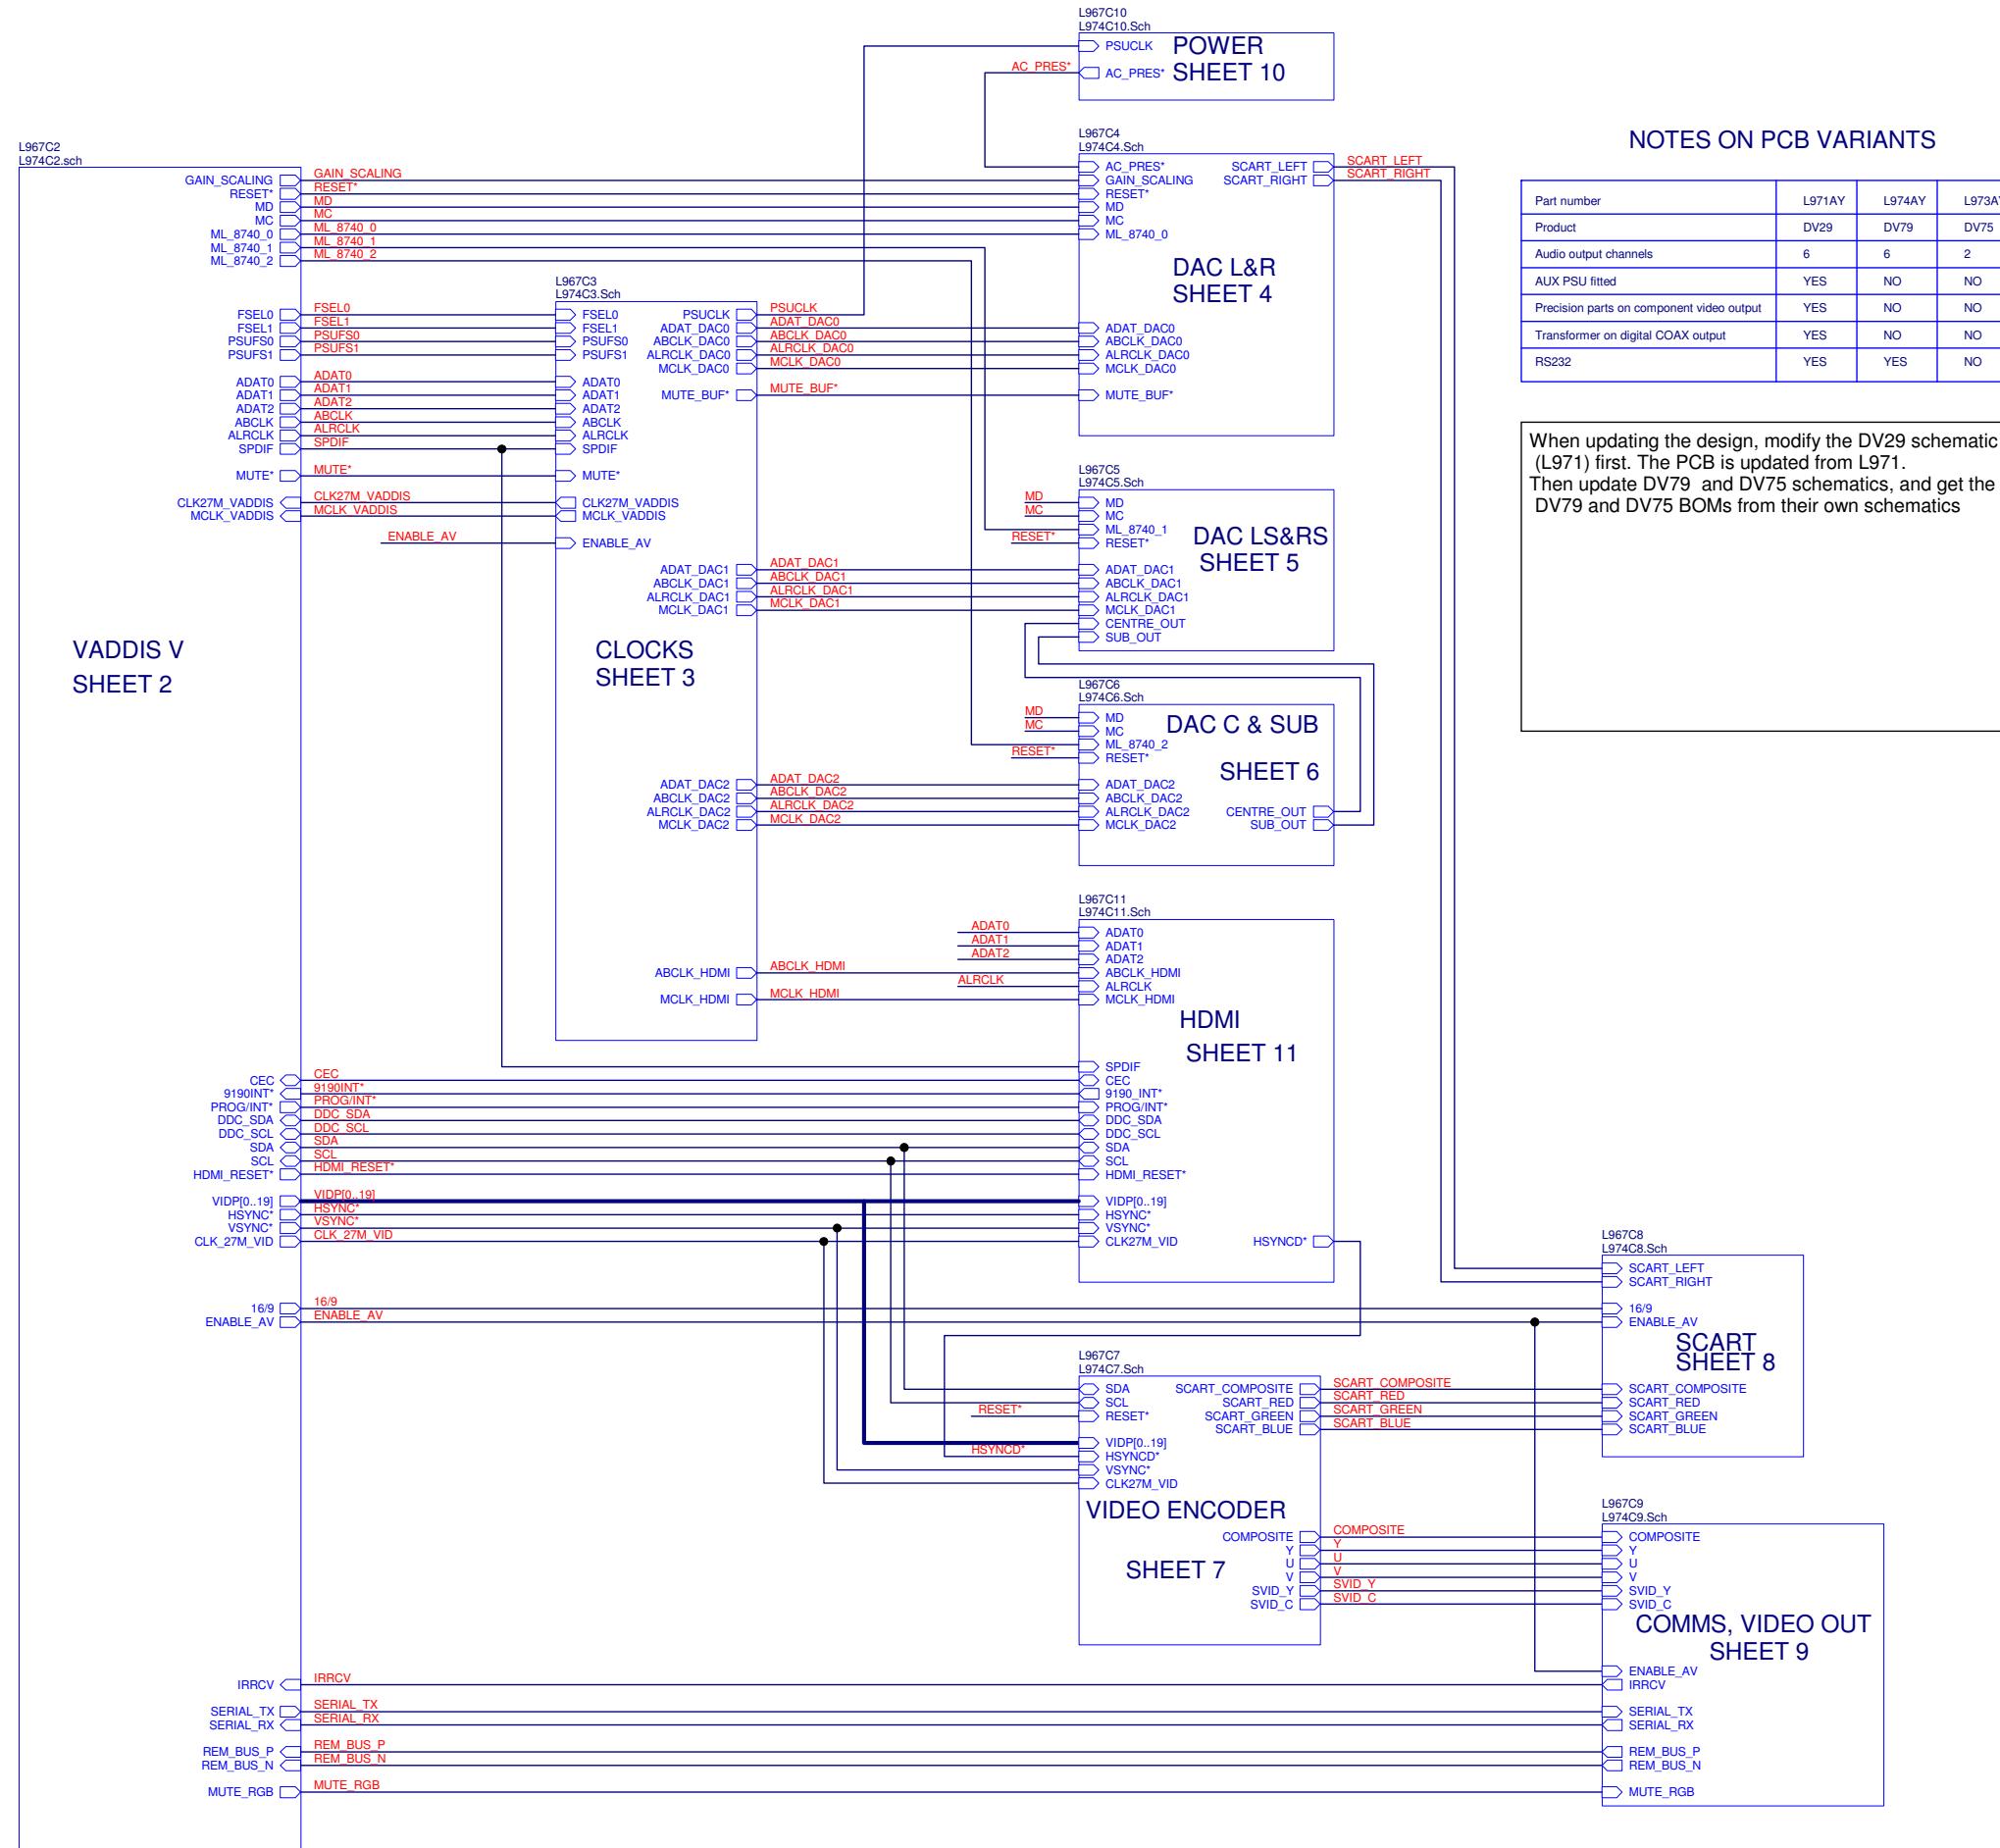

| DRAWING TITLE DV79 MAIN BOARD TOP LEVEL |  |   |      |                       |  |               |    |                    |  |  |  |
|---|--|---|------|-----------------------|--|---------------|----|--------------------|--|--|--|
| ARCAM                                   |  | Filename: L974C1.Pj   |      |                       |  |               |    |                    |  |  |  |
| Notes:                                  |  | 04_E142 PG 23-09-04 Correct BOM error - R320 now fitted<br>04_E129 PG 24-08-04 Production release |      |                       |  |               |    |                    |  |  |  |
| ECO No.                                 |  | INITIALS  | DATE | DESCRIPTION OF CHANGE |  |               |    |                    |  |  |  |
| Contact Engineer: Peter Gaggs           |  | Contact Tel: (01223) 203270   |      | Printed: 23-Sep-2004  |  | Sheet 1 of 11 | A2 | DRAWING NO. L974C1 |  |  |  |

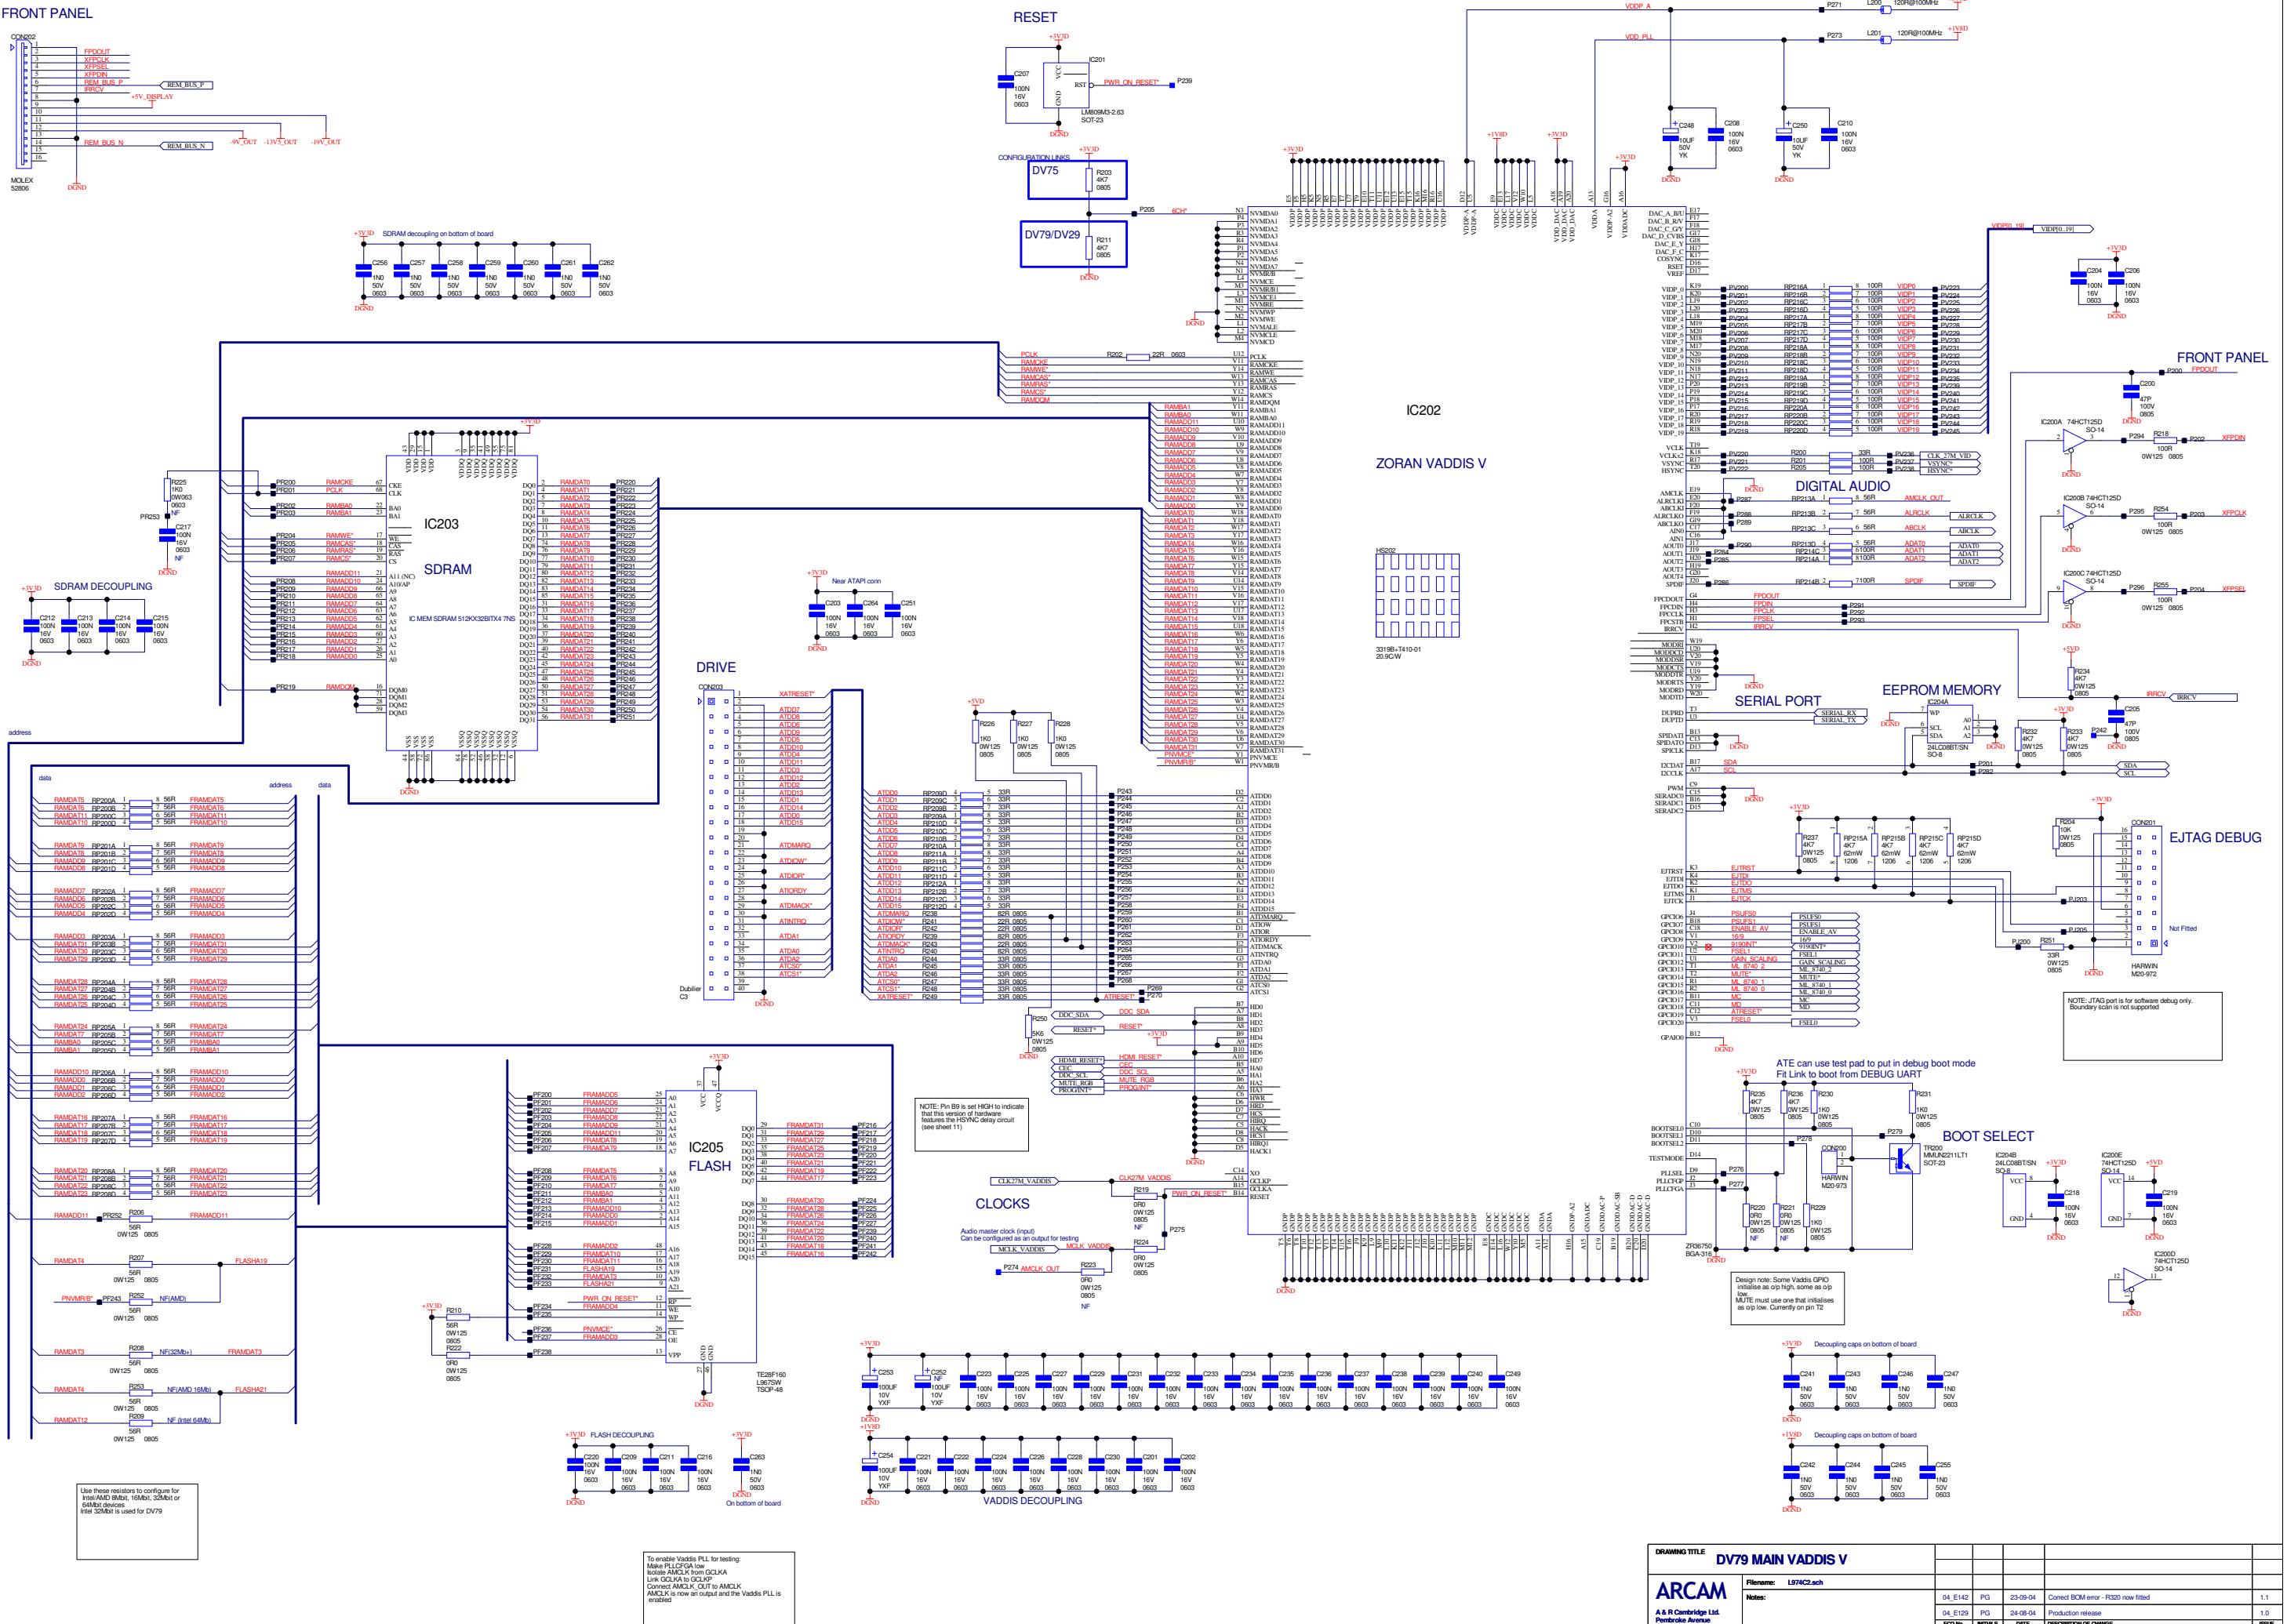

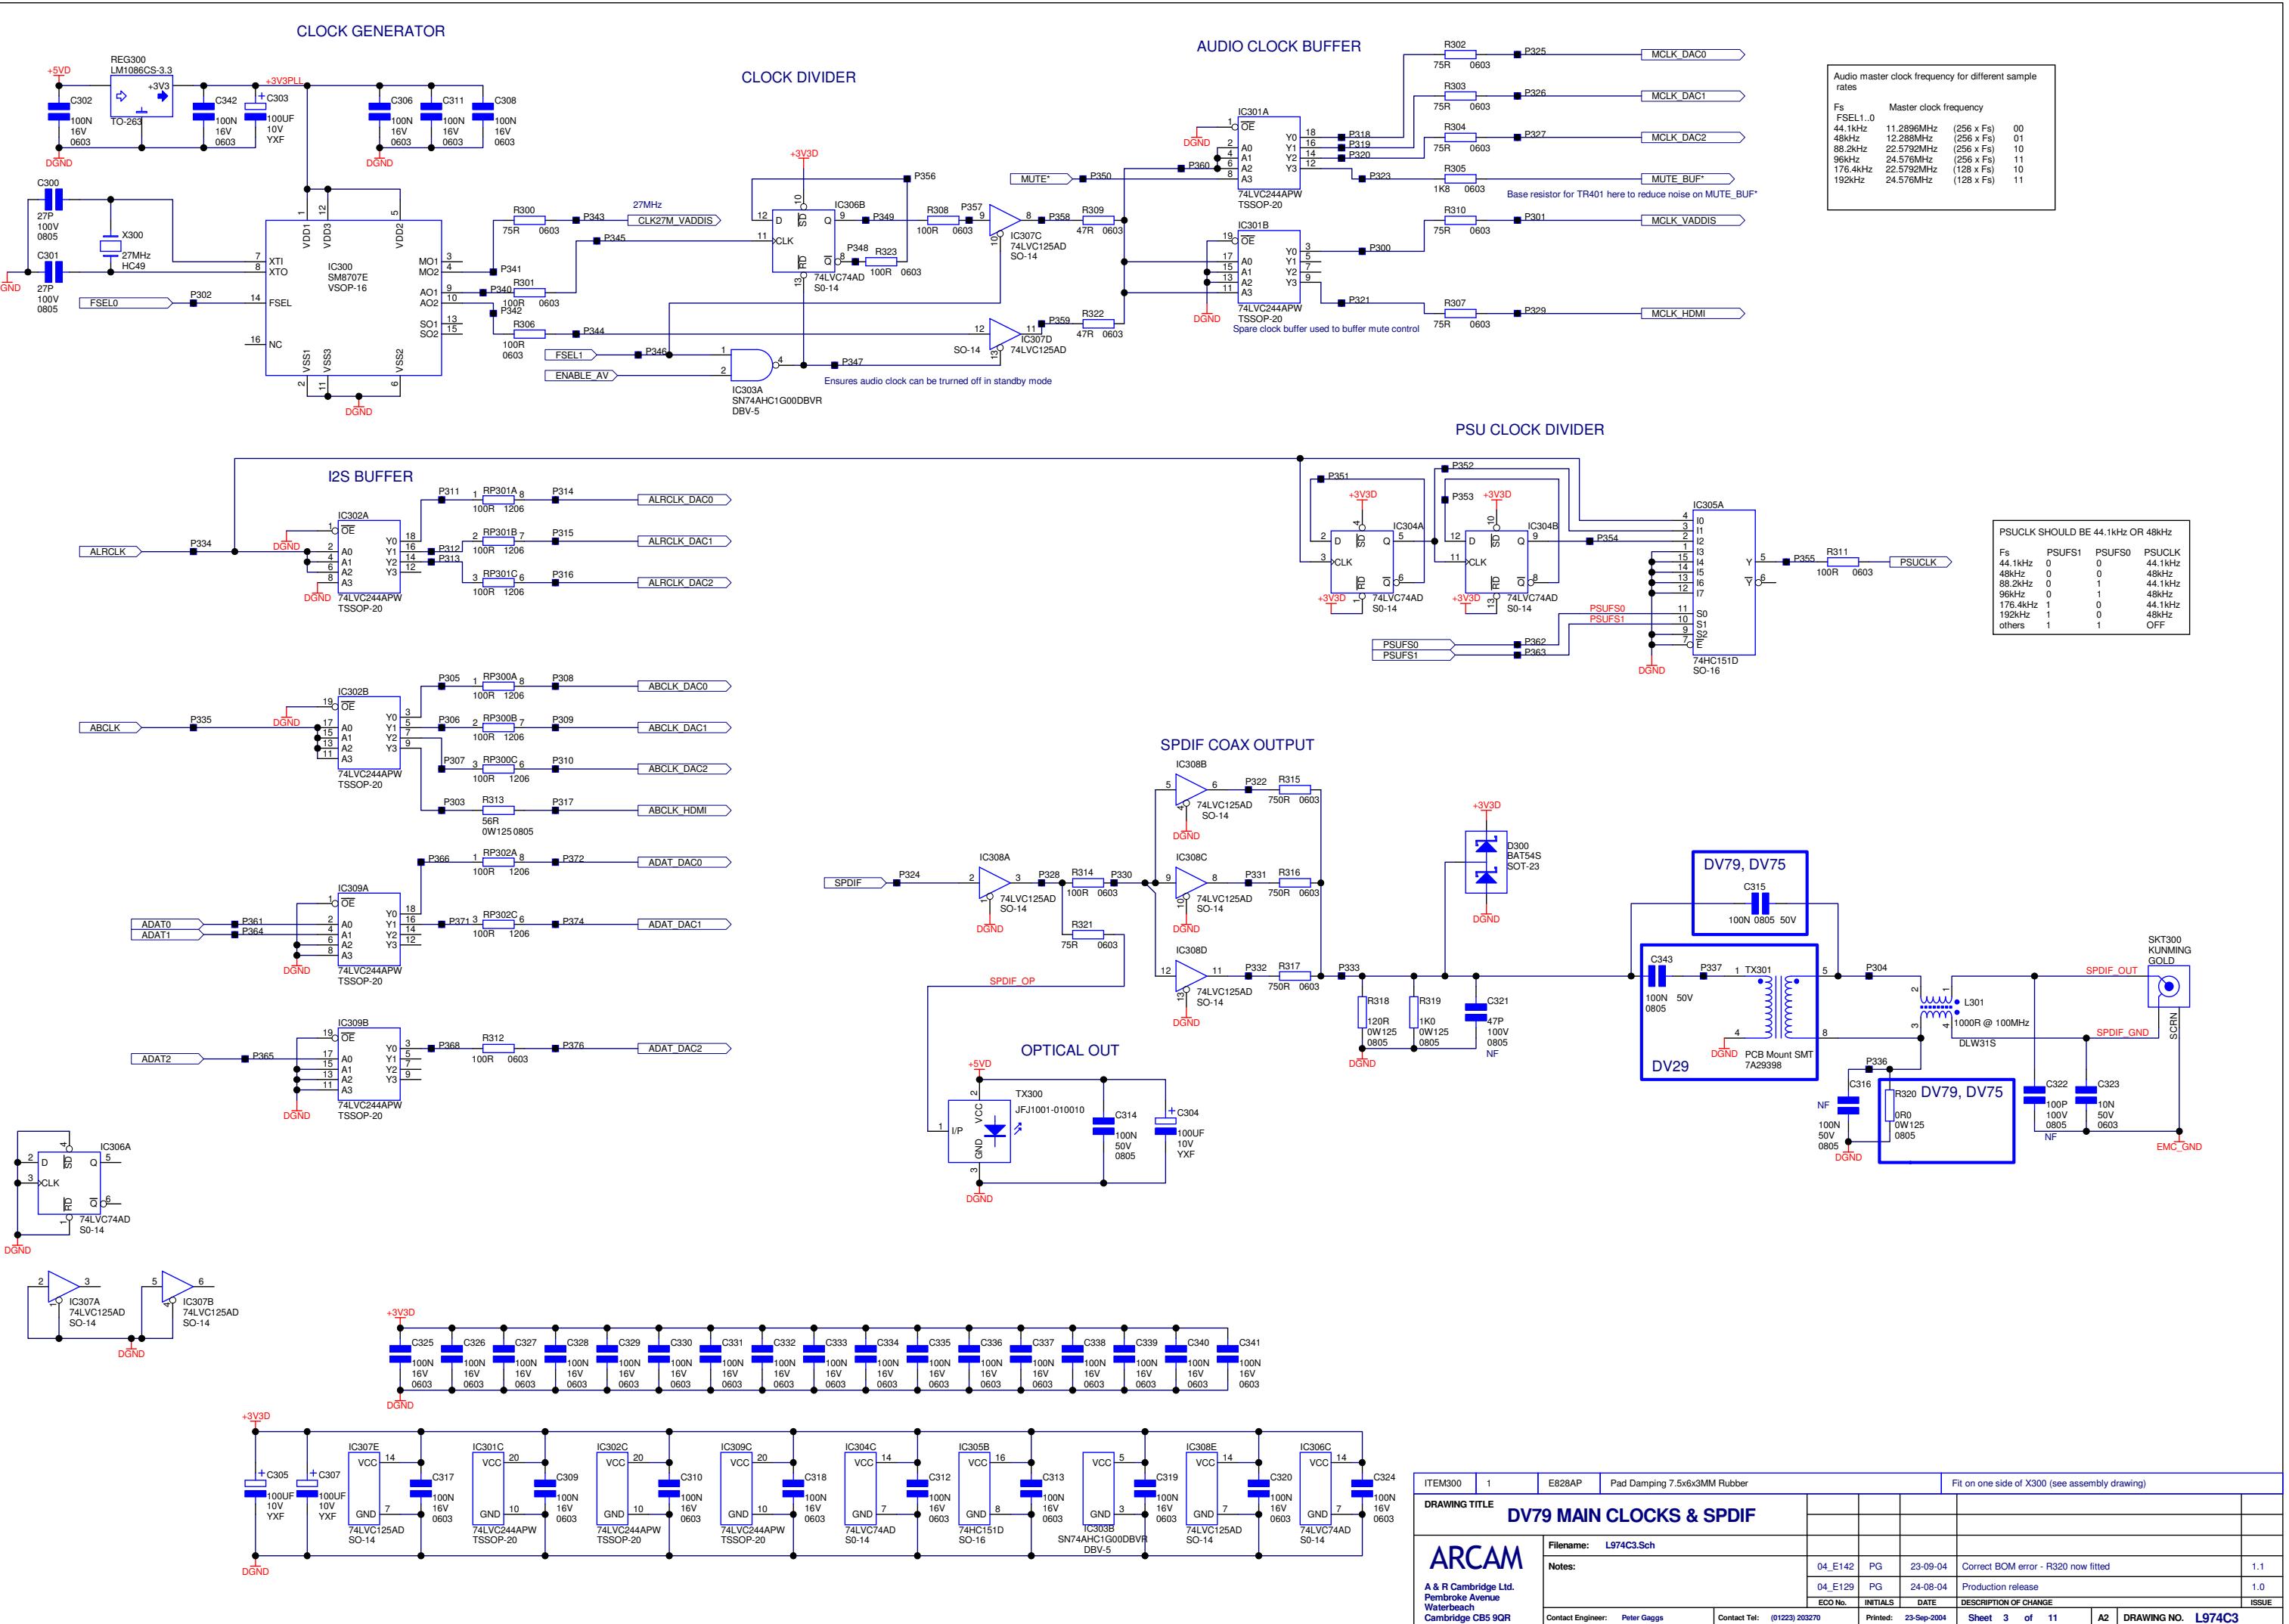


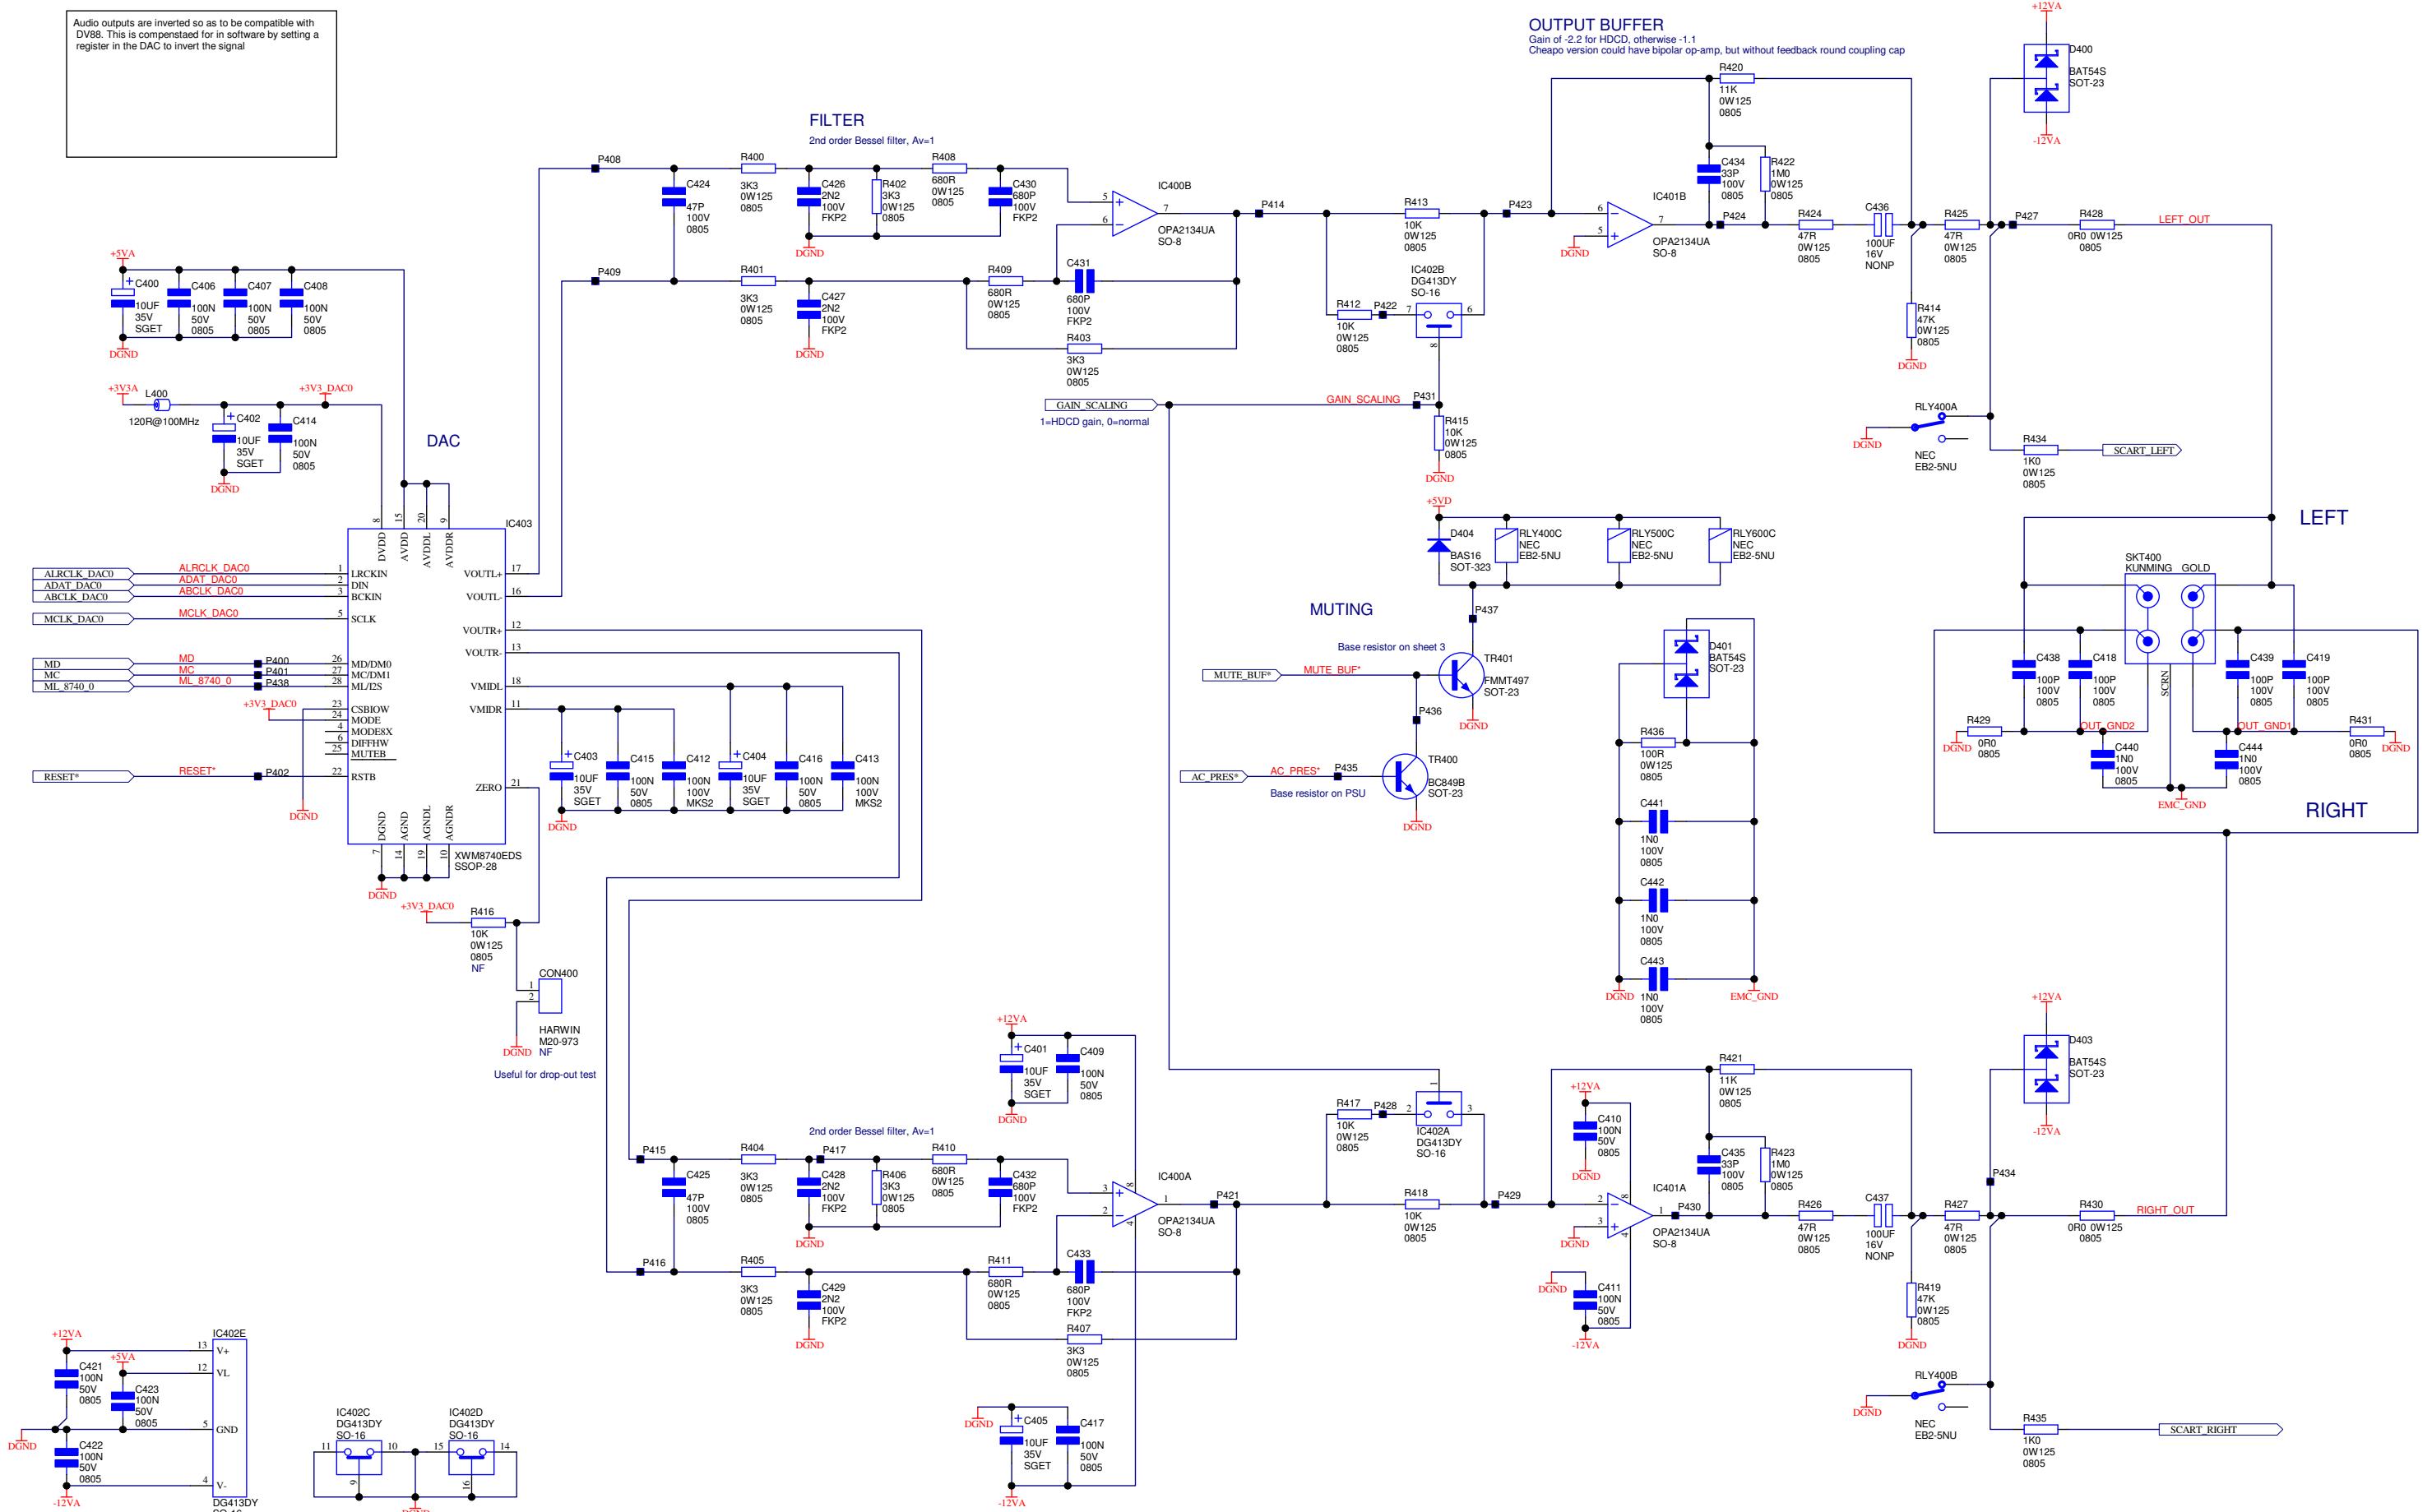

| ITEM400   1   E828AP   Pad Damping 7.5x6x3MM Rubber                              |                             |                      |               | Fit on top of RLY400                |                    |       |
|--|-----------------------------|----------------------|---------------|-------------------------------------|--------------------|-------|
| DRAWING TITLE DV79 MAIN DAC L & R AUDIO  |                             |                      |               |                                     |                    |       |
| ARCAM A & R Cambridge Ltd.<br>Pembroke Avenue<br>Waterbeach<br>Cambridge CB5 9QR |                             |                      |               |                                     |                    |       |
| Filename: L974C4.Sch   |                             |                      |               |                                     |                    |       |
| Notes:   | 04_E142                     | PG                   | 23-09-04      | Correct BOM error - R320 now fitted | 1.1                |       |
|  | 04_E129                     | PG                   | 24-08-04      | Production release                  | 1.0                |       |
| Contact Engineer: Peter Gaggs  | Contact Tel: (01223) 203270 | Printed: 23-Sep-2004 | Sheet 4 of 11 | A2                                  | DRAWING NO. L974C4 | ISSUE |

Audio outputs are inverted so as to be compatible with DV88. This is compensated for in software by setting a register in the DAC to invert the signal.


### ALL PARTS ON THIS SHEET ARE NOT FITTED FOR DV75

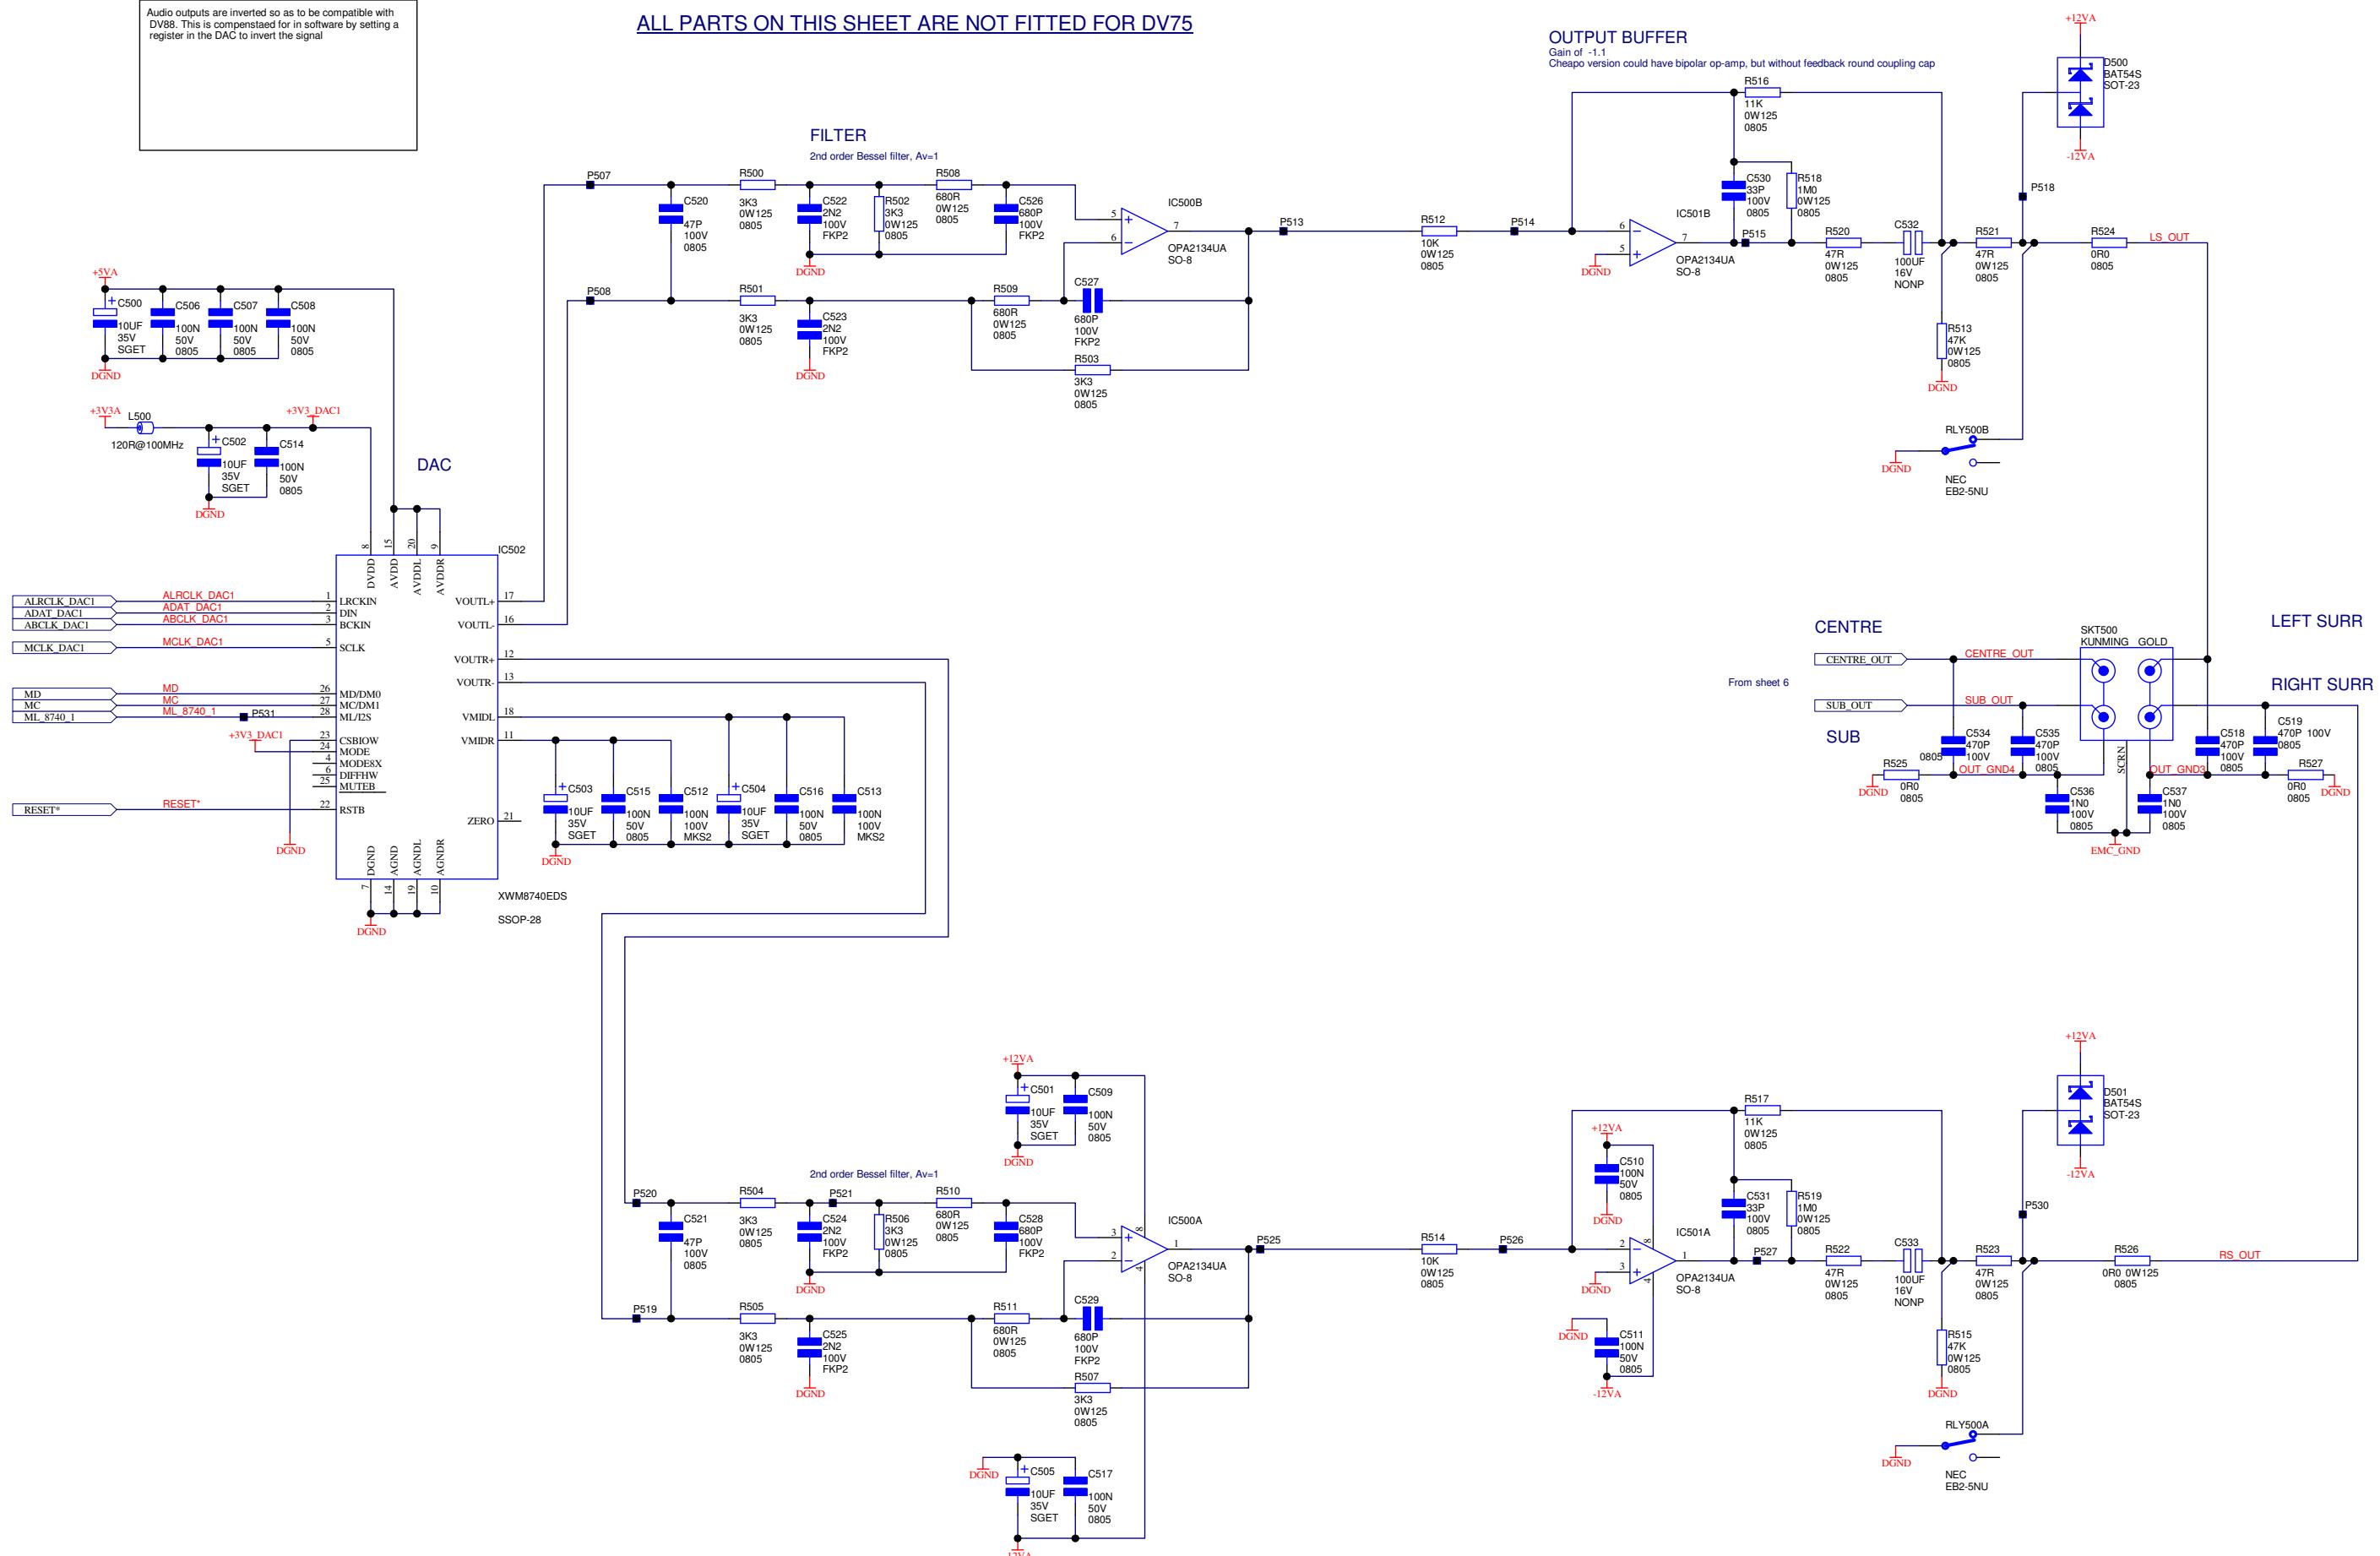


| ITEM NO.          | 1                    | E828AP                      | Pad Damping 7.5x6x3MM Rubber | Fit on top of RLY500                |
|-------------------|----------------------|-----------------------------|------------------------------|-------------------------------------|
| DRAWING TITLE     |                      |                             |                              |                                     |
| <b>ARCAM</b>      | Filename: L974C5.Sch |                             |                              |                                     |
| Notes:            |                      |                             |                              |                                     |
|                   | 04_E142              | PG                          | 23-09-04                     | Correct BOM error - R320 now fitted |
|                   | 04_E129              | PG                          | 24-08-04                     | Production release                  |
| ECO No.           | INITIALS             | DATE                        | DESCRIPTION OF CHANGE        | ISSUE                               |
| Contact Engineer: | Peter Gaggs          | Contact Tel: (01223) 203270 | Printed: 23-Sep-2004         | Sheet 5 of 11 A2 DRAWING NO. L974C5 |

Audio outputs are inverted so as to be compatible with DV88. This is compensated for in software by setting a register in the DAC to invert the signal


ALL PARTS ON THIS SHEET ARE NOT FITTED FOR DV75

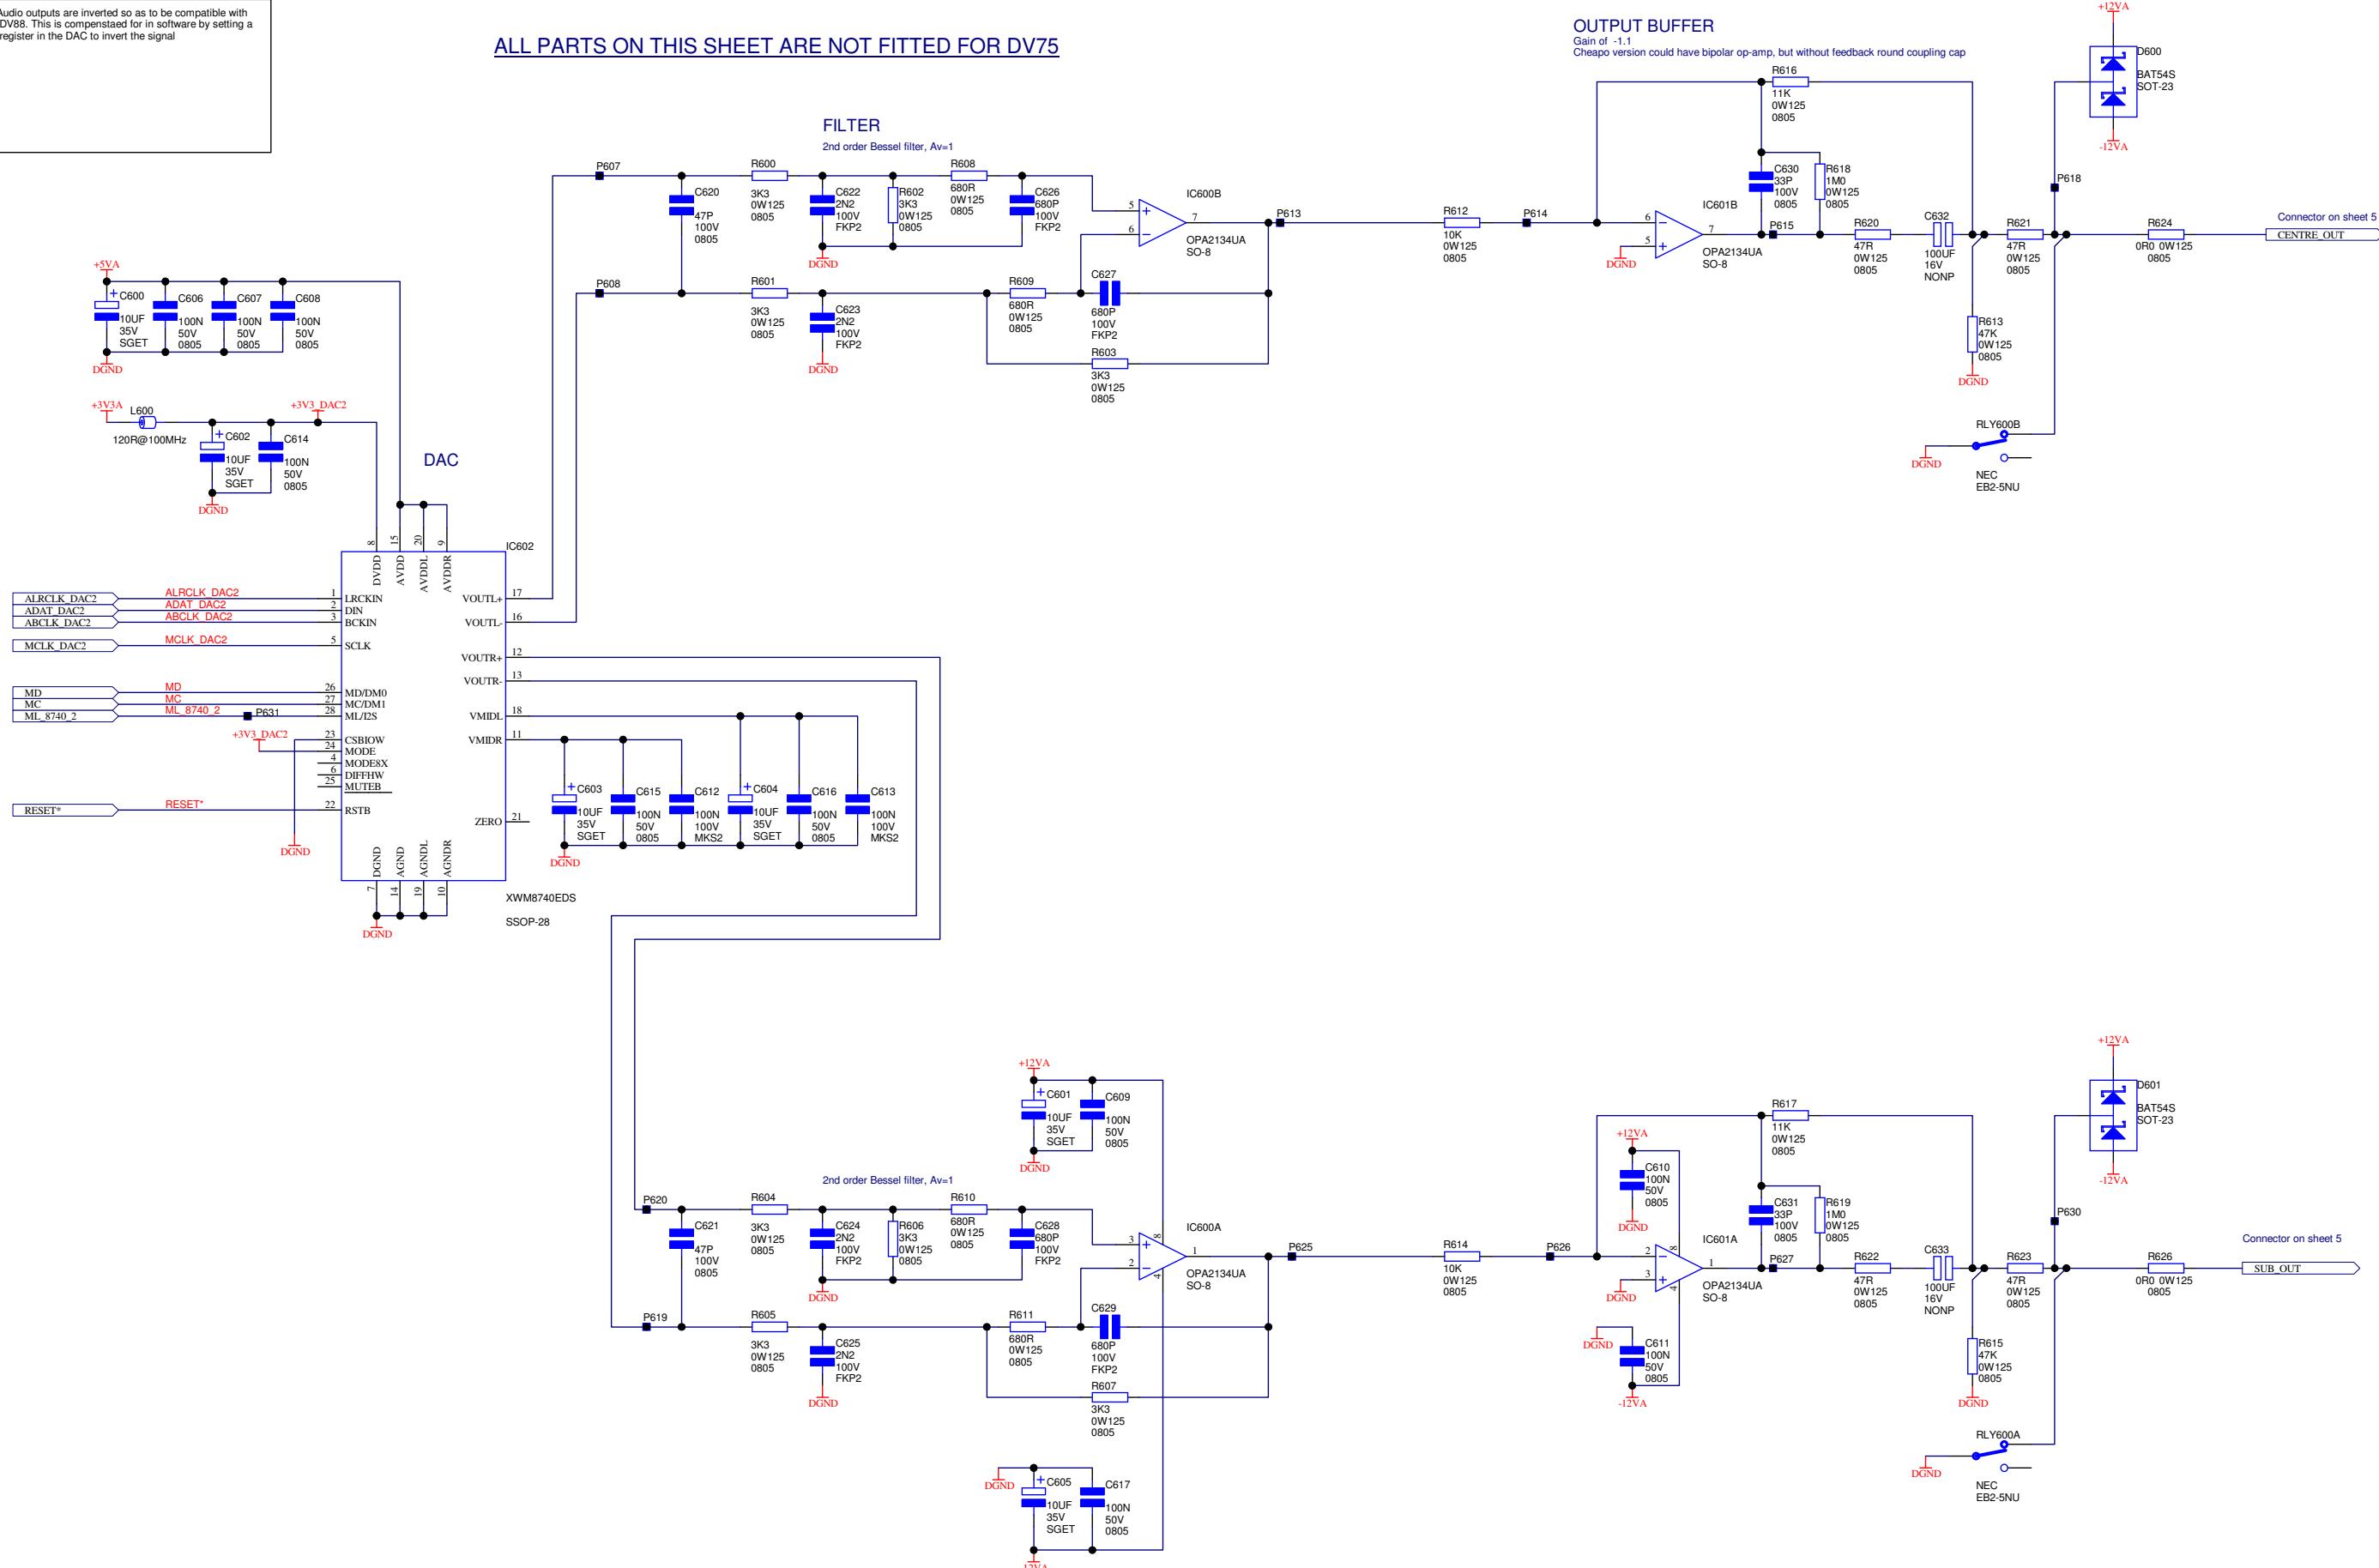


| ITEM600       |  | 1                          | E828AP            | Pad Damping 7.5x6x3MM Rubber | Fit on top of RLY600        |                                     |
|---------------|--|----------------------------|-------------------|------------------------------|-----------------------------|-------------------------------------|
| DRAWING TITLE |  | DV79 MAIN DAC CENTRE & SUB |                   |                              |                             |                                     |
| <b>ARCAM</b>  |  | Filename: L974C6.Sch       |                   |                              |                             |                                     |
|               |  | Notes:                     |                   |                              |                             |                                     |
|               |  |                            | 04_E142           | PG                           | 23-09-04                    | Correct BOM error - R320 now fitted |
|               |  |                            | 04_E129           | PG                           | 24-08-04                    | Production release                  |
|               |  |                            | ECO No.           | INITIALS                     | DATE                        | DESCRIPTION OF CHANGE               |
|               |  |                            | Contact Engineer: | Peter Gaggs                  | Contact Tel: (01223) 203270 | Printed: 23-Sep-2004                |
|               |  |                            |                   |                              |                             | Sheet 6 of 11 A2 DRAWING NO. L974C6 |

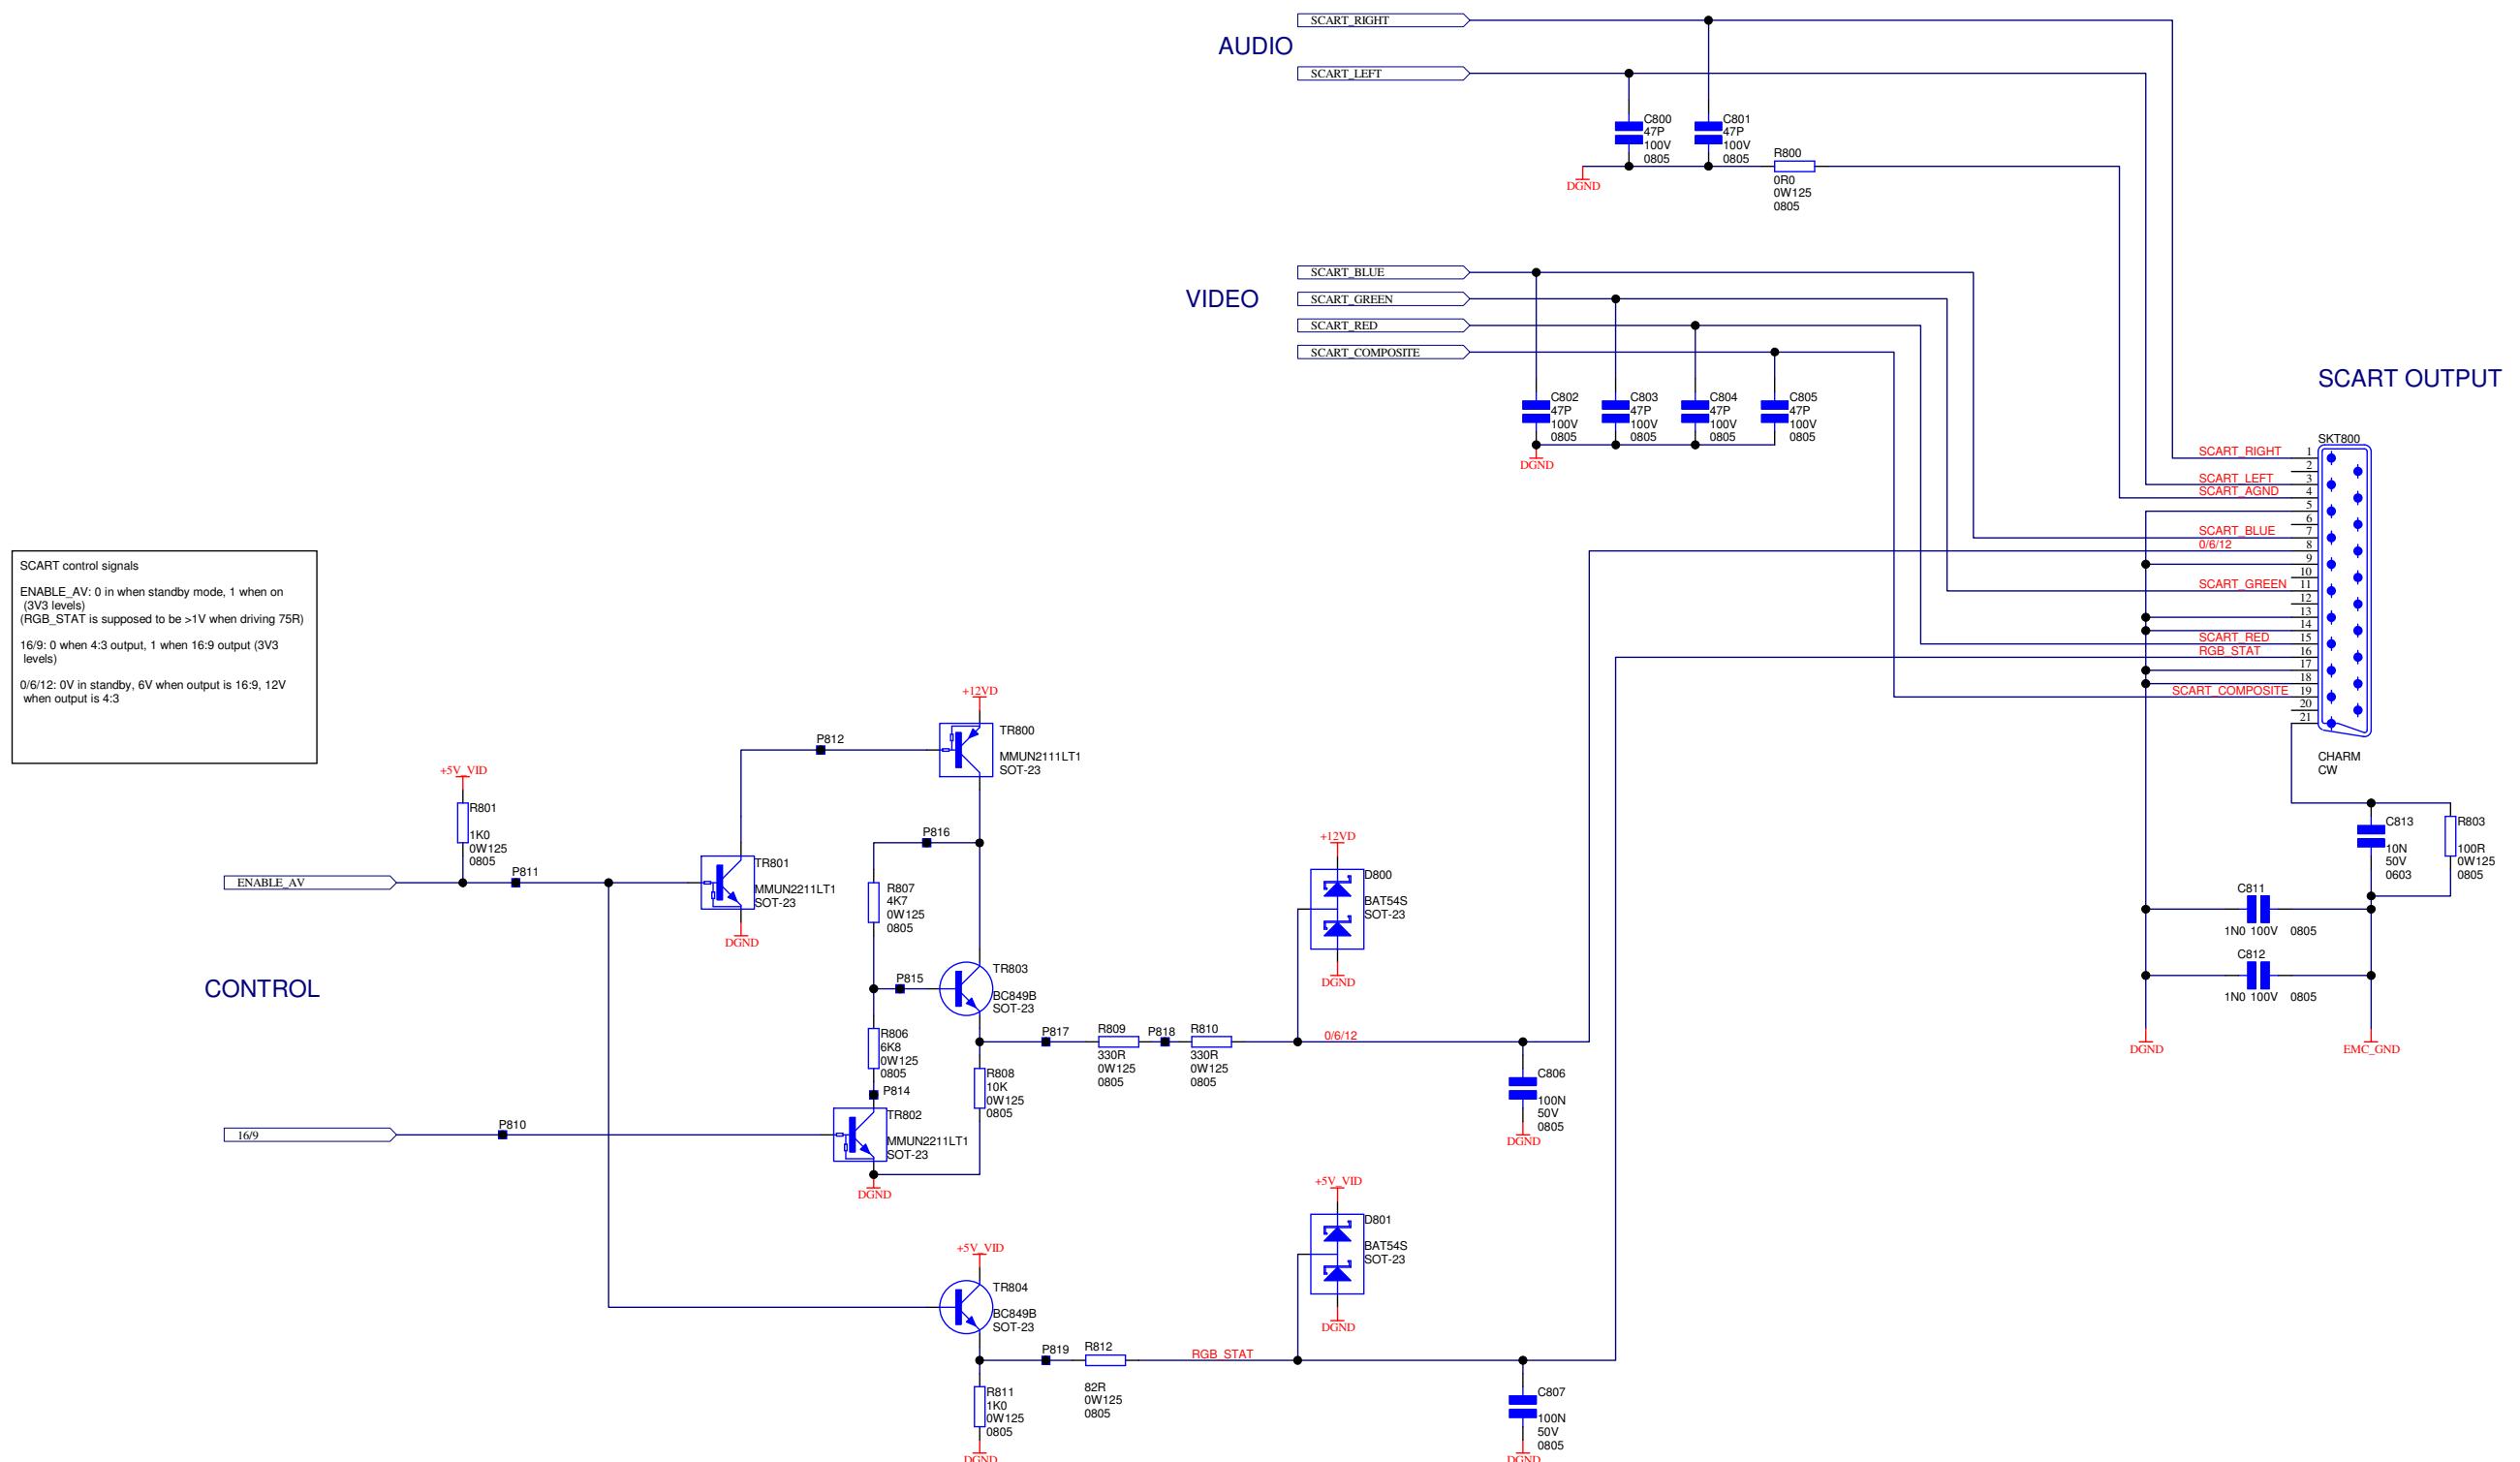



| DRAWING TITLE DV79 MAIN SCART OUTPUT |          |                      |                       |             |  |
|--------------------------------------|----------|----------------------|-----------------------|-------------|--|
| ARCAM                                |          | Filename: L974C8.Sch |                       |             |  |
| Notes:                               |          |                      |                       |             | 04_E142 PG 23-09-04 Correct BOM error - R320 now fitted 1.1                          |
|                                      |          |                      |                       |             | 04_E129 PG 24-08-04 Production release 1.0   |
| ECO No.                              | INITIALS | DATE                 | DESCRIPTION OF CHANGE |             |  |
|                                      |          |                      | Contact Engineer:     | Peter Gaggs | Contact Tel: (01223) 203270 Printed: 23-Sep-2004 Sheet 8 of 11 A2 DRAWING NO. L974C8 |

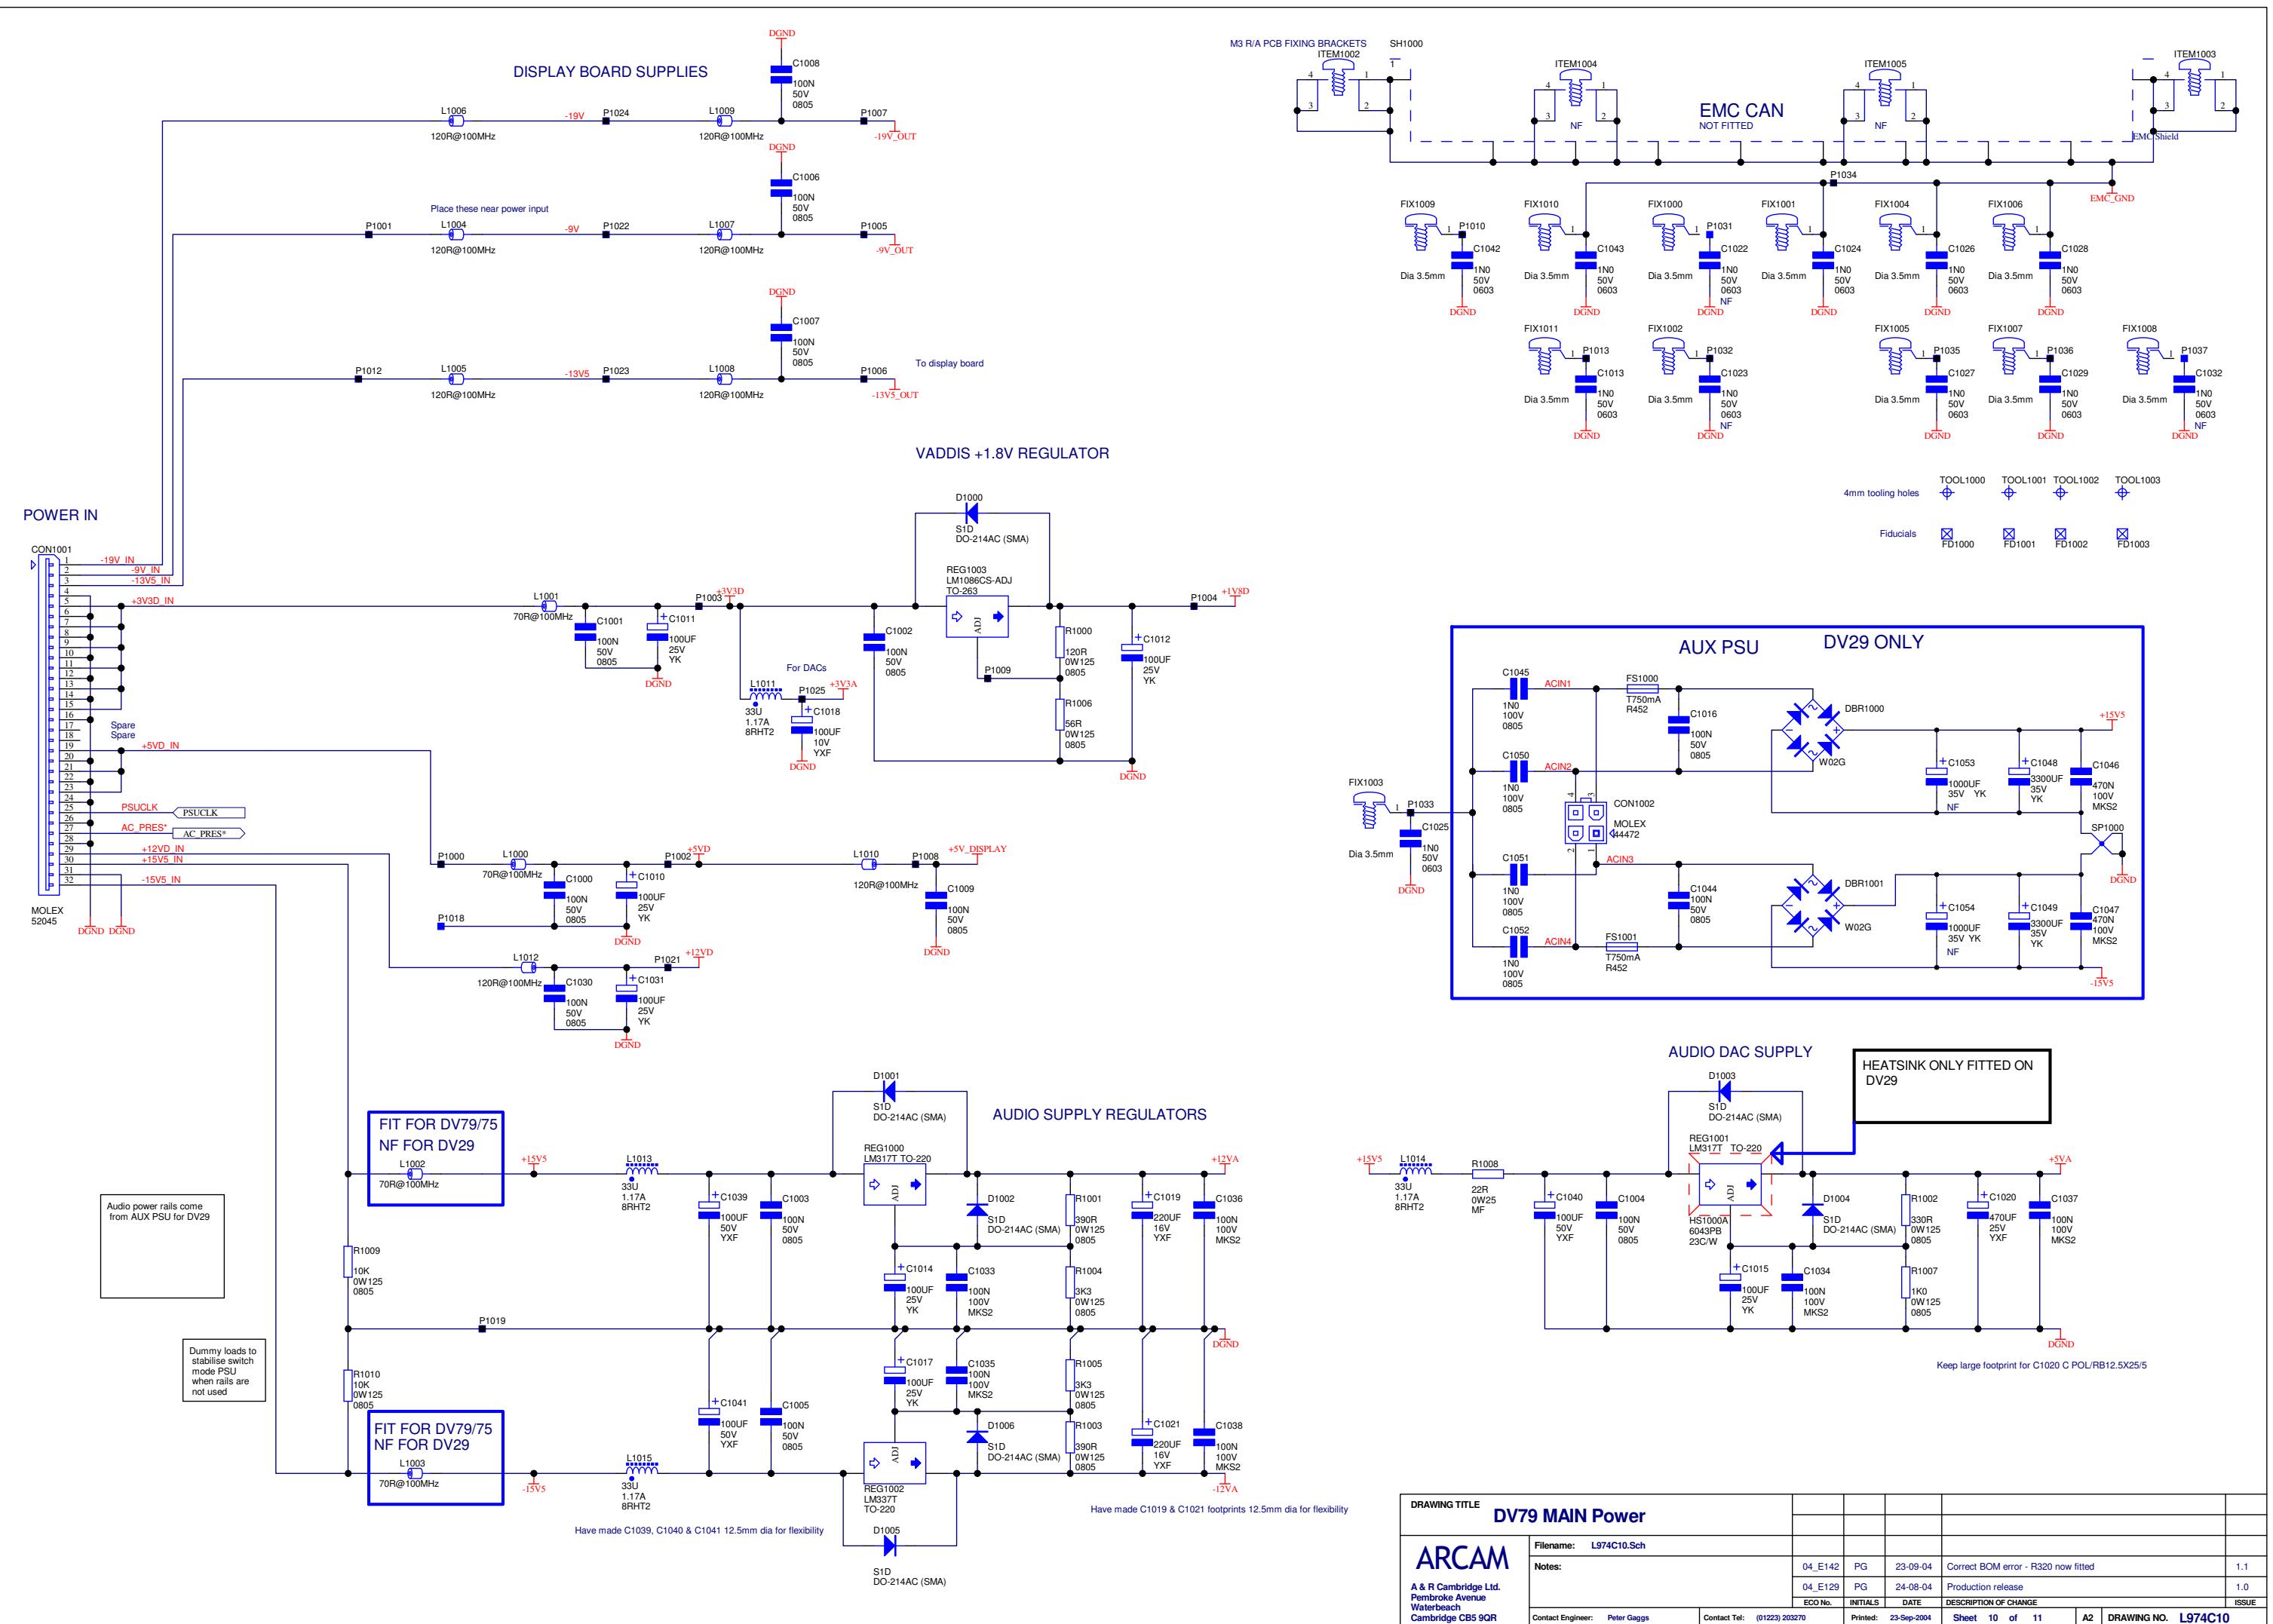

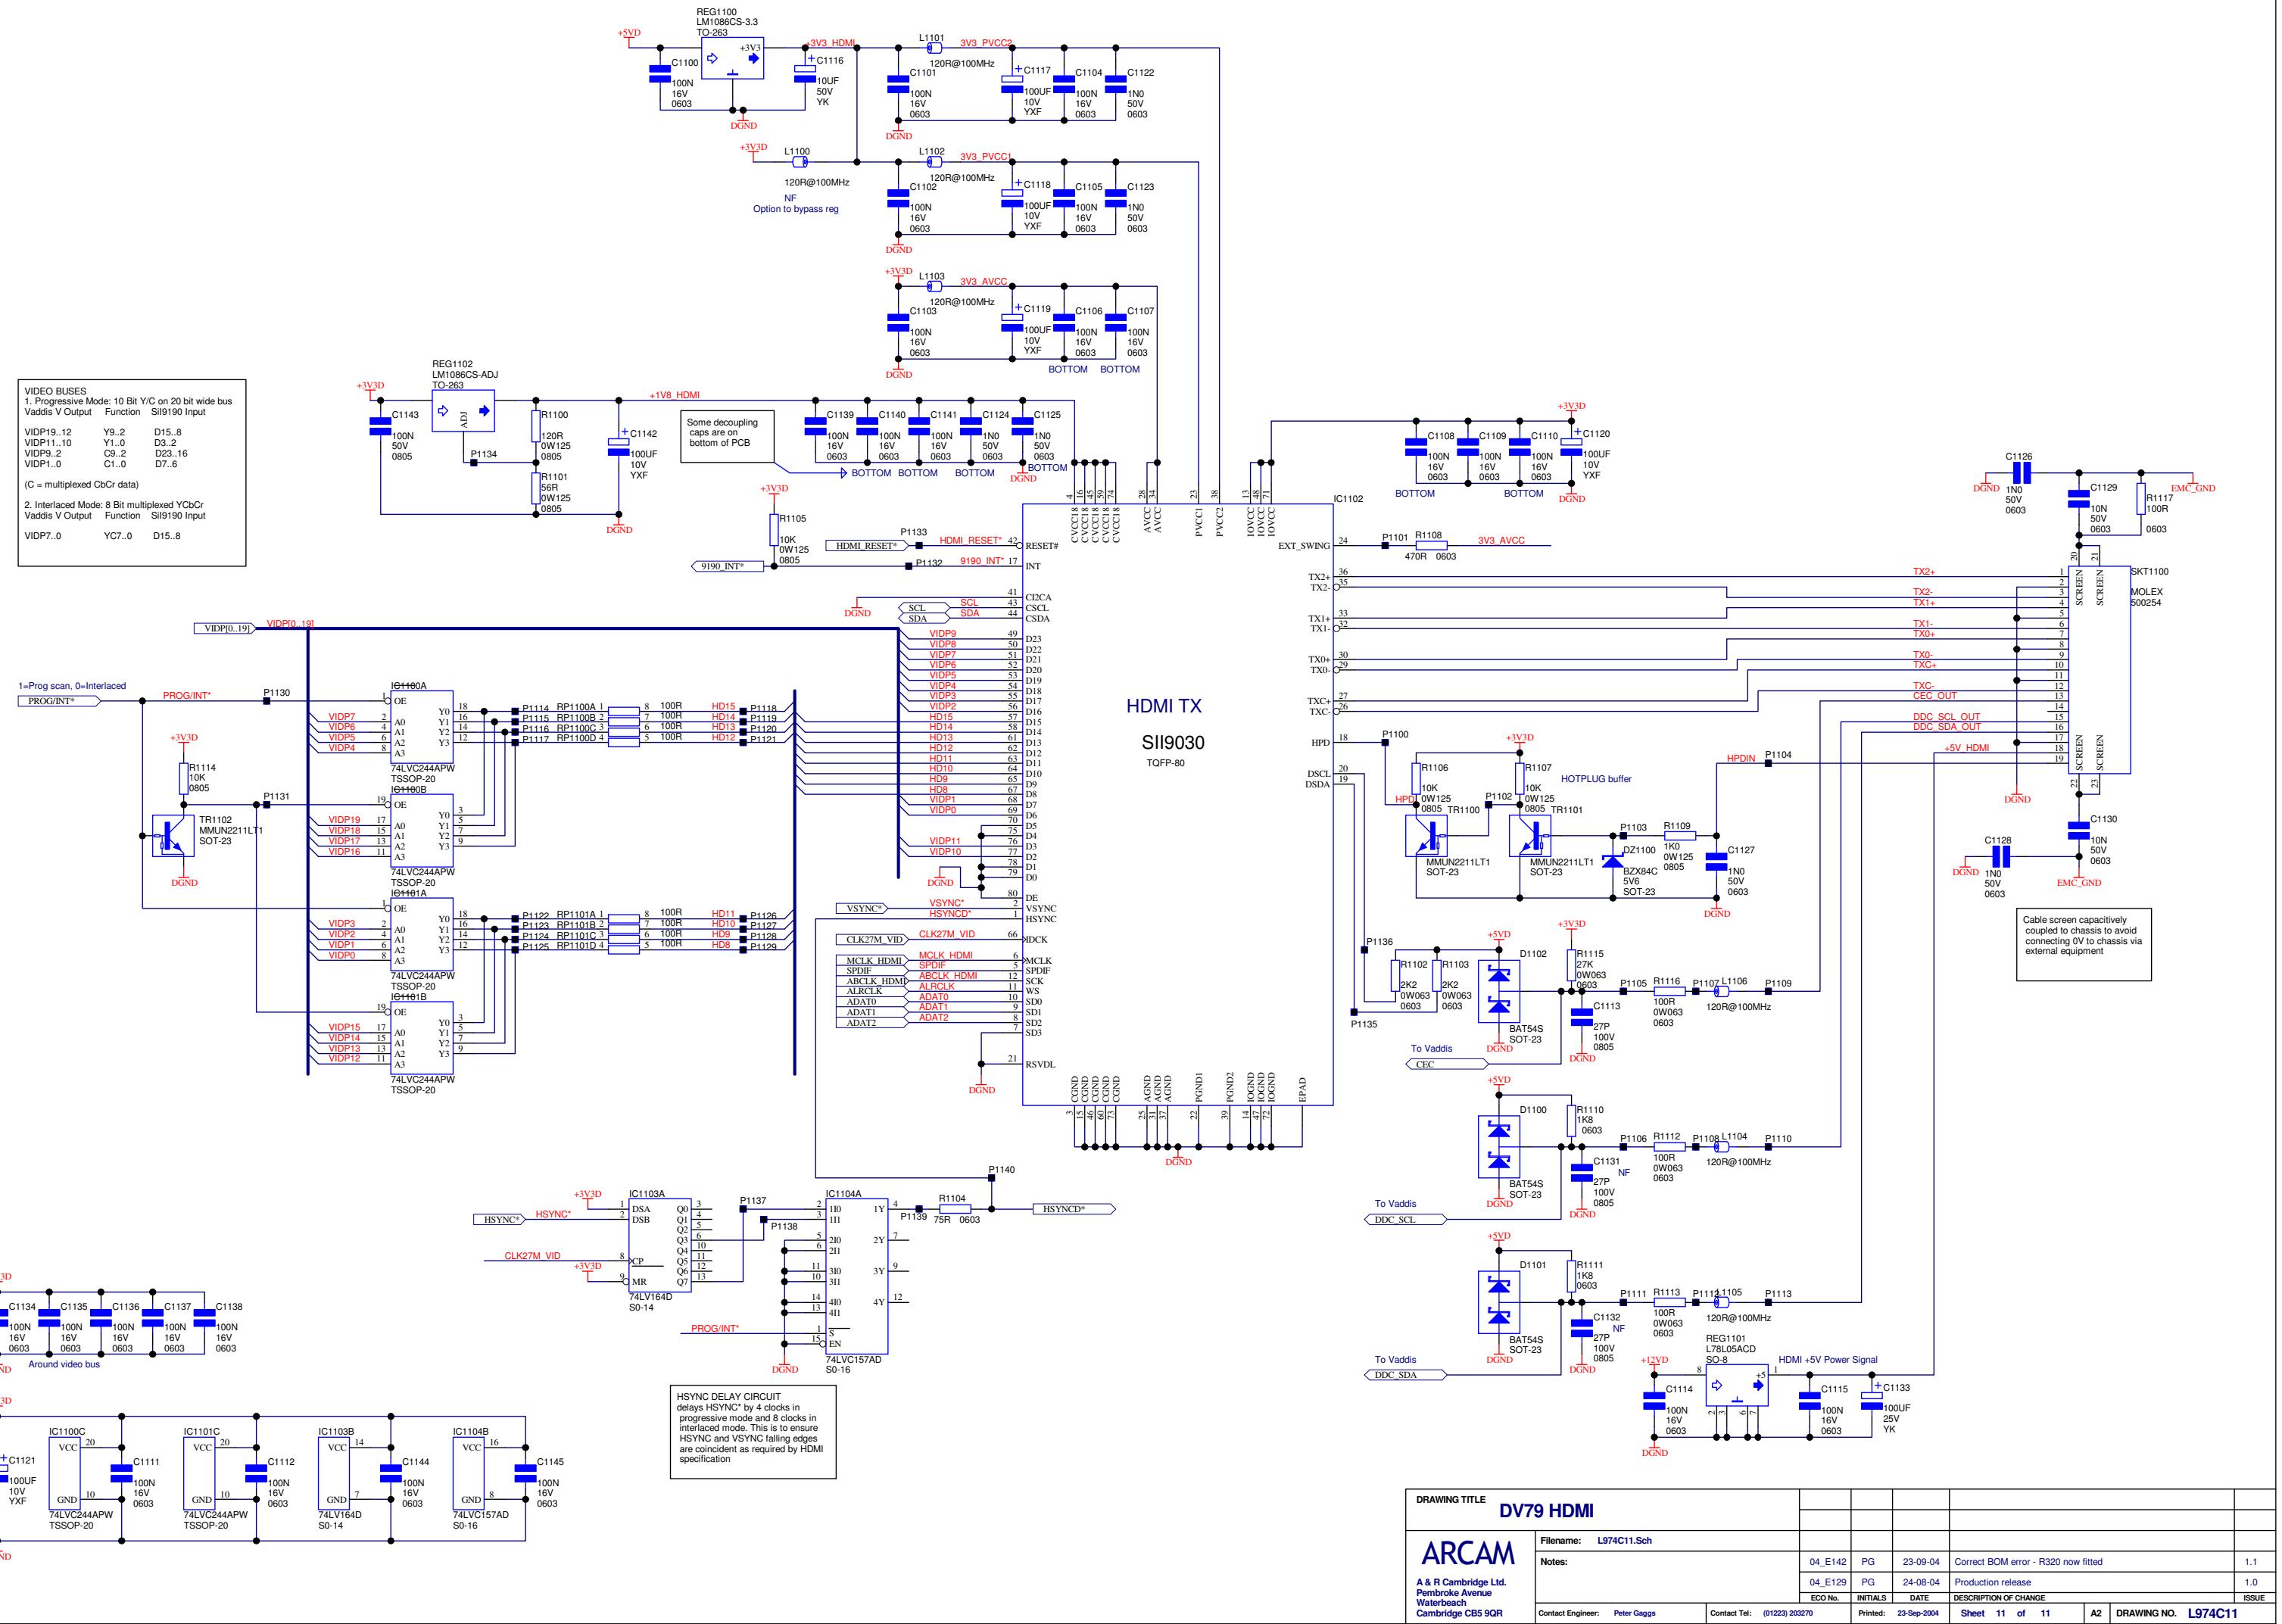

ON SNAP-OFF PCB

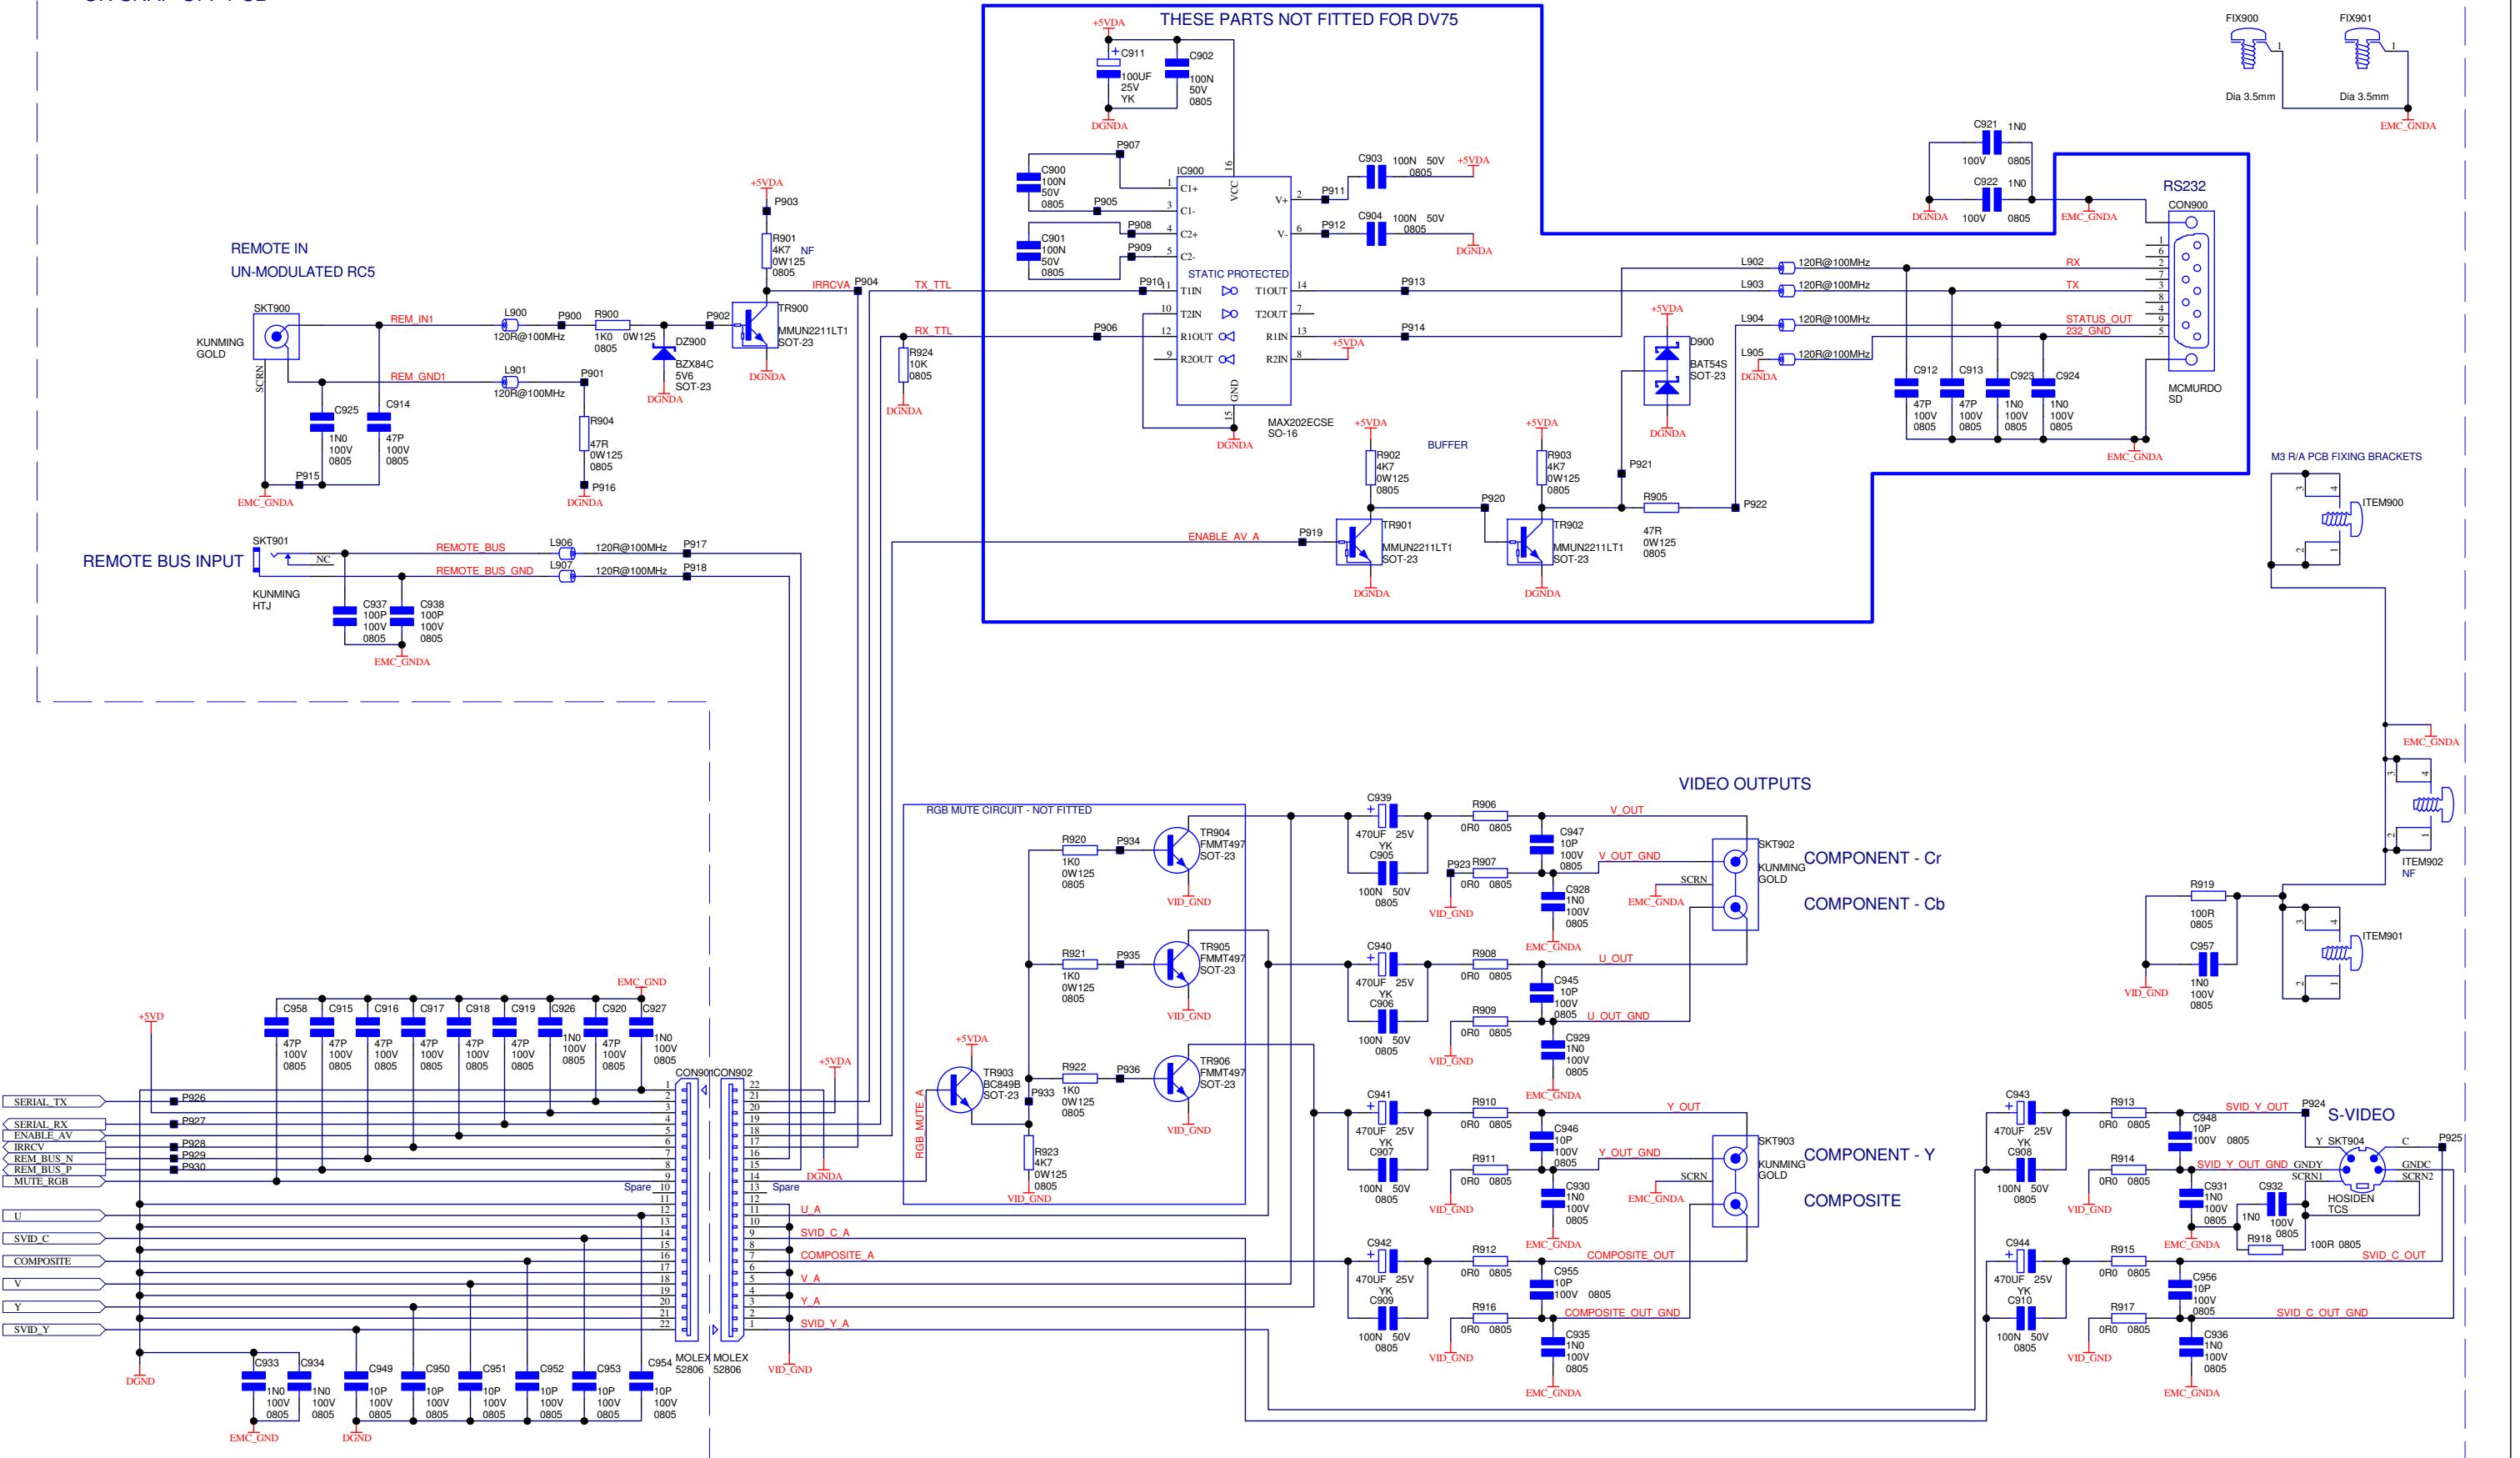

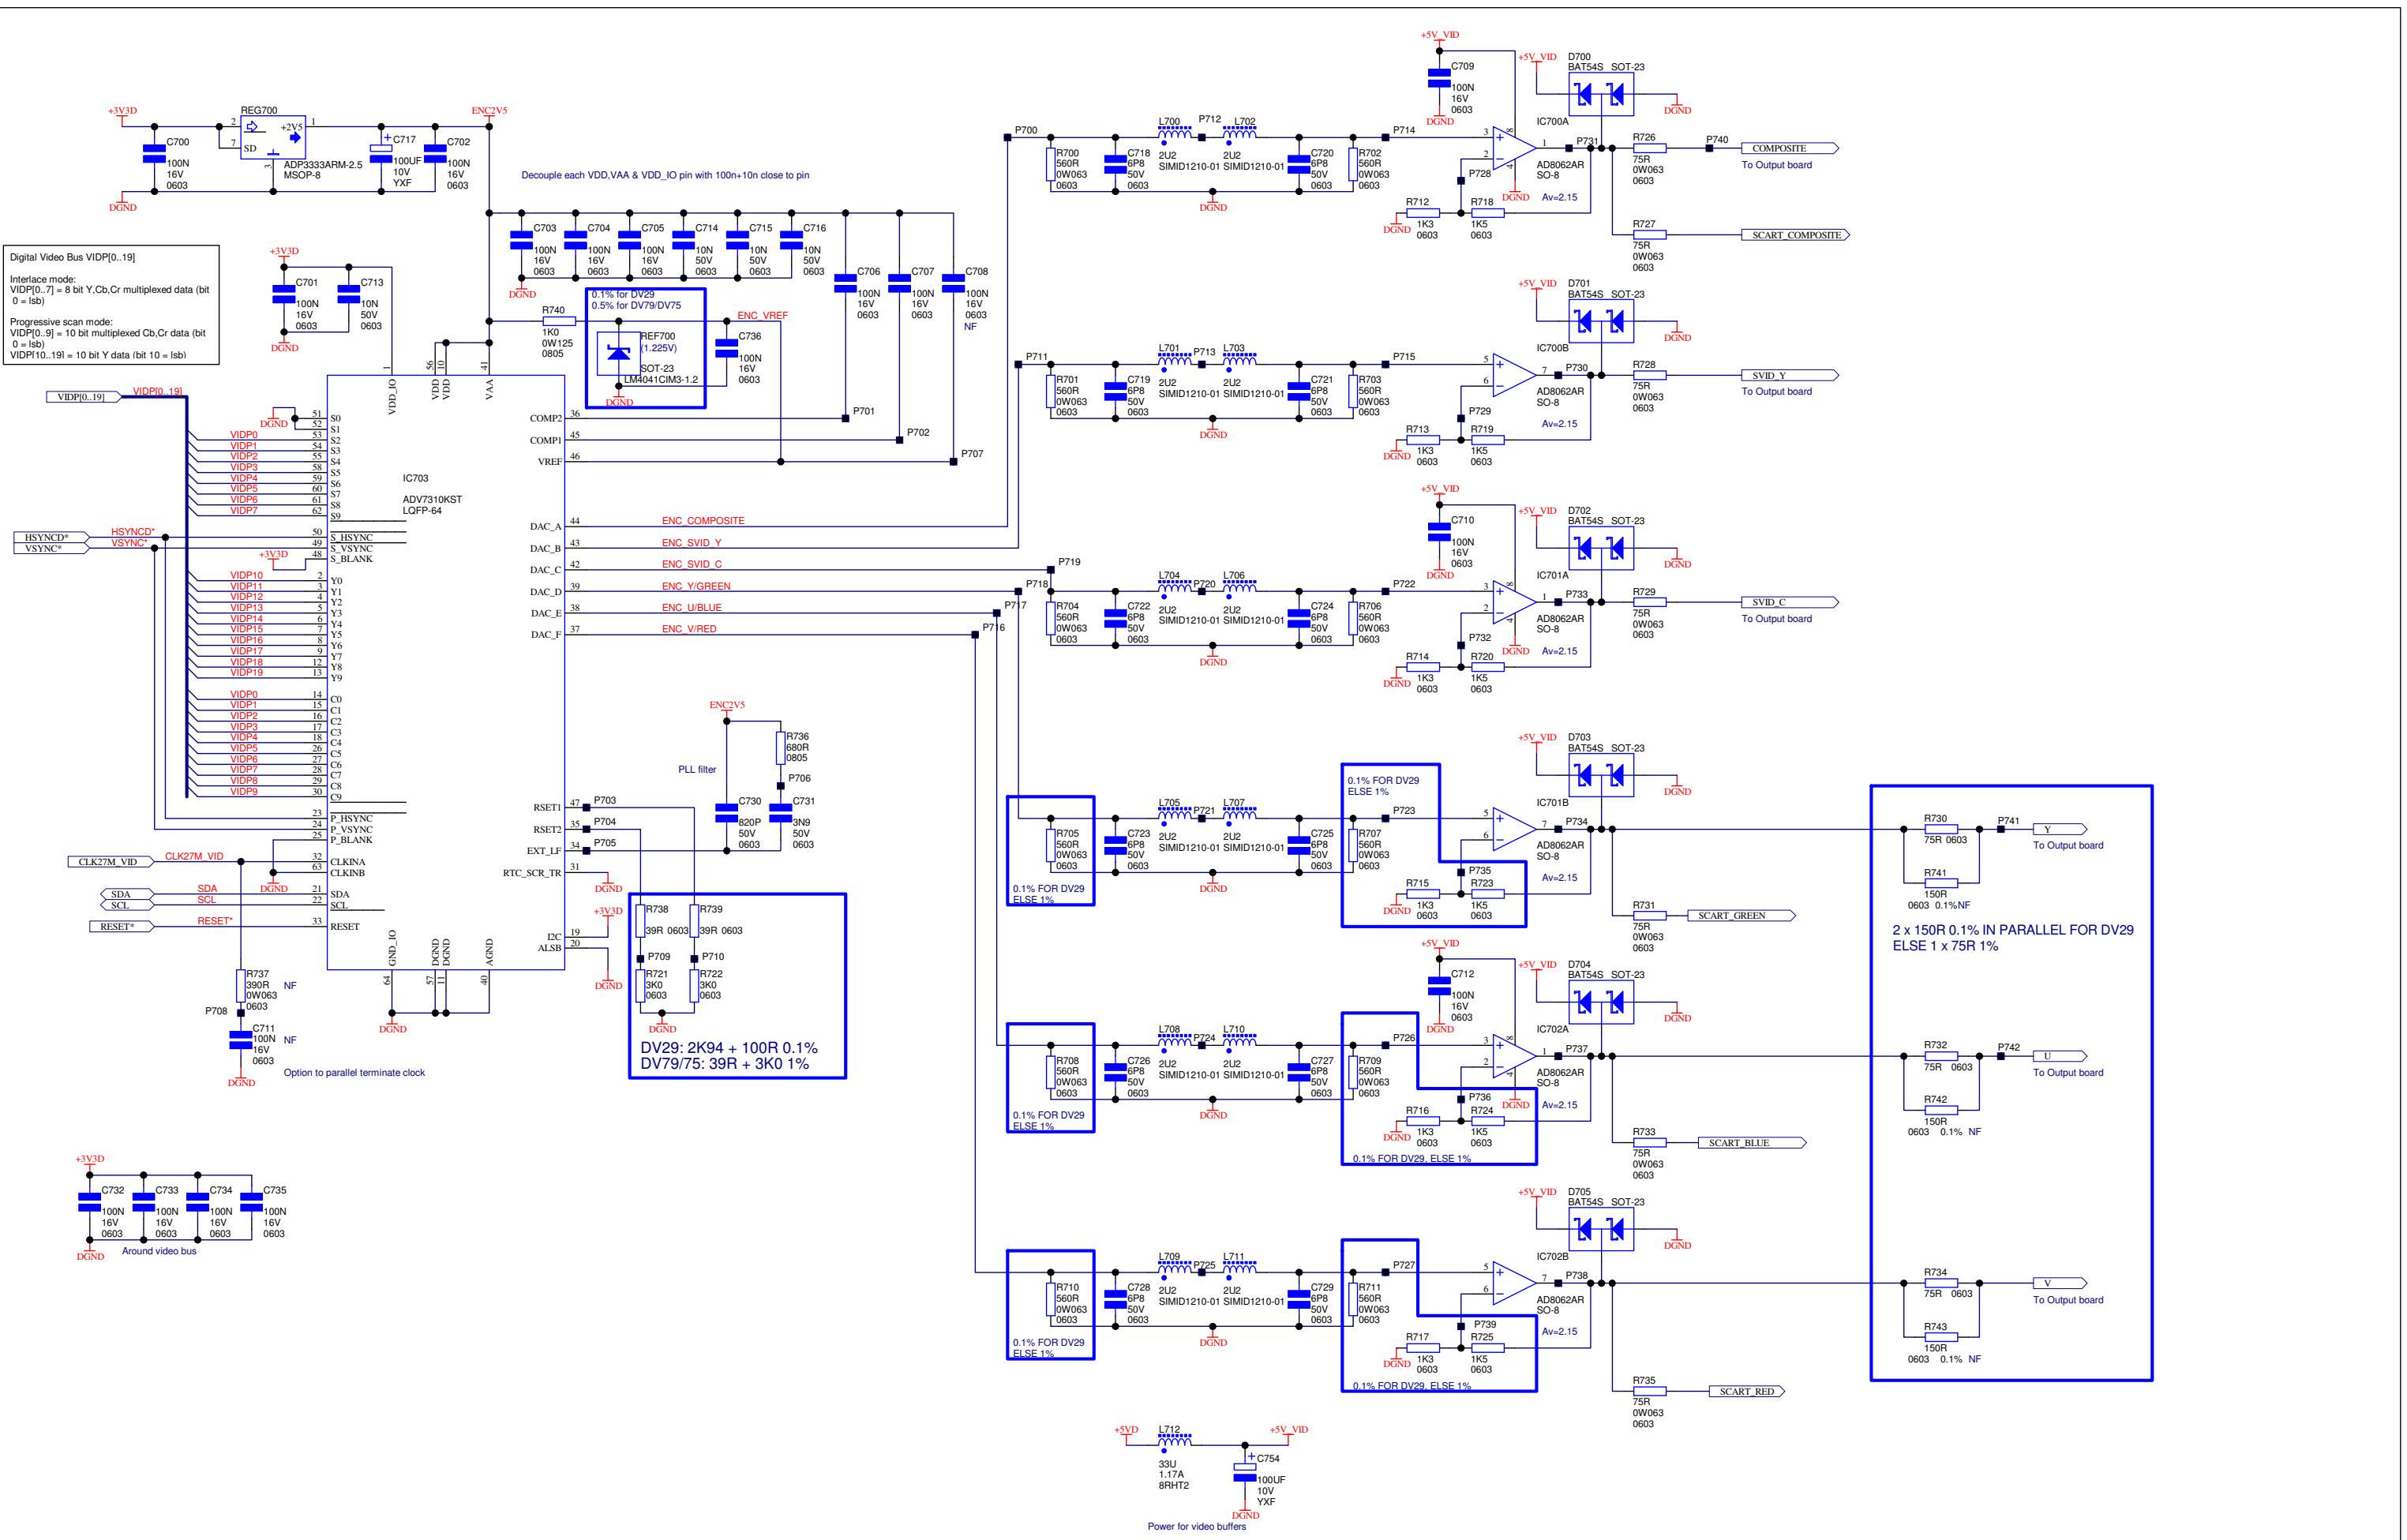

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description   |
|------------|--------|---|
| C200       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C201       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C202       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C203       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C204       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C205       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C206       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C207       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C208       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C209       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C210       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C211       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C212       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C213       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C214       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C215       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C216       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C217       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C218       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C219       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C220       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C221       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C222       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C223       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C224       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C225       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C226       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C227       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C228       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C229       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C230       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C231       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C232       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C233       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C234       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C235       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C236       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C237       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C238       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C239       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C240       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C241       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C242       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C243       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C244       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C245       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C246       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C247       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C248       | 2N610  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 10UF 50V                |
| C249       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C250       | 2N610  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 10UF 50V                |
| C251       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C252       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C253       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C254       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C255       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C256       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C257       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C258       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C259       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C260       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C261       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description   |
|------------|--------|---|
| C262       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C263       | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C264       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C300       | 2L027  | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C301       | 2L027  | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C302       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C303       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C304       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C305       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C306       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C307       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C308       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C309       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C310       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C311       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C312       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C313       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C314       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C315       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C316       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C317       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C318       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C319       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C320       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C321       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C322       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P                              |
| C323       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C324       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C325       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C326       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C327       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C328       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C329       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C330       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C331       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C332       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C333       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C334       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C335       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C336       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C337       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C338       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C339       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C340       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C341       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C342       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C343       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C400       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C401       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C402       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C403       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C404       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C405       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C406       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C407       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C408       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C409       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C410       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C411       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C412       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C413       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C414       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description  |
|------------|--------|--|
| C415       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C416       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C417       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C418       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C419       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C421       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C422       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C423       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C424       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C425       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C426       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C427       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C428       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C429       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C430       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C431       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C432       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C433       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C434       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C435       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C436       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V    |
| C437       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V    |
| C438       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C439       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P           |
| C440       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C441       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C442       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C443       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C444       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0            |
| C500       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C501       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C502       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C503       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C504       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C505       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V      |
| C506       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C507       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C508       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C509       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C510       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C511       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C512       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N   |
| C513       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N   |
| C514       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C515       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C516       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C517       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N           |
| C518       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P           |
| C519       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P           |
| C520       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C521       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P            |
| C522       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C523       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C524       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C525       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2  |
| C526       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C527       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C528       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C529       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P |
| C530       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C531       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P            |
| C532       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V    |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description   |
|------------|--------|---|
| C533       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V                       |
| C534       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P                              |
| C535       | 2L147  | Capacitor SM 0805 NPO Ceramic 5% 100V 470P                              |
| C536       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C537       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C600       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C601       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C602       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C603       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C604       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C605       | 2P610  | Capacitor Radial Electrolytic Elna ROD 10UF 35V                         |
| C606       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C607       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C608       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C609       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C610       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C611       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C612       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C613       | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                      |
| C614       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C615       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C616       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C617       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C620       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C621       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C622       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C623       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C624       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C625       | 2DA222 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 2N2                     |
| C626       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C627       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C628       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C629       | 2DA168 | Capacitor Boxed Polypropylene 5mm Pitch 100V 5% 680P                    |
| C630       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P                               |
| C631       | 2L033  | Capacitor SM 0805 NPO Ceramic 5% 100V 33P                               |
| C632       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V                       |
| C633       | 2V710  | Capacitor Non-Polar Radial Electrolytic 100UF 16V                       |
| C700       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C701       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C702       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C703       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C704       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C705       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C706       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C707       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C708       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C709       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C710       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C711       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C712       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C713       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C714       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C715       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C716       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C717       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C718       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C719       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C720       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C721       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C722       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C723       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C724       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description   |
|------------|--------|---|
| C725       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C726       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C727       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C728       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C729       | 2LA868 | Capacitor SM 0603 NPO Ceramic 5% 50V 6P8                                |
| C730       | 2JC182 | Capacitor SM 0603 X7R Ceramic 10% 50V 820P                              |
| C731       | 2JC239 | Capacitor SM 0603 X7R Ceramic 10% 50V 3N9                               |
| C732       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C733       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C734       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C735       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C736       | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C754       | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C800       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C801       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C802       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C803       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C804       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C805       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C806       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C807       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C811       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C812       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C813       | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 10N                               |
| C900       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C901       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C902       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C903       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C904       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C905       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C906       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C907       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C908       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C909       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C910       | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C911       | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V               |
| C912       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C913       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C914       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C915       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C916       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C917       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C918       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C919       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C920       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                               |
| C921       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C922       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C923       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C924       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C925       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C926       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C927       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C928       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C929       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C930       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C931       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C932       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C933       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C934       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C935       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C936       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C937       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P                              |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description  |
|------------|--------|--|
| C938       | 2L110  | Capacitor SM 0805 NPO Ceramic 5% 100V 100P                               |
| C939       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C940       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C941       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C942       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C943       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C944       | 2N747  | Capacitor Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V               |
| C945       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C946       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C947       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C948       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C949       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C950       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C951       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C952       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C953       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C954       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C955       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C956       | 2L010  | Capacitor SM 0805 NPO Ceramic 5% 100V 10P                                |
| C957       | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                                |
| C958       | 2L047  | Capacitor SM 0805 NPO Ceramic 5% 100V 47P                                |
| C1000      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1001      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1002      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1003      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1004      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1005      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1006      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1007      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1008      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1009      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1010      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1011      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1012      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1013      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1014      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1015      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1016      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1017      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1018      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V  |
| C1019      | 2Z722A | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 220UF 16V  |
| C1020      | 2Z747B | Capacitor Low Impedance Radial Electrolytic Dia 10mm Pitch 5mm 470UF 25V |
| C1021      | 2Z722A | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 220UF 16V  |
| C1022      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1023      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1024      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1025      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1026      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1027      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1028      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1029      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1030      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                               |
| C1031      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V                |
| C1032      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                                |
| C1033      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1034      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1035      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1036      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1037      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1038      | 2KA410 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 100N                       |
| C1039      | 2Z710D | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 100UF 50V  |
| C1040      | 2Z710D | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 100UF 50V  |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description   |
|------------|--------|---|
| C1041      | 2Z710D | Capacitor Low Impedance Radial Electrolytic Dia 8mm Pitch 5mm 100UF 50V |
| C1042      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1043      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1044      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C1045      | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1046      | 2KA447 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 470N                      |
| C1047      | 2KA447 | Capacitor Boxed Polyester 5mm Pitch 5% 100VDC 470N                      |
| C1048      | 2N833A | Capacitor Radial Electrolytic Dia 16mm Pitch 7.5mm 3300UF 35V           |
| C1049      | 2N833A | Capacitor Radial Electrolytic Dia 16mm Pitch 7.5mm 3300UF 35V           |
| C1050      | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1051      | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1052      | 2L210  | Capacitor SM 0805 NPO Ceramic 5% 100V 1N0                               |
| C1053      | 2N810C | Capacitor Radial Electrolytic Dia 12.5mm Pitch 5mm 1000UF 35V           |
| C1054      | 2N810C | Capacitor Radial Electrolytic Dia 12.5mm Pitch 5mm 1000UF 35V           |
| C1100      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1101      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1102      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1103      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1104      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1105      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1106      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1107      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1108      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1109      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1110      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1111      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1112      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1113      | 2L027  | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C1114      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1115      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1116      | 2N610  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 10UF 50V                |
| C1117      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1118      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1119      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1120      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1121      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1122      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1123      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1124      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1125      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1126      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1127      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1128      | 2JC210 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1129      | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1130      | 2JC310 | Capacitor SM 0603 X7R Ceramic 10% 50V 1N0                               |
| C1131      | 2L027  | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C1132      | 2L027  | Capacitor SM 0805 NPO Ceramic 5% 100V 27P                               |
| C1133      | 2N710  | Capacitor Radial Electrolytic Dia 5mm Pitch 5mm 100UF 25V               |
| C1134      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1135      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1136      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1137      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1138      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1139      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1140      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1141      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1142      | 2Z710B | Capacitor Low Impedance Radial Electrolytic Dia 5mm Pitch 5mm 100UF 10V |
| C1143      | 2J410  | Capacitor SM 0805 X7R Ceramic 10% 50V 100N                              |
| C1144      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| C1145      | 2JD410 | Capacitor SM 0603 X7R Ceramic 10% 16V 100N                              |
| CON200     | 8K6201 | Con Single ROW Hdr 0.1IN Vertical 2WAY                                  |
| CON201     | 8K6316 | Con Hdr Dual ROW 0.1IN Vertical 16WAY                                   |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part        | Description  |
|------------|-------------|--|
| CON202     | 8K8516      | Con 1.00MM Vertical FFC 16WAY 52806 Series               |
| CON203     | 8KB40       | Con Boxed Header 0.1IN Dual ROW 40WAY                    |
| CON400     | 8K6201      | Con Single ROW Hdr 0.1IN Vertical 2WAY                   |
| CON900     | 8K9009M     | Con Dtype Horiz 9WAY Male With Boardlock                 |
| CON901     | 8K8022B     | Con 1.00MM Vertical FFC 22WAY 52806 Series               |
| CON902     | 8K8022B     | Con 1.00MM Vertical FFC 22WAY 52806 Series               |
| CON1001    | 8K8032      | Con 1.25MM Vertical FFC 32WAY                            |
| CON1002    | 8K2304      | Con Minifit HCS 4WAY                                     |
| D300       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D400       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D401       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D403       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D404       | 3AS16W      | Diode Surface Mount Small Signal BAS16W SOT-23 Package   |
| D500       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D501       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D600       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D601       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D700       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D701       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D702       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D703       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D704       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D705       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D800       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D801       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D900       | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D1000      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1001      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1002      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1003      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1004      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1005      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1006      | 3BS1D       | Diode Surface Mount S1D                                  |
| D1100      | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D1101      | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| D1102      | 3F54S       | Diode Schottky BAT54S SOT-23 Package                     |
| DBR1000    | 3BW02       | Diode Bridge Rectifier W02G Plastic Package              |
| DBR1001    | 3BW02       | Diode Bridge Rectifier W02G Plastic Package              |
| DZ900      | 3CW35V6     | Zener Diode 0.25W Surface Mount BZX84C5V6 SOT-23 Package |
| DZ1100     | 3CW35V6     | Zener Diode 0.25W Surface Mount BZX84C5V6 SOT-23 Package |
| FS1000     | C3751       | Fuse Littelfuse T750mA SM                                |
| HS202      | F013        | Heatsink BGA 3319 20.9 Deg C/W                           |
| HS1000     | F007        | Heatsink TO-220 6043PB 23 Degc/W Clip ON                 |
| FS1001     | C3751       | Fuse Littelfuse T750mA SM                                |
| IC200      | 5K74125T    | IC Quad Buffer 74HCT125D SMT                             |
| IC201      | 5H809263    | IC Micro Reset LM809M3-2.63 SOT-23                       |
| IC202      | 5L36750     | IC Vaddis V DVD ZR36750 BGA-316 Package                  |
| IC203      | 5H6432-7    | IC Sdram 64Mbit K4S643232F-TC70                          |
| IC204      | 5G24LC08    | IC Eeprom 24LC08BT/SN 8K SO-8 Package                    |
| IC205      | L029AY      | Programmed Flash 28F160 For DV79 DVD Player              |
| IC300      | 5A8707E     | IC Clock Generator SM8707E VSOP-16 Package               |
| IC301      | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY      |
| IC302      | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY      |
| IC303      | 5KA100      | IC Single 2-INPUT Nand GATESN74AHC1G00DBVR DBV           |
| IC304      | 5K74LVC74   | IC Dual Flip-Flop 74LVC74AD SMT                          |
| IC305      | 5K151       | IC 8-INPUT Mux 74HC151D SMT                              |
| IC306      | 5K74LVC74   | IC Dual Flip-Flop 74LVC74AD SMT                          |
| IC307      | 5KLVC125    | IC Quad Buffer 5V Tol 74LVC125AD SMT                     |
| IC308      | 5KLVC125    | IC Quad Buffer 5V Tol 74LVC125AD SMT                     |
| IC309      | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY      |
| IC400      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |
| IC401      | 5B2134      | Opamp OPA2134UA SO-8 Package                             |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part        | Description   |
|------------|-------------|---|
| IC402      | 5S413DY     | IC Quad Analogue Switch DG413DY SO-16 Package           |
| IC403      | 5A8740      | IC Audio DAC XWM8740EDS SSOP-28 Package                 |
| IC500      | 5B2134      | Opamp OPA2134UA SO-8 Package                            |
| IC501      | 5B2134      | Opamp OPA2134UA SO-8 Package                            |
| IC502      | 5A8740      | IC Audio DAC XWM8740EDS SSOP-28 Package                 |
| IC600      | 5B2134      | Opamp OPA2134UA SO-8 Package                            |
| IC601      | 5B2134      | Opamp OPA2134UA SO-8 Package                            |
| IC602      | 5A8740      | IC Audio DAC XWM8740EDS SSOP-28 Package                 |
| IC700      | 5B8062      | Opamp AD8062AR SO-8 Package                             |
| IC701      | 5B8062      | Opamp AD8062AR SO-8 Package                             |
| IC702      | 5B8062      | Opamp AD8062AR SO-8 Package                             |
| IC703      | 5V7310      | IC Video Encoder ADV7310KST LQFP-64 Package             |
| IC900      | 5N202E      | IC RS232 Charge Pump Driver MAX202ECSE Static Protected |
| IC1100     | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY     |
| IC1101     | 5KLVC244APW | IC Octal 3 State Buffer74LVC244A TSSOP PHILIPS ONLY     |
| IC1102     | 5V9030      | IC HDMI Transmitter Si9030                              |
| IC1103     | 5KLV164     | IC Shift Register 74LV164 SMT                           |
| IC1104     | 5KLVC157A   | IC Quad 2 Input Multiplexer 74LVC157A SMT               |
| L200       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L201       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L301       | 7E101       | Common Mode Choke 1000R@100MHz                          |
| L400       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L500       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L600       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L700       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L701       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L702       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L703       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L704       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L705       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L706       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L707       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L708       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L709       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L710       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L711       | 7BA822      | Inductor SM SIMID1210 2U2                               |
| L712       | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L900       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L901       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L902       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L903       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L904       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L905       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L906       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L907       | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1000      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1001      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1002      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1003      | 7F003       | Ferrite Bead Axial 100MHz/20 Degree C                   |
| L1004      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1005      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1006      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1007      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1008      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1009      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1010      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1011      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1012      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |
| L1013      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1014      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1015      | 7C033B      | Inductor 33UH 10% 1.17A A823LY-330K=R                   |
| L1100      | 7F007       | Ferrite Bead SM0805 120R@100MHz                         |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part  | Description                                |
|------------|-------|--|
| L1101      | 7F007 | Ferrite Bead SM0805 120R@100MHz            |
| L1102      | 7F007 | Ferrite Bead SM0805 120R@100MHz            |
| L1103      | 7F007 | Ferrite Bead SM0805 120R@100MHz            |
| L1104      | 7F007 | Ferrite Bead SM0805 120R@100MHz            |
| L1105      | 7F007 | Ferrite Bead SM0805 120R@100MHz            |
| L1106      | 7F007 | Ferrite Bead SM0805 120R@100MHz            |
| R200       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R201       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R202       | 1N022 | Resistor 0603 Surface Mount 0.063W 1% 22R  |
| R203       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R204       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R205       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R206       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R207       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R208       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R209       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R210       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R211       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R218       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R219       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R220       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R221       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R222       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R223       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R224       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R225       | 1N210 | Resistor 0603 Surface Mount 0.063W 1% 1K0  |
| R226       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R227       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R228       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R229       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R230       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R231       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R232       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R233       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R234       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R235       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R236       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R237       | 1M247 | Resistor 0805 Surface Mount 0.125W 1% 4K7  |
| R238       | 1M082 | Resistor 0805 Surface Mount 0.125W 1% 82R  |
| R239       | 1M082 | Resistor 0805 Surface Mount 0.125W 1% 82R  |
| R240       | 1M082 | Resistor 0805 Surface Mount 0.125W 1% 82R  |
| R241       | 1M022 | Resistor 0805 Surface Mount 0.125W 1% 22R  |
| R242       | 1M022 | Resistor 0805 Surface Mount 0.125W 1% 22R  |
| R243       | 1M022 | Resistor 0805 Surface Mount 0.125W 1% 22R  |
| R244       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R245       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R246       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R247       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R248       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R249       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R250       | 1M256 | Resistor 0805 Surface Mount 0.125W 1% 5K6  |
| R251       | 1M033 | Resistor 0805 Surface Mount 0.125W 1% 33R  |
| R252       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R253       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R254       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R255       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R300       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R301       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R302       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R303       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R304       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R305       | 1N218 | Resistor 0603 Surface Mount 0.063W 1% 1K8  |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part  | Description                                |
|------------|-------|--|
| R306       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R307       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R308       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R309       | 1N047 | Resistor 0603 Surface Mount 0.063W 1% 47R  |
| R310       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R311       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R312       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R313       | 1M056 | Resistor 0805 Surface Mount 0.125W 1% 56R  |
| R314       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R315       | 1N175 | Resistor 0603 Surface Mount 0.063W 1% 750R |
| R316       | 1N175 | Resistor 0603 Surface Mount 0.063W 1% 750R |
| R317       | 1N175 | Resistor 0603 Surface Mount 0.063W 1% 750R |
| R318       | 1M112 | Resistor 0805 Surface Mount 0.125W 1% 120R |
| R319       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R320       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R321       | 1N075 | Resistor 0603 Surface Mount 0.063W 1% 75R  |
| R322       | 1N047 | Resistor 0603 Surface Mount 0.063W 1% 47R  |
| R323       | 1N110 | Resistor 0603 Surface Mount 0.063W 1% 100R |
| R400       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R401       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R402       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R403       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R404       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R405       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R406       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R407       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R408       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R409       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R410       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R411       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R412       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R413       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R414       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R415       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R416       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R417       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R418       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R419       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R420       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R421       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R422       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R423       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R424       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R425       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R426       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R427       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R428       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R429       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R430       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R431       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R434       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R435       | 1M210 | Resistor 0805 Surface Mount 0.125W 1% 1K0  |
| R436       | 1M110 | Resistor 0805 Surface Mount 0.125W 1% 100R |
| R500       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R501       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R502       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R503       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R504       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R505       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R506       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R507       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R508       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part  | Description                                |
|------------|-------|--|
| R509       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R510       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R511       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R512       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R513       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R514       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R515       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R516       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R517       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R518       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R519       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R520       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R521       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R522       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R523       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R524       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R525       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R526       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R527       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R600       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R601       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R602       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R603       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R604       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R605       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R606       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R607       | 1M233 | Resistor 0805 Surface Mount 0.125W 1% 3K3  |
| R608       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R609       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R610       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R611       | 1M168 | Resistor 0805 Surface Mount 0.125W 1% 680R |
| R612       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R613       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R614       | 1M310 | Resistor 0805 Surface Mount 0.125W 1% 10K  |
| R615       | 1M347 | Resistor 0805 Surface Mount 0.125W 1% 47K  |
| R616       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R617       | 1M311 | Resistor 0805 Surface Mount 0.125W 1% 11K  |
| R618       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R619       | 1M510 | Resistor 0805 Surface Mount 0.125W 1% 1M0  |
| R620       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R621       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R622       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R623       | 1M047 | Resistor 0805 Surface Mount 0.125W 1% 47R  |
| R624       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R626       | 1M000 | Resistor 0805 Surface Mount 0.125W 1% 0R0  |
| R700       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R701       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R702       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R703       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R704       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R705       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R706       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R707       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R708       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R709       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R710       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R711       | 1N156 | Resistor 0603 Surface Mount 0.063W 1% 560R |
| R712       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R713       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R714       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R715       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |
| R716       | 1N213 | Resistor 0603 Surface Mount 0.063W 1% 1K3  |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part   | Description                                  |
|------------|--------|--|
| R717       | 1N213  | Resistor 0603 Surface Mount 0.063W 1% 1K3    |
| R718       | 1N215  | Resistor 0603 Surface Mount 0.063W 1% 1K5    |
| R719       | 1N215  | Resistor 0603 Surface Mount 0.063W 1% 1K5    |
| R720       | 1N215  | Resistor 0603 Surface Mount 0.063W 1% 1K5    |
| R721       | 1N230  | Resistor 0603 Surface Mount 0.063W 1% 3K0    |
| R722       | 1N230  | Resistor 0603 Surface Mount 0.063W 1% 3K0    |
| R723       | 1N215  | Resistor 0603 Surface Mount 0.063W 1% 1K5    |
| R724       | 1N215  | Resistor 0603 Surface Mount 0.063W 1% 1K5    |
| R725       | 1N215  | Resistor 0603 Surface Mount 0.063W 1% 1K5    |
| R726       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R727       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R728       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R729       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R730       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R731       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R732       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R733       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R734       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R735       | 1N075  | Resistor 0603 Surface Mount 0.063W 1% 75R    |
| R736       | 1M168  | Resistor 0805 Surface Mount 0.125W 1% 680R   |
| R737       | 1N139  | Resistor 0603 Surface Mount 0.063W 1% 390R   |
| R738       | 1N039  | Resistor 0603 Surface Mount 0.063W 1% 39R    |
| R739       | 1N039  | Resistor 0603 Surface Mount 0.063W 1% 39R    |
| R740       | 1M210  | Resistor 0805 Surface Mount 0.125W 1% 1K0    |
| R741       | 1NA115 | Resistor 0603 Surface Mount 0.032W 0.1% 150R |
| R742       | 1NA115 | Resistor 0603 Surface Mount 0.032W 0.1% 150R |
| R743       | 1NA115 | Resistor 0603 Surface Mount 0.032W 0.1% 150R |
| R800       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R801       | 1M210  | Resistor 0805 Surface Mount 0.125W 1% 1K0    |
| R803       | 1M110  | Resistor 0805 Surface Mount 0.125W 1% 100R   |
| R806       | 1M268  | Resistor 0805 Surface Mount 0.125W 1% 6K8    |
| R807       | 1M247  | Resistor 0805 Surface Mount 0.125W 1% 4K7    |
| R808       | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K    |
| R809       | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R   |
| R810       | 1M133  | Resistor 0805 Surface Mount 0.125W 1% 330R   |
| R811       | 1M210  | Resistor 0805 Surface Mount 0.125W 1% 1K0    |
| R812       | 1M082  | Resistor 0805 Surface Mount 0.125W 1% 82R    |
| R900       | 1M210  | Resistor 0805 Surface Mount 0.125W 1% 1K0    |
| R901       | 1M247  | Resistor 0805 Surface Mount 0.125W 1% 4K7    |
| R902       | 1M247  | Resistor 0805 Surface Mount 0.125W 1% 4K7    |
| R903       | 1M247  | Resistor 0805 Surface Mount 0.125W 1% 4K7    |
| R904       | 1M047  | Resistor 0805 Surface Mount 0.125W 1% 47R    |
| R905       | 1M047  | Resistor 0805 Surface Mount 0.125W 1% 47R    |
| R906       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R907       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R908       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R909       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R910       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R911       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R912       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R913       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R914       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R915       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R916       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R917       | 1M000  | Resistor 0805 Surface Mount 0.125W 1% 0R0    |
| R918       | 1M110  | Resistor 0805 Surface Mount 0.125W 1% 100R   |
| R919       | 1M110  | Resistor 0805 Surface Mount 0.125W 1% 100R   |
| R920       | 1M210  | Resistor 0805 Surface Mount 0.125W 1% 1K0    |
| R921       | 1M210  | Resistor 0805 Surface Mount 0.125W 1% 1K0    |
| R922       | 1M210  | Resistor 0805 Surface Mount 0.125W 1% 1K0    |
| R923       | 1M247  | Resistor 0805 Surface Mount 0.125W 1% 4K7    |
| R924       | 1M310  | Resistor 0805 Surface Mount 0.125W 1% 10K    |

**DV79 DVD player Main board L974AY issue 1.1.1**

| Designator | Part      | Description   |
|------------|-----------|---|
| R1000      | 1M112     | Resistor 0805 Surface Mount 0.125W 1% 120R                  |
| R1001      | 1M139     | Resistor 0805 Surface Mount 0.125W 1% 390R                  |
| R1002      | 1M133     | Resistor 0805 Surface Mount 0.125W 1% 330R                  |
| R1003      | 1M139     | Resistor 0805 Surface Mount 0.125W 1% 390R                  |
| R1004      | 1M233     | Resistor 0805 Surface Mount 0.125W 1% 3K3                   |
| R1005      | 1M233     | Resistor 0805 Surface Mount 0.125W 1% 3K3                   |
| R1006      | 1M056     | Resistor 0805 Surface Mount 0.125W 1% 56R                   |
| R1007      | 1M210     | Resistor 0805 Surface Mount 0.125W 1% 1K0                   |
| R1008      | 1H022     | Resistor Metal Film 0.25W 1% 22R                            |
| R1009      | 1M310     | Resistor 0805 Surface Mount 0.125W 1% 10K                   |
| R1010      | 1M310     | Resistor 0805 Surface Mount 0.125W 1% 10K                   |
| R1100      | 1M112     | Resistor 0805 Surface Mount 0.125W 1% 120R                  |
| R1101      | 1M056     | Resistor 0805 Surface Mount 0.125W 1% 56R                   |
| R1102      | 1N222     | Resistor 0603 Surface Mount 0.063W 1% 2K2                   |
| R1103      | 1N222     | Resistor 0603 Surface Mount 0.063W 1% 2K2                   |
| R1104      | 1N075     | Resistor 0603 Surface Mount 0.063W 1% 75R                   |
| R1105      | 1M310     | Resistor 0805 Surface Mount 0.125W 1% 10K                   |
| R1106      | 1M310     | Resistor 0805 Surface Mount 0.125W 1% 10K                   |
| R1107      | 1M310     | Resistor 0805 Surface Mount 0.125W 1% 10K                   |
| R1108      | 1N147     | Resistor 0603 Surface Mount 0.063W 1% 470R                  |
| R1109      | 1M210     | Resistor 0805 Surface Mount 0.125W 1% 1K0                   |
| R1110      | 1N218     | Resistor 0603 Surface Mount 0.063W 1% 1K8                   |
| R1111      | 1N218     | Resistor 0603 Surface Mount 0.063W 1% 1K8                   |
| R1112      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| R1113      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| R1114      | 1M310     | Resistor 0805 Surface Mount 0.125W 1% 10K                   |
| R1115      | 1N327     | Resistor 0603 Surface Mount 0.063W 1% 27K                   |
| R1116      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| R1117      | 1N110     | Resistor 0603 Surface Mount 0.063W 1% 100R                  |
| REG300     | 5D10863S  | IC Voltage Regulator +3.3V LM1086CS-3.3 TO-263 Package      |
| REF700     | 5D40411V2 | Voltage Reference 1.225V LM4041CIM3-1.2 SOT-23 Package      |
| REG700     | 5D33332V5 | IC Voltage Regulator +2.5V ADP3333ARM-2.5 MSOP-8 Package    |
| REG1000    | 5D317T    | IC Voltage Regulator ADJ LM317T TO-220 Package              |
| REG1001    | 5D317T    | IC Voltage Regulator ADJ LM317T TO-220 Package              |
| REG1002    | 5D337     | IC Voltage Regulator Neg ADJ LM337T TO-220 Package          |
| REG1003    | 5D1086AS  | IC Voltage Regulator Adjustable LM1086CS-ADJ TO-263 Package |
| REG1100    | 5D10863S  | IC Voltage Regulator +3.3V LM1086CS-3.3 TO-263 Package      |
| REG1101    | 5D78L05S  | IC Voltage Regulator +5V L78L05ACD SO-8 Package             |
| REG1102    | 5D1086AS  | IC Voltage Regulator Adjustable LM1086CS-ADJ TO-263 Package |
| RLY400     | A216      | Relay 2P2T 5V SM  |
| RLY500     | A216      | Relay 2P2T 5V SM  |
| RLY600     | A216      | Relay 2P2T 5V SM  |
| RP200      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP201      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP202      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP203      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP204      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP205      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP206      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP207      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP208      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP209      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP210      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP211      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP212      | 1V033B    | Resistor Pack Surface Mount 4 Isolated Resistors 33R        |
| RP213      | 1V056B    | Resistor Pack Surface Mount 4 Isolated Resistors 56R        |
| RP214      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP215      | 1V247B    | Resistor Pack Surface Mount 4 Isolated Resistors 4K7        |
| RP216      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP217      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP218      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |
| RP219      | 1V110B    | Resistor Pack Surface Mount 4 Isolated Resistors 100R       |

## DV79 DVD player Main board L974AY issue 1.1.1

Transformer Specification for 115/230V 50/60Hz mains transformer.

Arcam Part Number L924TX

The transformer is extremely cost sensitive. It is to employ the most cost effective techniques to achieve the specification.

The transformer output voltage will be regulated by a switch mode power supply.

The only essential specification is the fact that it must produce no acoustic noise either internally or by induced eddy currents in steel chassis etc..

All other specifications are negotiable in the interest of allowing cost reduction. Even the use of a frame TX rather than a toroid is negotiable providing it is silent.

1. The transformer MUST be silent when loaded to  $P_o + 10\%$  and when supplied from  $V_{in} = 270V$  r.m.s.

General Safety specification.

2. To standards BS415 / EN60065 - Class I / EN60742

3. Transformer to be used in equipment which will be sold worldwide and certified to CE, CB, UL and CSA Standards. All materials etc to be adequate for worldwide safety approvals.

Material Safety Specification

4. Winding Wire to be Grade 2 (130°C rating) to BS 60317-4 1995

5. Mylar Polyester Insulator Rated to 130°C

Electrical Specification

6. Transformer to have dual 115V primaries to allow parallel operation for 115V input and series operation with 230V input.

7. Transformer is required to provide a mains isolation barrier and provide a single secondary winding.

8. The secondary winding is to be full wave rectified and smoothed as shown in the below diagram.

9. The DC voltage so provided will be followed by a switch mode power supply which will provide a constant power load.

(i.e. the current drawn by the load will increase as the DC output voltage falls- hence the capacitor ripple voltage will be higher at low input voltage)

10. The power drawn by the load has a maximum continuous rating ( $P_o$ ) of 22W.

11. Transformer input voltage range as follows:

115V (85V to 132.5V) windings in parallel  
230V (170V to 265V) windings in series

Note. Extended input voltage range 85V to 265V

12. At minimum input voltage (170V AC) the minimum voltage on the capacitor must be > 22.5V with  $P_o = 22W$

13. At maximum input voltage and minimum load of 6W the max voltage on output capacitor must be < 63V.

14. The secondary voltages and r.m.s currents have been calculated and are tabulated against input voltage.

The model assumes the transformer regulation is made as poor as possible while meeting spec.

The equivalent series resistance of the windings transformed to the secondary is 7ohms under this condition.

Rms figures for voltages and currents are true rms figures measured with the specified bridge rectifier, Capacitor and load resistor connected to the transformer secondary.

In the case of the load regulation for lowest cost transformer being better than the worst case specification then the transformer voltages shall be modified so that the minimum 22.5V spec is met at 170V input and the output voltages at 230V and 265V input voltage are lower than the specified voltages.

15. Temperature rise to be such that transformer is safe when operated in an enclosure with 50C maximum internal temperature.

16. Toroid to be fitted with interwinding screen.

Mechanical Specification

17. Primary wires self-ended and individually sleeved for colour coding, then sleeved together.

18. Secondary wires self-ended and individually sleeved, then sleeved together.

19. Wire type used on the terminations must be such that the wire may be bent with a minimum bend radius of 10mm through an angle of 90degrees 10times without the wire fracturing. This will allow the wires to be dressed in production without risk of damage to terminations.


20. All wire lengths are +20, -0 mm. All wires stripped 8 +/-2mm and tinned.

21. Transformer to be marked with part number and issue number.

22. Toroidal transformer will be attached to the chassis by a dished washer and bolt (no potting required).

23. A frame transformer meeting the above spec will be chassis mounted with flying leads and should have clamp fitted to allow it to be screwed to chassis.

24. Toroidal transformer to be supplied with mounting kit consisting of metal dished washer and 2 neoprene or similar washers.

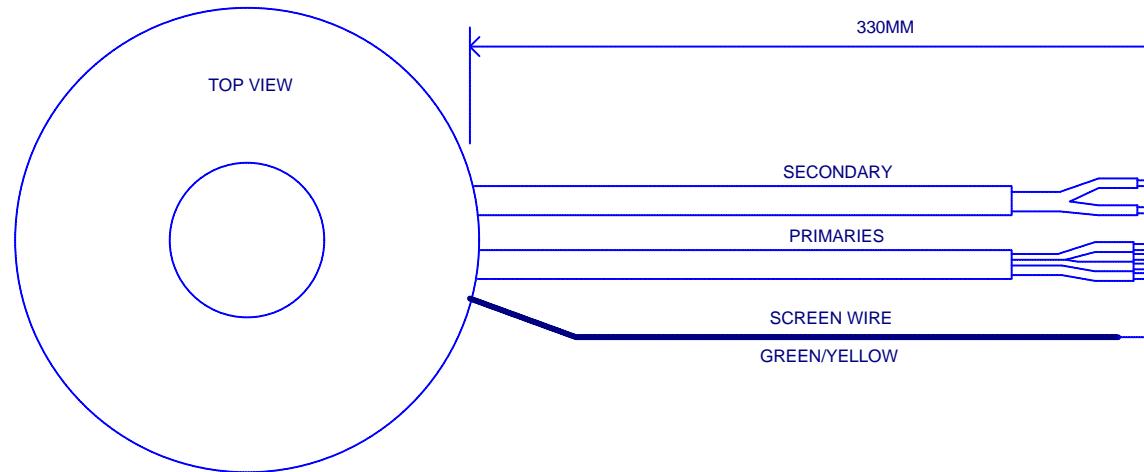



### Secondary Winding Voltage and Current Specs

assuming  $C=1360\mu F$ ,  $f = 50Hz$  for  $P_o = 22W$



Bridge Rectifier  $V_f$  diode = 1.1V per leg = 2.2V Total

Ideal TX assumed with 7Ohm series resistor in secondary to simulate regulation.

| AC Supply Voltage Pri in Series (V r.m.s.) | Loaded Secondary Voltage (V r.m.s.) | Capacitor Peak Voltage Vpk (Volt) | Capacitor Min Voltage Vmin (Volt) | Capacitor Average Voltage (Volt) | Load Resistor to simulate Load RL (Ohm) | Secondary Winding r.m.s. Current (A r.m.s.) |
|--|-------------------------------------|-----------------------------------|-----------------------------------|----------------------------------|---|---|
| 170  | 23.2                                | 26.9                              | 23.7                              | 25.3                             | 28                                      | 1.3   |
| 230  | 37.3                                | 46.0                              | 43.7                              | 44.8                             | 88                                      | 0.86  |
| 265  | 44.4                                | 55.7                              | 53.8                              | 54.8                             | 130                                     | 0.75  |

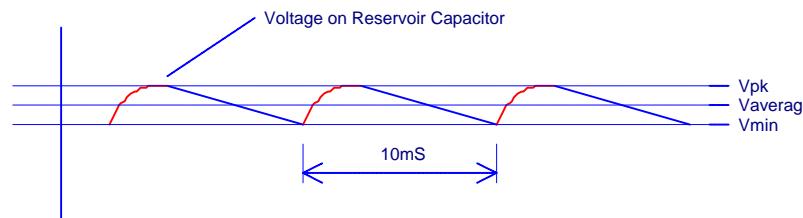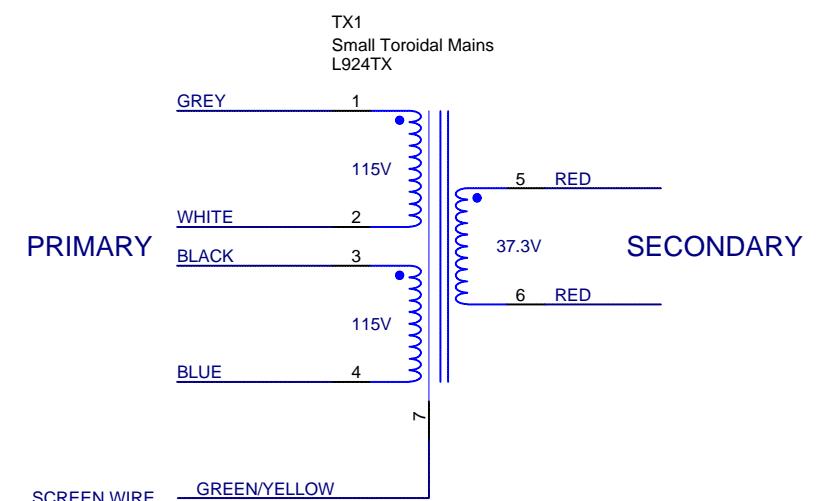


TEST CIRCUIT

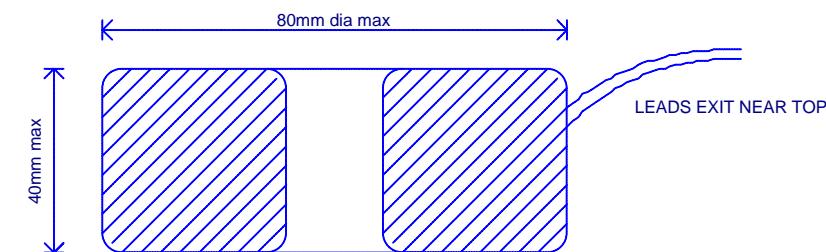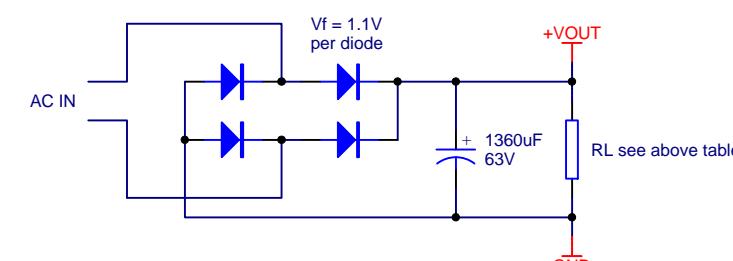


| DRAWING TITLE DV78 TRANSFORMER 115/230V                                    |            |              |                       |          |            |              |   |
|--|------------|--------------|-----------------------|----------|------------|--------------|---|
| <b>ARCAM</b>   |            |              |                       | 03_E195  | KAL        | 02-07-2003   | Production Release                                      |
| A & R Cambridge Ltd.<br>Pembroke Avenue<br>Waterbeach<br>Cambridge CB5 9PB |            |              |                       | 03_E086  | KAL        | 21-03-2003   | Corrected Wire Colours added notes re Clamp             |
| Notes:<br><br>Filenum: L924TX_1.0.sch                                      |            |              |                       | 03_E042  | KAL        | 4-02-2003    | Reduced Power Output Spec, Reduced Load Regulation Spec |
| ECO No.  | INITIALS   | DATE         | DESCRIPTION OF CHANGE |          |            |              | ISSUE   |
| Contact Engineer:  | Kevin Lamb | Contact Tel: | (01223) 203243        | Printed: | 7-Jul-2003 | Sheet 1 of 1 | A3 DRAWING NO. L924TX                                   |

## NOTE.


TRANSFORMER IS TO BE USED ON SECONDARY SIDE OF MAINS ISOLATION BARRIER (I.E. THIS TRANSFORMER IS NOT REQUIRED TO PROVIDE MAINS ISOLATION BARRIER)  
MAXIMUM VOLTAGE BETWEEN WINDINGS <60V

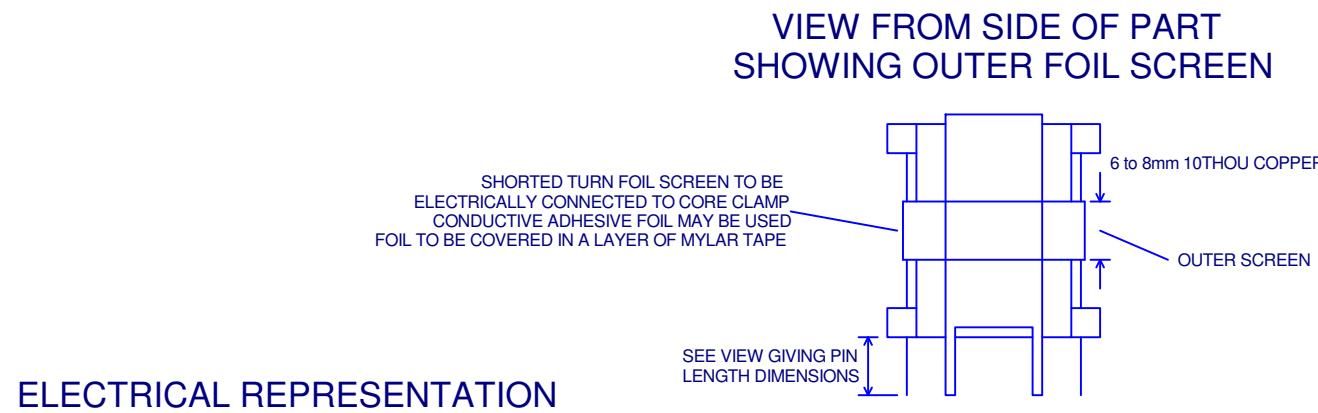

## ELECTRICAL REPRESENTATION

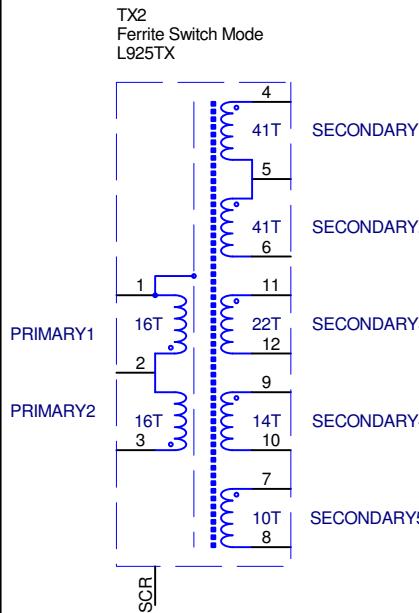


## VIEW FROM SIDE OF PART SHOWING PIN LENGTH DIMENSIONS

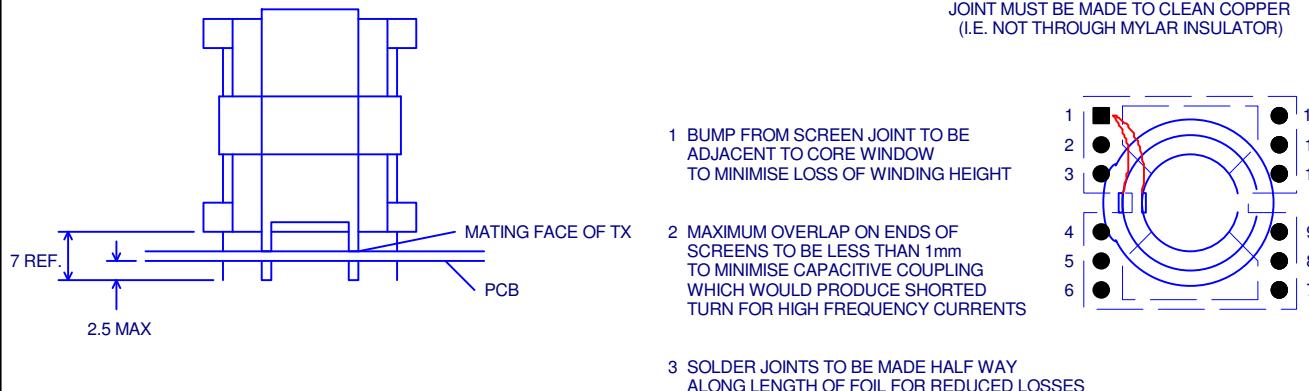

## VIEW FROM SIDE OF PART SHOWING OUTER FOIL SCREEN


| WINDING    | TURNS | WIRE DETAILS                    | No PER CABLE | ID     | OD     | START PIN # | END PIN # | NOTES  |
|------------|-------|---------------------------------|--------------|--------|--------|-------------|-----------|--|
| PRIMARY2   | 16    | ENAMELLED COPPER WIRE           | 1            | 0.8mm  | 0.86mm | 3           | 2         | SPACE WINDING ACROSS WHOLE BOBBIN WIDTH                        |
| SCREEN 2   |       | INSULATED 2mil COPPER FOIL      |              |        |        |             | 1         | SCREEN TO HAVE NO OVERLAP AT ENDS                              |
| SECONDARY3 | 22    | ENAMELLED COPPER WIRE           | 1            | 0.25mm | 0.3mm  | 11          | 12        | WIND ACROSS WHOLE BOBBIN WIDTH BETWEEN GAPS IN SEC4            |
| SECONDARY4 | 14    | ENAMELLED COPPER WIRE           | 1            | 0.66mm | 0.72mm | 9           | 10        | SPACE WINDING ACROSS WHOLE BOBBIN WIDTH                        |
| SECONDARY5 | 10    | ENAMELLED COPPER WIRE (BIFILAR) | 2            | 0.66mm | 0.72mm | 7           | 8         | WIND AS A BIFILAR PAIR ACROSS WHOLE BOBBIN WIDTH               |
| SECONDARY1 | 41    | ENAMELLED COPPER WIRE           | 1            | 0.25mm | 0.3mm  | 4           | 5         | WIND SEC1 AND SEC2 AS A BIFILAR PAIR ACROSS WHOLE BOBBIN WIDTH |
| SECONDARY2 | 41    | ENAMELLED COPPER WIRE           | 1            | 0.25mm | 0.3mm  | 5           | 6         |  |
| SCREEN 1   |       | INSULATED 2mil COPPER FOIL      |              |        |        |             | 1         | SCREEN TO HAVE NO OVERLAP AT ENDS                              |
| PRIMARY1   | 16    | ENAMELLED COPPER WIRE           | 1            | 0.8mm  | 0.86mm | 2           | 1         | SPACE WINDING ACROSS WHOLE BOBBIN WIDTH                        |

## VIEW FROM TOP OF PART WITH PART INSTALLED IN PCB

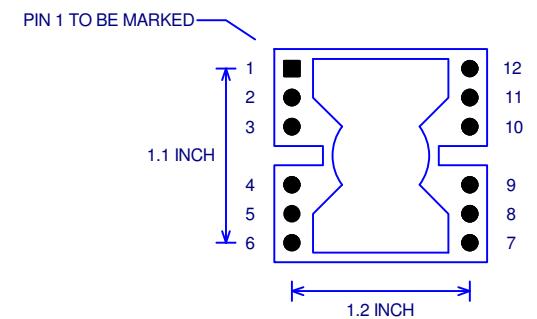

### NOTE PIN NUMBERING CONVENTION

## WINDING ARRANGEMENT ON BOBBIN

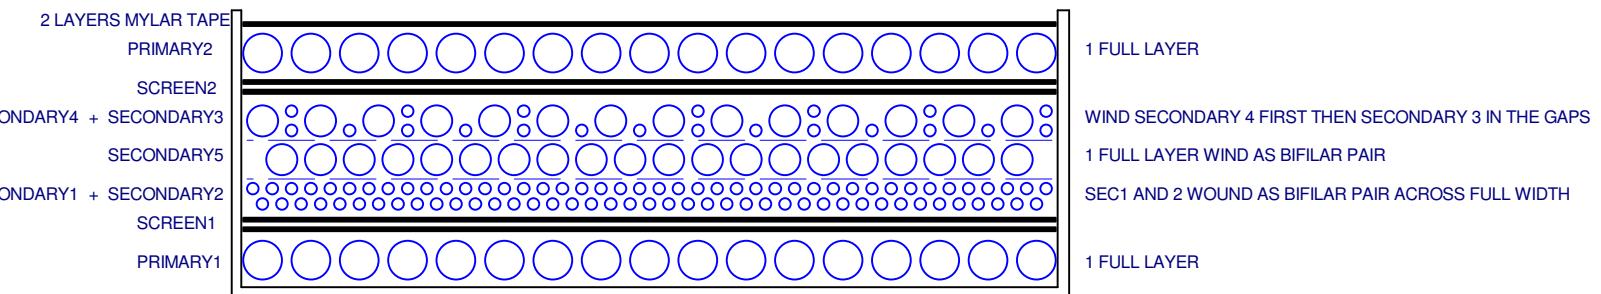


## MATERIALS

|              |   |
|--------------|---|
| CORE         | PQ32/30 in PC44 MATERIAL (OR EQUIVALENT)<br>CORE TO BE GAPPED IN CENTRE LEG TO GIVE REQUIRED Lpri (GAP APPROX 0.4mm)<br>(Lpri = 450uH +/- 10% PRIMARY INDUCTANCE MEASURED FROM PIN 1 TO 3)<br>PART NUMBER TDK PC44PQ32/30Z-12 (OR EQUIVALENT) |
| BOBBIN CLAMP | PART NUMBER TDK BPQ32/30-1112CP (OR EQUIVALENT)<br>PART NUMBER TDK FPQ32/30-A (OR EQUIVALENT)   |

## ASSEMBLY DETAILS

- PART TO BE MARKED WITH PART NUMBER / ISSUE NUMBER
- INTERNAL SCREENS TO BE FULL WIDTH. CONNECTION TO SCREEN VIA SOLDER JOINT TO COPPER (SEE DIAGRAM)  
SOLDER JOINT TO BE ARRANGED TO PRODUCE A LUMP IN THE CORE WINDOW  
SOLDER JOINT TO MAKE MADE TO CLEAN COPPER AND JOINT TO BE TAPE.
- SOLDER JOINT TO BE MADE HALF WAY ALONG LENGTH OF THE FOIL  
SCREEN TO BE HIGHEST POSSIBLE RESISTANCE FOIL FOR LOWEST LOSSES. (I.E. FOIL AS THIN AS POSSIBLE)  
SCREEN TO BE MADE FROM MAXIMUM 0.05mm (2MIL) FOIL
- WINDINGS WILL BE A TIGHT FIT ON BOBBIN. NOTES AND WINDING ARRANGEMENT SPECIFIED TO BE ADOPTED.
- TRANSFORMER TO BE FITTED WITH AN OUTER COPPER SCREEN WRAPPED AROUND THE OUTSIDE OF THE  
OF THE TRANSFORMER CORE AND CONTACTING THE METAL CORE CLAMP THUS FORMING A SHORTED TURN  
TO LEAKAGE FLUX. SEE DIAGRAM  
SCREEN TO BE 10THOU COPPER STRIP 6 to 8mm WIDE AND FITTED OVER THE JOIN OF THE CORE HALVES.
- PIN 1 ON BOBBIN TO BE MARKED WITH WHITE PAINT (OR OTHERWISE)  
THIS MARKING TO BE USED TO ORIENTATE TX DURING WINDING PHASE TEST
- 100% PHASE TEST AND ISOLATION TEST TO BE CARRIED OUT ON ALL WINDINGS.

| DRAWING TITLE     | DV78 450uH FLYBACK TX |              |                       |   |            |              |             |        |
|-------------------|-----------------------|--------------|-----------------------|---|------------|--------------|-------------|--------|
| ARCAM             | 03_E290               | SLS          | 06-10-03              | 'VIEW FROM SIDE OF PART SHOWING PIN LENGTH DIMS' added.         | 1.1        |              |             |        |
| Notes:            | 02_E195               | KAL          | 02-07-03              | Production Release  | 1.0        |              |             |        |
|                   | 02_E086               | KAL          | 21-03-03              | Changed Pri1,2 and Sec1,2 turns, Lpri & gap, Added outer screen | B.0        |              |             |        |
|                   | 02_E336               | KAL          | 20-11-02              | Prototype Release   | A.0        |              |             |        |
| ECO No.           | INITIALS              | DATE         | DESCRIPTION OF CHANGE |   |            |              |             | ISSUE  |
| Contact Engineer: | Kevin Lamb            | Contact Tel: | (01223) 203200        | Printed:  | 8-Oct-2003 | Sheet 1 of 1 | DRAWING NO. | L925TX |

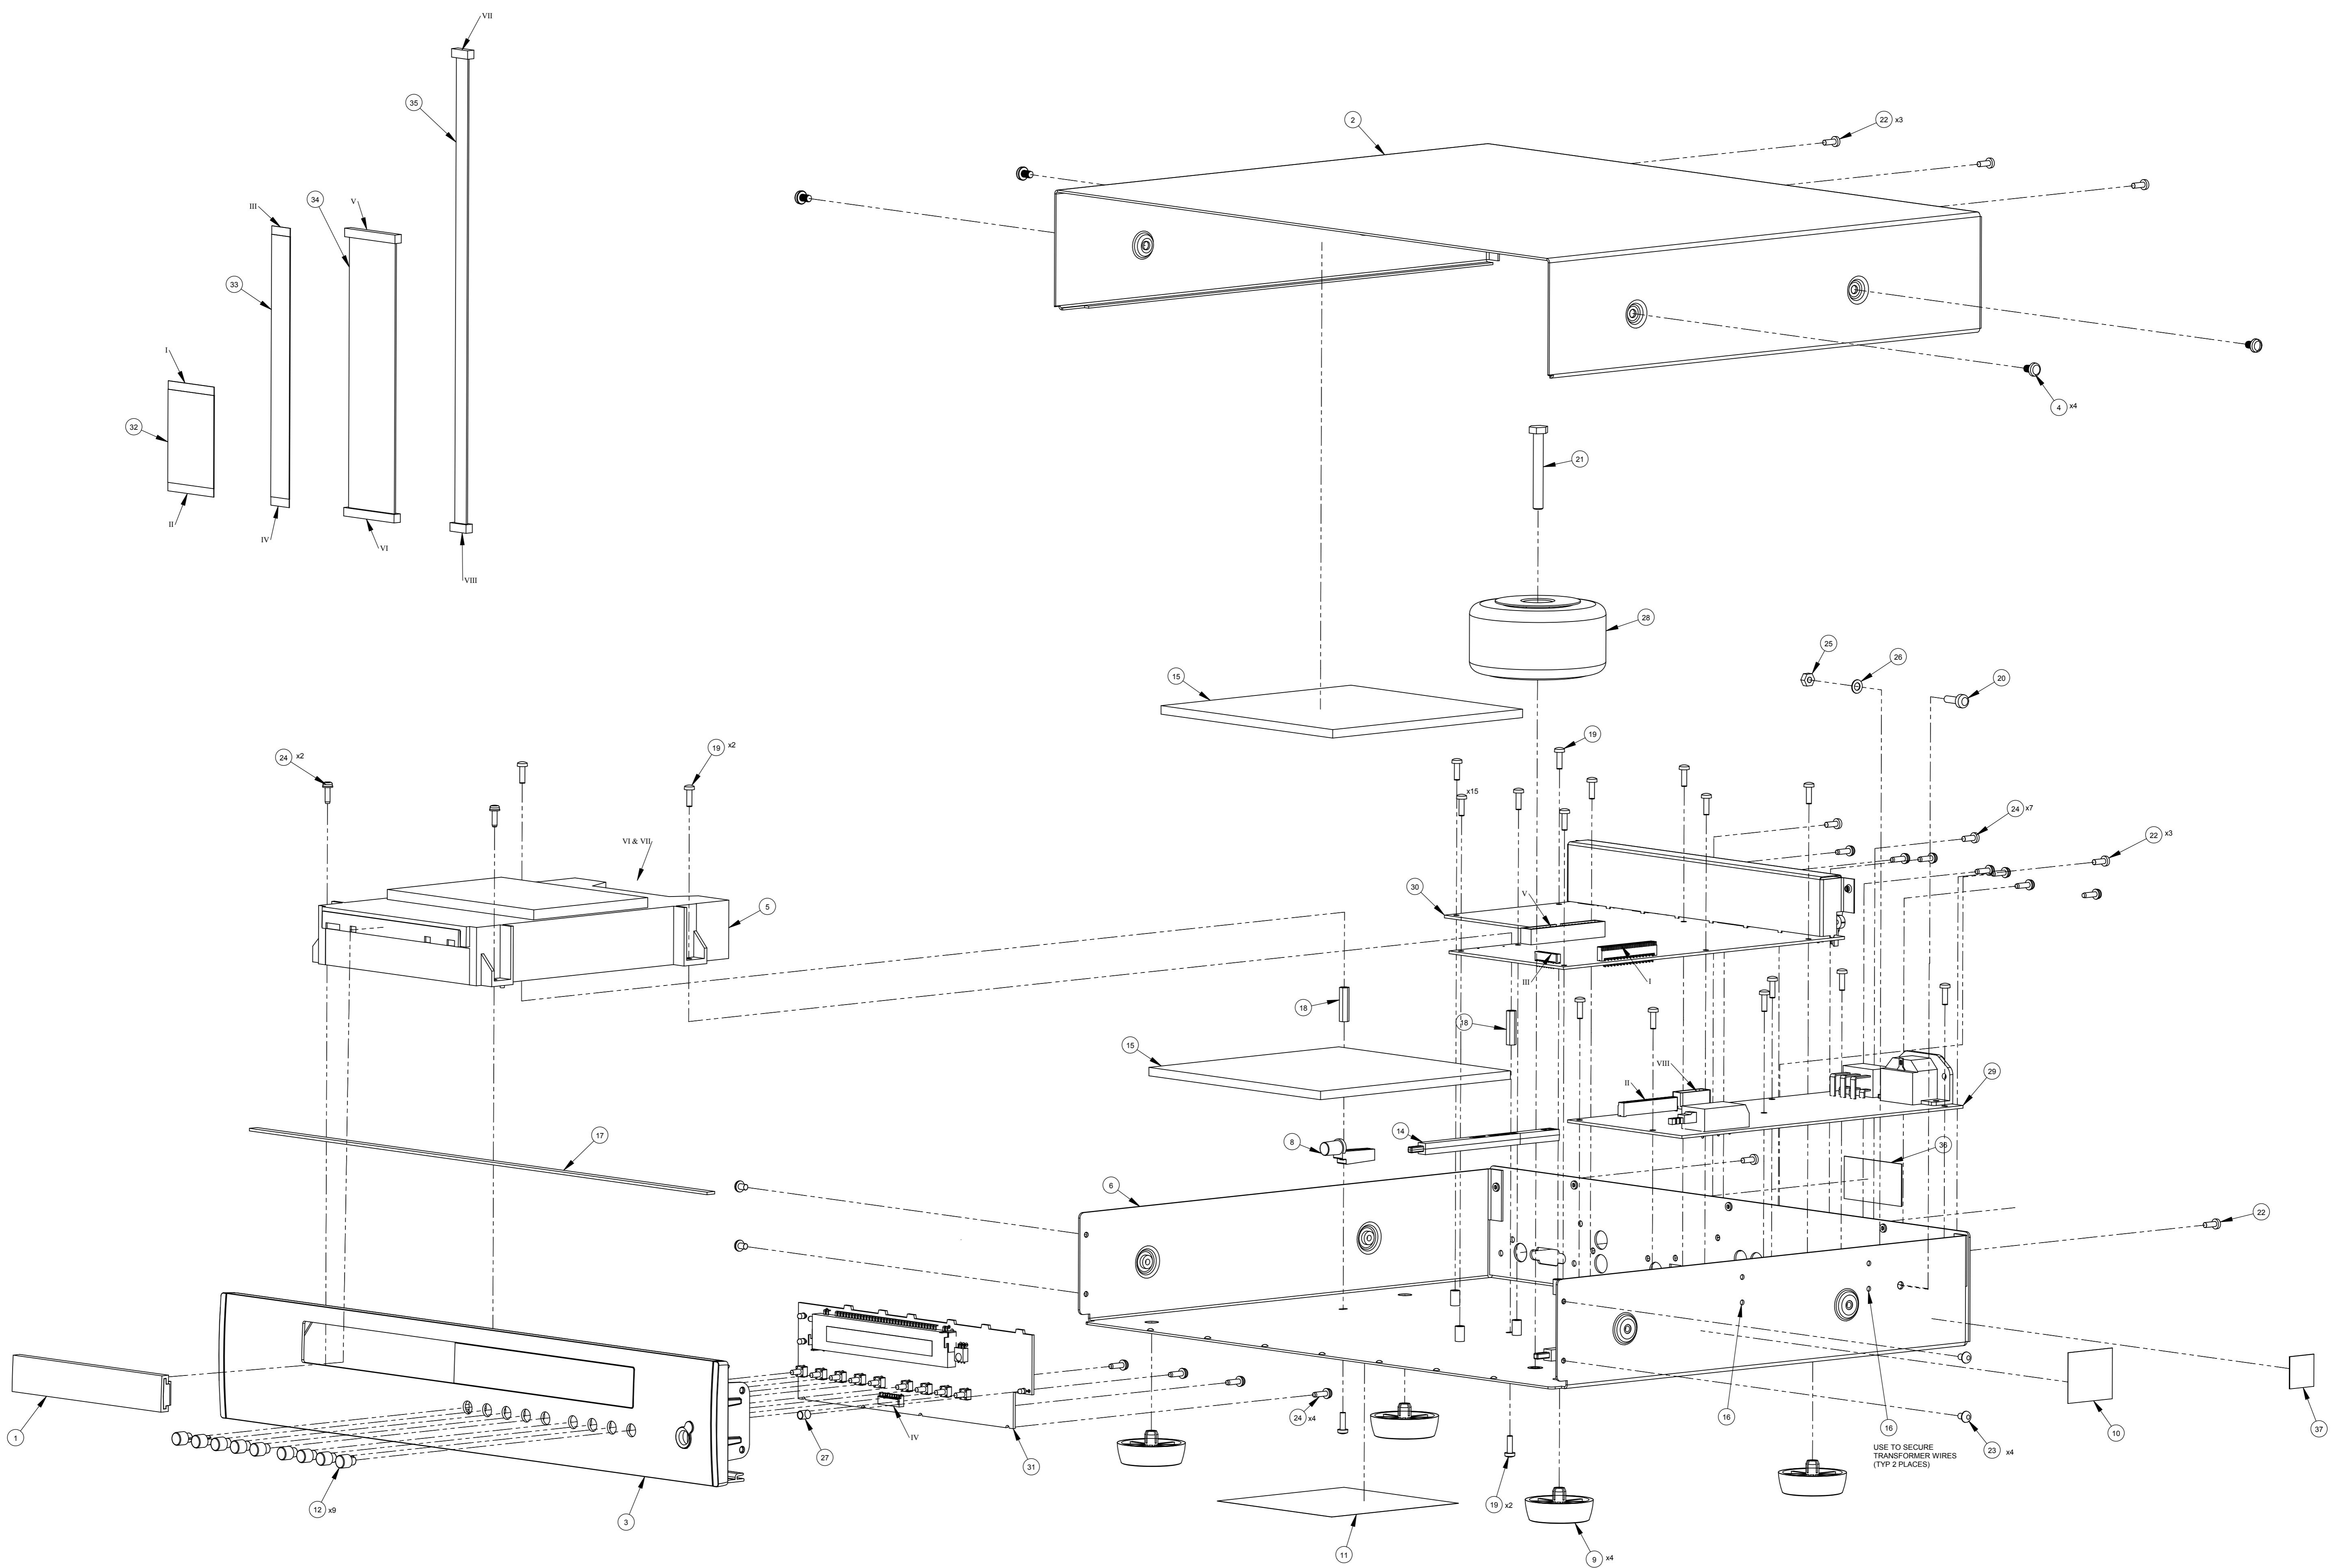

## DV79 Mechanical and packing parts list

| <b>Designator</b> | <b>Part</b> | <b>Description</b>  |
|-------------------|-------------|---|
| 5                 | B2014       | DVD Drive Atapi DVS DSL-710A LT74                                     |
| 6                 | E214AY      | Diva DV79 Chassis Assembly  |
| 8                 | E870PM      | Button Power Diva   |
| 9                 | E879PM      | Foot Black Diva   |
| 10                | E879SL      | Label Mod State   |
| 11                | E894SL      | Label DVD Licensing   |
| 12                | E897PM      | Button DT81 Confirm Button (MODIFIED SHANK)                           |
| 14                | E919PM      | Extended Button Adaptor Diva Power                                    |
| 15                | E953MC      | Adhesive Backed Foam Pad For Underneath And ON Top OF DV88 Mech       |
| 16                | F044        | Cable Tie 100MM X 2.5MM   |
| 18                | H031        | M3X20MM Brass N/Plated Hex Pillar FEMALE/FEMALE)                      |
| 19                | HA3V10A     | M Screw Torx M3x10MM ST ZP  |
| 19                | HA3V10B     | M/C Torx M3X10 Black (500)  |
| 20                | HA4A12B     | M Screw Pan Supa M4x12MM ST BLK                                       |
| 21                | HA6K45A     | Bolt Hex HD M6x45MM Mczp  |
| 23                | HE6V06B     | Screw Sftp Torx No.6x6MM BLK  |
| 24                | HF4V09B     | Screw Self-Tapping-Sems NO.4 X 9MM Pan Torx-Slot Steel Zinc-Plate BLK |
| 25                | HJ4A00A     | Nut M4 Full ST ZP   |
| 26                | HL4SB       | Washer M4 Int Shakeproof BLK  |
| 27                | K5408       | Diva Light Pipe Sleeve 6MM  |
| 28                | L924TX      | Transformer Toroid DV78 115/230V                                      |
| 29                | L959AY      | DV78 DVD Power Supply PCB   |
| 30                | L974AY      | DV79 Main Board PCB Assembly (replaces L967AY)                        |
| 31                | L961AY      | DV78/DV79 DVD Display Board   |
| 32                | L961CA      | Cable FFC 1.25mm 32 Way 65mm  |
| 33                | L962CA      | Cable FFC 1mm 16 Way 165mm  |
| 34                | L963CA      | DVD Drive Cable 40 Way IDC 160mm                                      |
| 35                | L964CA      | DVD Drive Power Cable 4 Way 275mm                                     |
| 37                | SL158       | SL158 Earth Symbol Label  |
| 38                | HL6CA       | Bright Washer M6 (Form C) to BS 4320                                  |
|                   | E217AY      | Rear Panel Assembly DiVA DV79   |
|                   | L857CA      | DVD Cable Ass DSP TO Prog Scan  |
|                   | F228        | EMC Gasket (5.0mm x 2.0mm rectangular cross section)                  |
|                   | F239        | EMC Gasket (7.0mm x 4.0mm rectangular cross section)                  |
|                   | F241        | Ferrite for Flexfoil  |
|                   | F242        | Ferrite Plate   |
|                   | E829AP      | Adhesive Pad 50mm X 30mm 51587  |
|                   | E984SL      | Green Blue Red Label  |
|                   |             |   |
| <b>Designator</b> | <b>Part</b> | <b>Silver parts</b>   |
| 1                 | E223AY      | DiVA Silver DV79 Drawer Front Assy                                    |
| 2                 | E229AY      | Cover Assembly Silver DiVA long                                       |
| 3                 | E221AY      | DiVA DV79 Silver Fascia Assembly                                      |
| 4                 | HA4V06S     | M Screw Torx M4x6MM Stainless Steel                                   |
|                   |             |   |
| <b>Designator</b> | <b>Part</b> | <b>Black parts</b>  |
| 1                 | E223AYB     | DiVA Black DV79 Drawer Front Assy                                     |
| 2                 | E229AYB     | Cover Assembly Black DiVA long  |
| 3                 | E221AYB     | DiVA DV79 Black Fascia Assembly                                       |
| 4                 | HA4V06B     | M Screw Torx M4x6MM ST BLK  |
|                   |             |   |
| <b>Designator</b> | <b>Part</b> | <b>Packing Accessories</b>  |
|                   | E980SL      | Diva DV79 Carton Label  |
|                   | SH135       | Handbook Diva DV79 DVD Player Multi                                   |
|                   | E822PK      | Poly Sheet 915x900MM 350 Gauge  |
|                   | L415RC      | DVD Remote Control CR415  |
|                   | P3020       | Poly Bag 10x14 Grippa Seal Clear                                      |
|                   | SH000       | Product Registration Card   |
|                   | SH000A      | Envelope For Registration Card  |
|                   | SM631       | Sellotape   |
|                   | E926PK      | Single End Cap (Left/Right) DiVA DV78                                 |
|                   | E927PK      | Carton Inner DV78   |
|                   | E978SL      | Intertek Listing Label (printed in-house)                             |

# **ARCAM**

All parts can be ordered via [spares@arcam.co.uk](mailto:spares@arcam.co.uk)

Pembroke Ave, Waterbeach, Cambridge, CB5 9PB, ENGLAND  
TEL: +44(0) 1223 203 200    FAX: +44(0) 1223 863 384