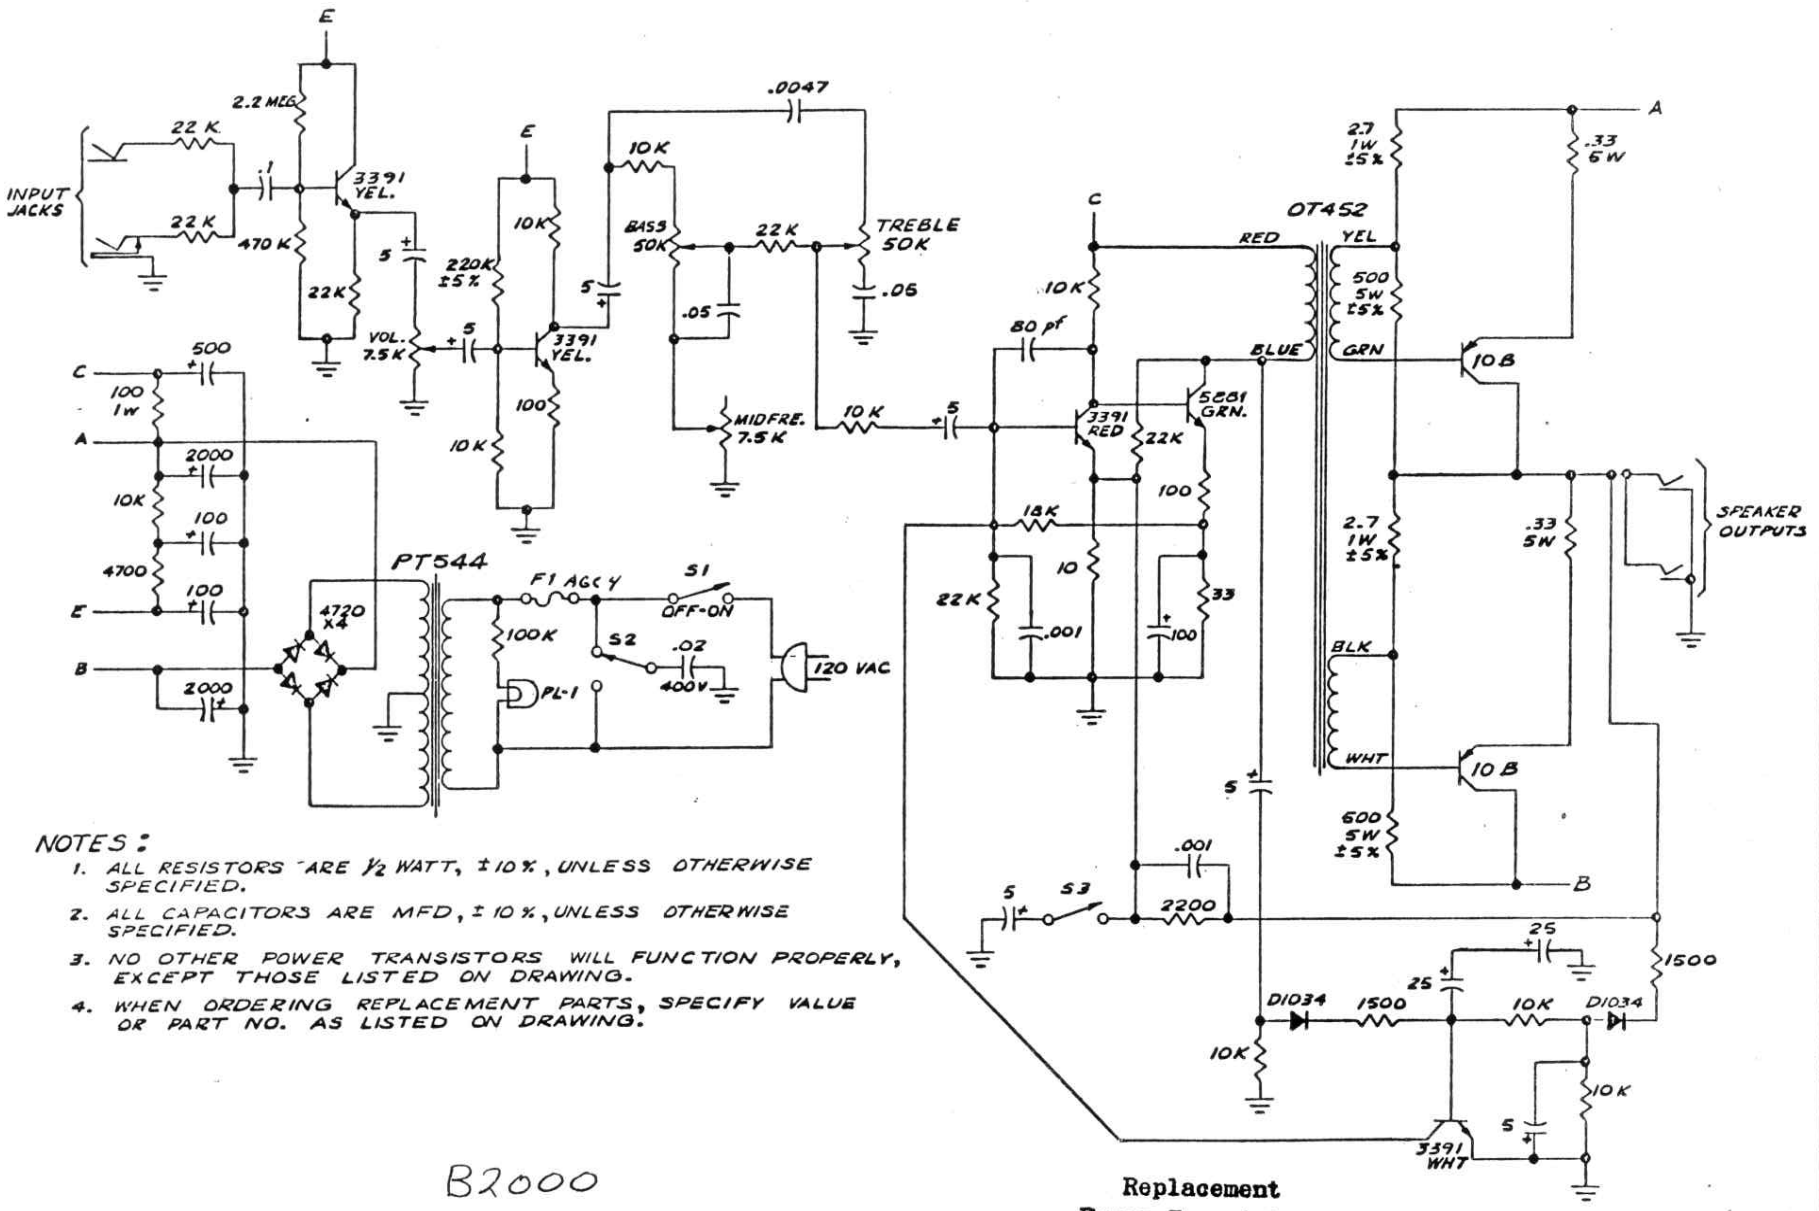

NOTES:

1. ALL RESISTORS ARE ½ WATT, ±10%, UNLESS OTHERWISE SPECIFIED.
2. ALL CAPACITORS ARE MFD, ±10%, UNLESS OTHERWISE SPECIFIED.
3. NO OTHER POWER TRANSISTORS WILL FUNCTION PROPERLY, EXCEPT THOSE LISTED ON DRAWING.
4. WHEN ORDERING REPLACEMENT PARTS, SPECIFY VALUE OR PART NO. AS LISTED ON DRAWING.

B2000

MINIMUM SPEAKER IMPEDANCE: 4 OHMS
INPUT IMPEDANCE: 25K – 100K OHMS
INPUT SENSITIVITY: 28 MV @ 1.5KHz

Replacement Power Transistors for All Amplifiers.
Deleco #DTG110B or
Motorola #HEP236

*1

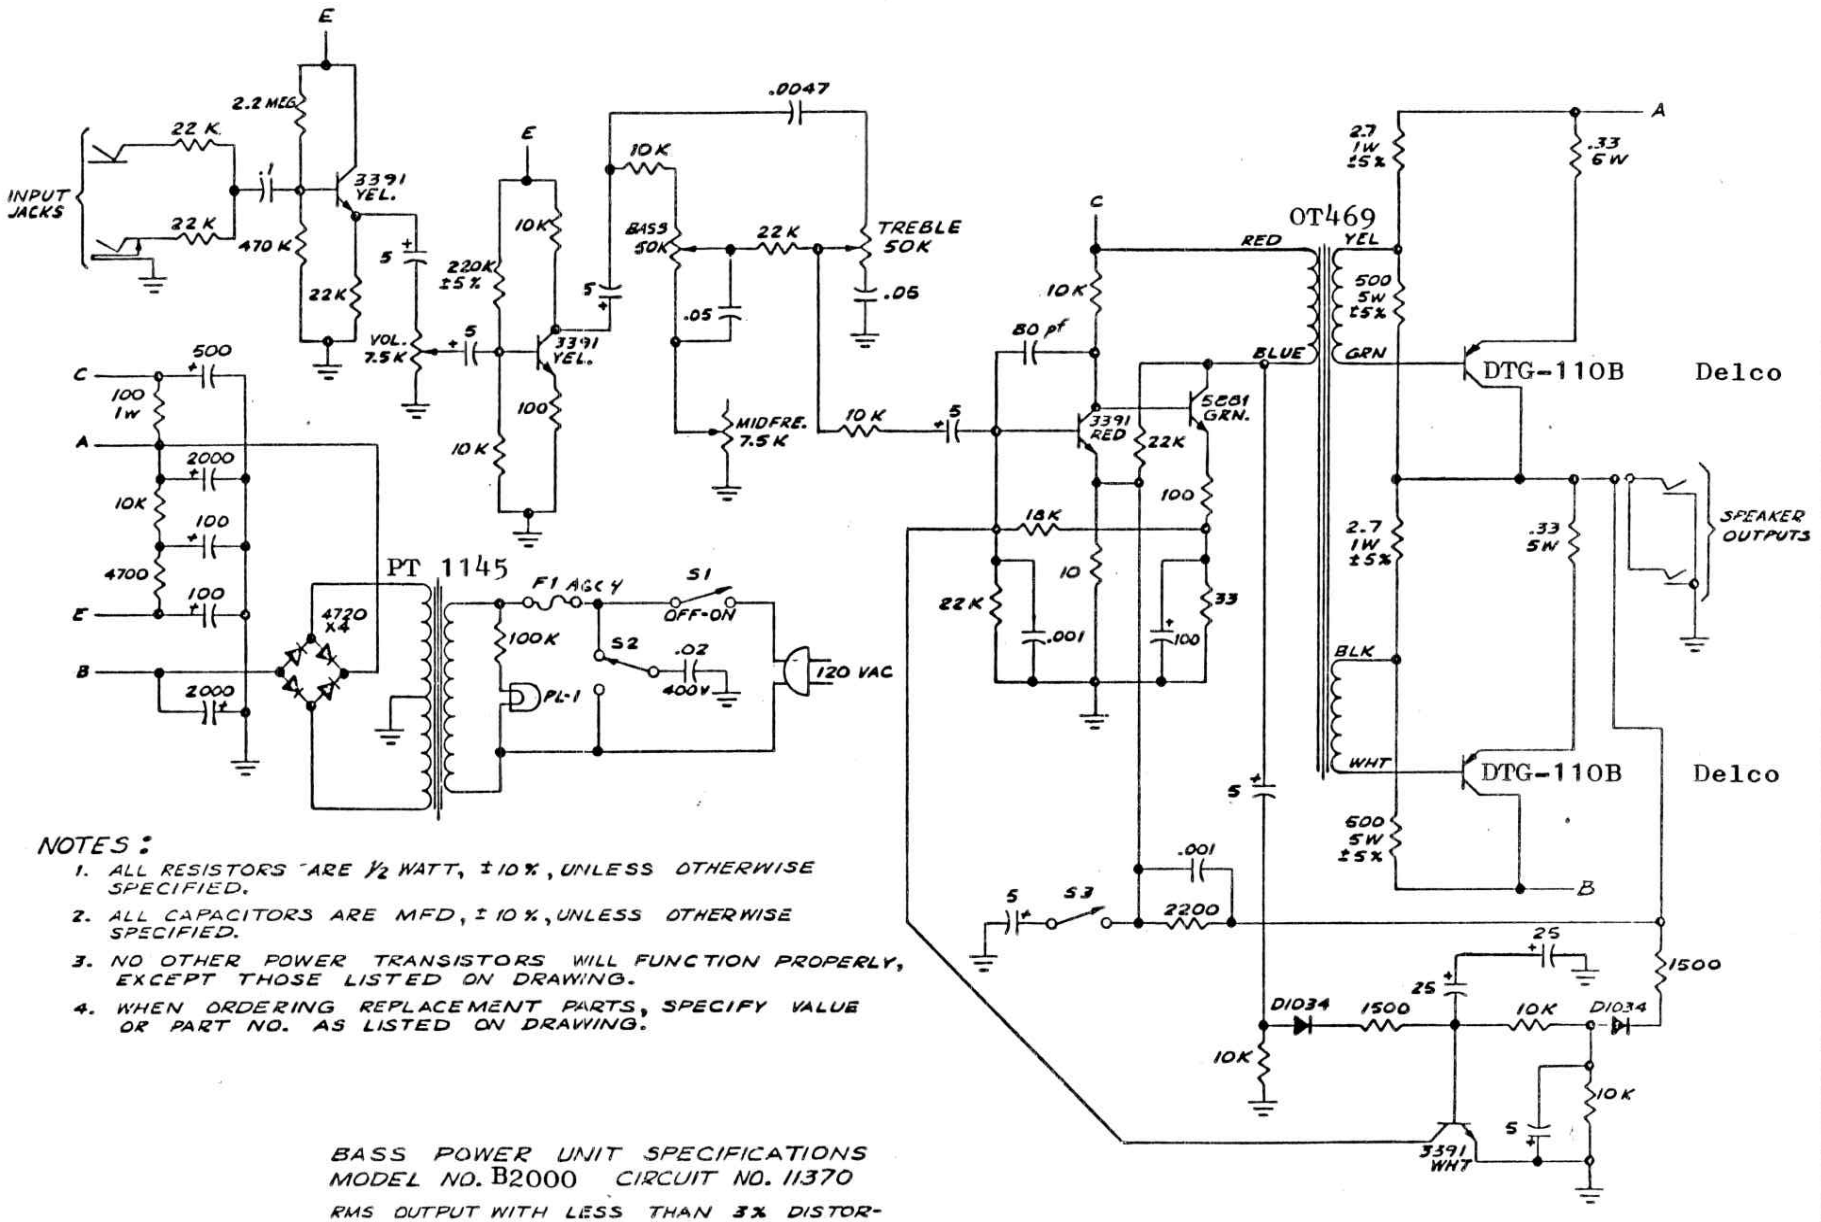

NOTES:

1. ALL RESISTORS ARE ½ WATT, ±10%, UNLESS OTHERWISE SPECIFIED.
2. ALL CAPACITORS ARE MFD, ±10%, UNLESS OTHERWISE SPECIFIED.
3. NO OTHER POWER TRANSISTORS WILL FUNCTION PROPERLY, EXCEPT THOSE LISTED ON DRAWING.
4. WHEN ORDERING REPLACEMENT PARTS, SPECIFY VALUE OR PART NO. AS LISTED ON DRAWING.

BASS POWER UNIT SPECIFICATIONS
MODEL NO. B2000 CIRCUIT NO. 11370

RMS OUTPUT WITH LESS THAN 3% DISTORTION: 110 WATTS @ 4 OHMS
MINIMUM SPEAKER IMPEDANCE: 4 OHMS
INPUT IMPEDANCE: 25K – 100K OHMS
INPUT SENSITIVITY: 28 MV @ 1.5KHz

Replacement Power Transistors for All Amplifiers. Deleco #DTG110B or Motorola #HEP236