CHANNEL 1

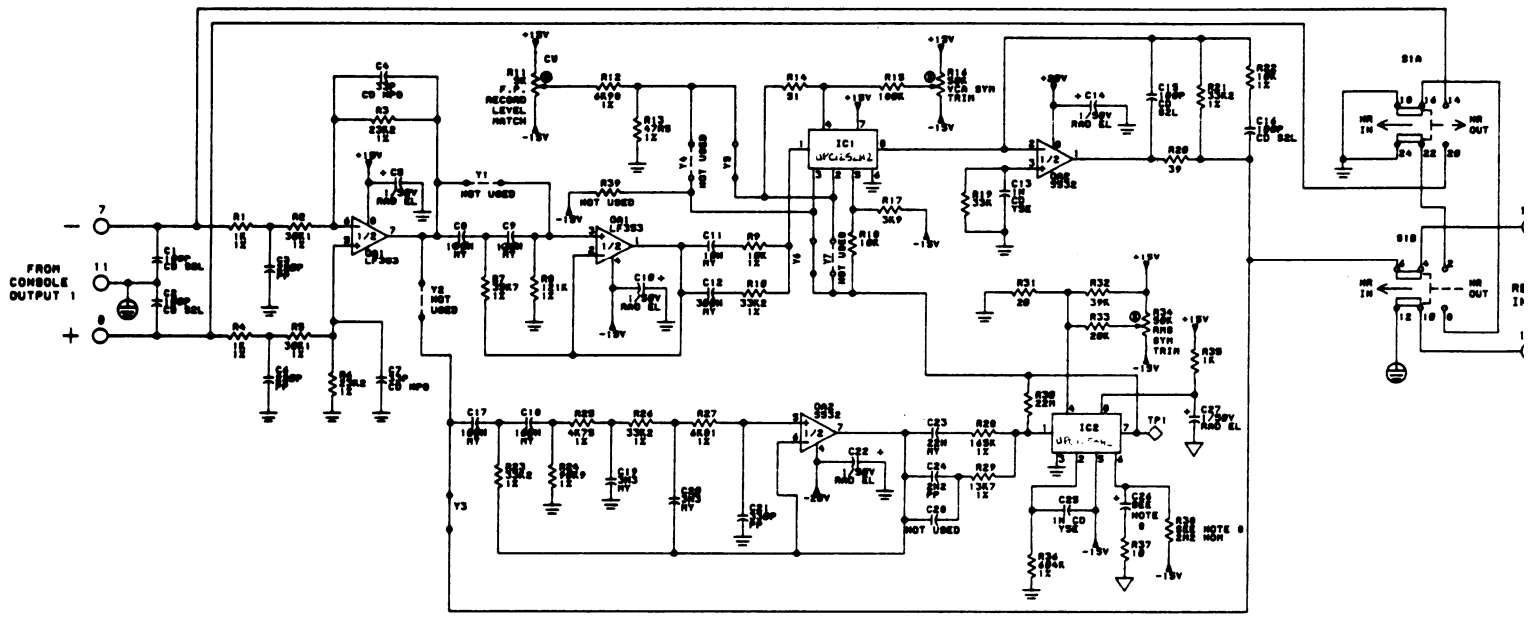

CHANNEL 2

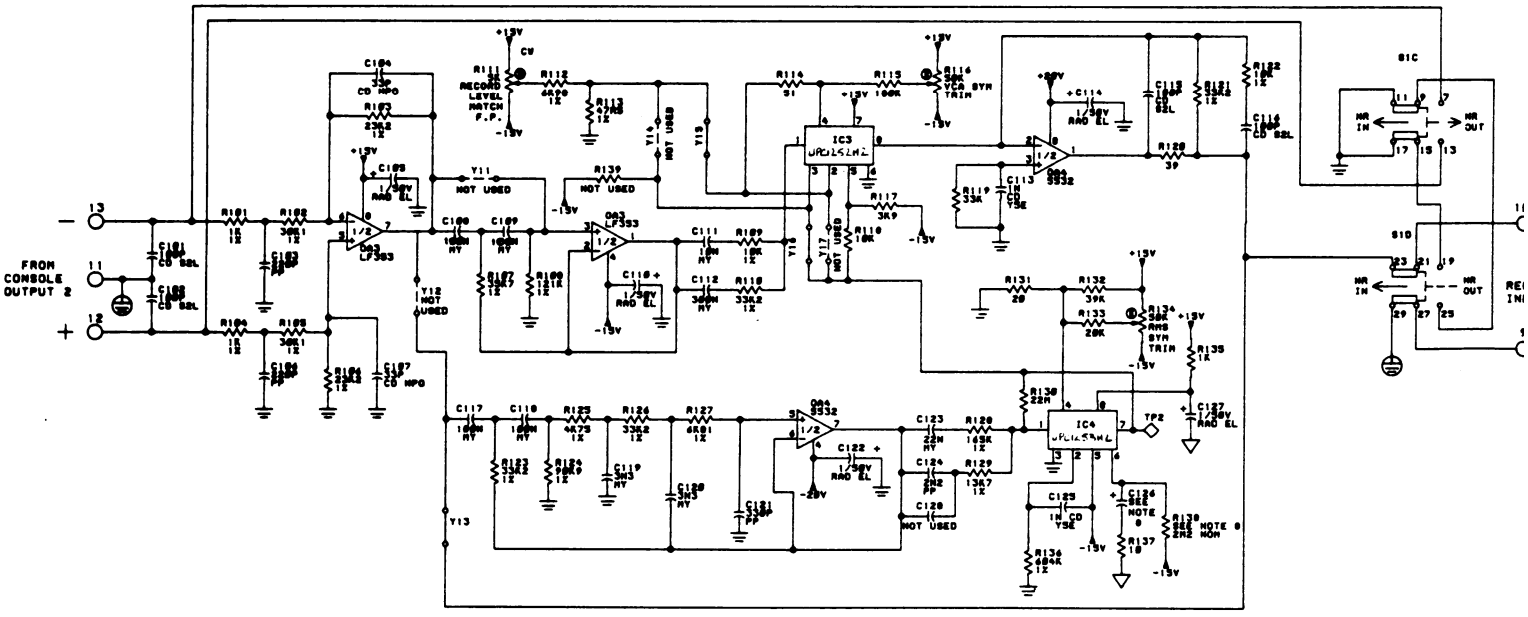

NOTES:
UNLESS OTHERWISE
1. ALL RESISTORS
2. ALL CAPACITOR
3. ALL MYLAR CAP
4. ALL NPO AND S
5. ALL Y5E CERAM
6. ALL POLYPROPY
7. ALL RADIAL EL
8. SELECT A 1% R
SELECTION PRO
SELECT RESIST
PROCEDURE
9. ▽ DENOTES GR
RETURN TO

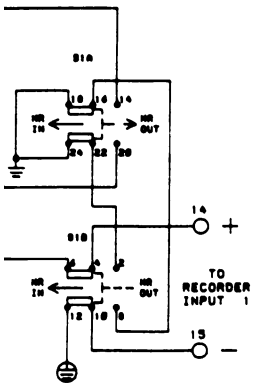

CHANNEL 1

CHANNEL 2

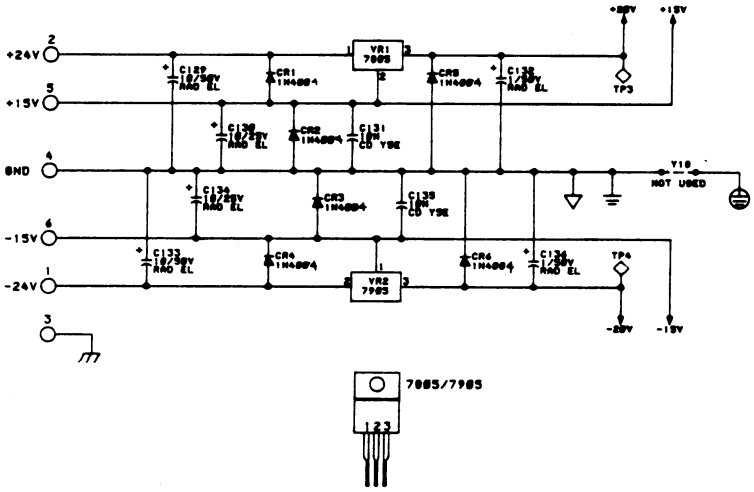

NOTES:
UNLESS OTHERWISE SPECIFIED:
1. ALL RESISTORS ARE EXPRESSED IN OHMS AND ARE 1/4W, 5%.
2. ALL CAPACITORS ARE EXPRESSED IN MICROFARADS.
3. ALL MYLAR CAPACITORS ARE +/-5%.
4. ALL NPO AND S2L CERAMIC DISC CAPACITORS ARE +/-5%.
5. ALL Y5E CERAMIC DISC CAPACITORS ARE +/-10%.
6. ALL POLYPROPYLENE CAPACITORS ARE +/-2.5%.
7. ALL RADIAL ELECTROLYTIC CAPACITORS ARE +/-20% AND ARE LOW LEAKAGE.
8. SELECT A 10 MFD ELECTROLYTIC CAPACTOR (C26 AND C126) WITH SELECTION PROCEDURE [illegible] GROUP A OR B.
   SELECT RESISTOR (R38 AND R138) WITH SELECTION PROCEDURE [illegible] GROUP A OR B.
9. ▽ DENOTES GROUNDS ARE TIED CLOSELY TOGETHER AND RETURN TO CENTRAL GROUND SEPARATELY.