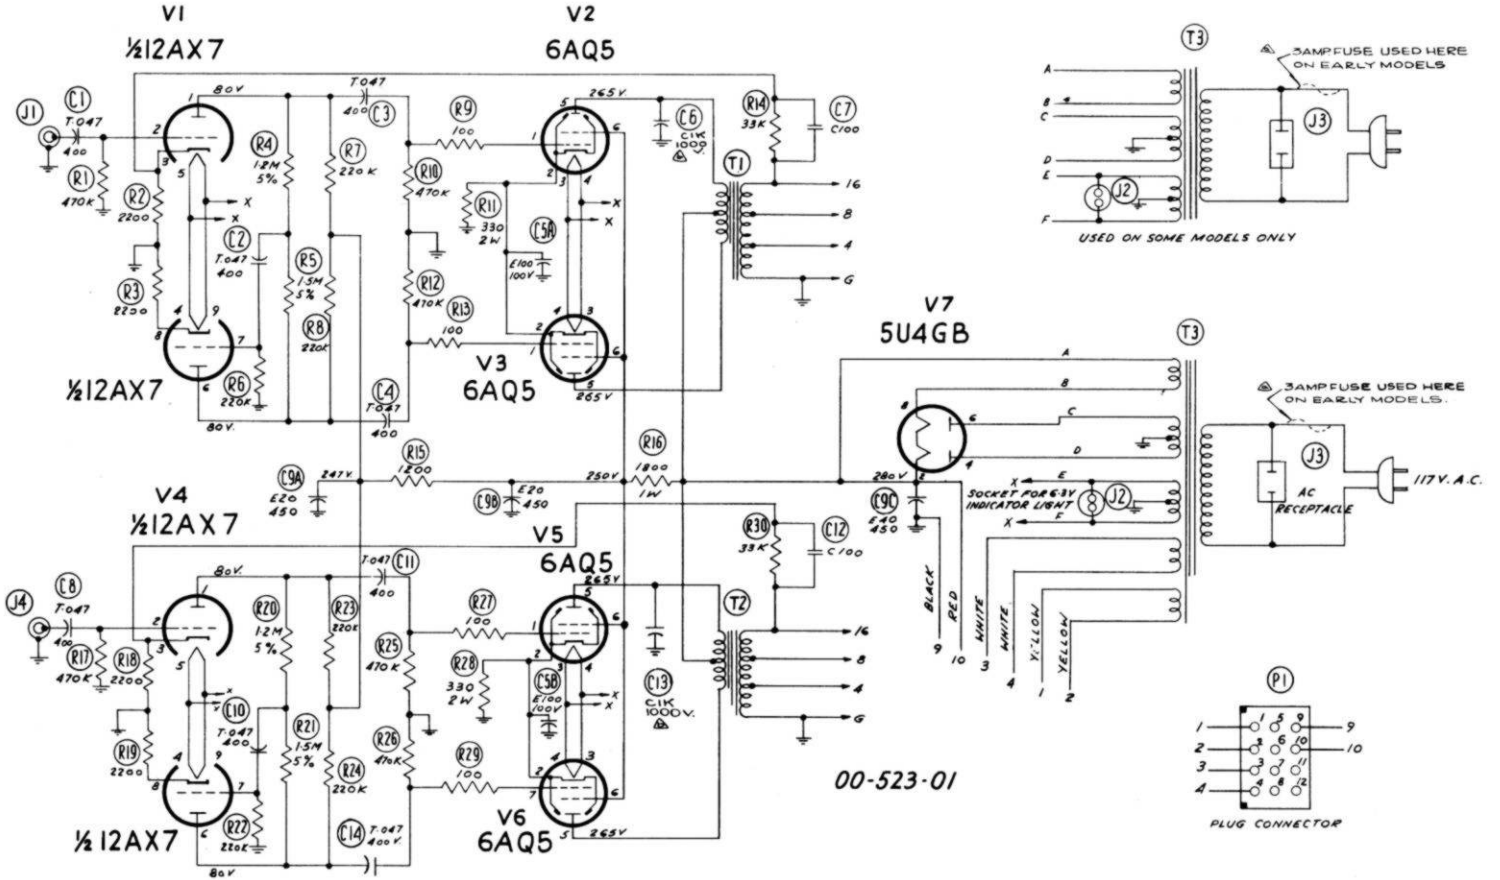

COMPONENT VALUES:

K = 1000 M = 1,000,000

RESISTORS: HALF WATT, UNLESS OTHERWISE NOTED
10% TOLERANCE, UNLESS OTHERWISE NOTED

CONDENSERS: T = TUBULAR, FOLLOWED BY CAPACITY IN MFD AND DCWV
E = ELECTROLYTIC, FOLLOWED BY CAP. IN MFD AND DCWV
C = CERAMIC, FOLLOWED BY CAP. IN MMFD AND TOLERANCE IF CRITICAL

ALL VOLTAGES MEASURED TO CHASSIS WITH 20,000 OHM/VOLT METER AT 117 V. LINE VOLTAGE.

E.C. No.	DATE	CHANGE	CH'K
58 864	7 55	P1 FUSE DELETED. NOTE ADDED (a)	LAN
56-945	10-20 58	C6 & C13 WERE T.001 600V (b)	/

Electrohome HFT-400 6 watt Power Amplifier