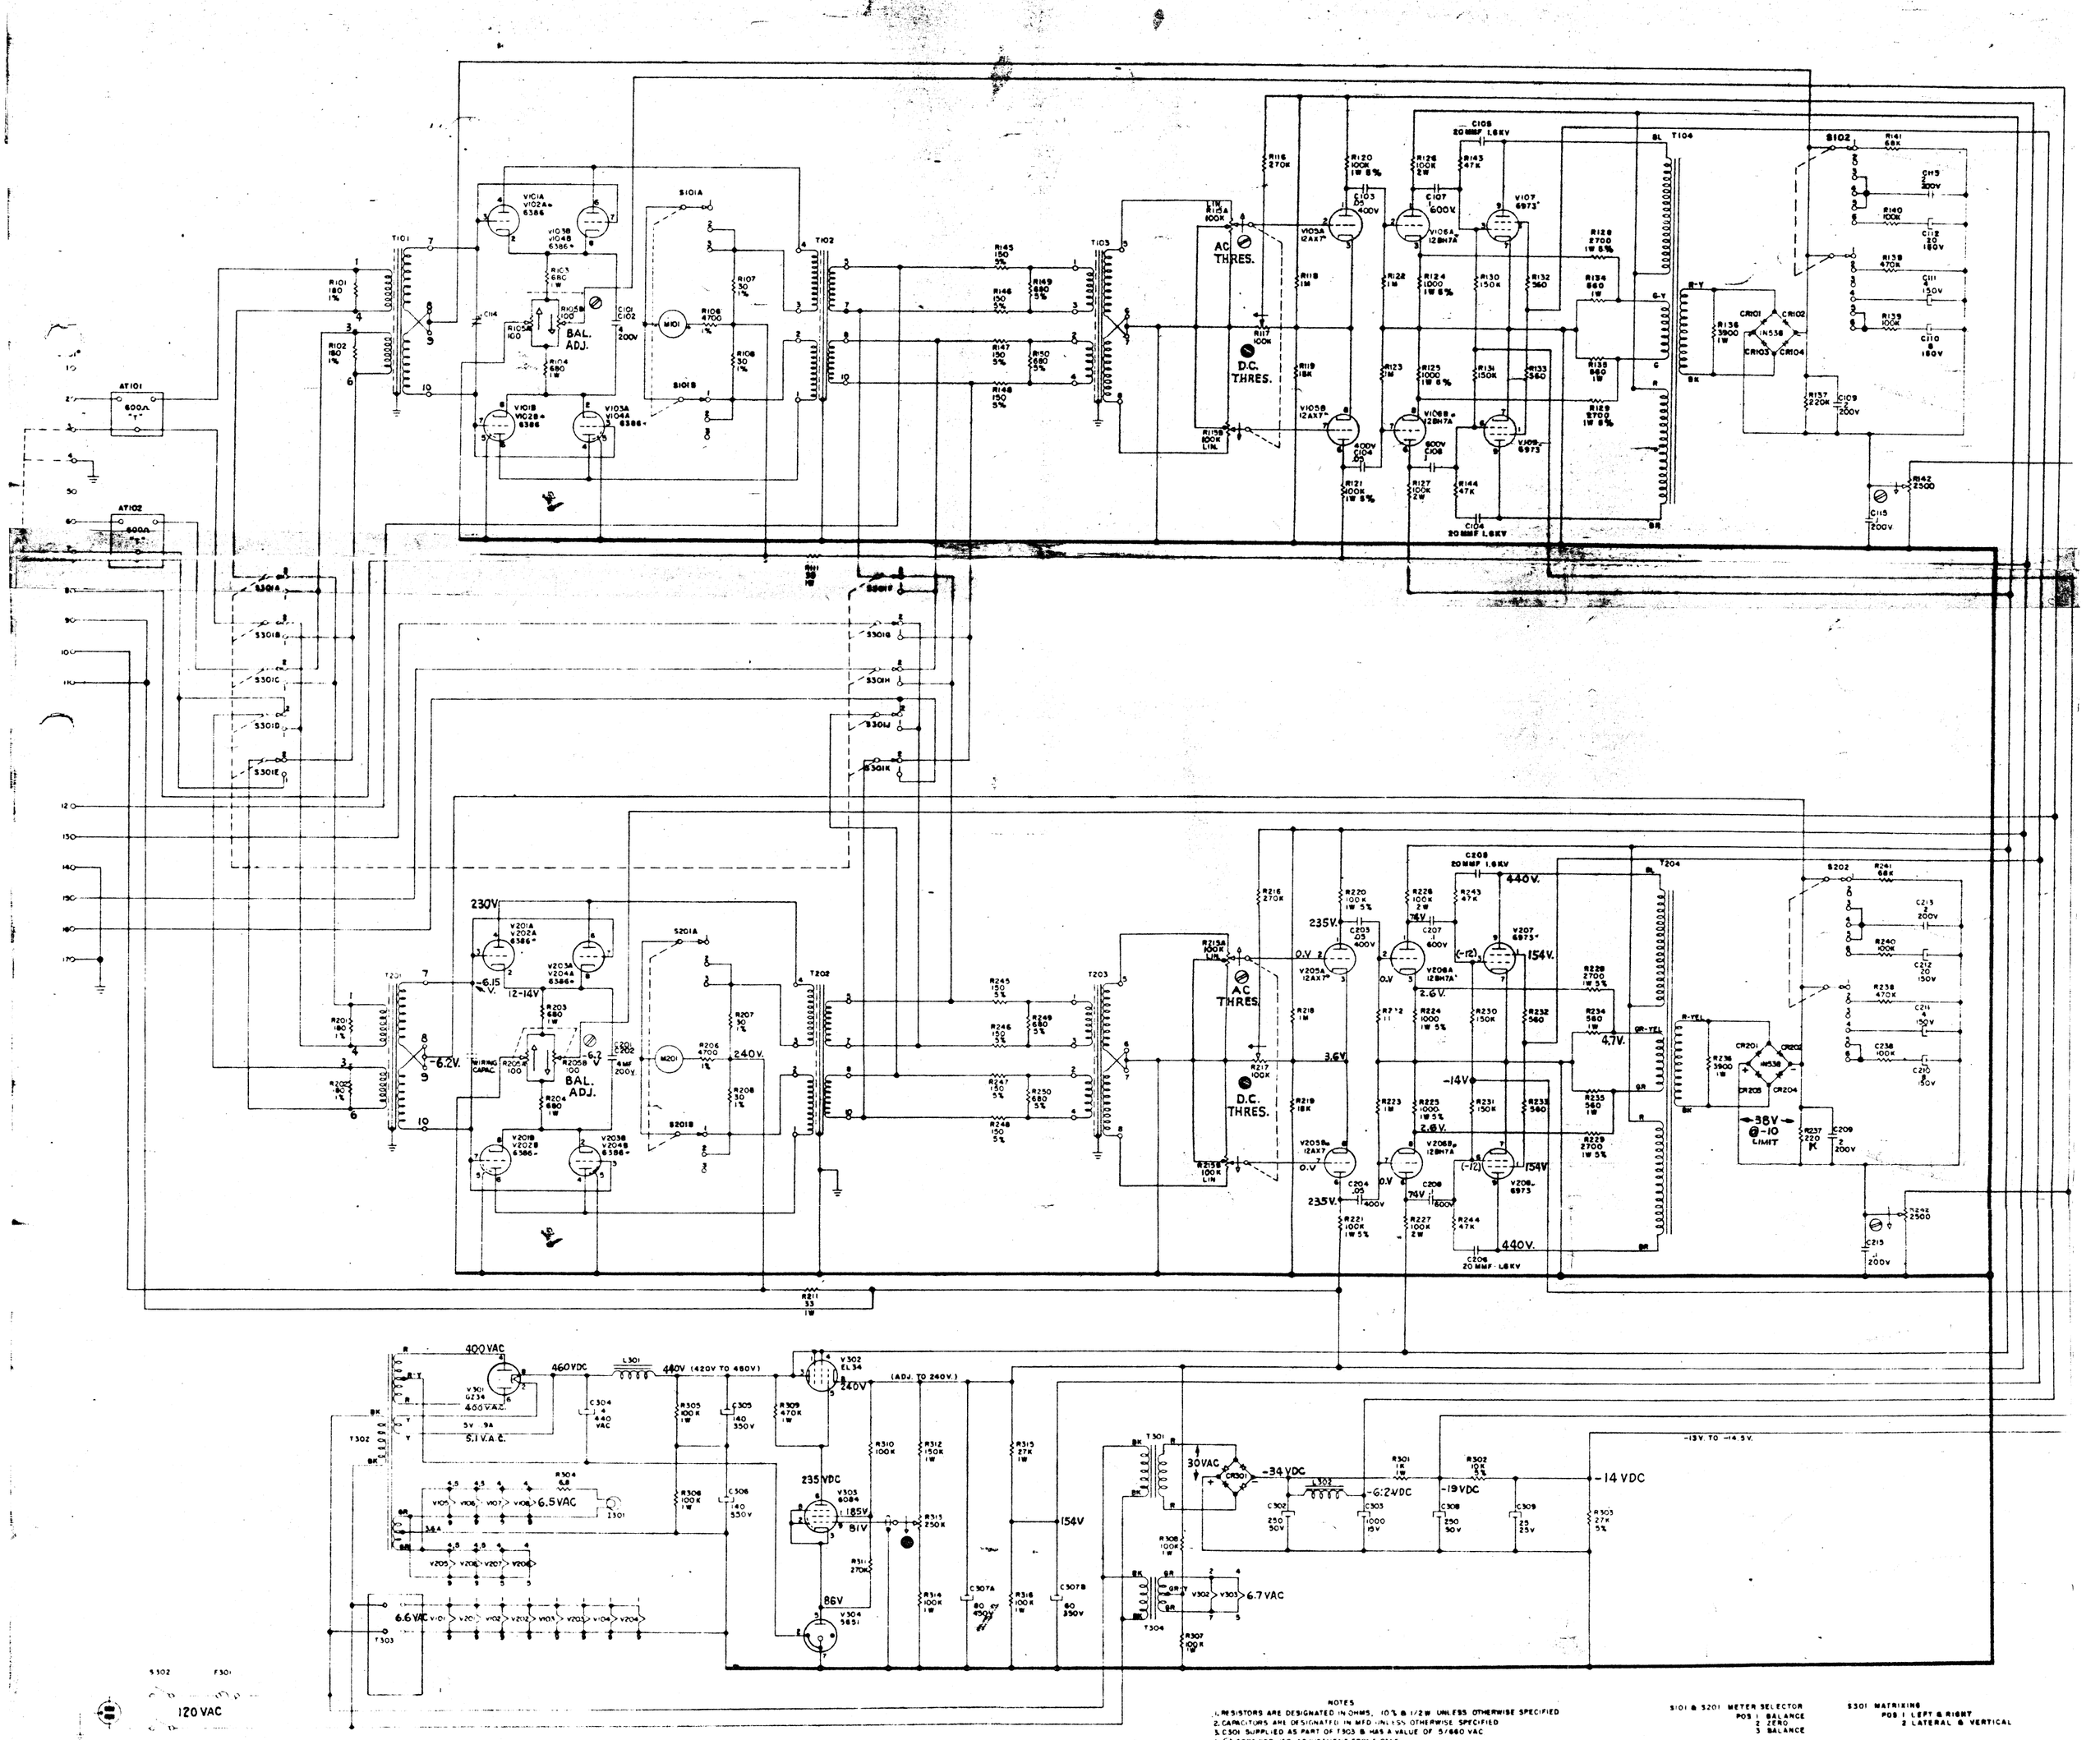

NOTES

1. RESISTORS ARE DESIGNATED IN OHMS, 10% @ 1/2W UNLESS OTHERWISE SPECIFIED
2. CAPACITORS ARE DESIGNATED IN MFD UNLESS OTHERWISE SPECIFIED
3. C301 SUPPLIED AS PART OF T303 & HAS A VALUE OF 5/660 VAC
4. ⊘ SCREWDRIVER ADJUSTMENT FRONT PANEL
5. ● SCREWDRIVER ADJUSTMENT BENEATH FRONT PANEL
6. ○ KNOB ADJUSTMENT FRONT PANEL
7. ALL SWITCHES SHOWN IN CCW POSITION EXCEPT S301.
8. VOLTAGES MEASURED WITH SIMPSON 20,000 Ω/VOLT D.C. & 5000 Ω/VOLT AC METER WITH RESPECT TO GROUND UNLESS OTHERWISE SPECIFIED.

S101 & S201 METER SELECTOR
POS 1 BALANCE
2 ZERO
3 BALANCE

S102 & S202 TIME CONSTANT
POS. 1-6

AT101 & AT201 INPUT GAIN
R105 & R205 BALANCE
R115 & R215 AC THRESHOLD
R117 & R217 DC THRESHOLD
R142 & R242 ZERO

S301 MATRIXING
POS 1 LEFT & RIGHT
2 LATERAL & VERTICAL

R318 REG. B+ ADJ.