


# FENDER "TREMOLUX" SCHEMATIC P/B MODEL 669 D-FA

## NOTICE


- VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN ± OR - 20%.
- ALL RESISTORS 1/2 WATT, 10% TOLERANCE IF NOT SPECIFIED.
- ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.

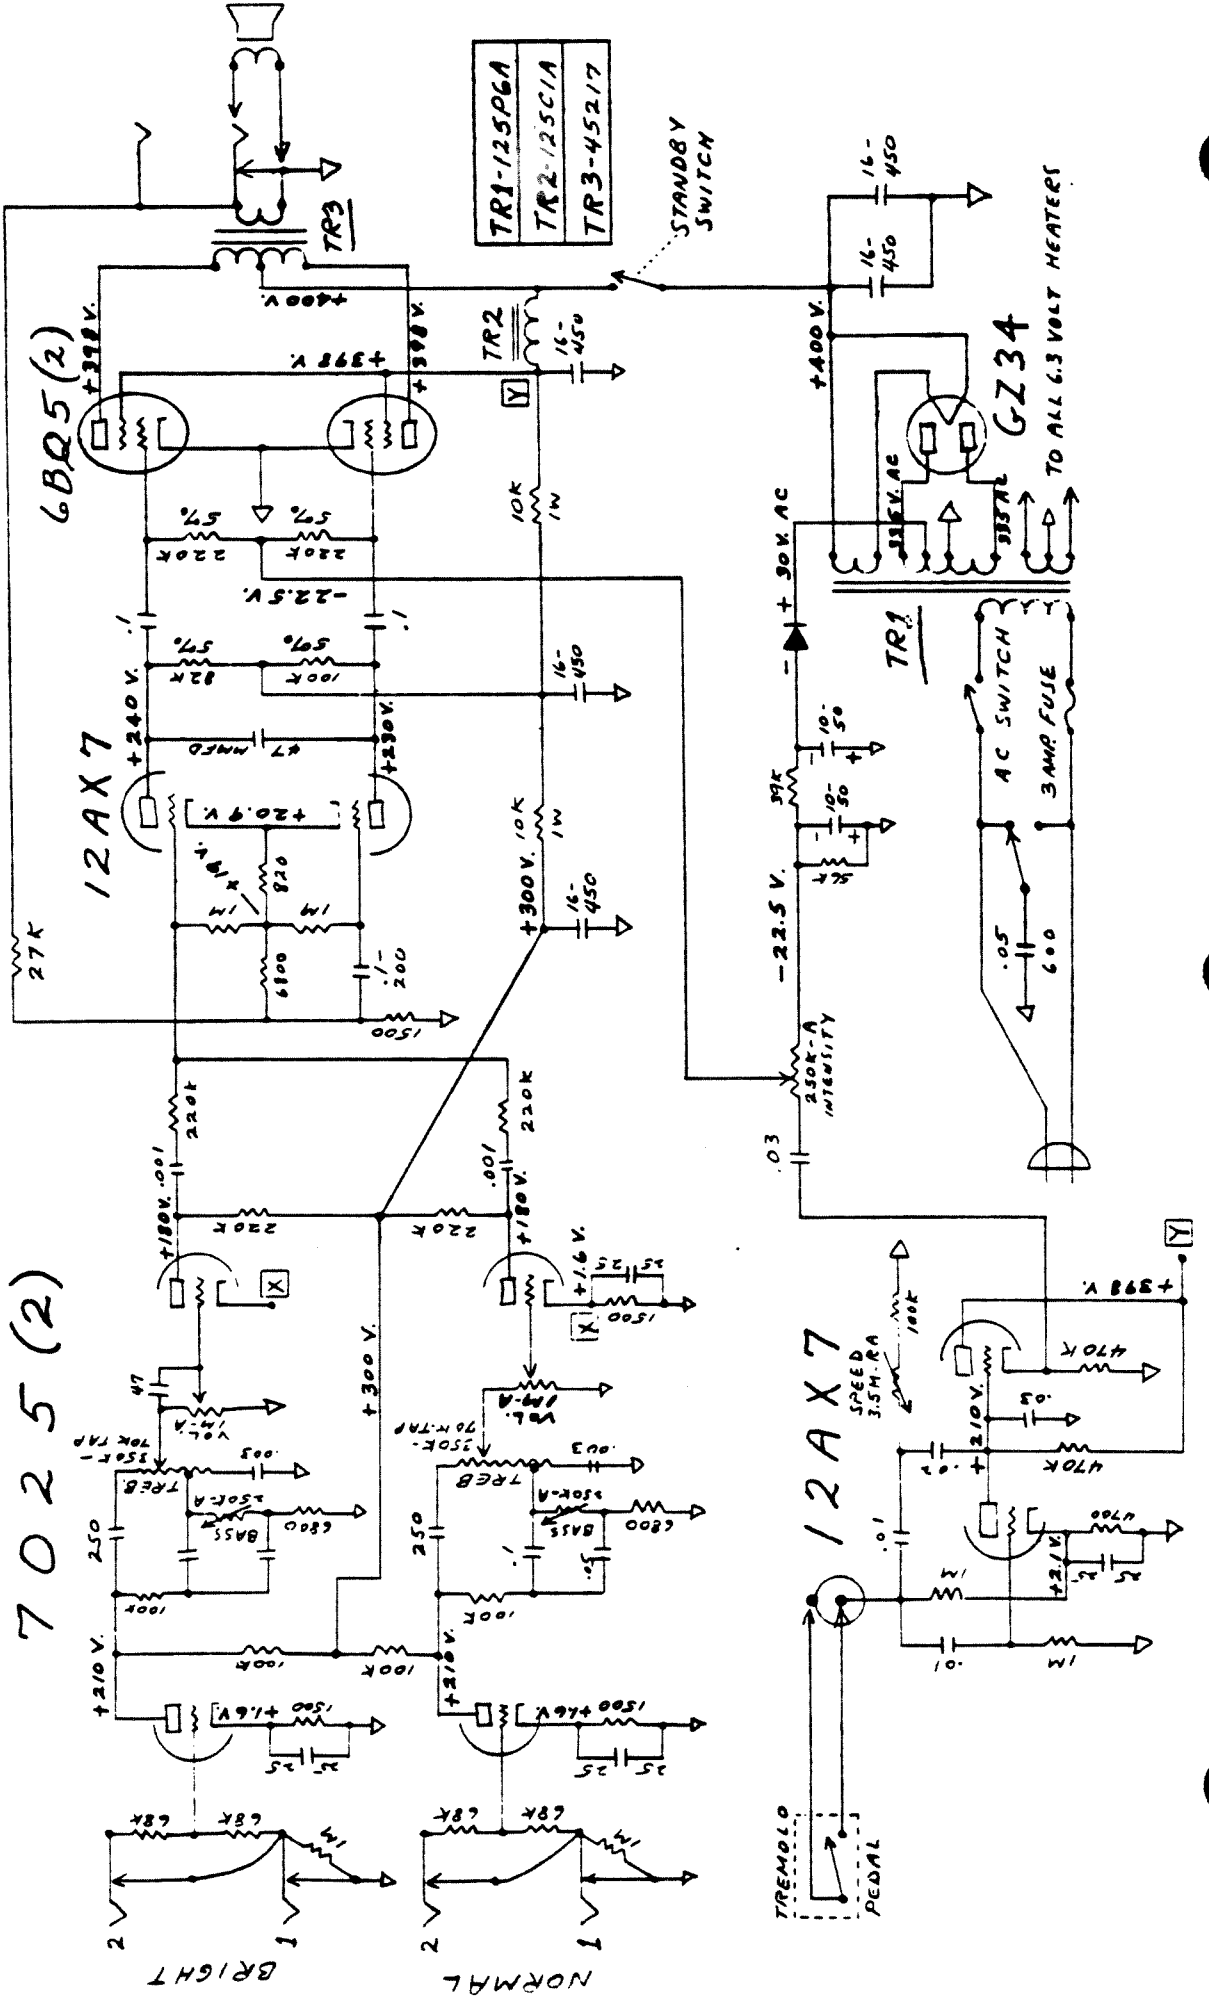

# FENDER "TREMOLUX" LAYOUT MODEL 6G9

## NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC  
VOLTMETER. VALUES SHOWN  $\pm$  OR - 20%

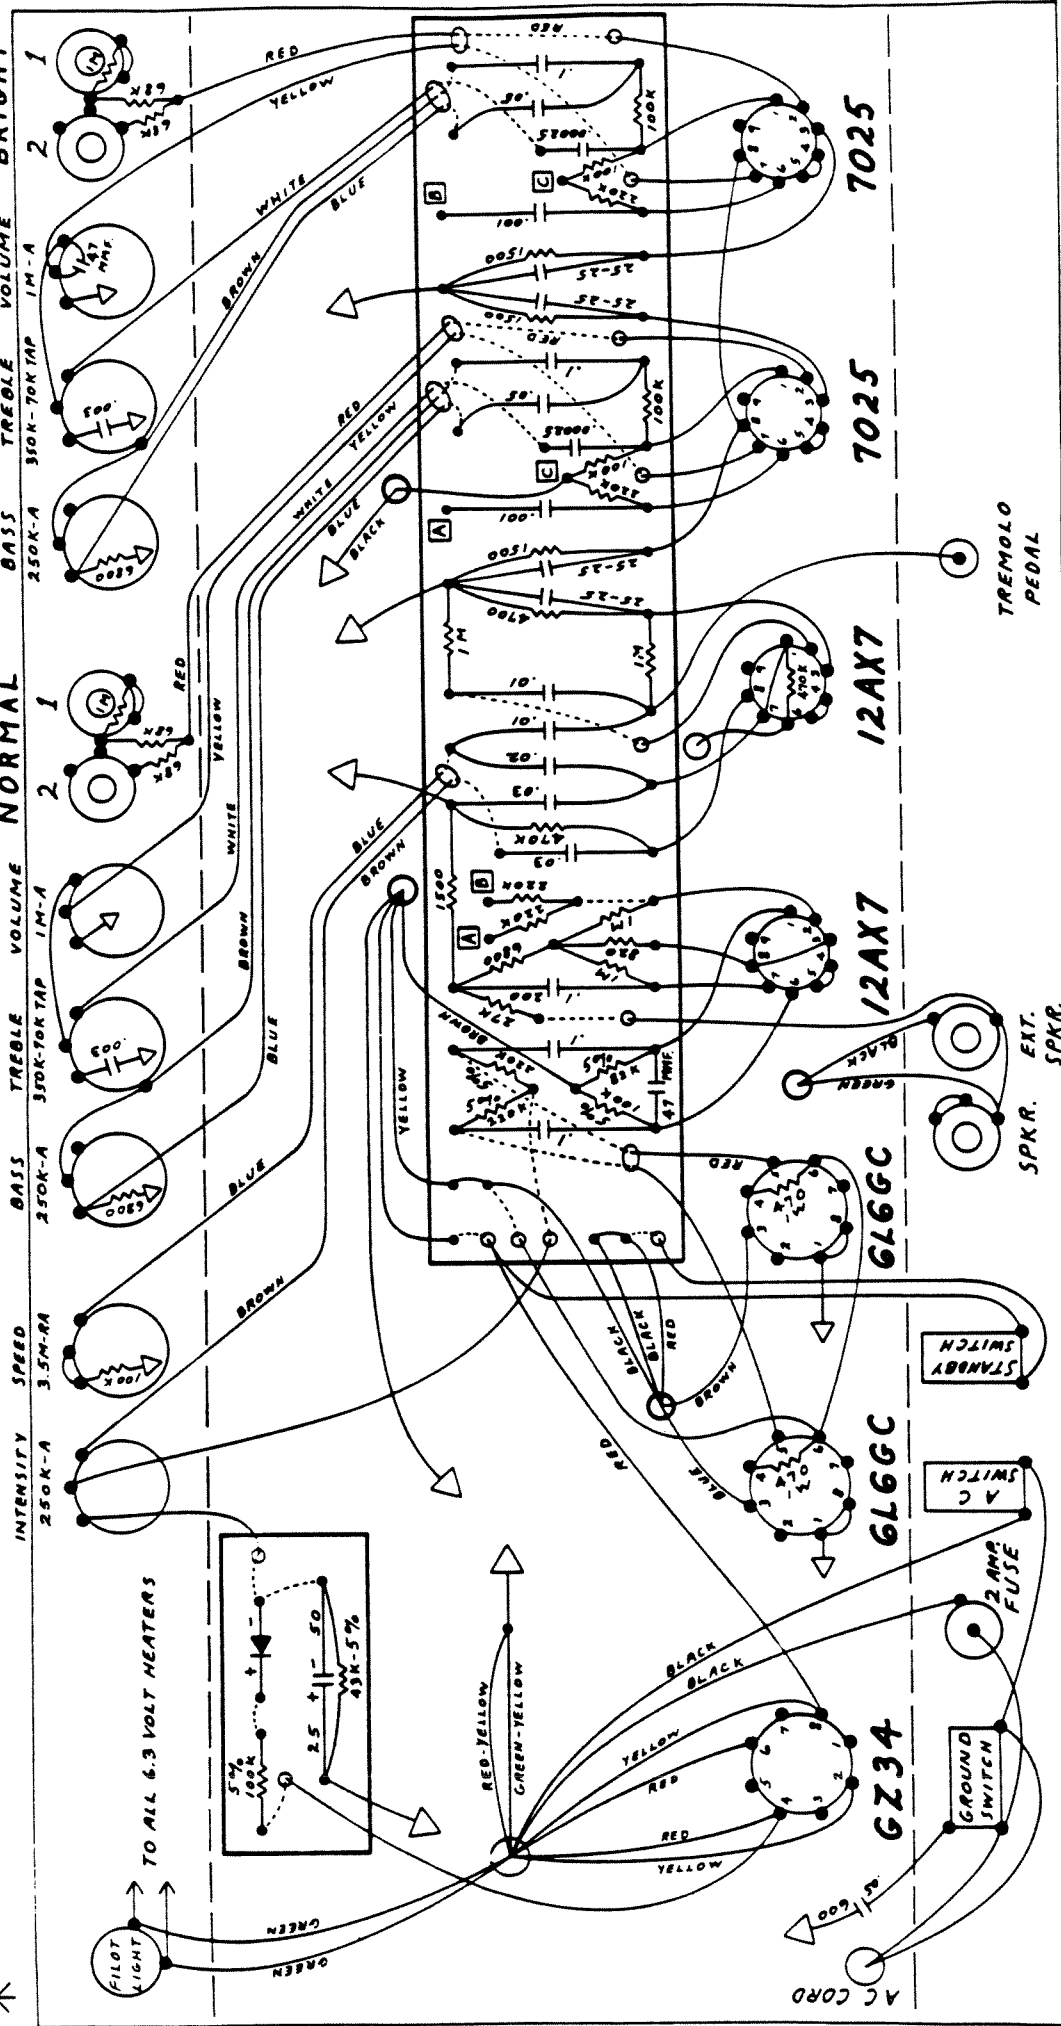

NOTE - ALL RESISTORS 1/2 WATT, 10% TOLERANCE UNLESS SPECIFIED. NOTE - ALL CAPACITORS AT LEAST 400 VOLT RATING UNLESS SPECIFIED

\* REVISION FOR CONVERTING OUTPUT TUBES FROM 6BD5s TO 6L6GCs