



# TUBE LAYOUT • MASTER AUDIO CONTROL



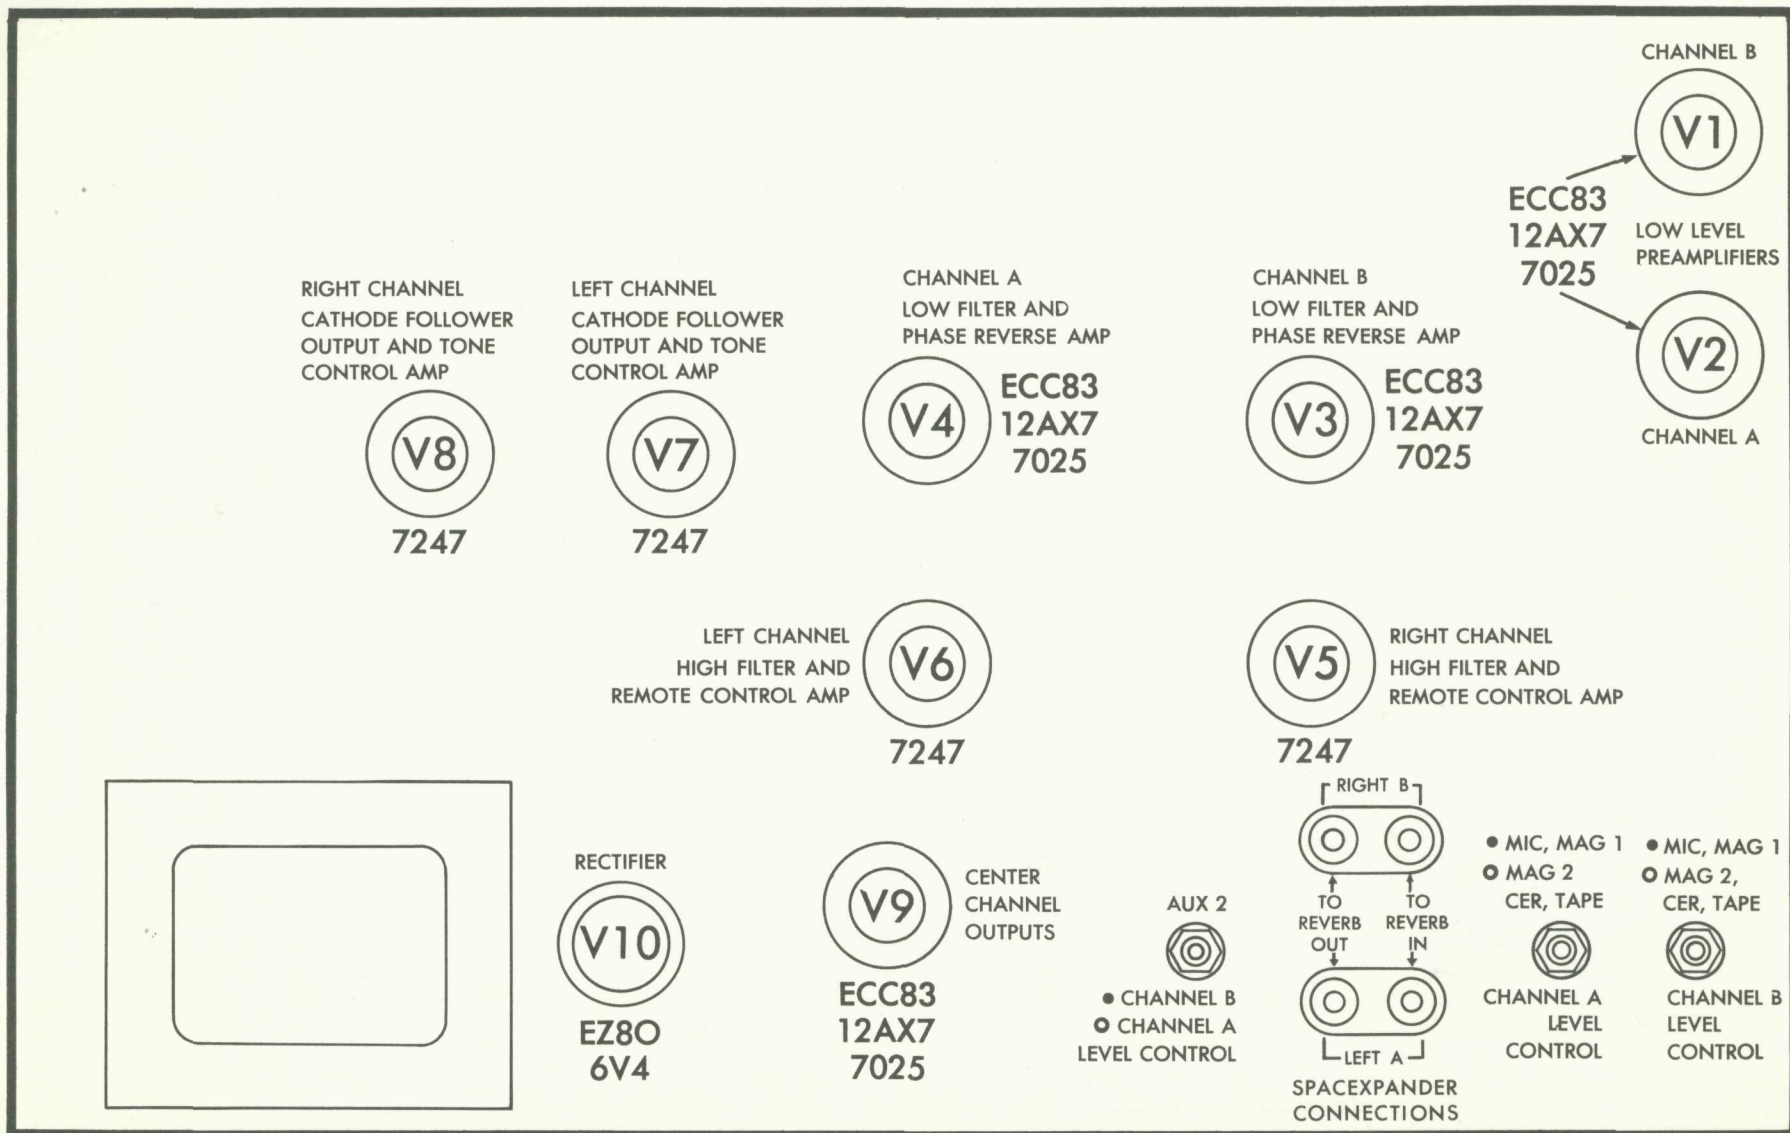

SCHEMATIC DIAGRAM • MASTER AUDIO CONTROL

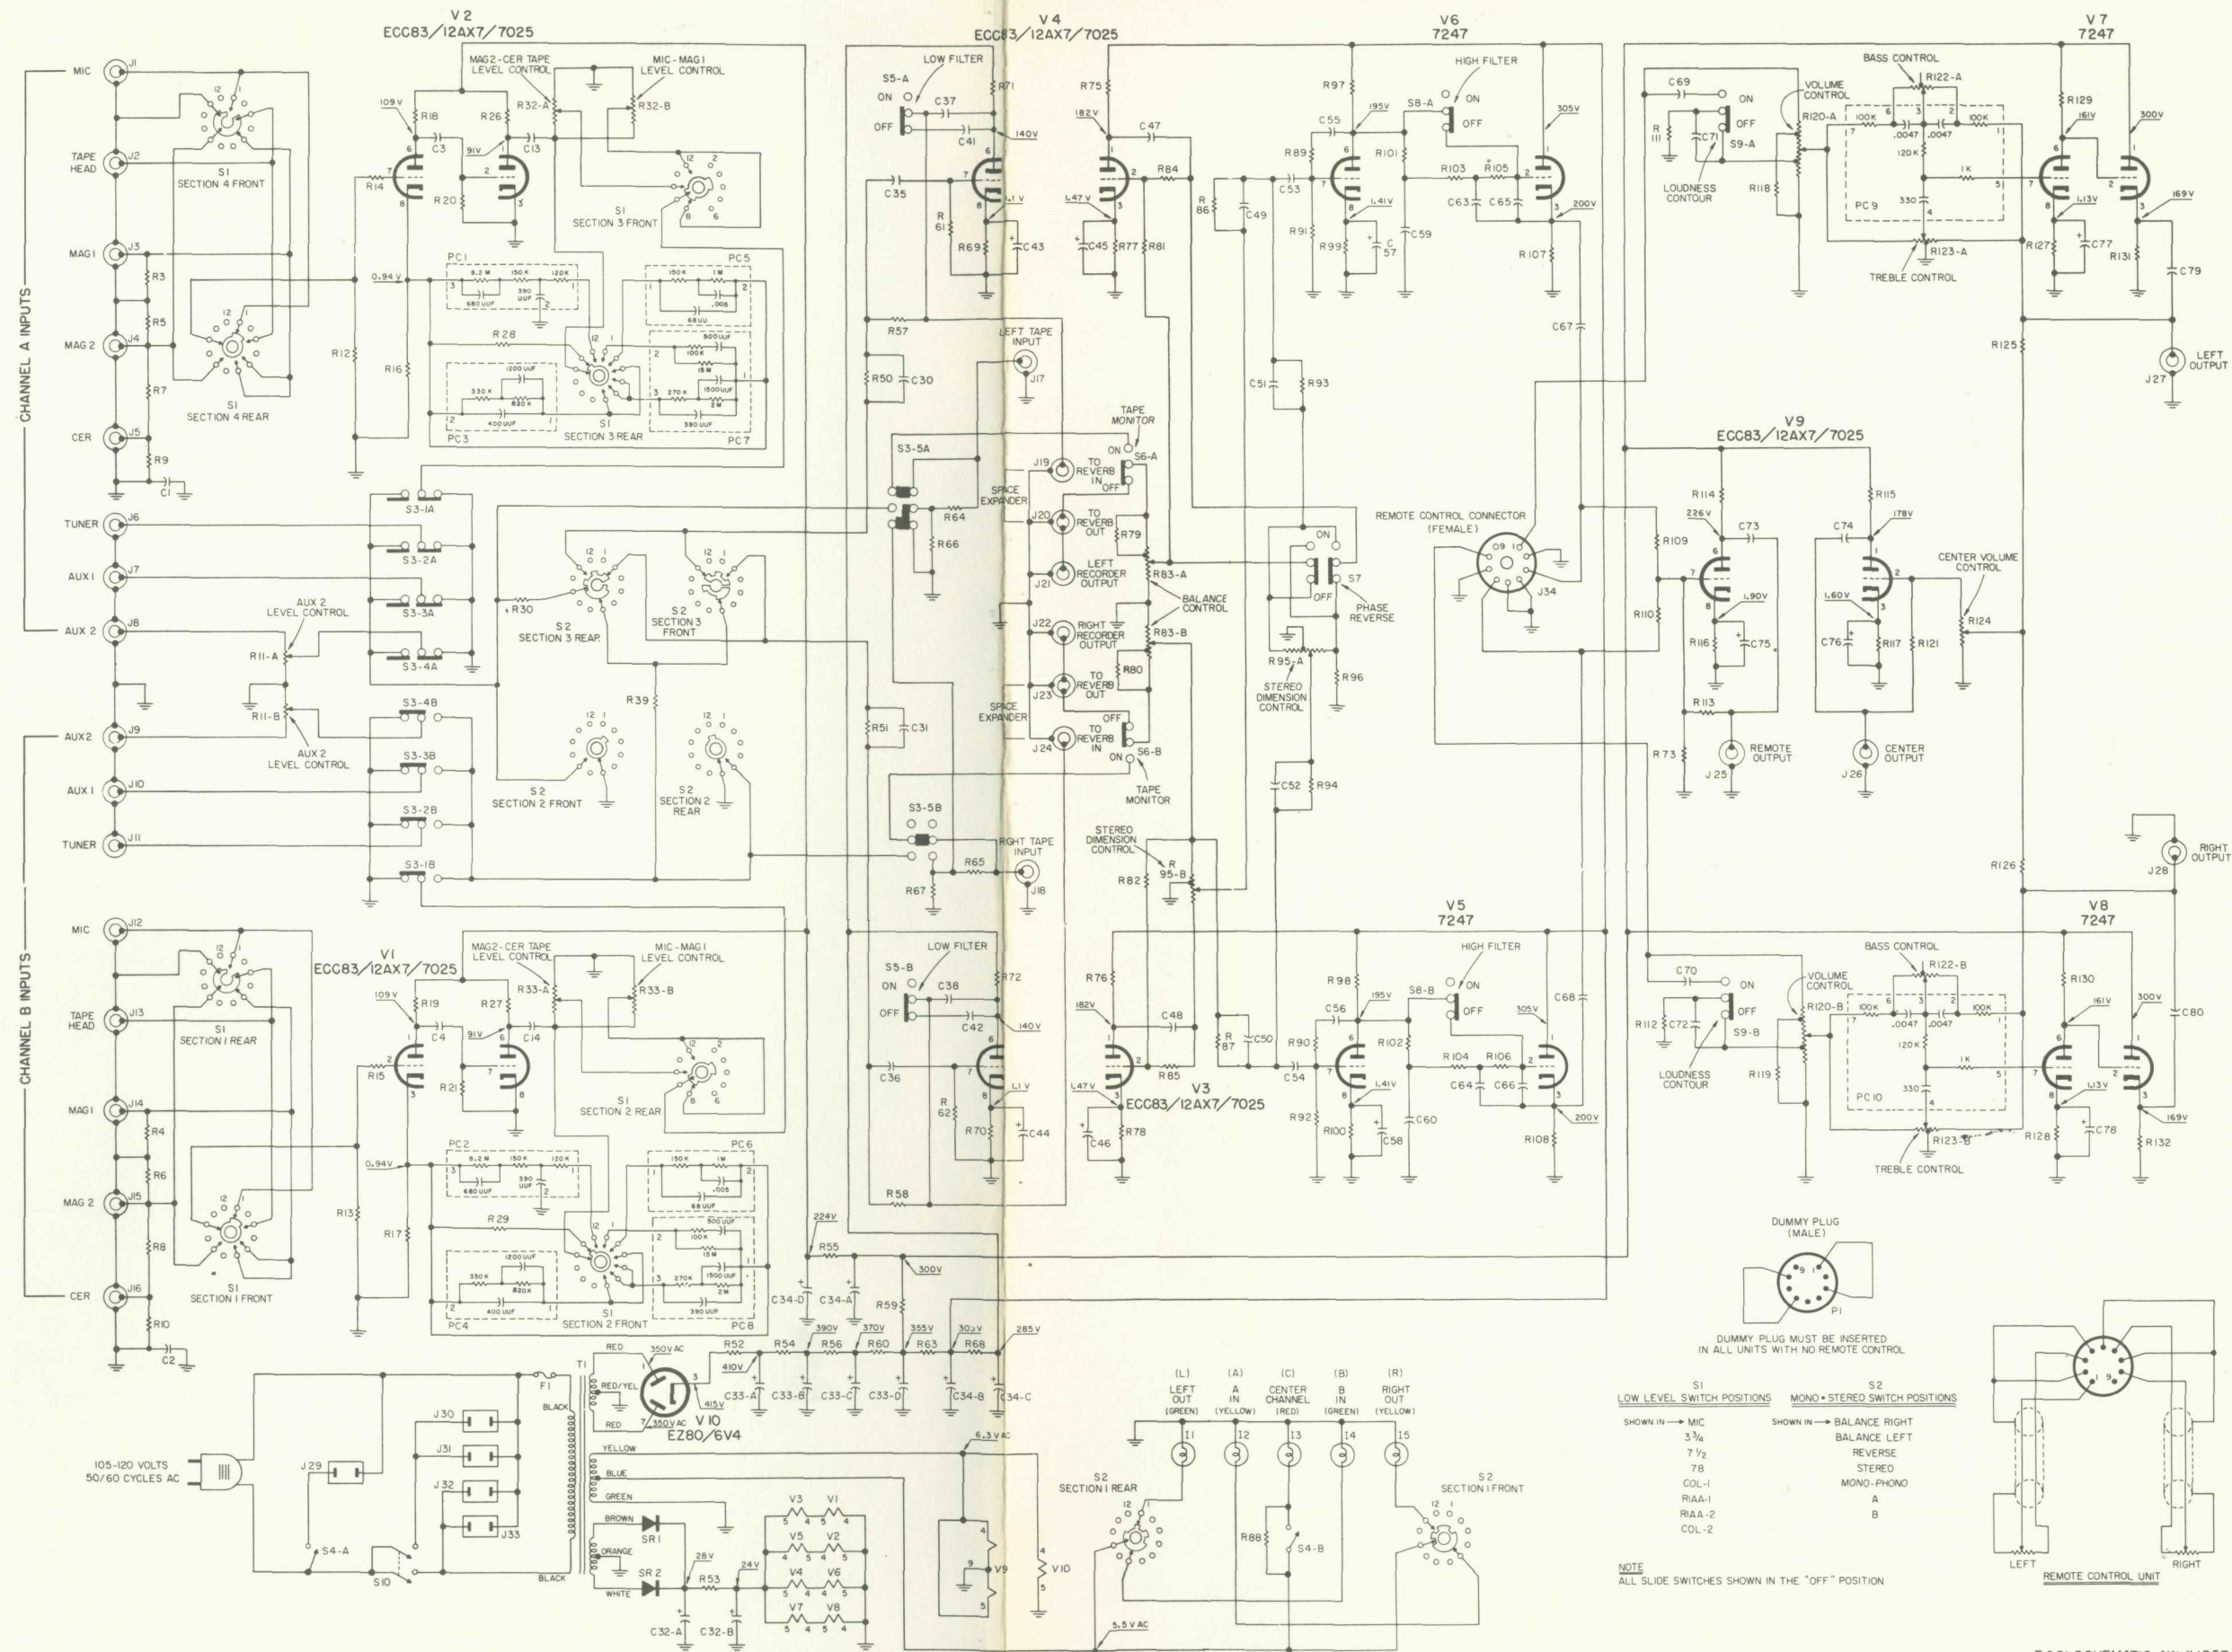

RESISTORS	R3 TO R10	R11	R12 TO R17	R18 TO R21	R22 TO R30	R31 TO R33	R34	R35	R36	R37 TO R43	R44	R45	R46	R47	R48	R49	R50 TO R57	R58	R59	R60	R61 TO R63	R64 TO R70	R71	R72	R73	R74	R75	R76	R77	R78	R79	R80	R81	R82	R83	R84	R85	R86	R87	R88	R89	R90	R91	R92	R93	R94	R95	R96	R97	R98	R99	R100	R101	R102	R103	R104	R105	R106	R107	R108	R109	R110	R111	R112	R113	R114	R115	R116	R117	R118	R119	R120	R121	R122	R123	R124	R125	R126	R127	R128	R129	R130	R131	R132
CAPACITORS	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29	C30	C31	C32	C33	C34	C35	C36	C37	C38	C39	C40	C41	C42	C43	C44	C45	C46	C47	C48	C49	C50	C51	C52	C53	C54	C55	C56	C57	C58	C59	C60	C61	C62	C63	C64	C65	C66	C67	C68	C69	C70	C71	C72	C73	C74	C75	C76	C77	C78	C79	C80				



# PARTS DESCRIPTION LIST • MASTER AUDIO CONTROL

## CAPACITORS

10% tolerance for all fixed capacitors, unless otherwise noted or marked GMV (guaranteed minimum value).

Symbol	Description	Part No.
C1, 2	Ceramic, 100uf, N1500, 100V	C50070-6
C3, 4	Mylar, .022uf, 250V	C50197-49
C13, 14	Mylar, .047uf, 250V	C50197-52
C30, 31	Ceramic, 100uf, N1500, 1000V	C50070-6
C32	Electrolytic, 2 section A — 1000uf, 35V B — 1000uf, 35V	C50180-29
C33	Electrolytic, 4 section A — 40uf, 450V B — 10uf, 450V C — 10uf, 450V D — 40uf, 450V	C50180-10
C34	Electrolytic, 4 section A — 30uf, 350V B — 10uf, 250V C — 30uf, 350V D — 10uf, 300V	C50180-30
C35, 36	Ceramic, .005uf, 20%, 500V	C50089-1
C37, 38	Ceramic, .0039uf, 1000V	C50072-34
C41, 42	Mylar, .1uf, 250V	C50197-54
C43, 44, 45, 46	Electrolytic, 50uf, 3V	C50283-1
C47, 48	Mylar, .1uf, 250V	C50197-54
C49, 50, 51, 52	Ceramic, 24uf, 5%, N150, 1000V	C50070-8
C53, 54	Mylar, .033uf, 250V	C50197-51
C55, 56	Ceramic, 2700uf, 1000V	C50072-17
C57, 58	Electrolytic, 50uf, 3V	C50283-1
C59, 60	Ceramic, 300uf, 1000V	C50072-39
C63, 64	Ceramic, 1000uf, 1000V	C50072-3
C65, 66	Ceramic, 220uf, 1000V	C50072-20
C67, 68	Mylar, .68uf, 250V	C50197-57
C69, 70	Ceramic, 220uf, 1000V	C50072-20
C71, 72	Mylar, .047uf, 250V	C50197-52
C73, 74	Mylar, .68uf, 250V	C50197-57
C75, 76, 77, 78	Electrolytic, 50uf, 3V	C50283-1
C79, 80	Mylar, .68uf, 250V	C50197-57

## RESISTORS AND POTENTIOMETERS

In ohms, 10% tolerance, 1/2 watt, unless otherwise noted. K=Kilohm, M=Megohm.

Symbol	Description	Part No.
R3, 4, 5, 6	Dep. Carbon, 100K, 5%, 1/3 W	R33DC104J
R7, 8,		
9, 10	Dep. Carbon, 120K, 5%, 1/3 W	R33DC124J
R11	Potentiometer, Dual, 250K, aux. 2 level	R50160-71
R12, 13	Dep. Carbon, 100K, 5%, 1/3 W	R33DC104J
R14, 15	Dep. Carbon, 10K, 5%, 1/3 W	R33DC103J
R16, 17	Glass, 2.7K, 5%, 1W	R30G272J
R18, 19	Glass, 330K, 5%, 1W	R30G334J
R20, 21	Dep. Carbon, 4.7M, 5%, 1/3 W	R33DC475J
R26, 27	Dep. Carbon, 220K, 5%, 1/3 W	R33DC224J
R28, 29	Composition, 560K	RC20BF564K
R30	Dep. Carbon, 100K, 5%, 1/3 W	R33DC104J
R32, 33	Potentiometer, Dual, 250K, Mag. 1 & Mag. 2 level	R50160-71
R39	Dep. Carbon, 100K, 5%, 1/3 W	R33DC104J
R50, 51	Dep. Carbon, 120K, 5%, 1/3 W	R33DC124J
R52	Glass, 330, 3W	RPG3W331K
R53	Wirewound, 10K, 7W	R851-128
R54	Glass, 1K, 3W	RPG3W102K
R55	Composition, 47K	RC20BF473K
R56	Glass, 1K, 3W	RPG3W102K
R57, 58	Composition, 1.5M	RC30BF155K
R59	Glass, 5.6K, 3W	RPG3W562K
R60	Glass, 1K, 3W	RPG3W102K

R61, 62	Dep. Carbon, 220K, 5%, 1/3 W	R33DC224J
R63	Glass, 4.7K, 3W	RPG3W472K
R64, 65	Composition, 300K, 5%	RC20BF304J
R66, 67	Dep. Carbon, 100K, 5%, 1/3 W	R33DC104J
R68	Composition, 15K	RC20BF153K
R69, 70	Composition, 1.5K	RC20BF152K
R71, 72	Composition, 330K	RC20BF334K
R73	Dep. Carbon, 4.7M, 5%, 1/3 W	R33DC475J
R75, 76	Dep. Carbon, 220K, 5%, 1/3 W	R33DC224J
R77, 78	Dep. Carbon, 2.7K, 5%, 1/3 W	R33DC272J
R79, 80	Dep. Carbon, 100K, 5%, 1/3 W	R33DC104J
R81, 82	Dep. Carbon, 470K, 5%, 1/3 W	R33DC474J
R83	Potentiometer, dual, 250K, balance	R50160-65
R84, 85, 86, 87	Dep. Carbon, 470K, 5%, 1/3 W	R33DC474J
R88	Composition, 33	RC20BF330K
R89, 90	Composition, 2.7M, 5%	RC20BF275J
R91, 92	Composition, 2.2M, 5%	RC20BF225J
R93, 94	Dep. Carbon, 470K, 5%, 1/3 W	R33DC474J
R95	Potentiometer, dual, 1M, dimension	R50160-7C
R96	Dep. Carbon, 470K, 5%, 1/3 W	R33DC474J
R97, 98	Dep. Carbon, 120K, 5%, 1/3 W	R33DC124J
R99, 100	Composition, 1.8K	RC20BF182K
R101, 102, 103, 104, 105, 106	Dep. Carbon, 47K, 5%, 1/3 W	R33DC473K
R107, 108	Composition, 68K, 10%, 1W	R30BF683K
R109, 110	Dep. Carbon, 470K, 5%, 1/3 W	R33DC474J
R111, 112	Dep. Carbon, 10K, 5%, 1/3 W	R33DC103J
R113	Dep. Carbon, 220K, 5%, 1/3 W	R33DC224J
R114, 115	Dep. Carbon, 220K, 5%, 1/3 W	R33DC224J
R116, 117	Dep. Carbon, 2.7K, 5%, 1/3 W	R33DC272J
R118, 119	Dep. Carbon, 22K, 5%, 1/3 W	R33DC223J
R120	Potentiometer, dual, 100K, volume	R50160-69
R121	Dep. Carbon, 470K, 5%, 1/3 W	R33DC474J
R122	Potentiometer, dual, 1M, bass	R50160-66
R123	Potentiometer, dual, 500K, treble	R50160-67
R124	Potentiometer, 500K, center volume	R50160-68
R125, 126	Dep. Carbon, 270K, 5%, 1/3 W	R33DC274J
R127, 128	Composition, 1.5K	RC20BF152K
R129, 130	Composition, 180K	RC20BF184K
R131, 132	Composition, 68K, 1W	R30BF683K

## MISCELLANEOUS

Symbol	Description	Part No.
F1	Fuse, .5 amp., slo-blo	F795-136
I1, 2, 3, 4, 5	Lamp, #47	I50009-1
PC1, 2	Printed Circuit, 3 3/4, tape EQ.	PC50187-7
PC3, 4	Printed Circuit, COL, EQ	PC50187-6
PC5, 6	Printed Circuit, 78, EQ.	PC50187-8
PC7, 8	Printed Circuit, R1AA, 7 1/2, EQ.	PC50187-3
PC9, 10	Printed Circuit, tone control	PC657-140
P1	Plug, dummy	P50181
S1	Switch, low level	S851-126
S2	Switch, mono-stereo	S851-127
S3	Switch, push button	S851-119
S4	Switch, center ch., power	Part of R124
S5, 6, 7, 8, 9	Switch, slide	S50200-5
S10	Switch, power	Part of R120
SR1, 2	Diode, silicon, SD91	SR851-121
T1	Transformer, power	T851-115
—	Dress panel	AS1011-108
—	Shielded cable	A550004-1
—	Knob, push button	E851-116
—	Knob, dual, front	E50323
—	Knob, dual, rear	E50221
—	Knob	E50325-1
—	Jewel, red	I50162-1
—	Jewel, yellow	I50162-2
—	Jewel, green	I50162-4