


M - 166/E/G/U/A/MEX

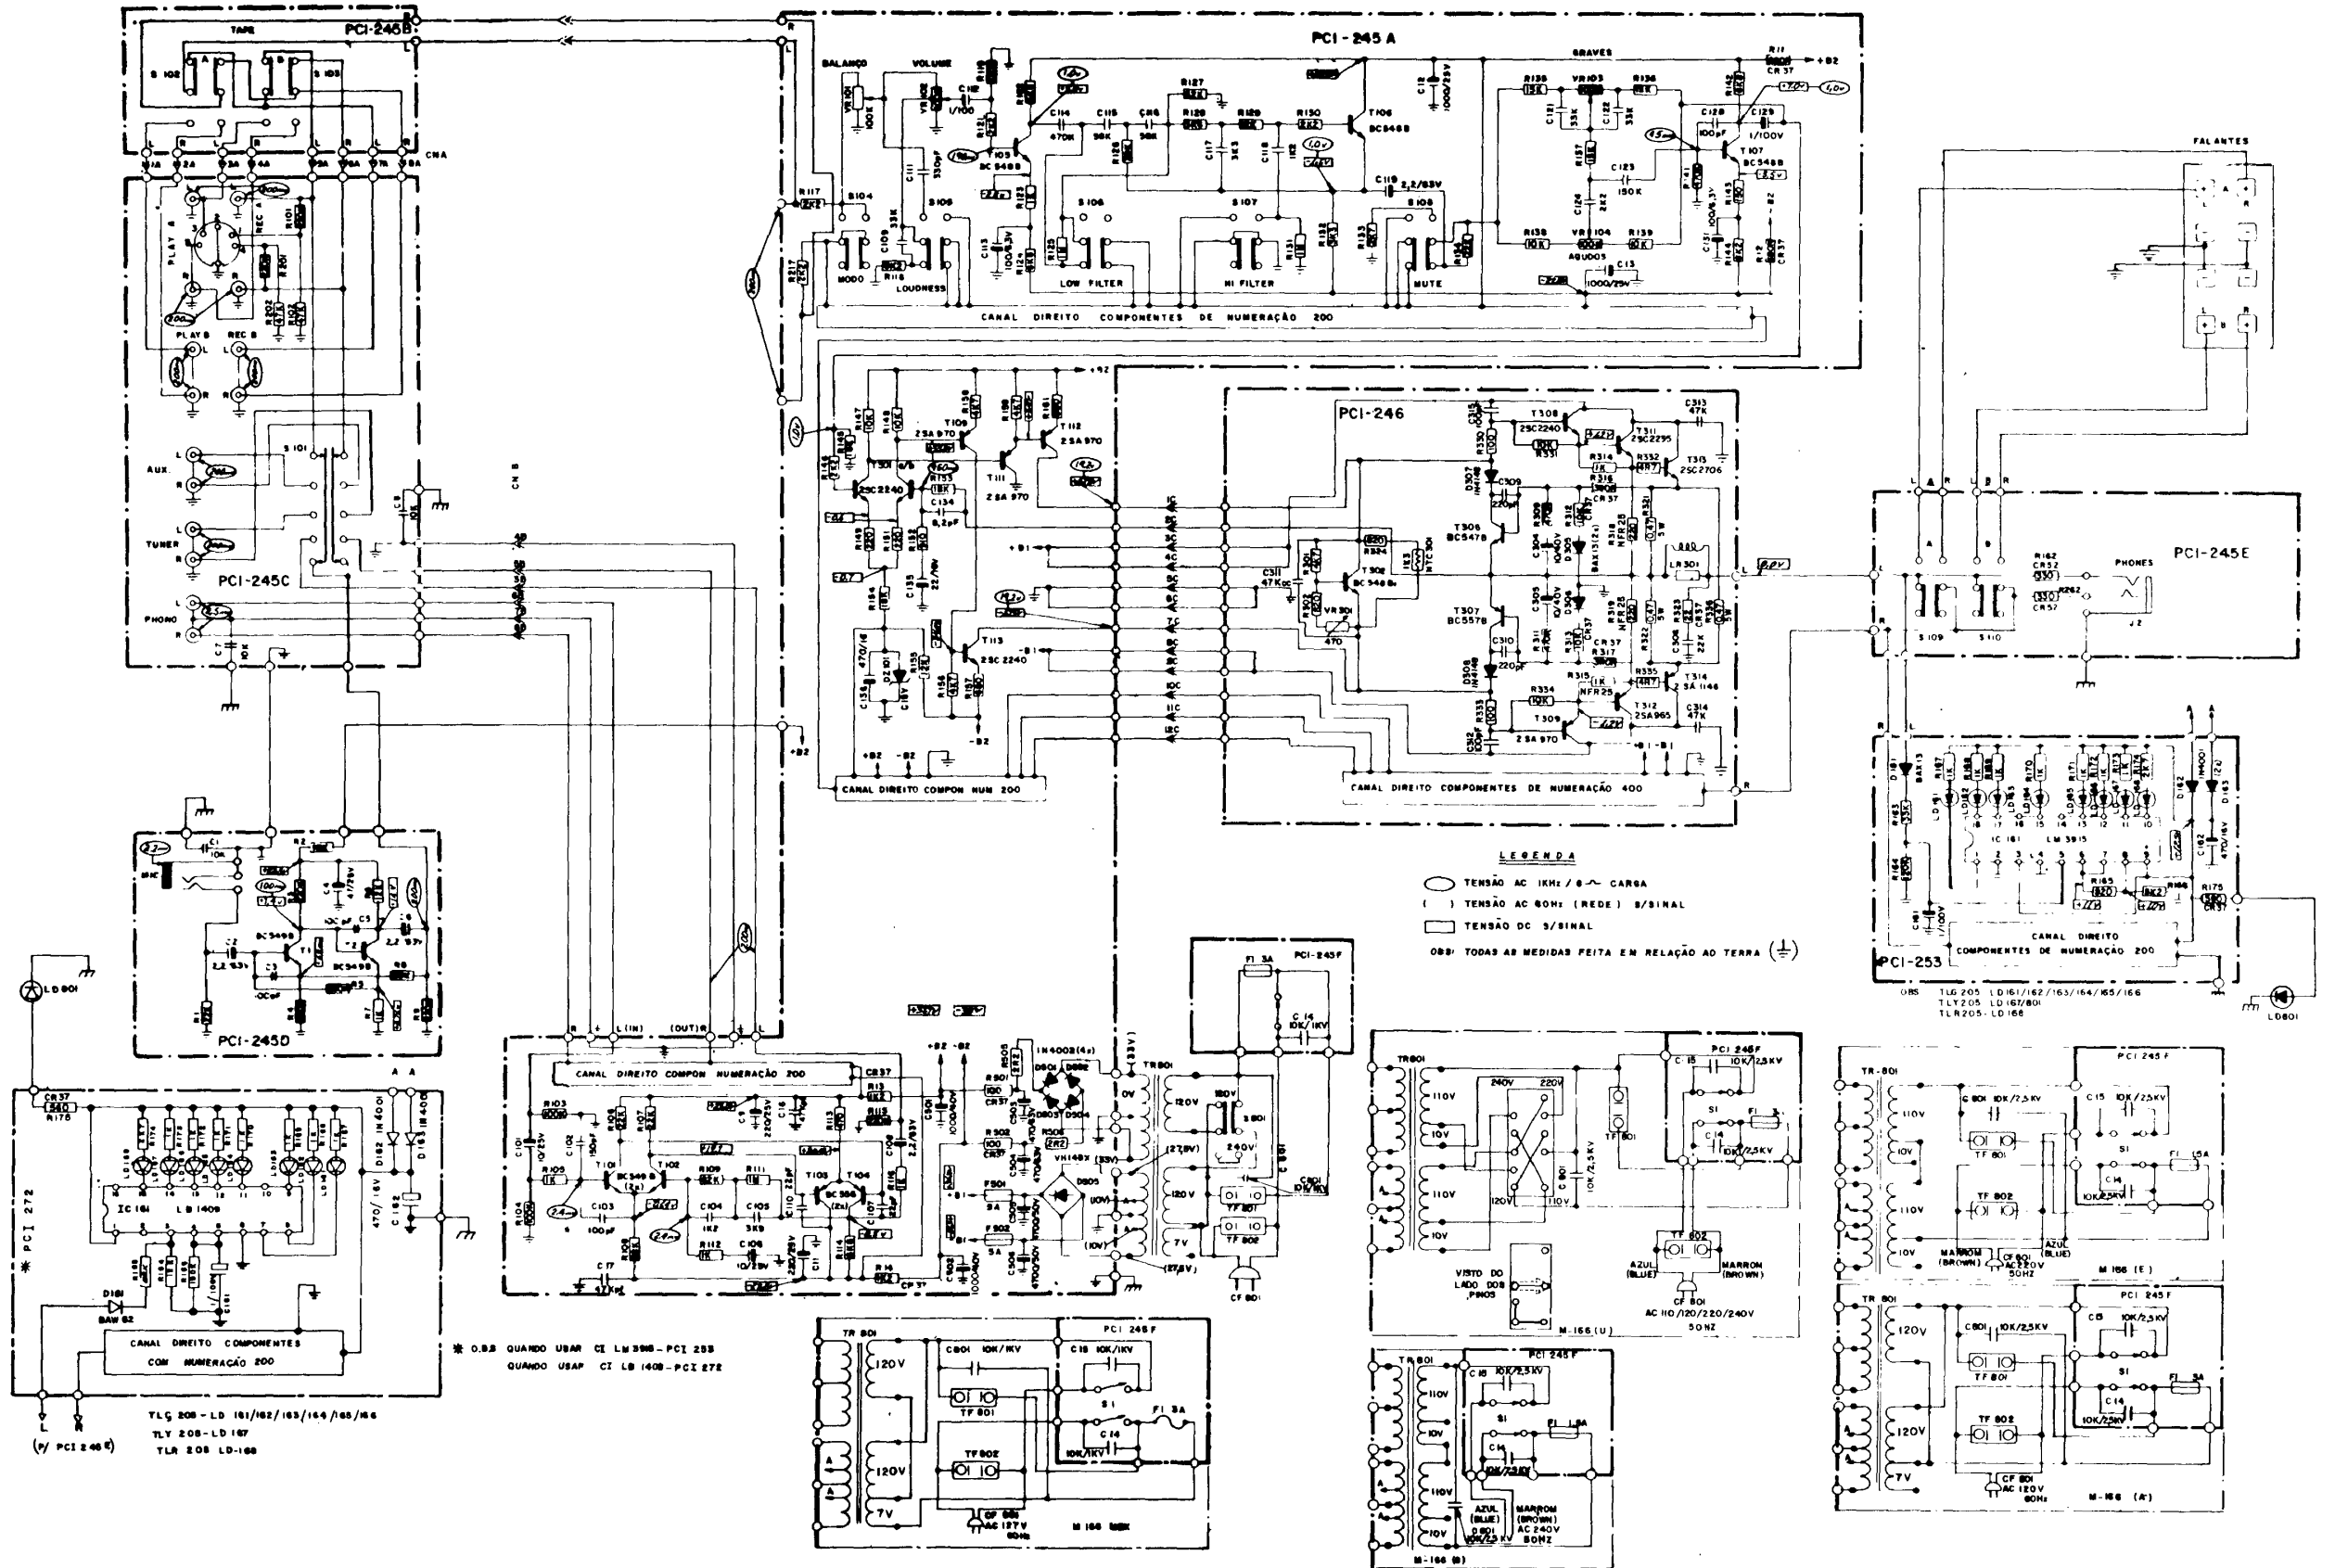

* O.B.S QUANDO USAR CI LM3906-PCI 253 QUANDO USAR CI LB 1408-PCI 272

TLG 208 - LD 161/162/163/164/165/166
 TLY 208 - LD 167
 TLR 208 LD-168

(/ PCI 246 E)