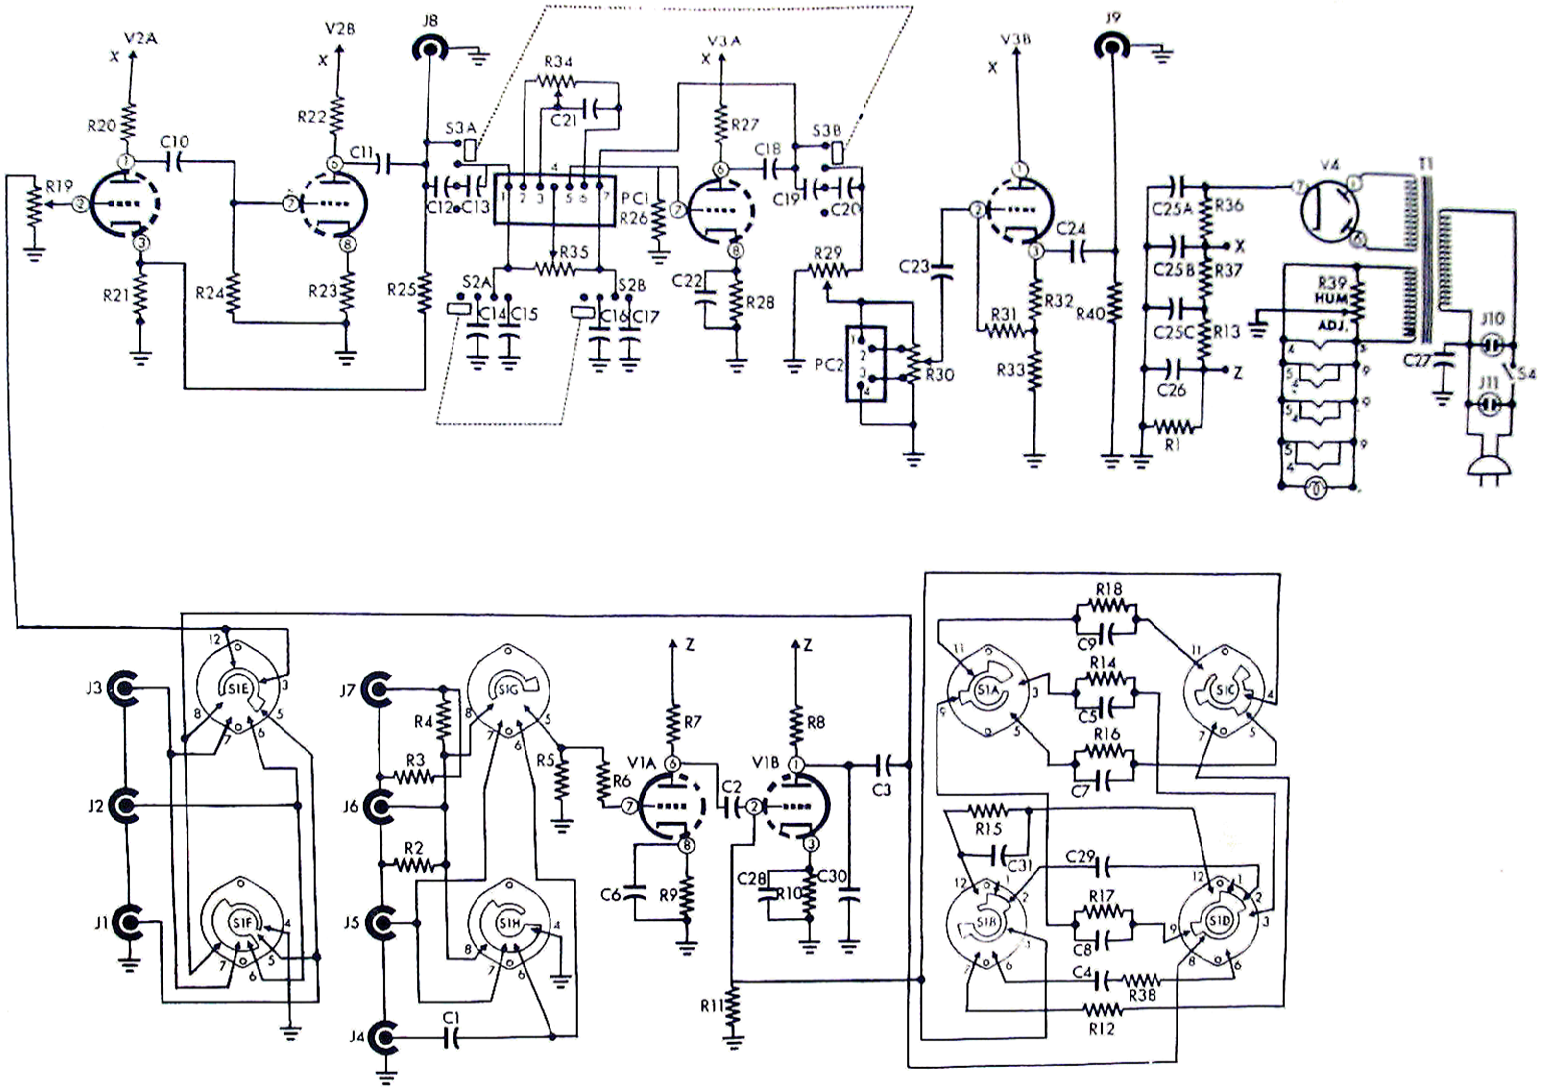

Sym.	Description
C1	cap., disc., .025 mfd
C2	cap., paper, .25 mfd - 200 V
C3	cap , disc., .025 mfd
C4	cap., disc , 600 mmf, ±10%
C5	cap., disc., .0027 mfd, ±10%
C6	cap., elec., 25 mfd - 6 V
C7	cap , disc., 500 mmf, ±10%
C8	cap., disc., .0033 mmf, ±10%
C9	cap., disc., 850 mmf, ±10%
C10	cap., disc., .025 mfd
C11	cap., molded, .1 mfd - 400 V, ±10%
C12	cap., disc., .02 mfd, ±20%

Sym.	Description
C13	cap., disc., .025 mfd
C14	cap., disc., .015 mfd, ±20%
C15	cap., disc., .02 mfd
C16	cap., disc., .005 mfd, ±10%
C17	cap., disc., .01 mfd, ±10%
C18	cap., molded, .1 mfd - 400V, ±10%
C19	cap., disc., .005 mfd, ±10%
C20	cap., disc., .0033 mmf, ±10%
C21	cap., disc., 600 mmf, ±10%
C22	cap., disc., .015 mfd, ±20%
C23	cap., disc., .025 mfd
C24	cap., molded, .25 mfd, ±20%

Sym.	Description
C25	cap., elec., 20-40-40/400-350-350
C26	cap., elec., 50 mfd - 150V
C27	cap., molded, .03 mfd-600V, ±20%
C28	cap., elec., 10 mfd - 6 V
C29	cap., disc., .0022 mfd, ±10%
C30	cap., disc., .0012 mfd, ±10%
C31	cap., disc., 47 mmf, ±10%
I1	bulb, #47
J1	jack, AUX.
J2	jack, TV
J3	jack, TUNER
J4	jack, MIC.

Sym.	Description
J5	jack, TAPE
J6	jack, PHONO, LO
J7	jack, PHONO, HI
J8	jack, OUTPUT
J9	jack, PREAMP OUTPUT
J10	jack, 117 VAC, SWITCHED
J11	jack, 117 VAC
PC1	printed circuit plate
PC2	printed circuit plate
R1	res., 150KΩ, 1/2W, ±10%
R2	res., 150KΩ, 1/2W, ±10%
R3	res., 150KΩ, 1/2W, ±10%

Sym.	Description
R4	res., 220KΩ, 1/2W, ±10%
R5	res., 1MΩ, 1/2W, ±10%
R6	res., 10KΩ, 1/2W, ±10%
R7	res., 200KΩ, 1/2W, ± 5%
R8	res., 200KΩ, 1/2W, ± 5%
R9	res., 2.2KΩ, 1/2W, ±10%
R10	res., 4.7KΩ, 1/2W, ±10%
R11	res., 1MΩ, 1/2W, ±10%
R12	res., 100KΩ, 1/2W, ± 5%
R13	res., 22KΩ, 1/2W, ±10%
R14	res., 2.2MΩ, 1/2W, ± 5%
R15	res., 150KΩ, 1/2W, ±10%

Sym.	Description
R16	res., 100KΩ, 1/2W, ± 5%
R17	res., 560KΩ, 1/2W, ± 5%
R18	res., 100KΩ, 1/2W, ± 5%
R19	pot., 500KΩ audio
R20	res., 220KΩ, 1/2W, ±10%
R21	res., 2.2KΩ, 1/2W, ±10%
R22	res., 100KΩ, 1/2W, ±10%
R23	res., 2.2KΩ, 1/2W, ±10%
R24	res., 470KΩ, 1/2W, ±10%
R25	res., 33KΩ, 1/2W, ±10%
R26	res., 470KΩ, 1/2W, ±10%
R27	res., 100KΩ, 1/2W, ±10%

Sym.	Description
R28	res., 1KΩ, 1/2W, ±10%
R29	pot., 100KΩ audio
R30	pot., 500KΩ linear
R31	res., 1MΩ, 1/2W, ±10%
R32	res., 1KΩ, 1/2W, ±10%
R33	res., 68KΩ, 1/2W, ±10%
R34	pot., 1MΩ lin. w/SPST switch
R35	pot., 500KΩ lin. w/SPST switch
R36	res., 10KΩ, 1W, ±10%
R37	res., 68KΩ, 1/2W, ±10%
R38	res., 68KΩ, 1/2W, ± 5%

Sym.	Description
R39	pot., 100Ω
R40	res., 470KΩ, 1/2W, ±10%
S1	switch, selector
S2	switch, slide, DP3T
S3	switch, slide, DP3T
S4	pot., dual concentric w/SPST switch
T1	transformer, power
V1	tube, 12AX7/ECC83
V2	tube, 12AX7/ECC83
V3	tube, 12AX7/ECC83
V4	tube, 6X4

EICO

EICO MODEL HF-65

HIGH FIDELITY MASTER CONTROL

© 1958