



EICO MODEL HFT-90

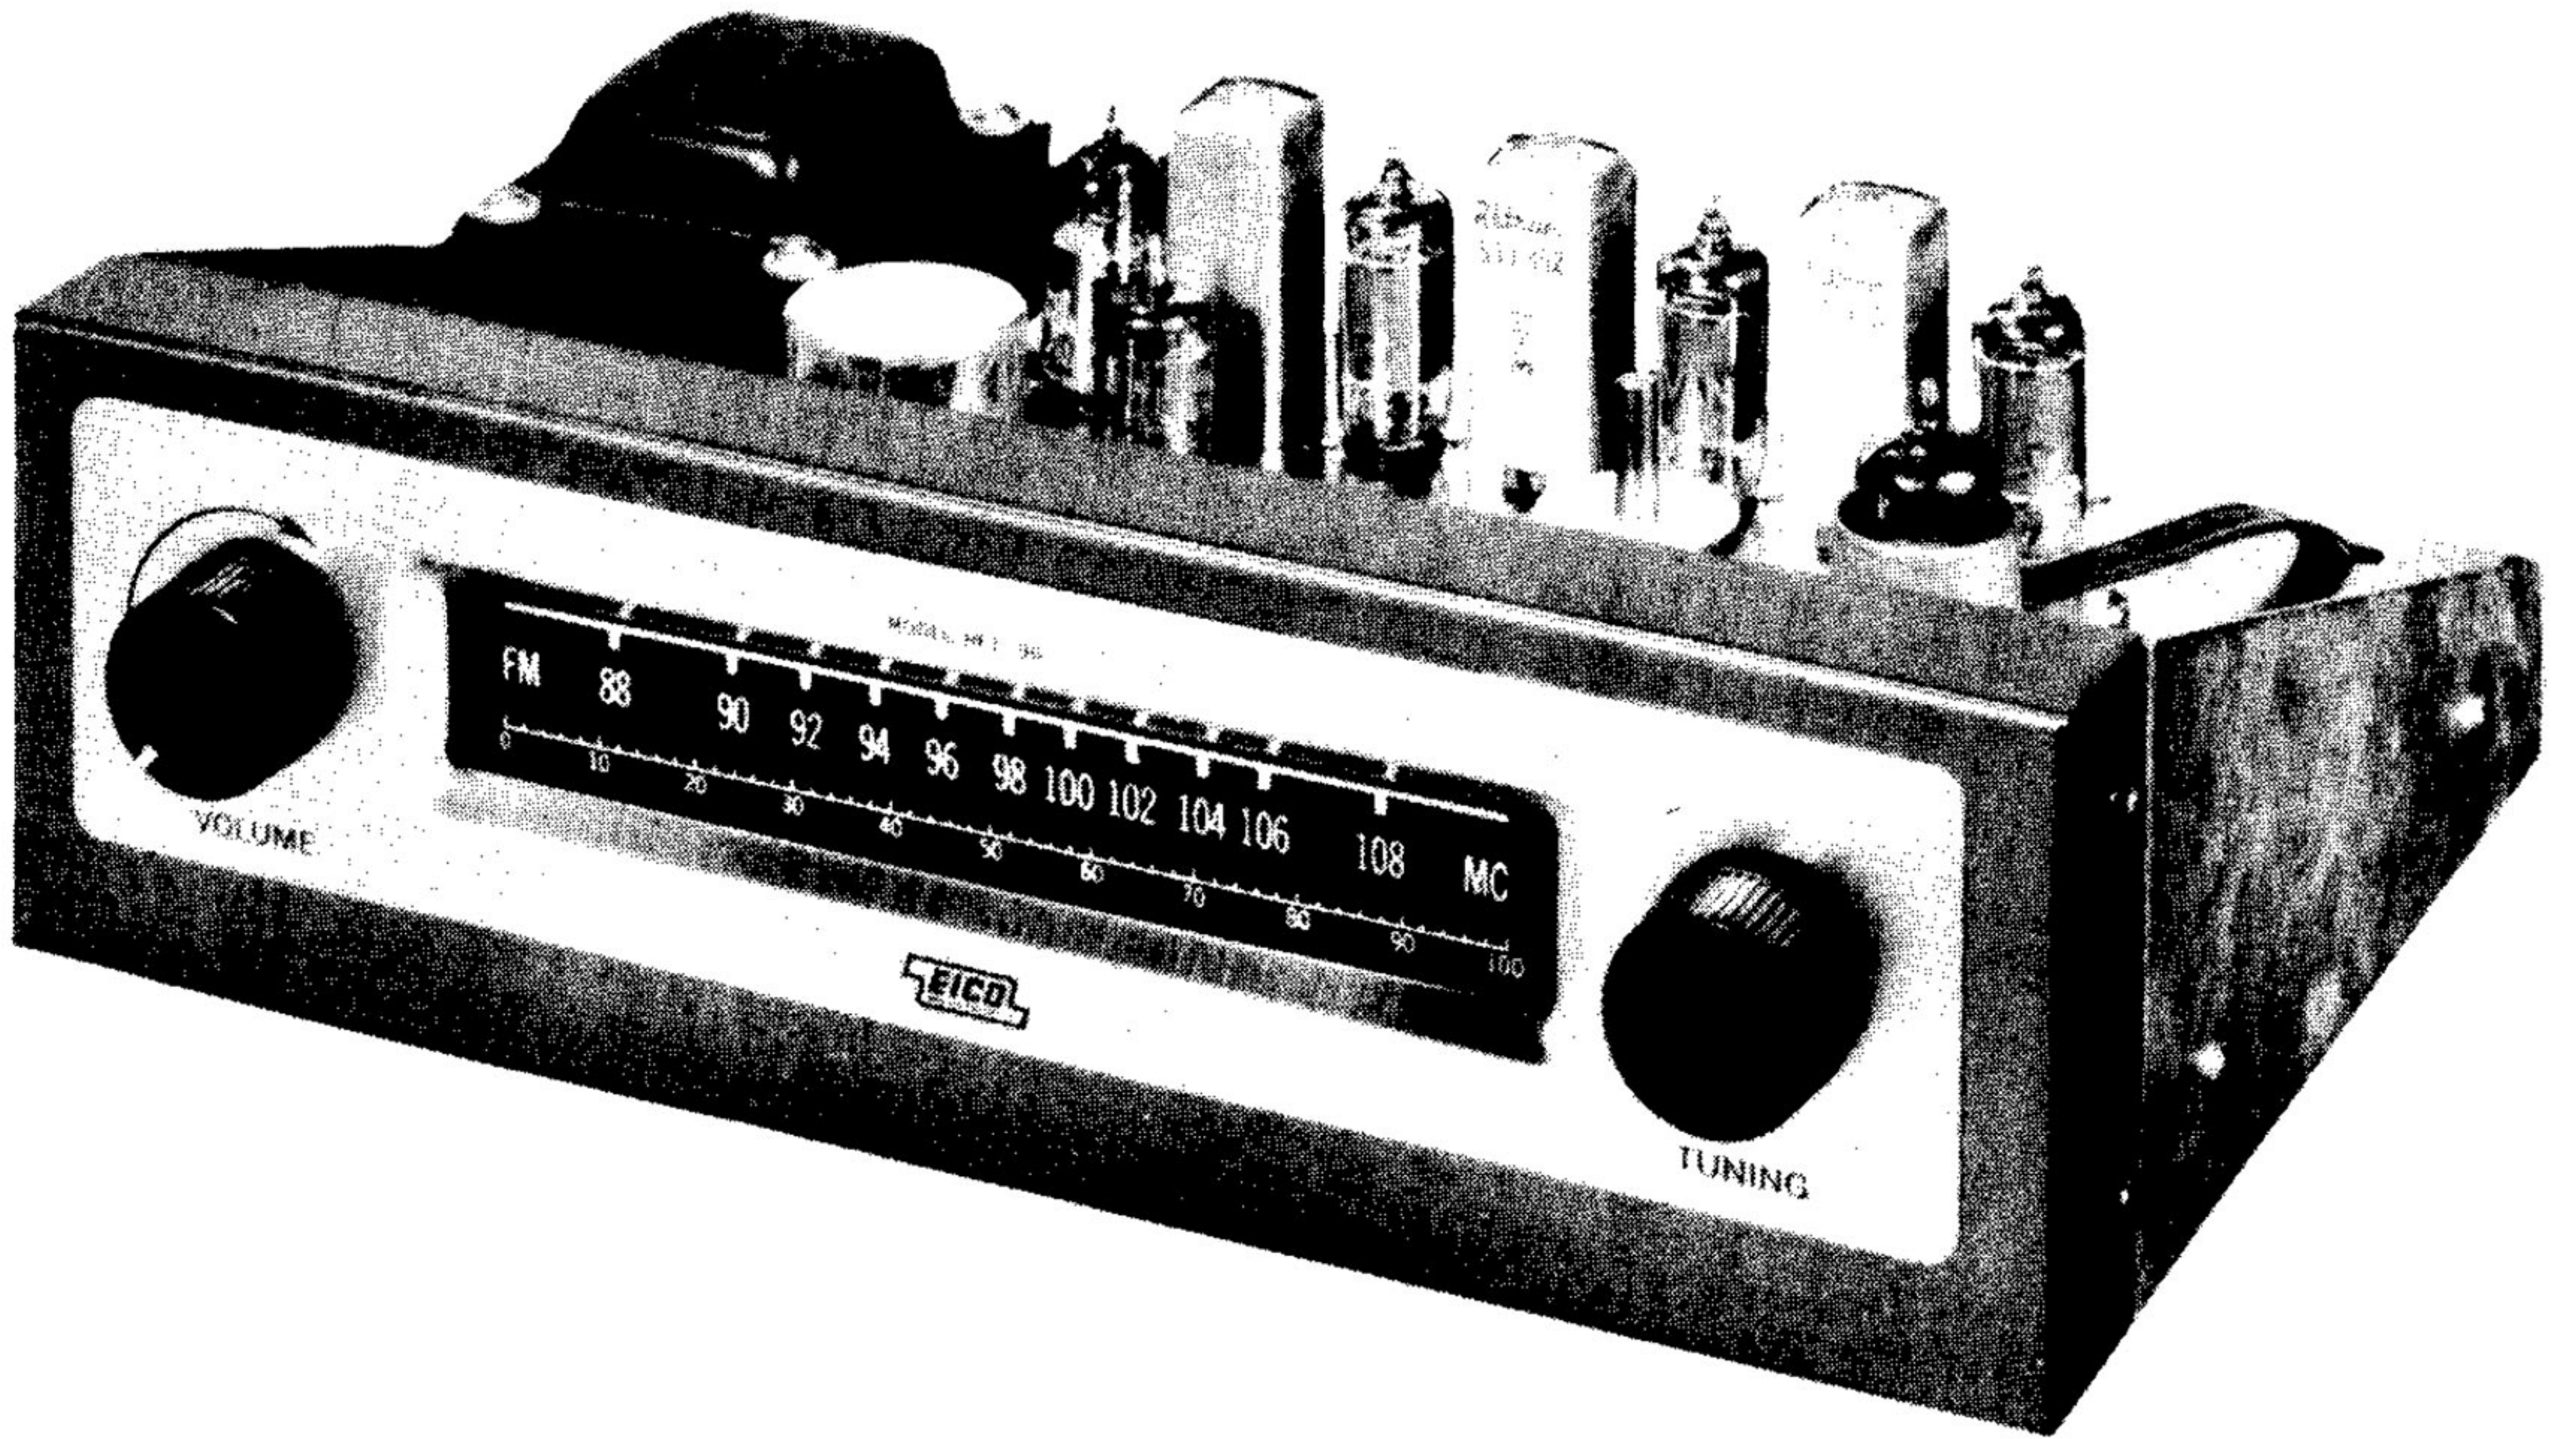

TRADE NAME	Eico Model HFT-90
MANUFACTURER	Electronic Instrument Co., Inc., 33-00 Northern Blvd., Long Island City 1, N. Y.
TYPE SET	AC Operated 8 Tube FM Tuner
POWER SUPPLY	110 - 120 Volts AC, 60 Cycles
TUNING RANGE—FREQ. MOD.	88 - 108MC RATING 32 Watts, .3 Amp. @117 Volts AC

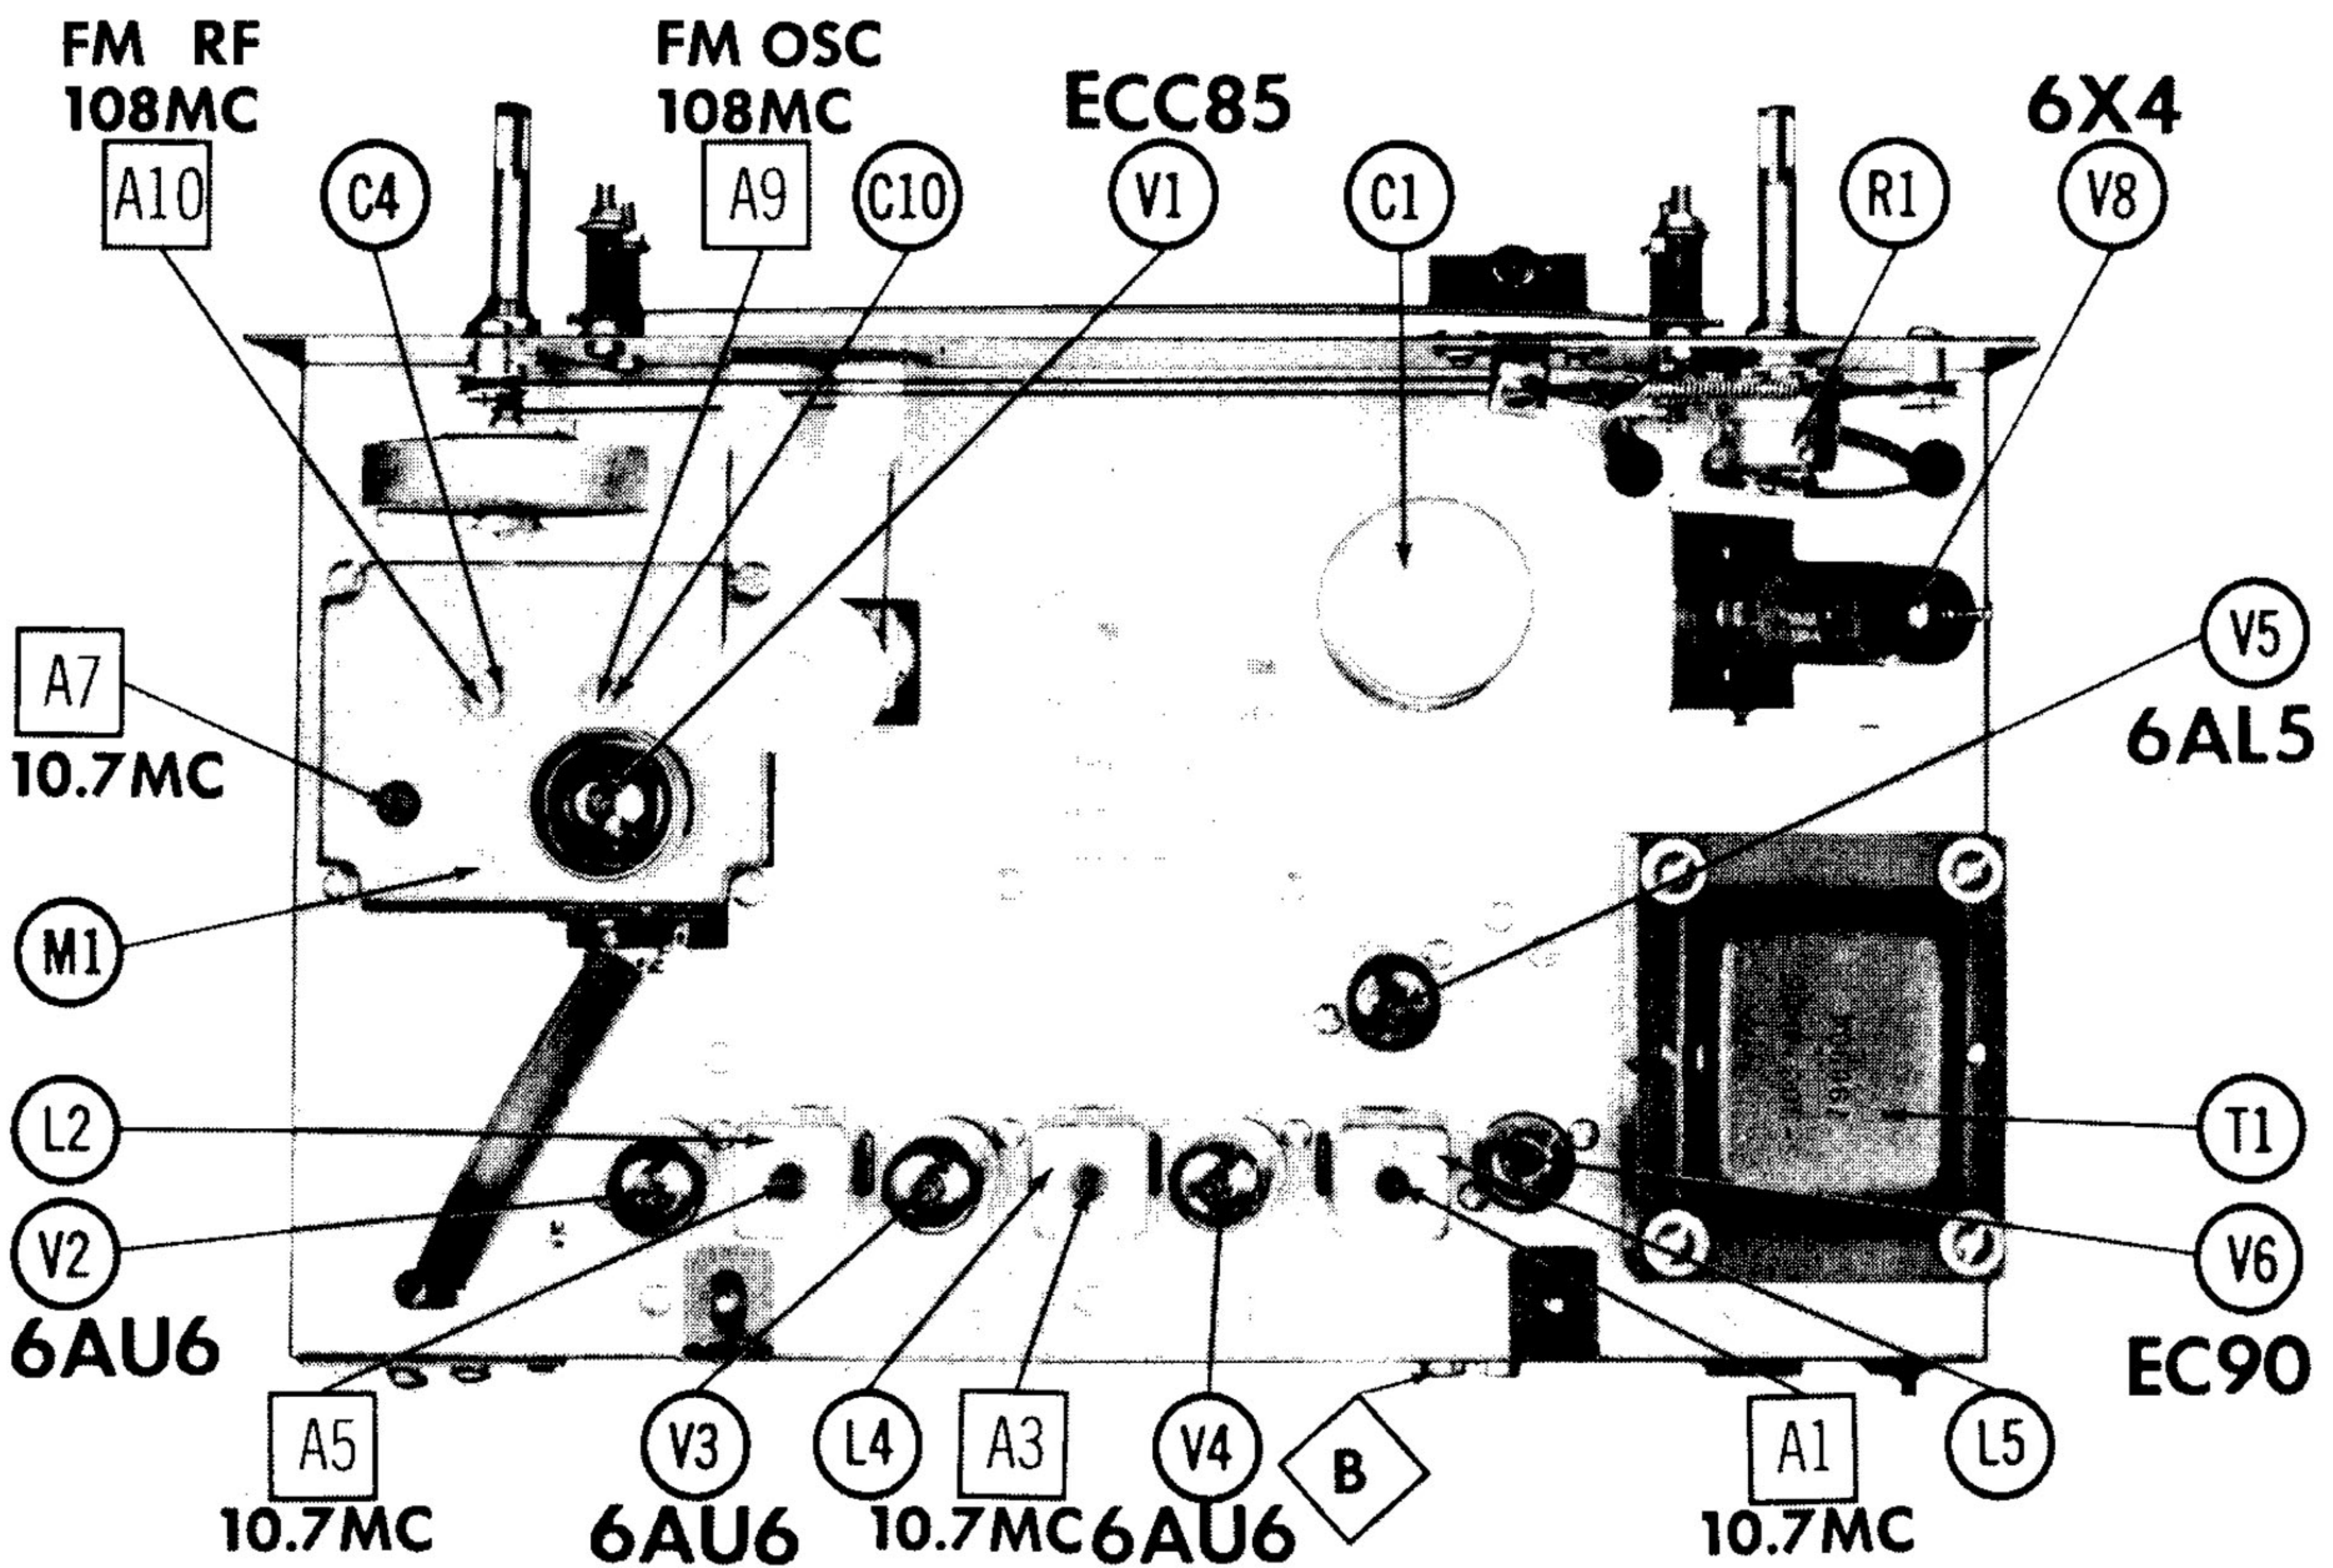

ALIGNMENT INSTRUCTIONS

ALIGNMENT INSTRUCTIONS—READ CAREFULLY BEFORE ATTEMPTING ALIGNMENT

Volume control should be at maximum position. Output of signal generator should be no higher than necessary to obtain an output reading.

Suggested alignment tools: A1 thru A5, A8..... GENERAL CEMENT #5009, 8195, 8274, 8275, 8728, 8987
WALSCO #2531
A6, A7..... GENERAL CEMENT #8282, 8606, 8606L, 9091
WALSCO #2526, 2541, 2543, 2544
A9, A10..... GENERAL CEMENT #5000, 5003, 5014, 5015, 5016, 8276, 8290
WALSCO #2512, 2515, 2522, 2523, 2525, 2537

IF ALIGNMENT USING AM SIGNAL GENERATOR AND VTVM

	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	RADIO DIAL SETTING	CONNECT VTVM	ADJUST	REMARKS
1.	High side thru 5mmf to pin 2 (grid) of Converter. Low side to chassis.	10.7MC (Unmod.)	Point of non-interference.	DC probe to point A . Common to chassis.	A1, A2, A3, A4, A5, A6, A7	Adjust for maximum deflection.
2.	"	"	"	DC probe to point B . Common to chassis.	A8	Adjust for zero reading. A positive and negative reading will be obtained on either side of the correct setting.




IF ALIGNMENT USING FM SIGNAL GENERATOR AND OSCILLOSCOPE

Use frequency modulated signal with 60% modulation and 450KC sweep. Use 120% sawtooth voltage in scope for horizontal deflection.

	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	RADIO DIAL SETTING	CONNECT SCOPE	ADJUST	REMARKS
1.	High side thru 5mmf to pin 2 (grid) of Converter. Low side to chassis.	10.7MC (450KC Swp)	Point of non-interference.	Vert. amp. to point A . Low side to chassis.	A1, A2, A3, A4, A5, A6, A7	Disconnect stabilizing capacitor C2. Adjust for maximum gain and symmetry of response similar to Fig. 1. Reconnect C2.
2.	"	"	"	Vert. amp. to point B . Low side to chassis.	A8	Adjust to place marker at the center of crossover lines similar to Fig. 2. SLIGHTLY retouch A1 for maximum amplitude and straightness of crossover lines.

RF ALIGNMENT


	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	RADIO DIAL SETTING	CONNECT VTVM	ADJUST	REMARKS
3.	Across antenna terminals with 120Ω in each lead.	108MC (Unmod.)	108MC	DC probe to point A . Common to chassis.	A9, A10	Adjust for maximum deflection.

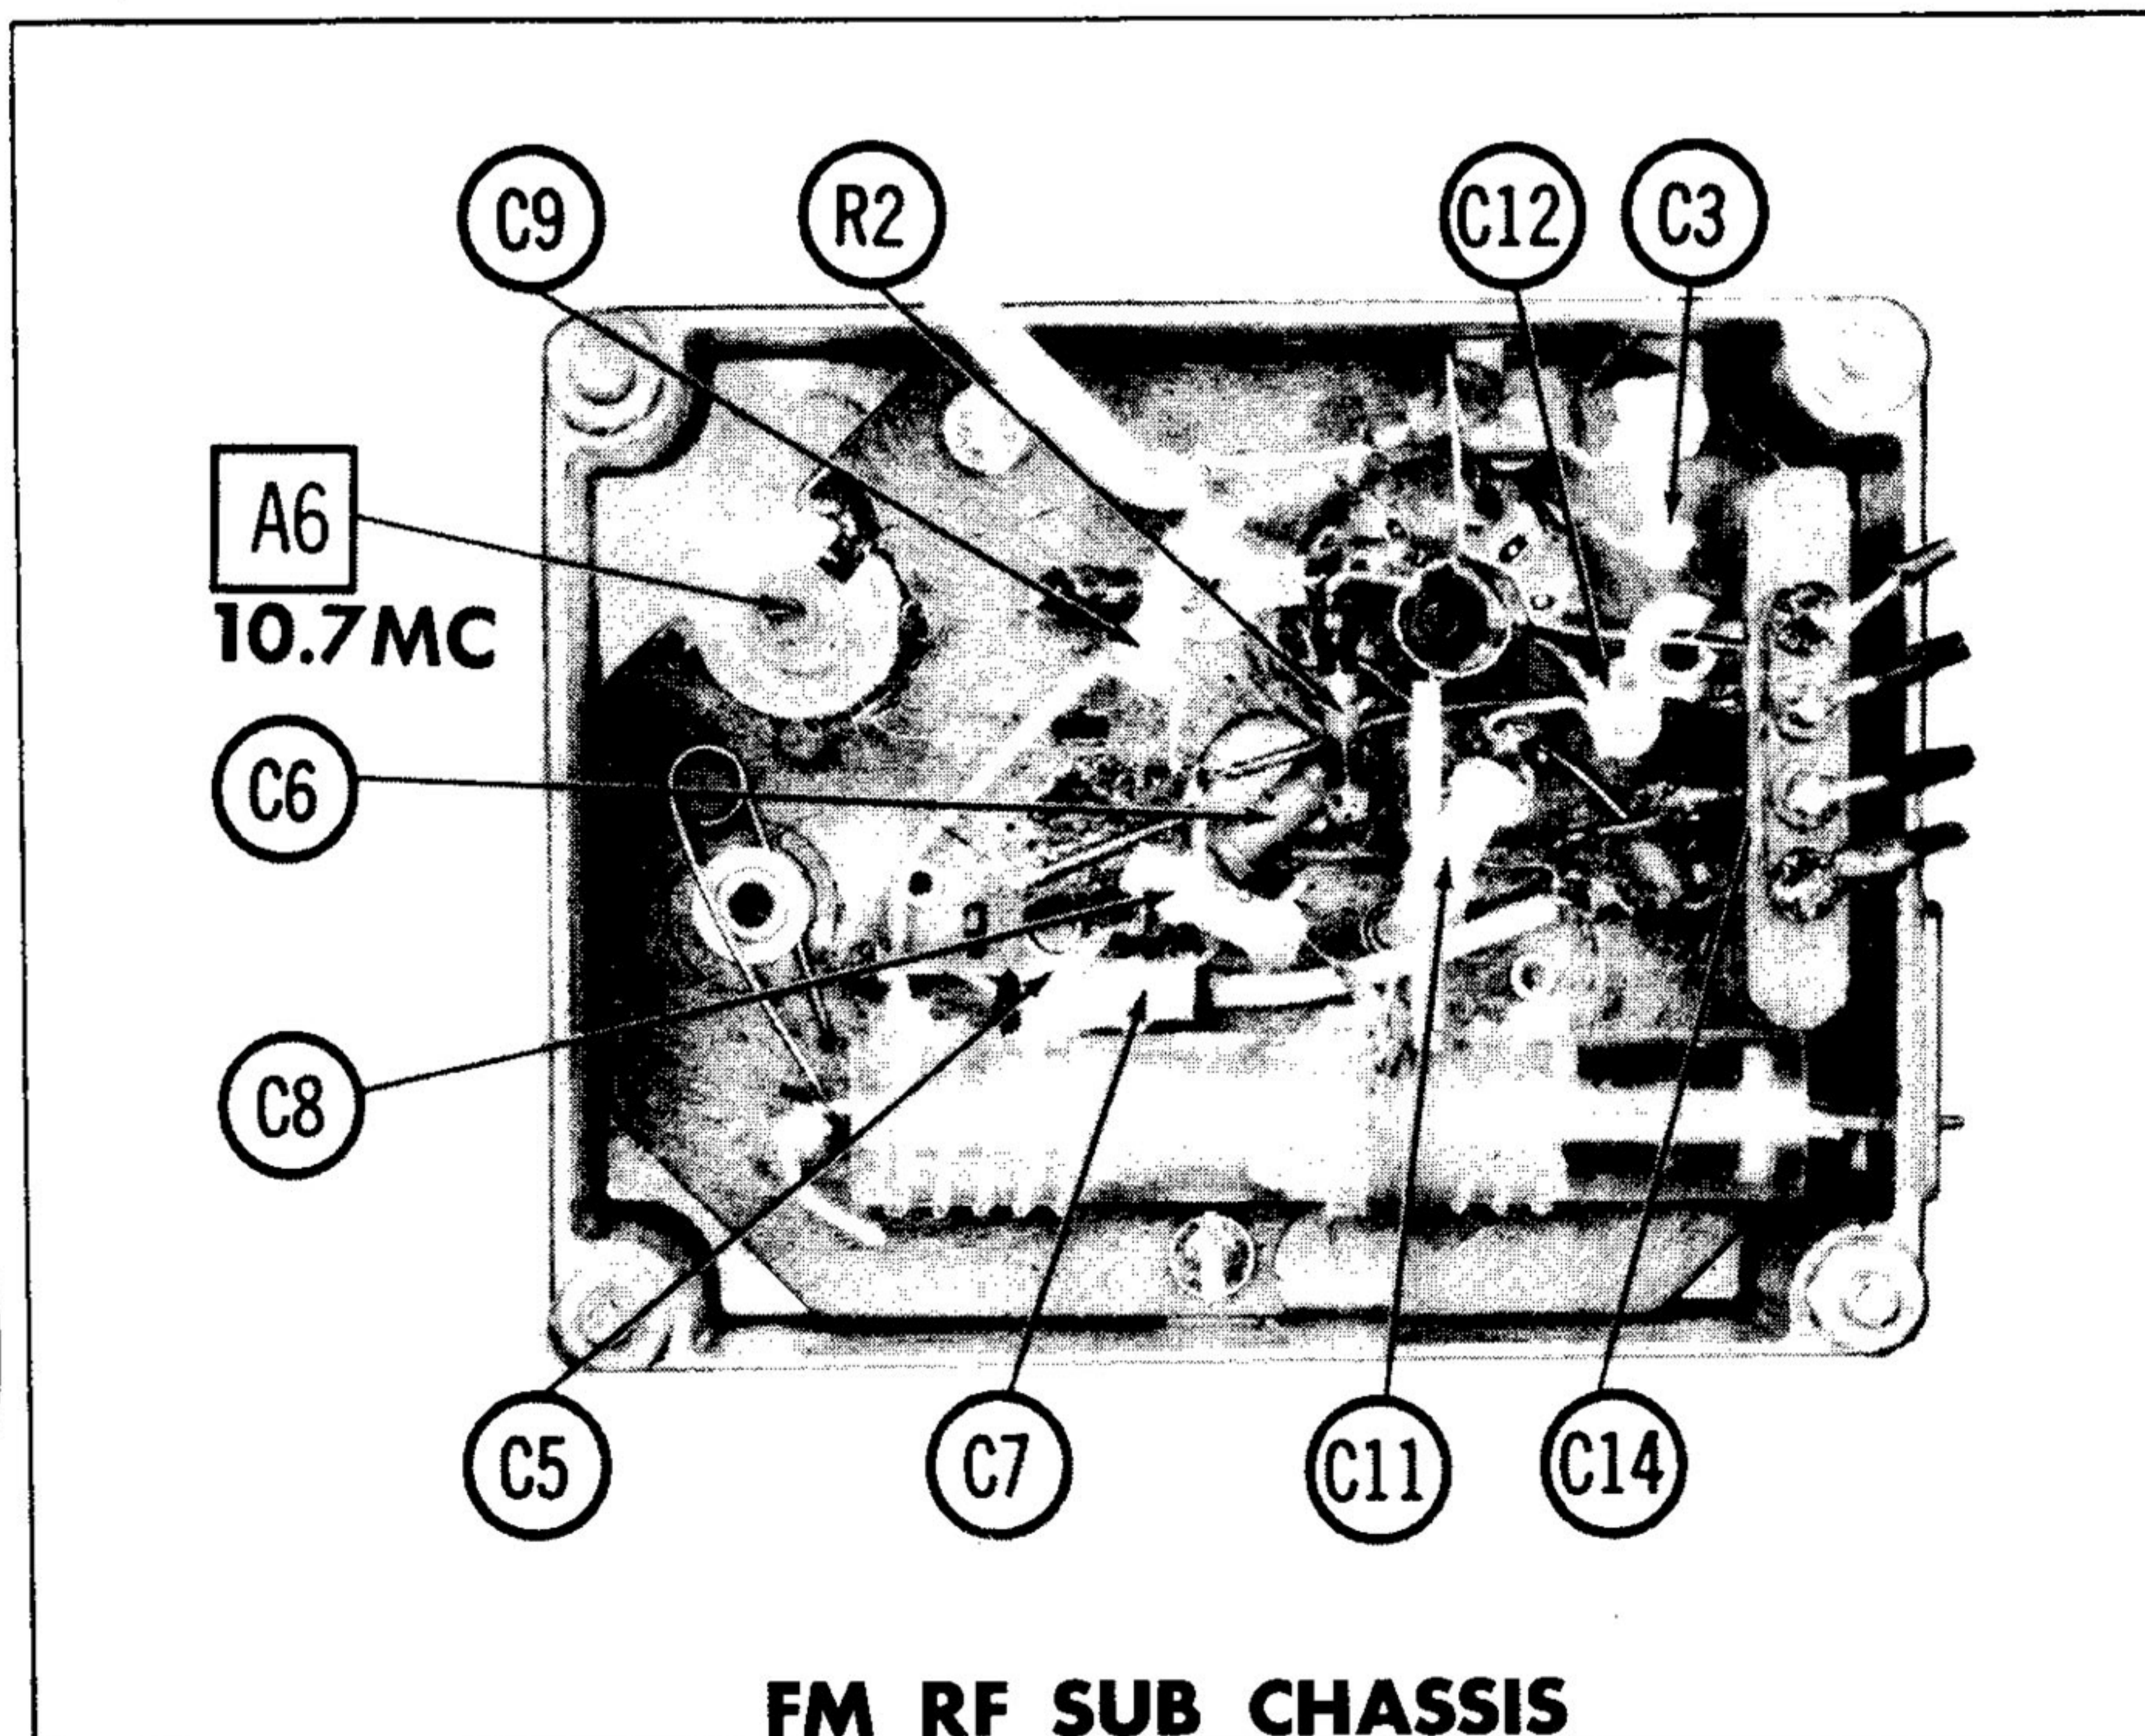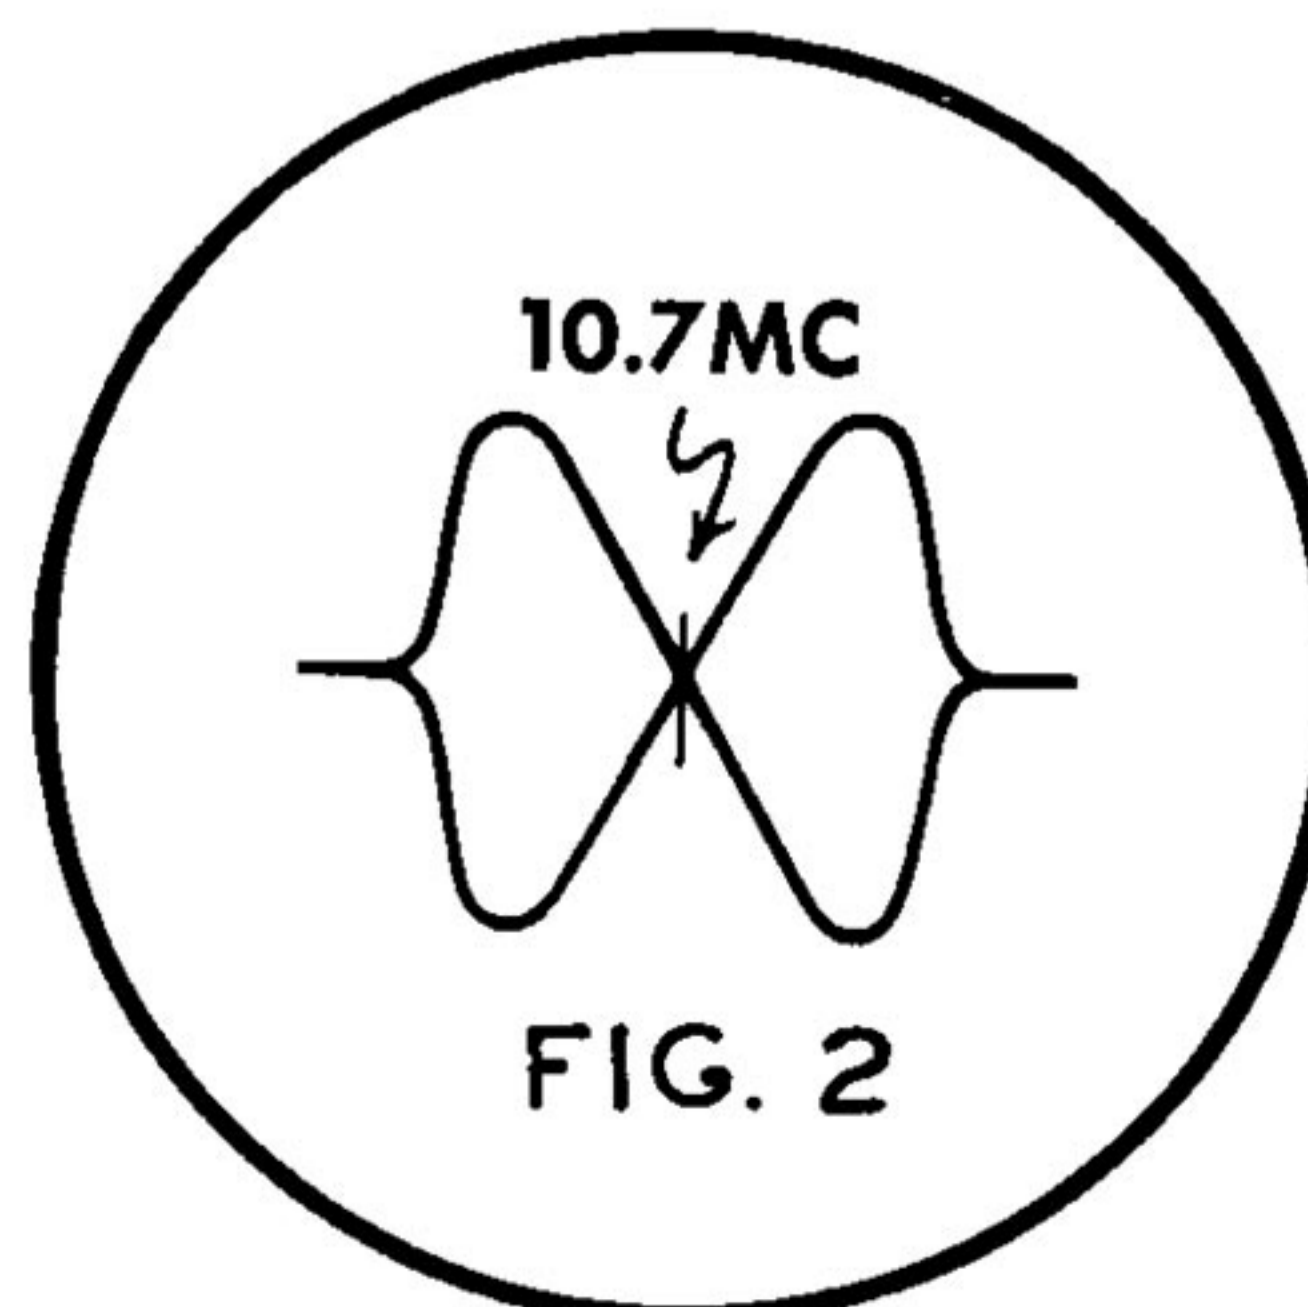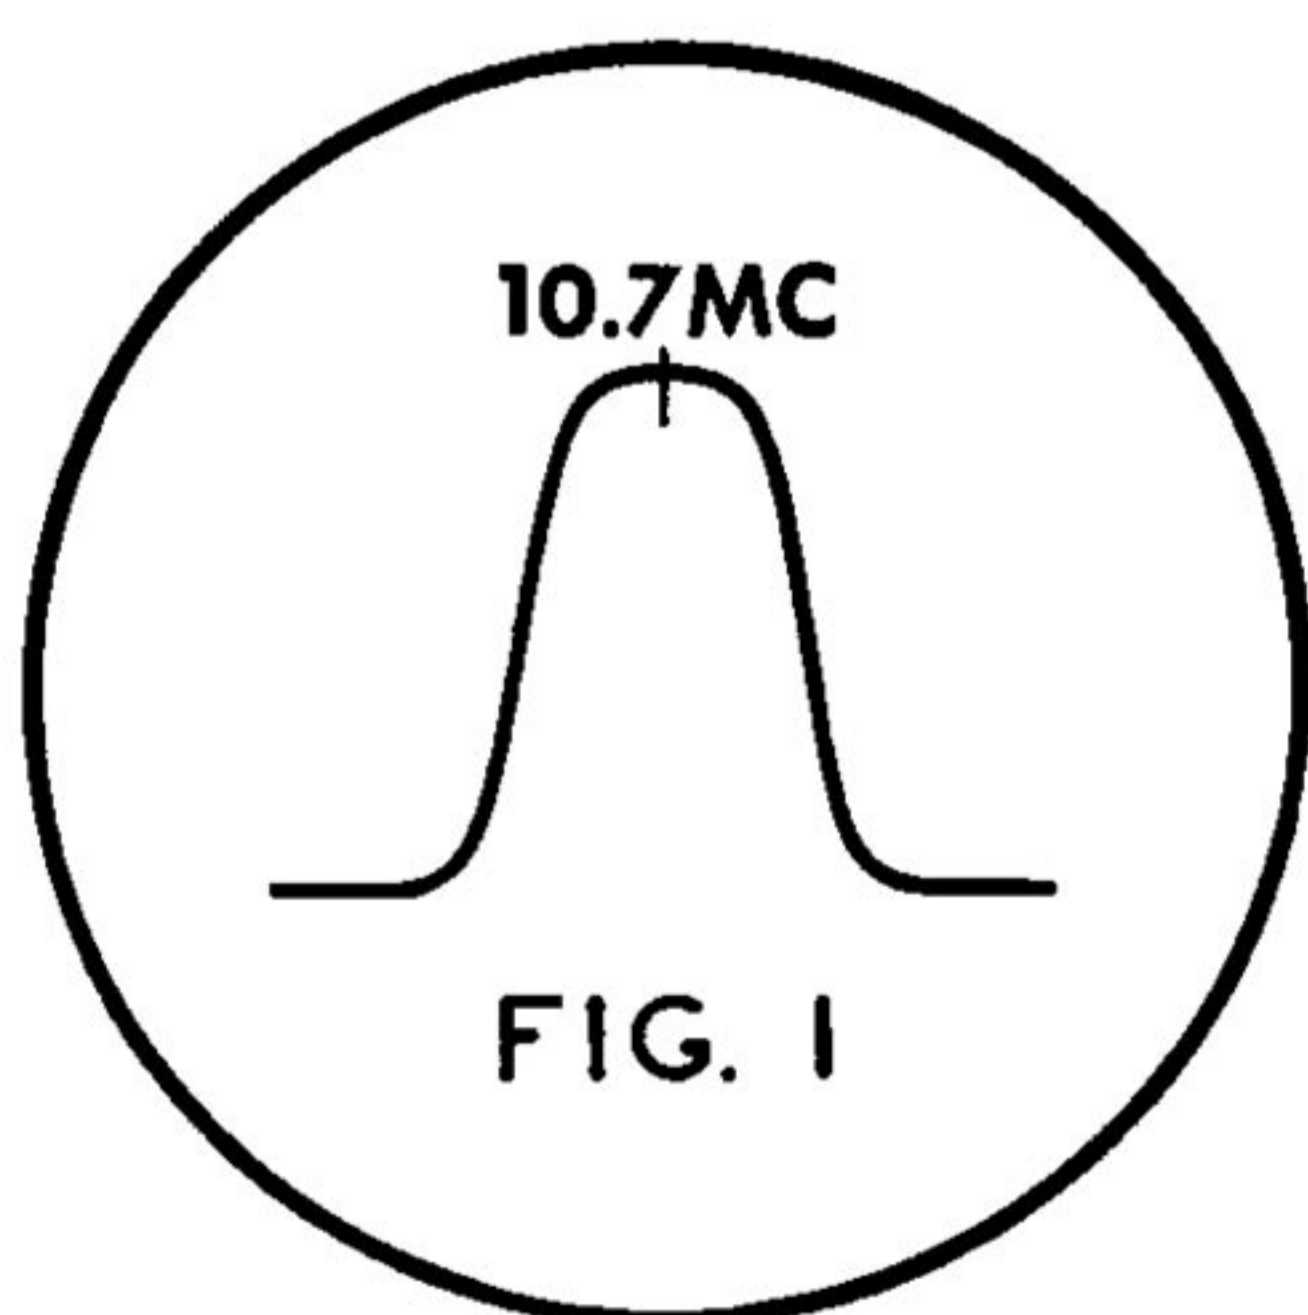

FM RF SUB CHASSIS

10.7MC

10.7MC

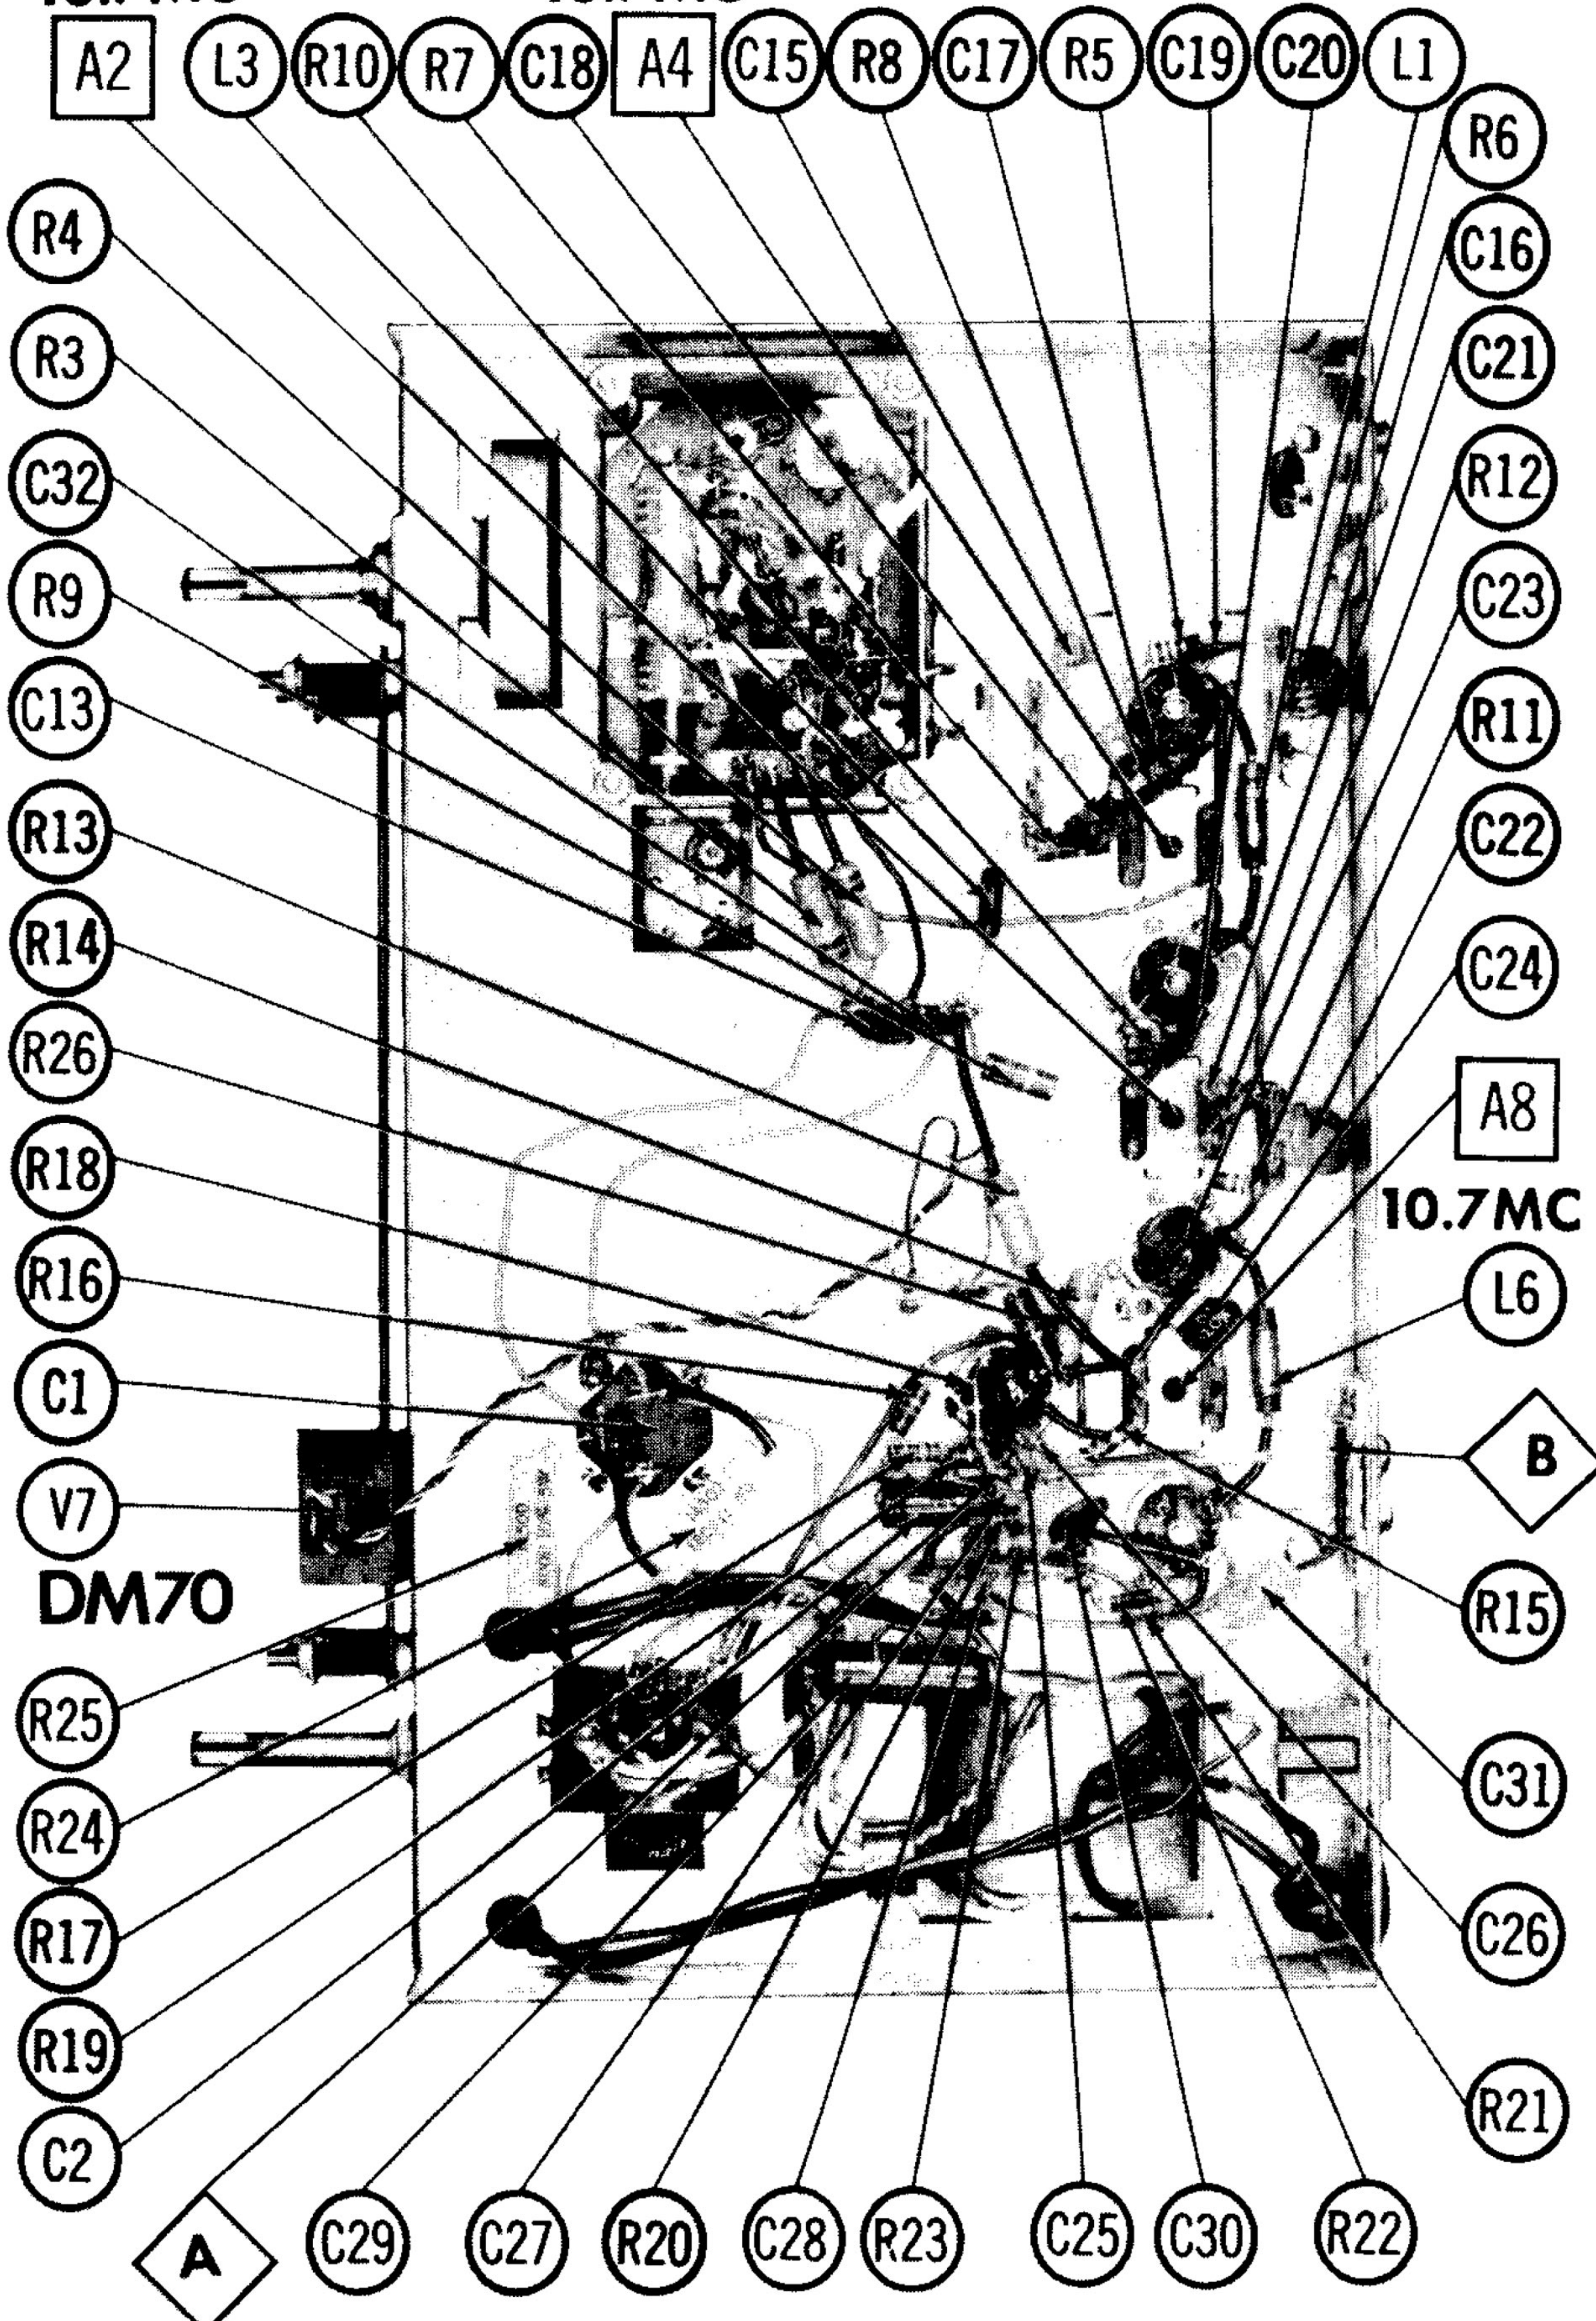

A2

L3

R10

R7

C18

A4

C15

R8

C17

R5

C19

C20

L1

R6

C16

C21

R12

C23

R11

C22

C24

A8

10.7MC

L6

B

R15

C31

C26

R21

R4

R3

C32

R9

C13

R13

R14

R26

R18

R16

C1

V7

DM70

R25

R24

R17

R19

C2

A

C29

C27

R20

C28

R23

C25

C30

R22

CHASSIS BOTTOM VIEW

PARTS LIST AND DESCRIPTIONS

TUBES

CBS			GENERAL ELECTRIC			RAYTHEON			SYLVANIA		
ITEM No.	USE	TYPE	ITEM No.	USE	TYPE	ITEM No.	USE	TYPE	ITEM No.	USE	TYPE
V1	RF Amp. -Conv.	ECC85	V5	Ratio Detector	6AL5	V6	Cathode Follower	EC90/6C4	V7	Tuning Indicator	DM70
V2	1st IF Amplifier	6AU6	V6	Cathode Follower	EC90/6C4	V7	Tuning Indicator	DM70	V8	Rectifier	6X4
V3	2nd IF Amplifier	6AU6									
V4	3rd IF Amplifier	6AU6									

ELECTROLYTIC CAPACITORS

ITEM No.	RATING		REPLACEMENT DATA						
	CAP.	VOLT.	EICO PART No.	AEROVOX PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	PYRAMID PART No.	SPRAGUE PART No.	NOTES
C1A	40	350	24010	AFH4-04	D0032			TVLS-3639.16*	
B	20	350							
C	20	250							
C2	10	25	23001	XPP-25010	NLW10-25	TT50X10	ML10-25	TE-1204	

* Not normally in distributor's stock. Available thru distributor on order to manufacturer.

FIXED CAPACITORS

Capacity values given in the rating column are in mfd. for Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

ITEM No.	RATING	REMARKS	REPLACEMENT DATA					
			AEROVOX PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	ELMENCO PART No.	MALLORY PART No.	SPRAGUE PART No.
C3	10 N750 +1mmf		N750-SI 10	TCN-10	C10Q1U	CCTN-100	CN7-410	10TCU-Q10
C4	2-20							
C5	1000		SI 1000	DD-102	BYA10D1	CCD-102	GP210	5HK-D10
C6	20 NPO		NPO-SI 20	TCZ-20	C10Q2C	CCTO-200	CNO-422	10TCC-Q20
C7	20 NPO		NPO-SI 20	TCZ-20	C10Q2C	CCTO-200	CNO-422	10TCC-Q20
C8	8.2 P100 +1mmf							
C9	68 N750 5%		N750-SI 68	TCN-68	C10Q68U	CCTN-680	CN7-468	10TCU-Q68
C10	2-6			829-6		VC-3	CT552	
C11	10 N470 +1mmf					*		
C12	15 NPO 10%		NPO-SI 15	TCZ-15	C10Q15C	CCTO-150	CNO-415	10TCC-Q15
C13	10000 10%		DI-10000		PM6S1	CCD-103		10TS-S10
C14	1000		SI 1000	DD-102	BYA10D1	CCD-102	GP210	5HK-D10
C15	25 10%		NPO-DI 25	DD-250	L10Q25	CCD-250	GP425	10TS-Q25
C16	5000 10%		DI-5000		PM6D5	CCD-502	JL-250	10TS-D50
C17	10000 10%		DI-10000		PM6S1	CCD-103		10TS-S10
C18	5000 10%		DI-5000		PM6D5	CCD-502	JL-250	10TS-D50
C19	5000 10%		DI-5000		PM6D5	CCD-502	JL-250	10TS-D50
C20	10000 10%		DI-10000		PM6S1	CCD-103		10TS-S10
C21	47 10%		DI-47	DD-47	L10Q47	CCD-470	GP447	10TS-Q47
C22	5000 10%		DI-5000		PM6D5	CCD-502	JL-250	10TS-D50
C23	5000 10%		DI-5000		PM6D5	CCD-502	JL-250	10TS-D50
C24	10000 10%		DI-10000		PM6S1	CCD-103		10TS-S10
C25	330 10%		DI-330	DD-331	L10T33	CCD-331	GP333	10TS-T33
C26	330 10%		DI-330	DD-331	L10T33	CCD-331	GP333	10TS-T33
C27	330 10%		DI-330	DD-331	L10T33	CCD-331	GP333	10TS-T33
C28	1000 10%		DI-1000	DD-102	PM6D1	CCD-102	GP210	10TS-D10
C29	.05 400V 10%		V84C4S5-10%		PM4S5	4DP-3-503	GEM-1615	4TM-S5
C30	10000 10%		DI-10000		PM6S1	CCD-103		10TS-S10
C31	25000				ST6S25	6DP-3-253	GEM-6125	5HK-S25
C32	10000 10%		DI-10000		PM6S1	CCD-103		10TS-S10

* Not normally in distributor's stock. Available thru distributor on order to manufacturer.

CONTROLS

ITEM No.	RATING		REPLACEMENT DATA					INSTALLATION NOTES
	RESISTANCE	WATTS	EICO PART No.	CENTRALAB PART No.	CLAROSTAT PART No.	CTS-IRC PART No.	MALLORY PART No.	
RIA	250K	1/2	18044	B-51	A47-250K-Z	Q13-130	U44	Volume
B	Shaft			Not Req.	KSS-3	Not Req.	Not Req.	
C	Switch			KR-1	SWE-12	76-1	US-26	Power Off-On

RESISTORS

All wattages 1/2 watt, or less, unless otherwise listed.

ITEM No.	RATING	REMARKS	ITEM No.	RATING	REMARKS	ITEM No.	RATING	REMARKS
R2	1meg		R11	470K		R20	68K	
R3	10K 1W		R12	100K		R21	1meg	
R4	10K 1W		R13	15K 1W		R22	4700Ω	
R5	470K		R14	15K 1W		R23	47K 1W	
R6	470K		R15	68Ω		R24	1800Ω 5W	
R7	1200Ω 1W		R16	1000Ω		R25	500Ω 5W	
R8	100Ω		R17	6800Ω		R26	220Ω 5% 1W	
R9	1200Ω 1W		R18	1500Ω				
R10	100Ω		R19	6800Ω				

COILS (RF-IF)

ITEM No.	USE	REPLACEMENT DATA						NOTES
		EICO PART No.	Gramer PART No.	Meissner PART No.	Merit PART No.	Miller PART No.	Ram PART No.	
L1	Fil. Choke	35024						1.2uh
L2	2nd IF Trans.	34600	16-3487	16-3487	FM-254	1463		
L3	RF Choke	35025	19-1002	19-1002	BC-563	4606		2.2uh
L4	3rd IF Trans.	34601	16-3487	16-3487	FM-254	1463		
L5	Ratio Detector	34602	17-3498	17-3498	FM-255	1465		
L6	Fil. Choke	35024			BC-561			1.2uh

TRANSFORMER (POWER)

ITEM No.	RATING			REPLACEMENT DATA						
	PRI.	SEC. 1	SEC. 2	EICO PART No.	Halldorson PART No.	Merit PART No.	Ram PART No.	Stancor PART No.	Thordarson PART No.	Triad PART No.
T1	117V @ .3A	420 VCT @ .040A	6.3V @ 2.6A	30024	24R11			PM8418	24R11	

MISCELLANEOUS

ITEM No.	PART NAME	EICO PART No.	NOTES
M1	FM Tuner	37001	




CABINETS & CABINET PARTS

(When Ordering Cabinets & Cabinet Parts, Specify Model, Chassis & Color)

NAME	PART NO.	DESCRIPTION
Knob	53007	(With dot) Off-On Volume
Knob	53019	Tuning

WIRING DATA

General-use Unshielded Hook-up Wire	Use BELDEN No. 8530 (Solid) Available in Ten Colors
	8524 (Stranded) Available in Ten Colors
Power Cord	1765-B (6 Ft. Length)
	1725-K (7 1/2 Ft. Length)

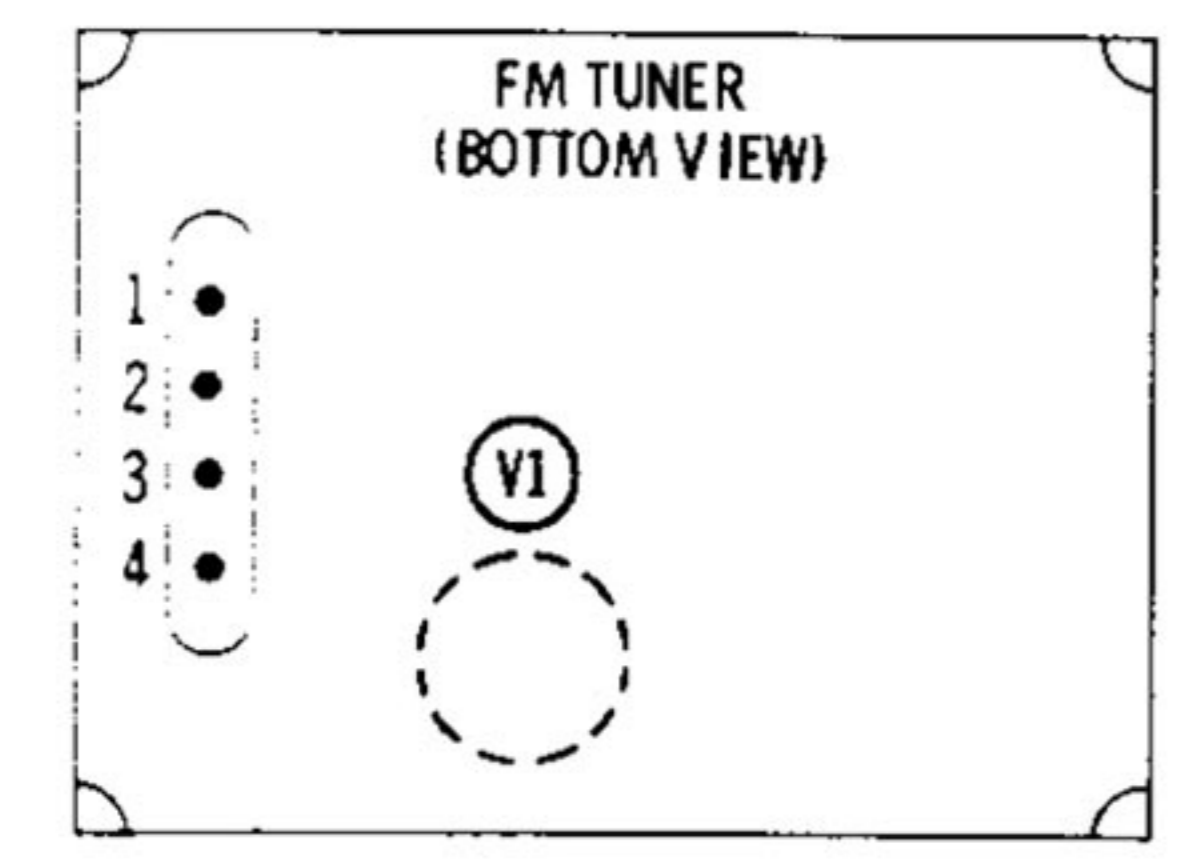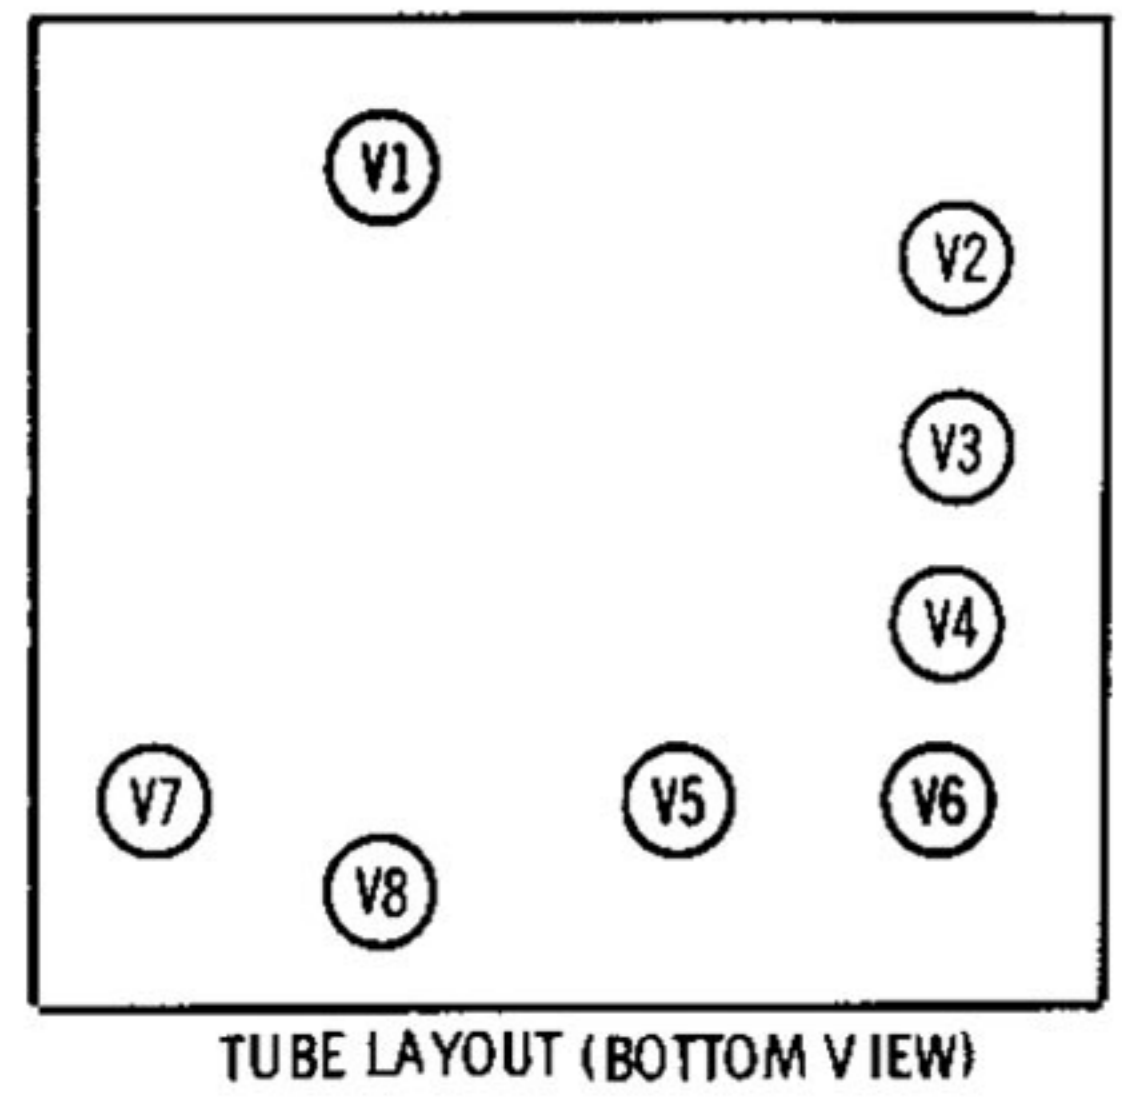

RESISTANCE READINGS

ITEM	TUBE	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9
V1	ECC85	† 10K	1meg	0Ω	.1Ω	0Ω	† 10K	0Ω	.1Ω	0Ω
V2	6AU6	1.5meg	0Ω	0Ω	.1Ω	† 3500Ω	† 3500Ω	100Ω		
V3	6AU6	.8Ω	0Ω	0Ω	.1Ω	† 3500Ω	† 3500Ω	100Ω		
V4	6AU6	100K	0Ω	0Ω	.1Ω	† 17K	† 17K	0Ω		
V5	6AL5	7800Ω	8300Ω	0Ω	.1Ω	INF	0Ω	INF		
V6	EC90	† 2300Ω	NC	0Ω	.1Ω	† 2300Ω	1meg	52K		
V7	DM70	6800Ω	NC	NC	.1Ω	0Ω	NC	NC	† 3500Ω	
V8	6X4	310Ω	NC	0Ω	.1Ω	NC	300Ω	†		

† THIS READING WILL VARY DEPENDING UPON THE CONDITION OF THE ELECTROLYTIC IN THE CIRCUIT.
 † MEASURED FROM PIN 7 OF V8.
 † MEASURED FROM PIN 7 OF V6.
 NC NO CONNECTION

- DC voltage measurements taken with vacuum tube voltmeter; AC voltages measured at 1000 ohms per volt.
- Socket connections are shown as bottom views.
- Measured values are from socket pin to common negative.
- Line voltage maintained at 117 volts for voltage readings.
- Nominal tolerance on component values makes possible a variation of ±15% in voltage and resistance readings.
- Volume control at maximum, no signal applied for voltage measurements.

