

**SERVICE MANUAL**

**The Fisher®**

**4020  
4060  
4025  
474  
495  
674  
895**

**4/2-Channel  
Stereo Receiver**

**WORLD LEADER IN HIGH QUALITY STEREO**

# TABLE OF CONTENTS

REQUIRED TEST EQUIPMENT . . . . .	2	TUNER SCHEMATIC (All Models) . . . . .	7
HARMONIC DISTORTION CHECK . . . . .	2	4060/674/895 SCHEMATICS . . . . .	8, 9
FM TUNER ALIGNMENT . . . . .	3	4060/674/895 PARTS LISTS . . . . .	8, 9
AM TUNER ALIGNMENT . . . . .	4, 5	LAMP BOARD PARTS LIST (4060 Only) . . . . .	9
CHASSIS PARTS LIST (All Models) . . . . .	6	4020/4025/474/495 SCHEMATICS . . . . .	10, 11
TUNER PARTS LIST (All Models) . . . . .	7	4020/4025/474/495 PARTS LISTS . . . . .	10, 12

## REQUIRED TEST EQUIPMENT

The following test equipment is required to test and align the Receiver:

- Line Voltage Autotransformer or Voltage Regulator
- AC DC Multimeter
- Accurately Calibrated AC Voltmeter
- Oscilloscope (Flat to 100 kHz Minimum)
- Low-Distortion Audio Sine-Wave Generator
- Harmonic Distortion Analyzer
- Four (4) Load Resistors, 8-ohms, 50 Watts (Minimum Rating)
- Low-Distortion AM-FM Signal Generator 10.7 MHz Sweep Generator
- Multiplex Generator
- 455 kHz Sweep Generator

**CAUTION:** This precision high-fidelity instrument should be serviced only by qualified personnel, trained in the repair of transistorized equipment and printed circuitry.

## HARMONIC DISTORTION CHECK

To perform the harmonic distortion check proceed as follows:

**CAUTION:** Measure one channel at a time. Limit Full Power On periods to five minutes. Use a load resistor with a rating of at least 50 watts.

- (1) Set BASS and TREBLE controls flat, SELECTOR switch to AUX 1, and POWER/SPKRS switch to AC OFF.
- (2) Connect a low distortion sine wave signal generator between L AUX FRONT IN jack and chassis ground. Set the generator output at 1000 Hz, minimum output.
- (3) Connect an 8-ohm load resistor between L MAIN SPKR and COM terminals. Connect an AC VTVM,

scope, and harmonic distortion analyzer across the 8-ohm load.

- (4) Set the POWER/SPKRS switch to 2-CH. Set FRONT BALANCE (or VOLUME/BALANCE) control(s) to full LEFT position. Turn VOLUME control slowly up to maximum.
- (5a) For Models 4020/4025/474/495, adjust the generator output until the VTVM indicates 9 volts RMS. The distortion analyzer should indicate less than 1% harmonic distortion.
- (5b) For Models 4060, 674, 895, adjust the generator output until the VTVM indicates 11 volts RMS. The distortion analyzer should indicate less than 1% harmonic distortion.
6. Repeat steps 3 through 5b for RIGHT FRONT channels.

# TUNER ALIGNMENT


**FM ALIGNMENT—FM MUTING OFF  
MODE to 2-CH, SELECTOR to FM, VOLUME to MIN, TAPE MONITOR OFF.**

Maintain generator output as low as possible for suitable indication.


ITEM	GENERATOR	DIAL SETTING	INDICATOR	PROCEDURE
<b>Note:</b> The FM IF circuit utilizes a non-tunable ceramic filter which establishes the IF bandpass. To insure symmetrical tuning and selectivity, the IF must be aligned precisely to the center of the filter bandpass, rather than to 10.7 MHz as in conventional LC circuits.				
1. IF ALIGNMENT	Connect to 10.7 MHz sweep through 2 pF capacitor and 22K resistor to TP1 (FM IN). Connect ground lead to rear of chassis. Markers are not required.	Position of non-interference.	Scope vertical input to TP2 (FM OUT). Ground lead to rear of chassis.	Short FM oscillator variable capacitor (section nearest L4) with a clip lead. Detune T9 by turning core up (CCW).  Adjust T5, T3, T2, T1, for curve as shown in photograph. Repeat as required to obtain best shape.  Adjust T9 for best shape (widest bandpass, not for max amplitude).
2. PRELIMINARY DETECTOR ALIGNMENT	Readjust generator output to 100 uV. Reduce output amplitude as much as possible throughout this procedure.		Scope vert input through a 100K resistor to TP3 (DISCRI).	Adjust T7 top and bottom for best gain and symmetry. S-curve should appear as shown in photograph.
<b>Note:</b> 120-ohm composition resistors in series with each lead from the RF generator match the 50-ohm output to the 300-ohm input impedance. Generator output voltage is reduced to one-half at antenna terminals. Signal voltages specified in this table are generator output levels, not antenna voltages.				
3. FRONT END ALIGNMENT		Tuning knob fully CCW.		Center dial pointer on 0 and cement it in place.
4.	Connect FM RF generator through two 120-ohm resistors to FM ANT screw terminals. Set generator to position of non-interference near 90 MHz, modulate with 400 Hz to provide $\pm$ 75 kHz deviation. Output amplitude should be sufficient to provide a reading of 3 on receiver front panel meter.	Position of non-interference near 90 MHz.	Receiver front panel meter.  Note: To ensure that meter is not indicating a local broadcast station connect scope for step 5, below.	Adjust L4 for maximum gain.  Adjust L2, then L7 for maximum gain.  Repeat the two steps above as required.
5.	Change generator setting to position of non-interference near 106 MHz.	Position of non-interference near 106 MHz.		Adjust TC3 for maximum gain.  Adjust TC1, then TC2, for maximum gain.  Repeat the two steps above as required.
6. FINAL DETECTOR ALIGNMENT	As above, except set to position of non-interference near 100 MHz. Set output amplitude to 1 mV (500 mV at receiver antenna terminals).	Position of non-interference near 100 MHz.	Distortion meter to RCDR OUT jack. DC VTVM through 100K resistor to TP3 (DISCRI).	Adjust top core of T7 for zero point on 0.1 scale.  Adjust bottom core of T7 for minimum distortion (should be below 1%) on distortion meter.
7. FM OUTPUT	As above (100 MHz), deviation set to $\pm$ 22.5 kHz.	Position of non-interference near 100 MHz.	VTVM and scope to RCDR OUT jack.	Adjust VR1 (FM Level Adjust) for 350 mV at RCDR OUT jack.

## TUNER ALIGNMENT (CONT'D)


ITEM	GENERATOR	DIAL SETTING	INDICATOR	PROCEDURE
8. SIGNAL STRENGTH (0-5) METER ADJUSTMENT	As above; set amplitude of generator output to 1 Millivolt.	Position of non-interference near 100 MHz.	Receiver Signal Strength (0-5) Meter.	Adjust VR5 (FM Meter Drive Adjust) so the front panel meter reads 4.
9. CENTER CHANNEL METER ADJUSTMENT (4060 only)			Receiver Center Channel (Arrows) Meter.	Slowly tune receiver above, then below generator signal. Needle should go from center (on signal) to right (above signal), then to left (below signal). Meter should remain centered when not near signal.  If meter does not perform as described above, repeat steps 2 through 6 to produce properly shaped curves in IFs and Detector, as shown in photographs.
10. MUTING LEVEL ADJUSTMENT	Same except generator output set to 16 uV.		VTVM and scope to RCDR OUT jack.	Set MUTING ON-OFF switch on receiver front panel to ON.  Adjust VR6 (Muting Adjust) until generator output signal overcomes MUTING (until signal shows on scope).
11. STEREO SEPARATION			Move VTVM and scope to TP5 (19 kHz) and GND.  Move VTVM and scope to TP6 (38 kHz).	Set VR2 (Separation adjust) to the middle of its rotation.  Adjust L6 and L9 (19 kHz) for maximum output.  Adjust L7 for maximum.
12.	Change amplitude of 19 kHz modulation to 8%, and modulate with 400 Hz. Main signal (Left) amplitude should be sufficient to produce 42 kHz deviation.		Scope and VTVM to Right RCDR OUT jack.	Adjust L9 for maximum output. If L9 requires more than $\frac{1}{2}$ turn, readjust L6, then L9 several times, to get best settings for maximum.  Adjust VR2 for minimum.
13.	As above, except 19 kHz amplitude to produce 3.75 kHz deviation.		Move scope and VTVM to Left RCDR OUT jack.	Adjust VR7 so the STEREOBEACON just lights. Reduce amplitude of modulation until the STEREOBEACON just goes out. Note the amount of deviation. Increase the deviation until the light comes ON again. The STEREOBEACON should light and go out between 3 and 4.

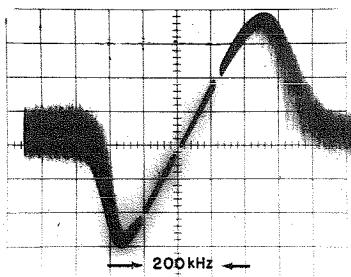

FM DETECTOR

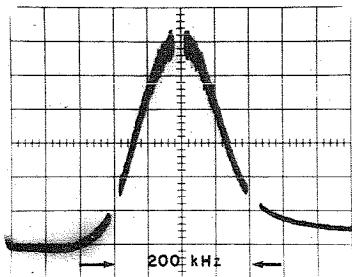

FM IF

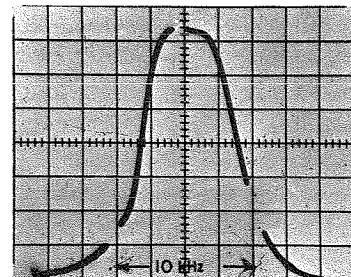

AM IF


# TUNER ALIGNMENT

## (CONT'D)

**AM ALIGNMENT—SAME FRONT PANEL SETTINGS as FM ALIGNMENT EXCEPT SELECTOR SET to AM**

Maintain generator output as low as possible for suitable indication.

ITEM	GENERATOR	DIAL SETTING	INDICATOR	PROCEDURE
1. AM IF	Connect 445 kHz sweep generator to AM EXT ANT terminals.  Note: After each adjustment reduce generator output as required to keep front panel m meter near 2.5.	Position of non-interference.	Scope vertical input to TP4 (AM OUT).	Adjust T8 for maximum gain.  Adjust T4 for maximum gain.  Repeat above two steps as required.
2. AM RF	Connect RM AM generator to antenna terminals and set output position of non-interference near 550 kHz, modulated 30% with 1 kHz audio, amplitude 5 mV.	Position of non-interference near 550 kHz.	Scope and VTVM to RCDR OUT jack.	Adjust L8 (AM Osc) for maximum.
3.	Change the RF output frequency to position of non-interference near 1,600 kHz.	Position of non-interference near 1,600 kHz.		Adjust TC5 for maximum.
4.	Reset the output frequency to position of non-interference near 600 kHz.	Position of non-interference near 600 kHz.		Repeat steps 2 and 3, above for maximum at both 600 and 1,400 kHz.
5.	Reset output to 1,600 kHz.	Position of non-interference near 1,400 kHz.		Remove tape from ferrite antenna case and adjust slide for maximum gain signal.  Repeat steps 4 and 5.
6. AM OUTPUT	Reset generator output to position of non-interference near 1,000 kHz, amplitude 5 mV.	Position of non-interference near 1,000 kHz.		Adjust VR3 (AM Output) for 315 mV.
7. AM SIGNAL STRENGTH METER (0-5) ADJUSTMENT	Reset generator output to position of non-interference near 1,000 kHz, amplitude 5 mV.	Position of non-interference near 1,000 kHz.	Receiver Signal Strength (0-5) meter.	Adjust VR4 (AM Meter Adjust) so that signal meter reads 4.

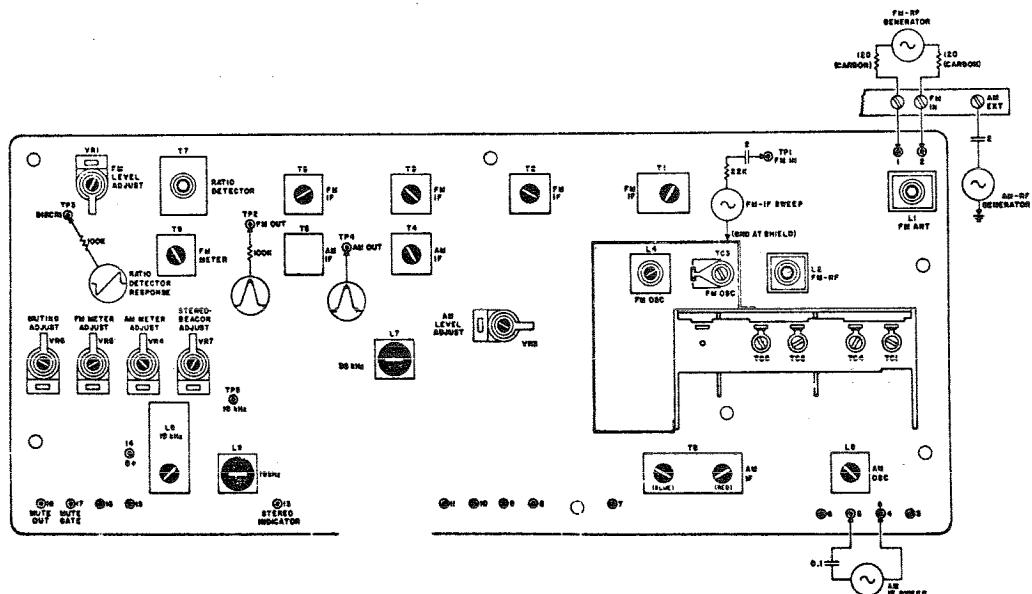

# CHASSIS PARTS LIST

Ref. Des.	Description	Part Number	Ref. Des.	Description	Part Number
	Cabinet (4020/4025)	9403023	S5	POWER/SPKRS switch (4060/674/895)	2617351
	Cabinet (474/495)	9403022	T 1	Power Transformer (4020/4025/474/495)	2217731
	Cabinet (4060)	9403919	T1	Power Transformer (4060)	2217711
	Cabinet (674/895)	9403025	T1	Power Transformer (674/895)	2217741
	Washer, square, for cabinet assembly	4370451	C001	Capacitor, ceramic, 4700 pF	0243873
	Screw, for above	4504582	C002	Capacitor, electrolytic, 2200 UF, 63V	0250131
	Front Panel (4020)	3242773	C005	Capacitor, electrolytic, 100 UF, 50V	1252831
	Front Panel (4025)	3242777	R001	Resistor, 2.7 M	0139005
	Front Panel (474)	3242771	R003, 004	Resistor, 470, 1/2W (PHONES)	0134369
	Front Panel (495)	3242721	F001	Fuse, 2 A, 125V, (POWER, (4020/4025/474/495)	FL51313-13
	Front Panel (4060)	3242921	F001	Fuse, 2.5 A, 125V (POWER 4060/674/895)	FL51313-28
	Front Panel (674)	3242922	F002	Fuse, 3 A, 125V, pigtail slo blow (Lamp ckt.)	FL51313-14
	Front Panel (895)	3280791	F003	Fuse, 2 A, 125V (OUTPUT)	FL51313-29
	Dial Glass (4020/4025)	3198692		Fuseholder	2727241
	Dial Glass (474/495)	3198691		Jack, PHONES	2677061
	Dial Glass (4060)	3198671		Antenna, AM, Ferrite, incl. mtg. bracket	2757126
	Dial Glass (674/895)	3280791		Terminal Strip, Antenna	2687353
	Knob, Tuning (4020/4025/4060)			Terminal Strip, Speakers	2687321
	Knob, Tuning (474/495/674/895)			Terminal Strip, I/O, 6 RCA jacks	2677131
	Knob, VOLUME, BALANCE, FRONT (4020/4025/4060)	3218722		Terminal Strip, I/O, 8 RCA jacks	2677161
	Knob, VOLUME, BALANCE, FRONT (474/495/674/895)	3218752		Terminal Strip, DISC OUT jack	2677181
	Knob, VOLUME, BALANCE, REAR (4020/4025/4060)	3281751		AC Outlet	2657211
	Knob, VOLUME, BALANCE, REAR (474/495/674/895)	3281723		Line cord	2740241
	Pushbutton, LOUDNESS, MUTING (4020/4025/4060)	EK20046-3		Spring, meter retaining (4020/4025/474/495)	3337103
	Pushbutton, LOUDNESS, (474/495/674/895)	EK20046-4		Pulley, dial cord (metal, 3-1/2") (4020/4025/474/495)	3346045
	Tuning Shaft assembly (4020/4025/474/495)	4561482		Spring, for above	4564711
	Tuning Shaft assembly (674/895)	4381051		Spring, tuning backlash assembly (4060/674/895)	0662084
	Tuning Shaft Assembly (4060)	4566071		Lamp Chassis, less lamps (4020/4025/474/495)	2518786
	Dial Pointer (4020/4025/474/495)	3386671		Lamp Chassis, less lamps (674/895)	3918751
I9	Dial Pointer, w/lamp (4060/674/895)	3386441		Lamp Board, less lamps (4060)	3918729
I9	Lamp, only for above	2767094	<b>Printed Circuit Boards Complete (incl. components)</b>		
M101	Tuning Meter (4020/4025)	2577122		Tuner (4020/4025/474/495)	2519198
M101	Tuning Meter (474/495)	25577129		Tuner (4060/674/895)	2519196
M101	Tuning Meter (4060/674/895)	2787302		Preamp/Control/SQ (4020/4025/474/495)	2519662
M102	Center Channel Meter (4060)	2787301		Preamp/Control (674/895)	2519631
I58, I10	Lamp, Dial and Meter, fuse type, 6.3V, 250 mA	2767201		SQ (674/895)	2519641
	Lamp, STEREOBEACON, 8V, 30 mA	2767333		Preamp/Control/SQ (4060)	2579531
I1-4	Lamp, MON, 2-CH, SQ, 4-CH, 6.3V, 65 mA	2767116		Power Supply/Amp (4020/4025)	2519523
	Lamp holder (rubber)	2720022		Power Supply/Amp (474/495)	2519661
S7	POWER/SPKRS switch (4020/4025/474/495)	2617352		Power Supply/Amp (4060)	2519521
				Power Supply/Amp (674/895)	2519522


Note: Chassis mounted components may also be listed on the parts list of the circuit with which they function electrically.

## TUNER PARTS LIST


Ref. Des.	Description	Part Number	Ref. Des.	Description	Part Number
C1	Ceramic, 100 pF	0248724	Q1	Transistor, NPN, 2SC535 (B)	0573510
C2	Ceramic, 6 pF	0246416	Q2	Transistor, NPN, 2SC461 (B)	0573507
C3	Ceramic, 47 pF	0248676	Q3, 4, 8	Transistor, NPN, 2SC460 (B)	0573486
C4, 5, 6, 11, 12, 13, 20	Ceramic, 0.01 uF	1245017	Q5, 7	Transistor, NPN, 2SC454 (B)	0573491
C7, 25, 39	Ceramic, 2 pF	0248632	R1	120K	2320063
C9	Ceramic, 27 pF	0246450	R2, 24	220K	0114283
C10	Ceramic, 220 pF	0248362	R3	56	0114289
C14, 85	Ceramic, 1 pF	0248631	R4	390K	0114059
C15, 16	Ceramic, 18 pF	0248176	R5	470	0114295
C17	Ceramic, 7 pF	0246417	R6, 11, 15, 16, 22	150	0114147
C18	Ceramic, 15 pF	0246444	R7, 14, 47	15K	0114135
C21, 22, 24, 26, 27, 28, 44, 45, 53, 60, 67, 70, 81, 86	Ceramic, 0.02 uF	1245018	R8, 50	3.9K	0114205
C23	Mylar, 1000 pF	1274011	R9, 51, 62, 63	1K	0114175
C30, 31, 33	Electrolytic, 4.7 uF, 50V	1252815	R10, 12	1.2K	0114161
C32, 46, 62, 63, 65, 85	Electrolytic, 1 uF, 50V	1252811	R13, 32, 34, 37, 53, 56	0114163	
C34, 35	Mylar, 0.1 uF	1276011	R17, 41	100	0114177
C36	Polystyrene, 2200 pF	0228343	R18	180	0114131
C40, 43, 48, 51	Mylar, 0.01 uF	1275011	R19, 26, 43, 85	2.2K	RC07BF181J
C41	Ceramic, 20 pF	0248667	R20, 23	330	0114143
C42	Polystyrene, 360 pF	0228324	R21, 25, 27, 28, 29, 66	560	0114149
C47, 56, 58, 69	Electrolytic, 3.3 uF, 50V	1252813	R30, 31, 55	22K	0114209
C50	Mylar, 0.047 uF	1275015	R36, 40	1.5K	0114165
C52, 64	Electrolytic, 47 uF, 16V	1252525	R38	220	0114139
C54	Ceramic, 22 pF	0248668	R39, 81	8.2K	114183
C59	Electrolytic, 220 uF, 16V	1252532	R44, 52	120	0114133
C61	Ceramic, 150 pF	0248728	R45, 48, 49, 59, 60	47K	0114217
C66	Polystyrene, 4700 pF	0212513	R46	2.7K	0114171
CP1	Encapsulated Circuit, Filter	0186022	R57	100K	0114281
CP2	Encapsulated Circuit, Filter	0186041	R58	180K	0114287
CP3, 4	Encapsulated Circuit,	0186051	R59	820	0114153
CP5	Deemphasis Network	0186031	R61	5.6K	0114179
CR1, 2, 3, 8	filter	R82, 83	R62	27K	0114211
CR4, 5	Diode, IS2076	R86	R66	560K	RC07BF564J
CR6, 7	Diode, IN34A	R87	R67	33K	0114213
FET 1	FET, 3SK45	T1	Ceramic Filter, 10.7 MHz	2154172	
IC1	Integrated Circuit, 10.7/455, HA1201	T2, 5	Transformer, 10.7 MHz	0322203	
IC2	Integrated Circuit, 10.7 HA1202	T3	Transformer, 10.7 MHz	2154199	
IC9	Integrated Circuit, MPX, HA1115W	T4	Transformer, 455 kHz	2154161	
L1	FM Antenna, Coil	T5	Transformer, 455 kHz	2154122	
L2	FM RF, Coil	T6	Ratio Detector	2140242	
L3	Choke, 1 uH	T7	Transformer, 455 kHz	2154183	
L4	FM Oscillator, Coil	T8	Transformer, FM Meter	2140155	
L6	19 kHz, Coil	TC3	Capacitor, Trimmer, 105 uH	0283121	
L7	38 kHz, Coil	VC1	Capacitor, Gang, FM/AM	0281169	
L8	AM Oscillator, Coil	VR1	Resistor, Variable, 20K	0151281	
L9	19 kHz, Coil	VR2, 7	Resistor, Variable, 1K	0151282	
		VR3, 4, 5	Resistor, Variable, 10K	0151224	
		VR6	Resistor, Variable, 50K	0151225	

All resistors are Deposited Film, 5%, 1/4W unless otherwise noted.  
K = Kilohm

## TUNER SCHEMATIC (All Models)

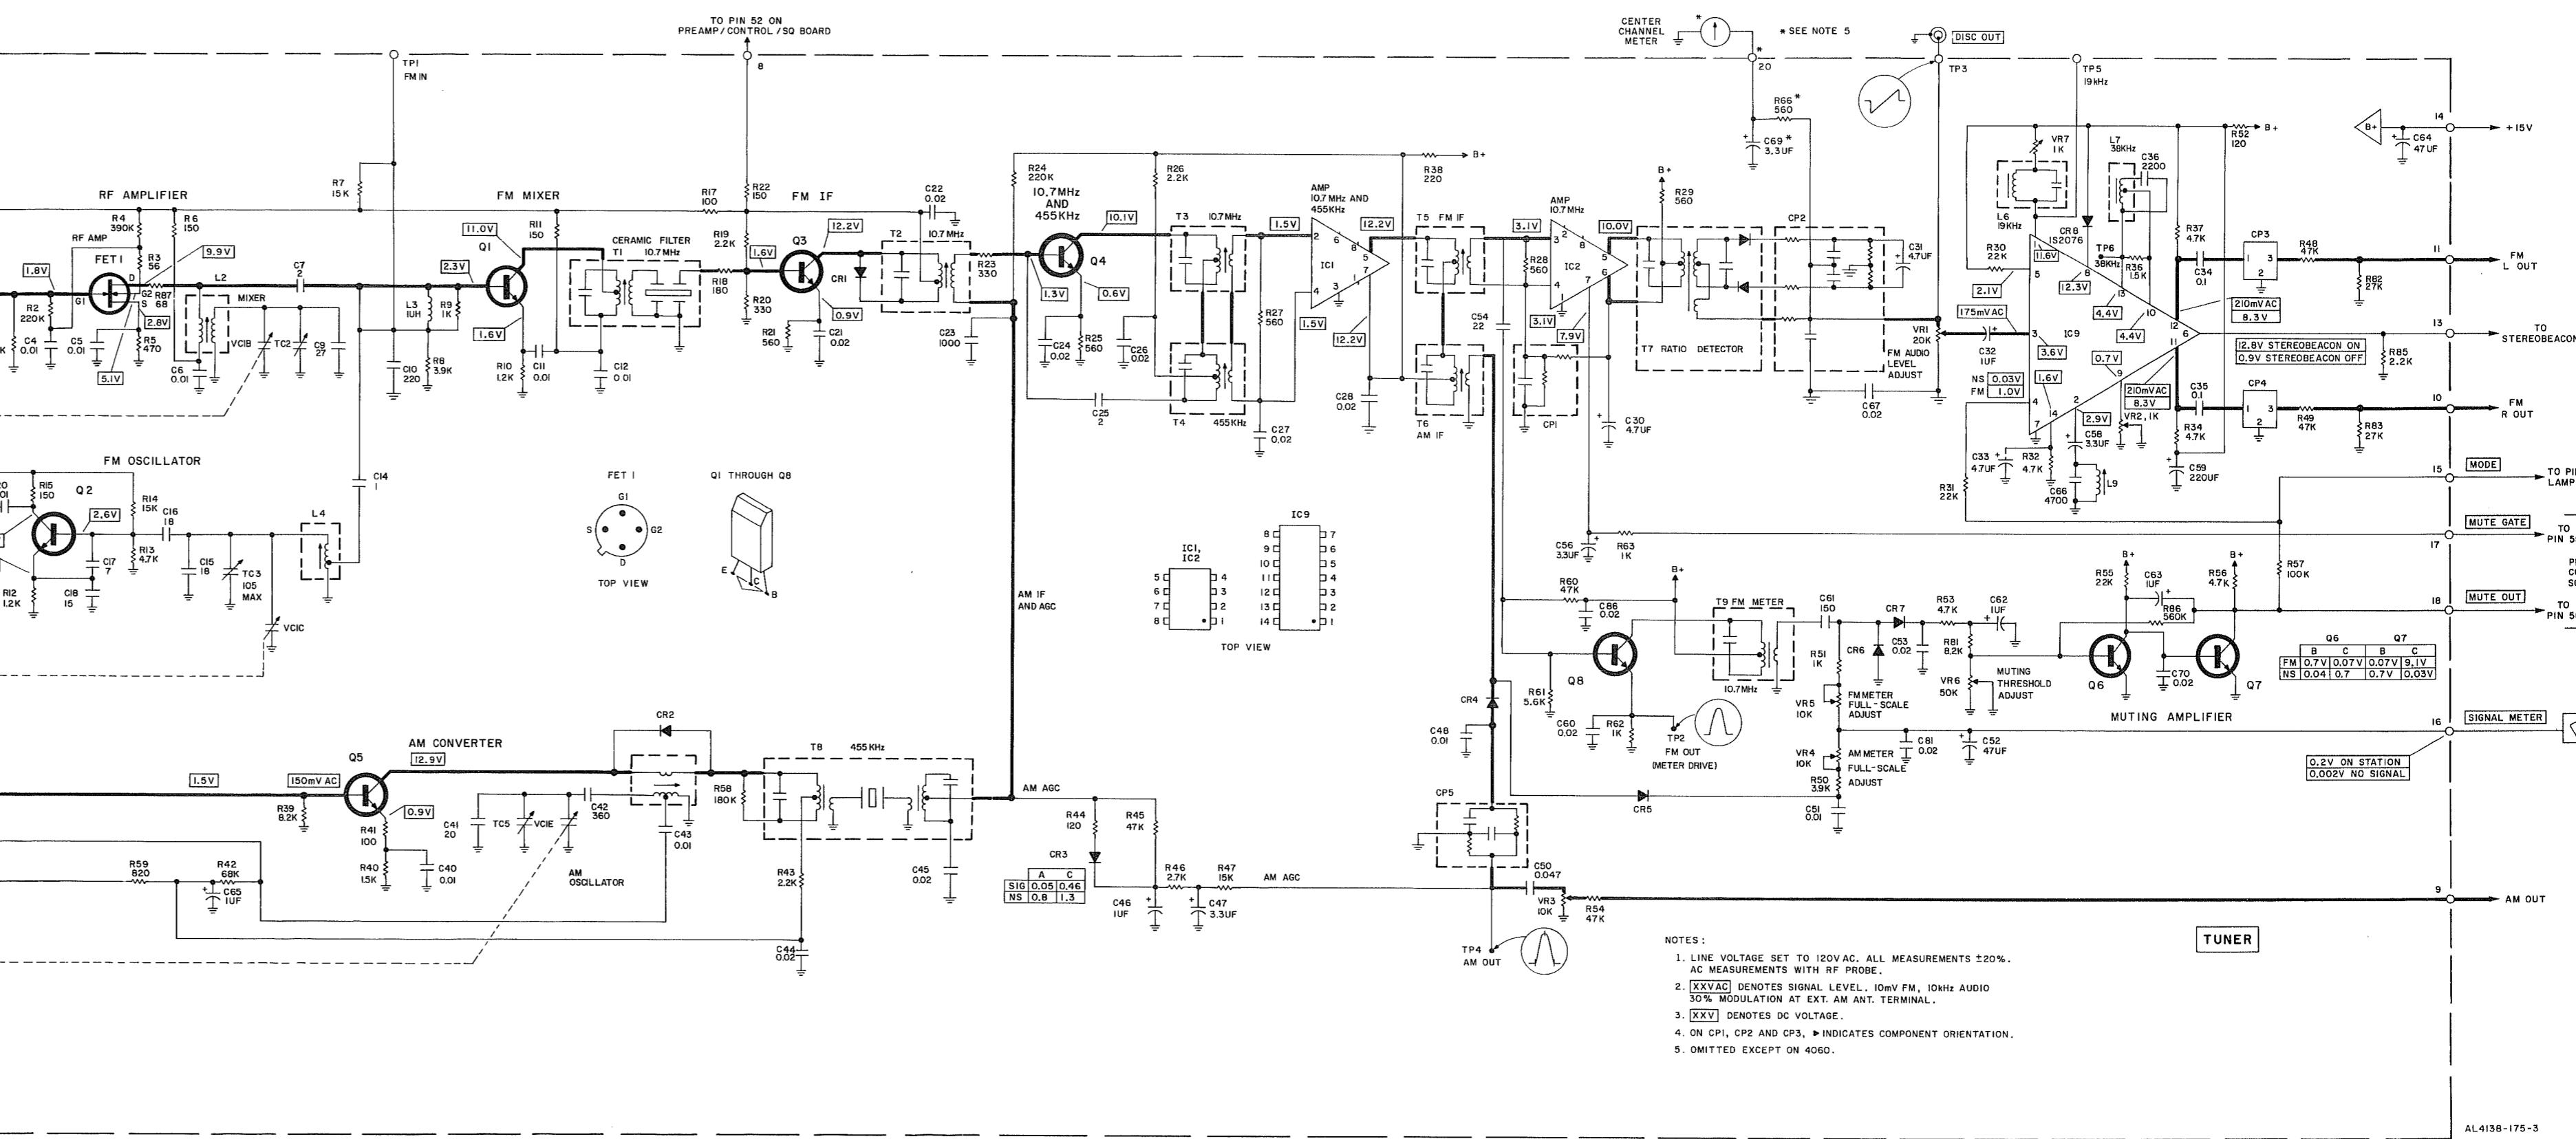

## PREAMPLIFIER/ CONTROL / SQ

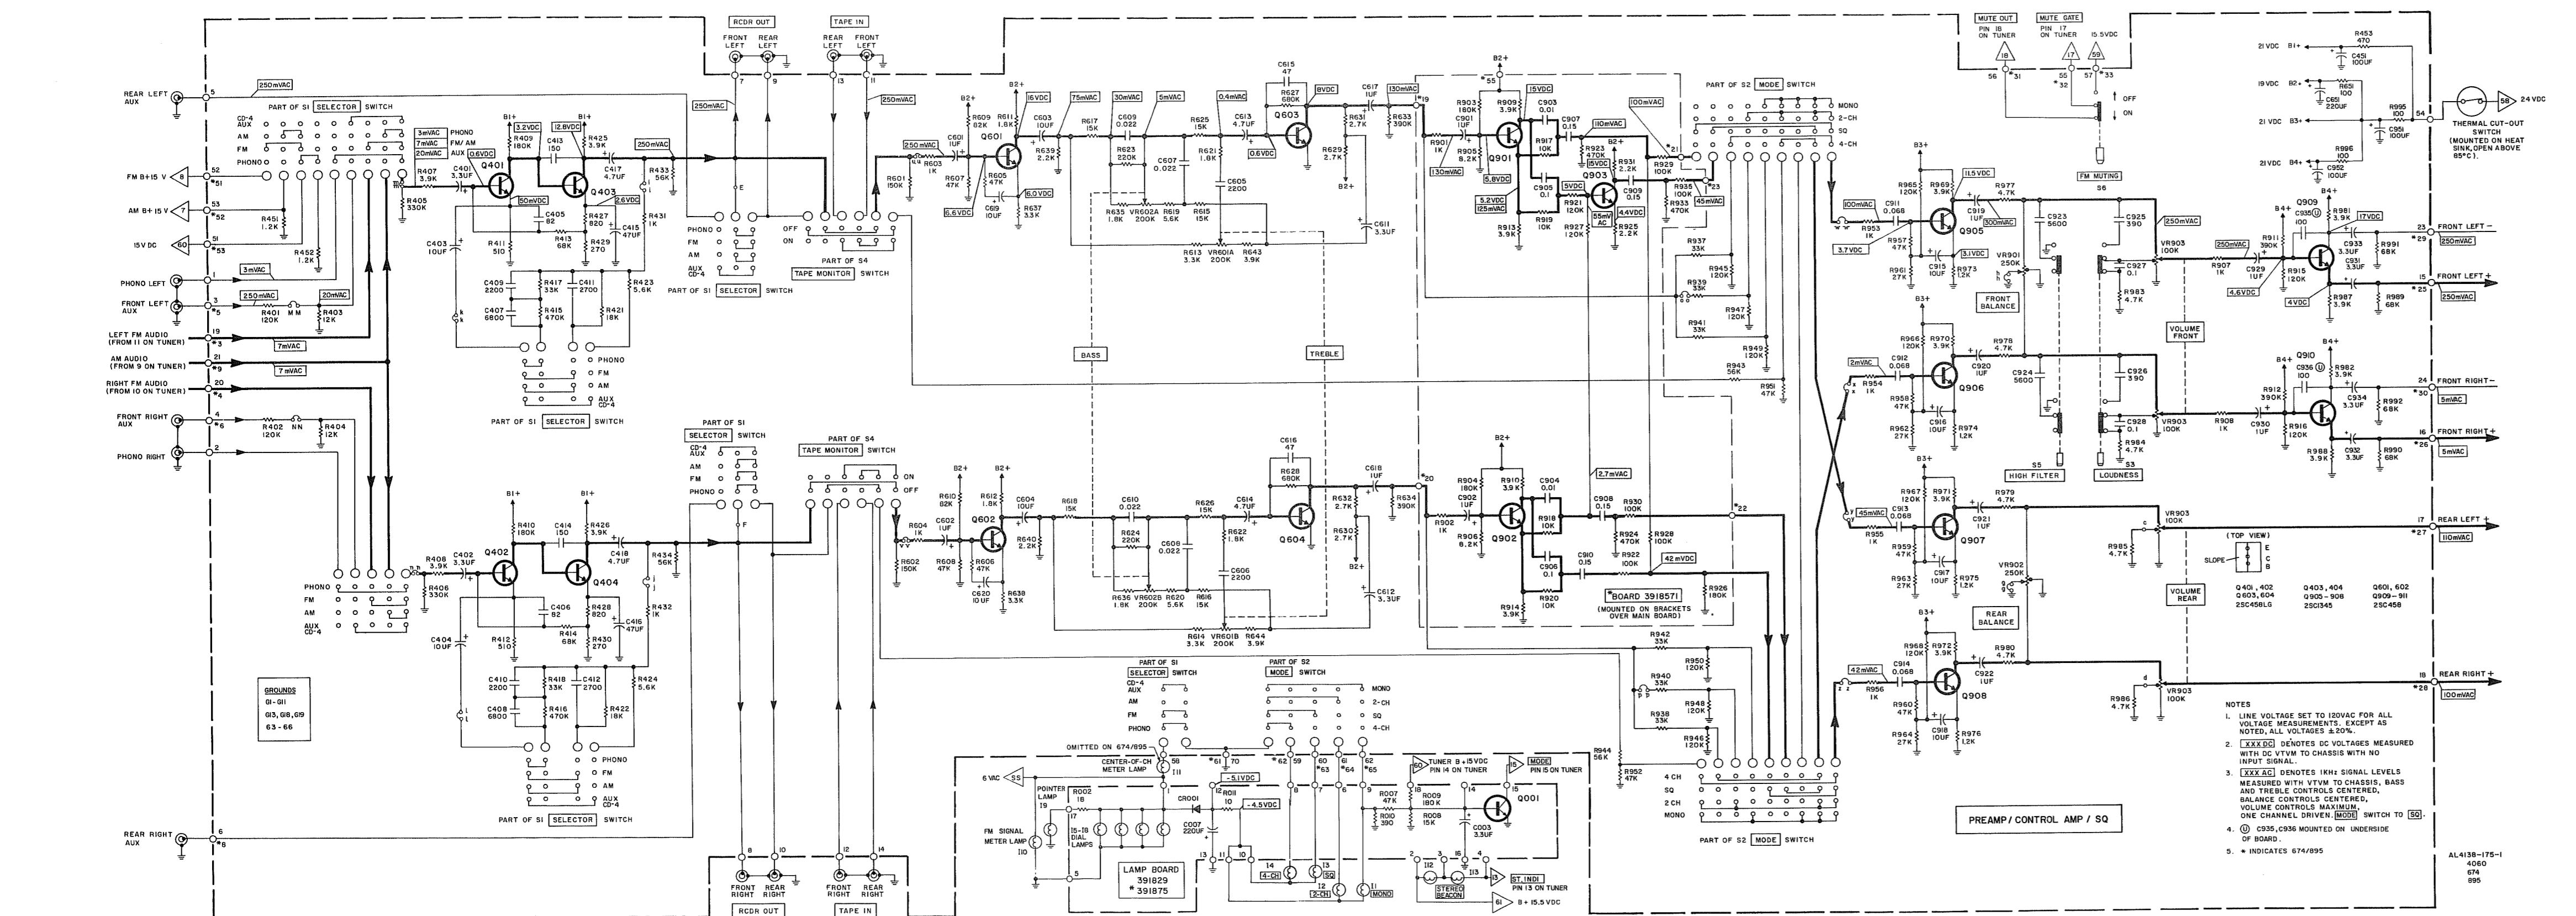

Ref. Des.	Description	Part Number	Ref. Des.	Description	Part Number
C401, 402, 611, 612, 931 thru 934	Electrolytic, 3.3 uF, 50V	1252813	R413, 414, 989 thru 992	68K	0114221
C403, 404, 603, 604, 619, 620, 915 thru 918	Electrolytic, 10 uF, 25V	1252621	R415, 416, 923, 924, 933	470K	0114297
C405, 406, 605, 606	Ceramic, 82 pF Mylar, 6800 pF	0248722	R417, 418, 937 thru 942	33K	0114267
C407, 408	Mylar, 2200 pF	1274016	R423, 424, 619, 620	5.6K	0114179
C409, 410, 605, 606	Mylar, 2700 pF Mylar, 150 pF	1274013	R427, 428, 620, 620	820	0114153
C411, 412	Mylar, 47 uF, 16V	1274014	R429, 430, 0248728	270	0114141
C413, 414	Electrolytic, 47 uF, 50V	1252525	R431, 432, 603, 604, 901, 902,	1K	0114161
C415, 416	Electrolytic, 4.7 uF, 50V	1252815	907, 908, 953 thru 956	500K	
C451, 951	Electrolytic, 100 uF, 50V	1252831	R451, 452, 943, 944	56K	0114219
C601, 602, 617, 618, 901, 902, 919, 920, 921, 922, 929, 930	Electrolytic, 1 uF, 50V	CE22342-2	R453, 454, 945, 946	1.2K	0114163
C607 thru 610	Mylar, 0.022 uF	1275013	R453	470	0114147
C615, 616	Ceramic, 47 pF	0248676	R601, 602, 605 thru 608	150K	0114285
C651	Electrolytic, 2200 uF, 50V	0252861	R605, 606, 951, 952	47K	0114217
C903, 904	Mylar, 0.01 uF	1275011	R609, 610, 611, 612, 621, 622, 635, 636	82K	0114223
C905, 906	Mylar, 0.1 uF	1276011	R613, 614, 637, 638	1.8K	0114167
C907 thru 910	Mylar, 0.015 uF	1276012	R615, 616, 621, 622, 635, 636	82K	0114223
C911 thru 914	Mylar, 0.068 uF	1275016	R613, 614, 637, 638	3.3K	0114173
C923, 924	Mylar, 5600 pF	1274035	R615, 616, 621, 622, 635, 636	390 pF	0114205
C925, 926	Polystyrene, 390 pF	0228325	R615, thru 618, 625, 626, 637, 638	15K	0114205
C935, 936	Ceramic, 100 pF	0248724	R622, 623, 624, 637	15K	0114205
Q401, 402	Transistor, NPN, 2SC4581 (D)	2327254	R623, 624, 625, 637	15K	0114205
Q403, 404, 905 thru 908	Transistor, NPN, 2SC4581 (E)	2327363	R623, 624, 625, 637	220K	0114289
Q601, 602, 903, 909, 910	Transistor, NPN, 2SC4581 (C)	2320063	R623, 624, 625, 637	680K	0114301
Q603, 604	Transistor, NPN, 2SC4581 (C)	2320073	R623, 624, 625, 637	27K	0114171
R003 thru 006	Composition, 470	0134369	R623, 624, 625, 637	8.2K	0114169
R401, 402, 915, 916, 921, 927, 935	8.2K	114183	R623, 624, 625, 637	8.2K	0114201
R951 thru 964	8.2K	114201	R623, 624, 625, 637	100K	0114281
RC07BF273J			R922, 928, 929, 930, 935		
R961 thru 964			R951 thru 954		
R965 thru 968			R955, 956		
R969 thru 972			R956, 957		
R973 thru 976			R956, 957		
R977 thru 979			R956, 957		
R980 thru 983			R956, 957		
R984 thru 987			R956, 957		
R988 thru 991			R956, 957		
R992 thru 995			R956, 957		
R996 thru 999			R956, 957		
R000 thru R003			R956, 957		
R900 thru R903			R956, 957		
R904 thru R907			R956, 957		
R908 thru R911			R956, 957		
R912 thru R915			R956, 957		
R916 thru R919			R956, 957		
R920 thru R923			R956, 957		
R924 thru R927			R956, 957		
R928 thru R931			R956, 957		
R932 thru R935			R956, 957		
R936 thru R939			R956, 957		
R940 thru R943			R956, 957		
R944 thru R947			R956, 957		
R948 thru R951			R956, 957		
R952 thru R955			R956, 957		
R956 thru R959			R956, 957		
R960 thru R963			R956, 957		
R964 thru R967			R956, 957		
R968 thru R971			R956, 957		
R972 thru R975			R956, 957		
R976 thru R979			R956, 957		
R980 thru R983			R956, 957		
R984 thru R987			R956, 957		
R988 thru R991			R956, 957		
R992 thru R995			R956, 957		
R996 thru R999			R956, 957		
R000 thru R003			R956, 957		
R004 thru R007			R956, 957		
R008 thru R011			R956, 957		
R012 thru R015			R956, 957		
R016 thru R019			R956, 957		
R020 thru R023			R956, 957		
R024 thru R027			R956, 957		
R028 thru R031			R956, 957		
R032 thru R035			R956, 957		
R036 thru R039			R956, 957		
R040 thru R043			R956, 957		
R044 thru R047			R956, 957		
R048 thru R051			R956, 957		
R052 thru R055			R956, 957		
R056 thru R059			R956, 957		
R060 thru R063			R956, 957		
R064 thru R067			R956, 957		
R068 thru R071			R956, 957		
R072 thru R075			R956, 957		
R076 thru R079			R956, 957		
R080 thru R083			R956, 957		
R084 thru R087			R956, 957		
R088 thru R091			R956, 957		
R092 thru R095			R956, 957		
R096 thru R099			R956, 957		
R100 thru R103			R956, 957		
R104 thru R107			R956, 957		
R108 thru R111			R956, 957		
R112 thru R115			R956, 957		
R116 thru R119			R956, 957		
R120 thru R123			R956, 957		
R124 thru R127			R956, 957		
R128 thru R131			R956, 957		
R132 thru R135			R956, 957		
R136 thru R139			R956, 957		
R140 thru R143			R956, 957		
R144 thru R147			R956, 957		
R148 thru R151			R956, 957		
R152 thru R155			R956, 957		
R156 thru R159			R956, 957		
R160 thru R163			R956, 957		
R164 thru R167			R956, 957		
R168 thru R171			R956, 957		
R172 thru R175			R956, 957		
R176 thru R179			R956, 957		
R180 thru R183			R956, 957		
R184 thru R187			R956, 957		
R188 thru R191			R956, 957		
R					

4060/674/895 PARTS LIST  
(CONTINUED)

LAMP BOARD (4060 Only)

Ref. Des.	Description	Part Number	Ref. Des.	Description	Part Number
C003	Electrolytic, 3.3 uF, 50V	1252813	R007	47K	0114217
C007	Electrolytic, 220 uF, 10V	0252332	R008	15K	1114205
CR001	Diode, IS2076 (1-2)	2337011	R009	180K	0114287
O001	Transistor, NPN, 2SC458 (C)	2320063	R010	390	1114145
R002		1114047	R011	10	1114041


All resistors are Deposited Film, 5%, 1/4W unless otherwise noted.  
K = Kilohm

POWER AMPLIFIER


Ref. Des.	Description	Part Number	Ref. Des.	Description	Part Number
C002	Electrolytic, 2200 uF, 35V	0250137	R717 thru 720	39	0114055
C004	Ceramic, 0.22 uF	0276011	R721 thru 724	39	0114145
C005	Electrolytic, 100 uF, 50V	0252831	R725 thru 728	1K	0114161
C701 thru 704	Electrolytic, 100 uF, 50V	1252831	R731 thru 734	4.7K	0114177
C705 thru 716	Ceramic, 100 pF	0248724	R735 thru 738	3.3K	0114173
C717 thru 720	Ceramic, 47 pF	0248676	R739 thru 742	2.7K	0114171
C721 thru 724	Ceramic, 150 pF	0248728	R745 thru 748	100	RC07BF101J
C725 thru 728	Ceramic, 2200 uF, 35V	1252742	R751 thru 754	22	0114049
C729 thru 732	Mylar, 0.1 uF	1276011	R759 thru 762	5.7K, 0.47W	0114139
C733 thru 736	Ceramic, 0.01 uF	0245408	R755 thru 758	220	0114139
C801, 802	Electrolytic, 220 uF, 25V	1252632	R763 thru 766	6.3 thru 7.6K	0114139
C804	Electrolytic, 4.7 uF, 50V	1252825	R768 thru 786	7.83 thru 8.7K	0114139
C805	Diode, SR3AM-8	2337111	R767 thru 770	7.71 thru 774	RP3WR47K
CR801 thru 804	Diode, Zener, AW01-16	2337065	R775 thru 778	3.9K	0114175
CR805	Diode, Zener, AW01-27	2327079	R779 thru 782	10, 1/4W	0134289
CR806	Transistor, PNP, 2SA672 (C)	2327263	R808	150K	0138205
Q701 thru 704	Transistor, NPN, 2SC1213 (C)	2327333	R801	Metal Oxide Fixed Film, 220, 2W	0119525
Q707 thru 710	Transistor, NPN, 2SC1213A (C)	2327293	R802	3.9K, 1/4W	0134380
Q711 thru 718	Transistor, NPN, 2SA673A (C)	2327387	R803	6.80, 1/4W	0134371
Q719 thru 722	Transistor, NPN, 2SC1061 (C) Q	2327153	R805	1.8K, 1/4W	0134376
Q723 thru 730, 801, 802	Transistor, NPN, 2SC1061 (C) Q	RS200W121J	TH701 thru 704	Thermistor, 23D25	0576041
R001, 012	120, 2W	0114169	VR701 thru 704	Potentiometer, 20K	0151281
R701, 702, 807	5.6K	0138129	VR705, 706	Variable, 1K	0151282
R703, 704	2.2K	014281			
R705 thru 708	100K	0114221			
R709 thru 712	68K	0114219			
R713 thru 716	56K				

All resistors are Deposited Film, 5%, 1/4W unless otherwise noted,  
K = Kilohm

4060/674/895 SCHEMATIC

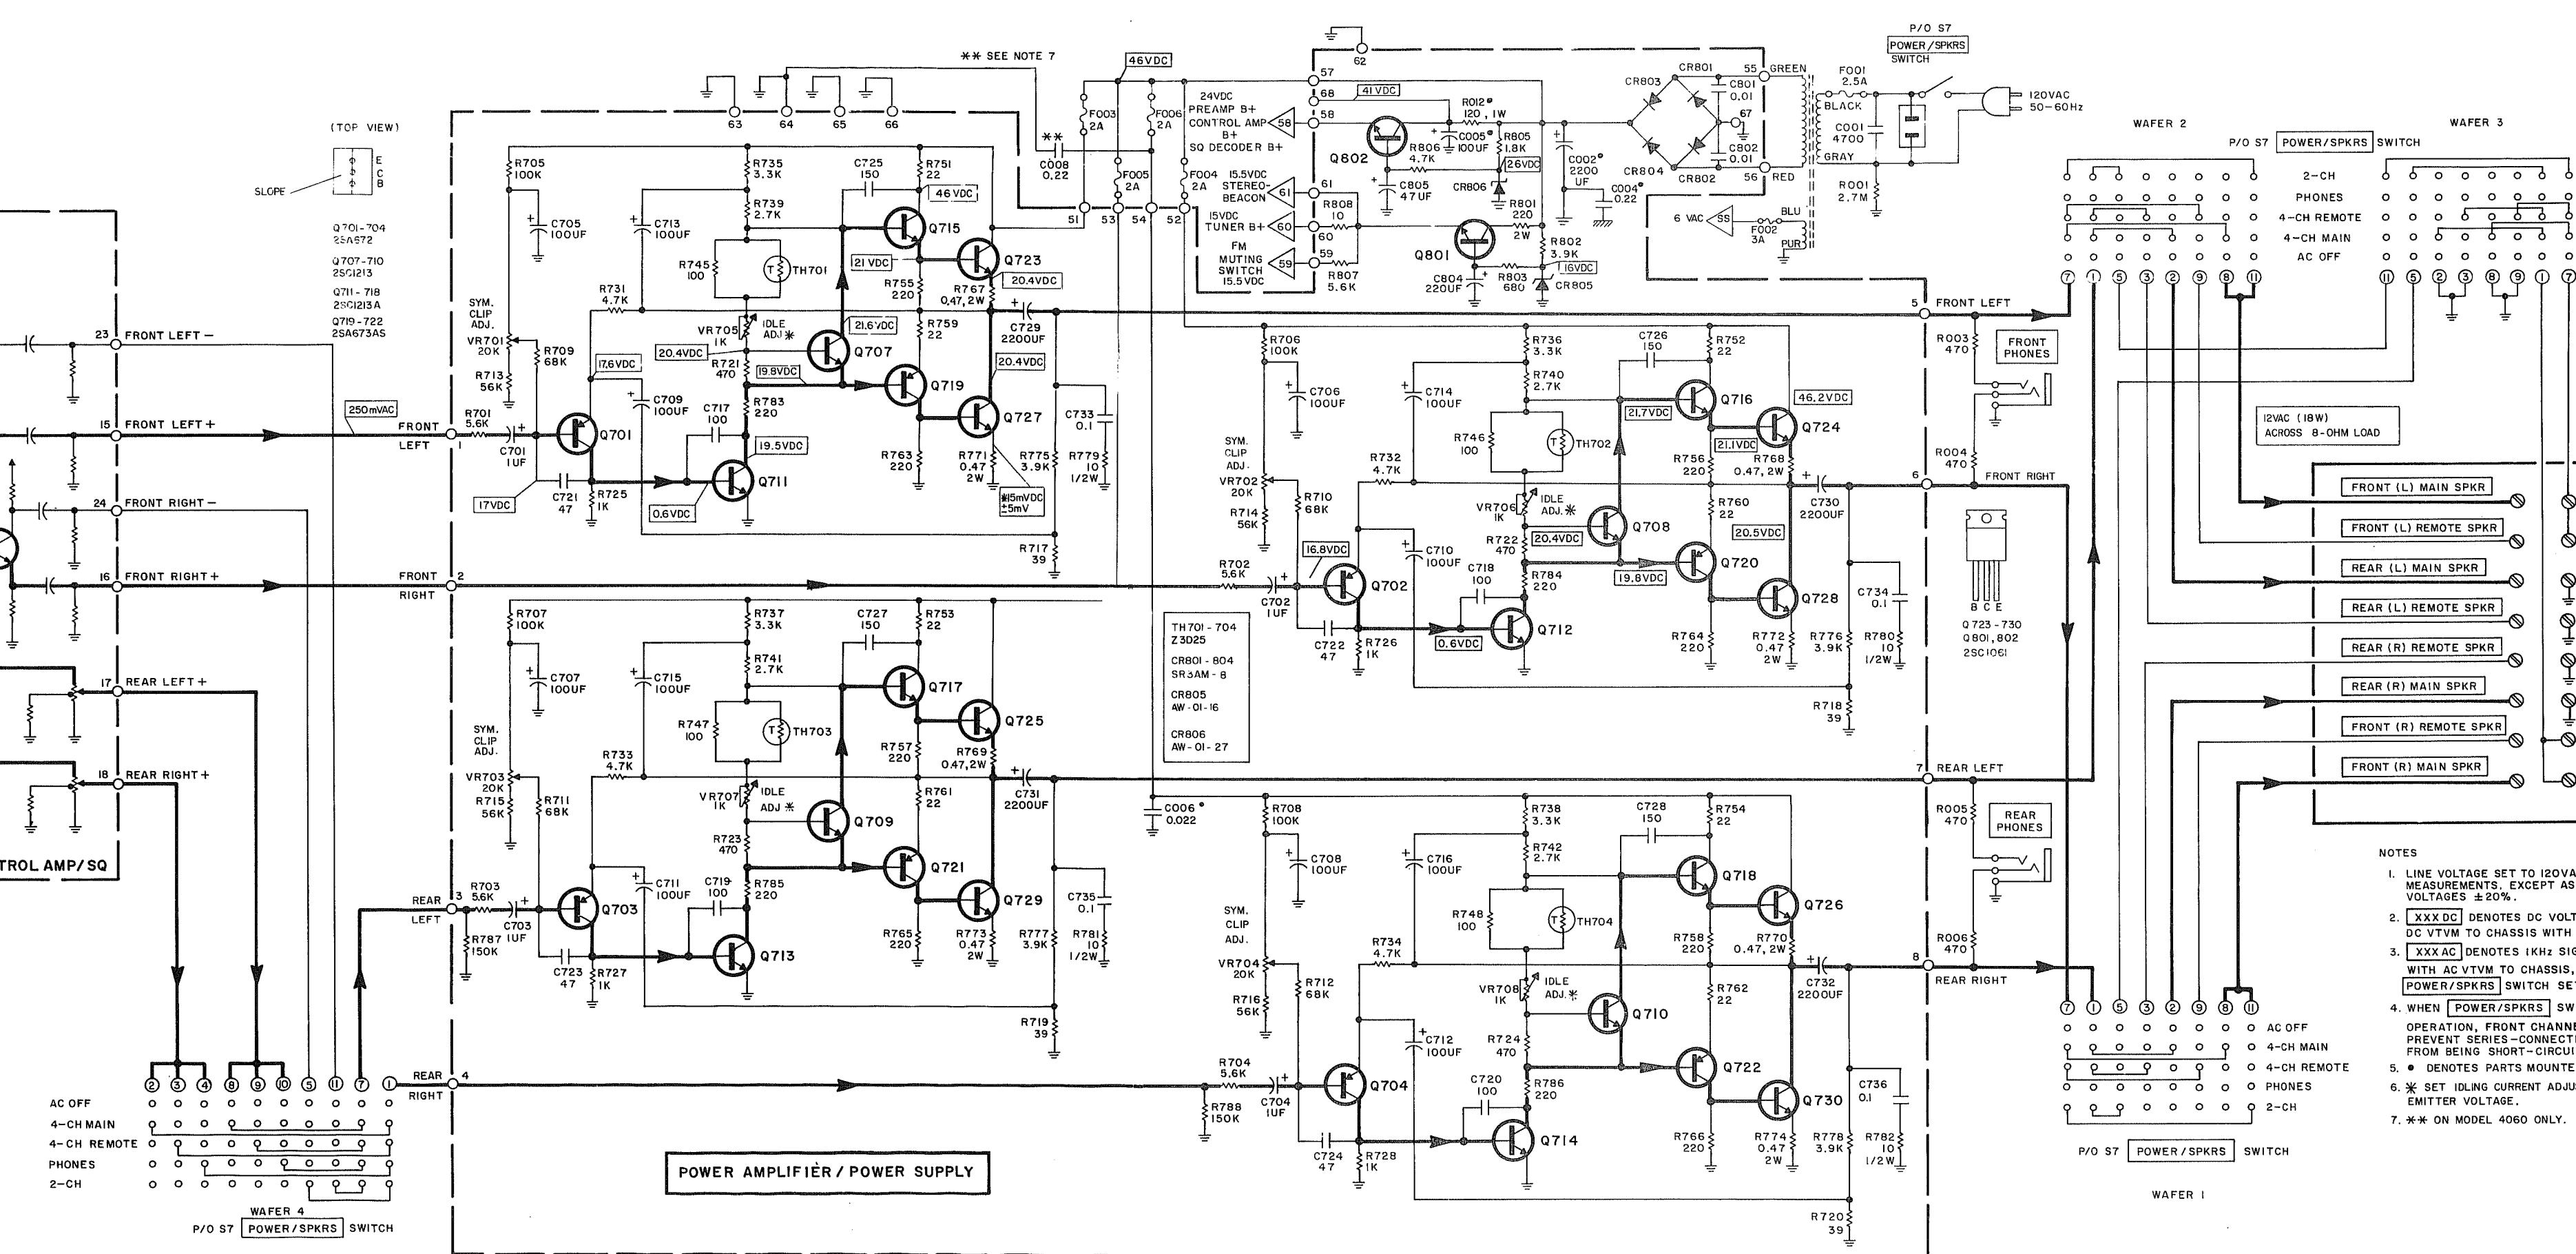


## PREAMPLIFIER/ CONTROL / SQ

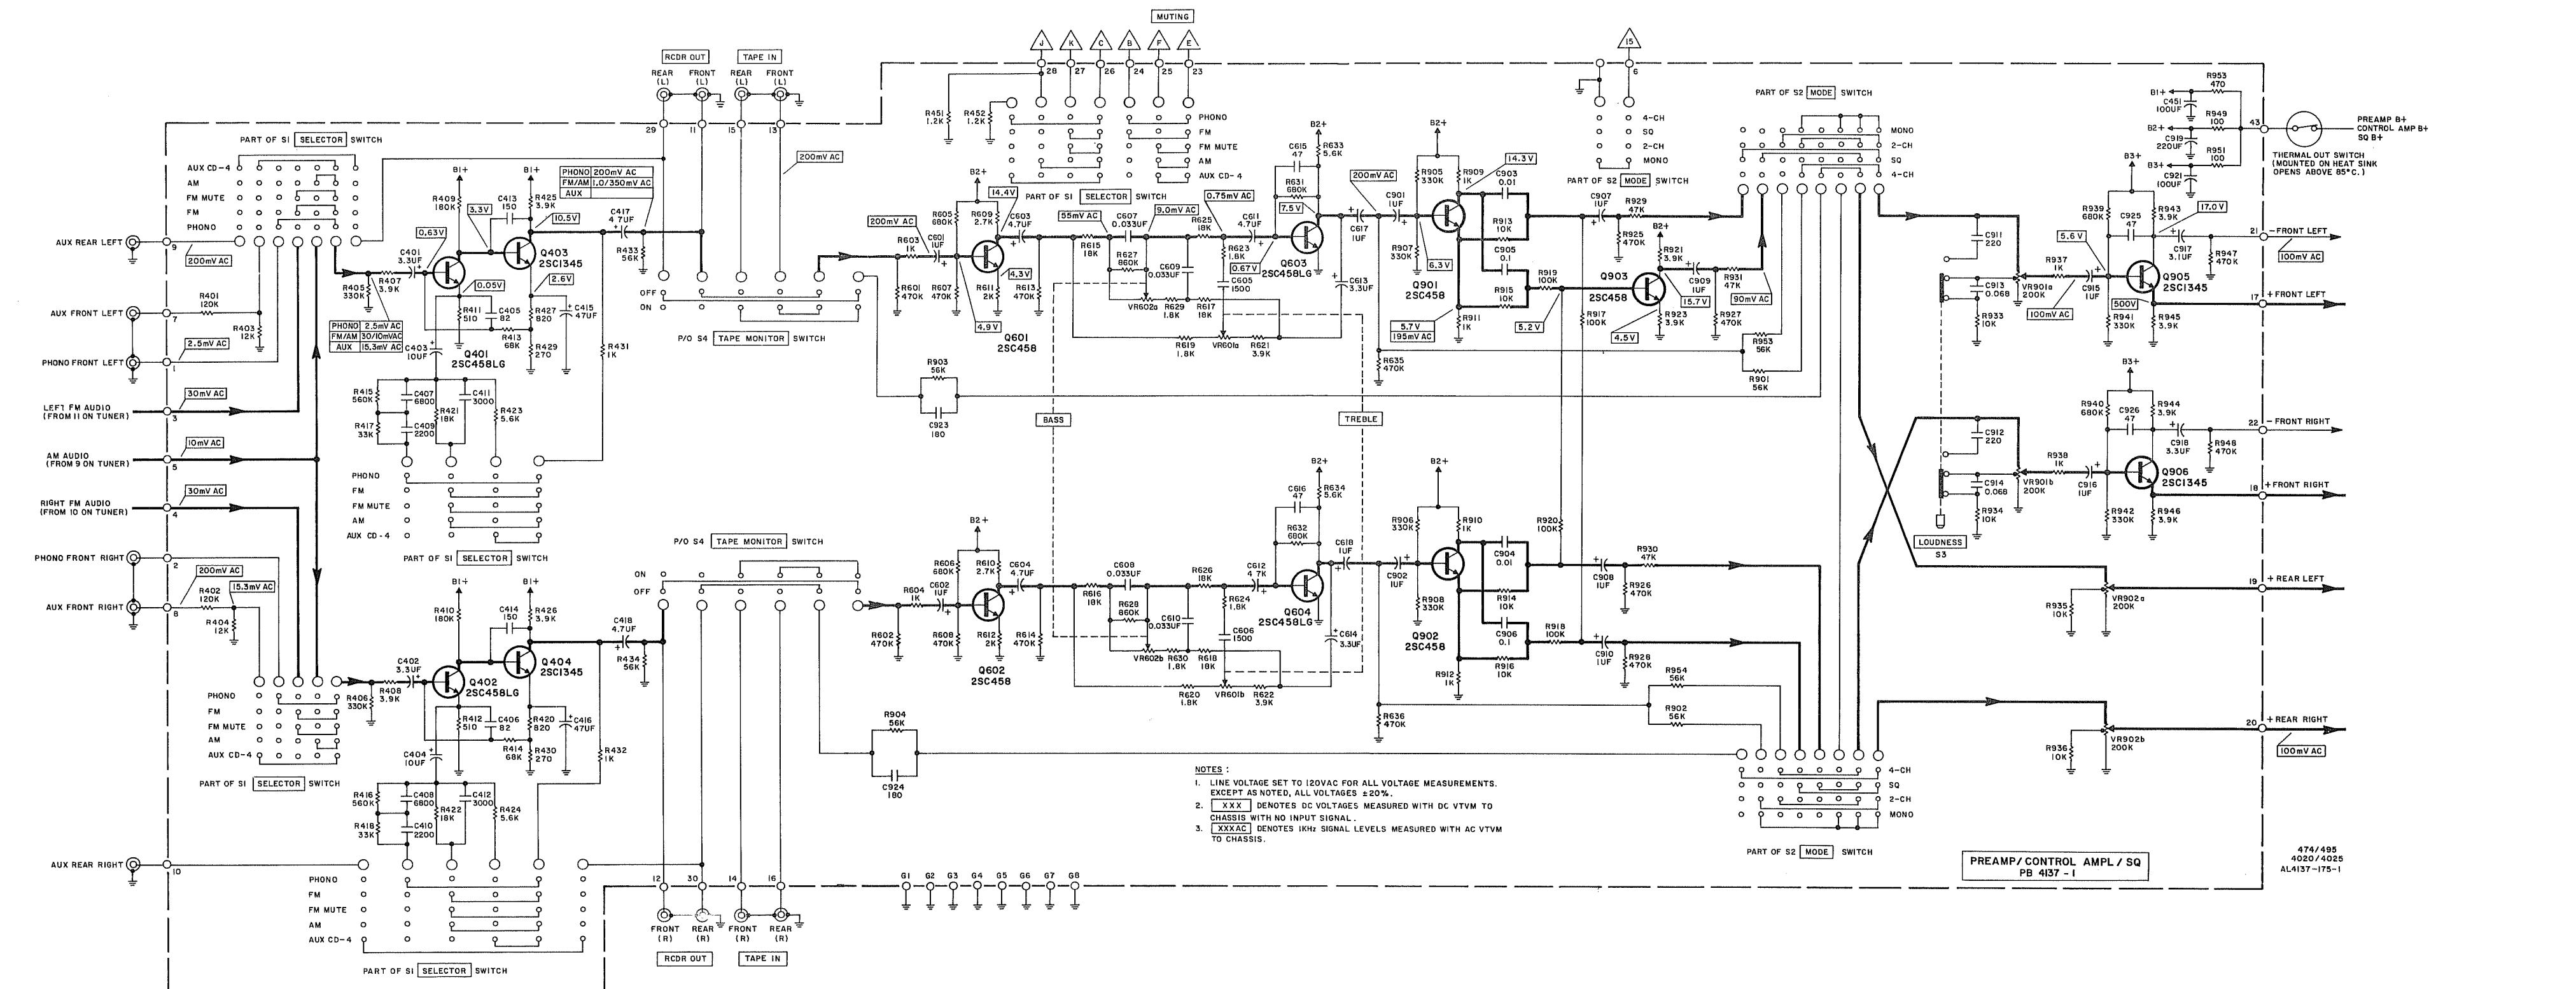

Ref. Des.	Description	Part Number	Ref. Des.	Description	Part Number
C401, 402, 613, 614	Electrolytic, 3.3 uF, 50V	1252813	R421, 422, 615, 616	18K	0114207
C403, 404	Electrolytic, 10 uF, 25V	1252621	617, 618		
C405, 406	Ceramic, 82 pF	0248727	625, 626		
C407, 408	Mylar, 6800 pF	1274016	R423, 424, 633, 634	5.6K	0114179
C409, 410	Mylar, 2200 pF	1274013	633, 634		
C411, 412	Mylar, 3000 pF	1274243	R427, 428, 642, 643	820	0114153
C413, 414	Ceramic, 150 pF	0248728	R429, 430, 643, 642	270	0114141
C415, 416	Electrolytic, 47 uF, 16V	1252525	R431, 432, 603, 604	1K	0114161
C417, 418, 611, 612	Electrolytic, 4.7 uF, 50V	1252815	909 thru 912, 937, 938		
C451, 921	100 uF, 50V	1252831	912, 937, 938		
C601, 602	Electrolytic, 1 uF, 50V	1252811	917, 918, 920, 921, 922, 923		
R433, 434, 617, 618	56K	1252811	920, 921, 922, 923		
R601, 602	60K	1252811	925 thru 928, 947, 948		
R603, 604	613, 614, 635, 636	1274012	928, 947, 948		
C605, 606	615, 616, 631, 632, 639, 940	1275014	948		
C607 thru 610	617, 618, 901, 902, 907, 908, 909, 910, 915, 916, 917, 918	1275014	948		
C615, 616, 925, 926	2.7K	1275011	948		
C903, 904	Mylar, 0.01 uF	1275011	0114171		
C905, 906	Mylar, 0.1 uF	1275011	0114168		
C911, 912	Mylar, 220 pF	1275019	0114167		
C913, 914	Mylar, 0.068 uF	1275016			
C919	Electrolytic, 2200 uF	1252632	3.9K	0114175	
C923, 924	Ceramic, 180 pF	0248730	820K	0114303	
Q401, 402	Transistor, NPN, 2SC458L (D)	2327254	0114219		
Q403, 404	Transistor, NPN, 2SC458L (E)	2327363			
Q601, 602	Transistor, NPN, 2SC458L (C)	2320063	904, 953, 954	0114281	
R913, 914, 917, 918, 919, 920	100K	2320063			
R915, 916, 933, 934, 935, 936	10K	2320073			
O603, 604	Transistor, NPN, 2SC458L (C)	0114201			
R401, 402	120K	0114283			
R403, 404	12K	0114203			
R405, 406	330K	0114293			
R407, 408, 905, 906, 907, 908, 941, 942	47K	0114217			
R409, 410	680K	0114301			
R411, 412	100	0114131			
R413, 414	470	0114147			
R415, 416	180K	0114287			
R417, 418	510	0114149			
S1, 2	180K	0114221			
S3, 4	68K	0114229			
VR901, 602	560K	0114213			
VR901A, B, 902A, B	33K	0114213			

All resistors are Deposited Film, 5%,  $\frac{1}{4}W$  unless otherwise noted.  
K = Kilohm

# 4020/4025/474/495 SCHEMATIC

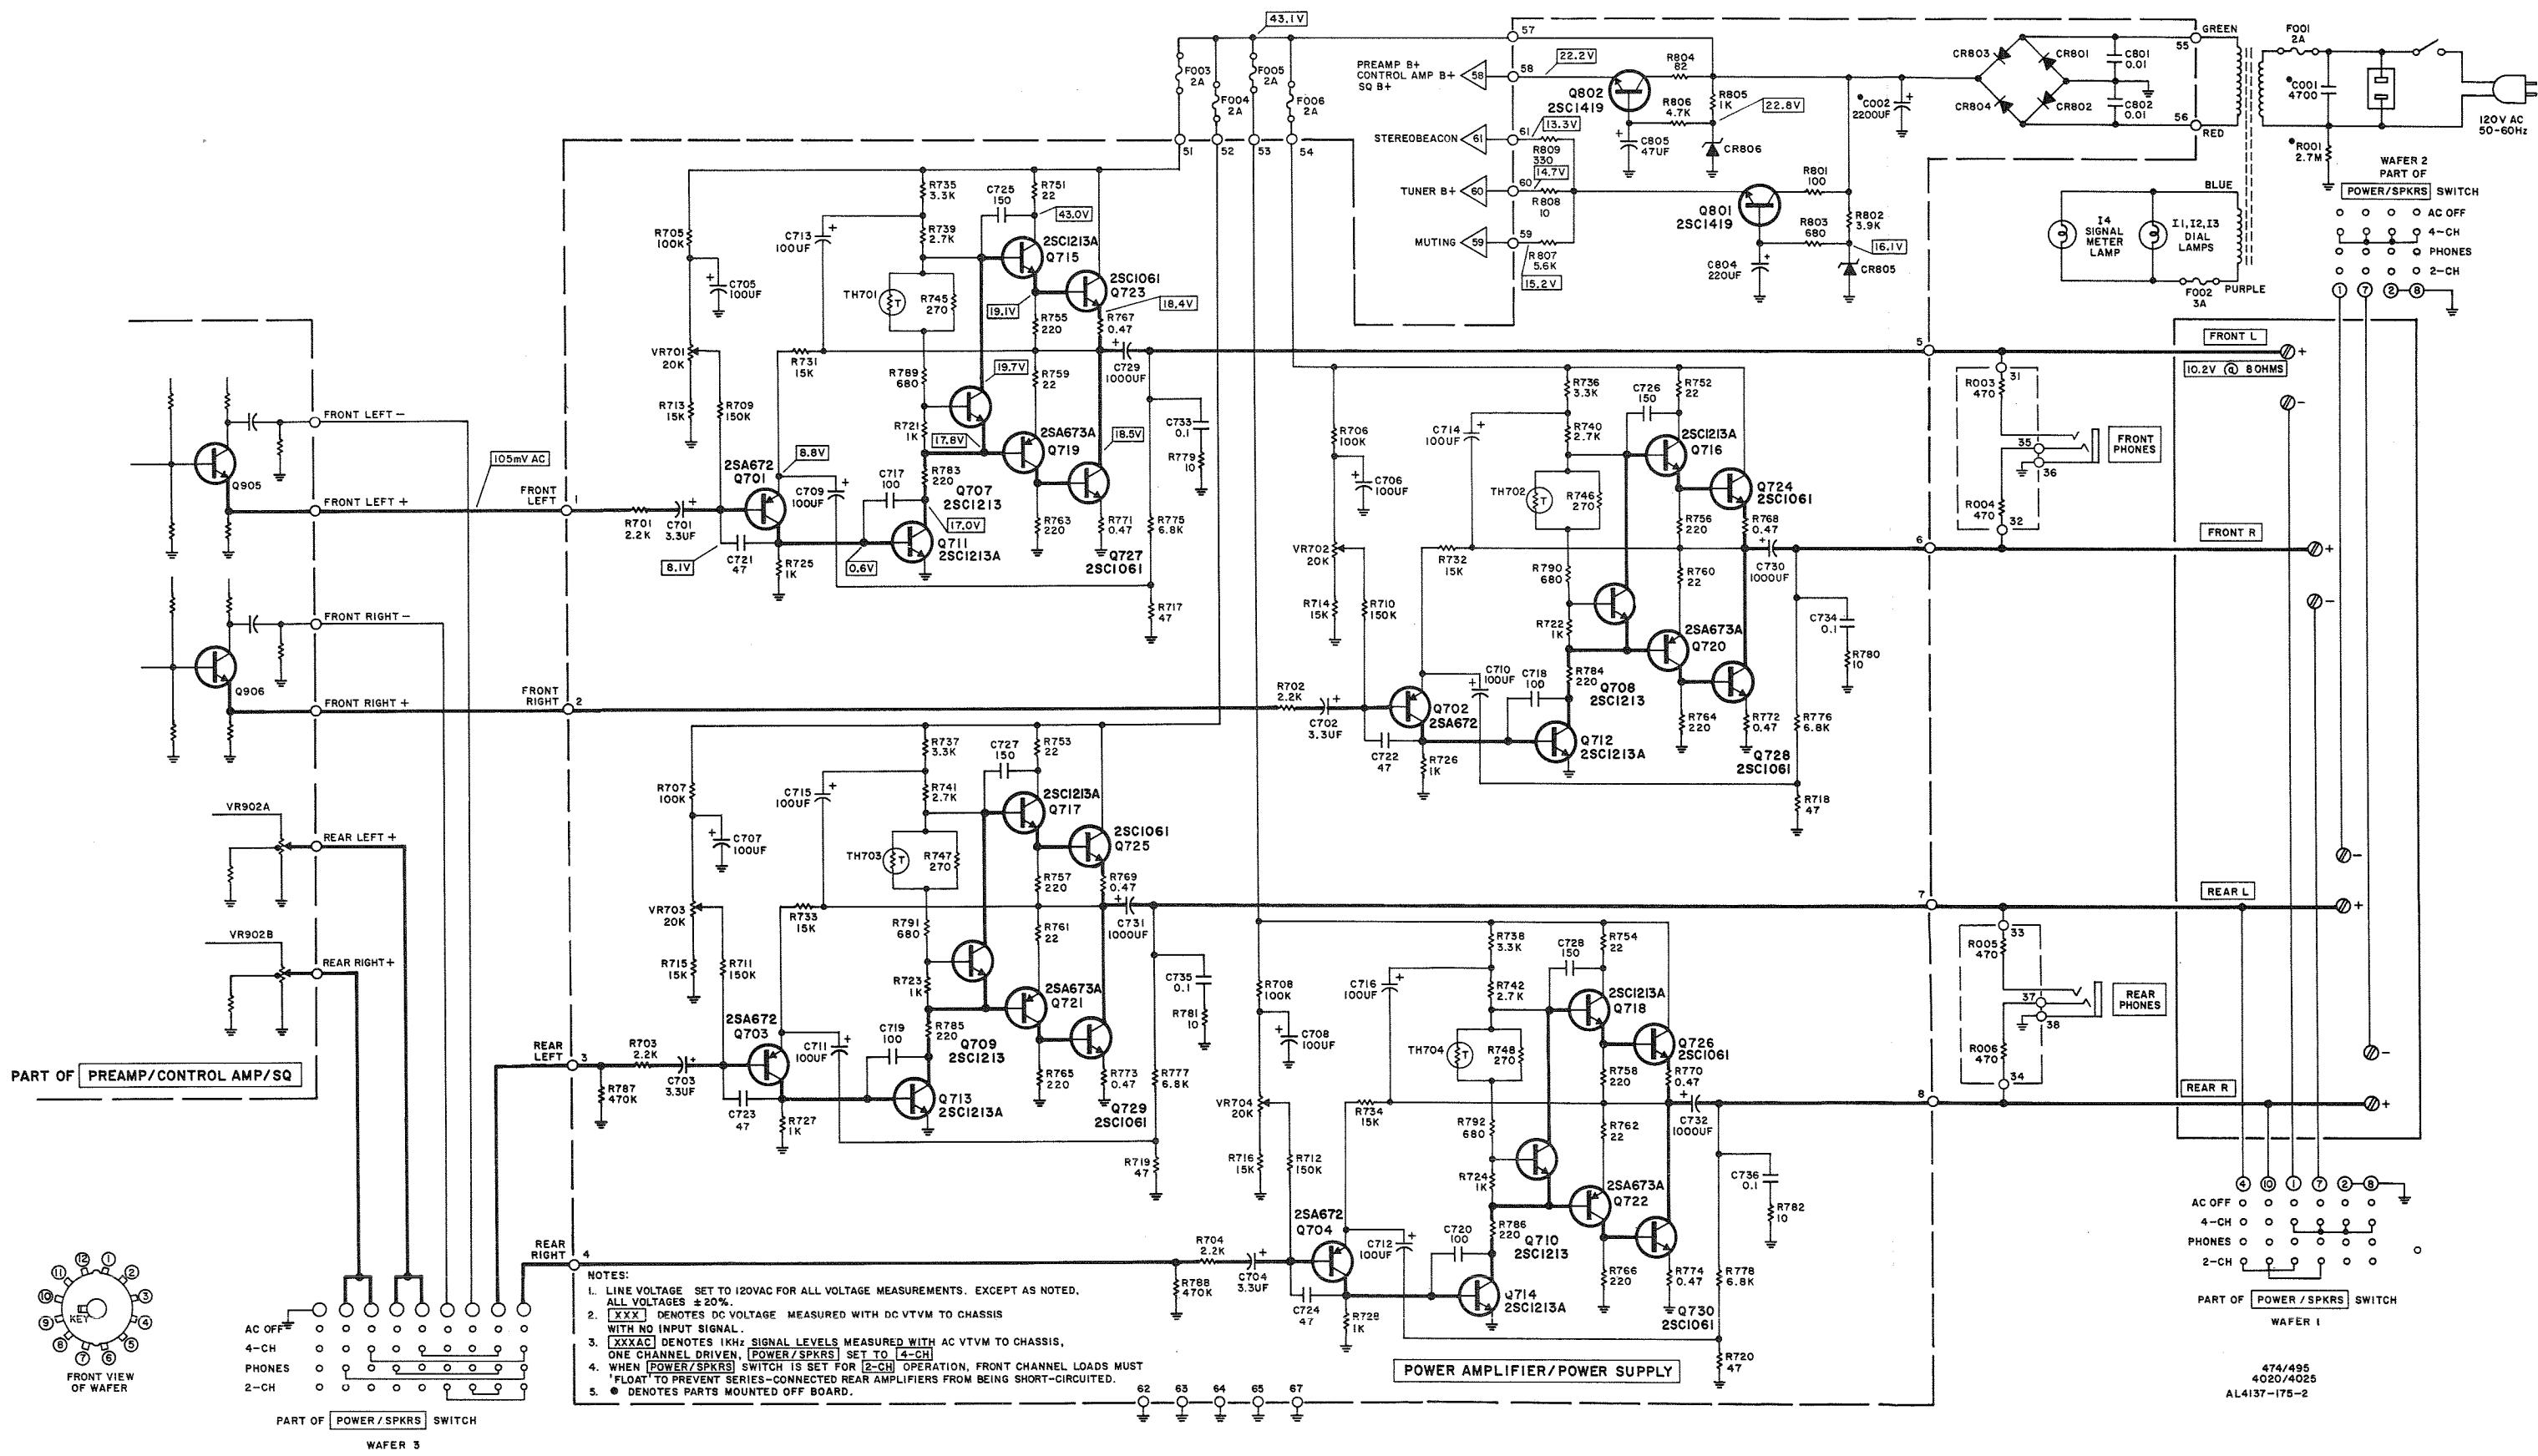

## POWER AMPLIFIER

Ref. Des.	Description	Part Number	Ref. Des.	Description	Part Number
C701 thru 704	Electrolytic, 3.3 uF, 50V	1252813	R721 thru 728	1K	0134373
C705 thru 716	Electrolytic, 100 uF, 50V	1252831	R735 thru 738	3.3K	0114173
C717 thru 720	Ceramic, 100 pF	0246464	R739 thru 742	2.7K	0114171
C721 thru 724	Ceramic, 47 pF	0248676	R745 thru 748	270	RC20BF271J
C725 thru 728	Ceramic, 150 pF	0248728	R751 thru 754, 759	22	0114049
C729 thru 732	Electrolytic, 1000 uF, 35V	1252741	thru 762		
C733 thru 736	Mylar, 0.1 uF	1276011	R755 thru 758, 763	220	0114139
C801, 802	Ceramic, 0.01 uF	0245408	thru 766, 783		
C804	Electrolytic, 220 uF	1252632	thru 786		
C805	Electrolytic, 47 uF	1252825	R767 thru 774	Wirewound, 0.47, 2W	RP3WR47J
CR801 thru 804	Diode, SR3AM-8	2337111	R775, 776	6.8K	0114181
CR805	Diode, Zener, AW01-16	2337065	R779 thru 782, 808	Composition, 10, 1/2W	0134289
CR806	Diode, Zener, AW01-22	2337063	R787, 788	470K	0138217
Q701 thru 704	Transistor, PNP, 2SA672 (C)	2327263	R801	Metal Oxide Fixed Film, 100, 2W	0111410
Q707 thru 710	Transistor, NPN, 2SC1213 (C)	2327333	R802	Composition, 3.9K, 1/2W	0134380
Q711 thru 718	Transistor, NPN, 2SC1213A (C)	2327293	R803	Composition, 680, 1/2W	0134371
Q719 thru 722	Transistor, PNP, 2SA673A (C)	2327283	R804	Composition, 82, 1/2W	0134300
Q723 thru 730	Transistor, NPN, 2SC1061 (C)	2327153	R805	Composition, 1K, 1/2W	0134373
Q801, 802	Transistor, NPN, 2SC1419 (C)	2327593	R806	4.7K	0114177
R701 thru 704	2.2K	0114169	R807	5.6K	0114179
R705 thru 708	100K	0114281	R809	330, 1/2W	RC20BF331J
R709 thru 712	150K	0114285	VR701 thru 704	Potentiometer, 20K	0151281
R713 thru 716, 731 thru 734	15K	0114205			
R717 thru 720	47	0114057			

All resistors are Deposited Film, 5%, 1/2W unless otherwise noted.  
K = Kilohm

