


SERVICE MANUAL

The Fisher®

432

FM-AM
Stereo Receiver

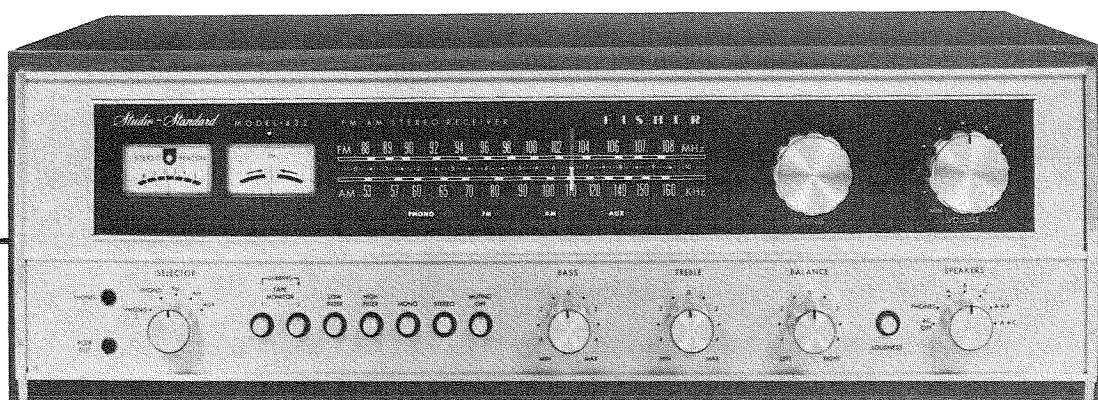

WORLD LEADER IN HIGH QUALITY STEREO

REQUIRED TEST EQUIPMENT

The following test equipment is required to completely test and align the Receiver:

- Line Voltage Autotransformer or Voltage Regulator
- AC DC Multimeter
- Accurately Calibrated AC Voltmeter
- Oscilloscope (Flat to 100 kHz Minimum)
- Low-Distortion Audio Sine-Wave Generator
- Harmonic Distortion Analyzer
- Two (2) Load Resistors, 8-ohms, 250 Watts (Minimum Rating)
- Low-Distortion AM-FM Signal Generator
- 10.7 MHz Sweep Generator
- Multiplex Generator
- 455 kHz Sweep Generator

HARMONIC DISTORTION TEST

CAUTION: Limit the following tests to no more than ten minutes each. Use 8-ohm resistors with a minimum power rating of 250 watts when connecting a load across the SPEAKERS terminals.

CONTROL SETTINGS:

Unplug the AC power cord and set the front panel controls as follows:

BASS, TREBLE, and BALANCE controls to center positions

SPEAKERS switch to AC OFF

SELECTOR switch to AUX

STEREO pushbutton depressed

LOUDNESS pushbutton out
(not depressed)

VOLUME control to MIN

ONE CHANNEL DRIVEN:

- (1) Connect a low distortion audio generator to LEFT AUX IN jack. Set generator frequency to 1 kHz and output to minimum.
- (2) Connect an 8-ohm load resistor between SPEAKERS A LEFT and COM terminals. Connect a Harmonic Distortion analyzer and an AC VTVM in parallel across the 8-ohm load.
- (3) Connect the AC power cord and set SPEAKERS switch to A. Turn VOLUME control to MAX.
- (4) Increase generator output for 40 Watts RMS (17.9 V across the 8-ohm load). Harmonic Distortion Analyzer should measure 0.5% distortion or less.
- (5) Repeat steps 1 through 4 for RIGHT CHANNEL.


BOTH CHANNELS DRIVEN

Connect 8-ohm load resistors across LEFT and RIGHT MAIN SPEAKERS terminals. Depress "MONO" pushbutton. Adjust generator output and "BALANCE" control for 40 Watts at Left and Right Channels (17.9 Volts across the 8-ohm loads). Harmonic Distortion Analyzer should measure 0.5% distortion or less at each channel.


CAUTION:

This precision high-fidelity instrument should be serviced only by qualified personnel, trained in the repair of transistor equipment and printed circuitry.


MULTIPLEX DECODER SCHEMATIC

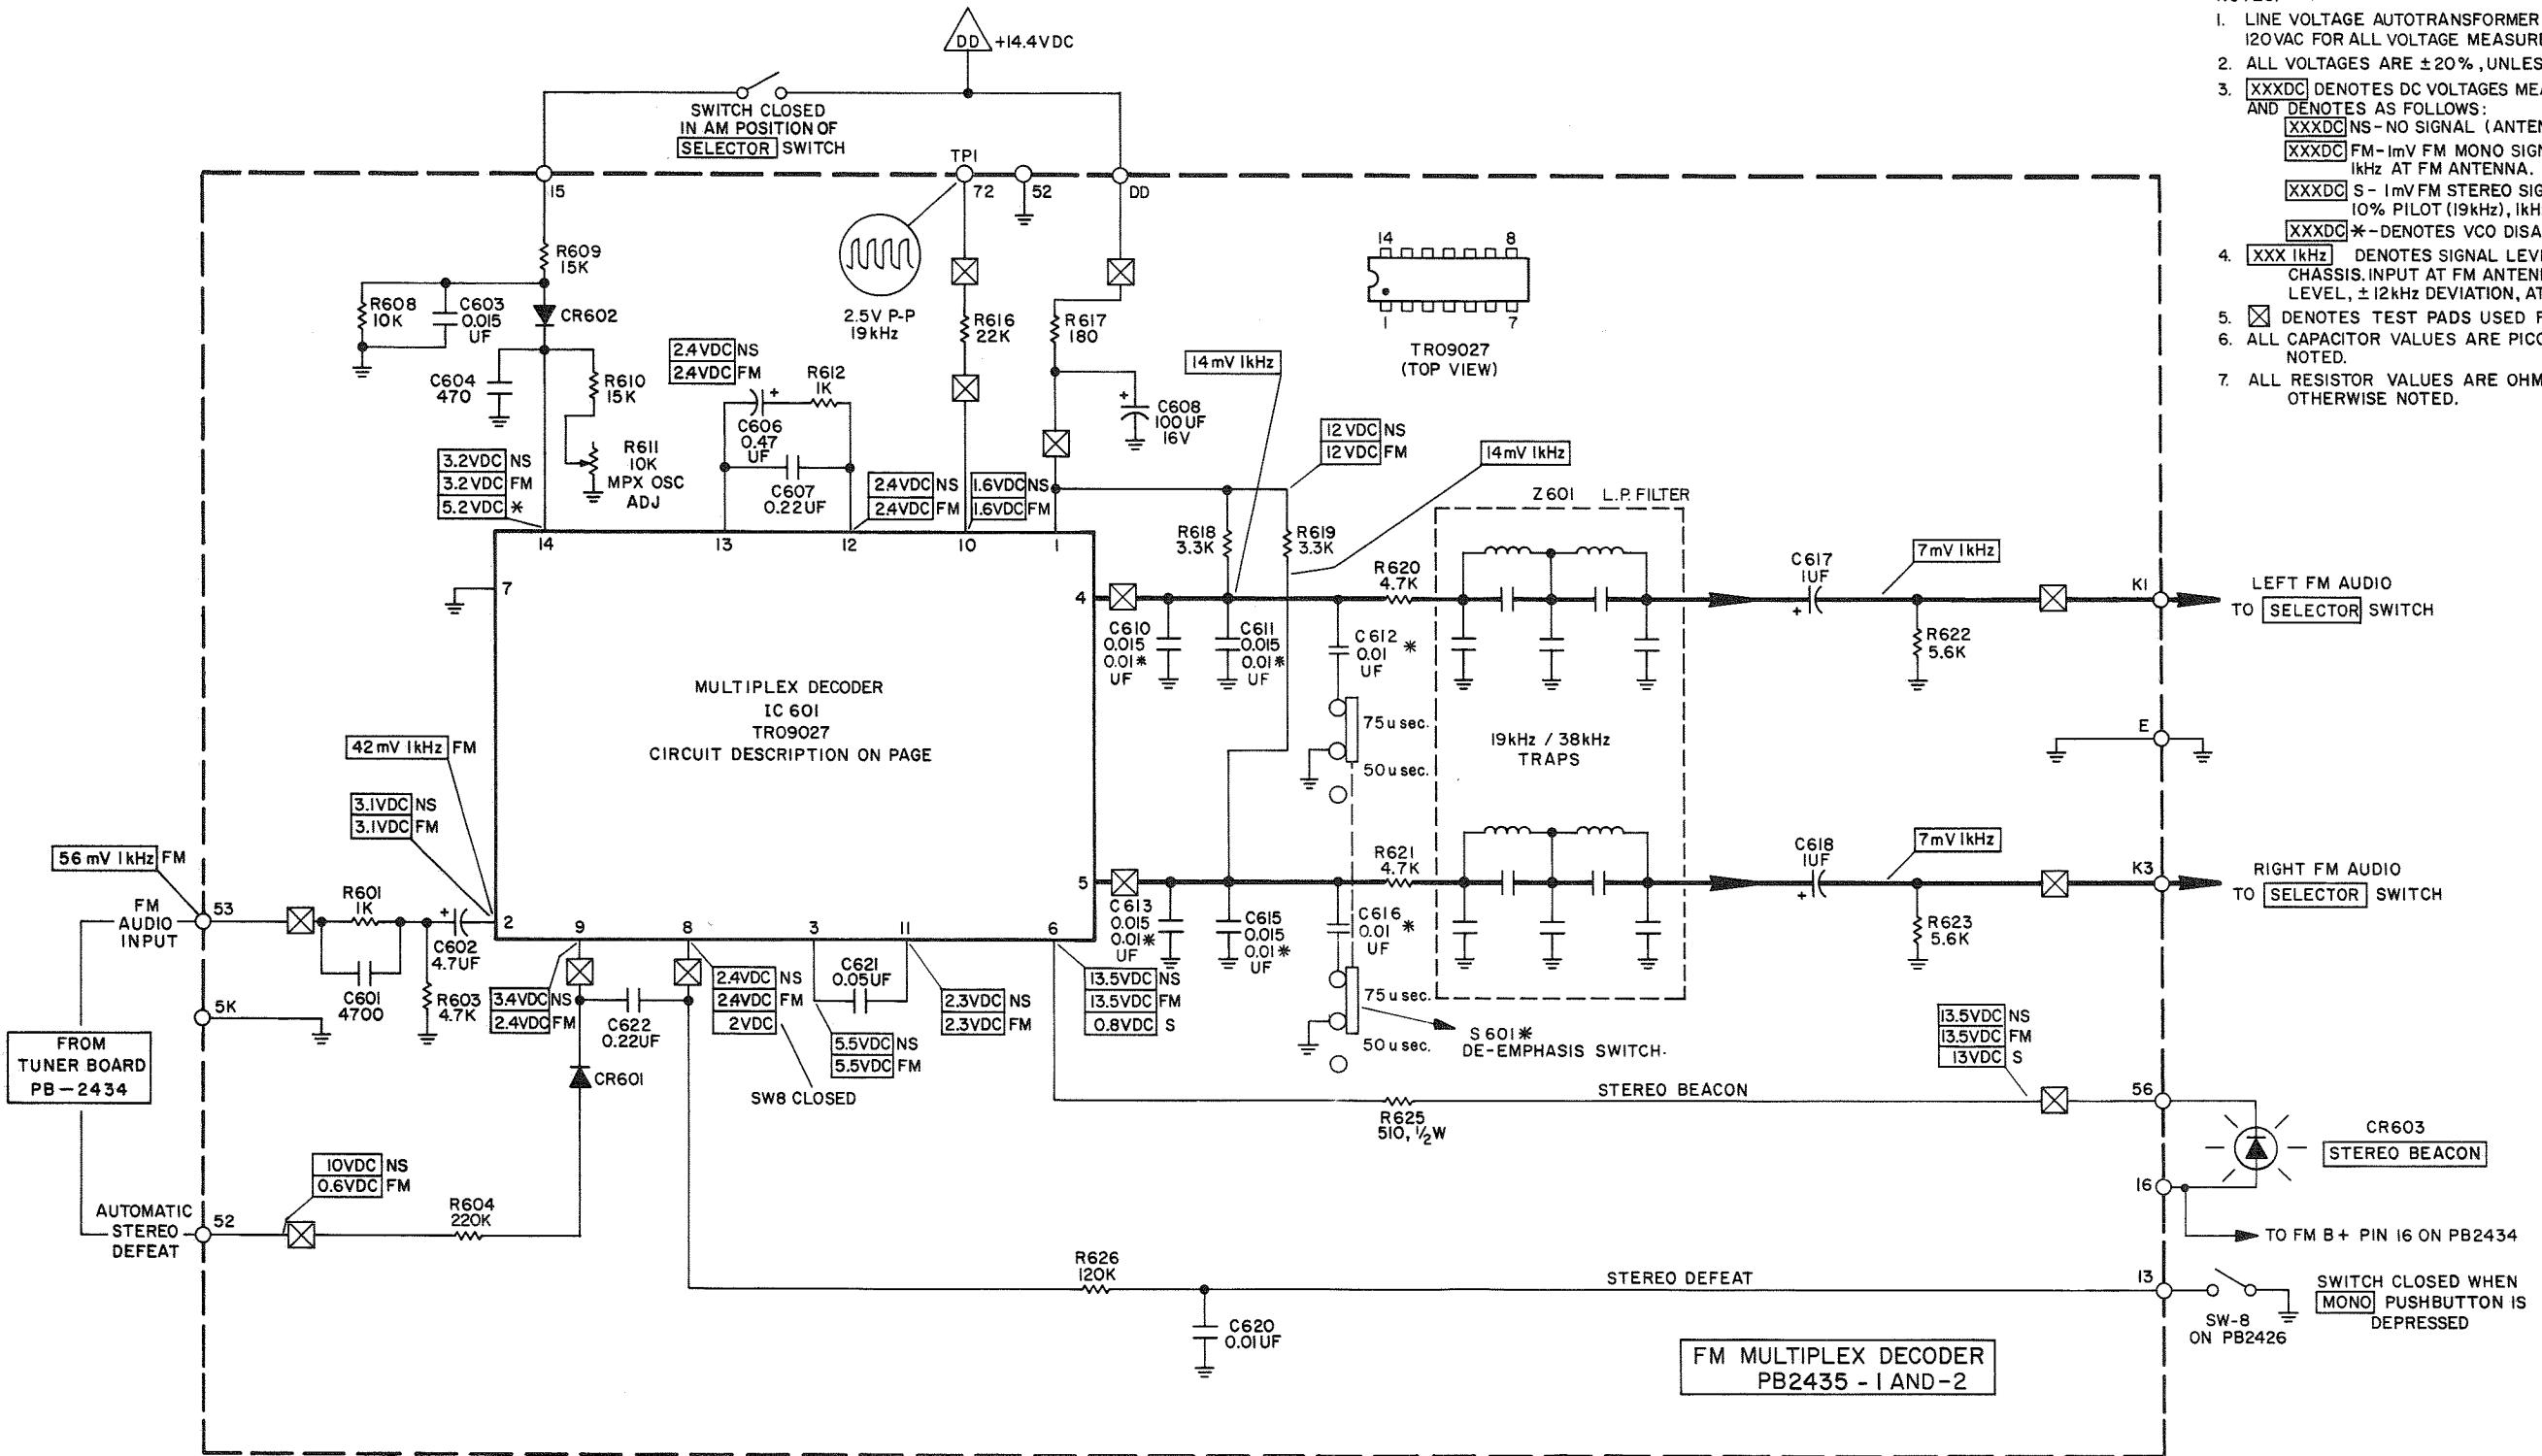

MULTIPLEX DECODER IC SIGNAL FLOW

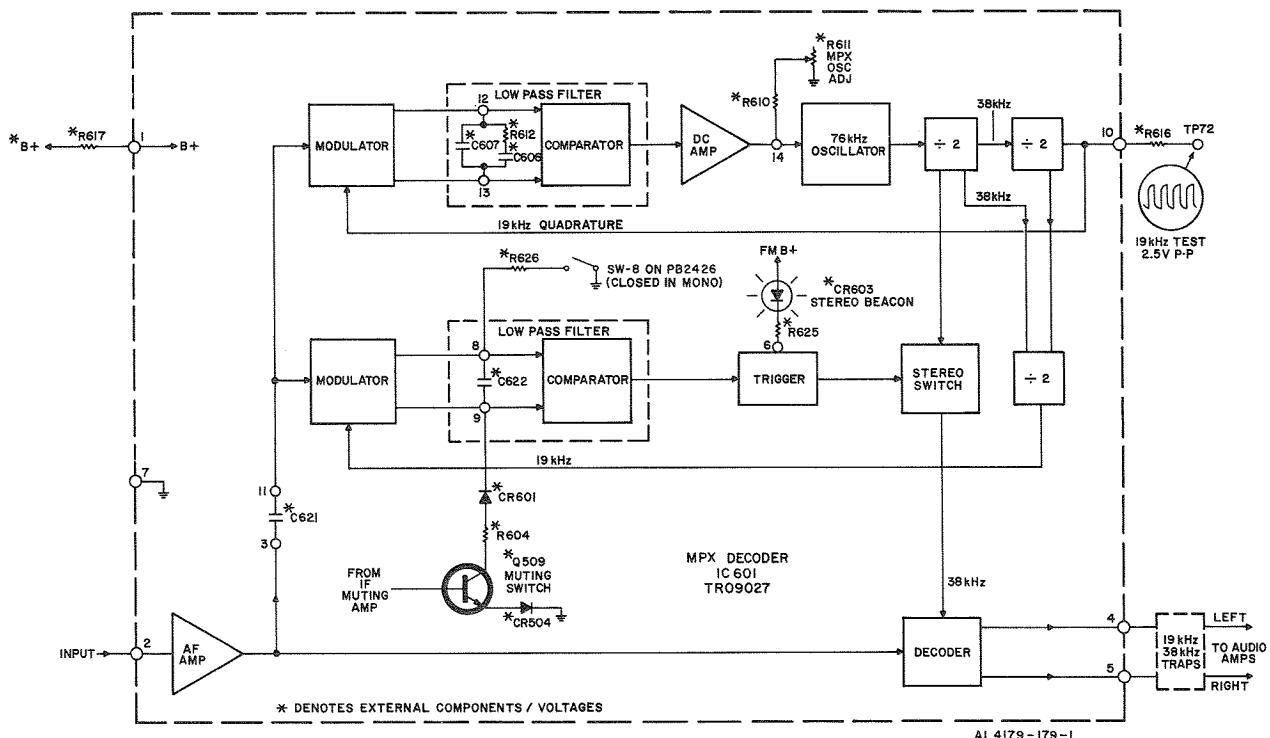

FM IF IC SIGNAL FLOW

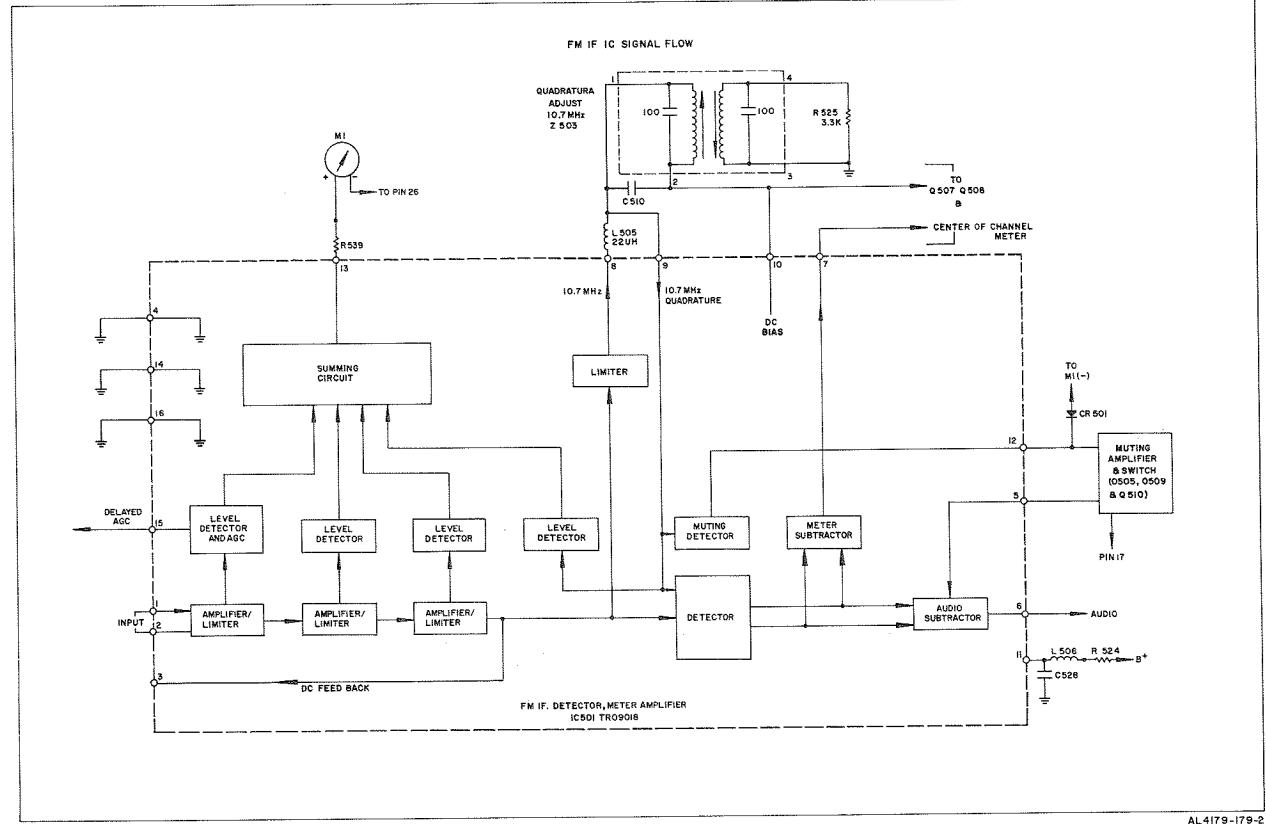

MULTIPLEX DECODER IC DESCRIPTION

MPX IC

When the receiver is tuned to a stereo broadcast the composite audio fed to pin 2 consists of sum-and-difference signal information ($L+R$ and $L-R$), and a 19 kHz pilot tone. The $L+R$ information is in the form of normal audio. The $L-R$ information is Amplitude Modulated on a suppressed 38 kHz subcarrier. (At the transmitter, the subcarrier is derived from the pilot tone through a frequency-doubler). In order to extract the $L-R$ information, it is necessary to regenerate the 38 kHz subcarrier and apply it, together with the composite signal, to the decoder. Left and Right channel information is then decoded by addition and subtraction of the $L+R$ and $L-R$ information.

The top line of the block diagram shows the 38 kHz subcarrier regeneration loop. The 76 kHz oscillator output is processed through two frequency divider stages to furnish 38 kHz and 19 kHz outputs. The 19 kHz output is a quadrature (90° out-of-phase) signal which is applied to the modulator. When the composite input signal contains a 19 kHz pilot tone (stereo broadcast) the 19 kHz quadrature signal is phase-compared to the pilot signal and the resulting DC voltage fed through the DC amp to the oscillator, where

it corrects the frequency. As a result, the oscillator is continuously phase-locked to the pilot signal. The setting of R611 determines the frequency of the free-running oscillator. With the oscillator phase-locked to the pilot, the 38 kHz output from the first divider is in the correct phase for decoding a stereo signal. The regenerated 38 kHz signal is fed to the decoder via a stereo switch. The stereo switch closes when a sufficiently large 19 kHz pilot tone is detected in the second modulator-comparator circuit. A third frequency divider stage, which processes signals derived from the first two dividers, returns a 19 kHz in-phase signal to the second modulator-comparator for pilot-detection. The DC voltage derived from the second modulator-comparator circuit is applied to the trigger which activates the STEREO-BEACON indicator and the stereo switch.

The circuit is forced into the monophonic mode by grounding pin 8, or by applying a positive DC voltage to pin 9. With very low-level, noisy FM signals, a positive voltage from pin 12 of IC501 is amplified without change of polarity and applied to pin 9 of IC601 forcing the circuit into mono operation. During AM operation pin 14 bias is high thus disabling the 76 kHz oscillator and eliminating interference.

FM IF IC DESCRIPTION

FM IF DETECTOR AND METER AMPLIFIER INTEGRATED CIRCUIT

The input from the IF filter is processed through three stages of amplification and limiting. The output of the third limiter is applied to a fourth limiter, and a balanced detector. The push-pull output from the detector is combined differentially in the subtractor stage to produce an audio output at pin 6.

The output from the fourth limiter is applied through L505 to a tuned circuit Z503. At the exact center of the IF passband (nominally 10.7 MHz), Z503 is preset to provide a 10.7 MHz quadrature (90° out-of-phase) signal to the detector. The phase of the signal from the tuned circuit changes proportionally with changes in the frequency of the IF signal. With no audio modulation, the inputs of the detector are in quadrature and the outputs of the detector are balanced. No differential signals appear at the outputs of the subtractor stages. When the frequency of the IF signal deviates from


10.7 MHz (as a result of audio modulation or station detuning), the detector outputs are unbalanced and a differential DC signal appears at pin 6.

The muting detector (pin 12) monitors the envelope signal-to-noise ratio across the tuned circuit and feeds the detected noise to the muting amplifier and switch. Excessive noise in the signal generates a control voltage which is amplified and applied to pin 9 of IC601 to force the receiver into monophonic operation and to pin 5 of IC 501 for muting.



Level detectors (pin 13) monitor the IF signal levels at the three amplifier/limiter stages and at the tuned circuit. Each limiter, beginning with the last, saturates progressively as the input level increases. Rectified signals from the level detectors are summed and applied (pin 13) as a linear-log voltage to the Field Strength meter.

As AGC voltage (pin 15) for the RF amplifier is obtained from the first level detector. This AGC voltage is delayed until the IF signal in the first amplifier approaches limiting.

POWER AMPLIFIER SCHEMATIC

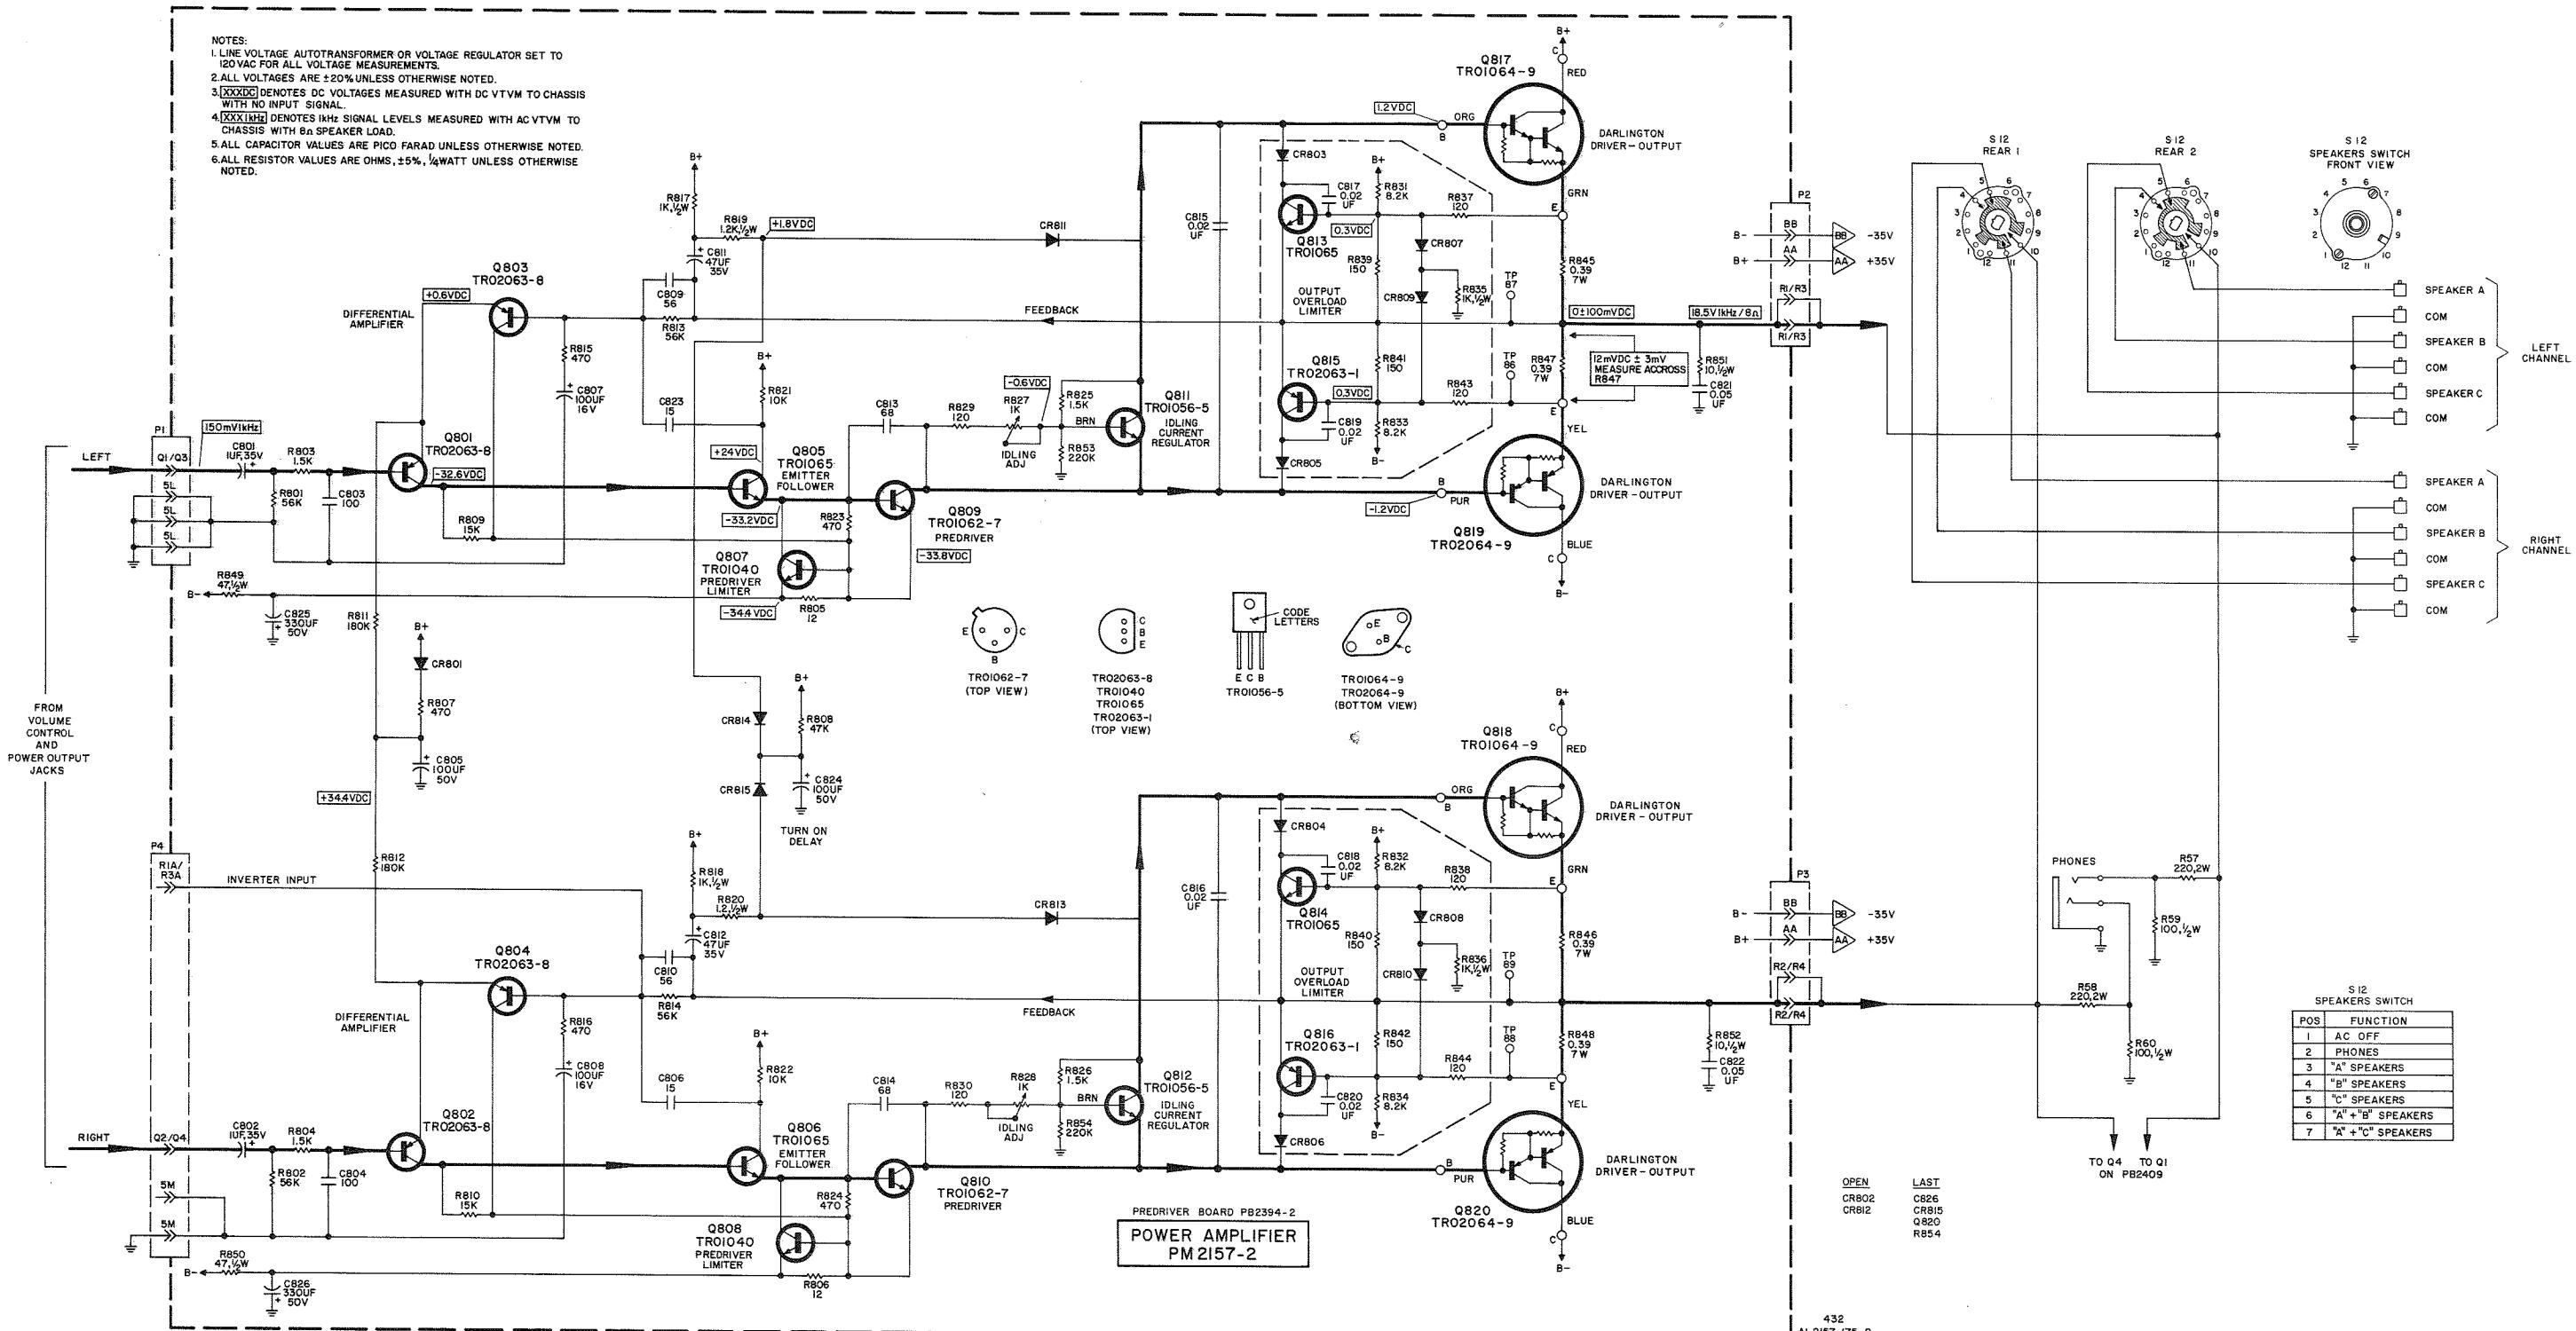

POWER SUPPLY AND SPEAKER PROTECTION SCHEMATIC

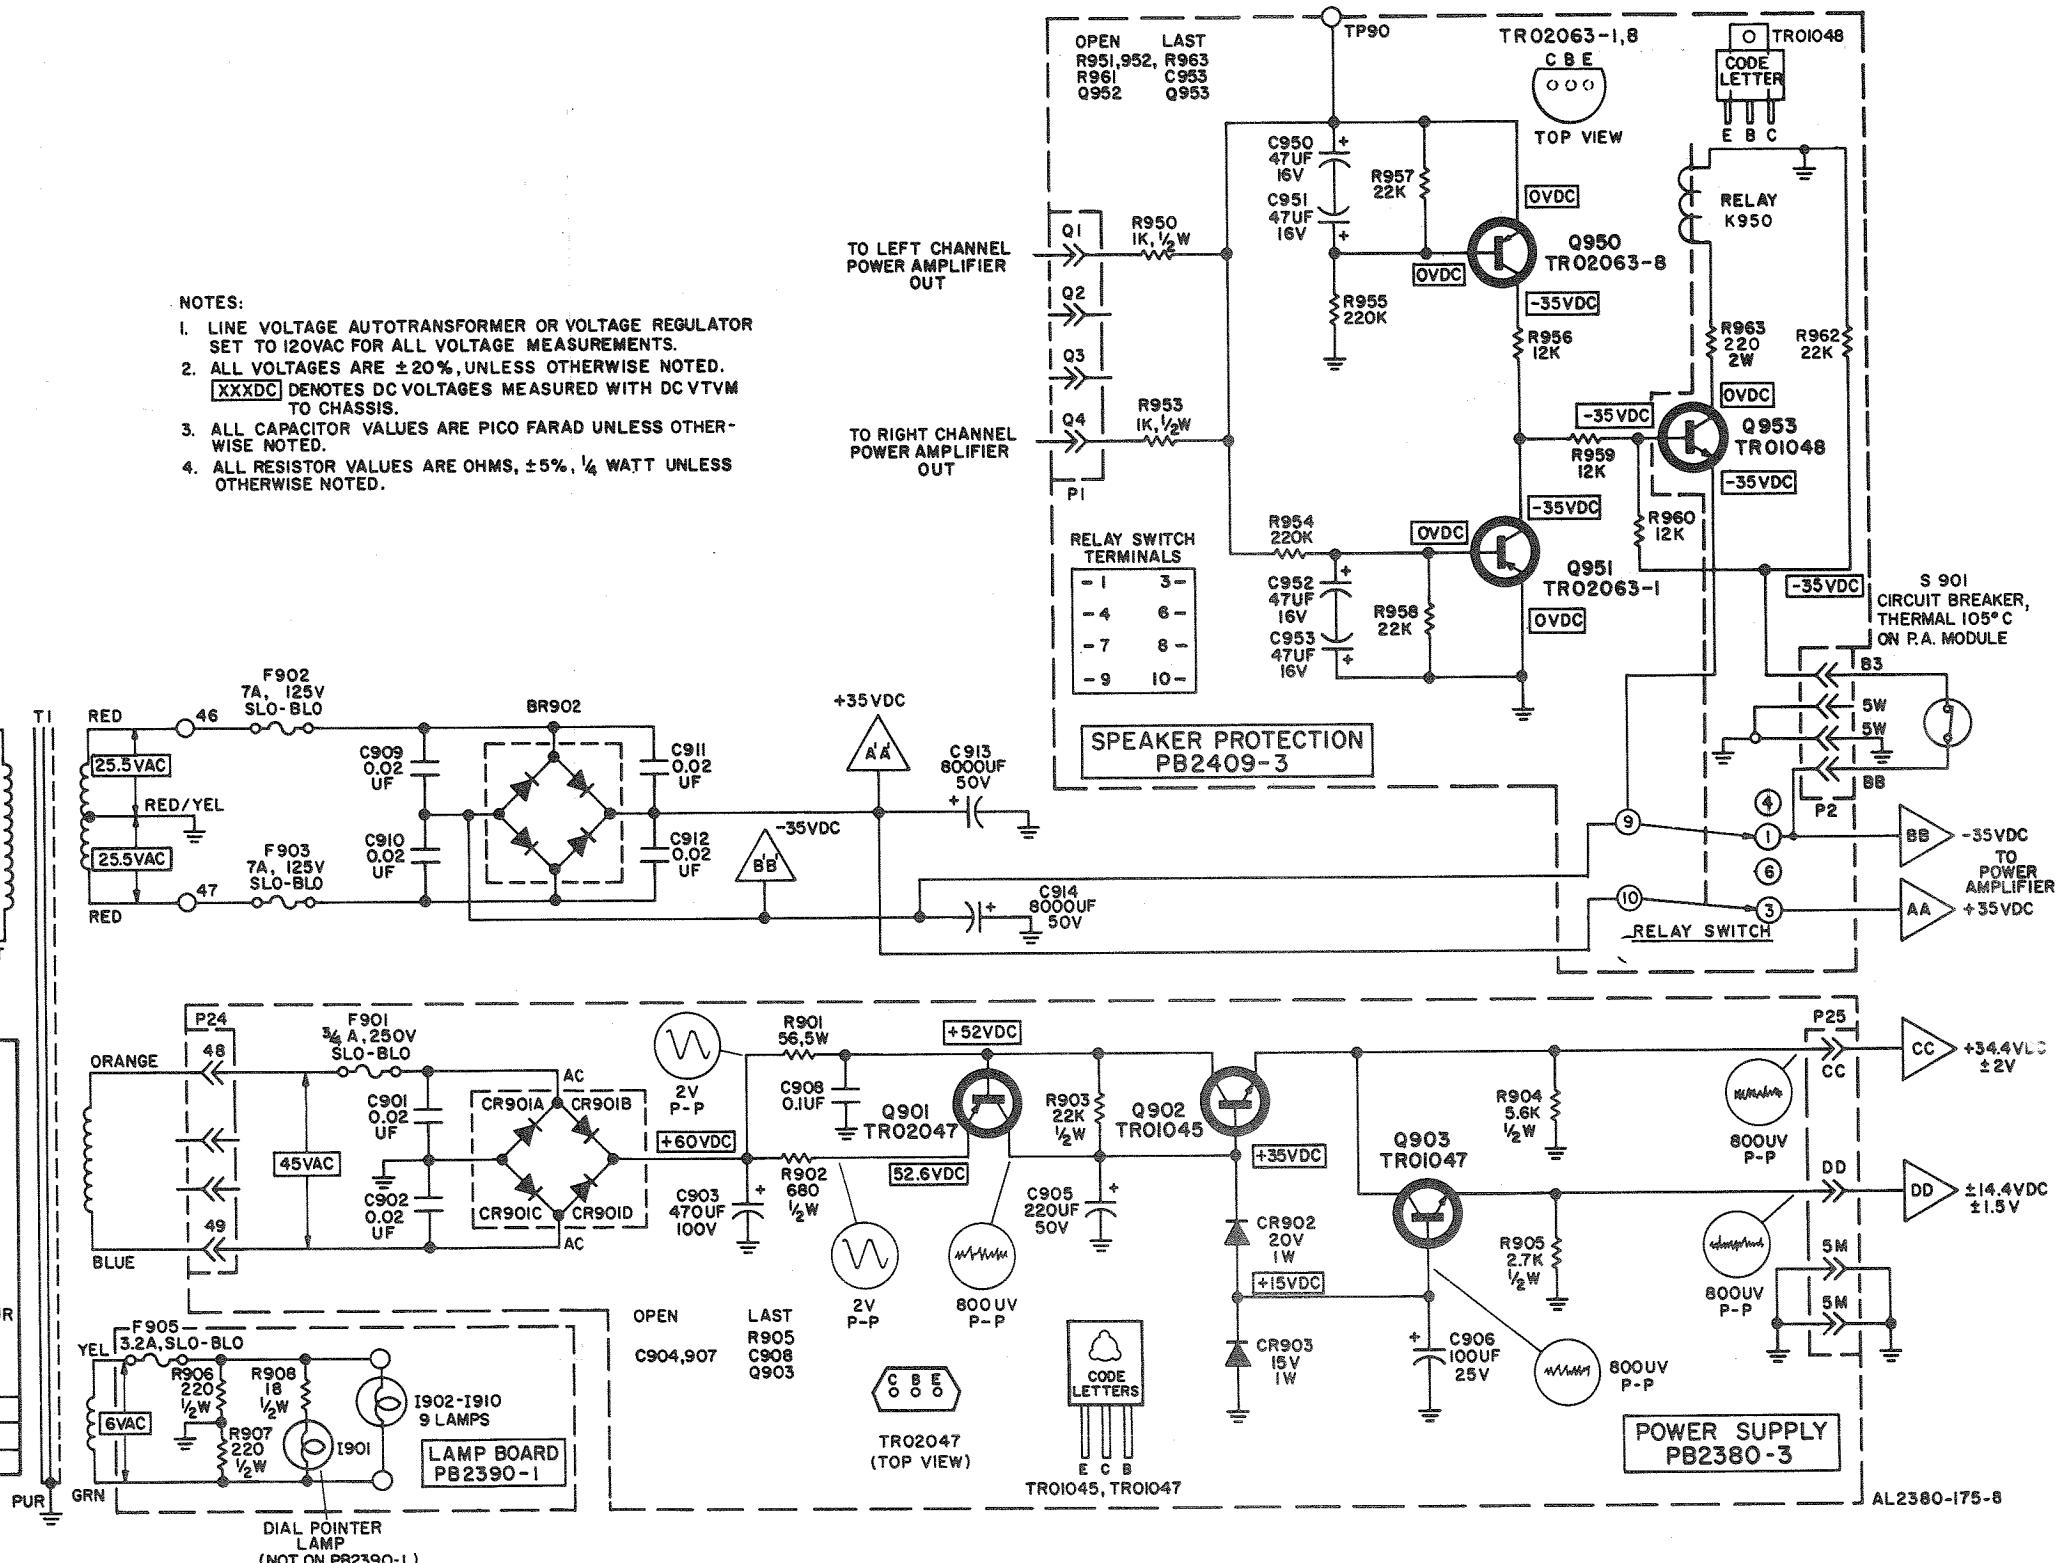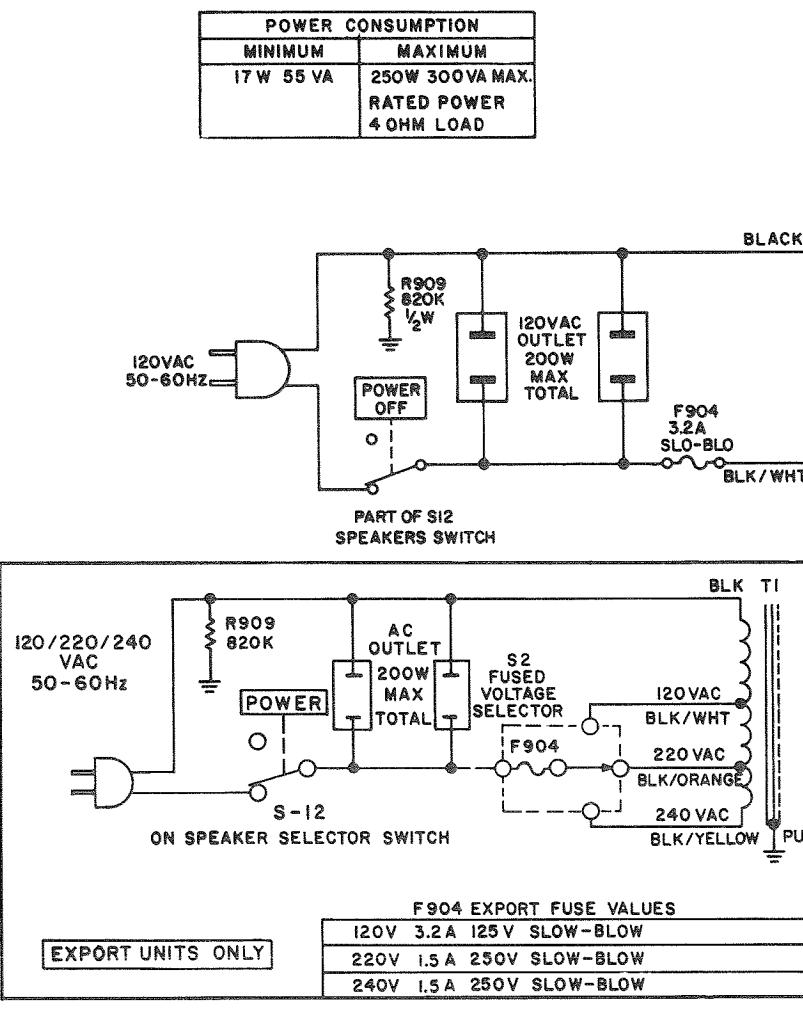

PARTS LIST

CHASSIS

Symbol No.	Part Number	Description
	AB51465	Bracket, Antenna Support
	AS51470	Drive Wheel Assy.
	AS20747	Tuning Shaft Assembly
	EA51408	Fuse Holder
	ET25028-6	Terminal Board, Speakers
	ET51459	Antenna Terminal Strip
	JK20627-5	Jack, Earphone
	JK25009	AC Outlet
	JK25022	15 Jack Connector
	JK25024	4 Jack Connector
	EA51464	Clamp, Antenna
S12	SR4180-128	Speaker Switch
S11	SR4180-133	Selector Switch
T1	TD4180-115	Power Transformer, 110 V
T1	**TE4180-215	Power Transformer, Multivoltage
	**TE4180-215	Power Transformer, Multivoltage
	LA51417-4	AM Antenna
	**EA51449	Multiple Voltage Selector
	LA51417-4	AM Antenna

CABINET

Symbol No.	Part Number	Description
	AS4180-121	Cabinet Assembly
	E51172	Plastic Foot
	EA51406	Grill

MISCELLANEOUS

Symbol No.	Part Number	Description
	AS4180-105	Dress Panel Assembly
	AD23120-3	Dress Panel Extrusion
	AD23126-5	End Strip (Left)
	AD23126-6	End Strip (Right)
	AD23130-2	Insert, Upper
	AD23122-2	Insert, Lower Screened
	AD23124	Window
	AS4180-109-1	Dial Plate
	AM20510	Carriage, Pointer
	AM20511	Housing, Pointer
	AP20508-3	Pointer (Plastic)
I901	LM21442-1	Lamp, Pointer

MISCELLANEOUS

Symbol No.	Part Number	Description
	M1	Meter (Signal Strength)
	M2	Meter (Center of Channel)
	CR603	Light Emitting Diode
	AS25026	Jumper
	BR902	Bridge Rectifier 200V 10A
	C27	Capacitor, Electrolytic 220uF 50V
	C913, 914	Capacitor, Electrolytic 8000uF 50V
	C47, 48, 49,	Capacitor, Ceramic 0.001uF
	50, 51	
	C25, 26	Capacitor, Ceramic 470pF
	C909, 910	Capacitor, Ceramic 0.02uF
	911, 912	
	F904	Fuse 3.2A 125V Slo-Blo
	F904	**Fuse 1.5A 250V Slo-Blo
	F902, 903	Fuse 7A 125V Slo-Blo
	R50, 52	Resistor 1K ohm 1/4W
	R23, 24	Resistor 100K ohm 1/4W
	R19, 20,	Resistor 1.5K ohm 1/4W
	21, 22	
	R25, 26	Resistor 5.6K ohm 1/4W
	R909	Resistor 920K ohm 1/2W
	R59, 60	Resistor 100 ohm 1/2W
	R29	Resistor 2.2K ohm 1/4W
	R57, 58	Resistor 220 ohm 2W
	R49	Resistor 270 ohm 3W
	R55	Volume Control
	PB2303-2	Pre Amp
	PB2380-3	PCB Regulated Power Supply
	PB2390-1	PCB Dial Lamp
	PB2395-4	PCB Lamp Assy.
	PB2394-1	PCB, Pre Driver
	PM2157-2	Power Amplifier Module
	PB2409-3	Speaker Protection Board
	PB2426-1	PCB Tone Control and Mode Selector
	PB2434-1	PCB Tuner
	**PB2435-2	PCB MPX Decoder
	EK20046-4	Knob, Pushbutton
	EK20062-3	Knob, Volume Control
	EK20062-1	Knob, Tuning
	EK20063-1	Knob, Bass/Treble/Balance/Switch

**Export Versions Only

PARTS LIST

Preamplifier PCB PB2303-2			TONE & MODE PCB PB2426-1		
Symbol No.	Part Number	Description	Symbol No.	Part Number	Description
C33	CE22342-16	Capacitor, Electrolytic 220 uF 10V	C109, 110, 119, 120, 123, 124	CE22342-2	Capacitor, Electrolytic 1uF 50V
C41, 42	CK22344-1	Capacitor, Ceramic 5pF	C105	CE22343-33	Capacitor, Electrolytic 470uF 50V
C39, 40	CK22349-2	Capacitor, Ceramic 0.005uF	C121, 122	CK22344-16	Capacitor, Ceramic 21pF
C37, 38	CK22350-1	Capacitor, Ceramic 120pF	C125, 126	CK22347-11	Capacitor, Ceramic 820pF
C43, 44	CK22351-8	Capacitor, Ceramic 0.0015uF	C107, 108	CL22305-2	Capacitor, Tantalum 0.68uF 35V
C29, 30	CK22360-8	Capacitor, Ceramic 33pF	C101, 102	CY22335-13	Capacitor, Mylar 0.027uF
C35, 36	CL22305-12	Capacitor, Tantalum, 10uF 10V	C127, 128	CY22335,20	Capacitor, Mylar 0.22uF
C45, 46	CL22305-4	Capacitor, Tantalum 2.7uF 35V	C115, 116	CY22335-23	Capacitor, Mylar 0.0012uF
C31, 32	CL22306-2	Capacitor, Tantalum 0.68uF 35V	C103, 104, 111, 112, 113, 114	CY22335-2	Capacitor, Mylar 0.015uF
R35, 47, 48	RF25DC103J	Resistor 10K ohm, 1/4W	R133, 134	RC07BF155J	Resistor 1.5M ohm 1/4W
R36	RF25DC104J	Resistor 100K ohm, 1/4W	R109, 110	RC07BF222J	Resistor 2.2K ohm 1/4W
R41, 42	RF25DC105J	Resistor 1M ohm, 1/4W	R103, 104, 117, 118	RF25DC102J	Resistor 1K ohm 1/4W
R33, 34	RF25DC124J	Resistor 120K ohm, 1/4W	R129, 130	RF25DC103J	Resistor 10K ohm 1/4W
R43, 44	RF25DC183J	Resistor 18K ohm, 1/4W	R101, 102, 107, 108	RF25DC105J	Resistor 1Mohm 1/4W
R45, 46	RF25DC563J	Resistor 56K ohm, 1/4W	R143, 144	RF25DC152J	Resistor 1.5K ohm 1/4W
R39, 40	RF25DC821J	Resistor 820 ohm, 1/4W	R115, 116	RF25DC182J	Resistor 1.8K ohm 1/4W
R31, 32, 37, 38	RF25DC823J	Resistor 82K ohm, 1/4W	R121, 122, 125, 126, 127, 128	RF25DC223J	Resistor 22K ohm 1/4W
Q33, 34	TR01015	Transistor NPN	R113, 114	RF25DC274J	Resistor 270K ohm 1/4W
Q31, 32	TR02020-2	Transistor PNP 2N4250	R135, 136	RF25DC392J	Resistor 3.9K ohm 1/4W
Power Supply PCB PB2380-3			R105, 106, 139, 140	RF25DC472J	Resistor 4.7K ohm 1/4W
Symbol No.	Part Number	Description	R111, 112	RF25DC823J	Resistor 82K ohm 1/4W
CR901	BR51400-1	Bridge Rectifier 1.5A 200V	R141	RP50160-327	Balance Control 250K ohm
C906	CE22343-26	Capacitor, Electrolytic 100uF 25V	R123, 131	RP50160-328	Bass/Treble Control 200K ohm
C905	CE22343-28	Capacitor, Electrolytic 220uF 50V	SW8	SP50200-77	Switch, 1 pushbutton
C903	CE22343-44	Capacitor, Electrolytic 470uF 100V	SW1-7	SP50200-85-1	Switch, 7 pushbuttons
C901, 902	CK22359-3	Capacitor, Ceramic 0.02uF	Q101, 102, 103, 104	TR01015	Transistor NPN
C908	CY22373-1	Capacitor, Mylar 0.1uF	R137	RC20BF271J	Resistor 270 ohm 1/2W
F901	FL51313-7	Fuse 1A 250V Slo-Blo	Speaker Protec. PCB PB2409-3		
R903	RF50DC223J	Resistor 22K ohm 1/4W	Symbol No.	Part Number	Description
R905	RF50DC272J	Resistor 2.7K ohm 1/4W	C950, 951, 952, 953	CE22342-8	Capacitor, Electrolytic 47uF 16V
R904	RF50DC562J	Resistor 5.6K ohm 1/4W	R953, 950	R50DC102J	Resistor 1K ohm 1/4W
R902	RF50DC681J	Resistor 680 ohm 1/4W	R956, 959, 960	RF25DC123J	Resistor 12K ohm 1/4W
R901	RW5W560J	Resistor 56 ohm 5W	R957, 958, 962	RF25DC223J	Resistor 22K ohm 1/4W
Q902	TR01045	Transistor NPN	R954, 955	RF25DC224J	Resistor 220K ohm 1/4W
Q903	TR01047	Transistor NPN	R963	RP2W221J	Resistor 220 ohm 2W
Q901	TR02047	Transistor PNP	K950	SK51490	Relay KA11DG, 25VDC
CR903	TR14002-2	Zener Reg 15V 1W	Q953	TR01048	Transistor NPN
CR902	TR14002-4	Zener Reg 20V 1W	Q951	TR02063-1	Transistor SPS 945 MK
Dial Lamp PCB PB2390-1			Q950	TR02063-8	Transistor
Symbol No.	Part Number	Description			
F905	FL51313-14	Fuse 3.2A 125V Slo-Blo Pig Tail			
I902-910	LM21421-6	Lamp 2112D (GE only)			
R908	RC20BF180K	Resistor 18 ohm 1/2W			
R906, 907	RC20BF221K	Resistor 220 ohm 1/2W			

PARTS LIST

POWER AMPLIFIER MODULE PM2157-2

PB2394-1		
Symbol No.	Part Number	Description
C801, 802	CL22305-3	Capacitor, Tantalum 1uF, 35V
C803, 804	CK22351-1	Capacitor, Ceramic 100pF
C805, 824	CE22342-9	Capacitor, Electrolytic 100uF, 50V
C806, 823	CK22344-9	Capacitor, Ceramic 15pF
C807, 808	CE22342-12	Capacitor, Electrolytic 100uF, 16V
C809, 810	CK22360-16	Capacitor, Ceramic 56pF
C811, 812	CE22342-7	Capacitor, Electrolytic 47uF, 35V
C813, 814	CK22344-26	Capacitor, Ceramic 68pF
C815, 816,	CK22354-2	Capacitor, Ceramic 0.02uF, 50V
817, 818,		
819, 820		
C821, 822	CK22362-14	Capacitor, Ceramic 0.05uF
C825, 826	CE22342-27	Capacitor, Electrolytic 330uF, 50V
CR801, 803,	TR13006-3	Silicon Diode
804, 805,		
806, 807,		
808, 809,		
810, 813,		
814, 815,		
816		
R801, 802	RF25DC563J	Resistor, 56K ohm 1/4W
813, 814		
R803, 804,	RF25DC152J	Resistor, 15K ohm 1/4W
825, 826		
R805, 806	RF25DC120J	Resistor, 12 ohm 1/4W
R807, 815,	RF25DC471J	Resistor, 470 ohm 1/4W
816, 823,		
824		
R808	RF25DC473J	Resistor, 47K ohm 1/4W
R809, 810	RF25DC153J	
R811, 812	RF25DC184J	Resistor, 180K ohm 1/4W
R817, 818,	RF50DC102J	Resistor, 1K ohm 1/4W
835, 836		
R919, 920	RC20BF122J	Resistor, 1.2K ohm 1/4W
R821, 822	RF25DC103J	Resistor, 10K ohm 1/4W
R827, 828	R50150-20-2	Resistor, Variable 1K
R831, 832,	RF25DC822J	Resistor, 8.2K ohm 1/4W
833, 834		
R837, 838,	RF25DC121J	Resistor, 120 ohm 1/4W
843, 844		
R839, 840	RF25DC151J	Resistor, 150 ohm 1/4W
841, 842		
R845, 846	RF7WR39J	Resistor, 0.39 ohm 7W
847, 848		
R849, 850	RF50DC470J	Resistor, 47K ohm 1/4W
R851, 852	RC20BF100K	Resistor, 10 ohm 1/4W
R853, 854	RF25DC224J	Resistor, 220K ohm 1/4W
Q801, 802,	TR02063-8	Transistor, PNP
803, 804		
Q805, 806,	TR01065	Transistor, NPN
813, 814		
Q807, 808	TR01040	Transistor, NPN
Q809, 810	TR01062-7	Transistor, NPN
Q811, 812	TR01056-5	Transistor, NPN
Q817, 818	TR01064-9	Transistor, Darlington Driver, Output, NPN
Q819, 820	TR02064-9	Transistor, Darlington Driver, Output, PNP
S901	SM51486	Circuit Breaker, Thermal 105° C.

MPX Decoder PCB PB2435-1 & 2*

Symbol No.	Part Number	Description
C604	CA22313-1	Capacitor, Mica 470pF
C608	CE22342-12	Capacitor, Electrolytic 100uF 16V
C617, 618	CE22342-2	Capacitor, Electrolytic 1uF 50V
C602	CE22342-3	Capacitor, Electrolytic 4.7uF 50V
C601	CK22347-22	Capacitor, Ceramic 4700pF
C620	CK22354-1	Capacitor, Ceramic 0.01uF
C606	CS22340-4	Capacitor, Sintered Alum. 0.47uF 25V
C607, 622	CY22335-20	Capacitor, Mylar 0.22uF
C603, 610,	CY22335-2	Capacitor, Mylar 0.015uF
611, 613,		
615		
C621	CY22335-5	Capacitor, Mylar 0.05uF
R625	RC20BF511J	Resistor, 510 ohm 1/4W
R601, 612	RF25DC102J	Resistor, 1K ohm 1/4W
R608	RF25DC103J	Resistor, 10K ohm 1/4W
R626	RF25DC124J	Resistor, 120K ohm 1/4W
R609, 610	RF25DC153J	Resistor, 15K ohm 1/4W
R617	RF25DC181J	Resistor, 180 ohm 1/4W
R616	RF25DC223J	Resistor, 22K ohm 1/4W
R604	RF25DC224J	Resistor, 220K ohm 1/4W
R622, 623	RF25DC562J	Resistor, 5.6K ohm 1/4W
R618, 619	RF25DC332J	Resistor, 3.3K ohm 1/4W
R603, 620,	RF25DC472J	Resistor, 4.7K ohm 1/4W
621		
R611	RV50150-23-7	Resistor, Variable 10K ohm
IC601	TR09027	Integrated Circuit, Multiplex
CR601, 602	TR13006-2	Diode, Silicon
Z601	ZZ50210-190	Filter, 15kHz Dual
S601	SS50200-30	Slide Switch **

*Multiplex Decoder PB2435-2 is used in Export Receivers with multivoltage Power Transformers.

** - 2 ONLY

PCB LAMP ASSY. PB2395-4

Symbol No.	Part Number	Description
I11, 12, 13	LM21421-7	Lamp 2187D (GE only)

PARTS LIST

Tuner PCB PB2434-1

Tuner PCB PB2434-1

Symbol No.	Part Number	Description	Symbol No.	Part Number	Description
C518 C308, 314, 319, 539, 543	C50938-5 CE22342-2	Capacitor, Trimmer 1-6pF Capacitor, Electrolytic 1uF 50V	R510 R316, 333, 508	RF25DC121J RF25DC122J	Resistor 120 ohm 1/4W Resistor 1.2K ohm 1/4W
C529, 535, 545	CE22342-3	Capacitor, Electrolytic 4.7uF 50V	R537	RF25DC124J	Resistor 120K ohm 1/4W
C312, 321, 327	CE22342-4	Capacitor, Electrolytic 10uF 50V	R509 R303, 305, 312, 315, 513	RF25DC151J RF25DC152J	Resistor 150 ohm 1/4W Resistor 1.5K ohm 1/4W
C317, 329	CE22342-6	Capacitor, Electrolytic 22uF 35V	R313 R503, 518, 535	RF25DC153J RF25DC154J	Resistor 15K ohm 1/4W Resistor 150K ohm 1/4W
C313, 316, 325, 537	CE22342-8	Capacitor, Electrolytic 47uF 16V	R552	RF25DC155J	Resistor 1.5M ohm 1/4W
C302	CK22344-22	Capacitor, Ceramic 39pF	R546	RF25DC163J	Resistor 16K ohm 1/4W
C510, 513	CK22344-2	Capacitor, Ceramic 15pF N750	R314, 321	RF25DC220J	Resistor 22 ohm 1/4W
C306	CK22344-34	Capacitor, Ceramic 8pF N1500	R505, 512	RF25DC221J	Resistor 220 ohm 1/4W
C514	CK22344-5	Capacitor, Ceramic 8pF NPO	R309, 506	RF25DC222J	Resistor 2.2K ohm 1/4W
C330, 501, 517	CK22344-7	Capacitor, Ceramic 12pF N470	R539, 540	RF25DC223J	Resistor 22K ohm 1/4W
C520	CK22345-15	Capacitor, Ceramic 21pF	R502, 520, 545	RF25DC224J	Resistor 220K ohm 1/4W
C305, 508	CK22346-3	Capacitor, Ceramic 2pF	R319, 529, 531	RF25DC272J	Resistor 2.7K ohm 1/4W
C504, 527, 534	CK22350-12	Capacitor, Ceramic 1000pF	R329	RF25DC273J	Resistor 27K ohm 1/4W
C536	CK22350-2	Capacitor, Ceramic 150pF	R528	RF25DC274J	Resistor 270K ohm 1/4W
C307	CK22350-5	Capacitor, Ceramic 270pF	R525, 532	RF25DC332J	Resistor 3.3K ohm 1/4W
C320, 326	CK22350-9	Capacitor, Ceramic 560pF	R301	RF25DC334J	Resistor 330K ohm 1/4W
C502, 506, 507, 511, 512, 515, 519, 523, 526, 528, 531, 544	CK22354-1	Capacitor, Ceramic 0.01uF	R320, 507	RF25DC392J	Resistor 3.9K ohm 1/4W
C309, 311, 521, 522, 525, 532	CK22354-2	Capacitor, Ceramic 0.02uF	R542	RF25DC393J	Resistor 39K ohm 1/4W
C322, 524, 533, 546	CK22354-3	Capacitor, Ceramic 0.1uF	R317, 323, 327, 516, 517, 522, 551	RF25DC471J	Resistor 470 ohm 1/4W
C318, 323	CP22375-4	Capacitor, Polystyrene 2200pF	R304, 311, 511,	RF25DC472J	Resistor 4.7K ohm 1/4W
C530	CT22336-11	Capacitor, Tubular 4pF N3300	R514	RF25DC562J	Resistor 5.6K ohm 1/4W
C505	CV21018	Capacitor, Variable	R308	RF25DC5R6J	Resistor 5.6 ohm 1/4W
C314	CY22335-12	Capacitor, Mylar 0.022uF	R302, 302A	RF25DC680J	Resistor 68 ohm 1/4W
C332	CY22335-18	Capacitor, Mylar 0.1uF	R536	RF25DC681J	Resistor 680 ohm 1/4W
C328	CY22335-1	Capacitor, Mylar 0.01uF	R306, 307	RF25DC682J	Resistor 6.8K ohm 1/4W
L505	L50848-18	Choke, R.F. 22uH	R533	RF25DC683J	Resistor 68K ohm 1/4W
L301, 506	LC21814-2	Choke, R.F. 3.3uH	R326, 328, 515	RF25DC821J	Resistor 820 ohm 1/4W
L501	LC21822-2	Choke, R.F. 1.2uH	R318	RF25DC822J	Resistor 8.2K ohm 1/4W
Z501	LC21832	Coil, FM Antenna	R553	RF25DC823J	Resistor 82K ohm 1/4W
L504	LC21833-1	Coil, FM Oscillator	Q303, 305, 505, 506, 509, 510	TR01014	Transistor, NPN BC239C
L503	LC21833-2	Coil, FM Mixer	O301, 302	TR01027	Transistor, A494/BF194
L502	LC21833-5	Coil, FM RF	Q504	TR01073	Transistor, BF198
R331, 504, 524, 543, 544	RF25DC101J	Resistor 100 ohm 1/4W	Q304	TR01074	Transistor, BF199
R310, 322, 325, 549	RF25DC102J	Resistor 1K ohm 1/4W	Q502	TR02012	Transistor, SP871
R332, 501, 521, 526, 527, 538, 541, 547, 548	RF25DC103J	Resistor 10K ohm 1/4W	Q507, 508	TR02020-2	Transistor, 2N4250
R324, 330, 519, 523, 534, 530, 550	RF25DC104J	Resistor 100K ohm 1/4W	Q503	TR06014	Transistor, FET
			Q501	TR08004	Transistor, MOS FET
			IC501	TR09018	Integrated Circuit FM-IF
					Monolithic System
					Diode, Germanium AA119
			CR301, 501	TR12001-4	Diode, Silicon
			CR302, 502 503, 504	TR13006-2	
			CF501	ZK22110	Ceramic Filter, 10.7 MHz
			Z502	ZZ50210-146	Transformer, FM-IF
			Z303	ZZ50210-156	Transformer, AM-IF
			Z304	ZZ50210-159	Transformer, AM-IF
			Z302	ZZ50210-161	Transformer, AM-IF
			Z503	ZZ50210-180	Transformer, FM-IF
			Z301	ZZ50210-181	Coil, AM Oscillator

ALIGNMENT

ALIGNMENT

ALIGNMENT

FM TUNER ALIGNMENT

FM ALIGNMENT – SELECTOR switch to FM, MUTING OFF pushbutton depressed, STEREO pushbutton depressed, VOLUME control to minimum.

Maintain generator output as low as possible for suitable indications.

ITEM	GENERATOR	DIAL SETTING	INDICATOR	PROCEDURE
NOTE: The FM IF circuit utilizes a non-tunable ceramic filter which establishes the IF bandpass. To insure symmetrical tuning and selectivity, the IF must be aligned precisely to the center of the filter bandpass, rather than to 10.7 MHz as in conventional LC circuits.				
1. IF ALIGNMENT	Connect 10.7 MHz Sweep Generator to pin 63, ground to pin 5Y. Markers are not required. Set generator output to -12dB (250mV).	Position of non-interference. Connect jumper from pin 26 to pin 5V on Tuner board.	Scope vertical input to pin 57, ground to pin 5Z. Set vertical sensitivity to 0.5V/cm.	Adjust Z502 top and bottom slugs for maximum gain and best symmetry. See figure for FM IF ALIGNMENT.
2. PRELIMINARY DETECTOR ALIGNMENT	Generator connections same as above. Adjust for S-curve display. Set generator output to -20dB. (100mV)	Position of non-interference.	Scope vertical input to pin 58.	Adjust Z503 top slug for maximum gain and best linearity. Adjust Z503 bottom slug for minimum gain and best linearity. See figure for FM DETECTOR ALIGNMENT. NOTE: Harmonic Distortion test must be performed as part of detector alignment. Remove jumper from between pins 26 and 5V on Tuner board.
NOTE: Connect 120-ohm composition resistors in series with each lead from the RF generator to match the 50-ohm output to the 300-ohm input impedance. Generator output voltage is reduced to one-half at antenna terminals. Signal voltages specified in this table are generator output levels, <i>not</i> antenna voltages.				
3. FRONT END ALIGNMENT		Tuning knob fully counterclockwise.		Center dial pointer on "0" and cement.
4.	Connect FM generator to FM ANTenna terminals through 120-ohm resistors. Set to 90 MHz. Adjust output for approximately 2 on Field Strength meter.	Center of 90 MHz calibration mark on dial.	Front panel Field Strength meter (M1).	Adjust L504, L503, L502, and Z501 for maximum deflection on Field Strength meter. Reduce generator output to keep Field Strength meter indication at approximately 2.
5.	Set to 106 MHz.	Center of 106 MHz calibration mark on dial.	Same as above.	Adjust C518, C540, C509 and C503 for maximum deflection on Field Strength meter (M1). Reduce generator output to keep Field Strength meter indication at approximately 2. Repeat steps 4 and 5 for optimum alignment.

FM TUNER ALIGNMENT

– continued –

ITEM	GENERATOR	DIAL SETTING	INDICATOR	PROCEDURE
6. FINAL DETECTOR ALIGNMENT (MINIMUM THD)	Set generator to receiver frequency. Modulate with 400 Hz ±75 kHz deviation. Connect generator to FM ANT terminals.	Tune receiver to position of non-interference.	Scope, AC VTVM & Distortion Analyzer to LEFT TAPE 1 OUT. DC VTVM to pins 74 & 75. (Remove jumper between the pins 74 & 75 on TUNER BOARD.)	Reduce generator output for noise to be visible on sine wave. Readjust generator frequency to center noise on positive and negative half cycles. See figure for SYMMETRICAL TUNING. NOTE: Do not change generator or receiver tuning; proceed with item 7.
7.	Same as above. Increase generator output to 2 mV.	Same as above.		Adjust Z503 top slug for zero indication on DC VTVM. Adjust Z503 bottom slug for minimum THD (0.2% typically). Restore jumper between pins 74 & 75.
8A. MPX OSC. ADJUSTMENT (ON MPX DECODER)	Same as above with output of 2 mV.	Same as above.	Connect frequency counter to pin 72.	Adjust R611 on MPX PCB for 19kHz ± 100 Hz indication on counter.
8B. ALTERNATE MPX OSC. ADJUSTMENT (ON MPX DECODER)	Same as above.	Same as above.	Scope vertical input to pin 72. Scope horizontal input to MPX generator 19 kHz pilot output.	Adjust R611 for a stable Lissajou display as shown on figure for MPX OSC ADJUSTMENT (19kHz).


AM TUNER ALIGNMENT

AM ALIGNMENT – BASS, TREBLE and BALANCE controls to center positions, SPEAKERS switch to PHONES position, SELECTOR switch to AM position, and VOLUME to MIN.

Maintain generator output as low as possible for suitable indications.


ITEM	GENERATOR	AM DIAL SETTING	INDICATOR	PROCEDURE
1. IF ALIGNMENT	455 kHz sweep generator to pin 70, ground to pin 5Y. Use 0.1 uF capacitor in series with generator lead.	Position of non-interference near 1400 kHz.	Scope vertical input to pin 61 ground to pin 5U. Set vertical sensitivity to 0.2 V/cm.	Connect a jumper between pin 67 and pin 5Z. Adjust Z302, Z303, and Z304 top and bottoms slugs for maximum gain and best symmetry. Keep signal low enough for noise on response as shown in figure. Disconnect jumper after completion of AM IF Alignment.
2. FRONT END ALIGNMENT	AM generator to EXT AM ANT and GND terminals. Open GND link. Set to 600 kHz. Modulate with 400 Hz; 30% modulation.	Center of 600 kHz calibration mark on dial.	Front panel Field Strength meter (M1).	Adjust Z301 and L300 (antenna) for maximum Field Strength meter indication. Reduce generator output to keep meter reading below 3.
3.	Set to 1400 kHz.	Center of 1400 kHz calibration mark on dial.	Front panel Field Strength meter (M1).	Adjust C303 and C304 for maximum deflection. Keep meter reading below 3. Repeat steps 2 and 3 until optimum alignment is reached.

MULTIPLEX DECODER BOARD LAYOUT

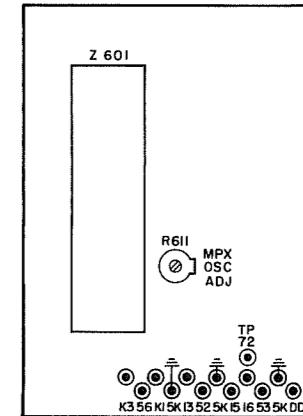


AL2435-177

FM-AM TUNER BOARD LAYOUT

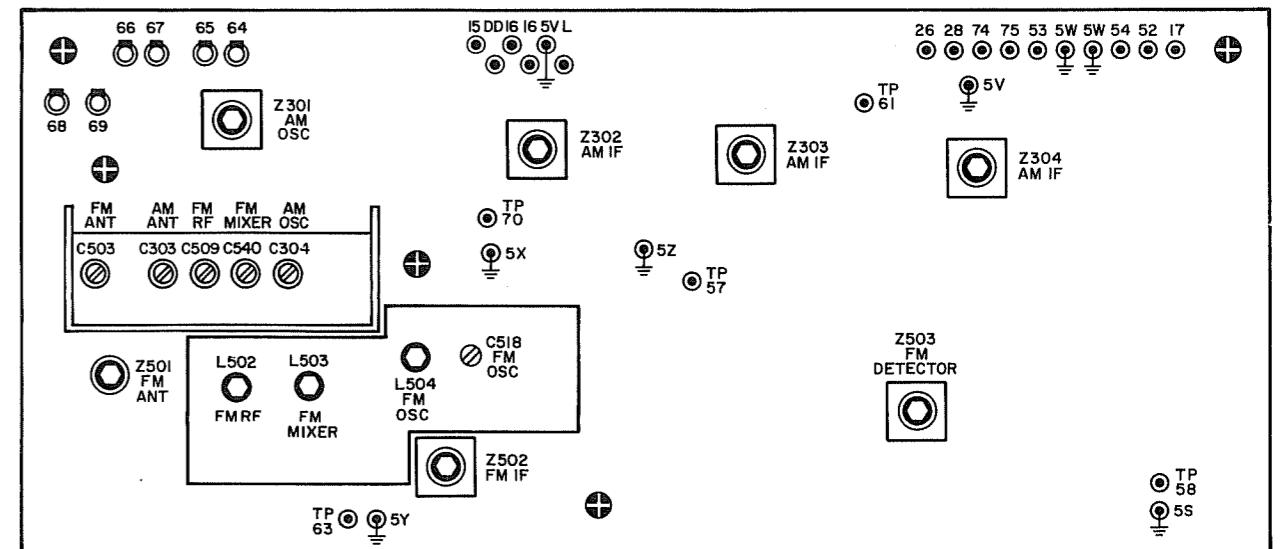


NOTE: CHASSIS GROUNDS ARE COMPLETED THROUGH MOUNTING SCREWS (+). TIGHTEN BEFORE ATTEMPTING ALIGNMENT.

AL2434-177

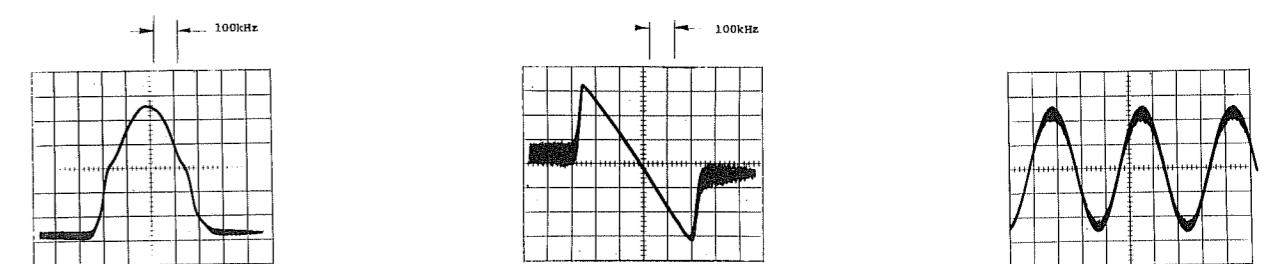


FM IF ALIGNMENT FM DETECTOR ALIGNMENT

SYMMETRICAL TUNING




MPX OSC ADJUSTMENT





AM IF ALIGNMENT

FM - AM TUNER SCHEMATIC

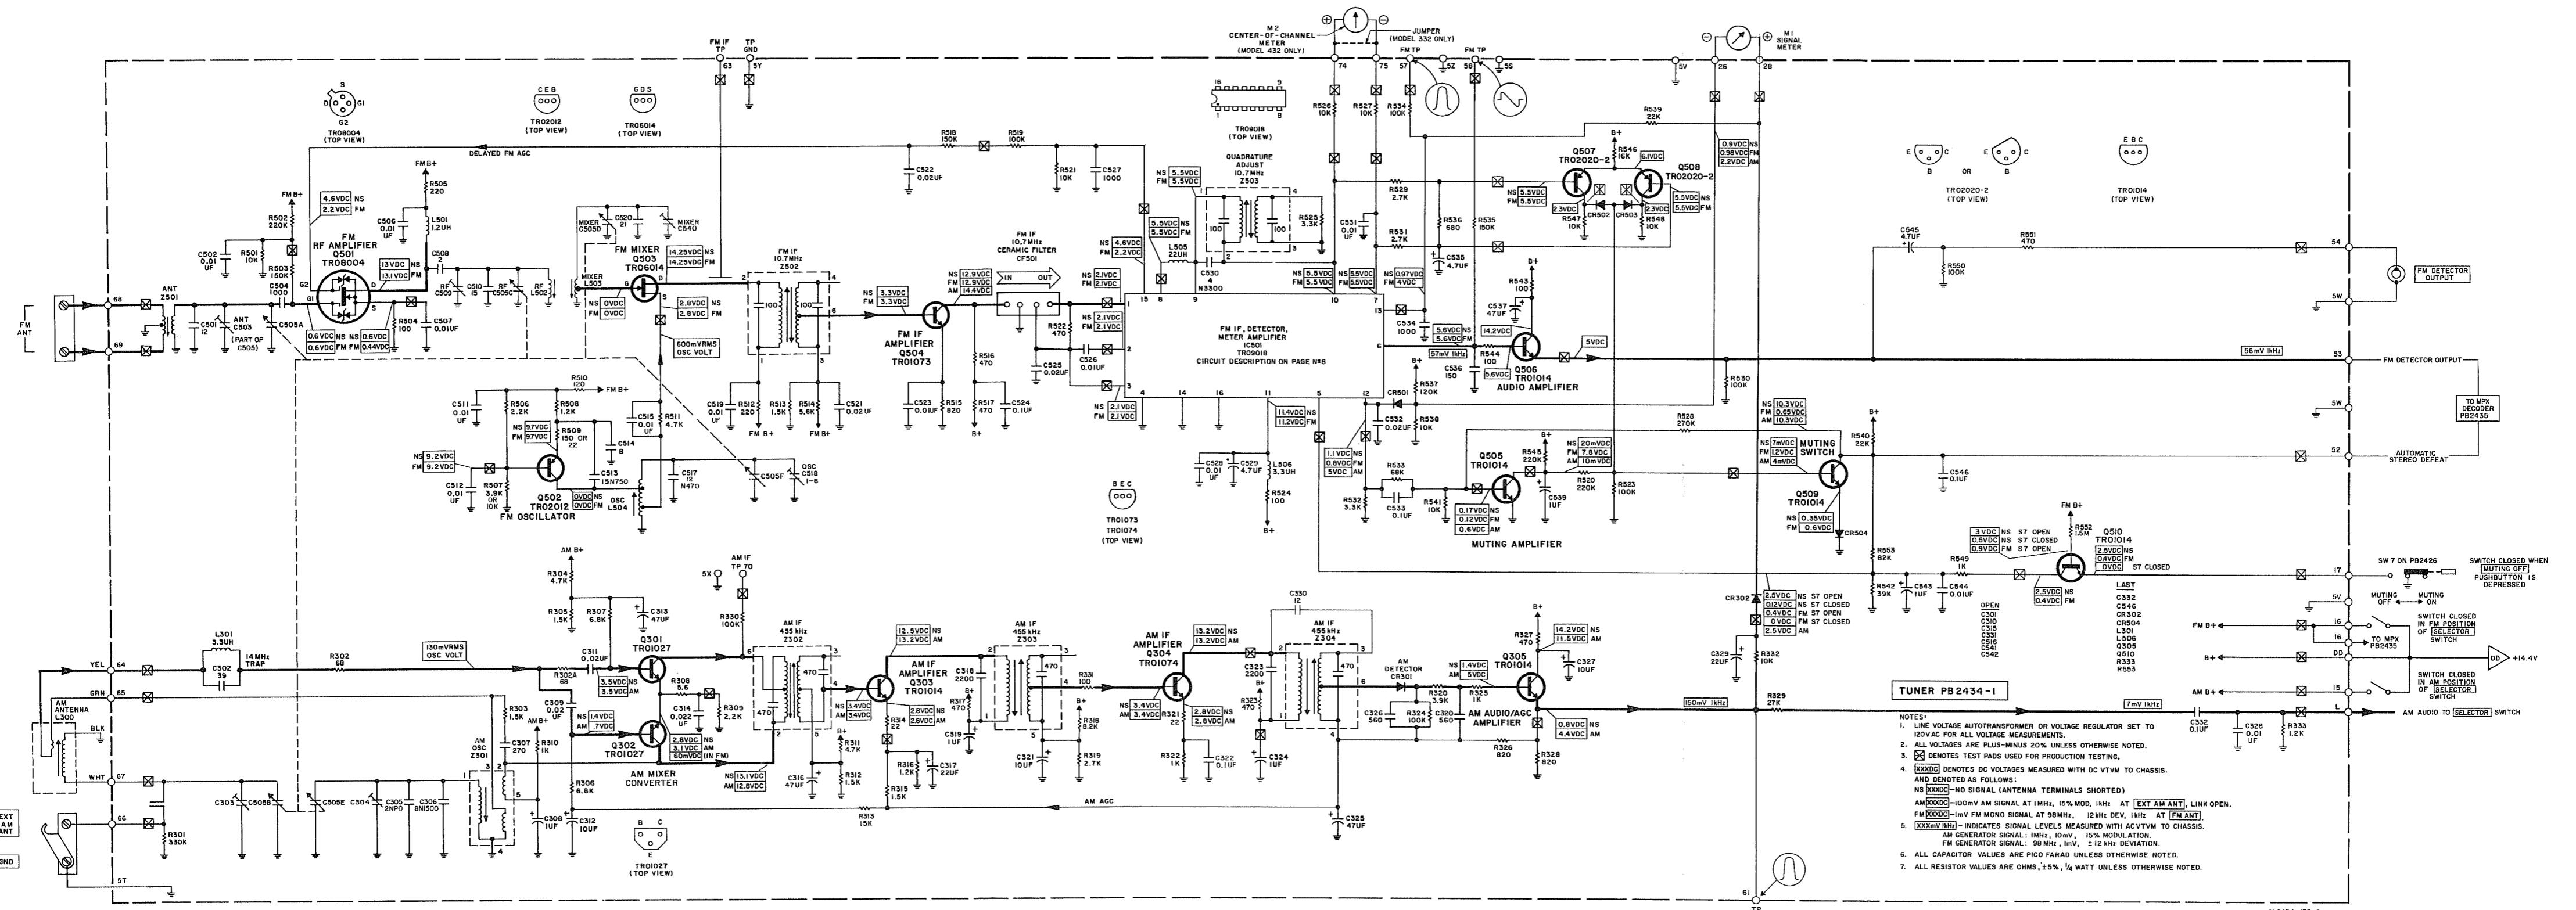

SELECTOR SWITCH AND PREAMPLIFIER SCHEMATIC

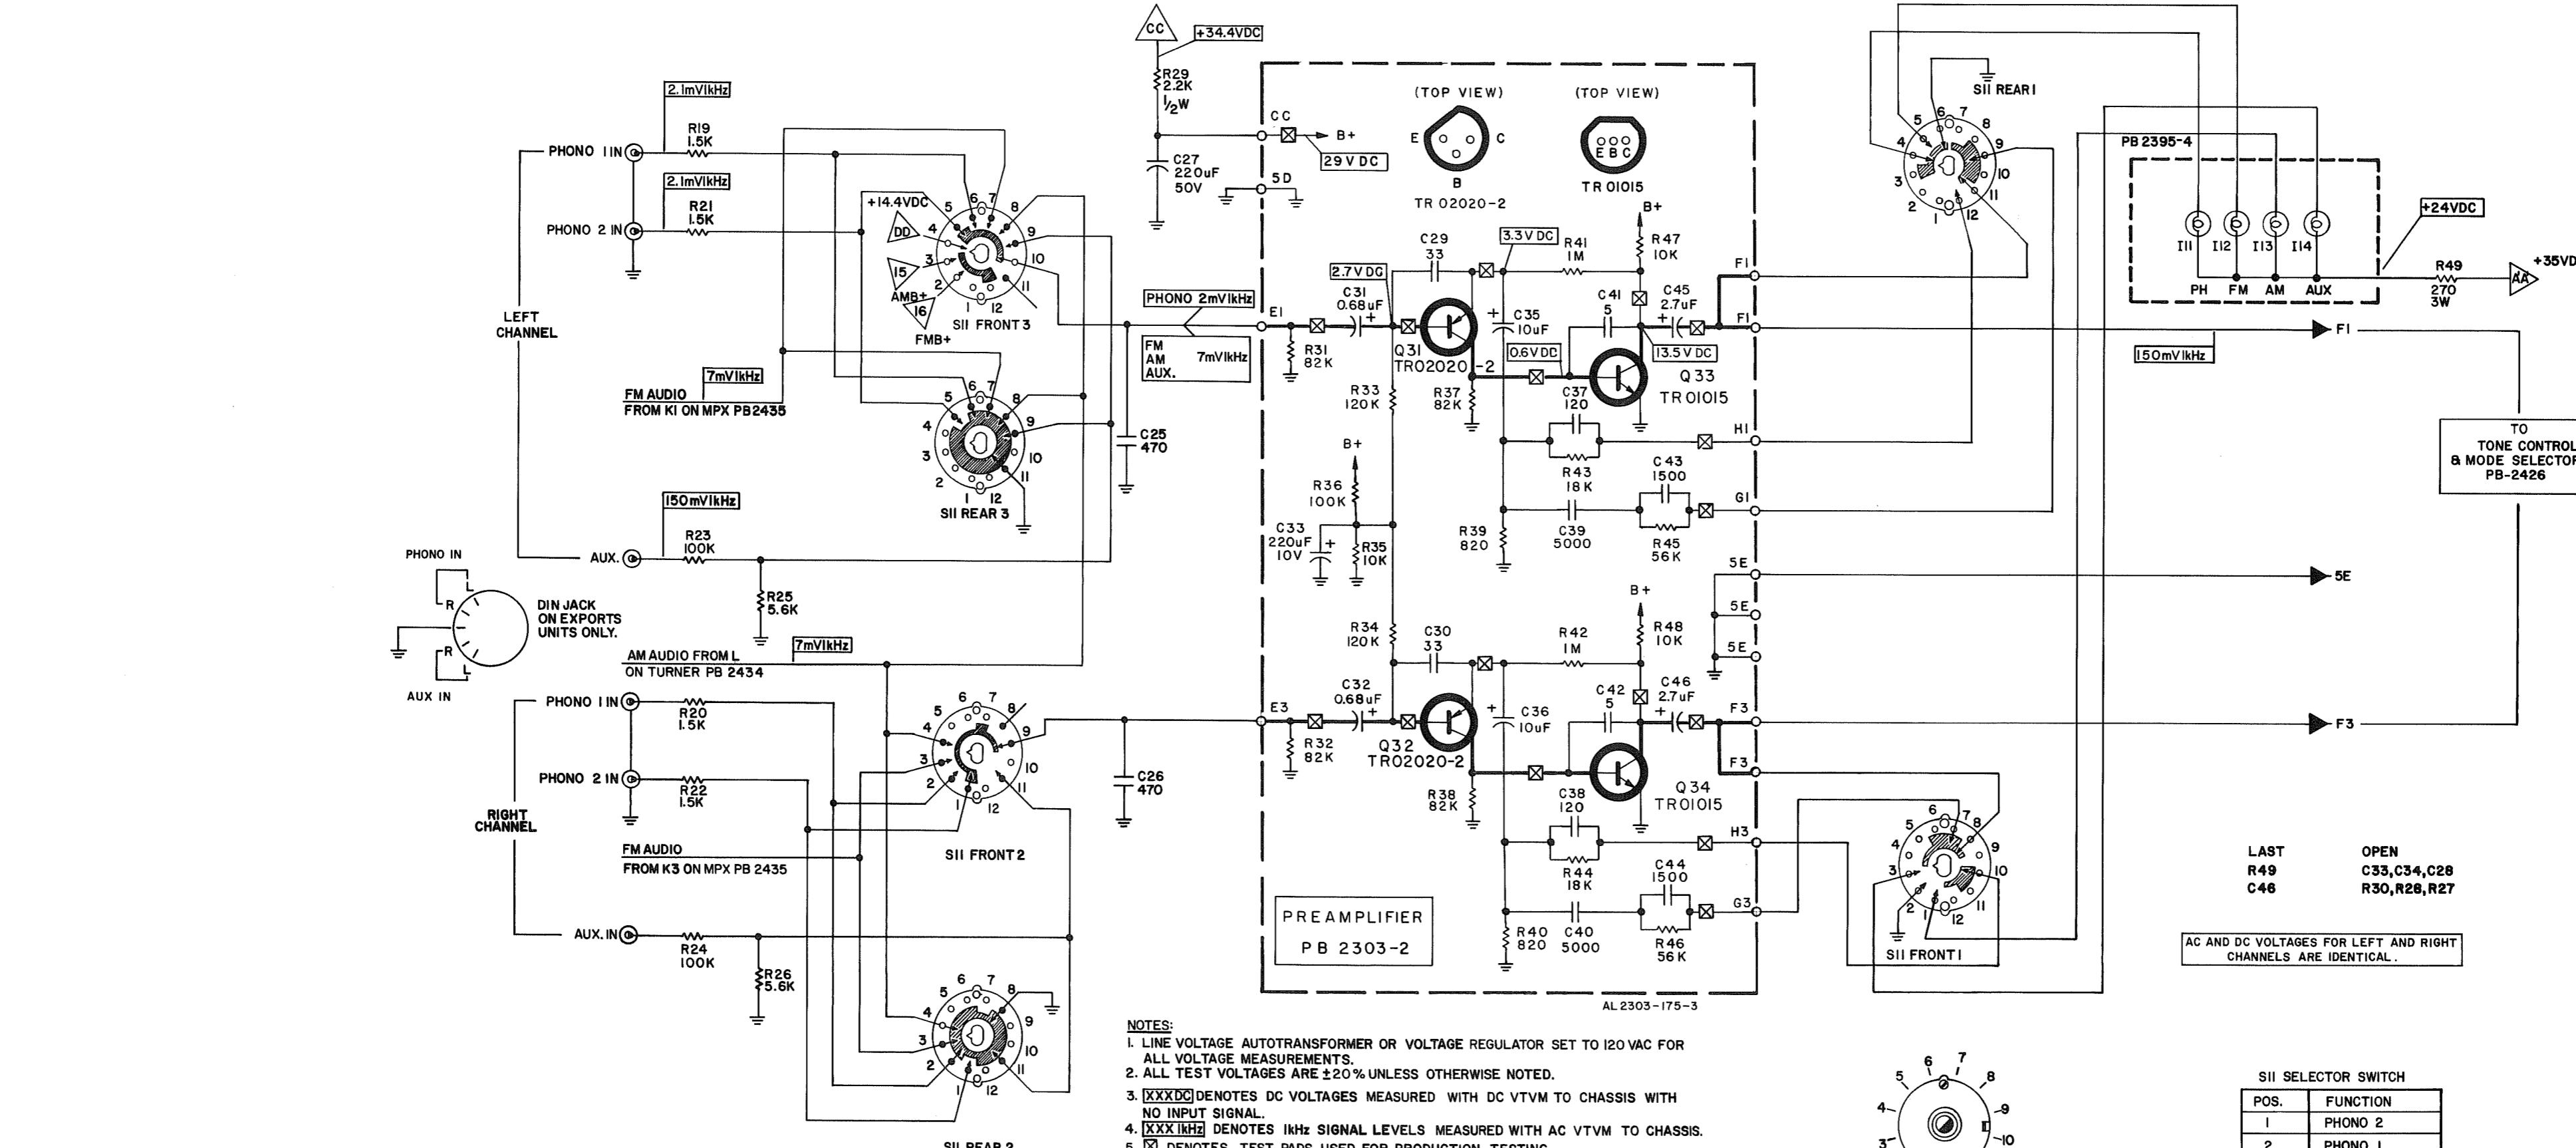


SII SELECTOR SWITCH	
POS.	FUNCTION
1	PHONO 2
2	PHONO 1
3	FM
4	AM
5	AUX.


LAST
OPEN
C33,C34,C28
R49
C46
R30,R28,R27

AC AND DC VOLTAGES FOR LEFT AND RIGHT CHANNELS ARE IDENTICAL.

TONE CONTROL AND MODE SELECTOR SCHEMATIC

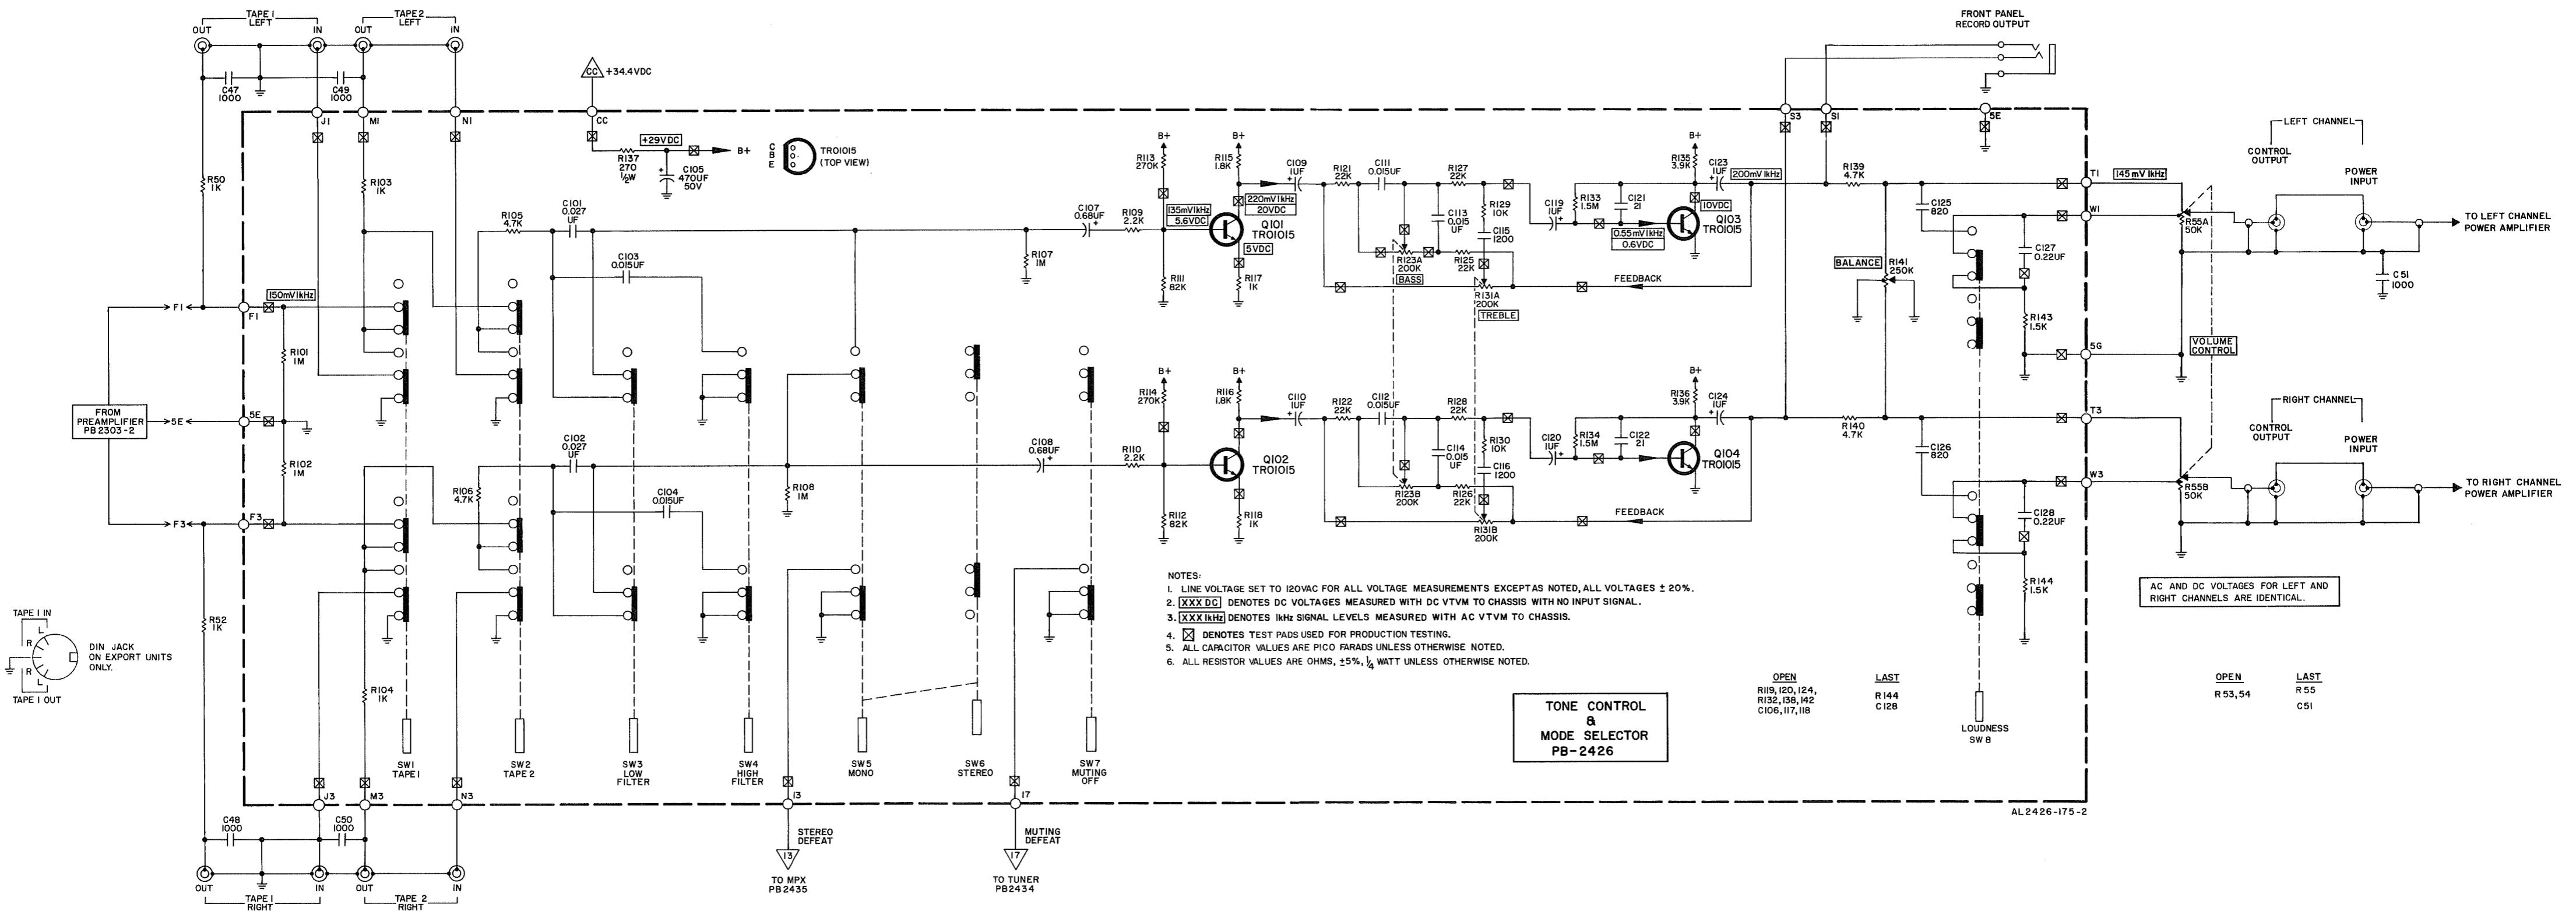

NOTES

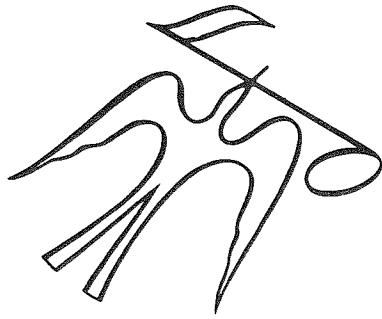

FISHER RADIO • 11-40 45th ROAD • LONG ISLAND CITY • NEW YORK 11101