

## SERVICE MANUAL



# FISHER

# CA-276

**Integrated  
Stereo Amplifier  
(EUROPE)**




132 284 40

## CONTENTS

Functional Block Diagram .....	2
Specifications .....	3
Circuit Description .....	4,5
Parametric Equalizer Controls Response .....	5
Recommended Test Equipments .....	6
Harmonic Distortion Test .....	6
Power Amp. Adjustment .....	7
IC Equivalent Circuit & Block Diagram .....	7,8,9
Cabinet & Chassis Exploded View (1) .....	10
Cabinet & Chassis Exploded View (2) .....	11
Cabinet & Chassis Parts List .....	12,13
P.C.B.Assy Parts List .....	14,15,16,17,18,19,20
Printed Circuit Board (Bottom View) .....	21,22,23,24,25,26,27,28
Point to Point Wiring Diagram .....	29,30
Schematic Diagram .....	31,32
Semiconductor Lead Identification .....	33

## FUNCTIONAL BLOCK DIAGRAM

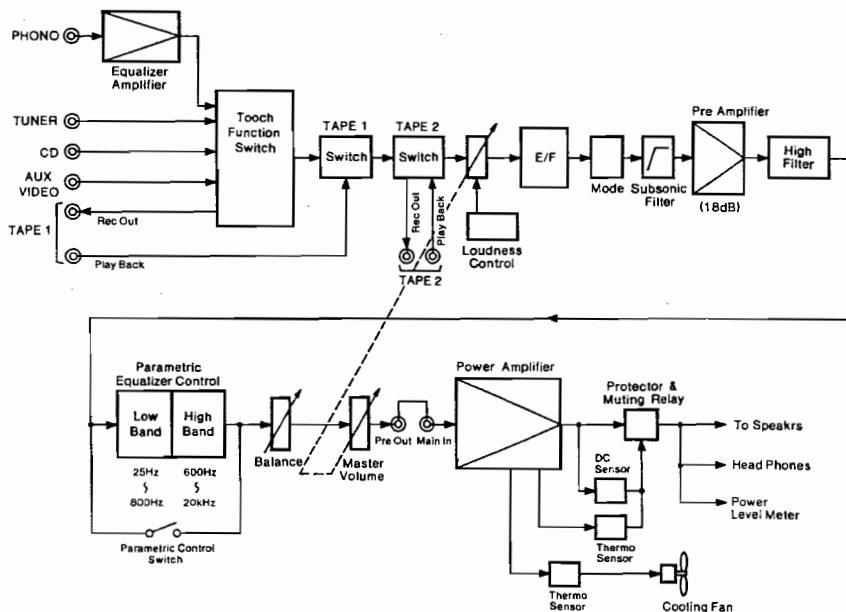

## SPECIFICATIONS

AMPLIFIER	CA-276
<b>POWER AMPLIFIER SECTION</b>	
Minimum RMS sine wave power per channel within stated bandwidth at no more than stated distortion and with 8-ohm load	150 Watts
<b>Power Bandwidth</b>	20 Hz – 20 kHz
<b>Total Harmonic Distortion</b>	0.009 %
I.M. Distortion	0.009 %
Speaker Damping	> 20
<b>PREAMPLIFIER SECTION</b>	
Frequency Response	
Phono (RIAA)	±0.2 dB
Aux (20 Hz – 20 kHz)	±0.2 dB
Input Sensitivity and Impedance	
Phono	2.5 mV/50 kΩ
Tape Monitor 1, 2	150 mV/50 kΩ
Tuner	150 mV/50 kΩ
CD/Aux/Video	150 mV/50 kΩ
Phono Max. Input Capability	200 mV
Parametric Equalizer	
25 Hz – 800 Hz	±12 dB
600 Hz – 20 kHz	±12 dB
High Filter (Above 10 kHz)	-6 dB/Oct.
Subsonic Filter (Below 10 Hz)	-12 dB/Oct.
Loudness Contour (100 Hz/10 kHz)	+8 dB/+4 dB
Hum & Noise (IHF Short Circuit, A Network)	
Phono	75 dB
Tape Monitor 1, 2	100 dB
Tuner	100 dB
CD/Aux/Video	100 dB
<b>GENERAL</b>	
Power Requirements (50 Hz)	110 / 220 V AC
Power Consumption	850 Watts
Dimensions (W x D x H)	440 x 292 x 140 mm
Weight (approx.)	12.4 kg

Because its products are subject to continuous improvement, Fisher Corporation reserves the right to modify product designs and specifications without notice and without incurring any obligation.


## CIRCUIT DESCRIPTION

### COMPOSITION OF POWER AMPLIFIER

The DC coupling of the input became possible with the differential FET amplifier used in the first stage and the distortion was reduced from the second stage to the final one in the complementary push-pull configuration.

The second stage is composed of the differential complementary push-pull, the third stage the cascade complementary push-pull, the output stage the triple Darlington push-pull, and the final stage is especially composed of the parabolic push to allow the output of 150W.

### Power Amplifier Block Diagram

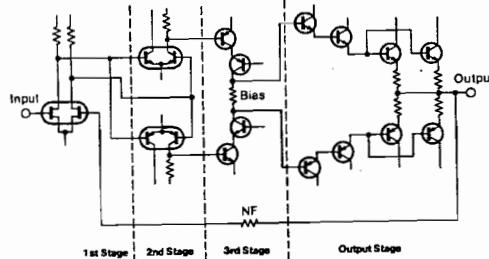

FTC Power 150W x 2 (Distortion 0.009%)

### FORCED COOLING SYSTEM

The forced cooling system is adopted as a heat radiation system of the 150W amplifier and the AC motor having low noise is used as a fan motor. The fan does not rotate continuously. It starts rotating when the thermosensor, connected thermally at the vicinity of the output-stage transistor, detects the temperature 85°C – 90°C of the power transistor. When the temperature of the heat radiation plate drops below 85°C, the fan stops rotating.

If the temperature does not reach the detectable range due to small output, the fan does not start rotating.

### PROTECTION CIRCUIT


If the fan cooling system does not function by any possibility and the temperature of the power transistor rises to about 125°C, another thermosensor starts functioning, so that the relay in the output circuit is set off and the speakers are disconnected from the amplifier.

Therefore, this double protection system secures the power amplifier against damages.

When DC voltage of more than ±2V is generated at the output terminal of the power amplifier, the power relay works to disconnect the speakers from the amplifier to protect them.

The ASO protector is also built in the unit to protect the ASO of the power transistor. This protector works very effectively to protect the transistor because it controls the current against the phase rotation such as capacitance and inductance loads, etc., the overvoltage, and the loaded short-circuit current.


### Protection System Block Diagram

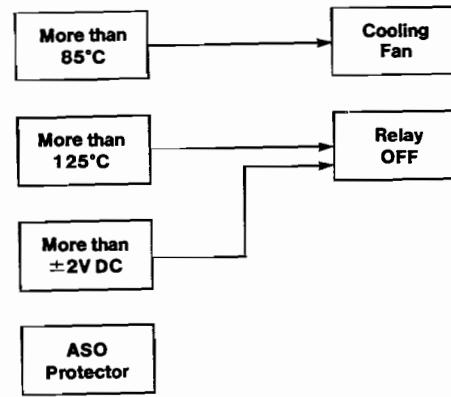

### PHONO EQUALIZER CIRCUIT

The differential FET amplifier having low noise is used in the first stage and it makes possible the DC coupling from the Player cartridge. It is also shown as an effect of the FET circuit that the amplifier has excellent capability to exclude the external power source.

### Phono Equalizer Block Diagram

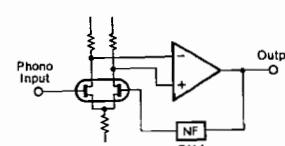

### AUTO FUNCTION & SYNCHRO RECORDING

When the amplifier CA-276 is used in combination with the optionally available tuner FM-276, turntable MT-750, double cassette deck CR-W80 and compact disc player AD-844, the auto function and synchro (simultaneous) recording can be used to full advantage.

### AUTO FUNCTION:

To operate...

- For radio reception:  
Press the desired preset station button on tuner.

## CIRCUIT DESCRIPTION (Continued)

### PARAMETRIC EQUALIZER CONTROLS

This unit is equipped with a sophisticated PARAMETRIC EQUALIZER that allows precision control over 3 audio parameters – center frequency, frequency band width and boost/cut level – while maintaining high sound quality. Use the PARAMETRIC EQUALIZER controls to compensate for adverse room acoustics, to reduce noise from noisy music sources, to create new sounds, or simply to adjust and maintain the ideal response of the entire playback system.

The center frequency is continuously variable from 25Hz to 800Hz for the LOW BAND, and from 600Hz to 20kHz for the HIGH BAND.


The frequency band width is adjustable from narrow to wide, while the boost/cut level can be adjusted up to ±12dB for both bands.

All 3 parameters are independently adjustable for even greater control over the system's frequency response.

### Power Indication

The adoption of the wide display made indication of power more accurate than ever and the selection switch (200W/2W) made possible the visible indication of power at low sound intensity.

## PARAMETRIC EQUALIZER CONTROLS RESPONSE

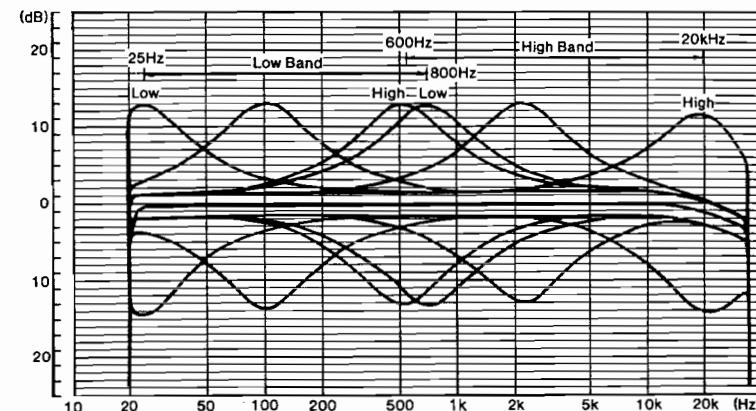

## RECOMMENDED TEST EQUIPMENTS

The following test equipments are recommended to completely test and align the Amplifier:

- Line Voltage Isolation Transformer
- AC DC Multimeter
- Accurately Calibrated AC Voltmeter
- Oscilloscope (Flat to 100 kHz Minimum)
- Low-Distortion Audio Sine-Wave Generator
- Harmonic Distortion Analyzer
- Two (2) Load Resistors 8-ohms, 250 Watts (Minimum Rating)

## HARMONIC DISTORTION TEST

**CAUTION:** Limit the following tests to no more than ten minutes each. Use 8-ohm resistors, with a minimum power rating of 250 watts when connecting a load across the SPEAKERS terminal.

### CONTROL SETTINGS:

- Unplug the AC power cord and set the front panel controls as follows:
- POWER switch to OFF
  - SPEAKER switch to OFF
  - PARAMETRIC EQUALIZER switch to DEFEAT
  - METER RANGE switch to 200W position
  - TAPE MONITOR switch to SOURCE
  - FUNCTION switch to AUX
  - HIGH FILTER switch to OFF
  - SUBSONIC FILTER switch to OFF
  - MODE switch to STEREO
  - LOUDNESS switch to OFF
  - VOLUME control to MINIMUM position
  - LEFT CHANNEL DRIVEN

### ONE CHANNEL DRIVEN:

- 1) Connect a low distortion audio generator to LEFT AUX IN jack. Set generator frequency to 1 kHz and output to minimum.
- 2) Connect an 8-ohm load resistor between SPEAKERS SYSTEM-A LEFT and COM terminals. Connect a Harmonic Distortion Analyzer and an AC VTVM in parallel across the 8-ohm load.
- 3) Connect the AC power cord and set SPEAKERS switch to ON position. Turn VOLUME control to slowly to maximum.
- 4) Increase generator output for 150 Watts RMS (34.8 volts across the 8-ohm load). Harmonic Distortion Analyzer should measure 0.009 % distortion or less.
- 5) Repeat steps 1 through 4 for RIGHT CHANNEL.

### BOTH CHANNELS DRIVEN

Connect 8-ohm load resistors across LEFT and RIGHT SPEAKERS SYSTEM-A terminals. Adjust generator output and "VOLUME" control for 150 watts at Left and Right Channels (34.8 volts across the 8-ohm loads). Harmonic Distortion Analyzer should measure 0.009 % distortion or less at each channel.

**CAUTION:** This precision high-fidelity instrument should be serviced only by qualified personnel, trained in the repair of transistor equipment and printed circuitry.

## POWER AMPLIFIER ADJUSTMENT

### BEFORE ADJUSTMENT

This adjustment is very sensitive to changes in ambient temperature. Allow set to operate for 10 minutes before attempting this adjustment, and IDLING CURRENT ADJUSTMENT VR02 setting to mechanical center position.

### CENTER VOLTAGE ADJUSTMENT

#### LEFT AMPLIFIER

1. Set the SPEAKERS switch to the OFF position.
2. Turn the MASTER VOLUME control to minimum.
3. Connect the DC VTVM between Pin No.21 on the FUSE P.C. Board, and Pin No.1 on the Power Amplifier P.C. Board.
4. Adjust the VR01 for an indication of 0V DC ( $\pm 3\text{mV}$ ).

#### RIGHT AMPLIFIER

Repeat steps 3 and 4 for RIGHT channels.

### IDLING CURRENT ADJUSTMENT

#### LEFT AMPLIFIER


1. Set the SPEAKERS switch to the OFF position.
2. Turn the MASTER VOLUME control to minimum.
3. Connect the DC VTVM between Pins No.1 and No.3 on the Power Amplifier P.C. Board.
4. Adjust the VR02 for an indication of 3mV on the DC VTVM.




#### RIGHT AMPLIFIER

Repeat steps 3 and 4 for RIGHT Channels.





## IC EQUIVALENT CIRCUIT & BLOCK DIAGRAM

### POWER LEVEL METER DRIVE IC BA 6146


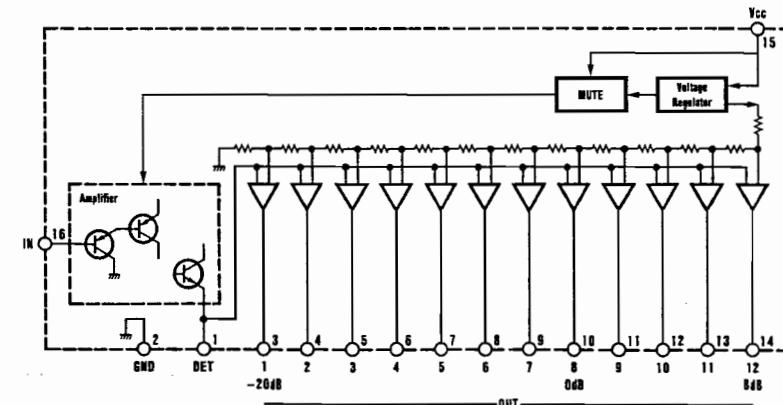


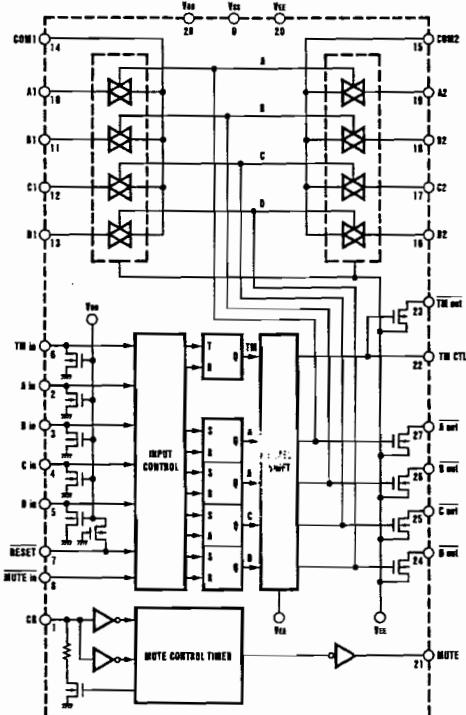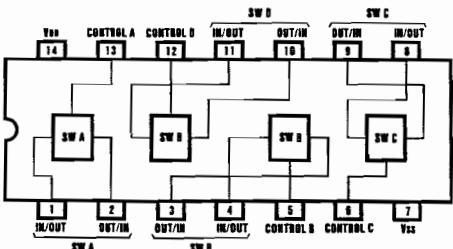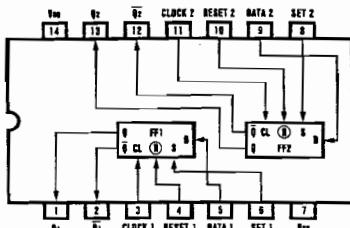**IC EQUIVALENT CIRCUIT & BLOCK DIAGRAM (Continued)****ANALOG FUNCTION SWITCH IC LC 7817****QUAD BILATERAL SWITCH IC LC 4966****DUAL D - TYPE FLIP - FLOP IC LC 4013 B**

- 8 -

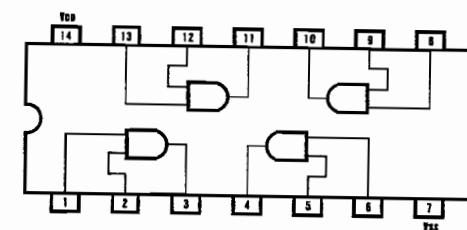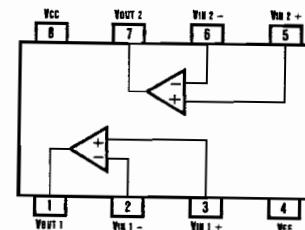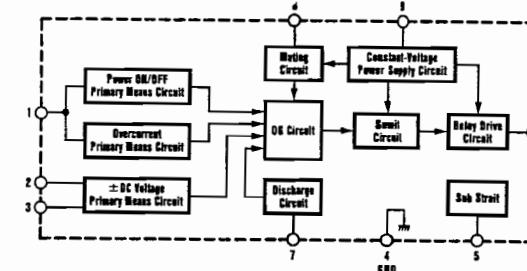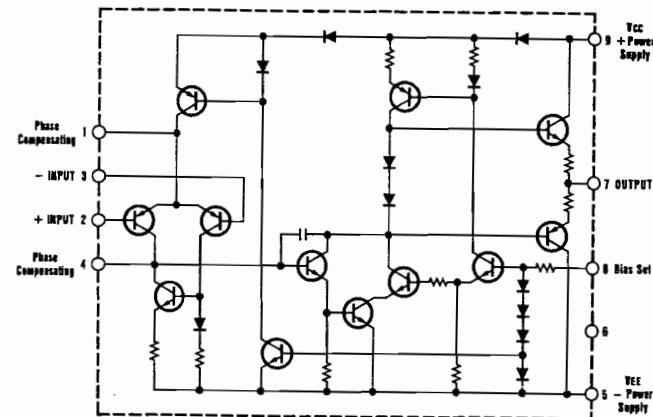**IC EQUIVALENT CIRCUIT & BLOCK DIAGRAM (Continued)****PHONO EQUALIZER AMP IC NJM 4560 DX****QUAD 2 - INPUT AND GATE IC LC 4081 B****SPEAKER PROTECTOR IC TA 7317 P****PRE AMPLIFIER IC TA 7322 P**

- 9 -

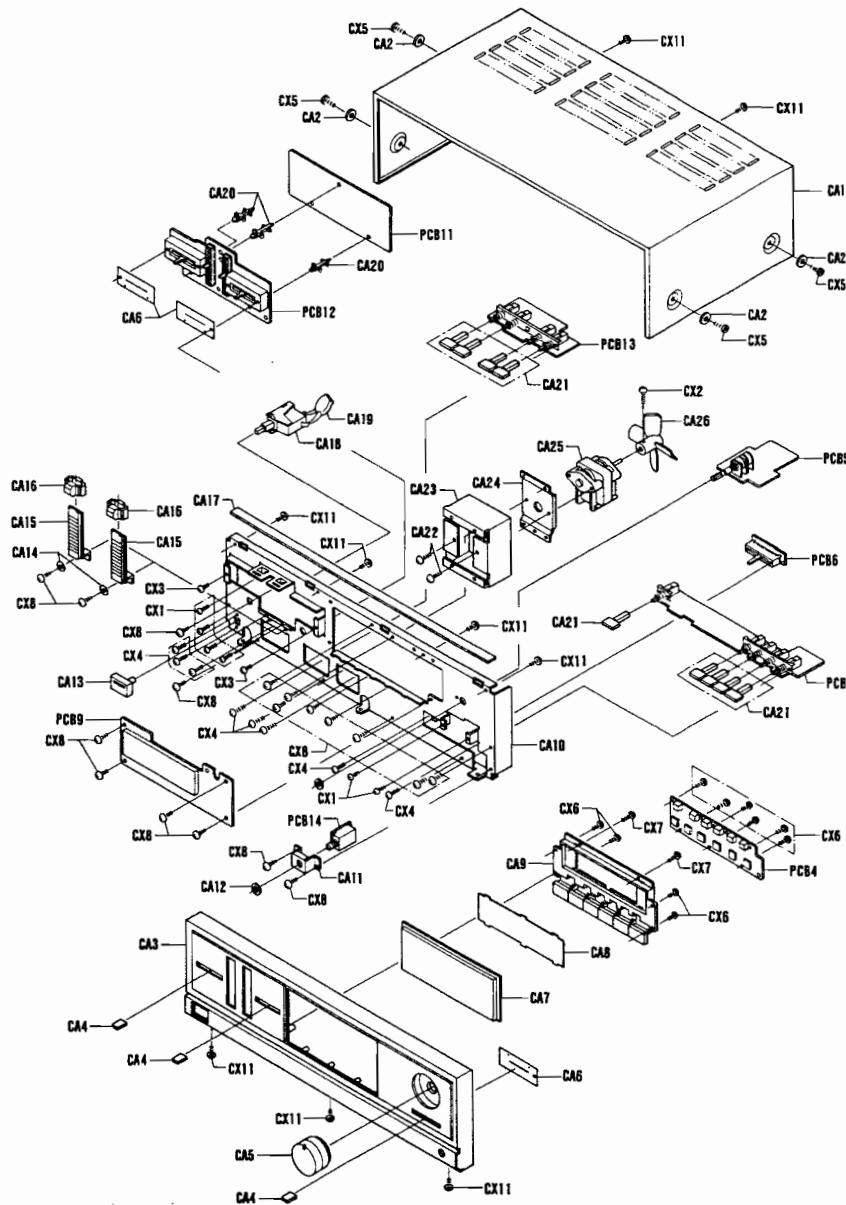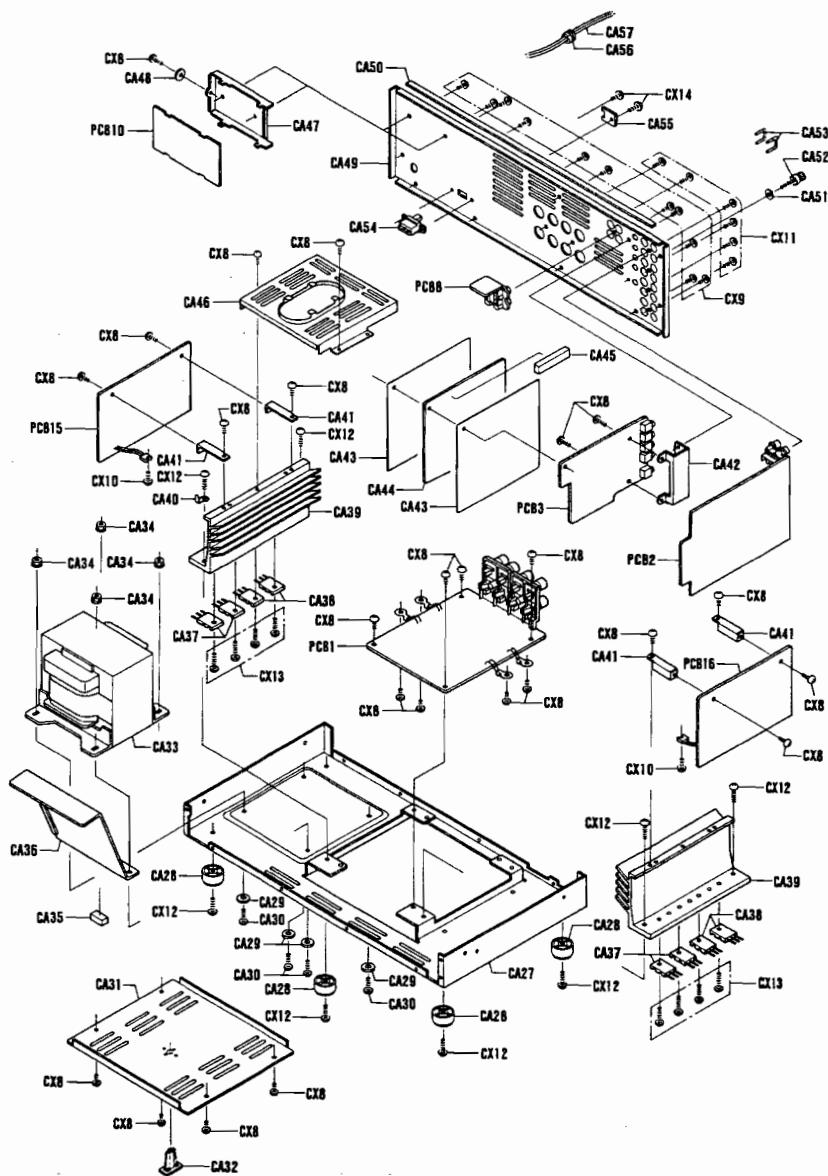**CABINET & CHASSIS EXPLODED VIEW (1)****CABINET & CHASSIS EXPLODED VIEW (2)**

# CABINET & CHASSIS PARTS LIST

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty
<b>PACKING PARTS LIST</b>							
3 9415 10300	Bag Polyethylene		1	CA17	131 2 5205 32300	Cushion	1
131 6 1169 15700	Box Corrugate-Exp.		1	CA18	△ 4 2319 77510	Power Switch	1
131 6 2119 02350	Bag Polyethylene-Exp.		1	CA19	131 2 6114 01400	Cover Safety	1
131 6 3009 35460	Pad Rear		1	CA20	131 2 3614 22200	Mount P.C.B. (Equalizer)	3
131 6 3009 35470	Pad Front		1	CA21	131 2 1601 70500	Knob (Speaker, Filter)	9
131 6 3069 16350	Patching Sheet		1	CA22	131 2 4201 19900	Screw, +3.0x6 Sems	2
131 6 4559 10900	Manufacturing No.		2	CA23	131 2 6103 23900	Cover Shield (Motor)	1
131 6 9459 00300	Rubber Band		1	CA24	131 2 3101 98600	Metal Mount Motor	1
<b>ACCESSORIES PARTS LIST</b>							
131 6 2719 10801	Bag Fan		1	CA25	4 5279 71441	Motor	1
131 6 4519 15700	Guarantee Certificate		1	CA26	141 2 3799 04200	Fan (Cooling Fan Motor)	1
131 6 4559 10900	Manufacturing No.		1	CA27	131 2 3301 31200	Chassis	1
142 6 4119 32104	Explanatory Booklet		1	CA28	131 2 1801 13300	Leg	4
<b>CABINET &amp; CHASSIS PARTS LIST</b>							
CA1	131 2 1410 32700	Cover	1	CA29	131 2 4203 84213	Washer, 4.2x13x1.0, Z1	4
CA2	131 2 4203 84231	Washer, 4.2x10x0.8 B	4	CA30	131 2 4201 23402	Screw, Brazier Hd. Tapping-C,	4
CA3	131 0 1016 44200	Panel Decorate Assy	1	CA31	131 2 1105 31100	Plate Bottom	1
	131 2 1203 62900	Panel Control Power	1	CA32	131 2 3614 27600	Mount P.C.B. (Plate Bottom)	1
	131 2 1203 63000	Panel Control	1	CA33	△ 4 2512 22920	Power Trans	1
	131 2 1203 63100	Panel Control (Volume)	1	CA34	131 2 4202 12904	Nut (Trans)	4
	131 2 1203 63200	Panel Control (Equalizer)	1	CA35	131 2 5205 22900	Cushion	1
CA4	131 2 1601 71000	Knob (Equalizer, Balance)	3	CA36	131 2 6101 31000	Plate Shield (Equalizer)	1
CA5	131 0 1001 63300	Knob (Main Volume)	1	CA37	4 2039 72120	Transistor, 2SA1301 (Q03,04) Left Channel	2
CA6	131 2 6113 51800	Shelter	3	CA37	4 2039 72120	Transistor, 2SA1301 (Q03,04) Right Channel	2
CA7	131 2 1205 28100	Decorate Plate Dial	1	CA38	4 2039 72110	Transistor, 2SC3280 (Q01,02) Left Channel	2
CA8	131 2 6308 23300	Filter	1	CA38	4 2039 72110	Transistor, 2SC3280 (Q01,02) Right Channel	2
CA9	131 0 1001 63500	Knob (Function)	1	CA39	131 2 6201 35300	Plate Heat Sink	2
	131 2 1604 48700	Decorate Knob Phono	1	CA40	4 2379 21520	Lug	1
	131 2 1604 48701	Decorate Knob Tuner	1	CA41	131 2 3101 98900	Metal Mount Heat Sink	4
	131 2 1604 48702	Decorate Knob CD	1	CA42	131 2 3101 98800	Metal Mount Auto Function	1
	131 2 1604 48703	Decorate Knob Aux	1	CA43	131 2 6107 30900	Plate Severe	2
	131 2 1604 48704	Decorate Knob Tape	1	CA44	131 2 6101 31100	Plate Shield (Function)	1
	131 2 1604 48705	Decorate Knob Rec	1	CA45	131 2 5205 33100	Cushion	1
	131 2 6113 51300	Shelter Knob	1	CA46	131 2 3101 98700	Metal Mount Condenser	1
CA10	131 2 3305 36100	Panel Front	1	CA47	131 2 3101 99500	Metal Mount Fuse	1
CA11	131 2 3101 98500	Metal Mount Headphone Jack	1	CA48	131 2 4203 83224	Washer, 3.2x12x0.8T Z1	1
CA12	131 2 4202 13400	Nut (Headphones)	1	CA49	131 2 3306 39801	Panel Rear	1
CA13	131 2 1501 90300	Knob (Power Switch)	1	CA50	131 2 5205 15300	Cushion	1
CA14	131 2 4203 83200	Washer, 3.2x8x0.5	2	CA51	131 2 4203 83223	Washer, 3.2x10x1 C2	1
CA15	131 2 6113 51200	Shelter EQ	2	CA52	131 2 4201 17800	Screw Ground	1
CA16	131 0 1001 63400	Knob (Equalizer)	2	CA53	4 2369 74040	Short Plug	2
	131 2 1601 90400	Knob (A)	1	CA54	△ 4 2312 01020	Switch Slide (Voltage Select)	1
	131 2 1601 90500	Knob (B)	1	CA55	131 2 7104 00500	Plate Pad Switch	1

## PRODUCT SAFETY NOTICE

Each precaution in this manual should be followed during servicing. Components identified with the IEC symbol △ in the parts list and the schematic diagram designate components in which safety can be of special significance. When replacing a component identified with △, use only the replacement parts designated, or parts with the same ratings of resistance, wattage or voltage that are designated in the parts list in this manual. Leakage-current or resistance measurements must be made to determine that exposed parts are acceptably insulated from the supply circuit before returning the product to the customer.

# CABINET & CHASSIS PARTS LIST (Continued)

Ref. No.	Part No.	Description	Q'ty
<b>P.C.B. ASSY PARTS LIST</b>			
PCB1	141 0 1939 07561	Power Supply Protect P.C.B. Assy	1
PCB2	141 0 1939 07411	EQ, Function P.C.B. Assy	1
PCB3	141 0 1939 07420	Auto Function P.C.B. Assy	1
PCB4	141 0 1939 07430	LED IND./Touch Switch P.C.B. Assy	1
PCB5	141 0 1939 07440	Volume P.C.B. Assy	1
PCB6	141 0 1939 07450	Balance Volume P.C.B. Assy	1
PCB7	141 0 1939 07460	Pre Amp. P.C.B. Assy	1
PCB8	141 0 1939 07470	Jack P.C.B. Assy	1
PCB9	141 0 1939 07480	Power Level Meter P.C.B. Assy	1
PCB10	141 0 1939 07491	Fuse P.C.B. Assy	1
PCB11	141 0 1939 07500	Parametric Tone P.C.B. Assy	1
PCB12	141 0 1939 07510	Parametric EQ, Volume P.C.B. Assy	1
PCB13	141 0 1939 07520	Switch P.C.B. Assy	1
PCB14	141 0 1939 07530	Headphone Jack P.C.B. Assy	1
PCB15	141 0 1939 07540	Power Amp. P.C.B. Assy (Left)	1
PCB16	141 0 1939 07550	Power Amp. P.C.B. Assy (Right)	1
<b>SCREW PARTS LIST</b>			
CX1	101 3 1302 00311	Screw, Pan Hd., +M2.0x3	6
CX2	101 3 1302 60811	Screw, Pan Hd., +M2.6x8	1
CX3	101 3 1303 00411	Screw, Pan Hd., +M3.0x4	2
CX4	101 3 1303 00611	Screw, Pan Hd., +M3.0x6	8
CX5	143 3 1704 00818	Screw, Bind Hd. Tapping-B, +M4.0x8	4
CX6	143 3 1902 60611	Screw, Brazier Hd. Tapping-B, +M2.6x6	10
CX7	143 3 1902 60811	Screw, Brazier Hd. Tapping-B, +M2.6x8	2
CX8	143 3 1903 00611	Screw, Brazier Hd. Tapping-B, +M3.0x6	43
CX9	143 3 1903 00618	Screw, Brazier Hd. Tapping-B, +M3.0x6	12
CX10	143 3 1903 00811	Screw, Brazier Hd. Tapping-B, +M3.0x8	2
CX11	143 3 1903 00818	Screw, Brazier Hd. Tapping-B, +M3.0x8	16
CX12	143 3 1903 01011	Screw, Brazier Hd. Tapping-B, +M3.0x10	8
CX13	143 3 1903 01211	Screw, Brazier Hd. Tapping-B, +M3.0x12	8
CX14	101 3 1303 00618	Screw, Pan Hd., +M3.0x6	2

## NOTES:

1. Parts order must contain Model Number, Part Number and Description.
2. Ordering quantity of screws and resistors must be multiple of 10 pcs.

## P.C.BOARD PARTS LIST

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty										
<b>POWER SUPPLY PROTECT P.C.B. ASSY</b>																	
PC81	141 0 1939 07561	Power Supply Protect P.C.B. Assy	1	IC02	4 2069 73820	IC, NJM 78 M24	1										
	4 2262 20920	Power Supply Protect P.C.B.	1	IC03	4 2069 73830	IC, NJM 79 M24	1										
	4 2329 70280	Relay Lead	1	Q01	203 5 7252 27450	Transistor, 2SC 2274	1										
	4 2329 70400	Relay	1	P01	4 2039 72050	Posistor, PTH487A-BB	1										
	4 2329 70410	Relay	2	P02	4 2039 72050	Posistor, PTH487A-BB	1										
	4 2369 73160	Connector 6P	1	P03	4 2039 72051	Posistor, PTH487A-BF	1										
	4 2379 70920	4P Speaker Terminal (Speakers)	2	P04	4 2039 72051	Posistor, PTH487A-BF	1										
111 2 6220 11100	Wire Wrap Terminal		13	<b>RESISTORS</b>													
131 2 3608 14100	Crimp Wire		1	R01	RD1 8 4251 JM000	Carbon	180kΩ 1/4W ±5%	1									
131 2 6201 21500	Plate Heat Sink		1	R02	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5%	1									
131 2 6201 29800	Heat Sink		1	R03	RD6 8 2251 JM000	Carbon	6.8kΩ 1/4W ±5%	1									
CA01	4 2359 76586	Connector 6P Assy	1	R04	RD9 3 2251 JM000	Carbon	3.9kΩ 1/4W ±5%	1									
CA02	4 2359 76587	Connector 6P Assy	1	R05	RD1 0 3251 JM000	Carbon	10kΩ 1/4W ±5%	1									
CA03	4 2359 77390	Connector 3P Assy	1	R06	RD1 0 4251 JM000	Carbon	100kΩ 1/4W ±5%	1									
CA04	4 2359 77398	Connector 8P Assy	1	R07	RD1 5 3251 JM000	Carbon	15kΩ 1/4W ±5%	1									
<b>CAPACITORS</b>																	
C01	CD4 7 7160 0001V	Electrolytic	470μF 16V	1	R08	RD5 6 3251 JM000	Carbon	56kΩ 1/4W ±5%	1								
C02	CD4 7 7160 0001V	Electrolytic	470μF 16V	1	R09	RD3 3 3251 JM000	Carbon	33kΩ 1/4W ±5%	1								
C03	4 2239 72110	Electrolytic	10000μF 80V	1	R10	RD6 8 2251 JM000	Carbon	6.8kΩ 1/4W ±5%	1								
C04	4 2239 72110	Electrolytic	10000μF 80V	1	R11	RD1 5 4251 JM000	Carbon	150kΩ 1/4W ±5%	1								
C05	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R12	RD1 5 4251 JM000	Carbon	150kΩ 1/4W ±5%	1								
C06	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R13	RD1 5 3251 JM000	Carbon	15kΩ 1/4W ±5%	1								
C07	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R14	RD5 6 3251 JM000	Carbon	56kΩ 1/4W ±5%	1								
C08	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R15	RD6 8 2251 JM000	Carbon	56kΩ 1/4W ±5%	1								
C09	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R16	RD7 3 3251 JM000	Carbon	47kΩ 1/4W ±5%	1								
C10	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R17	RF1 0 0501 JZ000	Fuse	100Ω 1/2W ±5%	1								
C11	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R18	RF1 0 0501 JZ000	Fuse	100Ω 1/2W ±5%	1								
C12	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R19	RH4 7 1501 JZ000	Metal	47Ω 1/2W ±5%	1								
C13	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R20	RH6 8 1202 JZ000	Metal	6800Ω 2W ±5%	1								
C14	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R21	RH6 8 1202 JZ000	Metal	680Ω 2W ±5%	1								
C15	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R22	RH1 2 1102 KZ000	Metal	120Ω 1W ±10%	1								
C16	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R23	RH1 2 1102 KZ000	Metal	120Ω 1W ±10%	1								
C17	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R24	RH2 7 1102 JZ000	Metal	270Ω 1W ±5%	1								
C18	CB4 7 6500 0000V	None-polar	47kΩ 50V	1	<b>EQ. FUNCTION P.C.B. ASSY</b>												
C19	CD1 0 5500 0001V	Electrolytic	1μF 50V	1	PCB2	141 0 1939 07411	EQ. Function P.C.B. Assy		1	<b>RESISTORS</b>							
C20	CD1 0 6250 0001V	Electrolytic	10μF 25V	1	4 2262 20770	EQ. Function P.C.B.		1	R01	RD1 0 4161 JH000	Carbon	100kΩ 1/6W ±5%	1				
C21	CD4 7 4500 0001V	Electrolytic	22μF 10V	1	4 2352 01700	Pin Jack 4P (Phone, Tuner)		1	R02	RD1 0 4161 JH000	Carbon	100kΩ 1/6W ±5%	1				
C22	CD4 7 6250 0001V	Electrolytic	47μF 25V	1	4 2352 01700	Pin Jack 4P (CD, Aux/Video)		1	R03	RD1 0 2161 JH000	Carbon	1kΩ 1/6W ±5%	1				
C23	4 2239 72080	Electrolytic	470μF 40V	1	4 2352 01700	Pin Jack 4P (Tape 1)		1	R04	RD1 0 2161 JH000	Carbon	1kΩ 1/6W ±5%	1				
C24	4 2239 72080	Electrolytic	470μF 40V	1	4 2352 01700	Pin Jack 4P (Tape 2)		1	R05	RD1 0 4161 JH000	Carbon	100kΩ 1/6W ±5%	1				
C25	CD1 0 7250 0006V	Electrolytic	100μF 25V	1	CN06	4 2369 73410	Connector 7P		1	R06	RD1 0 4161 JH000	Carbon	100kΩ 1/6W ±5%	1			
C26	CD1 0 7250 0006V	Electrolytic	100μF 25V	1	141 2 3229 44600	Plate Shield		1	R07	RD3 9 2161 JH000	Carbon	3.9kΩ 1/6W ±5%	1				
C27	CK3 3 3401 M000V	Mylar	0.033μF 400V ±20%	1	131 0 4006 31403	Cord Assy		1	R08	RD3 9 2161 JH000	Carbon	100Ω 1/6W ±5%	1				
C28	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	J03	4 2359 77803	Connector 6P Assy		1	R09	RD1 0 2161 JH000	Carbon	3.9kΩ 1/6W ±5%	1			
C29	CC1 0 2500 KE00R	Ceramic	1000pF 50V ±10%	1	<b>CAPACITORS</b>												
C30	CC1 0 2500 KE00R	Ceramic	0.001μF 50V ±10%	1	C01	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1	R10	RD1 0 2161 JH000	Carbon	3.9kΩ 1/6W ±5%	1			
C31	CC1 0 2500 KE00R	Ceramic	0.001μF 50V ±10%	1	C02	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1	R11	RD3 9 2161 JH000	Carbon	3.9kΩ 1/6W ±5%	1			
C32	CC1 0 2500 KE00R	Ceramic	0.001μF 50V ±10%	1	C03	CM1 0 2500 K00SV	Mylar	0.001μF 50V ±10%	1	R12	RD4 7 2161 JH000	Carbon	4.7kΩ 1/6W ±5%	1			
C33	CC1 0 2500 KE00R	Ceramic	0.001μF 50V ±10%	1	C04	CM1 0 2500 K00SV	Mylar	0.001μF 50V ±10%	1	R13	RD1 0 1161 JH000	Carbon	100Ω 1/6W ±5%	1			
C34	CC1 0 2500 KE00C	Ceramic	0.001μF 50V ±10%	1	C05	CM1 8 3500 K00SV	Mylar	0.01μF 50V ±10%	1	R14	RD1 0 1161 JH000	Carbon	100Ω 1/6W ±5%	1			
<b>SEMICONDUCTORS</b>																	
D01	202 5 2500 13541	Diode, DS 135		1	C06	CM1 8 3500 K00SV	Mylar	0.018μF 50V ±10%	1	R15	RD2 7 1161 JH000	Carbon	270Ω 1/6W ±5%	1			
D02	202 5 2500 13541	Diode, DS 135		1	C07	CM4 7 2500 K00SV	Mylar	0.0047μF 50V ±10%	1	R16	RD2 7 1161 JH000	Carbon	270Ω 1/6W ±5%	1			
D03	202 5 2500 13541	Diode, DS 135		1	C08	CM4 7 2500 K00SV	Mylar	0.0047μF 50V ±10%	1	R17	RD2 2 4161 JH000	Carbon	220kΩ 1/6W ±5%	1			
D04	202 5 2500 13541	Diode, DS 135		1	C09	CD4 7 6100 0001V	Electrolytic	47μF 10V	1	R18	RD2 2 4161 JH000	Carbon	220kΩ 1/6W ±5%	1			
D05	202 5 2500 13541	Diode, DS 135		1	C10	CD4 7 6100 0001V	Electrolytic	47μF 10V	1	R19	RD1 5 3161 JH000	Carbon	15kΩ 1/6W ±5%	1			
D06	202 5 2500 13541	Diode, DS 135		1	C11	CD1 0 6160 0001V	Electrolytic	10μF 16V	1	R20	RD1 5 3161 JH000	Carbon	15kΩ 1/6W ±5%	1			
D08 Δ	202 5 3510 02010	Diode, S1RBA 20		1	C12	CD1 0 6160 0001V	Electrolytic	10μF 16V	1	R21	RD4 7 1251 JM000	Carbon	470Ω 1/6W ±5%	1			
D09 Δ	202 5 3510 02010	Diode, S1RBA 20		1	C13	CM4 7 2500 K00SV	Mylar	0.0047μF 50V ±10%	1	R22	RD4 7 1251 JM000	Carbon	470Ω 1/6W ±5%	1			
D10 Δ	202 5 2780 10015	Bridge Diode, DBA 100 C		1	C14	CM4 7 2500 K00SV	Mylar	0.0047μF 50V ±10%	1	R23	RD1 0 2161 JH000	Carbon	1kΩ 1/6W ±5%	1			
DZ01	202 5 3210 15012	Zener Diode, GZA 15 Y		1	C15	CD2 2 7250 0001V	Electrolytic	220μF 25V	1	R24	RD1 0 2161 JH000	Carbon	680kΩ 1/6W ±5%	1			
IC01	4 2069 73810	IC, TA 7317 P		1	C16	CD2 2 7250 0001V	Electrolytic	220μF 25V	1	R25	RD1 0 2161 JH000	Carbon	680kΩ 1/6W ±5%	1			

## P.C.BOARD PARTS LIST (Continued)

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty			
C17	CD2 2 7250 0001V	Electrolytic	220μF 25V	1	R37	RD1 0 2161 JH000	Carbon	1kΩ 1/6W ±5%	1	R38	RD1 0 2161 JH000	Carbon	1kΩ 1/6W ±5%	1
C18	CD2 2 7250 0001V	Electrolytic	220μF 25V	1	R39	RD4 7 4161 JH000	Carbon	470kΩ 1/6W ±5%	1	R40	RD4 7 4161 JH000	Carbon	470kΩ 1/6W ±5%	1
C19	CD1 0 5500 0001V	Electrolytic	1μF 50V	1	R41	RD1 0 2161 JH000	Carbon	1kΩ 1/6W ±5%	1	R42	RD1 0 2161 JH000	Carbon	1kΩ 1/6W ±5%	1
C20	CD2 2 5500 0001V	Electrolytic	2.2μF 50V	1	R43	RD1 0 2161 JH000	Carbon	0.047μF 50V ±80-20%	1	R44	RD4 7 4161 JH000	Carbon	470kΩ 1/6W ±5%	1
C21	CD1 0 6250 0001V	Electrolytic	1000μF 25V	1	R45	RD3 3 3251 JM000	Carbon	33kΩ 1/4W ±5%	1	R46	RD1 0 4161 JH000	Carbon	100kΩ 1/6W ±5%	1
C22	CC4 7 3500 ZG00C	Ceramic	0.047μF 50V ±80-20%	1	R47	RD3 9 3251 JM000	Carbon	39kΩ 1/4W ±5%	1	R48	RD5 6 3251 JM000	Carbon	56kΩ 1/4W ±5%	1
C23	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1	R49	RD1 0 2251 JM000	Carbon	1kΩ 1/6W ±5%	1	R50	RD2 2 4161 JH000	Carbon	220kΩ 1/6W ±5%	1
C24	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1	R51	RD2 2 4251 JM000	Carbon	220kΩ 1/6W ±5%	1	R52	RD1 2 4251 JM000	Carbon	120kΩ 1/6W ±5%	1
C25	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1	R53	RD2 2 4251 JM000	Carbon	220kΩ 1/6W ±5%	1	R54	RD1 0 4161 JH000	Carbon	120kΩ 1/6W ±5%	1
C26	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1	R55	RD4 7 4161 JH000	Carbon	47kΩ 1/6W ±5%	1	R56	RD3 3 2251 JM000	Carbon	3.3kΩ 1/4W ±5%	1
C27	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R57	RD2 2 3251 JM000	Carbon	22kΩ 1/6W ±5%	1	R58	RD2 7 2251 JM000	Carbon	2.7kΩ 1/4W ±5%	1
C28	CC1 0 3501 YEY0C	Ceramic	0.01μF 500V +100-0%	1	R59	RD1 2 2102 JZ000	Metal	1.2kΩ 1W ±5%	1	R60	RD4 7 4251 JM000	Carbon	470kΩ 1/4W ±5%	1
C29	CC1 0 2500 KE00R	C												

**P.C.BOARD PARTS LIST (Continued)**

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty						
C09	CI1 0 3250 MF00R	Boundary	0.01μF	25V ±20%	1	R17	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	
C11	CD1 0 5500 0001V	Electrolytic	1μF	50V	1	R18	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	
C12	CD1 0 5500 0001V	Electrolytic	1μF	50V	1	R19	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	
C13	CD1 0 5500 0001V	Electrolytic	1μF	50V	1	R20	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	
C14	CD1 0 5500 0001V	Electrolytic	1μF	50V	1	R21	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	
C15	CD1 0 5500 0001V	Electrolytic	1μF	50V	1	R22	RD1 0 2251 JM000	Carbon	1.2kΩ	1/4W	±5%	1	
<b>SEMICONDUCTORS</b>													
D01	205 5 9040 44210	Diode, DS 442			R23	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1		
D02	205 5 9040 44210	Diode, DS 442			R24	RD1 0 3161 JH000	Carbon	10kΩ	1/5W	±5%	1		
D03	205 5 9040 44210	Diode, DS 442			R25	RD6 0 3251 JM000	Carbon	68kΩ	1/4W	±5%	1		
D04	205 5 9040 44210	Diode, DS 442			R26	RD4 7 2251 JM000	Carbon	4.7kΩ	1/4W	±5%	1		
D05	205 5 9040 44210	Diode, DS 442			R27	RD4 7 3161 JH000	Carbon	47kΩ	1/5W	±5%	1		
D06	205 5 9040 44210	Diode, DS 442			R28	RD1 0 4161 JH000	Carbon	100kΩ	1/6W	±5%	1		
D07	205 5 9040 44210	Diode, DS 442			R29	RD4 7 3161 JH000	Carbon	47kΩ	1/6W	±5%	1		
D08	205 5 9040 44210	Diode, DS 442			R30	RD1 0 4161 JH000	Carbon	100kΩ	1/5W	±5%	1		
D09	205 5 9040 44210	Diode, DS 442			R31	RD1 0 2251 JM000	Carbon	1kΩ	1/4W	±5%	1		
D10	205 5 9040 44210	Diode, DS 442			R32	RD1 0 4251 JM000	Carbon	100kΩ	1/4W	±5%	1		
D11	205 5 9040 44210	Diode, DS 442			R33	RD2 0 4161 JH000	Carbon	220kΩ	1/5W	±5%	1		
D12	205 5 9040 44210	Diode, DS 442			R34	RD8 2 1251 JM000	Carbon	820Ω	1/4W	±5%	1		
D13	205 5 9040 44210	Diode, DS 442			R35	RF1 2 1251 JK000	Fuse	120Ω	1/4W	±5%	1		
D14	205 5 9040 44210	Diode, DS 442			<b>LED IND./ TOUCH SWITCH P.C.B. ASSY</b>								
D15	205 5 9040 44210	Diode, DS 442			PCB4	141 0 1939 07430	LED Ind./ Touch Switch P.C.B. Assy						
D16	205 5 9040 44210	Diode, DS 442				4 2262 20790	LED Ind./ Touch Switch P.C.B. Assy						
D17	205 5 9040 44210	Diode, DS 442			S01	4 2312 01880	Key Board Switch (Phone)						
D18	205 5 9040 44210	Diode, DS 442			S02	4 2312 01880	Key Board Switch (Tuner)						
D19	205 5 9040 44210	Diode, DS 442			S03	4 2312 01880	Key Board Switch (CD)						
D20	205 5 9040 44210	Diode, DS 442			S04	4 2312 01880	Key Board Switch (Aux/Video)						
D21	205 5 9040 44210	Diode, DS 442			S05	4 2312 01880	Key Board Switch (Tape 1)						
D22	205 5 9040 44210	Diode, DS 442			S06	4 2312 01880	Key Board Switch (Synchro Rec)						
D23	205 5 9040 44210	Diode, DS 442			J08	4 2359 77397	Connector 8P Assy						
D24	205 5 9040 44210	Diode, DS 442			J09	4 2359 77396	Connector 7P Assy						
D25	205 5 9040 44210	Diode, DS 442			<b>SEMICONDUCTORS</b>								
D26	205 5 3210 10012	Zener Diode, GZA 10 Y			D01	4 2029 72590	L.E.D., SLF 202 B (Phone)						
IC01	206 5 9464 01310	IC, LC 4013 B			D02	4 2029 72590	L.E.D., SLF 202 B (Tuner)						
IC02	206 5 9494 06110	IC, LC 4081 B			D03	4 2029 72590	L.E.D., SLF 202 B (CD)						
Q01	203 5 5000 53670	Transistor, 2SC 536			D04	4 2029 72590	L.E.D., SLF 202 B (Aux/Video)						
Q03	203 5 5000 53670	Transistor, 2SC 536			D05	4 2029 72600	L.E.D., SLF 102 B (Tape 1)						
Q04	203 5 5000 53670	Transistor, 2SC 536			D06	4 2029 72600	L.E.D., SLF 102 B (Synchro Rec)						
Q05	203 5 5000 53670	Transistor, 2SC 536			<b>VOLUME P.C.B. ASSY</b>								
Q06	203 5 5000 53670	Transistor, 2SC 536			PCB5	141 0 1939 07440	Volume P.C.B. Assy						
Q07	203 5 5000 53670	Transistor, 2SC 536				4 2262 20800	Volume P.C.B.						
Q08	203 5 5000 53670	Transistor, 2SC 536				4 2229 75271	VR 100kΩ-Bx2, 10kΩ-Cx2 (Volume)						
Q09	203 5 5000 53670	Transistor, 2SC 536			CN04	4 2369 73130	Connector 3P						
Q10	203 5 5000 53670	Transistor, 2SC 536			CN08	4 2369 73160	Connector 6P						
Q11	203 5 5000 53670	Transistor, 2SC 536			<b>RESISTORS</b>								
R01	RD6 8 3161 JH000	Carbon	68kΩ	1/6W	±5%	1	CAPACITORS						
R02	RD6 8 3161 JH000	Carbon	68kΩ	1/6W	±5%	1	C01	CC4 7 1500 K000C	Ceramic	470pF	50V	±10%	1
R03	RD6 8 3161 JH000	Carbon	68kΩ	1/6W	±5%	1	C02	CC4 7 1500 K000C	Ceramic	470pF	50V	±10%	1
R04	RD6 8 3161 JH000	Carbon	68kΩ	1/6W	±5%	1	C03	CM2 2 4500 J000V	Mylar	0.22μF	50V	±5%	1
R05	RD6 8 3161 JH000	Carbon	68kΩ	1/6W	±5%	1	C04	CM2 2 4500 J000V	Mylar	0.22μF	50V	±5%	1
R06	RD2 2 4161 JH000	Carbon	220kΩ	1/6W	±5%	1	C05	CM1 0 4500 J000V	Mylar	0.1μF	50V	±5%	1
R07	RD2 2 4161 JH000	Carbon	220kΩ	1/6W	±5%	1	C06	CM1 0 4500 J000V	Mylar	0.1μF	50V	±5%	1
R08	RD2 2 4161 JH000	Carbon	220kΩ	1/6W	±5%	1	C07	CM1 0 4500 J000V	Mylar	0.1μF	50V	±5%	1
R09	RD2 2 4161 JH000	Carbon	220kΩ	1/6W	±5%	1	C08	CM1 0 4500 J000V	Mylar	0.1μF	50V	±5%	1
R10	RD3 9 3161 JH000	Carbon	39kΩ	1/6W	±5%	1	C09	CD1 0 5500 0001V	Electrolytic	1μF	50V	±10%	1
R11	RD3 3 3251 JM000	Carbon	33kΩ	1/4W	±5%	1	C10	CD1 0 5500 0001V	Electrolytic	1μF	50V	±10%	1
R12	RD3 3 3251 JM000	Carbon	33kΩ	1/4W	±5%	1	C11	CD1 0 6160 0001V	Electrolytic	10μF	16V	1	
R13	RD3 3 3251 JM000	Carbon	33kΩ	1/4W	±5%	1	C12	CD1 0 6160 0001V	Electrolytic	10μF	16V	1	
R14	RD3 3 3251 JM000	Carbon	33kΩ	1/4W	±5%	1	C13	CC1 5 0500 K000C	Ceramic	15pF	50V	±10%	1
R15	RD3 3 3251 JM000	Carbon	33kΩ	1/4W	±5%	1	C14	CC1 5 0500 K000C	Ceramic	15pF	50V	±10%	1
R16	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	C15	CC3 3 1500 K000C	Ceramic	330pF	50V	±10%	1
					C16	CC3 3 1500 K000C	Ceramic	330pF	50V	±10%	1		
					C17	CM4 7 2500 K005V	Mylar	0.0047μF	50V	±10%	1		
					C18	CM4 7 2500 K005V	Mylar	0.0047μF	50V	±10%	1		
					C19	CM3 3 3500 K005V	Mylar	0.0334μF	50V	±10%	1		
					C20	CM3 3 3500 K005V	Mylar	0.0334μF	50V	±10%	1		
					C21	CD1 0 6160 0001V	Electrolytic	10μF	16V	1			
					C22	CD1 0 6160 0001V	Electrolytic	10μF	16V	1			
					C23	CD2 2 7250 0001V	Electrolytic	220μF	25V	1			
					C24	CD2 2 7250 0001V	Electrolytic	220μF	25V	1			
					<b>SEMICONDUCTORS</b>								
					R01	RD1 0 3251 JM000	Carbon	10kΩ	1/4W	±5%	1		
					R02	RD1 0 3161 JH000	Carbon	10kΩ	1/6W	±5%	1		
					R03	RD1 0 3161 JH000	Carbon	10kΩ	1/6W	±5%	1		
					R04	RD1 0 3161 JH000	Carbon	10kΩ	1/6W	±5%	1		

**P.C.BOARD PARTS LIST (Continued)**

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty							
006	203 5 7230 60870	Transistor, 2SA 608	1	<b>SEMICONDUCTORS</b>										
R01	RD2 2 1161 JH000	Carbon	220Ω	1/6W	±5%	1	IC01	ITT - TA73 22P-	IC, TA 7322 P					
R02	RD2 2 1161 JH000	Carbon	220Ω	1/6W	±5%	1	IC02	ITT - TA73 22P-	IC, TA 7322 P					
R03	RD2 2 4161 JH000	Carbon	220kΩ	1/6W	±5%	1	<b>RESISTORS</b>							
R04	RD2 2 4161 JH000	Carbon	220kΩ	1/6W	±5%	1	R01	RD3 3 2161 JH000	Carbon	3.3kΩ	1/6W	±5%	1	
R05	RD5 6 2161 JH000	Carbon	5.6kΩ	1/6W	±5%	1	R02	RD3 3 2161 JH000	Carbon	3.3kΩ	1/6W	±5%	1	
R06	RD5 6 2161 JH000	Carbon	5.6kΩ	1/6W	±5%	1	R03	RD4 7 1161 JH000	Carbon	470Ω	1/6W	±5%	1	
R07	RD5 6 3161 JH000	Carbon	56kΩ	1/6W	±5%	1	R04	RD4 7 1161 JH000	Carbon	470Ω	1/6W	±5%	1	
R08	RD4 7 1161 JH000	Carbon	56kΩ	1/6W	±5%	1	R05	RD1 5 4161 JH000	Carbon	150kΩ	1/6W	±5%	1	
R09	RD4 7 1161 JH000	Carbon	470Ω	1/6W	±5%	1	R06	RD1 5 4161 JH000	Carbon	150kΩ	1/6W	±5%	1	
R10	RD1 0 3161 JH000	Carbon	470Ω	1/6W	±5%	1	R07	RD5 6 3161 JH000	Carbon	56kΩ	1/6W	±5%	1	
R11	RD3 3 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	R08	RD5 6 3161 JH000	Carbon	56kΩ	1/6W	±5%	1	
R12	RD3 3 3251 JM000	Carbon	10kΩ	1/4W	±5%	1	R09	RD6 8 2161 JH000						

## **P.C. BOARD PARTS LIST (Continued)**

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty		
<b>FUSE P.C.B. ASSY</b>									
PCB10	141 0 1939 07491	Fuse P.C.B. Assy	1	R13	RD3 3 2251 JM000	Carbon	3.3kΩ 1/4W ±5%		
	4 2262 20850	Fuse P.C.B.	1	R14	RD3 3 2251 JM000	Carbon	3.3kΩ 1/4W ±5% 1		
	△ 4 2349 20380	Fuse T 1.0A	4	R15	RD3 3 2251 JM000	Carbon	3.3kΩ 1/4W ±5% 1		
	△ 4 2349 21570	Fuse T 6.3A	2	R16	RD3 3 2251 JM000	Carbon	3.3kΩ 1/4W ±5% 1		
	4 2352 00200	Fuse Holder	12	R17	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1		
111 2 6220 11100	Wire Wrap Terminal	22	R18	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1			
4 2372 00830	EC Terminal 1P	2	R19	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1			
131 2 7103 13418	Label	4	R20	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1			
131 2 7103 40302	Label	2	R21	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5% 1			
<b>PARAMETRIC TONE P.C.B. ASSY</b>									
PCB11	141 0 1939 07500	Parametric Tone P.C.B. Assy	1	R22	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5% 1		
	4 2262 20860	Parametric Tone P.C.B.	1	R23	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1		
CN02	4 2369 73150	Connector 5P	1	R24	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1		
<b>CAPACITORS</b>									
C01	CD1 0 7100 0001V	Electrolytic	100μF	10V	1	R25	RD2 7 2251 JM000	Carbon	2.7kΩ 1/4W ±5% 1
C02	CD1 0 7100 0001V	Electrolytic	100μF	10V	1	R26	RD2 7 2251 JM000	Carbon	2.7kΩ 1/4W ±5% 1
C03	CC1 0 1500 KD00R	Ceramic	100pF	50V ±10%	1	R27	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1
C04	CC1 0 1500 KD00R	Ceramic	100pF	50V ±10%	1	R28	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1
C05	CC1 0 1500 KD00C	Ceramic	100pF	50V ±10%	1	R29	RD5 6 2251 JM000	Carbon	5.6kΩ 1/4W ±5% 1
C06	CC1 0 1500 KD00C	Ceramic	100pF	50V ±10%	1	R30	RD5 6 2251 JM000	Carbon	5.6kΩ 1/4W ±5% 1
C07	CM47 2500 K00SV	Mylar	0.0047μF	50V ±10%	1	R31	RD1 2 2251 JM000	Carbon	1.2kΩ 1/4W ±5% 1
C08	CM47 2500 K00SV	Mylar	0.0047μF	50V ±10%	1	R32	RD1 2 2251 JM000	Carbon	1.2kΩ 1/4W ±5% 1
C09	CD1 0 5500 0001V	Electrolytic	1μF	50V	1	R33	RD2 7 2251 JM000	Carbon	2.7kΩ 1/4W ±5% 1
C10	CD1 0 5500 0001V	Electrolytic	1μF	50V	1	R34	RD2 7 2251 JM000	Carbon	2.7kΩ 1/4W ±5% 1
C11	CD1 0 7100 0001V	Electrolytic	100μF	10V	1	R35	RD2 7 2251 JM000	Carbon	2.7kΩ 1/4W ±5% 1
C12	CD1 0 7100 0001V	Electrolytic	100μF	10V	1	R36	RD2 7 2251 JM000	Carbon	2.7kΩ 1/4W ±5% 1
C13	CC1 0 1500 KD00R	Ceramic	100pF	50V ±10%	1	R37	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1
C14	CC1 0 1500 KD00R	Ceramic	100pF	50V ±10%	1	R38	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1
C15	CC1 0 1500 KD00R	Ceramic	100pF	50V ±10%	1	R39	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1
C16	CC1 0 1500 KD00R	Ceramic	100pF	50V ±10%	1	R40	RD2 2 3251 JM000	Carbon	22kΩ 1/4W ±5% 1
C17	CC1 8 1500 JD00R	Ceramic	180pF	50V ±5%	1	R41	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5% 1
C18	CC1 8 1500 JD00R	Ceramic	180pF	50V ±5%	1	R42	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5% 1
C19	CM47 3500 K00SV	Mylar	0.047μF	50V ±10%	1	R43	RD5 6 1251 JM000	Carbon	560Ω 1/4W ±5% 1
C20	CM47 3500 K00SV	Mylar	0.047μF	50V ±10%	1	R44	RD5 6 1251 JM000	Carbon	560Ω 1/4W ±5% 1
C21	CD1 0 7100 0001V	Electrolytic	100μF	10V	1	R45	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5% 1
C22	CD1 0 7100 0001V	Electrolytic	100μF	10V	1	R46	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5% 1
C23	CD2 2 7250 0001V	Electrolytic	220μF	25V	1	R47	RF1 2 1251 JK000	Fuse	120Ω 1/4W ±5% 1
C24	CD2 2 7250 0001V	Electrolytic	220μF	25V	1	R48	RF1 2 1251 JK000	Fuse	120Ω 1/4W ±5% 1
<b>SEMICONDUCTORS</b>									
IC01	IJL - NJM4560DX	IC, NJM 4560 DX							
IC02	IJL - NJM4558DX	IC, NJM 4558 DX							
IC03	IJL - NJM4558DX	IC, NJM 4558 DX							
IC04	IJL - NJM4560DX	IC, NJM 4560 DX							
IC05	IJL - NJM4558DX	IC, NJM 4558 DX							
IC06	IJL - NJM4558DX	IC, NJM 4558 DX							
<b>RESISTORS</b>									
R01	RD2 2 1251 JM000	Carbon	220Ω	1/4W ±5%	1	CN01	4 2362 00900	Plug 8P	
R02	RD2 2 1251 JM000	Carbon	220Ω	1/4W ±5%	1	J20	4 2359 77704	Connector 3P Assy	
R03	RD2 2 3251 JM000	Carbon	22kΩ	1/4W ±5%	1				
R04	RD2 2 3251 JM000	Carbon	22kΩ	1/4W ±5%	1				
R05	RD2 7 2251 JM000	Carbon	2.7kΩ	1/4W ±5%	1	R01	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5%
R06	RD2 7 2251 JM000	Carbon	2.7kΩ	1/4W ±5%	1	R02	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5%
R07	RD2 2 3251 JM000	Carbon	22kΩ	1/4W ±5%	1				
R08	RD2 2 3251 JM000	Carbon	22kΩ	1/4W ±5%	1				
R09	RD5 6 3251 JM000	Carbon	56kΩ	1/4W ±5%	1				
R10	RD5 6 3251 JM000	Carbon	56kΩ	1/4W ±5%	1				
R11	RD1 5 3251 JM000	Carbon	15kΩ	1/4W ±5%	1				
R12	RD1 5 3251 JM000	Carbon	15kΩ	1/4W ±5%	1				
<b>SWITCH P.C.B. ASSY</b>									
PCB13	141 0 1939 07510	Parametric EQ Volume P.C.B. Assy							
	4 2262 20870	Parametric EQ Volume P.C.B.							
	4 2229 75280	Slide VR 100kΩ-Ax4 (Low Band)							
	4 2229 75280	Slide VR 100kΩ-Ax4 (High Band)							
	4 2229 75290	Slide VR 50kΩ-Bx2 (EQ. Volume)							
<b>PARAMETRIC EQ. VOLUME P.C.B. ASSY</b>									
PCB12	141 0 1939 07510	Parametric EQ Volume P.C.B. Assy							
	4 2262 20870	Parametric EQ Volume P.C.B.							
	4 2229 75280	Slide VR 100kΩ-Ax4 (Low Band)							
	4 2229 75280	Slide VR 100kΩ-Ax4 (High Band)							
	4 2229 75290	Slide VR 50kΩ-Bx2 (EQ. Volume)							
<b>SWITCH Push 4Key (Speakers Selector A/B, Parametric EQ, Meter Range)</b>									
PCB13	141 0 1939 07520	Switch P.C.B. Assy							
	4 2262 20880	Switch P.C.B.							
	4 2319 77490	Switch Push 4Key (Speakers Selector A/B, Parametric EQ, Meter Range)							
<b>RESISTORS</b>									
RD1 0 2251 JM000	Carbon	1kΩ	1/4W	±5%					
RD1 0 2251 JM000	Carbon	1kΩ	1/4W	±5%					
<b>HEADPHONE JACK P.C.B. ASSY</b>									
PCB14	141 0 1939 07530	Headphone Jack P.C.B. Assy							
	4 2262 20890	Headphone Jack P.C.B.							
	4 2359 76380	Jack 3P 6.43 (Headphones)							


## **P.C.BOARD PARTS LIST** (Continued)

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty				
<b>POWER AMP. P.C.B. ASSY (LEFT)</b>											
PCB15	141 0 1939 07540	Power Amp. P.C.B. Assy (Left)	1	R01	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5%				
	4 2262 20900	Power Amp. P.C.B. (Left)	1	R02	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5%				
	4 2369 73672	Plug 2P	1	R03	RD1 5 3251 JM000	Carbon	15kΩ 1/4W ±5%				
	4 2369 74810	Plug 6P	1	R04	RD1 5 3251 JM000	Carbon	15kΩ 1/4W ±5%				
111	2 6220 11100	Wire Wrap Terminal	3	R05	RD1 5 3251 JM000	Carbon	15kΩ 1/4W ±5%				
131	2 3608 14100	Cramp Wire	1	R06	RD7 2 3251 JM000	Carbon	27kΩ 1/4W ±5%				
131	2 6201 21500	Plate Heat Sink	2	R07	RD3 9 2251 JM000	Carbon	3.9kΩ 1/4W ±5%				
L01	4 2532 00180	RF Filter (3 μH)	1	R08	RD3 9 2251 JM000	Carbon	3.9kΩ 1/4W ±5%				
VR01	4 2229 75300	Semi Fixed 200Ω (Center Voltage Adjust)	1	R09	RD1 0 3251 JM000	Carbon	10kΩ 1/4W ±5%				
VR02	4 2229 75310	Semi Fixed 300Ω (Idling Current Adjust)	1	R10	RD2 2 0251 JM000	Carbon	22Ω 1/4W ±5%				
<b>CAPACITORS</b>											
C02	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1	R13	RD3 1 2521 JM000	Carbon	6.8kΩ 1W ±5%			
C04	CC1 0 2500 KD00C	Ceramic	0.001μF 50V ±10%	1	R14	RD3 1 2521 JM000	Carbon	6.8kΩ 1W ±5%			
C05	CD1 0 6250 0001V	Electrolytic	10μF 25V	1	R15	RD3 3 1251 JM000	Carbon	330Ω 1/4W ±5%			
C06	CD1 0 6250 0001V	Electrolytic	10μF 25V	1	R16	RD3 3 1251 JM000	Carbon	33kΩ 1/4W ±5%			
C07	4 2239 72040	Ceramic	15pF 500V	1	R17	RD3 3 3251 JM000	Carbon	33kΩ 1/4W ±5%			
C08	4 2239 72040	Ceramic	15pF 500V	1	R18	RD1 0 2251 JM000	Carbon	1kΩ 1/4W ±5%			
C09A	CC8 0 A500 DD00C	Ceramic	8pF 50V ±0.5%	1	R19	RD3 3 3251 JM000	Carbon	33kΩ 1/4W ±5%			
C09B	CC8 0 A500 DD00C	Ceramic	8pF 50V ±0.5%	1	R20	RD4 7 1251 JM000	Carbon	470Ω 1/4W ±5%			
C10	CD4 7 6101 0001V	Electrolytic	47μF 100V	1	R21	RF1 0 1501 JZ000	Fuse	100Ω 1/2W ±5%			
C11	CD4 7 6101 0001V	Electrolytic	47μF 100V	1	R22	RF1 0 1501 JZ000	Fuse	100Ω 1/2W ±5%			
C12	CD4 7 6100 0001V	Electrolytic	47μF 10V	1	R23	RD1 5 1251 JM000	Carbon	150Ω 1/4W ±5%			
C13	CC4 7 1500 KD00C	Ceramic	470pF 50V ±10%	1	R24	RD1 5 1251 JM000	Carbon	150Ω 1/4W ±5%			
C14	4 2239 72030	Ceramic	100pF 500V	1	R25	RD4 7 1251 JM000	Carbon	470Ω 1/4W ±5%			
C15	4 2239 72030	Ceramic	100pF 500V	1	R26	RD6 8 1251 JM000	Carbon	680Ω 1/4W ±5%			
C16	CM1 0 3500 KDSV	Mylar	0.01μF 50V ±10%	1	R27	RD6 8 1251 JM000	Carbon	680Ω 1/4W ±5%			
C17	CM1 0 3500 KDSV	Mylar	0.01μF 50V ±10%	1	R28	RD2 2 1251 JM000	Carbon	220Ω 1/4W ±5%			
C18	CM1 0 4500 J00TV	Mylar	0.1μF 50V ±5%	1	R29	RD2 2 1251 JM000	Carbon	220Ω 1/4W ±5%			
C19	4 2239 72060	Electrolytic	4.7μF 100V	1	R30	RH8 2 2102 JZ000	Metal	8.2kΩ 1W ±5%			
C20	4 2239 72060	Electrolytic	4.7μF 100V	1	R31	RH3 3 1202 JZ000	Metal	330Ω 2W ±5%			
C21	CM1 0 4500 J00TV	Mylar	0.1μF 50V ±5%	1	R32	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%			
<b>SEMICONDUCTORS</b>											
D01	202 5 2810 44210	Diode, DS 442	1	R33	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%				
D02	202 5 2810 44210	Diode, DS 442	1	R34	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%				
D03	202 5 2810 44210	Diode, DS 442	1	R35	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%				
D04	202 5 2810 44210	Diode, DS 442	1	R36	4 2219 71250	Cement	0.47Ω x2 ±5%				
D05	202 5 2810 44210	Diode, DS 442	1	R37	4 2219 71250	Cement	0.47Ω x2 ±5%				
D06	202 5 2810 44210	Diode, DS 442	1	R38	RD5 6 A251 JM000	Carbon	5.6Ω 1/4W ±5%				
D07	202 5 2810 44210	Diode, DS 442	1	R39	RH1 0 0202 JZ000	Metal	10Ω 2W ±5%				
D08	202 5 2810 44210	Diode, DS 442	1	R40	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5%				
D09	DA4 - STV- 3H-G	Diode, STV 3 H	1	R41	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5%				
D201	202 5 3210 22012	Zener Diode, GZ2 22 Y	1	<b>POWER AMP. P.C.B. ASSY (RIGHT)</b>							
D202	202 5 3210 22012	Zener Diode, GZ2 22 Y	1	PCB16	141 0 1939 07550	Power Amp. P.C.B. Assy (Right)	1				
D203	202 5 3210 05112	Zener Diode, GZ2 5.1 Y	1		4 2262 20910	Power Amp. P.C.B. (Right)	1				
D204	202 5 3210 05112	Zener Diode, GZ2 5.1 Y	1		4 2369 73672	Plug 2P	1				
D205	202 5 3200 03085	Zener Diode, GZ2 3.0 Y	1		4 2369 74810	Plug 6P	1				
D206	202 5 3200 03085	Zener Diode, GZ2 3.0 Y	1		111 2 6220 11100	Wire Wrap Terminal	3				
D207	202 5 3200 02211	Zener Diode, GZ2 2.2 X	1		131 2 3608 14100	Cramp Wire	1				
Q01	4 2039 72040	FET, 2SK 389	1		131 2 6201 21500	Plate Heat Sink	2				
Q02	203 5 5373 06760	Transistor, 2SC 3067	1	L01	4 2532 00180	RF Filter (3 μH)	1				
Q03	203 5 5361 24060	Transistor, 2SA 1240	1	VR01	4 2229 75300	Semi Fixed 200Ω (Center Voltage Adjust)	1				
Q04	203 5 7230 60860	Transistor, 2SA 608	1	VR02	4 2229 75310	Semi Fixed 300Ω (Idling Current Adjust)	1				
Q05	203 5 6931 20985	Transistor, 2SA 1209	1								
Q06	203 5 5251 57160	Transistor, 2SC 1571	1								
Q07	203 5 5632 91185	Transistor, 2SC 2911	1								
Q08	203 5 6931 20985	Transistor, 2SA 1209	1								
Q09	203 5 5632 91185	Transistor, 2SC 2911	1								
Q10	203 5 8122 34440	Transistor, 2SC 2344	1								
Q11	203 5 8631 01140	Transistor, 2SA 1011	1								
Q12	203 5 6830 43850	Transistor, 2SD 438	1								
Q13	203 5 6840 56050	Transistor, 2SA 560	1								
<b>CAPACITORS</b>											
C02	CC2 2 1500 KD00C	Ceramic	220pF 50V ±10%	1							
C04	CC1 0 2500 KD00C	Ceramic	0.001μF 50V ±10%	1							
C05	CD1 0 6250 0001V	Electrolytic	10μF 25V	1							
C06	CD1 0 6250 0001V	Electrolytic	10μF 25V	1							
C07	4 2239 72040	Ceramic	15pF 500V	1							
C08	4 2239 72040	Ceramic	15pF 500V	1							
C09A	CC8 0 A500 DD00C	Ceramic	8pF 50V ±0.5%	1							

**P.C.BOARD PARTS LIST (Continued)**

Ref. No.	Part No.	Description	Q'ty	Ref. No.	Part No.	Description	Q'ty								
C098	CC8 0 A500 DD00C	Ceramic	8pF	50V ±0.5%	1	R19	RD3 3 3251 JM000	Carbon	33kΩ 1/4W ±5%	1					
C10	CD4 7 6101 0001V	Electrolytic	47μF	100V	1	R20	RD4 7 1251 JM000	Carbon	470Ω 1/4W ±5%	1					
C11	CD4 7 6101 0001V	Electrolytic	47μF	100V	1	R21	RF1 0 1501 JZ000	Fuse	100Ω 1/2W ±5%	1					
C12	CD4 7 6100 0001V	Electrolytic	47μF	10V	1	R22	RF1 0 1501 JZ000	Fuse	100Ω 1/2W ±5%	1					
C13	CC4 7 1500 KD00C	Ceramic	470pF	50V ±10%	1	R23	RD1 5 1251 JM000	Carbon	150Ω 1/4W ±5%	1					
C14	4 2239 72030	Ceramic	100pF	500V	1	R24	RD1 5 1251 JM000	Carbon	150Ω 1/4W ±5%	1					
C15	4 2239 72030	Ceramic	100pF	500V	1	R25	RD4 7 1251 JM000	Carbon	470Ω 1/4W ±5%	1					
C16	CM1 0 3500 K00SV	Mylar	0.01μF	50V ±10%	1	R26	RD6 8 1251 JM000	Carbon	680Ω 1/4W ±5%	1					
C17	CM1 0 3500 K00SV	Mylar	0.01μF	50V ±10%	1	R27	RD6 8 1251 JM000	Carbon	680Ω 1/4W ±5%	1					
C18	CM1 0 4500 J00TV	Mylar	0.1μF	50V ±5%	1	R28	RD2 2 1251 JM000	Carbon	220Ω 1/4W ±5%	1					
C19	4 2239 72060	Electrolytic	4.7μF	100V	1	R29	RD2 2 1251 JM000	Carbon	220Ω 1/4W ±5%	1					
C20	4 2239 72060	Electrolytic	4.7μF	100V	1	R30	RH8 2 2102 JZ000	Metal	82kΩ 1W ±5%	1					
C21	CM1 0 4500 J00TV	Mylar	0.1μF	50V ±5%	1	R31	RH3 3 1202 JZ000	Metal	330Ω 2W ±5%	1					
<b>SEMICONDUCTORS</b>															
D01	202 5 2810 44210	Diode, DS 442			1	R32	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%	1					
D02	202 5 2810 44210	Diode, DS 442			1	R33	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%	1					
D03	202 5 2810 44210	Diode, DS 442			1	R34	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%	1					
D04	202 5 2810 44210	Diode, DS 442			1	R35	RF5 6 A251 JH000	Fuse	5.6Ω 1/4W ±5%	1					
D05	202 5 2810 44210	Diode, DS 442			1	R36	4 2219 71250	Cement	0.47Ω x2 ±5%	1					
D06	202 5 2810 44210	Diode, DS 442			1	R37	4 2219 71250	Cement	0.47Ω x2 ±5%	1					
D07	202 5 2810 44210	Diode, DS 442			1	R38	RD5 6 A251 JM000	Carbon	5.6Ω 1/4W ±5%	1					
D08	202 5 2810 44210	Diode, DS 442			1	R39	RH1 0 2020 JZ000	Metal	10Ω 2W ±5%	1					
D09	DAA - STV-3H-G	Diode, STV 3 H			1	R40	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5%	1					
D201	202 5 3210 22012	Zener Diode, GZA 22 Y			1	R41	RD4 7 3251 JM000	Carbon	47kΩ 1/4W ±5%	1					
D202	202 5 3210 22012	Zener Diode, GZA 22 Y			1	<b>NOTES:</b>									
D203	202 5 3210 05112	Zener Diode, GZA 5.1 Y			1	1.	1. Parts order must contain Model Number, Part Number and Description.								
D204	202 5 3210 05112	Zener Diode, GZA 5.1 Y			1	2.	2. Ordering quantity of screws and resistors must be multiple of 10 pcs.								
D205	202 5 3200 03085	Zener Diode, GZA 3.0 Y			1										
D206	202 5 3200 03085	Zener Diode, GZA 3.0 Y			1										
D207	202 5 3200 02211	Zener Diode, GZA 2.2 X			1										
001	4 2039 72040	FET, 2SK 389			1										
002	203 5 5373 06760	Transistor, 2SC 3067			1										
003	203 5 5361 24060	Transistor, 2SA 1240			1										
004	203 5 7230 60860	Transistor, 2SA 608			1										
005	203 5 6931 20985	Transistor, 2SA 1209			1										
006	203 5 5251 57160	Transistor, 2SC 1571			1										
007	203 5 5632 91185	Transistor, 2SC 2911			1										
008	203 5 6931 20985	Transistor, 2SA 1209			1										
009	203 5 5632 91185	Transistor, 2SC 2911			1										
010	203 5 8122 34440	Transistor, 2SC 2344			1										
011	203 5 8631 01140	Transistor, 2SA 1011			1										
012	203 5 6830 43850	Transistor, 2SD 438			1										
013	203 5 6840 56050	Transistor, 2SB 560			1										
<b>RESISTORS</b>															
R01	RD1 0 2251 JM000	Carbon	1kΩ	1/4W ±5%	1										
R02	RD4 7 3251 JM000	Carbon	47kΩ	1/4W ±5%	1										
R03	RD1 5 3251 JM000	Carbon	15kΩ	1/4W ±5%	1										
R04	RD1 5 3251 JM000	Carbon	15kΩ	1/4W ±5%	1										
R05	RD1 5 3251 JM000	Carbon	15kΩ	1/4W ±5%	1										
R06	RD2 7 3251 JM000	Carbon	27kΩ	1/4W ±5%	1										
R07	RD3 9 2251 JM000	Carbon	3.9kΩ	1/4W ±5%	1										
R08	RD3 9 2251 JM000	Carbon	3.9kΩ	1/4W ±5%	1										
R09	RD1 0 3251 JM000	Carbon	10kΩ	1/4W ±5%	1										
R10	RD2 2 0251 JM000	Carbon	22Ω	1/4W ±5%	1										
R11	RD2 2 0251 JM000	Carbon	22Ω	1/4W ±5%	1										
R12	RH6 8 2102 JZ000	Metal	6.8kΩ	1W ±5%	1										
R13	RH6 8 2102 JZ000	Metal	6.8kΩ	1W ±5%	1										
R14	RD3 3 1251 JM000	Carbon	330Ω	1/4W ±5%	1										
R15	RD3 3 1251 JM000	Carbon	330Ω	1/4W ±5%	1										
R16	RD3 3 3251 JM000	Carbon	33kΩ	1/4W ±5%	1										
R17	RD3 3 3251 JM000	Carbon	33kΩ	1/4W ±5%	1										
R18	RD1 0 2251 JM000	Carbon	1kΩ	1/4W ±5%	1										


## AUTO FUNCTION P.C.BOARD (BOTTOM VIEW)

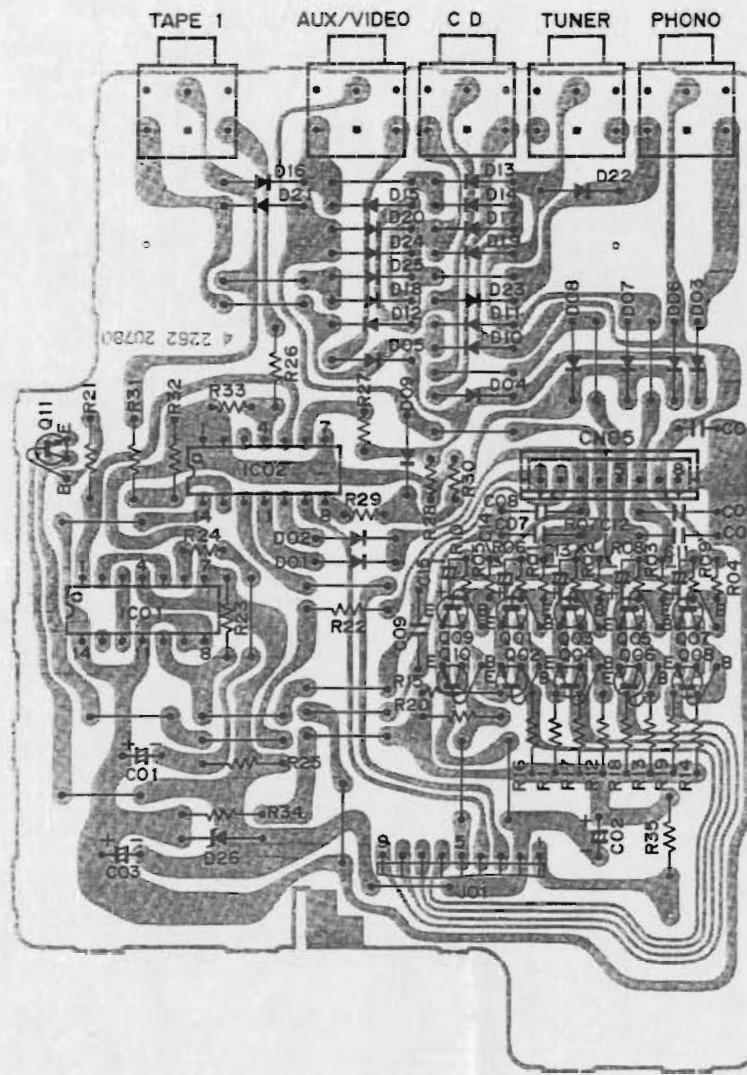

TRANSISTOR DC VOLTAGES					
SYMBOL No.	DEVICE	B	C	E	
001	2SC 536	0V	0.7V	0V	2SC 536 0.6V 0.7V 0V
002	2SC 536	0.7V	0V	0V	2SC 536 0.7V 0V 0V
003	2SC 536	0V	0.7V	0V	2SC 536 0.2V 0.7V 0V
004	2SC 536	0.7V	0V	0V	2SC 536 0.7V 0V 0V
005	2SC 536	0V	0.7V	0V	2SC 536 0.7V 0V 0V
006	2SC 536	0.7V	0V	0V	2SC 536 0V 10.3V 10.3V

IC PIN NUMBERS DC VOLTAGES					
SYMBOL No.	DEVICE	1	2	3	4
IC01	LC 4013 B	10.1V	0V	0V	0V
IC02	LC 4081 B	0V	0V	10.1V	0V
					0V 8.9V 0V -0.5V 0V 10.3V
					0V 0V 0V 0V 0V 10.3V


## EQ, FUNCTION P.C.BOARD (BOTTOM VIEW)

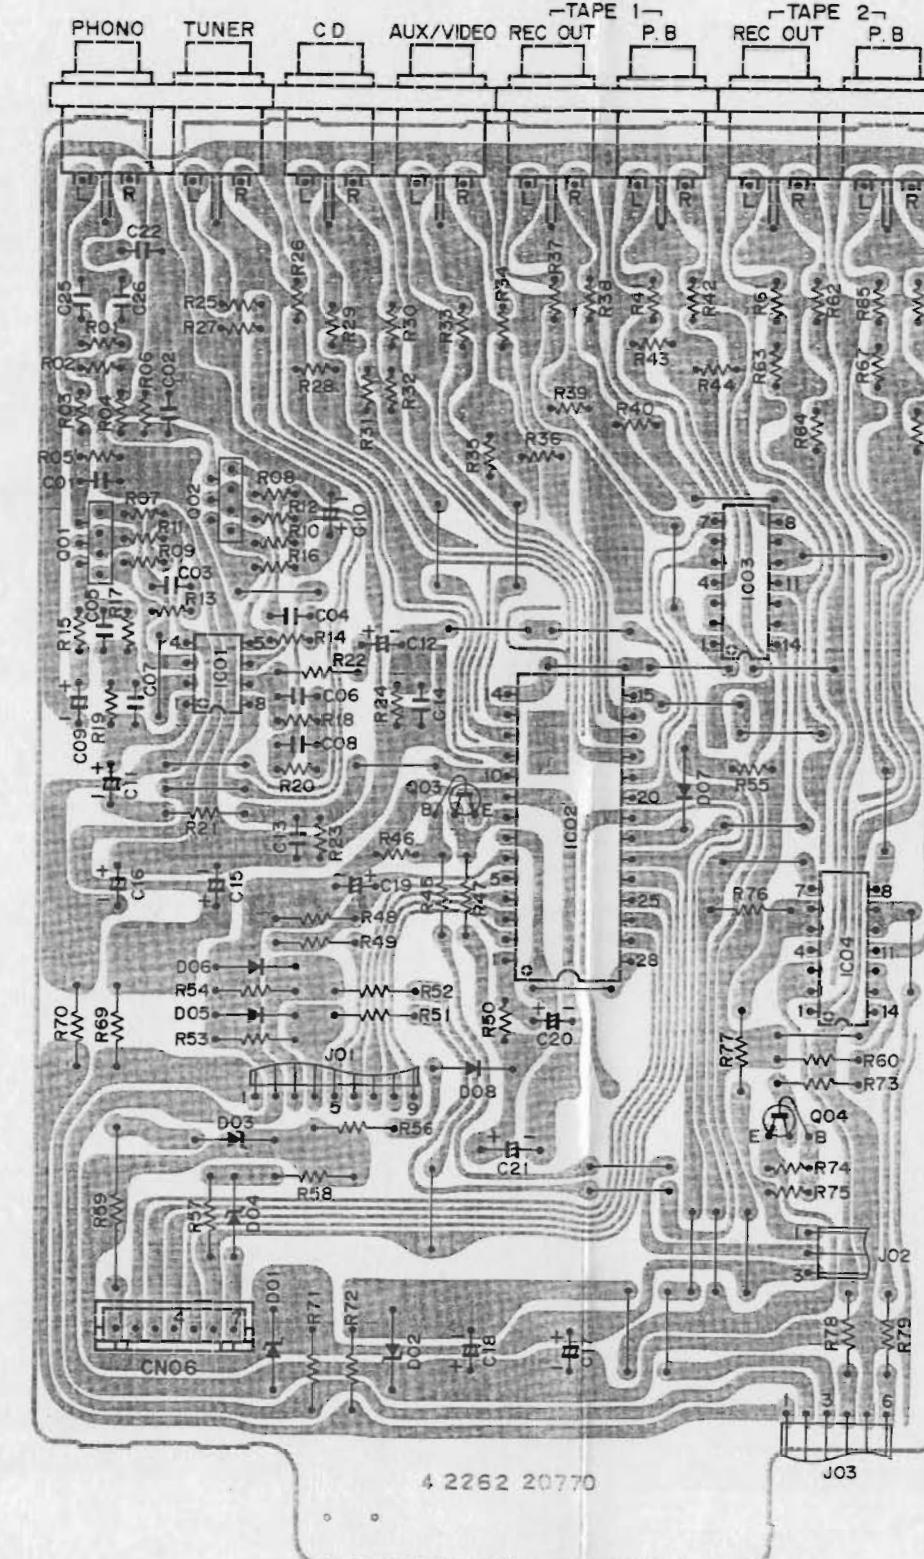


TRANSISTOR DC VOLTAGES					
SYMBOL No.	DEVICE	B	C	E	
001	2SK 389	0V	12.1V	0.2V	2SK 389 0V 12.1V 0.2V 0V
002	2SC 536	0V	19.2V	0V	2SC 536 0V 19.2V 0V 0V 20.7V
003	2SC 536	-20V	-20.7V	-20V	2SC 536 -20V -20.7V -20V 0V 0V
004	2SC 536	-20V	-20.7V	-20V	2SC 536 -20V -20.7V -20V 0V 0V

TRANSISTOR DC VOLTAGES					
SYMBOL No.	DEVICE	1	2	3	4
IC01	NAM 4560	0V	12.4V	-22.8V	12.4V
IC02	LC 7817	19.2V	0V	0V	19.6V
		21	22	23	24
		25	26	27	28
		29	30	31	32
		33	34	35	36
		37	38	39	40
		41	42	43	44
		45	46	47	48
		49	50	51	52
		53	54	55	56
		57	58	59	60
		61	62	63	64
		65	66	67	68
		69	70	71	72
		73	74	75	76
		77	78	79	80
		81	82	83	84
		85	86	87	88
		89	90	91	92
		93	94	95	96
		97	98	99	100


## LED IND. / TOUCH SWITCH P.C.BOARD (BOTTOM VIEW)

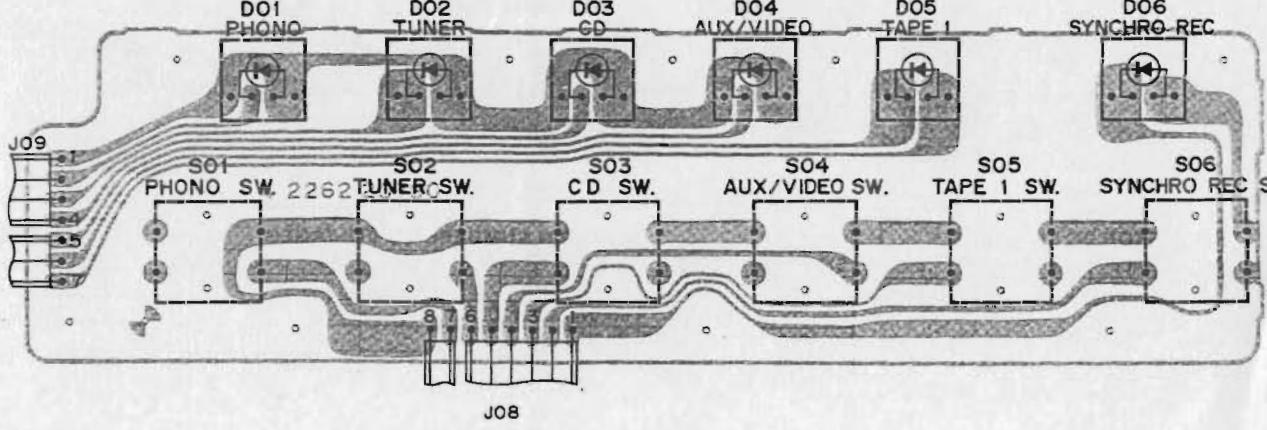

## PARAMETRIC TONE P.C.BOARD (BOTTOM VIEW)

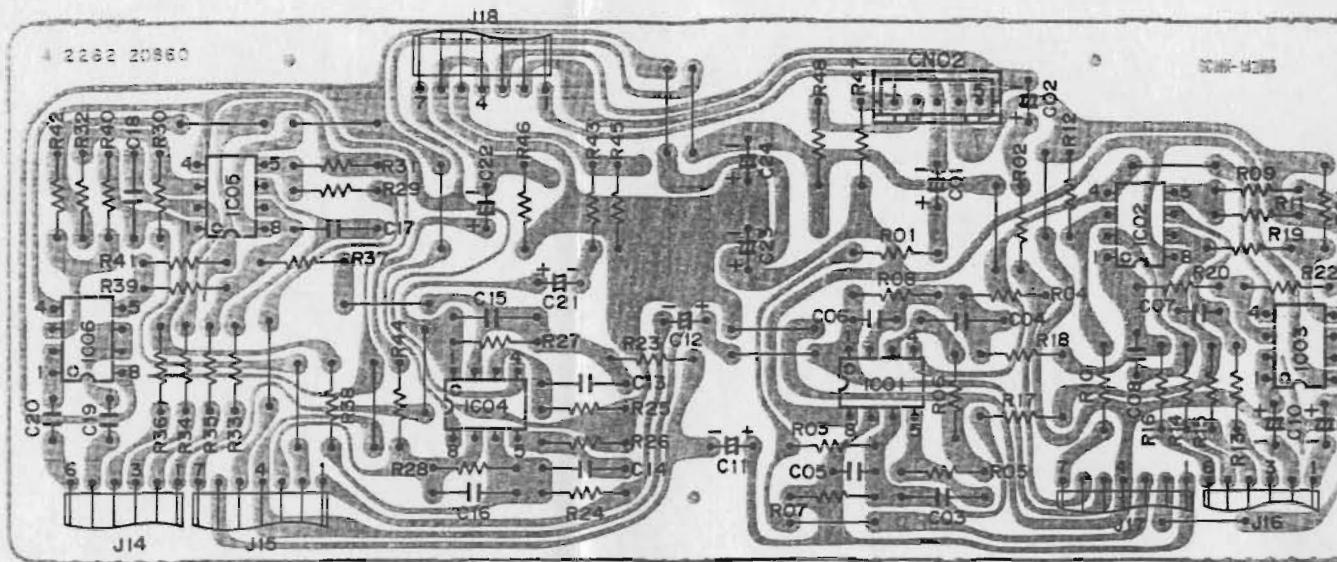


**PRE AMP. P.C.BOARD**  
(BOTTOM VIEW)

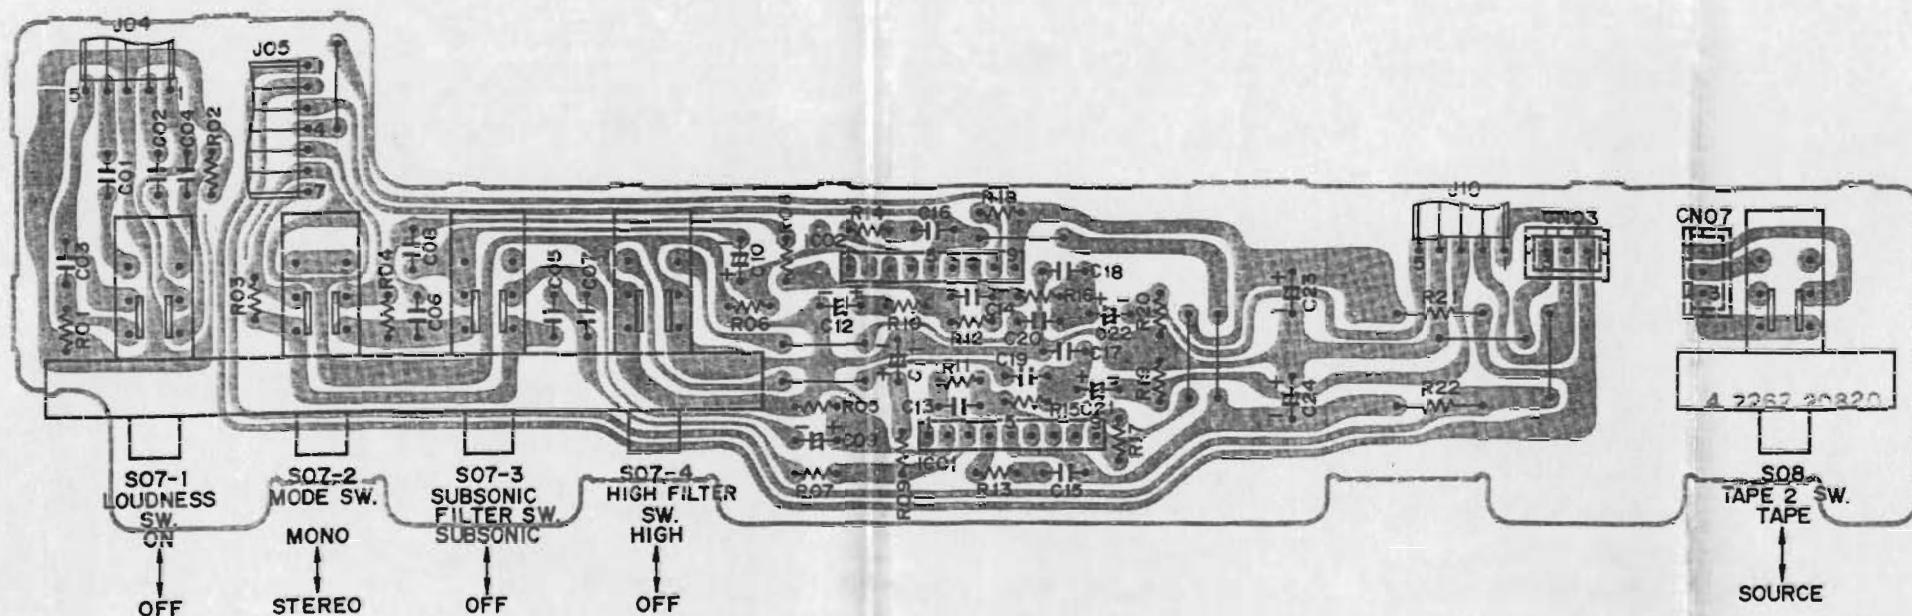

IC PIN NUMBERS DC VOLTAGES									
SYMBOL No.	DEVICE	1	2	3	4	5	6	7	8
IC01,02	TA 7322 P	0.7V	0.2V	0.2V	-21.5V	-22.8V	0.2V	0.1V	-17V
									21.7V


**POWER LEVEL METER P.C.BOARD**  
(BOTTOM VIEW)

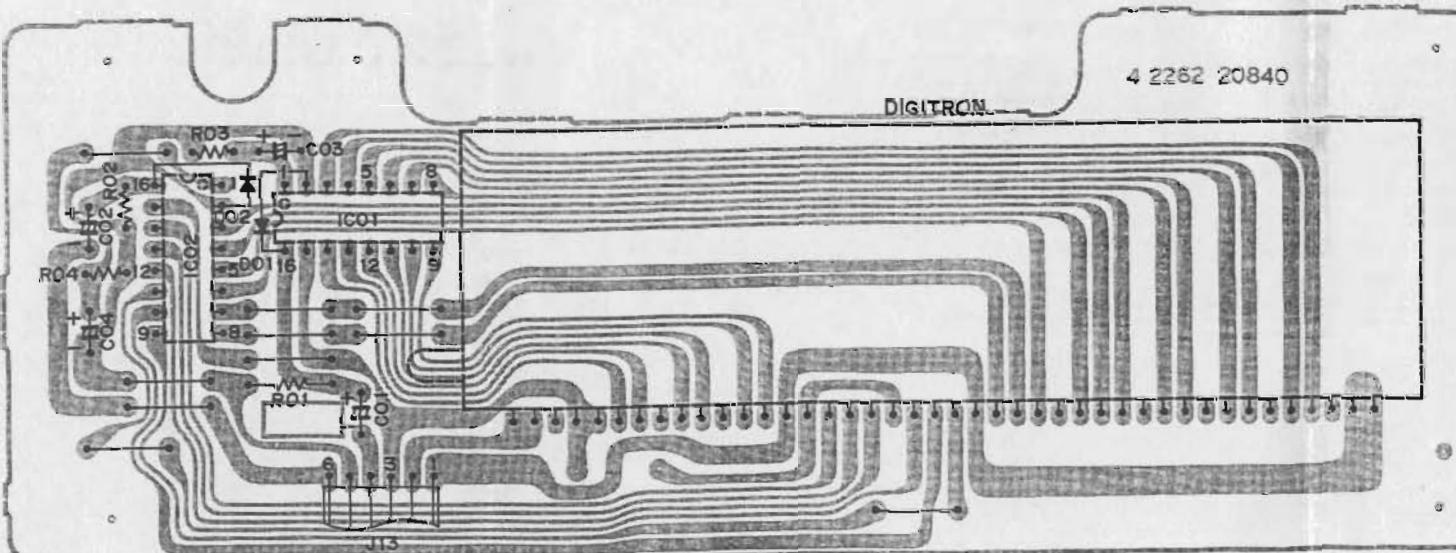

IC PIN NUMBERS DC VOLTAGES																	
SYMBOL No.	DEVICE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
IC01	BA 6146	0V	0V	-0.1V	-0.1V	-0.1V	0V	0.1V	0.2V	0.3V	0.2V	-0.1V	-0.1V	0V	-0.2V	15.1V	0V
IC02	BA 6146	0V	0V	-0.2V	-0.2V	-0.2V	-0.1V	-0.1V	0V	0V	-0.1V	-0.1V	-0.2V	-0.1V	15.1V	0V	


- 25 -

**SWITCH P.C.BOARD**  
(BOTTOM VIEW)

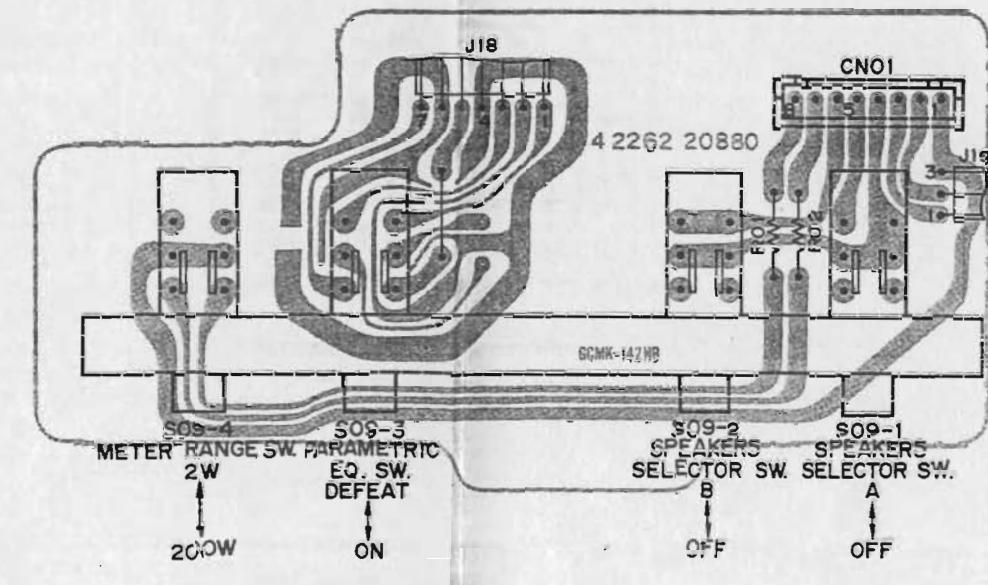

- 26 -


**POWER AMP. (LEFT) P.C.BOARD**  
(BOTTOM VIEW)

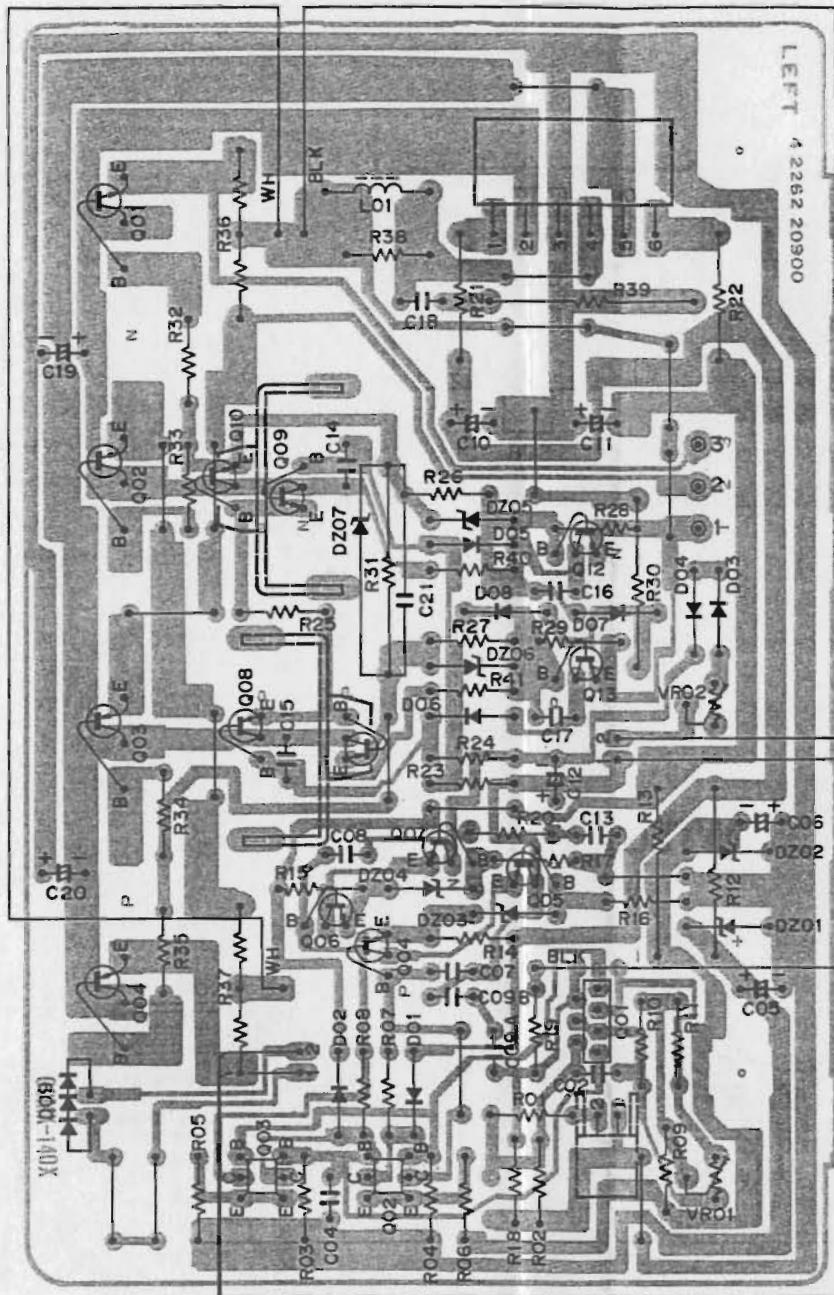


TRANSISTOR DC VOLTAGES			
SYMBOL No.	DEVICE	B	C
Q01	2SC 3281	0.6V	67.8V
Q02	2SC 3281	0.6V	67.8V
Q03	2SA 1302	-0.6V	-67.8V
Q04	2SA 1302	-0.6V	-67.8V

TRANSISTOR DC VOLTAGES			
SYMBOL No.	DEVICE	B	C
Q01	2SK 389	0V	5.0V
Q02	2SC 3067	5.0V	74.5V
Q03	2SA 1240	5.0V	-75V
Q04	2SA 608	73.4V	69.8V
Q05	SA 1209	69.5V	1.7V
SYMBOL No.	DEVICE	B	E
Q06	2SC 1571	-73V	-69.7V
Q07	2SC 2911	-70.7V	-0.2V
Q08	2SA 1209	-1.1V	-68.6V
Q09	2SC 2911	1.1V	68V
Q10	2SC 2344	1.1V	68V
SYMBOL No.	DEVICE	B	E
Q11	2SA 1011	-1.1V	-68.3V
Q12	2SD 438	0.4V	0.3V
Q13	2SB 560	-0.4V	-1.4V

**POWER AMP. (RIGHT) P.C.BOARD**  
(BOTTOM VIEW)

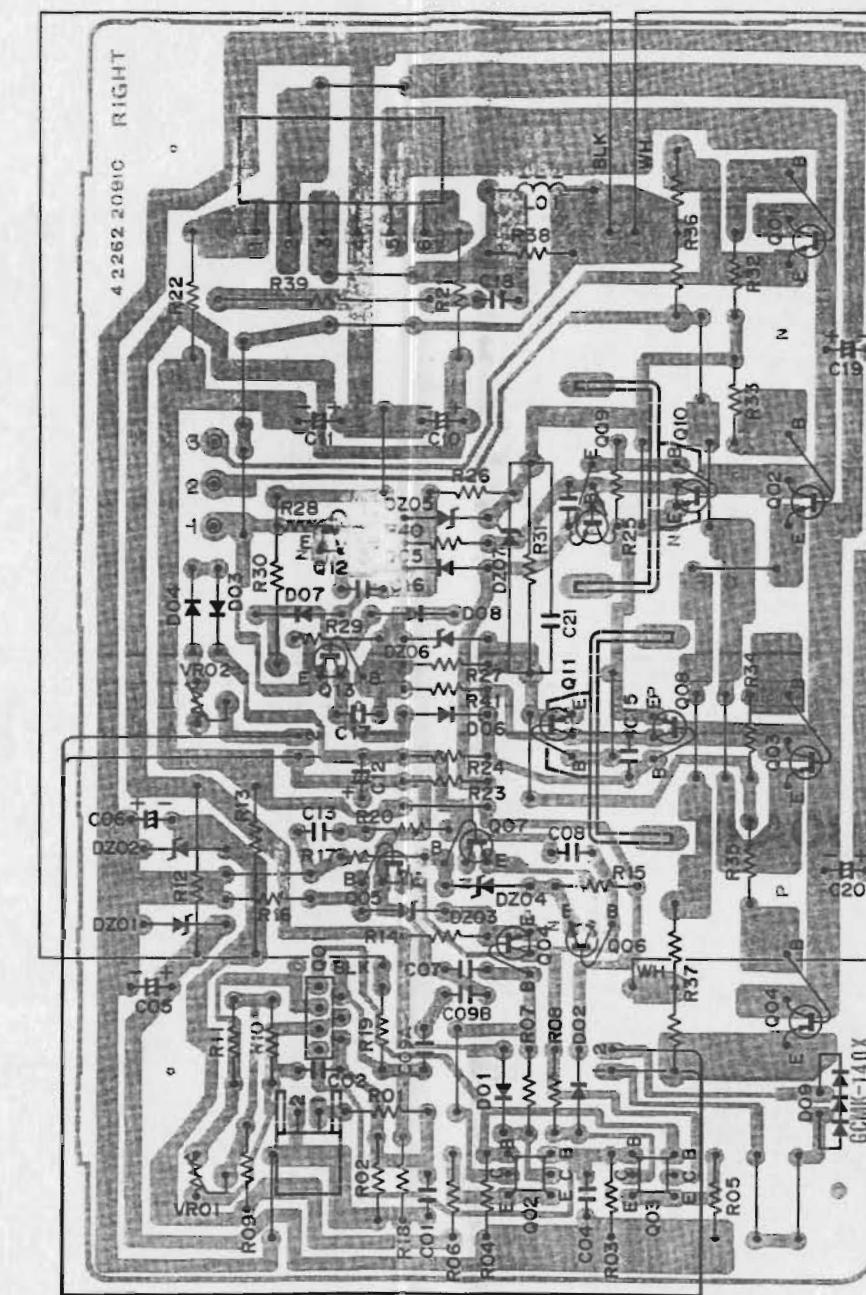


**VOLUME P.C. BOARD**  
(BOTTOM VIEW)

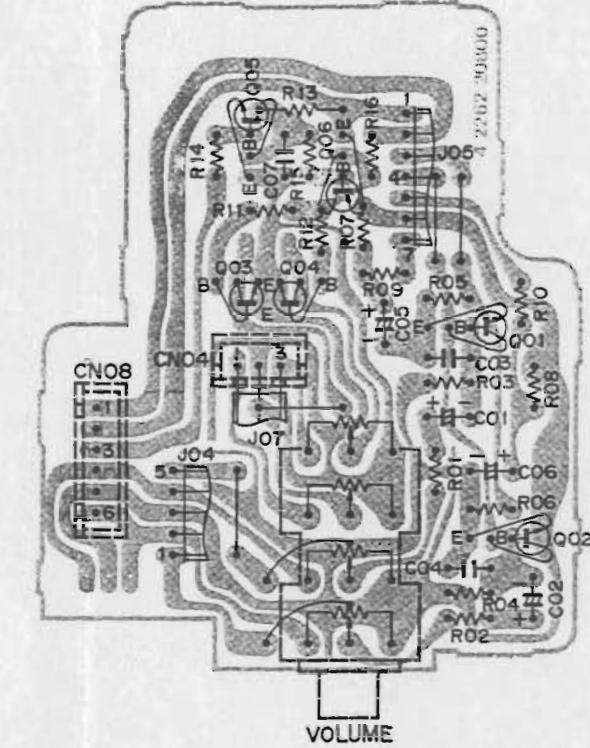


TRANSISTOR DC VOLTAGES			
SYMBOL No.	DEVICE	B	C
Q01	2SC 2240	-3.0V	21.7V
Q03	2SD 1012	-7.8V	0V
Q05	2SC 536	0V	0V
Q06	2SA 608	23.5V	-9.4V


**FUSE P.C. BOARD**

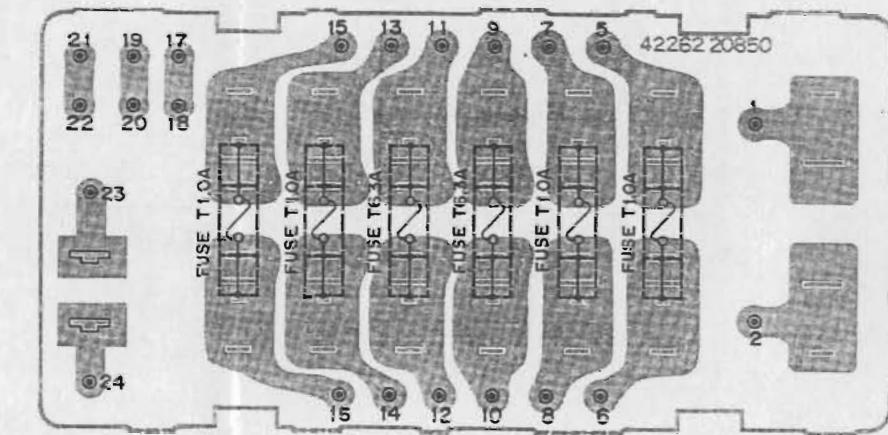


## POINT TO POINT WIRING DIAGRAM

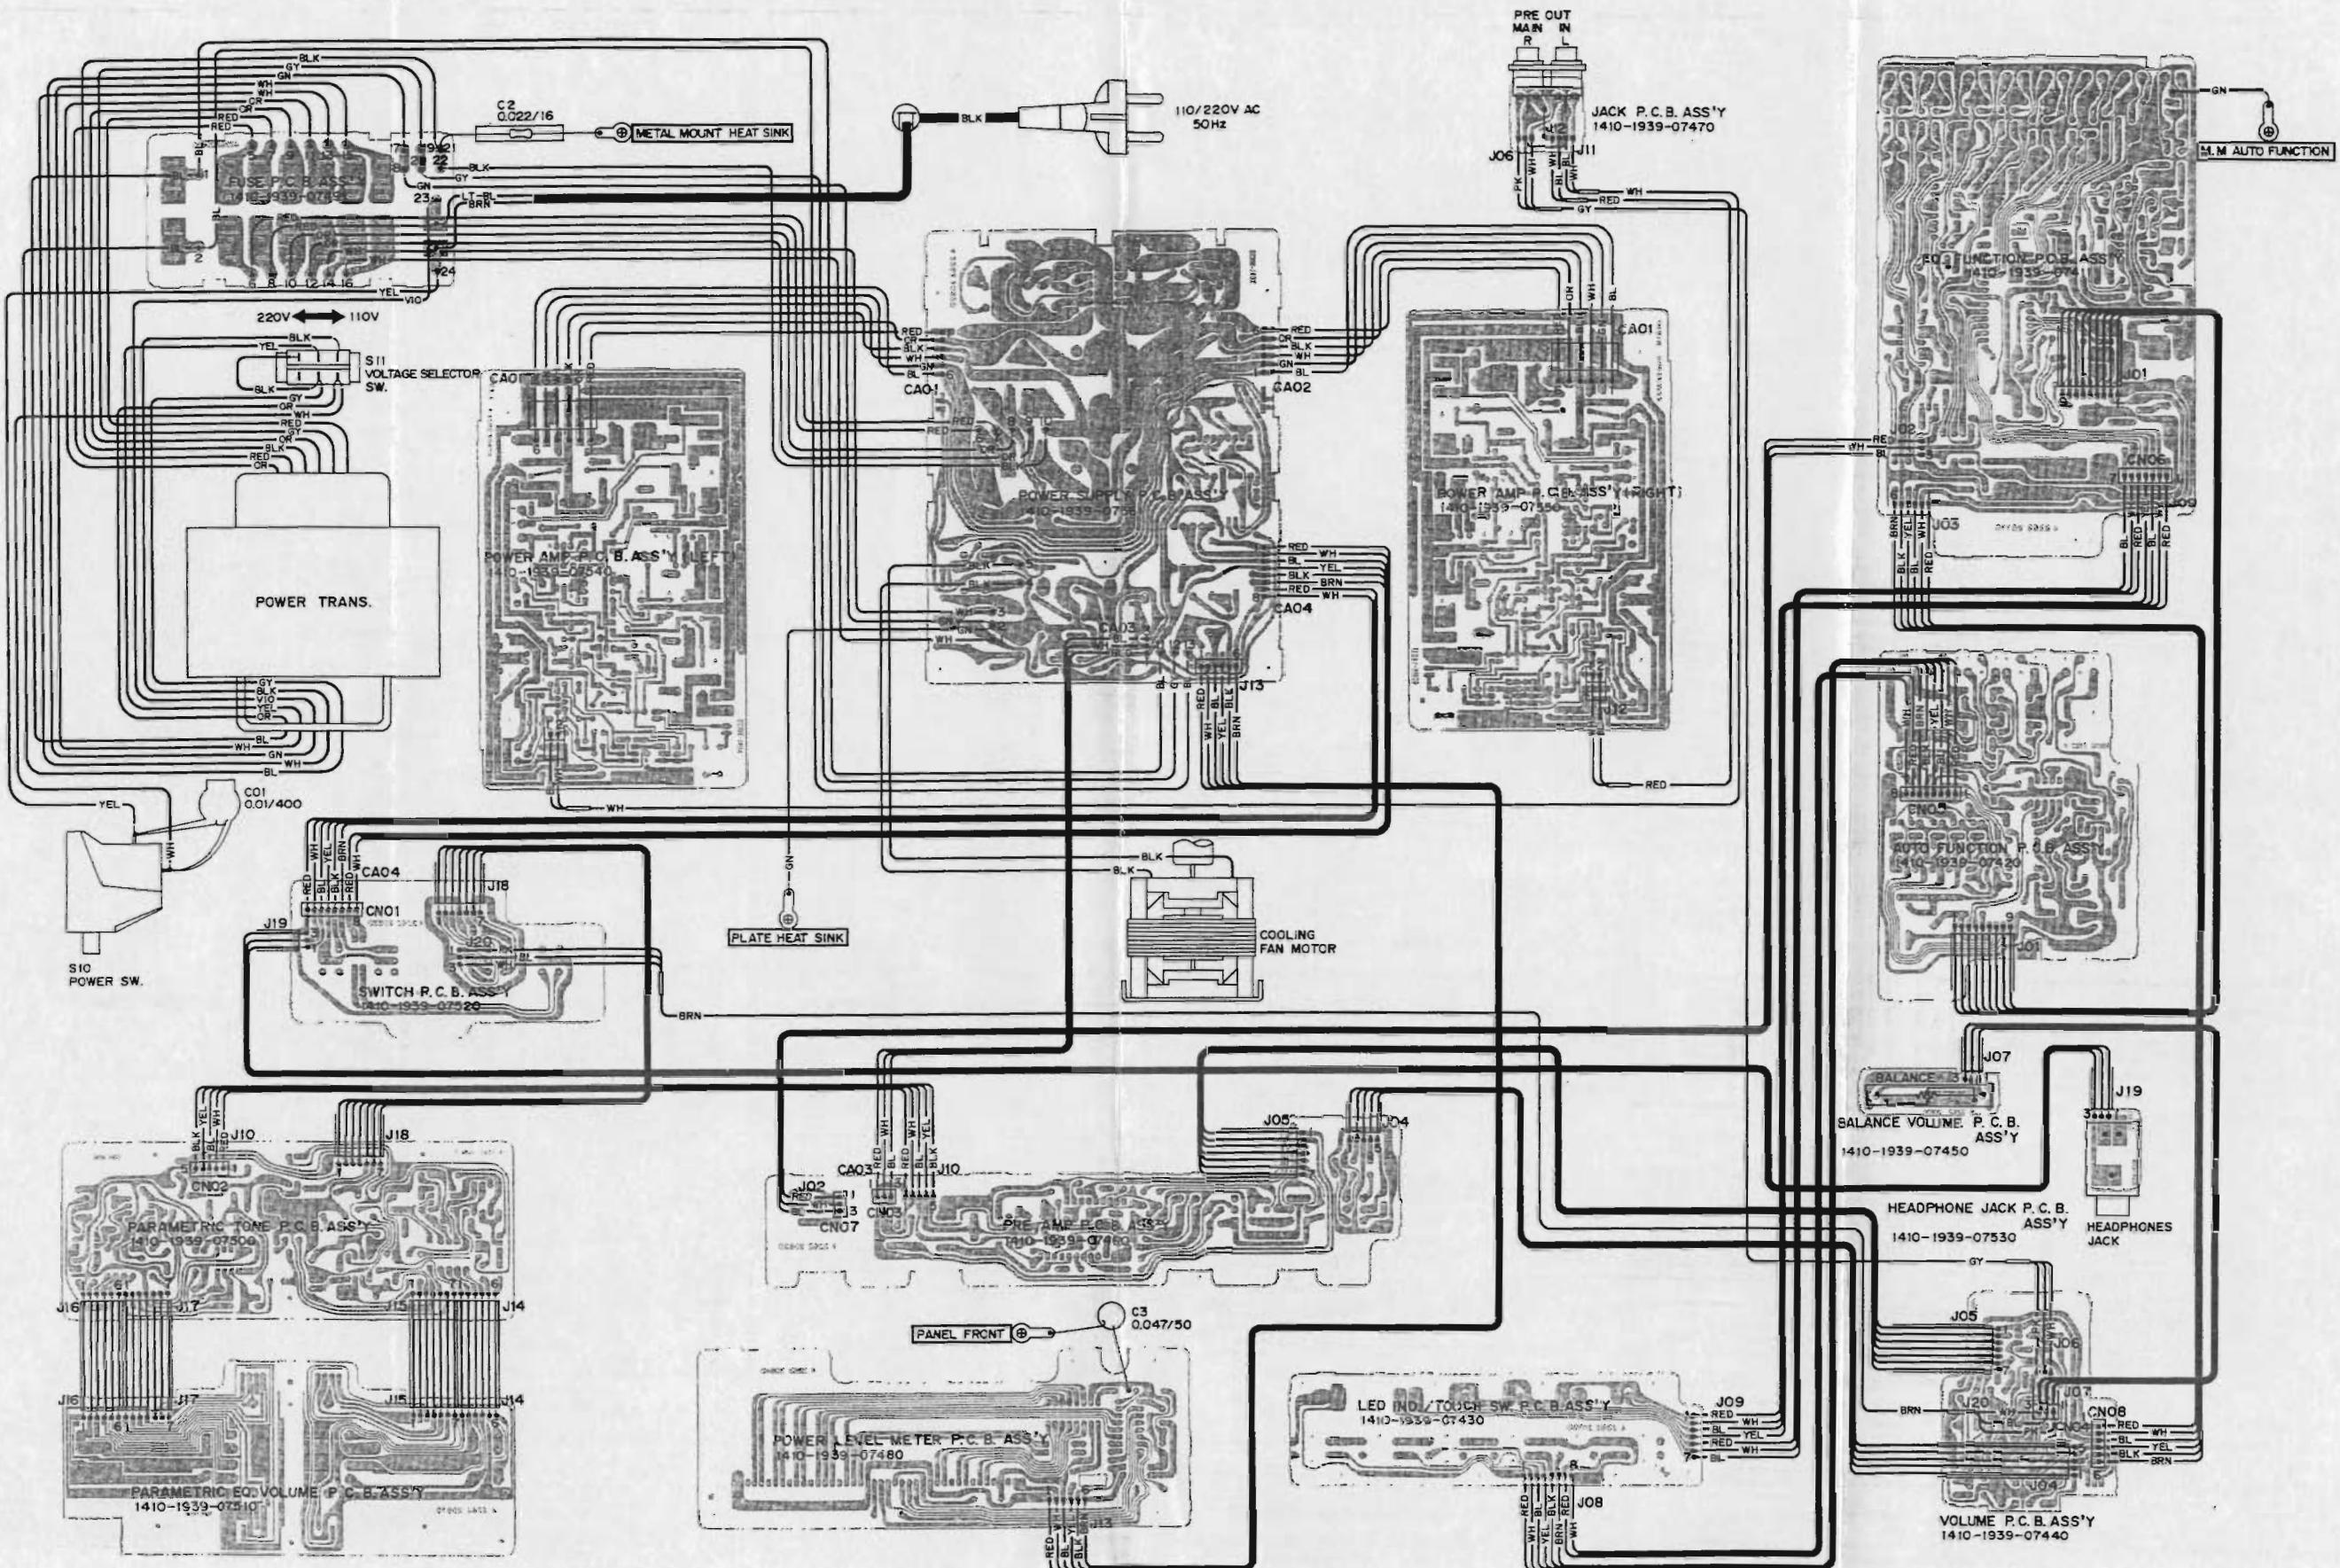

## SCHEMATIC DIAGRAM

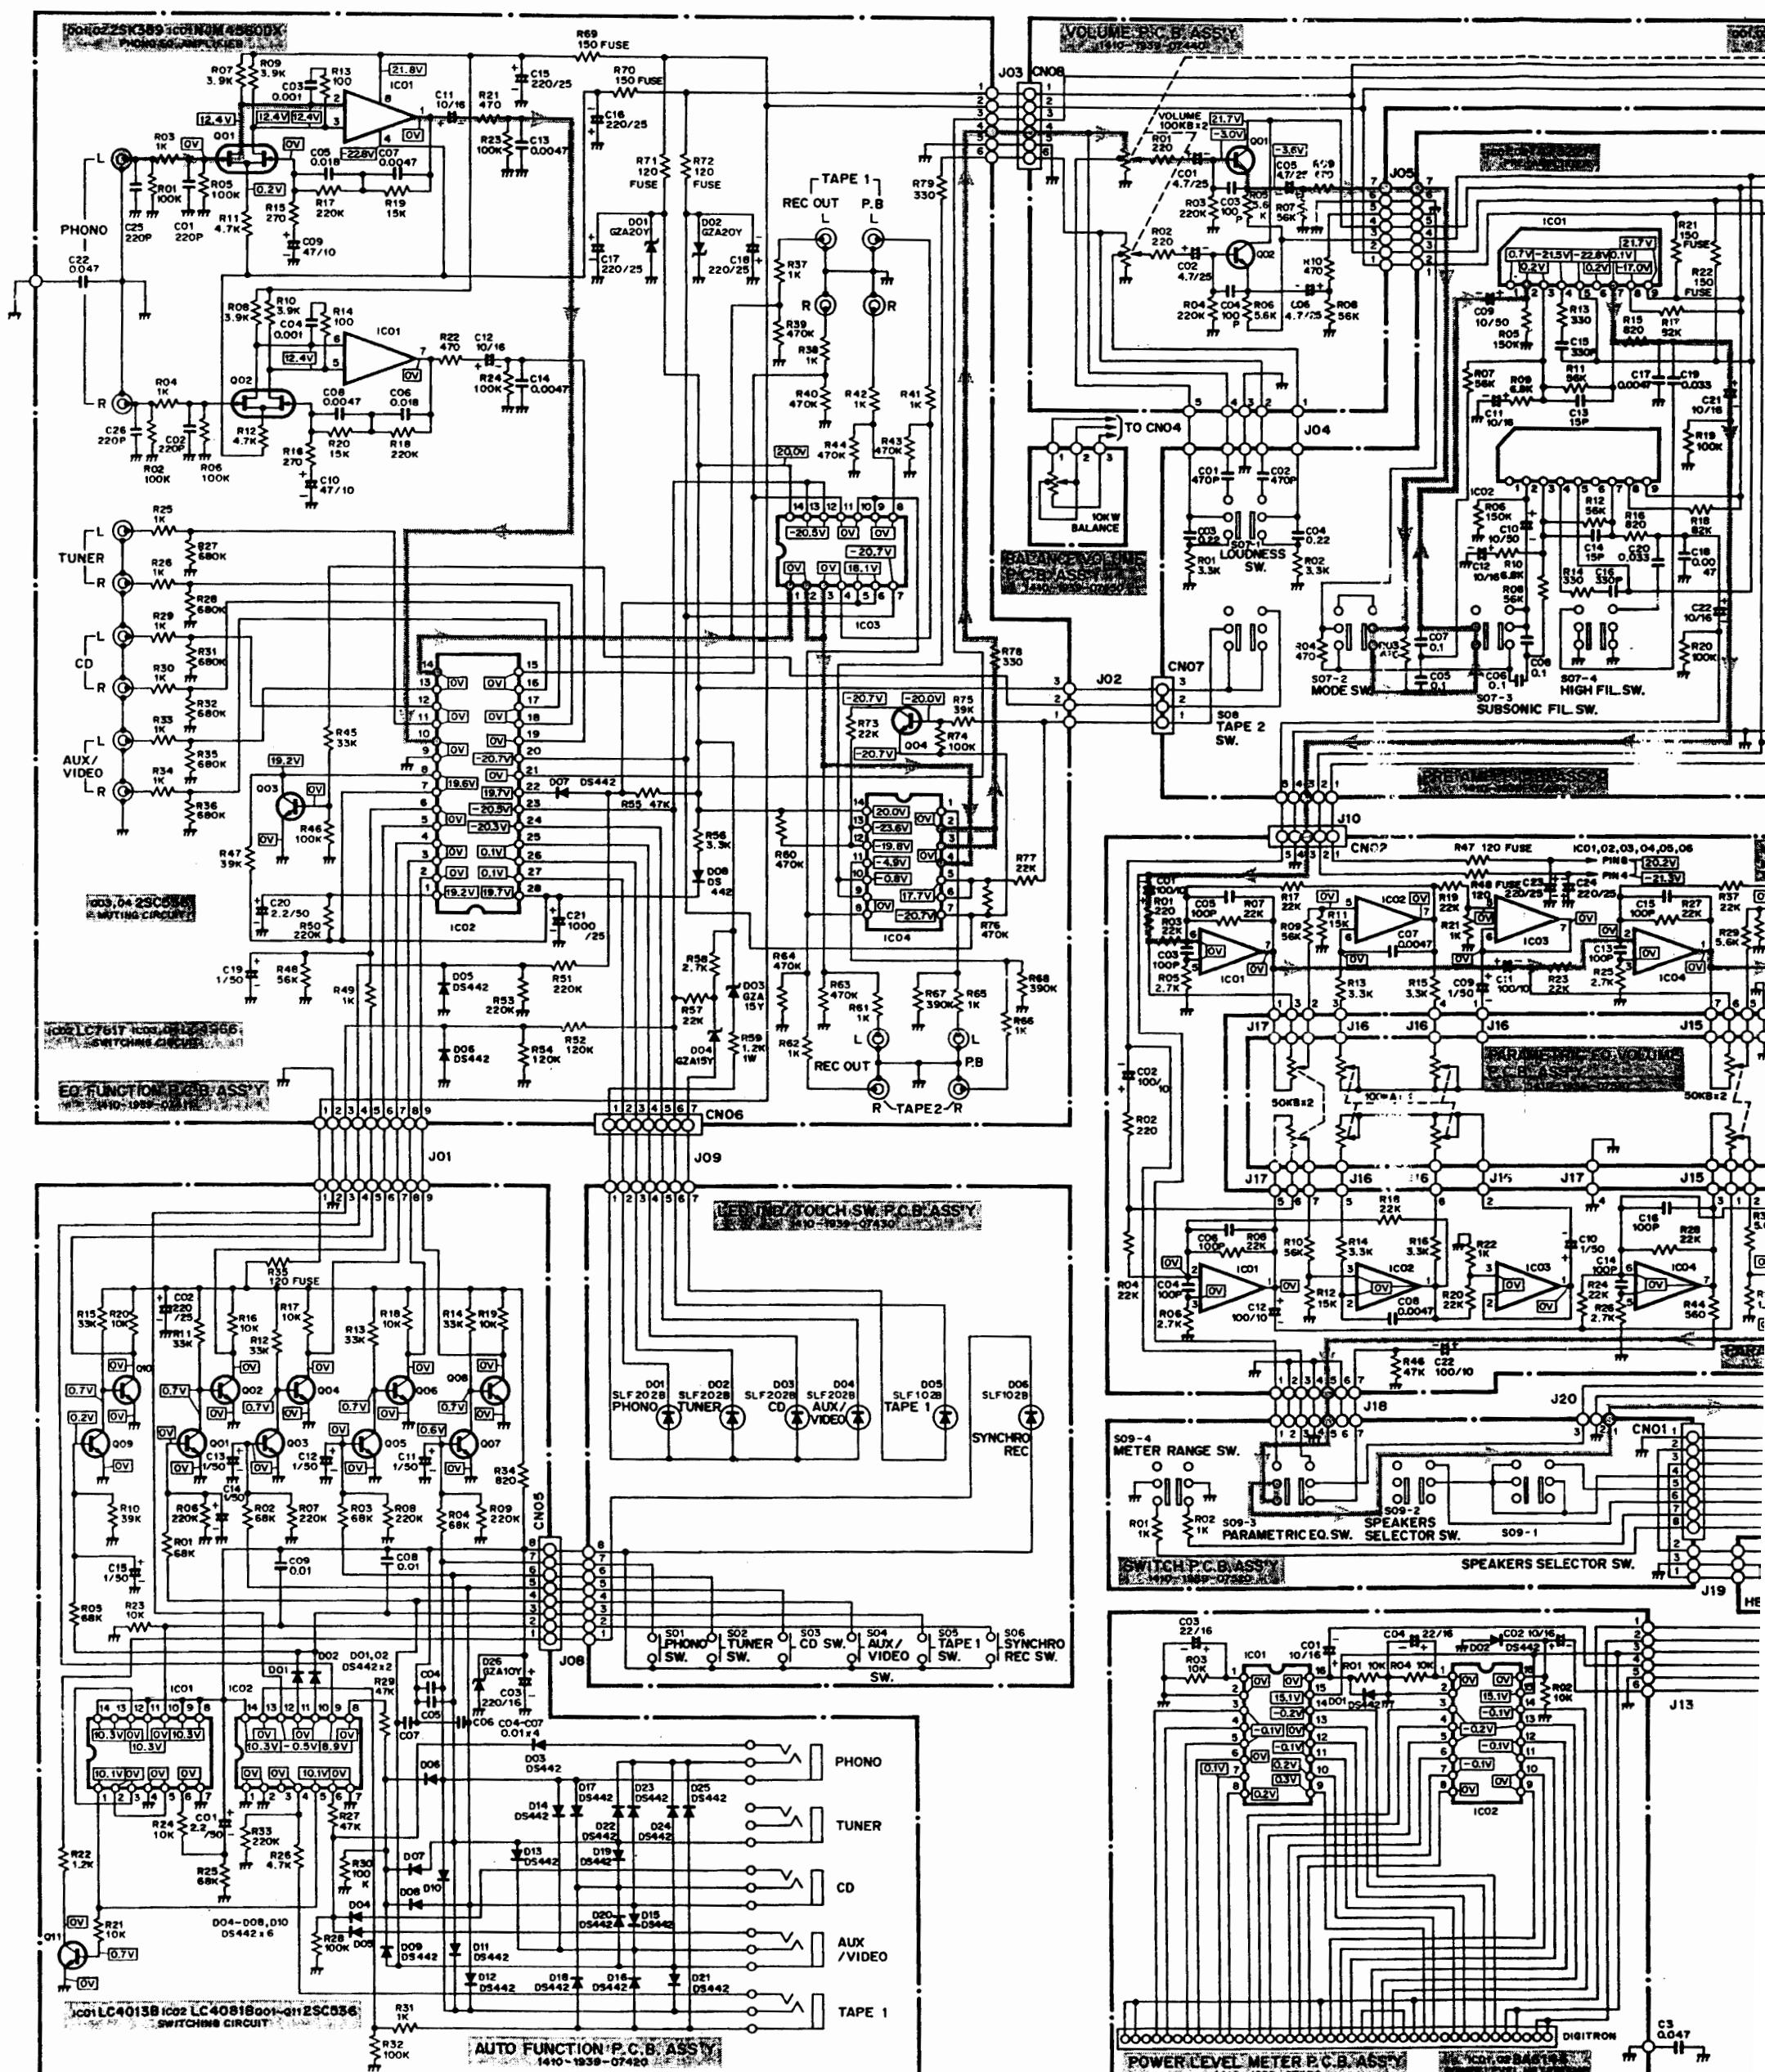

# 'IC DIAGRAM

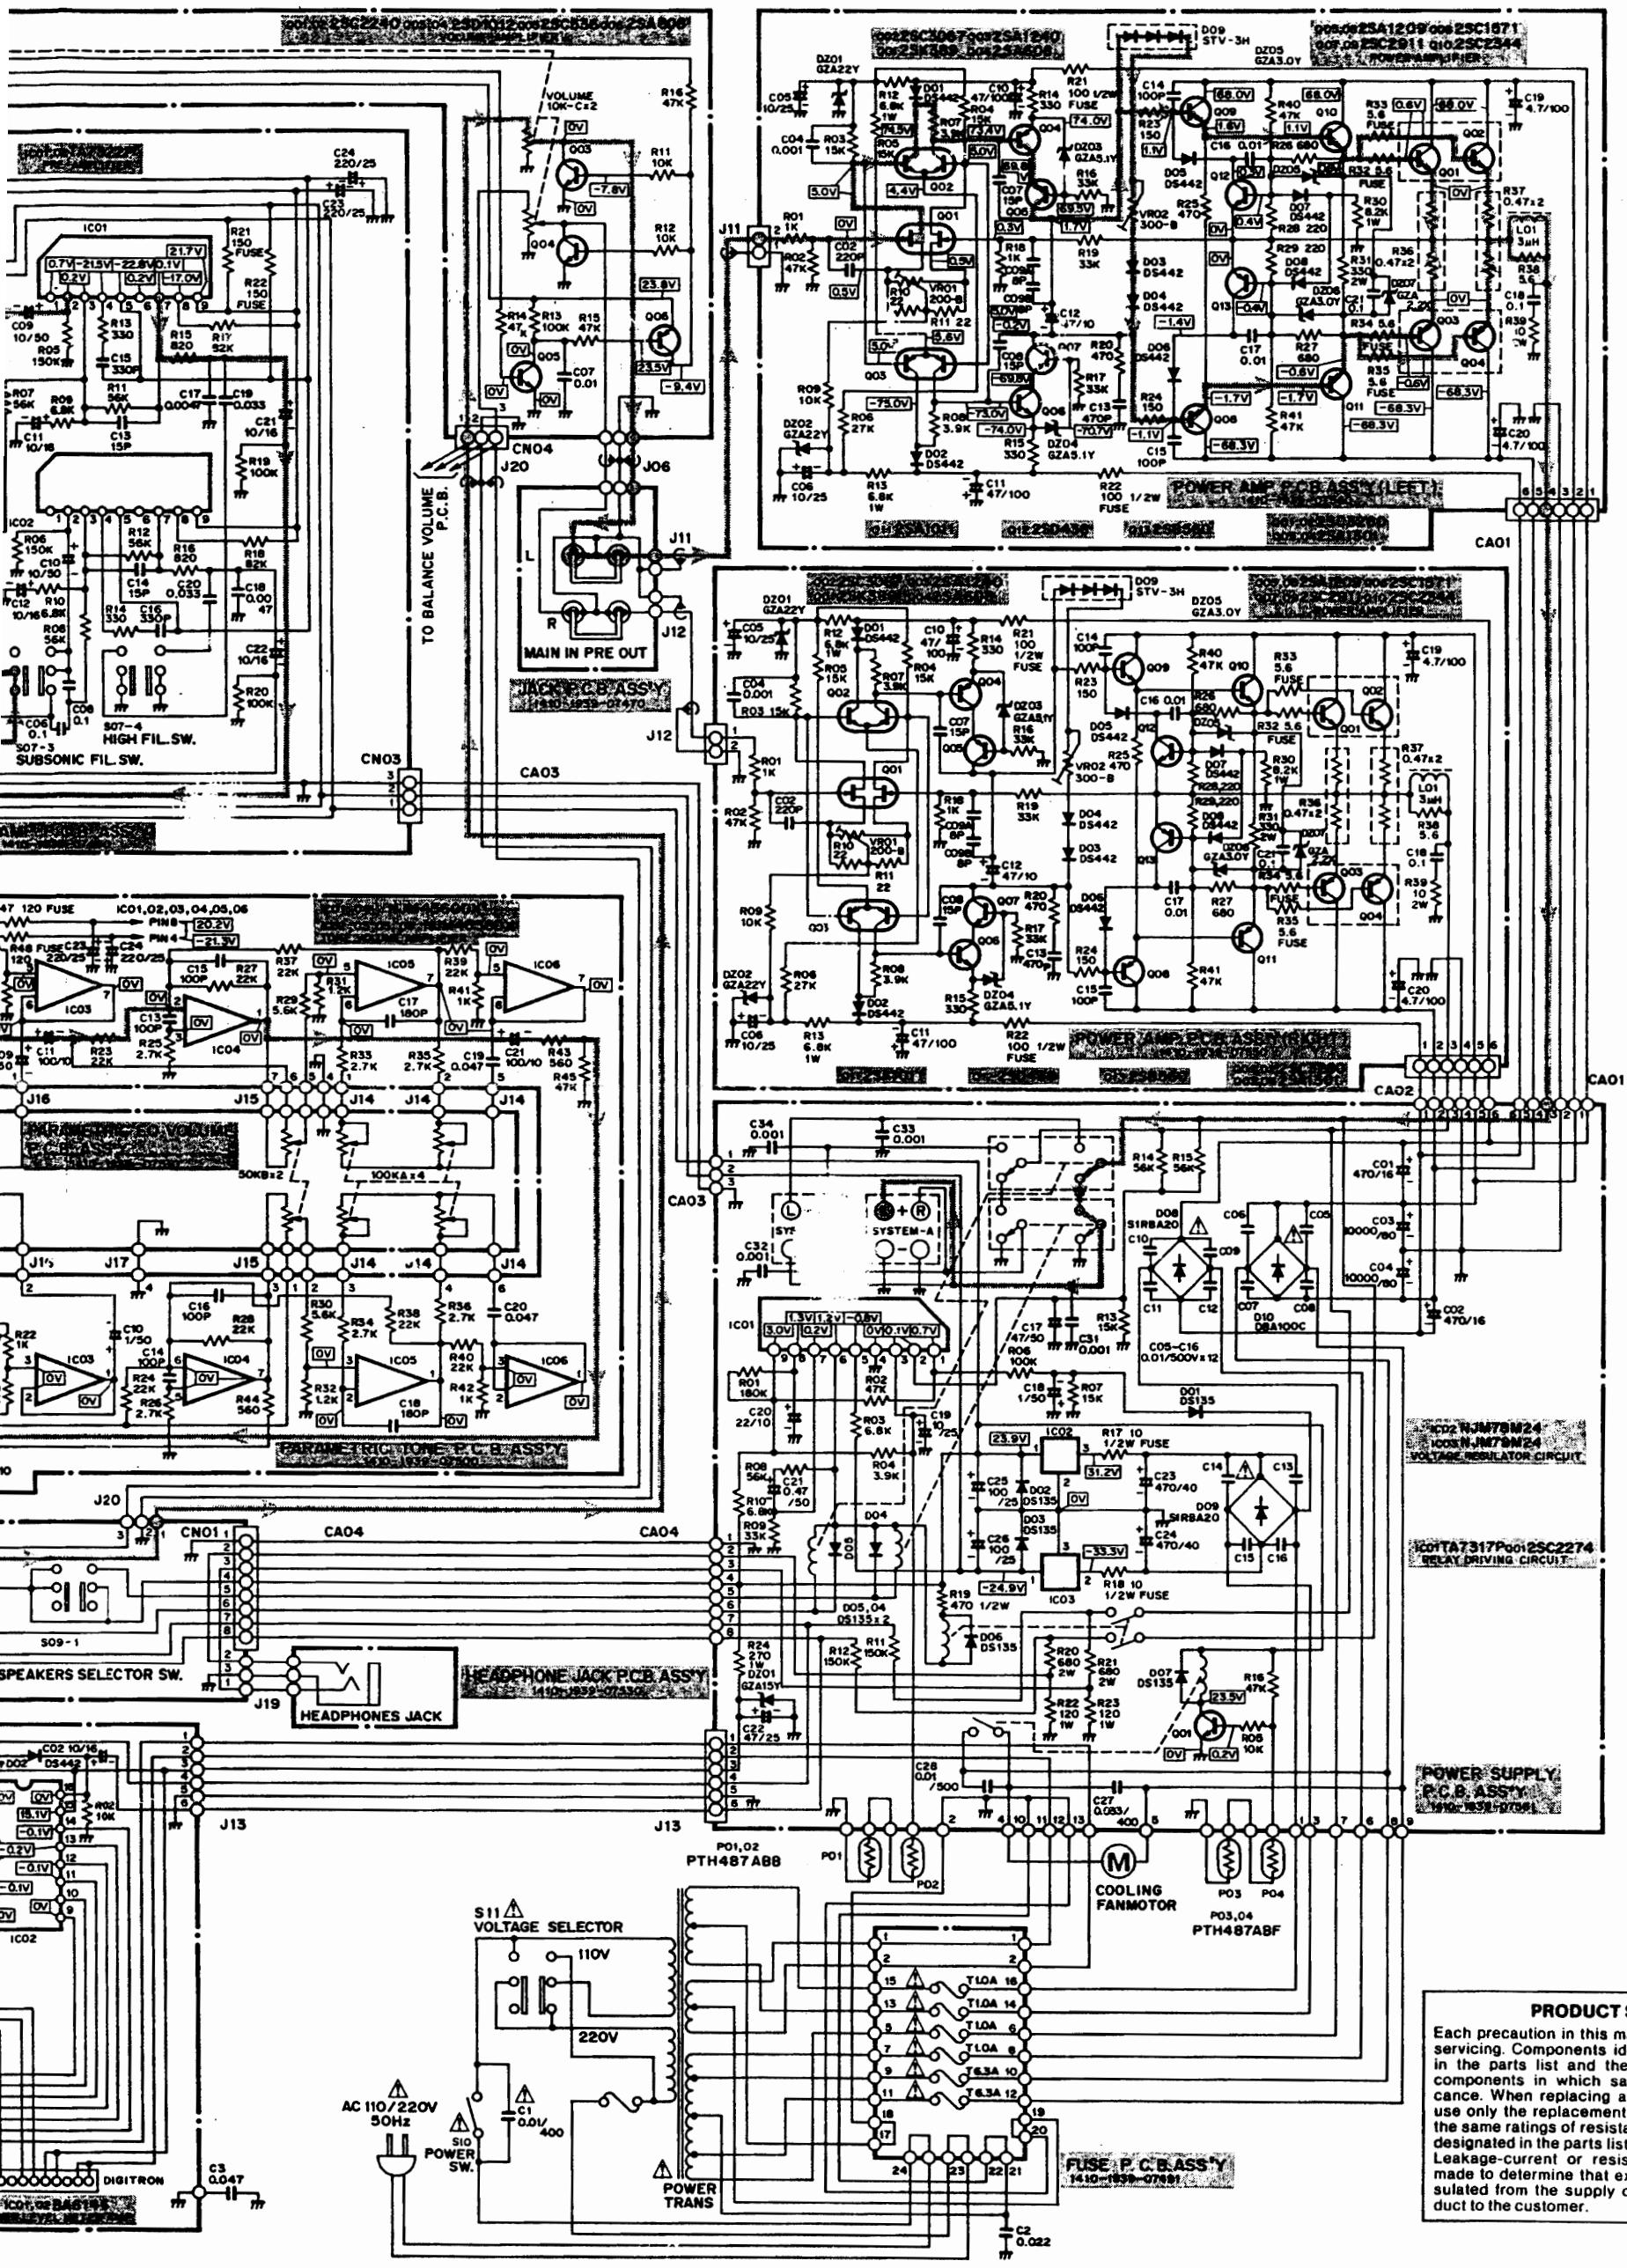

**PRODUCT SAFETY NOTICE**


**PRODUCT SAFETY NOTICE**

Each precaution in this manual should be followed during servicing. Components identified with the IEC symbol  $\Delta$  in the parts list and the schematic diagram designate components in which safety can be of special significance. When replacing a component identified with  $\Delta$ , use only the replacement parts designated, or parts with the same ratings of resistance, wattage or voltage that are designated in the parts list in this manual.


Leakage-current or resistance measurements must be made to determine that exposed parts are acceptably insulated from the supply circuit before returning the product to the customer.

# SEMICONDUCTOR LEAD IDENTIFICATION

## INTEGRATED CIRCUITS

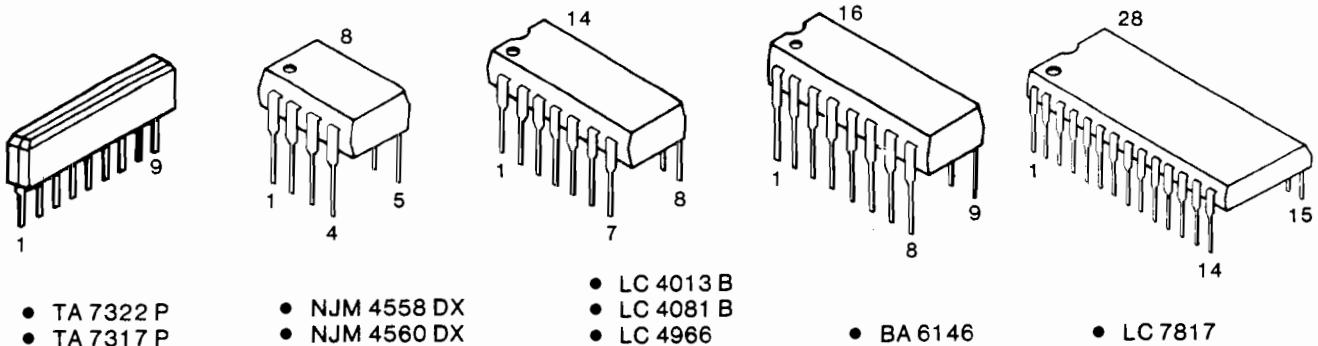

## TRANSISTORS

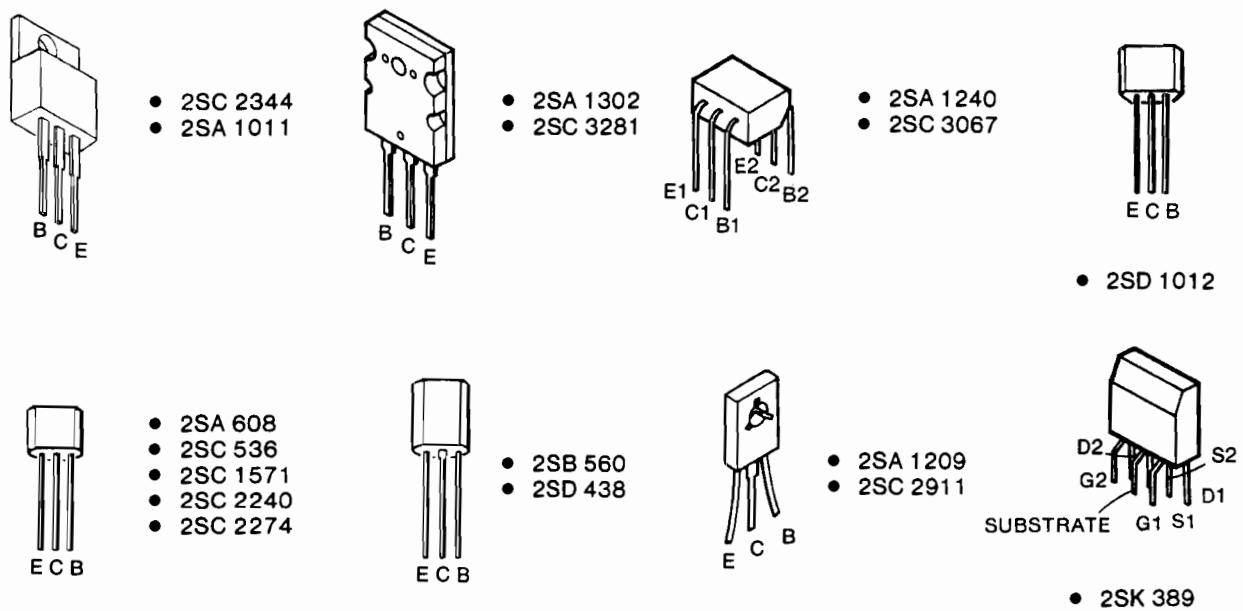

## SWITCH POSITION TABLE FOR SCHEMATIC DIAGRAM

No.	Name	Position	No.	Name	Position
S01	PHONO Switch	OFF	S07-4	HIGH FILTER Switch	OFF
S02	TUNER Switch	OFF	S08	TAPE 2 Switch	SOURCE
S03	CD Switch	OFF	S09-01	SPEAKERS SELECTOR Switch	OFF
S04	AUX/VIDEO Switch	OFF	S09-02	SPEAKERS SELECTOR Switch	OFF
S05	TAPE 1 Switch	OFF	S09-03	PARAMETRIC EQ. Switch	ON
S06	SYNCHRO REC Switch	OFF	S09-04	METER RANGE Switch	200W
S07-1	LOUDNESS Switch	OFF	S10	POWER Switch	OFF
S07-2	MODE Switch	STEREO	S11	VOLTAGE SELECTOR Switch	220V
S07-3	SUBSONIC FILTER Switch	OFF			

### NOTES:

- All resistors values are indicated in "ohm" ( $K=10^3$ ,  $M=10^6$ ).
  - All capacitors values are indicated in " $\mu F$ " ( $P=10^{-12}$ ).
  - All voltages indicated on the schematics are measured under the following conditions.
    - Use a V.T.V.M.
  - This is a basic schematic diagram.
- b. All voltages  $\pm 10\%$  with respect to chassis ground  
 c. No signals at input terminals  
 d. AC input at 220 volts 50 Hz
- Because Fisher products are subject to continuous improvement, Fisher Corporation reserves the right to make any changes or modifications without notice.