

## Servicing SW 2010, X 8SUB, and E 8SUB

Fuses F401 and F402 must be changed from T3.5A/125V to T5A/125V.

To carry out this modification, please order service kit, item no. 53980.

This kit contains:

- Fuses
  - Label for mounting on the back panel
  - Pictures showing placement of fuses and label (Fig. 1 and Fig. 2)
  - Instructions as to how the change is carried out:
- 1 Remove F401 and F402
  - 2 The two new fuses are soldered onto the PCB applying minimum heat as otherwise the fuses will be damaged
  - 3 Cross out the fuse rating on the PCB (see Fig. 1)
  - 4 Place the label on the back panel (see Fig. 2)

Fig. 1 - Cross out the fuse rating

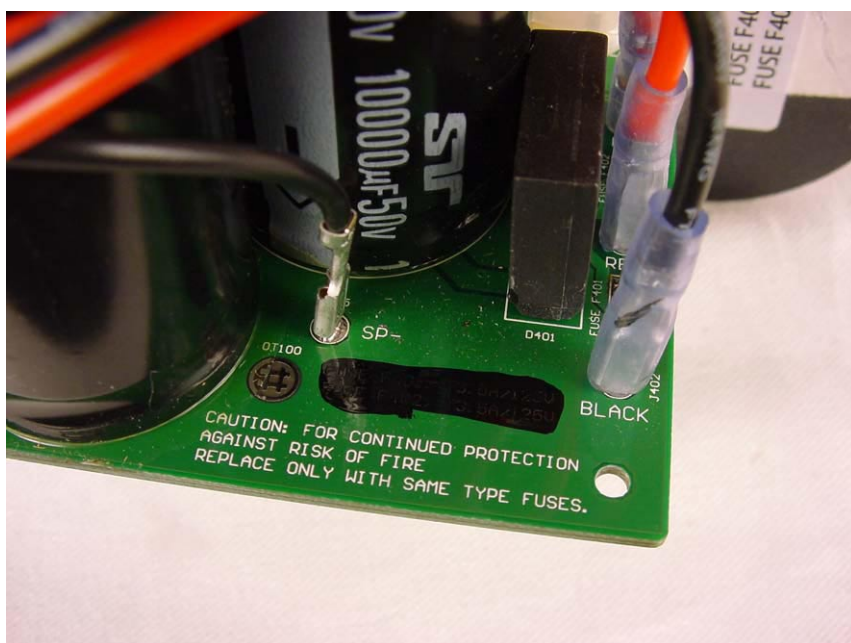


Fig. 2 - Place the label on the back panel

