HITACHI

SR-603
SR-503L
SR-303L

SERVICE MANUAL

English
Deutsch
Français

No. 113

SR-603
(Gold type)

SR-503L
(Gold type)

SR-303L
(Gold type)

SPECIFICATIONS (SR-603·503L·303L)

	SR-603	SR-503L	SR-303L
FM Section			
Frequency range	88 – 108MHz	88 – 108MHz	88 – 108MHz
Usable sensitivity	1.6μF (DIN)	1.7μF (DIN)	1.7μF (DIN)
Signal-to-noise ratio	Mono: 74dB Stereo: 67 dB	Mono: 74 dB Stereo: 67 dB	Mono: 72 dB Stereo: 65 dB
Harmonic distortion 100Hz	Mono: 0.15% Stereo: 0.3%	Mono: 0.15% Stereo: 0.3%	Mono: 0.15% Stereo: 0.3%
1kHz	Mono: 0.15% Stereo: 0.3%	Mono: 0.15% Stereo: 0.3%	Mono: 0.15% Stereo: 0.3%
6kHz	Mono: 0.2% Stereo: 0.4%	Mono: 0.2% Stereo: 0.4%	Mono: 0.2% Stereo: 0.5%
Frequency response	30 – 12kHz ($^{+0}_{-1.5}$dB)	30 – 12kHz ($^{+0.2}_{-1.5}$dB)	30 – 12kHz ($^{+0.2}_{-1.5}$dB)
Image response ratio	50 dB	50 dB	50 dB
Spurious response ratio	80 dB	80 dB	80 dB
IF response ratio	90 dB	90 dB	90 dB
Alternate channel selectivity	60 dB	56 dB	56 dB
Capture ratio	1 dB	1 dB	1 dB
AM suppression	60 dB	60 dB	55 dB
Stereo separation (1kHz)	45 dB	45 dB	40 dB
Sub-carrier suppression	60 dB	60 dB	60 dB
SCA rejection	60 dB	60 dB	55 dB
Muting threshold	6.3μV	6.3μV	6.3μV
Antenna input	300 ohms balanced, 75 ohms unbalanced	300 ohms balanced, 75 ohms unbalanced	300 ohms balanced, 75 ohms unbalanced

STEREO RECEIVER

June 1977

www.hifiengine.com

	SR-603	SR-503L	SR-303L
AM Section			
Frequency range	MW 530–1,605kHz	LW 150–350kHz MW 300μV/m, LW 800μV/m	LW 150–350kHz MW 250μV/m, LW 800μV/m
Sensitivity (S/N 20 dB)	250μV/m, 15μV (IHF,ext.antenna)	———	———
Image rejection	55 dB	———	———
IF rejection	35 dB	32 dB	32 dB
Selectivity (IHF)	35 dB	40 dB	40 dB
Signal-to-noise ratio	50 dB	Ferrite and separate ant. terminal	Ferrite and separate ant. terminal
Antenna	Ferrite and separate ant. terminal		
Audio Section			
Output			
RMS Power	30W/ch + 30W/ch (8 ohms, 20Hz–20kHz, 0.3%)	20W/ch + 20W/ch (8 ohms, 20Hz–20kHz, 0.3%)	15W/ch + 15W/ch (8 ohms, 20Hz–20kHz, 0.5%)
(both channels driven)	35W/ch + 35W/ch (8 ohms, 1kHz, 0.3%)	25W/ch + 25W/ch (8 ohms, 1kHz, 0.3%)	20W/ch + 20W/ch (8 ohms, 1kHz, 0.5%)
	40W/ch + 40W/ch (4 ohms, 1kHz, 0.3%)	30W/ch + 30W/ch (4 ohms, 1kHz, 0.3%)	25W/ch + 25W/ch (4 ohms, 1kHz, 0.5%)
Music power (IHF)	50W/ch + 50W/ch (8 ohms, 1kHz, 0.3%)	45W/ch + 45W/ch (8 ohms, 1kHz, 0.3%)	25W/ch + 25W/ch (8 ohms, 1kHz, 0.5%)
	60W/ch + 60W/ch (4 ohms, 1kHz, 0.3%)	55W/ch + 55W/ch (4 ohms, 1kHz, 0.3%)	35W/ch + 35W/ch (4 ohms, 1kHz, 0.5%)
Power bandwidth	10Hz–50kHz	10Hz–50kHz	10Hz–50kHz
Frequency characteristics (AUX, TAPE)	20Hz–20kHz (± 1 dB)	20Hz–20kHz (± 1 dB)	20Hz–20kHz (± 1 dB)
Harmonic distortion			
(at rated output)	Less than 0.3%	Less than 0.3%	Less than 0.5%
(at ½ rated output)	Less than 0.03%	Less than 0.03%	Less than 0.05%
Intermodulation distortion	Less than 0.3%	Less than 0.3%	Less than 0.5%
(at rated output)	Less than 0.05%	Less than 0.05%	Less than 0.05%
Input sensitivity	(at 32W output, 1kHz)	(at 22W output, 1kHz)	(at 22W output, 1kHz)
PHONO	2.5mV (47k-ohms)	2.5mV (47k-ohms)	2.5mV (47k-ohms)
AUX	200mV (40k-ohms)	200mV (40k-ohms)	200mV (40k-ohms)
TAPE-1	200mV (40k-ohms)	200mV (40k-ohms)	200mV (40k-ohms)
TAPE-2	200mV (40k-ohms)	200mV (40k-ohms)	———
DIN	450mV (100k-ohms)	450mV (100k-ohms)	450mV (100k-ohms)
Output level			
TAPE OUT	200mV (PHONO, AUX at rated input)	200mV (PHONO, AUX at rated input)	200mV (PHONO, AUX at rated input)
	300mV (FM 400Hz, 30% dev. input: 1mV)	300mV (FM 400Hz, 30% dev. input: 1mV)	300mV (FM 400Hz, 30% dev. input: 1mV)
	300mV (AM 400Hz, 30% mod. input: 5mV/m	300mV (AM 400Hz, 30% mod. input: 5mV/m	300mV (AM 400Hz, 30% mod. input: 5mV/m
DIN OUT	40mV (PHONO at rated input)	40mV (PHONO at rated input)	40mV (PHONO at rated input)
PHONO overload level (at 1kHz)	110mV	110mV	100mV
Signal-to-noise ratio (IHF, A-network, rated power)			
PHONO	70 dB	70 dB	70 dB
AUX	90 dB	90 dB	90 dB
TAPE	90 dB	90 dB	90 dB
Damping factor	30 (1kHz, 8 ohms)	25 (1kHz, 8 ohms)	25 (1kHz, 8 ohms)
Equalizer	RIAA ± 0.3 dB	RIAA ± 0.3 dB	RIAA ± 0.5 dB
Bass control (100Hz)	± 10 dB	± 10 dB	± 10 dB
Treble control (10kHz)	± 10 dB	± 10 dB	± 10 dB
Loudness control	+9 dB (100Hz),+4 dB (10kHz)	+9 dB (100Hz),+ 4 dB (10kHz)	+9 dB (100Hz),+4 dB (10kHz)
Semi-conductors	1 FET, 4 ICs, 18 transistors, 22 diodes	1 FET, 4 ICs, 14 transistors, 18 diodes	1 FET, 4 ICs, 14 transistors, 18 diodes
Power supply	100/120/220/240V~, 50V60Hz	100/120/220/240V~, 60/60Hz	100/120/220/240V~ 50/60Hz
Power consumption	240W	180W	140W
Dimensions	17-1/8(W)×5-11/16(H)×14-11/32(D) in.	17-1/8(W)×5-11/16(H)×14-11/32(D) in.	17-1/8(W)×5-11/16(H)×14-11/32(D) in.
	435(W) × 134(H) × 359(D)mm	435(W) × 134(H) × 359(D)mm	435(W) × 134(H) × 359(D)mm
Weight	8.0 kg (17.6 lbs)	7.6 kg (17.6 lbs)	7.6 kg (17.6 lbs)

Specifications and designs may be changed without notice for improvement.

www.hifiengine.com

FEATURES·TECHNISCHE MERKMALE·CARACTERISTIQUES

SR-603

Audio Section

1. All-stage Direct-connection Inverted Darlington OCL Amplifier
2. Electronic Protection Circuit
3. New ICs in the Equalizer and Main Amplifier
4. Tape Dubbing
5. Two Speaker System Connections

Tuner Section

1. High Quality FM Tuner
2. High Selectivity and Low Distortion IF Amplifier Using IC and 2 Ceramic Filters
3. Quadrature Detection
4. Phase Lock Loop for FM/MPX Circuit
5. A Ceramic Filter, IC in AM Tuner
6. Two Large Easy-to-read Meters and a Large-sized Flywheel Tuning Knob

Audio-Teil

1. Vollstufiger, direkt gekoppelter Darlington-OCL-Gegentaktverstärker
2. Elektronikschutzschaltung
3. Neue integrierte Schaltkreise im Entzerrer und Hauptverstärker
4. Bandaufnahme vom Original
5. Anschluß für zwei Lautsprecherpaare

Rundfunkempfangsteil

1. Hochwertiger UKW-Tuner
2. ZF-Verstärker mit großer Selektivität und geringem Klirrfaktor, mit IC und 2 Keramikfiltern bestückt
3. Phasenschieberkreis
4. Phasenstarre Scheife für die UKW/MPX-Schaltung
5. Keramikfilter, integrierte Schaltung im MW-Tuner
6. Zwei große, gut lesbare Meßinstrumente und ein großdimensionierter Schwungrad-Abstimmknopf

Section Audio

1. Amplificateur OCL à Darlington inversé à connexion directe tous étages
2. Circuit électronique de protection
3. De nouveaux circuits intégrés dans l'égalisateur et dans l'amplificateur principal
4. Copiage de bande
5. Branchement de deux paires d'enceintes

Section Tuner

1. Tuner FM de haute qualité
2. Amplificateur FM à faible taux de distorsion et haute sélectivité employant un circuit intégré et 2 filtres céramiques
3. Détection de quadrature
4. Boucle à blocage de phase pour le circuit FM/MPX
5. Filtre céramique et circuit intégré dans le tuner AM
6. Deux grands indicateurs d'accord faciles à lire et un bouton de syntonisation à volant surdimensionné

SR-503L

Tuner Section

1. High Quality FM Tuner
2. High Selectivity and Low Distortion IF Amplifier Using IC and 2 Ceramic Filters
3. Quadrature Detection
4. Phase Lock Loop for FM/MPX Circuit
5. A Ceramic Filter, IC in AM Tuner
6. One Large Easy-to-read Meter and a Large-sized Flywheel Tuning Knob

Audio Section

1. All-stage Direct-connection Inverted Darlington OCL Amplifier
2. New ICs in the Equalizer and Main Amplifier
3. Tape Dubbing
4. Two Speaker Systems Connection

Rundfunkempfangsteil

1. Hochwertiger UKW-Tuner
2. ZF-Verstärker mit großer Selektivität und geringem Klirrfaktor, der mit ICs und 2 Keramikfiltern bestückt ist
3. Phasenschieberkreis
4. Phasenstarre Scheife für die UKW/MPX-Schaltung
5. Keramikfilter, integrierte Schaltung im Tuner
6. Großes, gut lesbares Meßinstrument und großdimensionierter Schwungrad-Abstimmknopf

Audio-Teil

1. Vollstufiger, direkt gekoppelter Darlington-OCL-Gegentaktverstärker
2. Neue integrierte Schaltkreise im Entzerrer und Hauptverstärker
3. Bandaufnahme vom Original
4. Anschluß für zwei Lautsprecherpaare

Section Tuner

1. Tuner FM de haut qualité
2. Amplificateur FM à faible taux de distorsion et haute sélectivité employant des circuits intégrés et 3 filtres céramiques
3. Détection quadriphonique
4. Boucle à blocage de phase pour le circuit FM/MPX
5. Filtre céramique et circuits intégrés dans le tuner AM
6. Un grand indicateur d'accord facile à lire et un bouton de syntonisation à volant surdimensionné

Section Audio

1. Amplificateur OCL à Darlington inversé à connexion directe tous étages
2. De nouveaux circuits intégrés dans l'égalisateur et dans l'amplificateur principal
3. Copiage de bande
4. Branchement de deux paires de haut-parleurs

SR-303L

Tuner Section

1. High Quality FM Tuner
2. High Selectivity and Low Distortion IF Amplifier Using IC and 2 Ceramic Filters
3. Quadrature Detection
4. Phase Lock Loop for FM/MPX Circuit
5. A Ceramic Filter, IC in AM Tuner
6. One Large Easy-to-read Meter and a Large-sized Flywheel Tuning Knob

Audio Section

1. All-stage Direct-connection Inverted Darlington OCL Amplifier
2. New ICs in the Equalizer and Main Amplifier
3. Two Speaker System Connections

www.hifiengine.com

Rundfunkempfangsteil

1. Hochwertiger UKW-Tuner
2. ZF-Verstärker mit großer Selektivität und geringem Klirrfaktor, mit IC und 2 Keramikfiltern bestückt
3. Phasenschieberkreis
4. Phasenstarre Schleife für die UKW/MPX Schaltung
5. Keramikfilter und integrierte Schaltung im MW-Tuner
6. Großes, gut lesbares Meßinstrument und großdimensionierter Schwungrad Abstimmknopf

Audio-Teil

1. Vollstufiger, direkt gekoppelter Darlington-OCL-Gegentaktverstärker
2. Neue integrierte Schaltungen im Entzerrer und Hauptverstärker
3. Anschluß für zwei Lautsprecherpaare

Section Tuner

1. Tuner FM de haute qualité
2. Amplificateur FM à faible taux de distorsion et haute sélectivité employant un circuit intégré et 2 filtres céramiques
3. Détection de quadrature
4. Boucle à blocage de phase pour le circuit FM/MPX
5. Filtre céramique et circuit intégré dans le tuner AM
6. Un grand indicateur d'accord facile à lire et un bouton de syntonisation à volant surdimensionné

Section Audio

1. Amplificateur OCL Darlington inversé à connexion directe tous étages
2. Nouveaux CI dans le circuit Correcteur et amplificateur principal
3. Branchement de deux paires d'enceintes

DISASSEMBLY AND REPLACEMENT·ZERLEGUNG UND AUSTAUSCH· DEMONTAGE ET REPLACEMENT (SR-603·503L·303L)

- **REMOVING THE CABINET, FRONT PANEL & BOTTOM PLATE**
- **GEHÄUSE, FRONTTAFEL UND GEHÄUSEUNTERSEITE ABNEHMEN**
- **DÉPOSER LE COFFRAGE, LE PANNEAU AVANT ET LA PLAQUE INFÉRIEURE**

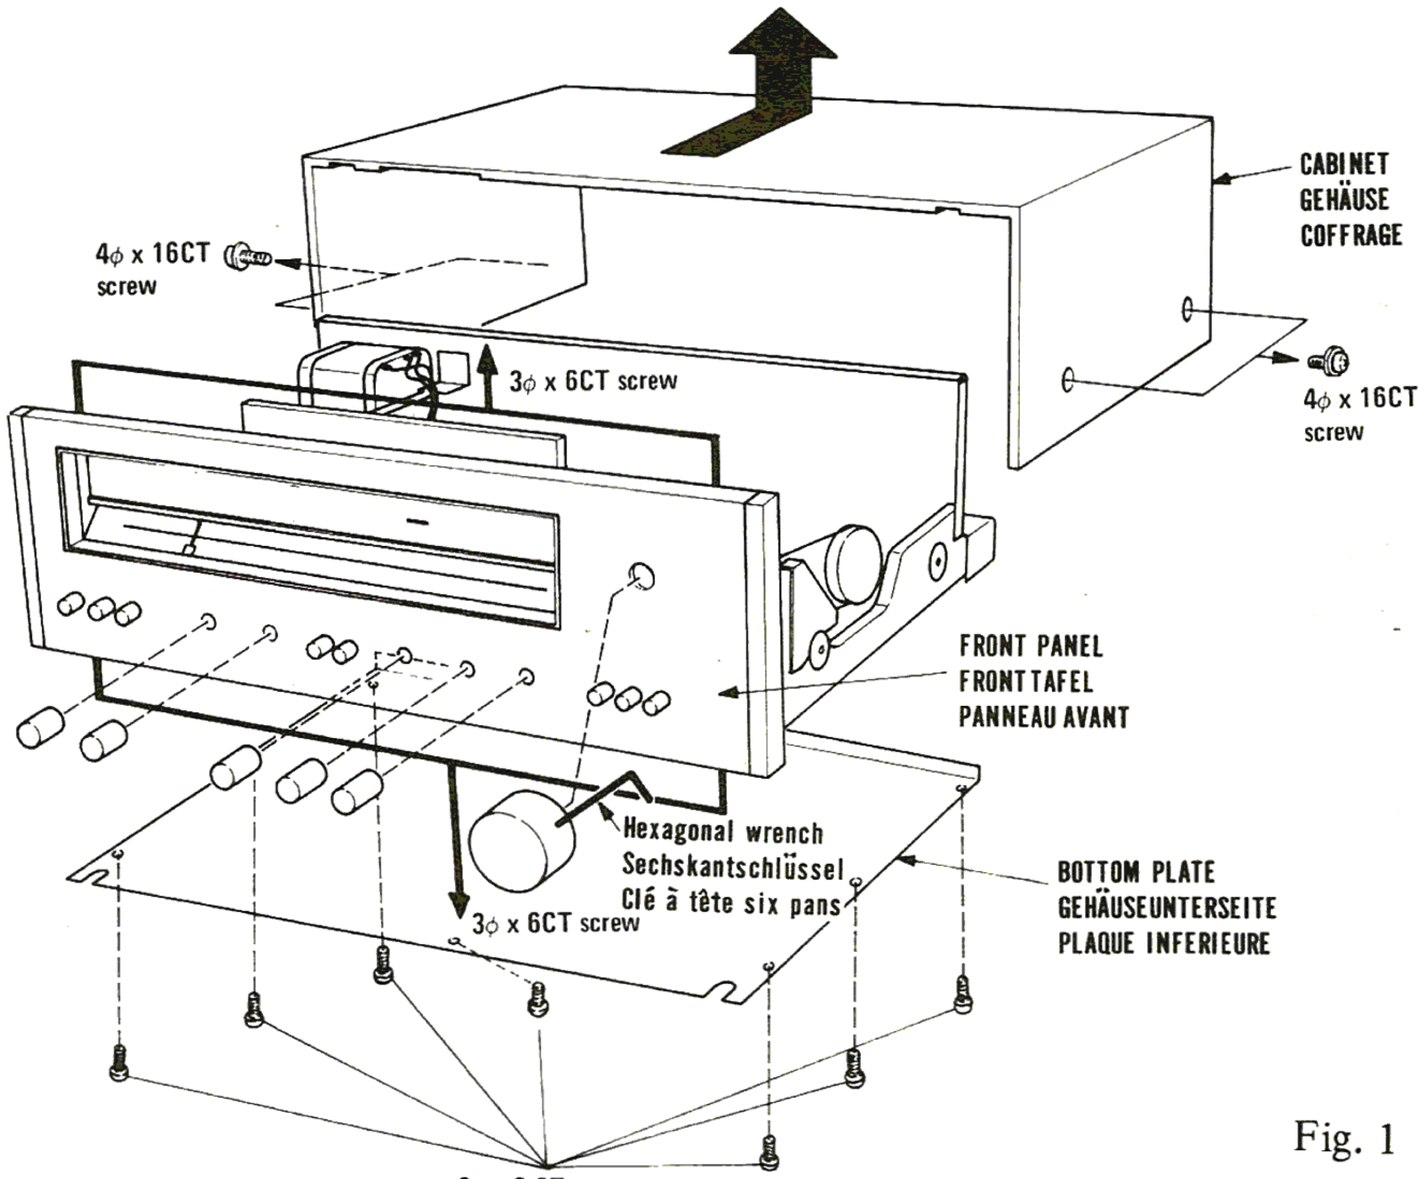

Fig. 1 Abb. 1

- **TUNER INPUT METER REPLACEMENT**
- **AUSWECHSELN DES ABSTIMMINSTRUMENTES**
- **REMPLACEMENT DU MÉTREUR DE SORTIE DU TUNER**

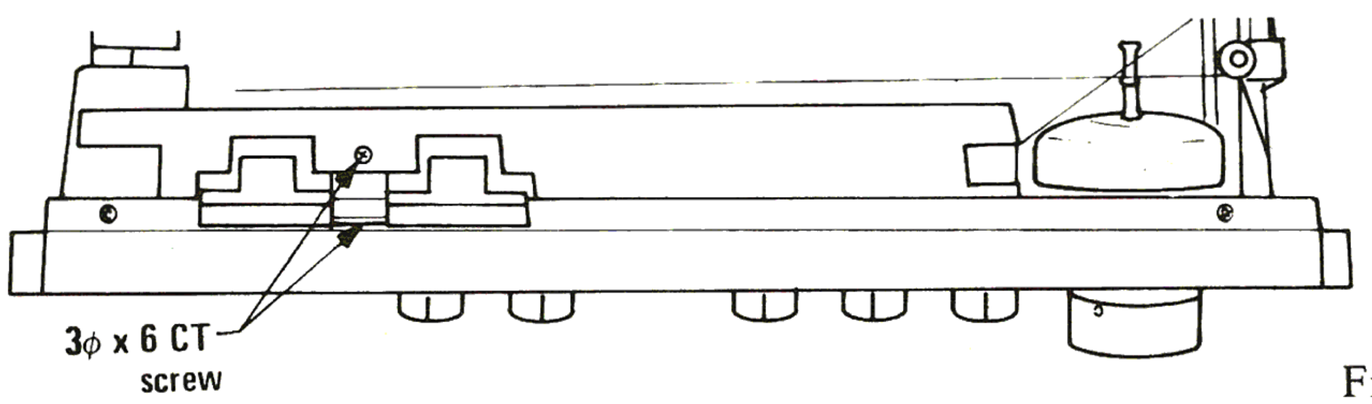

Fig. 2 Abb. 2

www.hifiengine.com

- FRONT END, TUNER & MAIN PRINTED WIRING BOARD REMOVAL
- AUSBAU DER LEITERPLATINE FÜR DIE EINGANGSSTUFE, DEN TUNER UND DEN HAUPTVERSTARKER
- ENLÈVEMENT DU TABLEAU DU RÉSEAU IMPRIMÊ DU FRONT END, TUNER ET MAIN

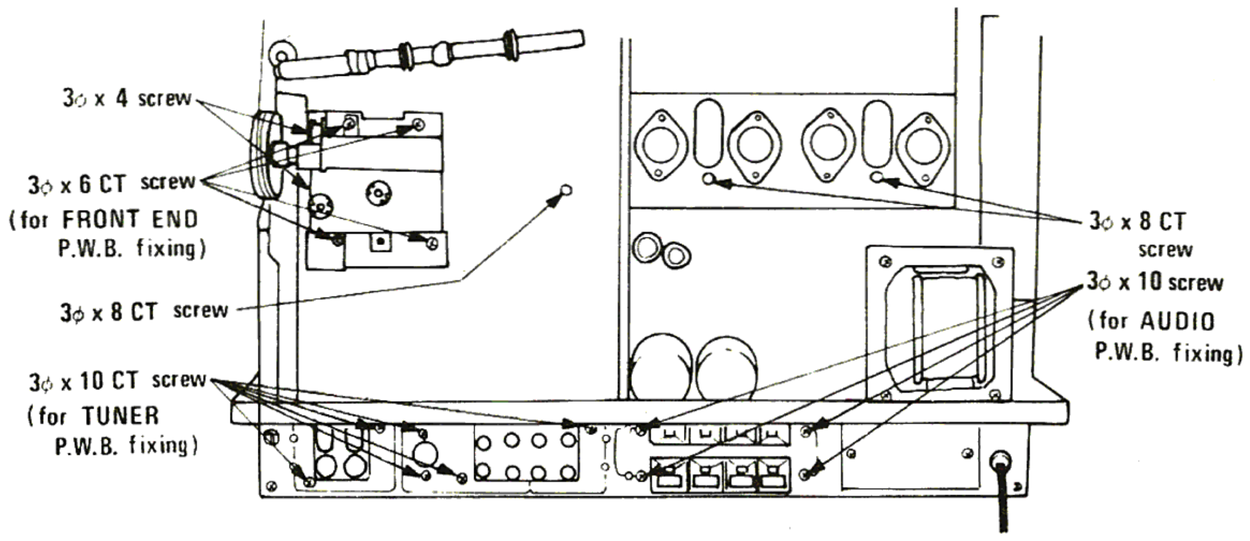

Fig. 3 Abb. 3

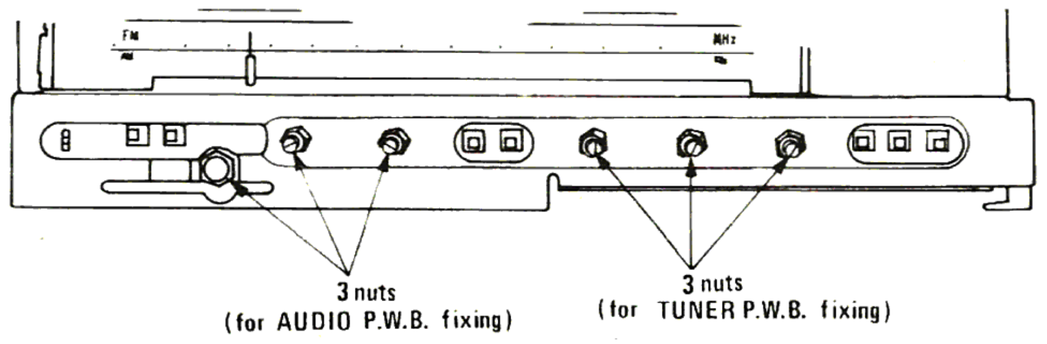

Fig. 4
Abb. 4

PROTECTION CIRCUIT (SR-603)

1. MUTING CIRCUIT

(Show the circuit diagram in Fig. 5 at page 10.)
A muting circuit, which turns off the relay for 3–6 sec. after the power switch is turned off, is employed to remove click noise at the start of circuit operation when the power switch is turned ON.
In the Fig. 5, C501 is charged via R502 and R503 when the power switch is turned ON. As a result, voltage is generated between B–E of Q503, and Q503 turns on. When C501 is completely charged, Q503 turns off, Q504 turns on, causing current to flow to the relay and turn the speaker terminal on.

2. DC VOLTAGE DETECTION CIRCUIT (PROTECTION OF SPEAKER)

In the OCL amplifier, when any trouble occurs, DC voltage appears at the speaker terminal and may damage the speakers. To prevent this any DC voltage is detected by the filter circuit of R508, C502. When it is (+) voltage, the relay turns off through Q501 ON–Q504 OFF. When the voltage is (–), the relay turns off (same as for (+)) the voltage through Q502 ON Q503 ON Q504 OFF. This circuit naturally assumes its normal condition when DC voltage is no longer detected. Also, when the input terminal is touched or any ultra low frequency noise enters, the speaker input is cut for a short time but is restored automatically.

Phenomena and remedy when the protection circuit operates

Type of protection circuit	Phenomenon when the protection circuit operates	Cause	Remedy
1. Muting circuit	About 3–6 sec. after, the power switch is turned on.	———	Normal
2. Speaker protection circuit	1. Sound do not come out. 2. Neutral point voltage ① is more than ± 1.0V.	Trouble in the main amplifier, etc.	Repair the fault. (Be sure to check that neutral point voltage is within ± 150mV.)

www.hifiengine.com

GENERAL ALIGNMENT INSTRUCTION·ALLGEMEINE AUSRICHT-ANLEITUG·INSTRUCTION GENERALE

SR-603

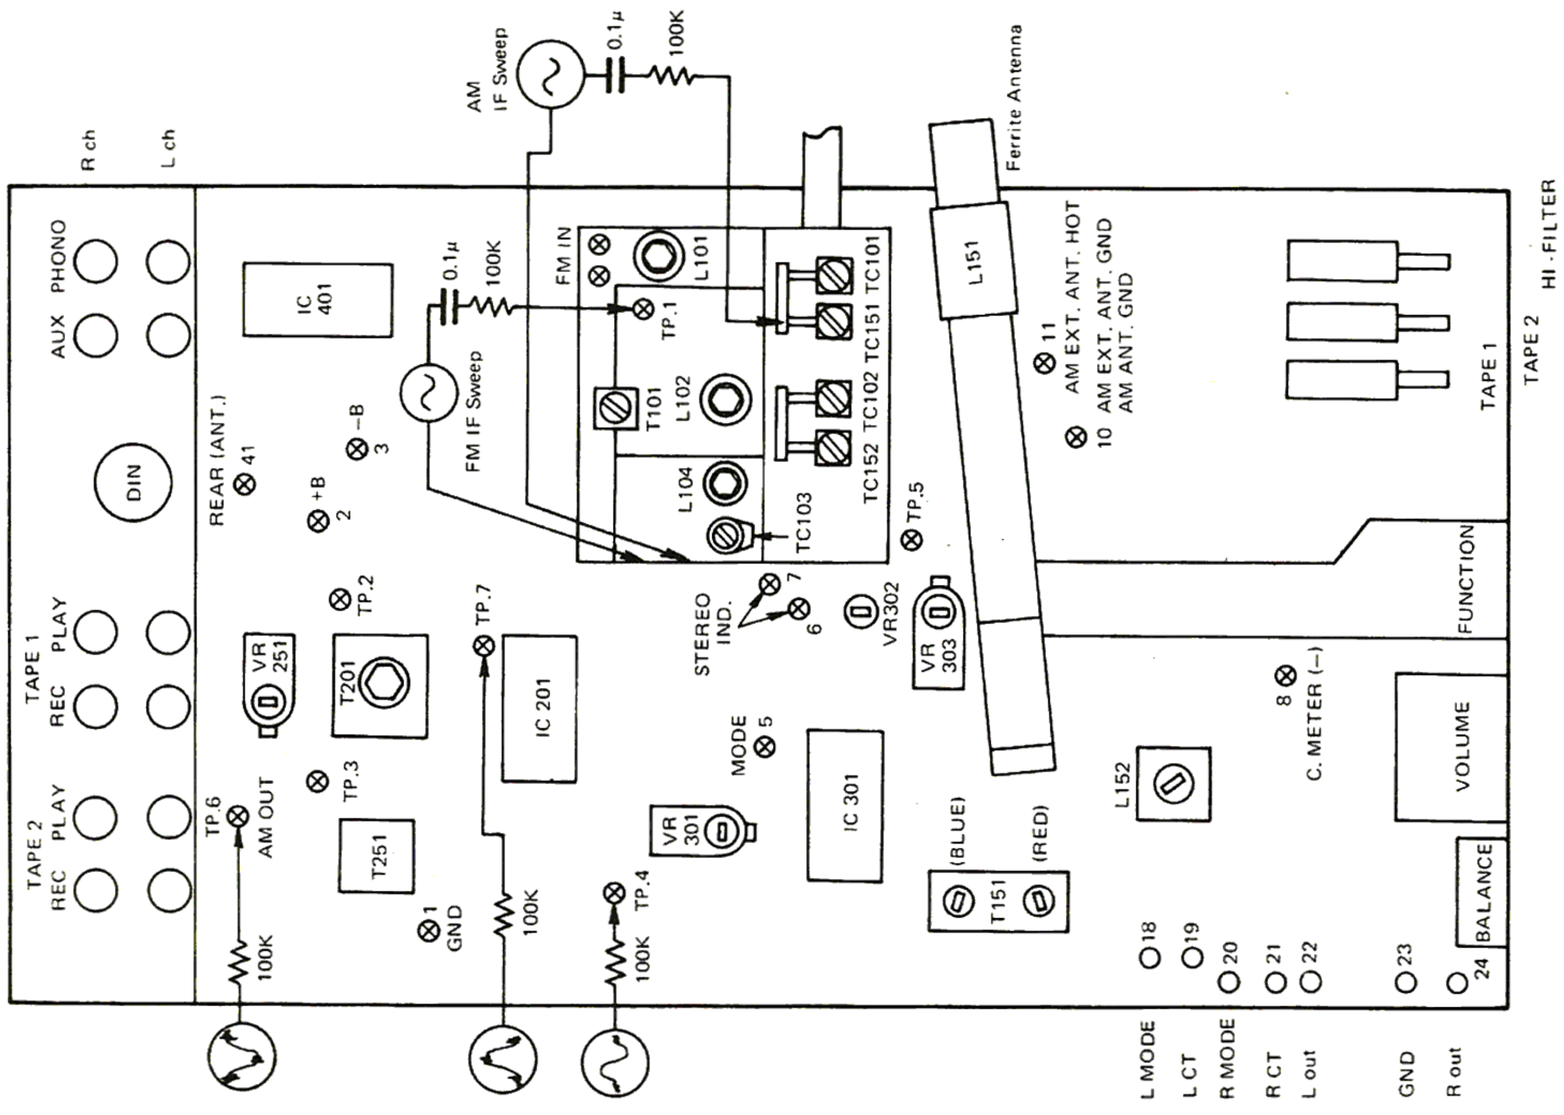

Fig. 6 Abb. 6

SR-503L · 303L

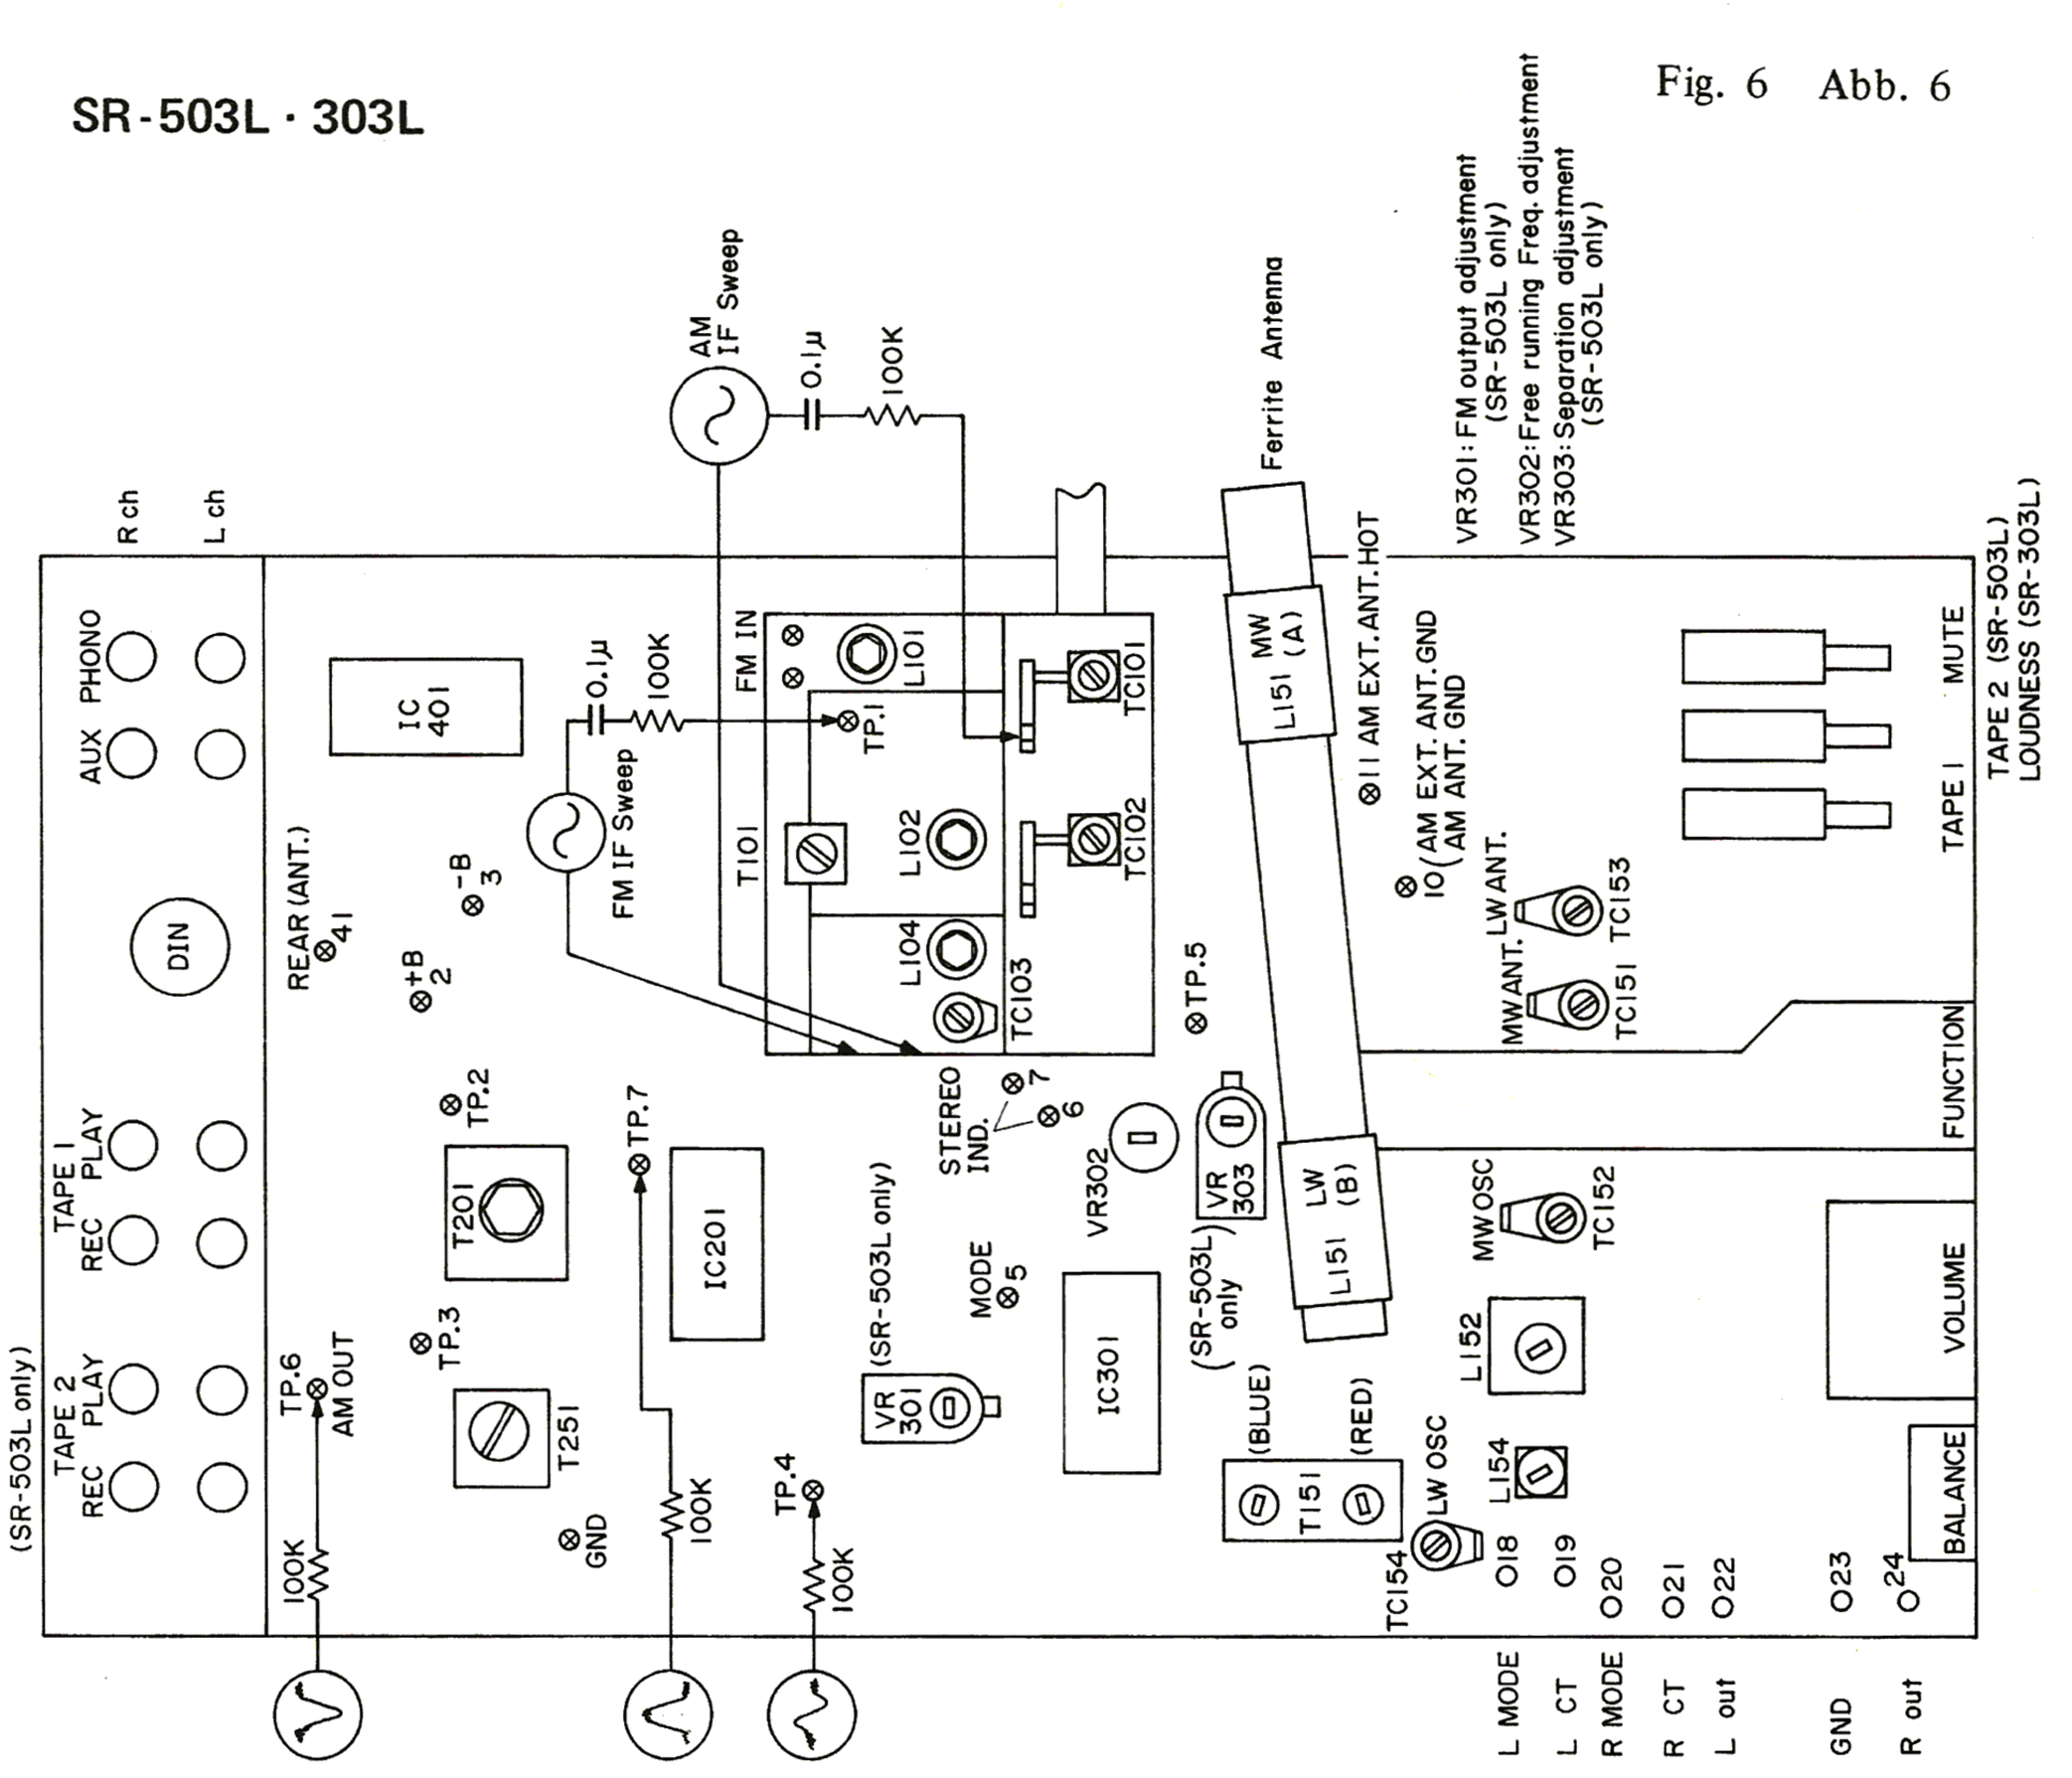

Fig. 7 Abb. 7

www.hifiengine.com

FM TUNER ALIGNMENT

Sweep Generator
Wobbeigenerator
Générateur de balayage

Signal generator
Oszillator
Générateur de signaux

Oscilloscope
Oszillograph
Oscilloscpoe

VTVM
Vakuumrohrenvoltmeter
Voltmètre électronique

Frequency Counter
Frequenzzahler
Frequencemetre

Dist.
Distortion Meter
Indicateur

Condition
Function : FM
Volume : Minimum
Modulation : 400 Hz 100% (unless otherwise notified)
FM Muting : OFF

Sequence Reihenfolge Sequence		Connection Anschluß Connexion Input Eingang Entree	Connection Output Ausgang Sortie	Setting Setzen Montage Tuning Abstimmung Indicateur d'accord	Setting Signal	Adjust for Einstellen für Reglage pour Adjust Einstellen Reglage	Adjust for Indication Anzeige Indication
1	IF Amp. ZF-Stufe Amplificateur de frèquence intermèdiaire	TP. 100k 0.1µ out	TP. 7		10.7 MHz	T101	MAX
2	"S" curve S, Kurve Courbe S		TP.4		10.7 MHz	T201 lower : "S" curve upper : Straight line	Straight line
3	Covering Abgleich Guipage	ANT. Terminal	REC out or SP out	f min	87.5MHz	L104	V max
				f max	108MHz	TC103	
4	Tracking Vorstufe Alignement			90MHz	90MHz	L101 L102	
				106MHz	106MHz	TC101 TC102	
5	Discri. Det. Discri.		REC out or SP out Dist.	98MHz	98MHz	T201 (lower)	pointer:center without:signal
6	Distortion					T201 (upper)	Distortion MIN
7	(except SR-303L) Output Ausgang Sortie	400 Hz 30% Mod.	REC out			VR301	1V ±3dB
8	76 kHz	Non-modulated	TP,5	98 MHz	98MHz	VR302	Freq. 76kHz ±100Hz
9	Separation Trennung Separation (except SR-303L)	R ch 400 Hz 46% Mod. Pilot 8% Mod.	REC out or SP out 13.6 kHz L. P. F.			VR303	Lch out MIN

www.hifiengine.com

AM TUNER ALIGNMENT

Function AM(SR-603)
LW or MW(SR-503L.303L)
Modulation 400Hz 30%

Sequence Reihenfolge Sequence		Connection Anschluß Connexion: Input Eingang Entrée	Connection: Output Ausgang Sortie	Setting Setzen Montage: Tuning Abstimmung Indicateur d'accord	Setting: Signal	Adjust for Einstellen für Reglage pour: Adjust Einstellen Reglage	Adjust for: Indication Anzeige Indication
1	IF Amp. ZF-Stufe Amplificateur de frèquence intèrmediaire	out 100k 0.1μ ANT. Termi. (V.C.)	TP.6 IN		455kHz	T151 T251 (SR-503L.303L only)	MAX
2	LW Covering Abgleich Guipage	L151 (A) MW (B) LW	REC out or SP out	f min	145kHz	L154	Vmax
				f max	355kHz	TC154	
3	LW Tracking Vorslute Alignement			175 kHz	175 kHz	L151 (B)	
				300 kHz	300 kHz	TC153	
4	MW Covering Abgleich Guipage			f min	515 kHz	L152	
				f max	1650 kHz	TC152	
5	MW Tracking Vorstufe Alignement			600 kHz	600 kHz	L151 (A)	
				1400 kHz	1400 kHz	TC151	

AUDIO CIRCUIT ALIGNMENT

Test conditions

FUNCTION ..... Free
VOLUME ..... Minimum

SR-503L · 303L

Item	Measuring Instrument	Point to be Measured	Value Obtained	Adjust	Value Adjusted
Idle Current	DC voltmeter	Jumper (13) : L	15 mV-50 mV		10 mV-60 mV
		Jumper (ℓ) : R	less than 15 mV	Cut R723L(R) and R724L(R) off	
		CAUTION (1)	greater than 50 mV	Cut R725L(R) and R726L(R) off	

CAUTION

After separating the jumper wire (13) and (ℓ), connect the 0.47 ohms resistor, then read the voltage at both ends using a DC voltmeter (Balance meter). Connect the jumper wire again after this adjustment is completed.

www.hifiengine.com

SR-603

Item	Measuring Instrument	Point to be Measured	Adjust	Value Adjusted
Idle Current	DC voltmeter	F701 L,R CAUTION (1)	VR703 L,R	20^{+15}_{-10}mV (40^{+30}_{-20}mA)

CAUTION

Remove the fuse F701L,R, and after connecting the 0.47 ohms resistor, read the voltage at both ends using a DC voltmeter.

Benennung	Meßinstrument	Meßpunkt	Abgleich	Eingestellter Wert
Blindstrom	Gleichstrom-Voltmeter	F701L,R Vorsicht (1)	VR703L,R	20^{+15}_{-10}mV (40^{+30}_{-20} mA)

VORSICHT

Die Sicherung F701L,R entfernen und einen 0,47-Ohm-Widerstand anschließen; danach die Spannung an beiden Enden mit Hilfe eines Gleichstrom-Voltmeters messen.

Désignation	Appaeil de mesure	Point de mesure	Réglage	Valeur ajustée
Courant déwatté	Voltmètre à D.C.	F701L,R ATTENTION (1)	VR703L,R	20 mV (40^{+30}_{-20} mA)

ATTENTION

Retirer le fusible F701L,R et après avoir branché une résistance de 0,47 ohms, lire la tension obtenue aux deux extrémités en se servant d'un voltmètre à courant continu.

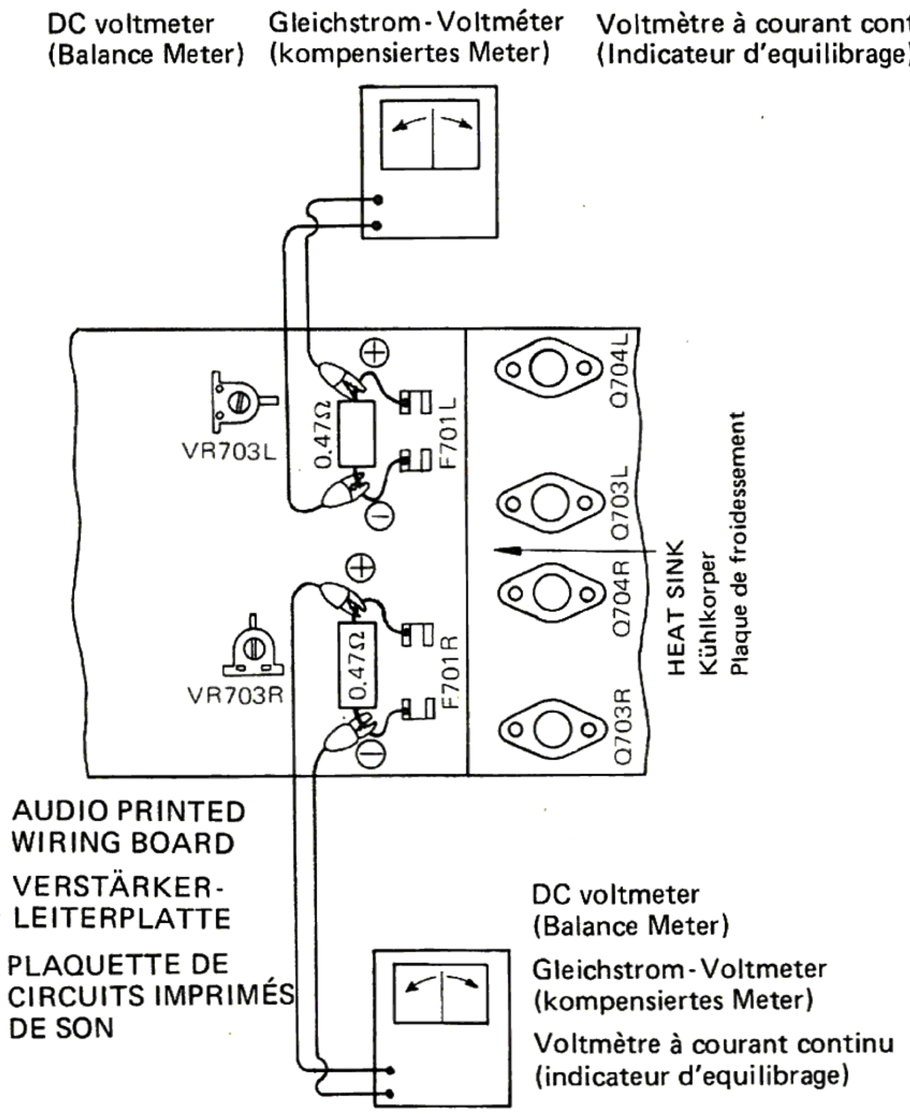

Fig. 10 Abb. 10

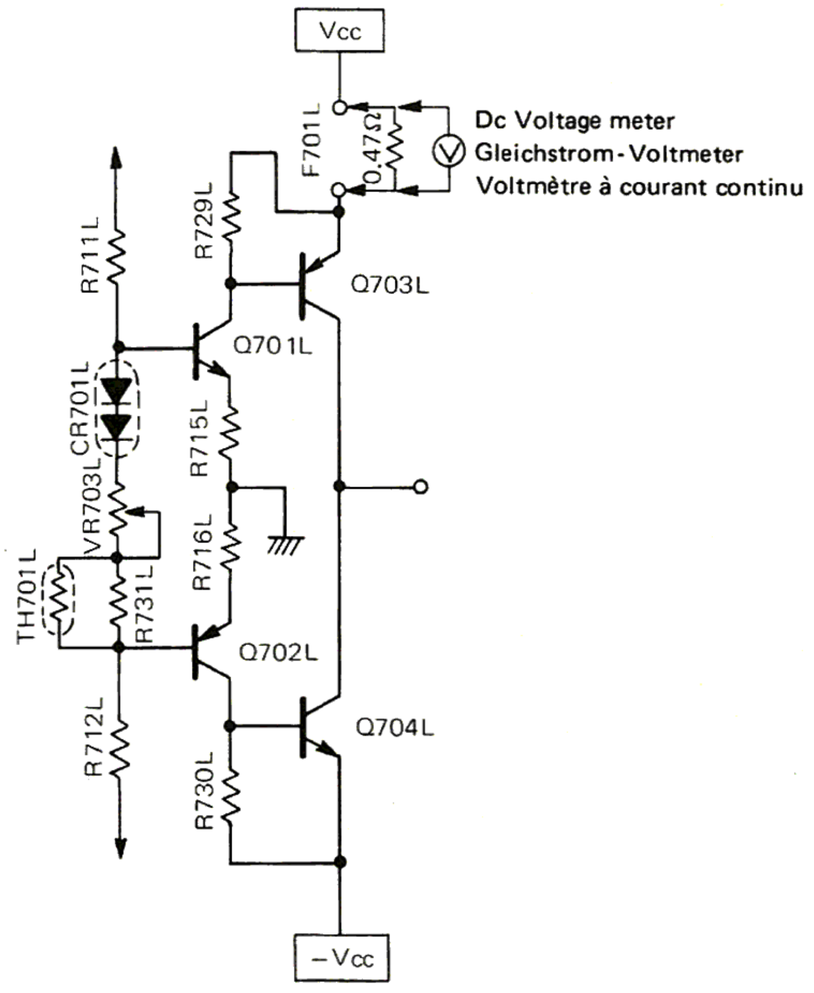

Fig. 11 Abb. 11

www.hifiengine.com

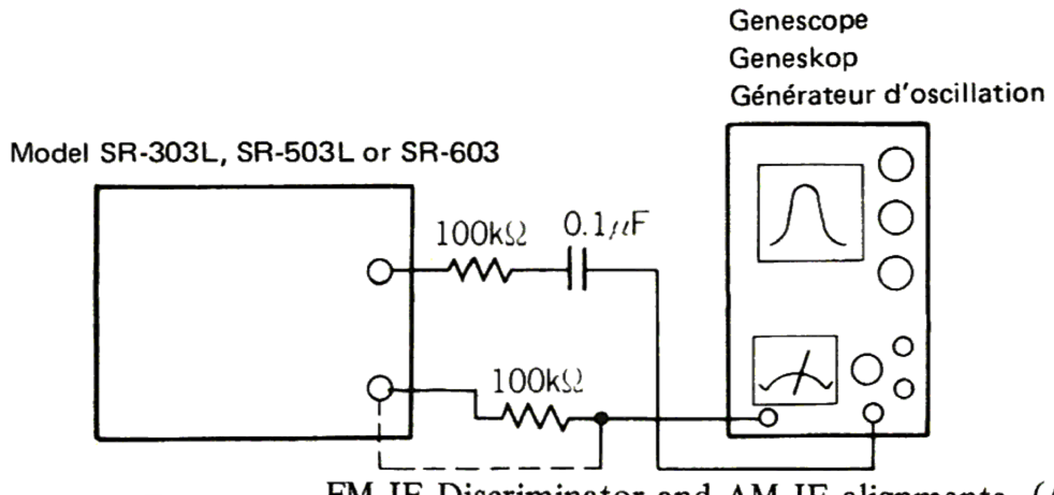

Fig. 12 FM IF Discriminator and AM IF alignments (AM Step. 1 and FM Step. 1,2)
Abb. 12 UKW-ZF-Diskriminator und AM-ZF-Abgleich
Réglages de discriminateur FM IF et AM IF

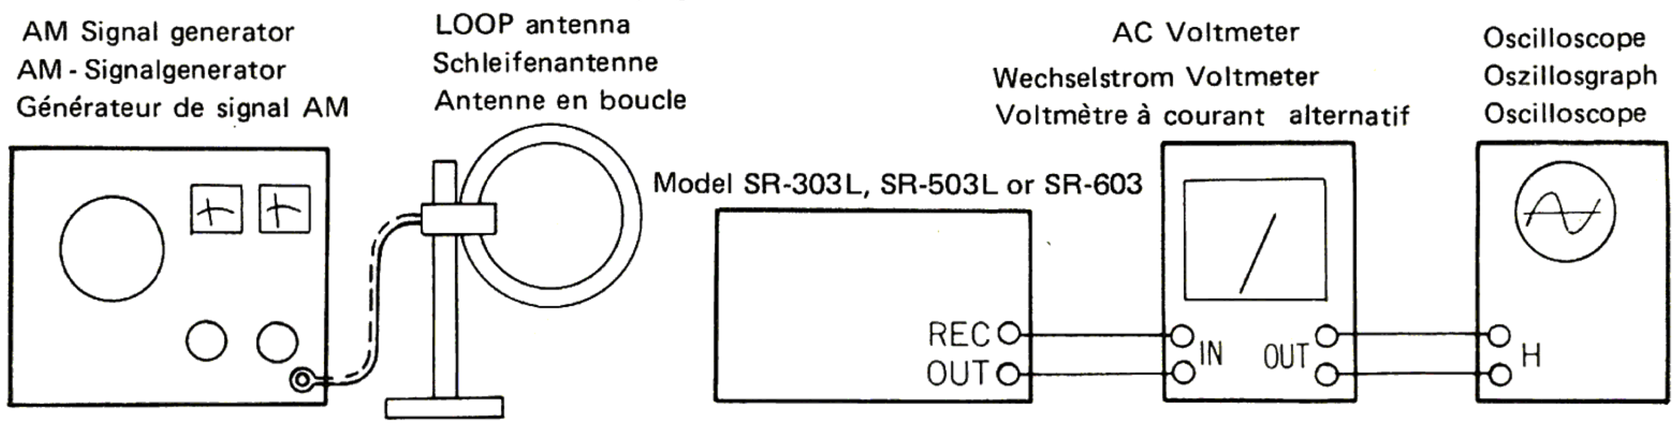

Fig. 13 AM frequency coverange and tracking alignments (Step. 2 to 5)
Abb. 13 AM-Frequenzbereich und Gleichlaufabgleich
Réglages de poursuite et d'étendue de fréquence AM

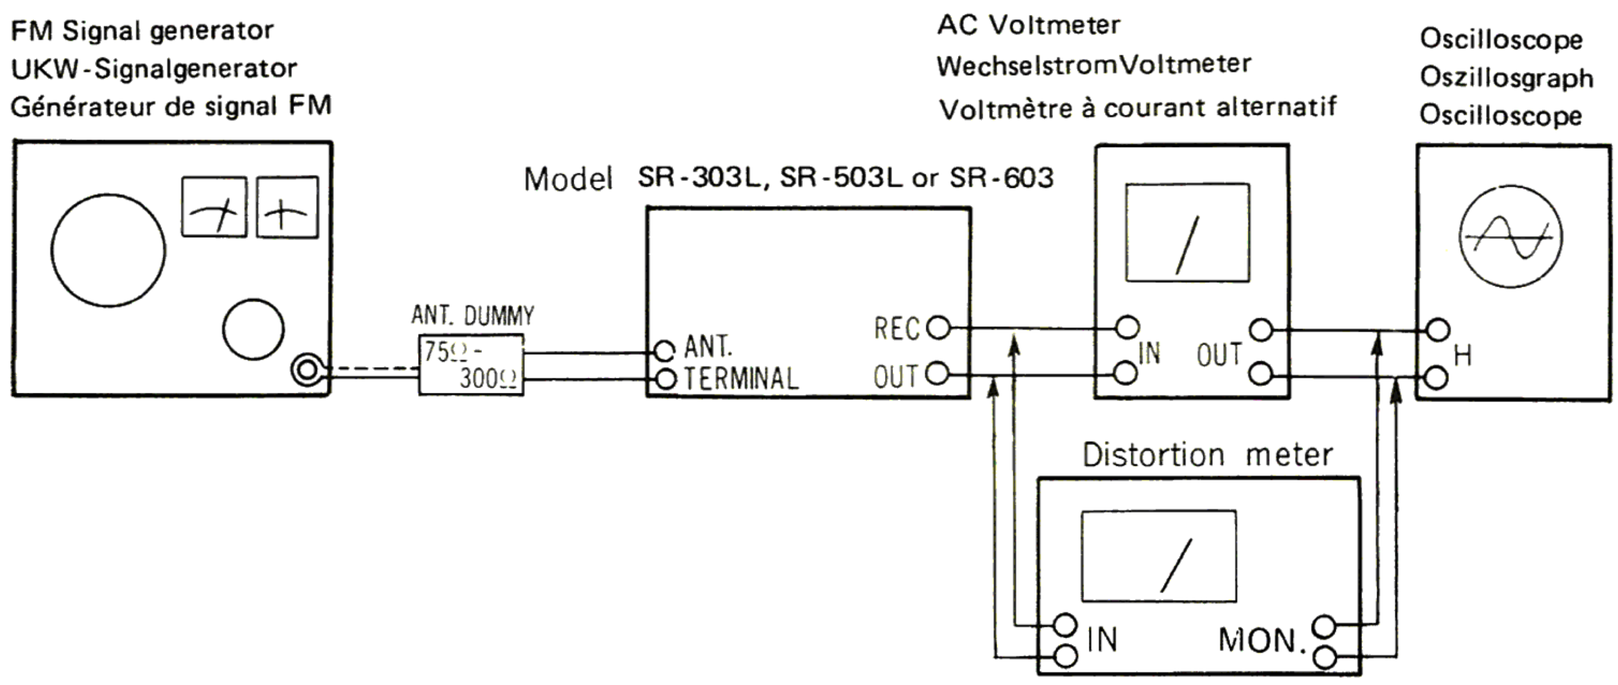

Fig. 14 FM frequency coverange, tracking and other alignments (Step. 3 to 7)
Abb. 14 UKW-Frequenzbereich-, Gleichlauf- und andere Abgleiche
Réglages de poursuite, d'étendue de fréquence FM et autres

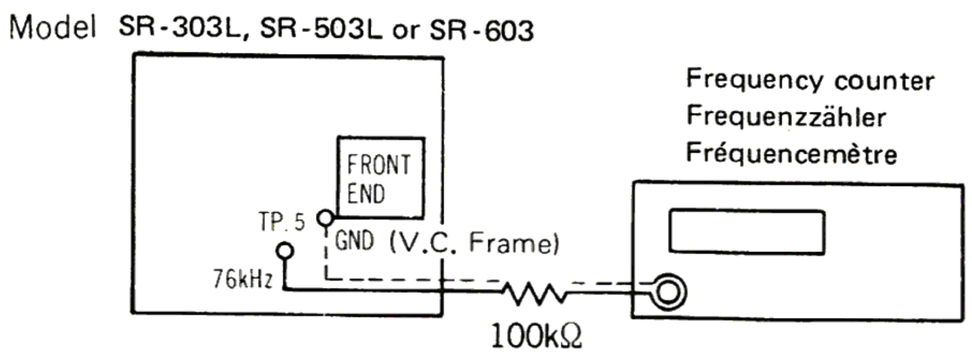

Fig. 15 FM MPX 76 kHz adjustment (Step. 8)
Abb. 15 UKW-Stereo-76-kHz-Abgleich
Réglage de 76kHz MPX FM

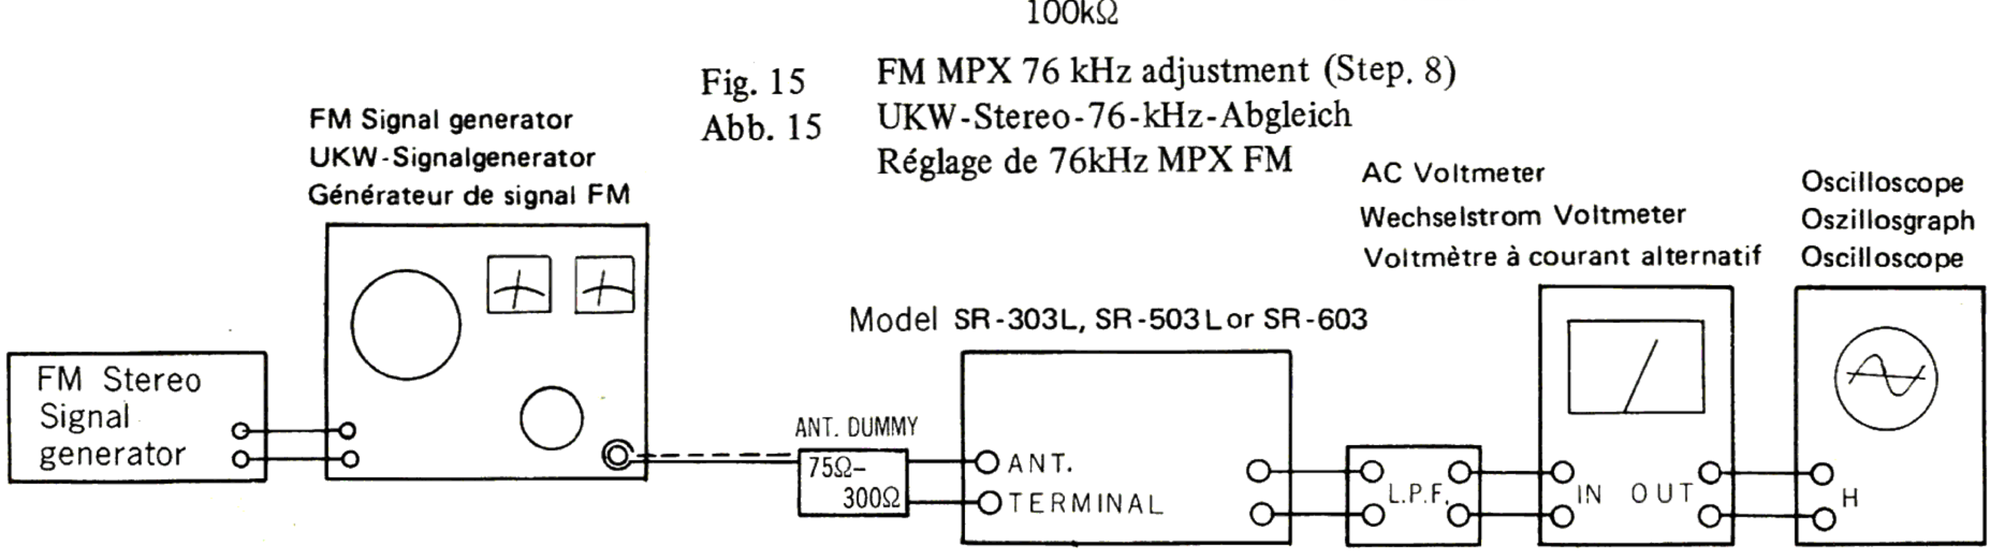

Fig. 16 FM MPX Alignments (Step. 9)
Abb. 16 UKW-Stereo-Abgleich
Réglage de MPX FM

www.hifiengine.com

CIRCUIT DIAGRAM·SCHALTPLAN·PLAN DE CIRCUIT

(SR-603)

The circuit diagram is subject to change for improvement without notice.

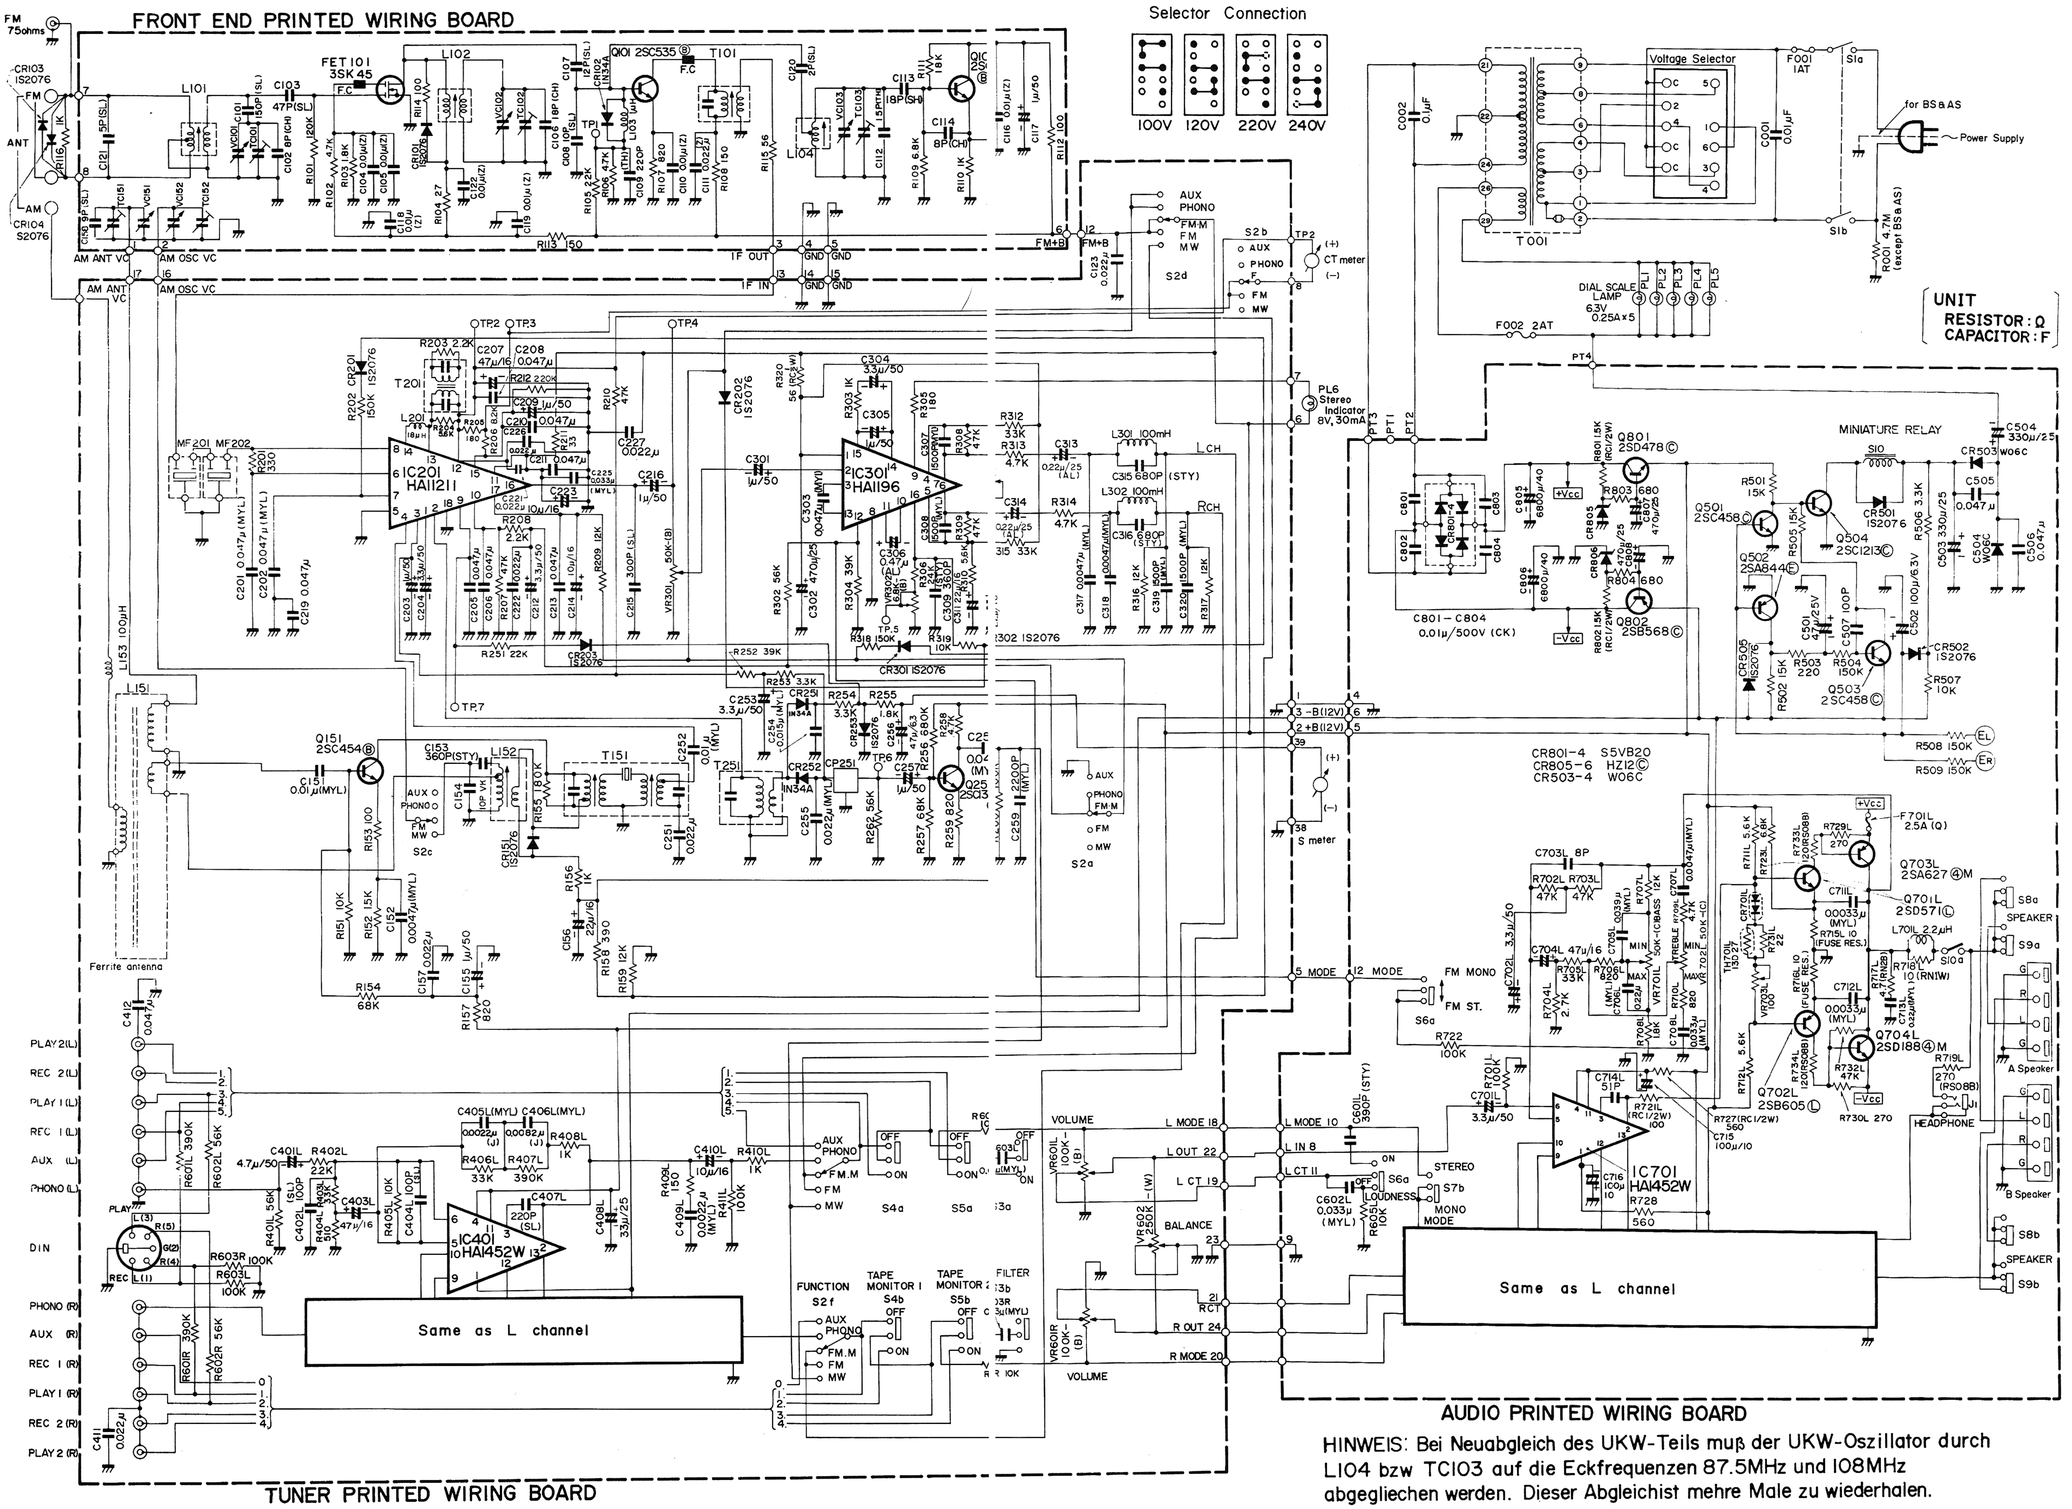

HINWEIS: Bei Neuabgleich des UKW-Teils muß der UKW-Oszillator durch L104 bzw TC103 auf die Eckfrequenzen 87.5MHz und 108MHz abgegliechen werden. Dieser Abgleichist mehre Male zu wiederhalen.

DIAL CORD SETTING·SKALENSEILEINSTELLUNG·EQUIPEMENT DE CADRAN

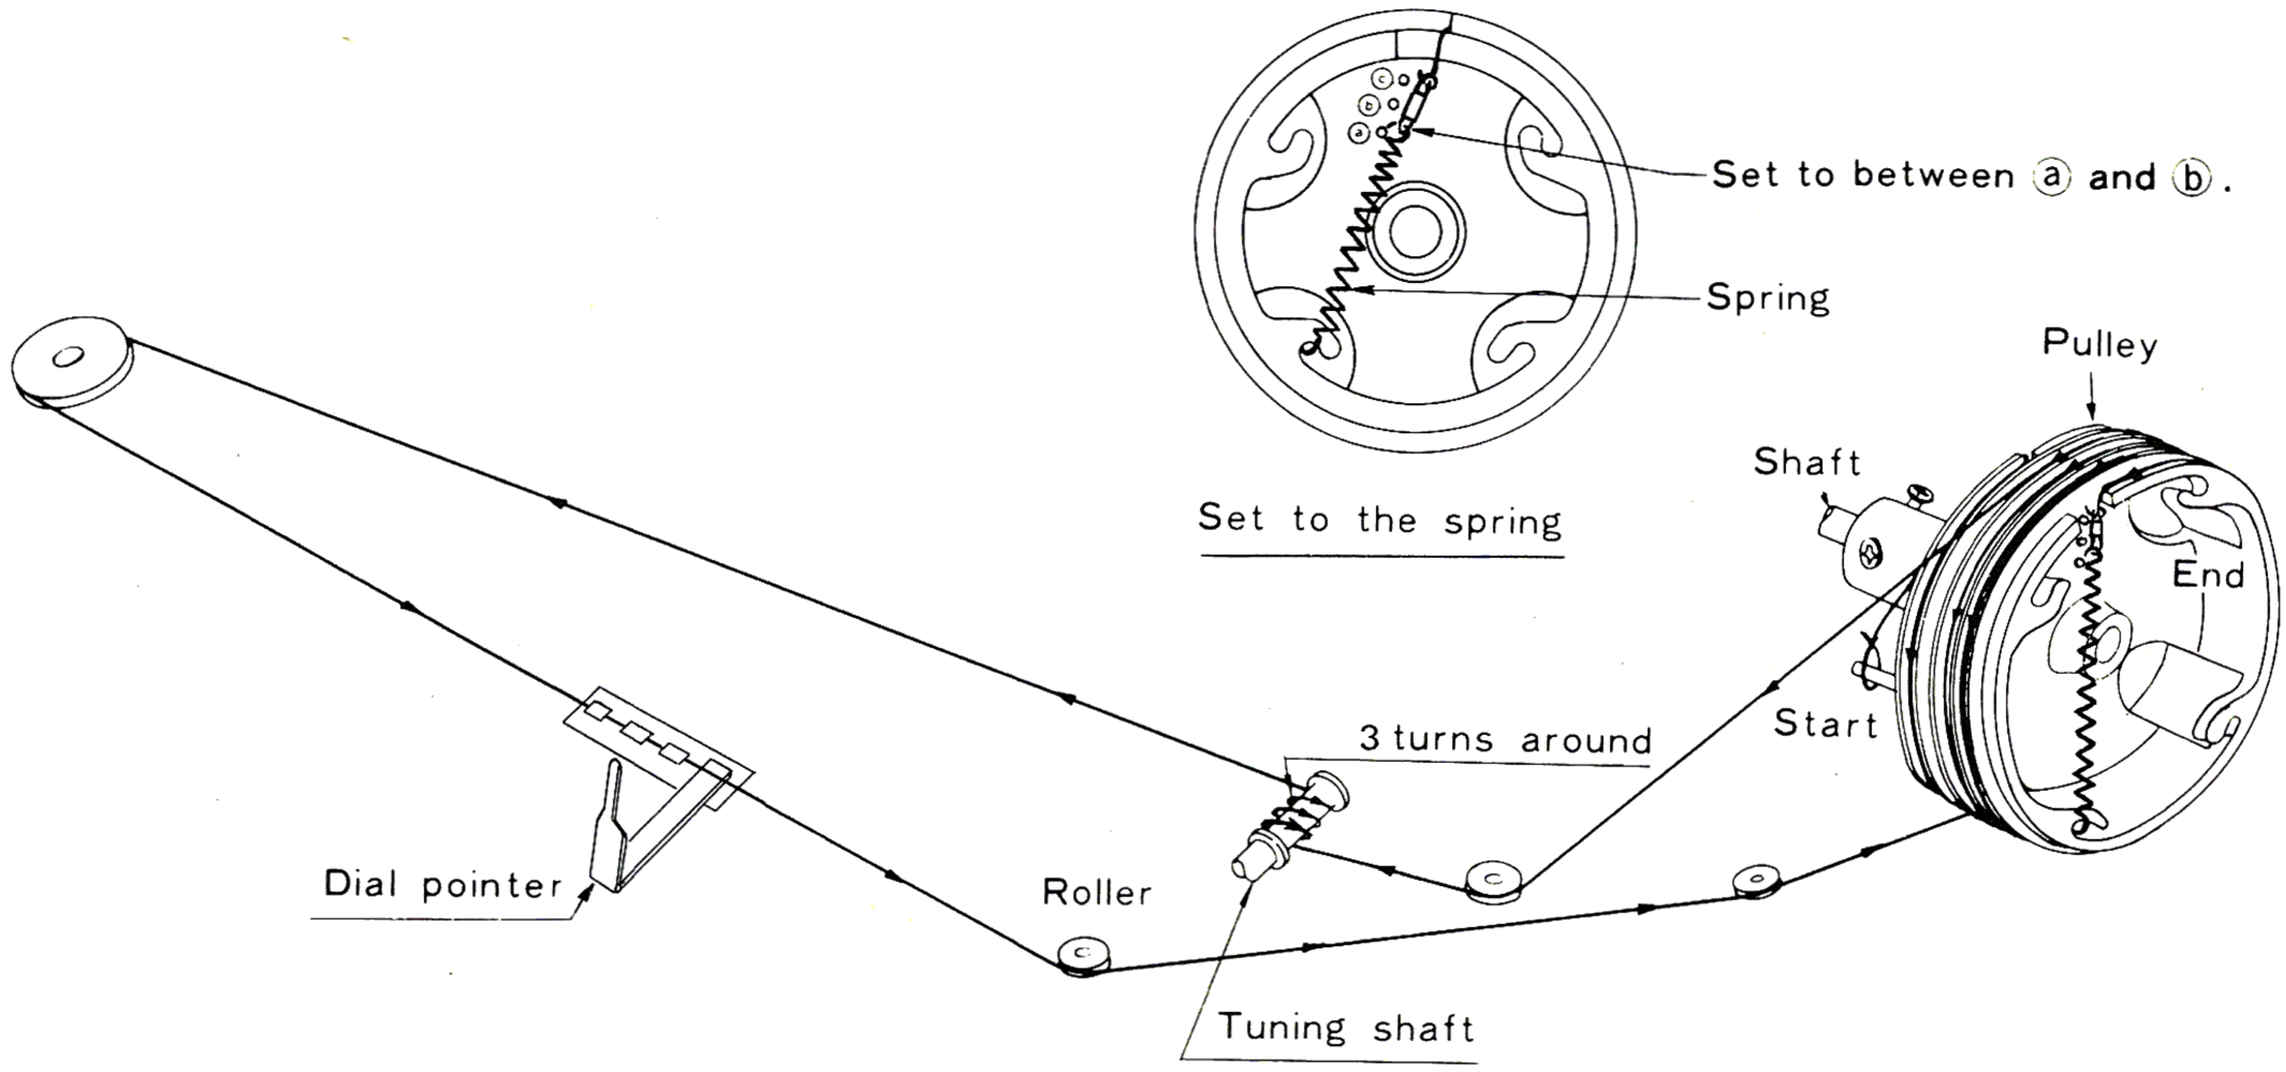

The dial pulley shows the position that the variable condenser is turned to the counterclockwise direction.

BLOCK DIAGRAM·BLOCKSCHEMA·SCHEMA

SR-603

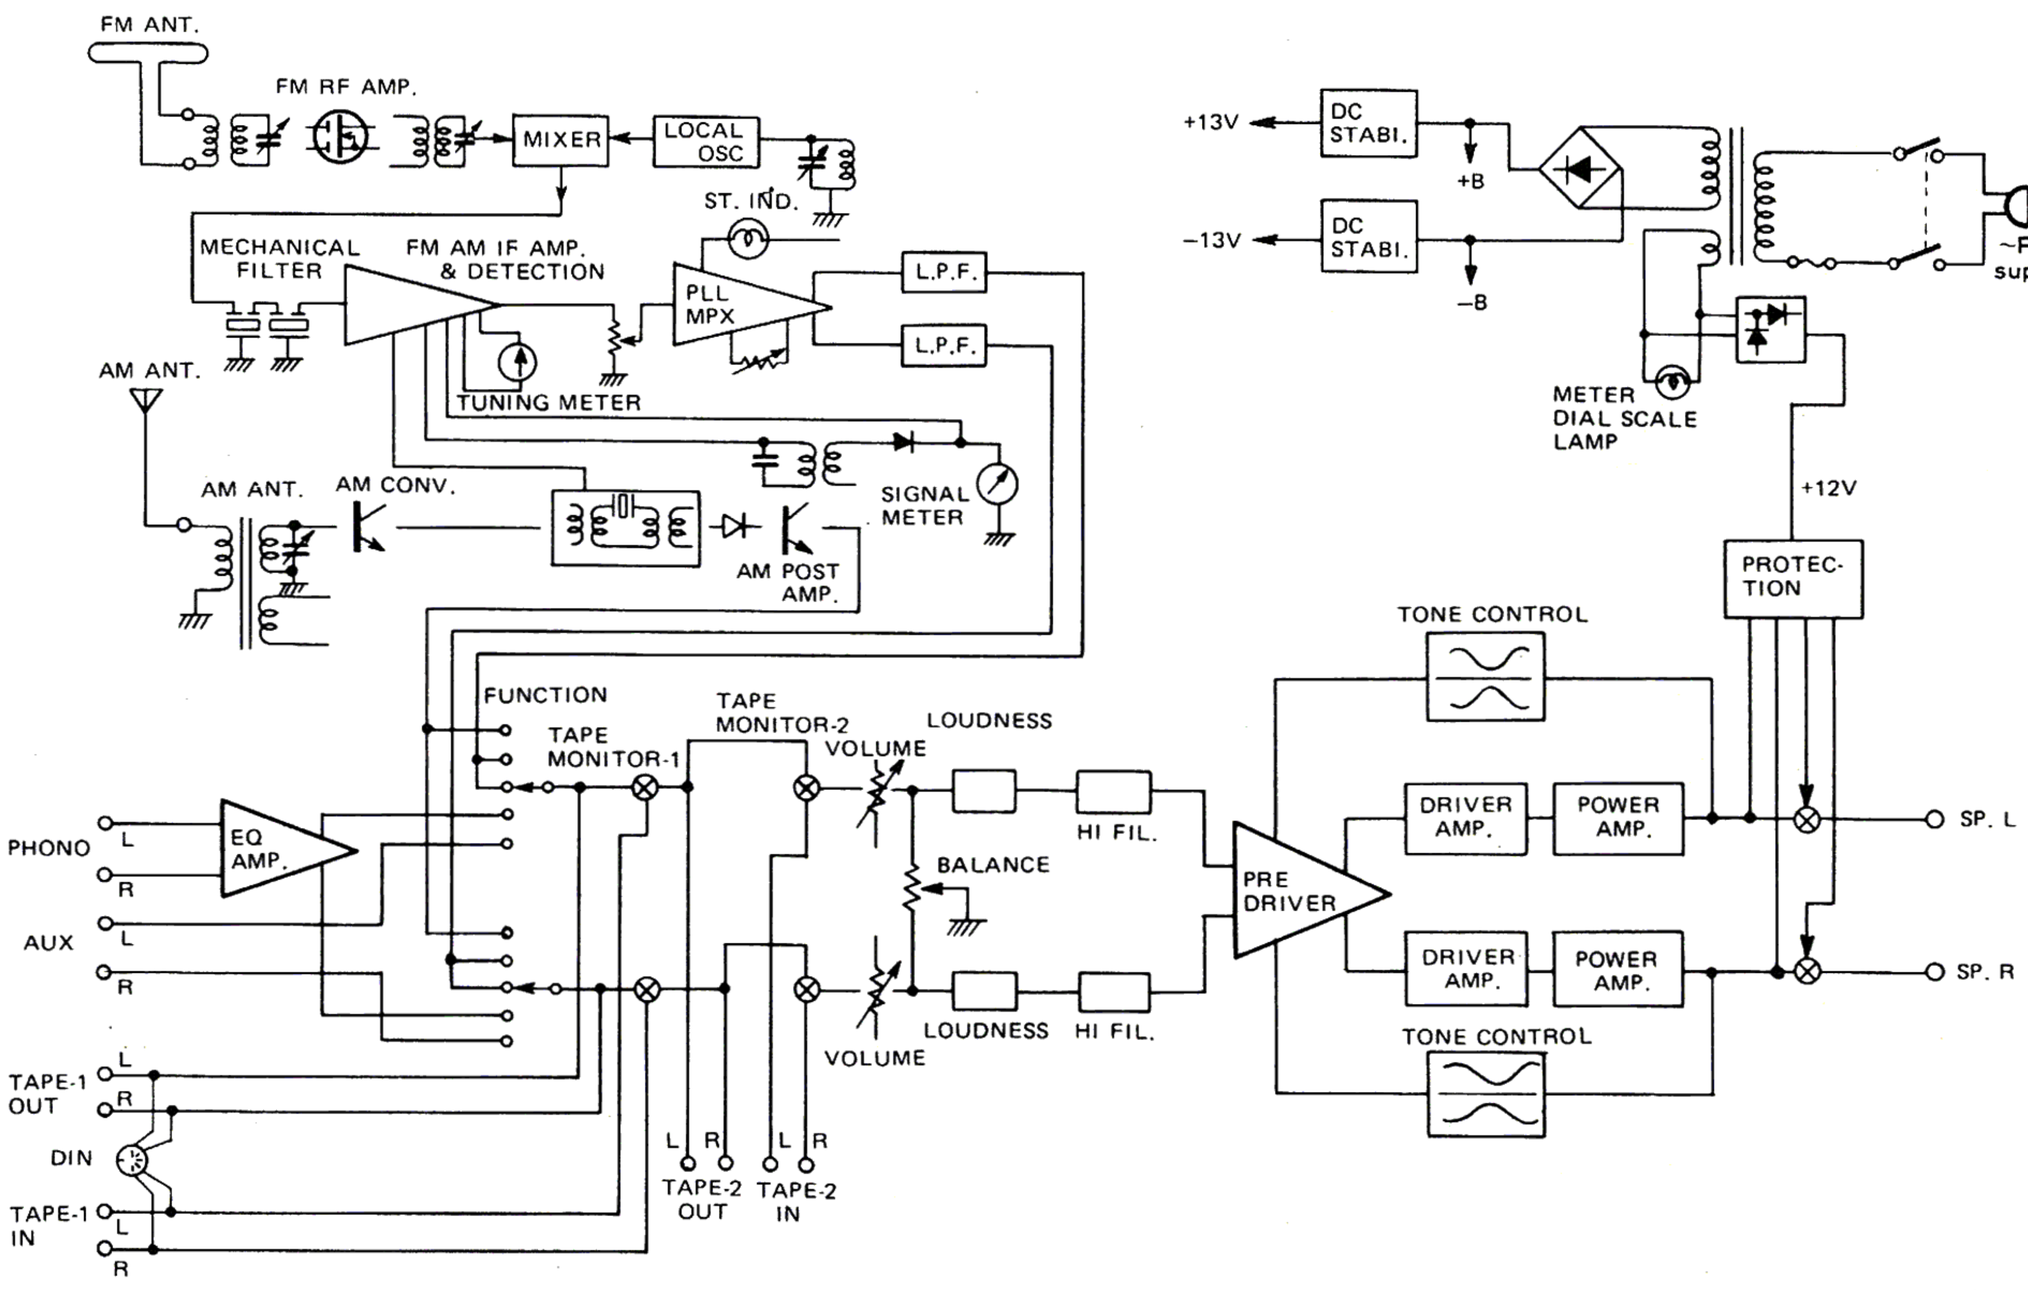

www.hifiengine.com

SR-503L

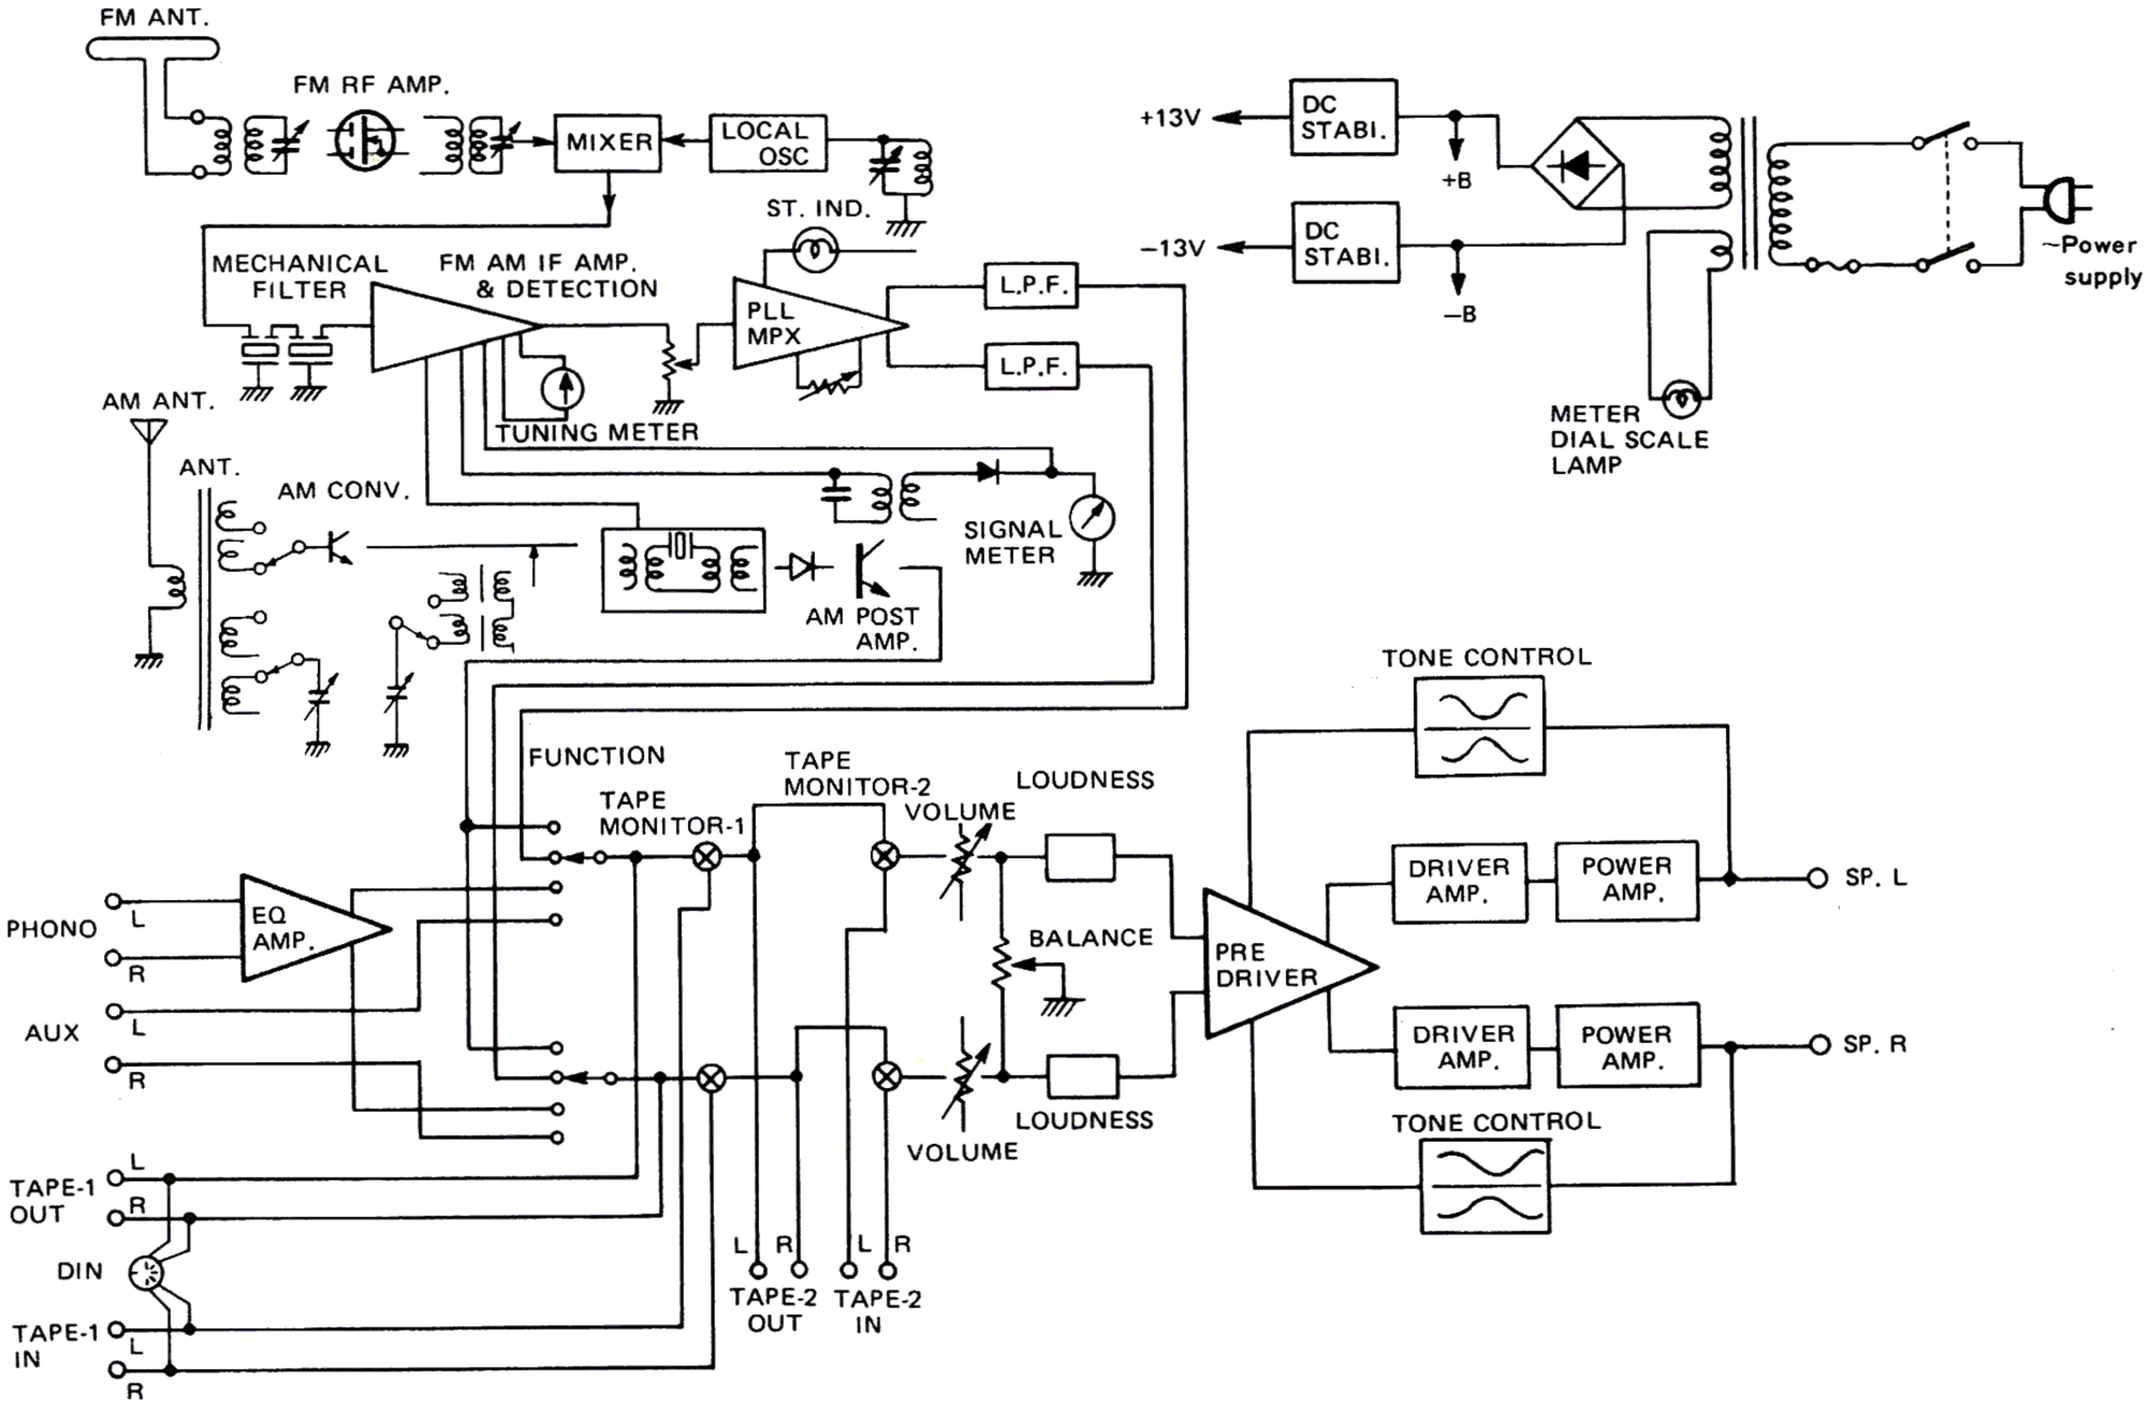

SR-303L

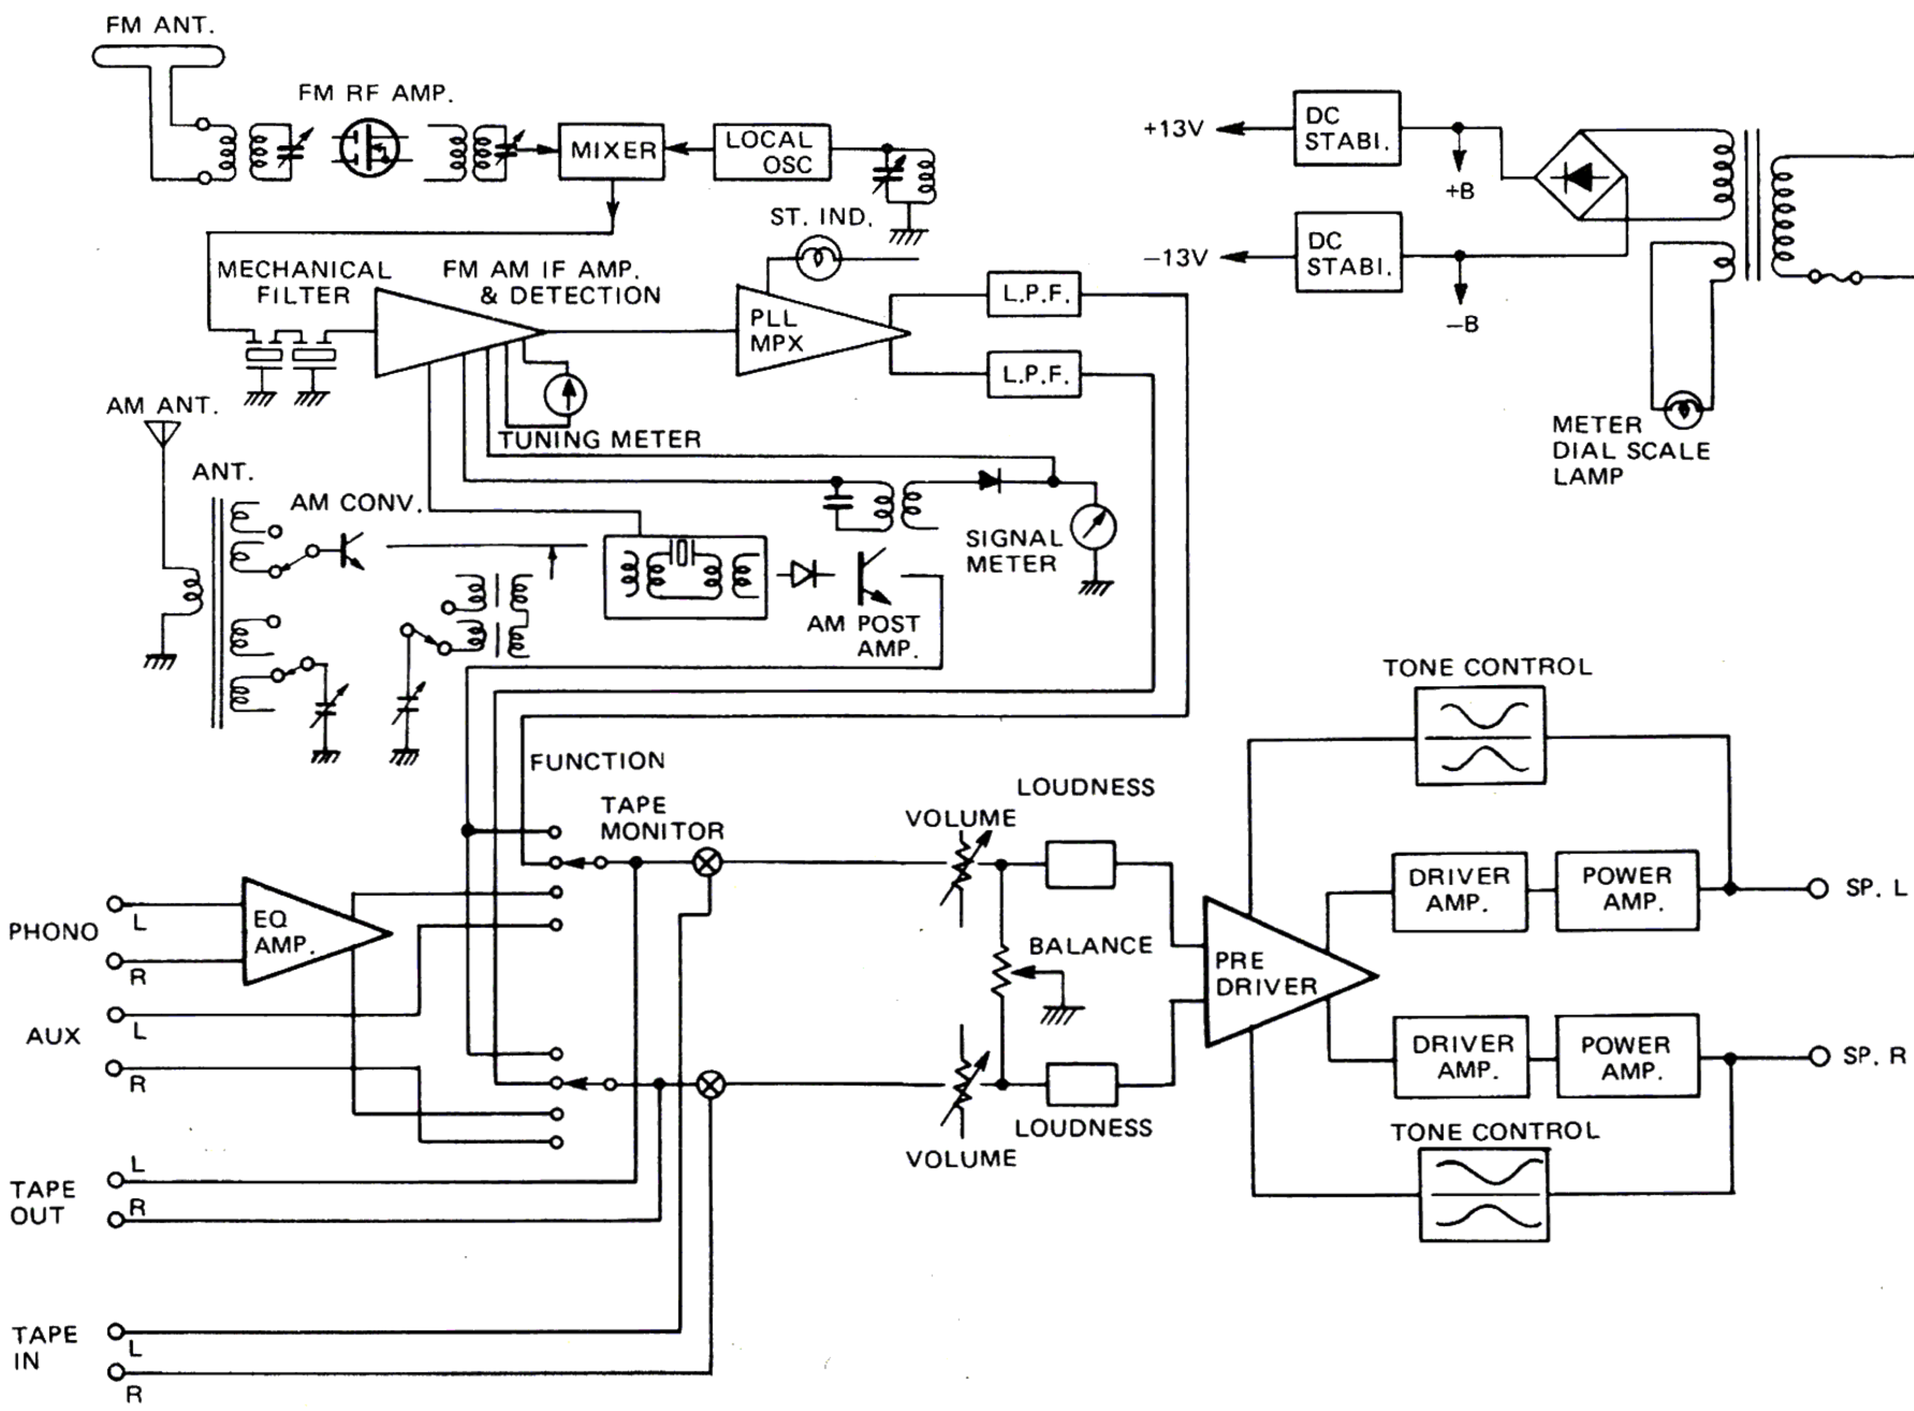

www.hifiengine.com

PRINTED WIRING BOARD·PRINTPLATTEN·PLAN DE BASE

SR-603 TUNER PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

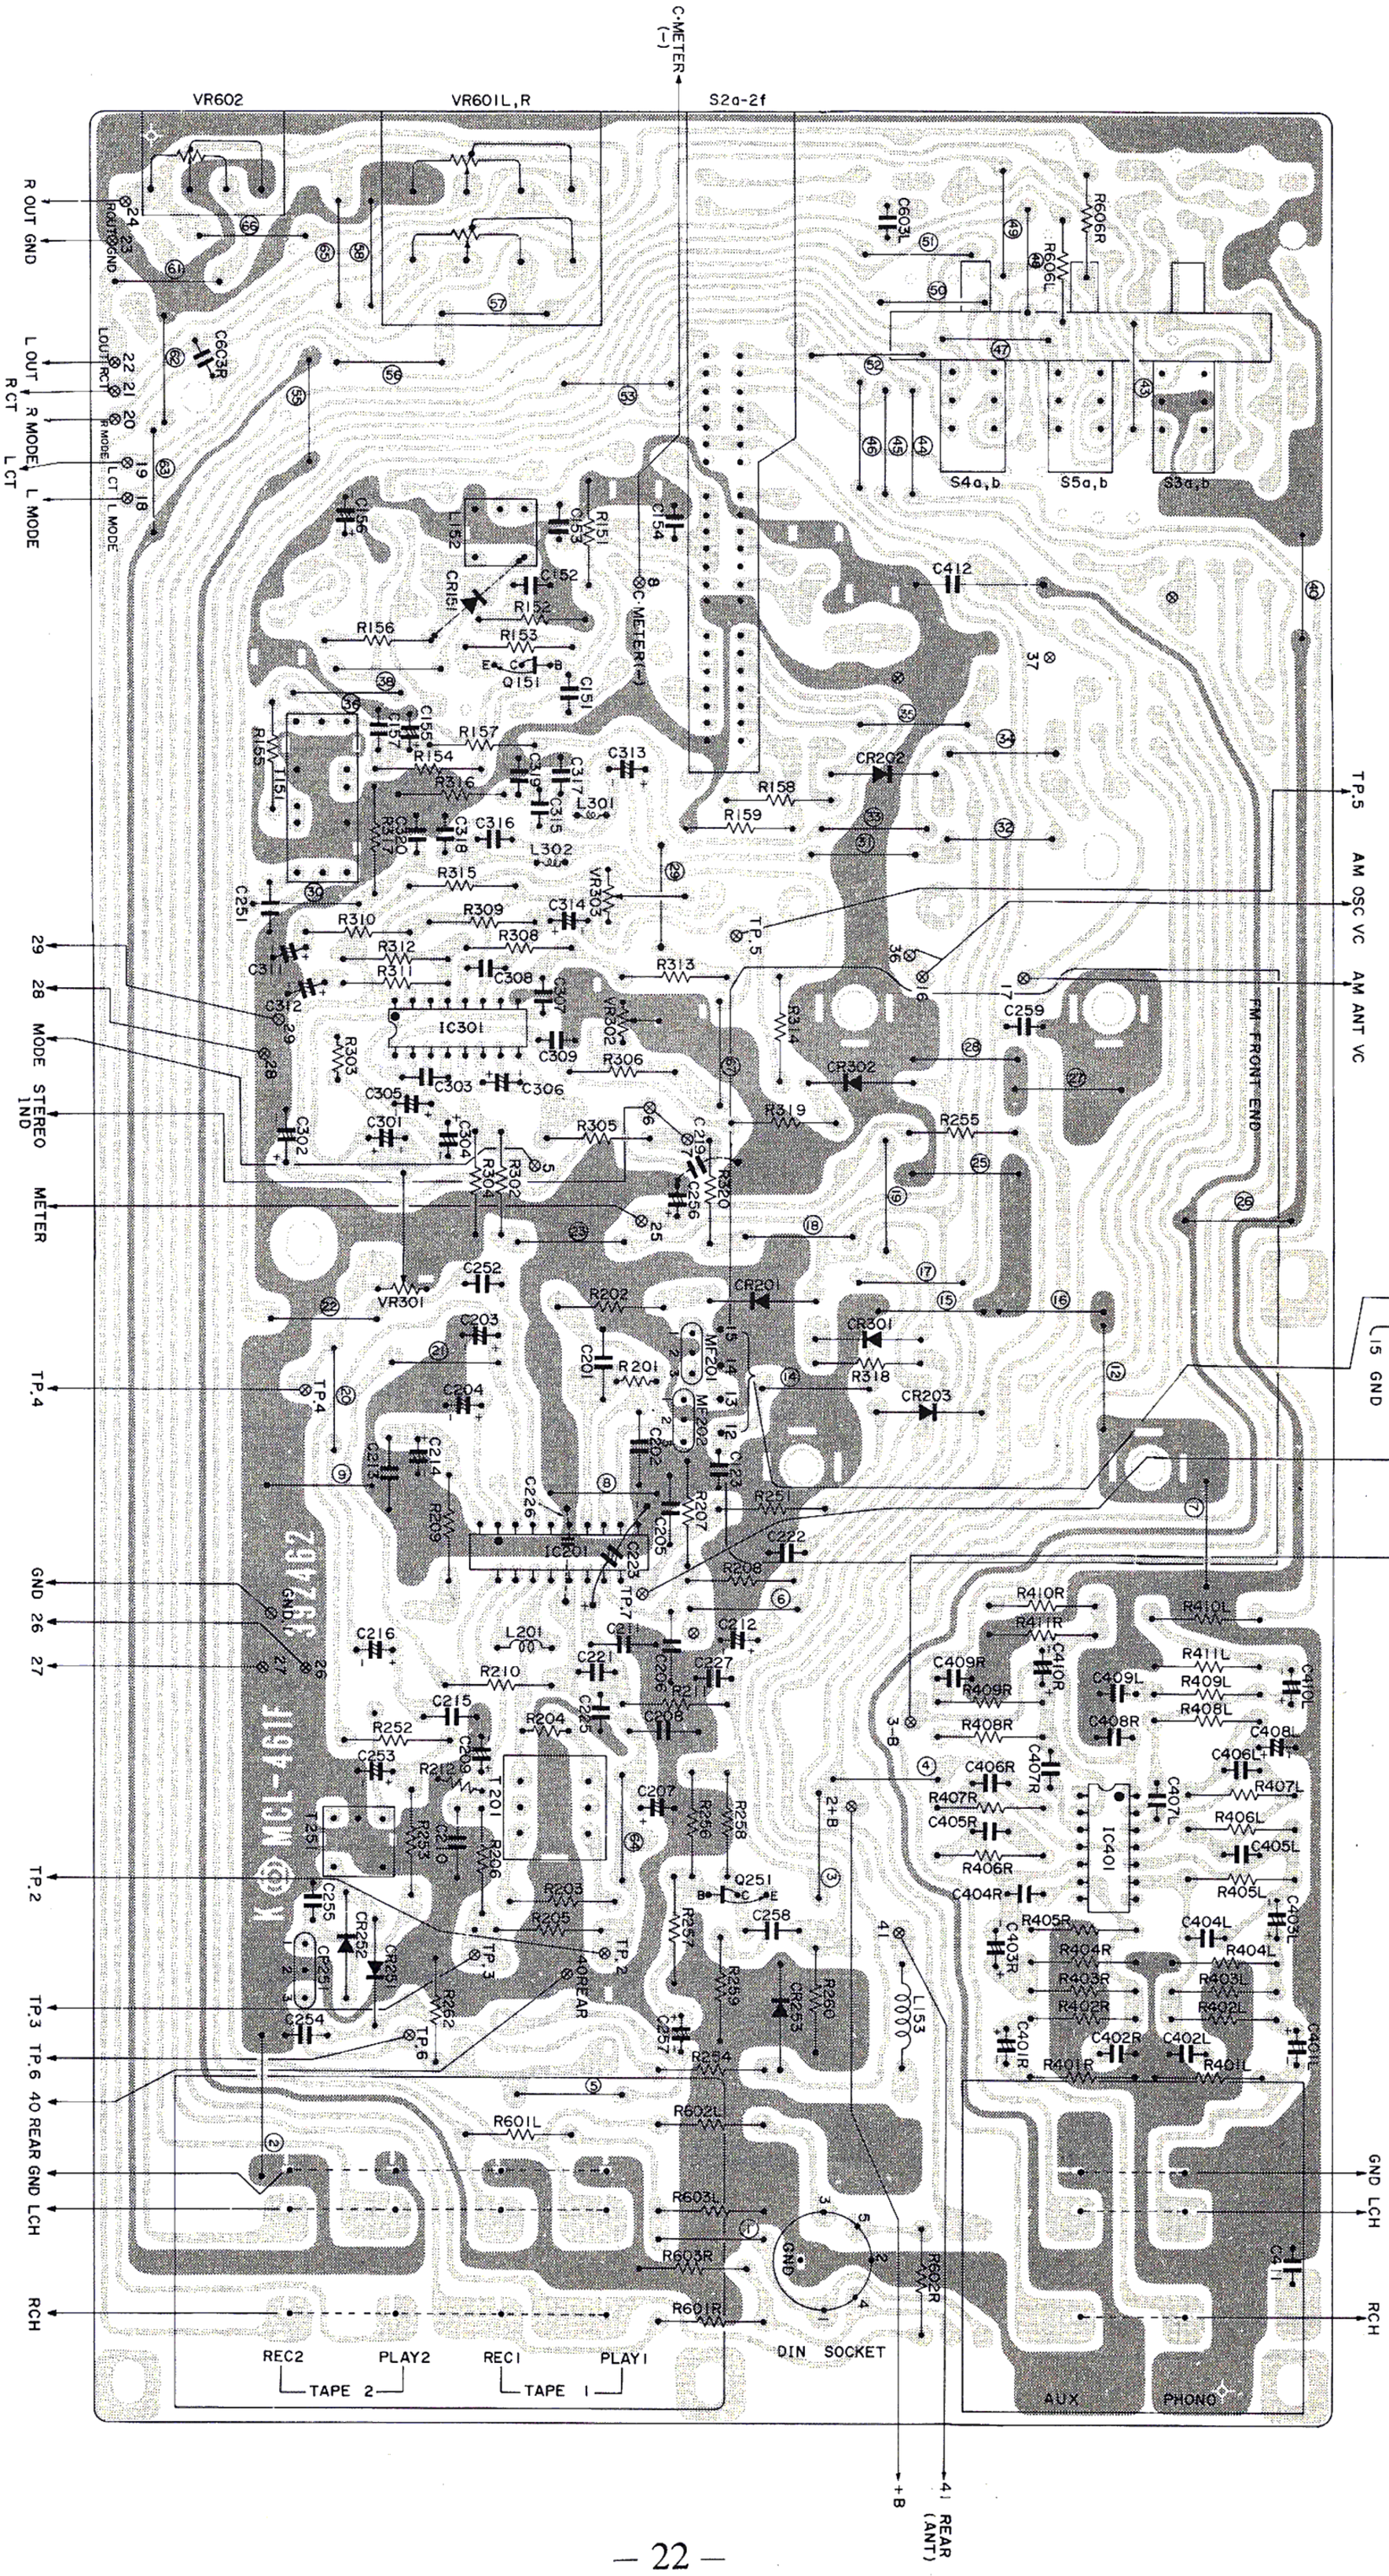

www.hifiengine.com

SR-503L TUNER PRINTED WIRING BOARD

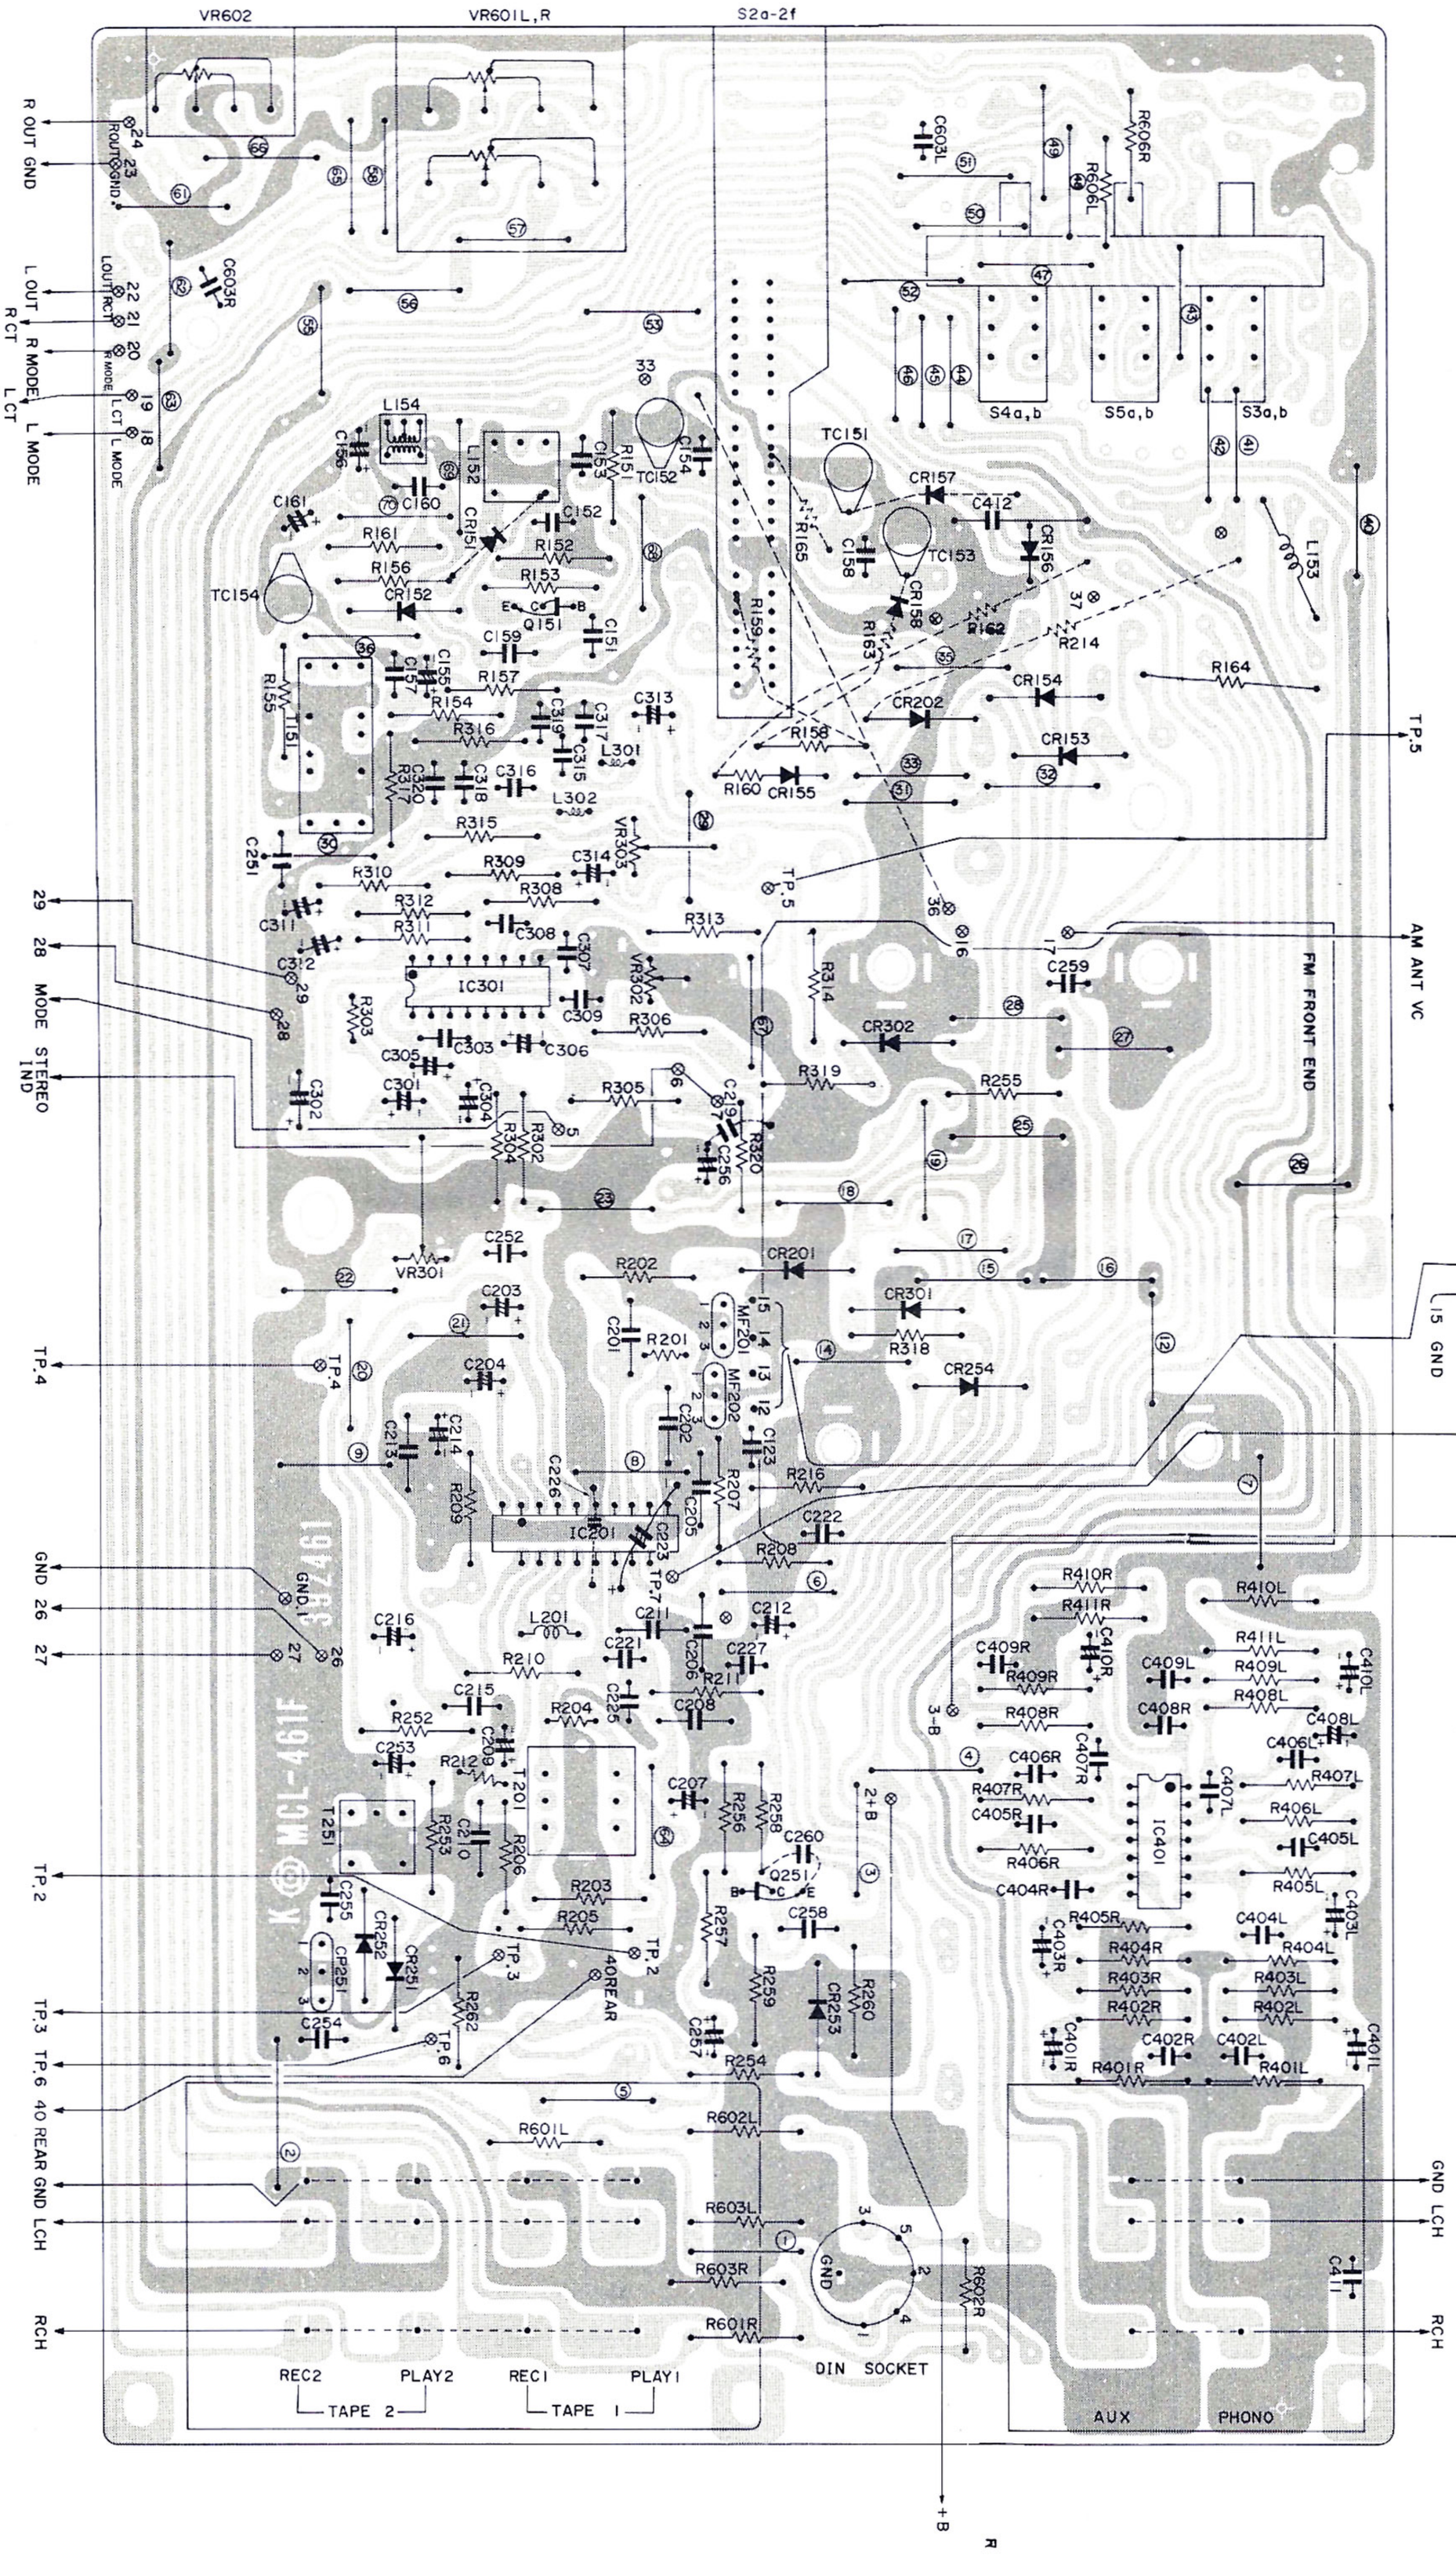

www.hifiengine.com

SR-303L TUNER PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

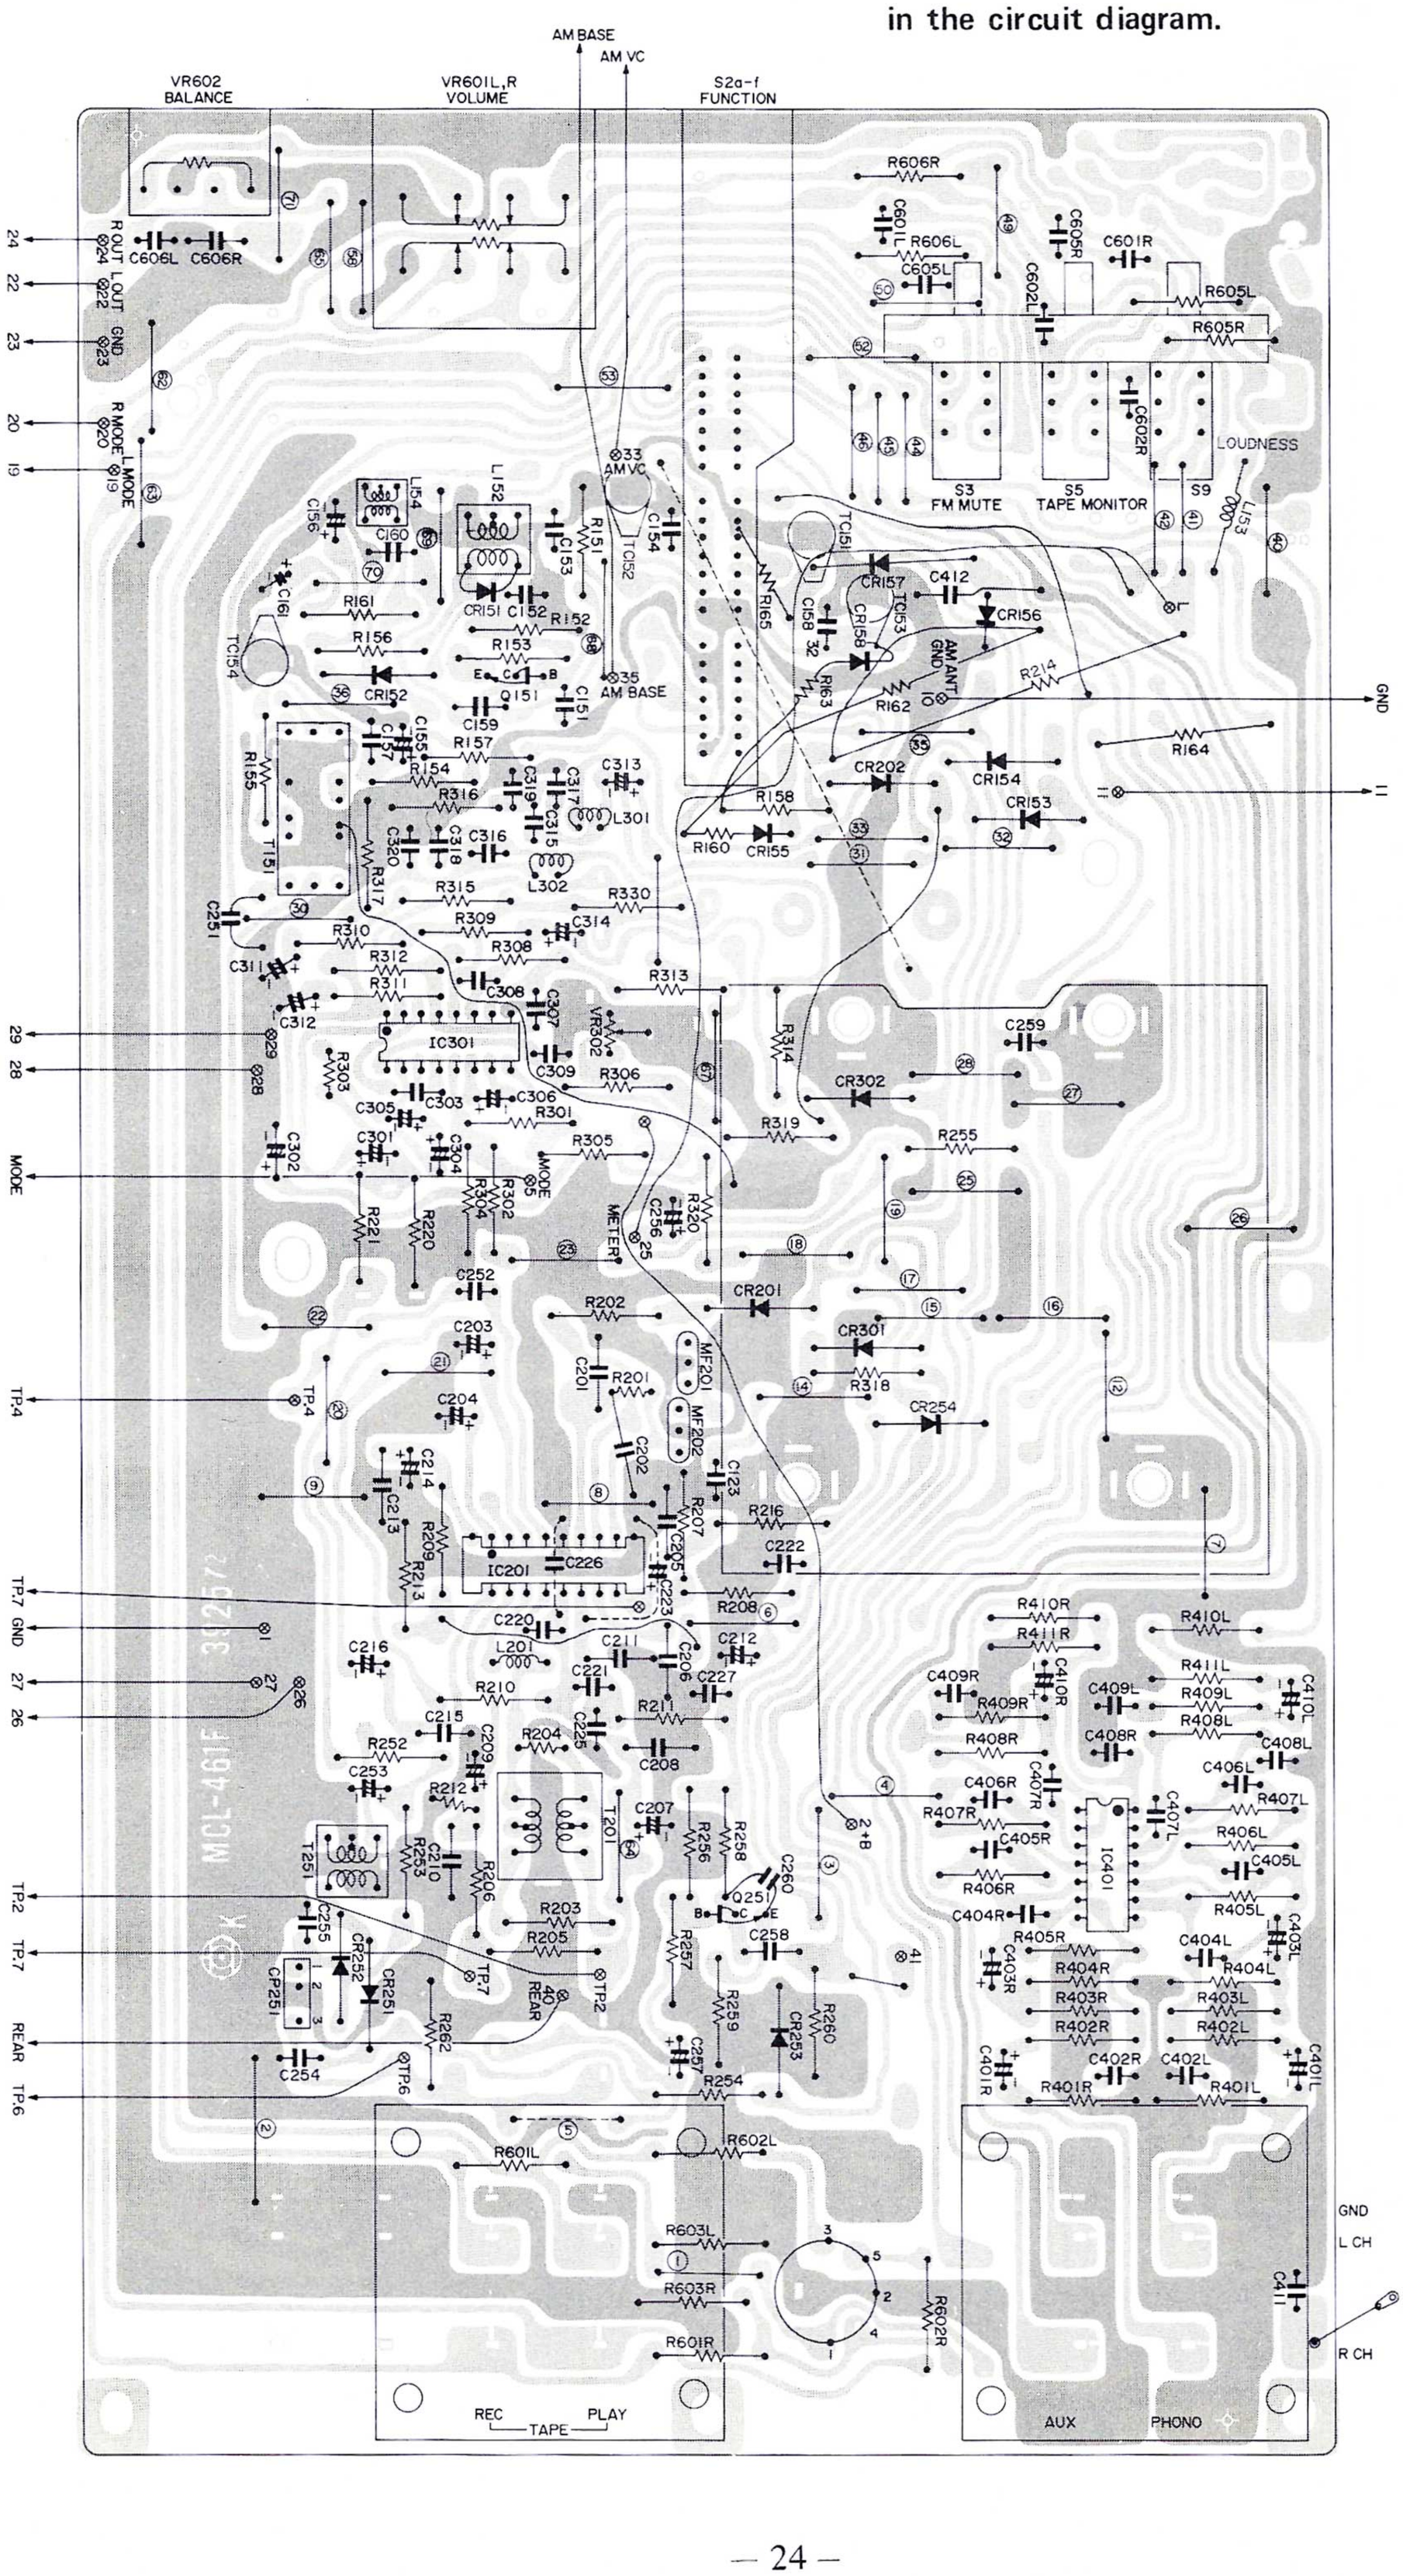

www.hifiengine.com

FRONT END PRINTED WIRING BOARD

SR-603

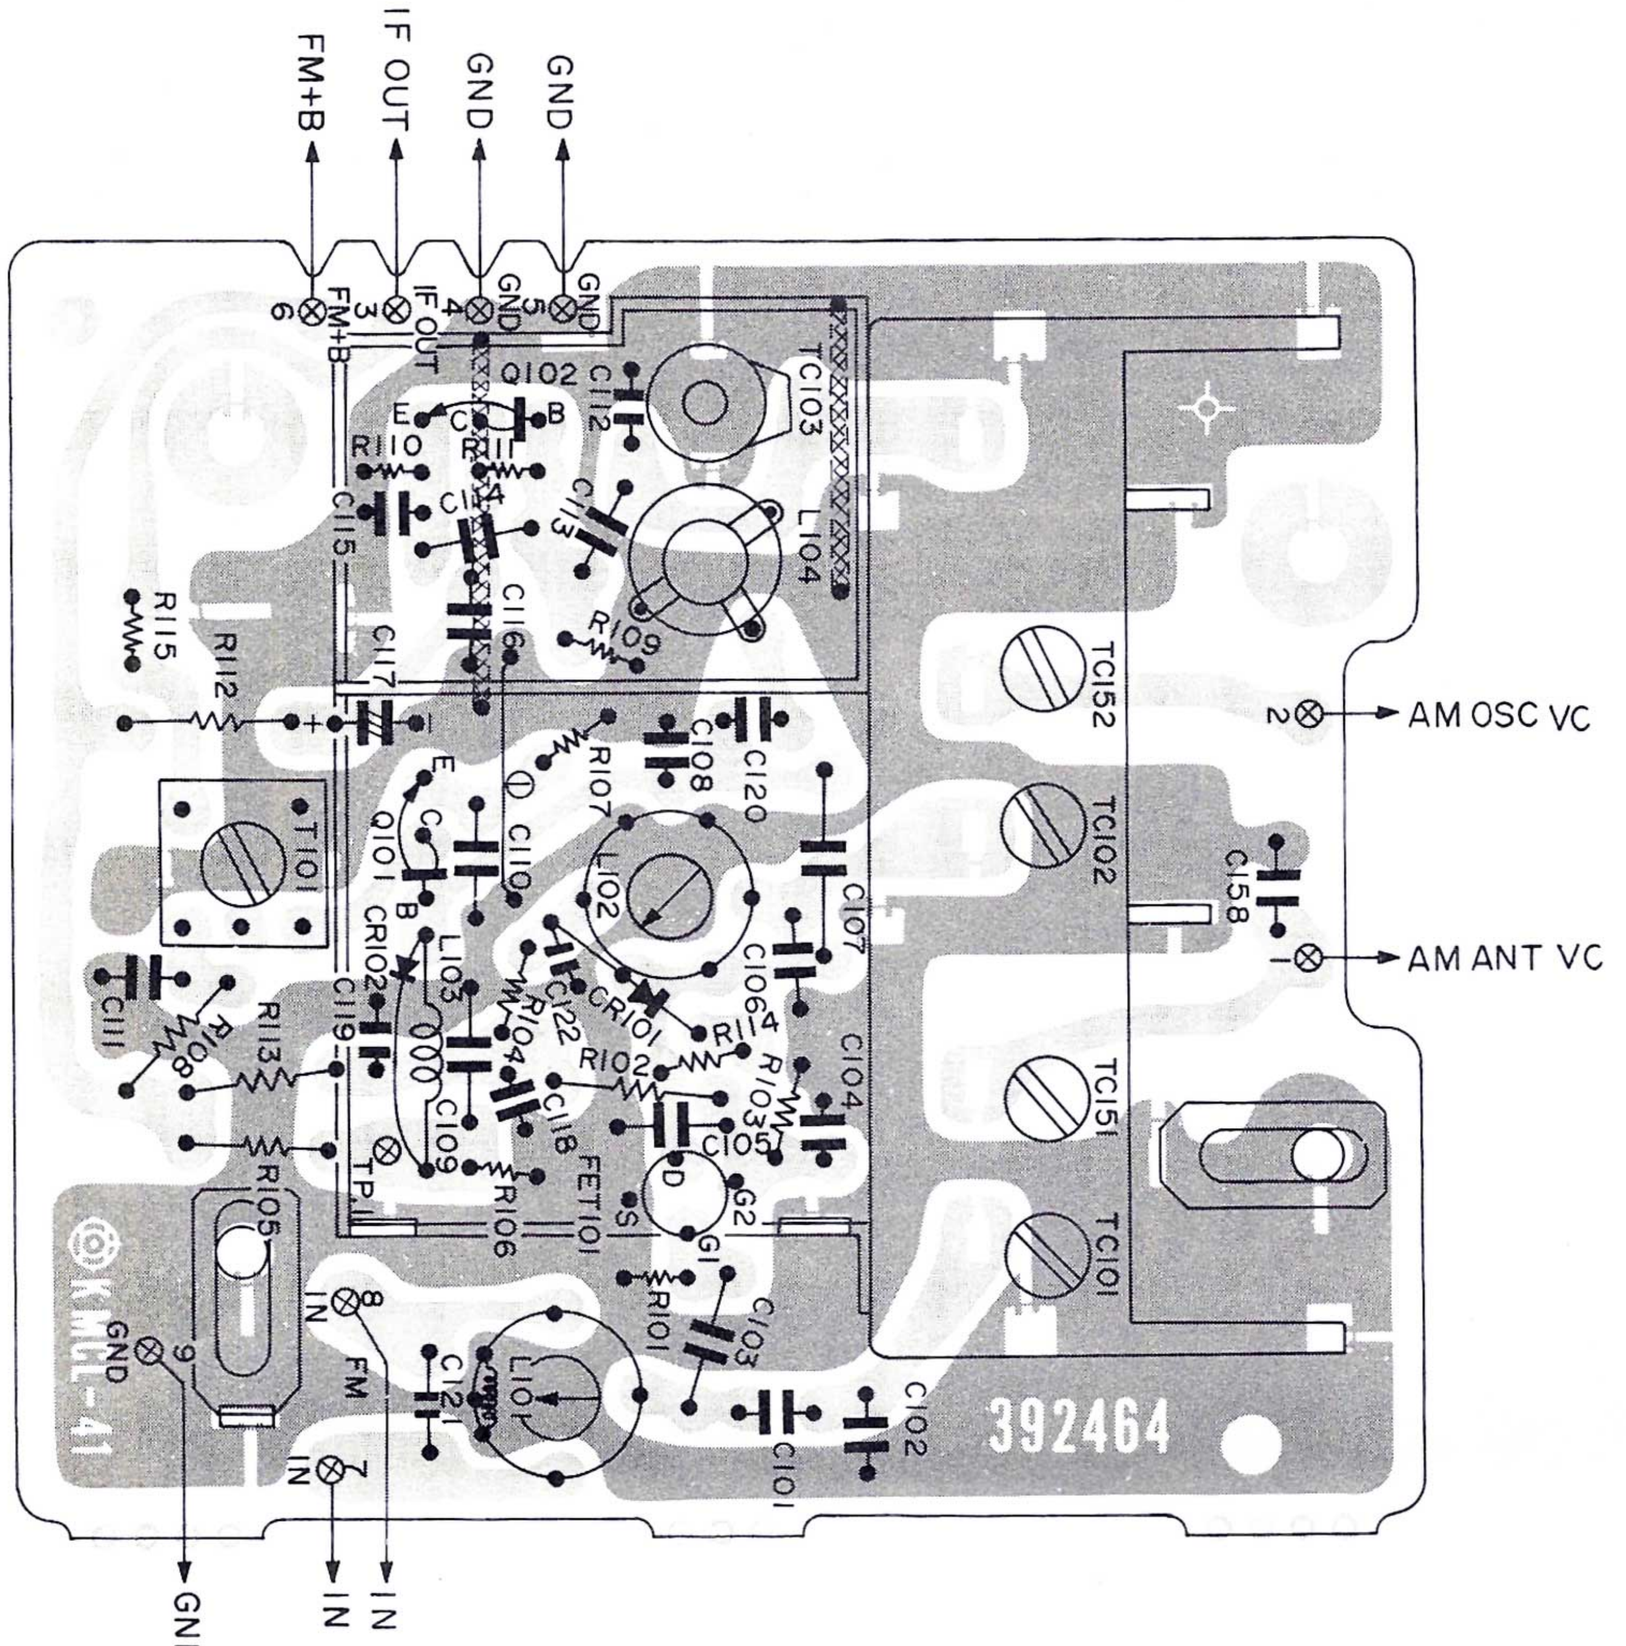

SR-503L · 303L

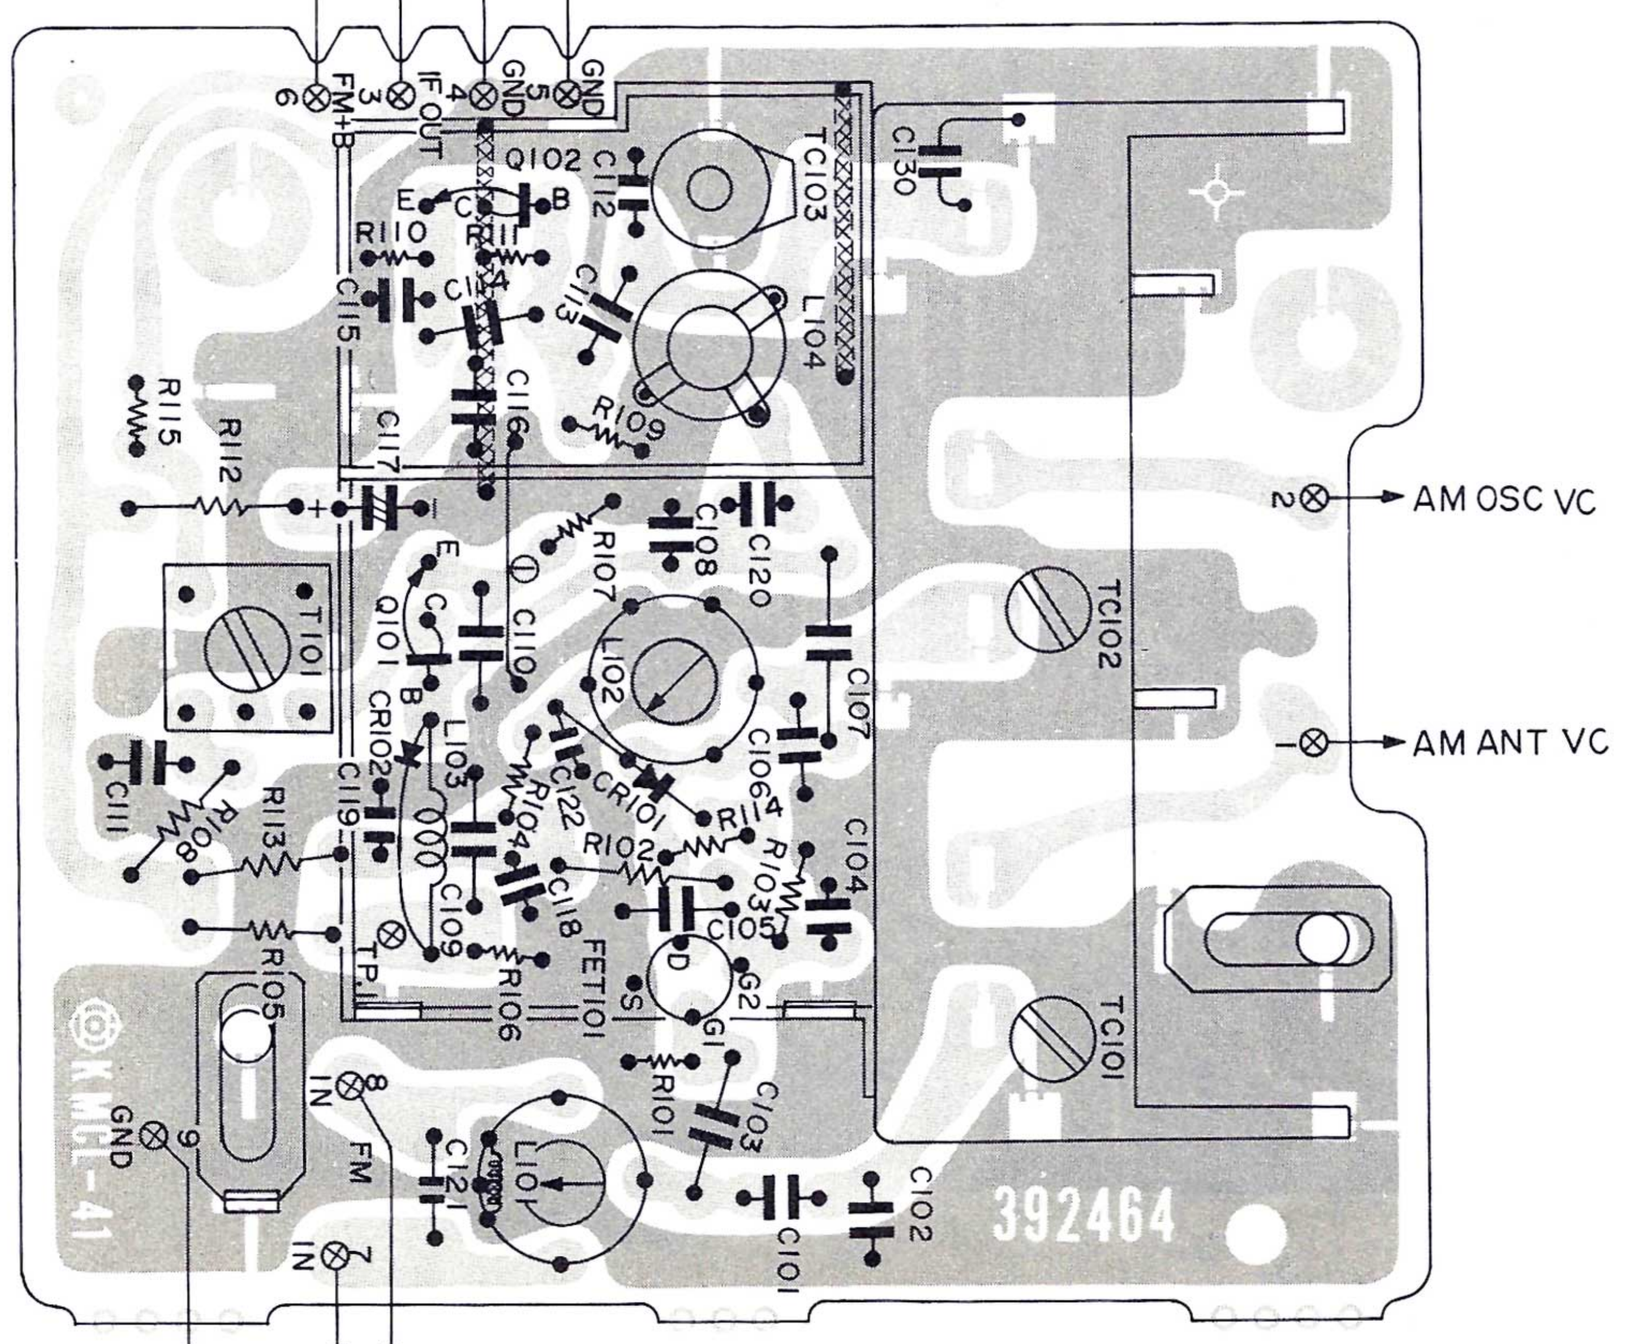

www.hifiengine.com

SR-603 AUDIO PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

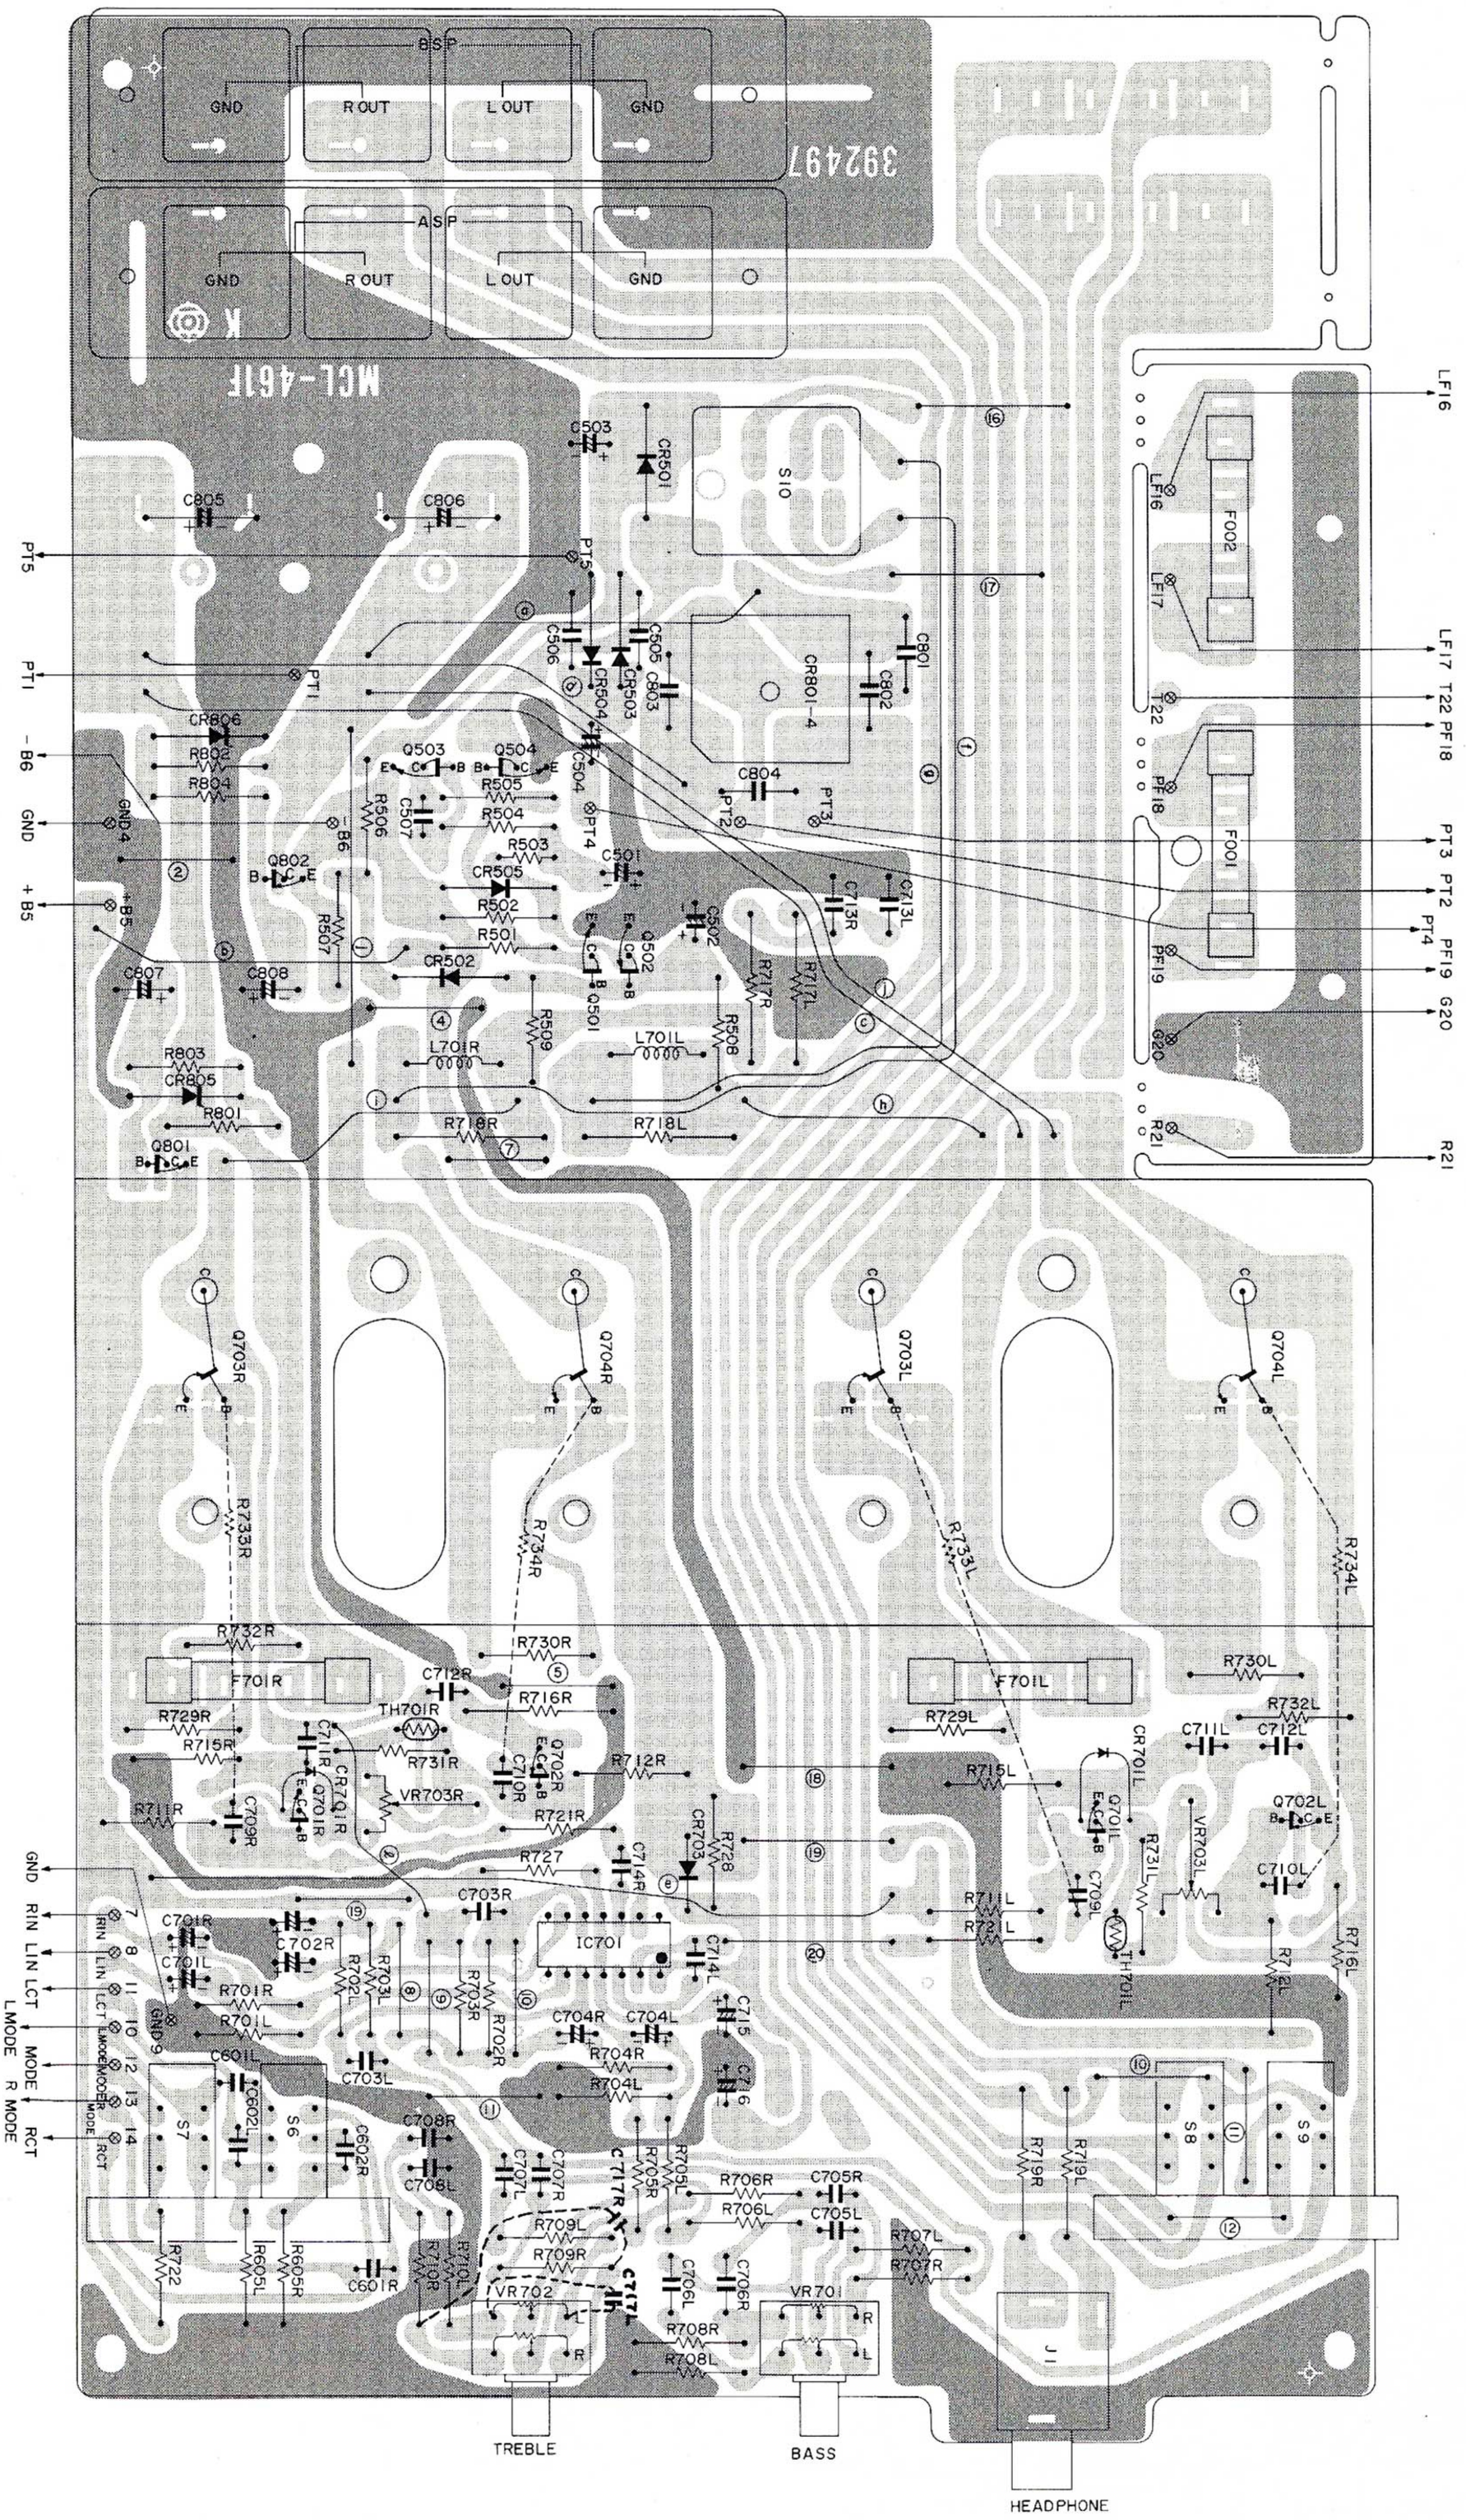

www.hifiengine.com

SR-503L AUDIO PRINTED WIRING BOARD

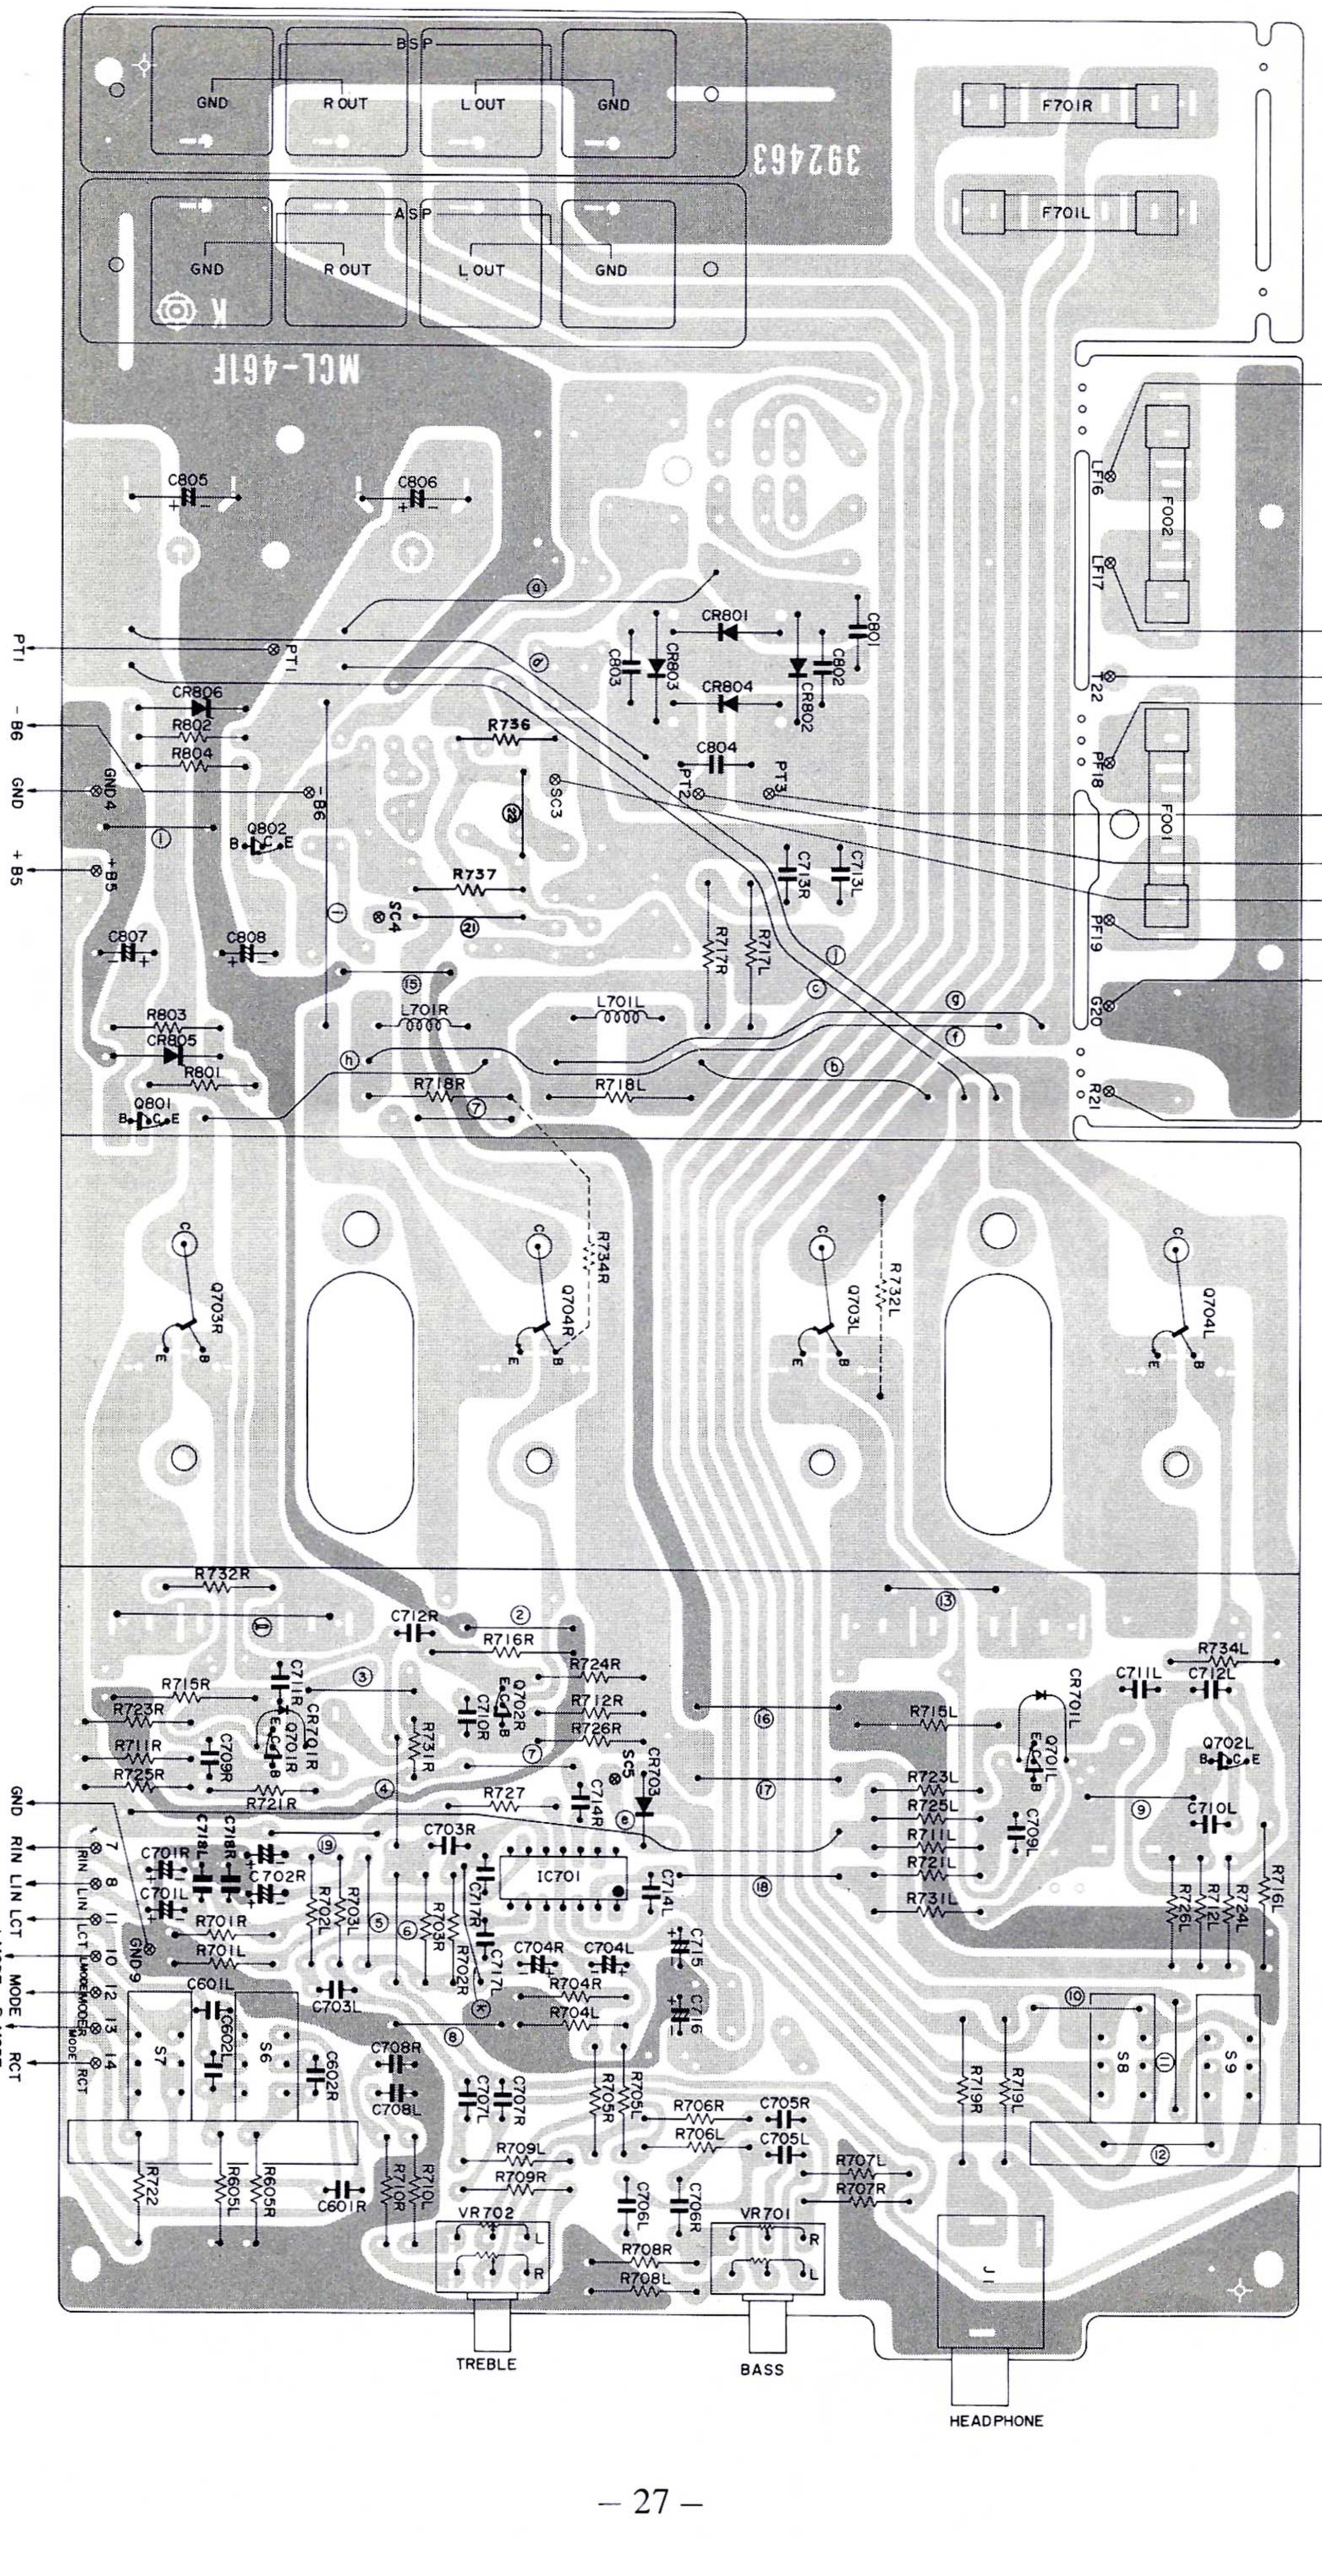

www.hifiengine.com

SR-303L AUDIO PRINTED WIRING BOARD

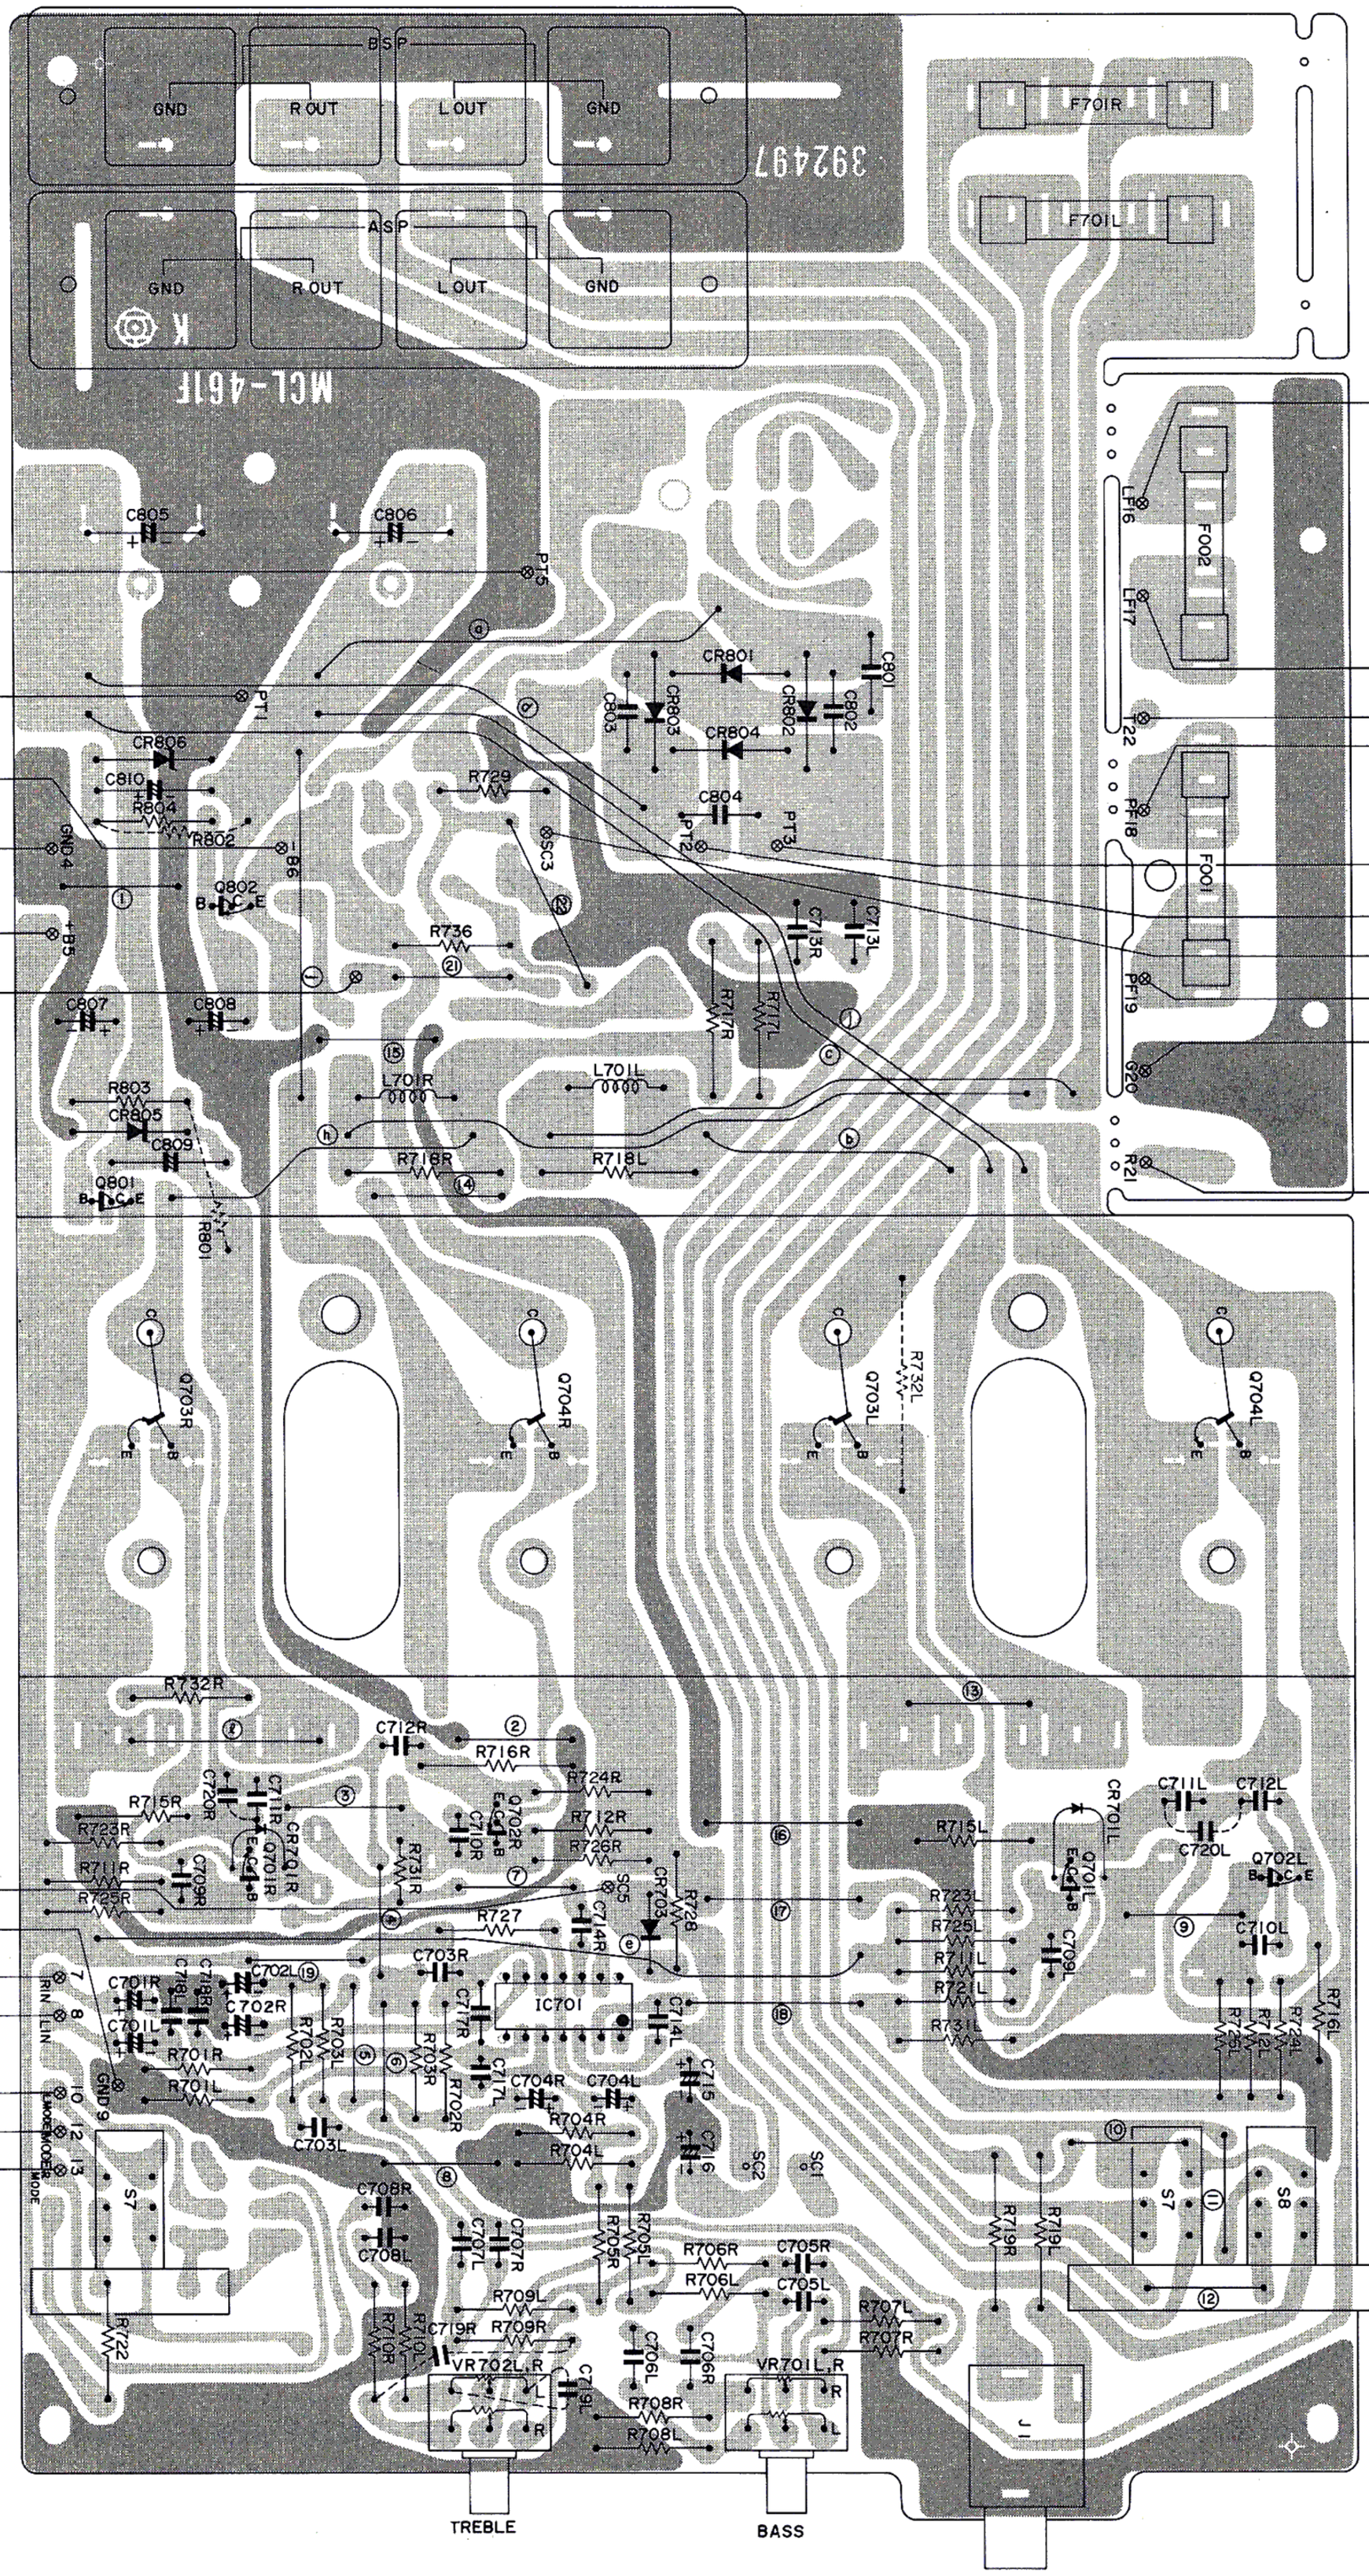

www.hifiengine.com

REPLACEMENT PARTS LIST·ERSATZTEILLISTE·TABLEAU DES PIECE

(SR-603)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
CAPACITORS					
for FRONT END PRINTED WIRING BOARD					
C101	248688	Ceramic, discal	150pF	±5%	50V
C102	0246418	Ceramic, discal	8pF	±0.25pF	50V
C103	0248676	Ceramic, discal	47pF	±5%	50V
C104	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C105	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C106	0246446	Ceramic, discal	18pF	±5%	50V
C107	0248662	Ceramic, discal	12pF	±5%	50V
C108	0248640	Ceramic, discal	10pF	±5pF	50V
C109	0248362	Ceramic, discal	220pF	±5%	50V
C110	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C111	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C112	0248334	Ceramic, discal	15pF	±5%	50V
C113	0248176	Ceramic, discal	18pF	±5%	50V
C114	0246418	Ceramic, discal	8pF	±0.25pF	50V
C115	0246447	Ceramic, discal	20pF	±5%	50V
C116	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C117	0252811	Electrolytic	1μF		50V
C118	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C119	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C120	0248632	Ceramic, discal	2pF	±0.25pF	50V
C121	0248635	Ceramic, discal	5pF	±0.25pF	50V
C122	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C158	0248639	Ceramic, discal	9pF	±0,25pF	50V
for TUNER PRINTED WIRING BOARD					
C123	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C151	0275011	Mylar, film	0.01μF	±10%	50V
C152	0274315	Mylar, film	4700pF	±10%	50V
C153	0228324	Styrol	360pF	±5%	50V
C154	0241860	Ceramic, discal	10pF	±1pF	50V
C155	0252811	Electrolytic	1μF		50V
C156	0252522	Electrolytic	22μF		16V
C157	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C201	0275015	Mylar, film	0.0047μF	±10%	50V
C202	0275015	Mylar, film	0.047μF	±10%	50V
C203	0252811	Electrolytic	1μF		50V
C204	0252813	Electrolytic	3.3μF		50V
C205	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C206	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C207	0252525	Electrolytic	47μF		16V
C208	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C209	0252811	Electrolytic	1μF		50V
C210	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C211	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C212	0252813	Electrolytic	3.3μF		50V
C213	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C214	0252521	Electrolytic	10μF		16V
C215	0248695	Ceramic, discal	300pF	±5%	50V
C216	0252811	Electrolytic	1μF		50V
C219	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C221	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C222	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C223	0252521	Electrolytic	10μF		16V
C225	0275014	Mylar, film	0.033μF	±10%	50V
C226	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C227	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C251	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C252	0275011	Mylar, film	0.01μF	±10%	50V
C253	0252813	Electrolytic	3.3μF		50V
C254	0275012	Mylar, film	0.015μF	±10%	50V
C255	0275013	Mylar, film	0.022μF	±10%	50V
C256	0252225	Electrolytic	47μF		6.3V
C257	0252811	Electrolytic	1μF		50V
C258	0275015	Mylar, film	0.047μF	±10%	50V
C259	0274013	Mylar, film	2200pF	±10%	50V
C301	0252811	Electrolytic	1μF		50V
C302	0252635	Electrolytic	470μF		25V
C303	0275015	Mylar, film	0.047μF	±10%	50V
C304	0252813	Electrolytic	3.3μF		50V
C305	0252811	Electrolytic	1μF		50V
C306	0251975	Electrolytic	0.47μF		25V
C307	1274231	Mylar, film	1200pF	±5%	50V
C308	1274231	Mylar, film	1200pF	±5%	50V
C309	0221523	Styrol	360pF	±5%	50V
C311	0252522	Electrolytic	22μF		16V
C312	0252522	Electrolytic	22μF		16V
C313	0251973	Electrolytic	0.22μF		25V
C314	0251973	Electrolytic	0.22μF		25V
C315	0228331	Styrol	680pF	±5%	50V
C316	0228331	Styrol	680pF	±5%	50V
C317	1274212	Mylar, film	1500pF	±5%	50V
C318	1274212	Mylar, film	1500pF	±5%	50V
C319	0274012	Mylar, film	1500pF	±10%	50V
C320	0274012	Mylar, film	1500pF	±10%	50V
C401(L,R)	0252815	Electrolytic	4.7μF		50V
C402(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C403(L,R)	0252525	Electrolytic	47μF		16V
C404(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C405(L,R)	1274213	Mylar, film	2200pF	±5%	50V
C406(L,R)	1274236	Mylar, film	8200pF	±5%	50V
C407(L,R)	0248732	Ceramic, discal	220pF	±10%	50V
C408(L)	0252623	Electrolytic	33μF		25V
C408(R)	0275014	Mylar, film	0.033μF	±10%	50V
C409(L,R)	0274013	Mylar, film	2200pF	±10%	50V
C410(L,R)	0252521	Electrolytic	10μF		16V
C411	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C412	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C603(L,R)	0274014	Mylar, film	3300pF	±10%	50V
for AUDIO PRINTED WIRING BOARD					
C501	0252625	Electrolytic	47μF		25V
C502	0252231	Electrolytic	100μF		6.3V
C503	0252633	Electrolytic	330μF		25V
C504	0252633	Electrolytic	330μF		25V
C505	0244175	Ceramic, discal	0.047μF	+80% −20%	50V
C506	0244175	Ceramic, discal	0.047μF	+80% −20%	50V
C507	0248724	Ceramic, discal	100pF	±10%	50V
C601(L,R)	0228325	Styrol	390pF	±5%	50V
C602(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C701(L,R)	0252813	Electrolytic	3.3μF		50V
C702(L,R)	0252813	Electrolytic	3.3μF		50V
C703(L,R)	0248648	Ceramic, discal	8pF	±5pF	50V
C704(L,R)	0252525	Electrolytic	47μF		16V
C705(L,R)	0275034	Mylar, film	0.039μF	±10%	50V
C706(L,R)	0276013	Mylar, film	0.22μF	±10%	50V
C707(L,R)	0274315	Mylar, film	4700pF	±10%	50V
C708(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C709(L,R)	0248710	Ceramic, discal	27pF	±10%	50V
C710(L,R)	0248710	Ceramic, discal	27pF	±10%	50V
C711(L,R)	0274014	Mylar, film	3300pF	±10%	50V

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C712(L,R)	0274014	Mylar, film	3300pF	±10%	50V
C713(L,R)	0276013	Mylar, film	0.22μF	±10%	50V
C714(L,R)	0248507	Mylar, film	51pF	±10%	50V
C715	0252331	Electrolytic	100μF		10V
C716	0252331	Electrolytic	100μF		10V
C801	0245408	Ceramic, discal	0.01μF	±20%	500V
C802	0245408	Ceramic, discal	0.01μF	±20%	500V
C803	0245408	Ceramic, discal	0.01μF	±20%	500V
C804	0245408	Ceramic, discal	0.01μF	±20%	500V
C805	0250488	Electrolytic	6800μF		40V
C806	0250488	Electrolytic	6800μF		40V
C807	0252635	Electrolytic	470μF		25V
C808	0252635	Electrolytic	470μF		25V
for REAR PLATE ASSEMBLY					
C001	0243885	Ceramic, discal	4700pF	±20%	125V

RESISTORS

for FRONT END PRINTED WIRING BOARD					
R101	0138203	Carbon film	120kΩ	±5%	SRD¼SD
R102	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R103	0138127	Carbon film	1.8kΩ	±5%	SRD¼SD
R104	0138051	Carbon film	27Ω	±5%	SRD¼SD
R105	0138169	Carbon film	22kΩ	±5%	SRD¼SD
R106	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R107	0138103	Carbon film	820Ω	±5%	SRD¼SD
R108	0138085	Carbon film	150Ω	±5%	SRD¼SD
R109	0138141	Carbon film	6.8kΩ	±5%	SRD¼SD
R110	0138121	Carbon film	1kΩ	±5%	SRD¼SD
R111	0138167	Carbon film	18kΩ	±5%	SRD¼SD
R112	0138081	Carbon film	100Ω	±5%	SRD¼SD
R113	0138085	Carbon film	150Ω	±5%	SRD¼SD
R114	0138081	Carbon film	100Ω	±5%	SRD¼SD
R115	0138059	Carbon film	56Ω	±5%	SRD¼SD
for TUNER PRINTED WIRING BOARD					
R151	0114201	Carbon film	10kΩ	±5%	SRD¼P
R152	0114165	Carbon film	1.5kΩ	±5%	SRD¼P
R153	0114131	Carbon film	100Ω	±5%	SRD¼P
R154	0114221	Carbon film	68kΩ	±5%	SRD¼P
R155	0114287	Carbon film	180kΩ	±5%	SRD¼P
R156	0114161	Carbon film	1kΩ	±5%	SRD¼P
R157	0114153	Carbon film	820Ω	±5%	SRD¼P
R158	0114145	Carbon film	390Ω	±5%	SRD¼P
R159	0114203	Carbon film	12kΩ	±5%	SRD¼P
R201	0138093	Carbon film	330Ω	±5%	SRD¼SD
R202	0114285	Carbon film	150kΩ	±5%	SRD¼P
R203	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R204	0138139	Carbon film	5.6kΩ	±5%	SRD¼SD
R205	0114137	Carbon film	180Ω	±5%	SRD¼P
R206	0114183	Carbon film	8.2kΩ	±5%	SRD¼P
R207	0114217	Carbon film	47kΩ	±5%	SRD¼P
R208	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R209	0114203	Carbon film	12kΩ	±5%	SRD¼P
R210	0114217	Carbon film	47kΩ	±5%	SRD¼P
R211	0134295	Composition	33Ω	±10%	RC½GF
R212	0138209	Carbon film	220kΩ	±5%	SRD¼SD
R251	0114209	Carbon film	22kΩ	±5%	SRD¼P
R252	0114215	Carbon film	39kΩ	±5%	SRD¼P
R253	0114213	Carbon film	33kΩ	±5%	SRD¼P
R254	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R255	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R256	0114301	Carbon film	680kΩ	±5%	SRD¼P
R257	0114221	Carbon film	68kΩ	±5%	SRD¼P
R258	0114177	Carbon film	4.7kΩ	±5%	SRD¼P

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R259	0114153	Carbon film	820Ω	±5%	SRD¼P
R260	0114281	Carbon film	100kΩ	±5%	SRD¼P
R262	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R302	0114219	Carbon film	56kΩ	±5%	SRD¼P
R303	0138121	Carbon film	1kΩ	±5%	SRD¼SD
R304	0114215	Carbon film	39kΩ	±5%	SRD¼P
R305	0114137	Carbon film	180Ω	±5%	SRD¼P
R306	0110820	Metal	24kΩ	±1%	RN¼B
R308	0114217	Carbon film	47kΩ	±5%	SRD¼P
R309	0114217	Carbon film	47kΩ	±5%	SRD¼P
R310	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R311	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R312	0114213	Carbon film	33kΩ	±5%	SRD¼P
R313	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R314	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R315	0114213	Carbon film	33kΩ	±5%	SRD¼P
R316	0114203	Carbon film	12kΩ	±5%	SRD¼P
R317	0114203	Carbon film	12kΩ	±5%	SRD¼P
R318	0114285	Carbon film	150kΩ	±5%	SRD¼P
R319	0114201	Carbon film	10kΩ	±5%	SRD¼P
R320	0134298	Composition	56Ω	±10%	RC½GF
R401(L,R)	0114219	Carbon film	56kΩ	±5%	SRD¼P
R402(L,R)	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R403(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R404(L,R)	0114148	Carbon film	510Ω	±5%	SRD¼P
R405(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R406(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R407(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R408(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R409(L,R)	0114135	Carbon film	150Ω	±5%	SRD¼P
R410(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R411(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R601(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R602(L,R)	0114219	Carbon film	56kΩ	±5%	SRD¼P
R603(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R606(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
for AUDIO PRINTED WIRING BOARD					
R501	0114205	Carbon film	15kΩ	±5%	SRD¼P
R502	0114205	Carbon film	15kΩ	±5%	SRD¼P
R503	0138089	Carbon film	220Ω	±5%	SRD¼SD
R504	0114285	Carbon film	150kΩ	±5%	SRD¼P
R505	0114205	Carbon film	15kΩ	±5%	SRD¼P
R506	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R507	0114201	Carbon film	10kΩ	±5%	SRD¼P
R508	0114285	Carbon film	150kΩ	±5%	SRD¼P
R509	0114285	Carbon film	150kΩ	±5%	SRD¼P
R605(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R701(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R702(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R703(L,R)	0014217	Carbon film	47kΩ	±5%	SRD¼P
R704(L,R)	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R705(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R706(L,R)	0114153	Carbon film	820Ω	±5%	SRD¼P
R707(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R708(L,R)	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R709(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R710(L,R)	0114153	Carbon film	820Ω	±5%	SRD¼P
R711(L,R)	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R712(L,R)	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R715(L,R)	0110601	Metal	10Ω	±5%	RN¼B
R716(L,R)	0110601	Metal	10Ω	±10%	RN1B

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R717(L,R)	0119139	Metal	4.7Ω	±10%	RN2B
R718(L,R)	0119041	Metal	10Ω	±10%	RN1B
R719(L,R)	0119426	Metal oxide	270Ω	±10%	RD1PA
R721(L,R)	0134361	Composition	100Ω	±10%	RC½GF
R722	0114281	Carbon film	100kΩ	±5%	SRD¼P
R727	0134059	Composition	560Ω	±5%	RC½GF
R728	0114149	Carbon film	560Ω	±5%	SRD¼P
R729	0114141	Carbon film	270Ω	±5%	SRD¼P
R730	0114141	Carbon film	270Ω	±5%	SRD¼P
R731(L,R)	0114049	Carbon film	22Ω	±5%	SRD¼P
R732(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R801	0134458	Composition	1.5kΩ	±10%	RC½GF
R802	0134458	Composition	1.5kΩ	±10%	RC½GF
R803	0114151	Carbon film	680Ω	±5%	SRD¼P
R804	0114151	Carbon film	680Ω	±5%	SRD¼P

for REAR PLATE ASSEMBLY

R001	0111955	Metal	4.7MΩ	±5%	RN½B
R116	0114161	Carbon film	1kΩ	±5%	SRD¼P

ICs, TRANSISTORS & FET

for FRONT END PRINTED WIRING BOARD

FET101	2327431	3SK 45
Q101	0573510	2SC 535 Ⓑ
Q102	0573507	2SC461 Ⓑ

for TUNER PRINTED WIRING BOARD

Q151	0573491	2SC454 Ⓑ
Q251	2327443	2SC1344 Ⓔ

for AUDIO PRINTED WIRING BOARD

Q501	2320063	2SC458 Ⓒ
Q502	2328083	2SA844 Ⓔ
Q503	2320063	2SC458 Ⓒ
Q504	2327333	2SC1213 Ⓒ
Q701(L,R)	2328261	2SD571 Ⓛ
Q702(L,R)	2328271	2SB605 Ⓛ
Q703(L,R)	2327811	2SA627 ④
Q704(L,R)	2327821	2SD188 ④
Q801	2327802	2SD478 Ⓒ
Q802	2327792	2SB568 Ⓒ

for TUNER PRINTED WIRING BOARD

IC201	2367281	HA1121
IC301	2367271	HA1196
IC401	2367152	HA1452W

for AUDIO PRINTED WIRING BOARD

IC701	2367152	HA1452W

SYMBOL NO.	STOCK NO.	DESCRIPTION

DIODES

for FRONT END PRINTED WIRING BOARD

CR101	2337011	1S2076
CR102	0575002	1N34A

for TUNER PRINTED WIRING BOARD

CR151	2337011	1S2076
CR201	2337011	1S2076
CR202	2337011	1S2076
CR203	2337011	1S2076
CR251	0575002	1N34A
CR252	0575002	1N34A
CR253	2337011	1S2076
CR301	2337011	1S2076
CR302	2337011	1S2076

for AUDIO PRINTED WIRING BOARD

CR501	2337011	1S2076
CR502	2337011	1S2076
CR503	2337083	W06C
CR504	2337083	W06C
CR505	2337011	1S2076
CR701(L,R)	2347042	MV - 5W
CR801	2337341	S5VB - 20
CR802	2337341	S5VB - 20
CR803	2337341	S5VB - 20
CR804	2337341	S5VB - 20
CR805	2337103	HZ - 12 Ⓒ
CR806	2337103	HZ - 12 Ⓒ
TH701(L,R)	0576031	13D27

for REAR PLATE ASSEMBLY

CR103	2337011	1S2076
CR104	2337011	1S2076

VARIABLE RESISTORS

for TUNER PRINTED WIRING BOARD

VR301	0151225	50kΩ - (B)
VR302	0151271	6.8kΩ - (B)
VR303	0151284	300kΩ - (B)
VR601(L,R)	0156185	100kΩ - (B)
VR602	0151678	250kΩ - (W)

for AUDIO PRINTED WIRING BOARD

VR701(L,R)	0151681	50kΩ - (C) (Tone control)
VR702(L,R)	0151681	50kΩ - (C) (Tone control)
VR703(L,R)	0151222	100Ω - (B)

COILS & TRANSFORMERS

for FRONT END PRINTED WIRING BOARD

L101	2134741	FM antenna coil
L102	2134653	FM RF coil

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION
L103	2227081	FM choke coil (1μH)
L104	2134471	FM OSC coil
T101	2154291	FM IF transformer
for TUNER PRINTED WIRING BOARD		
L151	2757291	Ferrite antenna
L152	2134431	MW OSC coil
L153	2227082	Choke coil (10μH)
L201	2227119	Choke coil (18μH)
L301	2227101	Coil (100mH)
L302	2227101	Coil (100mH)
T151	2154182	AM IF transformer
T201	2154271	FM IF transformer
T251	2154122	AM IF transformer
for AUDIO PRINTED WIRING BOARD		
L701(L,R)	2227261	Aduio trap coil (2.2μH)
MISCELLANEOUS		
	2506406	Tuner·front end printed wiring board assembly
	2506152	Audio printed wiring board assembly
VC101-103, VC151-152	0281169	Variable capacitor
TC103	0283121	Trimmer capacitor
CP251	0186131	CR multiple component
MF201	2134541	Ceramic filter
MF202	2134541	Ceramic filter
F001	2727191	Fuse-fuse (1A)
F002	2727193	Fuse-fuse (2A)
F701(L,R)	2727334	Fuse-fuse (2A)
S1	2638081	Switch-power switch
S2a-f	2617733	Switch-rotary switch (FUNCTION)
S3a,b,S4a,b, S9a,b	2638001	Switch-push switch (TAPE MONITOR, HIGH FILTER)
S6,7	2637991	Switch-push switch (signal select)
S8,9	2638012	Switch-push switch (speaker select)
S10a,b	2647072	Power relay
	2657123	Socket-voltage changing socket
	2677281	Socket-DIN 5P socket
J1	2677231	Jack-headphone jack
	2667161	Plug-short pin plug
	2677321	4P terminal board
	2677341	8P terminal board
	2218341	Power transformer
	4571925	Flywheel assembly
	3920802	Pulley
	4513311	Earth screw
	4567411	3 φ x 6CT bind screw (yellow)
	4567451	3 φ x 6CT bind screw (silver)
	4567433	3 φ x 10CT bind screw (balck)
	4567443	4 φ x 10CT bind screw
	4784106	3 φ x 8CT bind screw
	4770255	4 φ flanged nut
	4567431	3 φ x 6CT bind screw (black)
	4567453	3 φ x 10CT bind screw (silver)

SYMBOL NO.	STOCK NO.	DESCRIPTION
	2687792	4P push terminal
	3921301	Bushing (for Power transistor)
for REAR PLATE ASSEMBLY		
	2657361	Socket-coaxial cable socket
	2687831	Terminal-5P terminal
	2687652	3P mold screw terminal
	4567433	3 φ x 10CT bind screw
for DIAL MECHANISM ASSEMBLY		
	3199772	Dial scale (for U.K. & France)
	3199773	Dial scale (for West Germany)
	4399751	Dial pointer (for U.K. & France)
	4399752	Dial pointer (for West Germany)
	0666704	Wire clip
	3337201	Spring
	4394984	Metal panel (for West Germany)
	4394985	Metal panel (for U.K. & France)
	3923401	Indicator
	4684135	Indicator cover
	4398542	Lamp cover assembly
	2577294	Signal meter (for U.K. & France)
	2577295	Signal meter (for West Germany)
	2577242	Tuning meter (for U.K. & France)
	2577296	Tuning meter (for West Germany)
	2767233	Lamp (8V, 30mA)
for FINAL ASSEMBLY		
	3244434	Escutcheon assembly (for West Germany)
	3244437	Escutcheon assembly (for U.K. & France)
	3282397	Knob-push knob (Power) (for West Germany)
	3282398	Knob-push knob (Power) (for U.K. & France)
	3282804	Knob-push knob (for West Germany)
	3284451	Knob-push knob (for U.K. & France)
	3284041	Knob (for U.K. & France)
	3284042	Knob (for West Germany)
	3284393	Knob (Tuning) (for U.K. & France)
	3284394	Knob (Tuning) (for West Germany)
	4743422	Knob ring
	3916411	Leg
	4567413	3 φ x 10CT bind screw
	4567446	4 φ x 16CT bind screw
	3710471	Headphone cap (for West Germany)
	3922511	DIN cap
	3922521	US pin cap
for CABINET ASSEMBLY		
	9403066	Cabinet assembly (for U.K.)
	9403068	Cabinet assembly (for France & West Germany)
for ACCESSORY		
	2748371	FM antenna

www.hifiengine.com

(SR-503L)

CAPACITORS

for FRONT END PRINTED WIRING BOARD

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C101	0248688	Ceramic, discal	150pF	±5%	50V
C102	0246418	Ceramic, discal	8pF	±0.25pF	50V
C103	0248676	Ceramic, discal	47pF	±5%	50V
C104	0145017	Ceramic, discal	0.01μF	+80% −20%	25V
C105	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C106	0246446	Ceramic, discal	18pF	±5%	50V
C107	0248662	Ceramic, discal	12pF	±5%	50V
C108	0248640	Ceramic, discal	10pF	±5pF	50V
C109	0248362	Ceramic, discal	220pF	±5%	50V
C110	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C111	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C112	0248334	Ceramic, discal	15pF	±5%	50V
C113	0248176	Ceramic, discal	18pF	±5%	50V
C114	0246418	Ceramic, discal	8pF	±0.25pF	50V
C115	0146447	Ceramic, discal	20pF	±5%	50V
C116	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C117	0252811	Electrolytic	1μF		50V
C118	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C119	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C120	0248632	Ceramic, discal	2pF	±0.25pF	50V
C121	0248635	Ceramic, discal	5pF	±0.25pF	50V
C122	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C130	0246415	Ceramic, discal	5pF	±0.25pF	50V

for TUNER PRINTED WIRING BOARD

C123	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C151	0275011	Mylar, film	0.01μF	±10%	50V
C152	0274315	Mylar, film	4700pF	±10%	50V
C153	0228324	Styrol	360pF	±5%	50V
C154	0241882	Ceramic, discal	10pF	±1pF	50V
C155	0252811	Electrolytic	1μF		50V
C156	0252811	Electrolytic	1μF		50V
C157	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C158	0248498	Ceramic, discal	22pF	±5%	50V
C159	0228319	Styrol	220pF	±5%	50V
C160	0246463	Ceramic, discal	91pF	±5%	50V
C161	0252811	Electrolytic	1μF		50V
C201	0275015	Mylar, film	0.047μF	±10%	50V
C202	0275015	Mylar, film	0.047μF	±10%	50V
C203	0252811	Electrolytic	1μF		50V
C204	0252813	Electrolytic	3.3μF		50V
C205	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C206	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C207	0252525	Electrolytic	47μF		16V
C208	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C209	0252811	Electrolytic	1μF		50V
C210	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C211	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C212	0252813	Electrolytic	3.3μF		50V
C213	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C214	0252521	Electrolytic	10μF		16V
C215	0248695	Ceramic, discal	300pF	±5%	50V
C216	0252811	Electrolytic	1μF		50V
C219	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C221	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C222	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C223	0252521	Electrolytic	10μF		16V
C225	0275014	Mylar, film	0.033μF	±10%	50V
C226	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C227	0245018	Ceramic, discal	0.022μF	+80% −20%	25V

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C251	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C252	0275011	Mylar, film	0.01μF	±10%	50V
C253	0252813	Electrolytic	3.3μF		50V
C254	0275013	Mylar, film	0.022μF	±10%	50V
C255	0275014	Mylar, film	0.033μF	±10%	50V
C256	0252225	Electrolytic	47μF		6.3V
C257	0252811	Electrolytic	1μF		50V
C258	0275013	Mylar, film	0.022μF	±10%	50V
C259	0275012	Mylar, film	0.015μF	±10%	50V
C260	0275015	Mylar, film	0.047μF	±10%	50V
C301	0252811	Electrolytic	1μF		50V
C302	0252635	Electrolytic	470μF		25V
C303	0275015	Mylar, film	0.047μF	±10%	50V
C304	0252813	Electrolytic	3.3μF		50V
C305	0252811	Electrolytic	1μF		50V
C306	0251975	Electrolytic	0.47μF		25V
C307	1274231	Mylar, film	1200pF	±5%	50V
C308	1274231	Mylar, film	1200pF	±5%	50V
C309	0221523	Styrol	360pF	±5%	50V
C311	0252522	Electrolytic	22μF		16V
C312	0252522	Electrolytic	22μF		16V
C313	0251973	Electrolytic	0.22μF		25V
C314	0251973	Electrolytic	0.22μF		25V
C315	0228331	Styrol	680pF	±5%	50V
C316	0228331	Styrol	680pF	±5%	50V
C317	1274212	Mylar, film	1500pF	±5%	50V
C318	1274212	Mylar, film	1500pF	±5%	50V
C319	0274012	Mylar, film	1500pF	±10%	50V
C320	0274012	Mylar, film	1500pF	±10%	50V
C401(L,R)	0252815	Electrolytic	4.7μF		50V
C402(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C403(L,R)	0252522	Electrolytic	22μF		16V
C404(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C405(L,R)	1274213	Mylar, film	2200pF	±5%	50V
C406(L,R)	1274236	Mylar, film	8200pF	±5%	50V
C407(L,R)	0248732	Ceramic, discal	220pF	±10%	50V
C408(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C409(L,R)	0274013	Mylar, film	2200pF	±10%	50V
C410(L,R)	0252521	Electrolytic	10μF		16V
C411	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C412	0244175	Ceramic, discal	0.047μF	+80% −20%	25V

for AUDIO PRINTED WIRING BOARD

C601(L,R)	0228325	Styrol	390pF	±5%	50V
C602(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C701(L,R)	0252813	Electrolytic	3.3μF		50V
C702(L,R)	0252813	Electrolytic	3.3μF		50V
C703(L,R)	0248664	Ceramic, discal	15pF	±5%	50V
C704(L,R)	0252525	Electrolytic	47μF		16V
C705(L,R)	0275034	Mylar, film	0.039μF	±10%	50V
C706(L,R)	0276013	Mylar, film	0.22μF	±10%	50V
C707(L,R)	0274315	Mylar, film	4700pF	±10%	50V
C708(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C709(L,R)	0248712	Ceramic, discal	33pF	±10%	50V
C710(L,R)	0248712	Ceramic, discal	33pF	±10%	50V
C711(L,R)	0274014	Mylar, film	3300pF	±10%	50V
C712(L,R)	0274014	Myalr, film	3300pF	±10%	50V
C713(L,R)	0276013	Mylar, film	0.22μF	±10%	50V
C714(L,R)	0248720	Ceramic, discal	68pF	±10%	50V
C715	0252331	Electrolytic	100μF		10V
C716	0252331	Electrolytic	100μF		10V
C717	0248650	Ceramic, discal	10pF	±5%	50V
C718(L,R)	0248736	Ceramic, discal	330pF	±10%	50V
C801	0245408	Ceramic, discal	0.01μF	±20%	500V
C802	0279954	Ceramic, discal	0.01μF	±20%	500V
C803	0279954	Ceramic, discal	0.01μF	±20%	500V

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C804	0245408	Ceramic, discal	0.01μF	±20%	500V
C805	0250491	Electrolytic	5600μF		40V
C806	0250491	Electrolytic	5600μF		40V
C807	0252635	Electrolytic	470μF		25V
C808	0252635	Electrolytic	470μF		25V

for CHASSIS ASSEMBLY

C001	0214481	Paper	0.01μF	±20%	400V
C002	0279954	Mylar, film	0.1μF	±10%	100V

RESISTORS

for FRONT END PRINTED WIRING BOARD

R101	0138203	Carbon film	120kΩ	±5%	SRD¼SD
R102	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R103	0138127	Carbon film	1.8kΩ	±5%	SRD¼SD
R104	0138051	Carbon film	27Ω	±5%	SRD¼SD
R105	0138169	Carbon film	22kΩ	±5%	SRD¼SD
R106	0238137	Carbon film	4.7kΩ	±5%	SRD¼SD
R107	0138103	Carbon film	820Ω	±5%	SRD¼SD
R108	0138085	Carbon film	150Ω	±5%	SRD¼SD
R109	0138141	Carbon film	6.8kΩ	±5%	SRD¼SD
R110	0138121	Carbon film	1kΩ	±5%	SRD¼SD
R111	0138167	Carbon film	18kΩ	±5%	SRD¼SD
R112	0138081	Carbon film	100Ω	±5%	SRD¼SD
R113	0138085	Carbon film	150Ω	±5%	SRD¼SD
R114	0138081	Carbon film	100Ω	±5%	SRD¼SD
R115	0138059	Carbon film	56Ω	±5%	SRD¼SD

for TUNER PRINTED WIRING BOARD

R151	0114201	Carbon film	10kΩ	±5%	SRD¼P
R152	0114165	Carbon film	1.5kΩ	±5%	SRD¼P
R153	0114131	Carbon film	100Ω	±5%	SRD¼P
R154	0114221	Carbon film	68kΩ	±5%	SRD¼P
R155	0114221	Carbon film	68kΩ	±5%	SRD¼P
R156	0114145	Carbon film	390Ω	±5%	SRD¼P
R157	0114153	Carbon film	820Ω	±5%	SRD¼P
R158	0114145	Carbon film	390Ω	±5%	SRD¼P
R159	0114203	Carbon film	12kΩ	±5%	SRD¼P
R160	0114145	Carbon film	390Ω	±5%	SRD¼P
R161	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R162	0114147	Carbon film	470Ω	±5%	SRD¼P
R163	0114161	Carbon film	1kΩ	±5%	SRD¼P
R164	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R165	0114299	Carbon film	560kΩ	±5%	SRD¼P
R201	0138093	Carbon film	330Ω	±5%	SRD¼SD
R202	0114285	Carbon film	150kΩ	±5%	SRD¼P
R203	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R204	0138139	Carbon film	5.6kΩ	±5%	SRD¼SD
R205	0114137	Carbon film	180Ω	±5%	SRD¼P
R206	0114183	Carbon film	8.2kΩ	±5%	SRD¼P
R207	0114217	Carbon film	47kΩ	±5%	SRD¼P
R208	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R209	0114203	Carbon film	12kΩ	±5%	SRD¼P
R210	0114217	Carbon film	47kΩ	±5%	SRD¼P
R211	0134295	Composition	33Ω	±10%	RC½GF
R212	0138209	Carbon film	220kΩ	±5%	SRD¼SD
R213	0114217	Carbon film	47kΩ	±5%	SRD¼P
R214	0114283	Carbon film	120kΩ	±5%	SRD¼P
R216	0114209	Carbon film	22kΩ	±5%	SRD¼P
R252	0114215	Carbon film	39kΩ	±5%	SRD¼P
R253	0114213	Carbon film	33kΩ	±5%	SRD¼P
R254	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R255	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R256	0114297	Carbon film	470kΩ	±5%	SRD¼P
R257	0114221	Carbon film	68kΩ	±5%	SRD¼P
R258	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R259	0114149	Carbon film	560Ω	±5%	SRD¼P
R260	0114281	Carbon film	100kΩ	±5%	SRD¼P
R262	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R301	0114303	Carbon film	820kΩ	±5%	SRD¼P
R302	0114219	Carbon film	56kΩ	±5%	SRD¼P
R303	0138121	Carbon film	1kΩ	±5%	SRD¼SD
R304	0114215	Carbon film	39kΩ	±5%	SRD¼P
R305	0114137	Carbon film	180Ω	±5%	SRD¼P
R306	0110820	Metal	24kΩ	±1%	RN¼B
R308	0114217	Carbon film	47kΩ	±5%	SRD¼P
R309	0114217	Carbon film	47kΩ	±5%	SRD¼P
R310	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R311	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R312	0114213	Carbon film	33kΩ	±5%	SRD¼P
R313	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R314	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R315	0114213	Carbon film	33kΩ	±5%	SRD¼P
R316	0114203	Carbon film	12kΩ	±5%	SRD¼P
R317	0114203	Carbon film	12kΩ	±5%	SRD¼P
R318	0114285	Carbon film	150kΩ	±5%	SRD¼P
R319	0114201	Carbon film	10kΩ	±5%	SRD¼P
R320	0134299	Composition	68Ω	±10%	RC½GF
R401(L,R)	0114219	Carbon film	56kΩ	±5%	SRD¼P
R402(L,R)	0114169	Carbon film	2,2kΩ	±5%	SRD¼P
R403(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R404(L,R)	0114148	Carbon film	510Ω	±5%	SRD¼P
R405(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R406(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R407(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R408(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R409(L,R)	0114135	Carbon film	150Ω	±5%	SRD¼P
R410(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R411(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R601(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R602(L,R)	0114219	Carbon film	56kΩ	±5%	SRD¼P
R603(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R606(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P

for AUDIO PRINTED WIRING BOARD

R605(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R701(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R702(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R703(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R704(L,R)	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R705(L,R)	0114211	Carbon film	27kΩ	±5%	SRD¼P
R706(L,R)	0114153	Carbon film	820Ω	±5%	SRD¼P
R707(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R708(L,R)	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R709(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R710(L,R)	0114153	Carbon film	820Ω	±5%	SRD¼P
R711(L,R)	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R712(L,R)	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R715(L,R)	0119046	Metal	27Ω	±10%	RN1B
R716(L,R)	0119046	Metal	27Ω	±10%	RN1B
R717(L,R)	0119041	Metal	10Ω	±10%	RN1B
R718(L,R)	0119041	Metal	10Ω	±10%	RN1B
R719(L,R)	0119426	Metal, oxide	270Ω	±10%	RD1PA

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R721(L,R)	0114143	Carbon film	330Ω	±5%	SRD¼P
R722	0114281	Carbon film	100kΩ	±5%	SRD¼P
R723(L,R)	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R724(L,R)	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R725(L,R)	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R726(L,R)	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R727	0114147	Carbon film	470Ω	±5%	SRD¼P
R728	0114147	Carbon film	470Ω	±5%	SRD¼P
R731(L)	0114131	Carbon film	100Ω	±5%	SRD¼P
R731(R)	0138081	Carbon film	100Ω	±5%	SRD¼P
R732(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R733	0114135	Carbon film	150Ω	±5%	SRD¼P
R734(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R735	0134362	Composition	120Ω	±10%	RC½GF
R801	0134375	Composition	1.5kΩ	±10%	RC½GF
R802	0134375	Composition	1.5kΩ	±10%	RC½GF
R803	0114151	Carbon film	680Ω	±5%	SRD¼P
R804	0114151	Carbon film	680Ω	±5%	SRD¼P

for REAR PLATE ASSEMBLY

R001	0111955	Metal	4.7kΩ	±5%	RN½B
			(for U.K., France & Switzerland)		
R116	0114161	Carbon film	1kΩ	±5%	SRD¼P

ICs, TRANSISTORS & FET

for FRONT END PRINTED WIRING BOARD

FET101	2327431	3SK45
Q101	0573510	2SC535 Ⓑ
Q102	0573507	2SC461 Ⓑ

for TUNER PRINTED WIRING BOARD

Q151	0573491	2SC454 Ⓑ
Q251	2327443	2SC1344 Ⓔ

for AUDIO PRINTED WIRING BOARD

Q701(L,R)	2328261	2SD571 Ⓛ
Q702(L,R)	2328271	2SB605 Ⓛ
Q703(L,R)	2328247	2SB565A Ⓒ - 01
Q704(L,R)	2328227	2SD475A Ⓒ - 01
Q801	2327802	2SD478 Ⓒ
Q802	2327792	2SB568 Ⓒ

for TUNER PRINTED WIRING BOARD

IC201	2367281	HA1121
IC301	2367271	HA1196
IC401	2367152	HA1452W

for AUDIO PRINTED WIRING BOARD

IC701	2367152	HA1452W

DIODES

for FRONT END PRINTED WIRING BOARD

CR101	2337011	1S2076
CR102	0575002	1N34A

SYMBOL NO.	STOCK NO.	DESCRIPTION

for TUNER PRINTED WIRING BOARD

CR151	2337011	1S2076
CR152	2337011	1S2076
CR153	2337011	1S2076
CR154	2337011	1S2076
CR155	2337011	1S2076
CR156	2337011	1S2076
CR157	2337011	1S2076
CR158	2337011	1S2076
CR201	2337011	1S2076
CR202	2337011	1S2076
CR251	0575002	1N34A
CR252	0575002	1N34A
CR253	2337011	1S2076
CR254	2337011	1S2076
CR301	2337011	1S2076
CR302	2337011	1S2076

for AUDIO PRINTED WIRING BOARD

CR701(L,R)	2347042	MV - 5W
CR703	2347042	MV - 5W
CR801	2327031	V03C
CR802	2327031	V03C
CR803	2327031	V03C
CR804	2327031	V03C
CR805	2337103	HZ - 12 Ⓒ
CR806	2337103	HZ - 12 Ⓒ

for REAR PLATE ASSEMBLY

CR103	2337011	1S2076
CR104	2337011	1S2076

VARIABLE RESISTORS

for TUNER PRINTED WIRING BOARD

VR301	0151225	50kΩ - (B)
VR302	0151271	6.8kΩ - (B)
VR303	0151284	300kΩ - (B)
VR601(L,R)	0156185	100kΩ - (B)
VR602	0151678	250kΩ - (B)

for AUDIO PRINTED WIRING BOARD

VR701(L,R)	0151681	50kΩ - (C) (Tone control)
VR702(L,R)	0151681	50kΩ - (C)(Tone control)

COILS & TRANSFORMERS

for FRONT END PRINTED WIRING BOARD

L101	2134741	FM Antenna coil
L102	2134653	FM RF coil
L103	2227081	FM choke coil
L104	2134471	FM OSC coil
T101	2154291	FM IF transformer

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION
		for TUNER PRINTED WIRING BOARD
L151	2757301	Ferrite antenna
L152	2134431	MW OSC coil
L153	2227082	Choke coil (100μH)
L154	2134447	LW OSC coil
L201	2227119	Choke coil (18μH)
L301	2227101	Coil (100mH)
L302	2227101	Coil (100mH)
T151	2154182	AM IF transformer
T201	2154271	FM IF transformer
T251	2154302	AM IF transformer
		for AUDIO PRINTED WIRING BOARD
L701(L,R)	2227261	Audio trap coil (2.2μH)
		MISCELLANEOUS
	2506404	Tuner·front end printed wiring board assembly
	2506142	Audio printed wiring board assembly
VC101-103, VC151,152	0281185	Variable capacitor
TC103	0283121	Trimmer capacitor
TC151	0283121	Trimmer capacitor
TC152	0283122	Trimmer capacitor
TC153	0283121	Trimmer capacitor
TC154	0283122	Trimmer capacitor
CP251	0186131	CR multiple component
MF201	2134541	Ceramic filter
F001	2727198	Fuse - fuse (800mA)
F002	2727193	Fuse - fuse (2A)
F701(L,R)	2727335	Fuse - fuse (2.5A)
S1	2638081	Switch - power switch
S3a,b,S4a,b, S9	2638001	Switch - push switch
S2a - f	2617733	Switch - rotary switch (FUNCTION)
S7,8	2638012	Switch (speaker select)
S5,6	2637991	Switch (signal select)
	2657123	Socket - voltage changing socket
	2677281	Socket - DIN 5P socket
	2667161	Plug - short pin plug
J1	2677231	Jack - head phone jack
	2218331	Power transformer
	3920802	Pulley
	4571925	Flywheel assembly
	4513311	Earth screw
	4567411	3 ϕ x 6CT bind screw (yellow)
	4567451	3 ϕ x 6CT bind screw (silver)
	4567453	3 ϕ x 10CT bind screw (silver)
	4784106	3 ϕ x 8CT bind screw
	4567443	4 ϕ x 10CT bind screw
	4770255	4 ϕ flanged nut
	2677321	4P US pin terminal board
	2677341	8P US pin terminal board
	2687792	4P push terminal
	3921301	Bushing (for Power transistor)
		for DIAL MECHANISM ASSEMBLY
	3199843	Dial scale (for U.K., France & Switzerland)
	3199844	Dial scale (for Australia)
	4399751	Dial pointer (for U.K., France & Switzerland)
	4399752	Dial pointer (for Australia)

SYMBOL NO.	STOCK NO.	DESCRIPTION
	0666704	Wire clip
	3337201	Spring
	4394986	Meter panel (for Australia)
	4394987	Meter panel (for U.K., France & Switzerland)
	3923401	Indicator
	4684135	Indicator cover
	4567411	3 ϕ x 6CT bind screw
	4398542	Lamp cover assembly
	2577294	Signal meter (for U.K., France & Switzerland)
	2577295	Signal meter (for Australia)
	2767233	Lamp-indicator lamp (8V, 30mA)
		for REAR PLATE ASSEMBLY
	4567433	3 ϕ x 10CT bind screw
	2657361	Socket-coaxial cable socket
	2687652	3P mold screw terminal
	2687831	5P terminal
		for FINAL ASSEMBLY
	3244435	Escutcheon (for U.K., France & Switzerland)
	3244436	Escutcheon (for Australia)
	3282397	Knob-push knob (Power) (for Australia)
	3282398	Knob-push knob (Power) (for U.K., France & Switzerland)
	3282804	Knob-push knob (for Australia)
	3284451	Knob-push knob (for U.K., France & Switzerland)
	3284041	Knob (for U.K., France & Switzerland)
	3284042	Knob (for Australia)
	3284393	Knob (Tuning) (for U.K., France & Switzerland)
	3284394	Knob (Tuning) (for Australia)
	4743422	Knob ring
	3916411	Leg
	4567413	3 ϕ x 10CT bind screw
	4567411	3 ϕ x 6CT bind screw
	4567446	4 ϕ x 16CT bind screw
	3922511	DIN cap
	3922521	US pin cap
	3710471	Headphone cap (for Australia)
	2587471	AC socket cover
		for CABIENT ASSEMBLY
	9403067	Cabinet (for U.K.)
	9403068	Cabinet (for France, Switzerland & Australia)
		for ACCESSORY
	2748371	FM antenna
		for REAR PLATE ASSEMBLY
	3715183	Bushing (for AC power cord) (for U.K.)
	3715184	Bushing (for AC power cord) (for Australia)
	3913001	Bushing (for AC power cord) (for France & Switzerland)
	2748621	AC power cord (for U.K.)
	2748511	AC power cord (for France)
	2747771	AC power cord (for Switzerland)
	2747301	AC power cord (for Australia)
	2787221	Belt (for AC power cord) (for Australia)

www.hifiengine.com

(SR-303L)

CAPACITORS

for FRONT END PRINTED WIRING BOARD

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C101	0248688	Ceramic, discal	150pF	±5%	50V
C102	0246418	Ceramic, discal	8PF	±0.25pF	50V
C103	0248676	Ceramic, discal	47pF	±5%	50V
C104	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C105	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C106	0246446	Ceramic, discal	18pF	±5%	50V
C107	0248662	Ceramic, discal	12pF	±5%	50V
C108	0248640	Ceramic, discal	10pF	±5pF	50V
C109	0248362	Ceramic, discal	220pF	±5%	50V
C110	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C111	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C112	0248334	Ceramic, discal	15pF	±5%	50V
C113	0248176	Ceramic, discal	18pF	±5%	50V
C114	0246418	Ceramic, discal	8pF	±0.25pF	50V
C115	0246447	Ceramic, discal	20pF	±5%	50V
C116	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C117	0252811	Electrolytic	1μF		50V
C118	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C119	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C120	0248632	Ceramic, discal	2pF	±0.25pF	50V
C121	0248635	Ceramic, discal	5pF	±0.25pF	50V
C122	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C130	0246415	Ceramic, discal	5pF	±0.25pF	50V

for TUNER PRINTED WIRING BOARD

C123	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C151	0275011	Mylar, film	0.01μF	±10%	50V
C152	0274315	Mylar, film	4700pF	±10%	50V
C153	0228324	Styrol	360pF	±5%	50V
C154	0241882	Ceramic, discal	10pF	±1pF	50V
C155	0252813	Electrolytic	3.3μF		50V
C156	0252811	Electolytic	1μF		50V
C157	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C158	0248498	Ceramic, discal	22pF	±5%	50V
C159	0228319	Styrol	220pF	±5%	50V
C160	0246463	Ceramic, discal	91pF	±5%	50V
C161	0252811	Electrolytic	1μF		50V
C201	0275015	Mylar, film	0.047μF	±10%	50V
C202	0275015	Mylar, film	0.047μF	±10%	50V
C203	0252811	Electrolytic	1μF		50V
C204	0252813	Electrolytic	3.3μF		50V
C205	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C206	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C207	0252525	Electrolytic	47μF		16V
C208	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C209	0252811	Electrolytic	1μF		50V
C210	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C211	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C212	0252813	Electrolytic	3.3μF		50V
C213	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C214	0252521	Electrolytic	10μF		16V
C215	0248695	Ceramic, discal	300pF	±5%	50V
C216	0252811	Electrolytic	1μF		50V
C219	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C221	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C222	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C223	0252521	Electrolytic	10μF		16V
C225	0275014	Mylar, film	0.033μF	±10%	50V
C226	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C227	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C251	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C252	0275011	Mylar, film	0.01μF	±10%	50V
C253	0252813	Electrolytic	3.3μF		50V
C254	0275013	Mylar, film	0.022μF	±10%	50V
C255	0275014	Mylar, film	0.033μF	±10%	50V
C256	0252225	Electrolytic	47μF		6.3V
C257	0252811	Electrolytic	1μF		50V
C258	0275013	Myalr, film	0.022μF	±10%	50V
C259	0275012	Mylar, film	0.015μF	±10%	50V
C260	0275015	Mylar, film	0.047μF	±10%	50V
C301	0252811	Electrolytic	1μF		50V
C302	0252635	Electrllytic	470μF		25V
C303	0275015	Mylar, film	0.047μF	±10%	50V
C304	0252813	Electrolytic	3.3μF		25V
C305	0252811	Electrolytic	1μF		50V
C306	0251975	Electrolytic	0.47μF		25V
C307	1274231	Mylar, film	1200pF	±5%	25V
C308	1274231	Mylar, film	1200pF	±5%	50V
C309	0221523	Styrol	360pF	±5%	50V
C311	0252522	Electrolytic	22μF		16V
C312	0252522	Electrolytic	22μF		16V
C313	0251973	Electrolytic	0.22μF		25V
C314	0251973	Electrolytic	0.22μF		25V
C315	0228331	Styrol	680pF	±5%	50V
C316	0228331	Styrol	680pF	±5%	50V
C317	1274212	Mylar, film	1500pF	±5%	50V
C318	1274212	Mylar, film	1500pF	±5%	50V
C319	0274012	Mylar, film	1500pF	±10%	50V
C320	0274012	Mylar, film	1500pF	±10%	50V
C401(L,R)	0252815	Electrolytic	4.7μF		50V
C402(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C403(L,R)	0252522	Electrolytic	22μF		16V
C404(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C405(L,R)	1274213	Mylar, film	2200pF	±5%	50V
C406(L,R)	1274236	Mylar, film	8200pF	±5%	50V
C407(L,R)	0248732	Ceramic, discal	220pF	±10%	50V
C408(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C409(L,R)	0274013	Mylar, film	2200pF	±10%	50V
C410(L,R)	0252521	Electrolytic	10μF		16V
C411	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C412	0244175	Ceramic, discal	0.047μF	+80% 20%	25V
C601(L,R)	0228325	Styrol	390pF	±5%	50V
C602(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C605(L,R)	0274011	Mylar, film	1000pF	±10%	50V
C606(L,R)	0248668	Ceramic, discal	22pF	±5%	50V

for AUDIO PRINTED WIRING BOARD

C701(L,R)	0252813	Electrolytic	3.3μF		50V
C702(L,R)	0252813	Electrolytic	3.3μF		50V
C703(L,R)	0248664	Ceramic, discal	15pF	±5%	50V
C704(L,R)	0252525	Electrolytic	47μF		16V
C705(L,R)	0275034	Mylar, film	0.039μF	±10%	50V
C706(L,R)	0276013	Mylar, film	0.22μF	±10%	50V
C707(L,R)	0274315	Mylar, film	4700pF	±10%	50V
C708(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C709(L,R)	0248712	Ceramic, discal	33pF	±10%	50V
C710(L,R)	0248712	Ceramic, discal	33pF	±10%	50V
C711(L,R)	0274014	Mylar, film	3300pF	±10%	50V
C712(L,R)	0274014	Mylar, film	3300pF	±10%	50V

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C713(L,R)	0276013	Mylar, film	0.22μF	±10%	50V
C714(L,R)	0248720	Ceramic, discal	68pF	±10%	50V
C715	0252531	Electrolytic	100μF		16V
C716	0252331	Electrolytic	100μF		10V
C717(L,R)	0248650	Ceramic, discal	10pF	±5%	50V
C718(L,R)	0248736	Ceramic, discal	330pF	±10%	50V
C719(L,R)	0248684	Ceramic. discal	100pF	±5%	50V
C720(L,R)	0248736	Ceramic, discal	330pF	±10%	50V
C801	0245408	Ceramic, discal	0.01μF	±20%	500V
C802	0279954	Mylar, film	0.1μF	±10%	100V
C803	0279954	Mylar, film	0.1μF	±10%	100V
C804	0245408	Ceramic, discal	0.01μF	±20%	500V
C805	0250318	Electrolytic	4700μF		35V
C806	0250318	Electrolytic	4700μF		35V
C807	0252635	Electrolytic	470μF		25V
C808	0252635	Electrolytic	470μF		25V
C809	0252723	Electrolytic	33μF		35V
C810	0252723	Electrolytic	33μF		35V

RESISTORS

for FRONT END PRINTED WIRING BOARD

R101	0138203	Carbon film	120kΩ	±5%	SRD¼SD
R102	0138173	Carbon film	4.7kΩ	±5%	SRD¼SD
R103	0138127	Carbon film	1.8kΩ	±5%	SRD¼SD
R104	0138051	Carbon film	27Ω	±5%	SRD¼SD
R105	0138169	Carbon film	22kΩ	±5%	SRD¼SD
R106	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R107	0138103	Carbon film	820Ω	±5%	SRD¼SD
R108	0138085	Carbon film	150Ω	±5%	SRD¼SD
R109	0138141	Carbon film	6.8kΩ	±5%	SRD¼SD
R110	0138121	Carbon film	1kΩ	±5%	SRD¼SD
R111	0138167	Carbon film	18kΩ	±5%	SRD¼SD
R112	0138081	Carbon film	100Ω	±5%	SRD¼SD
R113	0138085	Carbon film	150Ω	±5%	SRD¼SD
R114	0138081	Carbon film	100Ω	±5%	SRD¼SD
R115	0138059	Carbon film	56Ω	±5%	SRD¼SD

for TUNER PRINTED WIRING BOARD

R151	0114201	Carbon film	10kΩ	±5%	SRD¼P
R152	0114165	Carbon film	1.5kΩ	±5%	SRD¼P
R153	0114131	Carbon film	100Ω	±5%	SRD¼P
R154	0114221	Carbon film	68kΩ	±5%	SRD¼P
R155	0114221	Carbon film	68kΩ	±5%	SRD¼P
R156	0114145	Carbon film	390Ω	±5%	SRD¼P
R157	0114153	Carbon film	820Ω	±5%	SRD¼P
R158	0114145	Carbon film	390Ω	±5%	SRD¼P
R159	0114203	Carbon film	12kΩ	±5%	SRD¼P
R160	0114145	Carbon film	390Ω	±5%	SRD¼P
R161	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R162	0114147	Carbon film	470Ω	±5%	SRD¼P
R163	0114161	Carbon film	1kΩ	±5%	SRD¼P
R164	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R165	0114299	Carbon film	560kΩ	±5%	SRD¼P
R201	0138093	Carbon film	330Ω	±5%	SRD¼SD
R202	0114285	Carbon film	150kΩ	±5%	SRD¼P
R203	0114169	Carbon film	22kΩ	±5%	SRD¼P
R204	0138139	Carbon film	5.6kΩ	±5%	SRD¼SD
R205	0114137	Carbon film	180Ω	±5%	SRD¼P
R206	0114183	Carbon film	8.2kΩ	±5%	SRD¼P
R207	0114217	Carbon film	47kΩ	±5%	SRD¼P
R208	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R209	0114203	Carbon film	12kΩ	±5%	SRD¼P
R210	0114217	Carbon film	47kΩ	±5%	SRD¼P
R211	0134295	Composition	33Ω	±10%	RC½GF
R212	0138209	Carbon film	220kΩ	±5%	SRD¼SD
R213	0114217	Carbon film	47kΩ	±5%	SRD¼P
R214	0114283	Carbon film	120kΩ	±5%	SRD¼P
R216	0114209	Carbon film	22kΩ	±5%	SRD¼P
R220	0114205	Carbon film	15kΩ	±5%	SRD¼P
R221	0114211	Carbon film	27kΩ	±5%	SRD¼P
R252	0114215	Carbon film	39kΩ	±5%	SRD¼P
R253	0114213	Carbon film	33kΩ	±5%	SRD¼P
R254	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R255	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R256	0114297	Carbon film	680kΩ	±5%	SRD¼P
R257	0114221	Carbon film	68kΩ	±5%	SRD¼P
R258	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R259	0114149	Carbon film	560Ω	±5%	SRD¼P
R260	0114281	Carbon film	100kΩ	±5%	SRD¼P
R262	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R302	0114219	Carbon film	56kΩ	±5%	SRD¼P
R303	0138121	Carbon film	1kΩ	±5%	SRD¼SD
R304	0114215	Carbon film	39kΩ	±5%	SRD¼P
R305	0114137	Carbon film	180Ω	±5%	SRD¼P
R306	0110820	Metal	24kΩ	±1%	RN¼B
R308	0114217	Carbon film	47kΩ	±5%	SRD¼P
R309	0114217	Carbon film	47kΩ	±5%	SRD¼P
R310	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R311	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R312	0114213	Carbon film	33kΩ	±5%	SRD¼P
R313	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R314	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R315	0114213	Carbon film	33kΩ	±5%	SRD¼P
R316	0114203	Carbon film	12kΩ	±5%	SRD¼P
R317	0114203	Carbon film	12kΩ	±5%	SRD¼P
R318	0114285	Carbon film	150kΩ	±5%	SRD¼P
R319	0114201	Carbon film	10kΩ	±5%	SRD¼P
R320	0134299	Composition	68Ω	±10%	RC½GF
R330	0114221	Carbon film	68kΩ	±5%	SRD¼P
R401(L,R)	0114219	Carbon film	56kΩ	±5%	SRD¼P
R402(L,R)	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R403(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R404(L,R)	0114148	Carbon film	510Ω	±5%	SRD¼P
R405(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R406(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R407(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R408(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R409(L,R)	0114135	Carbon film	150Ω	±5%	SRD¼P
R410(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R411(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R601(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R602(L,R)	0114219	Carbon film	56kΩ	±5%	SRD¼P
R603(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R605(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R606(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P

for AUDIO PRINTED WIRING BOARD

R701(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R702(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R703(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R704(L,R)	0114171	Carbon film	3kΩ	±5%	SRD¼P
R705(L,R)	0114211	Carbon film	27kΩ	±5%	SRD¼P
R706(L,R)	0114153	Carbon film	820Ω	±5%	SRD¼P
R707(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R708(L,R)	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R709(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R710(L,R)	0114153	Carbon film	820Ω	±5%	SRD¼P
R711(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R712(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R715(L,R)	0119046	Metal	27Ω	±10%	RN1B
R716(L,R)	0119046	Metal	27Ω	±10%	RN1B
R717(L,R)	0119153	Metal	15Ω	±10%	RN2B
R718(L,R)	0119041	Metal	10Ω	±10%	RN1B
R719(L,R)	0119426	Metal, oxide	270Ω	±10%	RD1PA
R721(L)	0114131	Carbon film	100Ω	±5%	SRD¼P
R722	0114281	Carbon film	100kΩ	±5%	SRD¼P
R723(L,R)	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R724(L,R)	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R725(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R726(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R727	0114131	Carbon film	100Ω	±5%	SRD¼P
R728	0114139	Carbon film	220Ω	±5%	SRD¼P
R729	0114139	Carbon film	220Ω	±5%	SRD¼P
R731(R)	0114131	Carbon film	100Ω	±5%	SRD¼P
R732(L,R)	0114299	Carbon film	560kΩ	±5%	SRD¼P
R735	0114171	Carbon film	2.7kΩ	±5%	SRD¼P
R801	0134375	Composition	1.5kΩ	±10%	RC½GF
R802	0134375	Composition	1.5kΩ	±10%	RC½GF
R803	0114151	Carbon film	680Ω	±5%	SRD¼P
R804	0114151	Carbon film	680Ω	±5%	SRD¼P

for REAR PLATE ASSEMBLY

R001	0111955	Metal	4.7MΩ	±5%	RN½B
		(for U.K., France Switzerland & Australia)			
R116	0114161	Carbon film	1kΩ	±5%	SRD¼P

FET, ICs & TRANSISTORS

for FRONT END PRINTED WIRING BOARD

FET101	2327431	3SK45
Q101	0573510	2SC535 Ⓑ
Q102	0573507	2SC461 Ⓑ

for TUNER PRINTED WIRING BOARD

IC201	2367281	HA11211
IC301	2367271	HA1196
IC401	2367152	HA1452W
Q151	0573491	2SC454 Ⓑ
Q251	2327443	2SC1344 Ⓔ

for AUDIO PRINTED WIRING BOARD

IC701	2367152	HA1452W
Q701(L,R)	2328261	2SD571 Ⓛ
Q702(L,R)	2328271	2SB605 Ⓛ
Q703(L,R)	2328247	2SB565A Ⓒ - 01
Q704(L,R)	2328227	2SD457A Ⓒ - 01

SYMBOL NO.	STOCK NO.	DESCRIPTION
Q801	2327802	2SD478 Ⓒ
Q802	2327792	2SB568 Ⓒ

DIODES

for FRONT END PRINTED WIRING BOARD

CR101	2337011	1S2076
CR102	0575002	1N34A

for TUNER PRINTED WIRING BOARD

CR151	2337011	1S2076
CR152	2337011	1S2076
CR153	2337011	1S2076
CR154	2337011	1S2076
CR155	2337011	1S2076
CR156	2337011	1S2076
CR157	2337011	1S2076
CR158	2337011	1S2076
CR201	2337011	1S2076
CR201	2337011	1S2076
CR251	0575002	1N34A
CR252	0575002	1N34A
CR253	2337011	1S2076
CR254	2337011	1S2076
CR301	2337011	1S2076
CR302	2337011	1S2076

for AUDIO PRINTED WIRING BOARD

CR701(L,R)	2347042	MV - 5W
CR703	2347042	MV - 5W
CR801	2327031	V03C
CR802	2327031	V03C
CR803	2327031	V03C
CR804	2327031	V03C
CR805	2337103	HZ - 12 Ⓒ
CR806	2337103	HZ - 12 Ⓒ

for REAR PLATE ASSEMBLY

CR103	2337011	1S2076
CR104	2337011	1S2076

VARIABLE RESISTORS

for TUNER PRINTED WIRING BOARD

VR302	0151271	6.8kΩ - (B) (VCO adj.)
VR601(L,R)	0156188	100kΩ - (B) (Volume)
VR602	0151678	250kΩ - (A) (Balance)

for AUDIO PRINTED WIRING BOARD

VR701(L,R)	0151681	50kΩ - (C) (Bass)
VR702(L,R)	0151681	50kΩ - (C) (Treble)

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION
COILS & TRANSFORMERS		
for FRONT END PRINTED WIRING BOARD		
L101	2134741	FM Antenna coil
L102	2134653	FM RF coil
L103	2227081	FM choke coil
L104	2134471	FM OSC coil
T101	2154291	FM IF transformer
for TUNER PRINTED WIRING BOARD		
L151	2757301	Ferrite antenna
L152	2134431	MW OSC coil
L153	2227082	Choke coil (100μH)
L154	2134447	LW OSC coil
L201	2227119	Choke coil (18μH)
L301	2227101	Coil (100mH)
L302	2227101	Coil (100mH)
T151	2154182	AM IF transformer
T201	2154271	FM if transformer
T251	2154302	AM IF transformer
for AUDIO PRINTED WIRING BOARD		
L701(L,R)	2227261	Audio trap coil (2.2μH)
MISCELLANEOUS		
	2506405	Tuner·front end printed wiring board assembly
	2506144	Audio printed wiring board assembly
VC101-103, VC151,152	0281185	Variable capacitor
TC103	0283121	Trimmer capacitor
TC151	0283121	Trimmer capacitor
TC152	0283122	Trimmer capacitor
TC153	0283121	Trimmer capacitor
TC154	0283122	Trimmer capacitor
CP251	0186131	CR multiple component
MF201	2134541	Ceramic filter
MF202	2134541	Ceramic filter
F001	2727195	Fuse - fuse (630mA)
F002	2727193	Fuse - fuse (2A)
F701(L,R)	2727334	Fuse - fuse (2A)
S1	2638081	Switch - power switch
S3a,b, S5a,b, S9	2638001	Switch - push switch (FM mute, Tape moni. / Loudness)
S2a - f	2617733	Switch - rotary switch (Function)
S7,8	2638012	Switch (speaker select)
S6a,b	2638071	Switch - push switch (Mode)
	2657123	Socket - voltage changing socket
	2677281	Socket - DIN 5P socket
	2667161	Plug - short pin plug
J1	2677231	Jack - headphone jack
PT001	2218411	Power transformer
	3920802	Pulley
	4571925	Flywheel assembly
	4571861	12 ϕ nut
	4397041	Washer
	4513311	Earth screw
	4567411	3 ϕ x 6CT bind screw
	4567412	3 ϕ x 8CT bind screw
	4567453	3 ϕ x 10CT bind screw (silver)
	4567433	3 ϕ x 10CT bind screw (black)
	4770255	4 ϕ flaged nut
	2677321	4P US pin terminal
	2687792	4P push terminal
	3921301	Bushing (for Power transistor)
for DIAL MECHANISM ASSEMBLY		
	3199843	Dial scale (for U.K., France & Switzerland)
	3199844	Dial scale (for Australia)
	4399751	Dial pointer assembly (for U.K., France & Switzerland)
	4399752	Dial pointer assembly (for Australia)
	0666704	Wire clip
	3337201	Spring (for dial cord setting)
	4394986	Meter panel (for Australia)
	4394987	Metal panel (for U.K., France & Switzerland)
	3923401	Indicator (for FM stereo)
	4684135	Indicator cover
	4683315	Cover cushion (for Dial pointer stopper)
	4398542	Lamp cover assembly
	2577294	Signal meter (for U.K., France & Switzerland)
	2577295	Signal meter (for Australia)
	2767233	Lamp - indicator lamp (8V, 30mA)
	4562414	Roller shaft
	4567411	3 ϕ x 6CT bind screw (yellow)
	4567412	3 ϕ x 8CT bind screw
for REAR PLATE ASSEMBLY (½)		
	2657361	Socket - coaxial cable socket
	2687652	3P antenna terminal
	2687831	5P terminal
for FINAL ASSEMBLY		
	3244673	Escutcheon assembly (for U.K., France & Switzerland)
	3244674	Escutcheon assembly (for Australia)
	3282397	Knob - push knob (Power) (for Australia)
	3282398	Knob - push knob (Power) (for U.K , France & Switzerland)
	3282804	Knob - push knob (for Australia)
	3284451	Knob - push knob (for U.K., France & Switzerland)
	3284041	knob (Bass, Treble ,others) (for U.K., France & Switzerland)
	3284042	Knob (Bass, Treble, others) (for Australia)
	3284393	Knob (Tuning) (for U.K., France & Switzerland)
	3284394	Knob (Tuning) (for Australia)
	4743422	Ring
	3922511	DIN cap
	3922521	US pin cap
	3916411	Leg
	4567413	3 ϕ x 10CT bind screw
	4567411	3 ϕ x 6CT bind screw
	4567446	4 ϕ x 16CT bind screw (black)
	4125642	Washer
	4567433	3 ϕ x 10CT bind screw
	4770255	4 ϕ flanged nut
	2677321	4P US pin terminal
	2687792	4P push terminal
	3921301	Bushing (for Power transistor)
for DIAL MECHANISM ASSEMBLY		
	3199843	Dial scale (for U.K., France & Switzerland)
	3199844	Dial scale (for Australia)

www.hifiengine.com

SYMBOL NO.	STOCK NO.	DESCRIPTION
	4399751	Dial pointer assembly (for U.K., France & Switzerland)
	4399752	Dial pointer assembly (for Australia)
	0666704	Wire clip
	3337201	Spring (for dial cord setting)
	4394986	Meter panel (for Australia)
	4394987	Meter panel (for U.K., France & Switzerland)
	3923401	Indicator (for FM stereo)
	4684135	Indicator cover
	4683315	Cover cushion (for Dial pointer stopper)
	4398542	Lamp cover assembly
	2577294	Signal meter (for U.K., France & Switzerland)
	2577295	Signal meter (for Australia)
	2767233	Lamp-indicator lamp (8V, 30mA)
	4562414	Roller shaft
	4567411	3 ϕ x 6CT bind screw (yellow)
	4567412	3 ϕ x 6CT bind screw
		for REAR PLATE ASSEMBLY
	2657361	Socket - coaxial cable socket
	2687652	3P antenna termianl
	2687831	5P terminal
	3715183	Bushing (for AC power cord) (for U.K.)
	3715184	Bushing (for AC power cord) (for Australia)
	3913001	Bushing (for AC power cord) (for France & Switzerland)
	2748511	AC power cord (for France)
	2747771	AC power cord (for Switzerland)
	2748621	AC power cord (for U.K.)
	2747301	AC power cord (for Australia)
	2787221	Belt (for AC power cord) (for Australia)
		for FINAL ASSEMBLY
	3244673	Escutcheon assembly (for U.K., France & Switzerland)
	3244674	Escutcheon assembly (for Australia)
	3282397	Knob - push knob (Power) (for Australia)
	3282398	Knob - push knob (Power) (for U.K., France & Switzerland

SYMBOL NO.	STOCK NO.	DESCRIPTION
	3282804	Knob - push knob (for Australia)
	3284451	Knob - push knob (for U.K., France & Switzerland)
	3284041	Knob (Bass, Treble, Others) (for U.K., France & Switzerland)
	3284042	Knob (Bass, Treble, Others) (for Australia)
	3284393	Knob (Tuning) (for U.K., France & Switzerland)
	3284394	Knob (Tuning) (for Australia)
	4743422	Knob ring
	3922511	DIN cap
	3922521	US pin cap
	3916411	Leg
	4567413	3 ϕ x 10CT bind screw
	4567411	3 ϕ x 6CT bind screw
	4567446	4 ϕ x 16CT bind screw
	4125642	F. washer
	3710471	Headphone cap (for Australia)
	2587471	AC socket cover
		for CABINET ASSEMBLY
	9403064	Cabinet assembly (for U.K.)
	9403065	Cabinet assembly (for France, Switzerland & Australia)
		for ACCESSORY
	2748371	FM antenna

FRONT AND PEAR PANEL·VORDERE UND HINTERE BEDIENUNGSTAFEL·
PANNEAUX AVANT ET ARRIERE

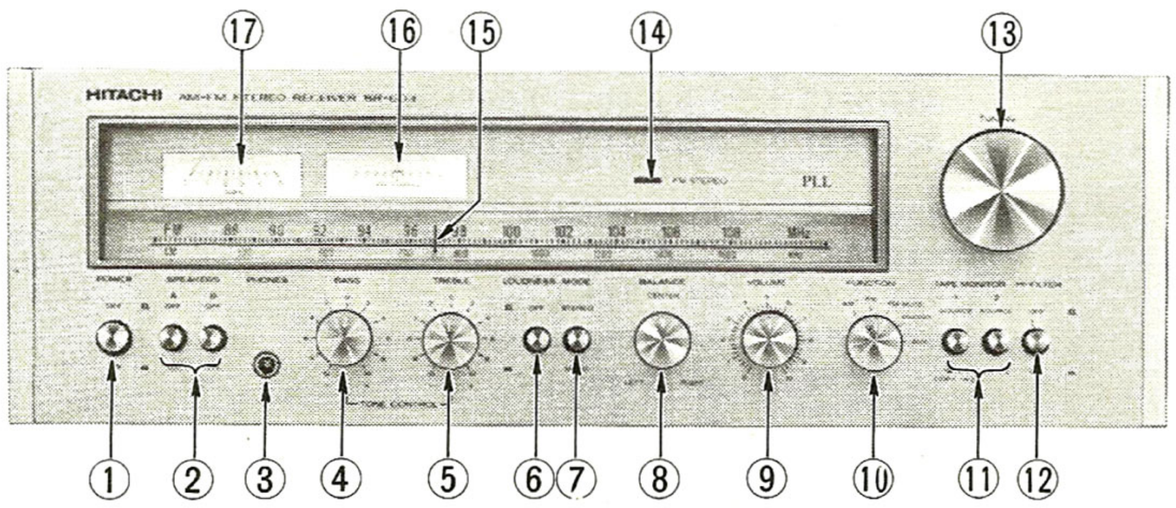

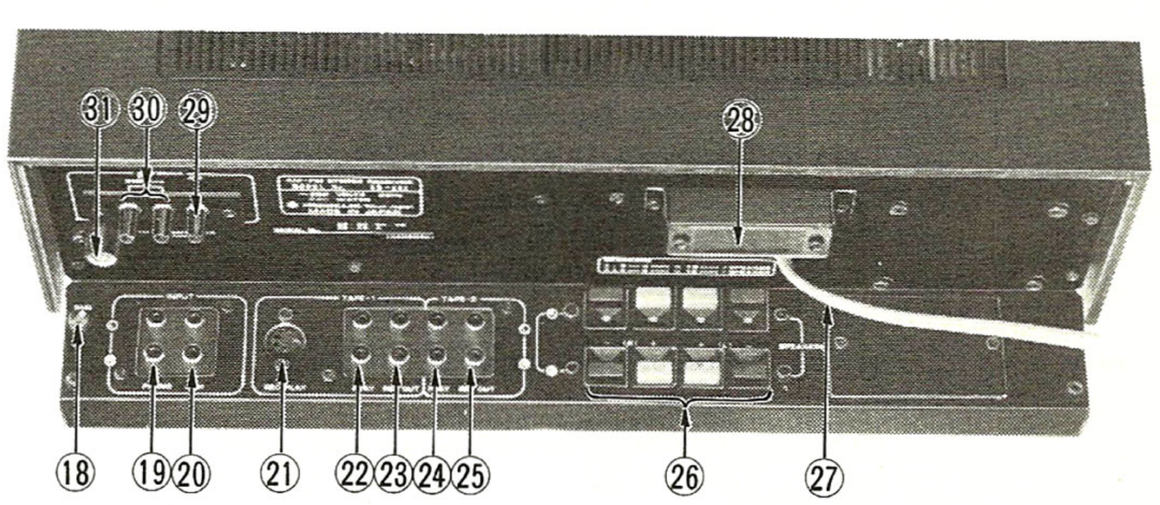

SR-603

www.hifiengine.com

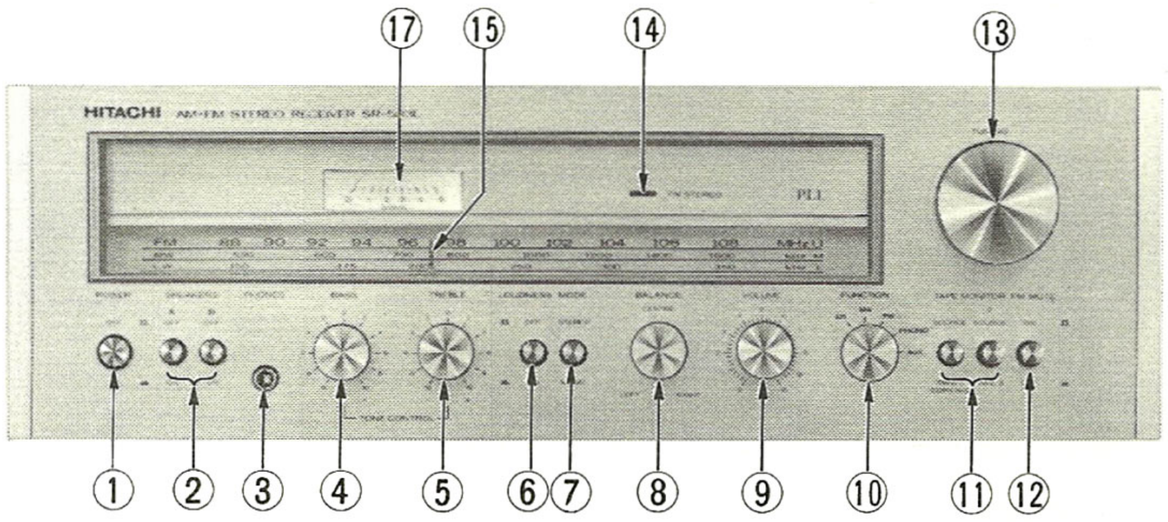

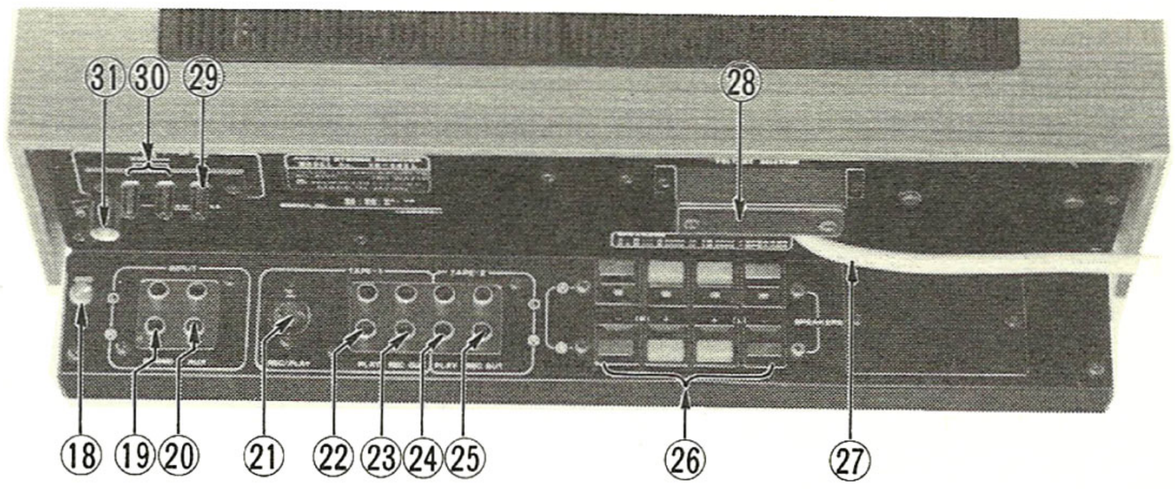

SR - 503L

① POWER switch
② SPEAKER switches (A, B)
③ PHONES jack
④ BASS control
⑤ TREBLE control
⑥ LOUDNESS switch
⑦ MODE switch
⑧ BALANCE control
⑨ VOLUME control
⑩ FUNCTION switch
⑪ TAPE MONITOR switches
⑫ HIGH FILTER switch (SR-603)
⑫ FM MUTE switch (SR-503L)
⑬ TUNING knob
⑭ FM STEREO indicator
⑮ Dial pointer
⑯ TUNING meter (SR-603)
⑰ SIGNAL meter
⑱ Ground terminal (GND)
⑲ PHONO input terminals
⑳ AUX input terminals
㉑ TAPE-1 DIN REC/PLAY socket
㉒ TAPE-1 PLAY terminals
㉓ TAPE-1 REC OUT terminals
㉔ TAPE-2 PLAY terminals
㉕ TAPE-2 REC OUT terminals
㉖ SPEAKER terminals
㉗ Power supply cord
㉘ Voltage selector
㉙ AM ANTENNA terminal
㉚ FM ANTENNA terminal (300 ohms)
㉛ FM ANTENNA socket (75 ohms)

① Netzschalter (POWER)
② Lautsprecherschalter (SPEAKERS)
③ Kopfhörerbuchse (PHONES)
④ Tiefenregler (BASS)
⑤ Höhenregler (TREBLE)
⑥ Schalter für gehörrichtige Lautstärkekontur (LOUDNESS)
⑦ Stereo/Mono-Schalter (MODE)
⑧ BALANCE-Regler
⑨ Lautstärkeregler (VOLUME)
⑩ Funktionsschalter (FUNCTION)
⑪ Schalter für Hinterbandkontrolle (TAPE MONITOR)
⑫ Höhenfilter-Schalter (HIGH FILTER) (SR-603)
⑫ UKW-Stillabstimmschalter (FM MUTE) (SR-503L)
⑬ Abstimmknopf (TUNING)
⑭ UKW-Stereo-Anzeige (FM STEREO)
⑮ Abstimmzeiger
⑯ Abstimmanzeige (TUNING) (SR-603)
⑰ Feldstärke-Meßinstrument (SIGNAL)
⑱ Erdungsklemme (GND)
⑲ Plattenspielereingänge (PHONO)
⑳ Eingänge für ext. Schallquellen (AUX)
㉑ DIN-Buchse für Aufnahme/Wiedergabe mit Tonbandegerät 1 (TAPE-1 REC/PLAY)
㉒ Eingänge für Wiedergabe von Tonbandegerät 1 (TAPE-1 PLAY)
㉓ Ausgänge für Aufnahme mit Tonbandgerät 2 (TAPE-1 REC OUT)
㉔ Eingänge für Wiedergabe von Tonbandgerät 2 (TAPE-2 PLAY)
㉕ Ausgänge für Aufnahme mit Tonbandgerät 2 (TAPE-2 REC OUT)
㉖ Lautsprecheranschlüsse (SPEAKERS)
㉗ Netzkabel
㉘ Metzspannungswahlschalter
㉙ MW-Antennenanschluß (AM ANTENNA)
㉚ UKW-Antennenanschluß (300 Ohm) (FM ANTENNA)
㉛ UKW-Antennenbuchse (75 Ohm) (FM ANTENNA)

① Interrupteur secteur (POWER)
② Interrupteurs d'enceintes (A, B) (SPEAKERS)
③ Borne de casque stéréophonique (PHONES)
④ Commande de grave (BASS)
⑤ Commande d'aigu (TREBLE)
⑥ Correcteur physiologique (LOUDNESS)
⑦ Commutateur de MODE
⑧ Commande d'équilibrage (BALANCE)
⑨ Commande de VOLUME
⑩ Commutateur de fonction (FUNCTION)
⑪ Commutateurs de contrôle de bande (TAPE MONITOR)
⑫ Commutateur de filtre passe-haut (HIGH FILTER) (SR-603)
⑫ Commutateur de sourdine FM (FM MUTE) (SR-503L)
⑬ Bouton d'accord (TUNING)
⑭ Indicateur stéréo (FM STEREO)
⑮ Aiguille de cadran
⑯ Indicateur de syntonisation (TUNING)
⑰ Indicateur de l'intensité du SIGNAL
⑱ Prise de terre (GND)
⑲ Bornes d'entrée PHONO
⑳ Bornes d'entrée auxiliaires (AUX)
㉑ Prise DIN d'enregistrement/reproduction de bande 1 (TAPE-1 REC/PLAY)
㉒ Bornes de reproduction de bande 1 (TAPE-1 PLAY)
㉓ Bornes d'enregistrement de bande 1 (TAPE-1 REC OUT)
㉔ Bornes de reproduction de bande 2 (TAPE-2 PLAY)
㉕ Bornes d'enregistrement de bande 2 (TAPE-2 REC OUT)
㉖ Bornes d'enceintes (SPEAKERS)
㉗ Cordon d'alimentation
㉘ Sélecteur de tension
㉙ Borne d'antenne AM (AM ANTENNA)
㉚ Borne d'antenne FM (300 ohms) (FM ANTENNA)
㉛ Prise d'antenne FM (75 ohms) (FM ANTENNA)

www.hifiengine.com