

KR-V888D/1080VR

Y05-3310-10

KENWOOD


CC

CD


CE

CF

CG

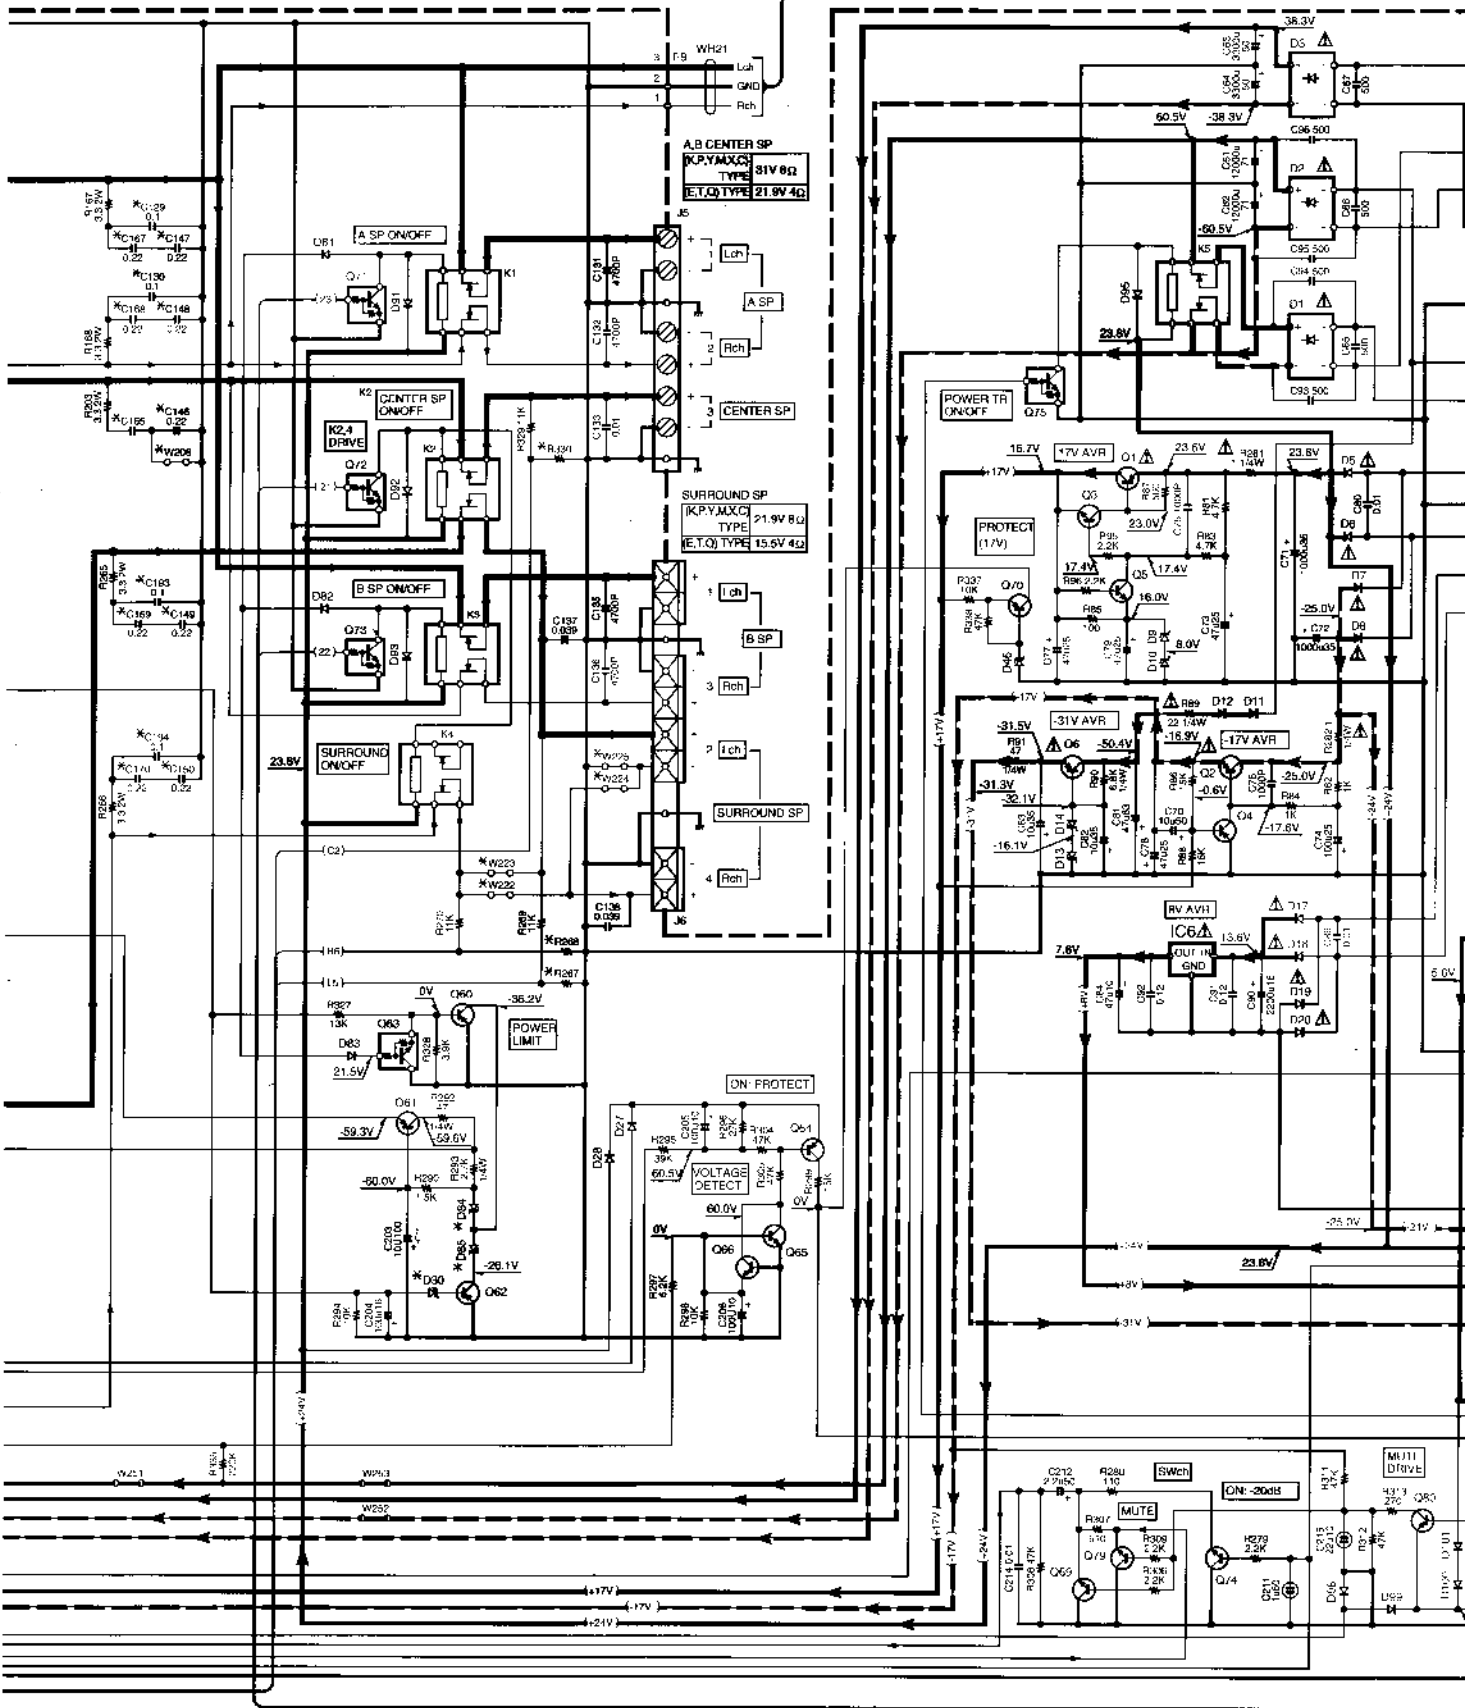


D65	R125,126,183, 217,228	R129,132,185,186, 267,268,330	R231-234	R331	C8,10,21,22,25,26, 29-34,37,38	C129,130, 193,194	C146-150, 167-172	C169	S1	W208,235	W229,237,238	W230,236,241
RFID-NIP) or H751:MR)	220	12K	8.2K	YES NO	NO	YES NO	NO YES	0.1 0.22	NO YES	YES NO	NO	YES

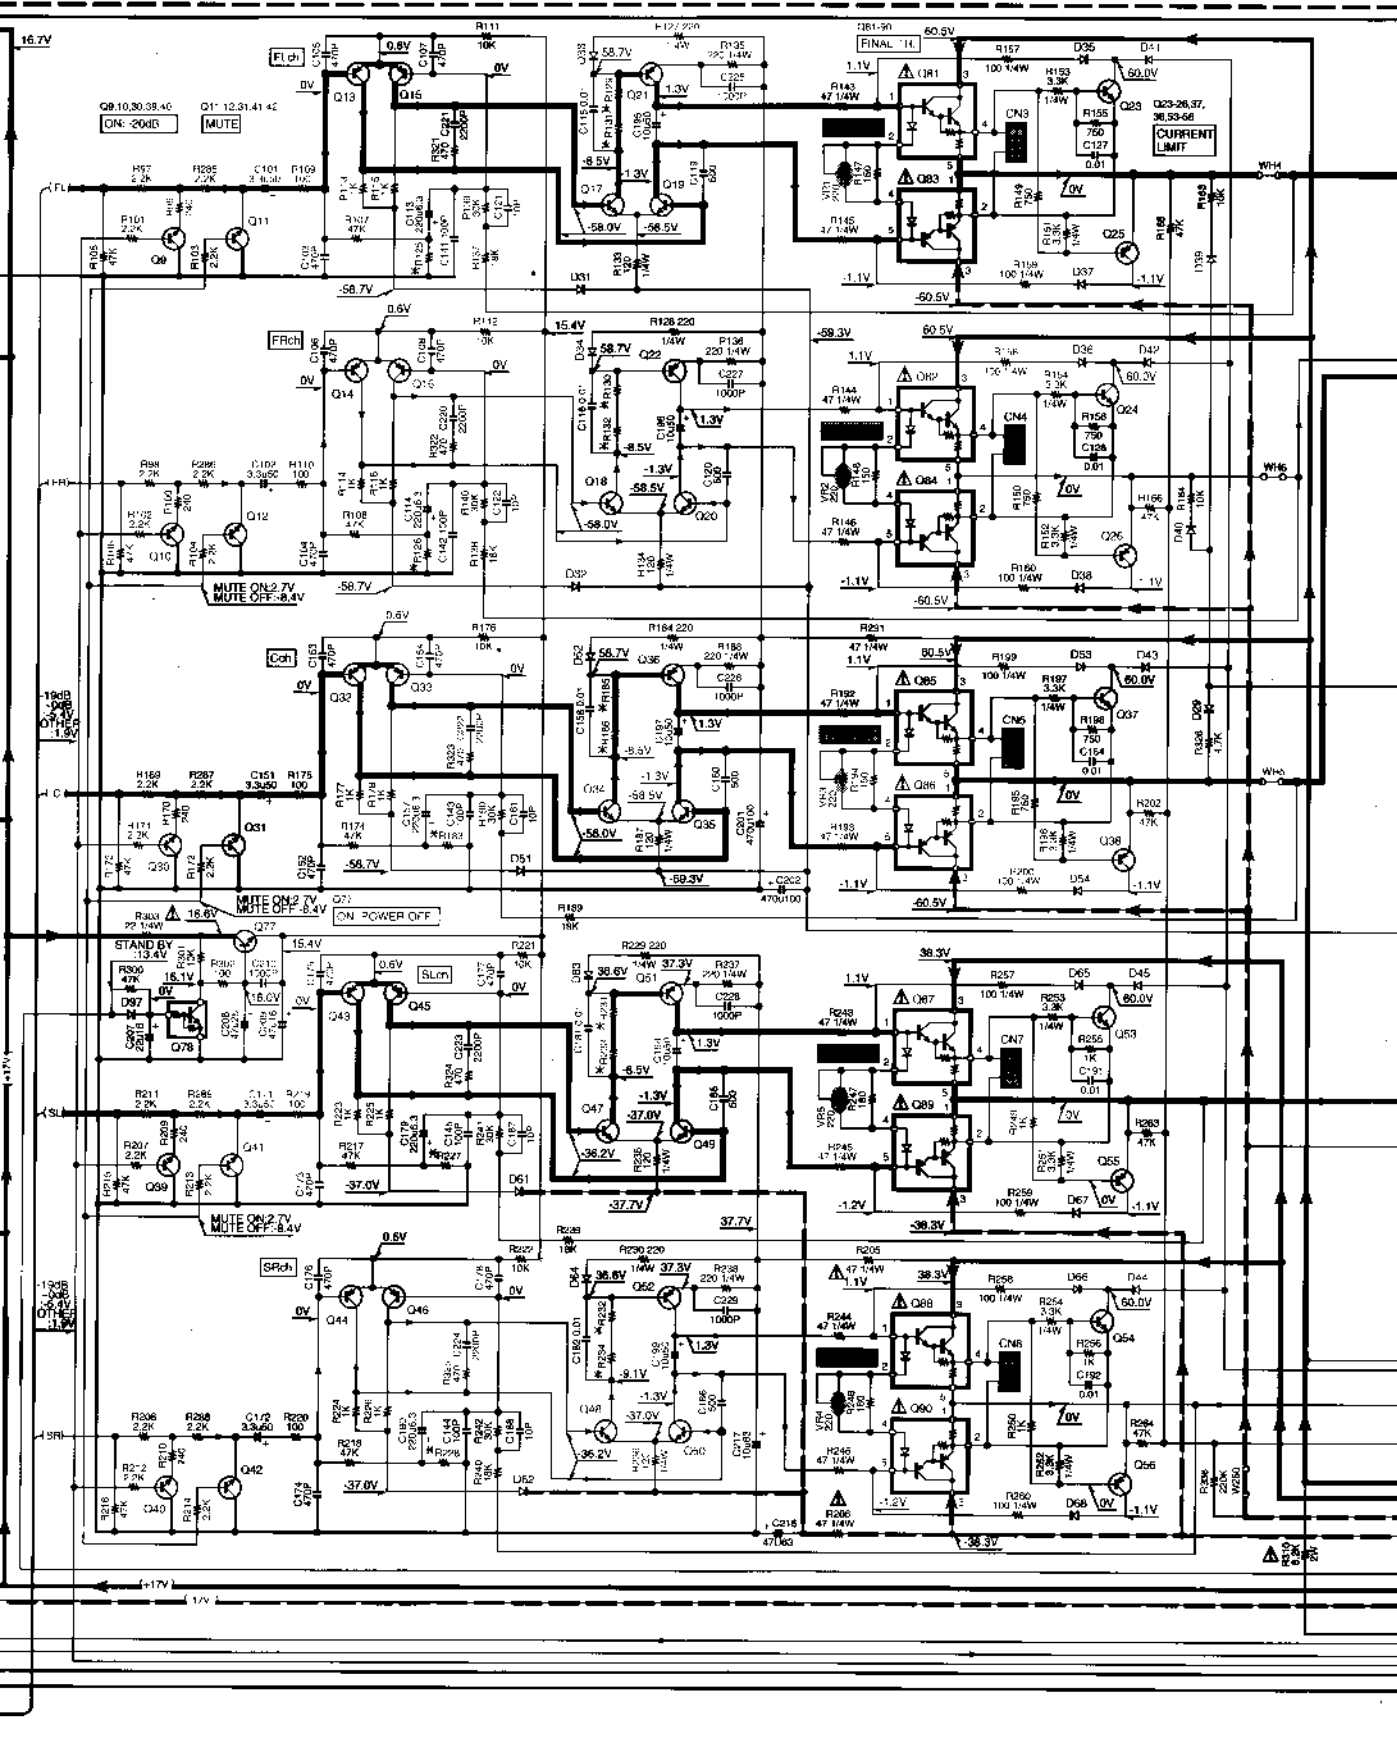

1080VH 1508-455K-2X2


DESTINATION	COUNTRY ABB.	UNIT No.	J7	P1,2	P3	WH1	WH1-9	F2	F3	F4,5	F6,7	CN11,12	T1	J3C	D64	
U.S.A	K															
CANADA	P	0110	E03-0148	NO	YES	YES	NO	25V 3A	NC	25V 1A	125V 2A	125V 4A	NO	L07-2800	RD11E5/R27 or H2S-11M/R1	RD24E5(B) or H2324(NB)
PX	Y	2-91		NO	NO	YES	250V 1A	250V 74A L	25-1V 100mA 1	250V 11A L	350V T3 15A L	YES	L07-2321			

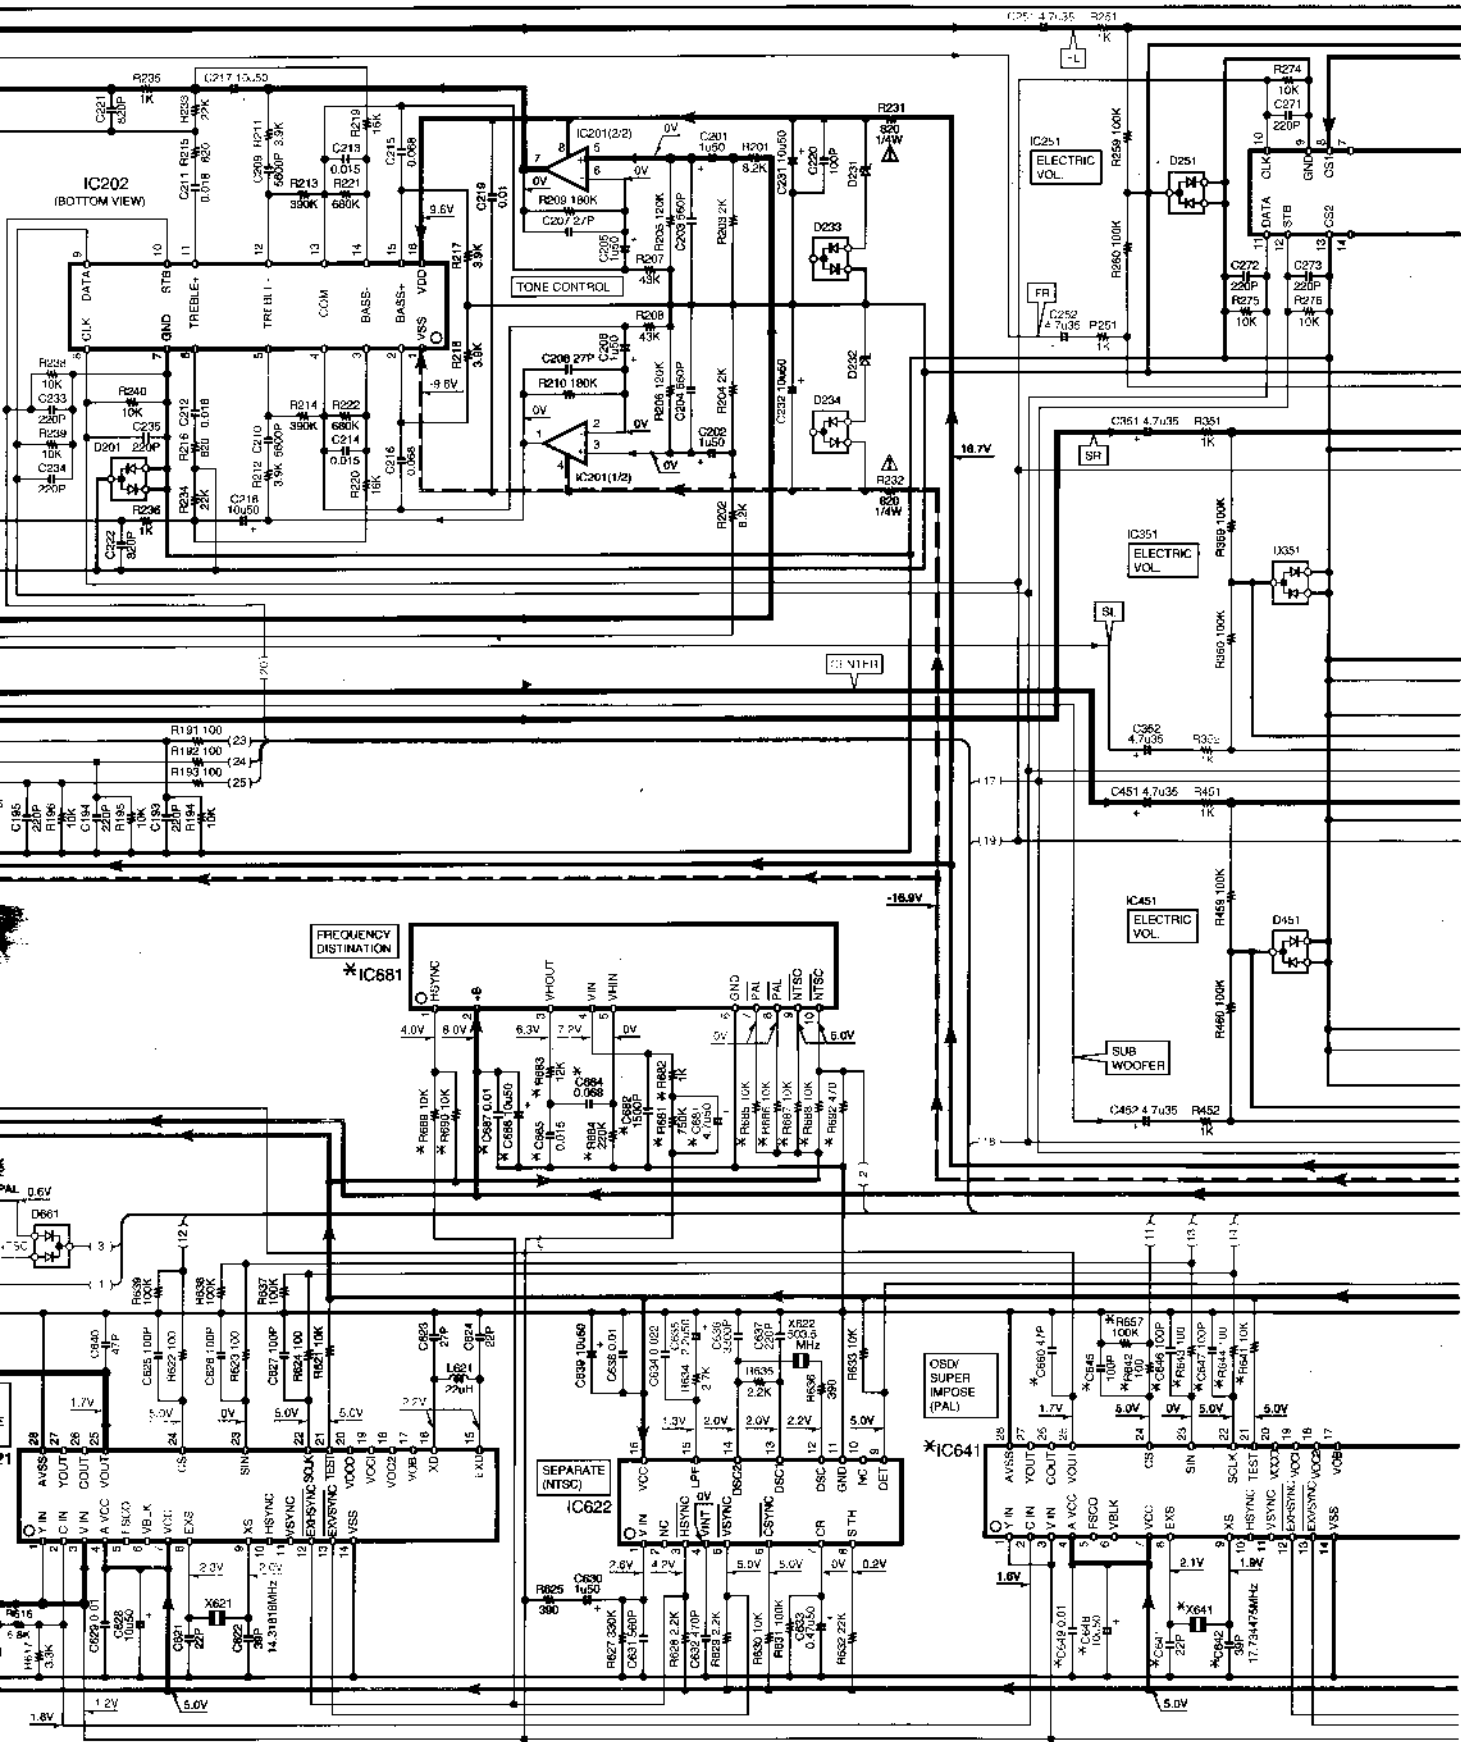

MAIN UNIT (X09-455X-XX) (A/4)

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

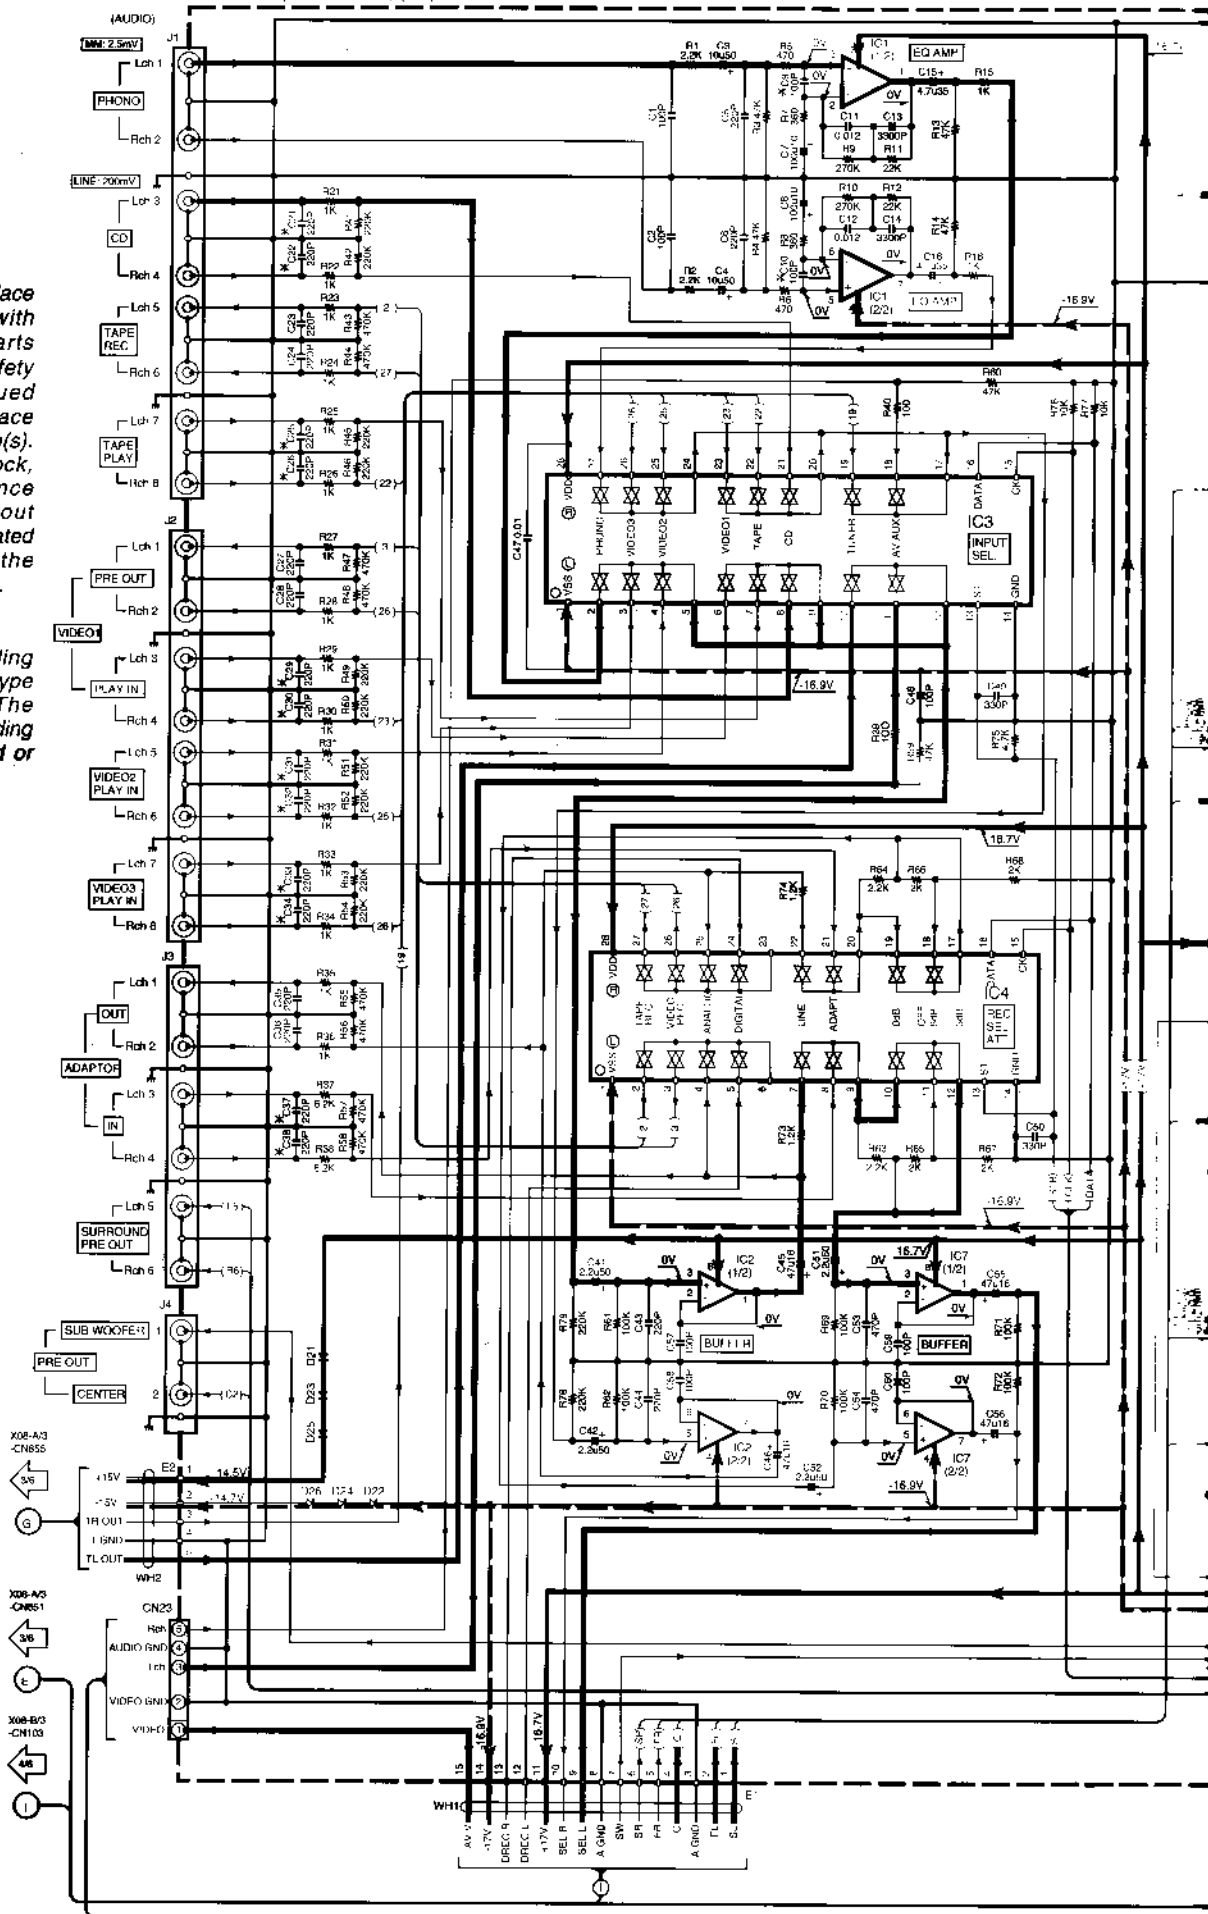

BI

BJ

BK

BL

BM


SIGNAL
 GND L
 +8 LIN
 -8 LIN

KR-V88D (X06-274X-XX)

DESTINATION	COUNTRY	ABB	UNIT No.	IC64
U.K.	E	T	2-71	NO
EUROPE	E	E	2-71	YES
CHINA	C	M	0-21	YES
GENERAL MARKET				
AUSTRALIA	X	Q	0-21	
RUSSIA	Q	Q	3-81	

1080VR (X06-274X-XX)

DESTINATION	COUNTRY	ABB	UNIT No.	IC64
U.S.A.	K	K	0-10	NO
CANADA	P	P	0-10	NO
PX	Y	Y	2-91	YES

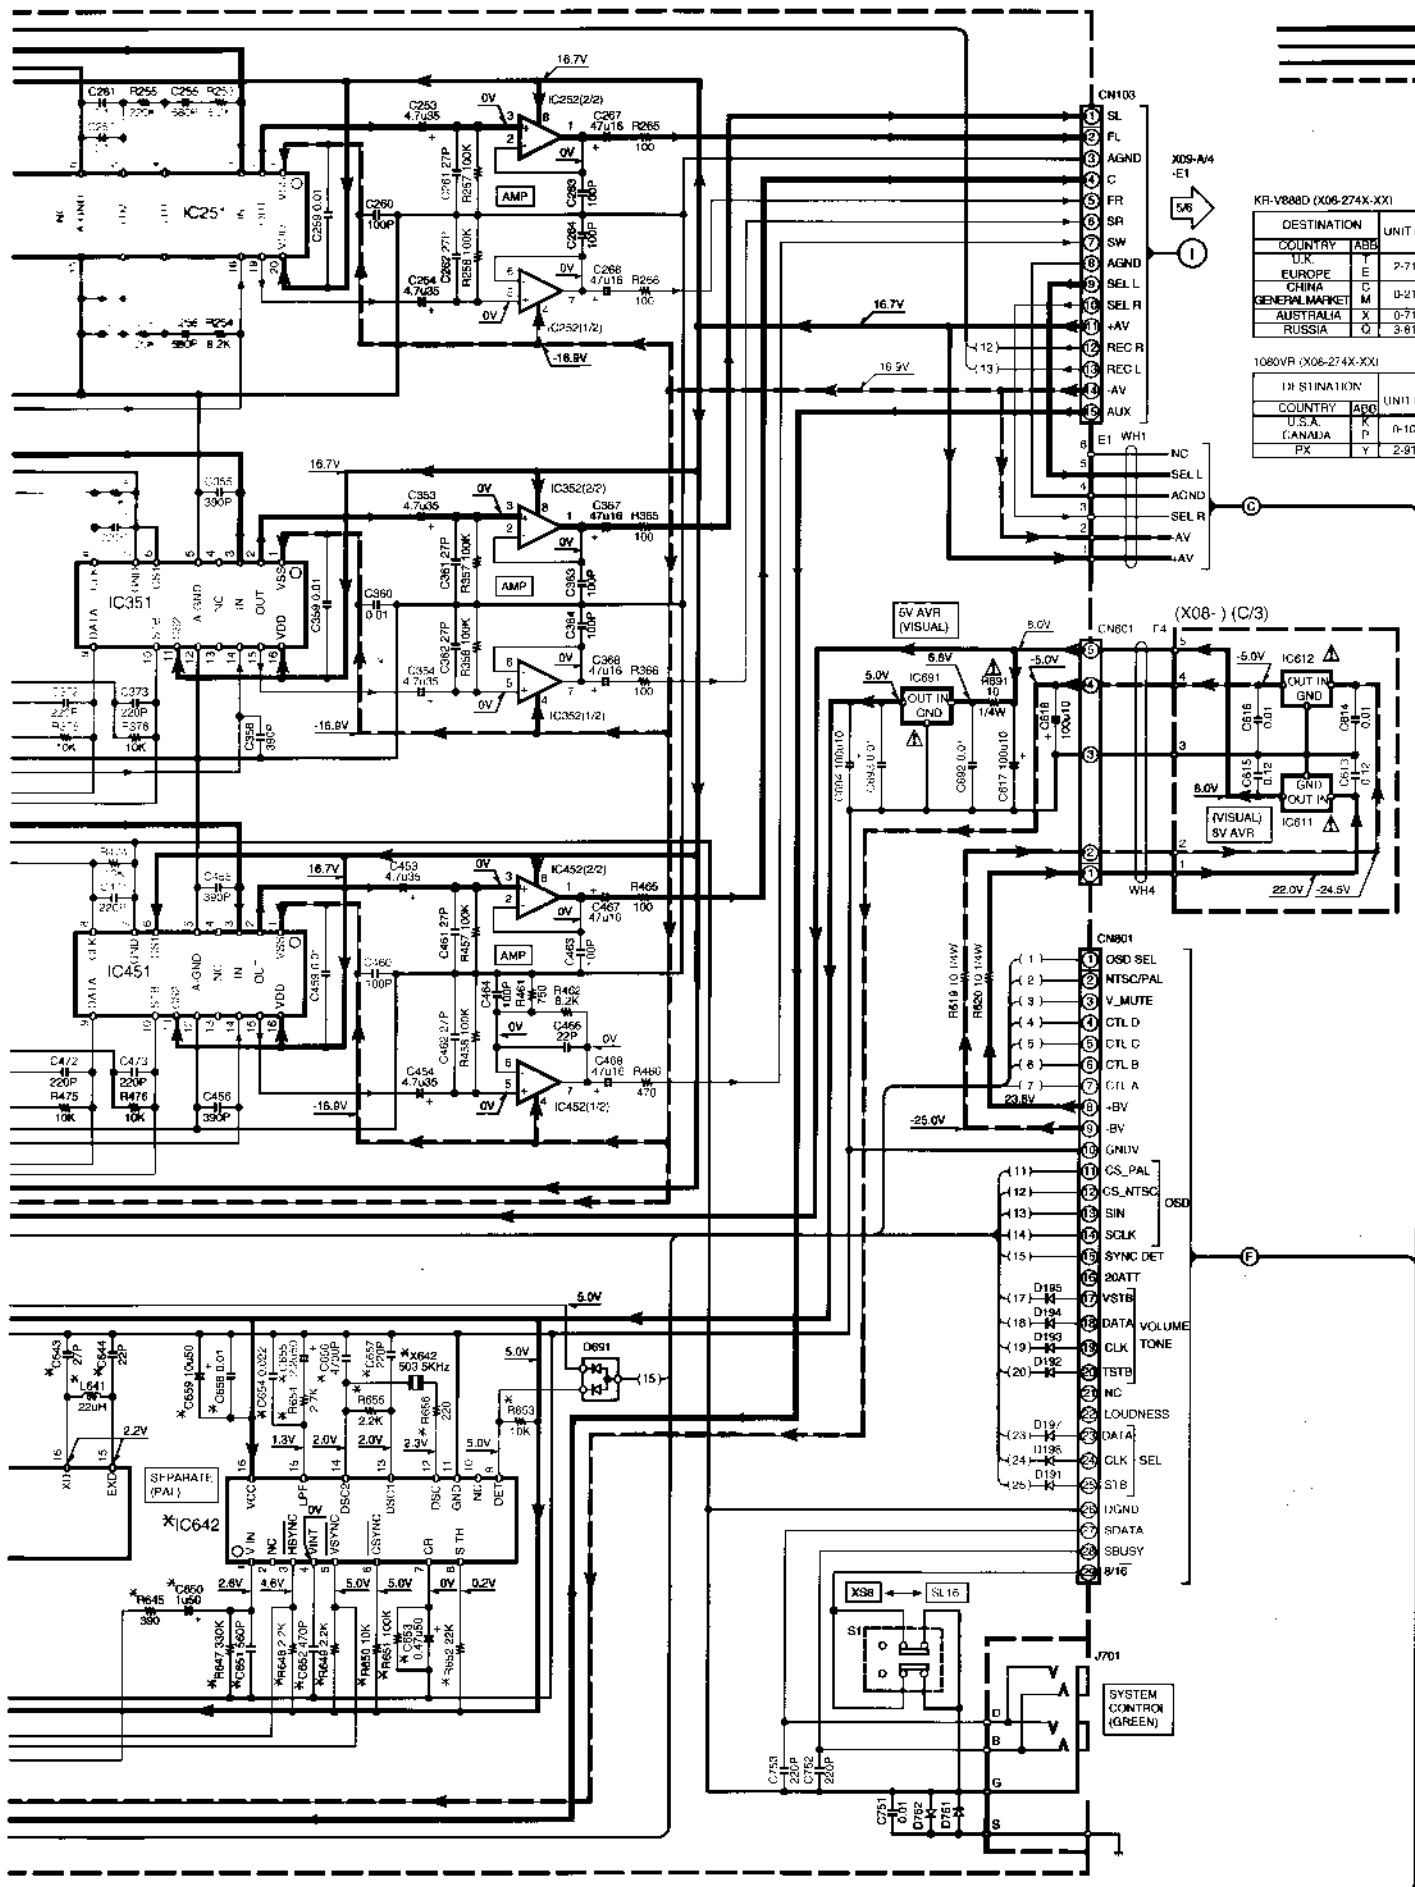

SIGNAL LINE
 GND LINE
 +B LINE
 -B LINE

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.


IC641, 642	IC681	Q692 664 665 669	C641-680 682 683 684 685	R641-645 647-657 652 654 655 673-677 681-690	R692 632	L641	X641, 642	J2
YES	YES	YES	YES	YES	NO	YES	YES	YES
	NO							NO
								YES

IC641, 642, 681	Q692 664 665 669	C641-680 682 683 684 685	R641-645 647-657 652 654 655 673-677 681-690	R692 632	L641	X641, 642	J2
NO	NO	NO	NO	YES	NO	NO	NO
YES	YES	YES	YES	NO	YES	YES	YES


(X08-1) (B3WC3)

- IC181, 201, 252, 252, 452, 551
- NJM4565M
- IC181 NJU7311AM
- IC202 TC9184AP
- IC251 TC9412AP
- IC351, 451 TC9413P
- IC801 SN761200N
- IC811 TA7805S
- IC812 TA79005S
- IC821, 841 MB90009PF-108
- IC822, 842 MM1067AF
- IC801 LA7808
- IC811 TA7808B or MPC7805AHF
- Q61, 1, 201, 202 2SC4081(R,S) or 2SC4116(Y,GR)
- Q612 2SA1578A(R,S) or 2SA1586(Y,GR)
- Q691, 692 2SC4213(B)
- Q693, 694 UM6112 or DT4124EUA
- Q695-697 UN5212 or DTC124EUA
- Q671, 672 2SC3115/D07.2B
- D195, 201, 203, 204, 251, 351, 451 DA204U or 1SS302 or MA143A
- D191-195, 197, 198, 662, 751, 752 MA111
- D231, 232 UDZ8.2B
- O661 DAN202U or 1SS301 or MA142WK
- O691 DAN202U or 1SS300 or MA142WA

2SA1110



DTC124ESA
 2SA1048
 2SC2458



2SA1586 2SC4081
 2SC2714 2SC4116
 2SC3115




2SB1370




TRAI TR3N
 TRAI TR3P
 TRAI TR4N
 TRAI TR4P




NJM4565D-D




TC9184AP




TC9413P



SN761200N



UN4212
 UN4219
 2SA1309A
 2SC3311A




NJM4565M
 TC7W04FU




UPD16311



DAN202U



UPC7805AHF
 UPC7808AHF




DAP202U
 DA204U



MA142WA
 MA142WK
 UN5212



1SS301




MC13028AM




TC74HCU04AF




2SD1757K




TC9412AP




LC72131




NJU7311AM
 NJU7312AM



TA7805S




TA79005S



LA1832



2SA1123
 2SA1534A
 2SA992
 2SC1845
 2SC2003




2SC2631
 2SC2878


TC7S04F




NJU7312AL
 NJU7313AL



TA7808S



NJM4580L-D



DSPF56009FJ81



KR-V888D/1080VF

KENWOOD

Y05-3310-10