


JVC

SERVICE MANUAL

MODEL

KD-A77 A/B/C/E/J/U

STEREO CASSETTE DECK

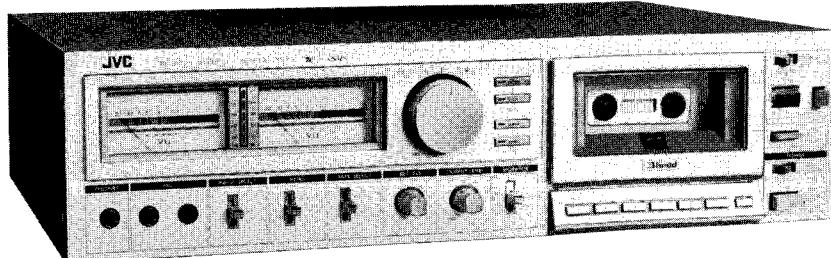

No. 4186
September 1979

Contents

Specifications	2	Wiring Connection (2) of KD-A77	22
Features.....	3	Enclosure Ass'y and Electrical Parts	25
Controls and Connections	3	Enclosure Ass'y and Electrical Parts List	23
Main Parts Location.....	4	Mechanical Components Parts	26
Maintenance	4	Mechanical Components Parts List	28
New Technique	5	Printed Wiring Board Parts	
Removal of the Main Parts	6	Main Amp. P.W. Board Parts	33
Main Adjustments.....	10	Power Supply P.W. Board Parts	34
Block Diagram	16	Main Amp. P.W.B Parts List	30
Integrator Circuit.....	18	Power Supply P.W.B Parts List	35
Standard Schematic Diagram of KD-A77		Other P.W.B Parts	37
Amplifier circuit	19	Other P.W.B Parts List	39
Mecha. control circuit	20	Packing	Back cover
Wiring Connection (1) of KD-A77	21	Accessories	Back cover

Specifications

Type	: Stereo cassette deck	Motors	: FG type DC servo motor (for Capstan) DC motor (for Reel)
Track system	: 4-track, 2-channel	Fast forward time	: 85 sec. with C-60 cassette
Tape speed	: 1-7/8 inch/sec (4.8 cm/sec)	Rewind time	: 85 sec. with C-60 cassette
Frequency response	:	Semiconductors	: 18 ICs, 49 transistors, 59 diodes, 14 LEDs
OVU		Input terminals	: Mic jack x 2, Max. sensitivity; 0.2mV (-72dBs) Matching impedance; 600Ω - 10kΩ
Metal tape	; 25-12500Hz ± 3dB(Typical)		Input jack x 2, Min. input level; 80mV (-20dBs)
SA/CrO ₂ tape	; 25-8000Hz ± 3dB(Typical)		Input impedance; 100kΩ
-20VU		Output terminals	: Output jack x 2, Output level; 0-300mV Output impedance; 6kΩ Matching impedance; 50kΩ or more
Metal tape *1	; 15-20000Hz 25-18000Hz ± 3dB(Typical)		Phones jack x 1, Output level; 0~0.5mW/8Ω
SA/CrO ₂ tape *2	; 15-20000Hz 25-18000Hz ± 3dB(Typical)		Matching impedance; 8Ω-1kΩ
SF/Normal tape *3	; 15-19000Hz 25-17000Hz ± 3dB(Typical)	Power requirement	: AC 120V, 60Hz (KD-A77C/J) AC 240/220/120V, 50/60Z (KD-A77A/B/E) AC 240/220/120/100V, 50/60Hz (KD-A77U)
S/N ratio	: 60dB (from peak level, weighted, Metal tape) The S/N is improved by 5dB at 1kHz and by 10dB above 5kHz with ANRS on. (DIN 45 500 weighted)	Power consumption	: 36W
Effect of Super ANRS	: (normal tape)	Dimensions	: 17-3/4" (450 mm) W 4-3/4" (120 mm) H 12-7/16" (316 mm) D
Improvement of S/N	: the same as with ANRS	Weight	: 18.3 lbs (8.3 kg)
Improvement of frequency response	: OVU recording; 6dB at 10kHz +5VU recording; 12dB at 10kHz		Note: *1 ... SCOTCH METAFINE or Equivalent *2 ... TDK SA or Equivalent *3 ... MAXELL UD or Equivalent
Improvement of distortion	: OVU recording; 3% or less at 10kHz +5VU recording; 3% or less at 10kHz	Design and specifications are subject to change without notice.	
Wow and flutter	: 0.04% (WRMS), 0.14% (DIN 45 500)		
Crosstalk	: 65dB (1kHz)		
Hormonic distortion	: K3; 0.4%, THD: 1.0% (metal tape, 1kHz OVU)		
Bias	: AC bias (85kHz)		
Erasure	: AC erasure (85kHz)		
Heads	: 3 heads SEN ALLOY head for recording, SEN ALLOY X cut type for playback and two-gap SEN ALLOY head for erasure		

Features

1. 3 SA (SEN-ALLOY) heads
Combined SA (SEN-ALLOY) record/play (X-cut type) heads make possible record monitoring. The erase head is a 2-gap head also made from SA (SEN-ALLOY).
2. Two-motor ID (Independent Drive) mechanism
This mechanism incorporates a newly developed Back Tension system which gives improved tape contact with the head.
3. Self-illuminated buttons for full logic mechanical operation (excluding STOP or REC-MUTE modes.)
4. Three position Metal-Tape-Compatible tape select switch.


METAL – FeCr – $\frac{\text{SA/CrO}_2}{\text{NORM}}$

(Automatic switching between SA/CrO₂ and NORM)

5. The REC MUTE button is at the right side of the mechanical operation buttons.


6. ANRS which reduces tape hiss to an inaudible level and Super ANRS which improves linearity at high frequencies are incorporated.
7. MEMORY/AUTO REW switch
8. Recording equalizer switch
9. Timer standby capability for automatic recording or playback using an AC timer.
10. Geared and oil-damped cassette holder.
11. New Metal-Tape-Compatible multi-peak level indicators (+ 9dB, + 6dB, + 3dB, -2dB, -7dB), together with back-lit VU meters with the expanded coverage from +7VU to -20VU, make level observation easier.
12. OUTPUT volume (for LINE and HEADPHONES use)
13. Remote control terminal (for the optional remote control unit – R-30E).

Controls and Connections

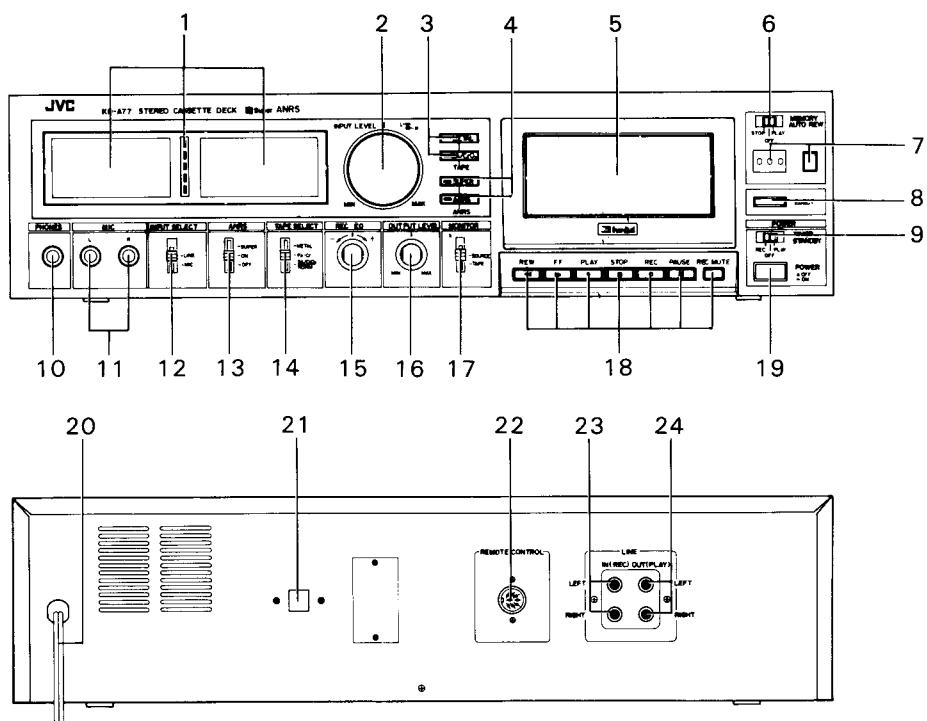

1. VU meters and Multi-point peak level indicators
2. INPUT LEVEL control
3. TAPE indicators
4. ANRS/Super ANRS indicators
5. Cassette holder
6. MEMORY/AUTO REW switch
7. Tape counter/counter reset button
8. EJECT button
9. TIMER STANDBY switch
10. PHONES jack
11. MIC jacks
12. INPUT SELECT switch
13. ANRS switch
14. TAPE SELECT switch
15. REC EQ switch
16. OUTPUT LEVEL control
17. MONITOR switch
18. Cassette Operation buttons
 - ◀ REW (rewind) button
 - ▶ FF (fast forward) button
 - PLAY button
 - STOP button
 - REC (record) button
 - PAUSE button
 - REC MUTE button
19. POWER switch
20. Power cord
21. Voltage select switch (KD-A77 A/B/E/U)
22. REMOTE CONTROL socket
23. LINE IN (REC) terminals
24. LINE OUT (PLAY) terminals


Main Parts Location

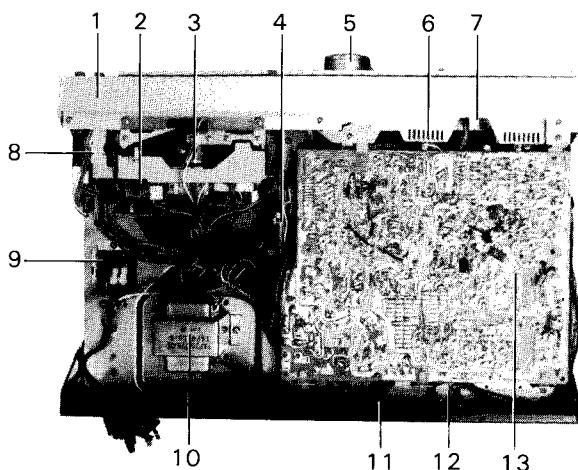

1. Front panel assembly
2. DC solenoid for playback
3. Reel motor
4. Geared and oil-damped brake ass'y
5. Variable resistor (INPUT LEVEL control)
6. Meter cover
7. LED P.W. Board ass'y
8. Hall element P.W. Board ass'y
9. Power switch
10. Power transformer
11. Remote control socket (DIN socket)
12. Pin jacks ass'y
13. Mecha. control P.W. Board ass'y

Other mechanical parts are the same as location of model KD-A6:

Please refer to the service manual o KD-A6 A/B/C/E/J/U (No. 4179 — page 4).

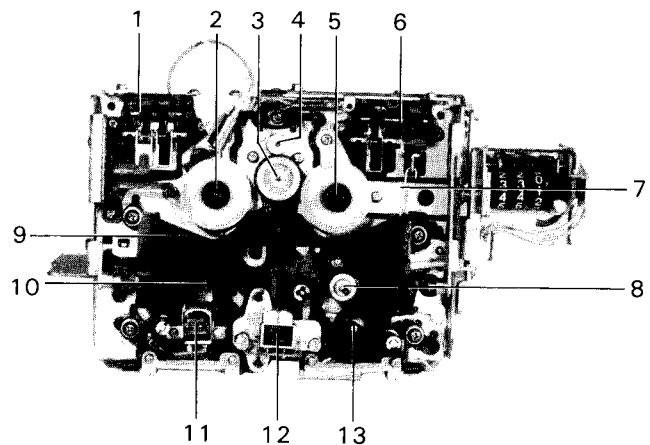

(Mechanical parts)

1. Switch holder (L)
2. Supply reel ass'y
3. Idler ass'y
4. Reel motor ass'y
5. Take-up reel ass'y
6. Switch holder (R)
7. Connecting wire (for play solenoid)
8. Capstan
9. Slide base ass'y
10. Std with pad (for back tension)
11. Erase head
12. Combined SA (SEN-ALLOY) record/play heads
13. Pinch roller ass'y

Maintenance

To get long, trouble-free service, maintenance is important.
Do not forget cleaning and demagnetizing.

Cleaning


After long, the heads and tape part — capstan, pinch roller, etc. — will become dirty with dust or magnetize particles. Dirty heads cause imperfect erasing or high frequency drop-off. A dirty capstan and pinch roller will cause unstable tape speed, leading to increased wow and flutter. Always keep them clean by following the procedure below.

1. Heads

- 1) Push the EJECT button to open the cassette holder.
- 2) Push up the transparent cover to remove it.
- 3) Use the head cleaning stick to wipe the surface where the tape comes into contact with the head.
(It is effective to moisten the cotton with alcohol.)

2. Pinch roller and capstan

Close the cassette holder with its transparent cover removed. Press the tape detection pin inside the cassette compartment and set the deck in the playback mode. Insert the cleaning stick into the hole on the right side at the bottom of the cassette holder and clean the pinch roller and capstan.

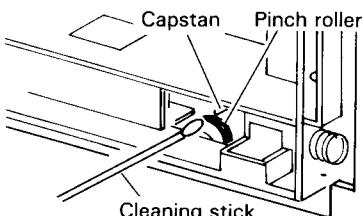

3. Cleaning the cabinet and panel

Wipe the cabinet and panel clean with a soft cloth dipped in a neutral cleaner. Do not use thinner, benzine, alcohol or other strong solvents, as these will cause damage to the surface finish of the cabient and panel.

Demagnetizing

The heads are made from a material resistant to magnetization, but after long use they may become magnetized. A magnet brought into their vicinity can magnetize the heads, causing excess noise. If noise seems to have increased, demagnetize the heads with a head demagnetizer through the following procedure.

1. Turn the POWER switch OFF.
 2. Wrap the tip of the demagnetizer with vinyl tape of soft cloth so as not to damage the head surface. Switch on the demagnetizer and bring it close to the head.
 3. Move the tip of the demagnetizer slowly first to the left and right, then up and down in front of the head.
Gradually move it away from the head and switch it off at a distance of more than 30 cm (12").
 4. The erase head need not be demagnetized. The capstan shaft and tape guide should be demagnetized in the same way as the record/playback head.
- * Do not bring a magnetized metallic object (a screwdriver for example) near the head as this will increase noise.

Oiling

Feed one or two drops of machine oil to pinch roller shaft once or twice a year under normal conditions of use. Avoid oiling them excessively, or rotation may become irregular because of oil splashes.

New Technique

Combination SA heads for recording and playback (Fig. A)
 Due to its high recording density, Metal Tape requires recording and playback heads that are made of materials having a greater maximum magnetic flux density than conventional ferrite or permalloy. The combined record/playback heads, newly developed for the KD-A77, both employ SA (Sen-Alloy) to ensure high performance.

The SA head has advantages over conventional heads in various fields such as fewer core loss, greater gap accuracy, better wear and corrosion resistance. However, its biggest feature is its high maximum magnetic flux density. Because of this, the SA head can bring the most out of the superior performance of Metal Tape. This is especially true for its extended frequency response at high frequencies; something that has never been possible to realize with usual cassette tapes.

The playback head incorporates a unique X-cut core structure to improve the characteristics of the low frequency range. With ordinary core configurations, playback output is subject to peaks and dips in the low frequency range as shown in Fig. B. This is called the "contour effect". This effect is caused by interference between the length of the tape-to-head contact area and the wavelength of the recording frequency. With the X-cut design the core is cut diagonally to enable the tape to leave the head, not abruptly, but with a gradually lessening contact area. The result is, as shown in the diagram, reduction of the contour effect. (Fig. C)

Configuration of record/playback combination SA heads

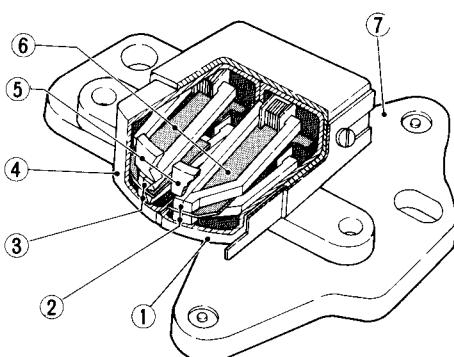


Fig. A

- ① SA recording head
- ② 4 μ m gaps
- ③ 1 μ m gaps
- ④ X-cut SA playback head
- ⑤ SA chips
- ⑥ Shield plate
- ⑦ Zinc die-casting head base

Comparison between characteristics of conventional cut core and X-cut core

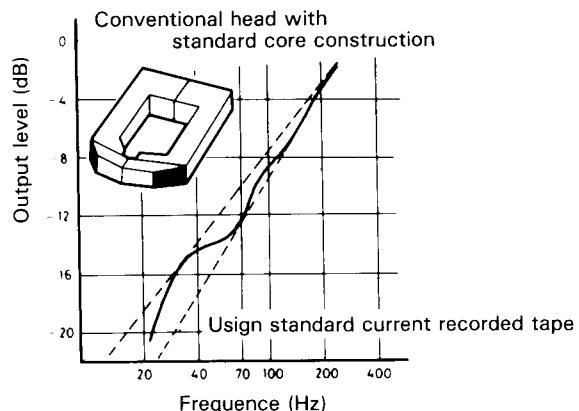


Fig. B

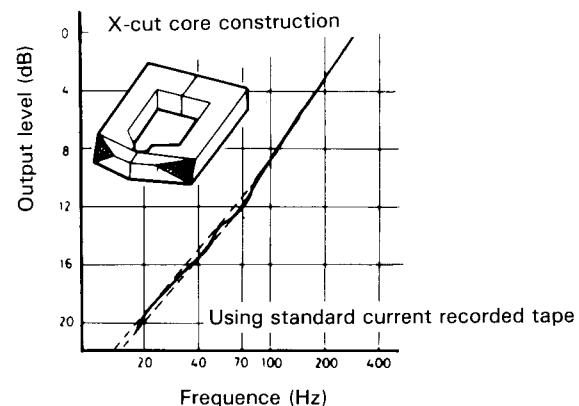







Fig. C

Note: SA (Sen-Alloy) is a trademark of JVC.

Removal of the Main Parts

This cassette deck which features a compact design and high performance uses miniature sized parts which are closely arranged.

Take special care when servicing it.

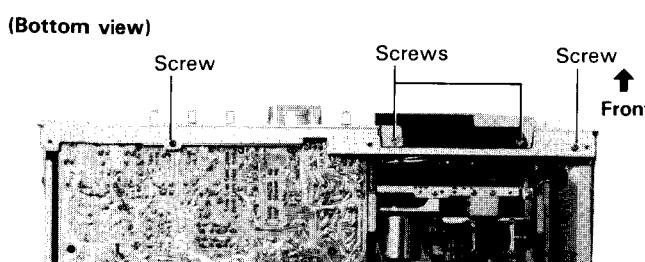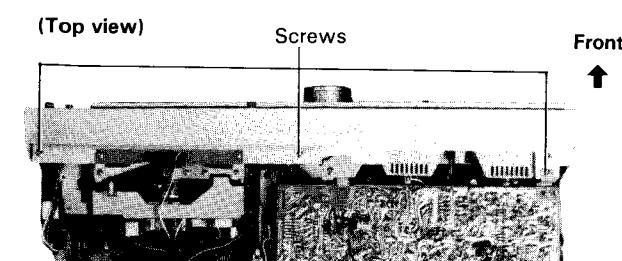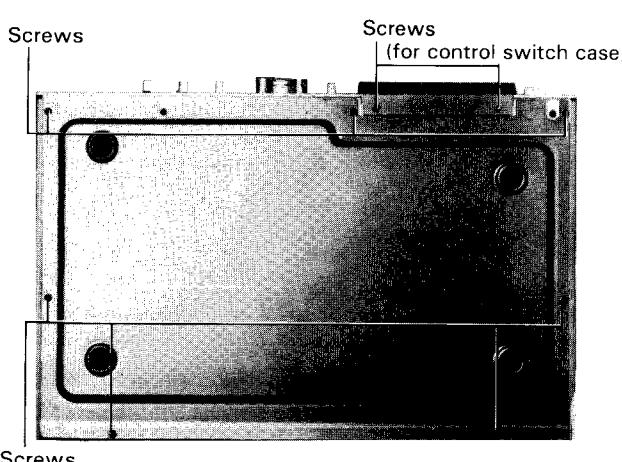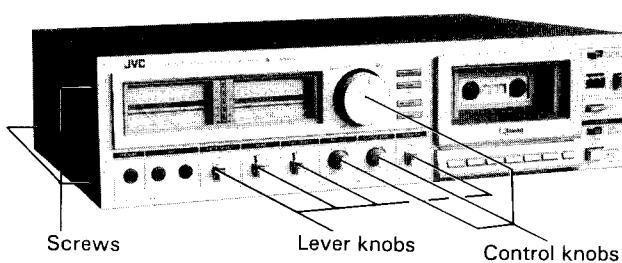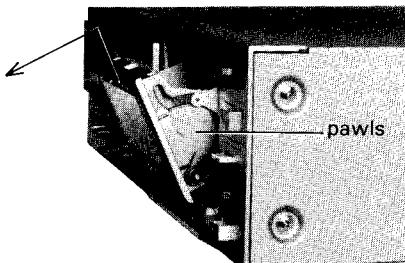

Enclosure assembly

1. Cassette door

Push the EJECT button to open the cassette door. Slide it upwards (approx. 5 mm) to unlock its pawls, and remove it to frontward.

2. Lever knobs (INPUT SELECT, ANRS, TAPE SELECT, MONITOR) and level control knobs (INPUT LEVEL — L and R, OUTPUT LEVEL and REC EQ)

Pull them to frontward

3. Top cover

Remove 6 screws fastening the top cover.

4. Bottom cover

Remove 7 screws fastening the bottom cover.

5. Front plate assembly

1) Remove 5 screws (3 screws on upper side and 2 screws on bottom side) fastening the front plate assembly

2) Remove TAPE & ANRS indicators wires socket.

When adjusting or replacing REC/PB heads or Erase head

1) Remove the wires of the control switches from the wire clamp and 2 wire sockets after having removed the top cover.

2) Remove 2 screws positioned below the control switches (on the bottom of the deck) and pull the control section forwards — no need of removing the front panel assembly.

Caution


When assembling the control switch assembly to the front panel, do in the order of the numbers as below as not to damage the front panel.

1) Wrap the sharp edges of the front panel with vinyl tape, etc.

2) Insert the control switch assembly in the front panel.


3) Remove the vinyl tape.

4) Fasten 2 screws for the control switch assembly.

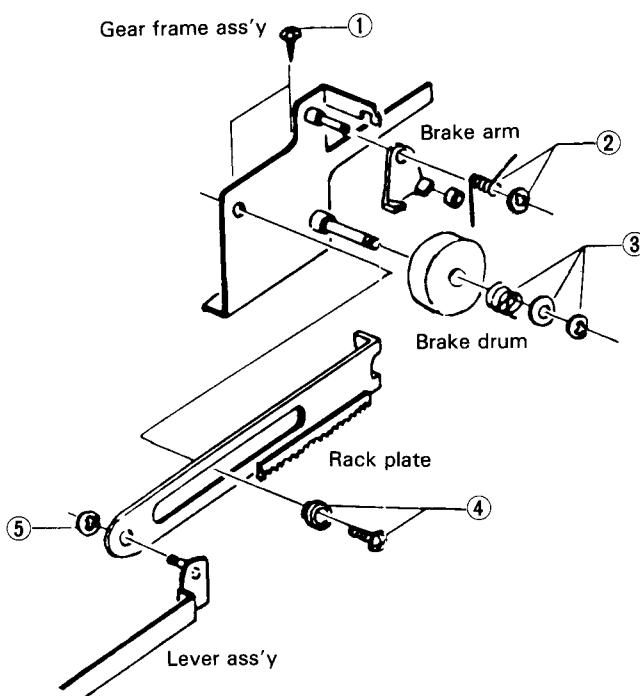



Door brake and its related parts

1. Gear frame ass'y Remove 2 screws (1).
2. Brake arm and tire Remove the E-ring and torsion spring (2).
3. Spur gear and brake drum Remove the E-ring, and spring (3).
4. Rack plate Remove the screw and the collar (4).
5. Brake lever ass'y Remove the E-ring (5).

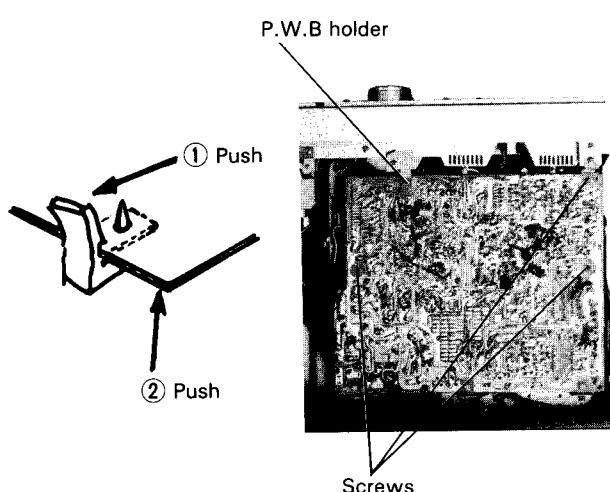

Electrical parts


1. Power supply P.W.B. parts assembly.

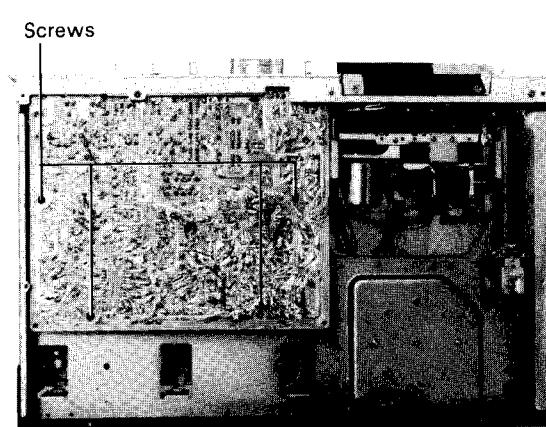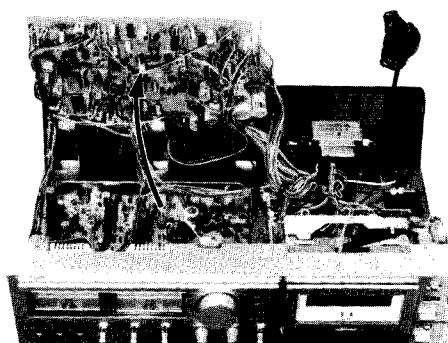

(Bottom view)

- 1) Remove a pawls of P.W.B. holder in the order of the numbers in the illustration arrow mark.
- 2) Remove 3 screws fastening the P.W. Board.
- 3) Open the P.W.B to upper side.


2. Main amp P.W.B parts assembly
 - 1) Remove 4 screws fastening the main amp. P.W. Board (on the bottom side).
 - 2) Remove 4 screws fastening the lever switches on the front bracket.
 - 3) Remove 5 washers and 5 nuts fastening the PHONES, MIC-L, MIC-R jacks and REC EQ, OUTPUT LEVEL control shafts.

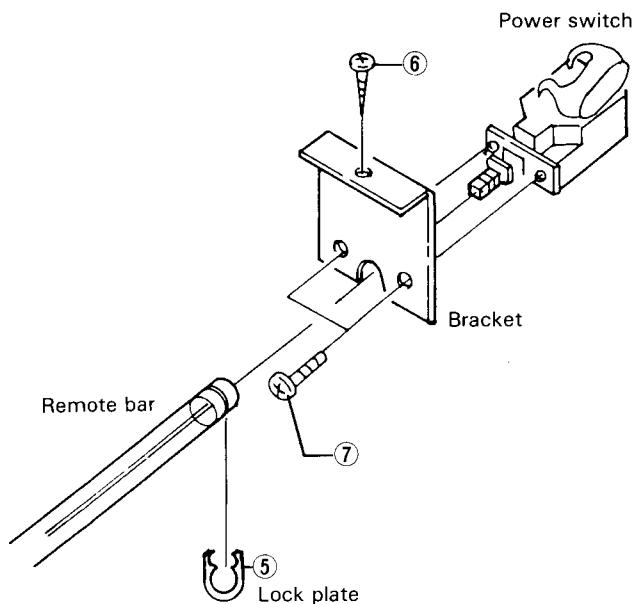**3. Power switch**


- 1) Remove the lock plate (5) holding the remote bar.
- 2) Remove a screw (6) fastening the power switch bracket.
- 3) Remove 2 screws (7) fastening the power switch.

4. Power transformer

Remove the 2 screws and 2 washers fastening the power transformer.

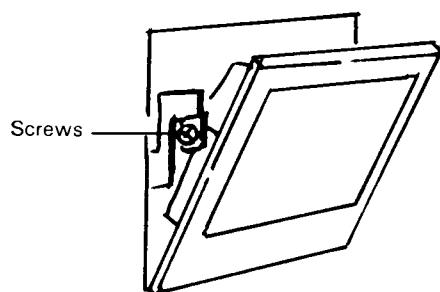


(Top view)

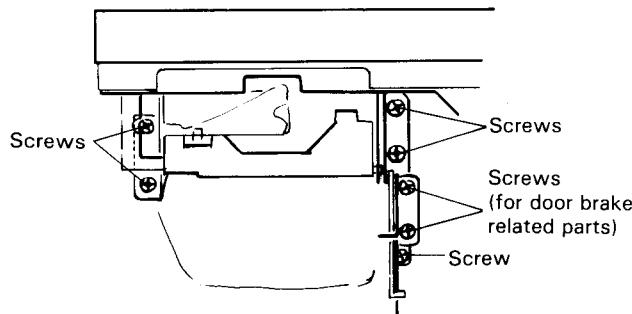**Removal of the mechanical assembly**


1. Remove a screw fastening the arm of gear-oil damper (Left side of the cassette holder), and Remove 2 screws fastening the gear frame ass'y to Remove door brake related parts.

2. Remove 5 screws fastening the mechanical bracket to the amp. chassis (Right — 2 p.c.s, Left — 3 p.c.s).

3. Remove a screw fastening the counter bracket to the front bracket.




(Top view) Screws

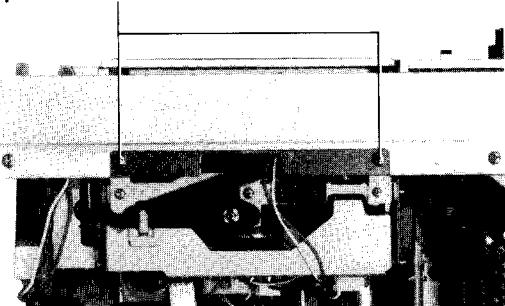

4. Remove 2 screws fastening the joint bracket to the front panel (upper side).

(Front view)

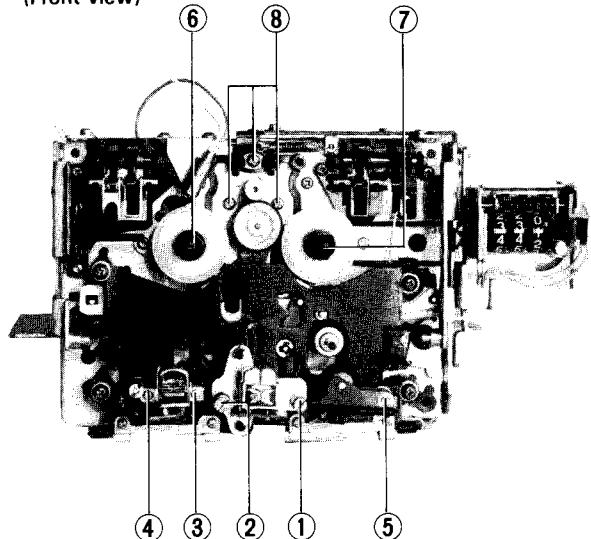


Removal of the mechanical parts

1. REC/PB head
Remove the screw ① for head adjustment.
Remove the screw ②.
2. Erase head
Remove the screw ③.
Remove the screw ④.
3. Pinch roller arm ass'y Remove the E-ring ⑤.
4. Supply reel disc Pull out the reel stopper ⑥.
5. Take-up disc Pull out the reel stopper ⑦.
Remove the counter belt.

Note:

- 1) Remove the reel disc stoppers with a piece of sheet metal inserted between the reel disc and the stopper.
 - 2) Be careful not to stain the counter belt.
6. Reel motor Remove the 3 screws ⑧ fastening the reel motor.

(Rear view)

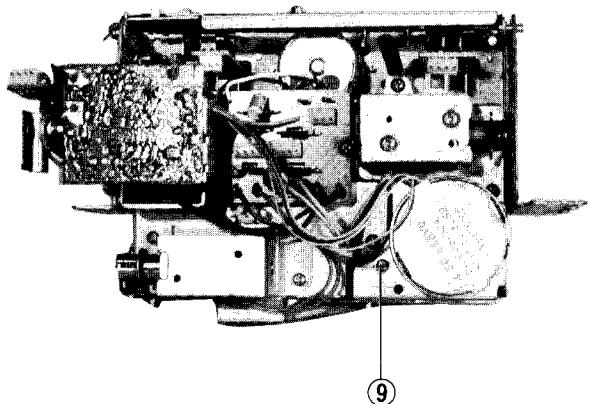

7. Capstan motor

- 1) Remove the screw ⑨ fastening the rubber stopper.
- 2) Remove its motor belt.
- 3) Turn the motor counter clockwise and pull it for removal.

Note:


- When replacing the motor, check the following items.
- 1) Is the motor placed in the correct position?
(Don't deflect the motor at mounting it.)
 - 2) Does the capstan belt run in the center of the motor pulley?
 - 3) Does the capstan belt run in the center of the flywheel?

Main Adjustments

[I] Equipment and measuring instruments used for adjustment

1. Electrical adjustment

- 1) Electronic voltmeter
- 2) Audio frequency oscillator
(range; 50 — 20kHz and output 0dB with impedance 600Ω)
- 3) Attenuator
- 4) Standard tapes for REC/PB
Maxell UD — SF tape (for normal)
TDK SA — SA tape (for CrO₂)
SCOTCH METAFINE — Metal tape } or equivalent
- 5) Reference tapes for playback (JVC Test Tape)
VTT-658 (for head azimuth adj.)
VTT-656 (for motor speed, wow flutter adj.)
VTT-664 (for Reference level 1kHz)
TMT-6002N (for playback frequency response)
- 6) Resistors
100Ω (for measurement of the bias current)
600Ω (for attenuator matching)

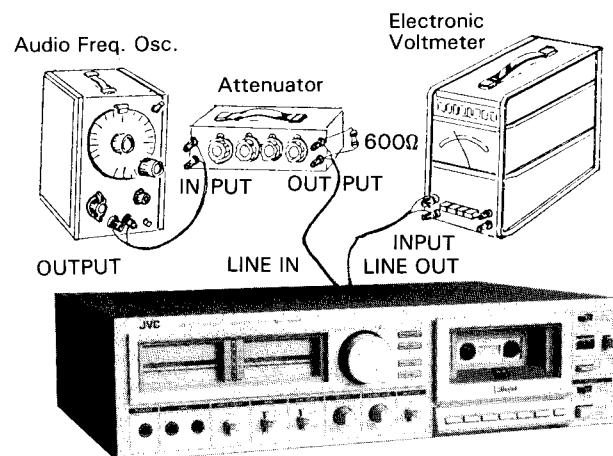


2. Mechanical adjustment


- 1) Gauge for checking the head position.
- 2) Torque gauge.
- 3) Blank tape (C-120) for tape running checker.

[II] Mechanical adjustment


Head adjustment

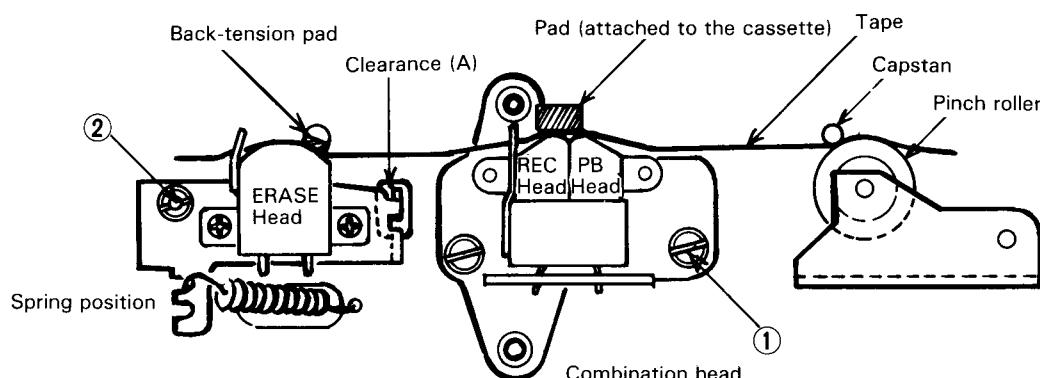

1. After installing the specified parts in the appropriate positions:
 - A. Snug screw ① gently, then back off about two turns. This makes the heads nearly horizontal.
 - B. Snug screw ② gently, then back off about one turn. This will roughly position the tape in the center of the tape path.
 For tightening screw ②, use a home make screwdriver, filed down to the specifications shown below. The same screwdriver can be used to tighten screw (1).



2. Make sure that the moving part of the erase head assembly moves smoothly around the pivot of screw ② and also confirm that there is enough clearance (A) in the play mode.
3. Next, make an operational adjustment. Load a C-120 cassette and adjust the height of the erase head by turning screw ②. Watching that the tape does not curl at the guides of both the combination and erase heads is indication of proper adjustment.

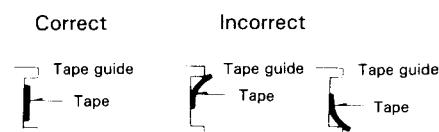

Item	Adjustment	Adjusting point	Standard value	Remarks
Adjusting motor speed	Connect a speed meter to the LINE OUT terminals. Play back the VTT-656 test tape. Adjust the semi-fixed resistor on the motor P.W. board until the reading of the speed meter is 3000Hz.	Semi-fixed resistor on the motor P.W. board	3000Hz	If the speed meter functions as a wow and flutter meter, also, connect the deck to the INPUT terminals of the meter.
Checking play-back torque	Employ a torque testing cassette tape for the checking, or remove the cassette cover and use a torque gauge.		40—70 gr-cm	If the standard torque is not obtained, replace the take-up disc assembly.
Checking fast forward torque	Measure the torque in the fast forward mode in the same manner as in the above.		More than 70 gr-cm	If the standard torque is not obtained, perform the following. 1. Clean the capstan belt, the idler circumference, the motor pulley, the take-up reel disc circumference, the flywheel circumference, etc. 2. Replace the belt and idler.
Checking re-wind torque	Measure the torque in the rewind mode in the same manner as in the above.		More than 70 gr-cm	If the standard torque is not obtained, clean the capstan belt, idler, motor pulley, flywheel circumference, rewinding idler circumference, left reel disc circumference, etc.
Checking wow and flutter	Connect a wow and flutter meter to the LINE OUT terminals. Play back the VTT-656 test tape. Check to see if the reading of the meter is within 0.04% (WRMS).			If the reading becomes moving value even if conforming to the standard, a re-claim may be raised. Repairs are necessary.

[III] Repair of wow flutter

If wow and flutter increase, check the following points.
If there is defect in revolving parts, the wow and flutter generated will increase in proportion to the number of revolutions.

Play a 3000Hz test tape, and defective part can be detected from the sound.

Section	Trouble	Repair
Capstan and flywheel	Capstan shaft has excessive run-out Flywheel turns heavily. (shaft seizure, thrust play, etc.)	Replace flywheel. Clean the capstan shaft and the groove in the flywheel. Apply oil to the metal position. Replace the capstan assembly.
Pinch roller	Rough rotation (Deformation scratches, or dust) The angular position of the pinch roller is not correct. The pinch roller pressure is not correct.	Replace pinch roller, or pinch roller spring. Clean the pinch roller or apply oil to the rotary shaft. Adjust the pinch roller so that it is parallel with the capstan shaft. Replace the pinch roller spring.
Belt	Belt has undue run-out. Belt is dirty or slippery.	Clean the belt. Replace the belt.
Back tension	Back tension is irregular, or back tension is too strong.	Replace back tension spring (under supply disc).
Motor	Motor shaft has undue run-out. Motor pulley is oily and dusty.	Replace motor. Clean motor pulley.


Damping gear oil

Oil employed — Torque grease specified by JVC (KANTO KASEI GP-608)
Applying method — Apply in both concaved sections as shown in the figure.




[IV] Adjustment Location of Electrical Circuit

Power Supply P.W. Board

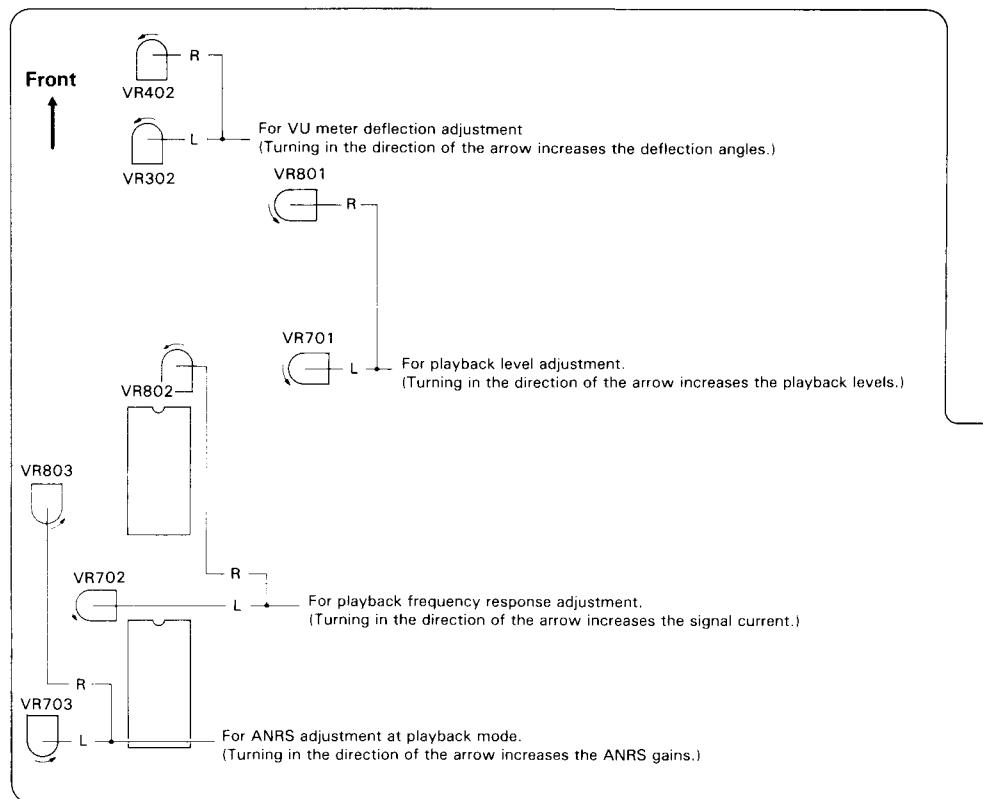

Main P.W Board

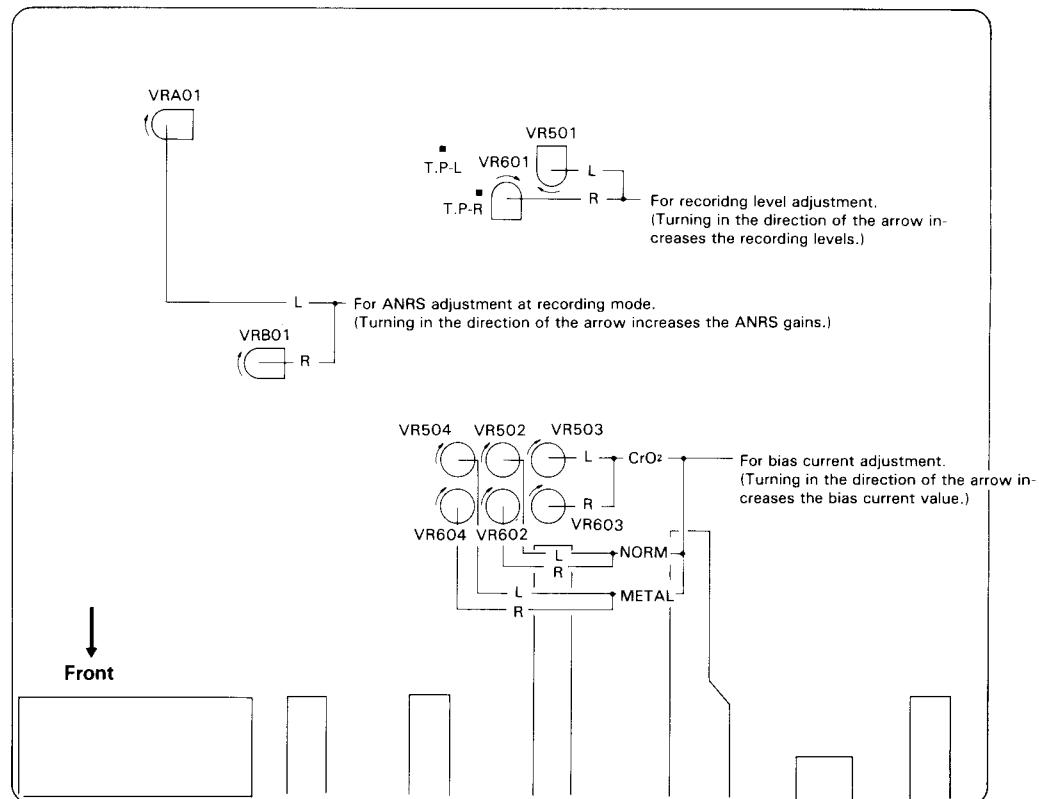


[V] Electrical circuit adjustment procedure


In the steps marked by an asterisk (*), adjustment should be performed, however, only checking is sufficient with steps other than those.

Adjustment should be performed in the order of steps 1, 2, 3


Perform these adjustments with the ANRS switch set to OFF and with the OUTPUT level control set max.

Step	Item	Adjustment	Adjusting point	Standard value	Remarks
1 *	Adjusting playback level	1. Play back the VTT-664 Reference tape (1kHz) with Tape select switch set to the NORMAL position. 2. Adjust VR701 and VR801 until the LINE OUT becomes about -8dBs.	VR701 801	-8dBs (0.3V)	This adjustment becomes necessary when a change in playback level results (for example, due to head replacement).
2 *	Adjusting playback frequency response	Play back test tape, TMT-6002N for following againstment. 1) Adjust VR702, 802 so that 10kHz signal and 1kHz signal gains become flat response.	VR702 802	Reference frequency; 1kHz 0±2dB at 10kHz	
3 *	Adjusting VU meter sensitivity	1. Set the cassette deck to its source mode. 2. Apply a 1kHz, approx. -10dBs signal to the LINE IN terminals. 3. Adjust the recording level controls until the signal is available at -8dBs at the LINE OUT terminals. 4. Adjust VR302 and VR402 until the VU meters deflect to 0.	VR302 402	OVU	Perform the adjustment when the parts are replaced.
4 *	Adjustment record/ playback frequency response	Record 1kHz, 50Hz and 12.5kHz signals at an input level of OVU -20dB. Play back the tape. Check to see that the 50Hz and 12.5kHz signal output deviations fall within the standard range, using the 1kHz signal output as a reference. (It is basically desirable that the 1kHz, 50Hz and 12.5kHz signal outputs are the same.) Adjust VR502 and VR602 (for a normal tape), VR503 and VR603 (for a chrome tape), VR504 and VR604 (for a metal tape) until the indicated deviation of the 12.5kHz signal output from the 1kHz signal output becomes 0.	For normal tape: VR502 602 For chrome tape: VR503 603 For Metal tape: VR504 604	Reference frequency; 1kHz 0±3dB at 50Hz 0±3dB at 12.5kHz	<p>1. Bias current adjustment for a cassette deck should generally be performed referring to the record/playback frequency response. This is because the frequency response of a cassette deck depends more greatly upon the bias current than does that of an open reel deck.</p> <p>The current measuring method described below is an alternative one.</p> <p>2. If the bias current is not properly adjusted, the record and playback characteristics become as shown below.</p>

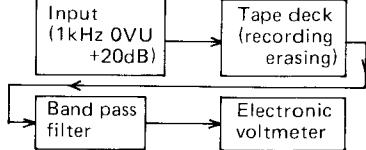Step	Item	Adjustment	Adjusting point	Standard value	Remarks
5	Adjusting recording level	<ol style="list-style-type: none"> Apply a 1kHz, approx. -10dBs signal to the LINE IN terminals. Adjust the recording level controls until the signal is available at -8dBs at the LINE OUT terminals. After checking to see if the VU meters point to 0, record the signal applied to both left and right channels using a normal tape. Play back the recorded part. Perform the recording signal adjustment with VR501 and VR601 so that the VU meters deflect to 0. 	VR501 601	0 VU	The level difference between left and right channels for normal tape, chrome tape and metal tape should be less than 1dB (1VU). Perform the adjustment using a normal tape, level difference between recording and playback for CrO ₂ and metal tapes should be less than 1.5dB, and that between left and right channels should also be less than 1dB.
6	Checking record/playback signal distortion	<ol style="list-style-type: none"> Record a 1kHz signal so that OUT-PUT level become -8dBs and VU meters deflect to 0. Play back the recorded part. Check the output with a distortion meter to see if the value conforms to the standard value. 		Normal tape: Less than 2.5% CrO ₂ tape: Less than 3% Metal tape Less than 2%	Be sure to perform this adjustment following bias current and recording level adjustments.
7	Checking signal to noise ratio in recording/playback	<ol style="list-style-type: none"> Record a 1kHz, OVU signal. Stop the input by disconnecting from the terminal to perform non-signal recording. Play back the recorded part. Measure the OVU recording output and the non-signal recording output for comparison using an electronic voltmeter. Check to see if the value conforms to the standard value. 		Normal tape: More than 42dB Chrome tape: More than 42dB	Apply an output (-72dBs) to the MIC terminals with the recording level controls set to maximum so that the VU meters deflect to 0.
8	Checking erasing coefficient	<ol style="list-style-type: none"> Apply a 1kHz signal to the LINE IN terminals. Adjust the recording level controls until the VU meters deflect to 0. Perform recording with the signal enhanced by 20dB. Erase a part of the recording. Measure the output difference between the erased part and non-erased part to compare with an electronic voltmeter. 		More than 65dB	For the measuring, connect a band pass filter between the deck and the electronic voltmeter.  Used test tape; Metal tape
9	Adjustment the Super ANRS circuit (Super ANRS circuit for recording mode)				
	<ol style="list-style-type: none"> Remove the bias-cut connector on the main P.W. board to stop the bias oscillation. Fully turn the semi-fixed resistors VRA01, B01 in the opposite direction of the arrow shown on the P.W. board. (If they have been roughly adjusted, there is no need to turn them.) Set the MONITOR switch of the deck to SOURCE position with ANRS switch set to OFF. Apply a 1kHz, -10dBs signal to the LINE IN terminals. Adjust the INPUT LEVEL control until the output at test points, TP-L and TP-R are -5.5dBs. (Be sure not to move the INPUT LEVEL control positions during this adjustment.) and then the OUTPUT level is approx. -5dBs. (Corresponding to +3VU on the VU meters.) Decrease the input signal to 40dB (its signal become -50dBs) with an attenuator. (The output at the test point is -45.5dB.) Adjust the VRA01 (for left channel) and the VRB01 (for right channel) with ANRS switch set to ON until the outputs at the test points are -39.8dBs. (The output difference is 5.7dB with ANRS switch set to ON from OFF.) Check to see if the output at test points is -22dB ± 1dB with the input 5kHz, -30dBs signal. (Its signal adjust to 20dB with an attenuator.) (The output difference with ANRS switch set to ON from OFF is 3.5dB ± 1dB) 				

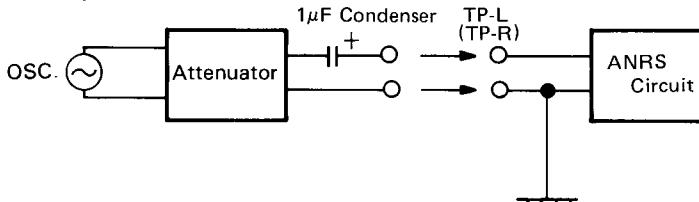
Step	Adjustment
	<p>8. Check to see if the test point output difference between that with ANRS switch set to ON and that set to OFF is less than ± 0.5dB, with the input a 1kHz, -10dBs signal. (its signal adjust to 20dB with an attenuator.)</p> <p>9. Set ANRS switch to SUPER from OFF when input 10kHz signal to LINE IN. Check LINE OUT level so that it become from -5.5dBs to -11.5dBs ± 1dB.</p>
	(Super ANRS circuit for playback mode)
10.	Apply the Oscillation signal with connecting a condenser ($1\mu F$) to test points TP-L and TP-R for playback mode.
	
11.	Fully turn the semi-fixed resistors VR703, 803 in the direction of the arrow shown on the P.W. board. (If they have been roughly adjusted, there is no need to turn them.)
12.	Set the deck to playback mode with ANRS switch set to OFF. (Use the non-tape cassette.)
13.	Apply a 1kHz signal to the LINE IN terminals. Adjust an attenuator until the LINE OUT levels become -5 dBs. (This level is caliblation point.)
14.	Adjust the input signal to 34.3dB with an attenuator, and then LINE OUT level become -39.3 dBs.
15.	Adjust the VR703 (for left channel) and the VR803 (for right channel) with ANRS switch set to ON until the LINE OUT levels become -45 dBs. (The output difference is 5.7dB with ANRS swith to ON from OFF.)
16.	Apply 5kHz signal with the ANRS switch set to OFF. Adjust an attenuator so that LINE OUT level become -21.5 dB.
17.	Check to see if the LINE OUT level is -25 dBs ± 1 dB with ANRS switch set to ON from OFF.
18.	Apply 1kHz signal of caliblation level with the ANRS switch set to ON from OFF, check to see if the LINE OUT level is less than -5 dBs ± 0.5 dB.
19.	Set the ANRS switch to SUPER, apply 10kHz signal to the LINE IN terminals. Adjust an attenuator so that LINE OUT level become check to see if the LINE OUT level is -5 dB ± 1 dB with ANRS switch set to OFF.
20.	Play back the reference tape VTT-664 and check output level so that it less than ± 1 dB when ANRS switch set to ON from OFF.
21.	To operate the bias oscillation, insert +B wire connector of the bias circuit.

Wiring Supplementary (refer to page 21 and 22)

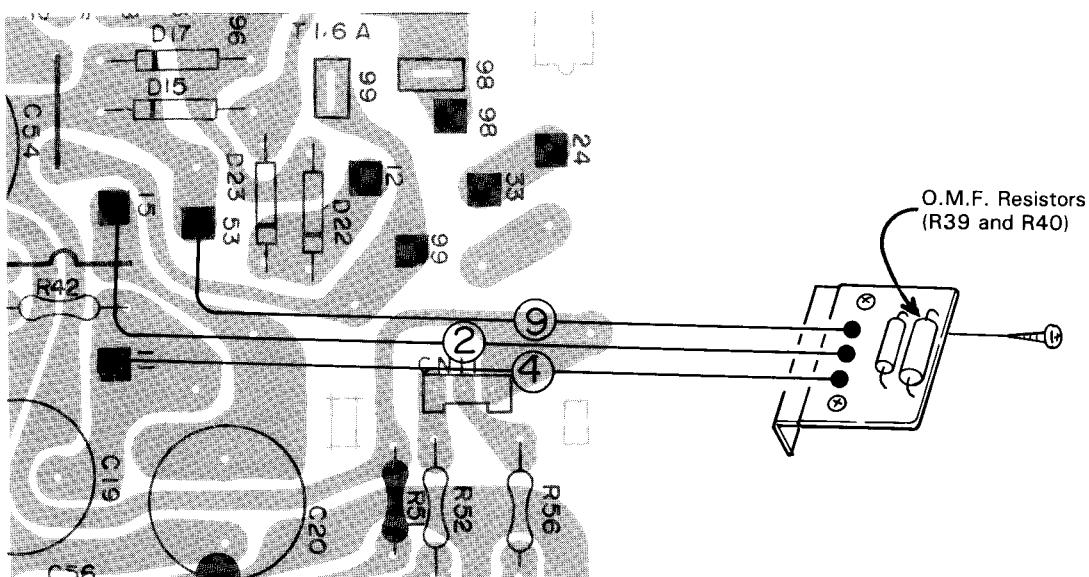


Block Diagram

Amplifier circuit

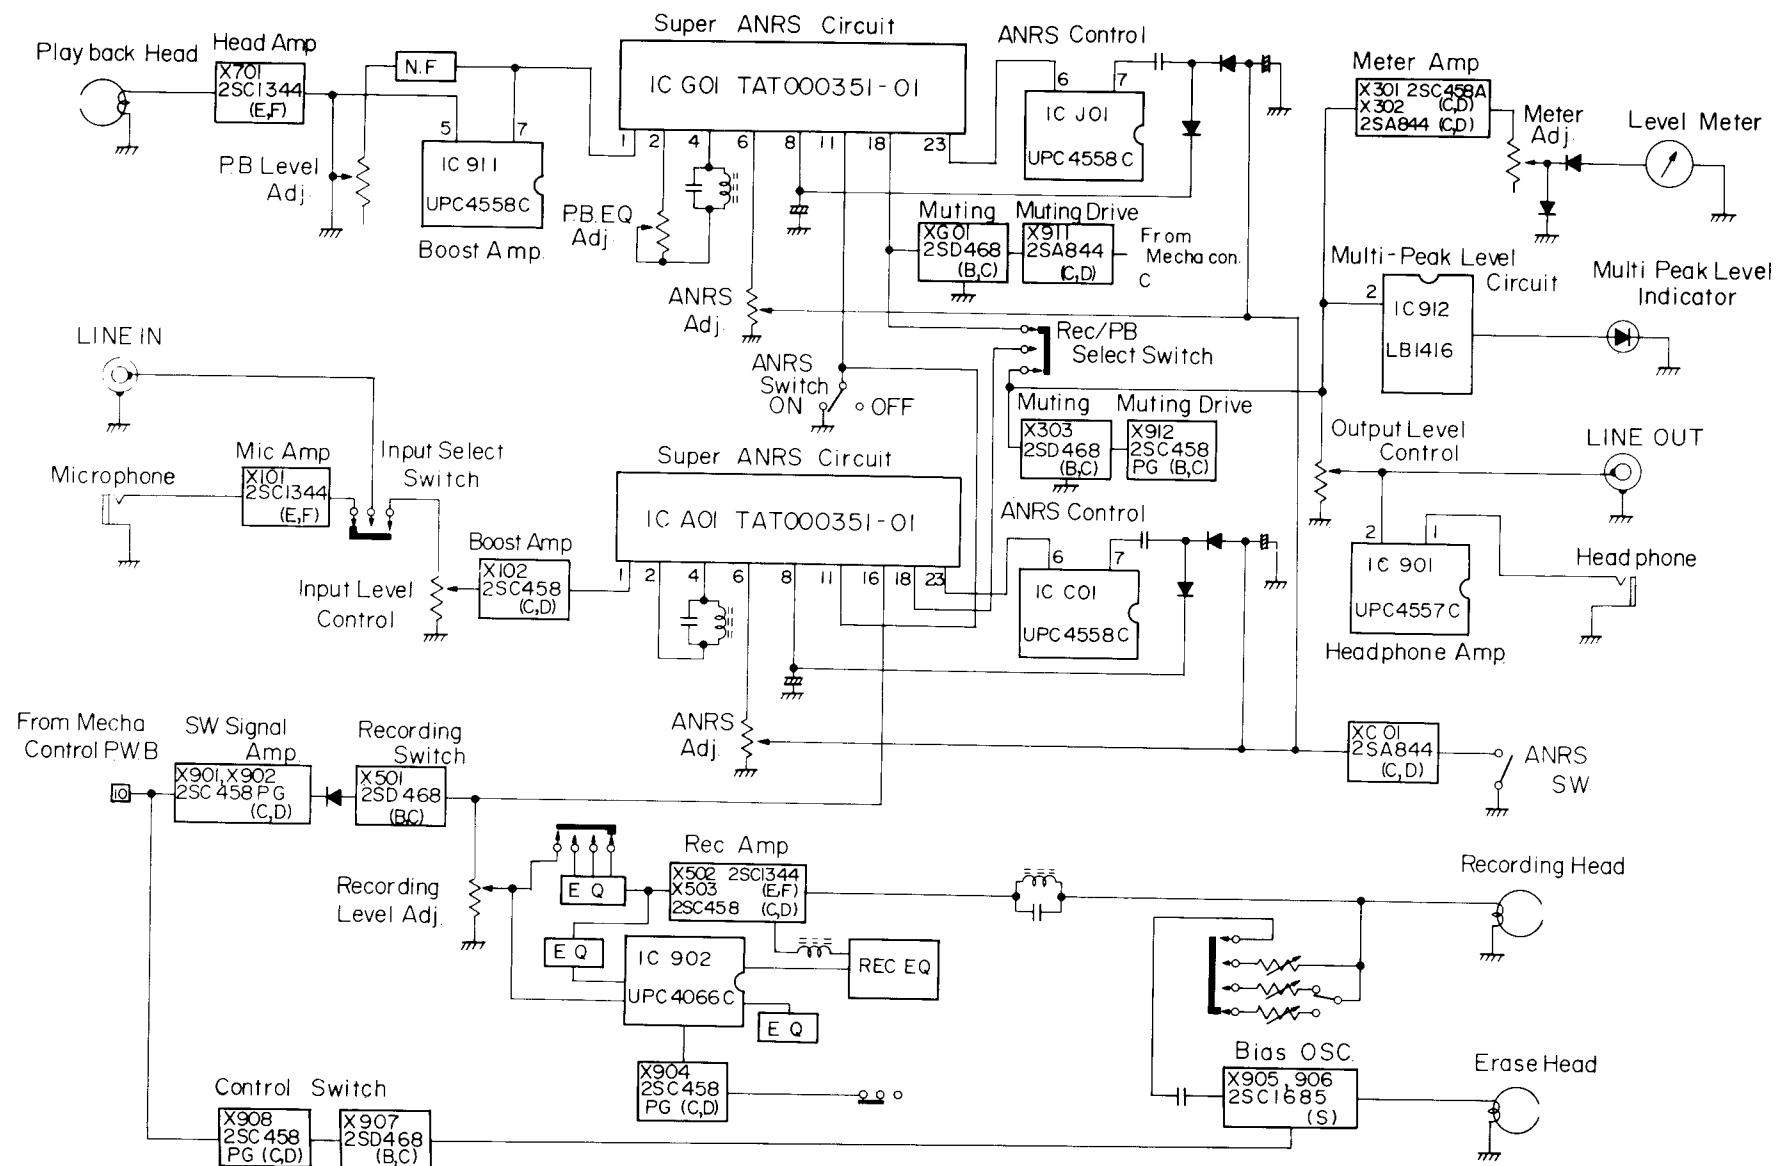


Mechanical control circuit

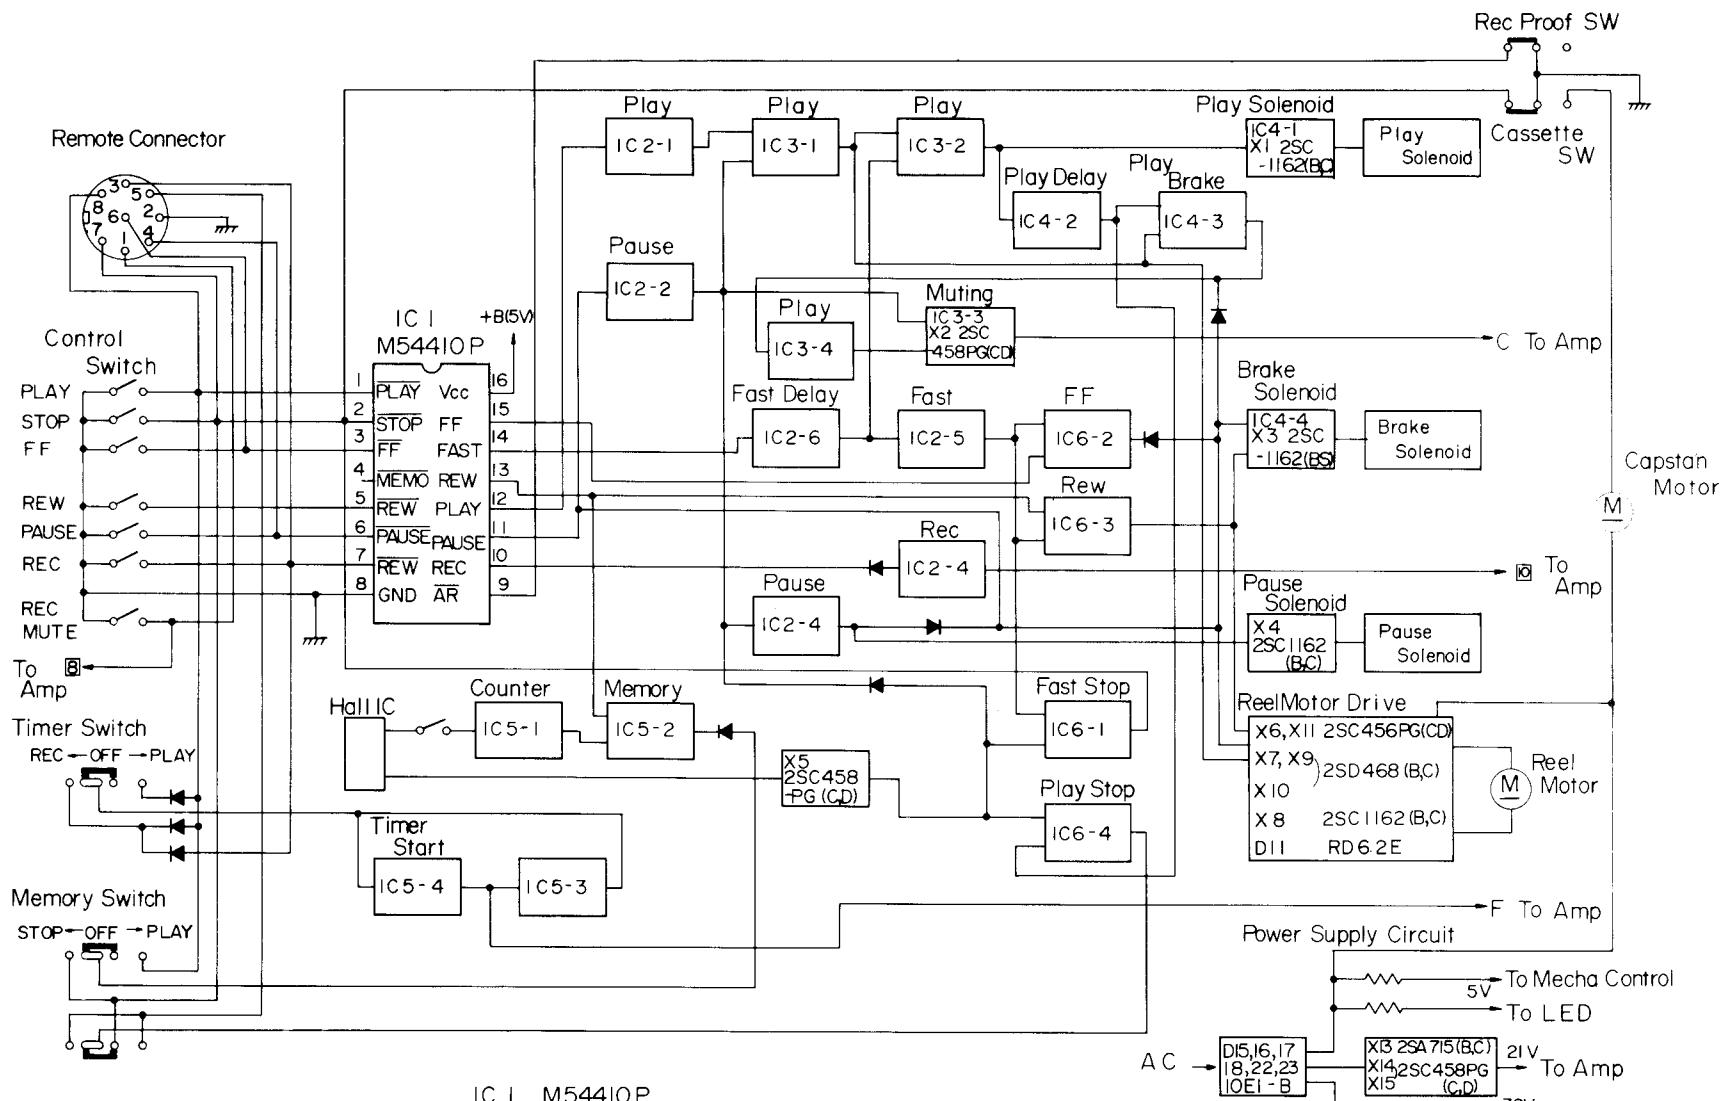

IC 1 M544IOP
 IC 2 HD7404P
 IC 3 HD7400P
 IC 4 HD7400P
 IC 5 HD7400P
 IC 6 HD7403P


Integrator Circuit

IC A01, B01 TAT000351-01 Super ANRS circuit
G01, H01 (Top view)




IC C01 UPC4558C ANRS control amp. circuit
J01

(Top view)

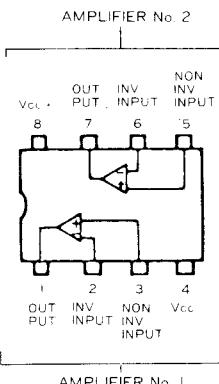

AMPLIFIER No. 1

Equivalent circuit (1/2)

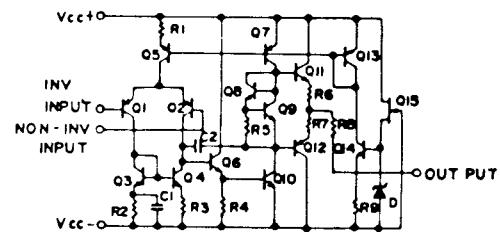


IC901 UPC4557C Headphone amp.
Top view is the same as
UPC4558C.


Equivalent circuit is the same as UPC4558C except R8 only.

IC903 LB1416 Multi-peak level circuit

(Top view)

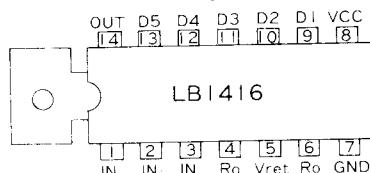

Equivalent circuit

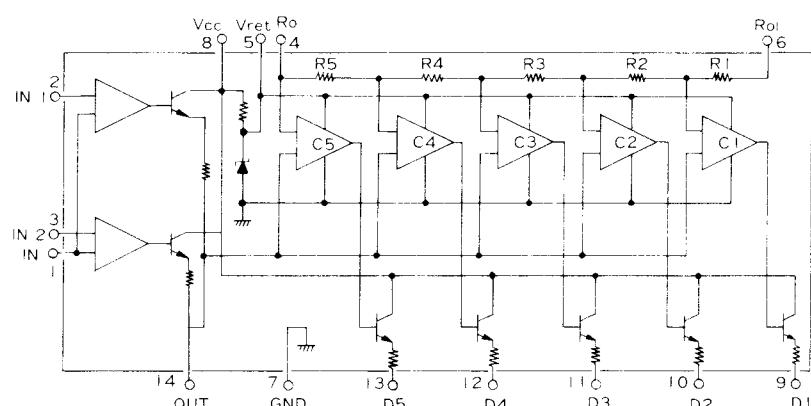


(Mecha. control)


IC1 M54410P See the service manual of KD-85A/B/C/E/J/U (No. 4165 — page 7).

IC3,4,5 HP7400P

(Top view)

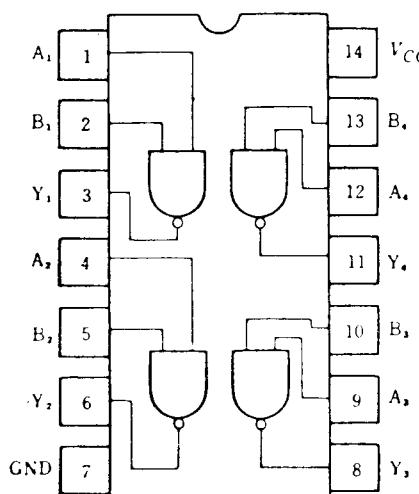

Equivalent circuit (1/4)

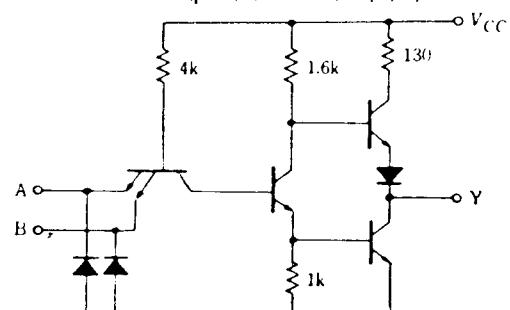


IC2 HD7404P


IC6 HD7403P

} See the service manual of KD-A7 A/B/C/E/J/U (No. 4185 — page 17)

Standard Schematic Diagram of KD-A77 (Amplifier circuit)

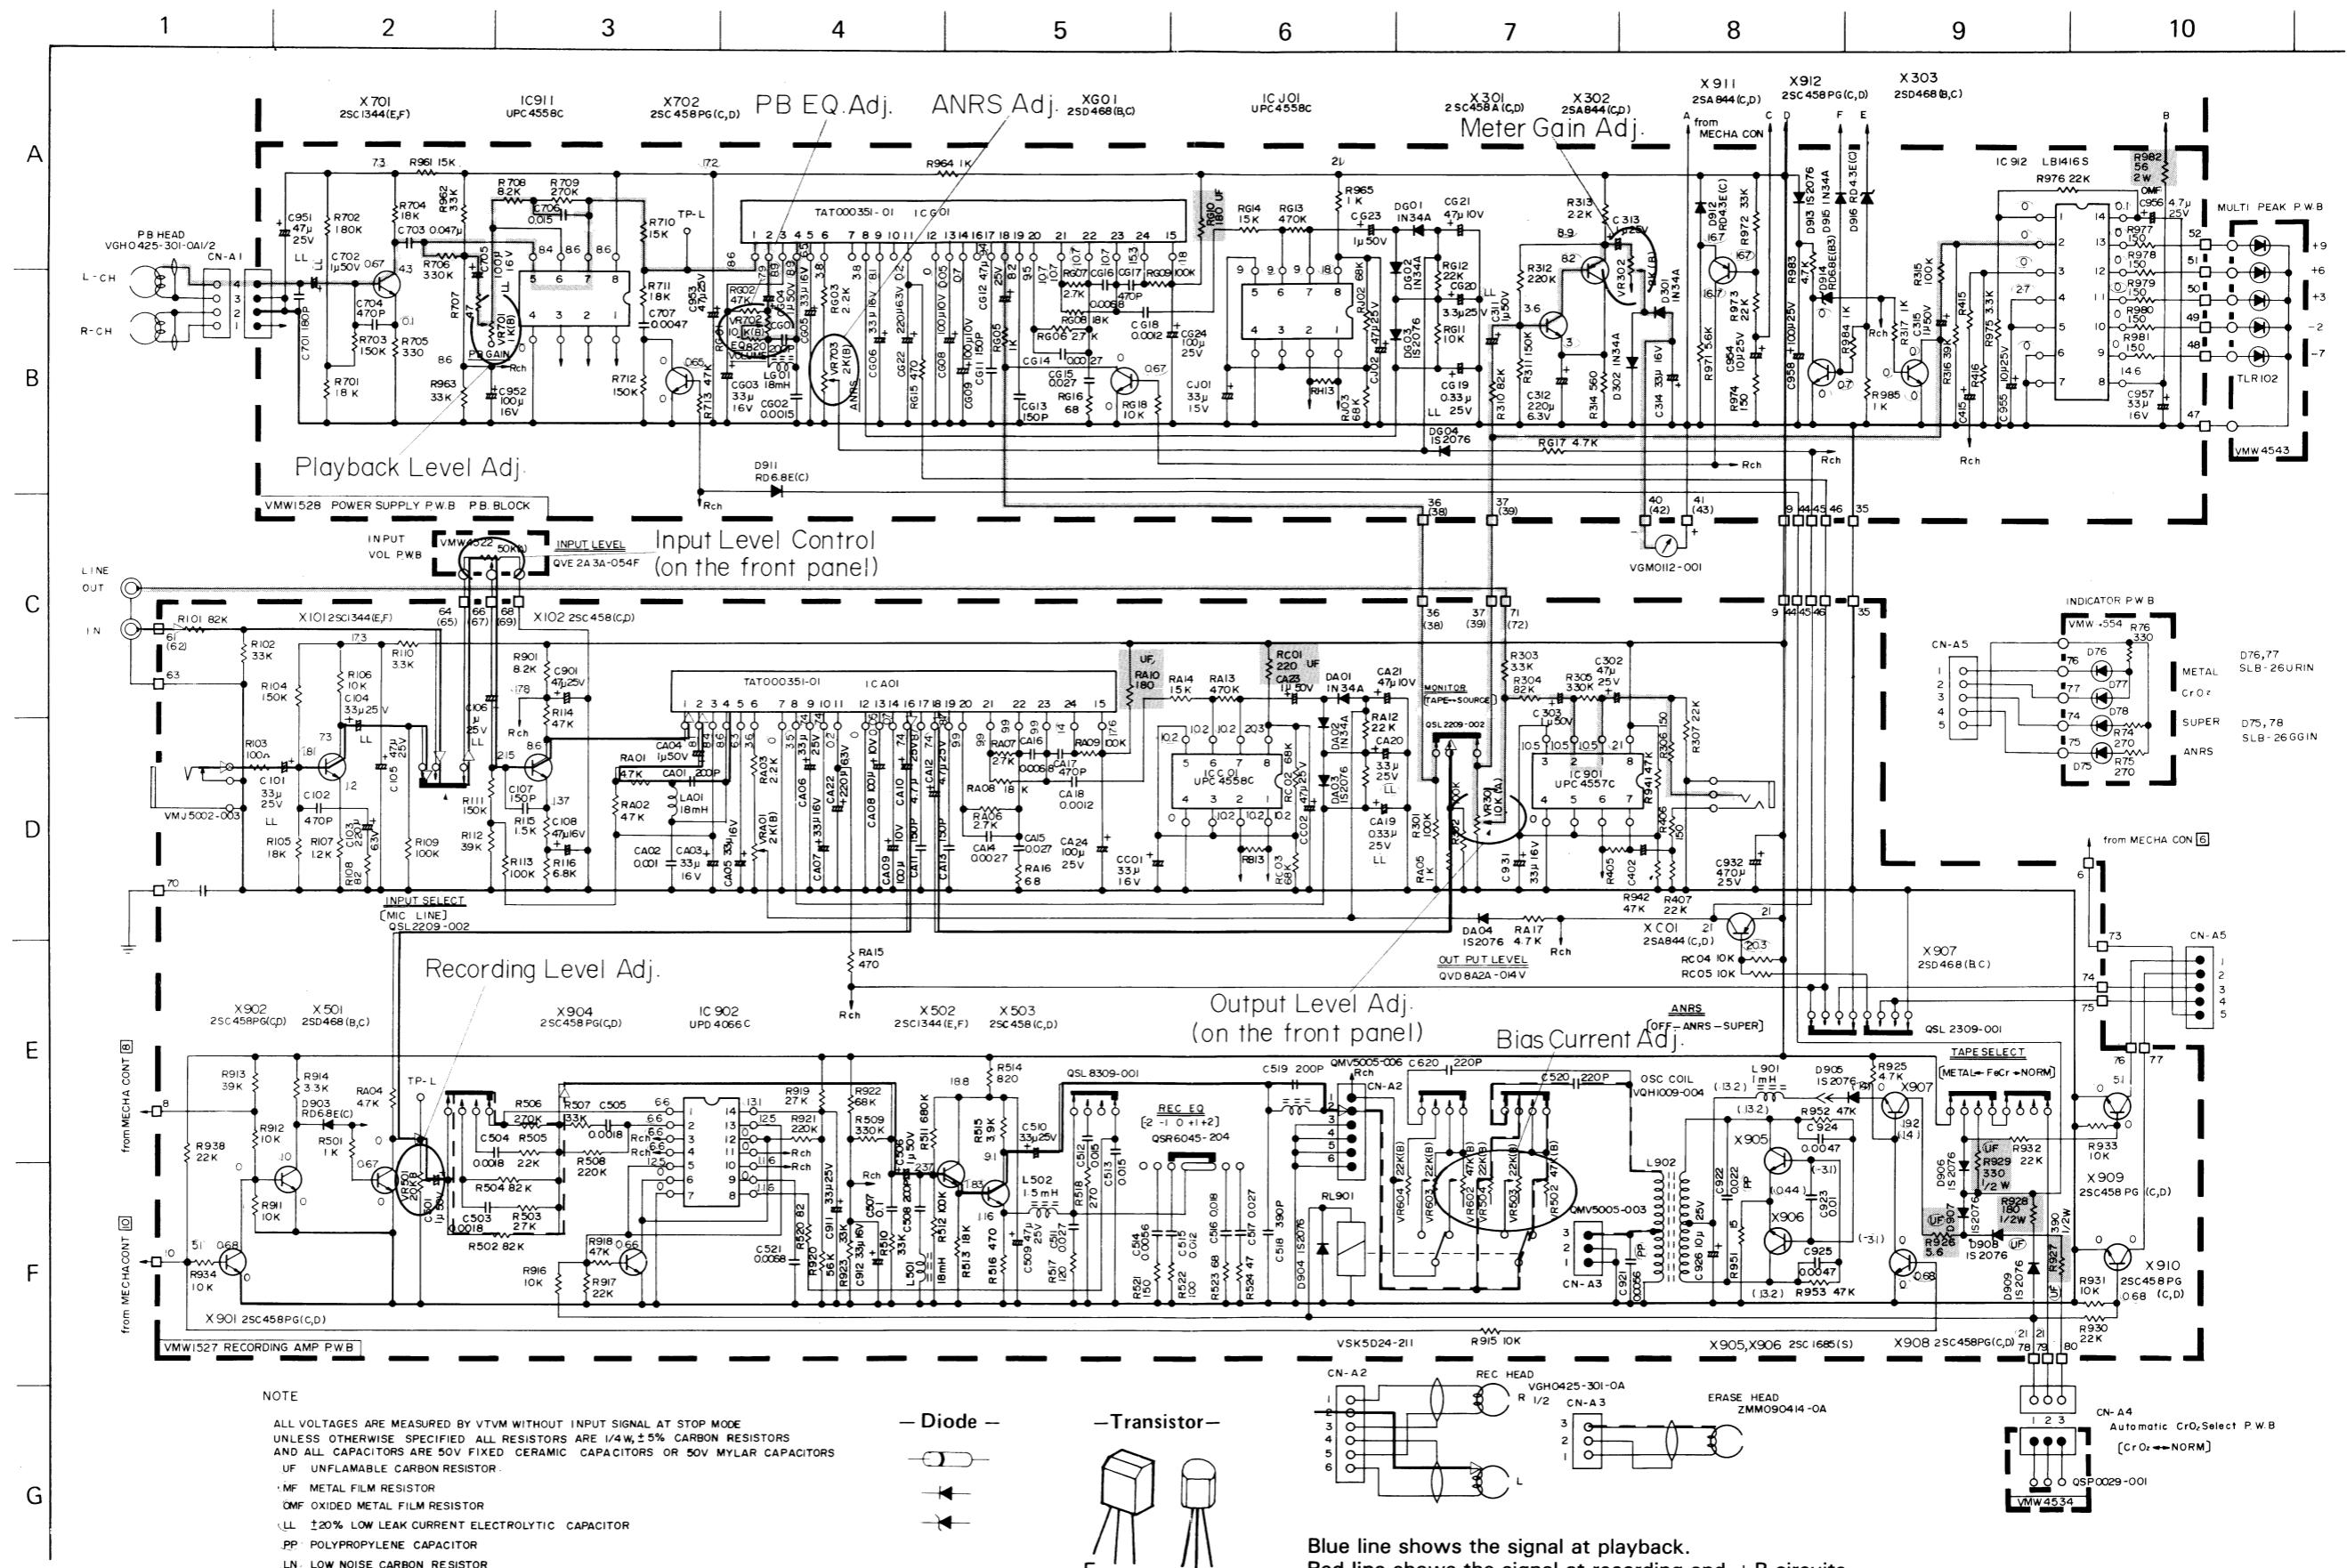


ALL VOLTAGES ARE MEASURED BY VTVM WITHOUT INPUT SIGNAL AT STOP MODE
UNLESS OTHERWISE SPECIFIED ALL RESISTORS ARE 1/4W, 1% CARBON RESISTORS
AND ALL CAPACITORS ARE 50V FIXED CERAMIC CAPACITORS OR 50V MYLAR CAPACITOR
UF UNFLAMMABLE CARBON RESISTOR
MF METAL FILM RESISTOR
OMF OXIDED METAL FILM RESISTOR
LL ±20% LOW LEAK CURRENT ELECTROLYTIC CAPACITOR
PP POLYPROPYLENE CAPACITOR
LN LOW NOISE CARBON RESISTOR
PS POLYSTYRENE CAPACITOR
Ta TANTALUM SOLID ELECTROLYTIC CAPACITOR




Blue line shows the signal at playback.
Red line shows the signal at recording and +B circuits.
 parts are safety assurance parts. When replacing


Standard Schematic Diagram of KD-A77 (Mecha. control circuit)

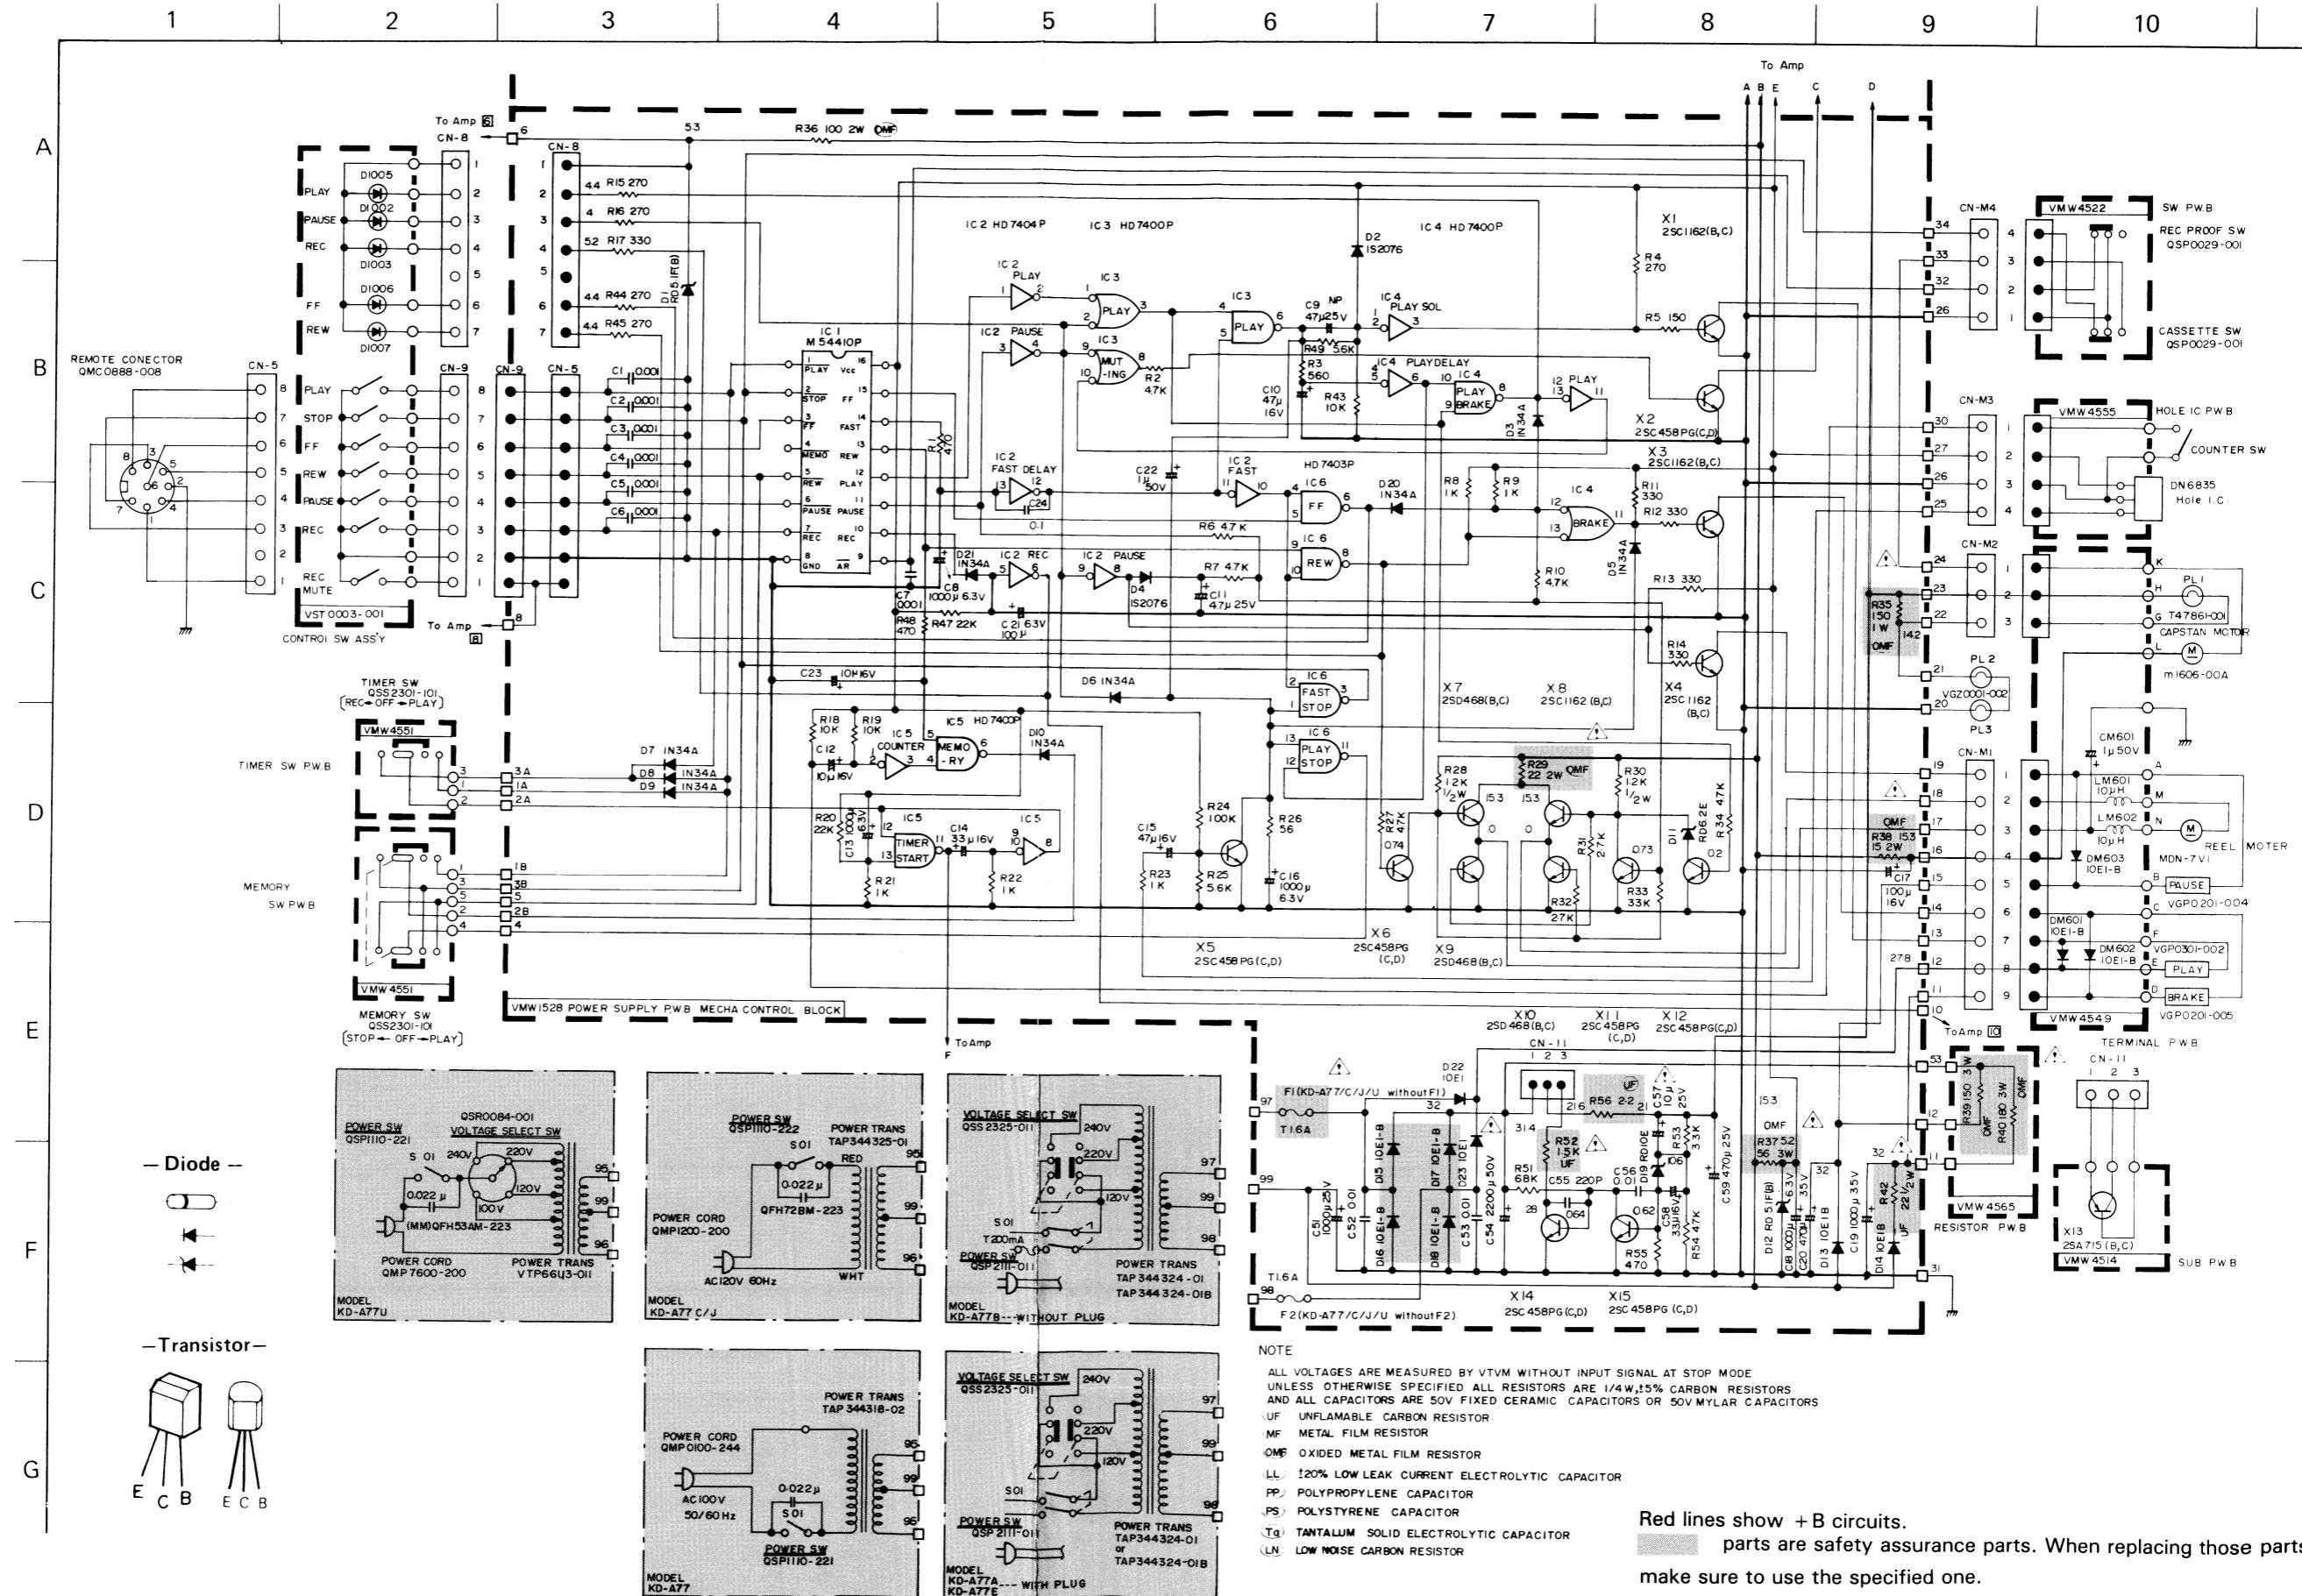

Wiring Connection (1) of KD-A77

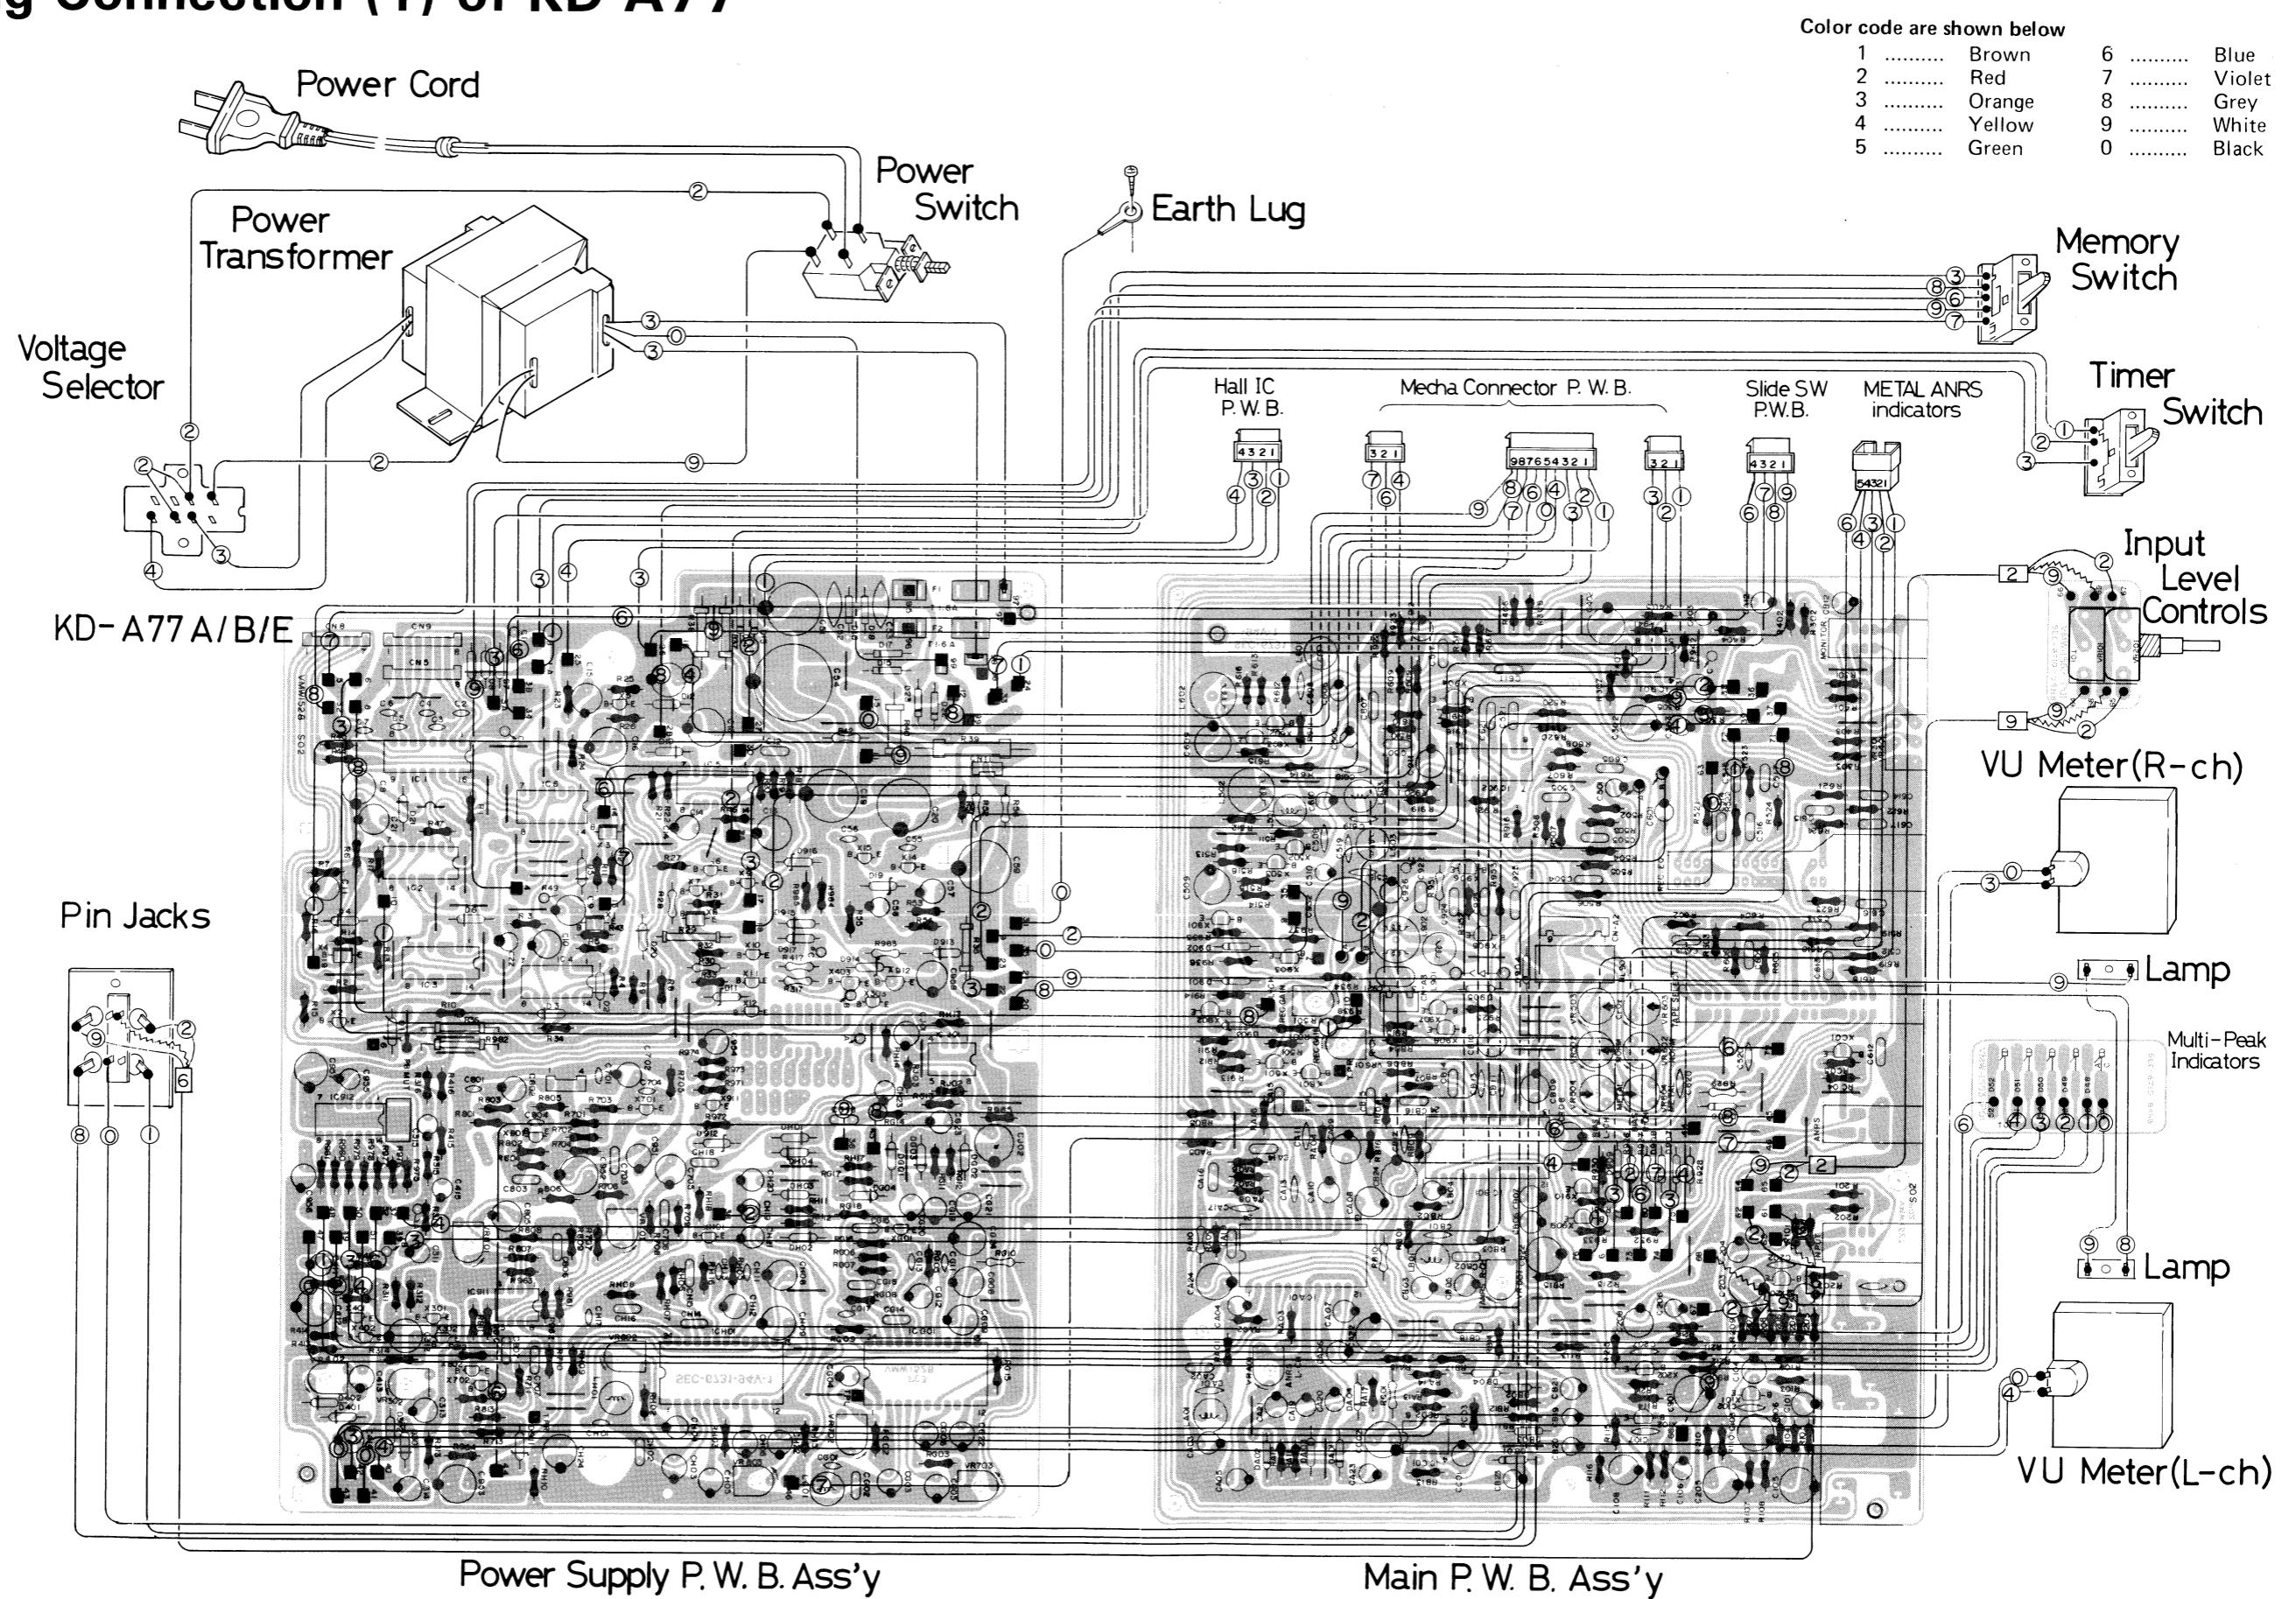

Wiring Connection (2) of KD-A77

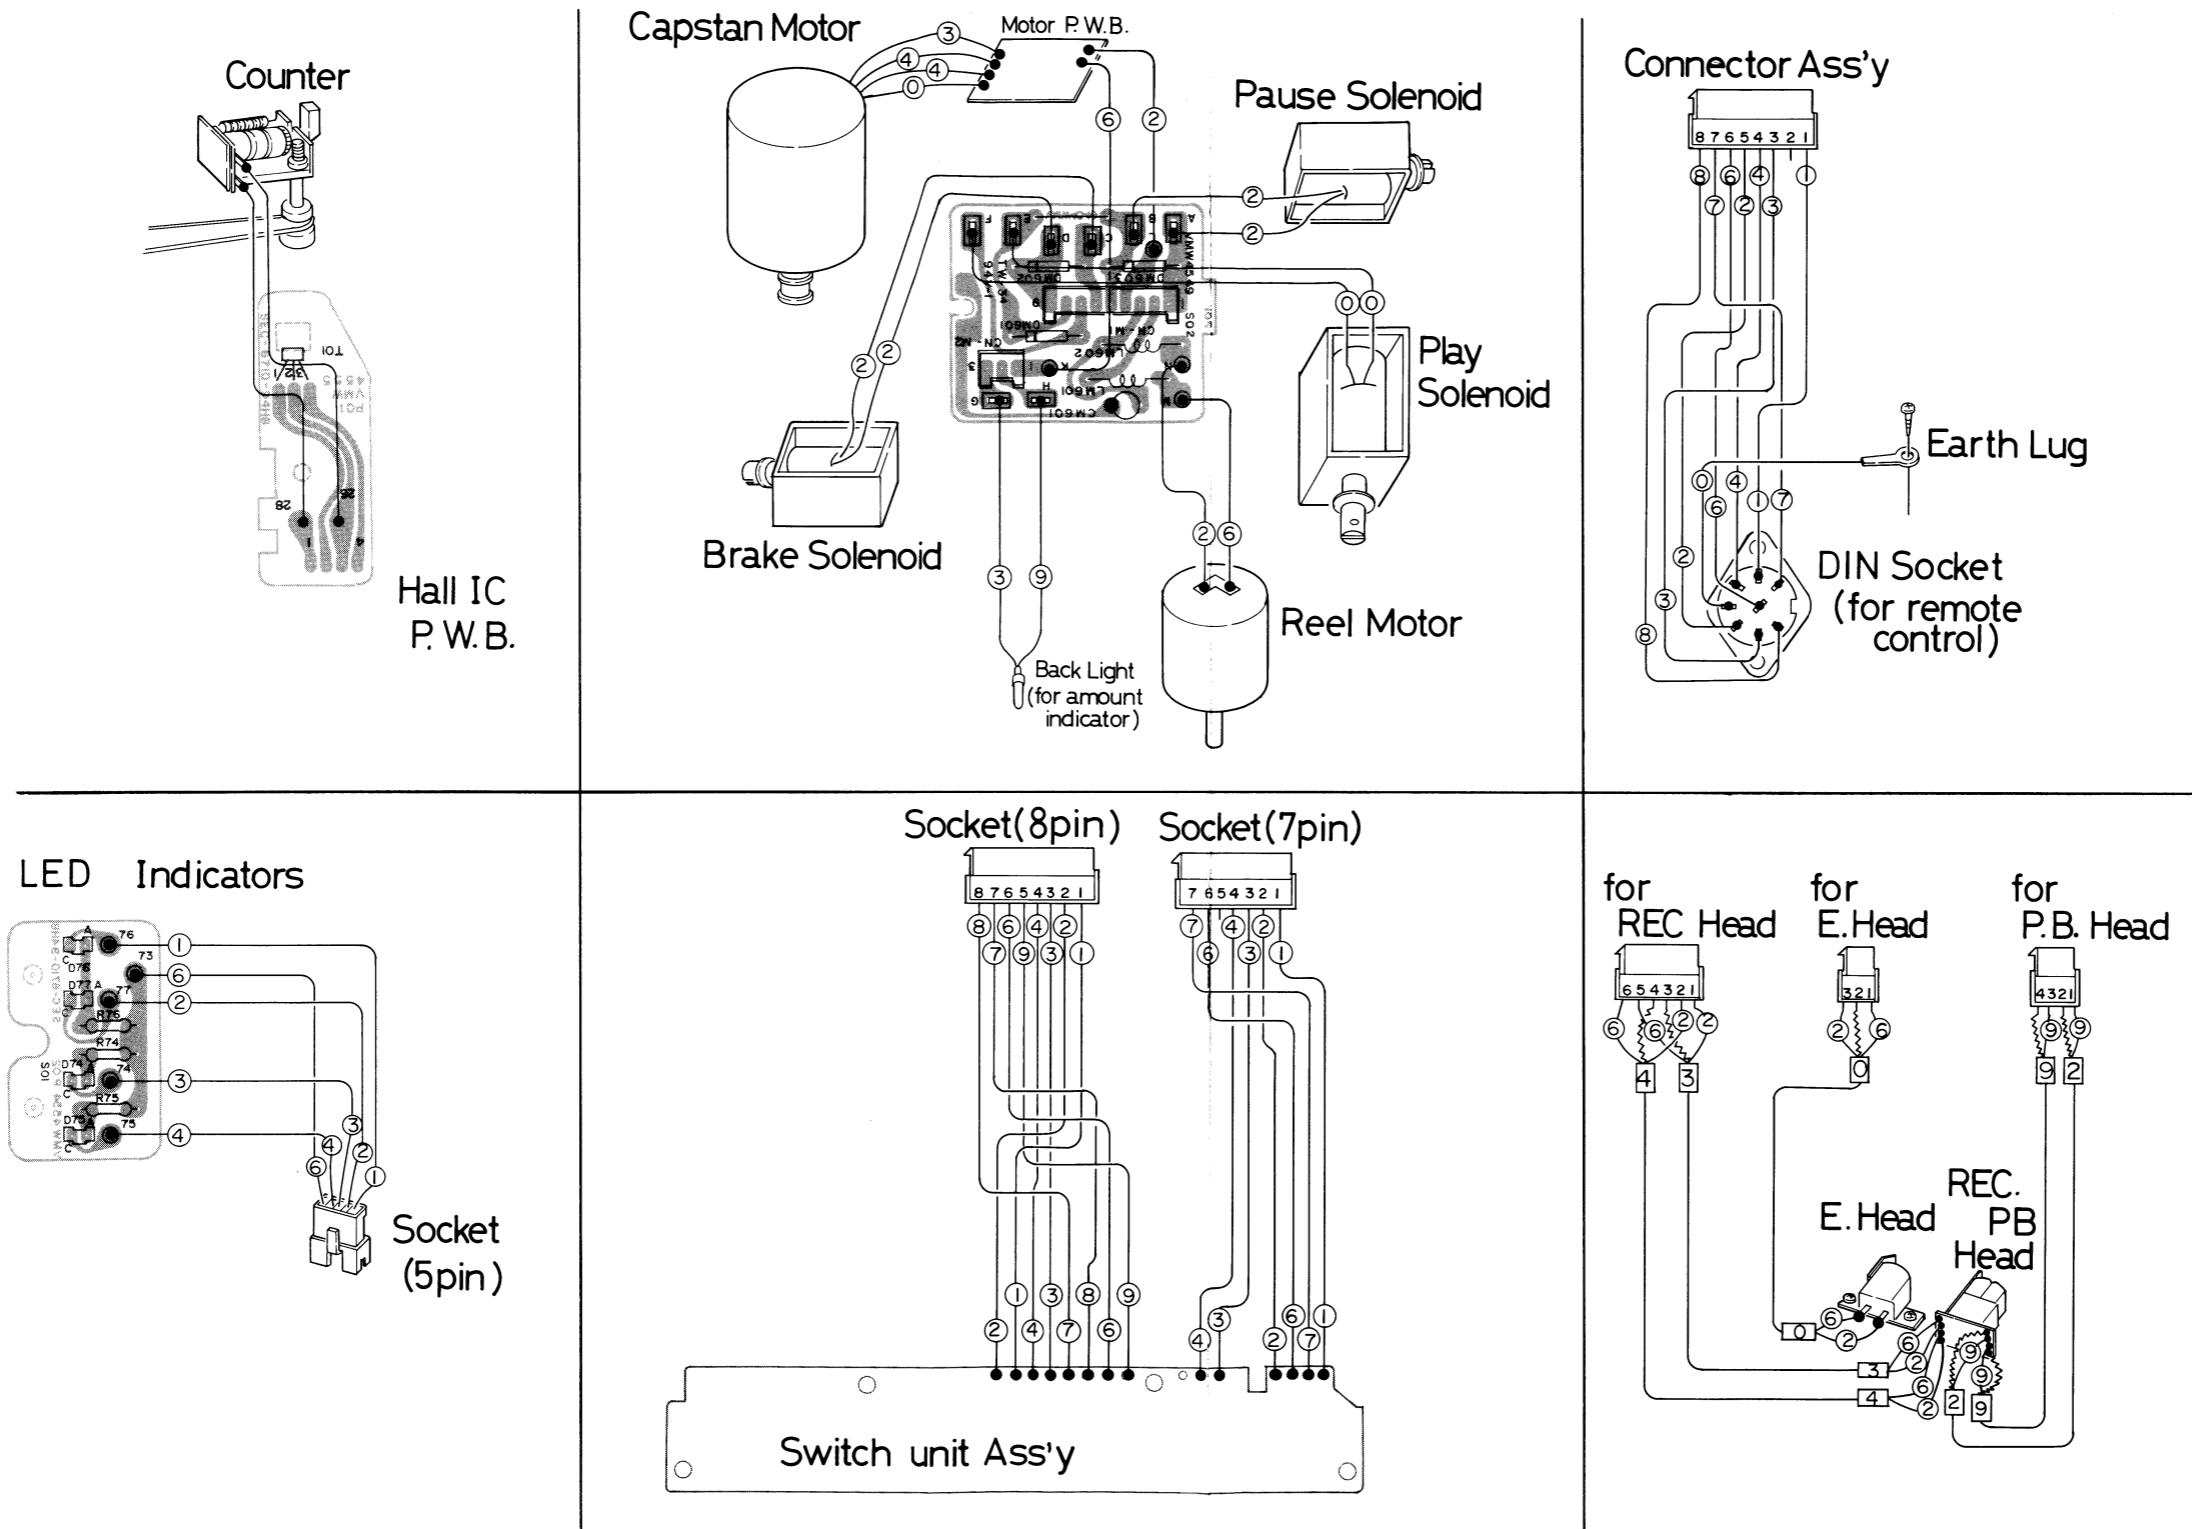

**Enclosure Ass'y and Electrical Parts List
(except P.W. Board Parts)**

parts are safety assurance parts.


When replacing those parts, make sure to use the specified one.

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
1	VKL4522-001	Joint Bracket		1
2	VKL4169-00A	Gear Frame Ass'y		1
3	VKS4109-004	Brake Drum		1
4	VKS4108-003	Spur Gear		1
5	VKW3001-006	Spring		1
6	VKS4110-002	Brake Arm		1
7	VKZ4111-001	Rubber Tire		1
8	VKL4271-001	Rubber Retainer		1
9	VKW4106-001	Torsion Spring		1
10	VKS3102-001	Rack Plate		1
11	VKH4123-001	Collar		1
12	VKL4609-00A	Arm Ass'y		1
13	*VKL3188-00C	Holder Plate Ass'y		1
14	VKL4213-002	Panel Plate		1
15	VJD4273-001	Indicator		1
16	VKZ4120-001	Sheet		1
17	VKL4507-001	Lamp Bracket		1
18	T47861-001	Pilot Lamp		1
19	VKL4380-00A	Cross Bar Ass'y		2
(20~22, 25)	ZCKDA77Y-CCA	Cassette Lid Sub Ass'y		1 set
20	VJT2035-001	Cassette Lid		1
21	VKY4156-001	Cassette Spring		2
22	VKY4159-002	Cassette Spring		1
23	VKW4153-002	Holder Spring		1
24	VKW4153-003	Holder Spring		1
25	*VJD4339-001	Head Mark		1
26	*VGM0112-001	Level Meter		2
(27~35)	ZCKDA77Y-CBF	Front Plate Sub Ass'y		1 set
27	*VJC1089-001	Front Plate		1
28	VJD4262-003	Power Escutcheon		1
29	*VJD4328-001	Knob Escutcheon		1
30	VXP4031-00B	Eject Knob Ass'y		1
31	*VKL4613-001	Knob Bracket		1
32	VKW3001-031	Spring		1
33	VJK4106-001	Counter Lens		1
34	*VJD4329-001	Lever Escutcheon		1
35	*VJD4330-001	Volume Escutcheon		1
36	*VJD3201-001	Meter Plate		1
37	*VJK3141-001	Finder		1
38	*VJD2142-002	Meter Escutcheon		1
39	*VJD4326-001	Indicator	for Multi-peak	1
40	*VJD4327-001	Indicator Holder		1
41	*VMW4554-001	P.W. Board	for Indicator	1
42	VXP3027-00B	Power Knob Ass'y		1
43	VKS4113-002	Remote Bar		1
44	VYT404-001	Lock Plate		1
45	VXS4019-001	Knob		2
46	T47818-001	Spacer		3
47	VXP3046-001	Push Button		1
48	" -002	"	for REW for FF	1
49	" -003	"	for PLAY	1
50	" -004	"	for STOP	1
51	" -005	"	for REC	1
52	" -006	"	for PAUSE	1
53	VJD3204-001	Button Case		1
54	VXP4056-001	Push Button	for Rec Mute	1
55	*VXL4088-00A	Knob Ass'y	for Rec (L)	1
56	*VXL4089-00A	"	for Rec (R)	1
57	*VXL4085-00A	"	for Output	1
58	*VXL4086-00A	"	for Rec EQ	1
59	*VXQ4017-002	Lever Knob		4
60	*VJT3046-001	Cassette Door		1
61	*VJT3032-003	Door Plate		1


Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
62	VJZ4008-001	Double Face		1
63	*VJD4331-001	3 Head Mark		1
64	*VKL1158-001	Bottom Cover		1
65	*VJF4003-001	Foot		4
66	VKL1124-002	Top cover		1
67	VKZ3001-002	Special Screw		6
68	VND4016-001	Metal Sticker		1
69	VYN2052-001GA " -002GA " -003GA " -004GA " -005GA " -006GA	Name Plate	KD-A77 B KD-A77 A KD-A77 C KD-A77 E KD-A77 J KD-A77 U	1 1 1 1 1 1
70	E48729-002	Plastic Rivet	for Name Plate	2
71	*VKL1155-001	Amp Chassis		1
72	VKL4441-001	Switch Bracket		1
73	QSP2111-011BS	Push Switch	KD-A77 B, for Power	1
	QSP2111-011	"	KD-A77 A, "	1
	QSP1110-222	"	KD-A77 C/J, "	1
	QSP1110-221	"	KD-A77 U, "	1
74	T47047-001	Condenser Cap.	KD-A77 J/U	1
75	QFA72BM-223	M.P. Capacitor	KD-A77 C, 0.022μF	1
	QFH72BM-223	M.M. Capacitor	KD-A77 J, 0.022μF	1
	QFH53AM-223	"	KD-A77 U, 0.022μF	1
76	QMG1321-002BS	Fuse Holder	KD-A77 B	1
77	QMG1321-002	"	KD-A77 E	1
	TAP344324-01	Power Transformer	KD-A77 A/E	1
	TAP344324-01BS	"	KD-A77 B	1
	TAP344325-01	"	KD-A77 C/J	1
	VTP66U3-011	"	KD-A77 U	1
78	QSS2325-011	Voltage Select Switch	KD-A77 A/E	1
	QSS2325-011BS	"	KD-A77 B	1
	QSR0084-001	"	KD-A77 U	1
79	QMF51A2-R20LBS	Fuse	KD-A77 B	1
80	TAZ000509-08	Fuse Seal	KD-A77 B	1
81	VKZ4001-011	Wire Clamp		5
82	VKL1156-001	Front Bracket		1
83	VMW4551-001	Switch P.W.B.	for Timer & Memory	2
84	QSS2301-101	Slide Switch	" "	2
85	VKL4641-001	Chassis Bracket	for Power Supply P.W.B.	2
86	QVE3A3A-054F	Variable Resistor		1
87	*VMW4552-001	P.W.B.	for V.R.	1
88	*VST0003-001	Switch Unit Ass'y		1
89	*TLR102S	LED	for REC	1
90	TLG102S	"	for PLAY, FF, REW, PAUSE	4
91	VKS4167-001	Spacer		5
92	VKS3000-001	P.C.B. Support		3
93	*VKL1157-001	Rear Bracket	KD-A77 A/B/E/U	1
	VKL1157-002	"	KD-A77 C/J	1
94	QMC0888-008	DIN Jack Ass'y	for Remote	1
95	QMP2560-200	Power Cord with Plug	KD-A77 A	1
	QMP9017-008BS	Power Cord	KD-A77 B	1
	QMP1200-200	Power Cord with Plug	KD-A77 C/J	1
	QMP3900-200	Power Cord	KD-A77 E	1
	QMP7600-200	Power Cord with Plug	KD-A77 U	1
96	QHS3876-162	Strain Relief		1
	QHS3876-162BS	"	KD-A77 B	1
97	TAJ331301-03	Pin Jack Ass'y		1
98	TAA345532-01	Circuit Board		1
99	VKS2104-001	Lamp Hood		1
100	QMG1121-003	Fuse Holder	for Lamp	2
101	VGZ0001-002	Lamp Ass'y		2
102	*VMW4553-001	P.W. Board	for LED	1
103	*VKS4164-001	LED Holder		1
104	TLR102	LED		1
105	*VKL4618-001	P.W.B Bracket		1

Enclosure Ass'y and Electrical Parts

(Except P.W. Board parts)

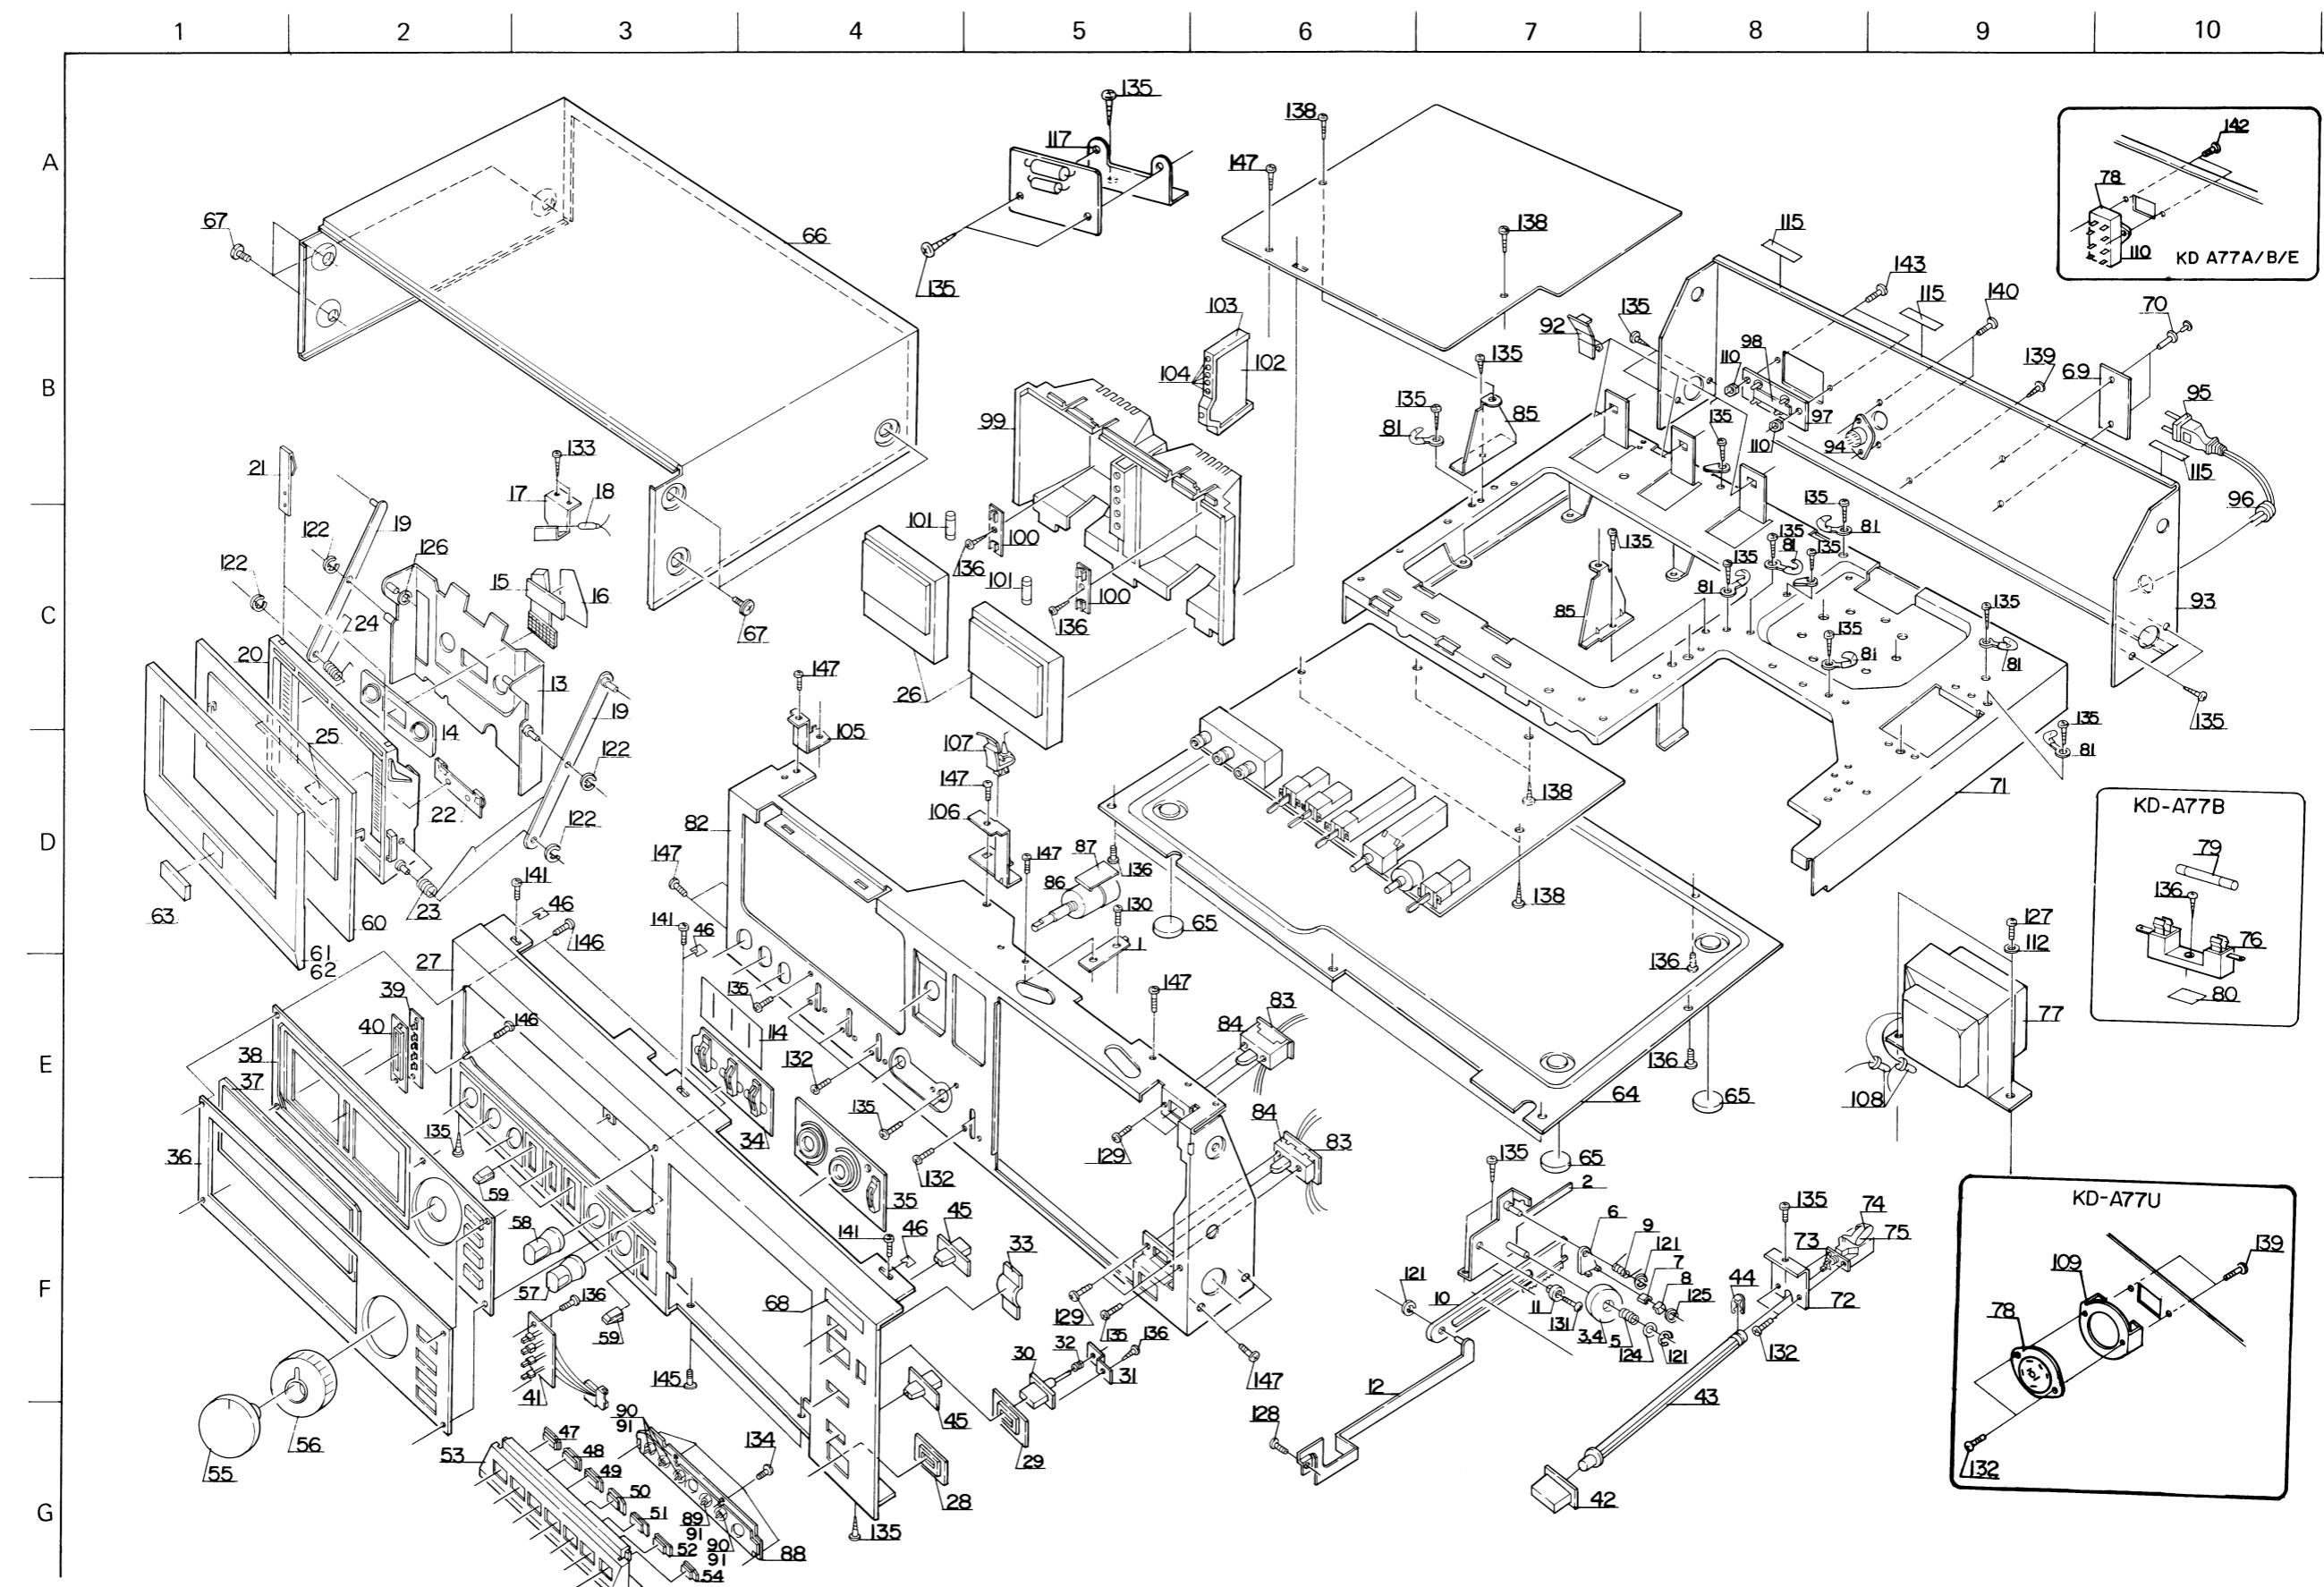

Mechanical Component Parts

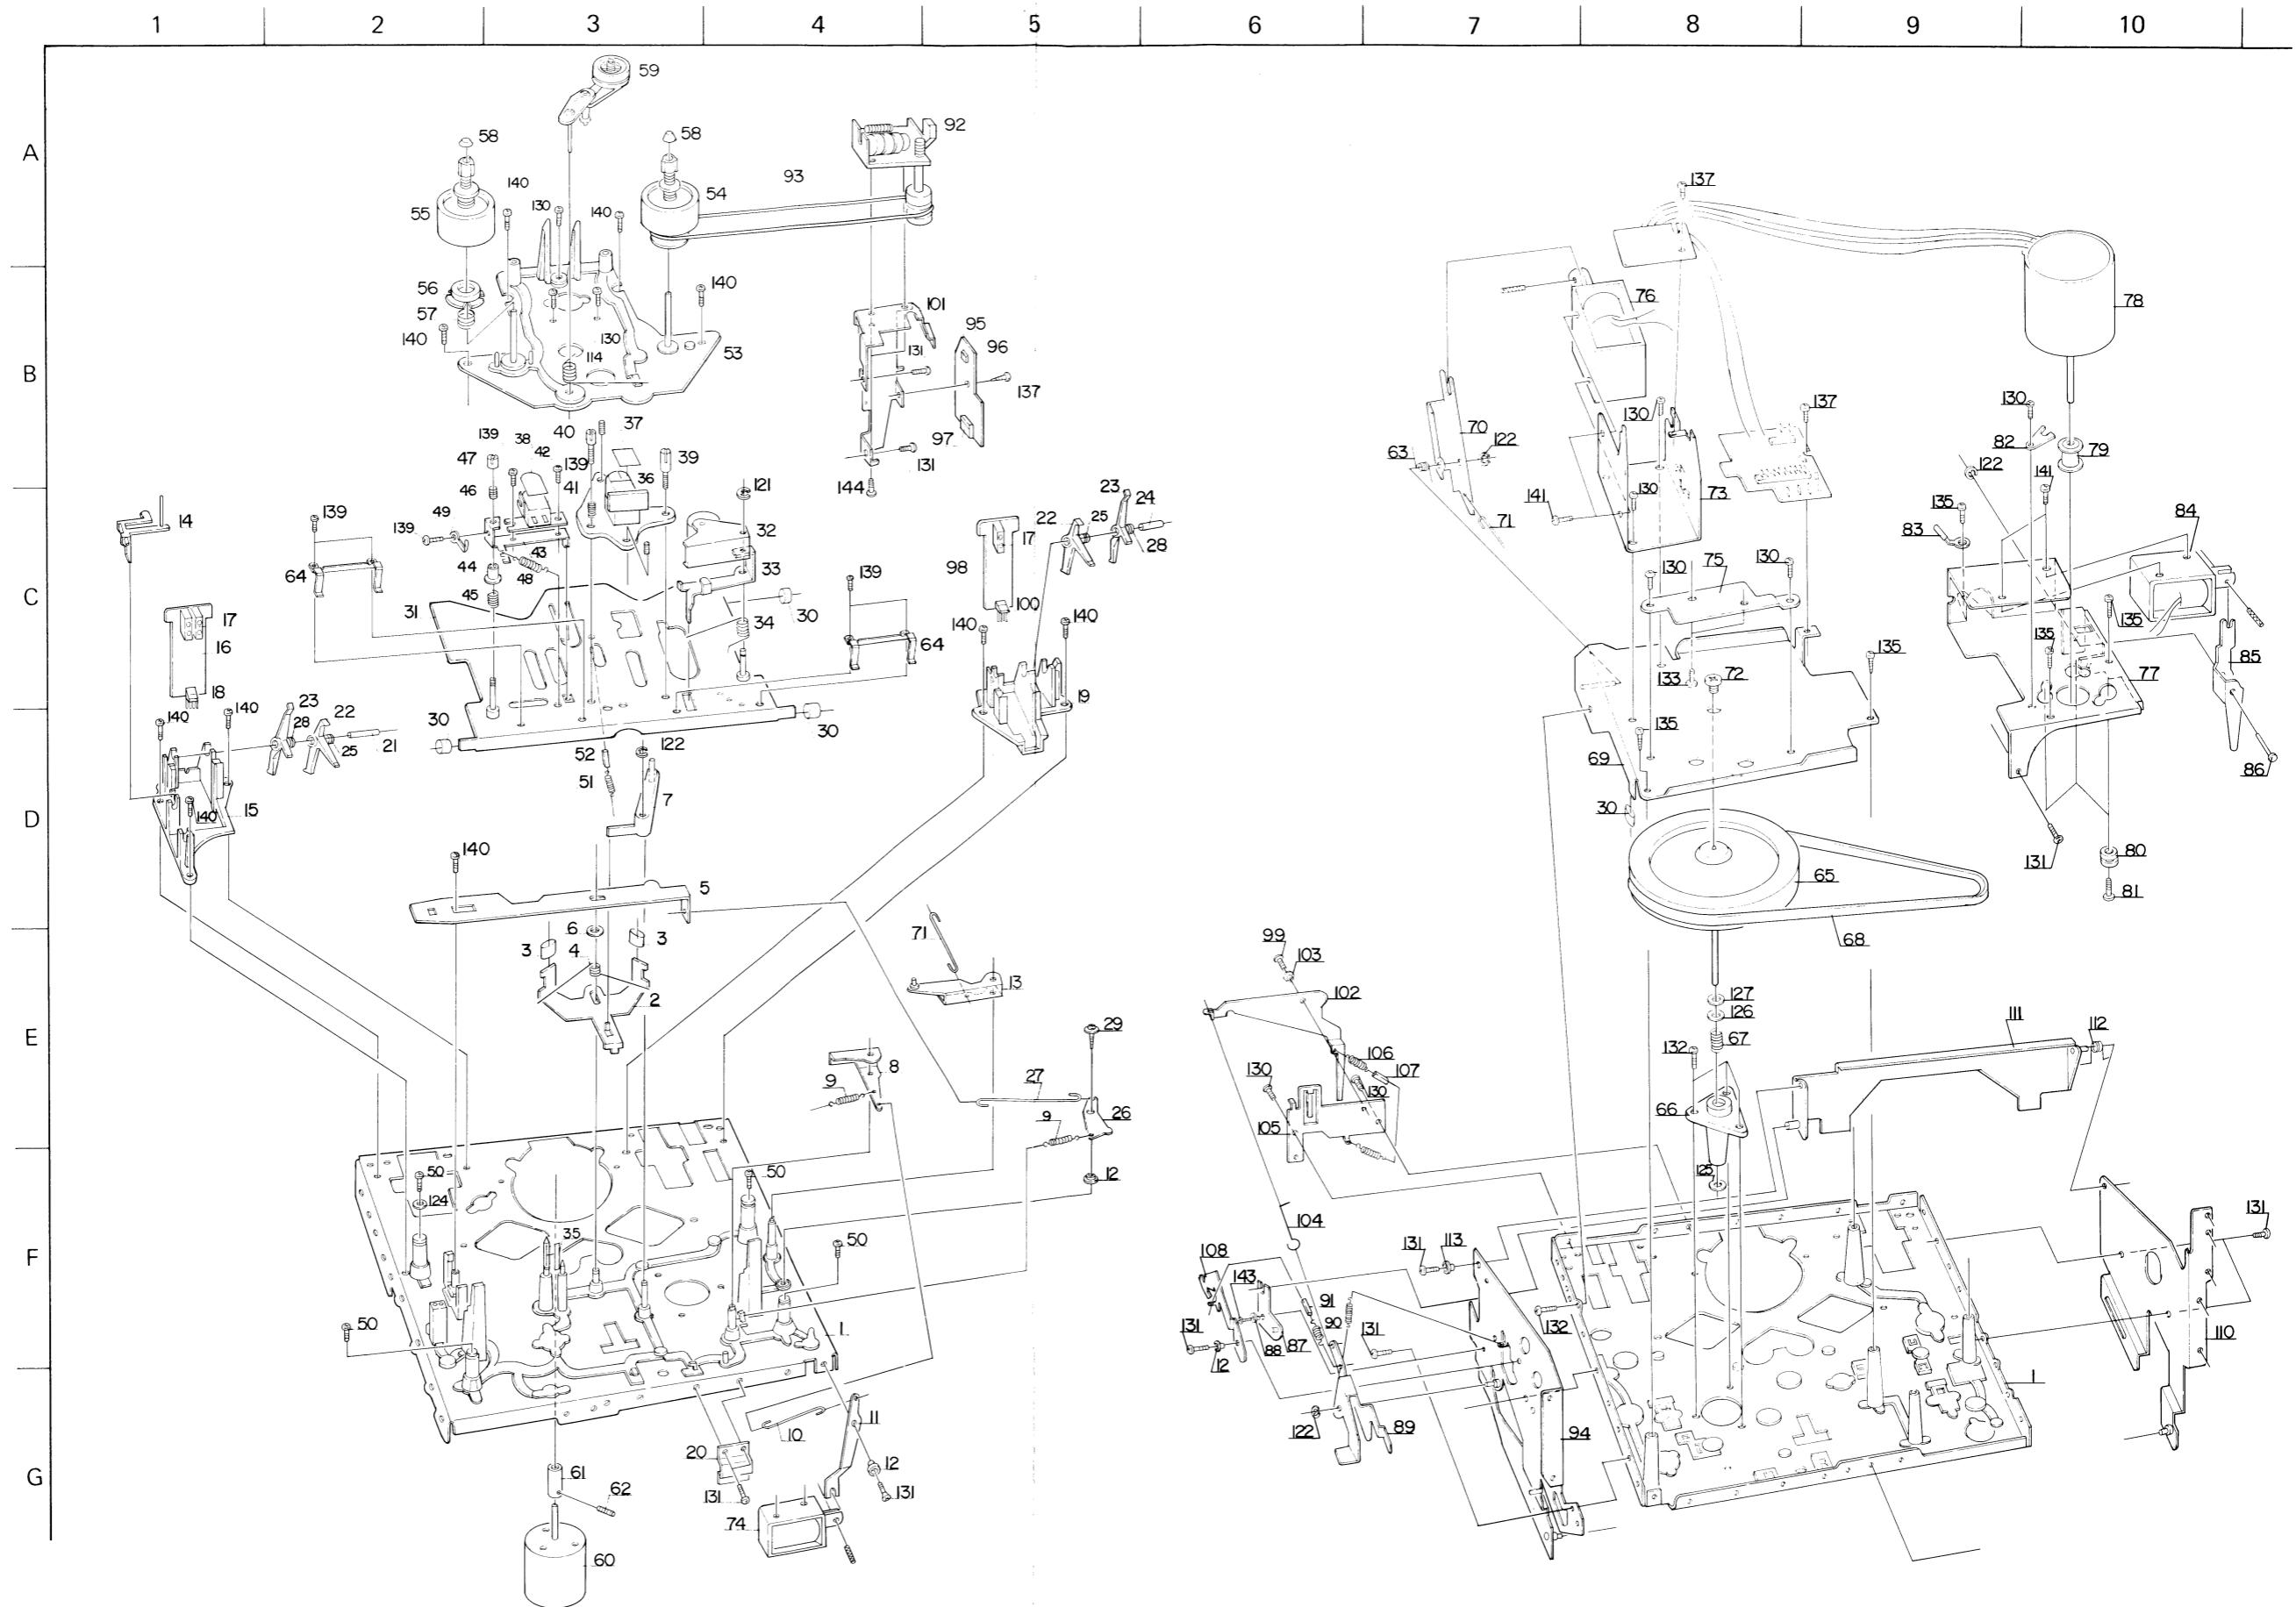

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
106	*VKL4619-001	Support Bracket		1
107	VKS3108-001	P.W.B. Support		1
108	TAW000504-01	Connector	KD-A77 C/J/U	2
109	VKL4275-001	Bracket	KD-A77 U	1
110	NTB3000S	Nut	for Voltage Select Switch for Pin Jack	2
111	VKZ4001-001	Wire Clamp		1
112	F4932-002	Special Washer		2
113	*VYTA446-001	Blind	for Volume ESC.	1
114	VYTA447-001	"	for Lever ESC.	1
115	T46392-009	Illumination Shield	for Rear Panel	3
116	VYSH103-023	Spacer		2
117	VKL4690-001	Bracket		1
121	REE2000	E Ring	for Brake Drum x 1 Rubber Retainer x 1 Rake Plate x 1 Arm Ass'y x 1	4
122	REE2500	"	for Holder Plate x 2 Cross Bar Ass'y x 2	4
124	WNS2600Z	Washer	for Brake Drum	1
125	Q03093-524	"	for Rubber Retainer	1
126	WSS3000N	"		1
127	DPSP4010ZS	Screw	for Power Transformer	2
128	LDSP2604R	"	for Cassette Lid	1
129	LPSP2604Z	"	for Timer SW. P.W.B. x 2 Memory SW. P.W.B. x 2	4
130	LPSP2605Z	"	for Joint Bracket	1
131	LPSP2608Z	"	for Rack Plate	1
132	LPSP3006ZS	"	for Power Switch x 2 Lever Switch x 4	6
133	SBSB2606Z	Tapping Screw	for Lamp Bracket	2
134	SBSB2608Z	"	for Button Case	4
135	SBSB3006Z	"	for Dumper x 2, Front Plate x 2 Chassis Bracket x 2, P. Bracket x 1, Wire Clamp x 10, Rear Bracket x 4	21
136	SBSB3008Z	"	for Knob Bracket x 1, Fuse Holder x 3, Bottom Cover x 7	11
138	SBSB3006V	"	for Amp. P.W.B. x 4 P.W.B. x 2	6
139	SDSB3006R	Screw	for Rear Bracket	1
140	SDSP2606R	"	for DIN jack Ass'y	2
141	SDSP3006ZS	"	for Front Bracket	7
142	SDSP3006RS	"	for Voltage Select SW	2
143	SDSP3008RS	"	for Pin Jack Ass'y	2
145	SSSP2608Z	"	for Button Case	2
146	DPSP2608Z	"	for Meter Escutcheon	5
147	DPSP3006ZS	"	for P.W.B Bracket x 2 Front Bracket x 4	6
(Label)		VND4001-005	Caution Label	1
		VND4006-002	Caution Label	1

Mechanical Component Parts List

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
1	*VKL1118-00E	Chassis Base Ass'y		1
2	VKL4361-002	Brake Bar		1
3	T44341-001	Rubber Tire		2
4	VKW4145-001	Brake Bar Spring	for Brake Bar	1
5	VKL4664-001	Lock Bar		1
6	VKZ4005-001	Stopper	for Brake Bar	1
7	VKS4135-00A	Lock Lever Ass'y		1
8	VKL4364-001	Pause Lever		1
9	VKW3002-004	Tension Spring	for Pause Lever	2
10	VKW4136-001	Connecting Wire		1
11	VKL4365-001	Pause Solenoid Lever		1
12	*VKh3001-027	Flange Collar		3
13	VKL4366-00A	Play Arm Ass'y		1
14	*VKS4166-001	Cassette SW. Lever		1
15	VKS3109-001	Switch Holder (L)		1
16	VMW4522-001	P.W.B.)L)		1
17	QSP0029-001	Slide Switch		3
18	QMV5004-004	Connector		1
19	VKS3110-001	Switch Holder (R)		1
20	VKL4479-001	Flywheel Cover		1
21	VKH4196-001	Shaft		1
22	VKS4136-002	Switch Lever		2
23	VKS4156-001	Pressure Lever		2
24	VKH4196-002	Shaft		1
25	VKW4138-001	Pressure Lever Spring		2
26	VKL4399-001	Eject Safety Lever		1
27	VKW4142-001	Connecting Wire		1
28	VKW4191-001	Pressure Lever Spring		1
29	GPSA2608Z	W. Tap. Screw		1
30	VKZ3003-001	Rubber Tube		4
31	*VKL4370-00D	Slide Base Ass'y		1
32	*VKP4105-00B	Pinch Roller Bracket Ass'y		1
33	VKL4371-001	Push Arm		1
34	VKW4139-001	Pinch Roller Spring		1
35	*VYSF101-013	Spacer		1
36	*VGH0425-301-0A	R & P Head Ass'y		1
37	*VND4020-001	Head Plate		1
38	THC037417-02	Head Plate		1
39	*VKh4238-001	Azimuth Screw		1
40	*VKh4239-001	R/P Head Screw		1
41	*VKW3001-038	Compression Spring	for Azimuth	1
42	ZMM090414-0A	E. Head Ass'y		1
43	*VKL4620-001	E. Head Lever		1
44	*VKh3001-029	Flange Collar	for E. Head Lever	1
45	*VKW3001-039	Compression Spring		1
46	*VKW3001-040	"		1
47	*VKh4240-001	Adjust Screw		1
48	*VKW3002-033	Tension Spring		1
49	VKZ4001-009	Wire Holder		1
50	GPSA2612Z	Tapping Screw	for Slide Base	4
51	VKW3002-005	Tension Spring		1
52	TJN265559-02	Silencer		1
53	VKL3155-00A	Reel Disk Bracket Ass'y		1
54	VKR4113-00A	Take-Up Reel Ass'y		1
55	VKR4118-00A	Supply Reel Ass'y		1
56	VKS4130-001	Back Tension Base		1
57	VKW3001-026	Compression Spring		1
58	VKS4131-001	Reel Stopper		2
59	VKS4151-00B	Idler Ass'y Unit		1
60	MDN-7V1	Reel Motor		1
61	VKR4121-001	Motor Pulley		1
62	YRS2603B	Screw		1
63	VKW4149-001	Play Solenoid Spring		1
64	VKY4170-001	Wire Clamper		2
65	VKF3107-00C	Flywheel Ass'y		1
66	VKF3103-00B	Capstan Metal		1

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
67	T30301-137	Spring		1
68	VKB3001-008	Capstan Belt		1
69	VKL4372-00B	Flywheel Holder Ass'y		1
70	VKL4368-002	Play Solenoid Lever		1
71	VKW4137-001	Connecting Wire		1
72	TEP357456-01	Thrust Screw		1
73	*VKL4629-001	Play Solenoid Bracket		1
74	VGP0201-004	D.C. Solenoid Ass'y	for Pause	1
75	VKL4478-001	Pause Solenoid Bracket		1
76	VGP0301-002	D.C. Solenoid Ass'y	for Play	1
77	VKL3161-002	Motor Bracket		1
78	m1606-00A	D.C. Motor	Capstan	1
79	VKS4139-001	Motor Pulley		1
80	TER357465-03	Cushion Rubber		3
81	VKZ4109-001	Motor Screw		3
82	TFB345469-01	Rubber Stopper		1
83	VKZ4001-011	Wire Holder		1
84	VGP0201-005	D.C. Solenoid Ass'y	for Brake	1
85	VKL4363-002	Lock Solenoid Lever		1
86	VKH4194-001	Shaft		1
87	*VKL4622-00A	Joint Arm Ass'y		1
88	VKH4202-001	Flange Collar		1
89	VKL4464-001	Lock Lever		1
90	VKW3000-030	Spring		1
91	TJN265559-04	Silencer		1
92	VKC6110-001T	Counter Ass'y		1
93	VKB3000-012	Belt		1
94	*VKL4608-00B	Mecha Bracket (R) Ass'y		1
95	*VMW4555-001	P.W. Board		1
96	DN6835	Hall I.C.		1
97	QMV5004-004	Connector		1
98	VMW4534-001	P.W. Board		1
99	VKZ4128-001	Special Screw		1
100	QMV5004-003	Connector		1
101	*VKL4617-001	Counter Bracket		1
102	*VKL4614-001	Lock Arm		1
103	*VKH4253-001	Collar		1
104	VKW4161-002	Wire		1
105	*VKL4615-001	Lock Arm Bracket		1
106	VKW3002-024	Tension Spring		1
107	TJN265559-04	Silencer		1
108	VKL4568-001	Hold Arm		1
110	*VKL4607-00A	Mecha Bracket (L) Ass'y		1
111	VKL4403-00D	Shift Arm Ass'y		1
112	VKW4156-001	Shift Arm Spring		1
113	T43909-002	Metal		1
114	VKW4134-001	Idler Spring		1
121	REE2000	E Ring	for Push Arm	1
122	REE2500	"	for Lock Lever Ass'y x 1 Play Solenoid Lever x 1 Shaft x 1, Lock Lever x 1	4
124	WNB2600N	Washer	for Slide Base Ass'y	1
125	Q03093-522	"	for Flywheel	1
126	Q03093-621	"	"	1
127	Q03093-827	"	"	1
130	LPSP2604Z	Screw	for Reel Motor x 3 Play Solenoid Bracket x 2 Pause Solenoid Bracket x 2 Rubber Stopper x 1 Lock Arm Bracket x 2	10
131	LPSP2605Z	"	for Pause Solenoid Lever x 1 Flywheel Cover x 2 Motor Bracket x 1 Counter Bracket x 3 Flange Collar x 2 Metal x 1, Mecha x 2	12

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
132	LPSP2606Z	Screw	for Capstan Metal x 3 Flywheel Holder x 1	4
133	LPSP3004ZS	"	for Solenoid	2
135	SSBS2610Z	Tapping Screw	for Flywheel Holder x 2 Motor Bracket x 2	4
137	SDSP2606Z	Screw	for P.W. Board	3
139	SPSP2004N	"	for E. Head	7
140	SPSP2605Z		for Reel Ass'y Unit x 4 Switch Holder x 5	9
141	SPSP3003ZS		for Play Solenoid x 2 Brake Solenoid x 2	4
143	SSSP2605Z	"	for Flange Collar	1
144	SSSP3006ZS	"	for Counter	2

Main Amp. P.W.B. Parts List


Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
R101,201,304,404, 502,602,504,604	VMW1527-002	P.W. Board	No supply as parts ass'y	1
R102,202,507,607, 510,610,923	QRD141J-823SY	C. Resistor	82kΩ 1/4W	8
R103,203	" -333SY	"	33kΩ "	7
R104,204,111,211	" -101SY	"	100Ω "	2
	" -154SY	"	150kΩ "	4
R105,205,513,613, A08,B08	" -183SY	"	18kΩ "	6
R106,206,A11,B11, C04,C05,911,912, 915,916,931,933, 934	" -103SY	"	10kΩ "	13
R107,207	" -122SY	"	1.2kΩ "	2
R108,208,520,620	" -820SY	"	82Ω "	4
R109,209,113,213, A09,B09,301,401, 302,402,512,612,	" -104SY	"	100kΩ "	12
R110,210,303,403, 914	" -332SY	"	3.3kΩ "	5
R114,214,A02,B02, 918,941,942,952, 953	" -473SY	"	47kΩ "	9
R115,215	" -152SY	"	1.5kΩ "	2
R116,216	" -682SY	"	6.8kΩ "	2
RA01,B01,A04,B04, A17,B17,925	" -472SY	"	4.7kΩ "	7
RA03,B03	" -222SY	"	2.2kΩ "	2
RA05,B05,501,601	" -102SY	"	1kΩ "	4
RA06,B06,A07,B07	" -272SY	"	2.7kΩ "	4
RA10,B10	QRD146K-181	Unflammable Resistor	180Ω "	2
RA12,B12,307,407, 505,605,917,930, 932,938	QRD141J-223SY	C. Resistor	22kΩ "	10
RA13,B13	" -474SY	"	470kΩ "	2
RA14,B14	" -153SY	"	15kΩ "	2
RA15,B15,516,616	" -471SY	"	470Ω "	4
RA16,B16,523,623	" -680SY	"	68Ω "	4
R901	" -822SY	"	8.2kΩ "	1
RC01	QRD146K-221	Unflammable Resistor	220Ω "	1
RC02,C03,922	QRD141J-683SY	C. Resistor	68kΩ "	3
R503,603,919	" -273SY	"	27kΩ "	3
R506,606	" -274SY	"	270kΩ "	2
R305,405,509,609	" -334SY	"	330kΩ "	4
R511,611	" -684SY	"	680kΩ "	2
R514,614	" -821SY	"	820Ω "	2

Ref. No.	Parts No.	Parts Name	Remarks		Q'ty
R515,615	QRD141J-392SY	C. Resistor	39kΩ	1/4W	2
R517,617	" -121SY	"	120Ω	"	2
R522,622	" -101SY	"	100Ω	"	2
R521,621,304,306	" -150SY	"	150Ω	"	4
R524,624	" -470SY	"	47Ω	"	2
R518,618	" -271SY	"	270Ω	"	2
R913,112,212	" -393SY	"	39kΩ	"	3
R920	" -563SY	"	56kΩ	"	1
R921,508,608	" -224SY	"	220kΩ	"	3
R926	QRD146K-330	Unflammable Resistor	33Ω	"	1
R927	QRD126K-391	"	390Ω	1/2W	1
R928	" -181	"	180Ω	"	1
R929	" -331	"	330Ω	"	1
R951	QRD146K-150	"	15Ω	1/4W	1
C101,201,104,204, A20,B20	QEB41EM-335N	Low Leak E. Capacitor	3.3μF	25V	6
C102,202,A17,B17	QCS11HJ-471	F. Ceramic Capacitor	470pF	50V	4
C105,205,901,C02, 509,609	QEWA41EA-476N	E. Capacitor	47μF	25V	6
C106,206	QEB41HM-105N	Low Leak E. Capacitor	1μF	50V	2
C107,207,A11,B11, A13,B13	QCS11HJ-151	F. Ceramic Capacitor	150pF	"	6
C108,208	QEWA41CA-476N	E. Capacitor	47μF	16V	2
CA01,B01	QCS11HJ-201	F. Ceramic Capacitor	200pF	50V	2
CA02,B02	QFM41HJ-102	Mylar Capacitor	0.001μF	"	2
CA03,B03,A05,B05, A07,B07,C01,912, 931	QEWA41CA-336N	E. Capacitor	33μF	16V	9
CA04,B04,A23,B23, 501,601,506,606, 303,403	QEWA41HA-105N	"	1μF	50V	10
CA06,B06	QEWA41EA-335N	"	3.3μF	25V	2
CA08,B08,A09,B09	QEWA41AA-107N	"	100μF	10V	4
CA10,B10,A12,B12	QEWA41EA-475N	"	4.7μF	25V	4
CA14,B14,924,925	QFM41HJ-272	Mylar Capacitor	0.0027μF	50V	4
CA15,B15,511,611	" -273	"	0.027μF	"	4
CA18,B18	" -122	"	0.0012μF	"	2
CA19,B19	QEB41HM-334M	Low Leak E. Capacitor	0.33μF	"	2
CA21,B21	QEWA41AA-476N	E. Capacitor	47μF	10V	2
CA24,B24	QEWA41EA-107N	"	100μF	25V	2
C503,603,504,604, 505,605	QFM41HJ-182	Mylar Capacitor	0.0018μF	50V	6
C507,607	" -104	"	0.1μF	"	2
C508,608	QCS11HJ-201	F. Ceramic Capacitor	200pF	"	2
C510,610	QEWA41EA-335N	E. Capacitor	3.3μF	25V	2
C512,612,513,613	QFM41HJ-153	Mylar Capacitor	0.015μF	50V	4
C514,614	" -562	"	0.0056μF	"	2
C515,615	" -123	"	0.012μF	"	2
C516,616	" -183	"	0.018μF	"	2
C517,617	" -273	"	0.027μF	"	2
C518,618	QCS11HJ-391	F. Ceramic Capacitor	390pF	"	2
C519,619	QCS12HJ-201	"	200pF	"	2
C520,620	" -221	"	220pF	"	2
C521,621	QFM41HJ-682	Mylar Capacitor	0.0068μF	"	2
C911	QEWA41EA-336N	E. Capacitor	33μF	25V	1
C921	QFP32AJ-562L	Polystyrene Capacitor	0.0056μF	10V	1
C922	" -223L	"	0.022μF	"	1
C923	QFM41HJ-103	Mylar Capacitor	0.01μF	50V	1
C926	QEWA41EA-106N	E. Capacitor	10μF	25V	1
C302,402	" -476N	"	47μF	"	2
VRA01,B01	QWY123-022	Bus Wire			45
VR501,601	QVP8A0B-023	Semi Fixed Resistor	2kΩ		2
	" -024	"	20kΩ		2
CR502,602	QVZ3501-473	"	47kΩ		2
VR503,603,504,604	*QVZ3501-223	"	22kΩ		4
VR301,401	QVP8A2A-014V	Variable Resistor	10kΩ		1

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
LA01,B01,501,601 503,603 L502,602 L901 L902 RL901	VQP0001-183 *TAC000320-08 VQP0001-102 *VQH1009-004 *VSK5D24-211	Indicator " " OSC Coil Relay	18mH 1mH	6 2 1 1 1
X101,201,502,602 X102,202 ICA01,B01 ICC01 IC901	2SC1344(E,F) 2SC458A(C,D) TAT000351-01 UPC4558C UPC4557C	Si. Transistor " I.C. " "		4 2 2 1 1
DA01,B01,A02,B02 DA03,B03,A04,B04 X901,902,904,908, 909,910 D903 X501,601,907	1N34A 1S2076 2SC458PG(C,D) RD6.8E(C) 2SD468(B,C)	Ge. Diode Si. Diode Si. Transistor Zener Diode Si. Transistor		4 4 6 1 3
IC902 X503,603 D904,905,906,907, 908,909 X905,906 XC01	UPC4066C 2SC458A(C,D) 1S2076 2SC1685(S) 2SA844(C,D) VMJ5002-003	I.C. Si. Transistor Si. Diode Si. Transistor " Jack Ass'y		1 2 6 2 1 1
S1 S2 S3 S4 S5	QSL2209-002 QSL2309-001 QSL8309-001 *QSR6045-204 QSL2209-002 QMV5005-003 QMV5005-006 VMZ0005-001 E43727-002	Lever Switch " " Rotary Switch Lever Switch Connector " Post pin Wrapping Tab	for Mic & Headphone for Input Select for ANRS for EQ for REC EQ for Monitor for Erase for Rec	1 1 1 1 1 1 1 2 33

Printed Wiring Board Parts

Main Amp P.W. Board Parts

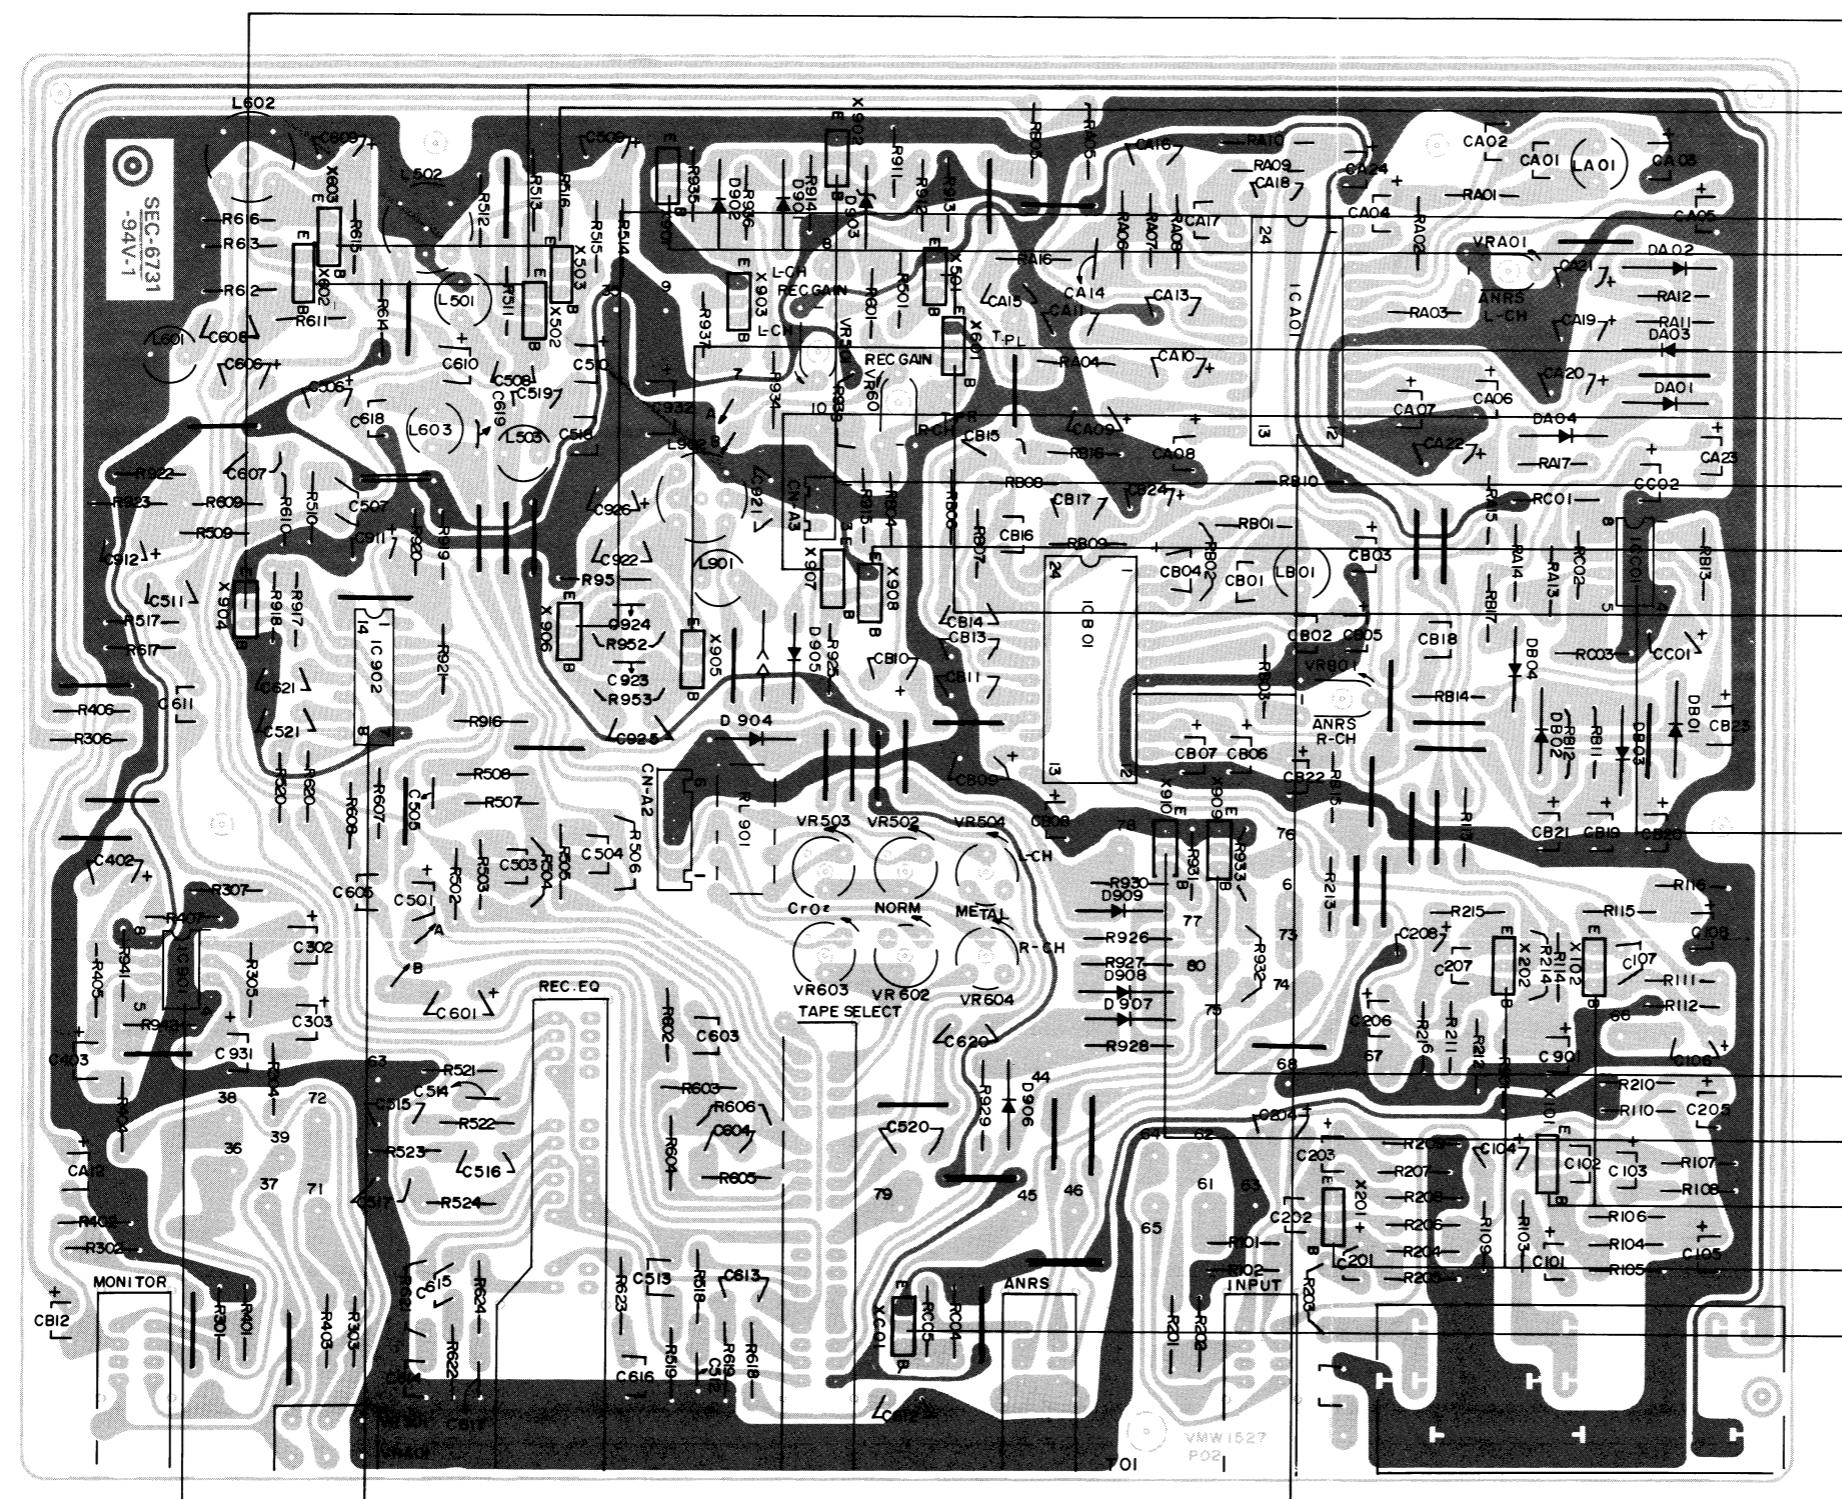

	E	C	B
X904	0	0	0.66
X502 602	1.83	18.8	2.37
X503 603	1.16	9.1	1.83
X906	(0.44)	(13.2)	(-3.1)
X901	0	0.68	5.1
X905	(0.44)	(13.2)	(-3.1)
X907	0	19.2 (14)	0
X902	0	10	0
X908	0	0	0.68
X501 601	0	0.67	0


() at recording mode

	1	2	3	4	5	6	7	8
ICCO1	10.2	10.2	10.2	0	10.2	10.2	10.2	20.3

	E	C	B
X909	0	5.1	0
X910	0	0.68	0
X101 102	1.2	7.3	1.81
X201 202	1.37	8.6	2.15
XC01	21	21	20.3

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
ICA01 B01	8.6	8.1	8.4	8.6	6.3	3.6	0	3.5	7.4	7.4	0.2	0	0.06	0.7	17.6	7.4	8.7	7.4	8.7	9.9	9.9	9.9	9.9	14
IC902	6.6	6.6	6.6	6.6	12.5	0	0	1.16	0	1.16	0	0	12.5	13.1										
IC901	10.5	10.5	10.5	0	10.5	10.5	10.5	21																

Power Supply P.W. Board Parts

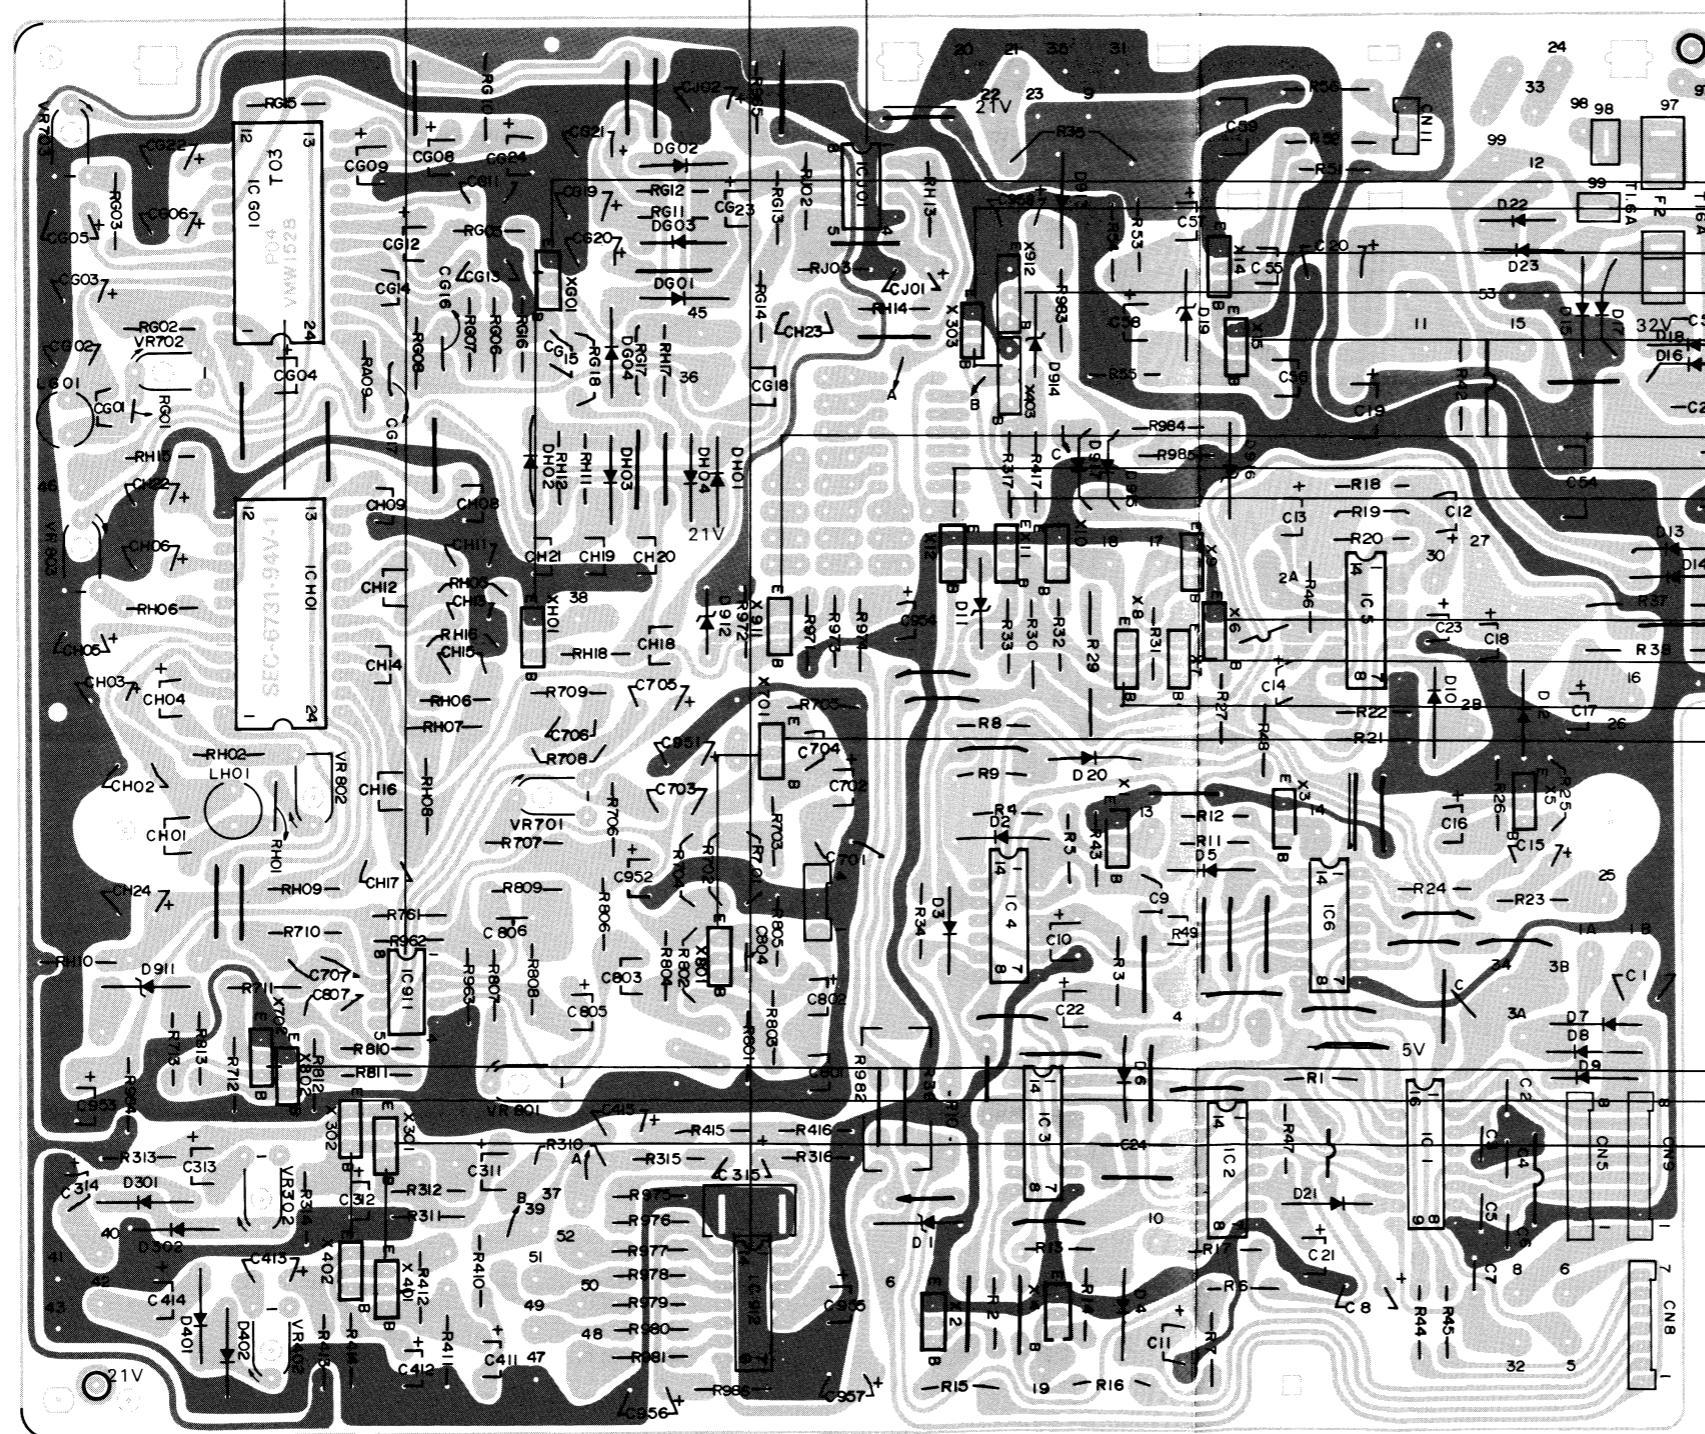

	E	C	B
XG01 H01	0	0	0.67
X303 403	0	0	0
X14	0	28	0.64
X912	0	0	0.7
X15	0	0.64	0.62
X911	16.7	16.7	16.7
X12	0	—	0.2
X11	0	0.74	0.73
X6	0	0	0.74
X7	0	15.3	0.74
X8	0	15.3	0.74
X701 801	0.1	4.3	0.67
X702 802	0	0	0.65
X302 402	8.9	3	8.2
X301 401	3	8.2	3.6

Power Supply P.W.B Parts List


Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
R8,9,21,22,23,G05, H05,317,417,964, 965,984,985	VMW1528-002 QRD141J-102SY	P.W. Board C. Resistor	No supply as parts ass'y 1kΩ 1/4W	1 13
R2,6,7,10,27,34, G17,H17,983	" -472SY	"	4.7kΩ "	9
R3	" -561SY	"	560Ω "	1
R4,15,16,44,45	" -271SY	"	270Ω "	5
R5,974,977,978, 979,980,981	" -151SY	"	150Ω "	7
R11,12,13,14,17	" -331SY	"	330Ω "	5
R24,G09,H09,315, 415	" -104SY	"	100kΩ "	5
R20,47,G12,H12, 973	" -223SY	"	22kΩ "	5
R1,G15,H15	" -471SY	"	470Ω "	3
R25,971	" -562SY	"	5.6kΩ "	2
R26	" -560SY	"	56Ω "	1
R28,30	QRD121K-122	"	1.2kΩ 1/2W	2
R29	QRG029J-220	O.M.F. Resistor	22Ω 2W ▲	1
RG03,H03,313,413	QRD141J-222SY	C. Resistor	2.2kΩ 1/4W	4
R31,32	" -272SY	"	2.7kΩ "	2
R33,962,963,972	" -333SY	"	33kΩ "	4
R35	QRG019J-151	O.M.F. Resistor	150Ω 1W ▲	1
R36	QRG029J-101	"	100Ω 2W ▲	1
R37	QRG039J-560	"	56Ω 3W ▲	1
R38	QRX029J-150	M.F. Resistor	15Ω "	1
R42	QRD126K-220	Unflammable Resistor	22Ω 1/2W ▲	1
R43	QRD141J-103SY	C. Resistor	10kΩ 1/4W	1
R46	" -391SY	"	390Ω "	1
R49	" -562S	"	5.6kΩ "	1
R51,J02,J03	" -683SY	"	68kΩ "	3
R52	QRD146K-152	Unflammable Resistor	1.5kΩ "	1
R53	QRD141K-332SY	C. Resistor	3.3kΩ "	1
R54	QRD141J-472SY	"	4.7kΩ "	1
R55,48	" -471SY	"	470Ω "	2
R56	QRD146K-2R2	Unflammable Resistor	2.2Ω "	1
RG11,H11,G18,H18, 18,19	QRD141J-103SY	C. Resistor	10kΩ "	6
R702,802	" -184SY	"	180kΩ "	2
R703,803	" -154SY	"	150kΩ "	2
R705,805	" -331SY	"	330Ω "	2
R706,806,976	" -334SY	"	330kΩ "	3
R707,807	" -470SY	"	47Ω "	2
R708,808	" -822SY	"	8.2kΩ "	2
R709,809	" -274SY	"	270kΩ "	2
R710,810,G14,H14, 961	" -153SY	"	15kΩ "	5
R711,811,G08,H08, 701,801,704,804, 986	" -183SY	"	18kΩ "	9
R712,812,311,411	" -154SY	"	150kΩ "	4
R713,813,G02,H02	" -473SY	"	47kΩ "	4
RG06,H06,G07,H07	" -272SY	"	2.7kΩ "	4
RG10,H10	QRD146K-181	Unflammable Resistor	180Ω "	2
RG13,H13	QRD141J-474SY	C. Resistor	470kΩ "	2
RG16,H16	" -680SY	"	68Ω "	2
R310,410	" -823SY	"	82kΩ "	2
R312,412	" -224SY	"	220kΩ "	2
R314,414	" -561SY	"	560Ω "	2
R316,416	" -393SY	"	39kΩ "	2
R975	" -473SY	"	47kΩ "	1
RG01,H01	QRD143J-821S	"	820Ω "	2
R982	QRG029J-560	Unflammable Resistor	56Ω 2W ▲	1
C1~7	QCF11HP-102	Mylar Capacitor	0.001μF 50V	7

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
C56 C8 C9 C10,15 C11,956,G12,H12	QCF11HP-103 QEWA0JA-108N QEN41EM-476M QEWA1CA-476N QEWA1EA-475N	F. Ceramic Capacitor E. Capacitor N.P.E. Capacitor E. Capacitor " " " "	0.01 μ F 50V 1000 μ F 6.3V 47 μ F 25V 47 μ F 16V 4.7 μ F 25V	1 1 1 2 4
C703,803 C13,16,18 C14,314,414,957, G03,H03,G05,H05, G06,H06,J01 C17,952 C19	QFM41HJ-473 QEWA0JA-108N QEWA1CA-336N QEWA1CA-107N QEWA1VA-108N	Mylar Capacitor E. Capacitor " "	0.047 μ F 50V 1000 μ F 6.3V 33 μ F 16V 100 μ F 16V 1000 μ F 35V	2 3 11
C20 C21 C22 C23 C24	" -477N QEWA0JA-107N QEWA1HA-105N QEWA1CA-106N QCF11HP-104	" " " " " F. Ceramic Capacitor	470 μ F " 100 μ F 6.3V 1 μ F 50V 10 μ F 16V 0.1 μ F 50V	1 1 1 1 1
C51 C52,53 C54 C55 C57,954	QEWA1EA-108N QCF12HP-103 QET41HR-228N QCS11HJ-221 QEWA1EA-106N	E. Capacitor F. Ceramic Capacitor E. Capacitor F. Ceramic Capacitor E. Capacitor	1000 μ F 25V Δ 0.01 μ F 50V Δ 2200 μ F 50V Δ 220pF " 10 μ F 25V	1 2 1 1 2
C58 C59 C701,801 C702,802 C704,804	QEWA1CA-336N QEWA1EA-477N QCS11HJ-181 QEWA1EM-105N QCS11HJ-471	" " F. Ceramic Capacitor Low Leak E. Capacitor F. Ceramic Capacitor	1 μ F 16V 470 μ F 25V Δ 180pF 50V 1 μ F 25V 470pF 50V	1 1 2 2 2
C705,805 C706,806 C707,807 C951 C953	QEWA1CM-107M QFM41HJ-153 " -472 QEWA1EM-476N QEWA1EA-476N	Low Leak E. Capacitor Mylar Capacitor " Low Leak E. Capacitor E. Capacitor	100 μ F 16V 0.015 μ F 50V 0.0047 μ F " 47 μ F 25V Δ 47 μ F "	2 2 2 1 1
C958 CG01,H01 CG02,H02 CG04,H04,G23,H23, 311,411,315,415 CG08,H08,G09,H09	" -107N QCS11HJ-201 QFM41HJ-152 QEWA1HA-105N QEWA1AA-107N	" " F. Ceramic Capacitor Mylar Capacitor E. Capacitor "	100 μ F " 200pF 50V 0.0015 μ F " 1 μ F " 100 μ F 10V	1 2 2 8 4
CG11,H11,G13,H13 CG14,H14 CG15,H15 CG16,H16 CG17,H17	QCS11HJ-151 QFM41HJ-272 " -273 " -682 QCS11HJ-471	F. Ceramic Capacitor Mylar Capacitor " " F. Ceramic Capacitor	150pF 50V 0.0027 μ F " 0.027 μ F " 0.0068 μ F " 470pF "	4 2 2 2 2
CG18,H18 CG19,H19 CG20,H20 CG21,H21 CG22,H22,312,412	QFM41HJ-122 QEWA1HM-334M QEWA1EM-335N QEWA1AA-476N QEWA0JA-227N	Mylar Capacitor Low Leak E. Capacitor " E. Capacitor "	0.0012 μ F " 0.33 μ F " 3.3 μ F 25V 47 μ F 10V 220 μ F 6.3V	2 2 2 2 4
CG24,H24 CJ02 C313,413 C955 VR701,801,	QEWA1EA-107N " -476N " -335N QEWA1EA-106N QWY123-022 V44611-005 " -006 VMZ0005-001 QVP8A0B-013	" " " " " Bus Wire " " Post pin Semi Fixed Resistor	100 μ F 25V 47 μ F " 3.3 μ F " 10 μ F " 1 2 1 1 2	2 1 2 1 46 1 2 1 2
VR702,802 VR302,402,703,803 LG01,H01 IC1 D1 IC2 IC3,4,5 IC6 D2,4	" -014 " -023 VQP0001-183 M54410P RD5.1F(B) HD7404 HD7400 HD7403 1S2076	" " Indicator I.C. Zener Diode I.C. " " Si. Diode		2 4 2 1 1 1 3 1 2


Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
D3,5,6,7,8,9,10,20, 21 D11 D12 D13~18 D19,22,23	1N34A RD6.2E(B3) RD5.1F(B) 10E1-B RD10E(I)	Ge. Diode Zener Diode Zener Diode Si. Diode Zener Diode		9 1 1 6 3
X1,3,4,8 X2,5,6,11,12,14,15, 702,802,912 X7,9,10 X701,801 IC911,J01	2SC1162(B,C) 2SC458PG(C,D) 2SD468(B,C) 2SC1344(E,F) UPC4558C	Si. Transistor " " " I.C.		4 10 3 2 2
D911 D914 ICG01,H01 XG01,H01,303,403 DG01,H01,G02,H02, 301,401,302,402, 915,917	RD6.8E(C) RD6.8E(B3) TAT000351-01 2SD468(B,C) 1N34A	Zener Diode " I.C. Si. Transistor Ge. Diode		1 1 2 4 10
DG03,H03,G04,H04, 913 X301,401 X302,402 D912,916 X911	1S2076 2SC458A(C,D) 2SA844(C,D) RD4.3E(C) 2SA844(C,D)	Si. Diode Si. Transistor " Zener Diode Si. Transistor		5 2 2 2 1
IC912	LB1416S QMF51A2-1R6BS QMV5005-004 QMV5005-008 QMV5005-007 QMF51A2-1R6 E43727-002 E40130-001 TAZ000331-02 QMV5005-003	I.C. Fuse Connector " " Fuse Wrapping Tab Tab Fuse Holder Plug Ass'y	for P. Head for Remote Control for LED KD-A77 A/E CN-11	1 2 1 2 1 2 55 3 4 1

Other P.W. Board Parts


Slide switch

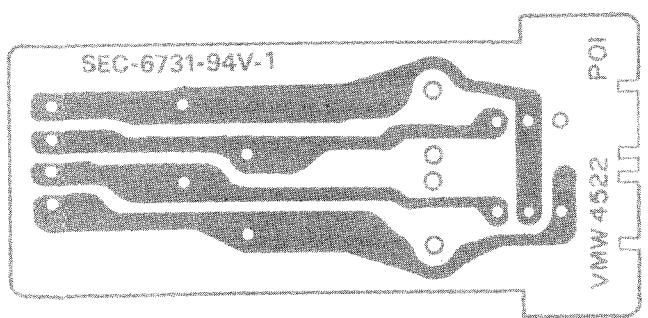


Hall IC

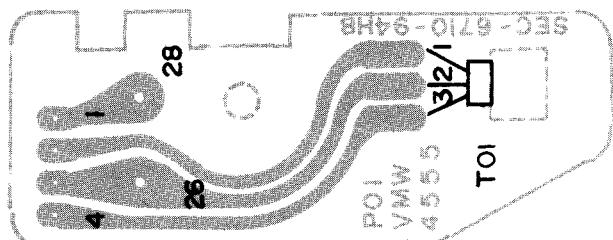


Variable resistor

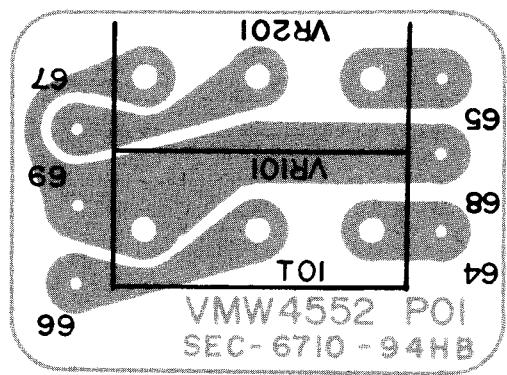


LED

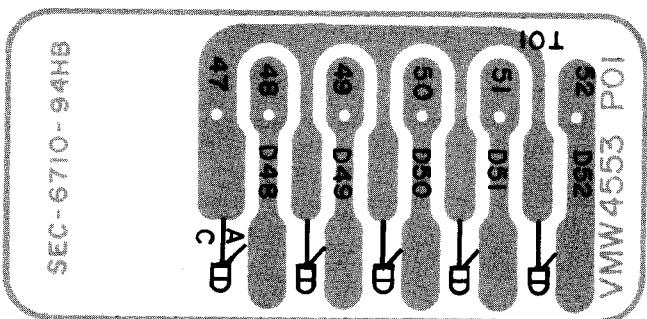


Connector

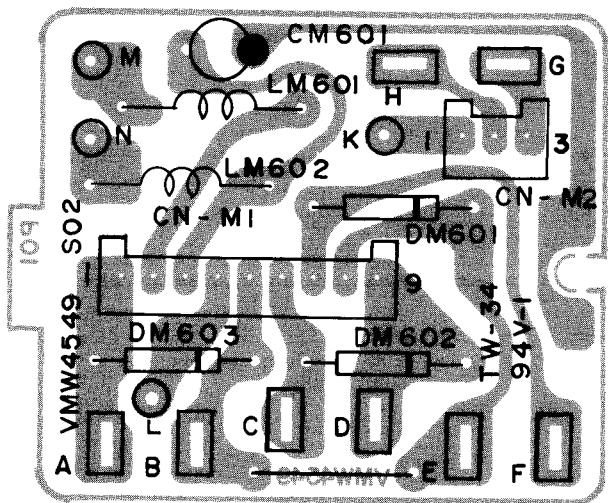


CrO₂ switch

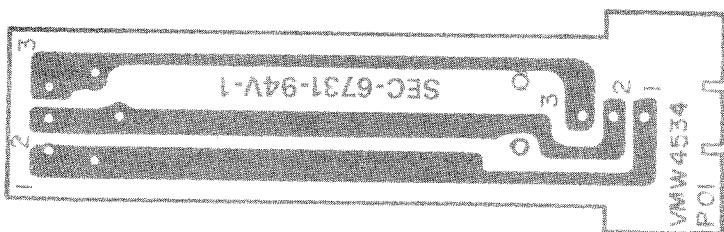


Timer and Memory switch

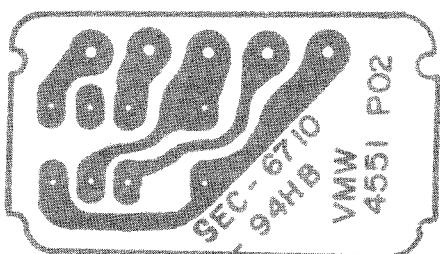


Pin jacks

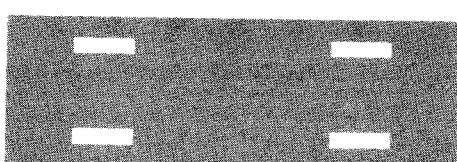

Transistor

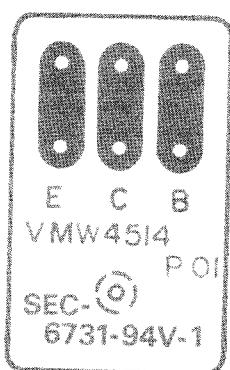


Resistor

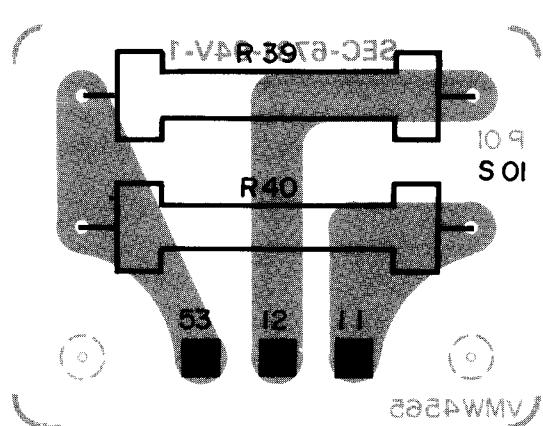

Other P.W.B. Parts List

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty	
(Slide Switch)	VMW4522-001 QSP0029-001 QMV5004-004	P.W. Board (L) Slide Switch Connector		1 2 1	
(Hall IC)	VMW4555-001 DN6835 QMV5004-004	P.W. Board Hall I.C. Connector		1 1 1	
(Connector)	VMW4549-002 10E1-B QMV5005-003 QMV5005-009 FG9010-001 QEWA1HA-105N T41572-001	P.W. Board Si. Diode Connector Connector Tab E. Capacitor Inductor		1 3 1 1 8 1 2	
(CrO ₂ Switch)	VMW4534-001 QSP0029-001 QMV5004-003	P.W. Board Slide Switch Connector		1 1 1	
(Timer and Memory Switches)	*VMW4551-001 QSS2301-101 LPSP2604Z	Switch P.W. Board Slide Switch Screw	for Timer Memory	2 2 4	
(Variable Resistor)	*VMW4552-001 QVE5A3A-054F	P.W. Board Variable Resistor	for V.R.	1 1	
(Pin Jacks)	TAA345532-01 TAJ331301-03	Circuit Board Pin Jack Ass'y		1 1	
(LED)	*VMW4553-001 *VKS4164-001 TLR102	P.W. Board LED Holder LED	for LED	1 1	
(LED)	D74,75 D76,77 R74,75	VMW4554-001 SLB-26GGIN SLB-26URIN QRD142J-271S	P.W. Board LED LED C. Resistor	270Ω 1/4W	1 2 2 2
(Transistor)	X13	VMW4514-001 VKL4264-002 2SA715(B,S) LPSP3008ZS LPSP2606Z SBSB3006Z	P.W. Board Radiation Plate Si. Transistor Screw Screw Tapping Screw		1 1 1 1 1 1
(Resistor)	R39 R40	VMW4565-001 QRG039J-151 QRG029J-181	P.W. Board O.M.F. Resistor "	150Ω 3W △ 180Ω 2W △	1 1 1

Packing

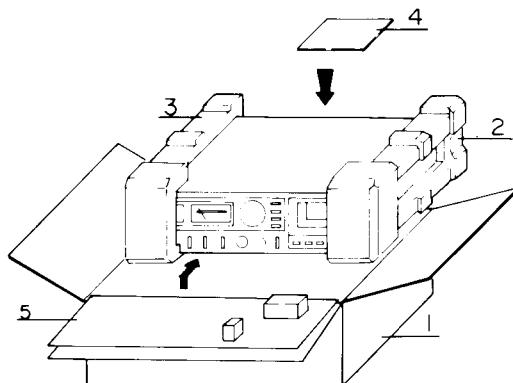

Packing Material List

Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
1.2.3	VPA3110-00B	Packing Case Ass'y	KD-A77 A/B/E/J/U	1
1.2.3	" -00F	"	KD-A77 C	1
1	VPA3110-004	Case	KD-A77 A/B/E/J/U	1
1	" -006	"	KD-A77 C	1
2	VPH2124-001	Cushion (L)		1
3	VPH2125-001	Cushion (R)		1
	TKS000501-01	Sheet	for Deck	1
	QPGA060-06005	Envelope	for Deck	1
4	AP4056A-036	"	for Provided Cord	1
5	QPGB024-03404	"	for Instruction Book	1
	*VPK3132-001	Front Pad		1

Accessories

Parts No.	Parts Name	Remarks	Q'ty
VMP0002-00A	PIN Cord		2
VYA4001-00A	Head Cleaning Stick		1
*VNN0046-301	Instruction Book		1
BT20029	Warranty Card	KD-A77 A	1
VND4013-001	Warning Label	KD-A77 A/B/E	1
T46328-003	Caution Label	KD-A77 A/B	1
TLJ000476-02	ANRS Seal		1
TLJ000477-02	Super ANRS Seal		1
VPZ4001-001	Serial Ticket	KD-A77 A/B/E/J/U	1
BT20013B	Guarantee Certificate	KD-A77 B	1
TJL000443-01	Seal	KD-A77 B	1
QZL1002-003BS	BEAB Label	KD-A77 B	
VNC5004-001	Warning Label	KD-A77 B	1
BT2005C	Mark Sticker	KD-A77 B/E	1
T44362-001	Warranty Card	KD-A77 C	1
	CSA Marker	KD-A77 C	1
TLT000505-01	UL/CSA Caution Label	KD-A77 C/J	1
T43758-003	Serial Ticket	KD-A77 C	1
T46328-004	Caution Label	KD-A77 E	1
BT20032	Warranty Card	KD-A77 J/U	1
BT20042	Special Reply Card	KD-A77 J/U	1
E7795-1	EP Mark	KD-A77 U	1
V04062-001	Siemens Plug	KD-A77 U	1
T46328-001	Caution Label	KD-A77 U	1

JVC

VICTOR COMPANY OF JAPAN, LIMITED
RADIO & RECORDING MACHINE DIVISION 804 Futoo-cho, Kohoku-ku, Yokohama, Japan