


JVC

SERVICE MANUAL

MICRO COMPONENT SYSTEM

**UX-G35US, UX-G35UB, UX-G33A,
UX-G33US, UX-G33UB, UX-G33UW,
UX-G30US, UX-G30UB, UX-G30UW**

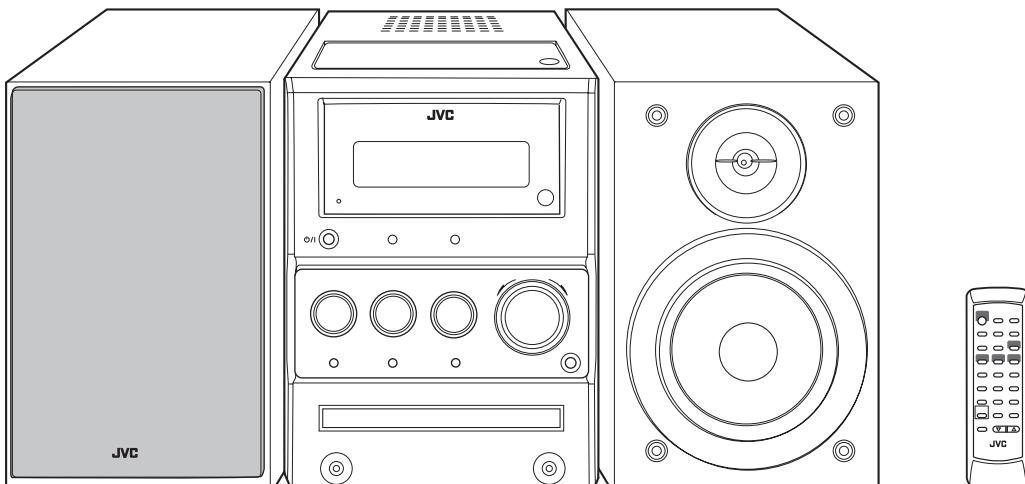

SP-UHG35
SP-UHG33
SP-UHG30

CA-UHG35
CA-UHG33
CA-UHG30

SP-UHG35
SP-UHG33
SP-UHG30



Lead free solder used in the board (material : Sn-Ag-Cu, melting point : 219 Centigrade)

TABLE OF CONTENTS

1 PRECAUTION	1-3
2 SPECIFIC SERVICE INSTRUCTIONS	1-7
3 DISASSEMBLY	1-8
4 ADJUSTMENT	1-21
5 TROUBLE SHOOTING	1-22

SPECIFICATION

Amplifier section	Output Power		60 W (30 W + 30 W) at 6 Ω (10% THD)
	Speakers/Impedance		6 Ω - 16 Ω
	Audio Input	AUX	500 mV/50 kΩ (at "AUX LVL 1") 250 mV/50 kΩ (at "AUX LVL 2") 125 mV/50 kΩ (at "AUX LVL 3")
Tuner section	FM tuning range		531 kHz - 1 710 kHz (at 9 kHz intervals)
	AM tuning range		530 kHz - 1 710 kHz (at 10 kHz intervals)
CD player section	Dynamic range		88 dB
	Signal-to-noise ratio		93 dB
	Wow and flutter		Immeasurable
Cassette deck section	Frequency response		Normal (type I): 50 Hz - 14 000 Hz
	Wow and flutter		0.15% (WRMS)
Speakers	Speaker units		10 cm cone × 1 + 1.5 cm dome × 1
	Impedance		6 Ω
	Dimensions (approx.)		140 mm × 231 mm × 195 mm (W/H/D)
	Mass (approx.)		1.7 kg each
General	Power requirement	Hong Kong	AC 220 V , 50 Hz
		Australia	AC 240 V , 50 Hz
		other	AC 110 V/AC 127 V/AC 220 V/AC 230 V - 240 V , 50 Hz/60 Hz (adjustable with the voltage selector)
	Power consumption	Hong Kong	50 W (at operation) 9.5 W (on standby/display on) 1.1 W (on standby/display off)
		Australia	50 W (at operation) 10 W (on standby/display on) 1.3 W (on standby/display off)
		other	60 W (at operation) 14.8 W (on standby/display on) 3.8 W (on standby/display off)
	Dimensions (approx.)		165 mm × 231 mm × 328 mm (W/H/D)
	Mass (approx.)		4.5 kg

Design and specifications are subject to change without notice.

SECTION 1

PRECAUTION

1.1 Safety Precautions

- (1) This design of this product contains special hardware and many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Services should be performed by qualified personnel only.
- (2) Alterations of the design or circuitry of the product should not be made. Any design alterations of the product should not be made. Any design alterations or additions will void the manufacturers warranty and will further relieve the manufacture of responsibility for personal injury or property damage resulting therefrom.
- (3) Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the Parts List of Service Manual. Electrical components having such features are identified by shading on the schematics and by (Δ) on the Parts List in the Service Manual. The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement parts shown in the Parts List of Service Manual may create shock, fire, or other hazards.
- (4) The leads in the products are routed and dressed with ties, clamps, tubings, barriers and the like to be separated from live parts, high temperature parts, moving parts and/or sharp edges for the prevention of electric shock and fire hazard. When service is required, the original lead routing and dress should be observed, and it should be confirmed that they have been returned to normal, after reassembling.

(5) Leakage shock hazard testing

After reassembling the product, always perform an isolation check on the exposed metal parts of the product (antenna terminals, knobs, metal cabinet, screw heads, headphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock. Do not use a line isolation transformer during this check.

- Plug the AC line cord directly into the AC outlet. Using a "Leakage Current Tester", measure the leakage current from each exposed metal parts of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground. Any leakage current must not exceed 0.5mA AC (r.m.s.).


• Alternate check method

Plug the AC line cord directly into the AC outlet. Use an AC voltmeter having, 1,000 Ω per volt or more sensitivity in the following manner. Connect a 1,500 Ω 10W resistor paralleled by a 0.15 μ F AC-type capacitor between an exposed metal part and a known good earth ground.

Measure the AC voltage across the resistor with the AC

voltmeter.

Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Voltage measured any must not exceed 0.75 V AC (r.m.s.). This corresponds to 0.5 mA AC (r.m.s.).

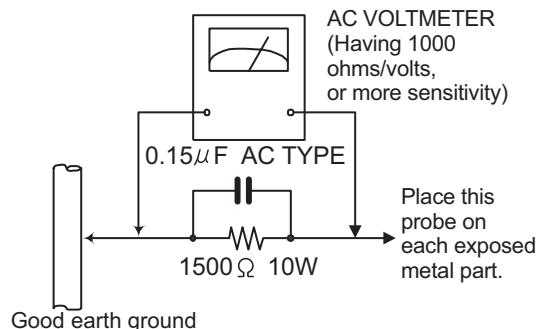

1.2 Warning

- (1) This equipment has been designed and manufactured to meet international safety standards.
- (2) It is the legal responsibility of the repairer to ensure that these safety standards are maintained.
- (3) Repairs must be made in accordance with the relevant safety standards.
- (4) It is essential that safety critical components are replaced by approved parts.
- (5) If mains voltage selector is provided, check setting for local voltage.

1.3 Caution

Burrs formed during molding may be left over on some parts of the chassis.

Therefore, pay attention to such burrs in the case of performing repair of this system.

1.4 Critical parts for safety

In regard with component parts appearing on the silk-screen printed side (parts side) of the PWB diagrams, the parts that are printed over with black such as the resistor (■), diode (■) and ICP (●) or identified by the " Δ " mark nearby are critical for safety. When replacing them, be sure to use the parts of the same type and rating as specified by the manufacturer.
(This regulation dose not Except the J and C version)

1.5 Safety Precautions (U.K only)

- (1) This design of this product contains special hardware and many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits.
- (2) Any unauthorised design alterations or additions will void the manufacturer's guarantee; furthermore the manufacturer cannot accept responsibility for personal injury or property damage resulting therefrom.
- (3) Essential safety critical components are identified by () on the Parts List and by shading on the schematics, and must never be replaced by parts other than those listed in the manual. Please note however that many electrical and mechanical parts in the product have special safety related characteristics. These characteristics are often not evident from visual inspection. Parts other than specified by the manufacturer may not have the same safety characteristics as the recommended replacement parts shown in the Parts List of the Service Manual and may create shock, fire, or other hazards.
- (4) The leads in the products are routed and dressed with ties, clamps, tubings, barriers and the like to be separated from live parts, high temperature parts, moving parts and/or sharp edges for the prevention of electric shock and fire hazard. When service is required, the original lead routing and dress should be observed, and it should be confirmed that they have been returned to normal, after re-assembling.

1.5.1 Warning

- (1) Service should be performed by qualified personnel only.
- (2) This equipment has been designed and manufactured to meet international safety standards.
- (3) It is the legal responsibility of the repairer to ensure that these safety standards are maintained.
- (4) Repairs must be made in accordance with the relevant safety standards.
- (5) It is essential that safety critical components are replaced by approved parts.
- (6) If mains voltage selector is provided, check setting for local voltage.



CAUTION Burrs formed during molding may be left over on some parts of the chassis. Therefore, pay attention to such burrs in the case of performing repair of this system.

1.6 Preventing static electricity

Electrostatic discharge (ESD), which occurs when static electricity stored in the body, fabric, etc. is discharged, can destroy the laser diode in the traverse unit (optical pickup). Take care to prevent this when performing repairs.

1.6.1 Grounding to prevent damage by static electricity

Static electricity in the work area can destroy the optical pickup (laser diode) in devices such as laser products.


Be careful to use proper grounding in the area where repairs are being performed.

(1) Ground the workbench

Ground the workbench by laying conductive material (such as a conductive sheet) or an iron plate over it before placing the traverse unit (optical pickup) on it.

(2) Ground yourself

Use an anti-static wrist strap to release any static electricity built up in your body.

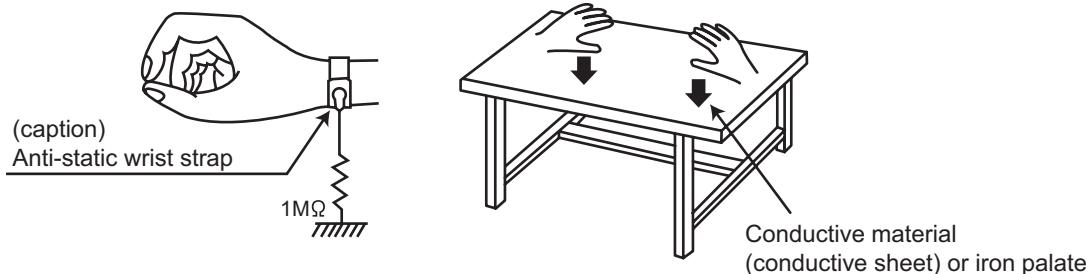

(3) Handling the optical pickup

- In order to maintain quality during transport and before installation, both sides of the laser diode on the replacement optical pickup are shorted. After replacement, return the shorted parts to their original condition.
(Refer to the text.)
- Do not use a tester to check the condition of the laser diode in the optical pickup. The tester's internal power source can easily destroy the laser diode.


1.7 Handling the traverse unit (optical pickup)

- Do not subject the traverse unit (optical pickup) to strong shocks, as it is a sensitive, complex unit.
- Cut off the shorted part of the flexible cable using nippers, etc. after replacing the optical pickup. For specific details, refer to the replacement procedure in the text. Remove the anti-static pin when replacing the traverse unit. Be careful not to take too long a time when attaching it to the connector.
- Handle the flexible cable carefully as it may break when subjected to strong force.
- It is not possible to adjust the semi-fixed resistor that adjusts the laser power. Do not turn it.

1.8 Attention when traverse unit is decomposed

*Please refer to "Disassembly method" in the text for the pickup unit.

- Apply solder to the short land sections before the card wire is disconnected from the connector on the servo board. (If the card wire is disconnected without applying solder, the pickup may be destroyed by static electricity.)
- In the assembly, be sure to remove solder from the short land sections after connecting the card wire.

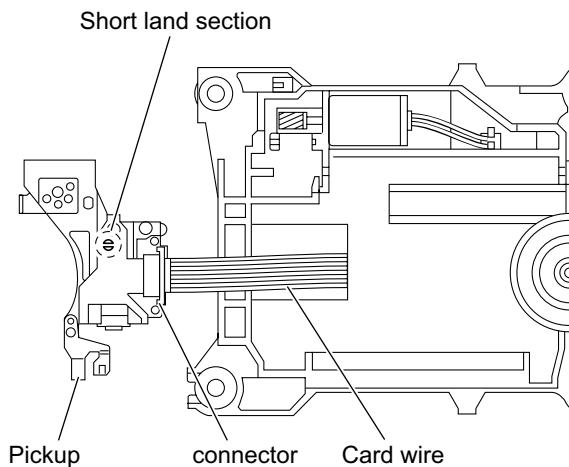

1.9 Important for laser products

1.CLASS 1 LASER PRODUCT

2.CAUTION :

(For U.S.A.) Visible and/or invisible class II laser radiation when open. Do not stare into beam.
 (Others) Visible and/or invisible class 1M laser radiation when open. Do not view directly with optical instruments.

3.CAUTION : Visible and/or invisible laser radiation when open and inter lock failed or defeated. Avoid direct exposure to beam.

4.CAUTION : This laser product uses visible and/or invisible laser radiation and is equipped with safety switches which prevent emission of radiation when the drawer is open and the safety interlocks have failed or are defeated. It is dangerous to defeat the safety switches.

(For U.S.A.)

CAUTION : Visible and/or invisible class II laser radiation when open. Do not stare into beam.

(Others)

CAUTION : Visible and/or invisible class 1M laser radiation when open. Do not view directly with optical instruments

ACHTUNG: Sichtbare und/oder unsichtbare Laserstrahlung der Klasse 1M bei offenen Abdeckungen. Nicht direkt mit optischen Instrumenten betrachten.

ATTENTION: Rayonnement laser visible et/ou invisible de classe 1M une fois ouvert. Ne pas regarder directement avec des instruments optiques.

VOORZICHTIG: Zichtbare en/of onzichtbare klasse 1M laserstralen indien geopend. Bekijk niet direct met optische instrumenten.

ATTENZIONE: Radiazione laser in classe 1M visibile e/o invisibile quando aperto. Non osservare direttamente con strumenti ottici.

WARNING: Synlig och/eller osynlig laserstrålning, klass 1M, när denna del är öppnad. Betrakta ej strålen med optiska instrument.

VARO!: Avattaessa olet alittina näkyvälle ja/tai näkymättömälle luokan 1M lasersateilylle. Älä tarkastele sitä optisen laitteen läpi.

ADVARSEL: Synlig og/eller usynlig klasse 1M-laserstråling ved åbning. Se ikke direkte med optiske instrumenter.

AVISO: Radiación láser de clase 1M visible y/o invisible cuando está abierto. No mirar directamente con instrumental óptico.

PRECAUÇÃO: Radiação laser de classe 1M visível e/ou invisível quando aberto. Não olhe directamente com instrumentos ópticos.

5.CAUTION : If safety switches malfunction, the laser is able to function.

6.CAUTION : Use of controls, adjustments or performance of procedures other than those specified here in may result in hazardous radiation exposure.



CAUTION Please use enough caution not to see the beam directly or touch it in case of an adjustment or operation check.

PRECAUÇÃO: Radiação laser de classe 1M visível e/ou invisível quando aberto. Não olhe diretamente com instrumentos óticos.

ПРЕДУПРЕЖДЕНИЕ: В открытом состоянии происходит видимое и/или невидимое излучение лазера класса 1М. Не смотрите непосредственно в оптические инструменты.

UWAGA: Otwarcie spowoduje narażenie na widzialne i/lub niewidzialne promieniowanie lasera klasy 1M. Nie patrzeć bezpośrednio w przyrządy optyczne.

UPOZORNĚNÍ: Při otevření vydává viditelné popř. neviditelné laserové ozáření třídy 1M. Nedívajte se do otvoru přímo s optickými nástroji.

FIGYELMEZETÉS: Látható és/vagy láthatatlan 1M osztályú sugárzás nyitott állapotban. Ne nézze közvetlenül optikai műszerekkel.

注意 : 打開蓋板可能會產生可見或不可見的 1M 級鐳射。不要使用光學儀器直接進行窺視。


注意： 打开盖板可能会产生可见或不可见的 1M 级镭射。不要使用光学仪器直接进行窥视。

تنبيه: يوجد إشعاع ليزري مرئي أو غير مرئي من الفئة 1M عندما يكون الجهاز مفتوحاً. يجب النظر مباشرة داخل الجهاز باستخدام أدوات بصريه.

احتیاط: هنگامی که باز گردد، تشعشع مرئی و یا نامرئی کلاس 1M لیزر وجود دارد. با لوازم چشمی مستقیماً به آن نگاه نکنید.

주의: 개방하면 가시 및/또는 비가시 클래스 1M 레이저 방사선이 나옵니다. 광학 기구로 직접 들여다보지 마십시오.

REPRODUCTION AND POSITION OF LABELS and PRINT WARNING LABEL and PRINT

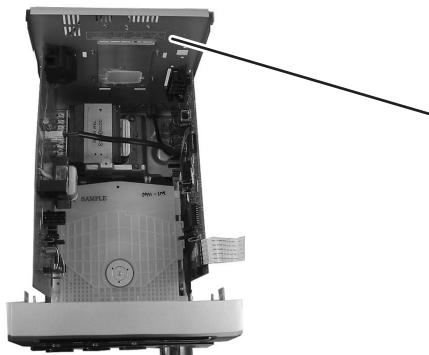

CAUTION VISIBLE AND/OR INVISIBLE CLASS 1M LASER RADIATION WHEN OPEN, DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS IEC60825-1:2001 (ENG)	ATTENTION RAYONNEMENT LASER VISIBLE ET/OU INVISIBLE DE CLASSE 1M QUAND IL EST OUVERT. NE PAS REGARDER DIRECTEMENT AVEC DES INSTRUMENTS OPTIQUES.	AVISO RADIACION LÁSER VISIBLE Y/O INVISIBLE DE CLASE 1M CUANDO ESTÁ ABIERTO. NO MIRAR DIRECTAMENTE A CON INSTRUMENTOS OPTICOS.	WARNING SYNLIG OCH/ELLER OSYNLIG LASER- STRÄLNING, KLASS 1M, NÄR DENNA DEL ÄR ÖPPNAD. BETRAKTA EJ STRÅLEN MED OPTISKA INSTRUMENT.	注意 これを聞くと可視 及び不可視の不可視 のクラス 1M レーザーが射出 します。 光学機器で直接 見てください。(ださい。 (JPN)	CAUTION VISIBLE AND/OR INVISIBLE CLASS II LASER RADIATION WHEN OPEN. DO NOT STARE INTO BEAM. FDA 21 CFR (ENG) LV44803-003A (JPN)
--	--	--	---	---	---

SECTION 2

SPECIFIC SERVICE INSTRUCTIONS

This service manual does not describe SPECIFIC SERVICE INSTRUCTIONS.

SECTION 3 DISASSEMBLY

3.1 Main Body

3.1.1 Removing the side panel (See Fig.1 to 3)

- (1) Remove the one screw **A** attaching the rear cover. (See Fig.1)
- (2) Remove the five screws **B** attaching the side panel and top cover. (See Fig.1)
- (3) Remove the two screws **C** attaching the front panel assembly. (See Fig.2)
- (4) Slide the both side panels in the direction of the arrow. (See Fig.3)

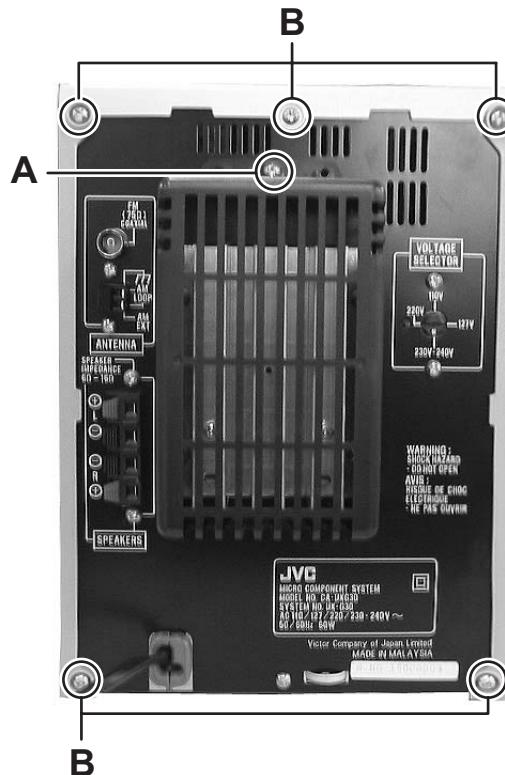


Fig.1


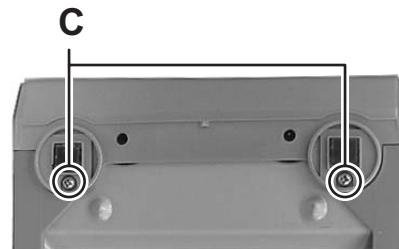


Fig.2

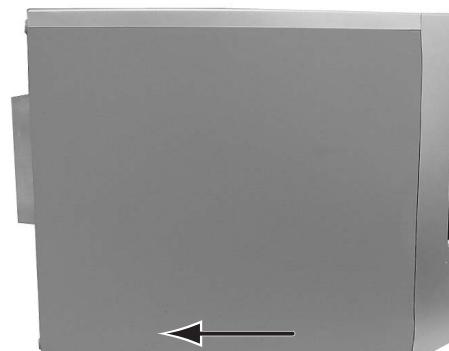

(both side)

Fig.3

3.1.2 Removing the front panel assembly

(See Fig.4)

- (1) Remove the two screws **D** attaching the front panel and top cover.
- (2) Disconnect the card wire of the switch board from the connector [CN401](#) of the micon board.
- (3) Disengage the two hooks **a** then remove the front panel assembly.

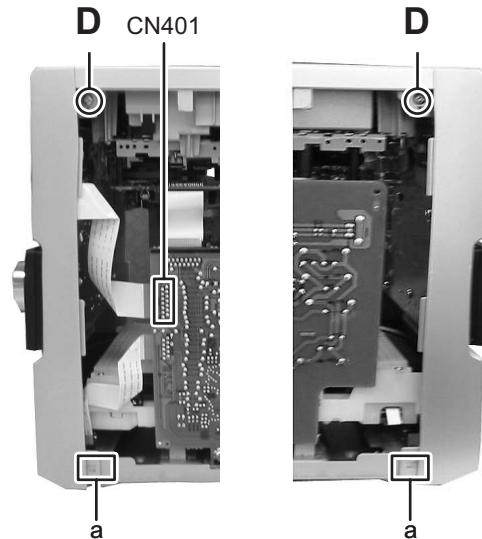


Fig.4

3.1.3 Removing the top cover

(See Fig.5)

- (1) Disconnect the card wire from connector [CN100](#).

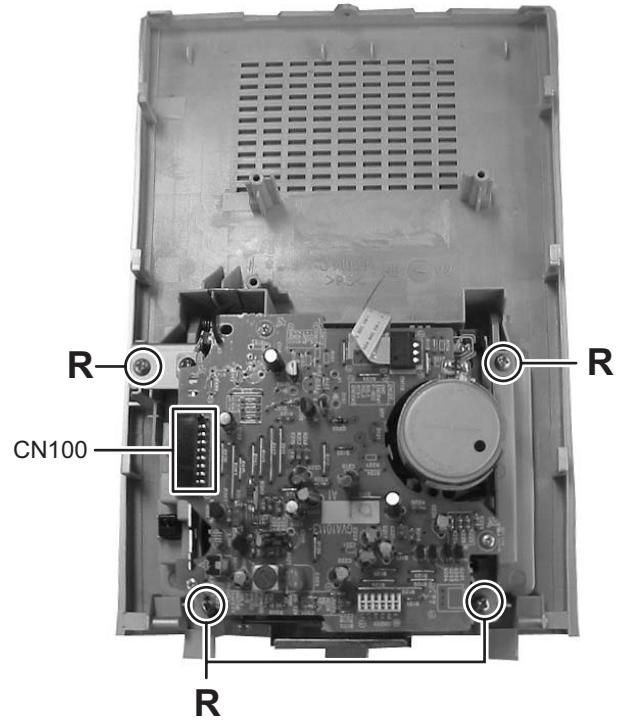


Fig.5

3.1.4 Removing the tuner pack

(See Fig.6, 7)

- (1) Disconnect the card wire of the tuner pack from connector [CN405](#) of the micon board. (See Fig.6)
- (2) Remove the two screws **E** attaching the tuner pack. (See Fig.7)

3.1.5 Removing the micon board

(See Fig.6 to 8)

- (1) Remove the two screws **F** attaching the micon board. (See Fig.7)
- (2) Disconnect the card wires from connectors [CN400](#), [CN406](#) of the micon board. (See Fig.6)
- (3) Disconnect the micon board from the power amplifier board in the direction of the arrow while releasing the claw **b**, **c** of the connectors [CN151](#), [CN152](#) on the power amplifier board. (See Fig.8)
- (4) Remove the tow screws **G** attaching the micon board. (See Fig.6)

3.1.6 Removing the power amplifier board

(See Fig.7, 8)

- (1) Remove the two screws **H** attaching the power IC. (See Fig.7)
- (2) Remove the one screw **J** attaching the amplifier board. (See Fig.8)
- (3) Disconnect the power amplifier board from the trans board in the direction of the arrow while releasing the claw **d** of the connector [CN150](#) on the power amplifier board. (See Fig.8)

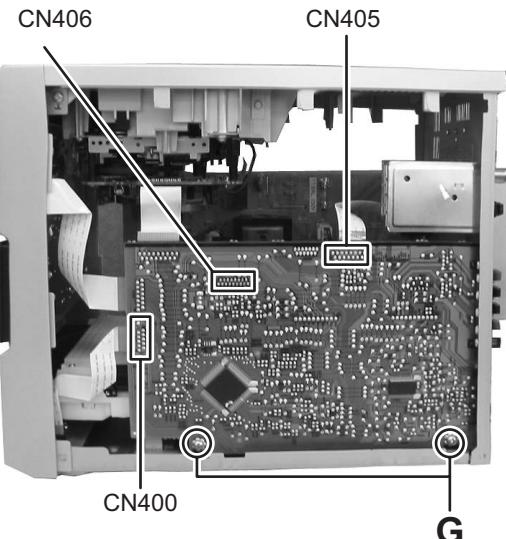


Fig.6

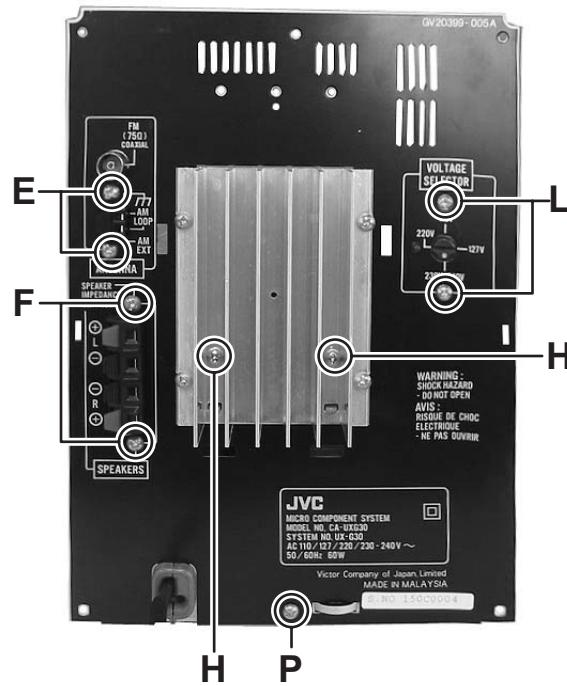


Fig.7

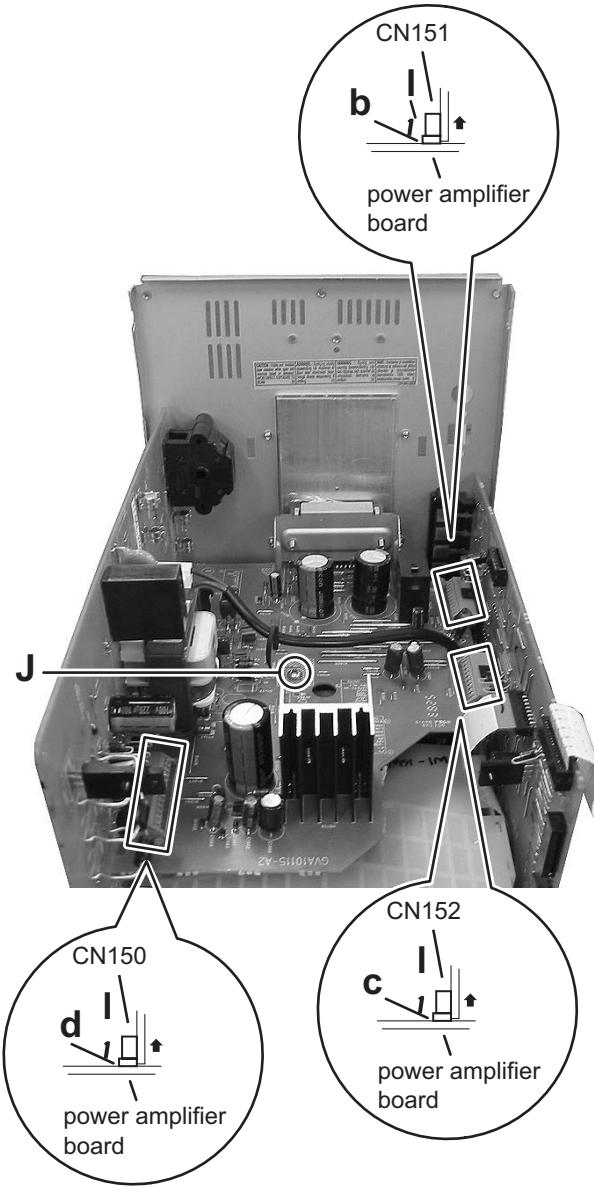


Fig.8

3.1.7 Removing the DVD mechanism assembly

(See Fig.9)

- (1) Remove the one screw **K** attaching the DVD mechanism assembly.

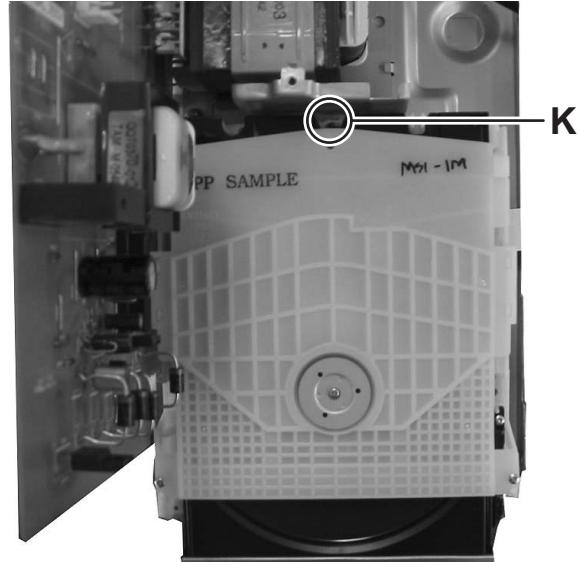


Fig.9

3.1.8 Removing the trans board

(See Fig.7, 10, 11)

- (1) Remove the two screws **L** attaching the trans board. (See Fig.7)
- (2) Disconnect the connector wire from the connector **CN900** of the trans board. (See Fig.10)
- (3) Remove the one screw **M** attaching the trans board. (See Fig.10)
- (4) Remove the three screws **N** attaching the power transformer. (See Fig.11)

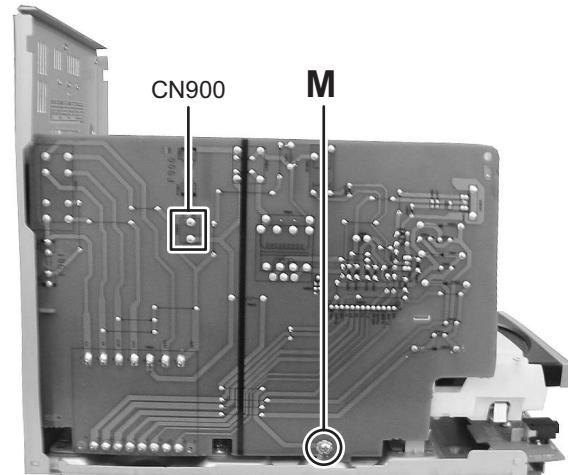


Fig.10

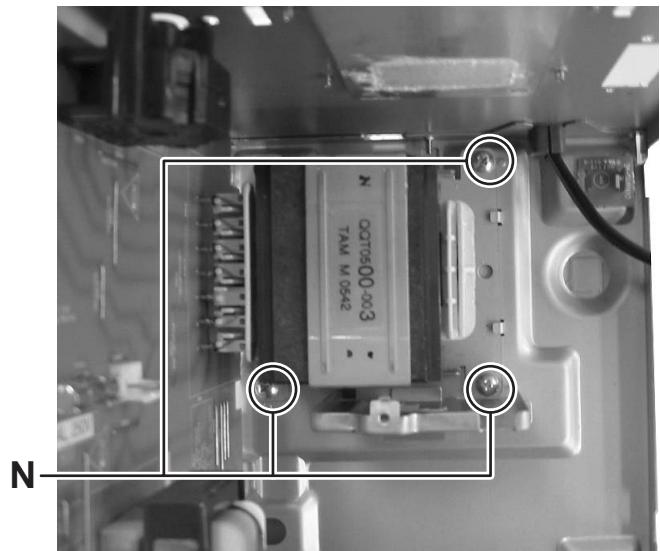


Fig.11

3.1.9 Removing the rear panel

(See Fig.7, 12)

- (1) Remove the one screw **P** attaching the rear panel. (See Fig.7)
- (2) Disengage the two hooks **e** then remove the rear panel. (See Fig.12)

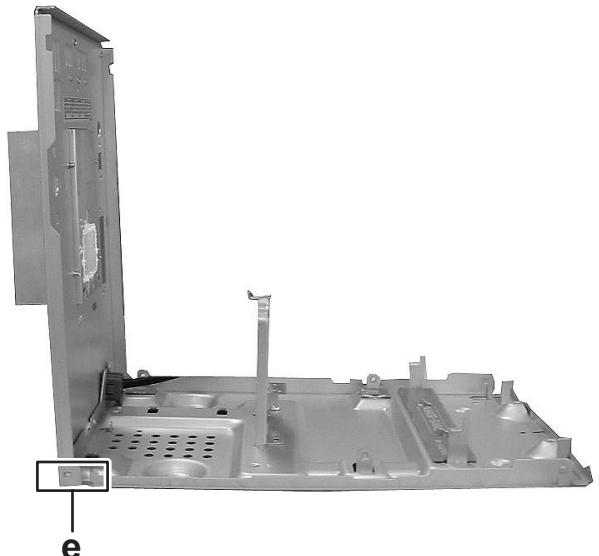


Fig.12

3.1.10 Removing the jack board

(See Fig.13)

- (1) Remove the two screws **Q** attaching the jack board.
- (2) Disengage the tow hooks **f** then remove the jack board.

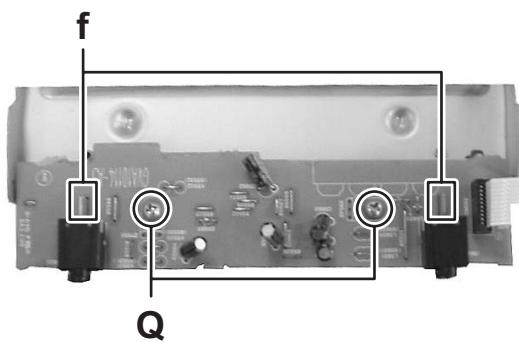


Fig.13

3.1.11 Removing the cassette mechanism assembly

(See Fig.5)

- (1) Remove the four screws **R** attaching the cassette mechanism assembly.

3.1.12 Removing the switch board

(See Fig.14, 15)

- (1) Take out the volume knob. (See Fig.14)
- (2) Remove the six screws **S** attaching the switch board. (See Fig.15)
- (3) Disengage the two hooks **g** then remove the switch board. (See Fig.15)



Fig.14

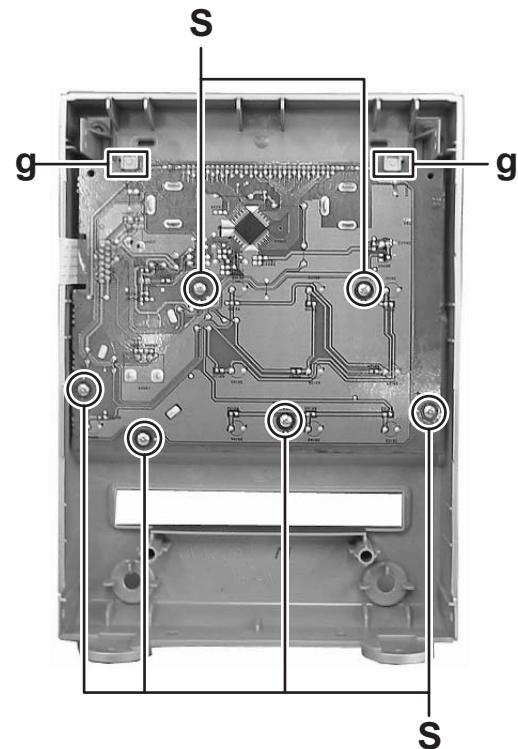


Fig.15

3.2 CD mechanism assembly

- Remove the CD mechanism assembly from main body.

3.2.1 Removing the CD cover

(See Fig.1)

- (1) Remove the two screws **A** attaching the CD cover from bottom side of CD mechanism assembly.
- (2) Lift up the CD cover from disengage boss **a** of the CD mechanism assembly.
- (3) Slide the CD cover to direction of the arrow and remove the CD cover from fixing part of **b**.
- (4) Remove the CD cover.

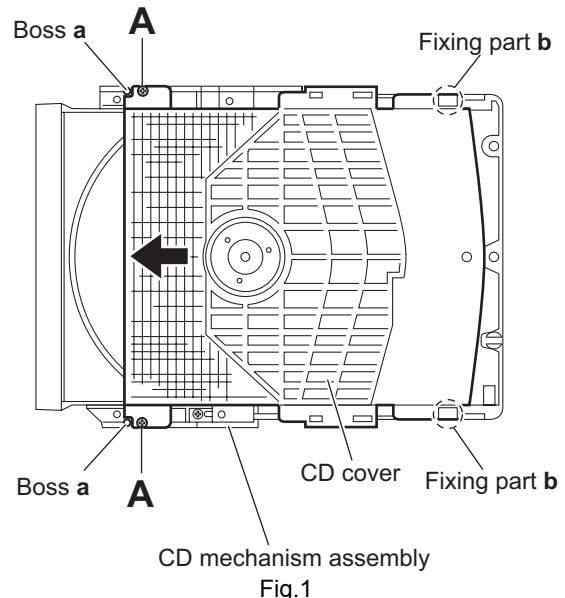


Fig.1

3.2.2 Removing the tray assembly

(See Fig.2 and 3)

- Remove the CD cover.
- (1) Press slide cam and pull out the tray assembly to direction of the arrow from right side of CD mechanism assembly. (See Fig.2)
 - (2) Remove the two screws **B** attaching the tray assembly from upper side of CD mechanism. (See Fig.3)
 - (3) Remove the bussing of the tray assembly from boss **c** of the CD mechanism assembly and remove the tray assembly. (See Fig.3)

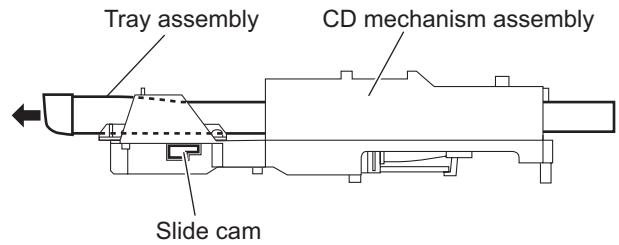


Fig.2

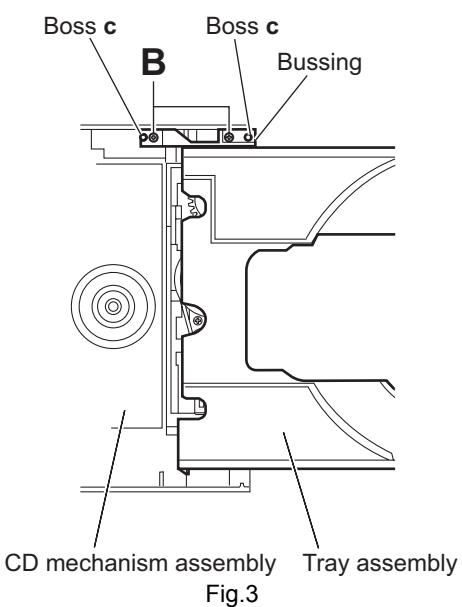


Fig.3

3.2.3 Removing the traverse mechanism assembly

(See Fig.4)

- (1) Remove the four screws **C** attaching the traverse mechanism assembly from bottom side of CD mechanism assembly.
- (2) Disconnect the card wire from connector [CN602](#) of the CD servo board and then take out the traverse mechanism assembly and CD servo board together.

Reference:

When reattaching the traverse mechanism assembly, the card wire should through the part **d**.

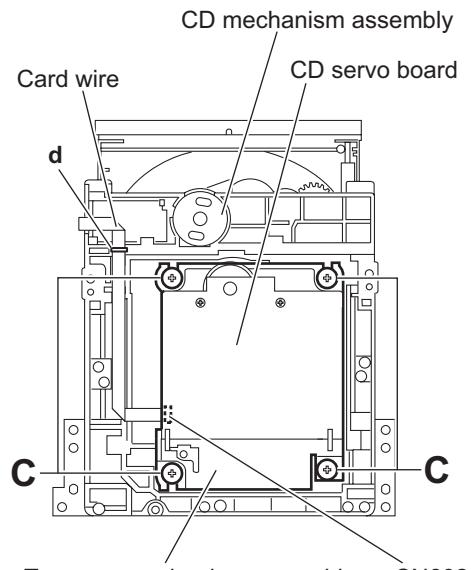


Fig.4



3.2.4 Removing the CD servo board

(See Fig.5 and 6)

- Remove the traverse mechanism assembly.
- (1) Remove the two screws **D** attaching the CD servo board from bottom side of traverse mechanism assembly. (See Fig.5)
- (2) Remove the solder from solder part **e** of the CD servo board. (See Fig.5)
- (3) Remove the yellow wire from solder part **f** of the CD servo board. (See Fig.5)
- (4) Remove the white wire from solder part **h** of the CD servo board. (See Fig.5)
- (5) Remove the CD servo board to upper side, disengage the hook **c** to direction of the arrow 1 then turn over the CD servo board. (See Fig.5)
- (6) Solder to short land part **j** of pickup. (See Fig.6)
- (7) Release the lock of connector **CN601** to direction of the arrow 2 and disengage the card wire. (See Fig.6)

Caution:

- Solder to short land part **j** of the pickup then disconnect the card wire from connector **CN601** of the CD servo board. If disconnect the card wire before soldering, pickup is make sure destroyed by static electricity. (See Fig.6)
- When reattaching the CD servo board, connect the card wire to connector **CN601** and then remove the solder of short land part **j** of the pickup.

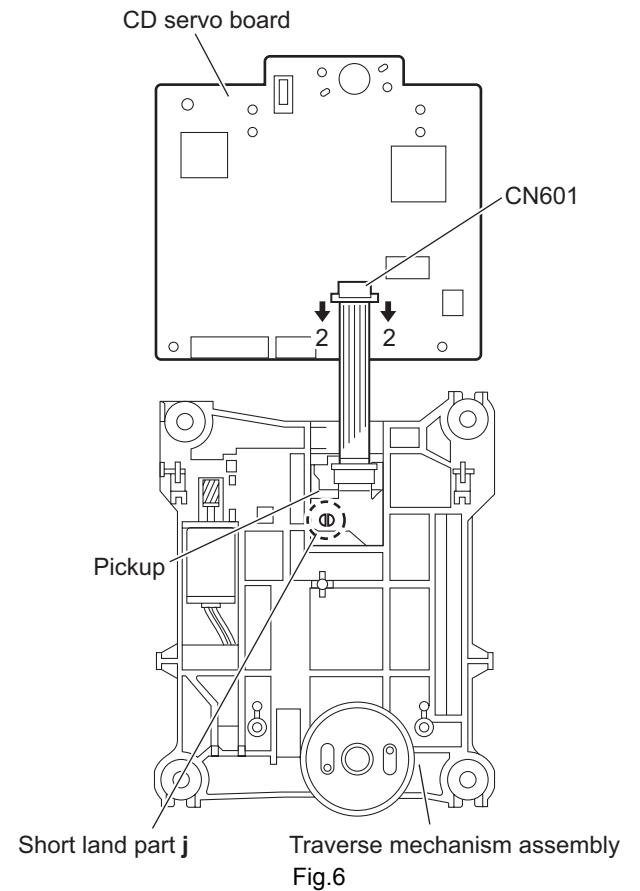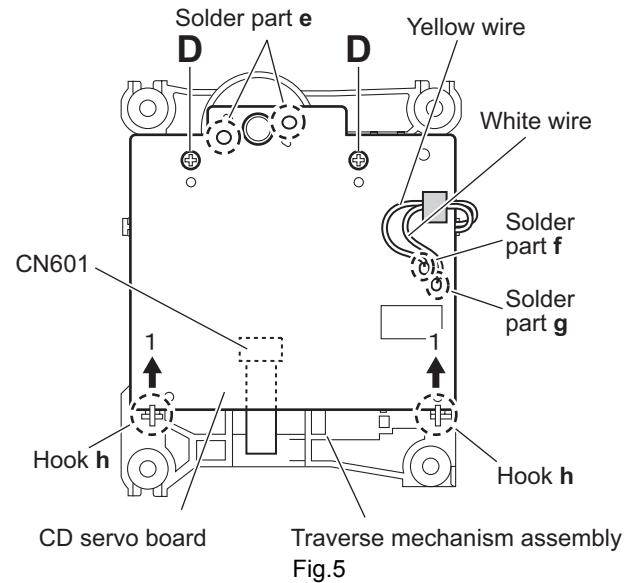

3.2.5 Removing the pickup

(See Fig.7 to 9)

- Remove the traverse mechanism assembly.
- (1) Remove the one screw **E** attaching the plate from upper side of traverse mechanism assembly. (See Fig.7)
- (2) Remove the plate from fixing part **k** then take out the plate. (See Fig.7)
- (3) Remove the two screws **F** attaching the LEAD spring and then take out the LEAD spring. (See Fig.8)
- (4) Take out the feed gear, and then remove the shaft of pickup from part **m** of the traverse mechanism assembly. (See Fig.8)
- (5) Remove the pickup from part **n** of the traverse mechanism assembly and then take out pickup with shaft. (See Fig.8)
- (6) Release the shaft from pickup. (See Fig.8)
- (7) Solder the short land part **p** of the pickup. (See Fig.9)
- (8) Release the lock of the connector to direction of the arrow, and then disconnect the card wire. (See Fig9)

Caution:

- Solder to short land part **p** of the pickup then disconnect the card wire from connector. If disconnect the card wire before soldering, pickup is make sure destroyed by static electricity. (See Fig.9)
- When reattaching the pickup, connect the card wire to connector and then remove the solder from short land part **p**. (See Fig.9)

3.2.6 Attaching the pickup

(See Fig.7 to 10)

- Please refer the "Removing the pickup".
- (1) Connect the card wire to connector of pickup, and then remove the solder from short land part **p** of the pickup. (See Fig.9)
- (2) Attach the shaft to pickup. (See Fig.8)
- (3) Fit the pickup to part **n** of the traverse mechanism and then attach the end of the shaft to part **k**. (See Fig.8)
- (4) Attach the LEAD spring and feed gear. (See Fig.8)
- (5) Attach the plate. (See Fig. 7)
- (6) One turn the LEAD gear to direction of the arrow 1 and fully shift to direction of the arrow 2. (See Fig.10)

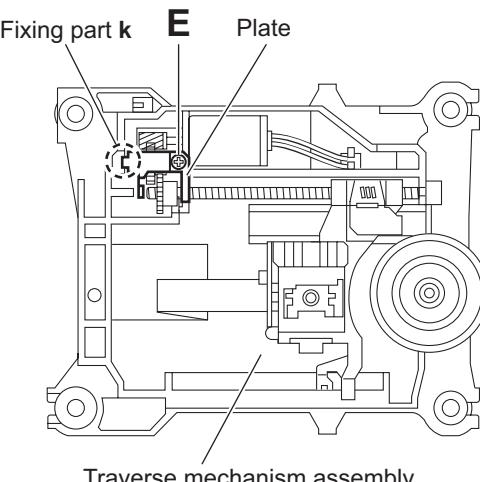


Fig.7

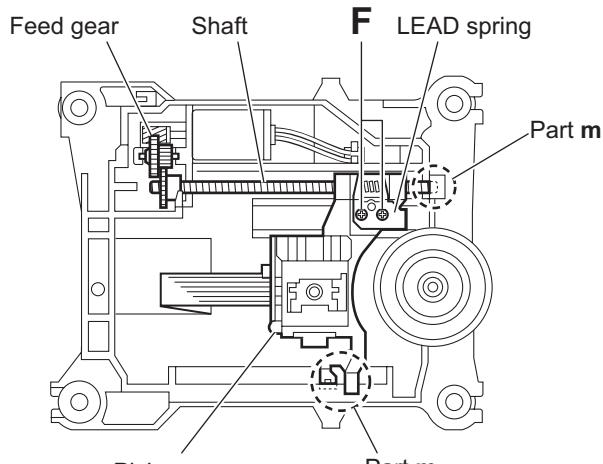


Fig.8

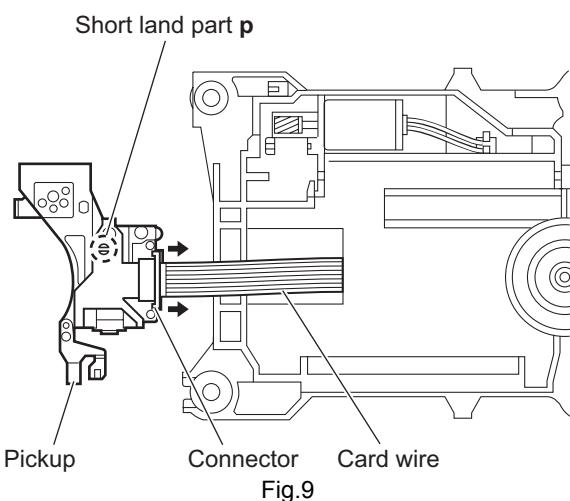


Fig.9

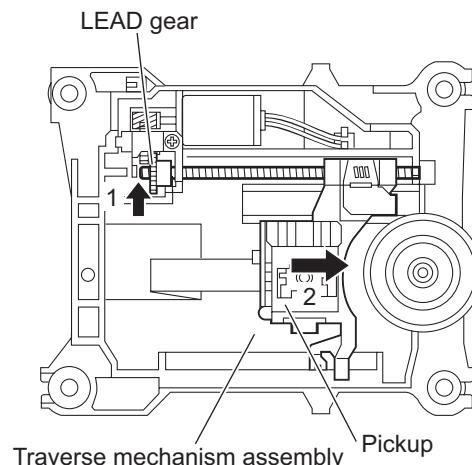


Fig.10


3.2.7 Removing the feed motor

(See Fig.11 to 13)


- Remove the traverse mechanism.
- (1) Remove the yellow wire from solder part **q** of the CD servo board from upper side of traverse mechanism. (See Fig.11)
 - (2) Remove the white wire from solder part **r** of the CD servo board. (See Fig.11)
 - (3) Remove the one screw **G** attaching the plate. (See Fig.12)
 - (4) Disengage the plate from fixing part **s** and take out the plate. (See Fig.12)
 - (5) Remove the feed gear and take out the feed motor. (See Fig13)

Reference:


When attaching the feed motor, the wire has to through the part **t** of the traverse mechanism assembly. (See Fig.13)

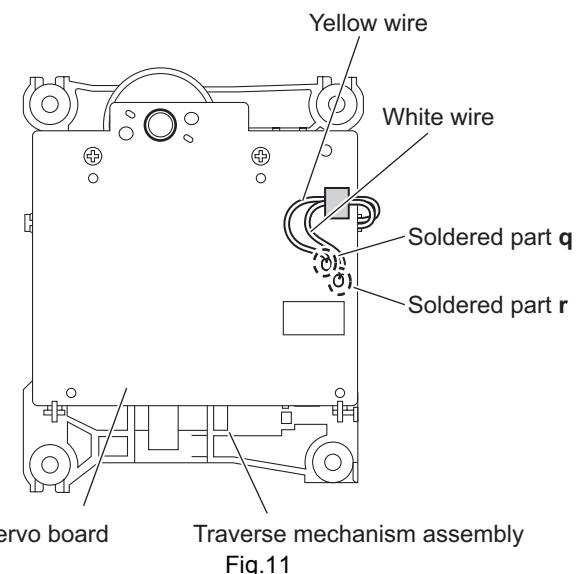

CD servo board Traverse mechanism assembly
Fig.11

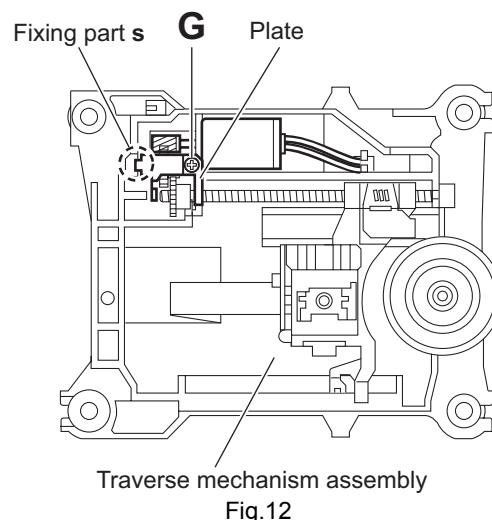

Traverse mechanism assembly
Fig.12

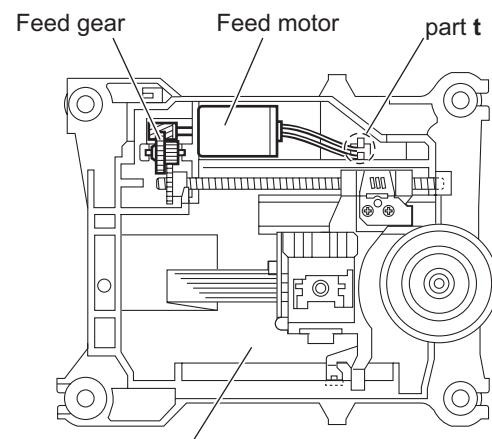

Traverse mechanism assembly
Fig.13

3.2.8 Removing the switch board

(See Fig.14)

- (1) Disconnect the card wire from **CN1** of the switch board from bottom side of CD mechanism assembly.
- (2) Remove the wire from solder part **u** of the switch board.
- (3) Remove the one screw **H** attaching the switch board to CD mechanism assembly.
- (4) Lift up the switch board by pushing the hook **v** of CD mechanism assembly and take out it from part **w**.

Reference:

- After attach the switch board to CD mechanism assembly, wire hooked to part **x**.
- Hook **u** of the CD mechanism assembly, it have to bond lock.

3.2.9 Removing the motor

(See Fig.14 and 15)

- Remove the tray assembly.
- (1) Remove the wire from solder part **u** of the switch board from bottom side of CD mechanism assembly.
- (2) Remove the belt of motor pulley from upper side of CD mechanism assembly. (See Fig.15)

Caution:

Belt should not apply grease.

- (3) Remove the two screws **J** attaching the motor to CD mechanism assembly and take out the motor from bottom side of CD mechanism assembly. (See Fig.15)

Reference:

After motor attached to CD mechanism assembly, wire should hook to part **w**. (See Fig.14)

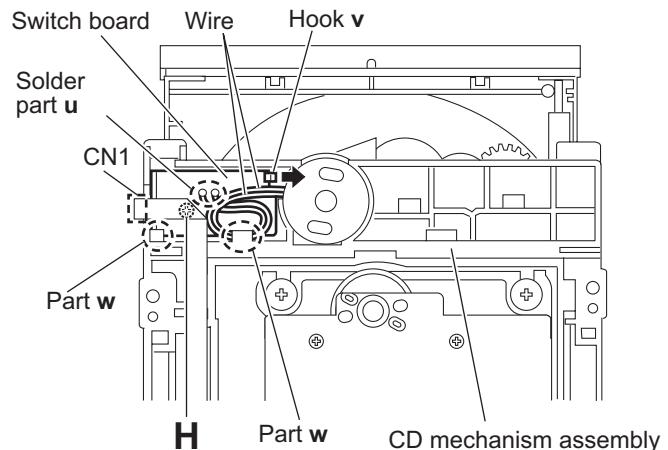


Fig.14

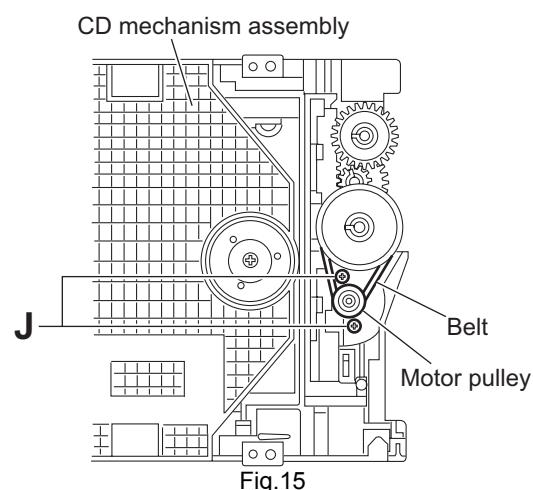


Fig.15

SECTION 4 ADJUSTMENT

4.1 Test mode

Step	Special key function	Keys	Description
1	Cold start	(remocon) A.STANDBY + SET + DISPLAY	<p>1. Restore factory setting at next AC Power ON. Volume level: 12 First source at Power ON: CD Sound Turbo: Enable AHB Pro: Disable FM Preset Channel: restore to factory setting Clock/ Timer: Clear Dimmer: restore to factory setting</p> <p>2. FL display: COLD during key pressed.</p>
2	Clock fast forward	(remocon) A.STANDBY + SET + FM MODE/ PLAY MODE	<p>1. Clock minute fast increase by 1 every seconds. (Clock starts from 0:00 if not preset)</p> <p>2. Pressed again to stop clock fast running.</p> <p>3. During: Power Standby: OK Power ON: OK ECO mode: OK Safety trigger: OK</p>
3	Volume change	(remocon) A.STANDBY + SET + SOUND TURBO	<p>1. Volume level changes from 40 > 21 > Vol MIN > 40</p> <p>2. During: Power Standby: OK (unit will turn ON) Power ON: OK ECO mode: OK Safety trigger: OK</p>
4	Version display	(remocon) A.STANDBY + SET + AHB PRO	<p>1. Display ROM version for 5 seconds.</p> <p>2. Example: 37R06107 Digit 1 and 2: ROM version = 37 Digit 3 and 4: ROM Correction version = 0 Digit 5: ROM issue year = 2006 Digit 6: ROM issue month = January (1: Jan, 2: Feb, 3: Mar, 4: Apr, 5: May, 6: June, 7: July, 8: Aug, 9: Sept, A: Oct, B: Nov, C: Dec) Digit 7 and 8: ROM issue day = 7</p> <p>3. During: Power Standby: NG Power ON: OK ECO mode: NG Safety trigger: NG</p>
5	FL display test	(remocon) A.STANDBY + SET + BASS/TREBLE	<p>1. All FL segments will blink at 500ms interval.</p> <p>2. During: Power Standby: OK Power ON: OK ECO mode (Pressing DIMMER key at Power Standby): NG Safety trigger: NG</p> <p>3. Press any key (except SOUND TURBO) on the unit or CANCEL key (remocon) will exit test mode."</p>
6	Safety info display	(Unit) SOUND TURBO + STOP	<p>1. Safety Information display. During safety trigger, safety info is display for 2 sec and return to ECO mode.</p> <p>2. Safety Information display: NO SAFTY: No Safety triggered. SFTY- VH: Power IC NG SFTY-REG: Power Regulator NG SFTY-ALP: tape module NG SFTY- CD: CD module NG SFTY-PRT: Power AMP Protector NG</p> <p>3. During: Power Standby: OK Power ON: NG ECO mode: OK (FL turns ON for 2sec then turns OFF) Safety trigger: OK (FL turns ON for 2sec then turns OFF)</p> <p>4. For version 36, there is no backup of safety information. It shows only current safety condition.</p> <p>5. For version 37, last safety information is backup.</p>

SECTION 5

TROUBLE SHOOTING

5.1 Maintenance of laser pickup (CD)


(1) Cleaning the pick up lens

Before you replace the pick up, please try to clean the lens with a alcohol soaked cotton swab.

(2) Life of the laser diode

When the life of the laser diode has expired, the following symptoms will appear.

- The level of RF output (EFM output : amplitude of eye pattern) will below.

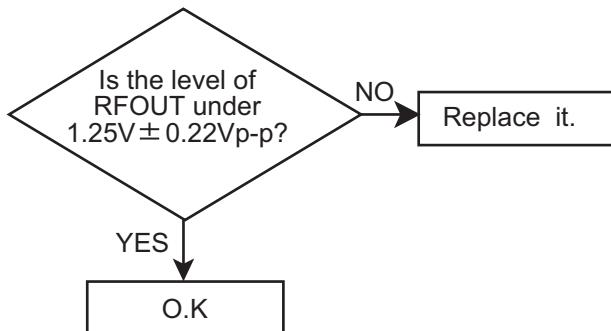

(3) Semi-fixed resistor on the APC PC board

The semi-fixed resistor on the APC printed circuit board which is attached to the pickup is used to adjust the laser power. Since this adjustment should be performed to match the characteristics of the whole optical block, do not touch the semi-fixed resistor.

If the laser power is lower than the specified value, the laser diode is almost worn out, and the laser pickup should be replaced.

If the semi-fixed resistor is adjusted while the pickup is functioning normally, the laser pickup may be damaged due to excessive current.

5.2 Replacement of laser pickup (CD)

Turn off the power switch and, disconnect the power cord from the ac outlet.

Replace the pickup with a normal one.(Refer to "Pickup Removal" on the previous page)

Plug the power cord in, and turn the power on. At this time, check that the laser emits for about 3seconds and the objective lens moves up and down.
Note: Do not observe the laser beam directly.

Play a disc.

Check the eye-pattern at TP1.

Finish.



Victor Company of Japan, Limited
Audio/Video Systems Category 10-1, 1chome, Ohwatari-machi, Maebashi-city, 371-8543, Japan

(No.MB536)

 Printed in Japan
VPT


JVC

SCHEMATIC DIAGRAMS

MICRO COMPONENT SYSTEM

**UX-G35US, UX-G35UB
UX-G33A, UX-G33US, UX-G33UB, UX-G33UW
UX-G30US, UX-G30UB, UX-G30UW**

CD-ROM No.SML200606

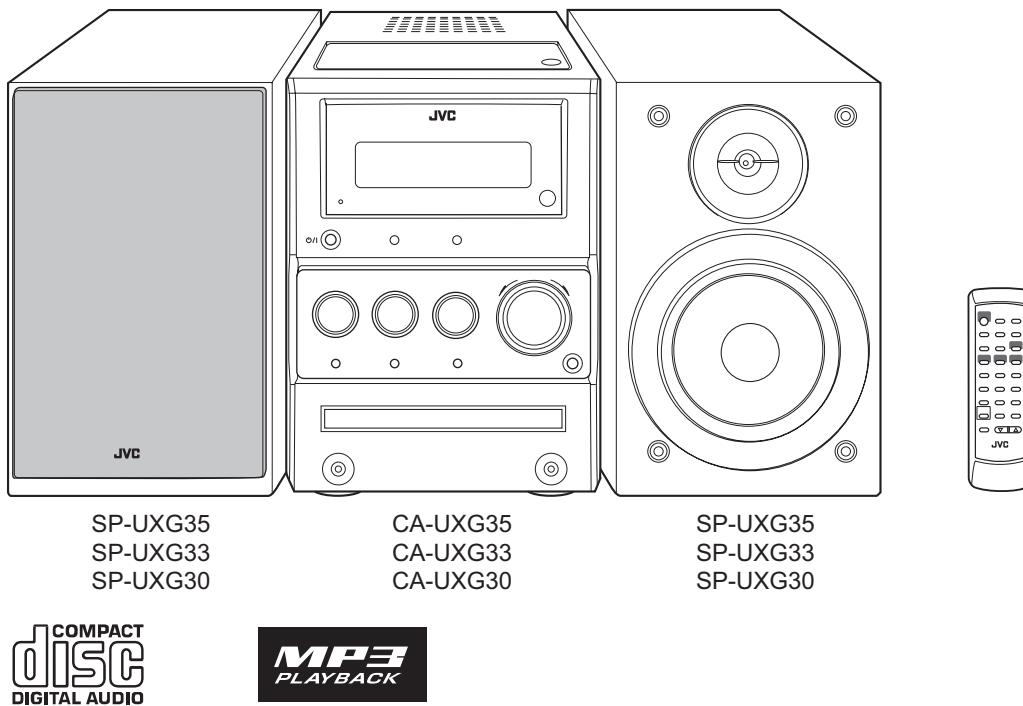


Lead free solder used in the board (material : Sn-Ag-Cu, melting point : 219 Centigrade)

Contents

Block diagrams	2-1
Standard schematic diagrams	2-2
Printed circuit boards	2-8 to 10

In regard with component parts appearing on the silk-screen printed side (parts side) of the PWB diagrams, the parts that are printed over with black such as the resistor (—), diode (■) and ICP (●) or identified by the "Δ" mark nearby are critical for safety.


Block diagram

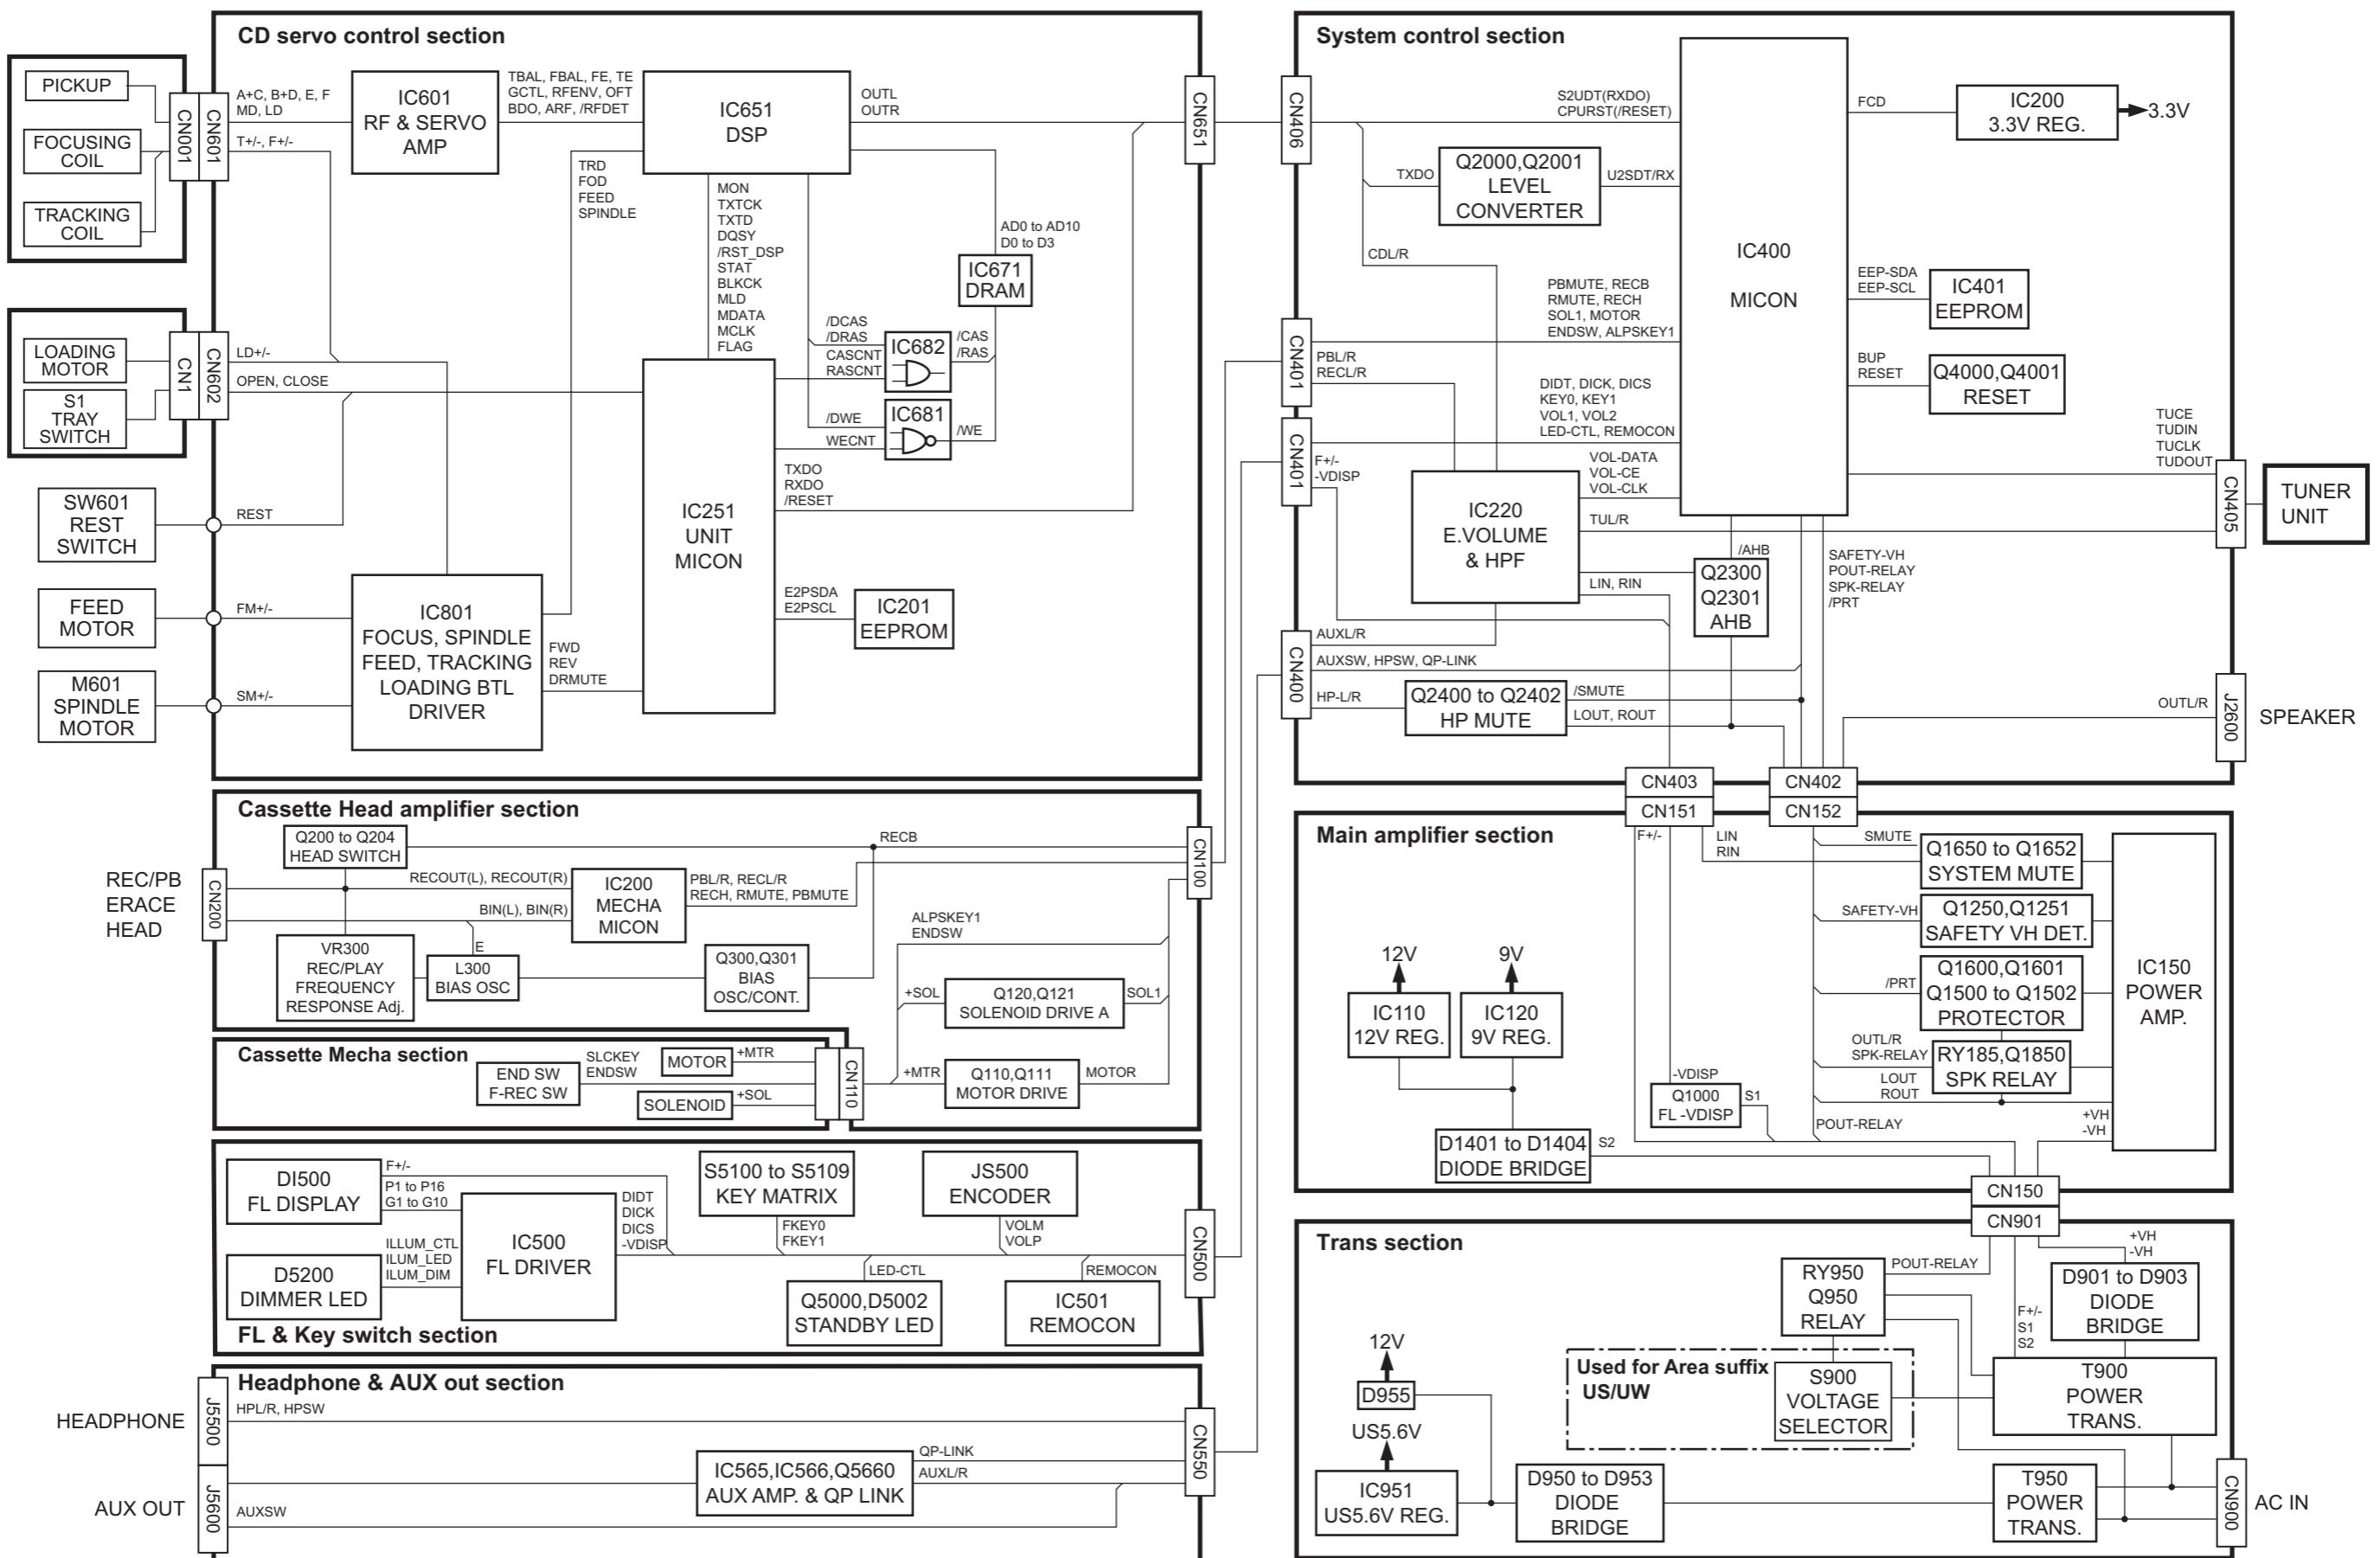

Standard schematic diagrams


■ Transformer section

B/E/EN/EV

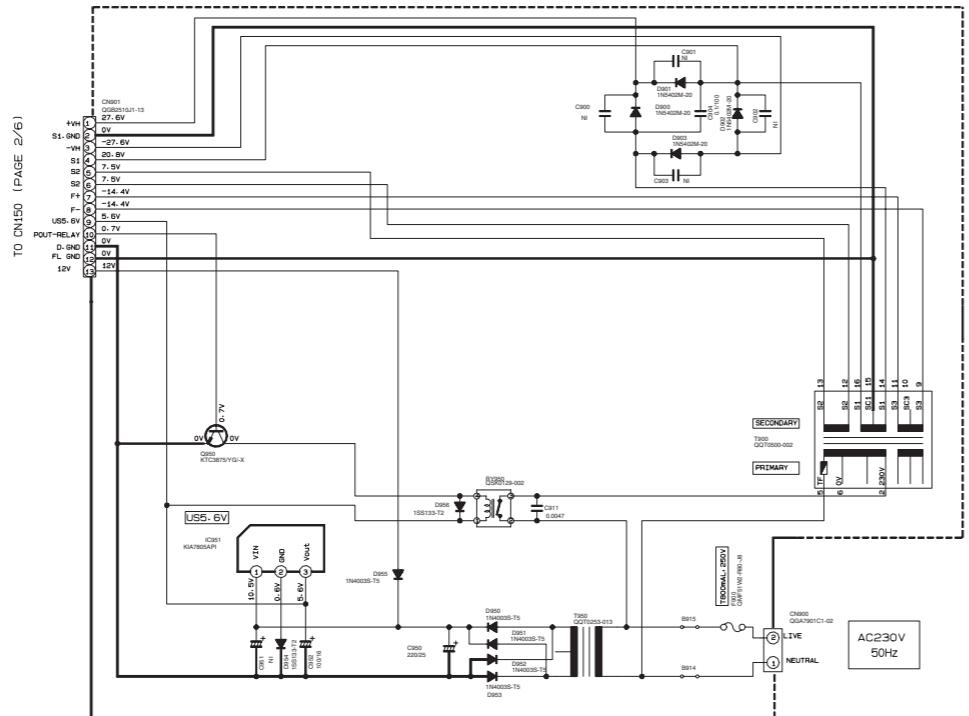


GVA10115-A1

UP/UF/UB/UY/A

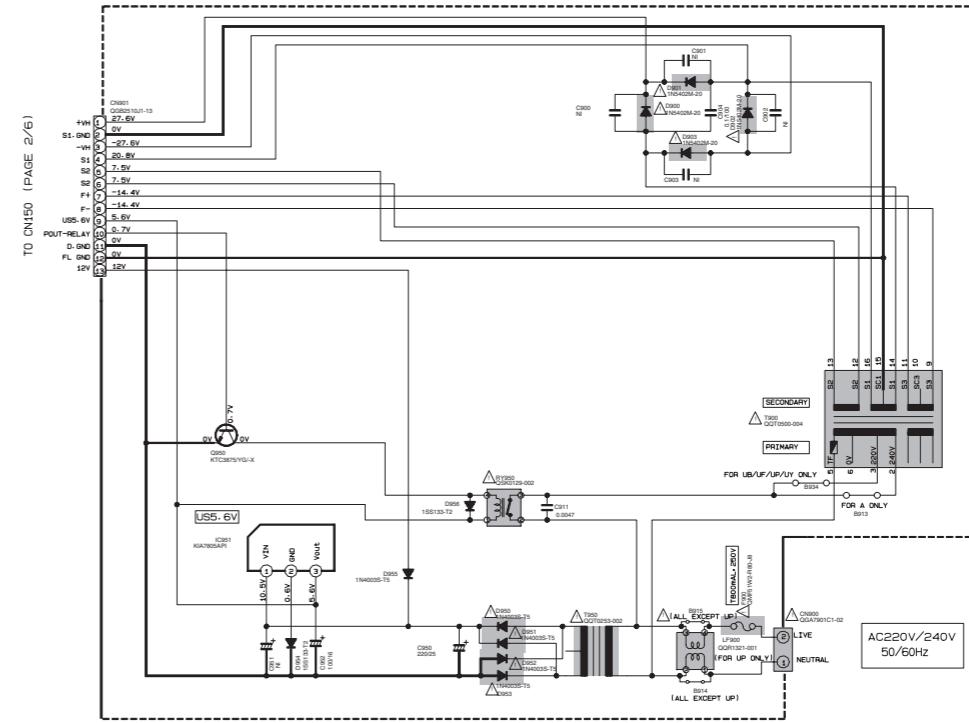

US/UT/UW

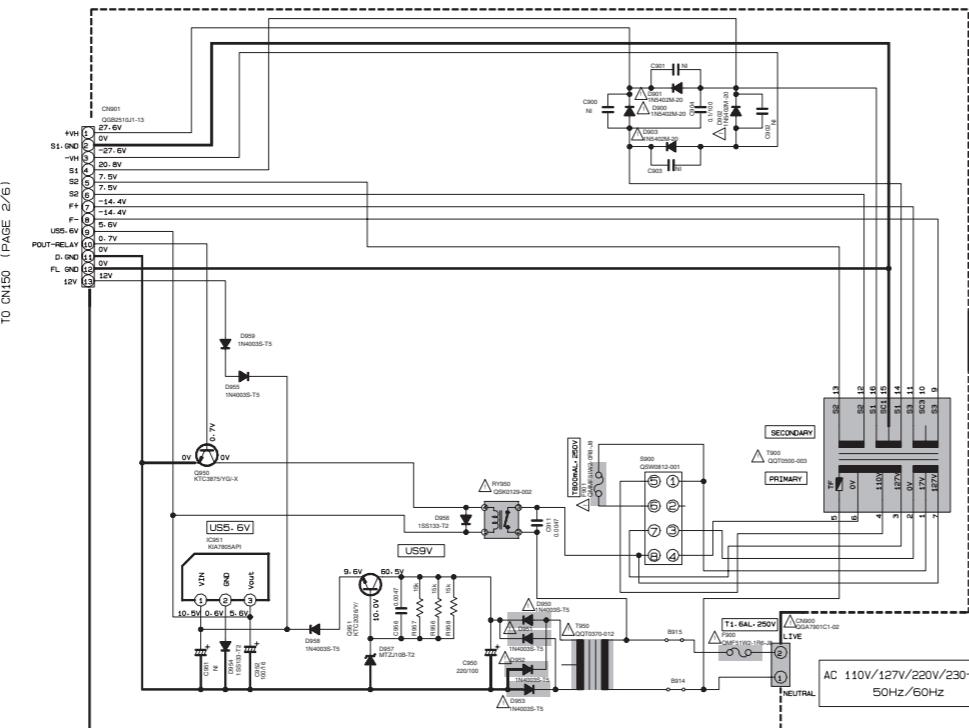


OL EXT	VERSION CODES
002	B : U.K.
005	E : CONTINENTAL EUROPE
009	EN : NORDIC COUNTRIES
025	EV : EASTERN EUROPE
003	A : AUSTRALIA
023	UF : CHINA
019	UB : HONG KONG
014	US : SINGAPORE
010	UT : TAIWAN
037	UW : SOUTH AMERICA
025	UY : ARGENTINA
022	UP : KOREA


NOTES

- 1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER OR OSCILLOSCOPE WITHOUT INPUT SIGNAL CONDITION ---- CD STOP MODE.
- 2. UNLESS OTHERWISE SPECIFIED.
- ALL RESISTORS ARE 1/4W ± 5% CARBON FILM RESISTOR OR 0.063W ± 5% THICK FILM CHIP RESISTOR.
- ALL CAPACITORS ARE CERAMIC CAPACITOR OR MYLAR CAPACITOR.
- ALL RESISTANCE VALUES ARE IN OHM (Ω).
- ALL CAPACITANCE VALUES ARE IN F (FARAD).
- ALL E CAPACITORS ARE SHOWN IN THE FORM OF CAPACITANCE (F) VOLTAGE (V).
- ALL INDUCTANCE VALUES ARE IN AH (mH).
- 3. NI = NO INSERT


VOLTAGE SELECTOR
LOCATION




110V



127V



220V



230V-240V




230V
110V
127V

⚠ Parts are safety assurance parts.
When replacing those parts make sure to use the specified one.


■ Amplifier section

FROM TRANSFORMER CN901

PAGE 1/6

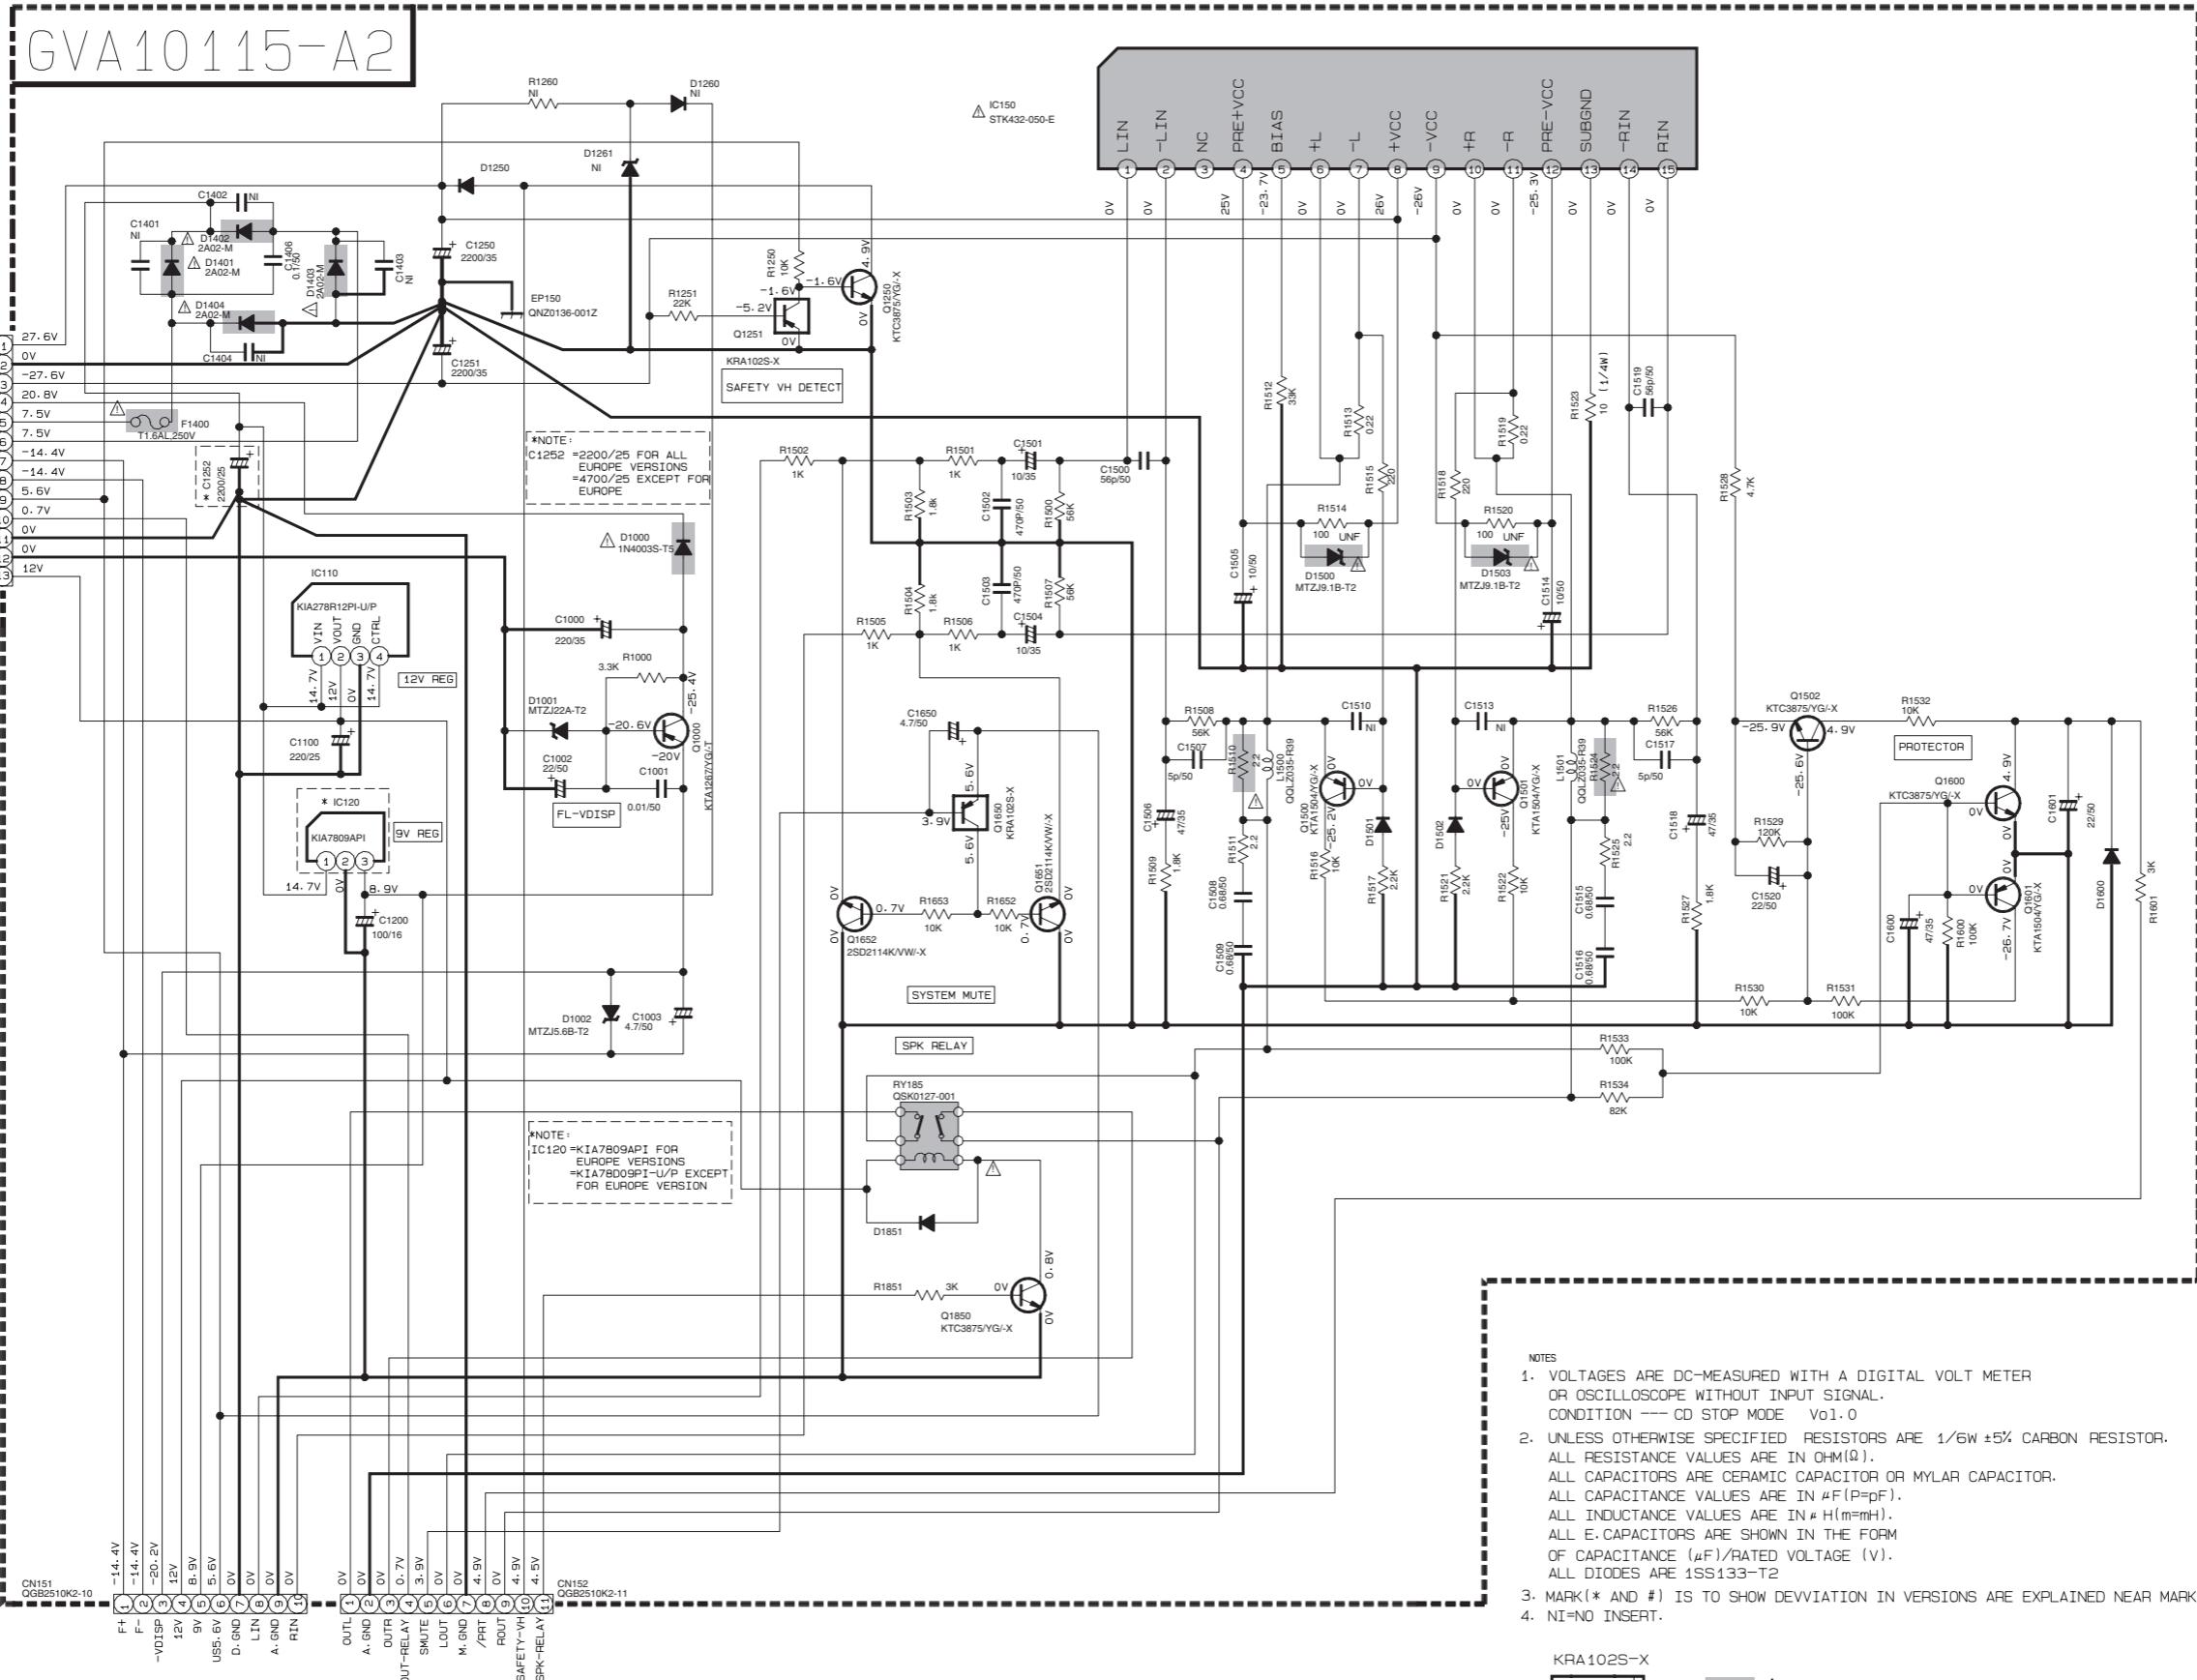


TO MICON CN403 TO MICON CN402
PAGE 3/6 PAGE 3/6




△ Parts are safety assurance parts.
When replacing those parts make sure to use the specified one.

Micon section

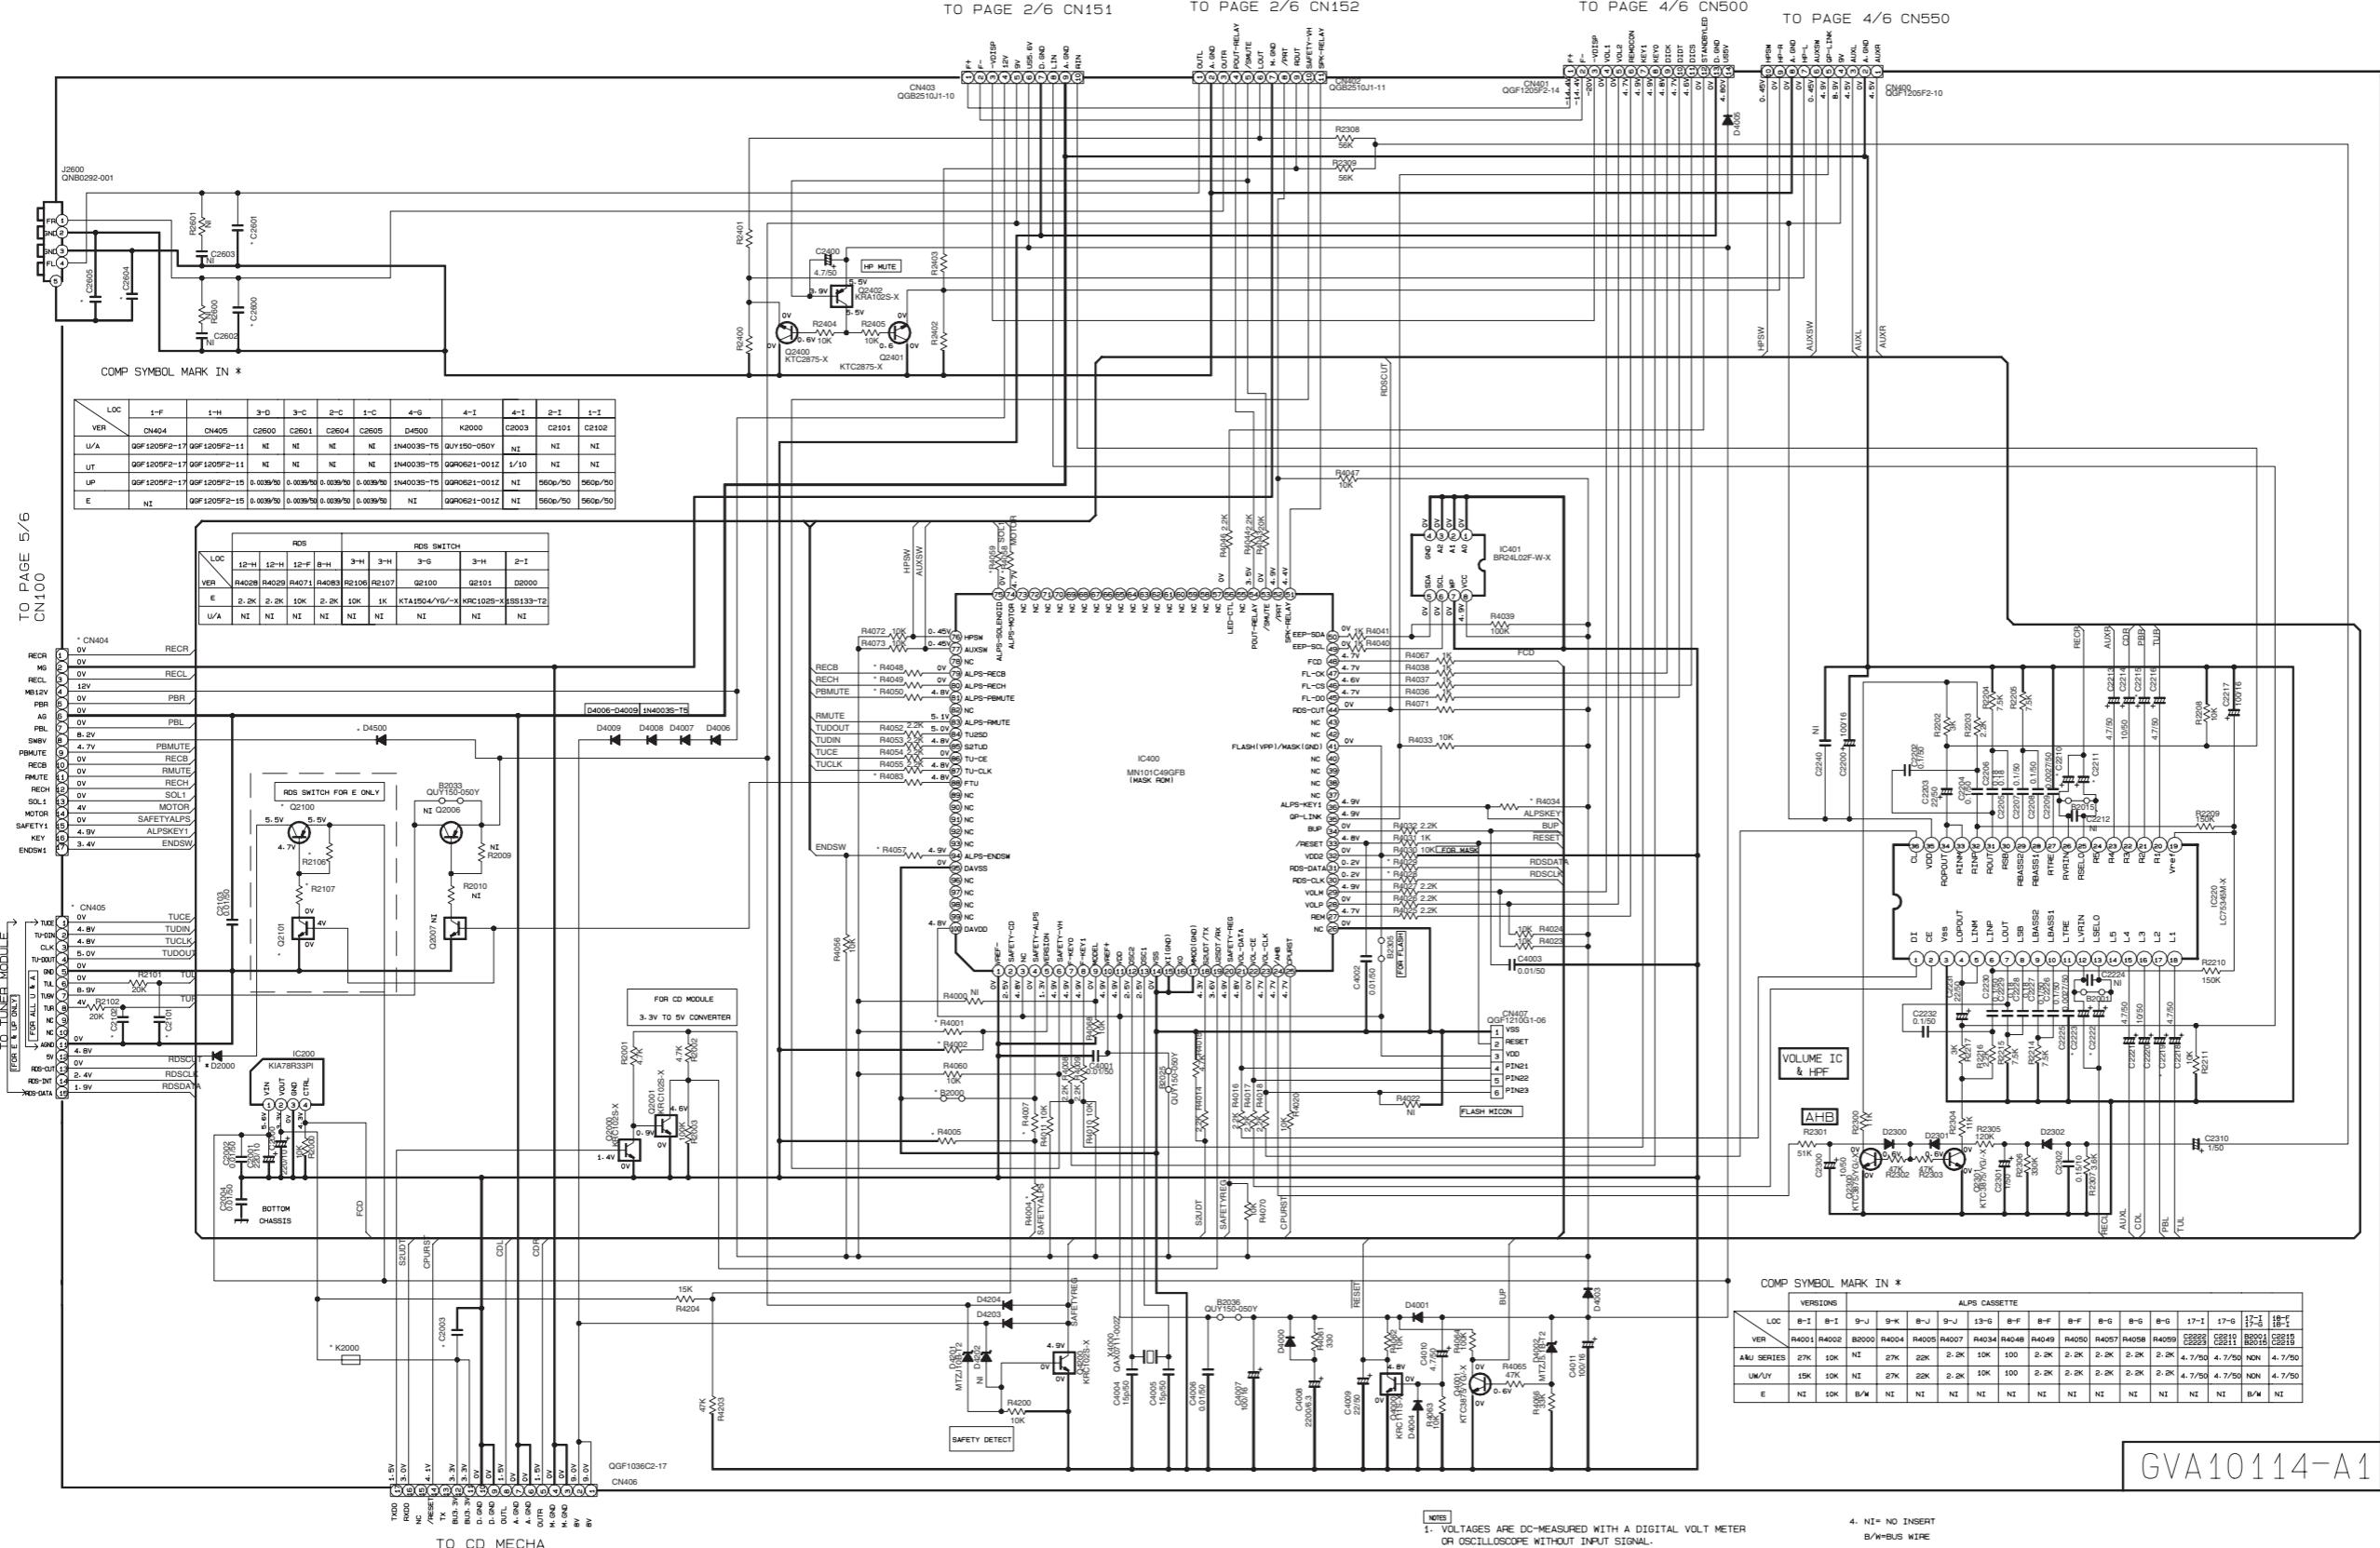


LOC/INS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
IC220	4.8V	OV	OV	4.4V	4.7V																															
CN402	OV	OV	0.77	3.9V	OV	4.9V	OV	4.9V	OV	4.9V																										
CN403	-14.4V	-14.4V	-20V	12V	8.9V	5.6V	OV	OV	OV																											




NOTES
1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER
OR OSCILLOSCOPE WITHOUT INPUT SIGNAL.
CONDITION --- CD/TAPE STOP MODE, VOL-0 : TUNER+FM MODE .
2. UNLESS OTHERWISE SPECIFIED, RESISTORS ARE 1/8W ±5% CARBON RESISTOR.
ALL RESISTANCE VALUES ARE IN OHM(Ω).
ALL CAPACITORS ARE CERAMIC CAPACITOR OR MYLAR CAPACITOR.
ALL CAPACITANCE VALUES ARE IN nF(pF).
ALL INDUCTANCE VALUES ARE IN H(mH).
ALL E-CAPACITORS ARE SHOWN IN THE FORM
OF CAPACITANCE (nF)/RATED VOLTAGE (V).
ALL DIODES ARE 1SS133-T2.
3. MARK (* #) IS TO SHOW DEVIATION IN VERSIONS ARE EXPLAINED NEAR MARK.

4. NI = NO INSERT
B/W = BUS WIRE

■ Front section

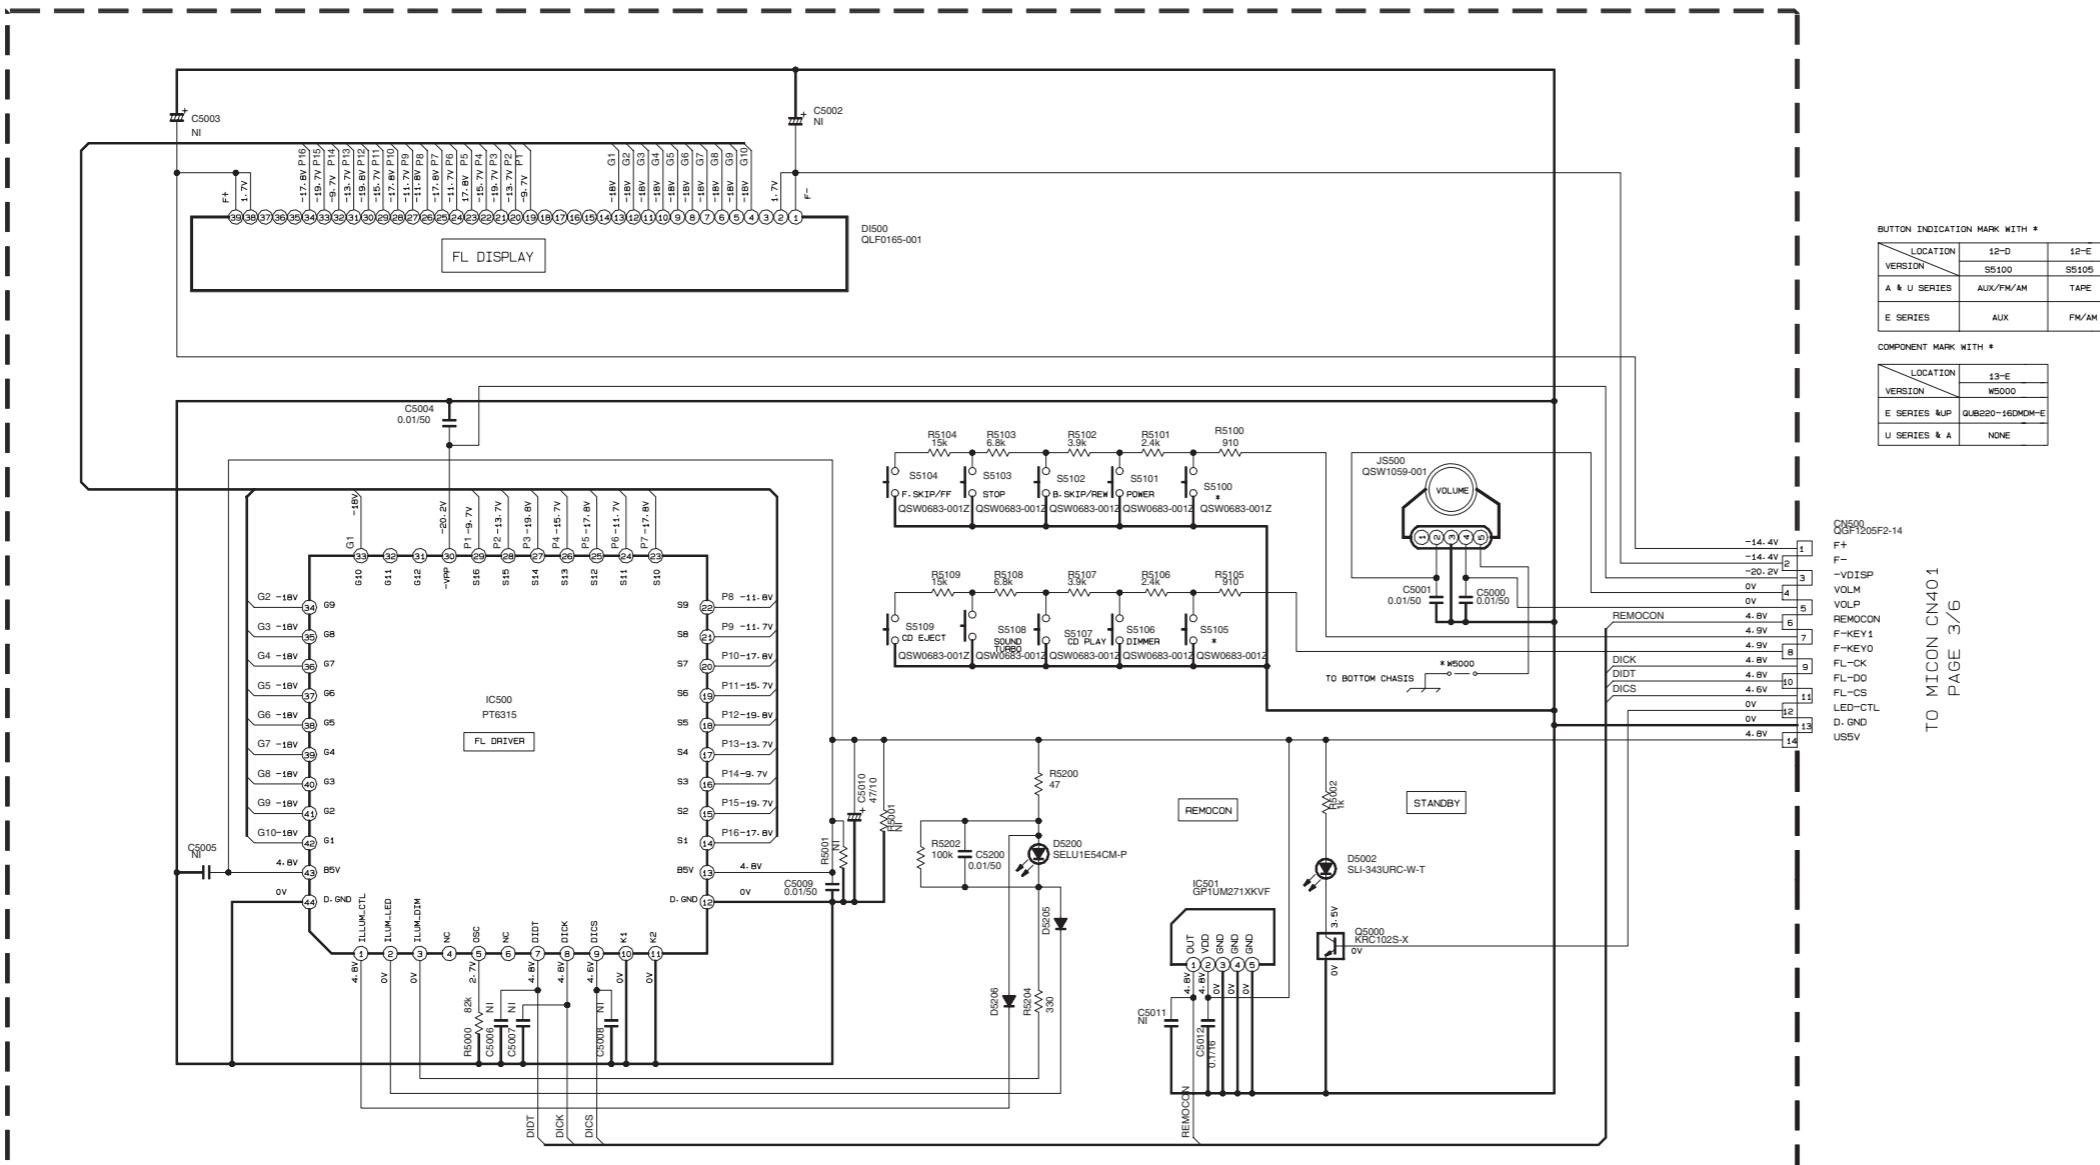


TO MICON CN401
PAGE 3/6

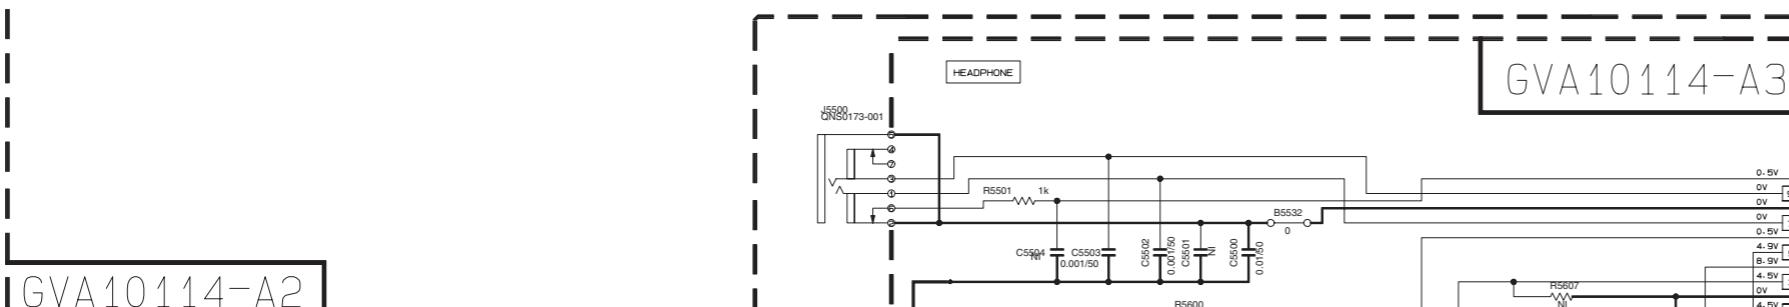

TO MICON CN400
PAGE 3/6


NOTES

- VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER
ON OSCILLOSCOPE WITHOUT INPUT SIGNAL.
CONDITION --- CD STOP MODE Vol.0
- UNLESS OTHERWISE SPECIFIED, RESISTORS ARE 1/6W ±5% CARBON RESISTOR.
ALL RESISTANCE VALUES ARE IN OHM(Ω).
ALL CAPACITORS ARE CERAMIC CAPACITOR OR MYLAR CAPACITOR.
ALL CAPACITANCE VALUES ARE IN μF(PMF).
ALL INDUCTANCE VALUES ARE IN H(mmh).
ALL E-CAPACITORS ARE SHOWN IN THE FORM
OF CAPACITANCE (μF)/RATED VOLTAGE (V).
ALL DIODES ARE 1SS133-T2.
- MARK(*) AND #) IS TO SHOW DEVIATION IN VERSIONS ARE EXPLAINED NEAR MARK.
- NI=NO INSERT.


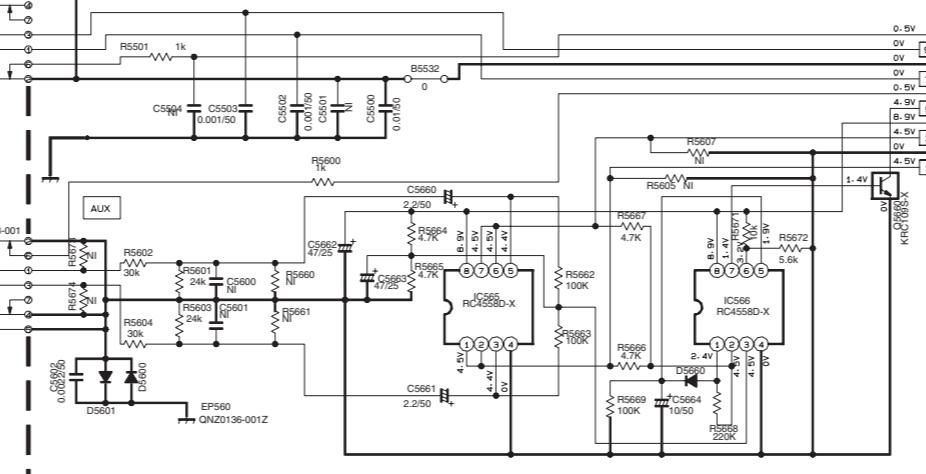


TO MICON CN400
PAGE 3/6


■ Cassette section

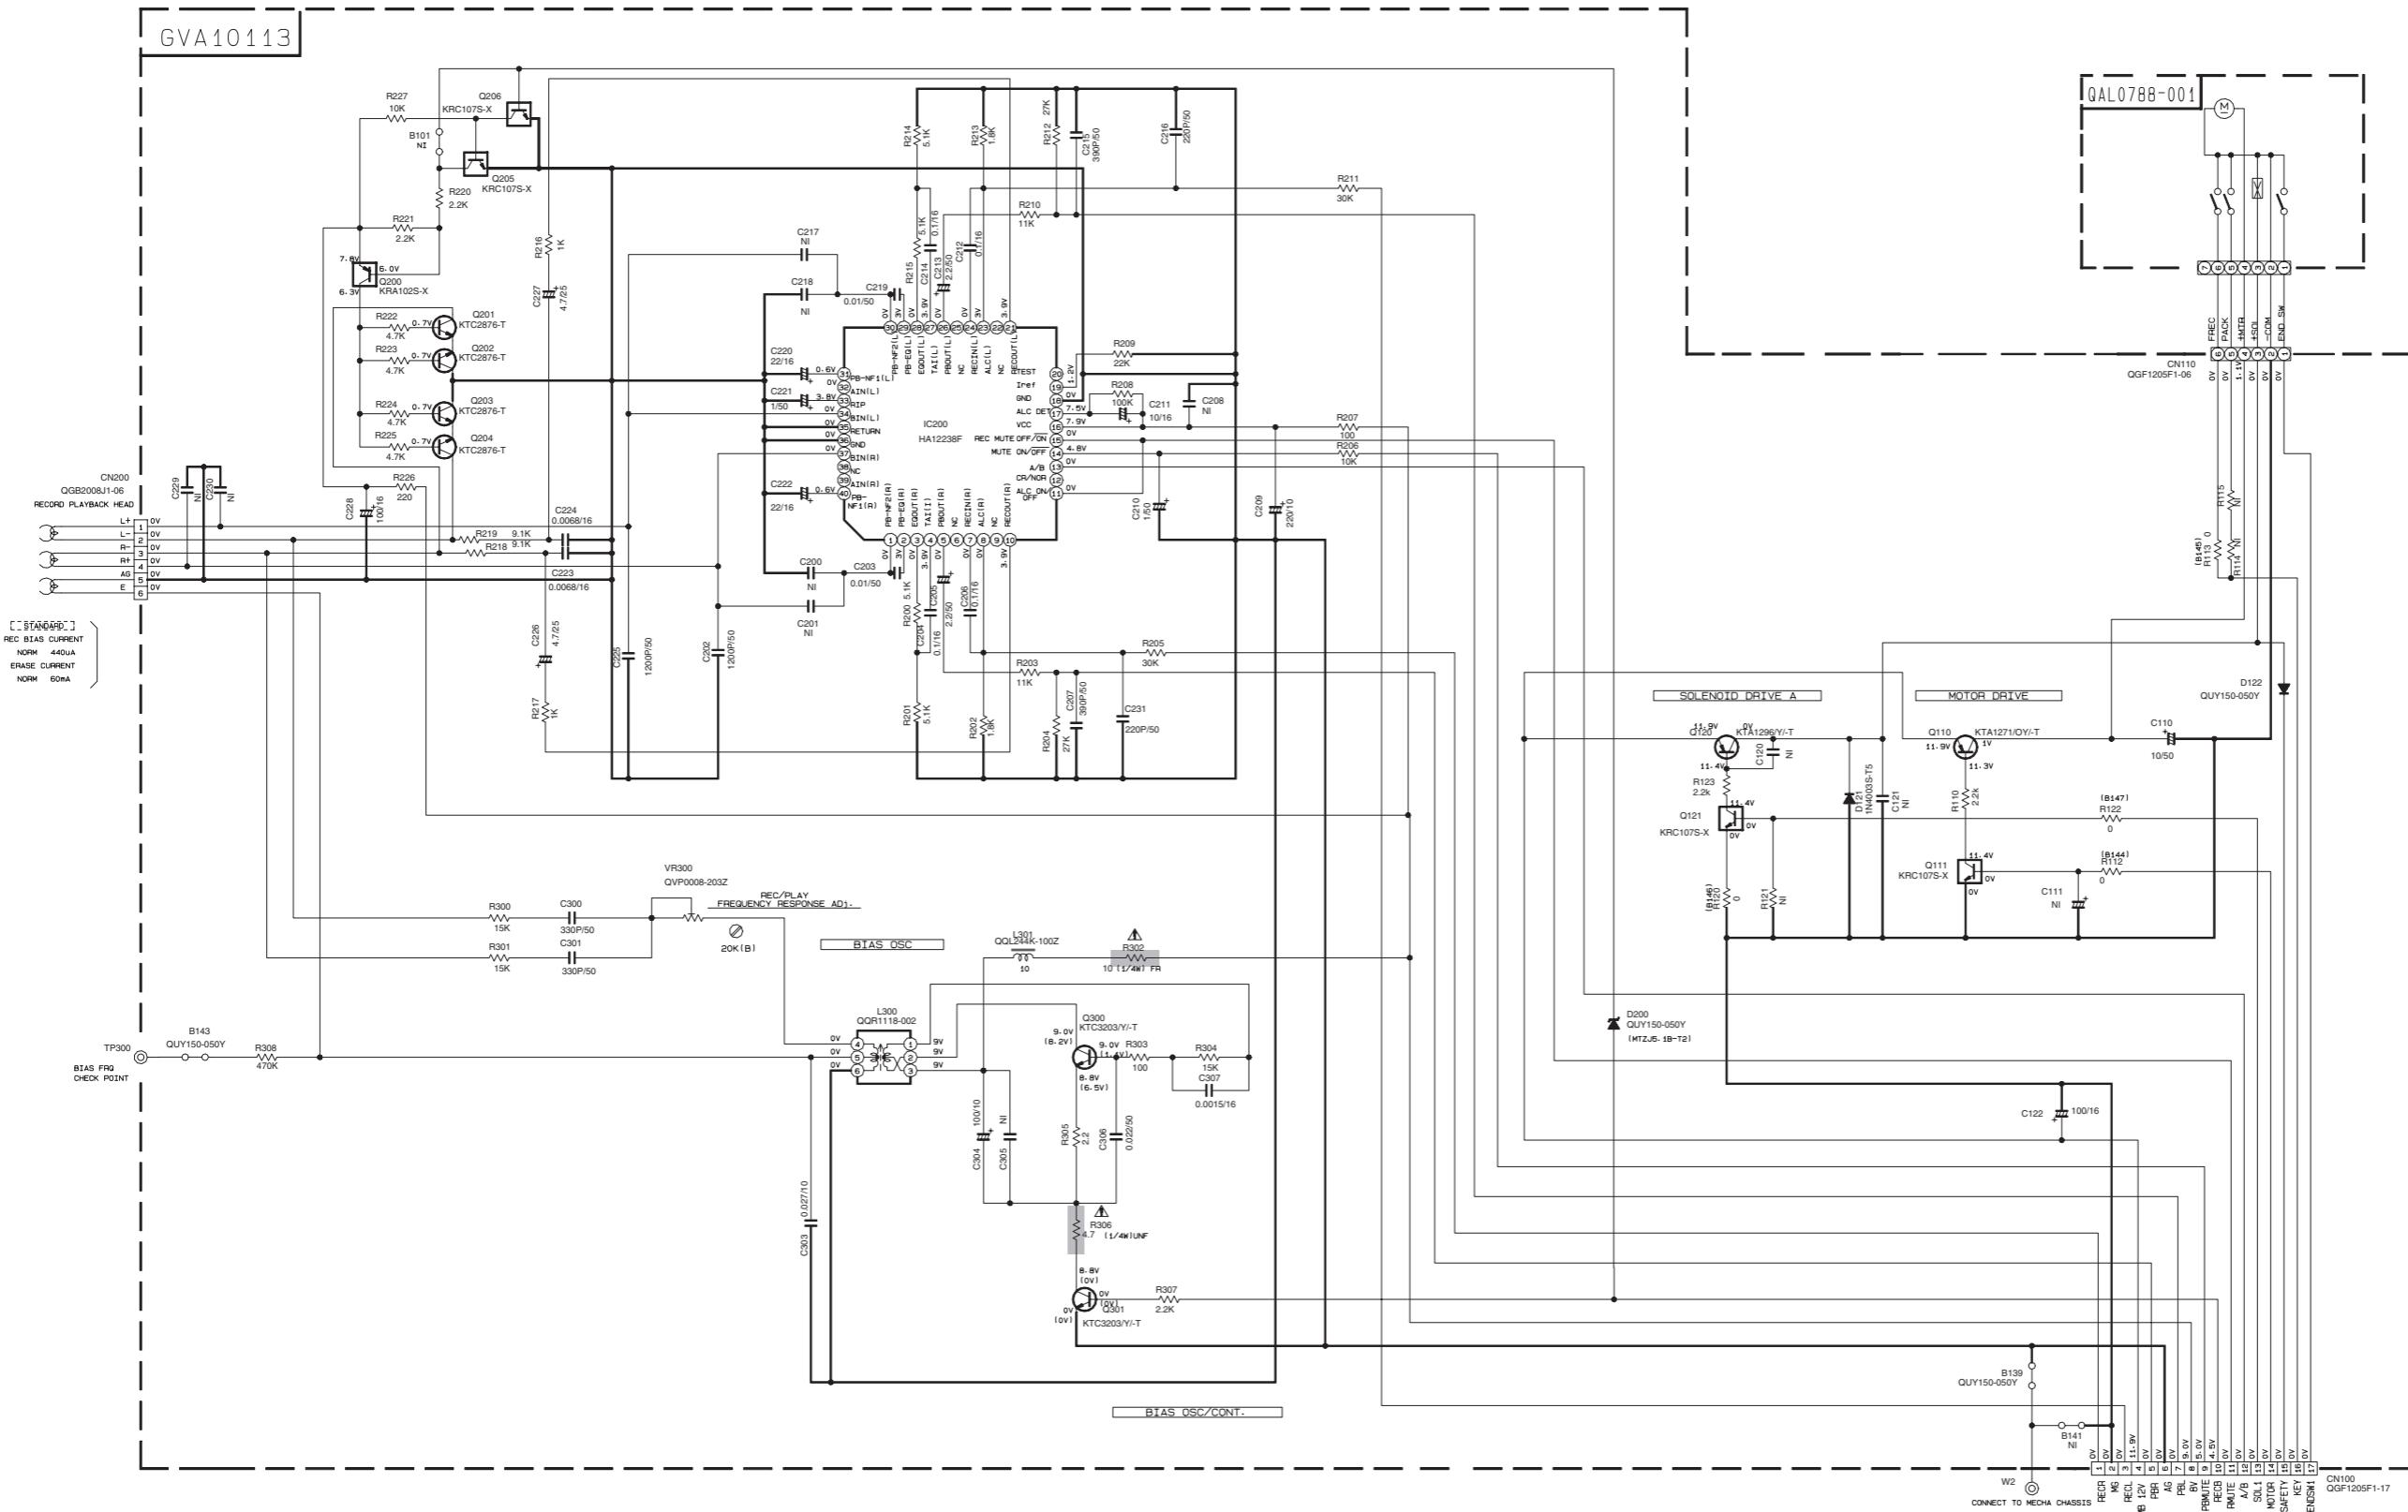


⚠ Parts are safety assurance parts.
When replacing those parts make
sure to use the specified one.



■ CD section

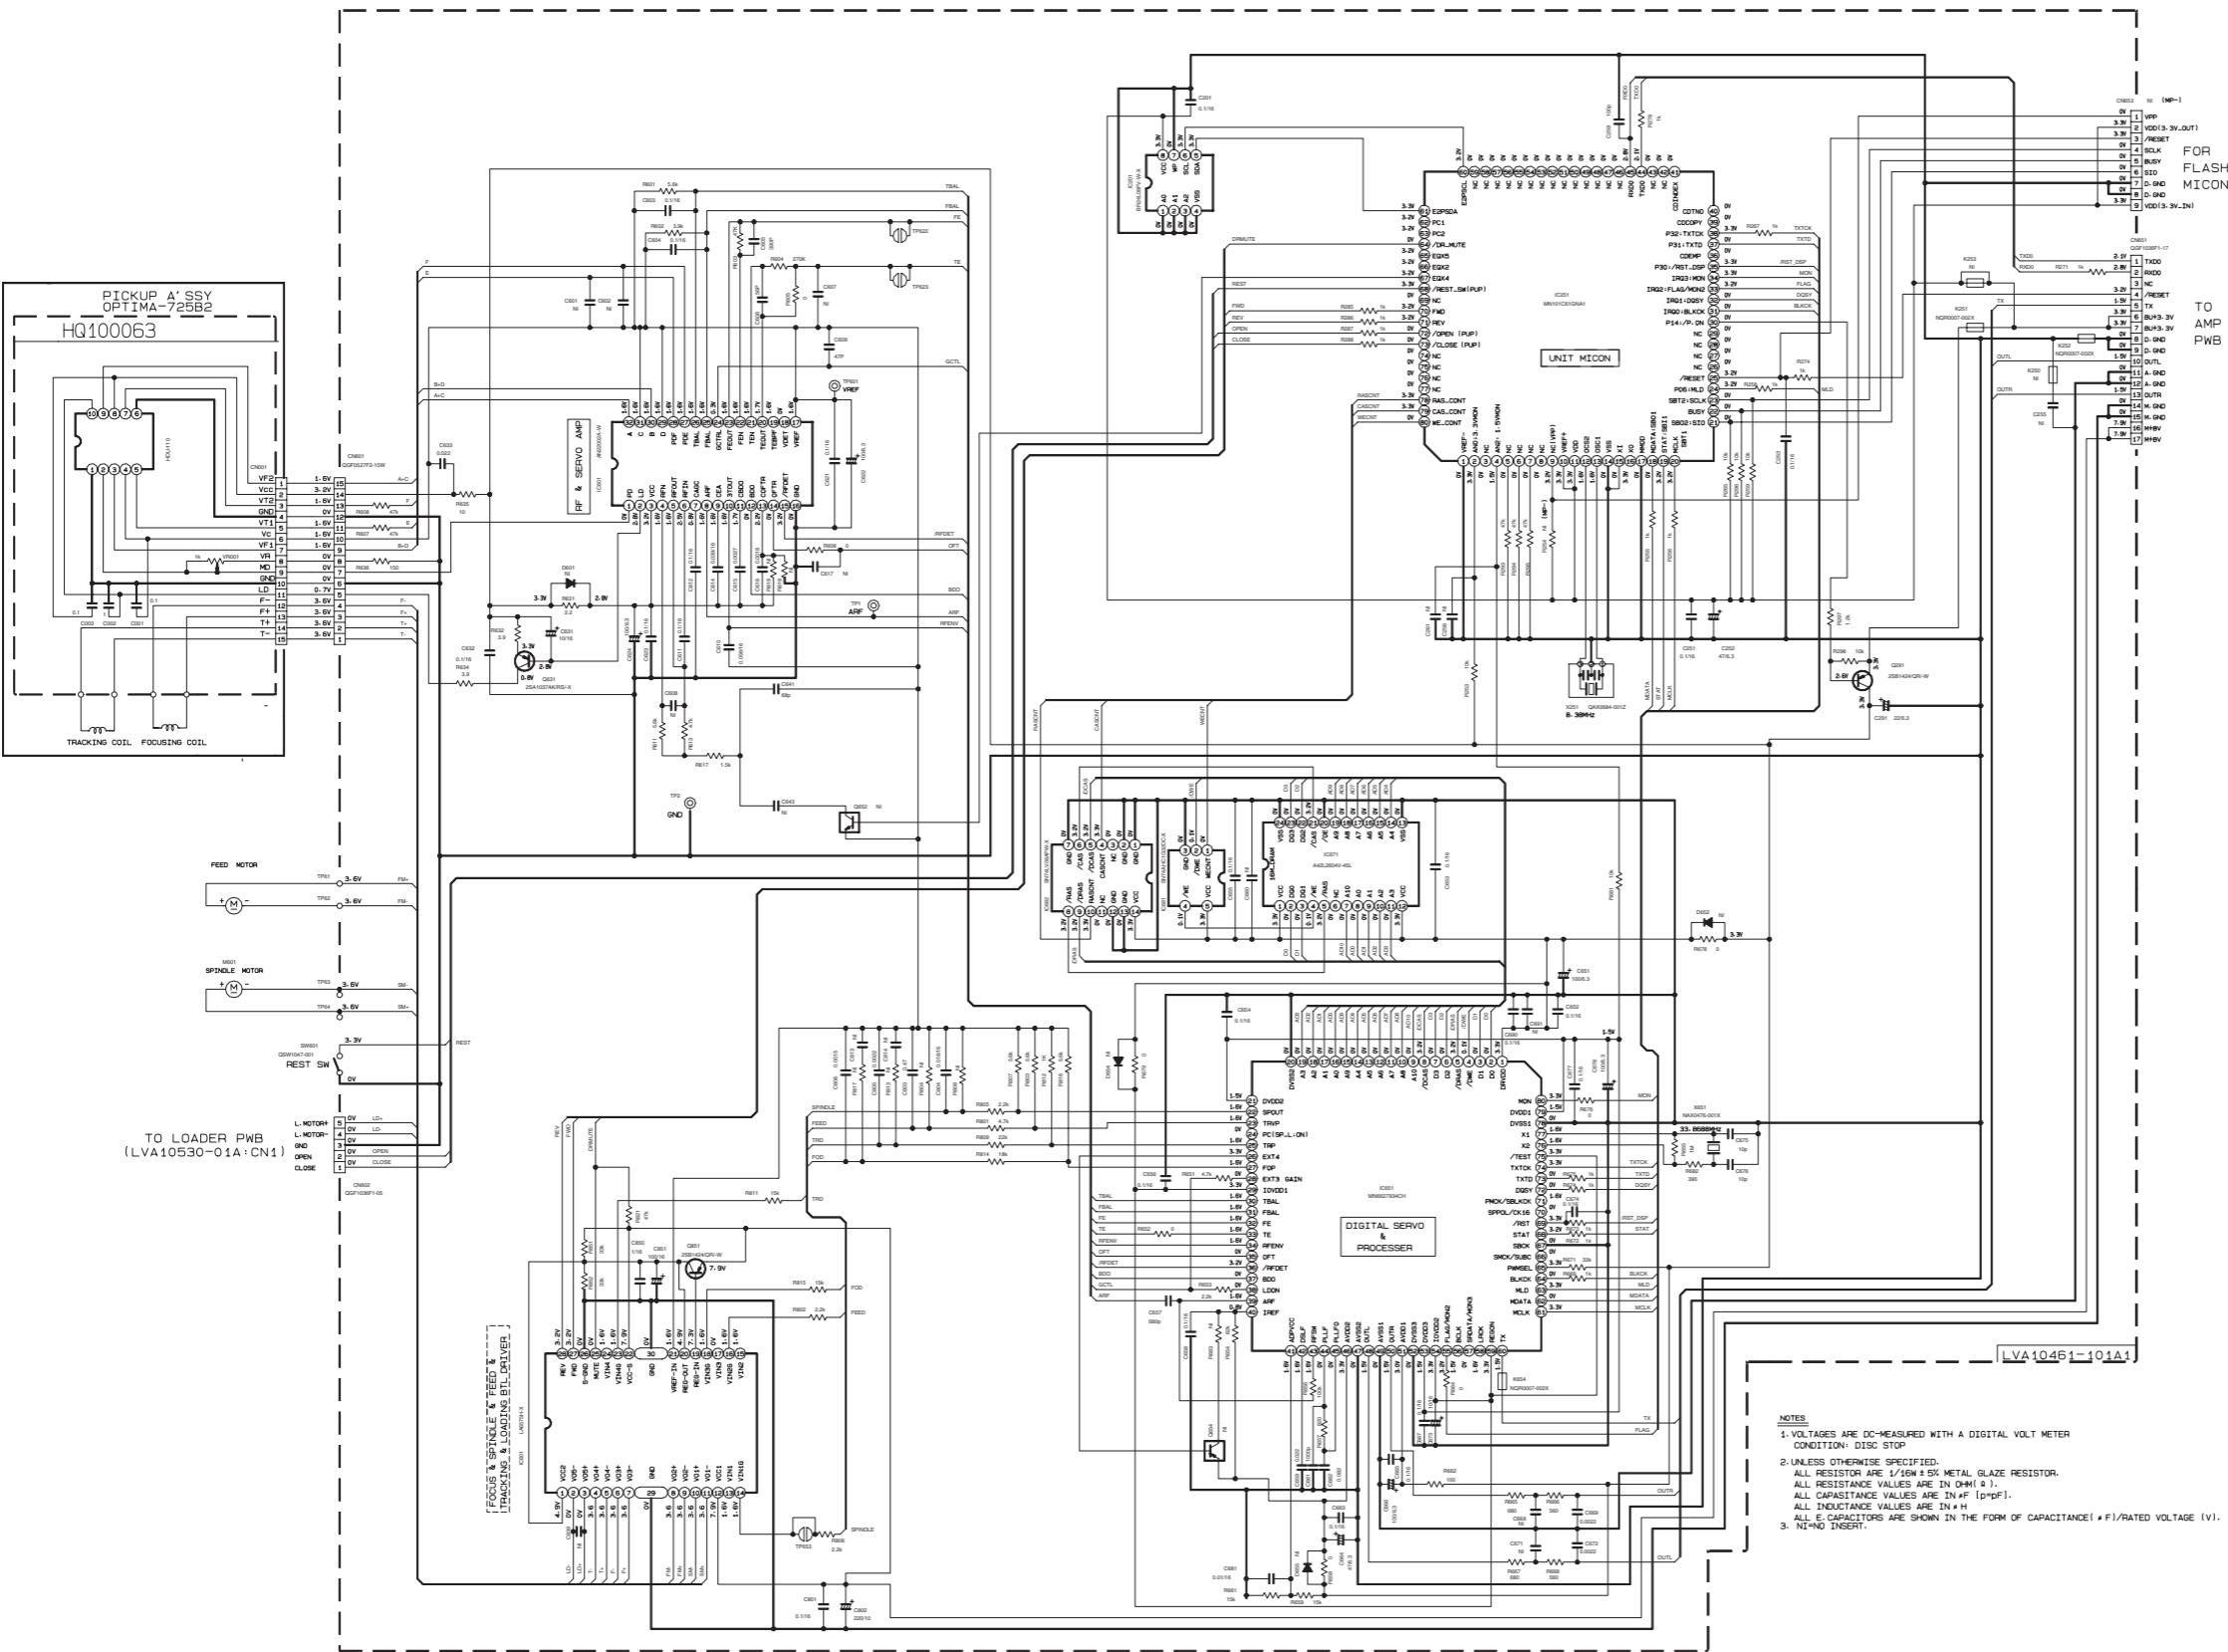

■ Loader section

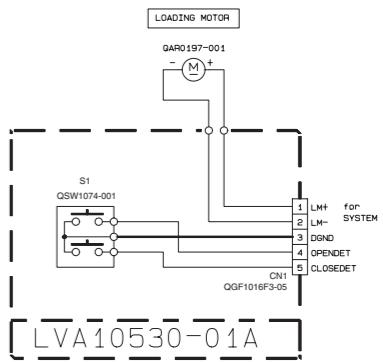


Printed circuit boards


■ Amplifier board

Lead free solder used in the board (material : Sn-Ag-Cu, melting point : 219 Centigrade)

(Power amplifier board)

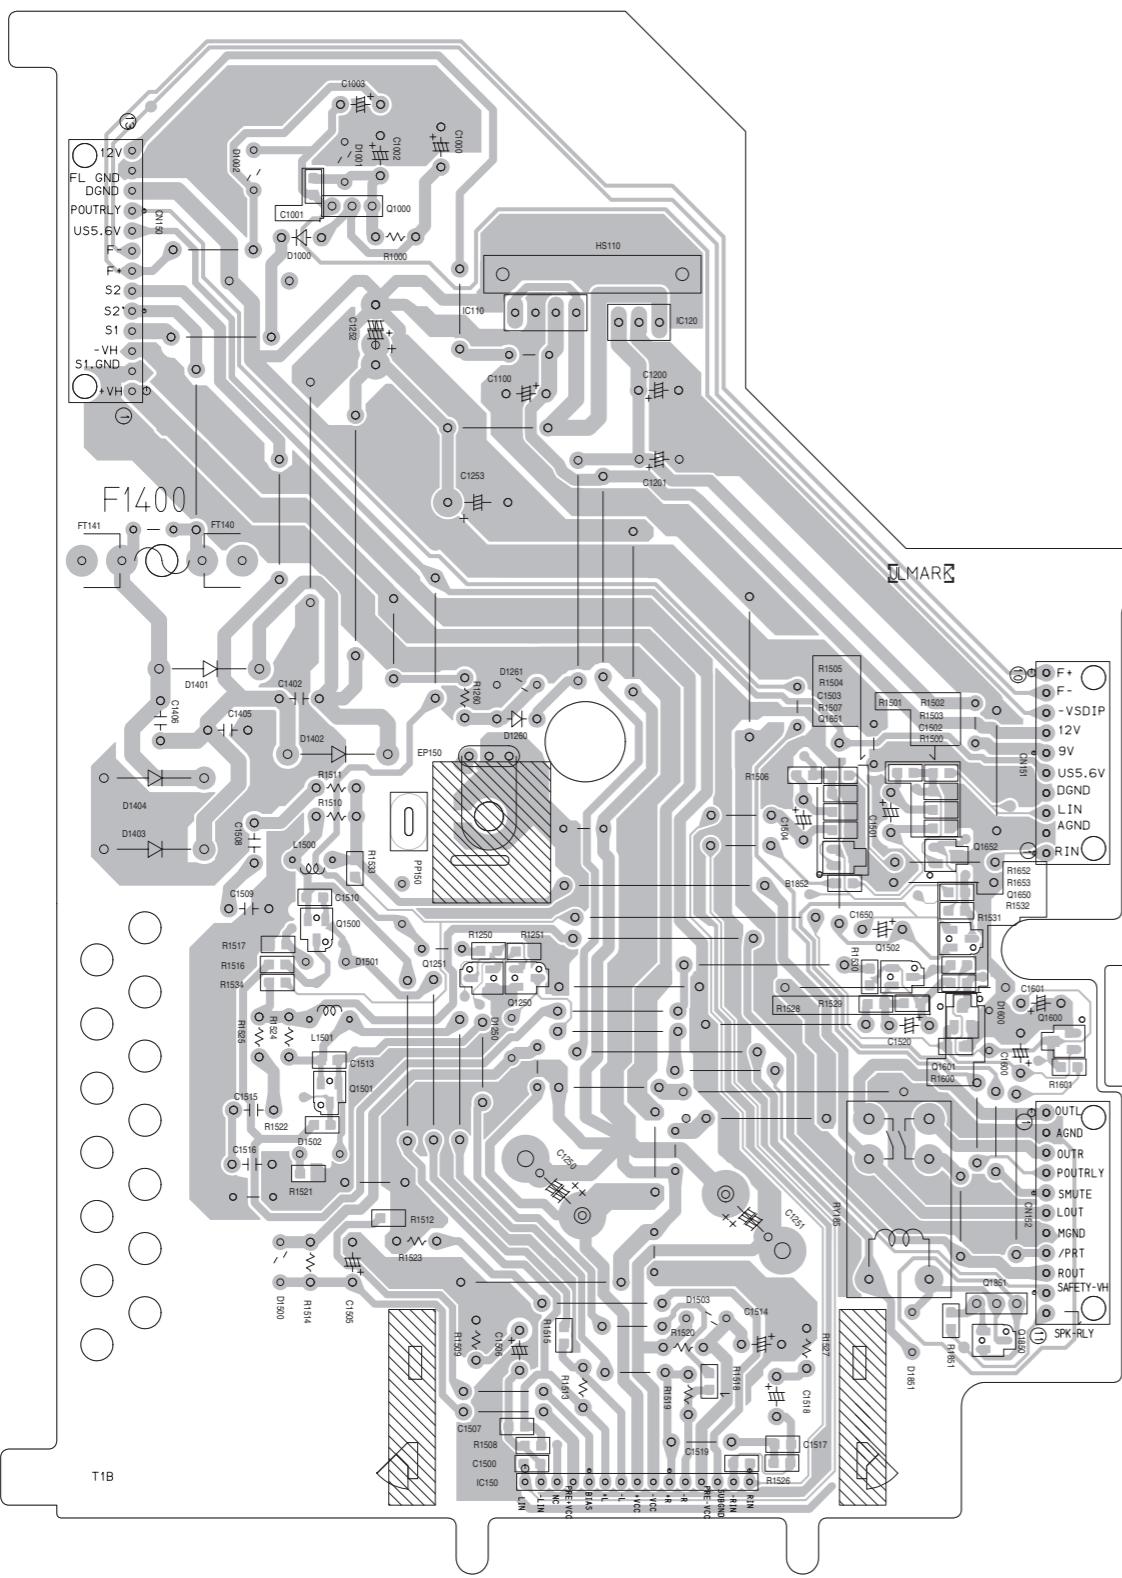


(Trans board)

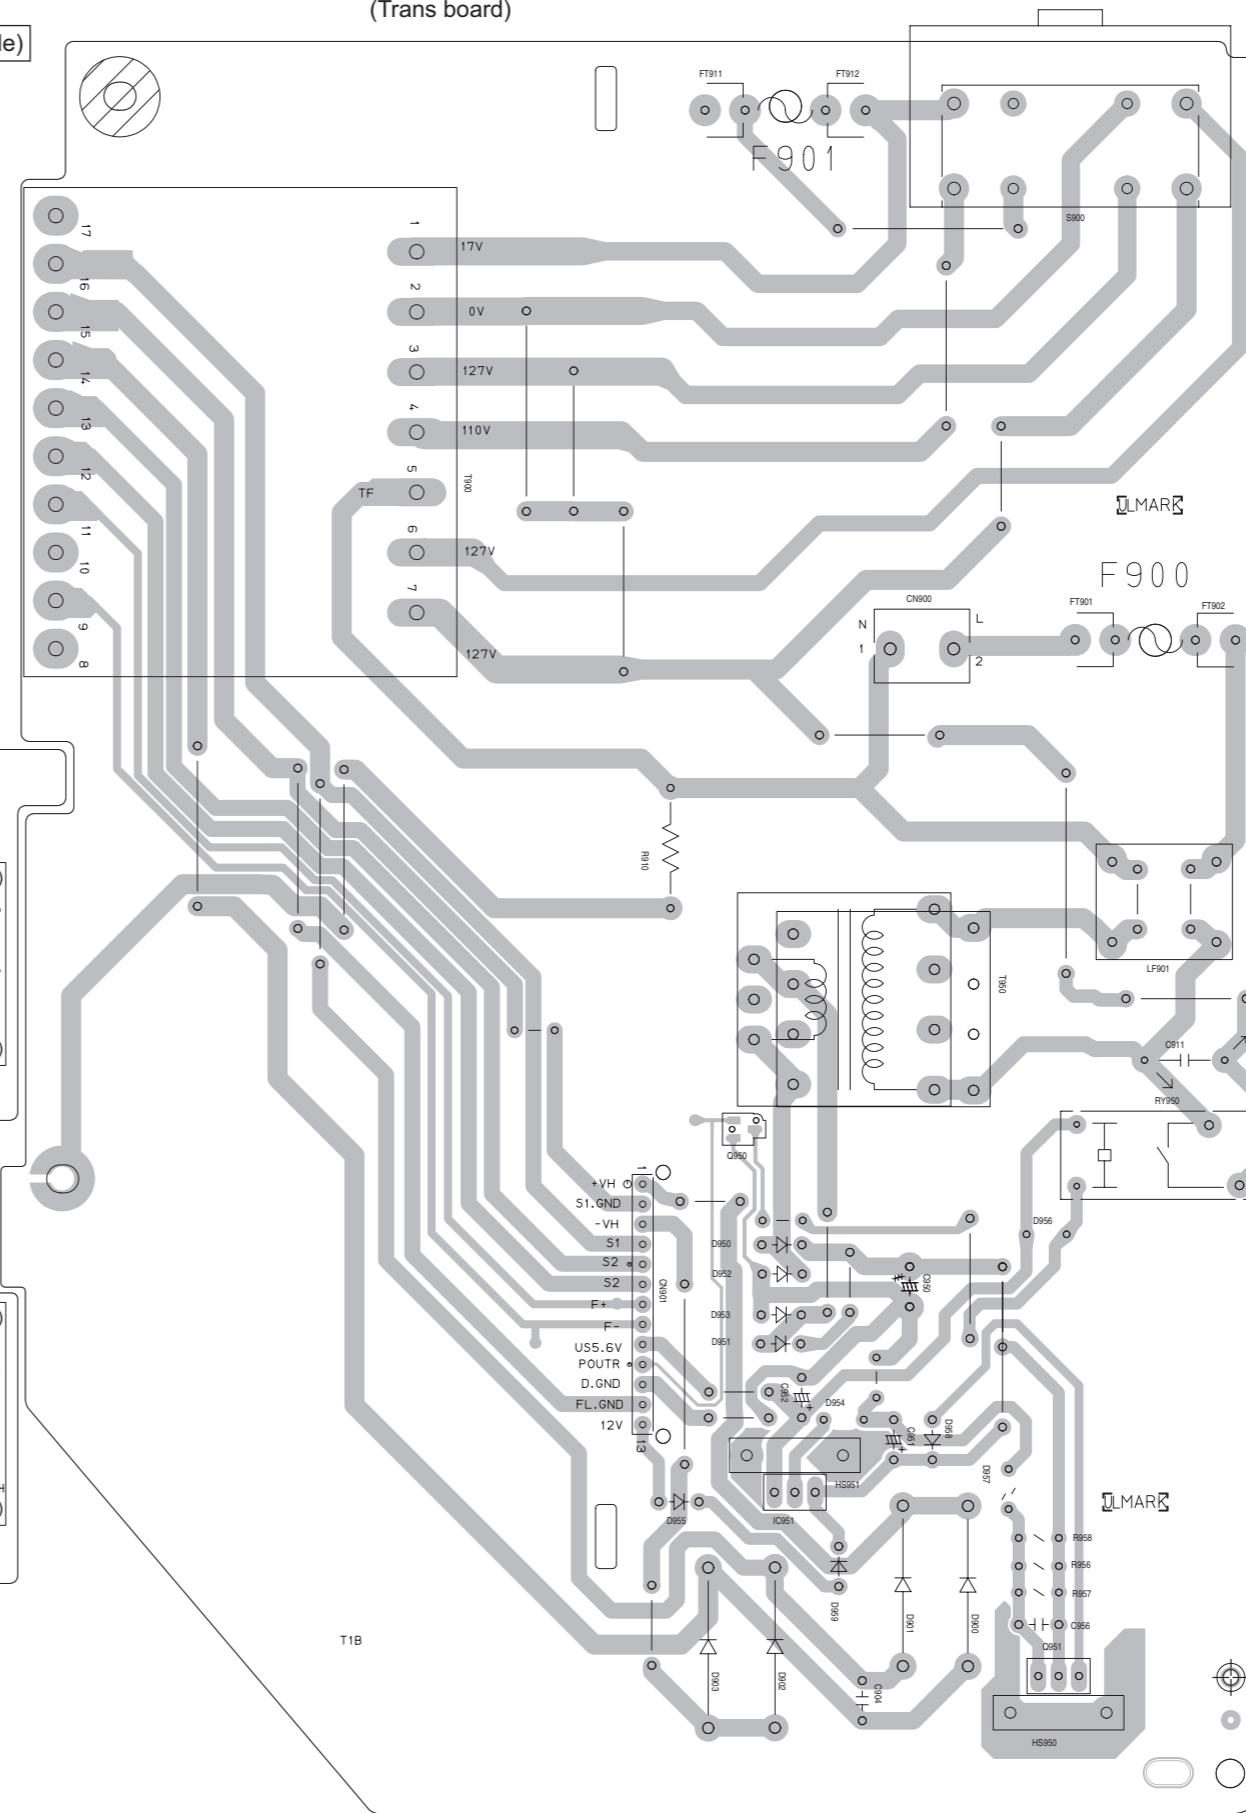


■ Micon board

Lead free solder used in the board (material : Sn-Ag-Cu, melting point : 219 Centigrade)


(Micon board)

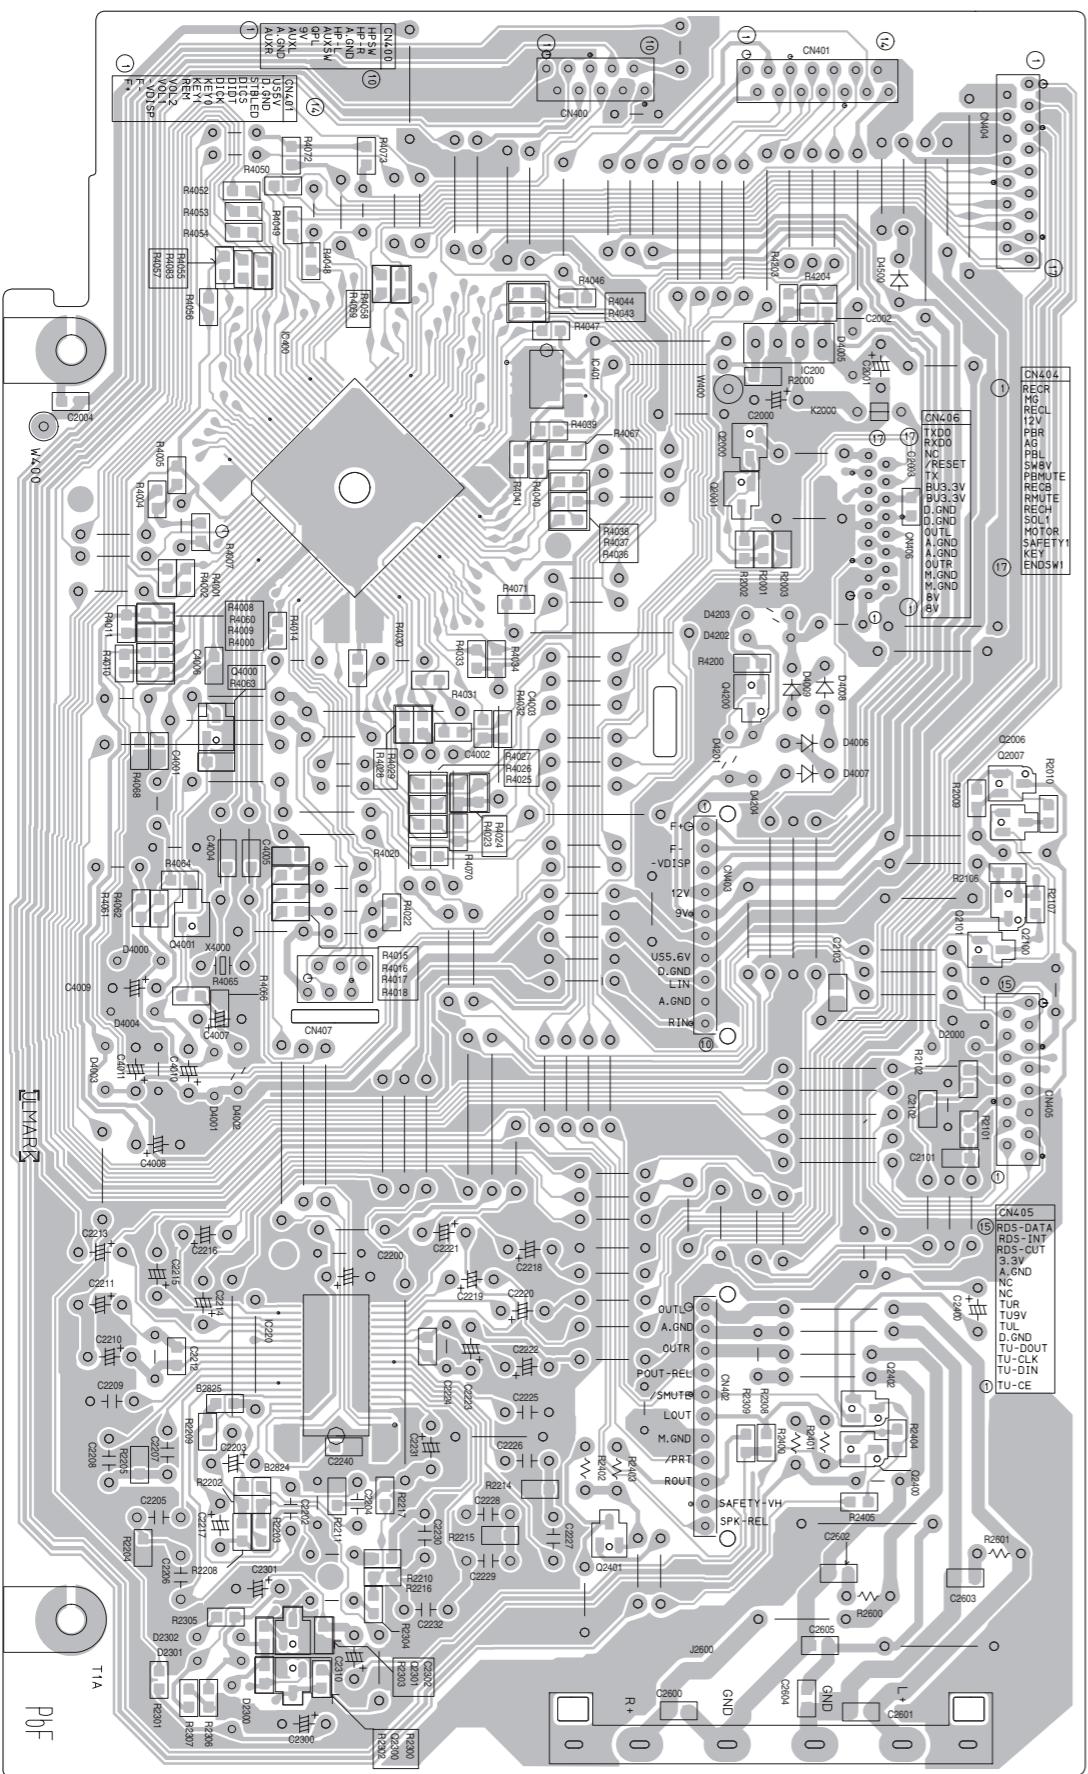

(Switch board)

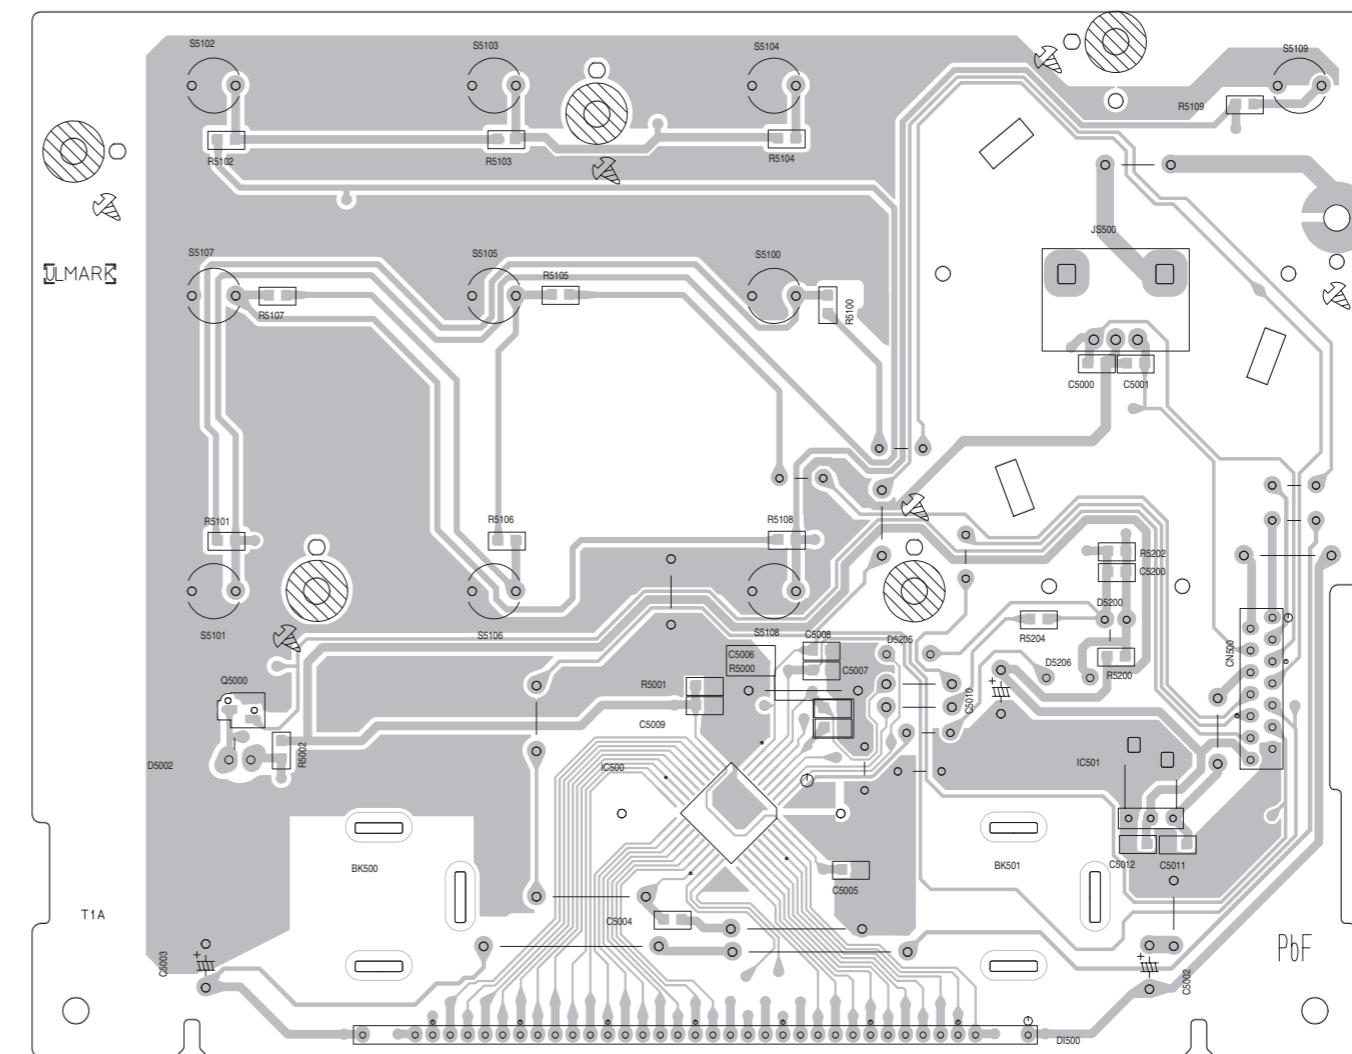


(Jack board)

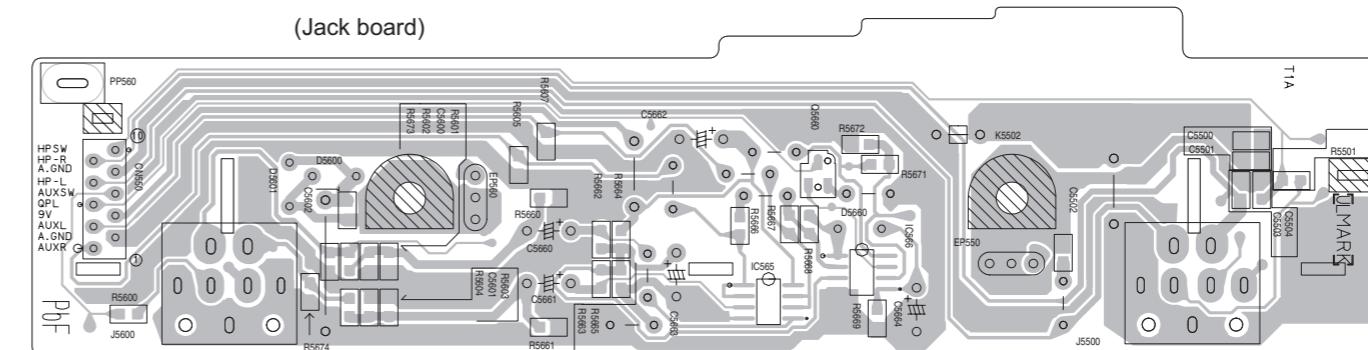


CD board
forward saide

Lead free solder used in the board (material : Sn-Ag-Cu, melting point : 219 Centigrade)

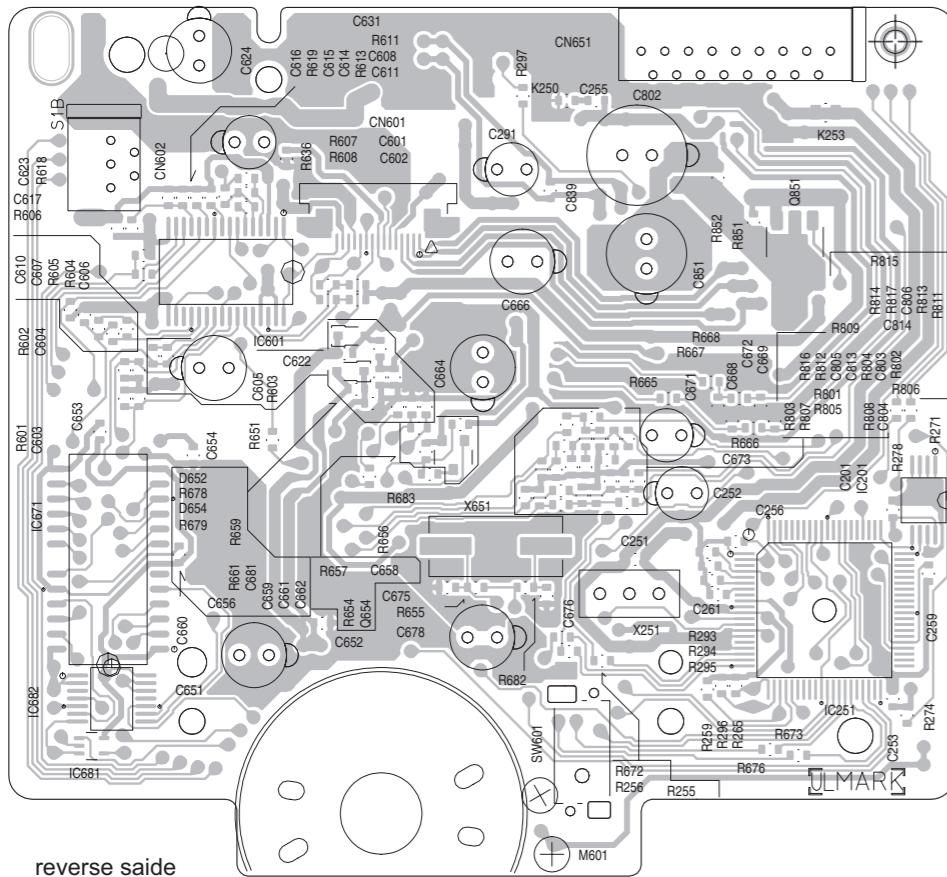


reverse saide

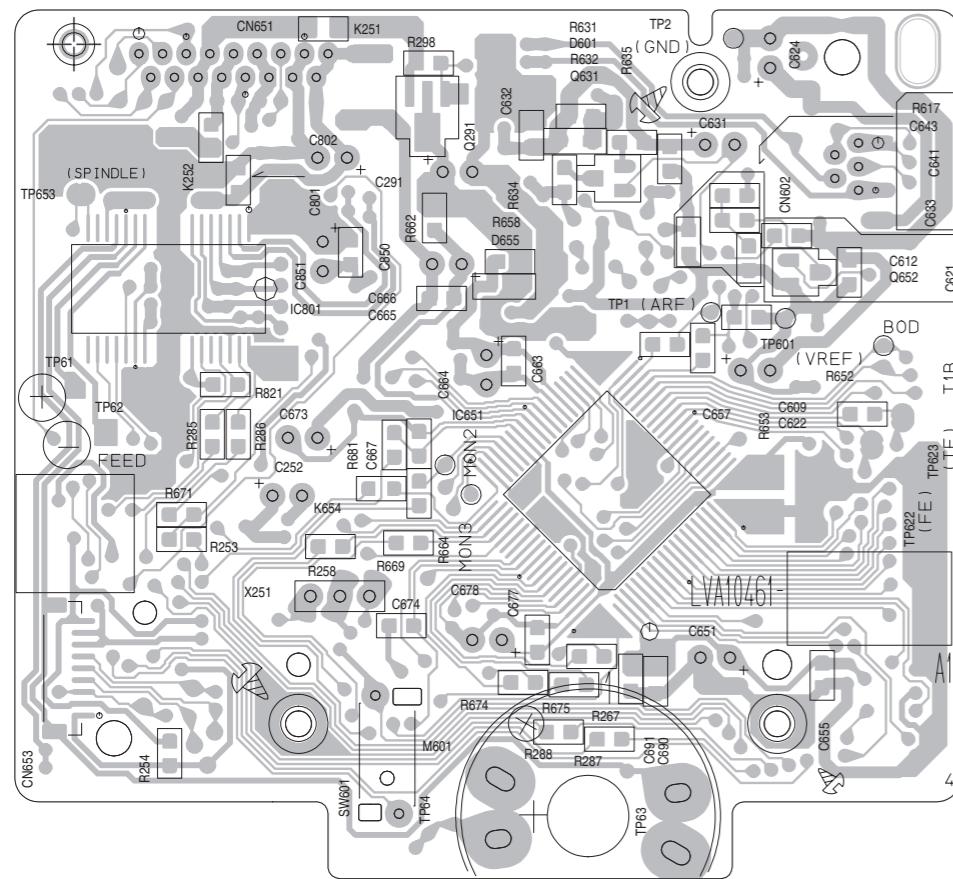


Loader board

Lead free solder used in the board (material : Sn-Ag-Cu, melting point : 219 Centigrade)

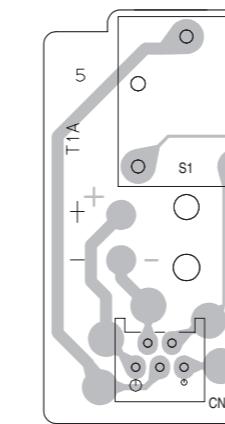

Cassette board

Lead free solder used in the board (material : Sn-Ag-Cu, melting point : 219 Centigrade)

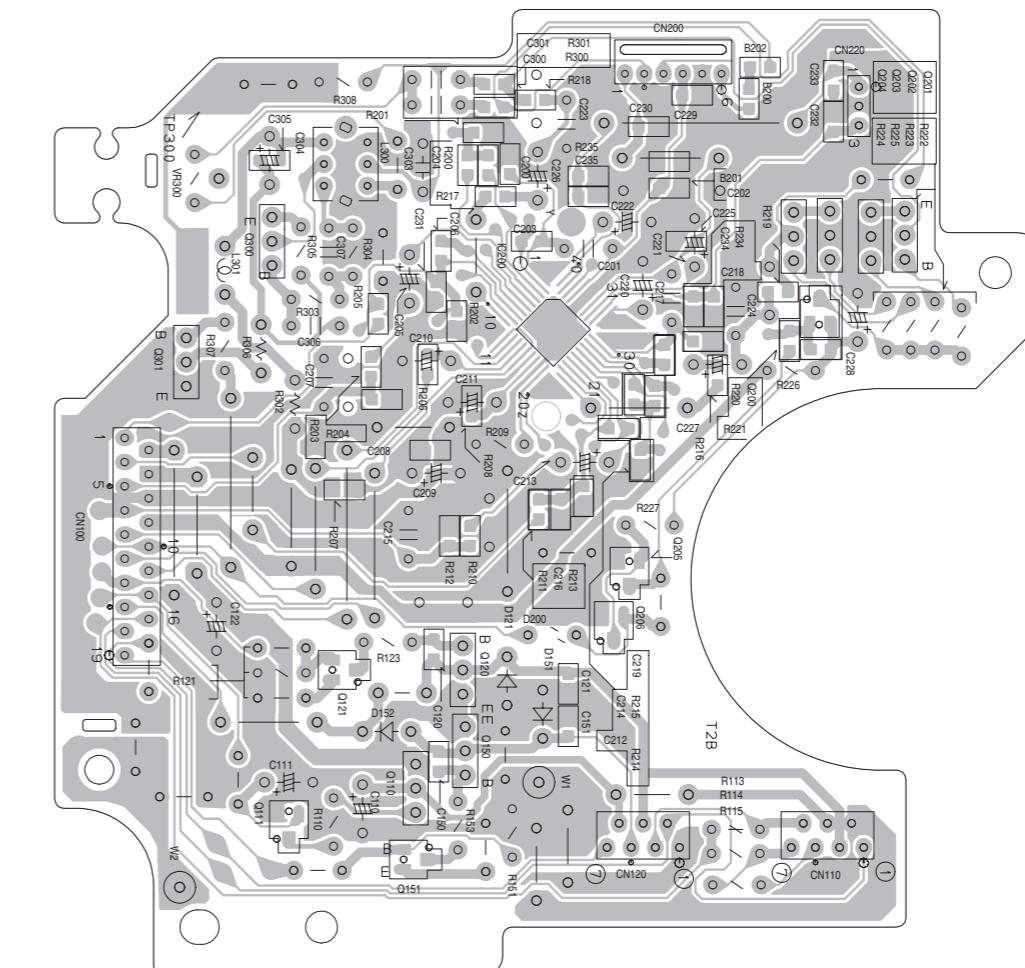

< MEMO >

JVC

Victor Company of Japan, Limited

Audio/Video Systems Category 10-1, 1chome, Ohwatari-machi, Maebashi-city, 371-8543, Japan

(No.MB536SCH)



Printed in Japan
VPT

PARTS LIST

UX-G35US,UX-G35UB
UX-G33A,UX-G33US,UX-G33UB,UX-G33UW
UX-G30US,UX-G30UB,UX-G30UW


* All printed circuit boards and its assemblies are not available as service parts.


- Contents -

Exploded view of general assembly and parts list (Block No.M1)	3-2
Speaker assembly and parts list (Block No.M2)	3-6
CD mechanism assembly and parts list (Block No.MB)	3-7
CD loading base assembly and parts list (Block No.MD)	3-9
Electrical parts list (Block No.01~05)	3-11
Packing materials and accessories parts list (Block No.M3)	3-16

Exploded view of general assembly and parts list

Block No. M 1 M M

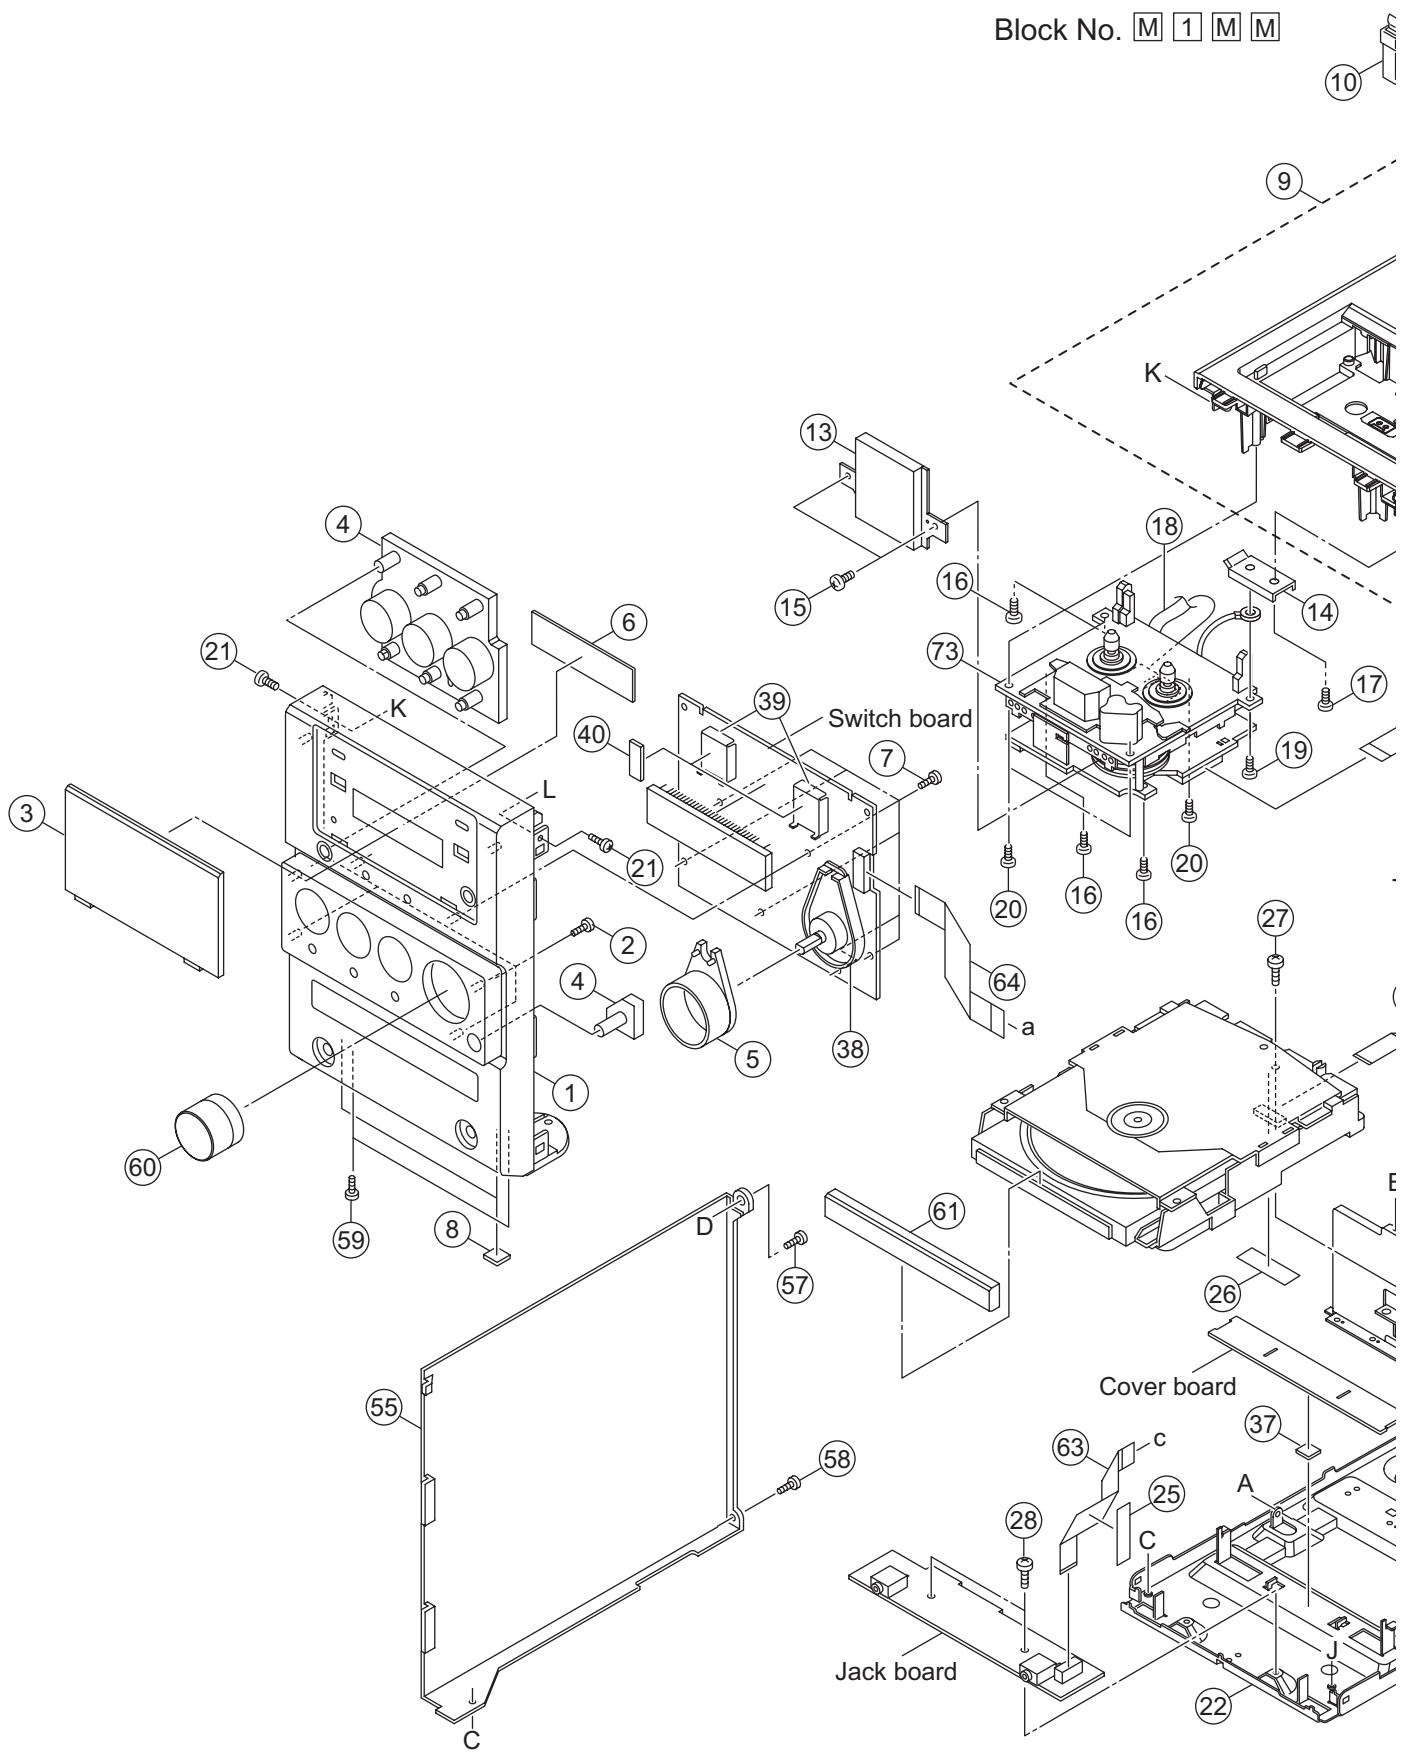

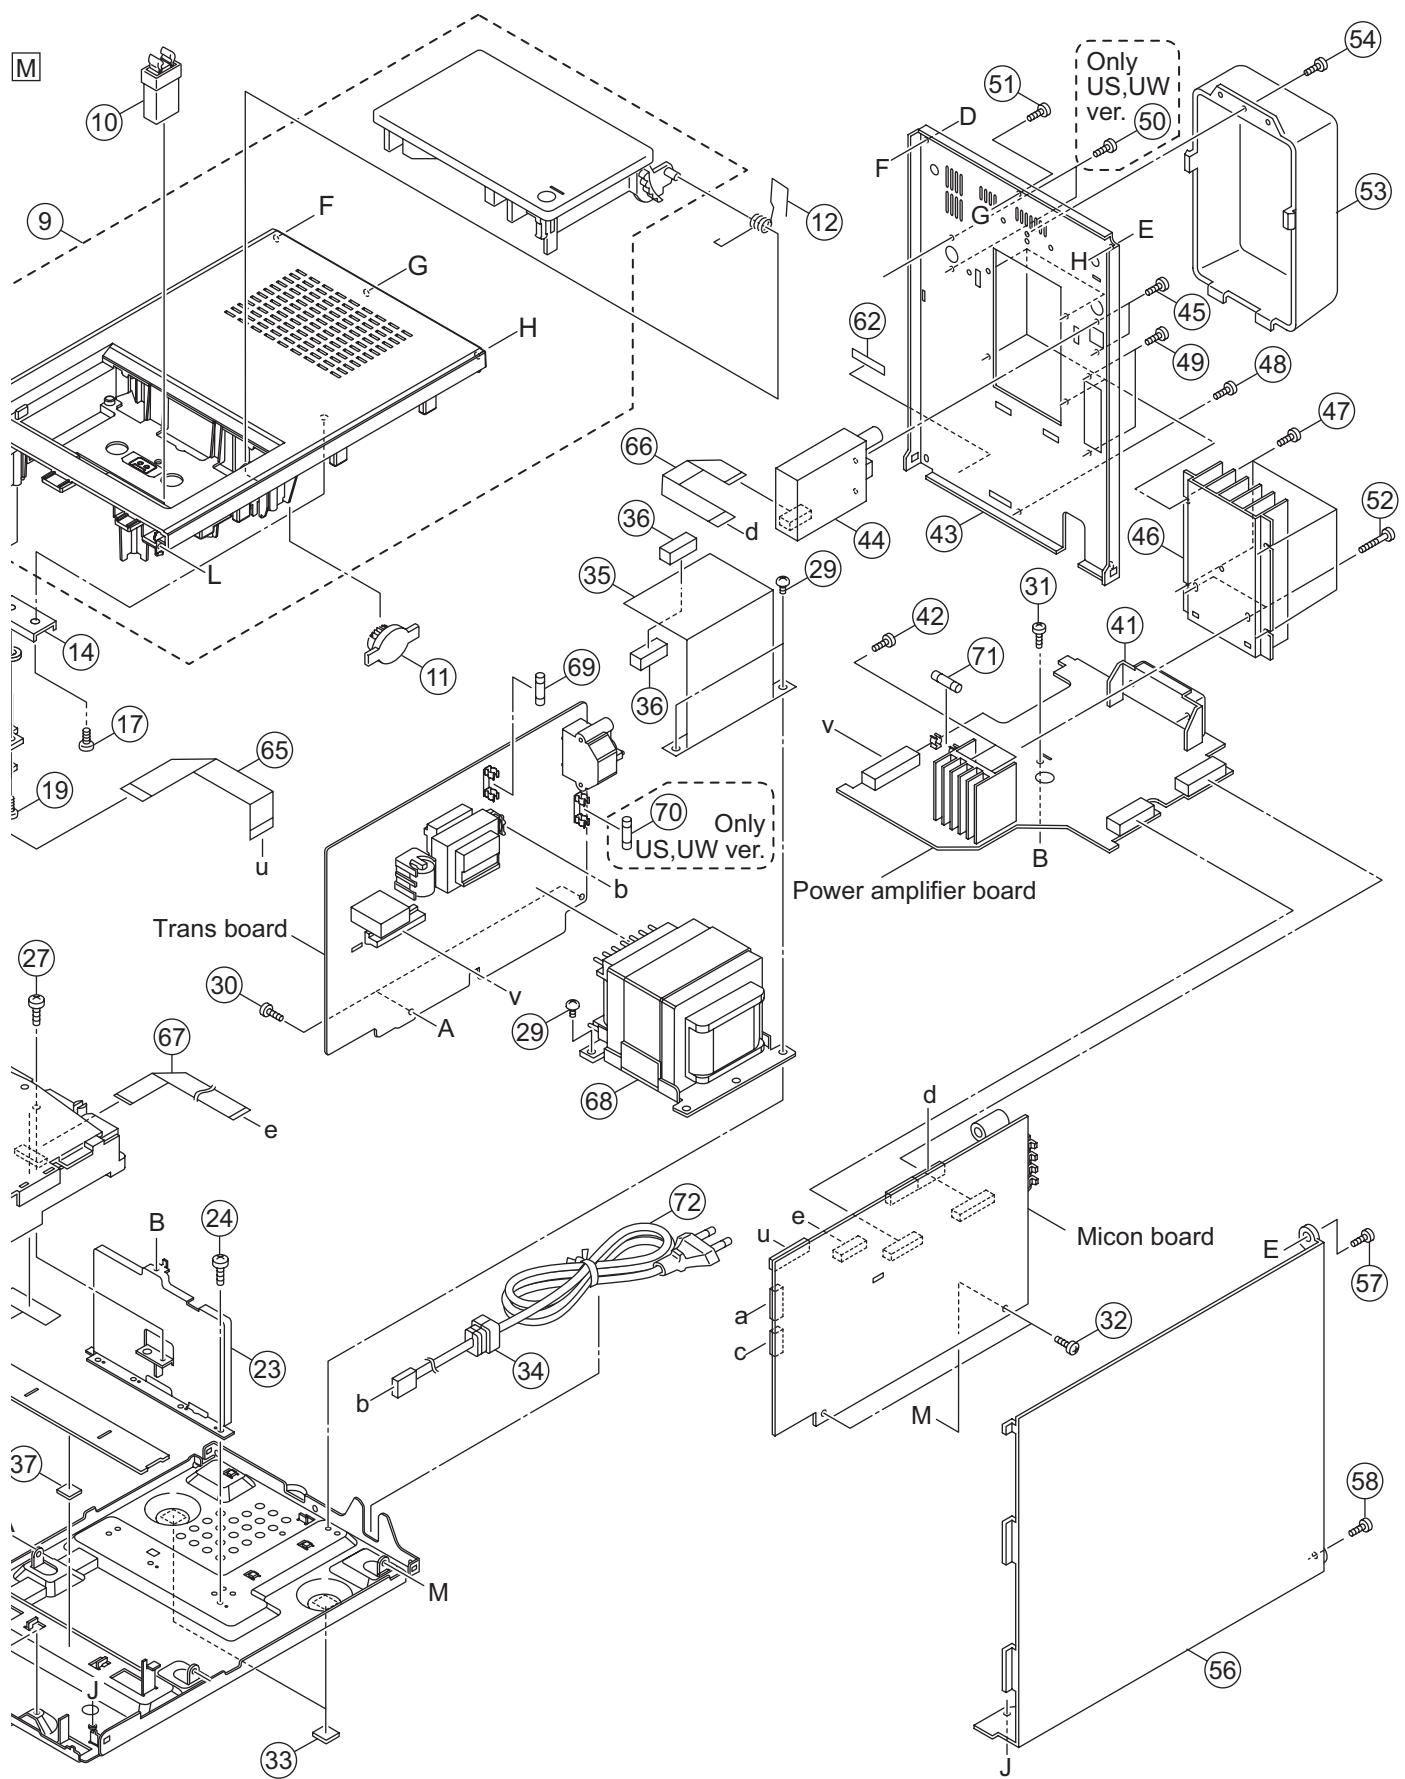

General Assembly


Block No. [M][1][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
	1	GV20428-004A	FRONT PNL.ASSY.		G35US,G35UB
	1	GV20428-003A	FRONT PNL.ASSY.		G33A,G33US,G33UB,G33UW,G30US, G30UB,G30UW
	2	QYSDF2608ZA	TAP SCREW	M2.6 x 8mm(x4)	G35US,G35UB
	3	GV30832-004A	FL LENS		G33A,G33US,G33UB,G33UW
	3	GV30832-003A	FL LENS		G30US,G30UB,G30UW
	3	GV30832-001A	FL LENS		G35US,G35UB
	4	GV30833-003A	FRONT BTN.ASSY		G33A,G33US,G33UB,G33UW,G30US, G30UB,G30UW
	4	GV30833-002A	FRONT BTN.ASSY		
	5	GV30835-001A	VOL.RING LENS		
	6	GV40678-001A	FL SCREEN		
	7	QYSDF2608ZA	TAP SCREW	M2.6 x 8mm(x6)	G35US,G35UB
	8	GV40313-002A	FELT SPACER	(x2)	G33A,G33US,G33UB,G33UW
	9	GV20405-002A	TOP COVER ASSY		G30US,G30UB,G30UW
	9	GV20405-001A	TOP COVER ASSY		G35US,G35UB
	10	GV40220-001A	LACH		G33A,G33US,G33UB,G33UW,G30US, G30UB,G30UW
	11	GV40034-001A	DAMPER ASSY.		
	12	GV40705-001A	DOOR SPRING		
	13	GV30839-001A	HEAD SHIELD		
	14	LV43116-001A	MECHA BRACKET		
	15	QYSBST3006ZA	TAP SCREW	M3 x 6mm(x2)	
	16	QYSDSF2006ZA	TAP SCREW	M2 x 6mm(x3)	
	17	QYSBSG3010ZA	TAP SCREW	M3 x 10mm	
	18	QUQU12-0607BJ-E	FFC WIRE	6pin 7cm	
	19	QYSBST3006ZA	TAP SCREW	M3 x 6mm	
	20	QYSBSG3010ZA	TAP SCREW	M3 x 10mm(x3)	
	21	QYSBSG3010ZA	TAP SCREW	M3 x 10mm(x2)	
	22	GV10295-001A	BOTTOM CHASSIS		
	23	GV30840-001A	SUPPORT BRACKET		
	24	QYSBST3006ZA	TAP SCREW	M3 x 6mm	
	25	GV30349-025A	SPACER		
	26	GV30349-038A	SPACER		
	27	QYSBSG3010ZA	TAP SCREW	M3 x 10mm	
	28	QYSBST3006ZA	TAP SCREW	M3 x 6mm(x2)	
	29	QYSBST4006ZA	TAP SCREW	M4 x 6mm(x3)	
	30	QYSBST3006ZA	TAP SCREW	M3 x 6mm(x2)	
	31	QYSBST3006ZA	TAP SCREW	M3 x 6mm	
	32	QYSBST3006ZA	TAP SCREW	M3 x 6mm(x2)	
	33	GV40313-002A	FELT SPACER	(x2)	
△	34	QZW0033-001	STRAIN RELIEF		
	35	GV30967-001A	TRANS SHIELD		
	36	LV30225-0R3A	SPACER	(x2)	
	37	E3400-431	SPECER		
	38	GV30836-001A	VOL.LENS HOLDER		
	39	LV43659-001A	FL HOLDER	(x2)	
	40	LV30225-0M9A	SPACER	(x2)	
	41	GV30842-001A	IC BRACKET		
	42	QYSBSG3010ZA	TAP SCREW	M3 x 10mm(x2)	
	43	GV20399-018A	REAR PANEL		G35US
	43	GV20399-019A	REAR PANEL		G35UB
	43	GV20399-016A	REAR PANEL		G33A
	43	GV20399-013A	REAR PANEL		G33US
	43	GV20399-017A	REAR PANEL		G33UB
	43	GV20399-014A	REAR PANEL		G33UW
	43	GV20399-005A	REAR PANEL		G30US
	43	GV20399-009A	REAR PANEL		G30UB
	43	GV20399-006A	REAR PANEL		G30UW
	44	QAU0412-001	TUNER		
	45	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	46	GV30841-002A	HEAT SINK		
	47	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x4)	
	48	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	49	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	50	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	G35US,G33US,G33UB,G30US,G30UW
	51	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	52	QYSBSG3020ZA	TAP SCREW	M3 x 20mm(x2)	
	53	GV20400-002A	REAR COVER		G35US,G33US,G33UB,G30US,G30UW
	53	GV20400-001A	REAR COVER		G35UB,G33A,G33UB,G30UB
	54	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	55	GV10296-002A	SIDE PANEL L		G35US,G35UB
	55	GV10296-001A	SIDE PANEL L		G33A,G33US,G33UB,G33UW,G30US, G30UB,G30UW
	56	GV10297-002A	SIDE PANEL R		G35US,G35UB

△	Symbol No.	Part No.	Part Name	Description	Local
	56	GV10297-001A	SIDE PANEL R		G33A,G33US,G33UB,G33UW,G30US, G30UB,G30UW
	57	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	58	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	59	QYSB3T3006ZA	TAP SCREW	M3 x 6mm(x2)	
	60	GV30837-001A	VOLUME KNOB		
	61	GV30838-002A	TRAY FITTING		G35US,G35UB G33A,G33US,G33UB,G33UW,G30US, G30UB,G30UW
	61	GV30838-001A	TRAY FITTING		
	62	GV30893-001A	NUMBER LABEL		
	63	QUQU12-1011BJ-E	FFC WIRE	10pin 11cm	
	64	QUQU12-1413BJ-E	FFC WIRE	14pin 13cm	
	65	QUQU12-1707AJ-E	FFC WIRE	17pin 7cm	
	66	QUQU12-1110BJ-E	FFC WIRE	11pin 10cm	
	67	QUR110-1718AJ-E	FFC WIRE		
△	68	QQT0500-003	POWER TRANSF		G35US,G33US,G33UW,G30US,G30UW
△	68	QQT0500-004	POWER TRANSF		G35UB,G33A,G33UB,G30UB
△	69	QMF51W2-1R6-J8	FUSE	1.6A AC250V	G33US,G33UB,G33UW,G30US,G30UW
△	69	QMF51W2-R80-J8	FUSE	0.8A AC250V	G35UB,G33A,G33UB,G30UB
△	70	QMF51W2-R80-J8	FUSE	0.8A AC250V	G33US,G33UB,G33UW,G30US,G30UW
△	71	QMF51W2-1R6-J8	FUSE	1.6A AC250V	
△	72	QMPK200-200-JD	POWER CORD(EU)	2m BLACK	G35US,G33US,G33UW,G30US,G30UW
△	72	QMPN160-200-JD	POWER CORD(EU)	2m BLACK	G35UB,G33UB,G30UB
△	72	QMPG150-244-JC	POWER CORD(AST)	2.44m BLACK	G33A
	73	QAL0788-001	CASS.MECHANISM		

Speaker assembly and parts list

Block No. [M] [2] [M] [M]

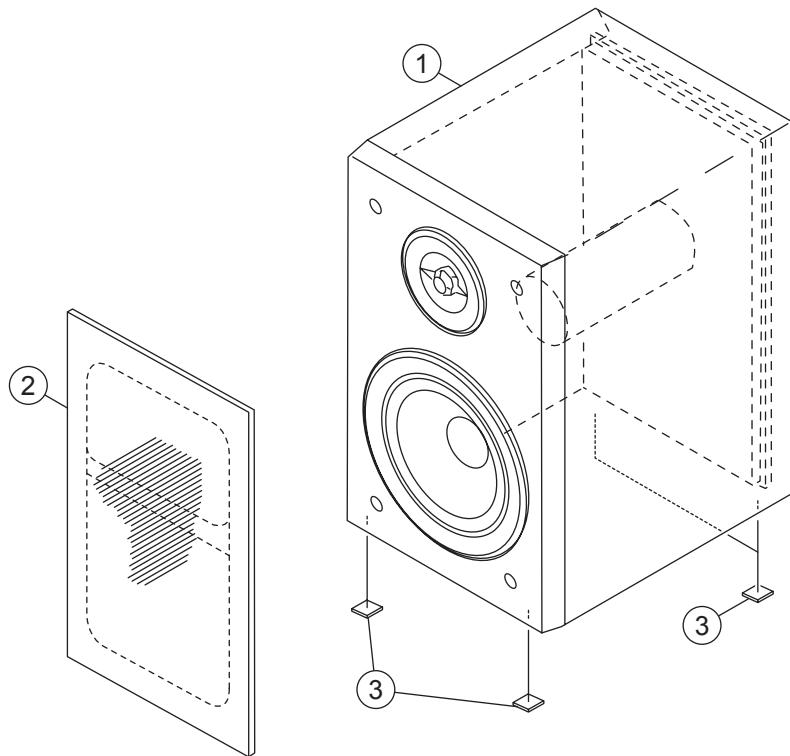

The parts without symbol number are not service.


Speaker

Block No. [M][2][M][M]


△	Symbol No.	Part No.	Part Name	Description	Local
1		SPUXG35U-SPBOX	SPK WITH BOX	(x2)	G35US,G35UB
1		SPUXG33E-SPBOX	SPK WITH BOX	(x2)	G33A,G33US,G33UB,G33UW
1		SPUXG30E-SPBOX	SPK WITH BOX	(x2)	G30US,G30UB,G30UW
2		J201-XG3503G-50	SPK NET ASSY	(x2)	G35US,G35UB
2		J201-XG3302G-50	SPK NET ASSY	(x2)	G33A,G33US,G33UB,G33UW
2		J201-XG3001G-50	SPK NET ASSY	(x2)	G30US,G30UB,G30UW
3		441-910102-00	RUBBER CUSHION	(x8)	

CD mechanism assembly and parts list

Block No. M B M M

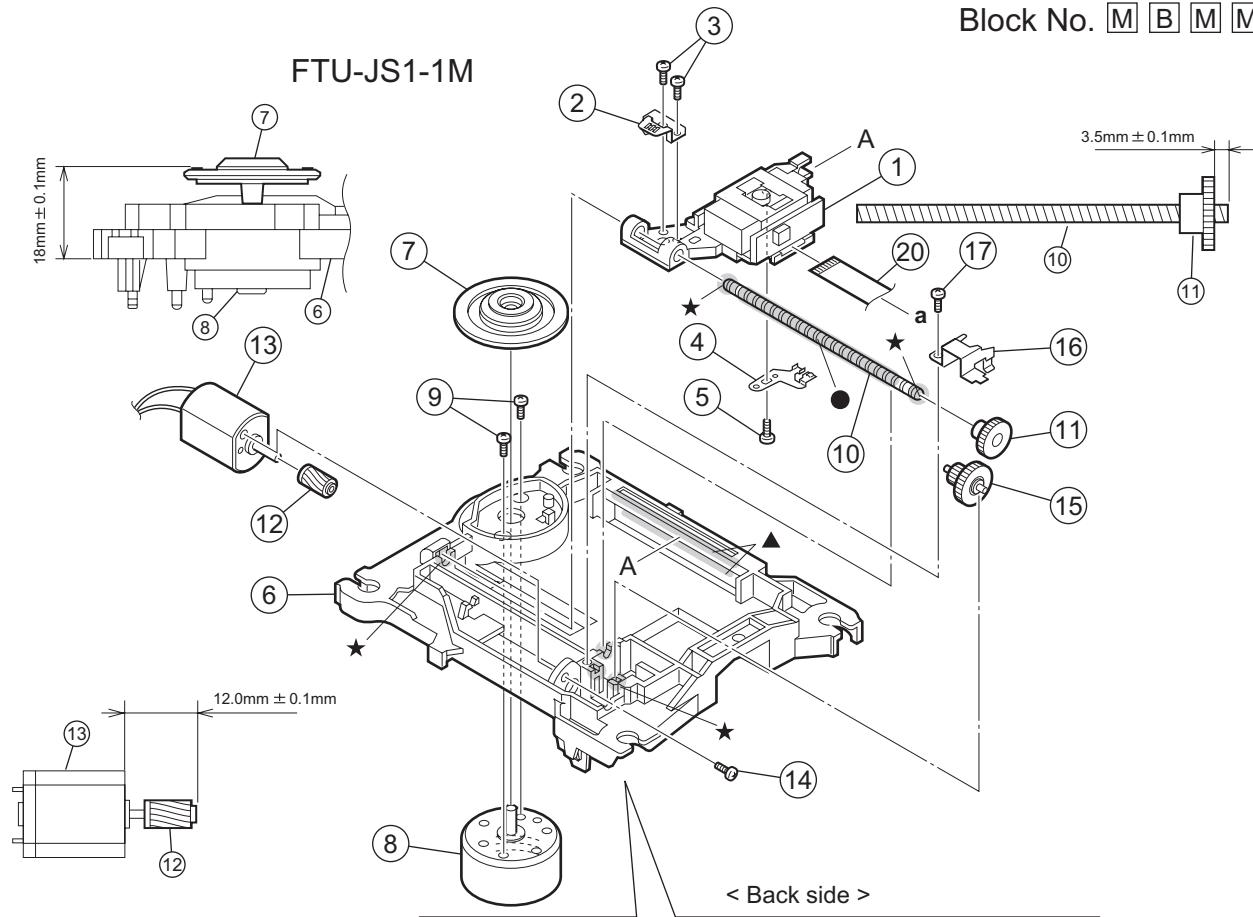

Grease
★ JVG-31N
● JVS-1003
▲ FL-7750E

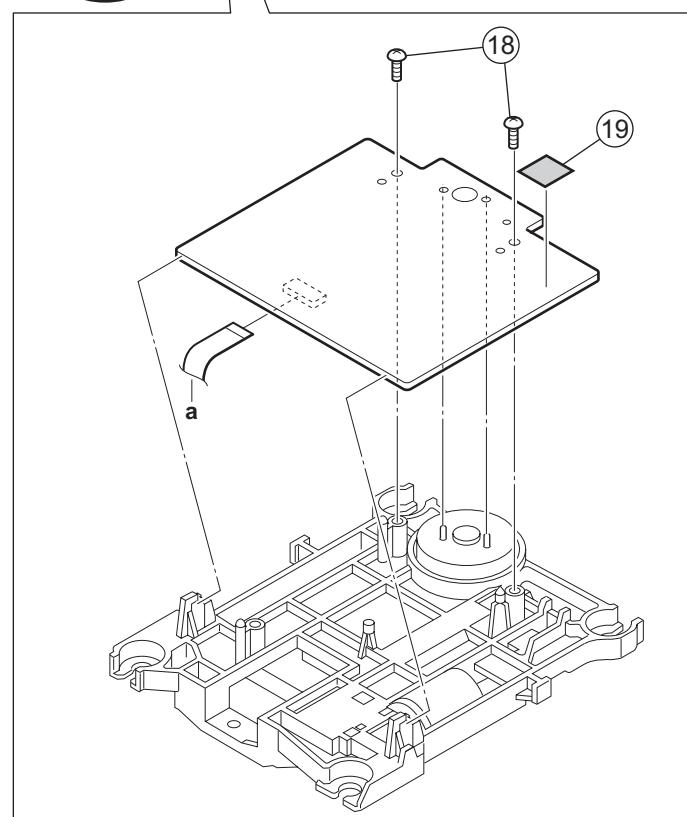

The parts without symbol number are not service.

CD mechanism


Block No. [M][B][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
1		QAL0750-001	CD PICK UP		
2		LV34564-001A	RACK ARM		
3		QYSPSPT1720MA	SCREW	M1.7 x 2mm(x2)	
4		LV31744-001A	P.SPRING		
5		QYSPSGT1425MA	TAP SCREW	M1.4 x 2.5mm	
6		LV10855-002A	TM CHASSIS		
7		LV43468-001A	T.T ASSY		
8		QAR0302-001	SPINDLE MOTOR		
9		VKZ4743-002	SPECIAL SCREW	(x2)	
10		LV40157-001A	SCREW SHAFT		
11		LV43651-001A	SS GEAR		
12		LV43650-001A	F MOTOR GEAR		
13		QAR0303-001	FEED MOTOR		
14		QYSPSPT2030MA	SCREW	M2 x 3mm	
15		LV34565-002A	F MIDDLE GEAR		
16		LV34563-001A	SHAFT HOLDER		
17		QYSPSFT1740ZA	TAP SCREW	M1.7 x 4mm	
18		QYSBSF2006ZA	TAP SCREW	M2 x 6mm(x2)	
19		LV30225-073A	SPACER		
20		QUQ105-1506BB-E	FFC WIRE	15pin 6cm	

CD loading base assembly and parts list

FMU-MS1-1M

Block No. M D M M

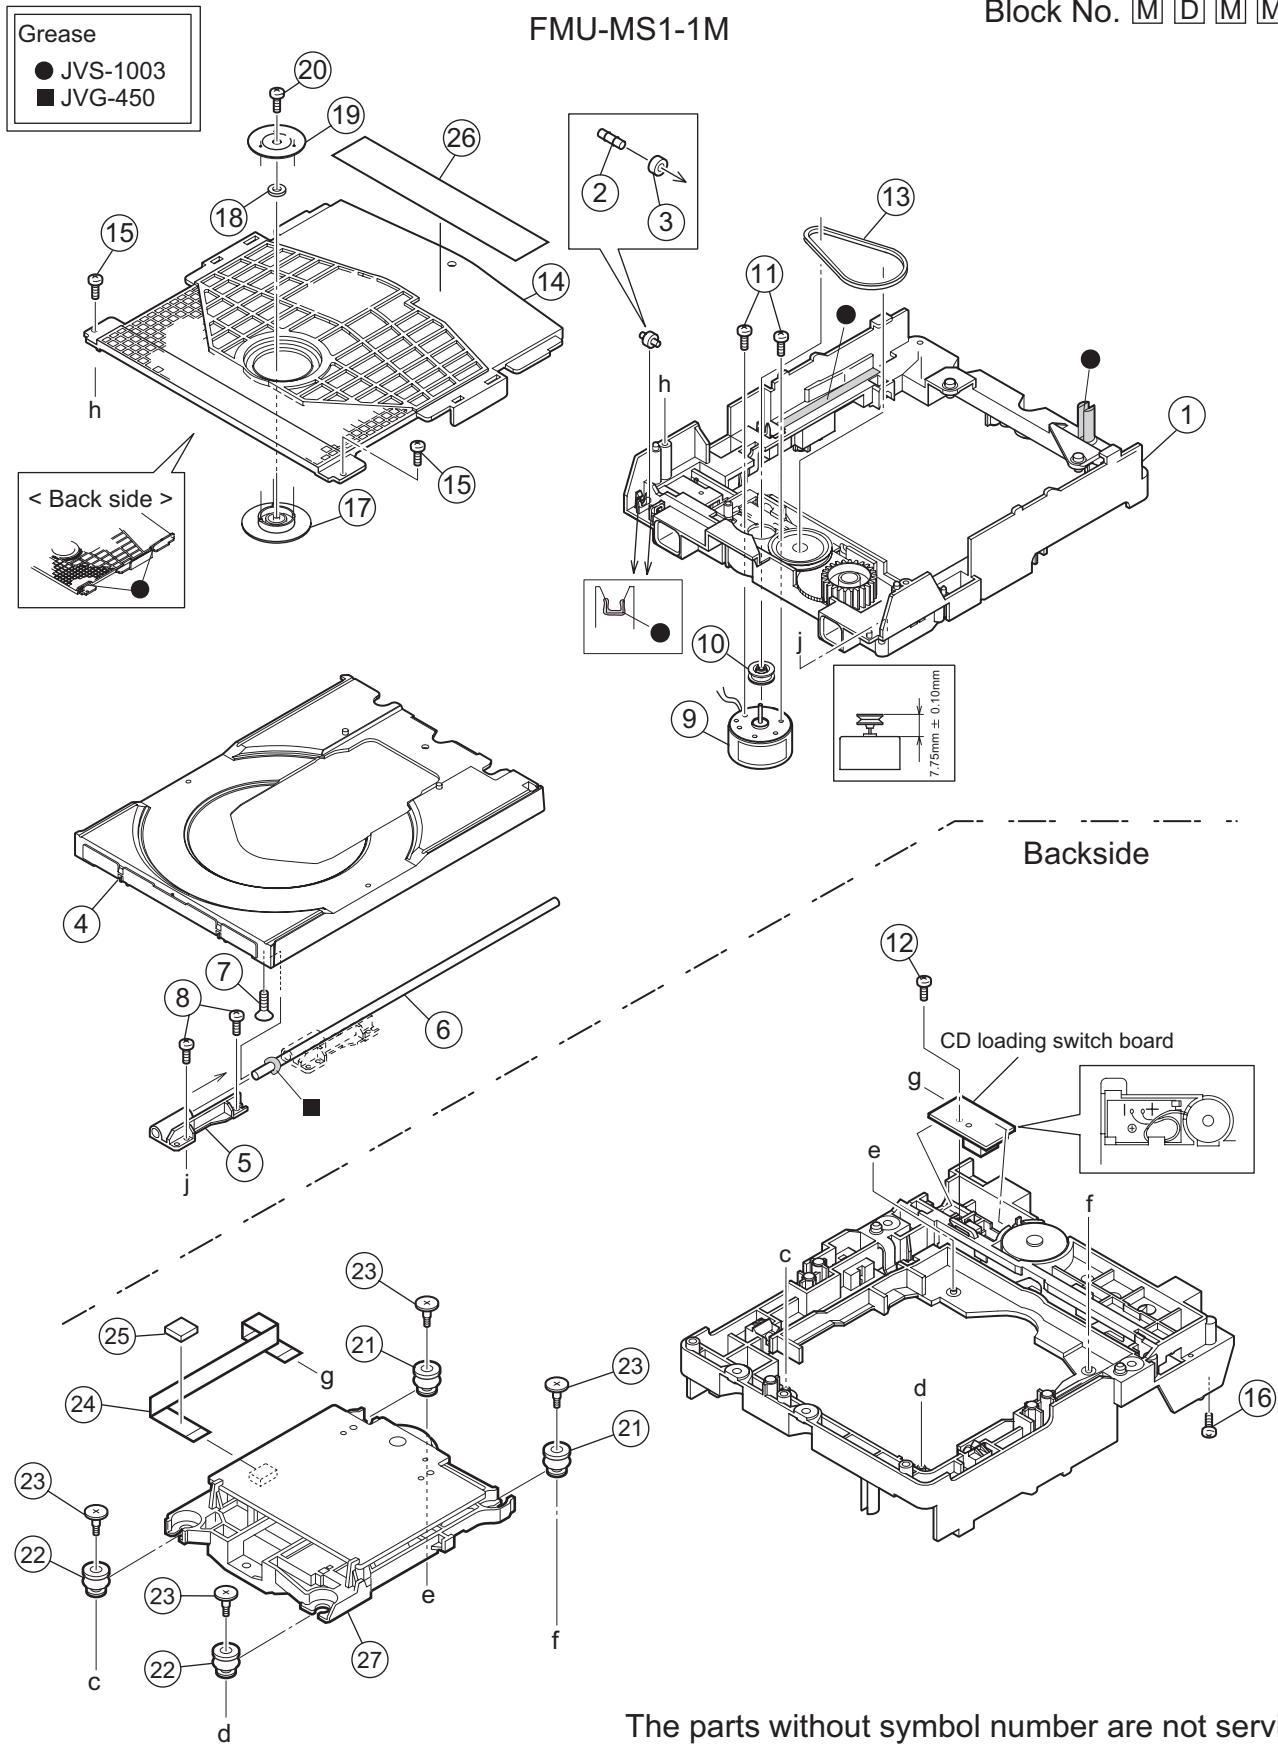

CD loading base

Block No. [M][D][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
1		LV11065-004A	LOADER SUB ASSY		
2		E407140-001SS	C.D ROLLER		
3		E407149-001SS	RUBBER TUBE		
4		LV10979-002A	TRAY		
5		LV35499-001A	SHAFT GUIDE		
6		LV44022-001A	SHAFT		
7		QYSSSF2008ZA	TAP SCREW	M2 x 8mm	
8		QYSDSF2008ZA	TAP SCREW	M2 x 8mm(x2)	
9		QAR0197-001	MOTOR		
9	or	QAR0280-001	LOADING MOTOR		
10		LV43844-002A	MOTOR PULLEY		
11		QYSPSPU1730ZA	SCREW	M1.7 x 3mm(x2)	
12		QYSDSF2008ZA	TAP SCREW	M2 x 8mm	
13		LV43974-001A	BELT		
14		LV21852-003A	CLAMPER BASE		
15		QYSDSF2008ZA	TAP SCREW	M2 x 8mm(x2)	
16		LV41741-004A	SPECIAL SCREW		
17		LV34586-002A	CD CLAMPER		
18		LV42930-003A	P.C.MAGNET		
18	or	LV41118-003A	P.C.MAGNET		
19		LV43848-001A	YOKE		
20		LV43958-001A	SPECIAL SCREW		
21		LE40900-003A	INSULATOR	(x2)	
22		LE40900-004A	INSULATOR	(x2)	
23		LV44044-001A	SPECIAL SCREW	(x4)	
24		LV43805-001A	FFC		
25		VYSH101-034	SPACER		
26		LV44603-001A	LASER CATION		
27		-----	CD TRAMECHA UNI		

Electrical parts list

Micon board

Block No. [0][1]





△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
IC200	KIA78R33PI	IC			C2222	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
IC220	LC75345M-X	IC			C2223	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
IC400	MN101C49GFB1	MASK ROM			C2225	QFLC1HJ-272Z	M CAPACITOR	2700pF 50V J	
IC401	BR24L02F-W-X	IC(DIGITAL)			C2226	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
IC500	PT6315	IC			C2227	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
IC501	GP1UM271XKVF	IR DETECT UNIT			C2228	QVF1HJ-184Z	MF CAPACITOR	0.18uF 50V J	
IC565	RC4558D-X	IC			C2229	QVF1HJ-184Z	MF CAPACITOR	0.18uF 50V J	
IC566	RC4558D-X	IC			C2230	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q2000	KRC102S-X	DIGI TRANSISTOR			C2231	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
Q2001	KRC102S-X	DIGI TRANSISTOR			C2232	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q2300	KTC3875/YG-/X	TRANSISTOR			C2300	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
Q2301	KTC3875/YG-/X	TRANSISTOR			C2301	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
Q2400	KTC2875-X	CHIP TR.			C2302	NCB31AK-154X	C CAPACITOR	0.15uF 10V K	
Q2401	KTC2875-X	CHIP TR.			C2310	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
Q2402	KRA102S-X	DIGI TRANSISTOR			C2400	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q4000	KRC11S-X	TRANSISTOR			C4001	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
Q4001	KTC3875/YG-/X	TRANSISTOR			C4002	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
Q4200	KRC102S-X	DIGI TRANSISTOR			C4003	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
Q5000	KRC102S-X	DIGI TRANSISTOR			C4004	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
Q5660	KRC109S-X	TRANSISTOR			C4005	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
D2300	1SS133-T2	SI DIODE			C4006	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D2301	1SS133-T2	SI DIODE			C4007	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
D2302	1SS133-T2	SI DIODE			C4008	QETN0JM-228Z	E CAPACITOR	2200uF 6.3V M	
D4000	1SS133-T2	SI DIODE			C4009	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
D4001	1SS133-T2	SI DIODE			C4010	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
D4002	MTZJ5.1B-T2	Z DIODE			C4011	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
D4003	1SS133-T2	SI DIODE			C5000	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D4004	1SS133-T2	SI DIODE			C5001	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D4005	1SS133-T2	SI DIODE			C5004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D4006	1N4003S-T5	SI DIODE			C5009	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D4007	1N4003S-T5	SI DIODE			C5010	QEKC1AM-476Z	E CAPACITOR	47uF 10V M	
D4008	1N4003S-T5	SI DIODE			C5012	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
D4009	1N4003S-T5	SI DIODE			C5200	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D4201	MTZJ10B-T2	Z DIODE			C5500	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D4203	1SS133-T2	SI DIODE			C5502	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
D4204	1SS133-T2	SI DIODE			C5503	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
D4500	1N4003S-T5	SI DIODE			C5602	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
D5002	SLI-343URC-W-T	LED			C5660	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
D5200	SELU1E54CM-P	LED			C5661	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
D5205	1SS133-T2	SI DIODE			C5662	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
D5206	1SS133-T2	SI DIODE			C5663	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
D5600	1SS133-T2	SI DIODE			C5664	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D5660	1SS133-T2	SI DIODE			R2000	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C2000	QETN1AM-227Z	E CAPACITOR	220uF 10V M		R2001	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C2001	QETN1AM-227Z	E CAPACITOR	220uF 10V M		R2002	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C2002	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R2003	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
C2004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R2101	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
C2103	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R2102	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
C2200	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R2202	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
C2202	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R2203	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C2203	QETN1HM-226Z	E CAPACITOR	22uF 50V M		R2204	NRSA63J-752X	MG RESISTOR	7.5kΩ 1/16W J	
C2204	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R2205	NRSA63J-752X	MG RESISTOR	7.5kΩ 1/16W J	
C2205	QVF1HJ-184Z	MF CAPACITOR	0.18uF 50V J		R2208	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C2206	QVF1HJ-184Z	MF CAPACITOR	0.18uF 50V J		R2209	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	
C2207	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R2210	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	
C2208	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R2211	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C2209	QFLC1HJ-272Z	M CAPACITOR	2700pF 50V J		R2214	NRSA63J-752X	MG RESISTOR	7.5kΩ 1/16W J	
C2210	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2215	NRSA63J-752X	MG RESISTOR	7.5kΩ 1/16W J	
C2211	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2216	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C2213	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2217	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
C2214	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R2300	NRSA63J-113X	MG RESISTOR	11kΩ 1/16W J	
C2215	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2301	NRSA63J-513X	MG RESISTOR	51kΩ 1/16W J	
C2216	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C2217	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2303	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C2218	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2304	NRSA63J-113X	MG RESISTOR	11kΩ 1/16W J	
C2219	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2305	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	
C2220	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R2306	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	
C2221	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R2307	NRSA63J-362X	MG RESISTOR	3.6kΩ 1/16W J	
					R2308	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
					R2309	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
					R2400	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J	
					R2401	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J	
					R2402	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J	
					R2403	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J	
					R2404	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
Q1651	KTC2875-X	CHIP TR.			C1519	NDC31HJ-560X	C CAPACITOR	56pF 50V J	
Q1652	KTC2875-X	CHIP TR.			C1520	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
Q1850	KTC3875/YG-X	TRANSISTOR			C1600	QETN1VM-476Z	E CAPACITOR	47uF 35V M	
△ D900	1N5402M-20	SI DIODE			C1601	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
△ D901	1N5402M-20	SI DIODE			C1650	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
△ D902	1N5402M-20	SI DIODE			R956	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	G35US, G33US, G30UW, G30US, G30UW
△ D903	1N5402M-20	SI DIODE			R957	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	G35US, G33US, G30UW, G30US, G30UW
△ D950	1N4003S-T5	SI DIODE			R958	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	G35US, G33US, G30UW, G30US, G30UW
△ D951	1N4003S-T5	SI DIODE			D957	MTZJ10B-T2	Z DIODE		
△ D952	1N4003S-T5	SI DIODE			R1000	QRJ146J-332X	UNF C RESISTOR	3.3kΩ 1/4W J	
△ D953	1N4003S-T5	SI DIODE			R1250	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
D954	1SS133-T2	SI DIODE			R1251	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
D955	1N4003S-T5	SI DIODE			R1500	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
D956	1SS133-T2	SI DIODE			△ R1501	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
				G35US, G33US, G30UW, G30US, G30UW	R1502	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
D958	1N4003S-T5	SI DIODE			△ R1503	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
D959	1N4003S-T5	SI DIODE			△ R1504	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
△ D1000	1N4003S-T5	SI DIODE			R1505	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
D1001	MTZJ22A-T2	Z DIODE			R1506	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
D1002	MTZJ5.6B-T2	Z DIODE			R1507	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
D1250	1SS133-T2	SI DIODE			R1508	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
△ D1401	2A02-M	DIODE			R1509	QRJ146J-182X	UNF C RESISTOR	1.8kΩ 1/4W J	
△ D1402	2A02-M	DIODE			R1510	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	
△ D1403	2A02-M	DIODE			R1511	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	
△ D1404	2A02-M	DIODE			R1512	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
D1500	MTZJ9.1B-T2	Z DIODE			R1513	QRT01DJ-R22X	MF RESISTOR	0.22Ω 1W J	
D1501	1SS133-T2	SI DIODE			R1514	QRJ146J-101X	UNF C RESISTOR	100Ω 1/4W J	
D1502	1SS133-T2	SI DIODE			R1515	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
△ D1503	MTZJ9.1B-T2	Z DIODE			R1516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
D1600	1SS133-T2	SI DIODE			R1517	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
D1851	1SS133-T2	SI DIODE			R1518	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
					R1519	QRT01DJ-R22X	MF RESISTOR	0.22Ω 1W J	
					R1520	QRJ146J-101X	UNF C RESISTOR	100Ω 1/4W J	
C904	QFNC2AJ-104Z	M CAPACITOR	0.1uF 100V J		R1521	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C911	QCZ9105-472	C CAPACITOR	4700pF 250V M		R1522	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C950	QETM2AM-227	E CAPACITOR	220uF 100V M		R1523	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
				G35US, G33US, G30UW, G30US, G30UW	△ R1524	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	
					R1525	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	
					R1526	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
C950	QETN1EM-227Z	E CAPACITOR	220uF 25V M		R1527	QRJ146J-182X	UNF C RESISTOR	1.8kΩ 1/4W J	
C952	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R1528	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
				G35US, G33US, G30UW, G30US, G30UW	R1529	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	
C956	QFLC2AJ-472Z	M CAPACITOR	4700pF 100V J		R1530	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
					R1531	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
					R1532	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
					R1533	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
C1000	QETN1VM-227Z	E CAPACITOR	220uF 35V M		R1534	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
C1001	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R1600	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
C1002	QETN1HM-226Z	E CAPACITOR	22uF 50V M		R1601	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
C1003	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R1652	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1100	QETN1EM-227Z	E CAPACITOR	220uF 25V M		R1653	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1200	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R1851	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
C1250	QETM1VM-228	E CAPACITOR	2200uF 35V M						
C1251	QETM1VM-228	E CAPACITOR	2200uF 35V M		L1500	QQLZ035-R39	COIL	0.39uH	
C1252	QETM1EM-478	E CAPACITOR	4700uF 25V M		L1501	QQLZ035-R39	COIL	0.39uH	
C1406	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J						G35US, G33US, G30UW, G30US, G30UW
C1500	NDC31HJ-560X	C CAPACITOR	56pF 50V J		△ T950	QQT0370-012	POWER TRANSF		
C1501	QTE1V06-106Z	E CAPACITOR	10uF 35V						
C1502	NCB31HK-471X	C CAPACITOR	470pF 50V K		△ T950	QQT0253-002	POWER TRANSF		
C1503	NCB31HK-471X	C CAPACITOR	470pF 50V K						
C1504	QTE1V06-106Z	E CAPACITOR	10uF 35V						
C1505	QETN1HM-106Z	E CAPACITOR	10uF 50V M						
C1506	QETN1VM-476Z	E CAPACITOR	47uF 35V M		CN150	QGB2510K2-13	CONNECTOR	B-B (1-13)	
C1507	NDC31HJ-5R0X	C CAPACITOR	5pF 50V J		CN151	QGB2510K2-10	CONNECTOR	B-B (1-10)	
C1508	QVFV1HJ-684Z	MF CAPACITOR	0.68uF 50V J		CN152	QGB2510K2-11	CONNECTOR	B-B (1-11)	
C1509	QVFV1HJ-684Z	MF CAPACITOR	0.68uF 50V J		△ CN900	QGA7901C1-02	CONNECTOR	W-B (1-2)	
C1514	QETN1HM-106Z	E CAPACITOR	10uF 50V M		CN901	QGB2510J1-13	CONNECTOR	B-B (1-13)	
C1515	QVFV1HJ-684Z	MF CAPACITOR	0.68uF 50V J		EP150	QN0136-001Z	EARTH PLATE		
C1516	QVFV1HJ-684Z	MF CAPACITOR	0.68uF 50V J		FT140	QNG0003-001Z	FUSE CLIP		
C1517	NDC31HJ-5R0X	C CAPACITOR	5pF 50V J		FT141	QNG0003-001Z	FUSE CLIP		
C1518	QETN1VM-476Z	E CAPACITOR	47uF 35V M						

Packing materials and accessories parts list

Block No. M 3 M M

No additional / supplemental order of WARRANTY CARDS are available.

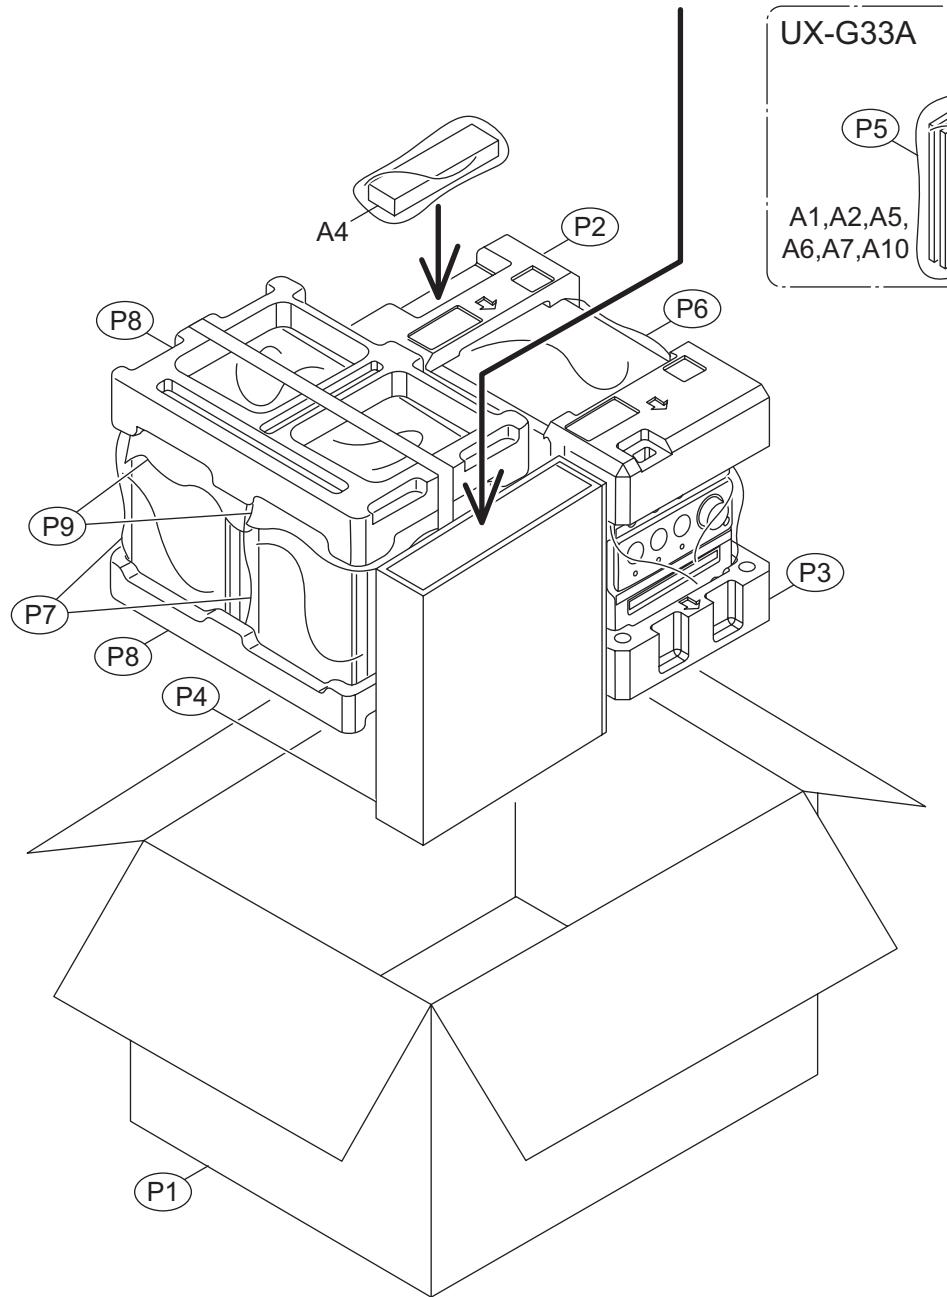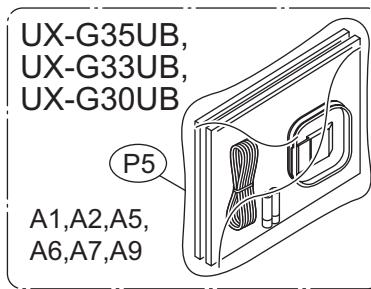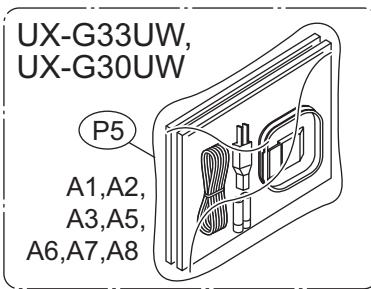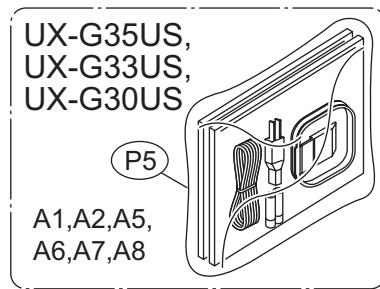

Packing and Accessories

Block No. [M][3][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
	A 1	GVT0171-005A	INST BOOK	ENG	
	A 2	GVT0171-008A	INST BOOK	CHI(PEKIN)	G35US,G35UB,G33US,G33UB,G30US, G30UB
	A 2	GVT0171-006A	INST BOOK	SPA	G33UW,G30UW
	A 3	GVT0171-007A	INST BOOK	POR	G33UW,G30UW
	A 4	RM-SUXG30U	REMOCON UNIT		
	A 5	-----	BATTERY	(x2)	
	A 6	QAL0014-003	AM LOOP ANT		
	A 7	QAL0457-001	ANT.WIRE		
△	A 8	QAM0112-002	PLUG ADAPTOR		G35US,G33US,G33UW,G30US,G30UW
	A 9	GV30024-058A	UB SHEET		G35UB
	A 9	GV30024-057A	UB SHEET		G33UB
	A 9	GV30024-056A	UB SHEET		G30UB
	A 10	-----	WARRANTY CARD	BT-56012-1	G33A
	P 1	GV20440-002A	CARTON ASSY		G35US,G35UB
	P 1	GV20439-005A	CARTON ASSY		G33A,G33US,G33UB,G33UW
	P 1	GV20401-005A	CARTON ASSY		G30US,G30UB,G30UW
	P 2	GV10299-001A	CUSHION UPPER		
	P 3	GV10298-001A	CUSHION BOTTOM		
	P 4	GV30852-001A	CARTON SPACER		
	P 5	QPC02503515P	POLY BAG	25cm x 35cm	
	P 6	QPC05006515P	POLY BAG	50cm x 65cm	
	P 7	700-120104-10	POLY BAG	(x2)	
	P 8	720-PUXG30-00	CUSHION	(x2)	
	P 9	715-220008-00	MIRAMAT SHEET	(x2)	