



- 2SA733 (A)
- 2SA954
- 2SA992
- 2SC945
- 2SC1980

- 2SA850
- 2SC1735

- 2SB686
- 2SD716

- TA7322P

- HA1457W-04

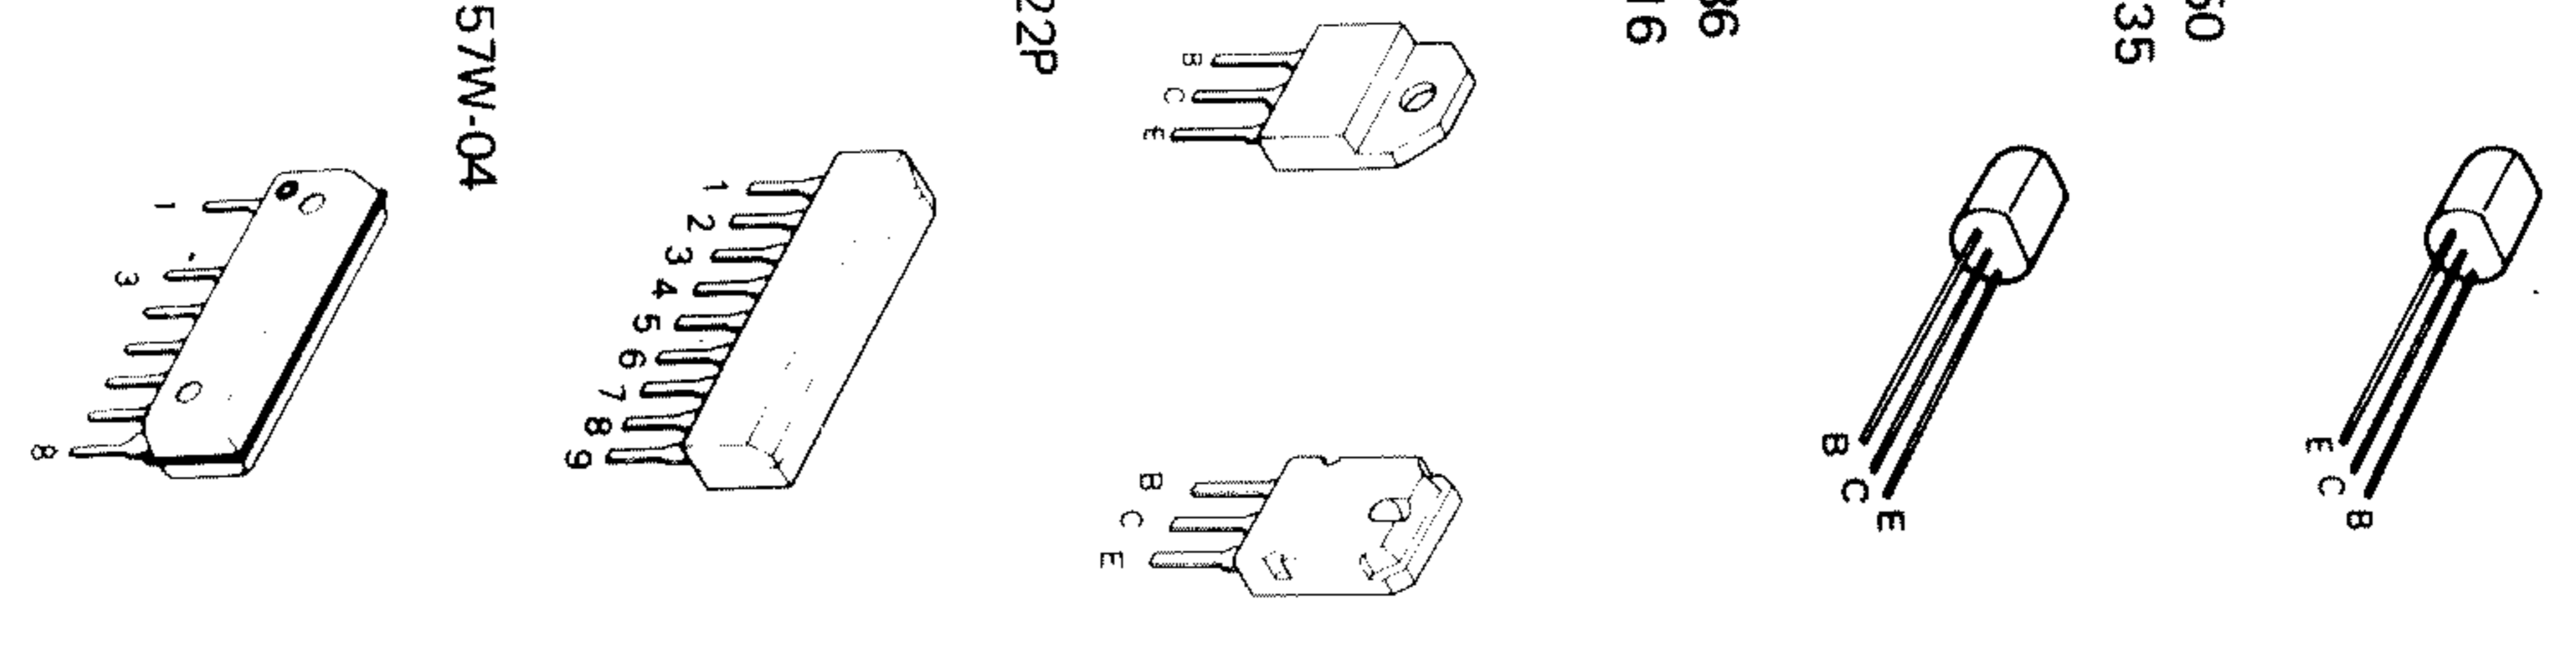


KA-60 (K)

DC voltages are measured by a
with 20 K Ω /V input impedance.

B C D E F G H

- S2 Sl-d Sl-c Sl-b Sl-d
- 1954 : C2-185
- 1733(A) : RB-151
- 1945 : W068
- D4 : STV-4H
- D5,6 : STV-4H
- D9,10 : IS2076A
- D11~14 : GP 20DL
- D15,16 : IS2076
- or IS1555

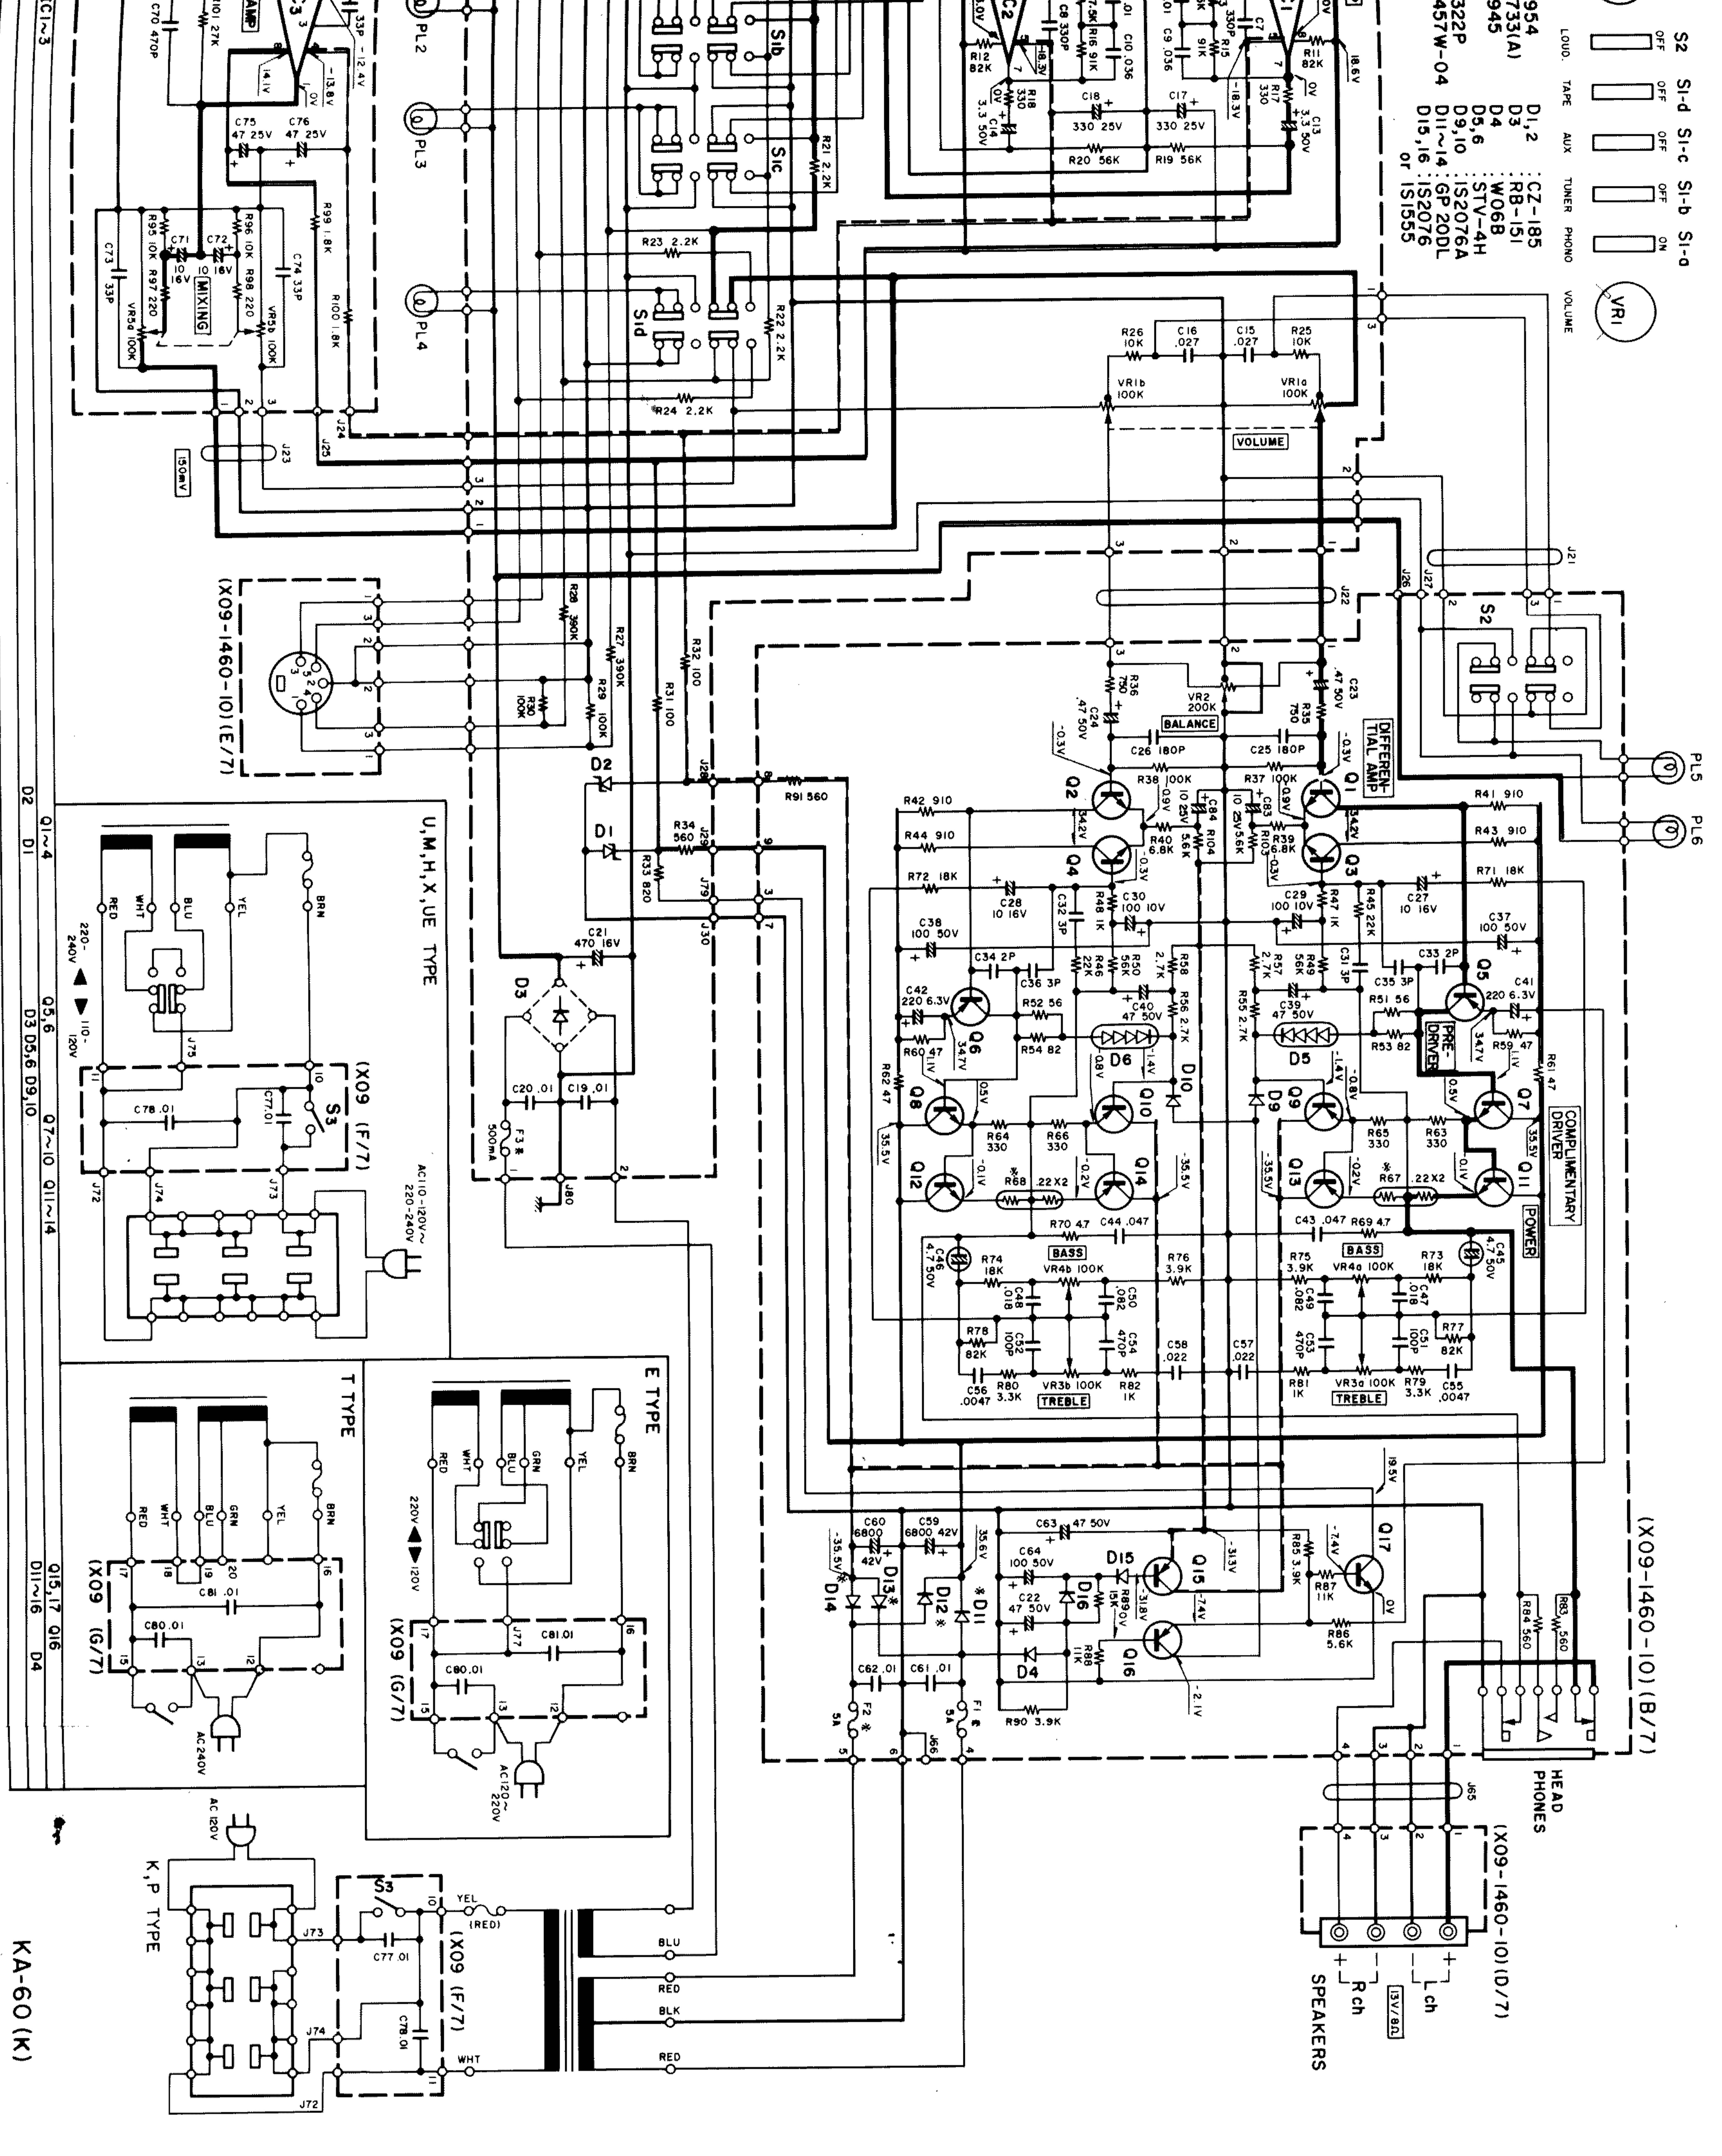

SPECIFICATIONS

Power output
 30 watts* per channel minimum RMS, both channels driven, at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.08% total harmonic distortion.

Both Channels Driven
 32 * 32 watts 8 ohms at 1,000 Hz
 32 * 32 watts 4 ohms at 1,000 Hz

Total Harmonic Distortion
 (20 Hz to 20,000 Hz)
 AUX input to SPEAKER output
 0.08% at rated power into 8 ohms
 0.04% at 1/2 rated power into 8 ohms
 0.08% at rated power with VOLUME -20 dB
 0.08% at rated power into 8 ohms

PHONO input to SPEAKER output
 Intermodulation Distortion
 (60 Hz, 7 kHz = 4 : 1)
 0.08% at rated power into 8 ohms

Damping Factor
 40, 20 Hz - 40,000 Hz into 8 ohms
 10 Hz to 100,000 Hz at 0.08% THD
 10 Hz to 100,000 Hz - 0 dB - 3 dB

Frequency Response
 Speaker Impedance
 Input Sensitivity Impedance
 2.5 mV/50 kohms
 150 mV/30 kohms

Phono, Mic, Tape
 Tuner, AUX, Tape
 Signal to Noise Ratio (HF A)
 80 dB for 2.5 mV input
 86 dB for 5.0 mV input
 92 dB for 10 mV input
 100 dB for 150 mV input
 73 dB for 2.5 mV input
 180 mV (RMS), T.H.D. 0.08% at 1,000 Hz
 150 mV/330 ohms
 30 mV/75 kohms
 RIAA standard curve ± 0.4 dB
 (30 Hz to 15,000 Hz)

Phono Frequency Response
 Tone Control
 Bass
 ± 10 dB at 100 Hz
 ± 10 dB at 10 kHz
 -9 dB at 100 Hz for -30 dB VOLUME level

Treble
 ± 10 dB at 100 Hz
 ± 10 dB at 10 kHz
 -9 dB at 100 Hz for -30 dB VOLUME level

GENERAL
 Power Requirements
 Power Consumption
 A.C. Outlet
 Dimensions
 Weight

60 Hz, 120 V, U.S.A. & Canada Model 1 or 50 60 Hz
 100-1, 230 V, 230-240 V, switchable
 70 W (U.S.A.)
 60 W (U.S.A.)
 20 W, 180 W, 180 W
 Switched 2, Unswitched 1
 W 440 mm (17.10 32.7)
 H 78 mm (3.2 32.1)
 D 338 mm (13.10 32.1)
 5.5 kg (12.1 lbs)

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

DC voltages are measured by a VOM with 20 kΩ/V input impedance.