
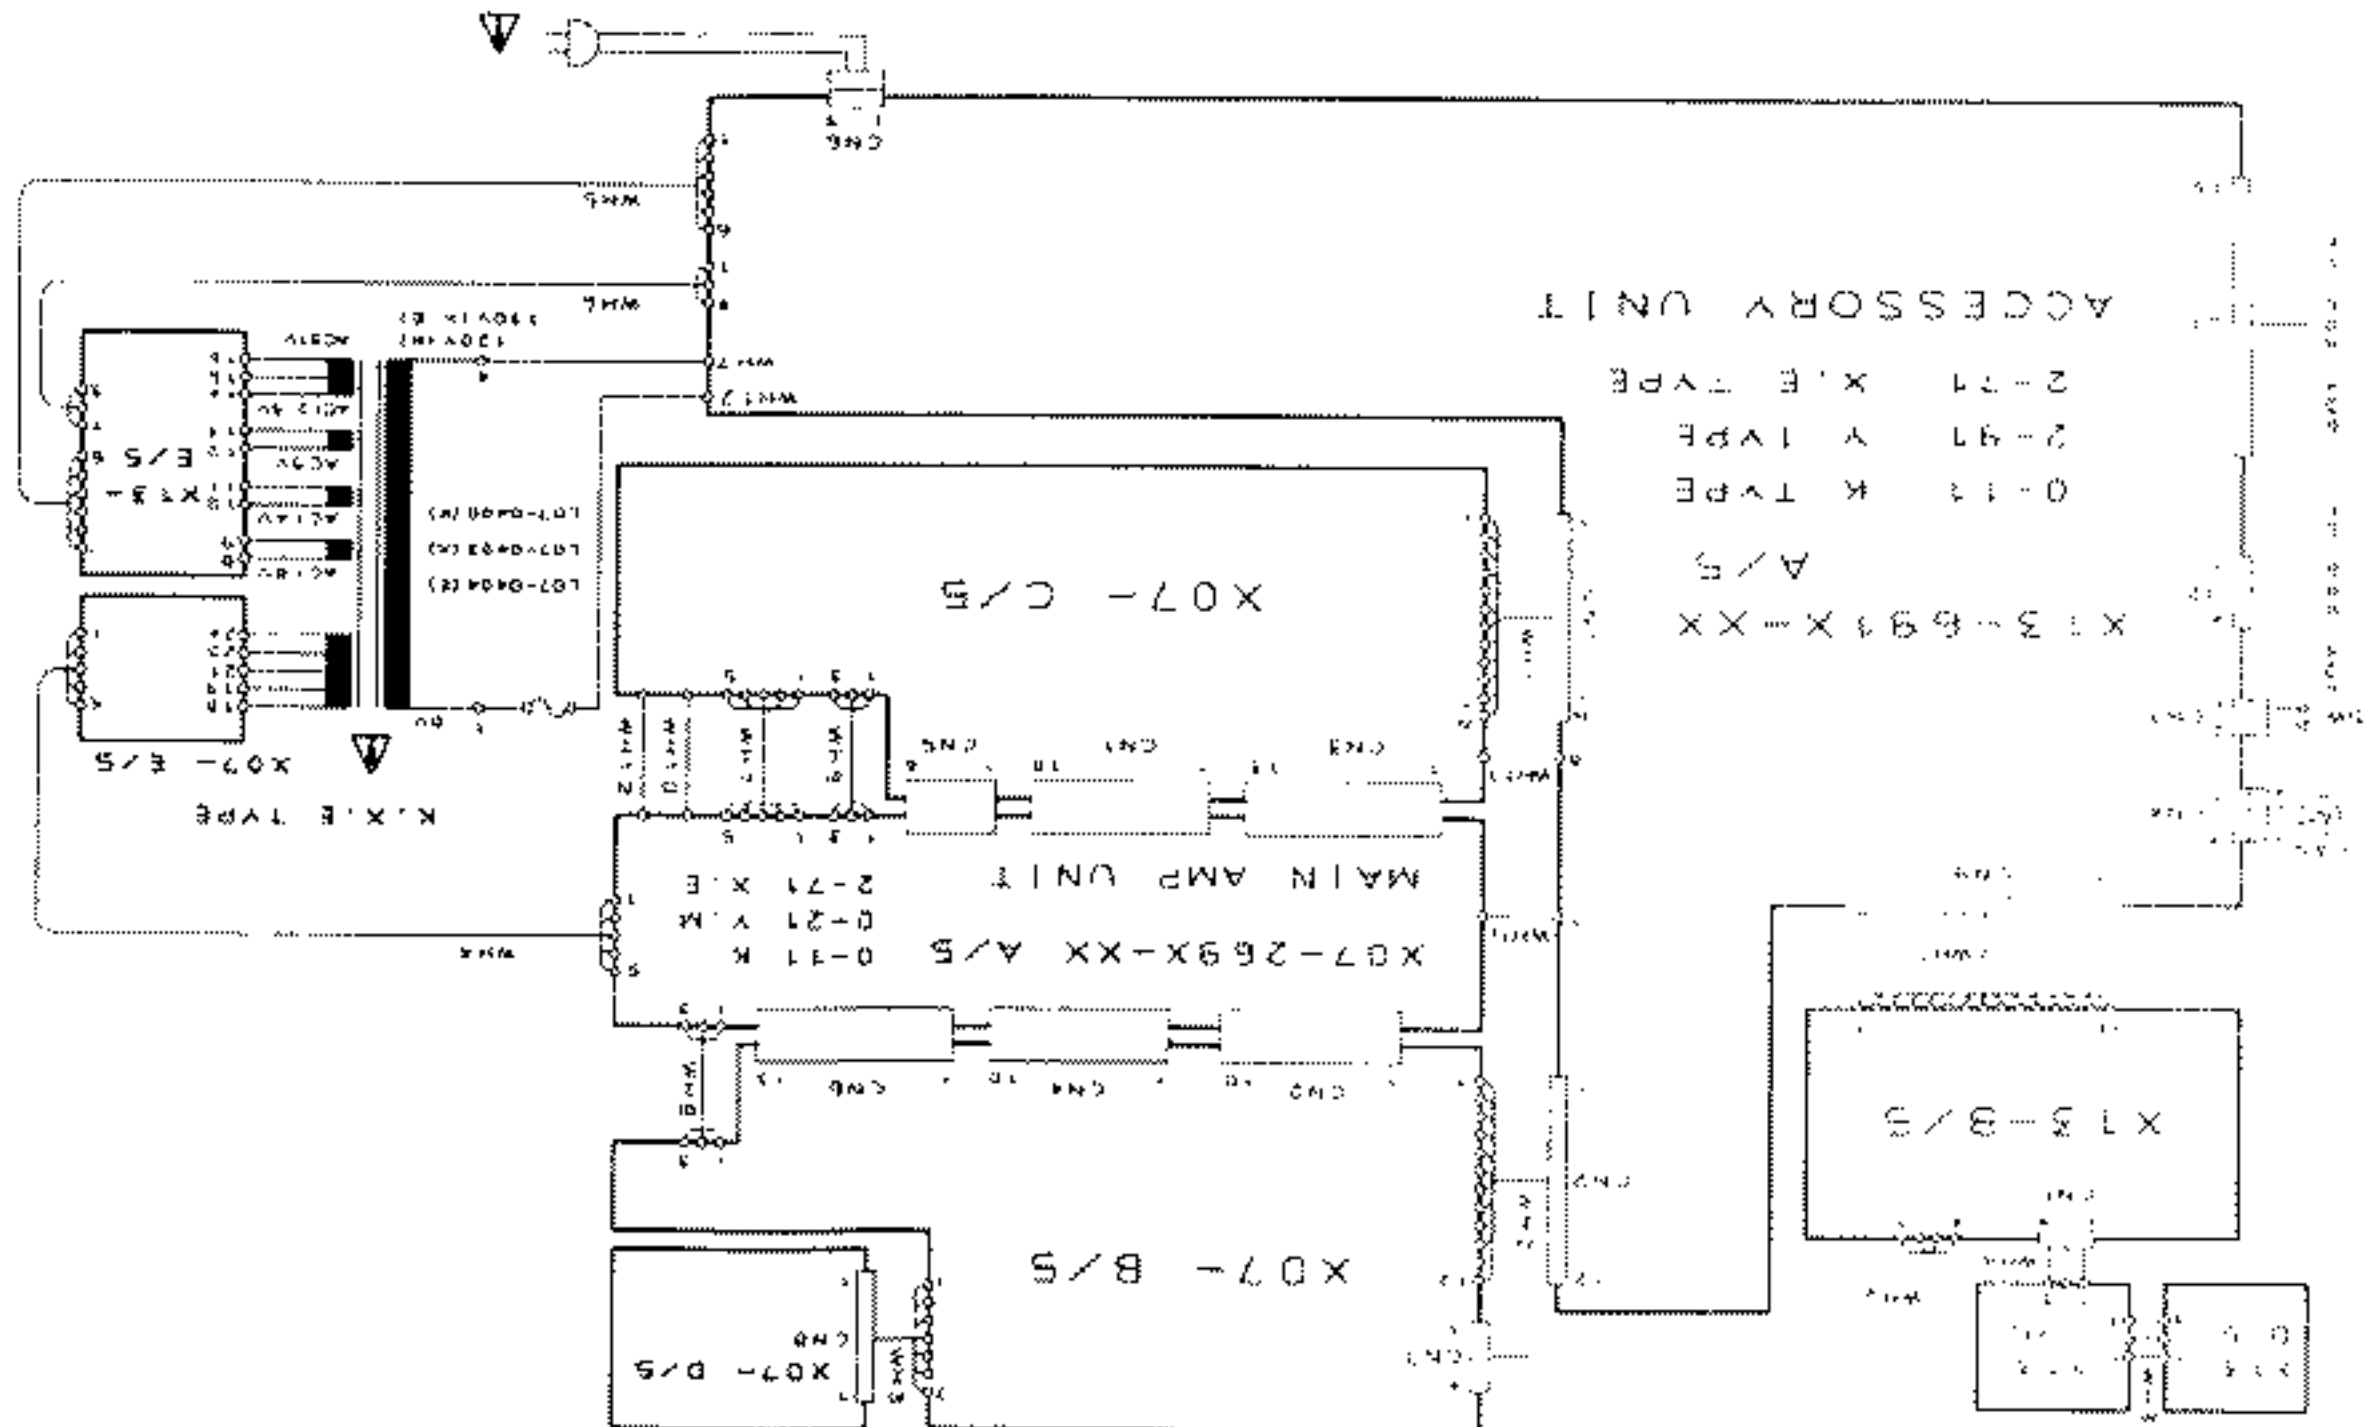


WIRING DIAGRAM

C 1991-8 PRINTED IN JAPAN
B51-4387-00(S)2434

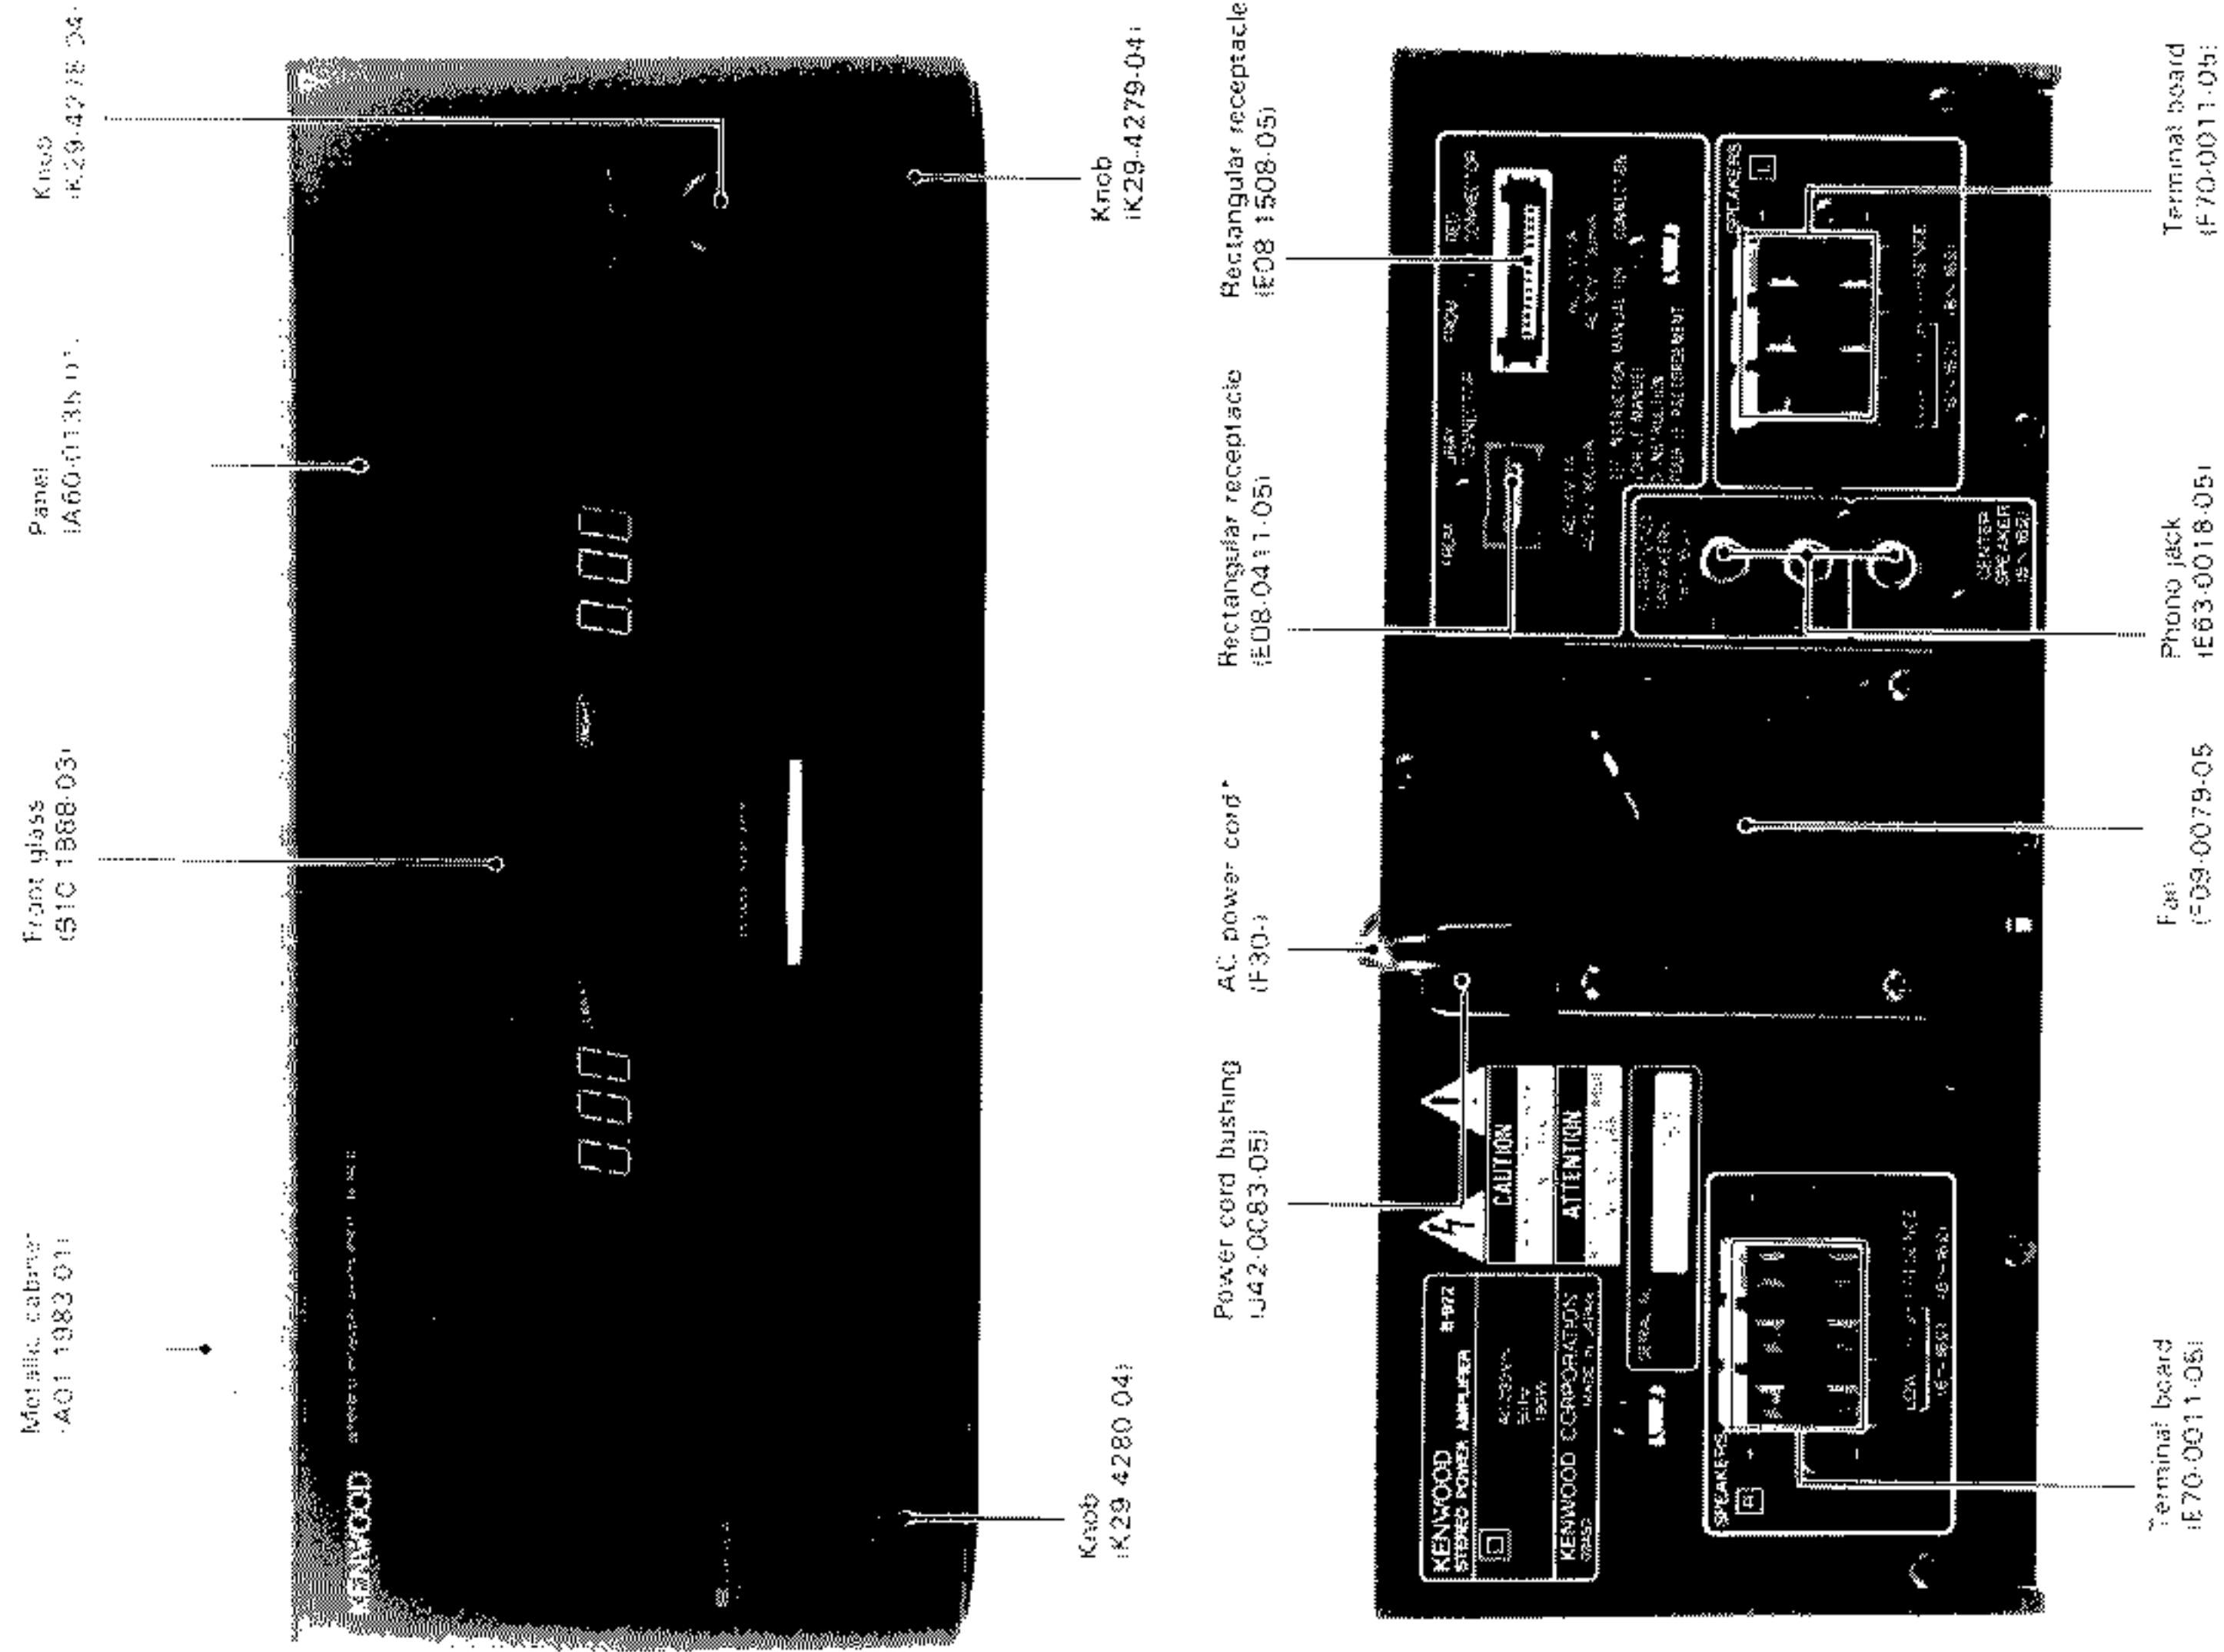


SYSTEM CONFIGURATION	3	PC BOARD	13
REMOTE CONTROL	4	SCHEMATIC DIAGRAM	17
CIRCUIT DESCRIPTION	5	EXPLODED-VIEW	25
ADJUSTMENT	11	PARTS-LIST	27
WIRING DIAGRAM	12	SPECIFICATIONS	27
		BACK COVER	27

DISASSEMBLY FOR REPAIR


How to remove the repairing chassis

- 1 Cut the 6 parts ① of the repairing chassis. Remove the repairing chassis from main chassis.

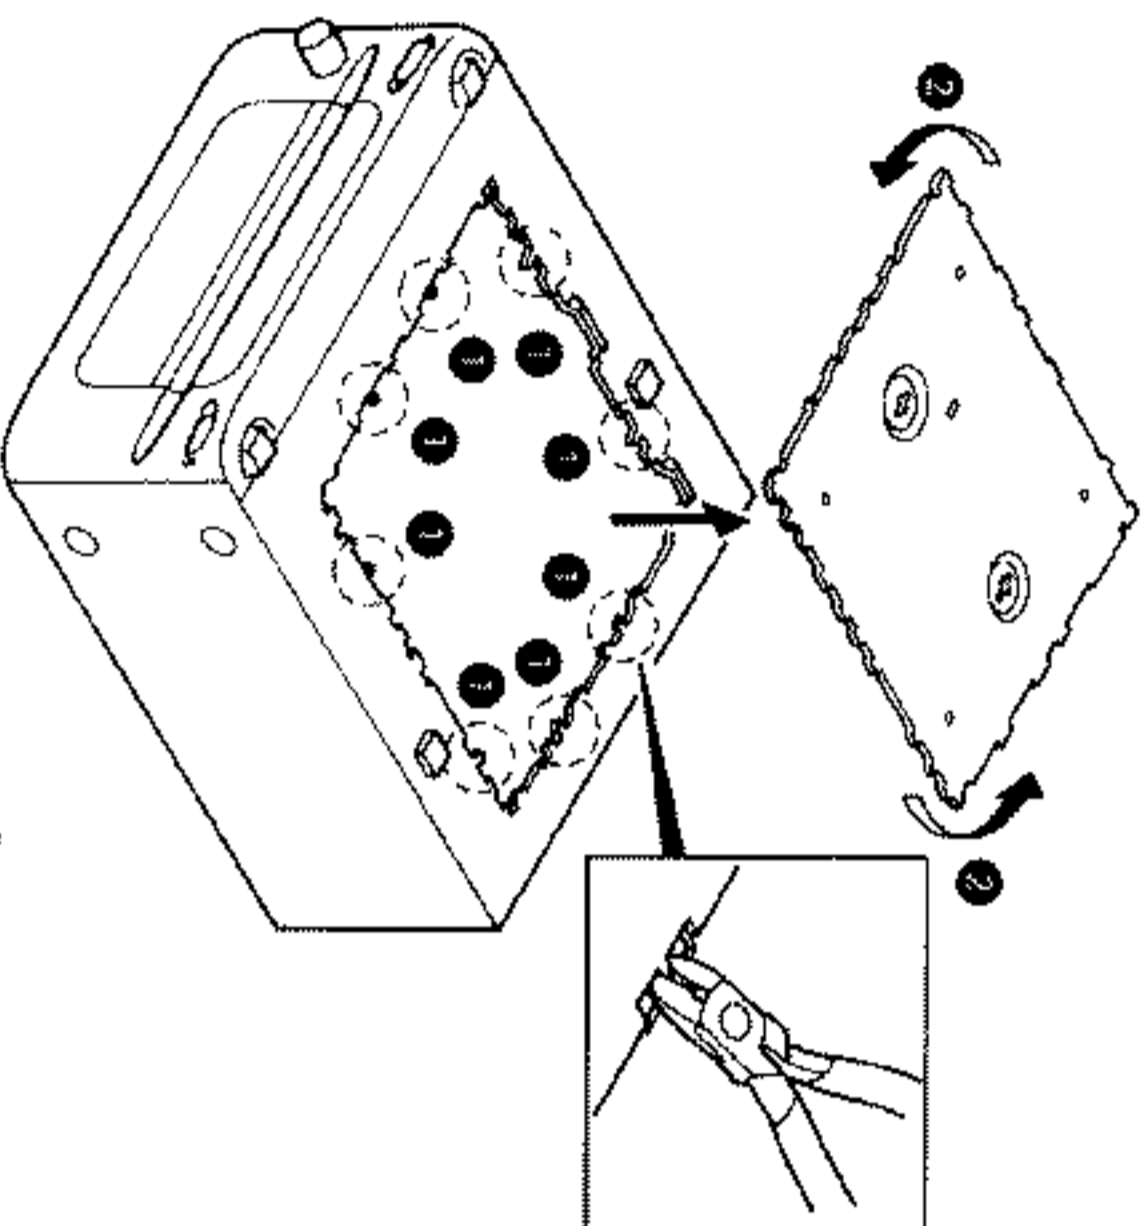

After repair


- 2 Turn the repairing chassis 180 degrees in the arrow direction ②.
- 3 Insert the 2 claws ③ into main chassis.
- 4 Lock to the main chassis by 2 screws (M3 x 6) ④.

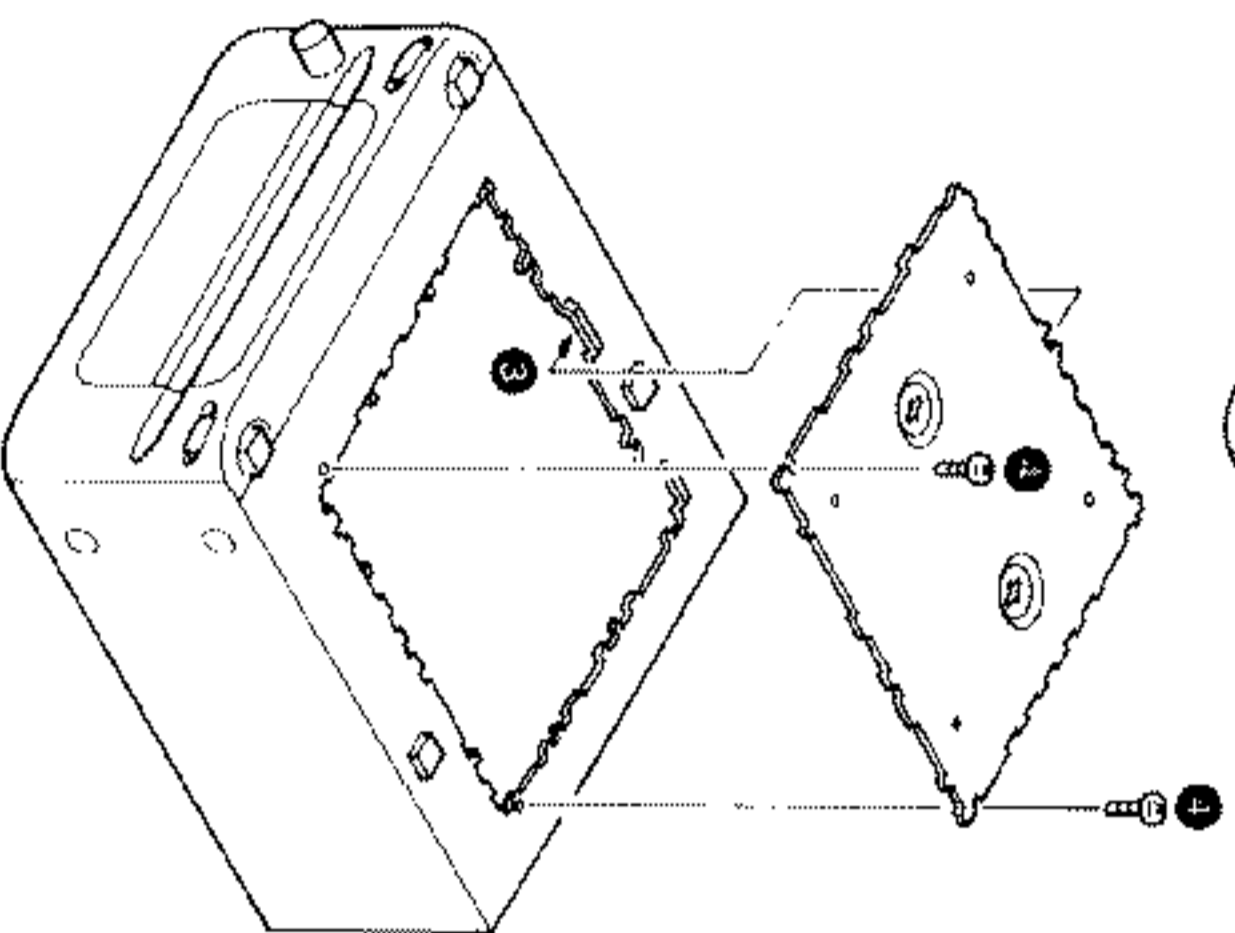

SYSTEM CONFIGURATION

UD 100	C-922	B-922	DP-722	X-722
Outside BOX	H50-0164-04	H50-0166-04	H50-0191-04	H50-0096-04
Packaging box	H60-0054-04 (P, M, Y)	H10-5205-02	H10-5186-02	H10-5153-02
	H60-0056-04 (X)	H10-5204-02	H10-5206-02	H10-5187-02
Foam material (L)	H10-5204-02	H10-5206-02	H10-5187-02	H10-5154-02
Foam material (R)	H10-5204-02	H10-5206-02	H10-5187-02	H10-5154-02
Protective bag	H25-0400-04	H25-0397-04	H25-0397-04	H25-0397-04

System Packing Diagram

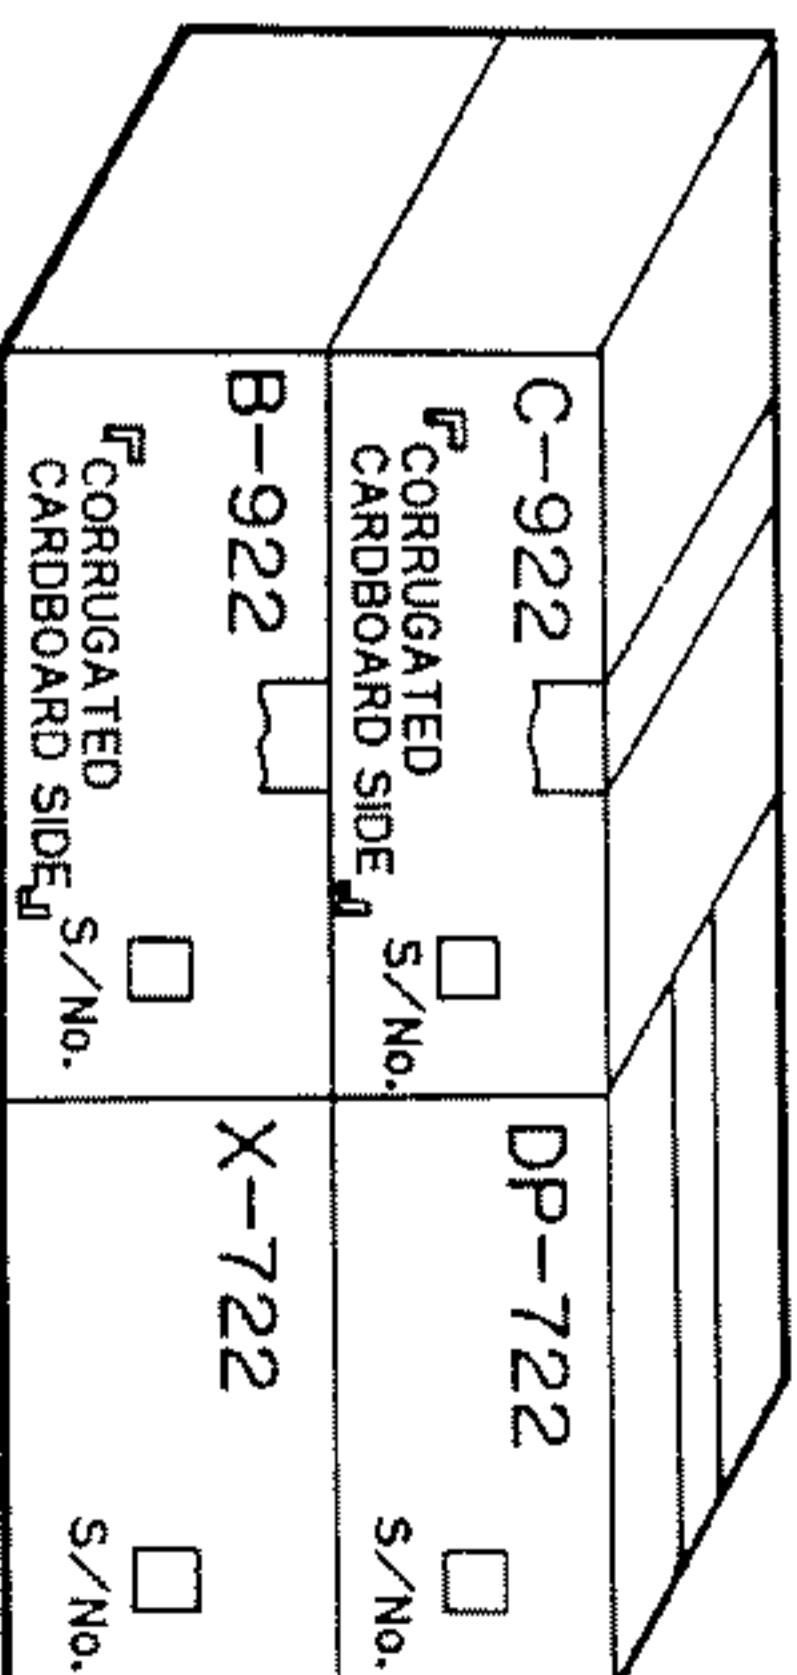

ACCESSORIES


<ul style="list-style-type: none"> ● AM Loop antenna.....1 (T90-0173-05) ● FM Indoor antenna.....1 (T90-0176-05) 	<ul style="list-style-type: none"> ● Antenna adaptor (75Ω/300Ω).....1 (T90-0136-05) ● Batteries (RO3/AAA).....2 	<ul style="list-style-type: none"> ● Loop antenna stand.....1 (J19-2815-04) ● Remote control unit.....1 (X94-1000-31) (BATTERY COVER A09-0115-13) 	<ul style="list-style-type: none"> ● AC Plug adaptor.....1 (Except for some areas) (E03-0115-05)
--	---	---	---

INSTRUCTION MANUAL

B60-0597-00 (ENGLISH)
 B60-0598-00 (FRENCH)
 B60-0600-00 (DUTCH)
 B60-0602-00 (CHINESE)
 B60-0603-00 (SPANISH)

For the unit with a European AC plug in areas other than Europe.


REMOTE CONTROL

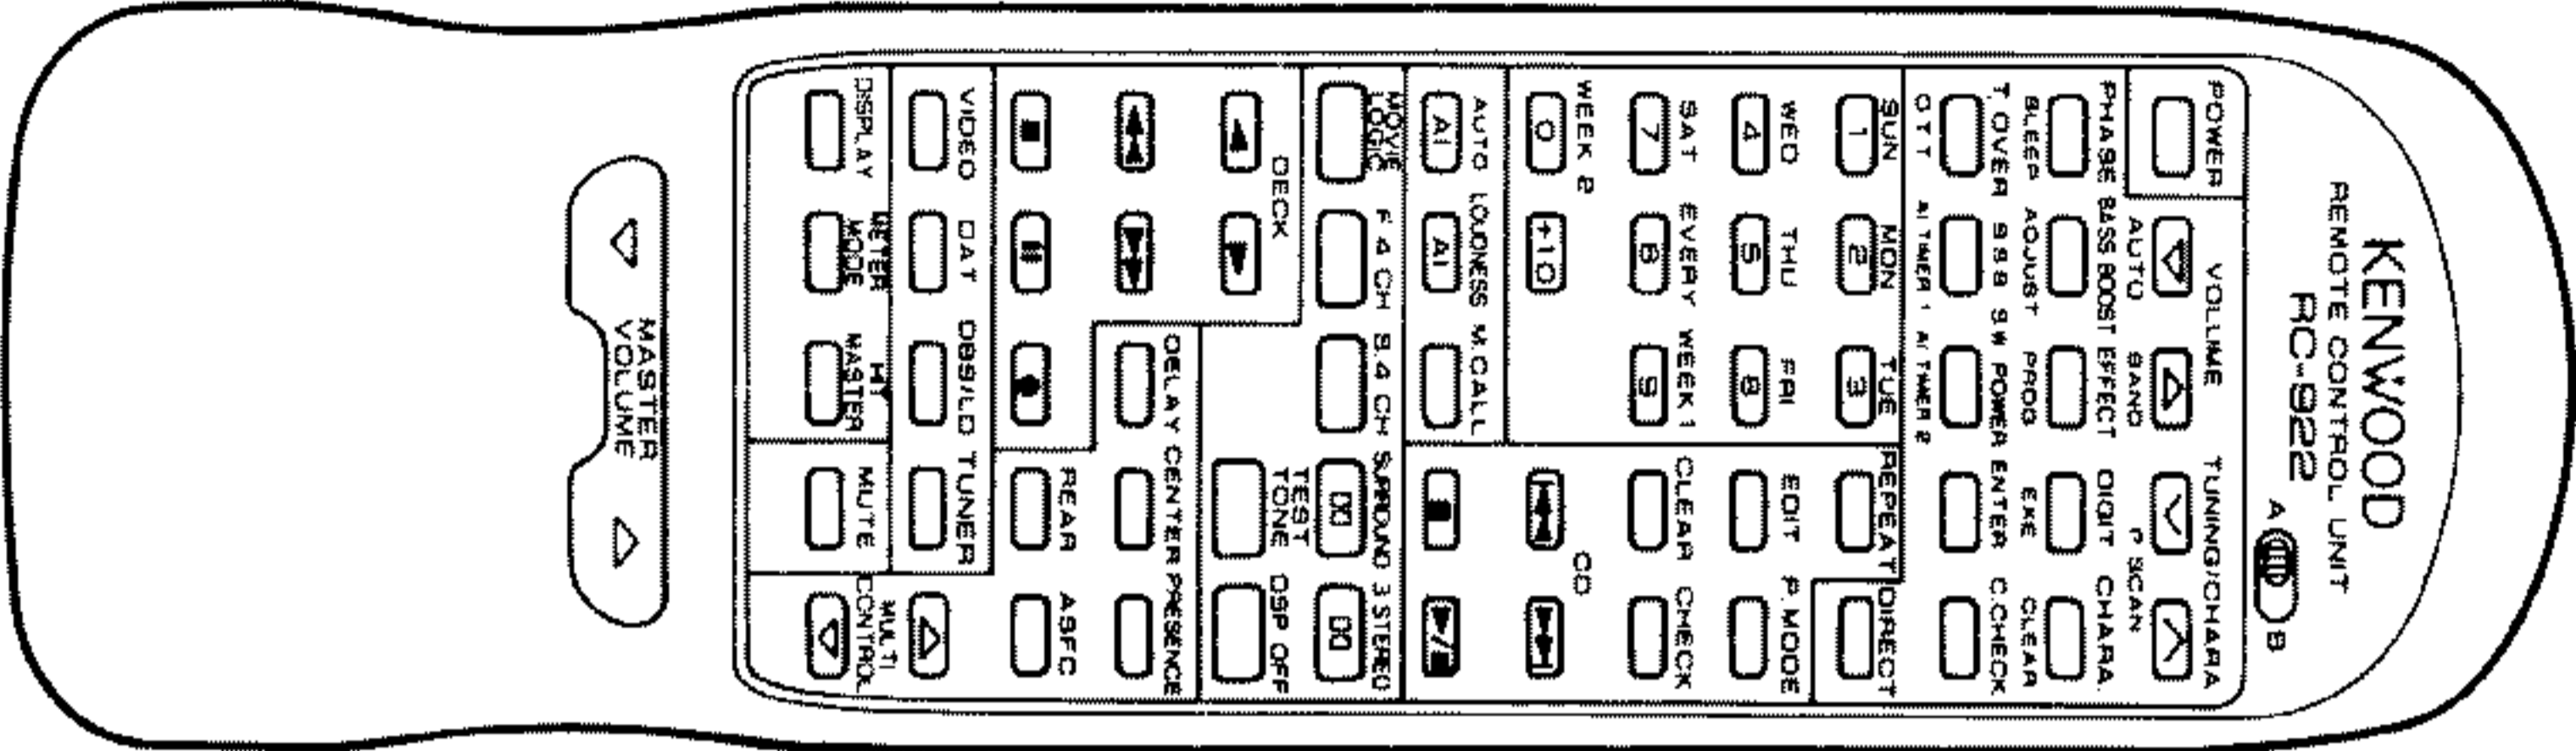

Model Name: RC-922
Infrared ray system

CIRCUIT DESCRIPTION

Micro Processor (μPD75028GC-503)
CPU Block Diagram

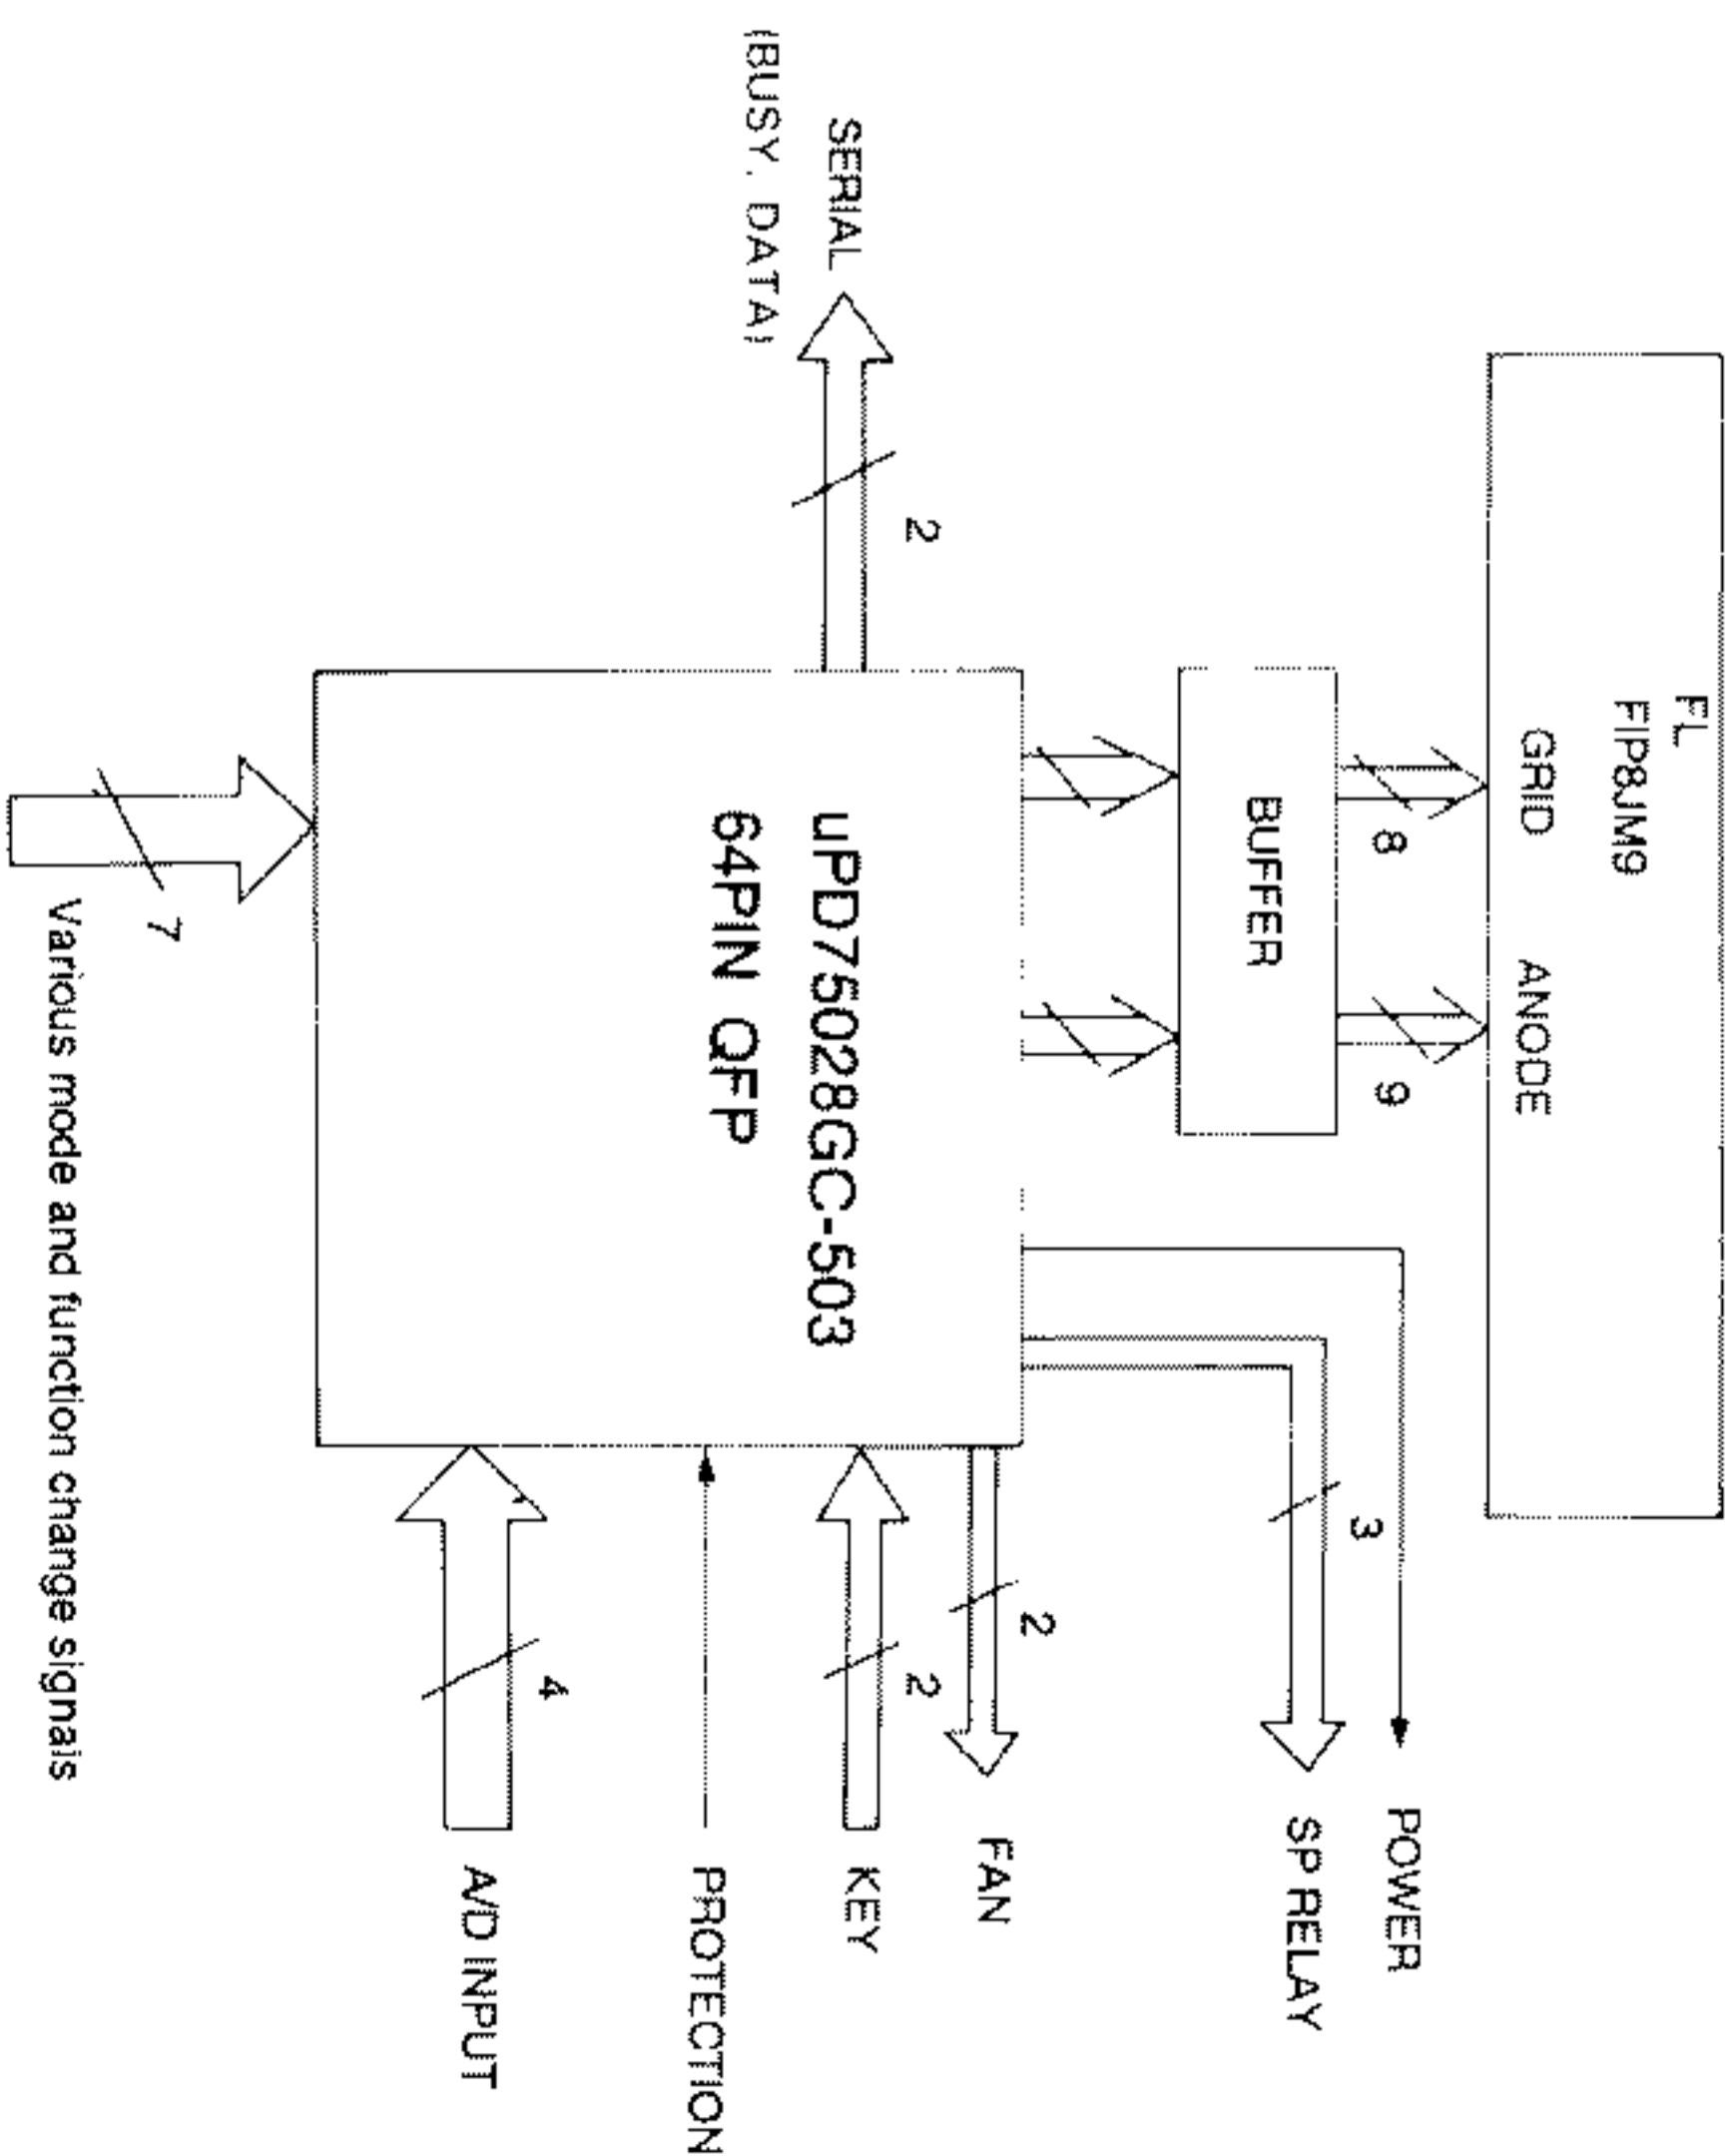

- 1. Initial Setup**
 - POWER OFF
 - INDICATION MODE Lch → Rch
 - RELAY NORMAL MODE
- 2. Test Mode**
 - Initiation Method
 - Cancellation Method (RESET)
Turn AC power OFF.
 - Verification
- 3. Speaker Relay Control**

The speaker relay is controlled by the Surround Mode data sent by the Pre-amplifier.

• Operates with power ON.
• All FL's should light up (Canceled if any key is depressed).
• Each time the Mode Key is depressed, the SP Mode steps successively from NORMAL to PRESENCE to DOLBY and back to NORMAL.
→ NORMAL → PRESENCE → DOLBY →

The Meter Mode should not change during this operation.

Relay	K1 Front LR Presence	K2 Center Rear	K3 Center Rear
Surround Mode	ON	ON	OFF
F 4ch (Front DSP 4ch)	ON	OFF	ON
S 4ch	ON	OFF	ON
3 STEREO (DOLBY 3 STEREO)	ON	OFF	ON
PRO LOGIC (DOLBY PRO LOGIC)	ON	OFF	ON
MOVIE LOGIC	ON	ON	OFF
NORMAL (SURROUND OFF)	ON	OFF	OFF
SP OFF (Same as power OFF)	OFF	OFF	OFF

When the PROTECTION signal is enabled, all speaker relays are immediately put into their "Off" condition.

CIRCUIT DESCRIPTION

Pin No	Name	Pin Name	I/O	Description
1	GRID4	P43	0	FL Grid 4 Drive Signal H = OFF L = ON
2	GRID3	P42	0	FL Grid 3 Drive Signal H = OFF L = ON
3	GRID2	P41	0	FL Grid 2 Drive Signal H = OFF L = ON
4	GRID1	P40	0	FL Grid 1 Drive Signal H = OFF L = ON
5	SHIMU33	P33	1	Mode Key operation change H = L = NORMAL
6	SHIMU32	P32	1	Mode Key operation change H = L = NORMAL
7	SBSY	P31	I/O	Serial I/O Busy
8	SDATA	P30	I/O	Serial I/O Data
9	Vss	Vss		Connected to GND
10		P03	1	Not Used (Connected to GND)
11		P02	1	Not Used (Connected to GND)
12		P01	1	Not Used (Connected to GND)
13	SHIMUJ	P00	1	Destination Change H = STBY Disabled L = STBY Enabled
14	SHIMU3	P23	1	Destination Change H = FAN 80sec L = FAN 1sec
15	SHIMU2	P22	1	Destination Change H = HOLD 2sec L = 1.8sec
16	SHIMU1	P21	1	Destination Change H = RENEW 180m L = 300ms
17	SHIMU0	P20	1	Destination Change H = RANDAM ADD L = NORMAL
18		P103	1	Not Used (Connected to GND)
19		P102	1	Not Used (Connected to GND)
20		P101	1	Not Used (Connected to GND)
21		P100	1	Not Used (Connected to GND)
22	RESET	RESET	1	Reset input H = NORMAL L = RESET
23	X1	X1	1	4.19 MHz Clock
24	X2	X2	0	4.19 MHz Clock
25		IC		Connected to VDD
26	XT1	XT1	1	Connected to GND
27	XT2	XT2	0	OPEN
28	Vdd	Vdd		Power (Connected to 5V)
29	AVdd	AVdd		A/D Converter Power (Connected to 5V)
30	AVref +	AVref +		A/D Conversion Reference Voltage + (Connected to 5V)
31	AVref -	AVref -		A/D Conversion Reference Voltage - (Connected to GND)
32	AN7	AN7	1	Not Used (Connected to GND)
33	AN6	AN6	1	Not Used (Connected to GND)
34	AN5	AN5	1	Not Used (Connected to GND)
35	AN4	AN4	1	Not Used (Connected to GND)

CIRCUIT DESCRIPTION

Pin No	Name	Pin Name	I/O	Description
36	Flow	AN3	1	Rch Low A/D input
37	Low	AN2	1	Lch Low A/D input
38	High	AN1	1	Rch HIGH A/D input
39	High	ANO	1	Lch HIGH A/D input
40	AVss	AVss		A/D Converter Vss (Connected to GND)
41	TPOWER	P13	1	Power Key H = KEY ON L = KEY OFF
42	TMODE	P12	1	Mode Key H = KEY ON L = KEY OFF
43		P11	1	Not Used (Connected to GND)
44	PROTECT	P10	1	Protection Detect H = PROTECT ON L = NORMAL
45	FANONOF	P93	0	Fan ON/OFF H = OFF L = ON
46	FANHL	P92	0	Fan Speed Change H = LOW SPEED L = HIGH
47	POWER	P91	0	Power Relay Control H = POWER ON L = POWER OFF
48	STBY	P90	0	Power Indicator H = ON L = OFF
49	FRONT	P83	0	Front SP Relay Control H = ON L = OFF
50	PRESENCE	P82	0	Presence SP Relay Control H = ON L = OFF
51	DOLBY	P81	0	Center and Rear SP Relay Control H = ON L = OFF
52	GRID8	P80	0	FL Grid 8 Drive H = OFF L = ON
53	GRID7	P73	0	FL Grid 7 Drive H = OFF L = ON
54	GRID6	P72	0	FL Grid 6 Drive H = OFF L = ON
55	GRID5	P71	0	FL Grid 5 Drive H = OFF L = ON
56	SGa	P70	0	FL a Segment Drive H = OFF L = ON
57	SGb	P63	0	FL b Segment Drive H = OFF L = ON
58	SGc	P62	0	FL c Segment Drive H = OFF L = ON
59	SGd	P61	0	FL d Segment Drive H = OFF L = ON
60	SGe	P60	0	FL e Segment Drive H = OFF L = ON
61	SGf	P53	0	FL f Segment Drive H = OFF L = ON
62	SGg	P52	0	FL g Segment Drive H = OFF L = ON
63	SGh	P51	0	FL h Segment Drive H = OFF L = ON
64	SGi	P50	0	FL i Segment Drive H = OFF L = ON

CIRCUIT DESCRIPTION

PIN No	Name	Pin Name	I/O	MODE	Description
51	DOLBY	P81	O		Center and Rear SP Relay Control H=ON L=OFF
52	GRID8	P80	O		FL Grid 8 Drive H=OFF L=ON
53	GRID7	P73	O		FL Grid 7 Drive H=OFF L=ON
54	GRID6	P72	O		FL Grid 6 Drive H=OFF L=ON
55	GRID5	P71	O		FL Grid 5 Drive H=OFF L=ON
56	SGa	P70	O		FL a Segment Drive H=OFF L=ON
57	SGb	P63	O		FL b Segment Drive H=OFF L=ON
58	SGc	P62	O		FL c Segment Drive H=OFF L=ON
59	SGd	P61	O		FL d Segment Drive H=OFF L=ON
60	SGe	P60	O		FL e Segment Drive H=OFF L=ON
61	SGf	P53	O		FL f Segment Drive H=OFF L=ON
62	SGg	P52	O		FL g Segment Drive H=OFF L=ON
63	SGh	P51	O		FL h Segment Drive H=OFF L=ON
64	SGi	P50	O		FL i Segment Drive H=OFF L=ON

Conversion Chart for A/D Reference Points to Output Power

CIRCUIT DESCRIPTION

A/D	Output (W)	A/D	Output (W)	A/D	Output (W)	A/D	Output (W)	A/D	Output (W)	A/D	Output (W)
0	0.00	33	0.39	66	6.27	99	25.15	CC	53.98		
1	0.00	34	0.42	67	6.43	9A	25.64	CD	54.02		
2	0.00	35	0.43	68	6.79	98	26.17	CE	54.70		
3	0.01	36	0.45	69	6.94	9C	26.79	CF	55.31		
4	0.02	37	0.48	6A	7.22	9D	27.23	DD	55.83		
5	0.03	38	0.50	6B	7.56	9E	27.80	D1	56.29		
6	0.03	39	0.51	6C	7.71	9F	28.21	D2	56.74		
7	0.03	3A	0.60	6D	7.95	A0	28.99	D3	57.75		
8	0.04	3B	0.64	6E	8.28	A1	29.42	D4	58.28		
9	0.04	3C	0.68	6F	8.49	A2	30.18	D5	58.81		
A	0.04	3D	0.76	70	8.60	A3	30.57	D6	59.42		
B	0.05	3E	0.78	71	8.83	A4	31.17	D7	60.00		
C	0.05	3F	0.81	72	9.17	A5	31.64	D8	60.87		
D	0.06	40	0.89	73	9.64	A6	32.03	D9	61.65		
E	0.06	41	0.94	74	9.89	A7	32.75	DA	62.13		
F	0.07	42	1.01	75	10.31	A8	33.31	DB	62.86		
10	0.07	43	1.06	76	10.76	A9	33.86	DC	63.71		
11	0.07	44	1.18	77	10.98	AA	34.19	DD	64.04		
12	0.08	45	1.27	78	11.13	AB	34.90	DE	64.79		
13	0.08	46	1.36	79	11.65	AC	35.32	DF	65.27		
14	0.09	47	1.44	7A	12.02	AD	35.81	EO	65.99		
15	0.09	48	1.50	7B	12.54	AE	36.27	E1	66.43		
16	0.10	49	1.59	7C	13.14	AF	36.80	E2	66.95		
17	0.10	4A	1.68	7D	13.67	BO	37.35	E3	67.61		
18	0.10	4B	1.73	7E	13.96	B1	37.84	E4	68.10		
19	0.11	4C	1.86	7F	14.49	B2	38.43	E5	68.84		
1A	0.11	4D	2.02	80	15.13	B3	38.99	E6	69.62		
1B	0.12	4E	2.11	81	15.13	B4	39.52	E7	70.45		
1C	0.13	4F	2.27	82	15.31	B5	40.01	E8	71.28		
1D	0.13	50	2.46	83	15.52	B6	40.87	E9	72.11		
1E	0.14	51	2.52	84	15.84	B7	41.20	EA	72.94		
1F	0.14	52	2.59	85	16.19	B8	41.85	EB	73.77		
20	0.15	53	2.67	86	16.65	B9	42.36	EC	74.60		
21	0.15	54	2.83	87	17.18	BA	43.11	ED	75.43		
22	0.16	55	3.08	88	17.33	BB	43.84	EE	76.26		
23	0.17	56	3.24	89	17.77	BC	44.43	EF	77.09		
24	0.17	57	3.31	8A	18.40	BD	44.99	FO	77.92		
25	0.18	58	3.43	8B	18.92	BE	45.12	F1	78.75		
26	0.19	59	3.58	8C	19.21	BF	46.08	F2	79.58		
27	0.21	5A	3.66	8D	19.76	CO	46.87	F3	80.41		
28	0.21	5B	3.84	8E	20.04	C1	47.01	F4	81.24		
29	0.22	5C	4.02	8F	20.55	C2	47.65	F5	82.07		
2A	0.23	5D	4.25	90	21.19	C3	48.09	F6	82.90		
2B	0.24	5E	4.47	91	21.87	C4	49.10	F7	83.73		
2C	0.26	5F	4.59	92	21.93	C5	49.84	F8	84.56		
2D	0.27	60	4.74	93	22.10	C6	50.43	F9	85.39		
2E	0.28	61	4.99	94	22.65	C7	51.18	FA	86.22		
2F	0.31	62	5.21	95	23.26	C8	51.86	FB	87.05		
30	0.33	63	5.53	96	23.78	C9	52.21	FC	87.88		
31	0.34	64	5.87	97	24.01	CA	52.97	FD	90.00		
32	0.36	65	6.10	98	24.52	CB	53.65	FE	99.99		

CIRCUIT DESCRIPTION

Fan Control Circuit (X 13-6910-00)


The circuit monitors and detects changes in the amplifier Speaker OUT lines and controls the voltage provided to the fan, enabling the fan to rotate at either one of two speeds, low or high.

When AC power is supplied to the amplifier and the power switch is in the OFF position, Q13 has 20 volts on it's collector but since the 12 volt bias voltage through R76 to the base is not yet available, Q13 is cutoff. This causes the output to the fan is be ZERO volts and the fan does not rotate.

Turning the power switch ON, produces 12 volts and through the timing action of RC network, R78 and C82, turns Q15 ON and Q14 OFF, for 100 msec. This in turn provides the fan with an initial "HIGH" starting voltage. After the initial 100 msec, Q15 turns OFF and Q14 turns ON, providing a LOW output from Q13, causing the fan to rotate at it's low speed. At the same time that the power switch is turned ON, the amplifier Speaker Out Signal activates.

If the Speaker Out Signal exceeds constantly the set power output detection cut-off voltage point of 1W, then Q15 turns ON and Q14 turns OFF, resulting in a HIGH output from Q13, causing the fan to rotate at it's high speed.

When the amplifier Speaker Out Signal drops back down below the detection voltage point (over the output power all ways (W point), Q15 turns OFF and Q14 turns ON, causing Q13 to output a LOW and the fan rotates at it's low speed once again.

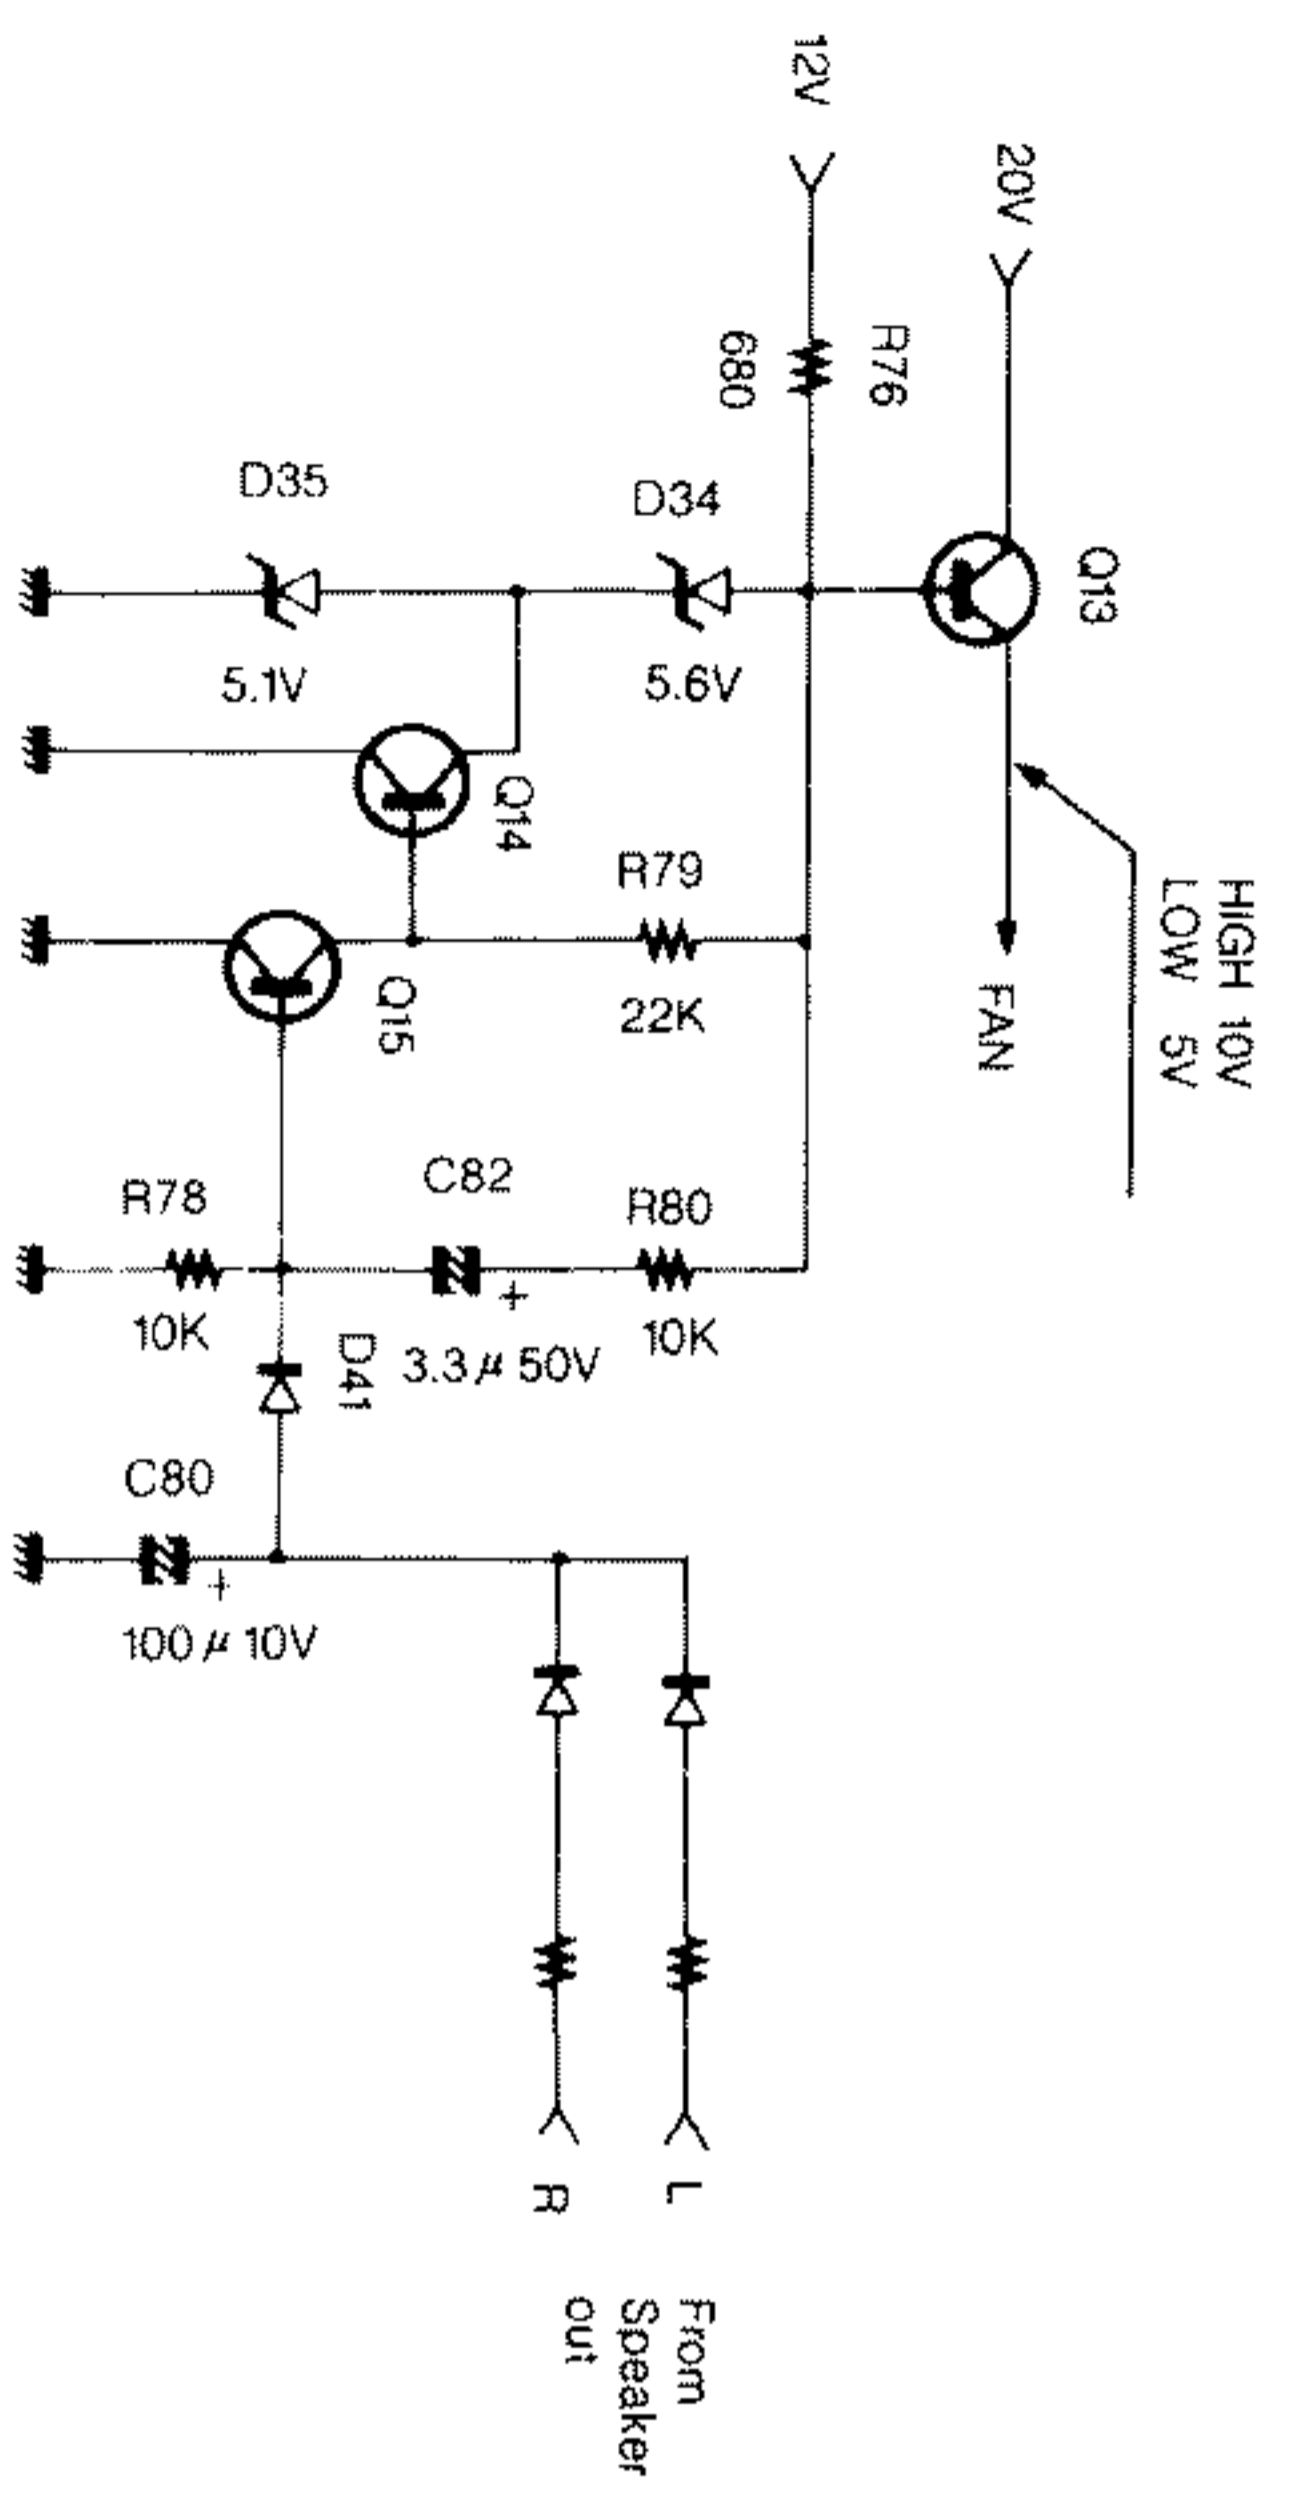

ADJUSTMENT

No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	AMPLIFIER SETTING	ALIGNMENT POINTS	ALIGN FOR	FIG.
Unless otherwise specified, set the respective switches as follows: POWER: ON SPEAKER: B REC. OUT: OFF SELECTOR: PHONO							
2	IDLE CURRENT (low amp)		Connect a DC Volt Meter between pins 1 & 2 of CN9 (TP1) and CN10 (TP2)	VOLUME: 0	VR3 (L) VR4 (R)	2.7 mV	(a)
3	IDLE CURRENT (Hi amp)		Connect a DC Volt Meter between pins 3 & 4 of CN9 (TP1) and CN10 (TP2)	VOLUME: 0	VR5 (L) VR6 (R)	6.6 mV	(a)


REGLAGES

N°	ITEM	REGLAGE DE L'ENTREE	REGLAGE DE LA SORTIE	REGLAGE DE L'AMPLIFICATEUR	POINTS DE L'ALIGNEMENT	ALIGNER POUR	FIG.
Sauf indication contraire, régler comme suit les commandes respectives: POWER: ON SPEAKER: B REC. OUT: OFF SELECTOR: PHONO							
2	COURANT DE POLARISATION (Amp base)		Connecter un voltmètre CC entre les broches 1 et 2 de CN9 (TP1) et CN10 (TP2).	VOLUME: 0	VR3 (L) VR4 (R)	2.7 mV	(a)
3	COURANT DE POLARISATION (Amp haut)		Connecter un voltmètre CC entre les broches 3 et 4 de CN9 (TP1) et CN10 (TP2).	VOLUME: 0	VR5 (L) VR6 (R)	6.6 mV	(a)

ABGLEICH

NR.	GENGENSTAND	EINGANGS-EINSTELLUNG	AUSGANGS-EINSTELLUNG	VORSTÄRKER-EINSTELLUNG	ABGLEICH-PUNKTE	ABGLEICHEN FÜR	ABB.
Wenn nicht anders angegeben, die einzelnen Schalter wie folgt einstellen: POWER: ON SPEAKER: B REC. OUT: OFF SELECTOR: PHONO							
2	LEERLAUFSTROM (Niederfrequenzverstärker)		Einen Gleichspannungsmeßgerät zwischen Pin 1 u. 2 von CN9 (TP1) und CN10 (TP2) schließen	VOLUME: 0	VR3 (L) VR4 (R)	2.7 mV	(a)
3	LEERLAUFSTROM (Hochfrequenzverstärker)		Einen Gleichspannungsmeßgerät zwischen Pin 3 u. 4 von CN9 (TP1) und CN10 (TP2) schließen	VOLUME: 0	VR5 (L) VR6 (R)	6.6 mV	(a)

PC BOARD (Component side view)

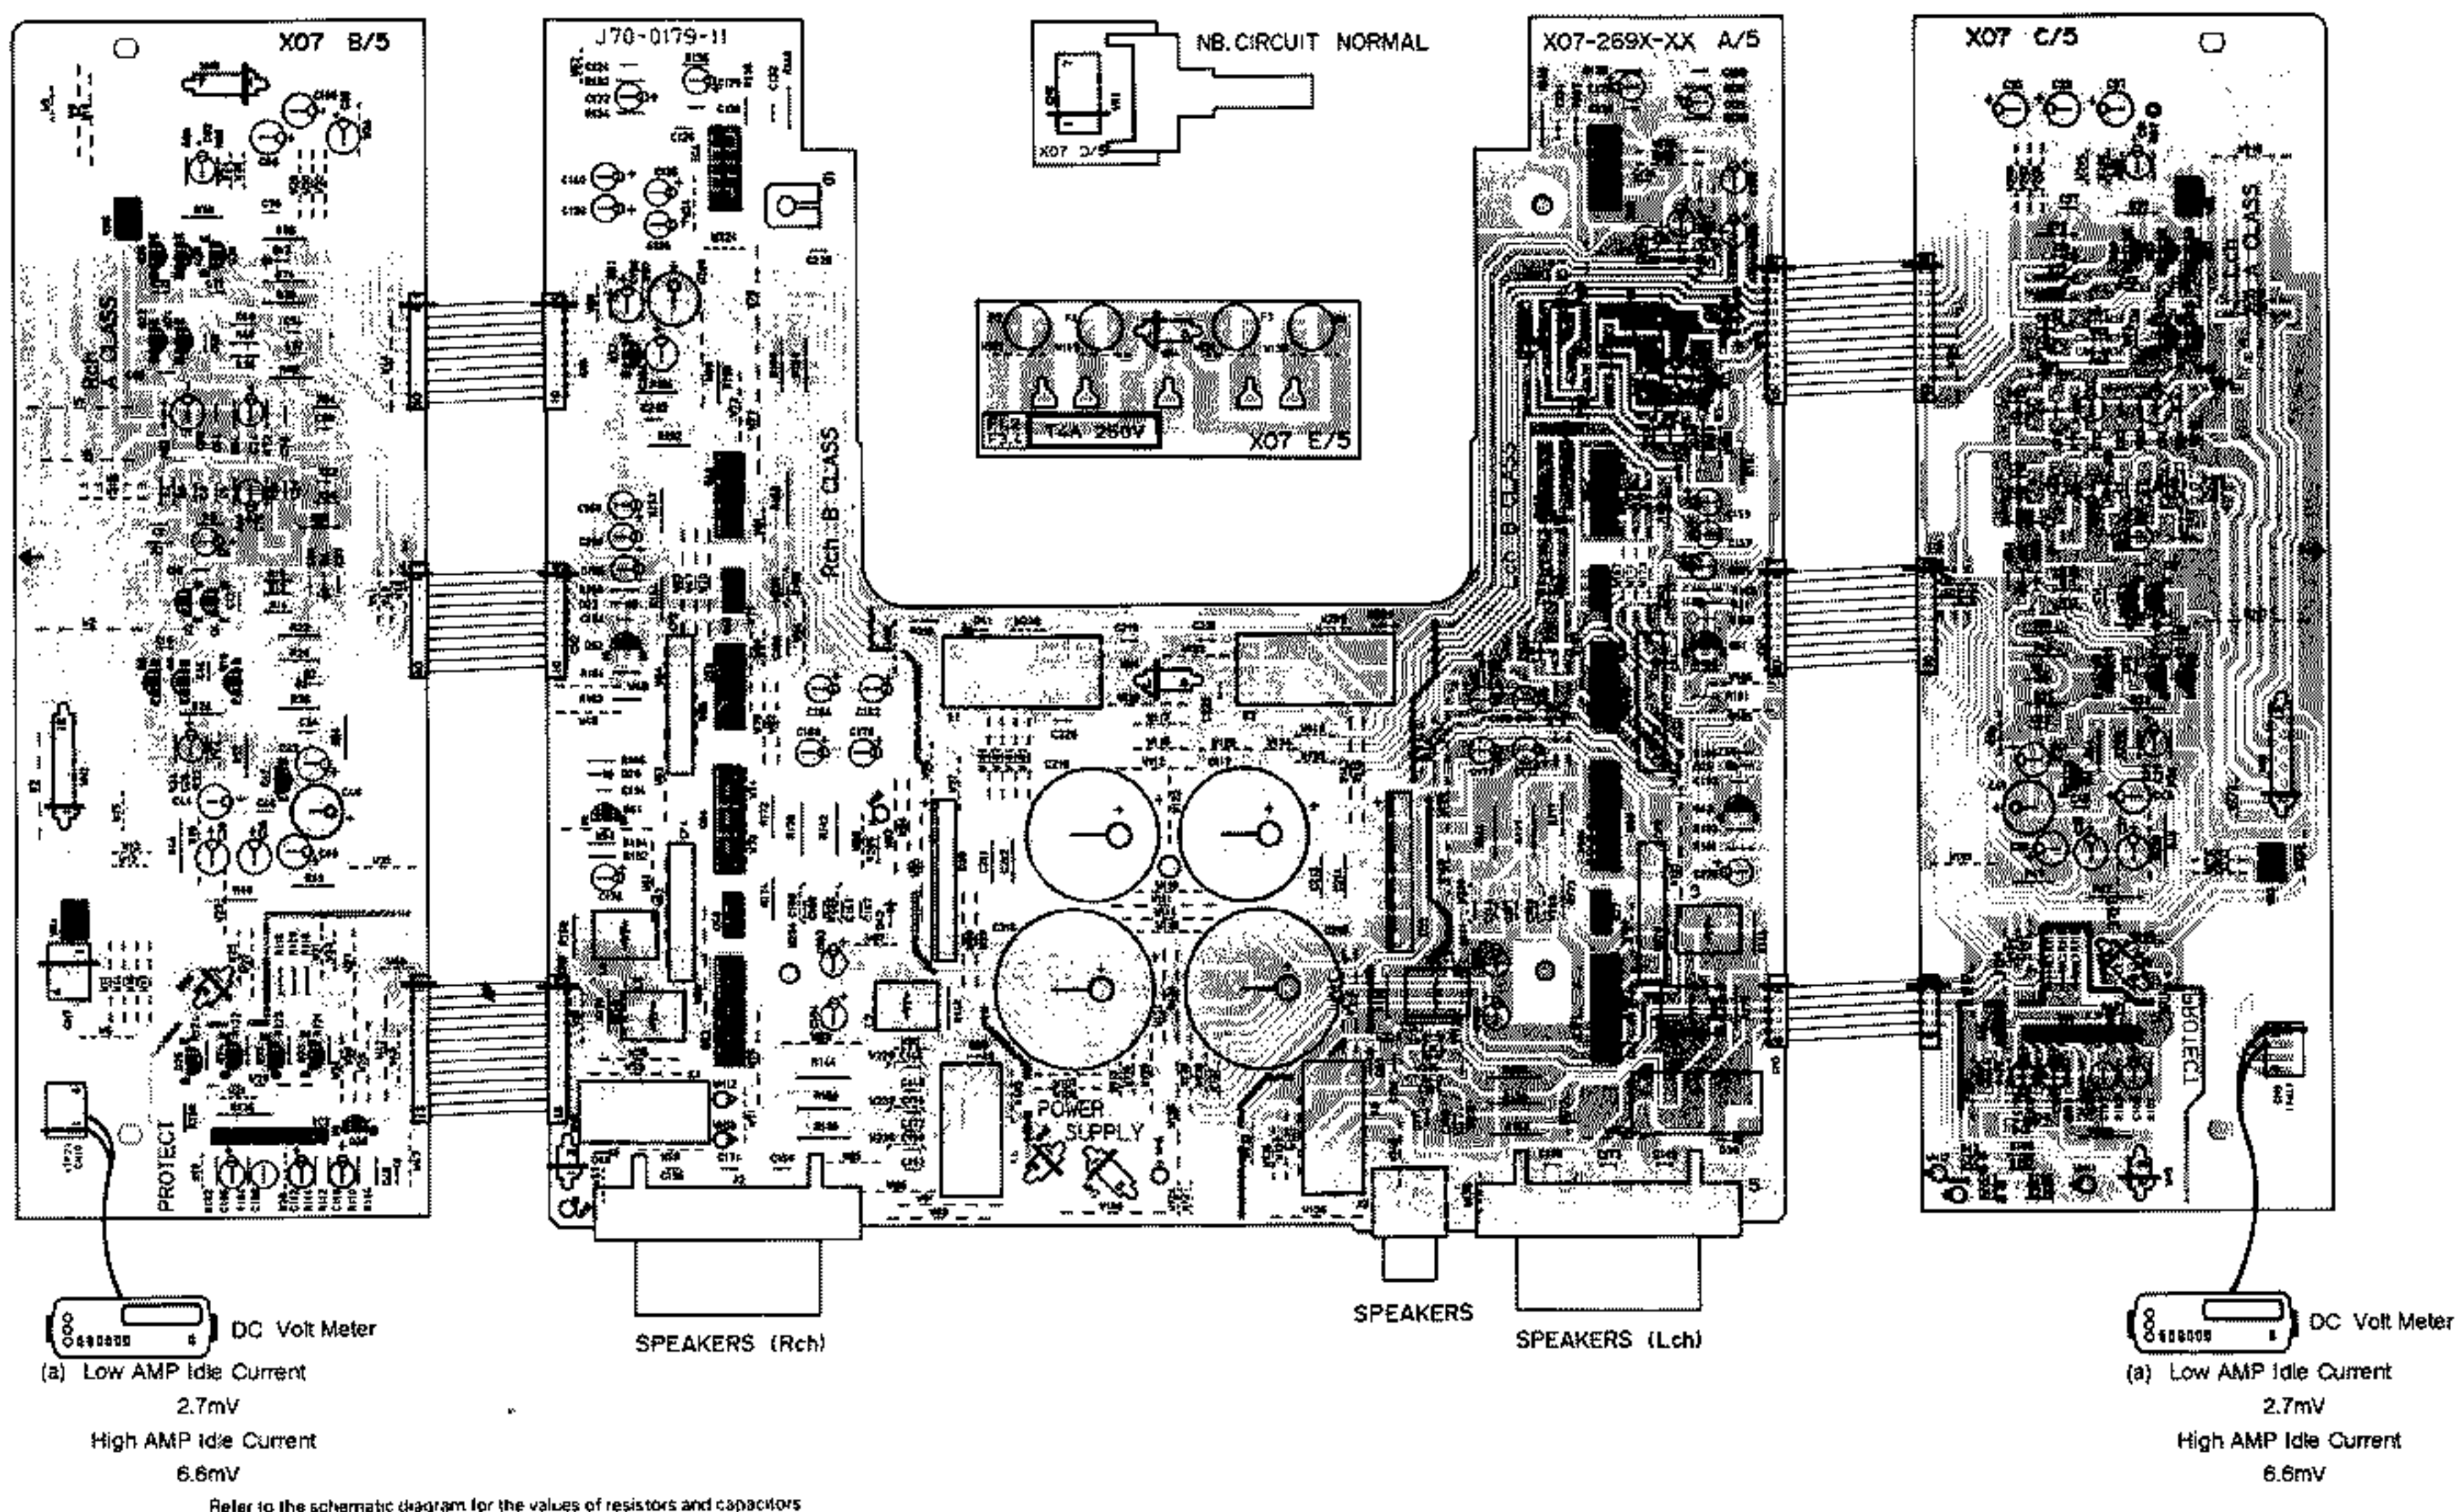


13

14

16


15

Refer to the schematic diagram for the values of resistors and capacitors

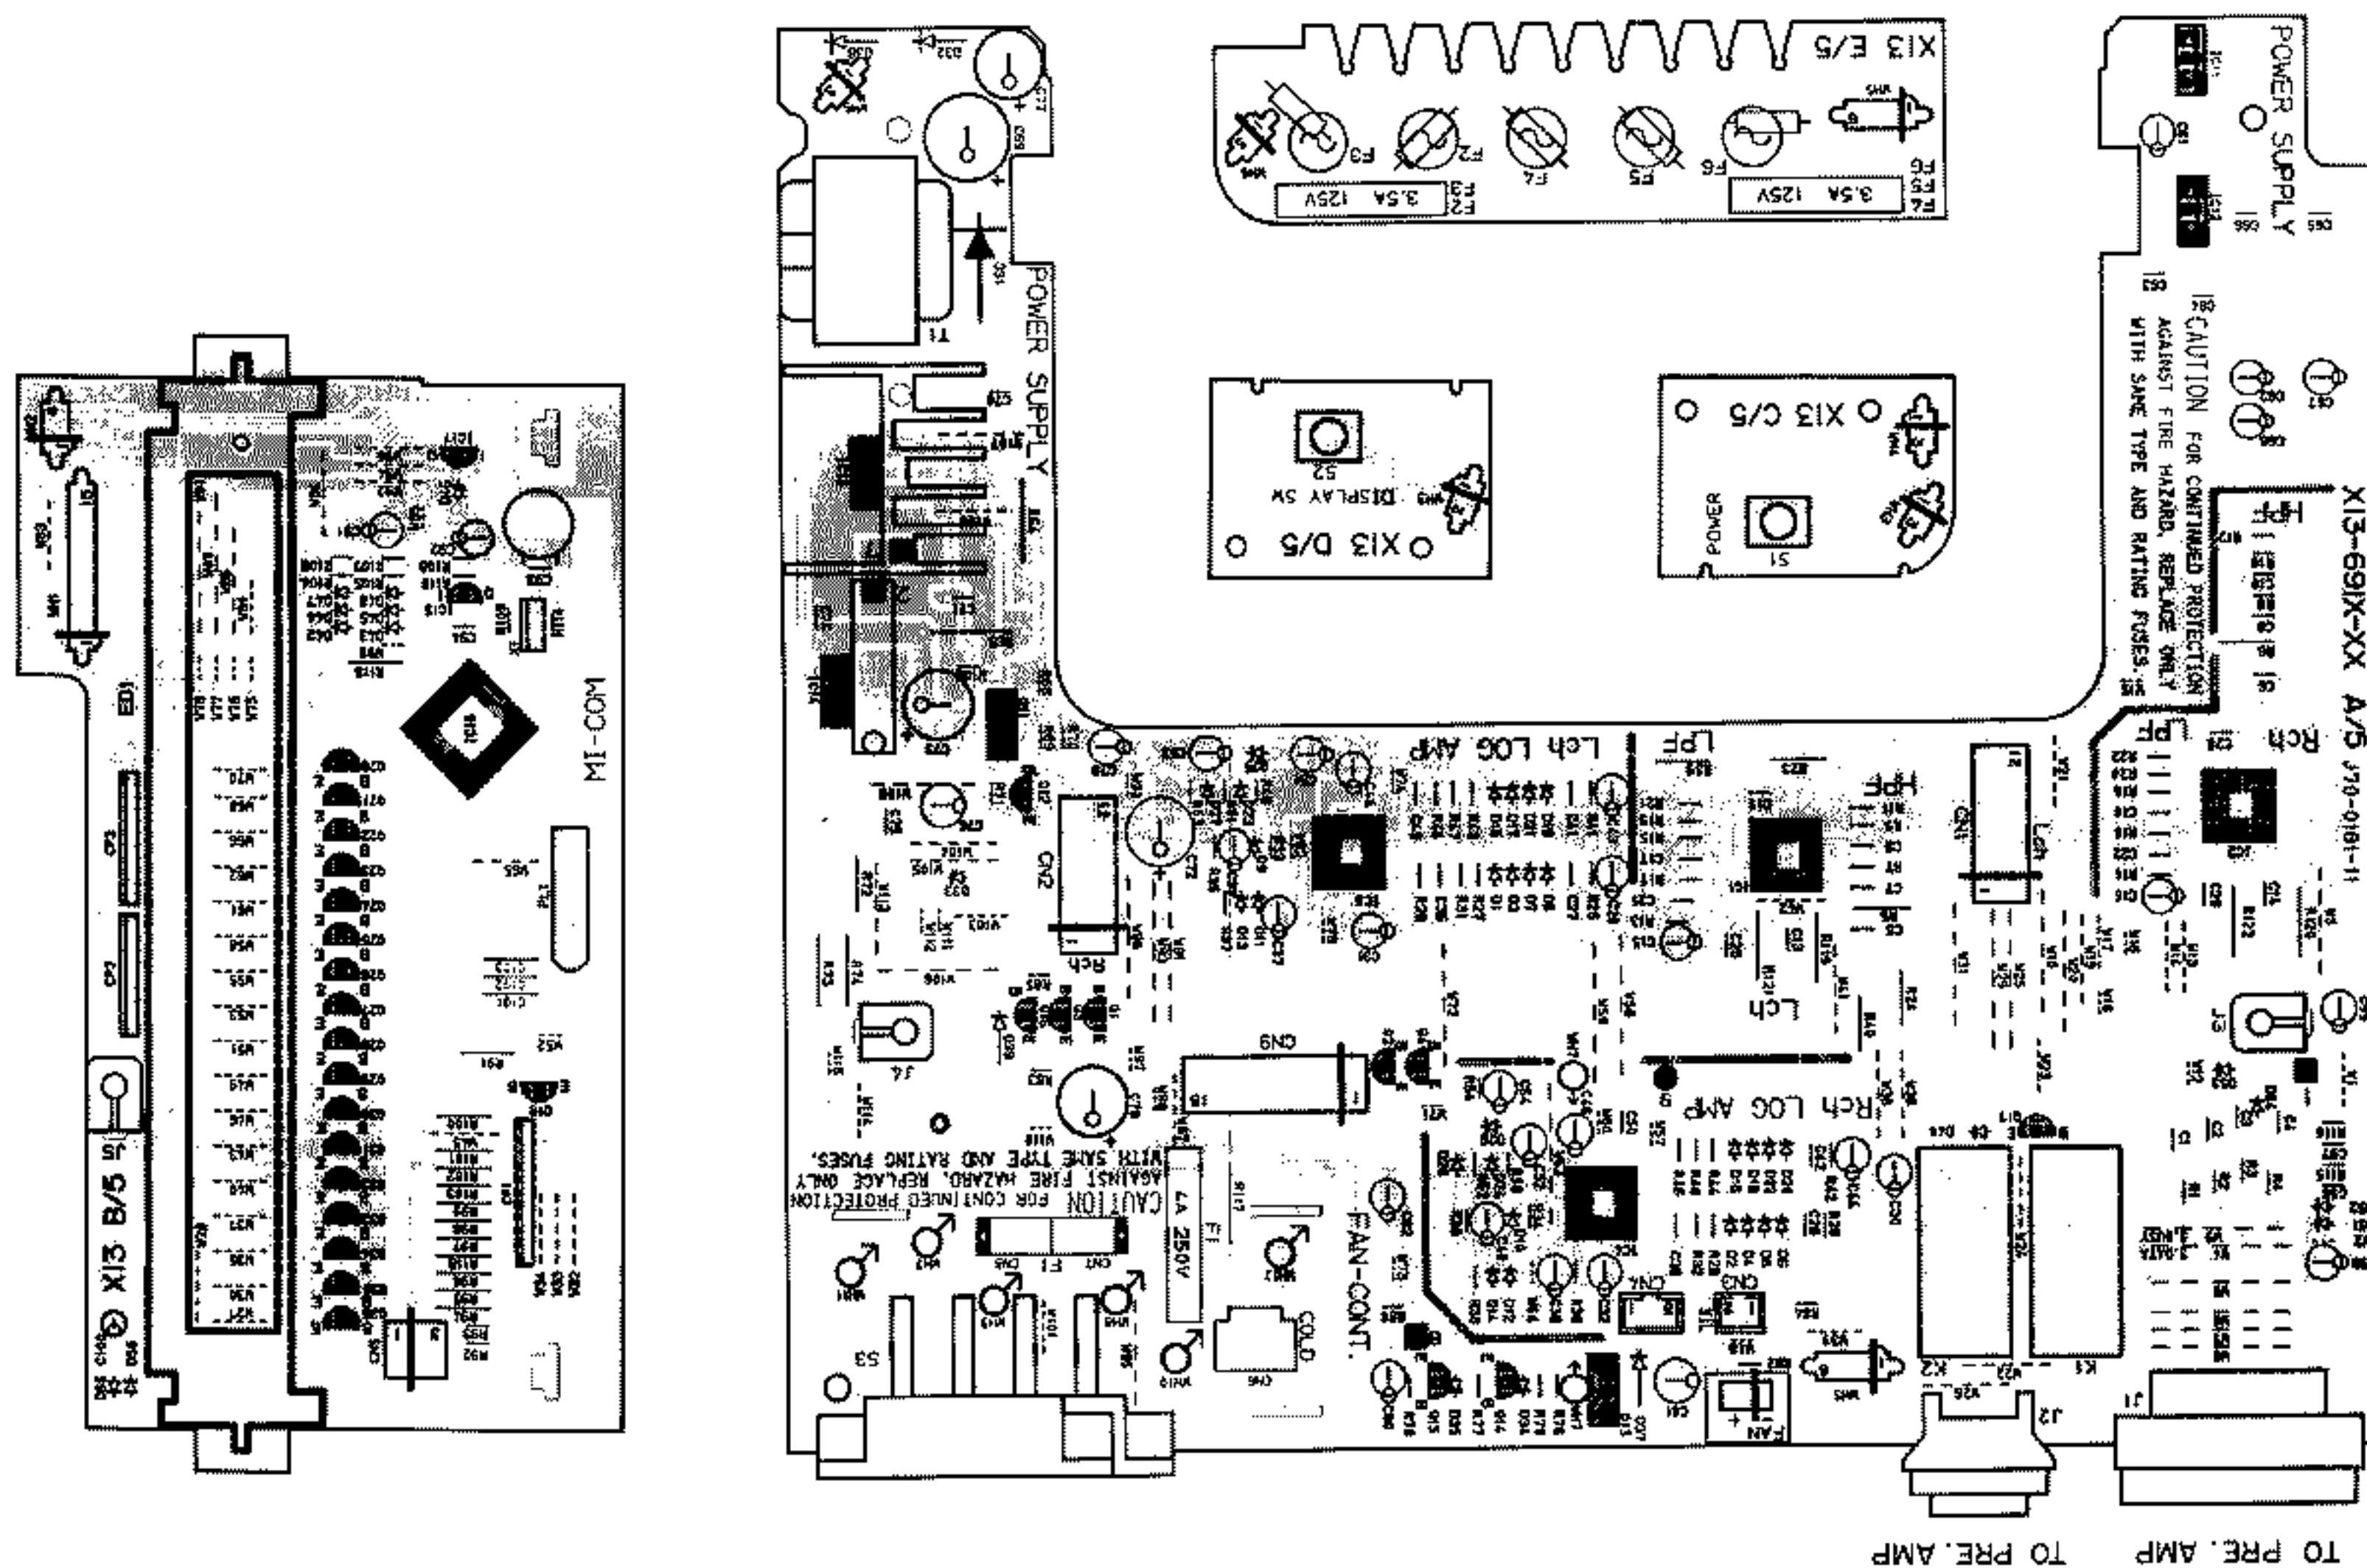


PC BOARD (Component side view)

B-922 B-922 EXPLODED VIEW (UNIT)

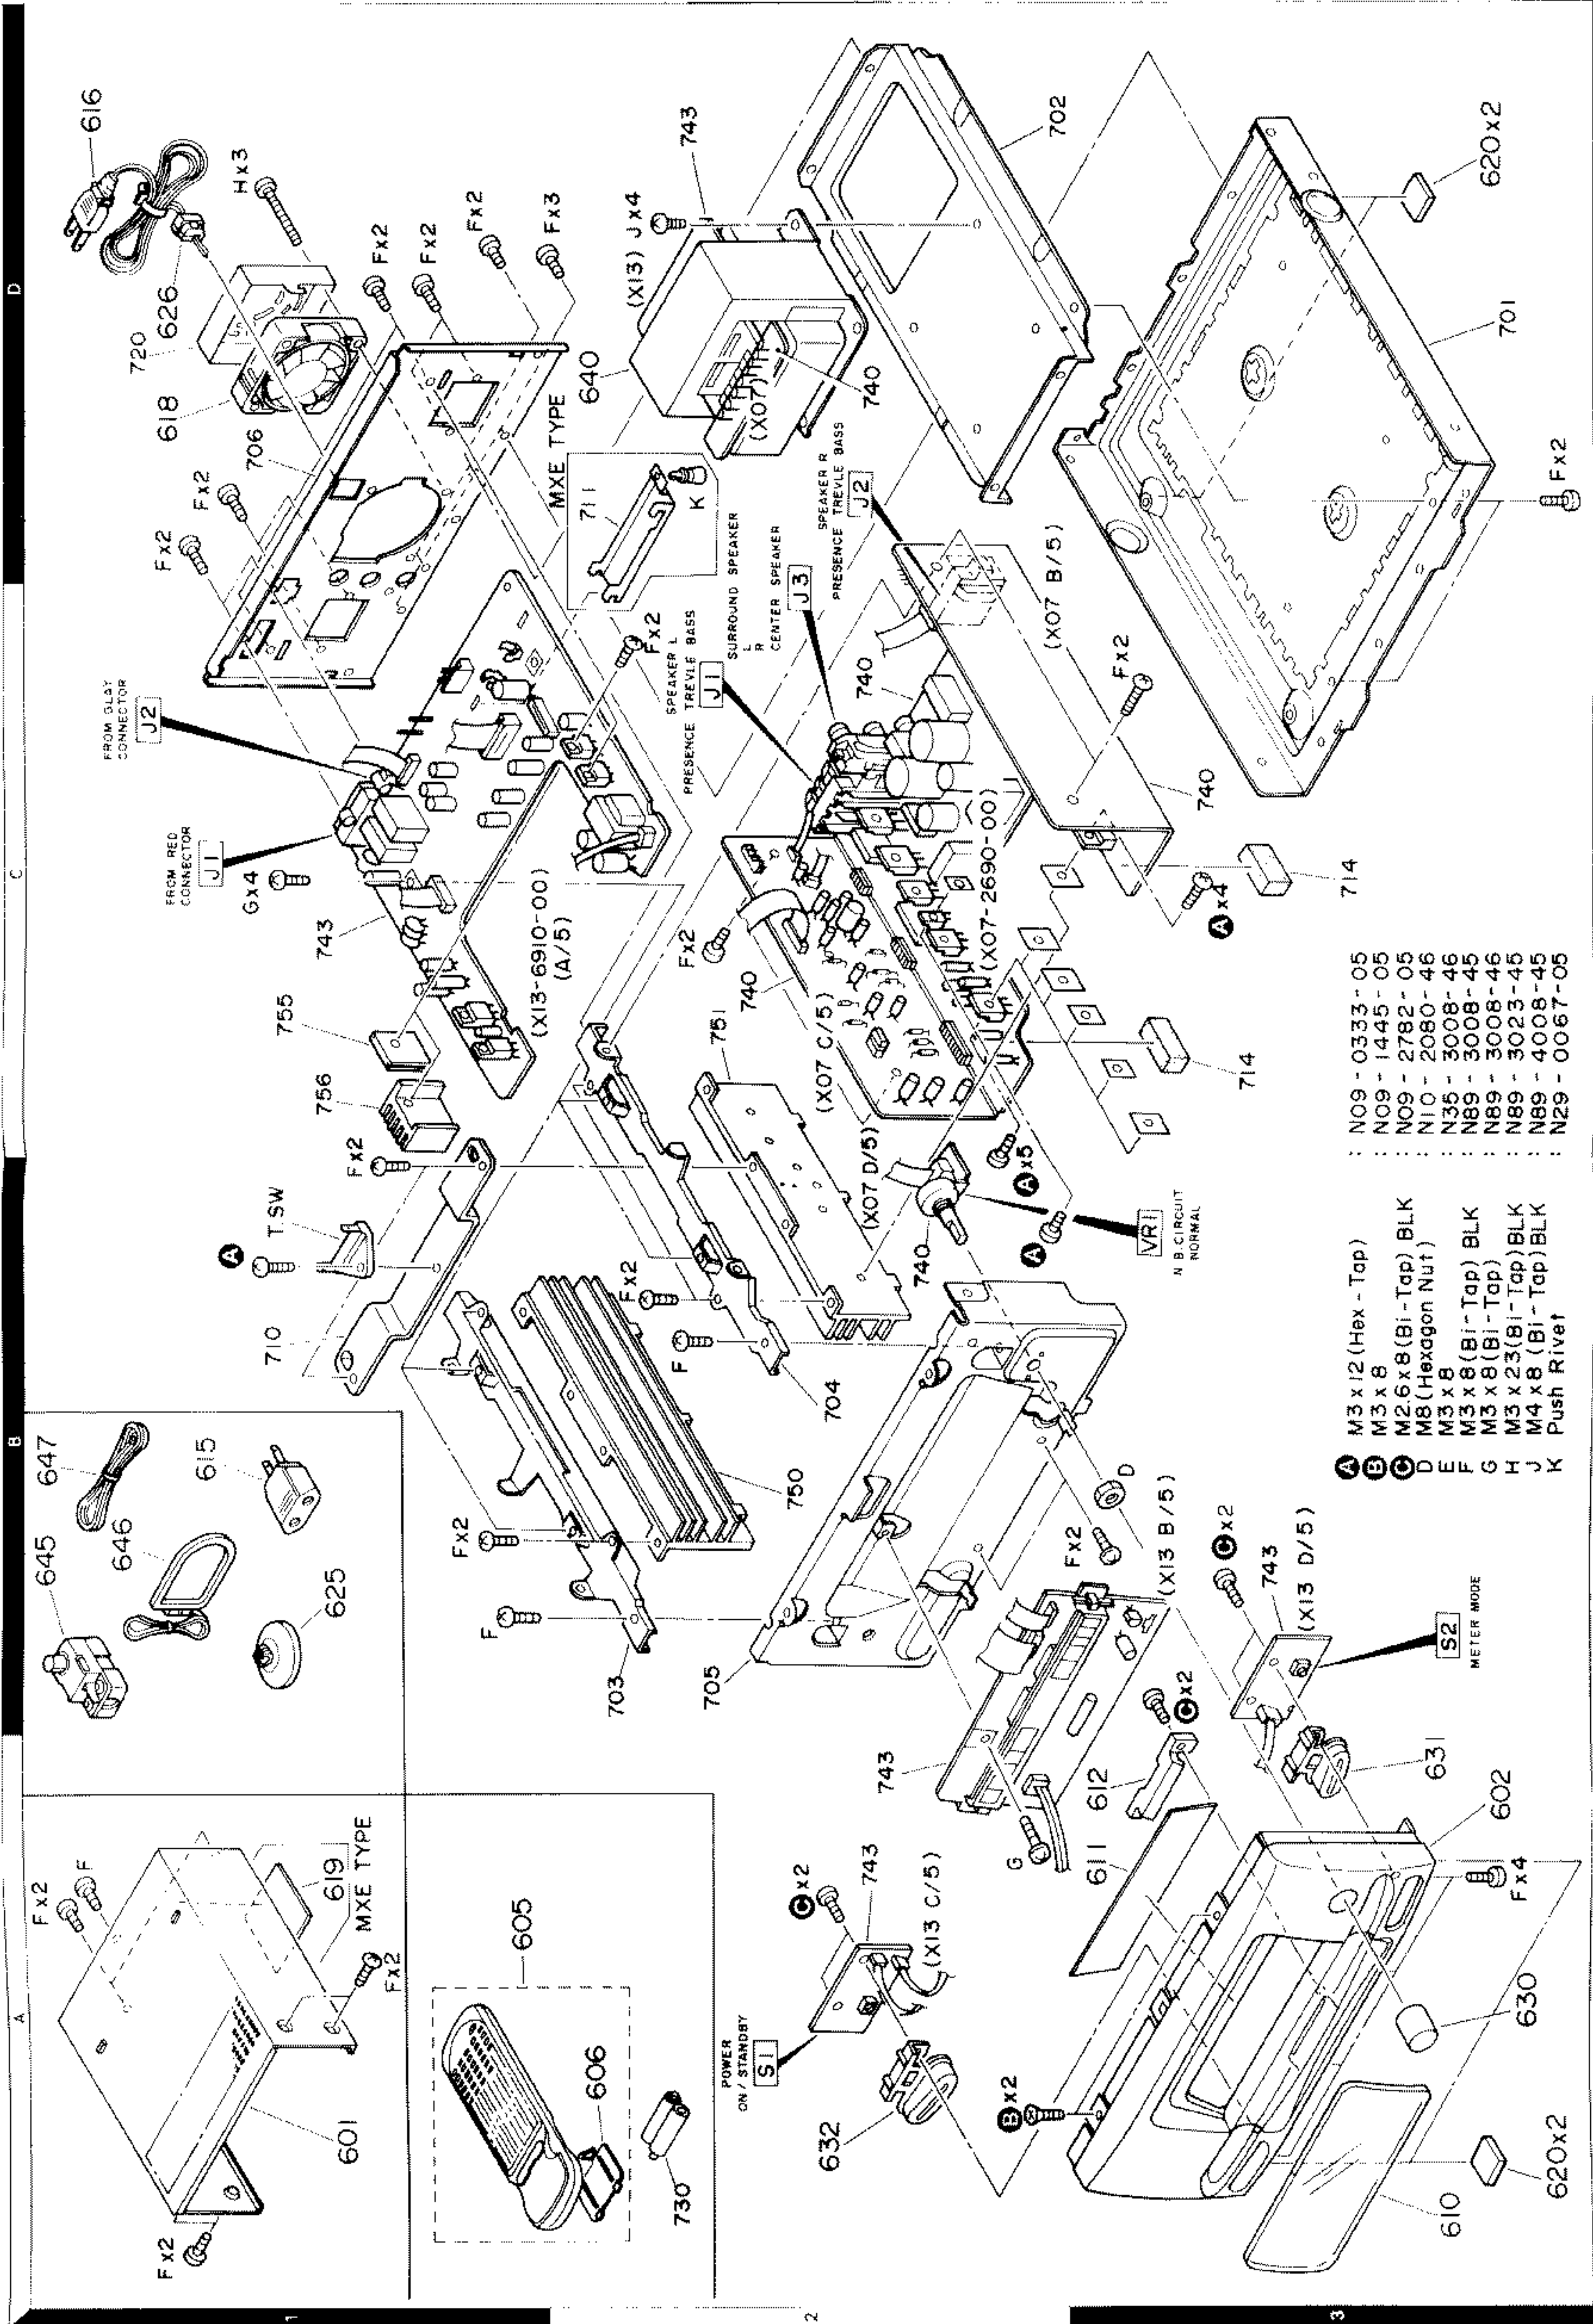


- : N09 - 0333 - 05
 - : N09 - 1445 - 05
 - : N09 - 2782 - 05
 - : N10 - 2080 - 46
 - : N35 - 3008 - 46
 - : N89 - 3008 - 45
 - : N89 - 3008 - 46
 - : N89 - 3023 - 45
 - : N89 - 4008 - 45
 - : N29 - 0067 - 05
- A M3 x 12 (Hex - Tap)
 - B M3 x 8
 - C M2.6 x 8 (Bl - Tap) BLK
 - D M8 (Hexagon Nut)
 - E M3 x 8
 - F M3 x 8 (Bl - Tap) BLK
 - G M3 x 8 (Bl - Tap)
 - H M3 x 2.3 (Bl - Tap) BLK
 - J M4 x 8 (Bl - Tap) BLK
 - K Push Rivet

(X13-691X-XX) (A/5)

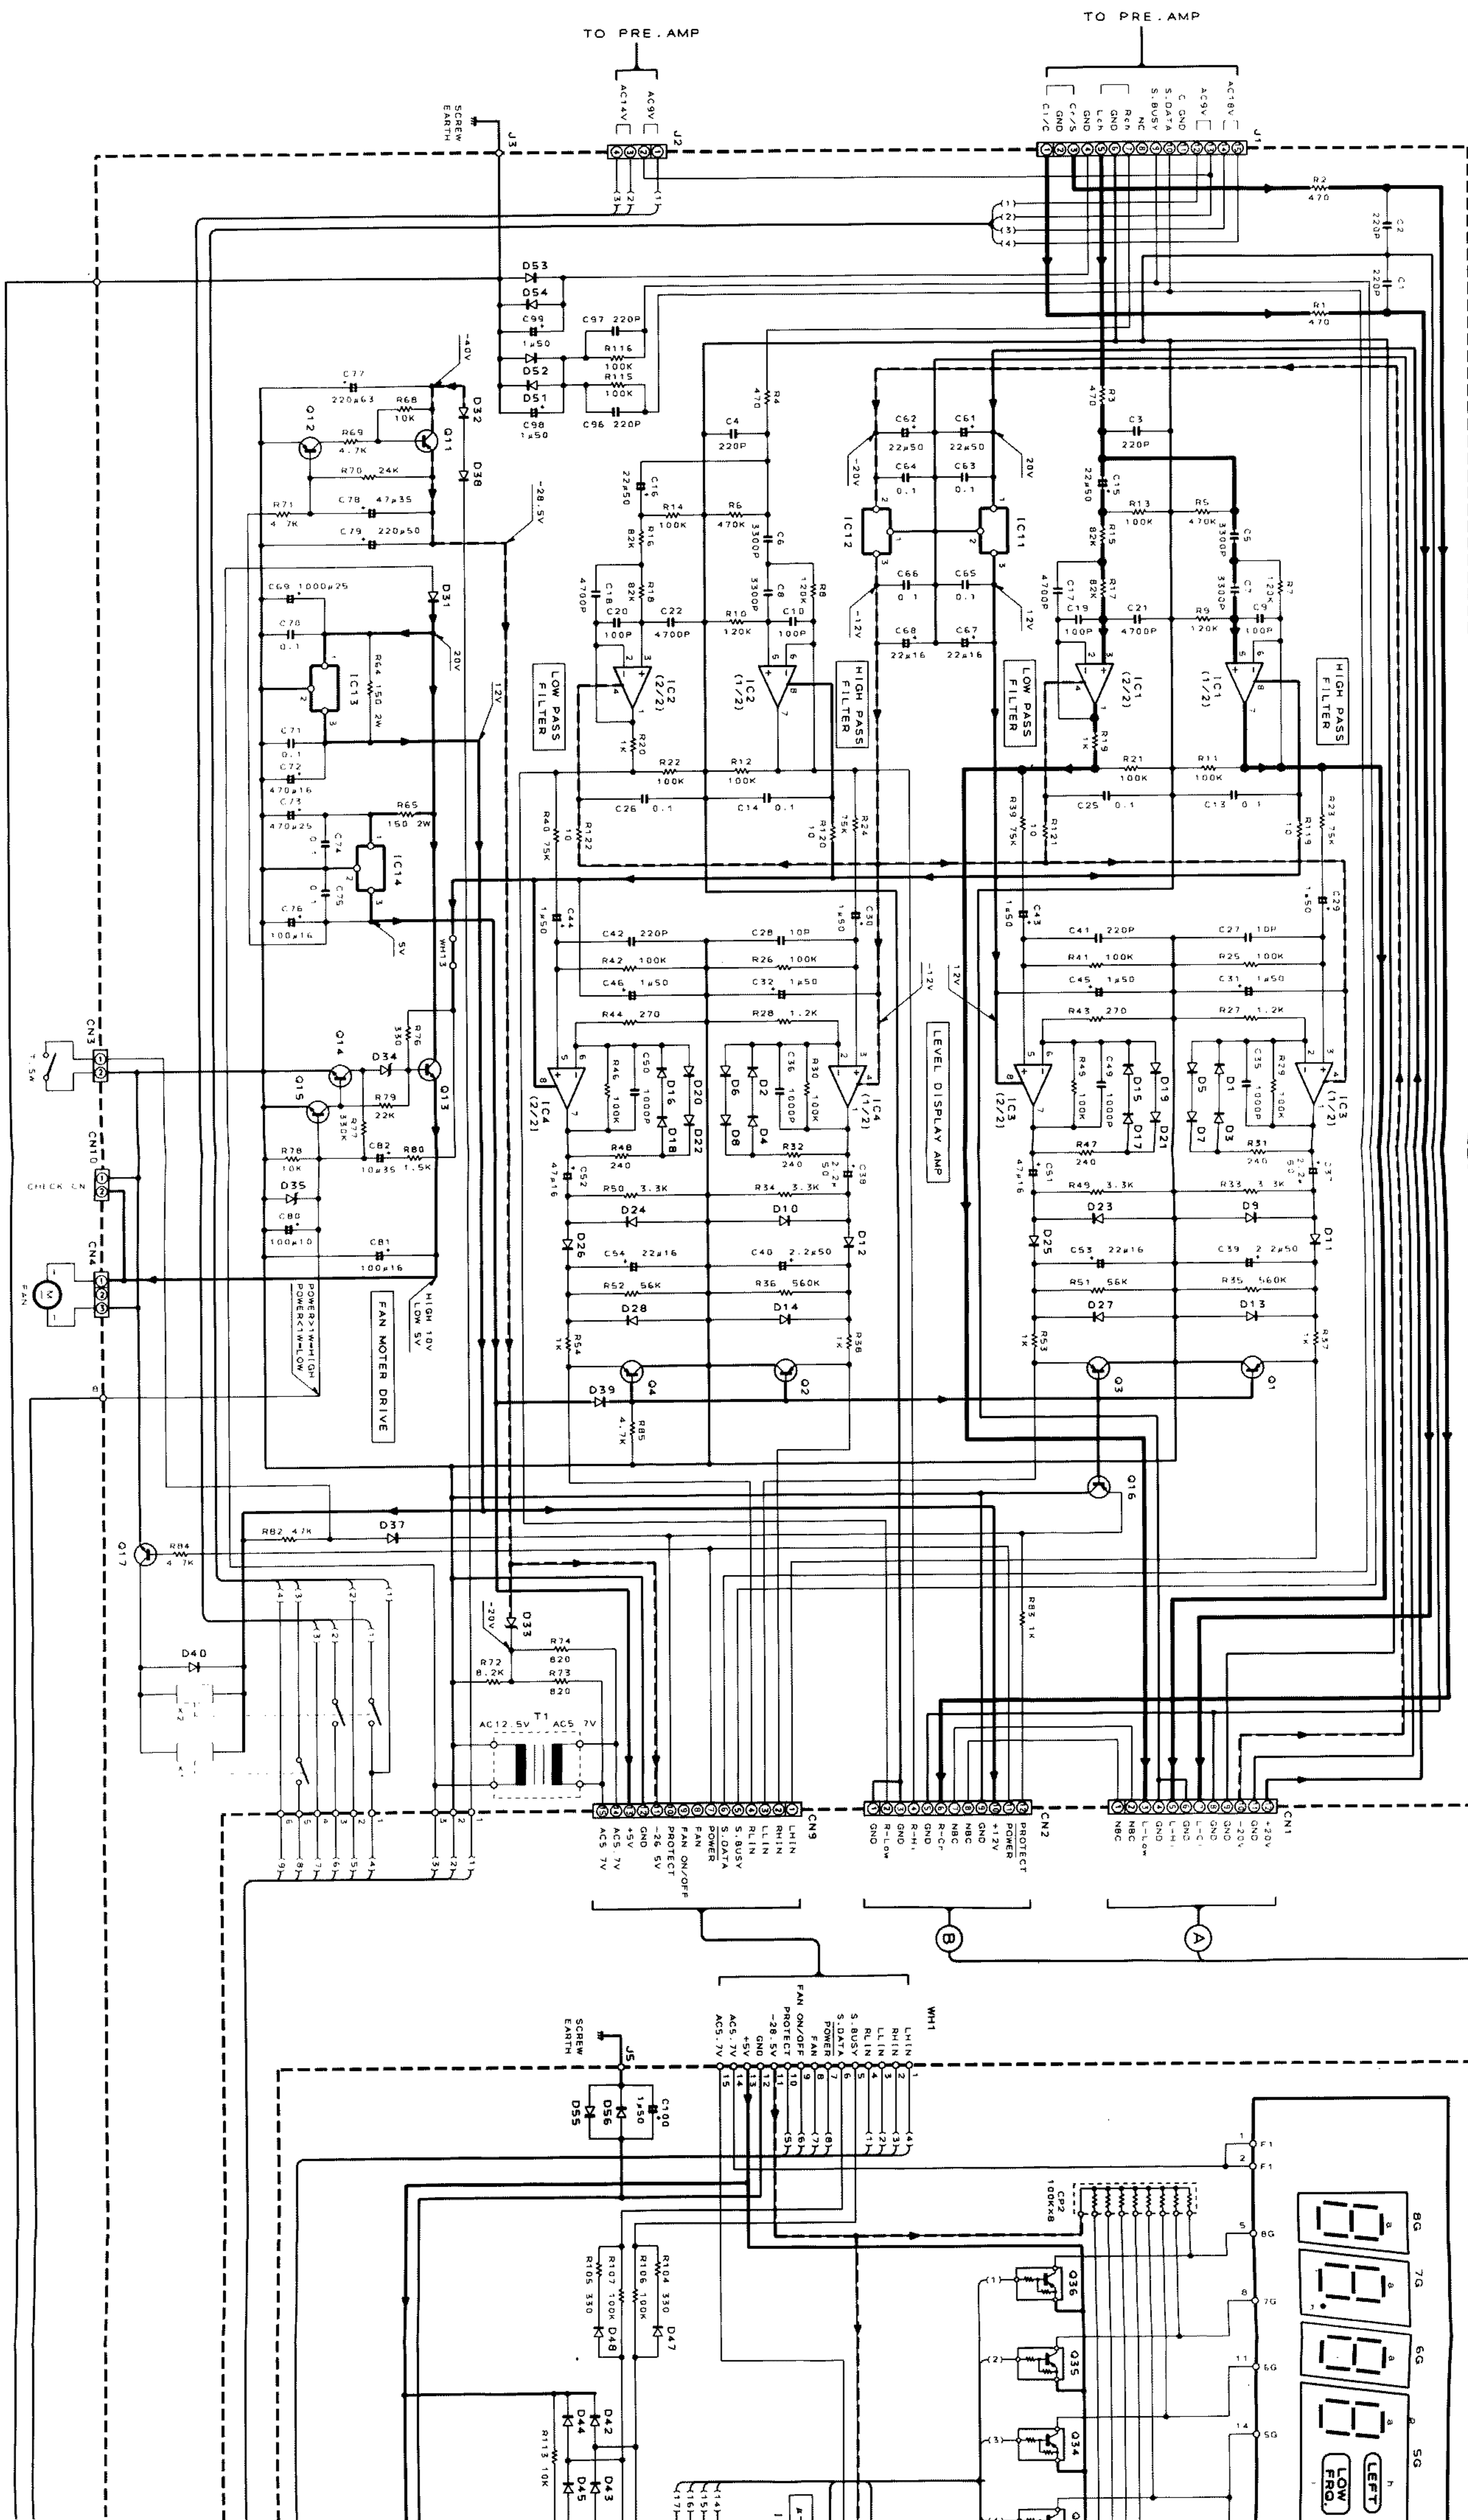


(X13-691X-XX) (B/5)


2SA954
2SA922
2SC1845
2SC2631
2SC3246

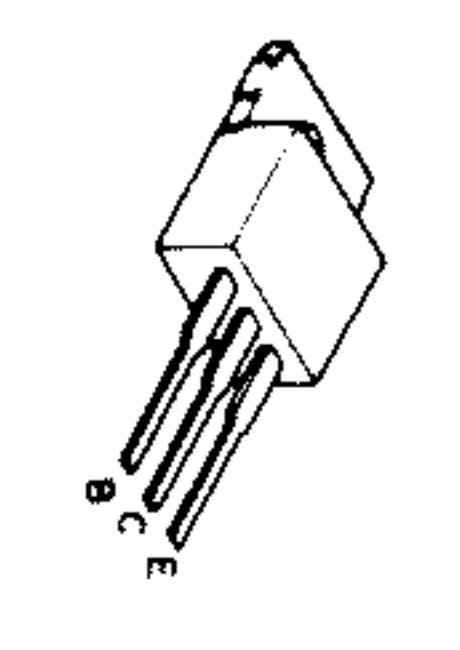


2SD1266

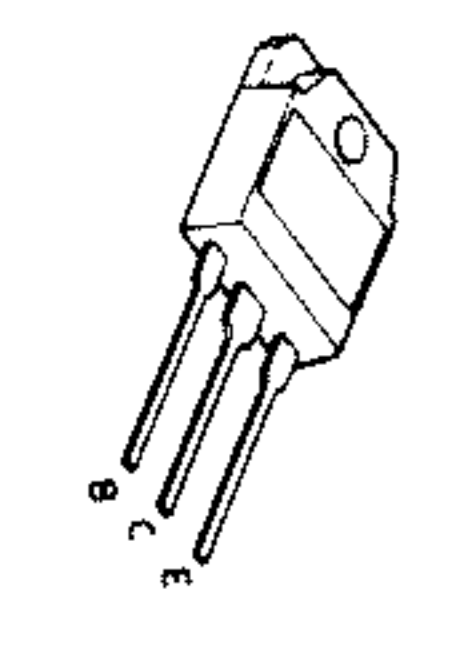

2SB1493*5
2SD2255*5

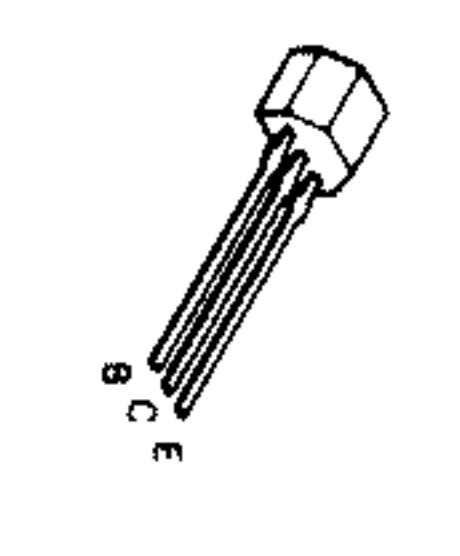

DTA124ES
UN4112
2SA933S
2SC1740S

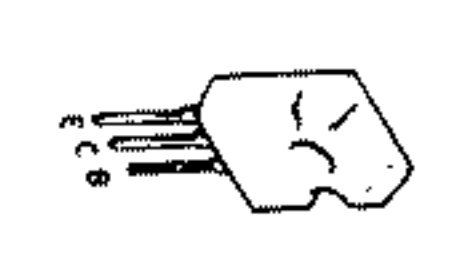

2SC4137





DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent varier légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser ohne Eingangssignal gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.


CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

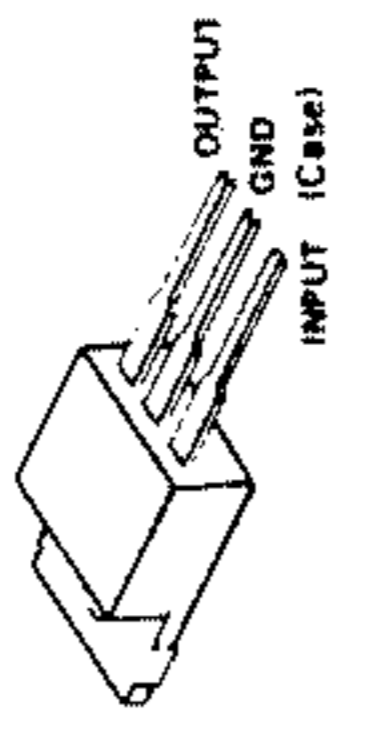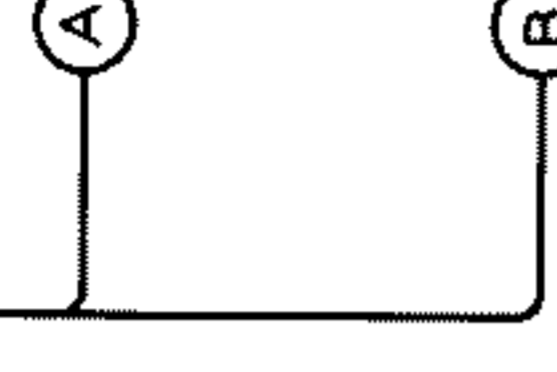

UPC1237HA



M51951ASL
PST529D

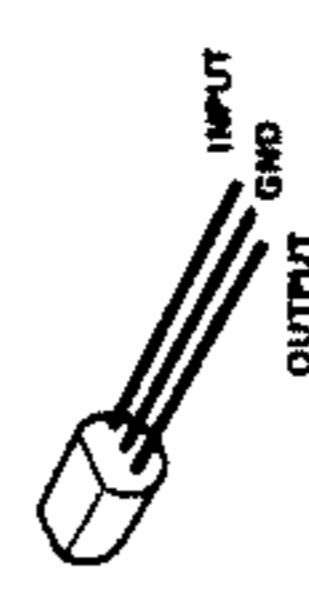

NJM78L05A



UPC7912HF

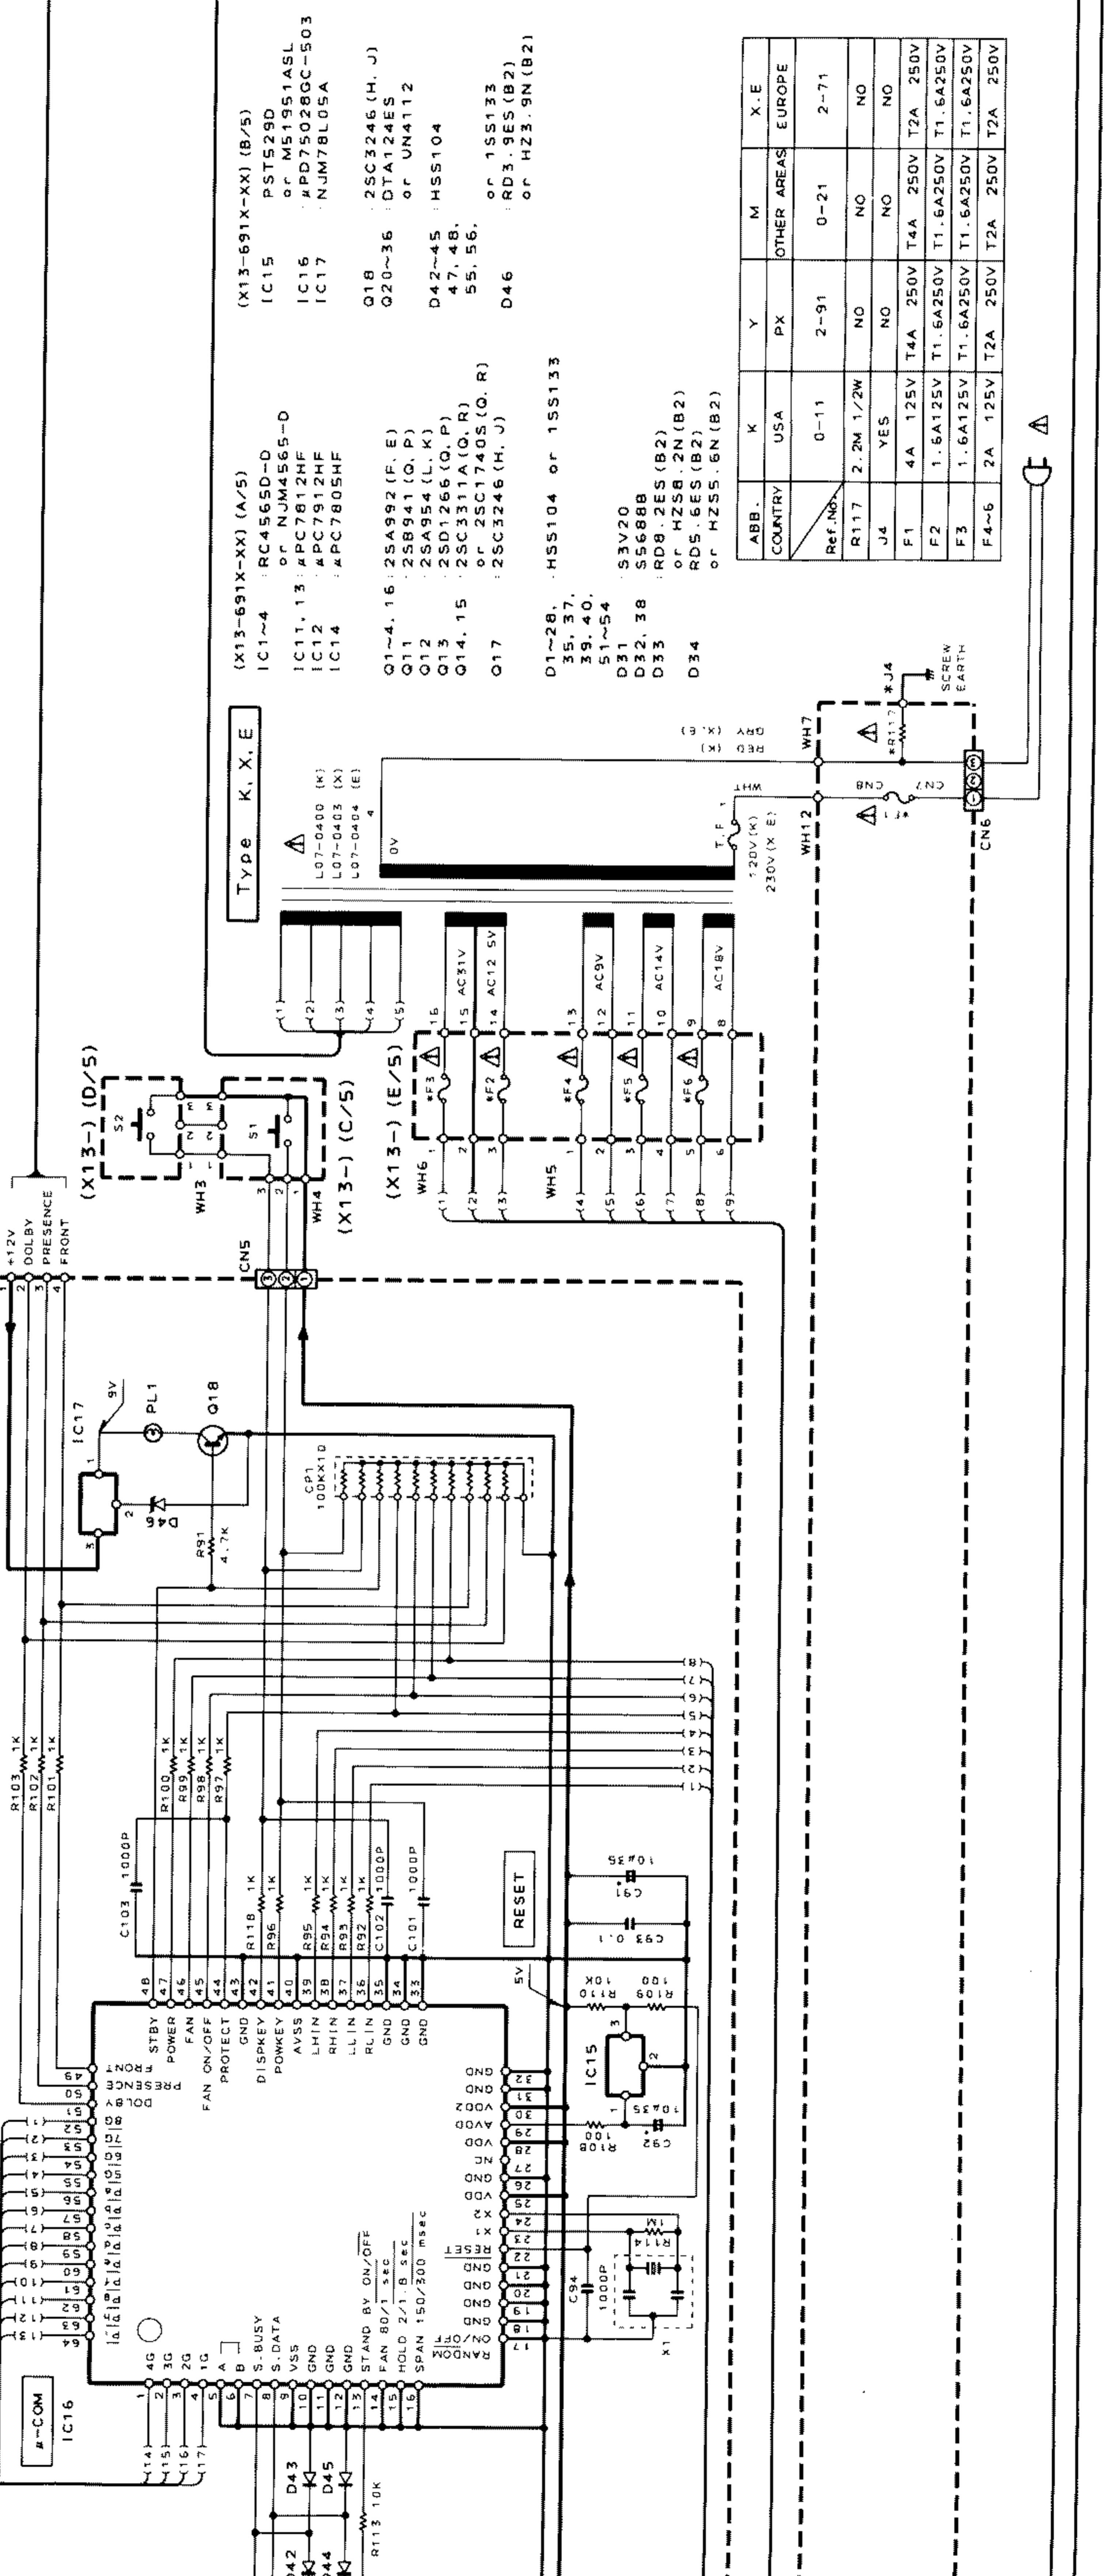
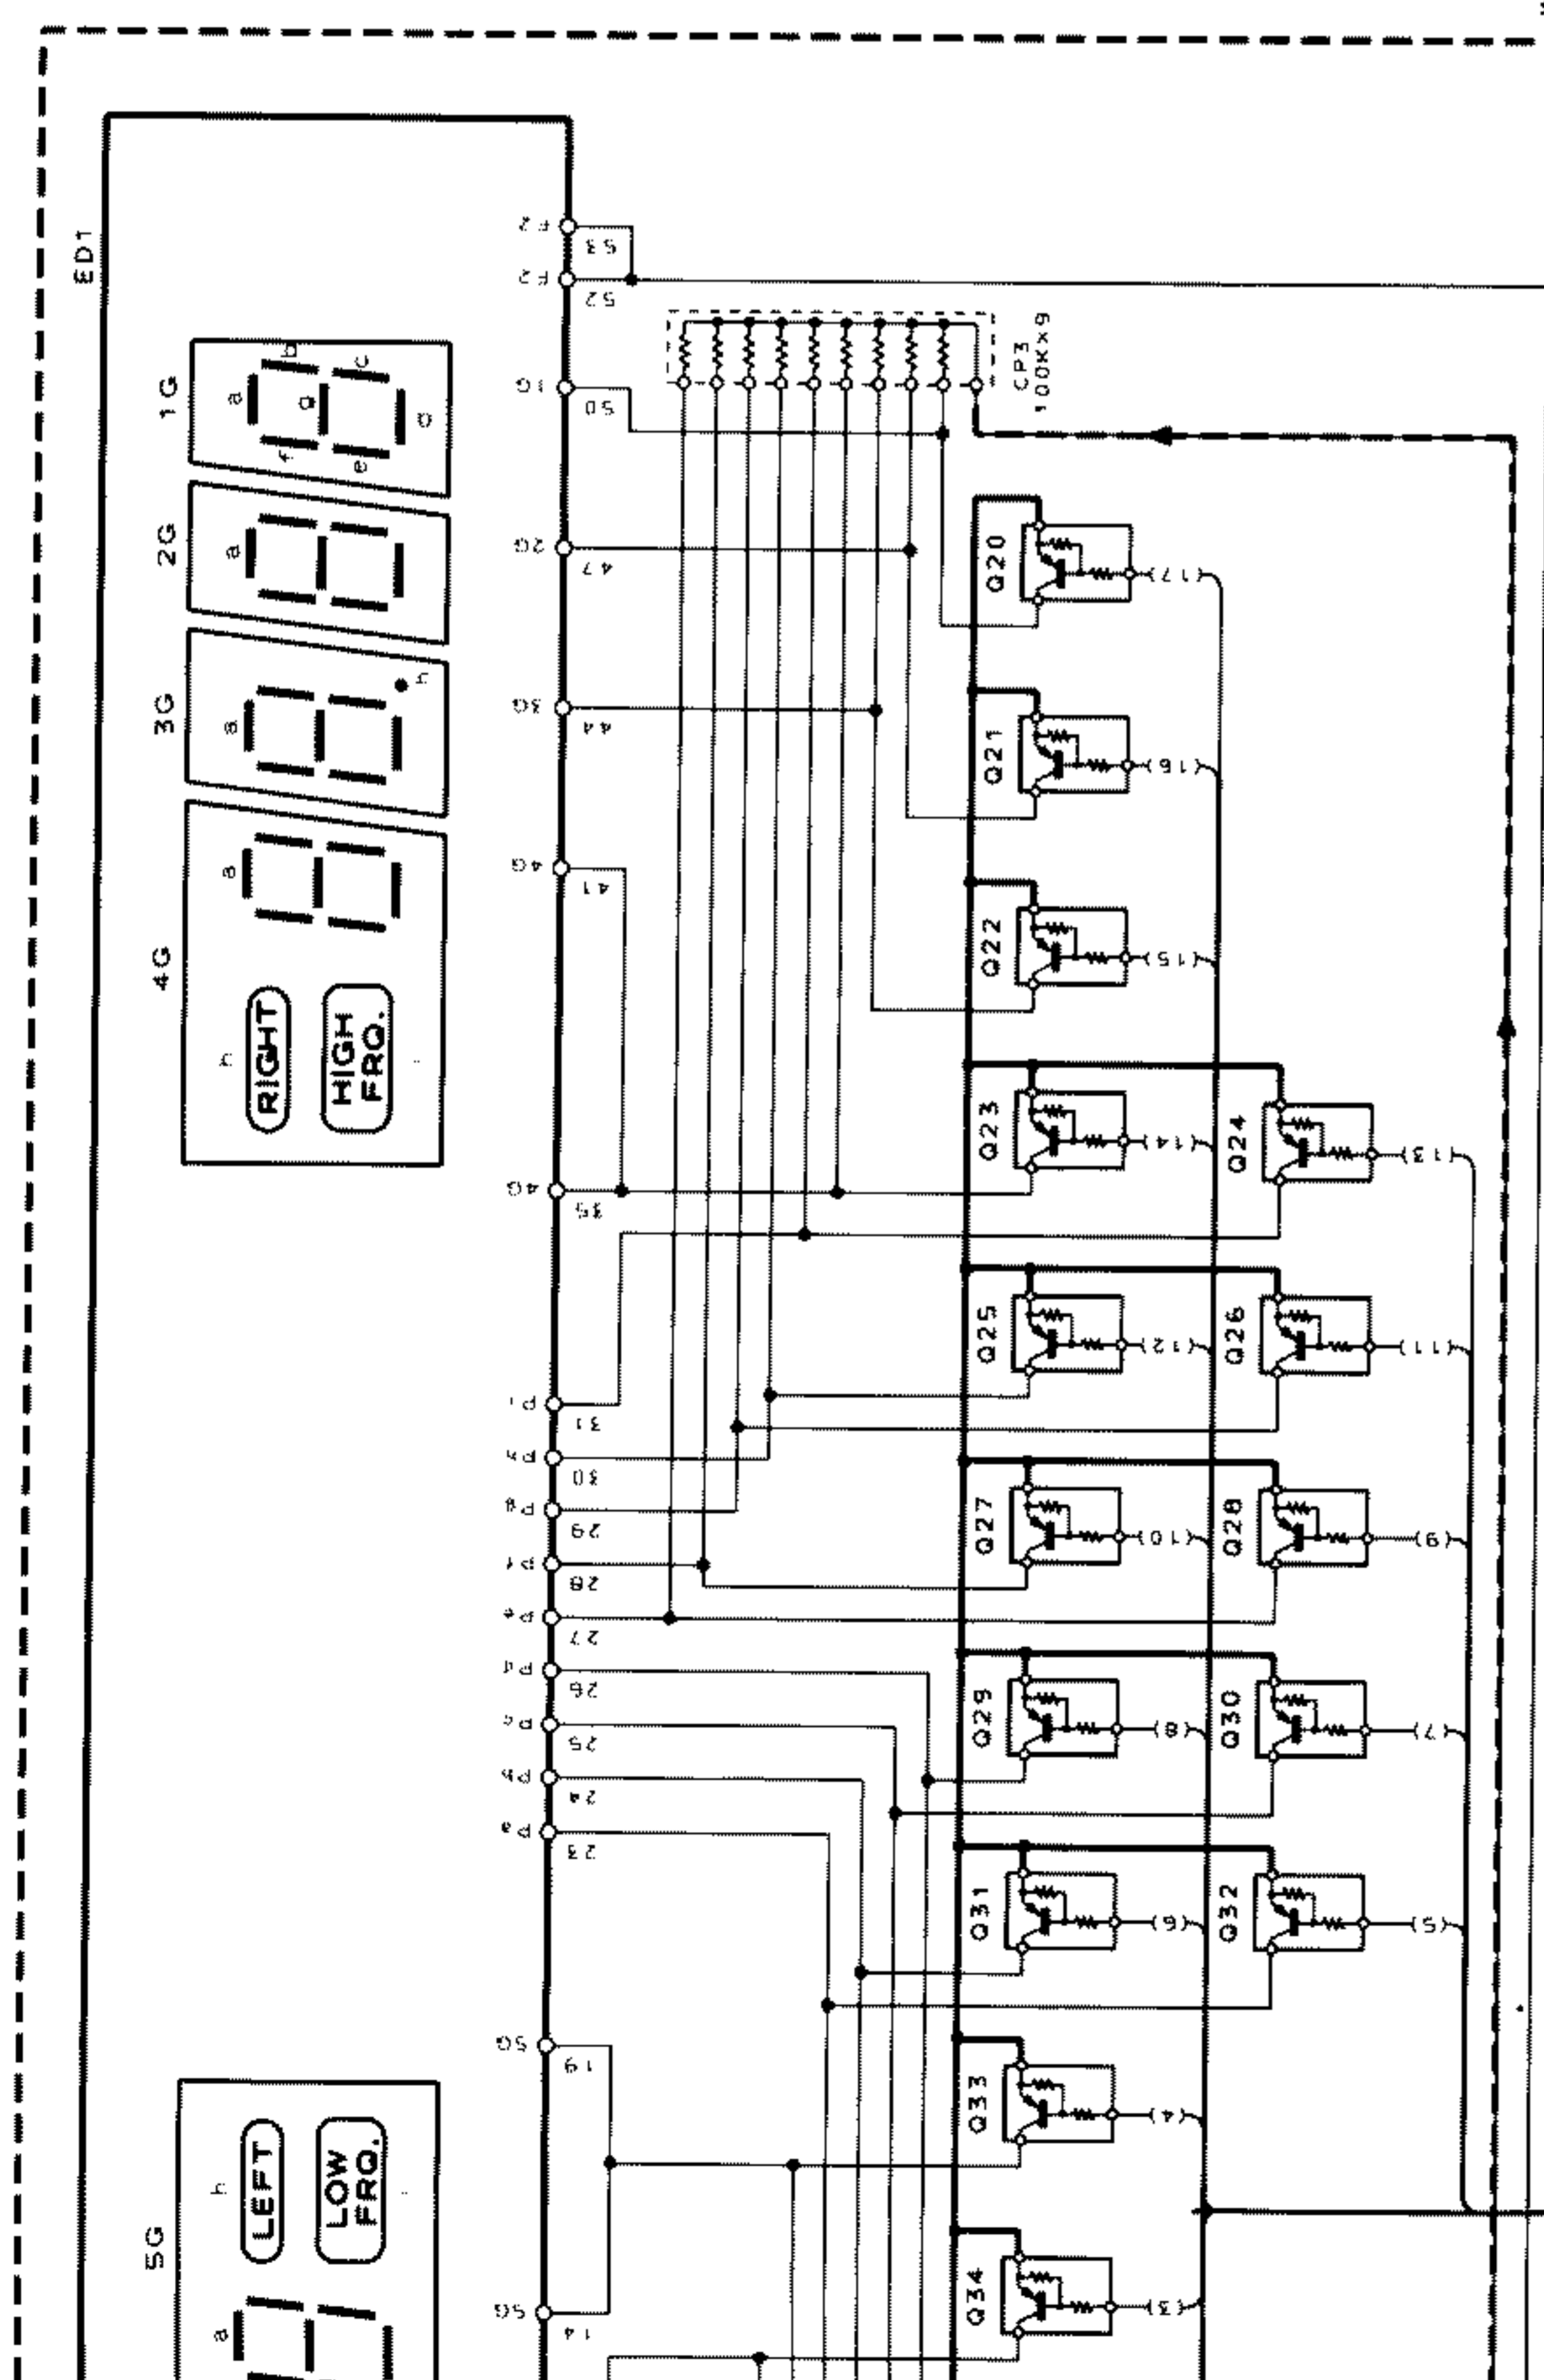
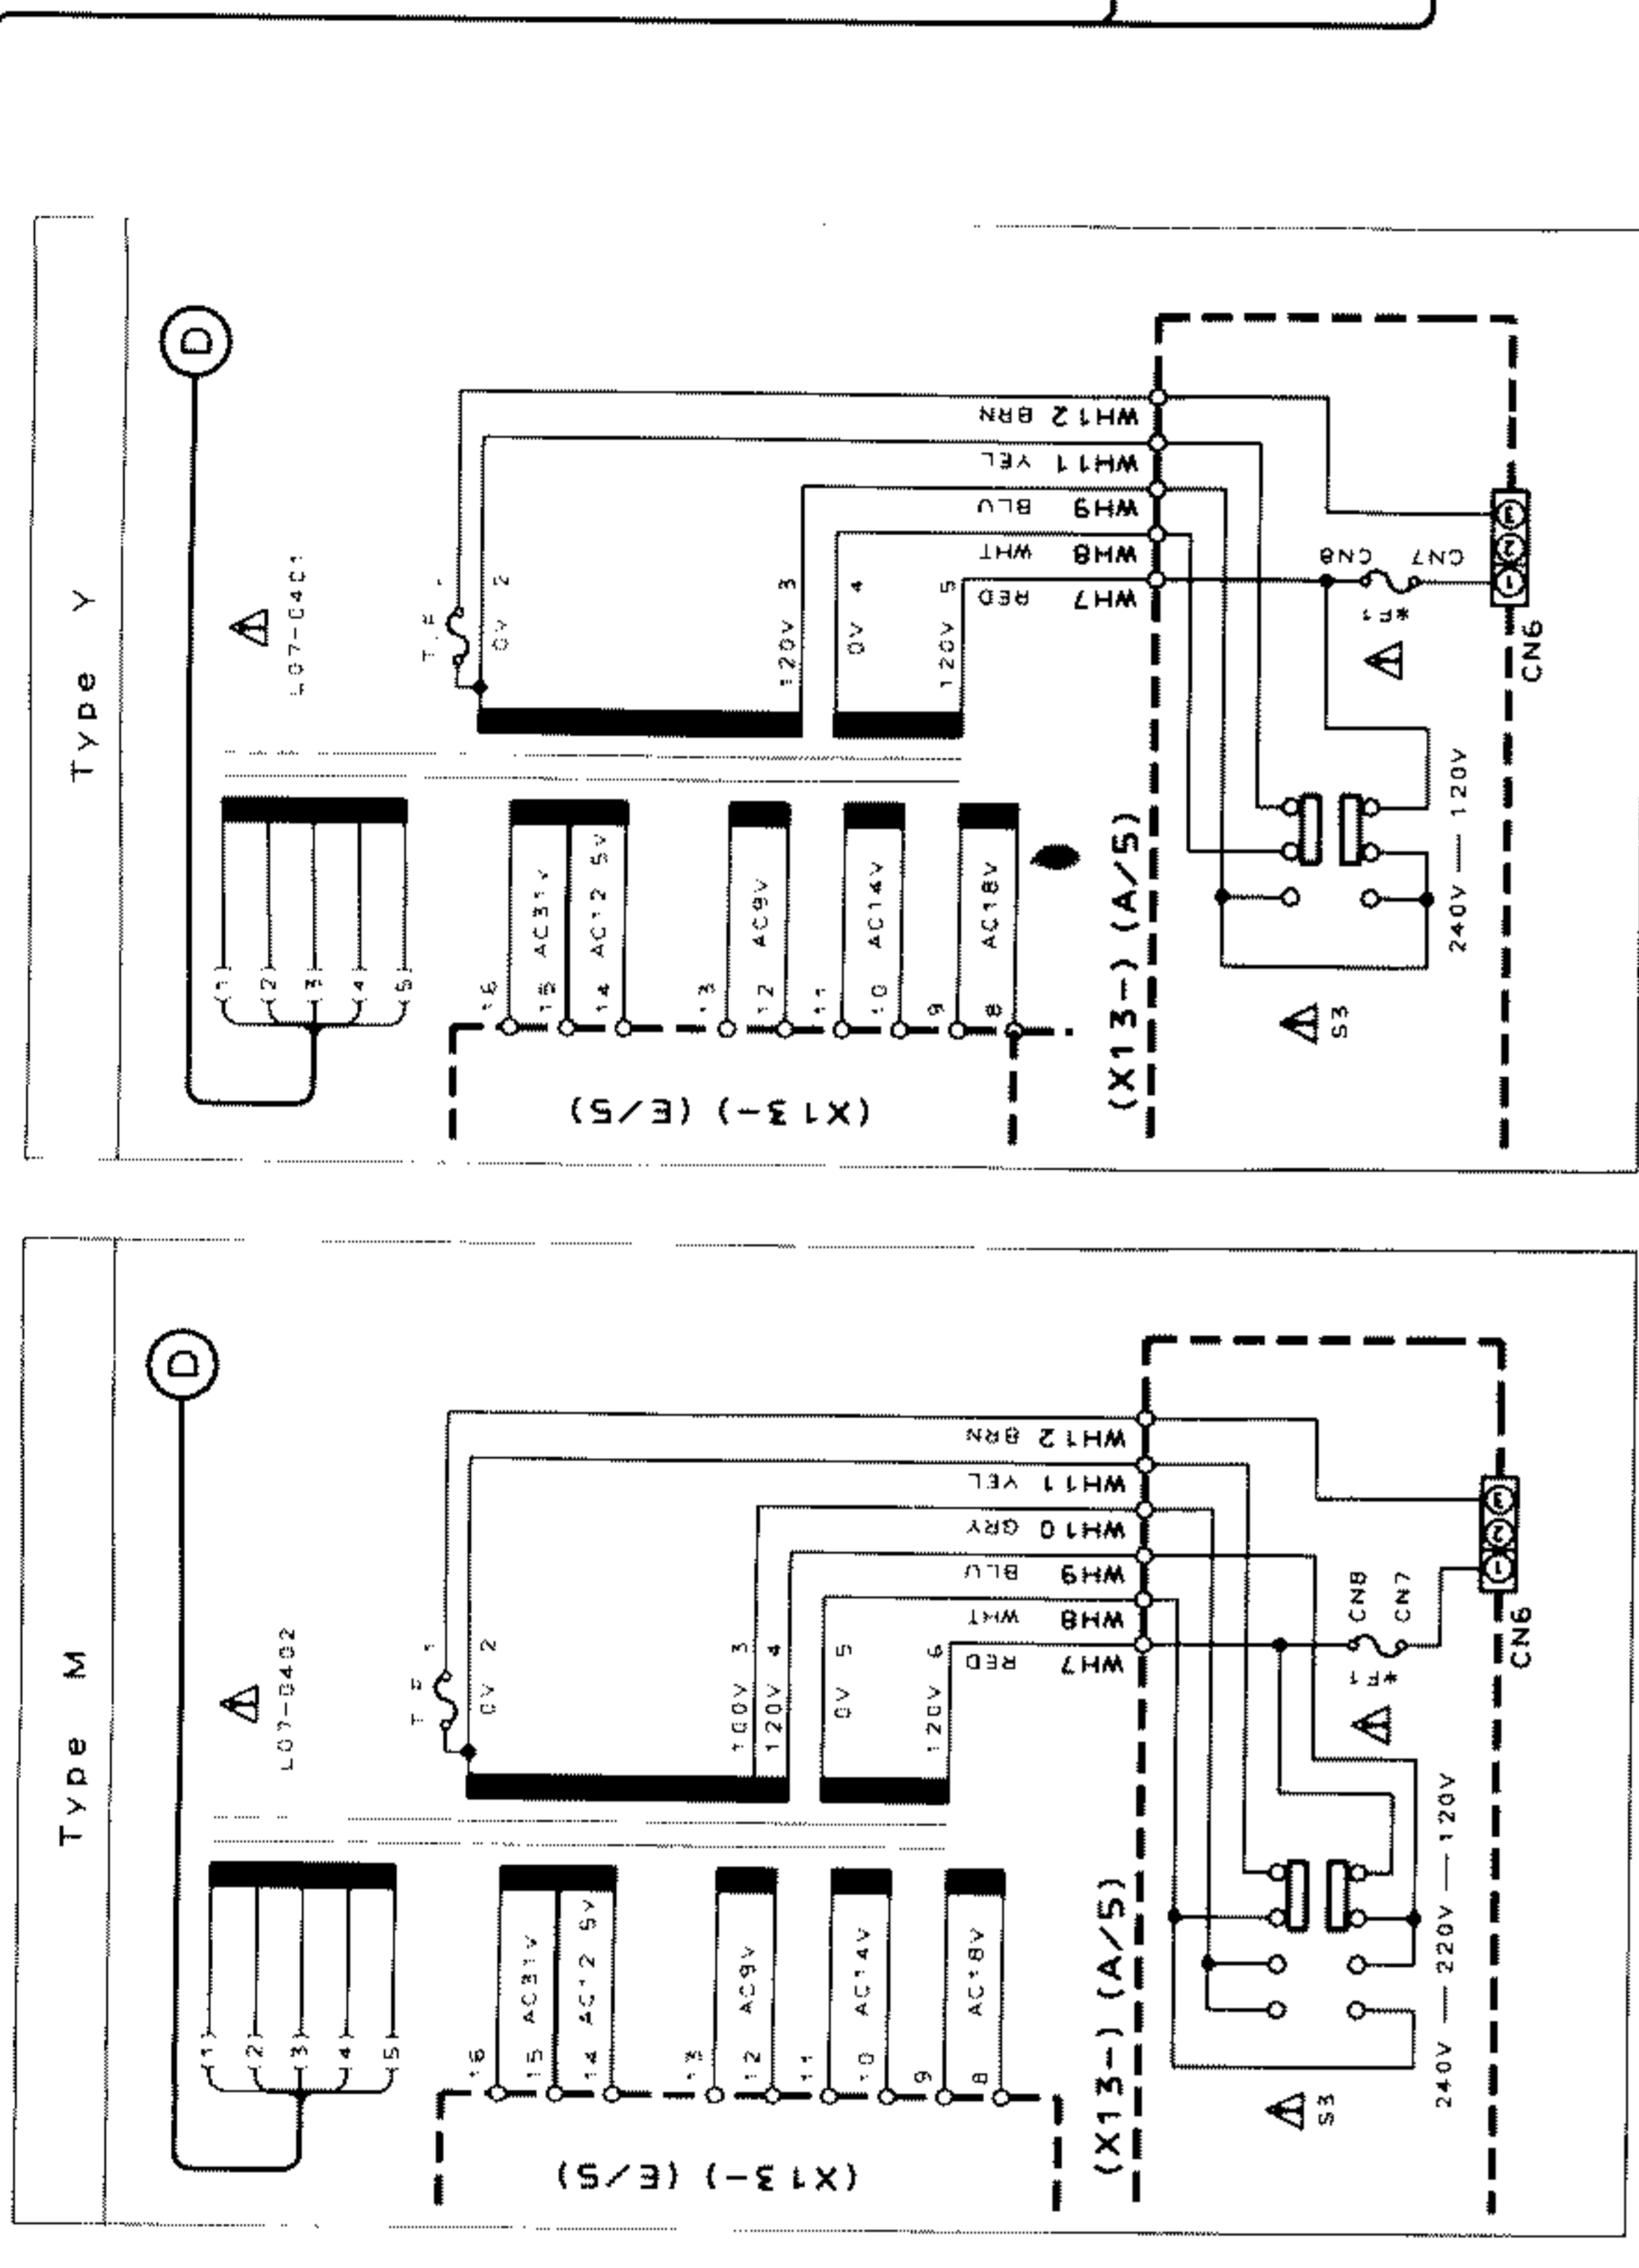


ABB.	K	Y	M	X-E
COUNTRY	USA	PX	OTHER AREAS	EUROPE
Ref. No.	0-11	2-91	0-21	2-71
J4	YES	NO	NO	NO
F1	4A 125V	T4A 250V	T4A 250V	T2A 250V
F2	1.6A125V	T1.6A250V	T1.6A250V	T1.6A250V
F3	1.6A125V	T1.6A250V	T1.6A250V	T1.6A250V
F4-6	2A 125V	T2A 250V	T2A 250V	T2A 250V

TYPE	K, X, E
Q1-4, 16	2SA992 (F, E)
Q11	2SB941 (O, P)
Q12	2SA954 (L, K)
Q13	2SD1266 (O, P)
Q14, 15	2SC3311A (Q, R)
Q17	2SC1740S (O, R)
	or 2SC3246 (H, J)
D1-28,	H5S104 or 1SS133
35, 37,	
39, 40,	
51-54	
D31	53V20
D32, 38	S56888
D33	RD8.2ES (B2)
	or HZ58.2N (B2)
D34	RD5.6ES (B2)
	or HZ55.6N (B2)

2SB1502*5
2SD2275*5

2SB941

2SA1309A
2SC3311A

NJM4565D-D

RC4565D-D



SIGNAL LINE
GND LINE
+8 LINE
-8 LINE

DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent varier légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser ohne Eingangssignal gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.


CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). **⚠** Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

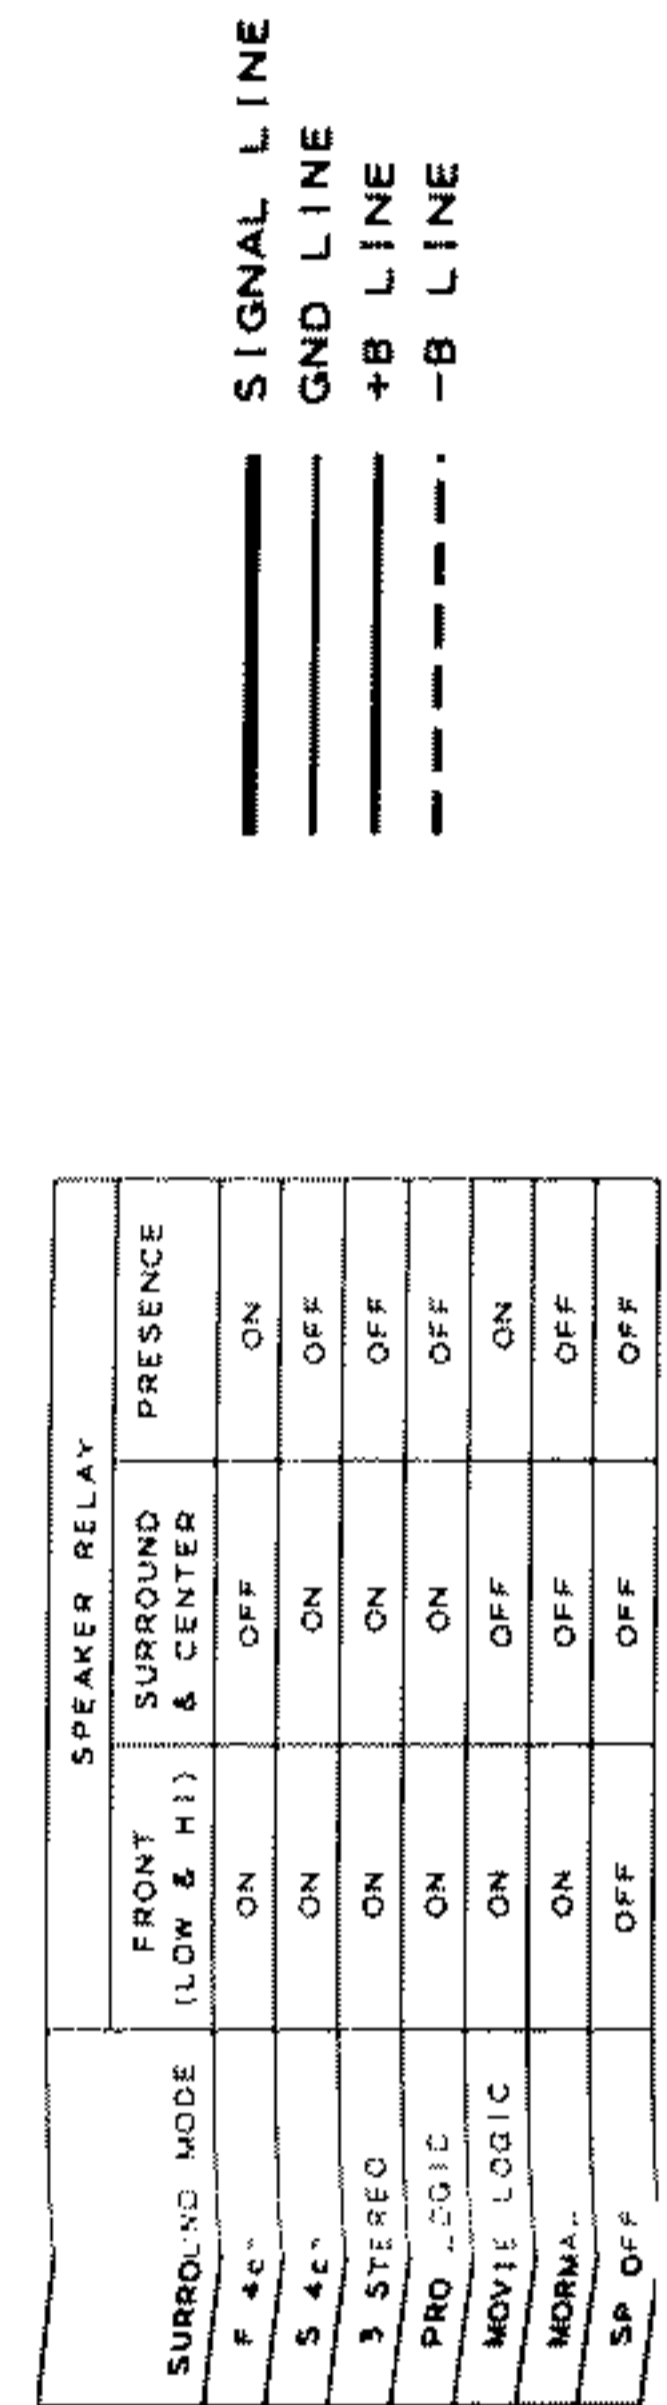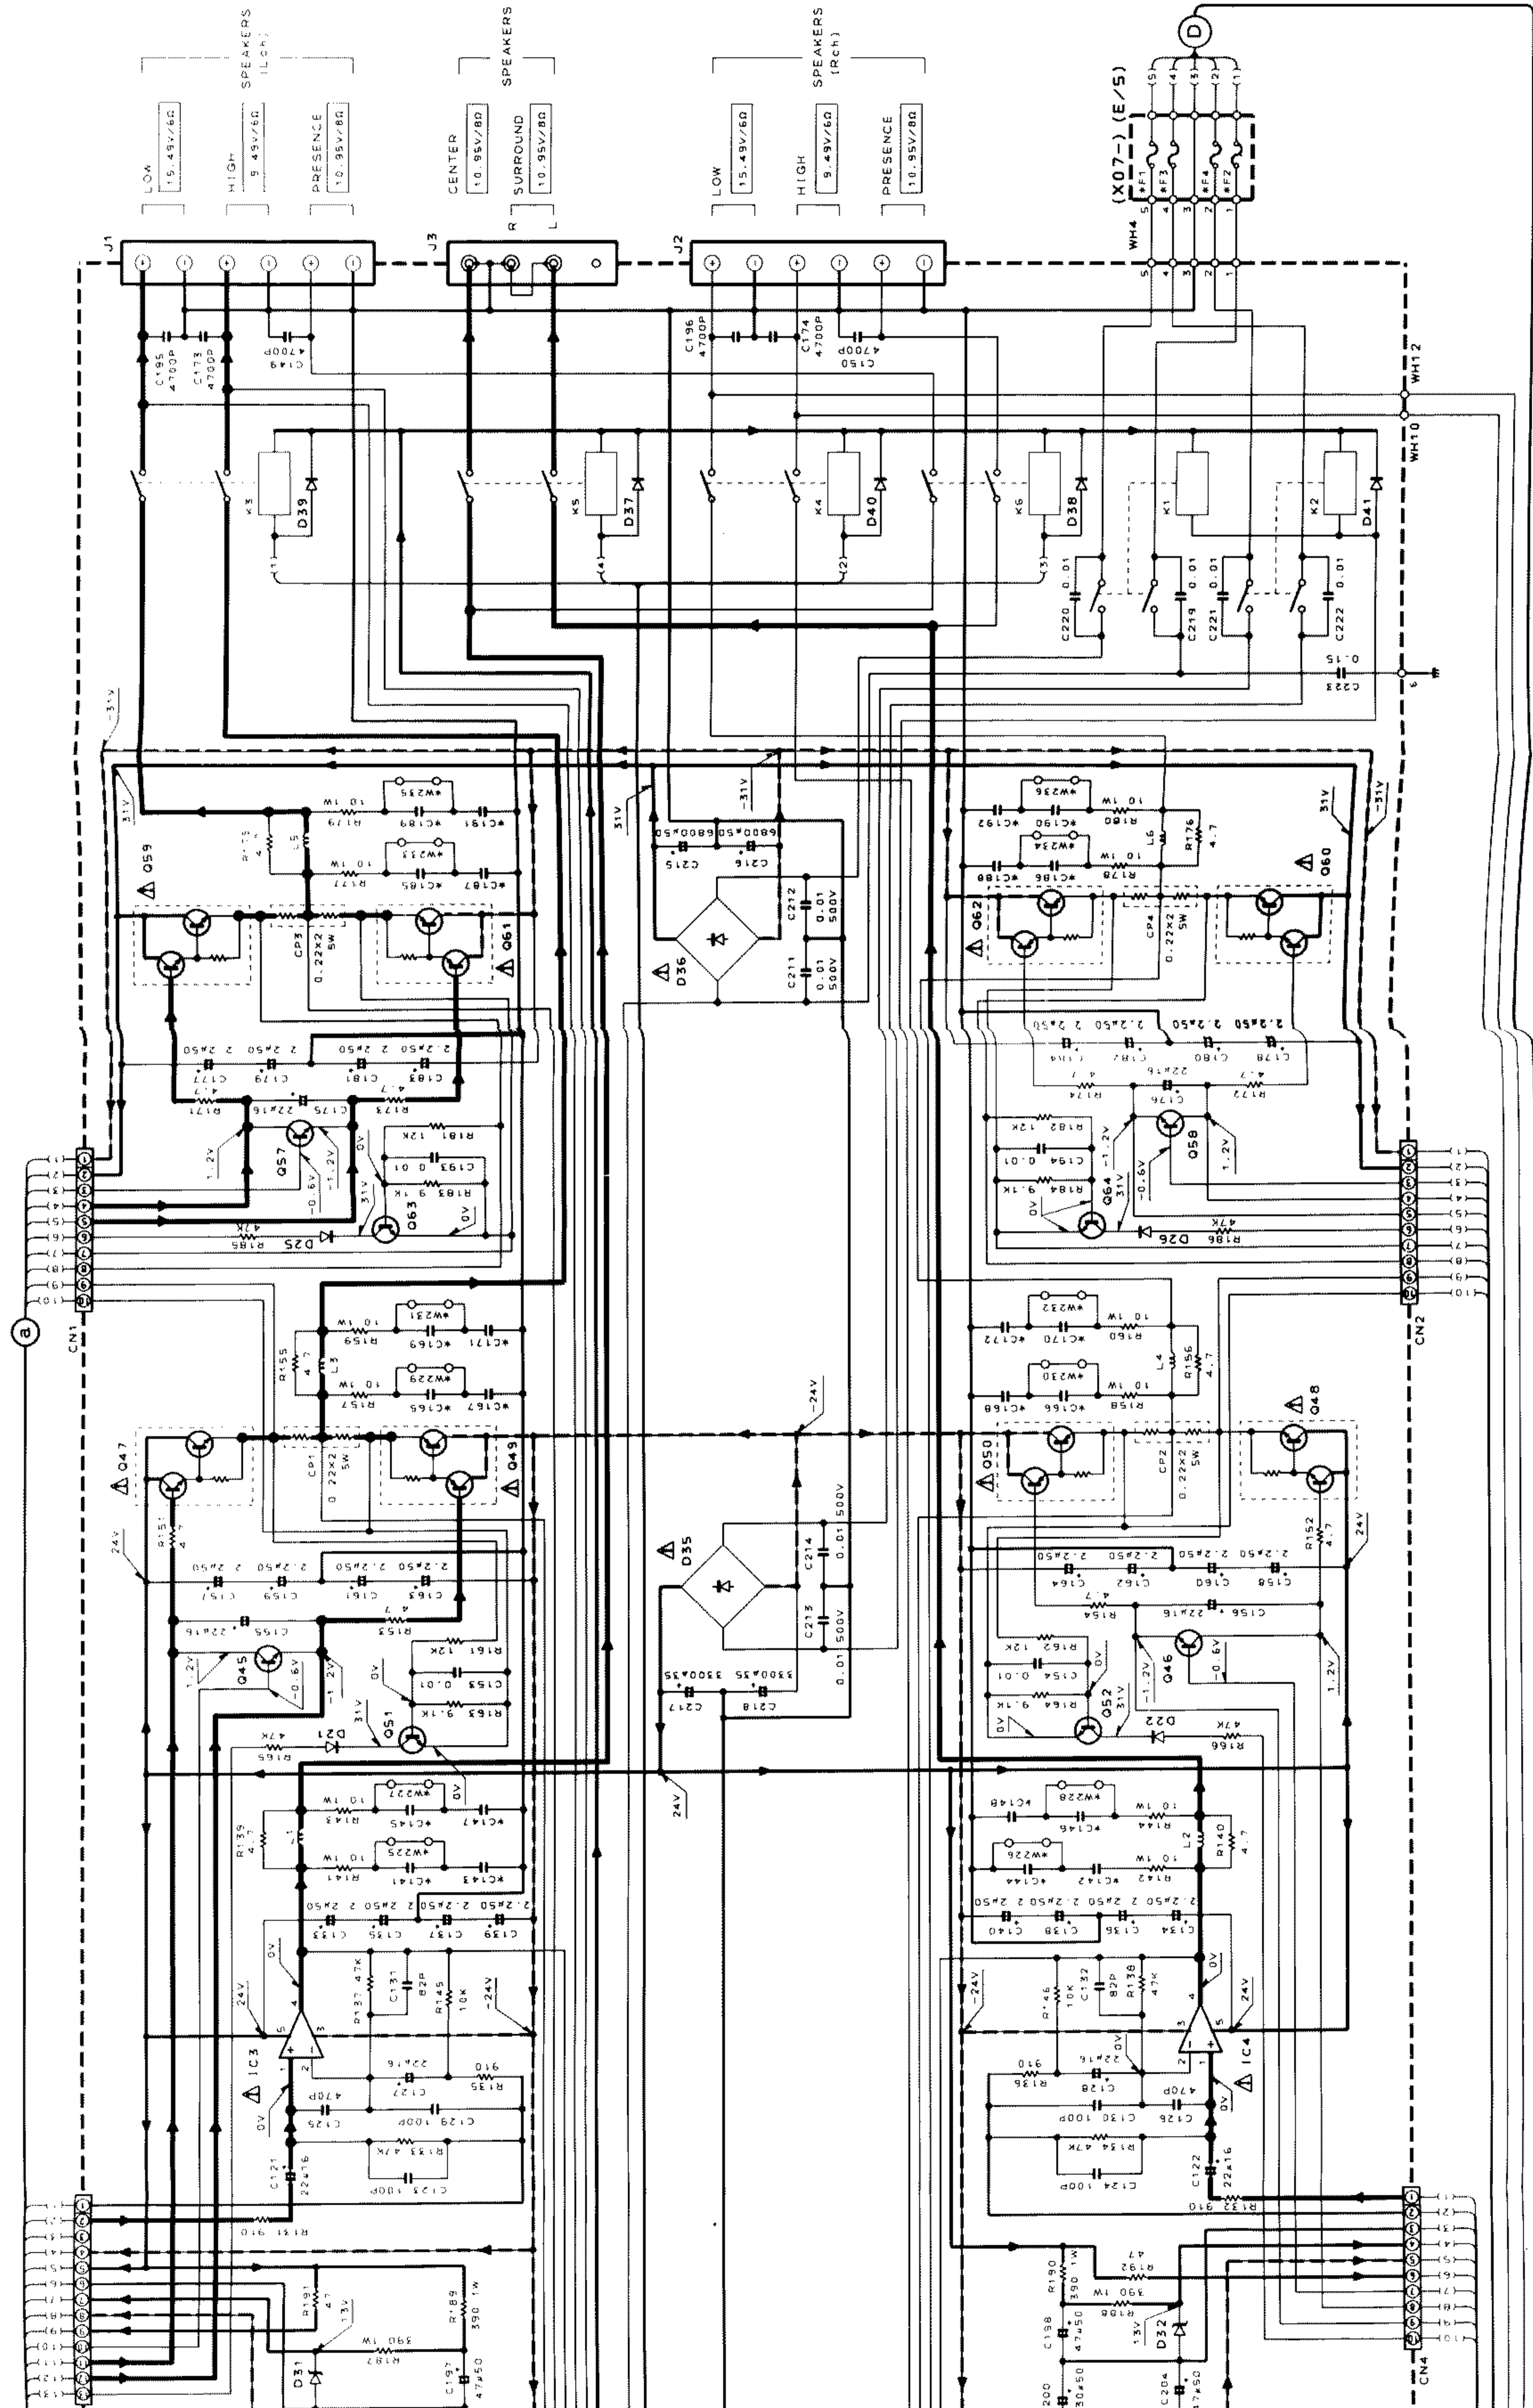


SURROUND MODE	SPEAKER RELAY		
	FRONT (L & R)	SURROUND & CENTER	PRESENCE
F 4c	ON	OFF	ON
S 4c	ON	ON	OFF
3 STEREO	ON	ON	OFF
PRO LOGIC	ON	ON	OFF
MOVIE LOGIC	ON	OFF	ON
NORMA	ON	OFF	OFF
SP OFF	OFF	OFF	OFF

Ref. No.	DESTINATION	Q41	Q42	Q43	Q44	Q45	Q46	Q47	Q48
167	C185	166	167	168	169	170	171	172	173
168	166	167	168	169	170	171	172	173	174
169	166	167	168	169	170	171	172	173	174
170	166	167	168	169	170	171	172	173	174
171	166	167	168	169	170	171	172	173	174
172	166	167	168	169	170	171	172	173	174
173	166	167	168	169	170	171	172	173	174
174	166	167	168	169	170	171	172	173	174
175	166	167	168	169	170	171	172	173	174
176	166	167	168	169	170	171	172	173	174
177	166	167	168	169	170	171	172	173	174
178	166	167	168	169	170	171	172	173	174
179	166	167	168	169	170	171	172	173	174
180	166	167	168	169	170	171	172	173	174
181	166	167	168	169	170	171	172	173	174
182	166	167	168	169	170	171	172	173	174
183	166	167	168	169	170	171	172	173	174
184	166	167	168	169	170	171	172	173	174
185	166	167	168	169	170	171	172	173	174
186	166	167	168	169	170	171	172	173	174
187	166	167	168	169	170	171	172	173	174
188	166	167	168	169	170	171	172	173	174
189	166	167	168	169	170	171	172	173	174
190	166	167	168	169	170	171	172	173	174
191	166	167	168	169	170	171	172	173	174
192	166	167	168	169	170	171	172	173	174
193	166	167	168	169	170	171	172	173	174
194	166	167	168	169	170	171	172	173	174
195	166	167	168	169	170	171	172	173	174
196	166	167	168	169	170	171	172	173	174
197	166	167	168	169	170	171	172	173	174
198	166	167	168	169	170	171	172	173	174
199	166	167	168	169	170	171	172	173	174
200	166	167	168	169	170	171	172	173	174
201	166	167	168	169	170	171	172	173	174
202	166	167	168	169	170	171	172	173	174
203	166	167	168	169	170	171	172	173	174
204	166	167	168	169	170	171	172	173	174
205	166	167	168	169	170	171	172	173	174
206	166	167	168	169	170	171	172	173	174
207	166	167	168	169	170	171	172	173	174
208	166	167	168	169	170	171	172	173	174
209	166	167	168	169	170	171	172	173	174
210	166	167	168	169	170	171	172	173	174
211	166	167	168	169	170	171	172	173	174
212	166	167	168	169	170	171	172	173	174
213	166	167	168	169	170	171	172	173	174
214	166	167	168	169	170	171	172	173	174
215	166	167	168	169	170	171	172	173	174
216	166	167	168	169	170	171	172	173	174
217	166	167	168	169	170	171	172	173	174
218	166	167	168	169	170	171	172	173	174
219	166	167	168	169	170	171	172	173	174
220	166	167	168	169	170	171	172	173	174
221	166	167	168	169	170	171	172	173	174
222	166	167	168	169	170	171	172	173	174
223	166	167	168	169	170	171	172	173	174
224	166	167	168	169	170	171	172	173	174
225	166	167	168	169	170	171	172	173	174
226	166	167	168	169	170	171	172	173	174
227	166	167	168	169	170	171	172	173	174
228	166	167	168	169	170	171	172	173	174
229	166	167	168	169	170	171	172	173	174
230	166	167	168	169	170	171	172	173	174
231	166	167	168	169	170	171	172	173	174
232	166	167	168	169	170	171	172	173	174
233	166	167	168	169	170	171	172	173	174
234	166	167	168	169	170	171	172	173	174
235	166	167	168	169	170	171	172	173	174
236	166	167	168	169	170	171	172	173	174
237	166	167	168	169	170	171	172	173	174
238	166	167	168	169	170	171	172	173	174
239	166	167	168	169	170	171	172	173	174
240	166	167	168	169	170	171	172	173	174
241	166	167	168	169	170	171	172	173	174
242	166	167	168	169	170	171	172	173	174
243	166	167	168	169	170	171	172	173	174
244	166	167	168	169	170	171	172	173	174
245	166	167	168	169	170	171	172	173	174
246	166	167	168	169	170	171	172	173	174
247	166	167	168	169	170	171	172	173	174
248	166	167	168	169	170	171	172	173	174
249	166	167	168	169	170	171	172	173	174
250	166	167	168	169	170	171	172	173	174
251	166	167	168	169	170	171	172	173	174
252	166	167	168	169	170	171	172	173	174
253	166	167	168	169	170	171	172	173	174
254	166	167	168	169	170	171	172	173	174
255	166	167	168	169	170	171	172	173	174
256	166	167	168	169	170	171	172	173	174
257	166	167	168	169	170	171	172	173	174
258	166	167	168	169	170	171	172	173	174
259	166	167	168	169	170	171	172	173	174
260	166	167	168	169	170	171	172	173	174
261	166	167	168	169	170	171	172	173	174
262	166	167	168	169	170	171	172	173	174
263	166	167	168	169	170	171	172	173	174
264	166	167	168	169	170	171	172	173	174
265	166	167	168	169	170	171	172	173	174
266	166	167	168	169	170	171	172	173	174
267	166	167	168	169	170	171	172	173	174
268	166	167	168	169	170	171	172	173	174
269	166	167	168	169	170	171	172	173	174
270	166	167	168	169	170	171	172	173	174
271	166	167	168	169	170	171	172	173	174
272	166	167	168	169	170	171	172	173	174
273	166	167	168	169	170	171	172	173	174
274	166	167	168	169	170	171	172	173	174
275	166	167	168	169	170	171	172	173	174
276	166	167	168	169	170	171	172	173	174
277	166	167	168	169	170	171	172	173	174
278	166	167	168	169	170	171	172	173	174
279	166	167	168	169	170	171	172	173	174
280	166	167	168	169	170	171	172	173	174
281	166	167	168	169	170	171	172	173	174
282	166	167	168	169	170	171	172</		


(X07-269X-XX) (C/5)

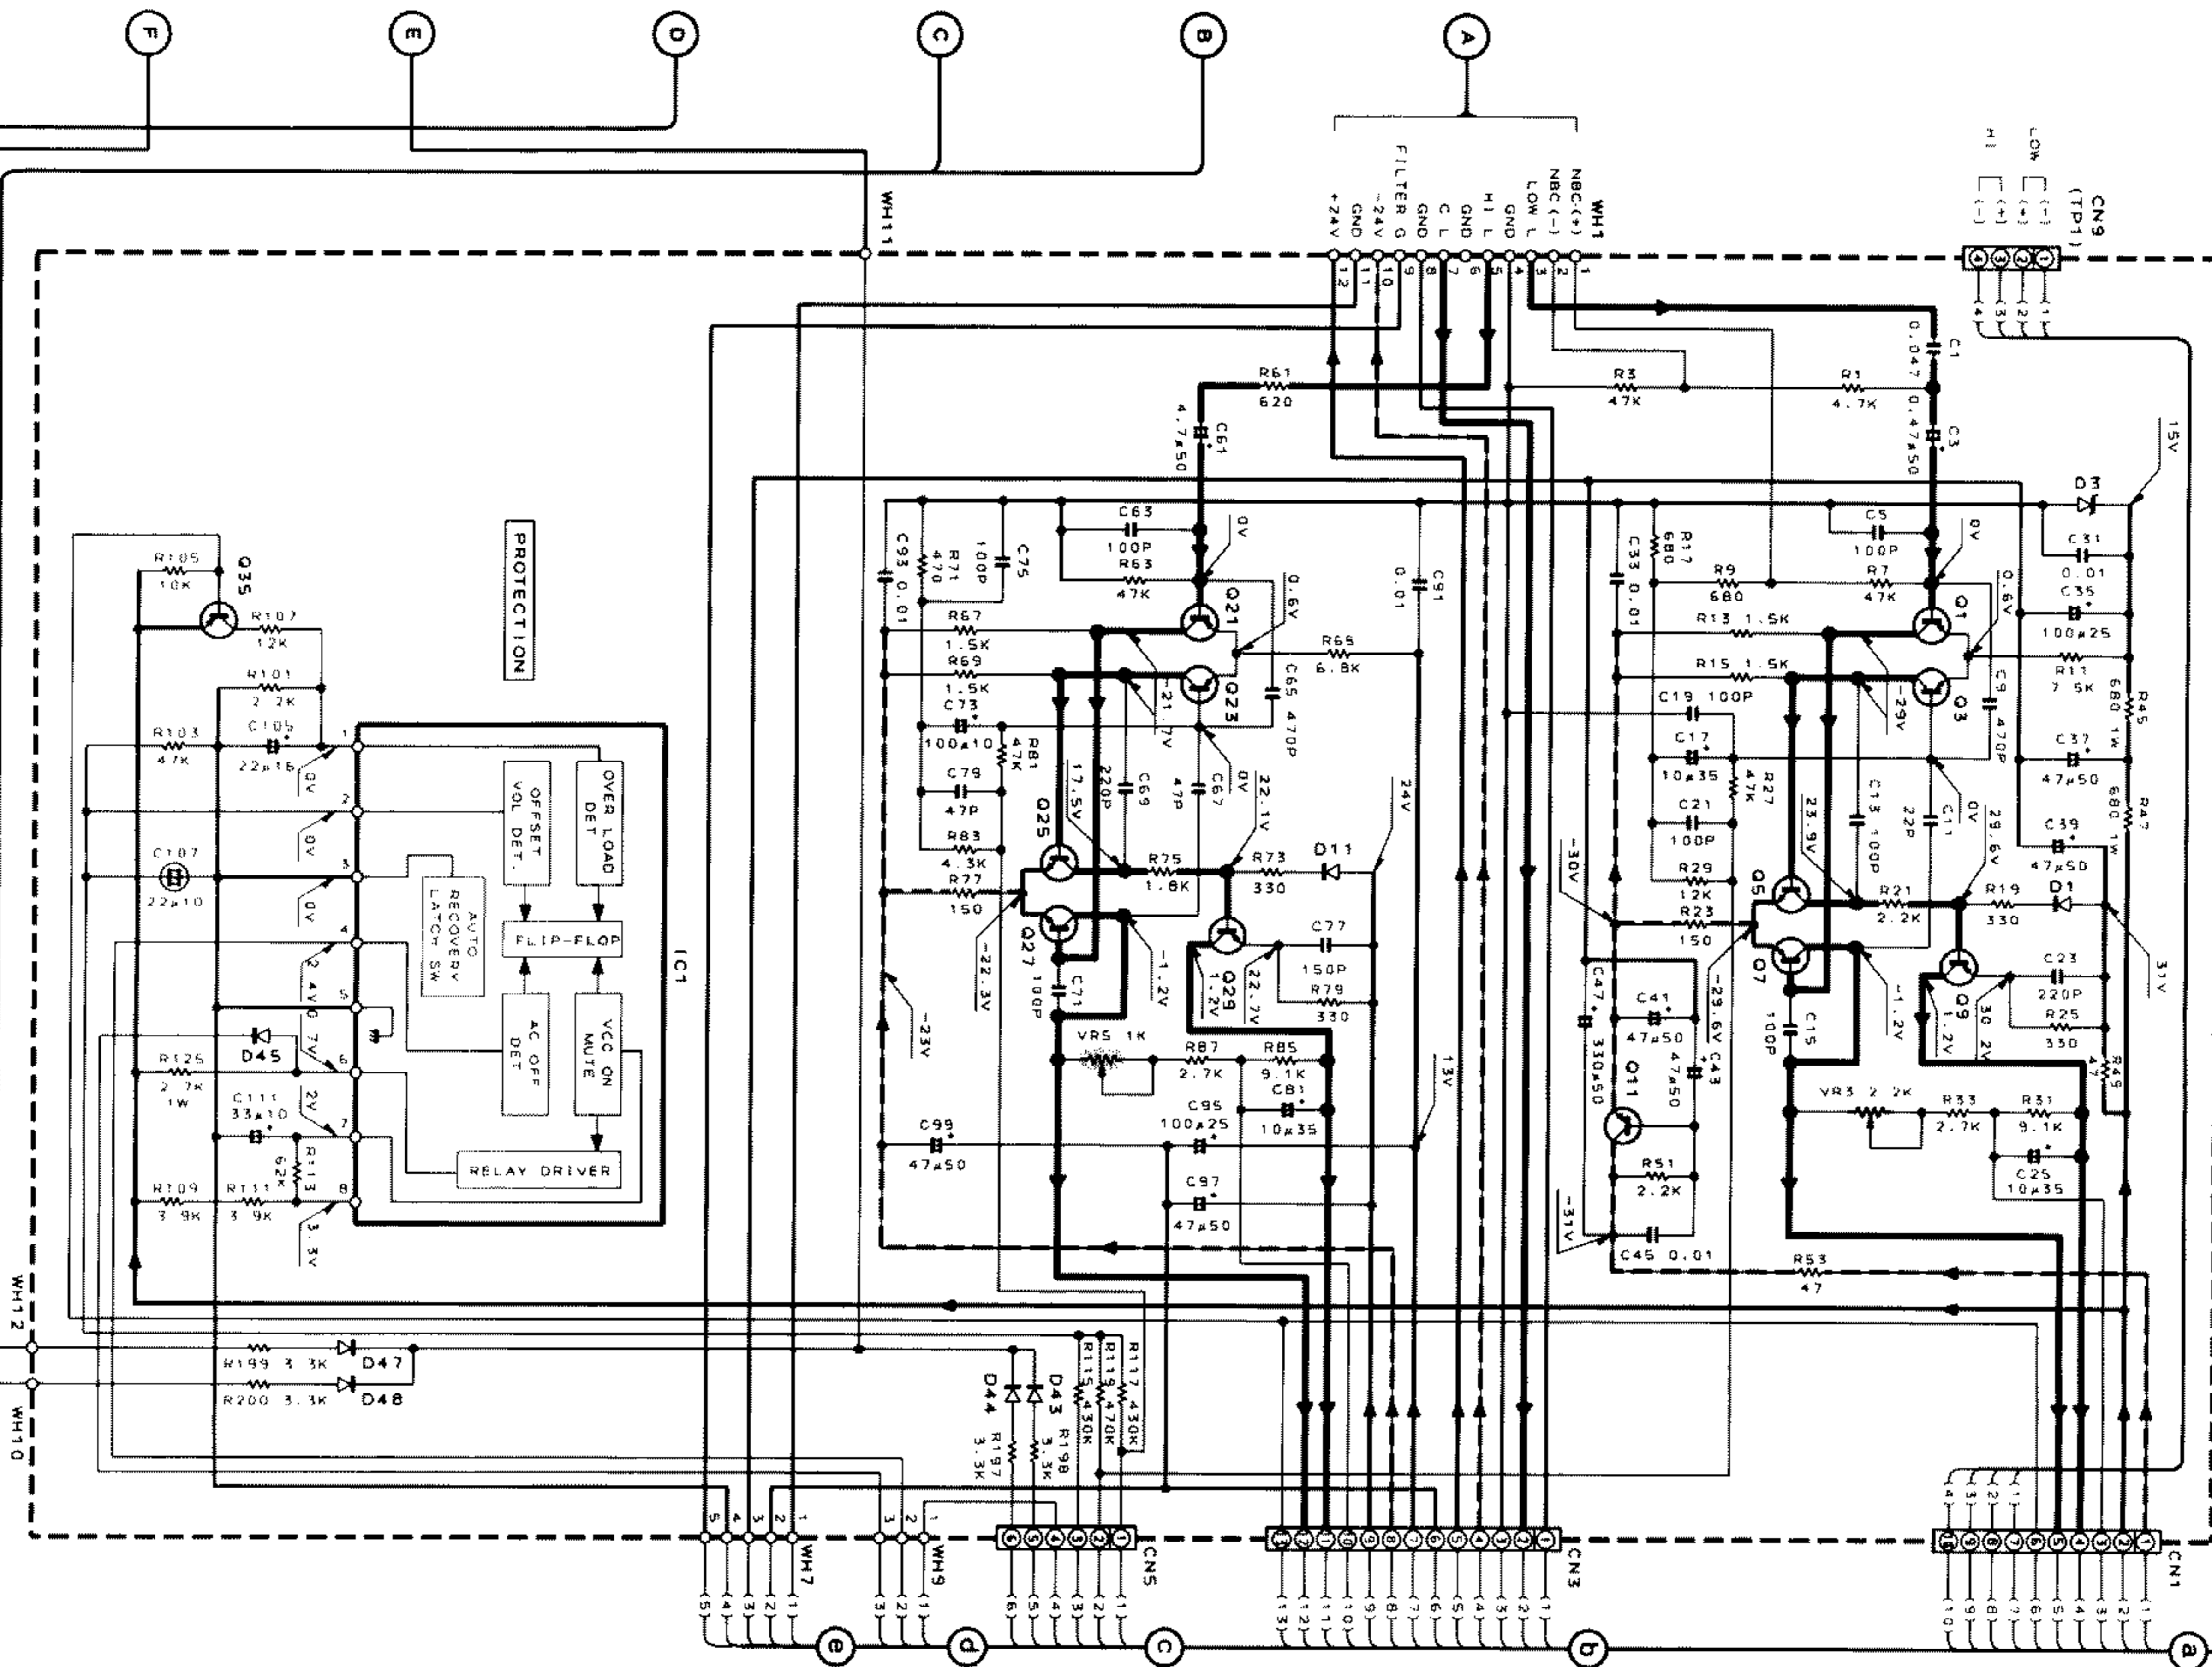

(X07-269X-XX) (B/5)

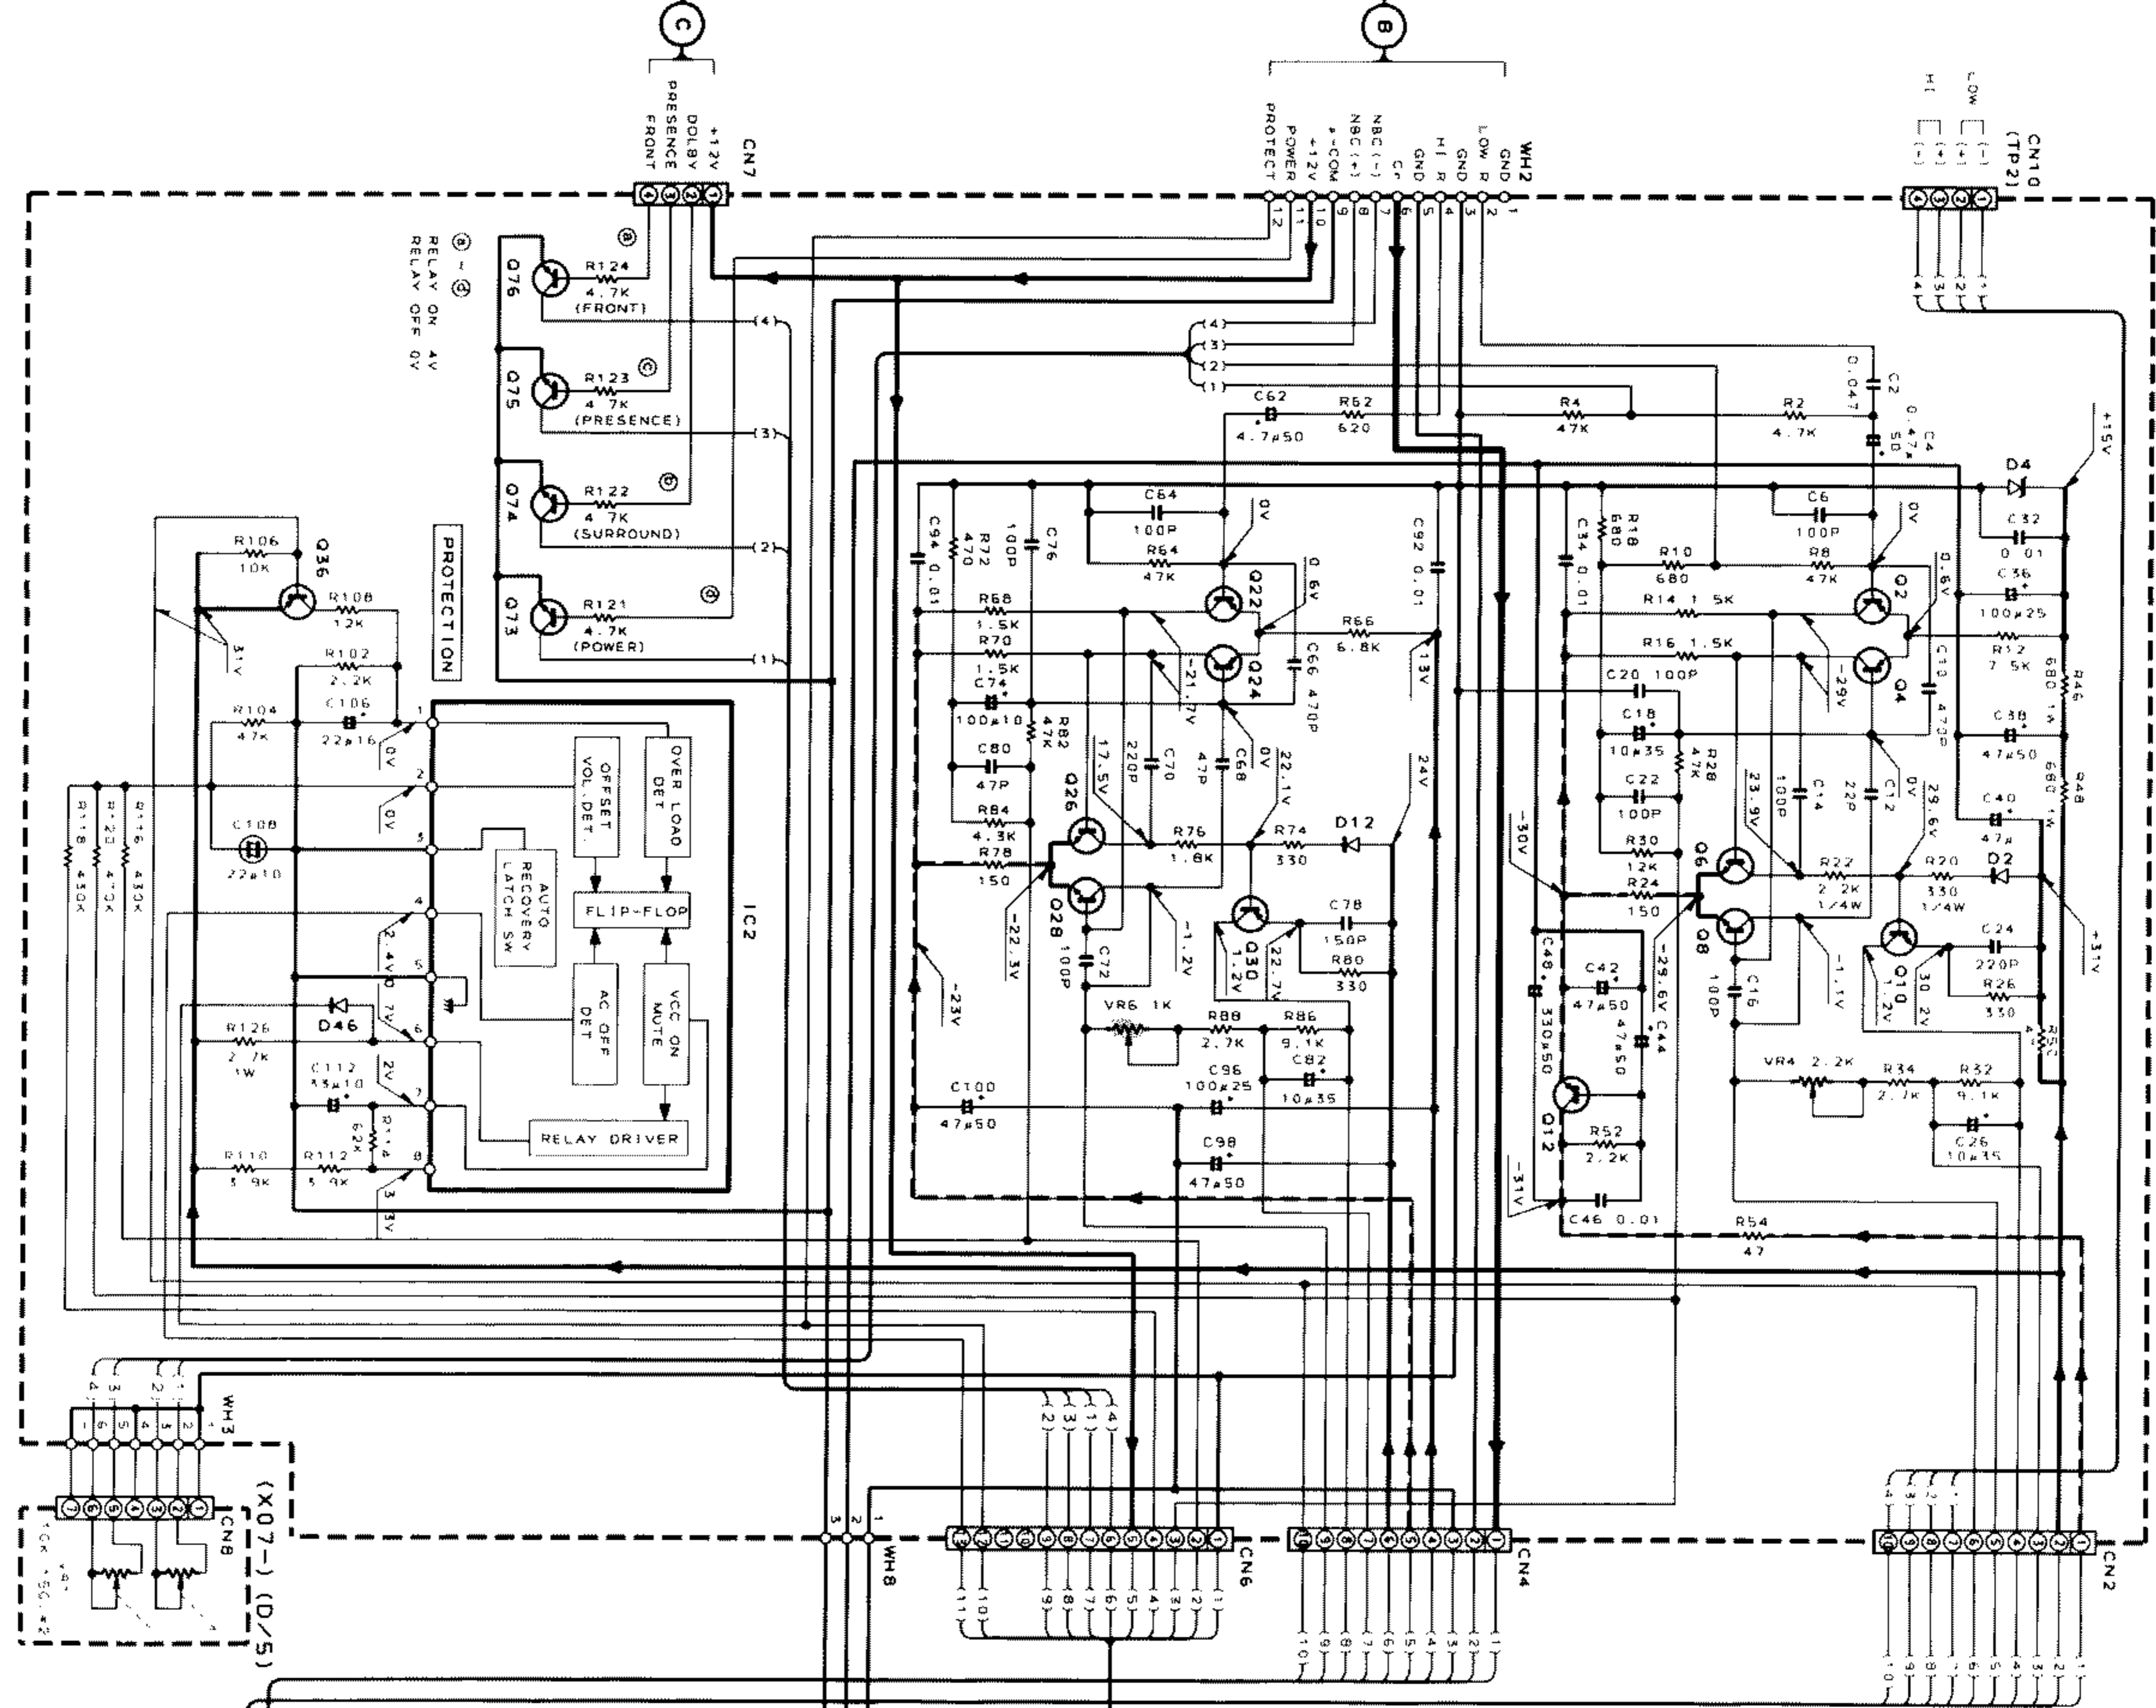

(X07-269X-XX) (A/5)

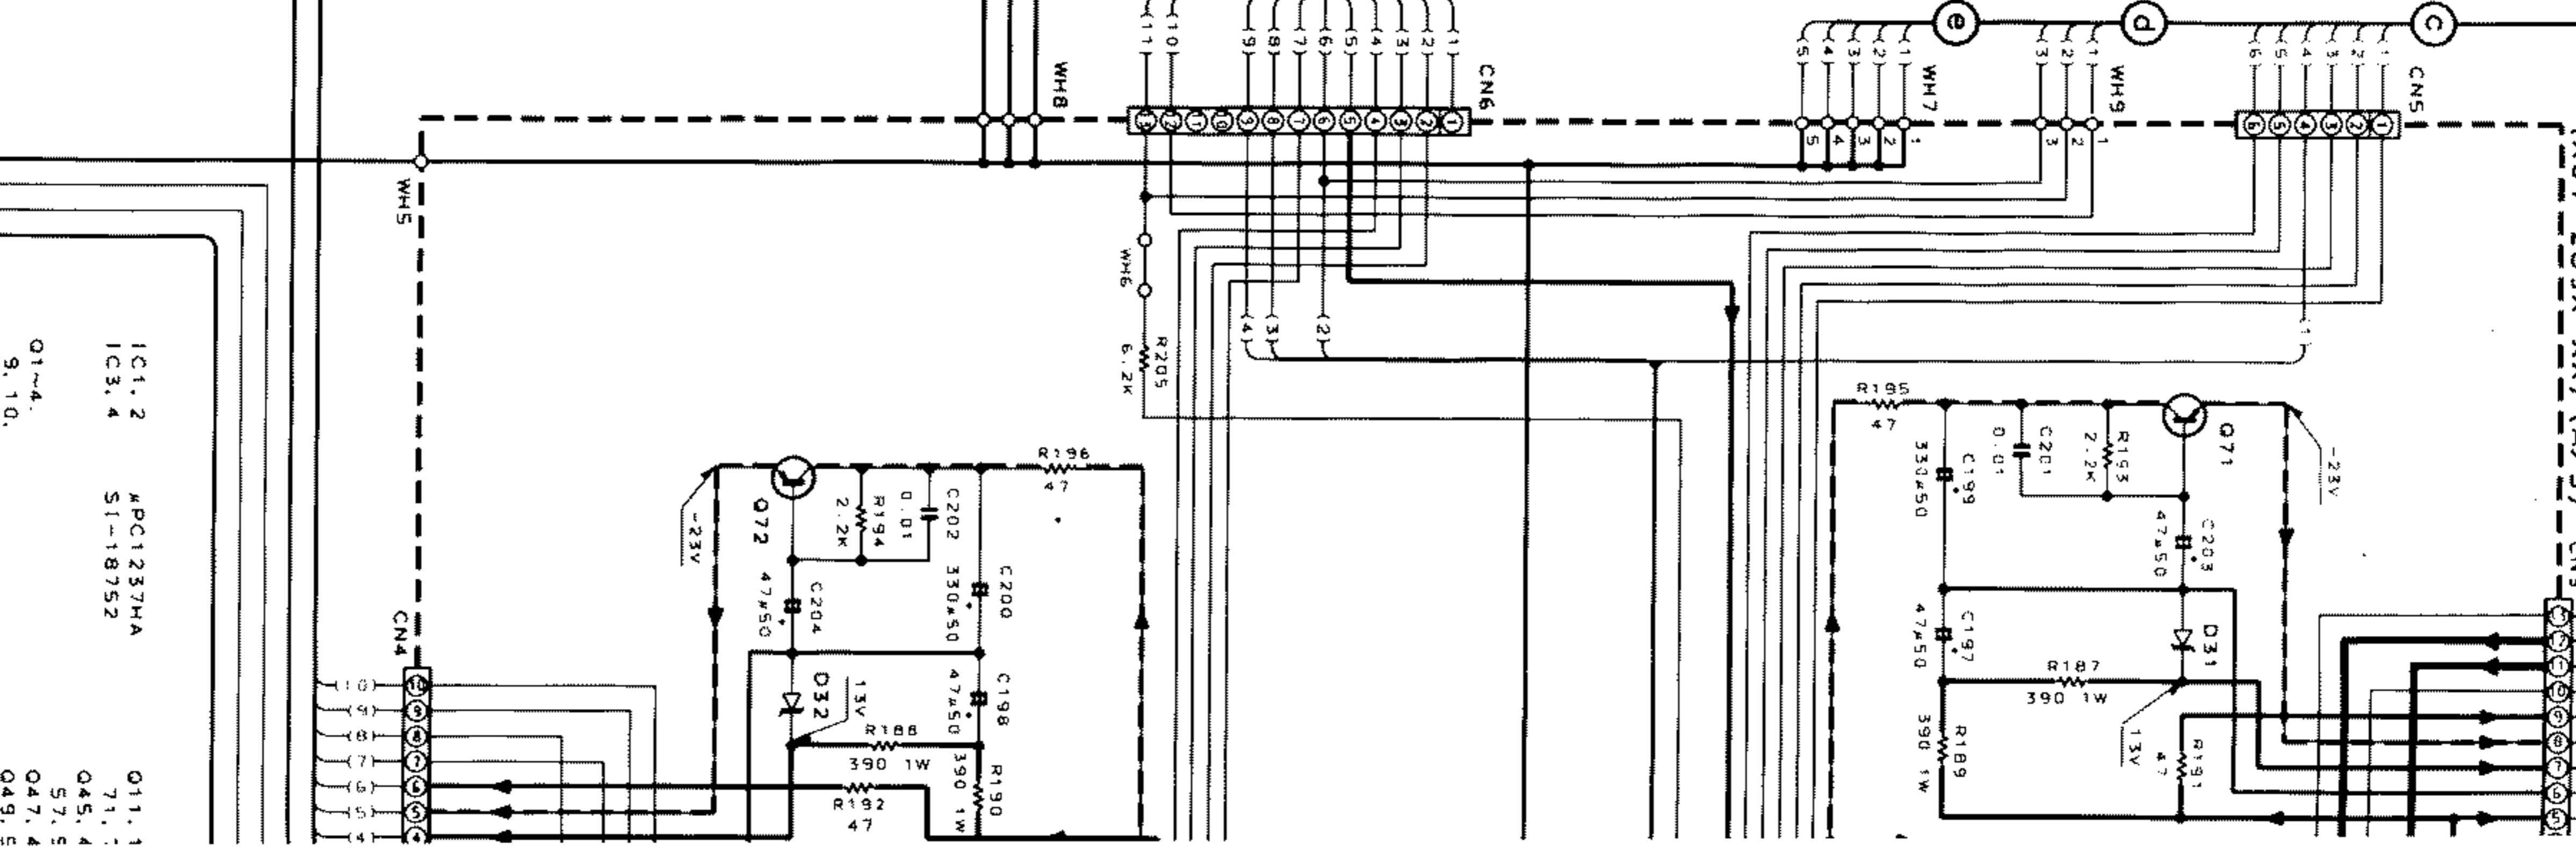

- Q1~4. 9.10.
- Q49. 5. 21~24.
- Q51. 6. 29. 30.
- Q59. 6. 35. 36
- Q5~8. 25A992 (F. E)
- Q5~28. 25C1845 (F. E)
- Q73~7. 081. 6

- IC1. 2. PDI1337HA
- IC3. 4. SI-18752

- Q11. 1. 71. 1.
- Q45. 4. 57. 5
- Q47. 4. 63. 6
- Q49. 5. 63. 6
- Q51. 6. 63. 6
- Q59. 6. 63. 6
- Q81. 6. 081. 6

SPECIFICATIONS

(For U.S.A. and other country)

Power Amplifier unit (B-922)
Rated power output
For the U.S.A. and Canada
(LOW)

37 watts per channel minimum RMS, both Channels driven, at 6 Ω from 400 Hz to 400 Hz with no more than 0.08% total harmonic distortion

(HIGH)

20 watts per channel minimum RMS, both Channels driven, at 6 Ω from 400 Hz to 20,000 Hz with no more than 0.08% total harmonic distortion

For other countries

(IHF'66) From 40 Hz to 400 Hz, 0.08% T.H.D.
at 6 Ω (LOW) 40 W + 40 W
From 400 Hz to 20 KHz, 0.08% T.H.D.
at 6 Ω (HIGH) 25 W + 25 W
(IEC/NF)
From 63 Hz to 400 Hz, 0.7% T.H.D.
(LOW) 35 W + 35 W (at 8 Ω)
..... 40 W + 40 W (at 6 Ω)
From 400 Hz to 12,500 Hz, 0.7% T.H.D.
(HIGH) 20 W + 20 W (at 8 Ω)
..... 25 W + 25 W (at 6 Ω)

Presence 1 KHz at 8 Ω 20 W + 20 W
Total harmonic distortion
..... 0.08% (40 Hz ~ 20 KHz Rated power 6 Ω)
..... 0.005% 1 KHz, Rated power 6 Ω)

Frequency response 40 Hz ~ 70 KHz, + 0 dB, -3 dB
Signal to noise ratio 105 dB (IHF'66) / 90 dB (IHF'78)

N.B. circuit (-30 dB Volume level) +13 dB (at 60 Hz)

[General]
Power consumption 190 W
Dimensions W : 270 mm (10-5/8")
H : 120 mm (4-3/4")
D : 330 mm (13")
Weight (net) 7.8 kg (17.2 lb)

(For U.K. and Europe)

Rated power output
(IEC/NF)

From 63 Hz to 400 Hz, 0.7% T.H.D.
(LOW) 35 W + 35 W (at 8 Ω)
..... 40 W + 40 W (at 6 Ω)
From 400 Hz to 12,500 Hz, 0.7% T.H.D.
(HIGH) 20 W + 20 W (at 8 Ω)
..... 25 W + 25 W (at 6 Ω)

(DIN)

1 KHz at 8 Ω 35 W + 35 W (LOW)
20 W + 20 W (HIGH)
1 KHz at 6Ω 40 W + 40 W (LOW)
25 W + 25 W (HIGH)

Presence 1 KHz at 8 Ω 20 W + 20 W
Total harmonic distortion
..... 0.08% (40 Hz ~ 20 KHz, Rated power 6 Ω)
..... 0.005% (1 KHz, Rated power 6 Ω)

Frequency response 40 Hz ~ 70 KHz, + 0 dB, -3 dB
Signal to noise ratio 105 dB (IHF'66) / 90 dB (IHF'78)
N.B. circuit (-30 dB Volume level) +13 dB (at 60 Hz)

[General]

Power consumption 190 W
Dimensions W : 270 mm (10-5/8")
H : 120 mm (4-3/4")
D : 330 mm (13")
Weight (net) 7.8 kg (17.2 lb)

KENWOOD CORPORATION

Shinagawa Building, 1-5-2 Shinagawa, Shinagawa-ku, Tokyo 150 Japan
KENWOOD U.S.A. CORPORATION
2201 East Dominguez Street, Long Beach, CA 90801
550 Clark Drive, South Cove, N.J. 07028, U.S.A.
KENWOOD ELECTRONICS CANADA INC.
6070 KESTREL ROAD, MISSISSAUGA, ONTARIO L5T 1S8
TRIO-KENWOOD U.K. LIMITED
KENWOOD House, Dwight Road, Watford, Herts. WD1 8BB, United Kingdom
KENWOOD ELECTRONICS BENELUX N.V.
Meynesteerweg 118 B-1930 Zaventem, Belgium
KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rheinbunnen-Str. 5, 50555 Housensham, Germany
TRIO-KENWOOD FRANCE S.A.
3 Boulevard Nier, 75008 Paris, France
KENWOOD LINEAR S.D.A.
2025, MILANO VIA ABBE 50, ITALY
KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (INCORPORATED IN N.S.W.)
P.O. Box 504, B. Figtree Drive, Australia Centre, Hornsby NSW 2150, Australia
KENWOOD & LEE ELECTRONICS, LTD.
Wang Kee Building 4th Floor, 34-37, Connaught Road, Central, Hong Kong

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No.	Address	New Parts	Parts No.	Description	Desti- nation	Re- marks
参照番号	位置	新	部品番号	部品名/規格	仕	備考
C15, 16			CE04KW1H220M	ELECTRO 220UF 50VV		
C17, 18			CF92FV1H472J	MF 4700PF J		
C19, 20			CC45FSL1H101J	CERAMIC 100PF J		
C21, 22			CF92FV1H472J	MF 4700PF J		
C25, 26			CF92FV1H104J	MF 0.10UF J		
C27, 28			CC45FSL1H100D	CERAMIC 10PF 0		
C29, 32			CE04KW1H010M	ELECTRO 1.0UF 50VV		
C35, 36			CF92FV1H102J	MF 1000PF J		
C37, 40			CE04KW1H2R2M	ELECTRO 2.2UF 50VV		
C41, 42			CC45FSL1H221J	CERAMIC 220PF J		
C43, 46			CE04KW1H010M	ELECTRO 1.0UF 50VV		
C49, 50			CF92FV1H102J	MF 1000PF J		
C51, 52			CE04KW1C470M	ELECTRO 47UF 16VV		
C53, 54			CE04KW1C220M	ELECTRO 22UF 16VV		
C61, 62			CE04KW1H220M	ELECTRO 22UF 50VV		
C63, 66			CF92FV1H104J	MF 0.10UF J		
C67, 68			CE04KW1C220M	ELECTRO 22UF 16VV		
C69			CE04KW1E102M	ELECTRO 1000UF 25VV		
C70, 71			CF92FV1H104J	MF 0.10UF J		
C72			CE04KW1C471M	ELECTRO 470UF 16VV		
C73			CE04KW1E471M	ELECTRO 470UF 25VV		
C74, 75			CF92FV1H104J	MF 0.10UF J		
C76			CE04KW1C101M	ELECTRO 100UF 16VV		
C77			CE04KW1J221M	ELECTRO 220UF 63VV		
C78			CE04KW1V470M	ELECTRO 47UF 35VV		
C79			CE04KW1H221M	ELECTRO 220UF 50VV		
C80			CE04KW1A101M	ELECTRO 100UF 10VV		
C81			CE04KW1C101M	ELECTRO 100UF 16VV		
C82			CE04KW1V100M	ELECTRO 10UF 35VV		
C91			CE04KW1V100M	ELECTRO 10UF 35VV		
C92			CE04JW1V100M	ELECTRO 10UF 35VV		
C93			C91-0700-05	CERAMIC 0.1UF J		
C94			CF92FV1H102J	MF 1000PF J		
C96, 97			CC45FSL1H221J	CERAMIC 220PF J		
C98, 99			CE04KW1H010M	ELECTRO 1.0UF 50VV		
C100			CE04JW1H010M	ELECTRO 1.0UF 50VV		
C101-103			C91-0757-05	CERAMIC 1000PF K		
J1			E08-1508-05	RECTANGULAR RECEPTACLE 1SP PRE		
J2			E08-0411-05	RECTANGULAR RECEPTACLE 4P PRE		
F1			F05-4025-05	FUSE (SEMKO) (250V T4A)	YN	
F1			F05-4028-05	FUSE (UL)	K	
F1			F06-2021-05	FUSE (SEMKO) (250V T2A)	YN	
F2			F53-0018-05	FUSE (SEMKO)	YHXB	
F2			F53-0032-05	FUSE (UL)	K	
F4			F53-0019-05	FUSE (SEMKO)	YHXB	
F4			F53-0033-05	FUSE (UL)	K	
CM7, 8			J11-0098-05	WIRE CRMPER		
			J13-0076-05	FUSE CLIP		
T1			L07-0412-05	POWER TRANSFORMER		
X1			L78-0267-05	RESONATOR		
E	2C		N35-3008-46	BINDING HEAD MACHIN SCREW		
E	2C		N89-3008-45	BINDING HEAD TAPTITE SCREW		

Ref. No.	Address	New Parts	Parts No.	Description	Desti- nation	Re- marks
参照番号	位置	新	部品番号	部品名/規格	仕	備考
CP1			R90-0802-05	MULTI-COMP 100KX10 J 1/4W		
CP2			R90-0492-05	MULTI-COMP 100KX8 J 1/6W		
CP3			R90-0493-05	MULTI-COMP 100KX9 J 1/6W		
R64, 65			RS14K830151J	FL-PROOF RS 150 J 2W		
R73, 74			RD14NB2E821J	RD 820 J 1/4W		
R117			R92-0173-05	RC 2.2M H 1/2W	K	
R119-122			RD14NB2E100J	RD 10 J 1/4W		
K1, 2			S51-2094-05	MAGNETIC RELAY		
S1, 2			S40-1064-05	PUSH SWITCH POWER METER		
S3			S31-2322-05	SLIDE SWITCH VOLTAGE SELECTOR	K	
S3			S62-0001-05	SLIDE SWITCH VOLTAGE SELECTOR	Y	
D1, 23			H5S104	DIODE		
D1, 28			1SS133	DIODE		
D31			S3V20	DIODE		
D32			S5688B	DIODE		
D33			HZ58.2N(B2)	ZENER DIODE		
D33			RD8.26S(B2)	ZENER DIODE		
D34			HZ55.6M(B2)	ZENER DIODE		
D34			RD5.6ES(B2)	ZENER DIODE		
D35			H5S104	DIODE		
D35			1SS133	DIODE		
D37			H5S104	DIODE		
D37			1SS133	DIODE		
D38			S5688B	DIODE		
D39, 40			H5S104	DIODE		
D39, 40			1SS133	DIODE		
D42, 45			H5S104	DIODE		
D42, 45			1SS133	DIODE		
D46			HZ53.9N(B2)	ZENER DIODE		
D46			RD3.9ES(B2)	ZENER DIODE		
D47, 48			H5S104	DIODE		
D47, 48			1SS133	DIODE		
D51, 56			H5S104	DIODE		
D51, 56			1SS133	DIODE		
ED1			PIP8JM9	FLUORESCENT INDICATOR TUBE		
IC1, 4			NJM4565B-D	IC(OP AMP X2)		
IC1, 4			RC4565D-D	IC(OP AMP X2)		
IC11			UPC7812HF	IC(VOLTAGE REGULATOR/ +12V)		
IC12			UPC7912HF	IC(VOLTAGE REGULATOR/ -12V)		
IC13			UPC7812HF	IC(VOLTAGE REGULATOR/ +12V)		
IC14			UPC7805HF	IC(VOLTAGE REGULATOR/ +5V)		
IC15			H51951ASL	IC(SYSTEM RESET)		
IC15			PST529D	IC(SYSTEM RESET)		
IC16			UPD75028CC-503	IC		
IC17			NJM78L05A	IC(VOLTAGE REGULATOR/ +5V)		
Q1, 4			2SA992(F, E)	TRANSISTOR		
Q11			2SB941(Q, P)	TRANSISTOR		
Q12			2SA954(L, K)	TRANSISTOR		
Q13			2SD1266(Q, P)	TRANSISTOR		
Q14, 15			2SC1740S(Q, R)	TRANSISTOR		
Q14, 15			2SC3311A(Q, R)	TRANSISTOR		
Q16			2SA992(F, E)	TRANSISTOR		
Q17, 18			2SC3246(H, J)	TRANSISTOR		
Q20, 36			DTA124ES	DIGITAL TRANSISTOR		

L:Scandinavia M:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AF/ES(Europe) X:Australia M:Other Areas

△ indicates safety critical components

L:Scandinavia M:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AF/ES(Europe) X:Australia M:Other Areas

△ indicates safety critical components

x New Parts
Parts without Parts No. are not supplied
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert

NO.1

Table with columns: Ref. No., Address, New Parts, Parts No., Description, Destination, Remarks. Includes sub-section B-922 and various component listings.

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AM(F Europe) X:Australia M:Other Areas

⚠ indicates safety critical components

x New Parts
Parts without Parts No. are not supplied
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert

NO.2

Table with columns: Ref. No., Address, New Parts, Parts No., Description, Destination, Remarks. Includes sub-section MAIN AMPLIFIER UNIT (X07-2690-11.K,0-21.Y,M,2-71.X,E).

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AM(F Europe) X:Australia M:Other Areas

⚠ indicates safety critical components

PARTS LIST

B-922

x New Parts
Parts without Parts No. are not supplied
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert

NO.3

Table with columns: Ref. No., Address, New Parts, Parts No., Description, Destination, Remarks. Includes various component listings.

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AM(F Europe) X:Australia M:Other Areas

⚠ indicates safety critical components

x New Parts
Parts without Parts No. are not supplied
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert

NO.4

Table with columns: Ref. No., Address, New Parts, Parts No., Description, Destination, Remarks. Includes sub-section ACCESSORY UNIT (X13-6910-11.K,0-21.M,2-71.X,E,2-91.Y).

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AM(F Europe) X:Australia M:Other Areas

⚠ indicates safety critical components

PARTS LIST

B-922