
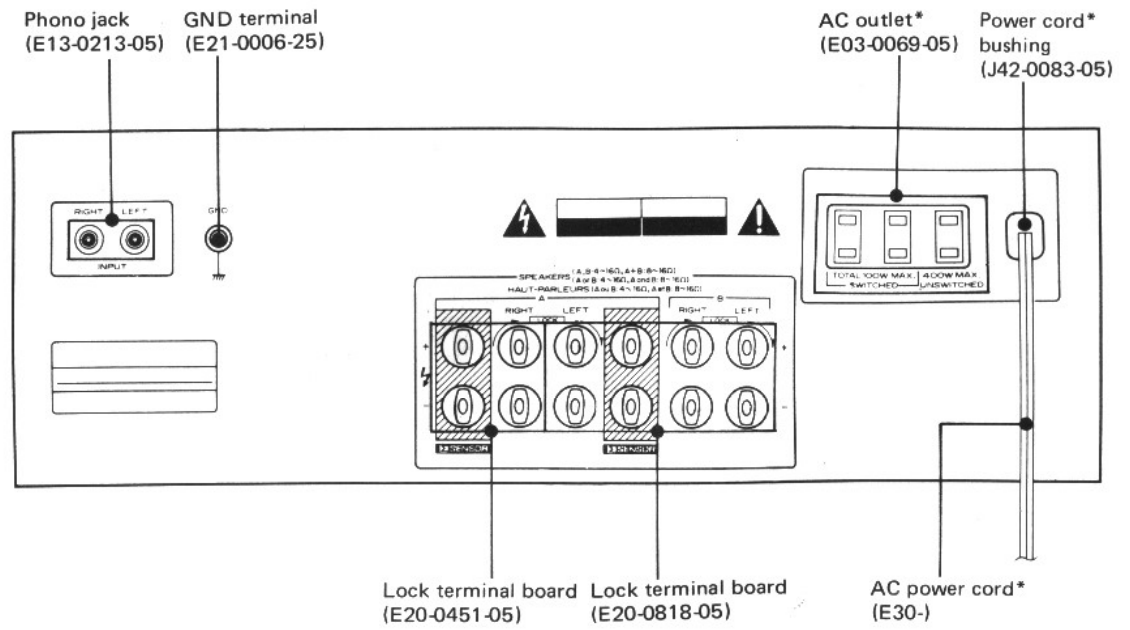


KENWOOD BASIC M2

STEREO POWER AMPLIFIER

SERVICE MANUAL

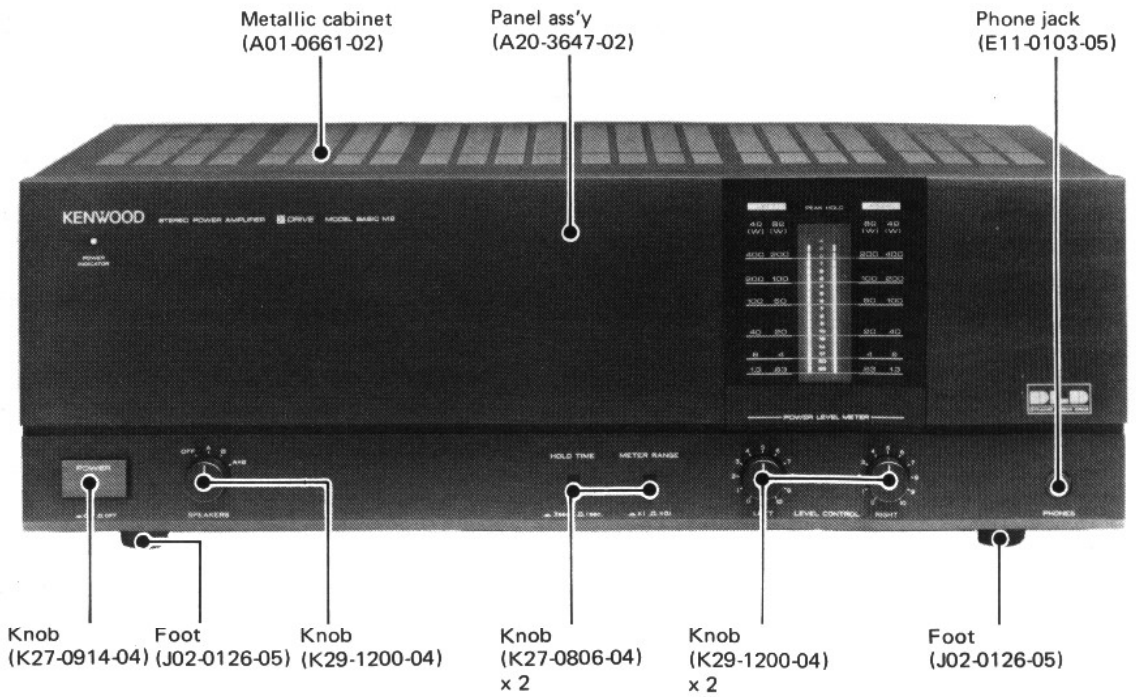

*Refer to parts list on page 9.

ADJUSTMENT

ADJUSTMENT

NO.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	AMPLIFIER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
Unless otherwise specified, the individual switches should be set as follows: SPEAKER : B							
1	OFFSET (X07-2030-11)	—	Connect a DC voltmeter to SPEAKER B terminal.	VOLUME: 0	VR1 (L) VR2 (R)	0V	(a)
2	IDLE CURRENT (X07-2030-11)	—	Connect a DC voltmeter across R85 (L) R86 (R)	VOLUME: 0	VR3 (L) VR4 (R)	13 ± 8 mV	(b)
3	POWER METER (1)	(A) 1 kHz, 1 V	(B)	METER RANGE : x 1 Adjust LEVEL CONTROL so that AC voltmeter indicates 40 V	VR3	Adjust the variable resistor so that the 200 W (8Ω) FL indicator lights.	
4	POWER METER (2)	(A) 1 kHz, 0,1 V	(B)	METER RANGE: x 0.1 Adjust LEVEL CONTROL so that AC voltmeter indicates 4 V	VR1	Adjust the variable resistor so that the 2 W (8Ω) FL indicator lights.	

Power Amplifier Check

After completing power amplifier repairs, be sure to confirm that waveforms are present as indicated below. Power amplifier operation is not normal if these waveforms cannot be observed.

It is not possible to observe both waveform C and D at the same time. Be sure to observe them individually, and be sure that no other test equipment is connected to the amplifier at the same time as the oscilloscope.

Test Condition

1. Apply a 50Hz sine wave to the INPUT terminal.
2. Connect an 8 ohm dummy load to the speaker terminals.
3. Connect the oscilloscope across the resistor (R67~74) of high output circuit.

4. Set the volume control of the BASIC M2 to 0, then turn on the power.
5. When the LEVEL CONTROL of the BASIC M2 is turned up slowly, the waveform shown in Figure C should appear suddenly at a certain point. This is evidence that the high output circuit has begun operating. Stop turning the volume control at the point where this waveform appears.
6. Momentarily turn off the power to the BASIC M2.
7. Connect the oscilloscope across the resistor (R75~82) of low output circuit.
8. Turn the power to the BASIC M2 back on.
9. The waveform shown in Figure D should appear.

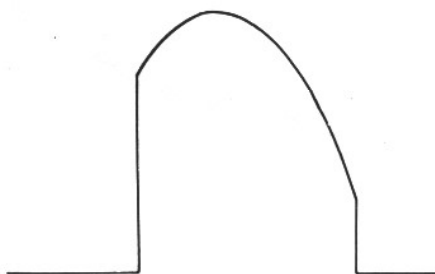


Fig. C


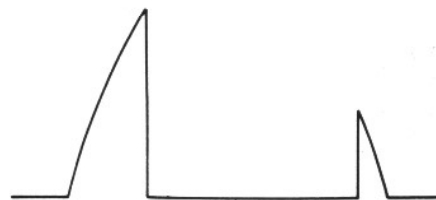


Fig. D


TEST INSTRUMENT CONNECTION

TEST INSTRUMENTS CONNECTION

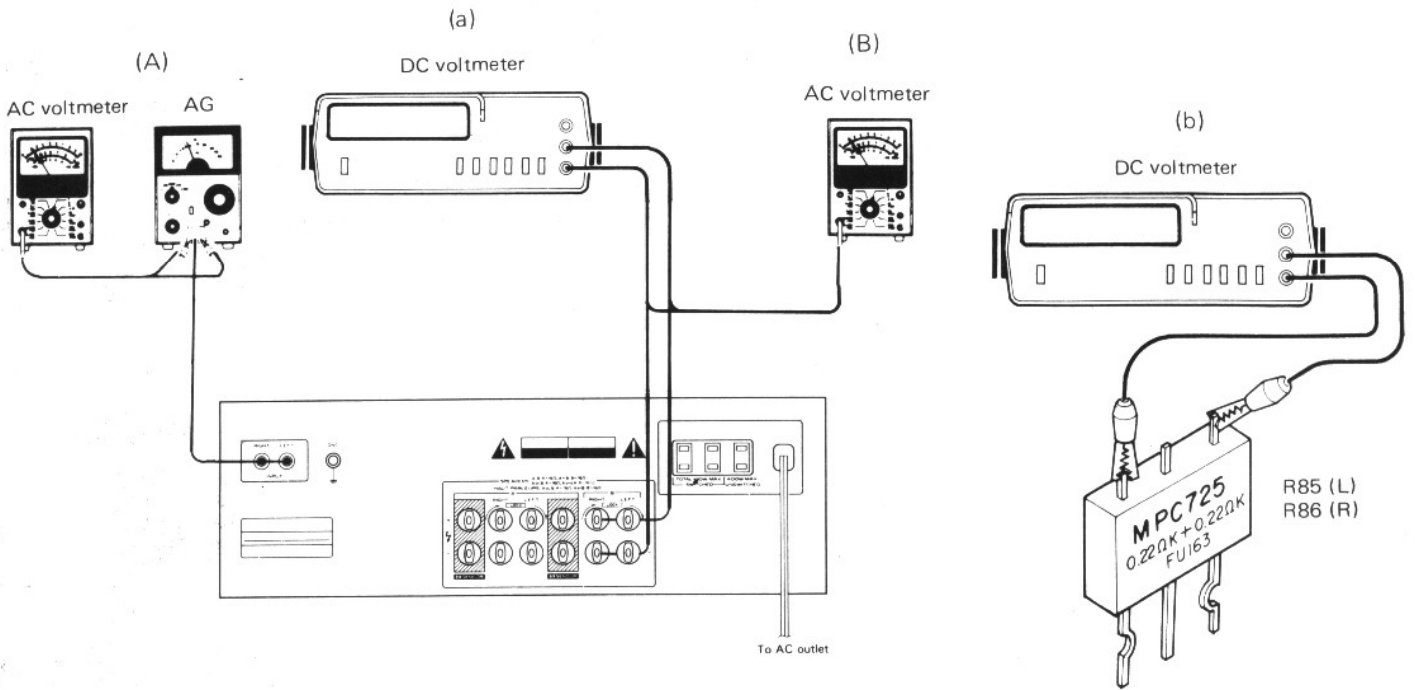


PC BOARD

SUB (X13-4290-10)
Component side view

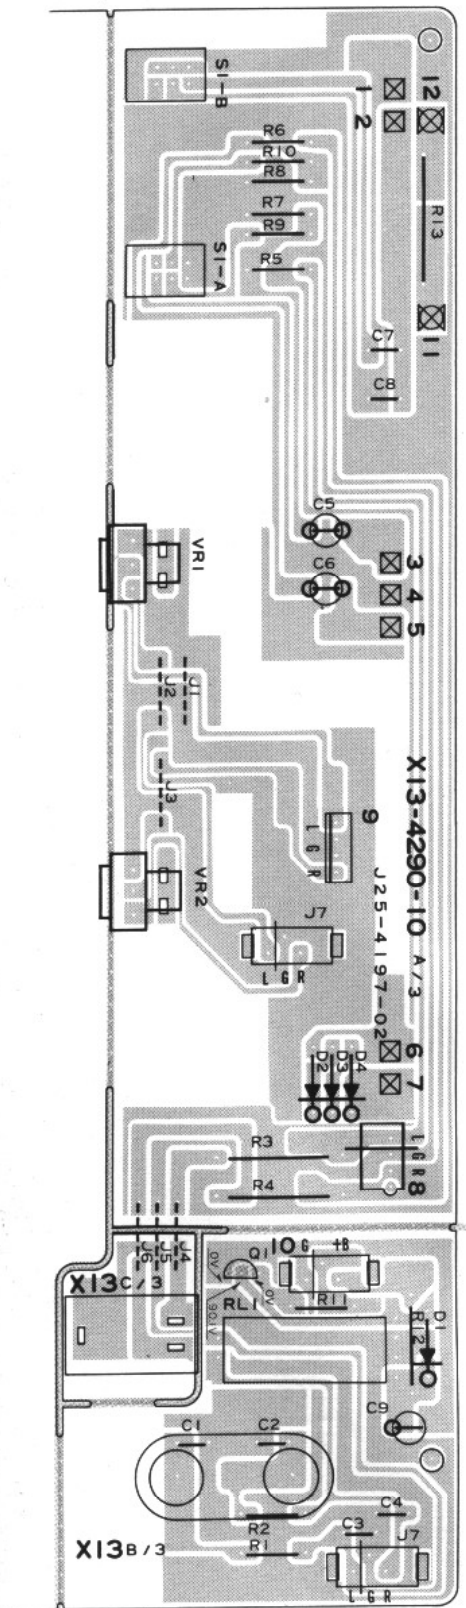


POWER SUPPLY (X00-2230-11) Component side view

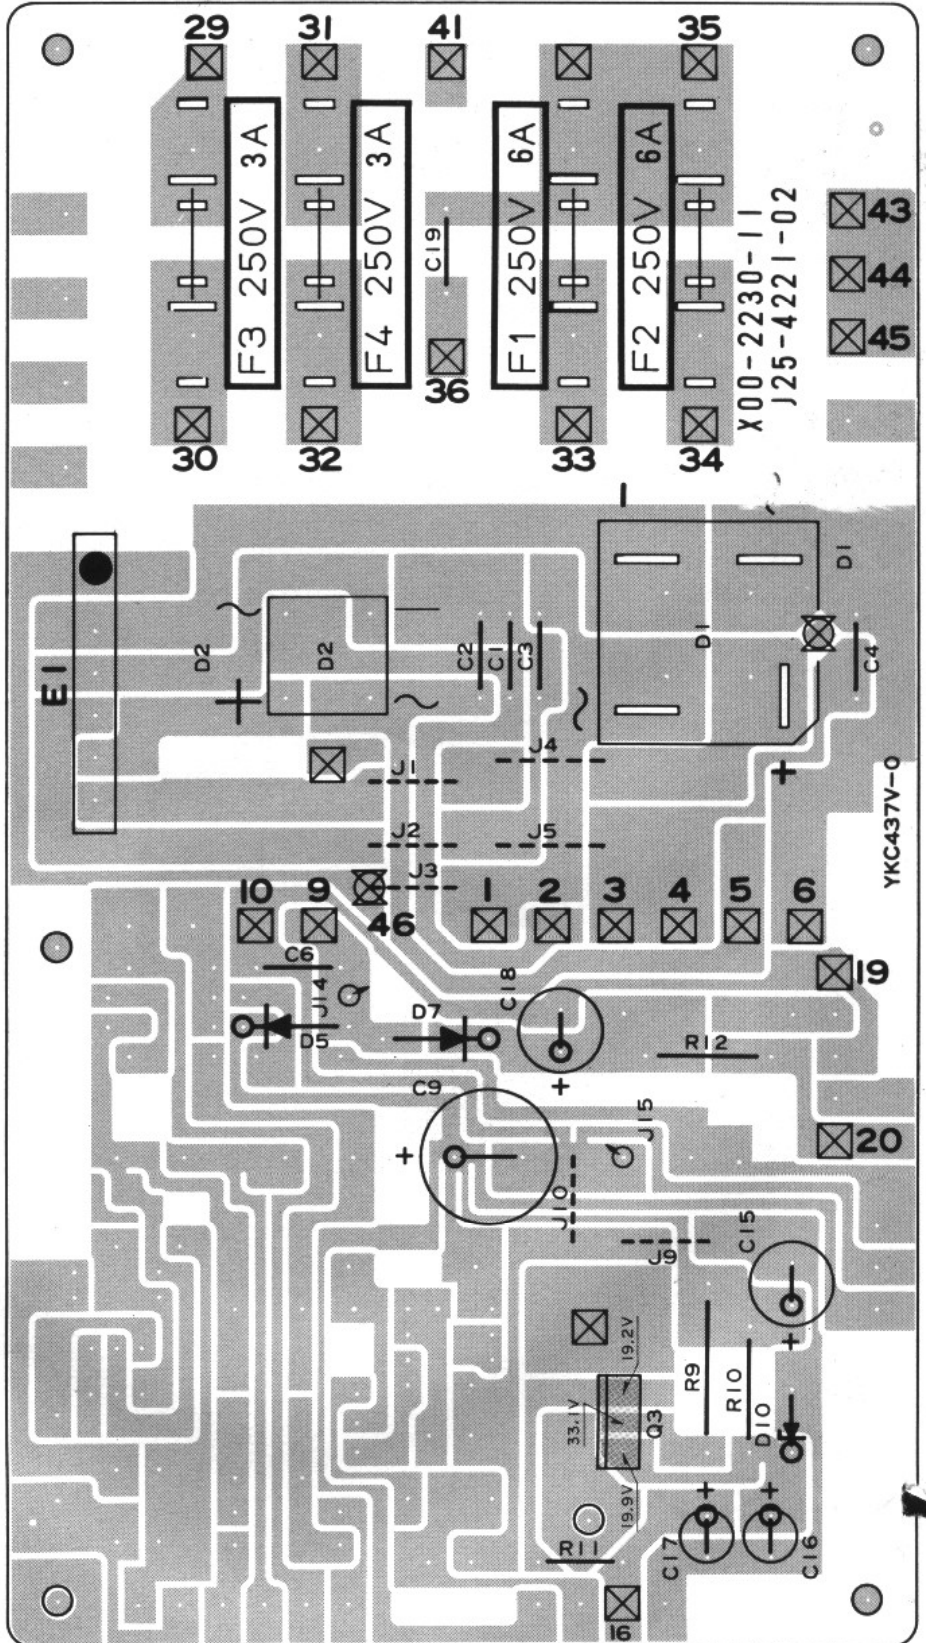


Refer to the schematic diagram for the values of resistors and capacitors.
The PC board drawing is viewing from the side easy to check.


DISPLAY (X25-1820-12) Component side view

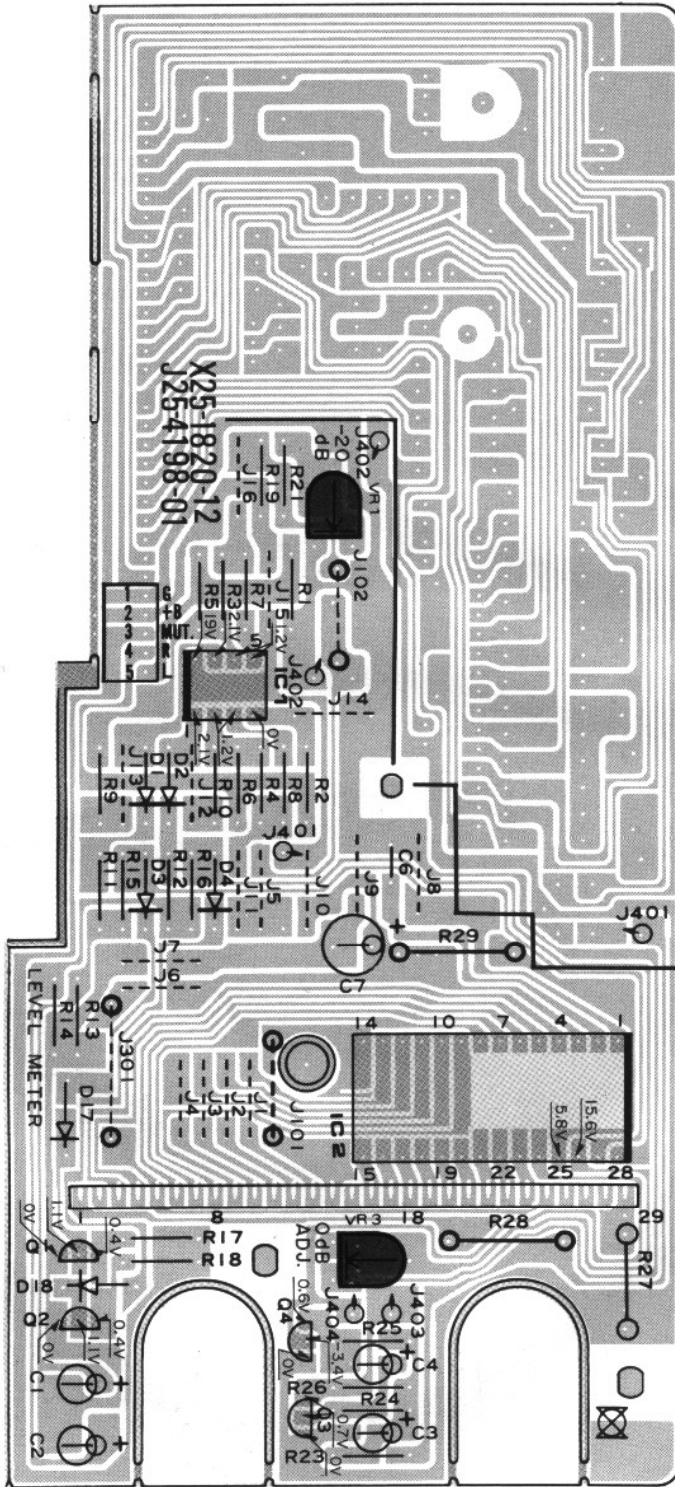

Refer to the schematic diagram for the values of resistors and capacitors. The PC board drawing is viewing from the side easy to check.


POWER AMP (X07-2030-11) Co

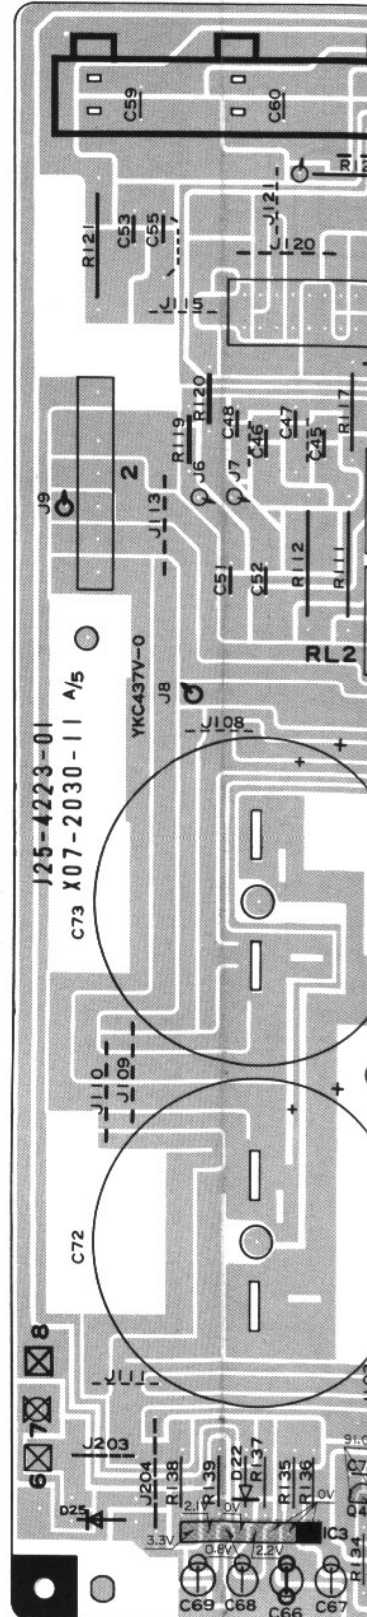


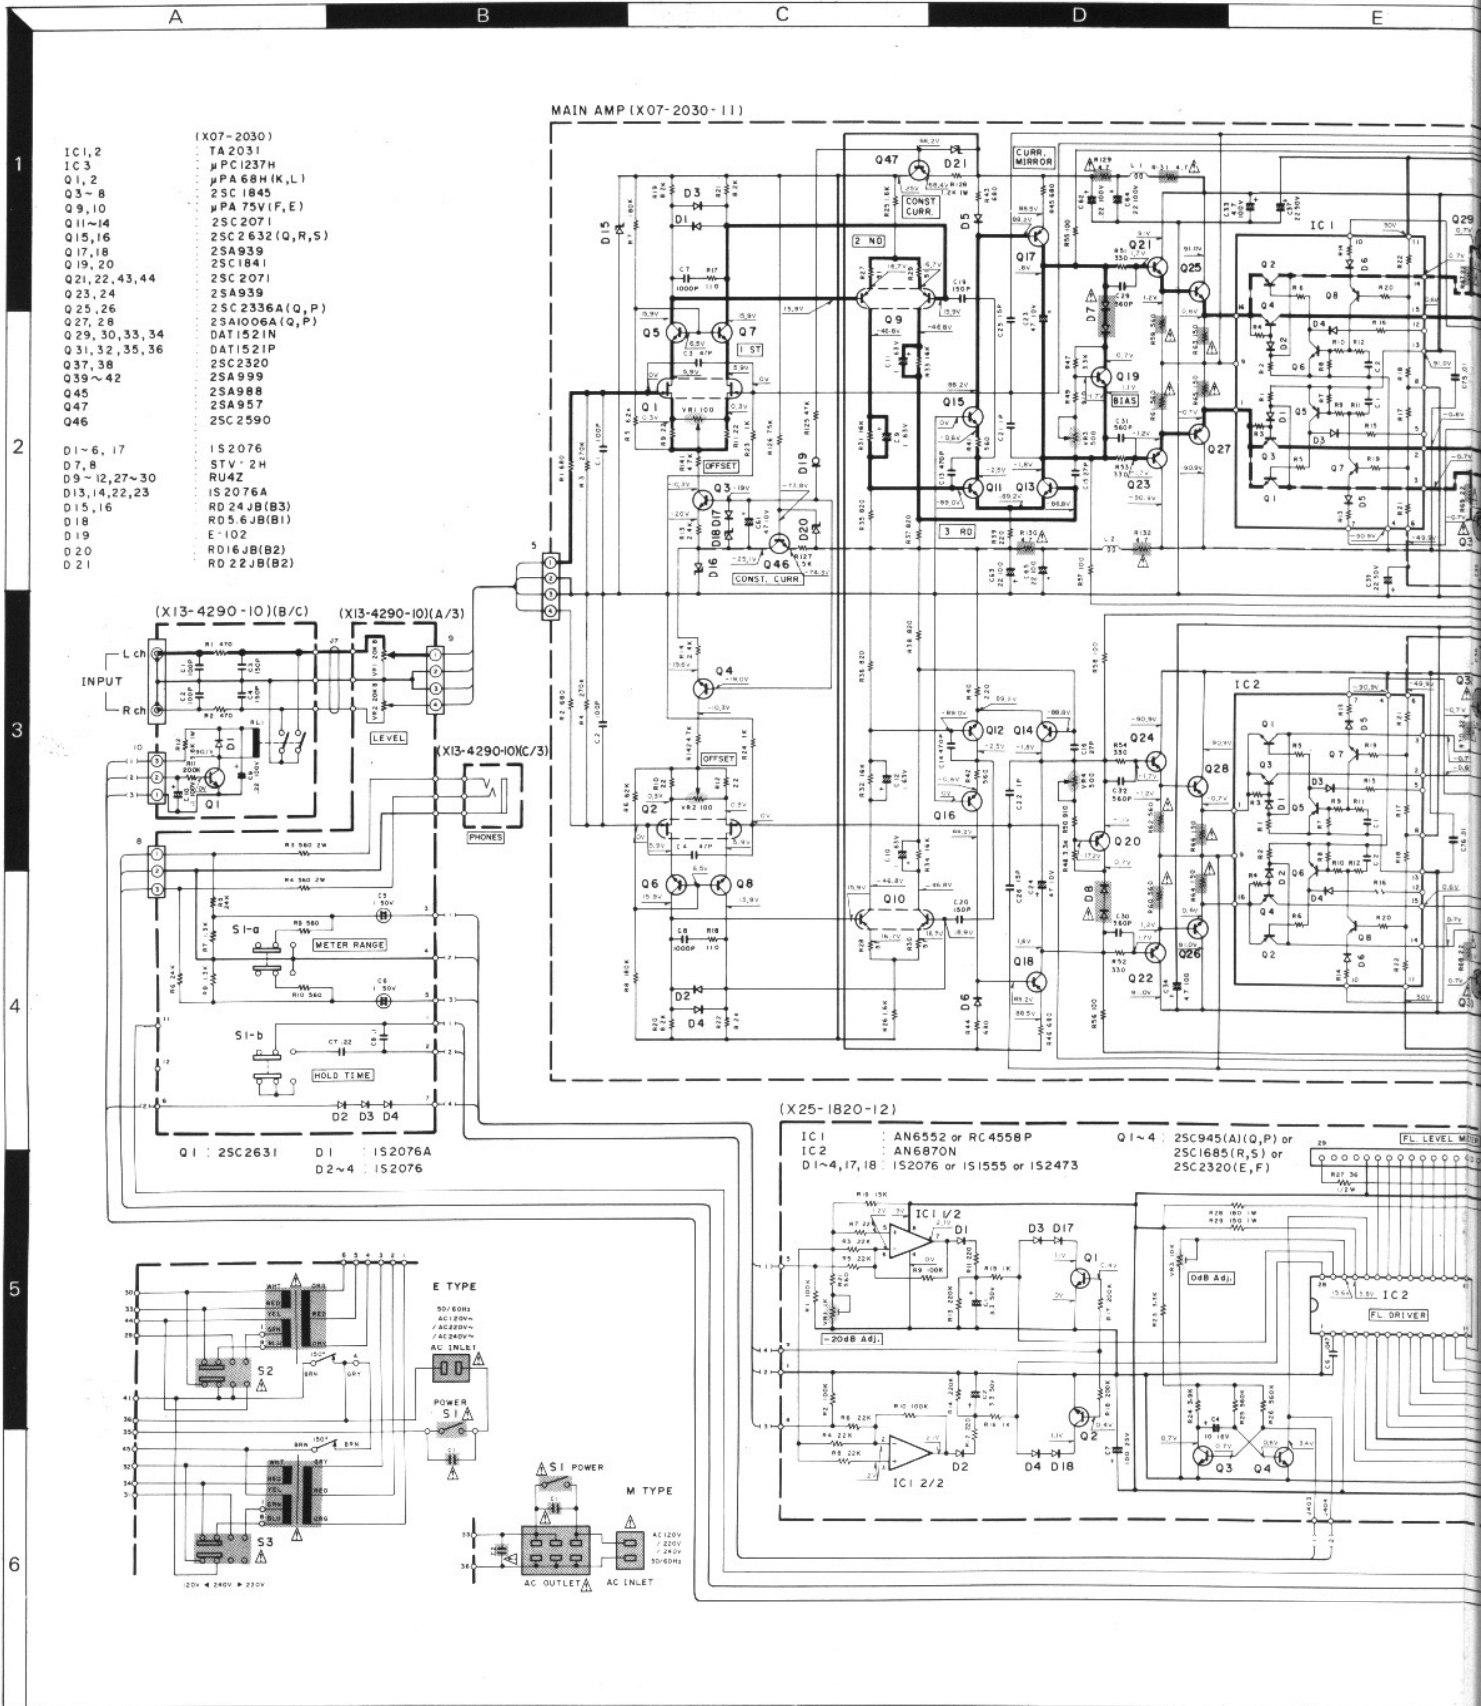


- 2SA988
- 2SA999
- 2SA999
- 2SC1685
- 2SC1841




- 2SC1845
- 2SC2320
- 2SC2631
- 2SC2632
- 2SC945



- 2SA939
- 2SC2071
- 2SC2590




- 2SA957
- 2SA1006B
- 2SC2368B



RC4558P

BASIC M2

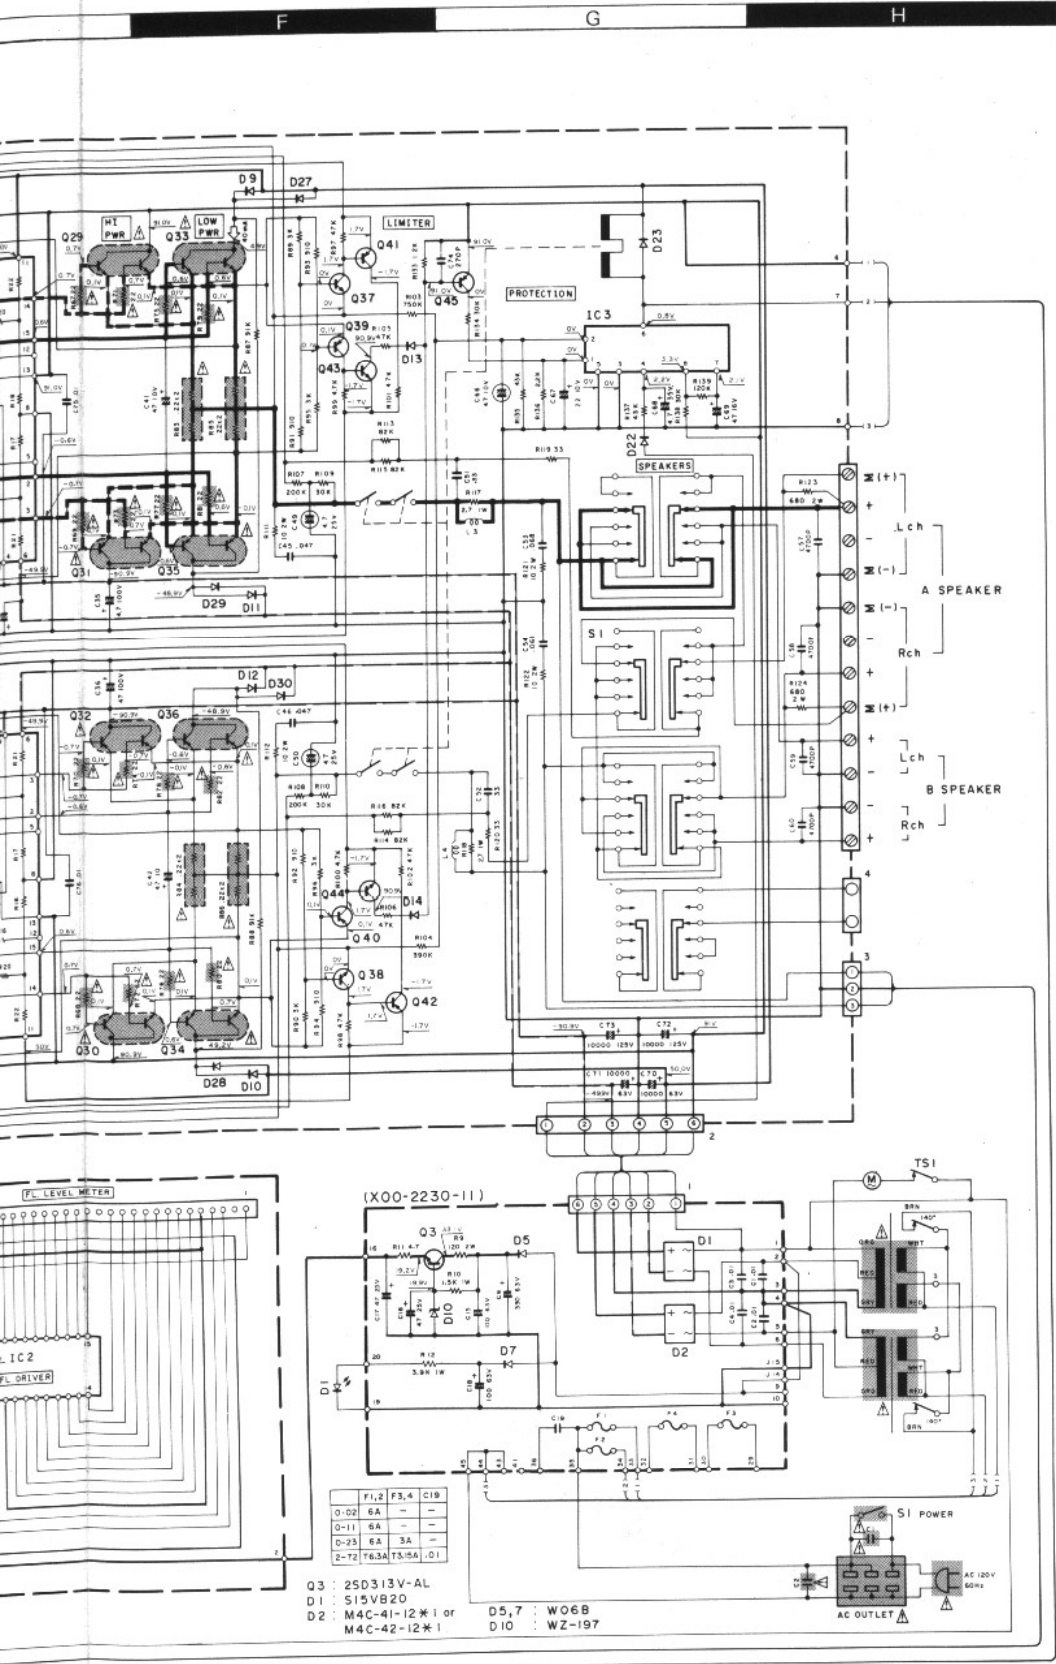

SPECIFICATION

Power output

220 watts* per channel minimum RMS, both channels driven, at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.004% total harmonic distortion.

Clipping Power

at 8 ohms242 W
 at 4 ohms324 W

Clipping Headroom

at 8 ohms0.2 dB
 at 4 ohms1.1 dB

Dynamic Power

at 8 ohms325 W
 at 4 ohms484 W

Dynamic Headroom

at 8 ohms1.5 dB
 at 4 ohms2.9 dB

Total Harmonic Distortion

(20 Hz to 20,000 Hz)
 Input to SPEAKER output0.004% at rated power into 8 ohms
 0.004% at 1/2 rated power into 8 ohms
 0.001% at rated power into 8 ohms at 1 kHz

Intermodulation Distortion0.004% at rated power into (60 Hz:7 kHz = 4:1) 8 ohms

Damping FactorMore than 1,000 at 50 Hz, 8 ohms

Transient Response

Rise Time1.8µs
 Slew Rate±100 V/µs

Frequency Response1 Hz to 200 kHz, +0 dB, -3 dB

Signal-to-Noise Ratio120 dB (IHF A Curve)

Speaker ImpedanceAccept 4 ohms to 16 ohms

Input Sensitivity/Impedance

INPUT1 V/47 kohms

General

Power Consumption6.9 A (UL and CSA), 1,350 W (Rated power at 8 ohms)

A.C. OutletsSwitched 2, Unswitched 1

DimensionsW 440 mm (17 5/16")

H 158 mm (6 7/32")

D 373 mm (14-11/16")

Net Weight15.5 kg (34.1 lb)

* Measured pursuant to Federal Trade Commission's Trade Regulation rule on Power Output Claims for Amplifier in U.S.A.

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

• DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.

