

COMPACT DISC PLAYER


DP-470

SERVICE MANUAL

(System K-66, MIDI M-47)

KENWOOD

© 1993-10 PRINTED IN JAPAN
B51-4794-00 (O) 2568

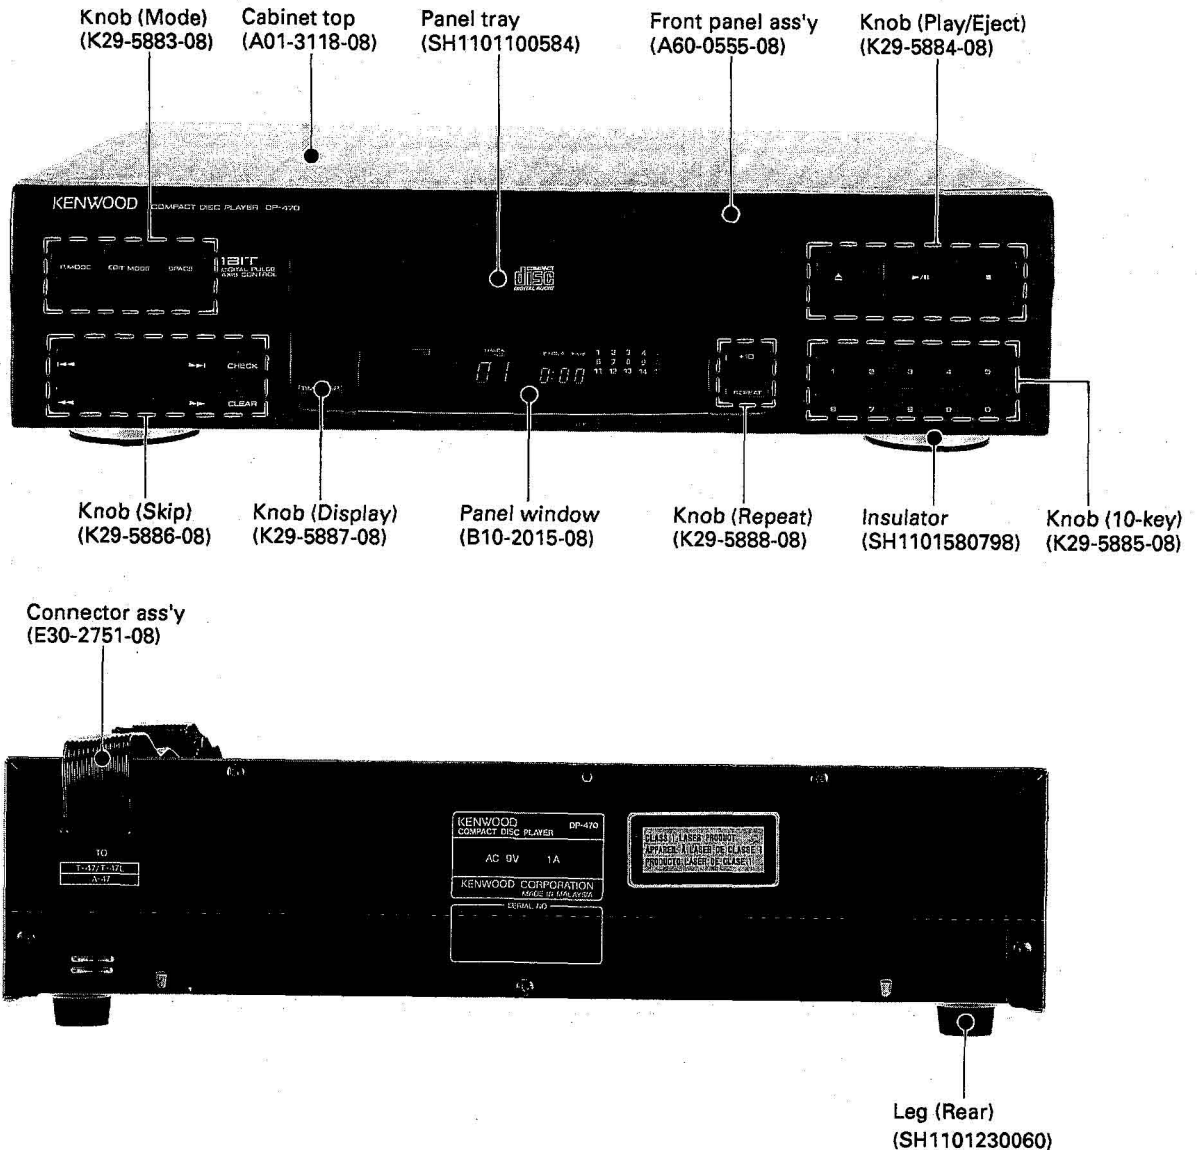

In compliance with Federal Regulations, following are reproductions of labels on, or inside the product relating to laser product safety.

KENWOOD-Corp. certifies this equipment conforms to DHHS Regulations No. 21 CFR 1040. 10, Chapter I, Subchapter J.

DANGER : Laser radiation when open and interlock defeated. AVOID DIRECT EXPOSURE TO BEAM.







DP-470

CONTENTS/ACCESSORIES

CONTENTS

ACCESSORIES	2	MECHANISM OPERATION DESCRIPTION	12
CONTROL	3	ADJUSTMENT	14
REMOTE CONTROL	4	PC BOARD (COMPONENT SIDE VIEW)	17
DISASSEMBLY FOR REPAIR	5	SCHEMATIC DIAGRAM	19
BLOCK DIAGRAM	7	EXPLODED VIEW	
CIRCUIT DESCRIPTION		(MECHANISM)	23
1. Test Mode	8	(UNIT)	24
2. Microprocessor		PARTS LIST	25
: μ PD75216ACW-A65 (IC4)	10	SPECIFICATIONS	BACK COVER

ACCESSORIES

<ul style="list-style-type: none"> • FM indoor antenna 1 (SH1105020014) 	<ul style="list-style-type: none"> • Loop antenna 1 (SH1105020020) 	<ul style="list-style-type: none"> • Remote control unit 1 (W03-4603-08) 
<ul style="list-style-type: none"> • Antenna adaptor (75Ω/300Ω) 1 (SH1105240051) 	<ul style="list-style-type: none"> • Batteries (R6/AA) 2 (-) 	<ul style="list-style-type: none"> • AC plug adaptor (M type only) 1 (SH1305240053) 

(Except for some areas)
For the unit with a European AC plug in areas other than Europe.

All accessories are packed with X-47.

M, X type

System name	Tuner	Amp	Cassette deck	CD player	Speaker
K-66	T-47	A-47	X-47	DP-470	LS-47

T, E type


System name	Tuner	Amp	Cassette deck	CD player	Speaker
MIDI M-47	T-47L	A-47	X-47	DP-470	LS-47

Option	Graphic equalizer
	GE-470


Note related to transportation and movement

Before transporting or moving the CD PLAYER, carry out the following operations.

1. Turn the power ON but do not load a disc.
2. Wait a few seconds and verify that the display shown appears.
3. Turn the power OFF.




CONTROL

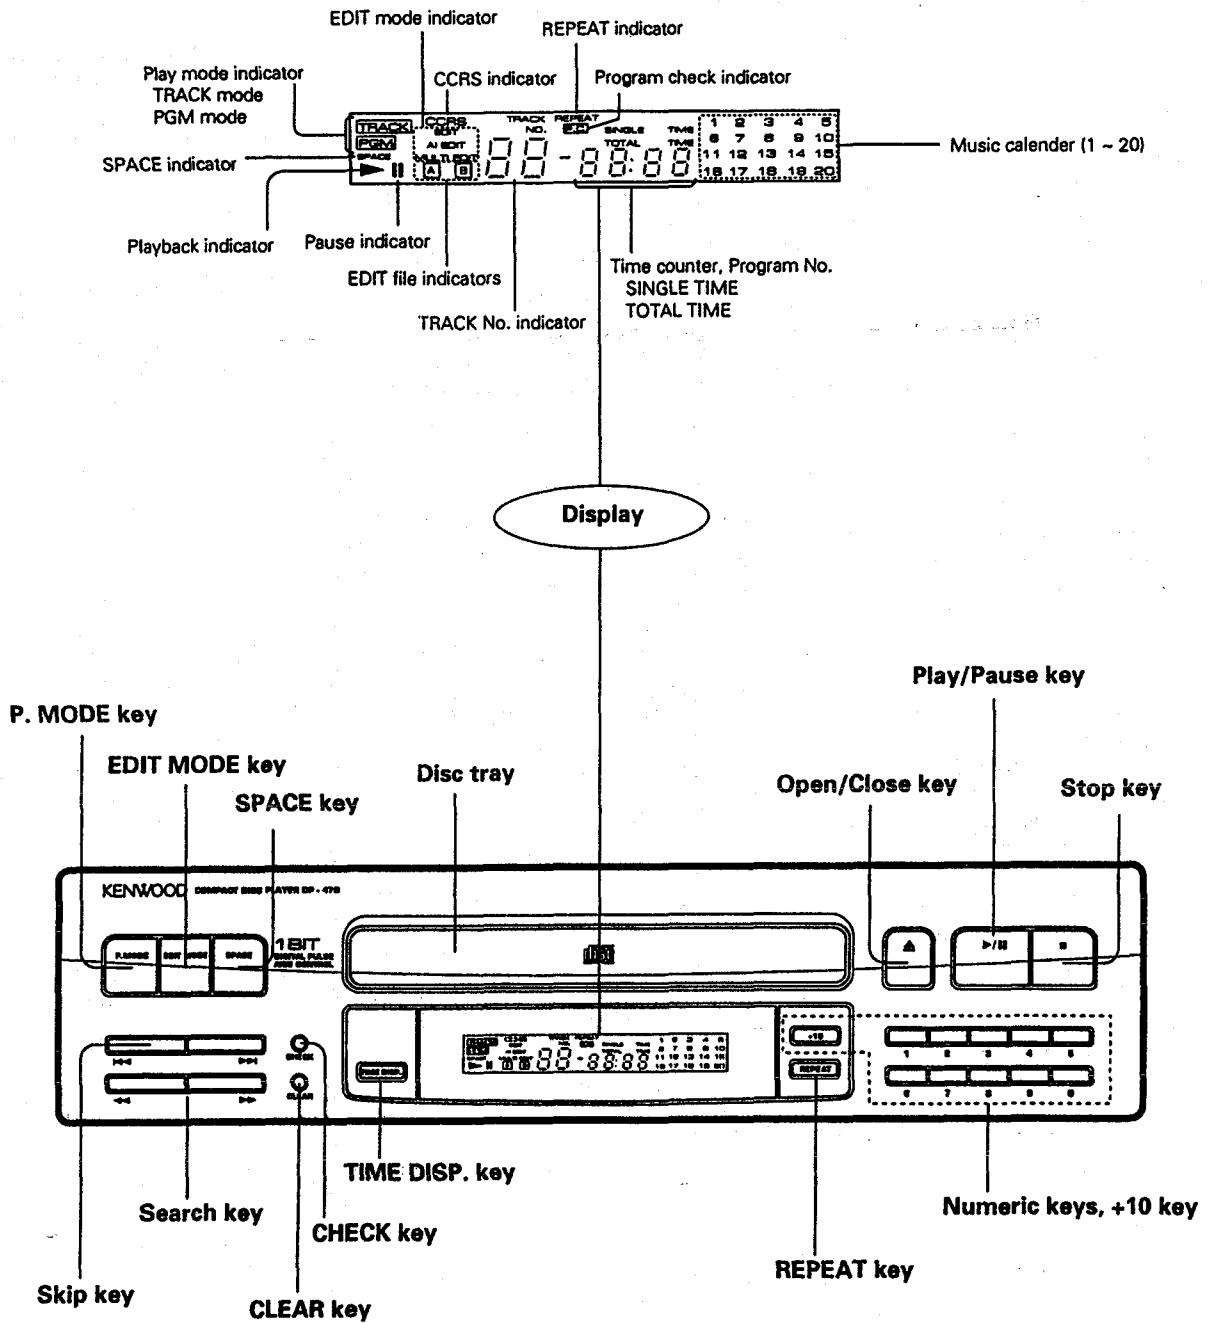

DP-470


REMOTE CONTROL

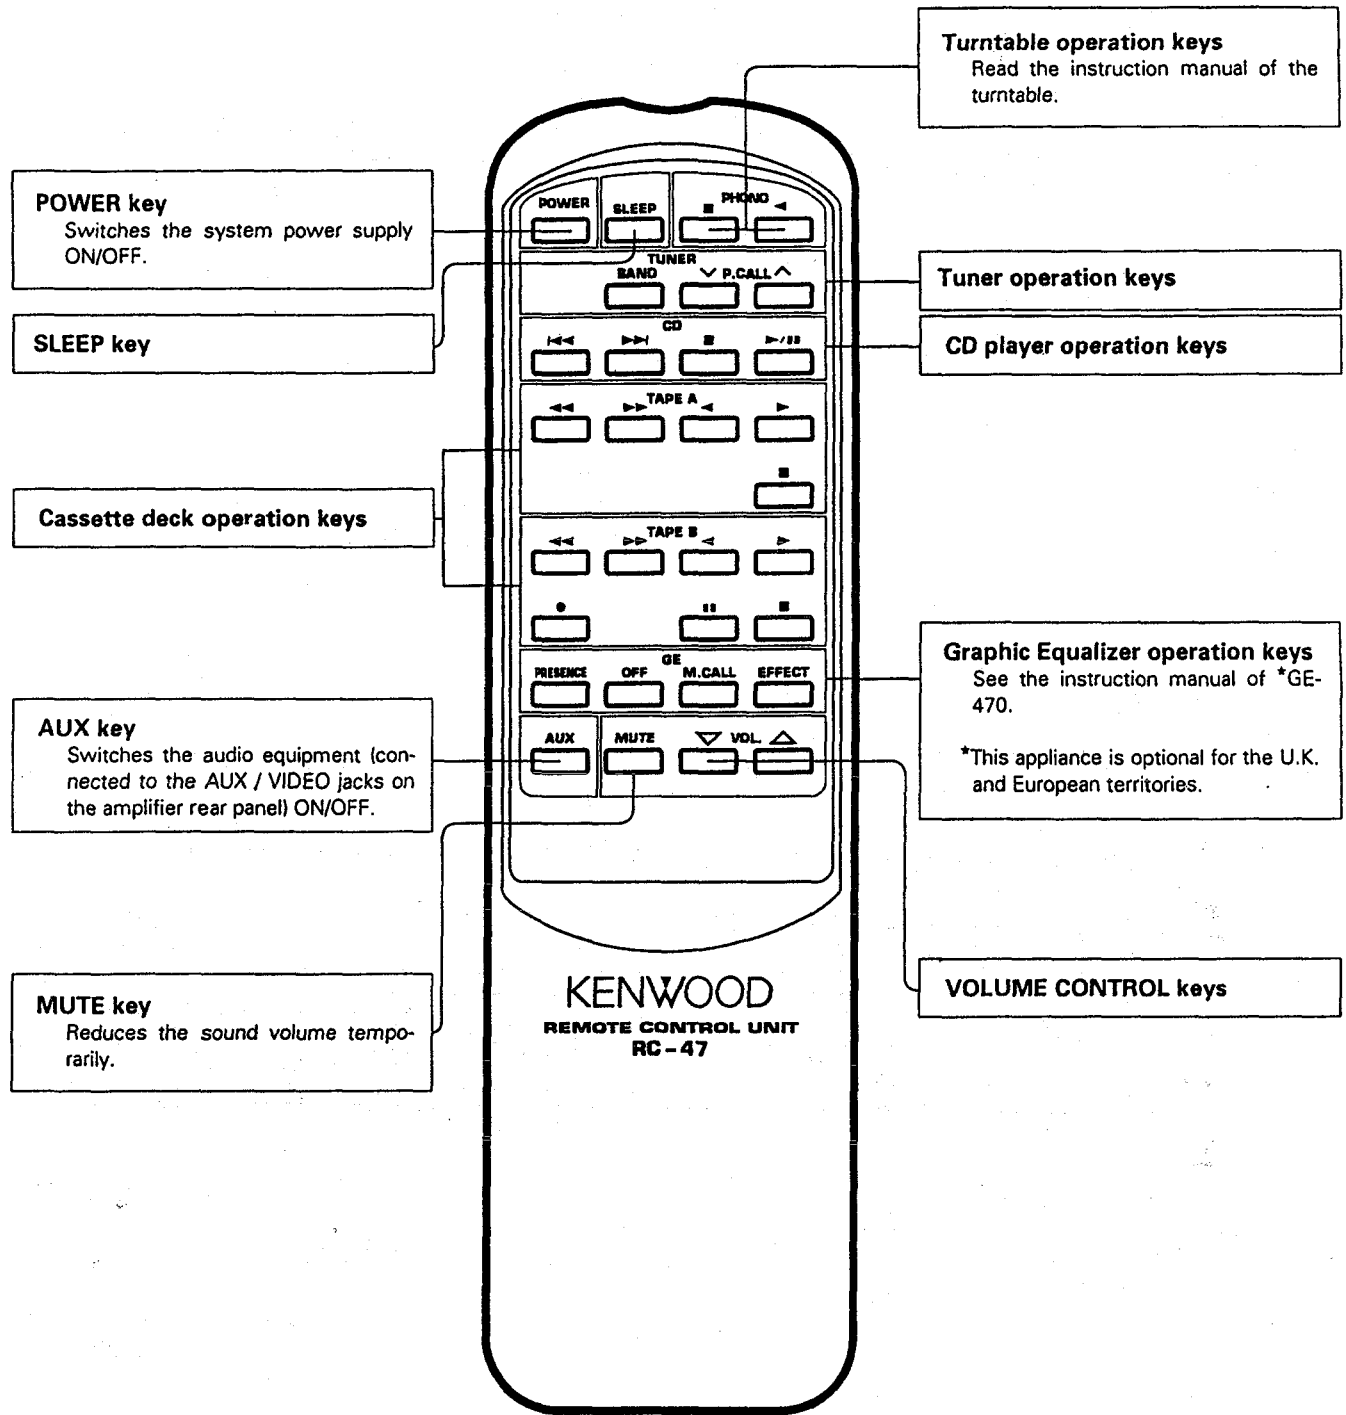

DISASSEMBLY FOR REPAIR


1. When not coming out the tray under normal operation

1. Press the tray slowly by hand (1).

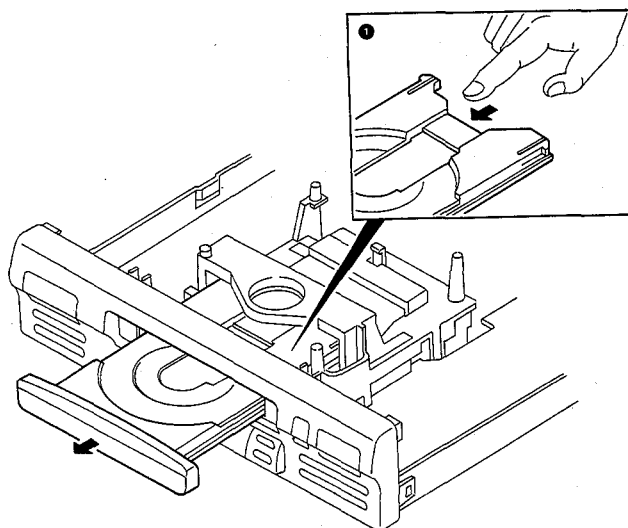


2. Removing the front panel

1. Remove the tray panel (2).
2. Disconnect the flexible cord (3).
3. Remove the 4 screws (4).
4. Remove the panel-catches from chassis (5), then remove the front panel.

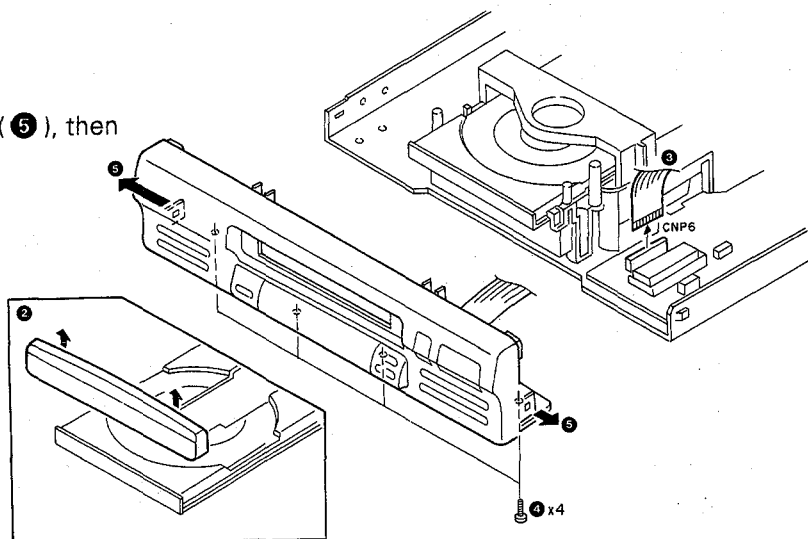

3. Removing the mechanism ass'y and that tray


1. Disconnect the 4 connectors (6).
2. Remove the 4 screws (7), then remove the mechanism ass'y.

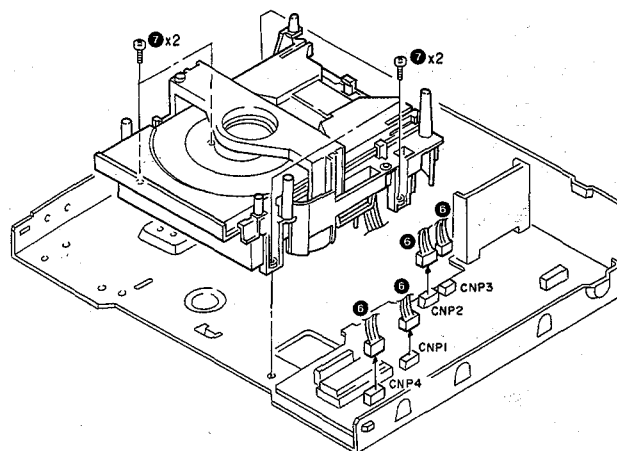

DP-470


DISASSEMBLY FOR REPAIR

- Slide the tray front-wards, remove the 2 catches (8), then remove the tray.

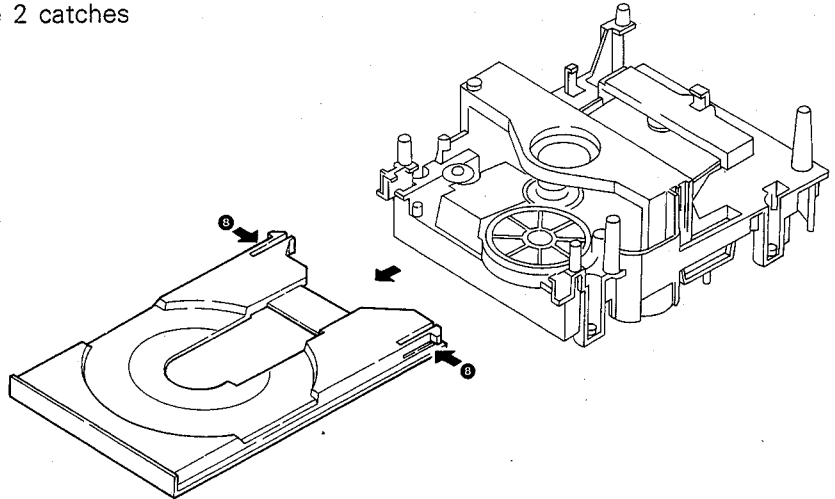


4. How to mount the tray

- Turn the gear fully clockwise (9).
- Insert the tray while pressing the 2 catches (10).

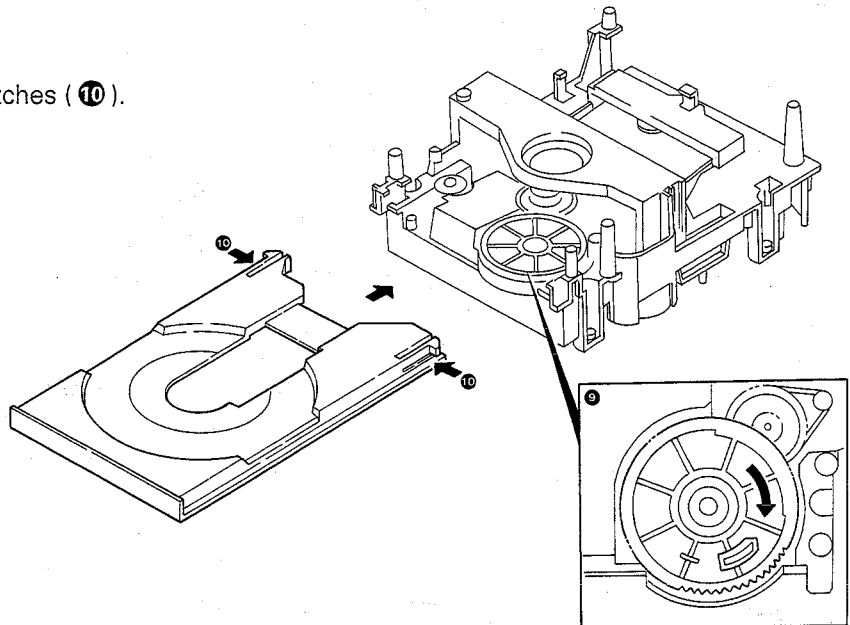


5. Removing the pickup

- Remove the 3 screws (11), then remove the pickup mechanism ass'y.
- Remove the 4 screws (12), then remove the pickup.

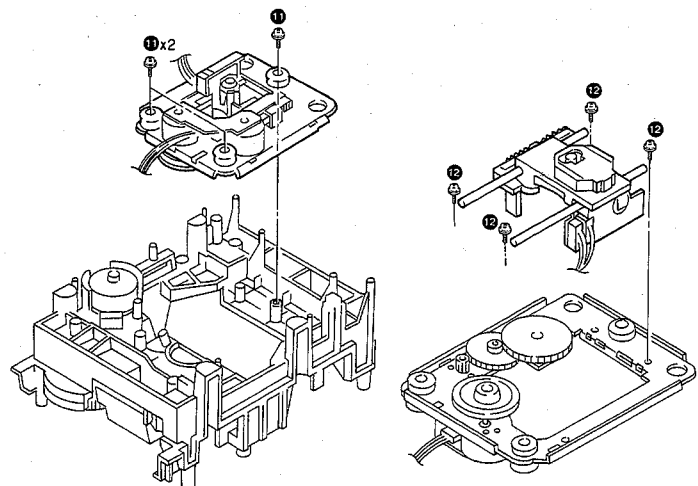

BLOCK DIAGRAM

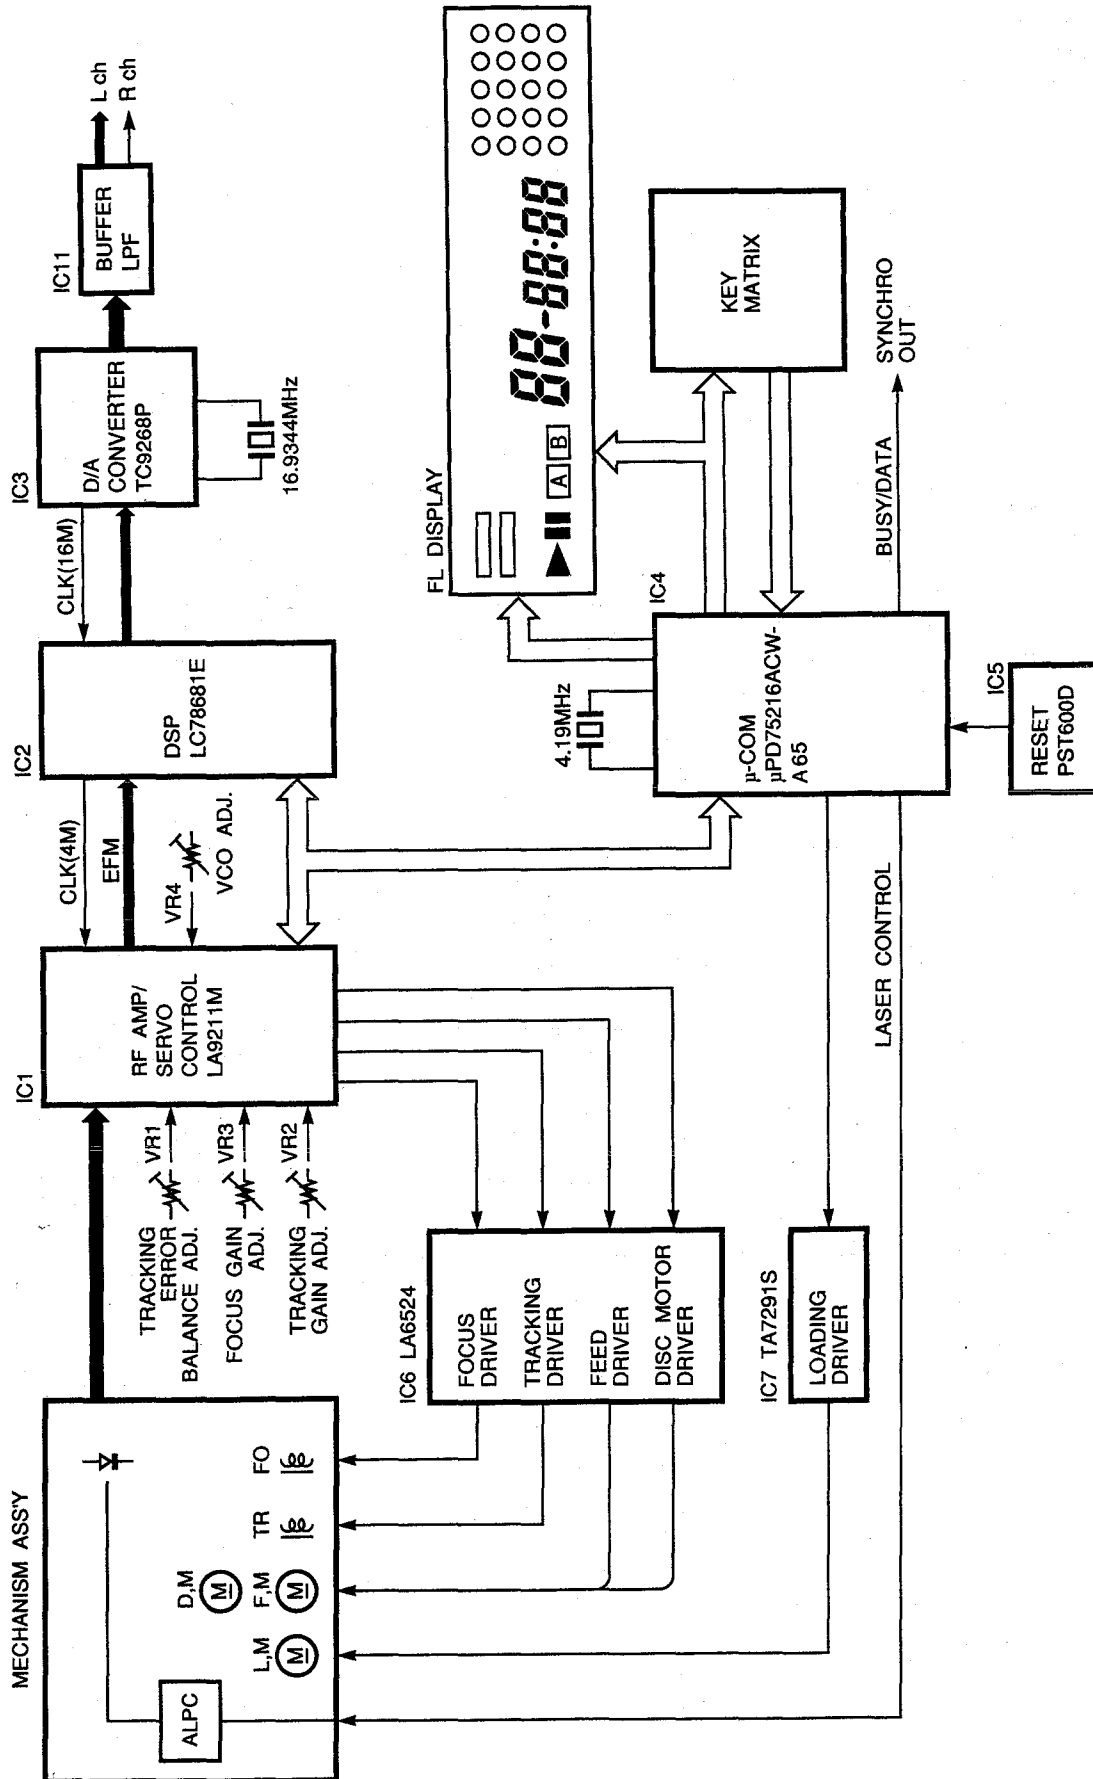


CIRCUIT DESCRIPTION

1. Test mode

1-1. Setting the test mode

This microprocessor built in this unit can be put to TEST MODE (SW10).

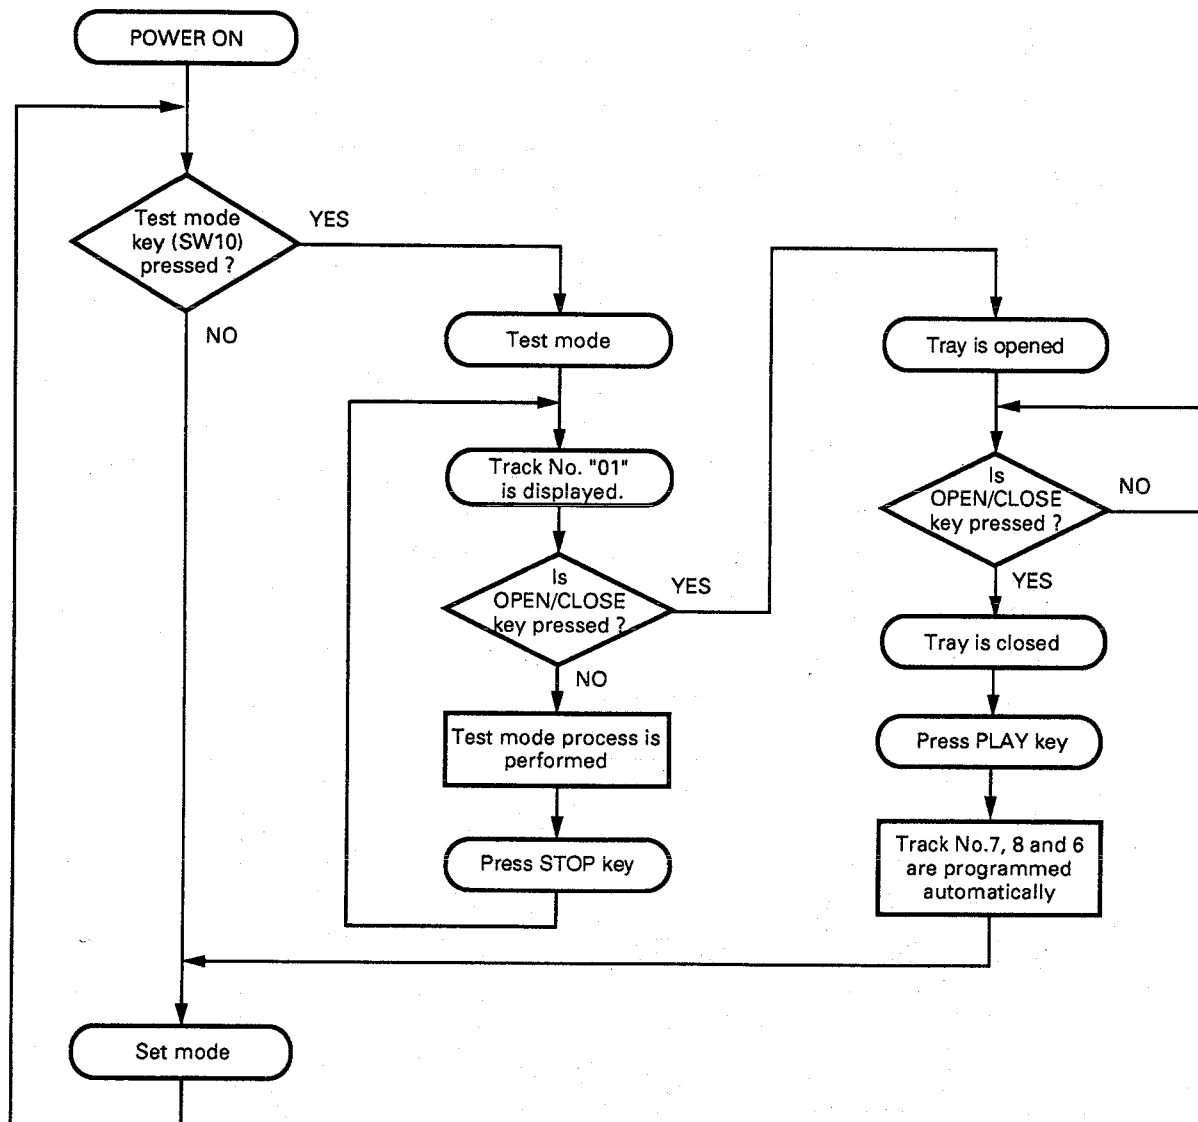

CIRCUIT DESCRIPTION

1-2. Key and functions valid in test mode

No.	Input key	Function	Track No. display																																			
1	PLAY	(1) Focusing servo ON (2) Tracking servo ON (3) Feed servo ON	TRACK NO. 05 ↓ Displayed for a few seconds after completion (1), (2) and (3). ↓ Disc Track No. is displayed.																																			
2	CHECK or Number "0" key	(1) Focusing servo ON (2) Tracking servo OFF (3) Feed servo OFF	TRACK NO. 03																																			
3	STOP	(1) Focusing servo OFF (2) Tracking servo OFF (3) Feed servo OFF	TRACK NO. 01																																			
4	▶▶	In the STOP mode, moves the pickup slightly toward the outer position of disc. When feed servo is ON, sets the track gain to "H".	-																																			
5	◀◀	In the STOP mode, moves the pickup slightly toward the inner position of disc. When feed servo is ON, sets the track gain to "L".	-																																			
6	UP ▶▶	Turns all FL display lamps ON.	TRACK NO. 88																																			
7	DOWN ◀◀	Turns all FL display lamps OFF. "TRACK NO." is lighted.	TRACK NO. 88																																			
8	+10	Playback Track No.1 under High-speed mode (If not open tray, SPACE key function is available.)	-																																			
9	SPACE	Set playback mode to High-speed or Normal.	-																																			
10	P. MODE	Track No. 7,8, and 6 (High-speed) are programmed and playback from Track No.7. The test mode is canceled.	-																																			
11	OPEN/CLOSE	When the tray is opened then closed. Track No. 7, 8, and 6 are programmed and set is in STOP mode. The test mode is canceled.	TRACK NO. 00																																			
12	Numeric key (1 ~ 9)	Jumps tracks as shown below. <table border="1" style="margin-left: 20px;"> <tbody> <tr> <td>Key</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> </tr> <tr> <td>Number of tracks</td> <td>1</td> <td>4</td> <td>128</td> <td>512</td> <td>1000</td> </tr> <tr> <td>Direction</td> <td colspan="5" style="text-align: center;">Outer</td> </tr> <tr> <td>Key</td> <td>6</td> <td>7</td> <td>8</td> <td>9</td> <td rowspan="2" style="text-align: center;">/</td> </tr> <tr> <td>Number of tracks</td> <td>1</td> <td>4</td> <td>128</td> <td>512</td> </tr> <tr> <td>Direction</td> <td colspan="5" style="text-align: center;">Inner</td> </tr> </tbody> </table>	Key	1	2	3	4	5	Number of tracks	1	4	128	512	1000	Direction	Outer					Key	6	7	8	9	/	Number of tracks	1	4	128	512	Direction	Inner					-
Key	1	2	3	4	5																																	
Number of tracks	1	4	128	512	1000																																	
Direction	Outer																																					
Key	6	7	8	9	/																																	
Number of tracks	1	4	128	512																																		
Direction	Inner																																					
13	REPEAT	(1) Tray Opened (2) Laser ON The REPEAT function is canceled when the tray is closed by pressing the tray. "REPEAT" figures is lighted.	TRACK NO. 02																																			


REPEAT mode : Press "REPEAT" key → Press "OPEN/CLOSE" key → Press "REPEAT" key...

DP-470

CIRCUIT DESCRIPTION

2. Microprocessor : μ PD75216ACW-A65 (IC4)

2-1. Terminal connection diagram

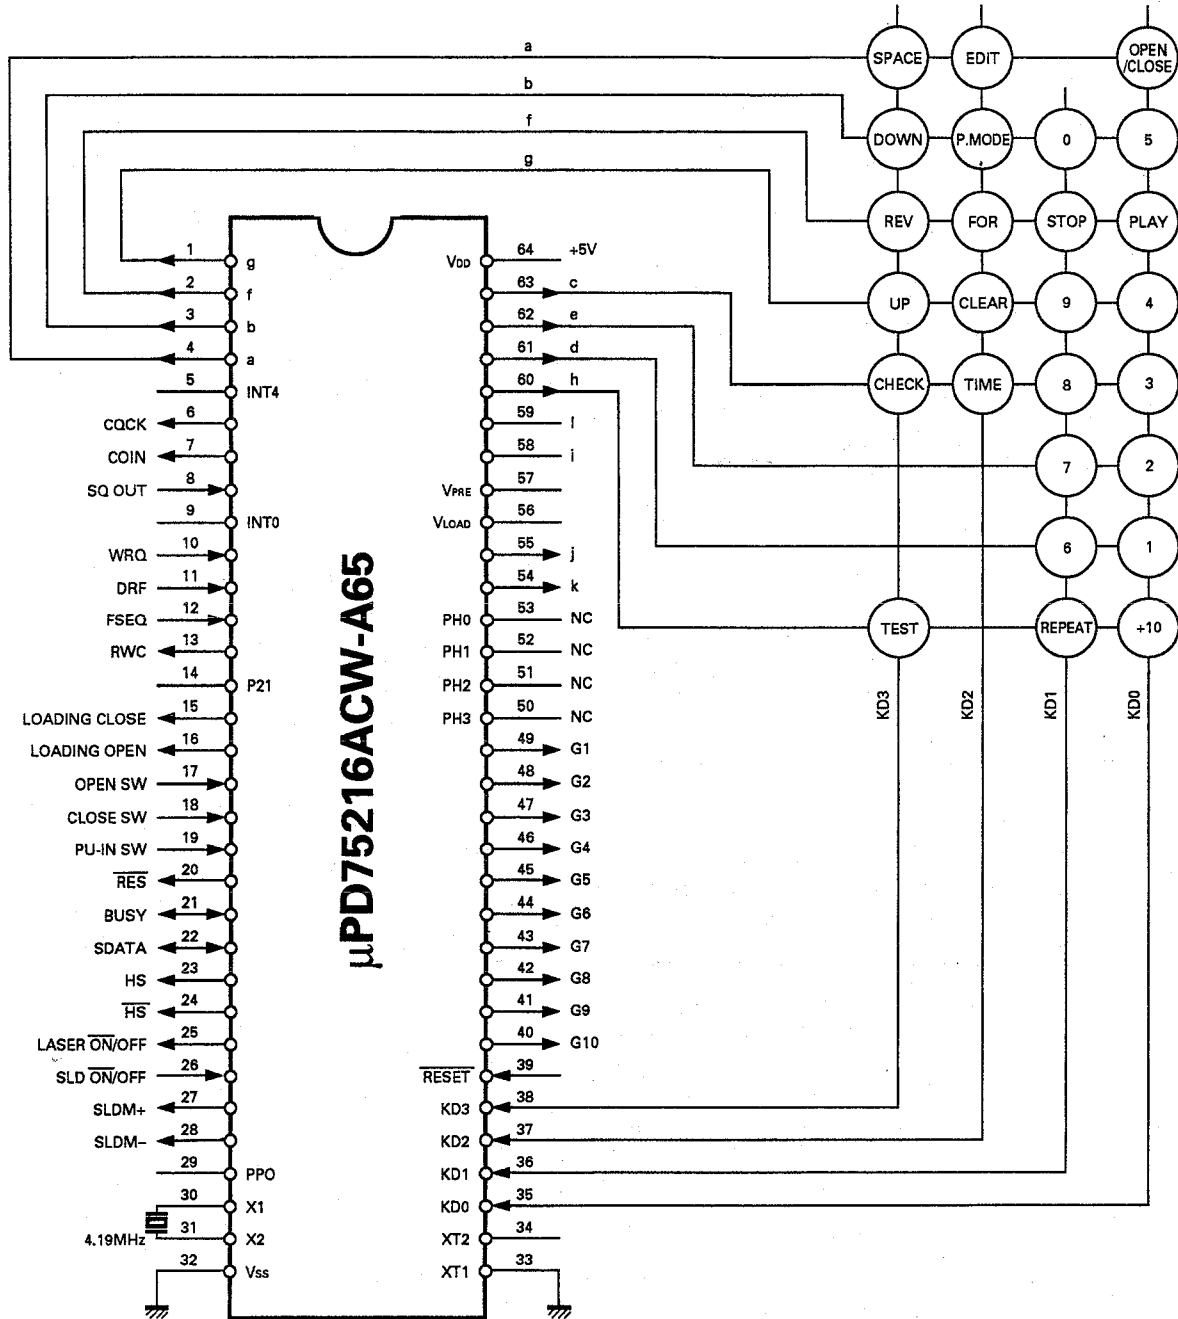


CIRCUIT DESCRIPTION

2-2. Pin function

No.	Pin name	I/O	Function
1~4	g, f, b, a	O	Fluorescent indicator segment.
5	INT4	-	GND
6	CQCK	O	DSP IC CQCK terminal.
7	COIN	O	DSP IC COIN terminal.
8	SQ OUT	I	DSP IC SQ OUT terminal.
9	INT0	-	GND
10	WRQ	I	DSP IC WRQ terminal.
11	DRF	I	LA9211M DRF terminal.
12	FSEQ	I	DSP IC FSEQ terminal.
13	PWC	O	DSP IC RWC terminal.
14	P21	-	GND
15	LOADING CLOSE	O	Tray close signal output.
16	LOADING OPEN	O	Tray open signal output.
17	OPEN SW	I	Tray open detection signal input.
18	CLOSE SW	I	Tray close detection signal input.
19	PU-IN SW	I	Pick up limit signal input.
20	RES	O	DSP IC reset signal output.
21	BUSY	I/O	System control signal (BUSY).
22	SDATA	I/O	System control signal (DATA).
23	HS	O	High speed control.
24	HS	O	High speed control.
25	LASER ON/OFF	O	Laser ON/OFF control signal output.
26	SLD ON/OFF	I	Feed motor ON/OFF signal input.
27	SLD +	O	Feed motor control signal output.
28	SLD -	O	Feed motor control signal output.
29	PPO	-	No connected.
30	X1	I	Oscillator signal input.
31	X2	O	Oscillator signal output.
32	Vss	-	GND
33	XT1	-	GND
34	XT2	-	No connected.
35~38	KD0~KD3	I	Key input signal.
39	RESET	I	Reset signal input.
40~49	G10~G1	O	Fluorescent indicator tube grid signal output.
50~53		-	GND
54, 55	k, j	O	Fluorescent indicator segment.
56	VLOAD	-	FL pull down resistor power supply (-30V).
57	VPRE	-	FL driver circuit power supply (-6V).
58~63	i, l, h, d, e, c	O	Fluorescent indicator segment.
64	VDD	-	Power supply (+5V).

DP-470


MECHANISM OPERATION DESCRIPTION

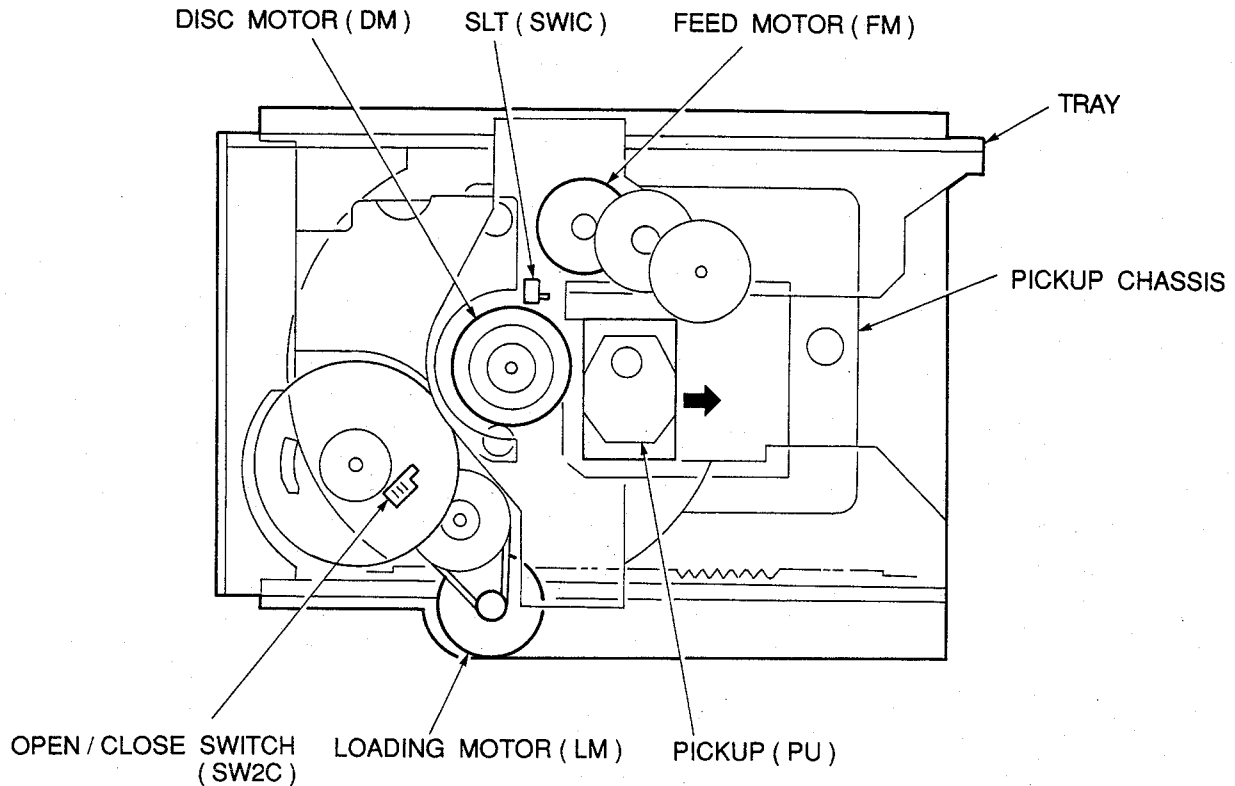

1. Tray OPEN/CLOSE operation

By the rotation of the motor (①), the gear (②) is rotated and the tray starts OPEN/CLOSE operation (③).


The OPEN/CLOSE operation stops when the protrusion of the gear comes in contact with the detection switch (④).

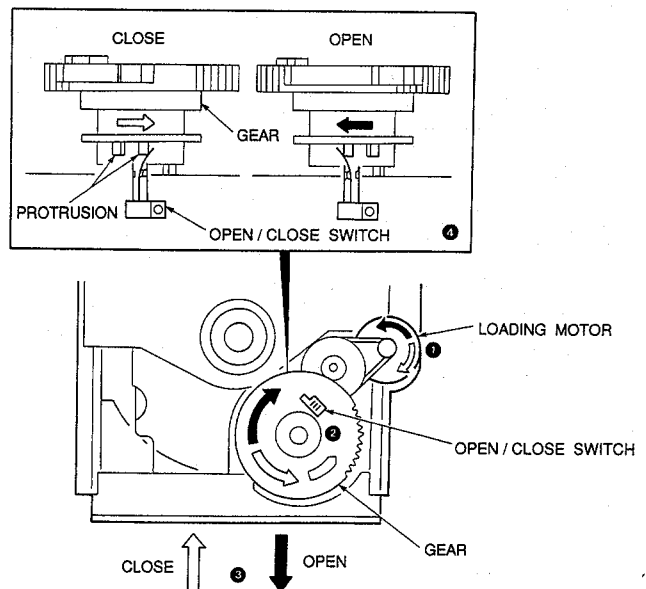

MECHANISM OPERATION DESCRIPTION

2. Pickup chassis UP/DOWN operation

Accompanied with the OPEN/CLOSE operation, the pickup chassis moves up and down along with the grooves in the gear (1).

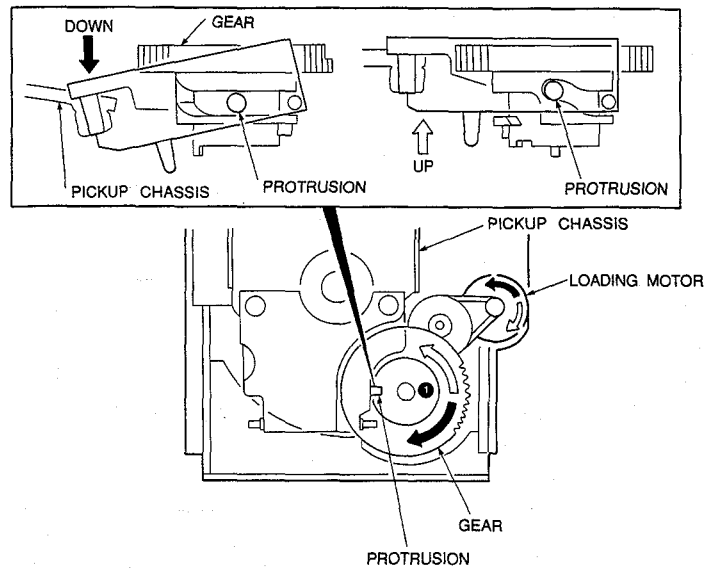

ADJUSTMENT


No.	ITEM	INPUT SETTING	OUTPUT SETTING	PLAYER SETTING	ALIGNMENT POINT	ALIGN FOR	FIG.
1	VCO	Test disc Type 4	Connect the frequency counter to "VCO" and GND.	Short-circuit pins TEST and turn the power on to enter the test mode. Press the STOP key. Then, confirm that the display is "01"	VR4	4.24MHz±15kHz	(a)
2	TRACKING ERROR BALANCE	Test disc Type 4	Connect the oscilloscope to "T.ER".	Press the OPEN/CLOSE key to open the tray. Reset to TEST mode Then, press the CHECK key. Confirm that the display is "03".	VR1	Symmetry between upper and lower patterns, or DC=0±0.05V	(b)
3	FOCUS GAIN	Test disc Type 4 Apply signal of 1kHz, 0.5Vrms to R61(F.P.- F.E.).	Connect a LPP to R61 (F.P.- F.E.), to which connect two AC voltmeters.	Press the PLAY key Confirm that the display is "05".	VR3	Two VTVMs should read the same value.	(c)
4	TRACKING GAIN	Test disc Type 4 Apply signal of 1kHz, 0.5Vrms to R63(T.P.- T.E.).	Connect a LPP to R63 (T.P.- T.E.), to which connect two AC voltmeters.	Press the PLAY key Confirm that the display is "05".	VR2	Two VTVMs should read the same value.	(d)
5	H.F. LEVEL CONFIRMATION	Test disc Type 4	Connect the oscilloscope to "H.F.".	Press the PLAY key Confirm that the display is "05".	-	1.5Vp-p ~ 2.5Vp-p	(e)

(NOTE) Type 4 disc : SONY YEDS-18 TEST DISC or equivalent.
Adjustment procedures are in TEST MODE.



ADJUSTMENT

ADJUSTMENT


(c) Focus gain

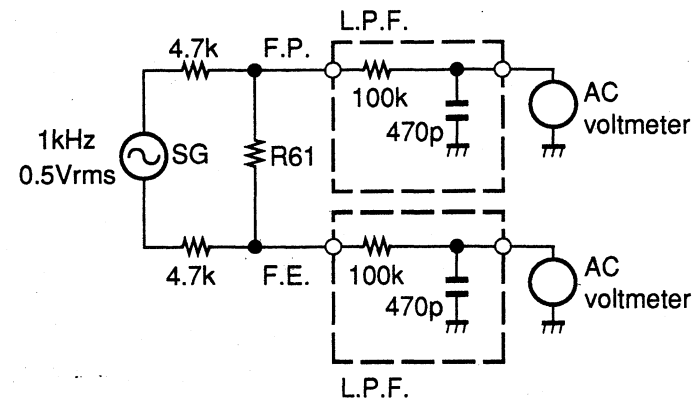

(d) Tracking gain

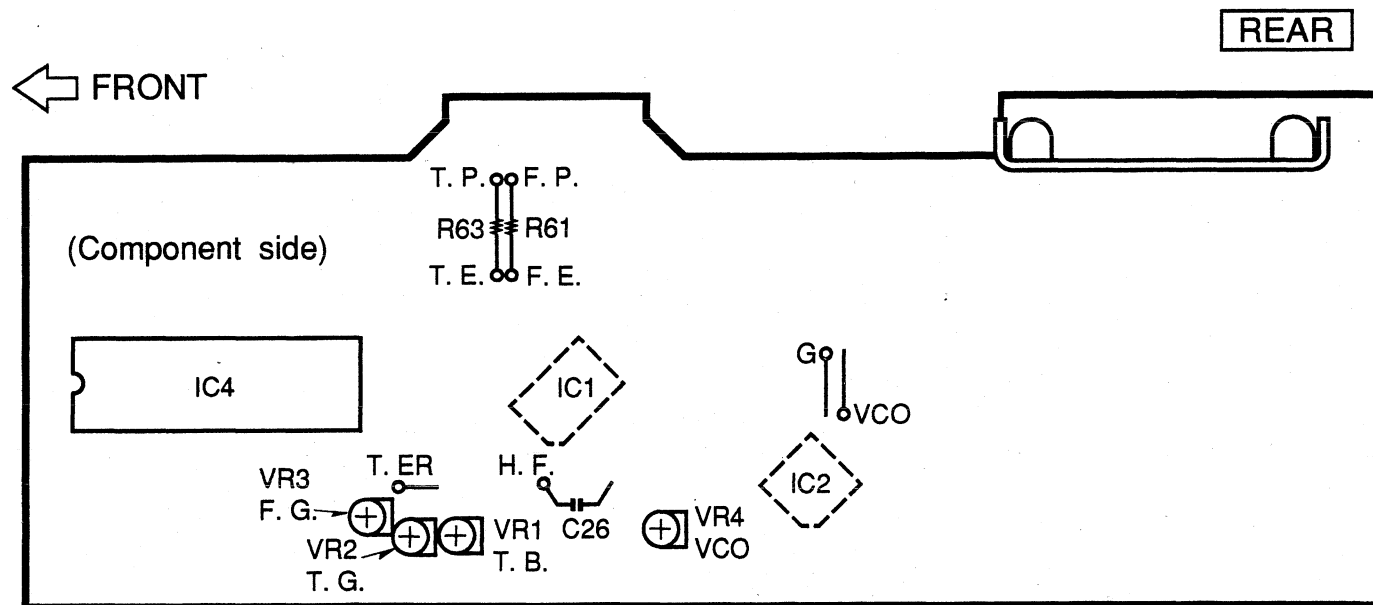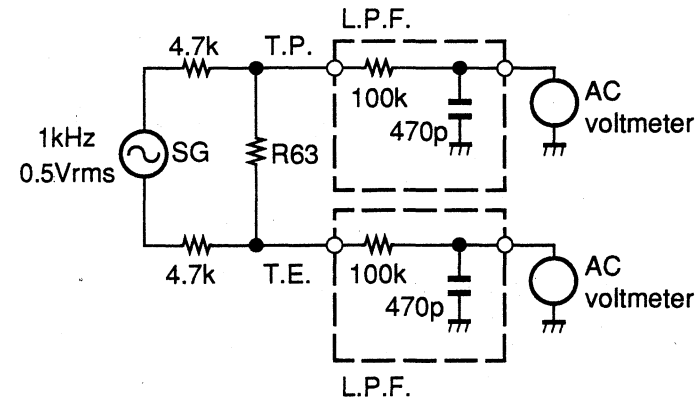


RF level, TE waveform

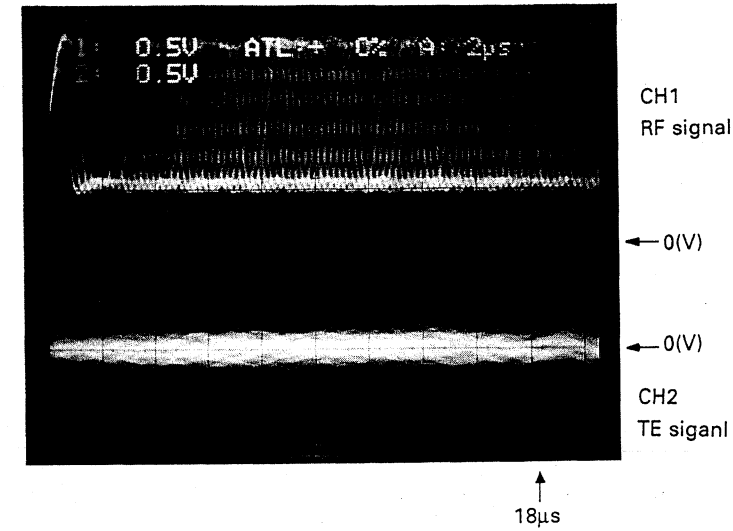

- RF signal and E.Spot signal in test mode (PLAY).
- If the diffraction grating has been adjusted properly, the influence of triggering is observed on the E.Spot waveform of approx. 18μs after RF signal, in the form of a projection.

(b) Tracking error balance

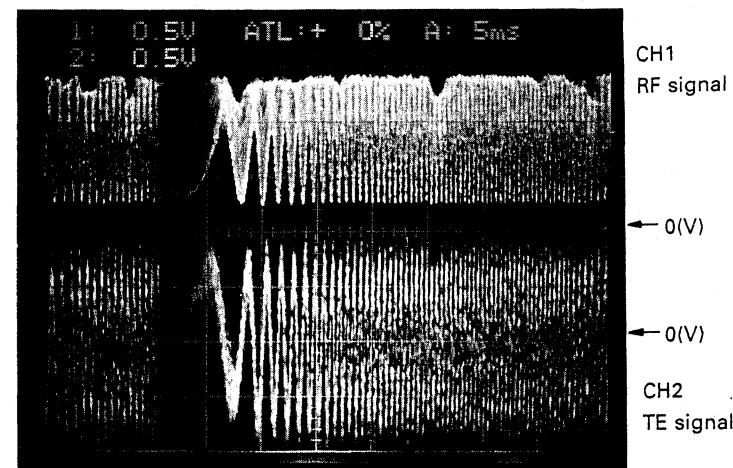


- RF signal and T.Error signal; in test mode (Focusing ON). (Disc type 4)
- Adjust T.Error so that the waveform is symmetrical above and below 0V. (VR 1)

PC BOARD (COMPONENT SIDE VIEW)


(c) Focus gain :

Two VTVMs should read the same value.

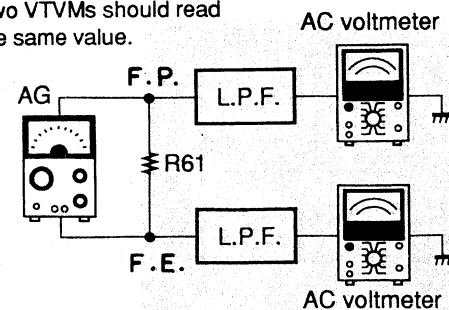


(d) Tracking gain :

Two VTVMs should read the same value.



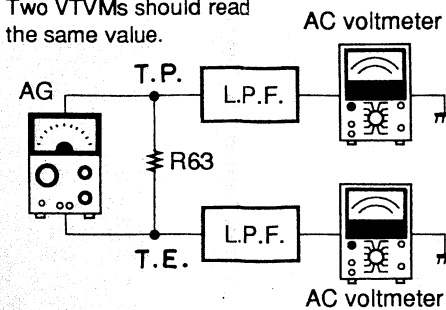


Frequency counter




(b) Tracking error balance :

Symmetry between upper and lower patterns, or DC=0±0.05V



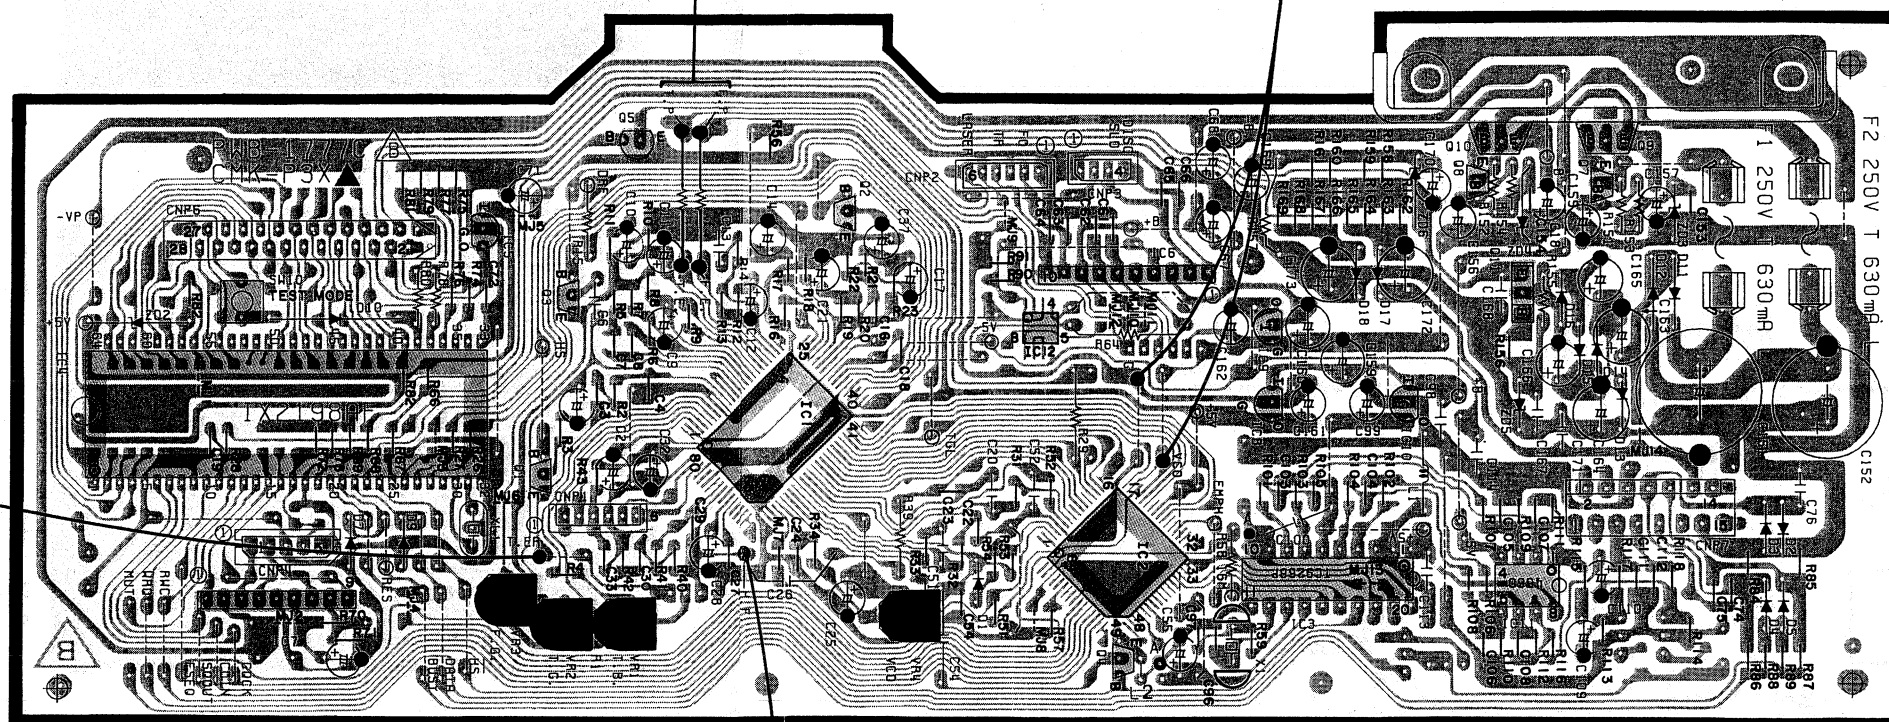



(e) H.F. Level confirmation : 1.5Vp-p ~ 2.5Vp-p

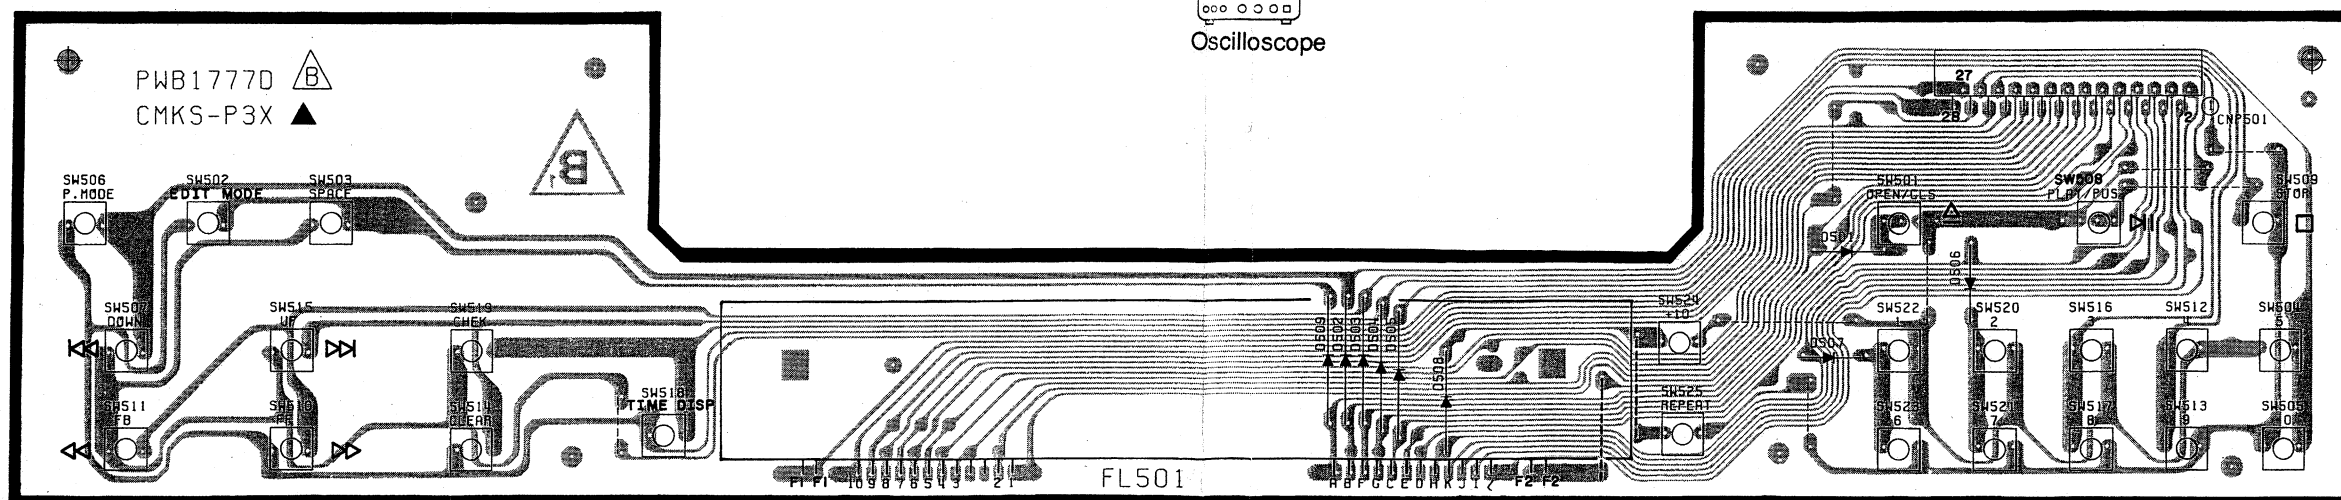


MECHANISM ASS'Y

HOLOGRAM LASER UNIT (PICK UP)

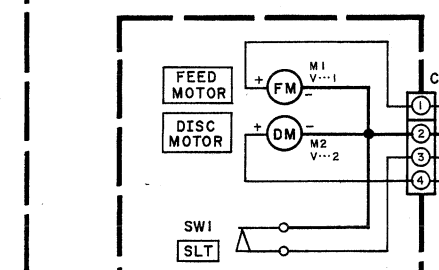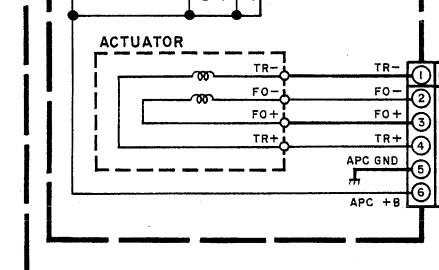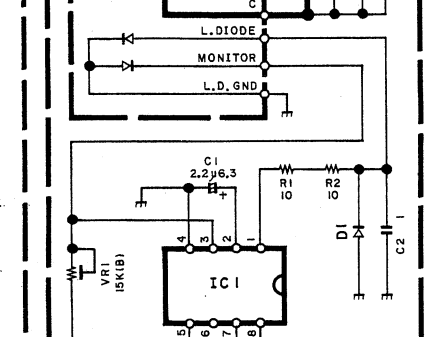
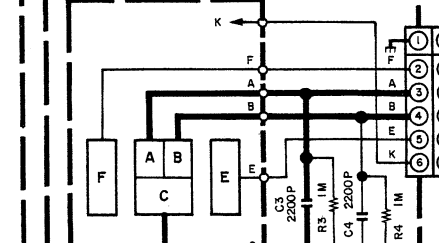


MAIN UNIT

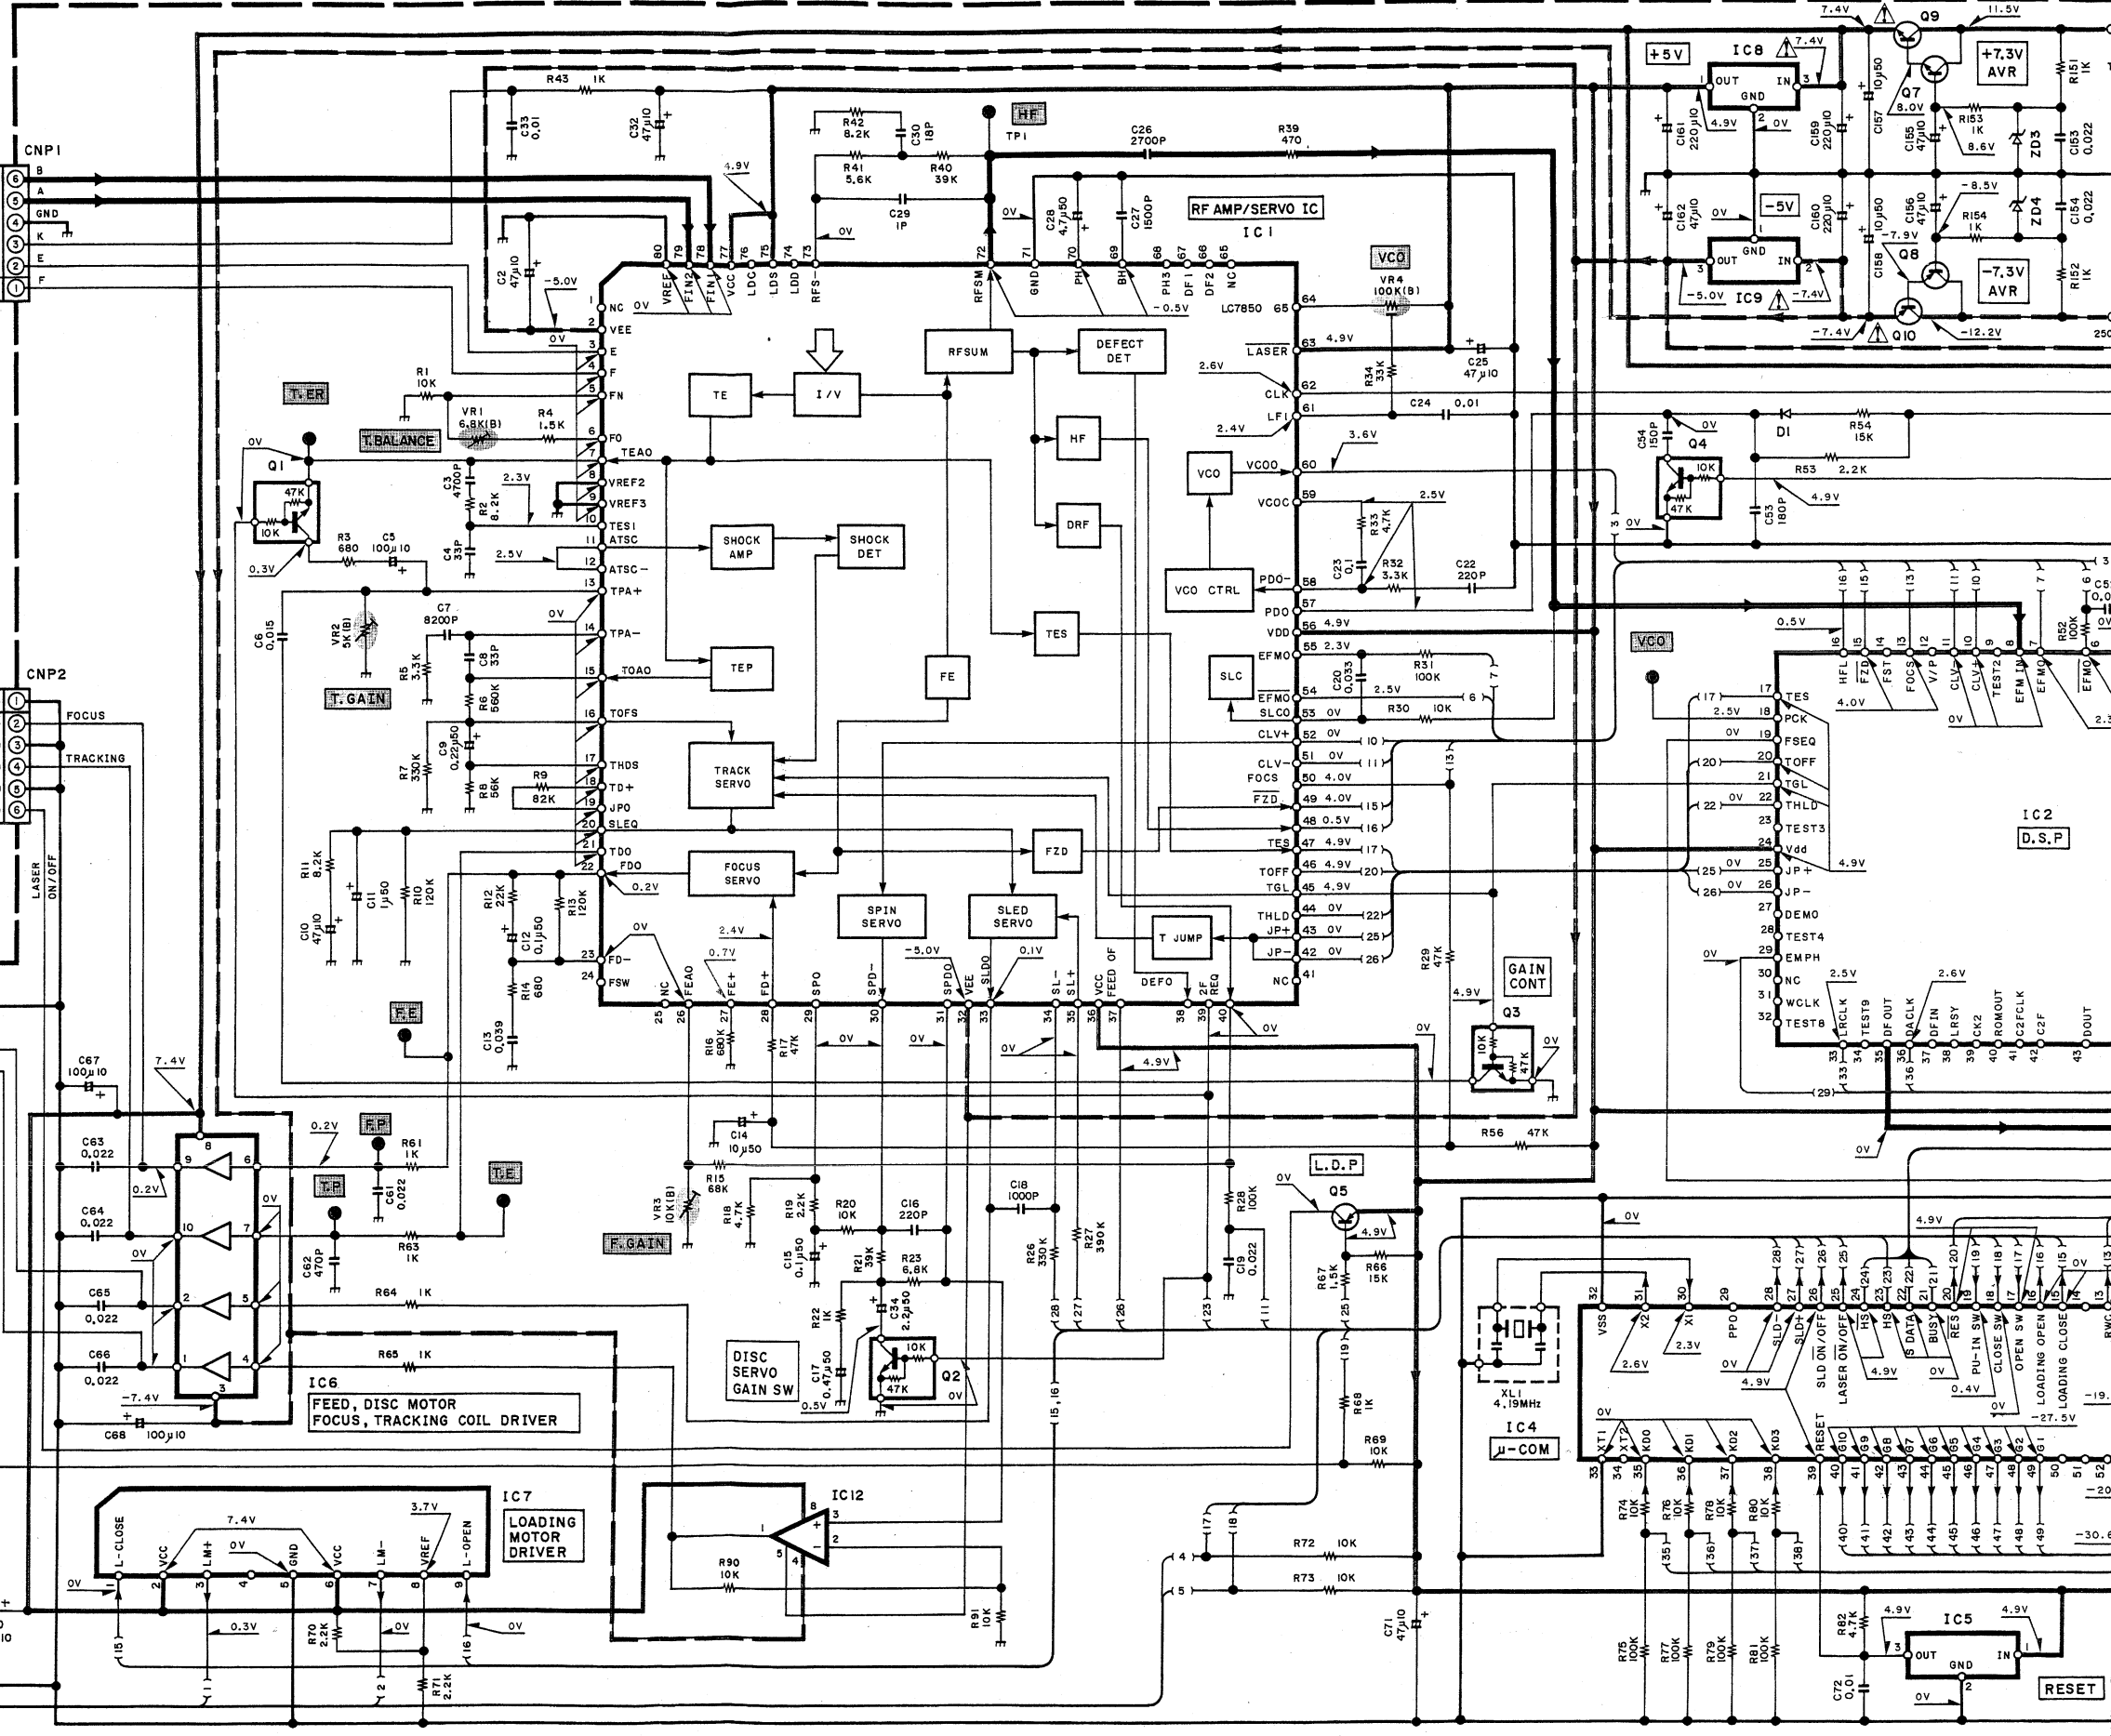


- | | |
|-----------------------|-------------------|
| IC1 : LA9211M | Q1-4 : DTC114YS |
| IC2 : LC78681E | Q5 : 2SA1015GR |
| IC3 : TC9268P | Q7 : 2SC1740SR |
| IC4 : μPD75216ACW-W65 | Q8 : 2SA933SR |
| IC5 : PST600D | Q9 : 2SD2012 |
| IC6 : LA6524 | Q10 : 2SB1375 |
| IC7 : TA7291S | Q11 : 2SB1237R3 |
| IC8 : TA78L005AP | |
| IC9 : AN79L05 | D1-5,7,9,10,13-18 |
| IC10 : AN78L05 | : 1SS133 |
| IC11 : NJM4560D | D11,12 : RL104T |
| IC12 : NJM4558M | ZD2-4 : MTZ9.1A |
| | ZD5 : MTZJ30B |
| | ZD6 : MTZJ6.8B |

2
3
4
5
6
7

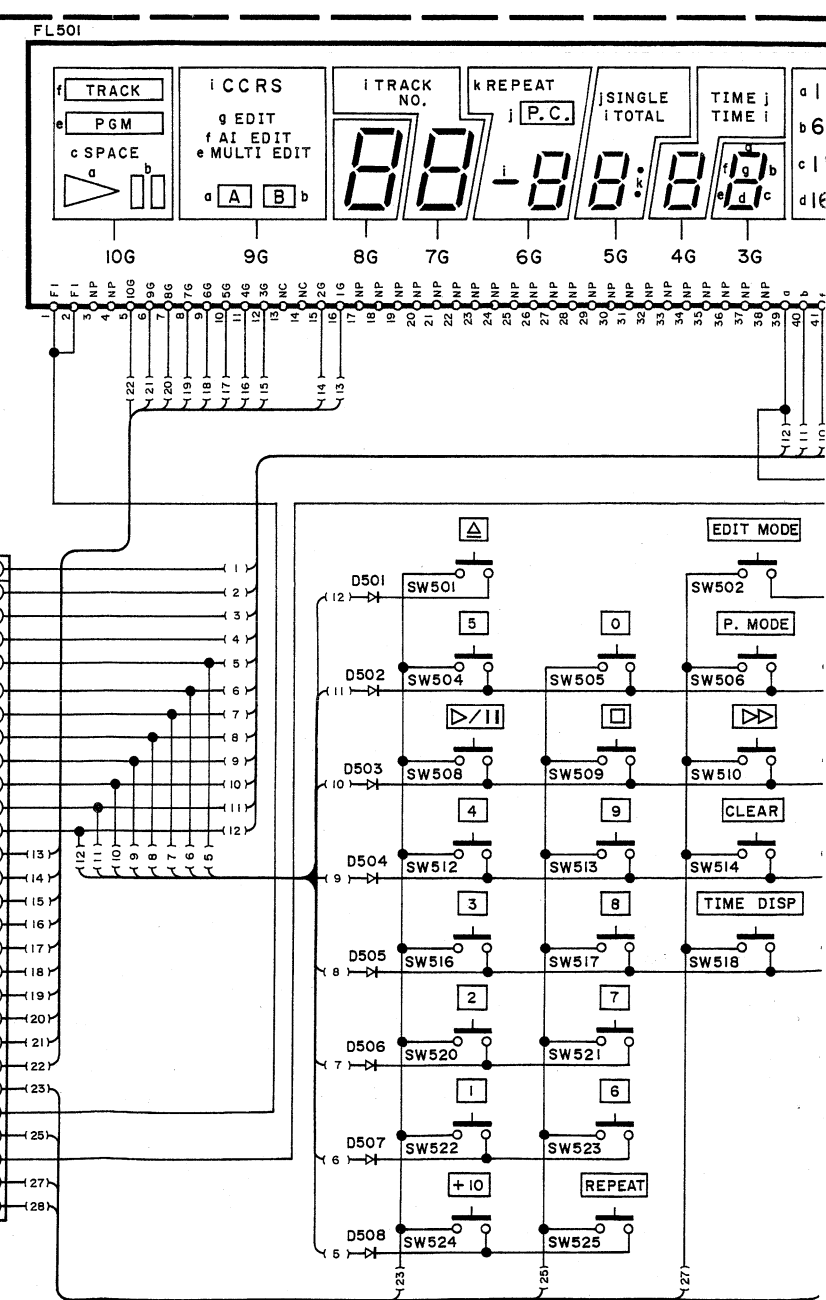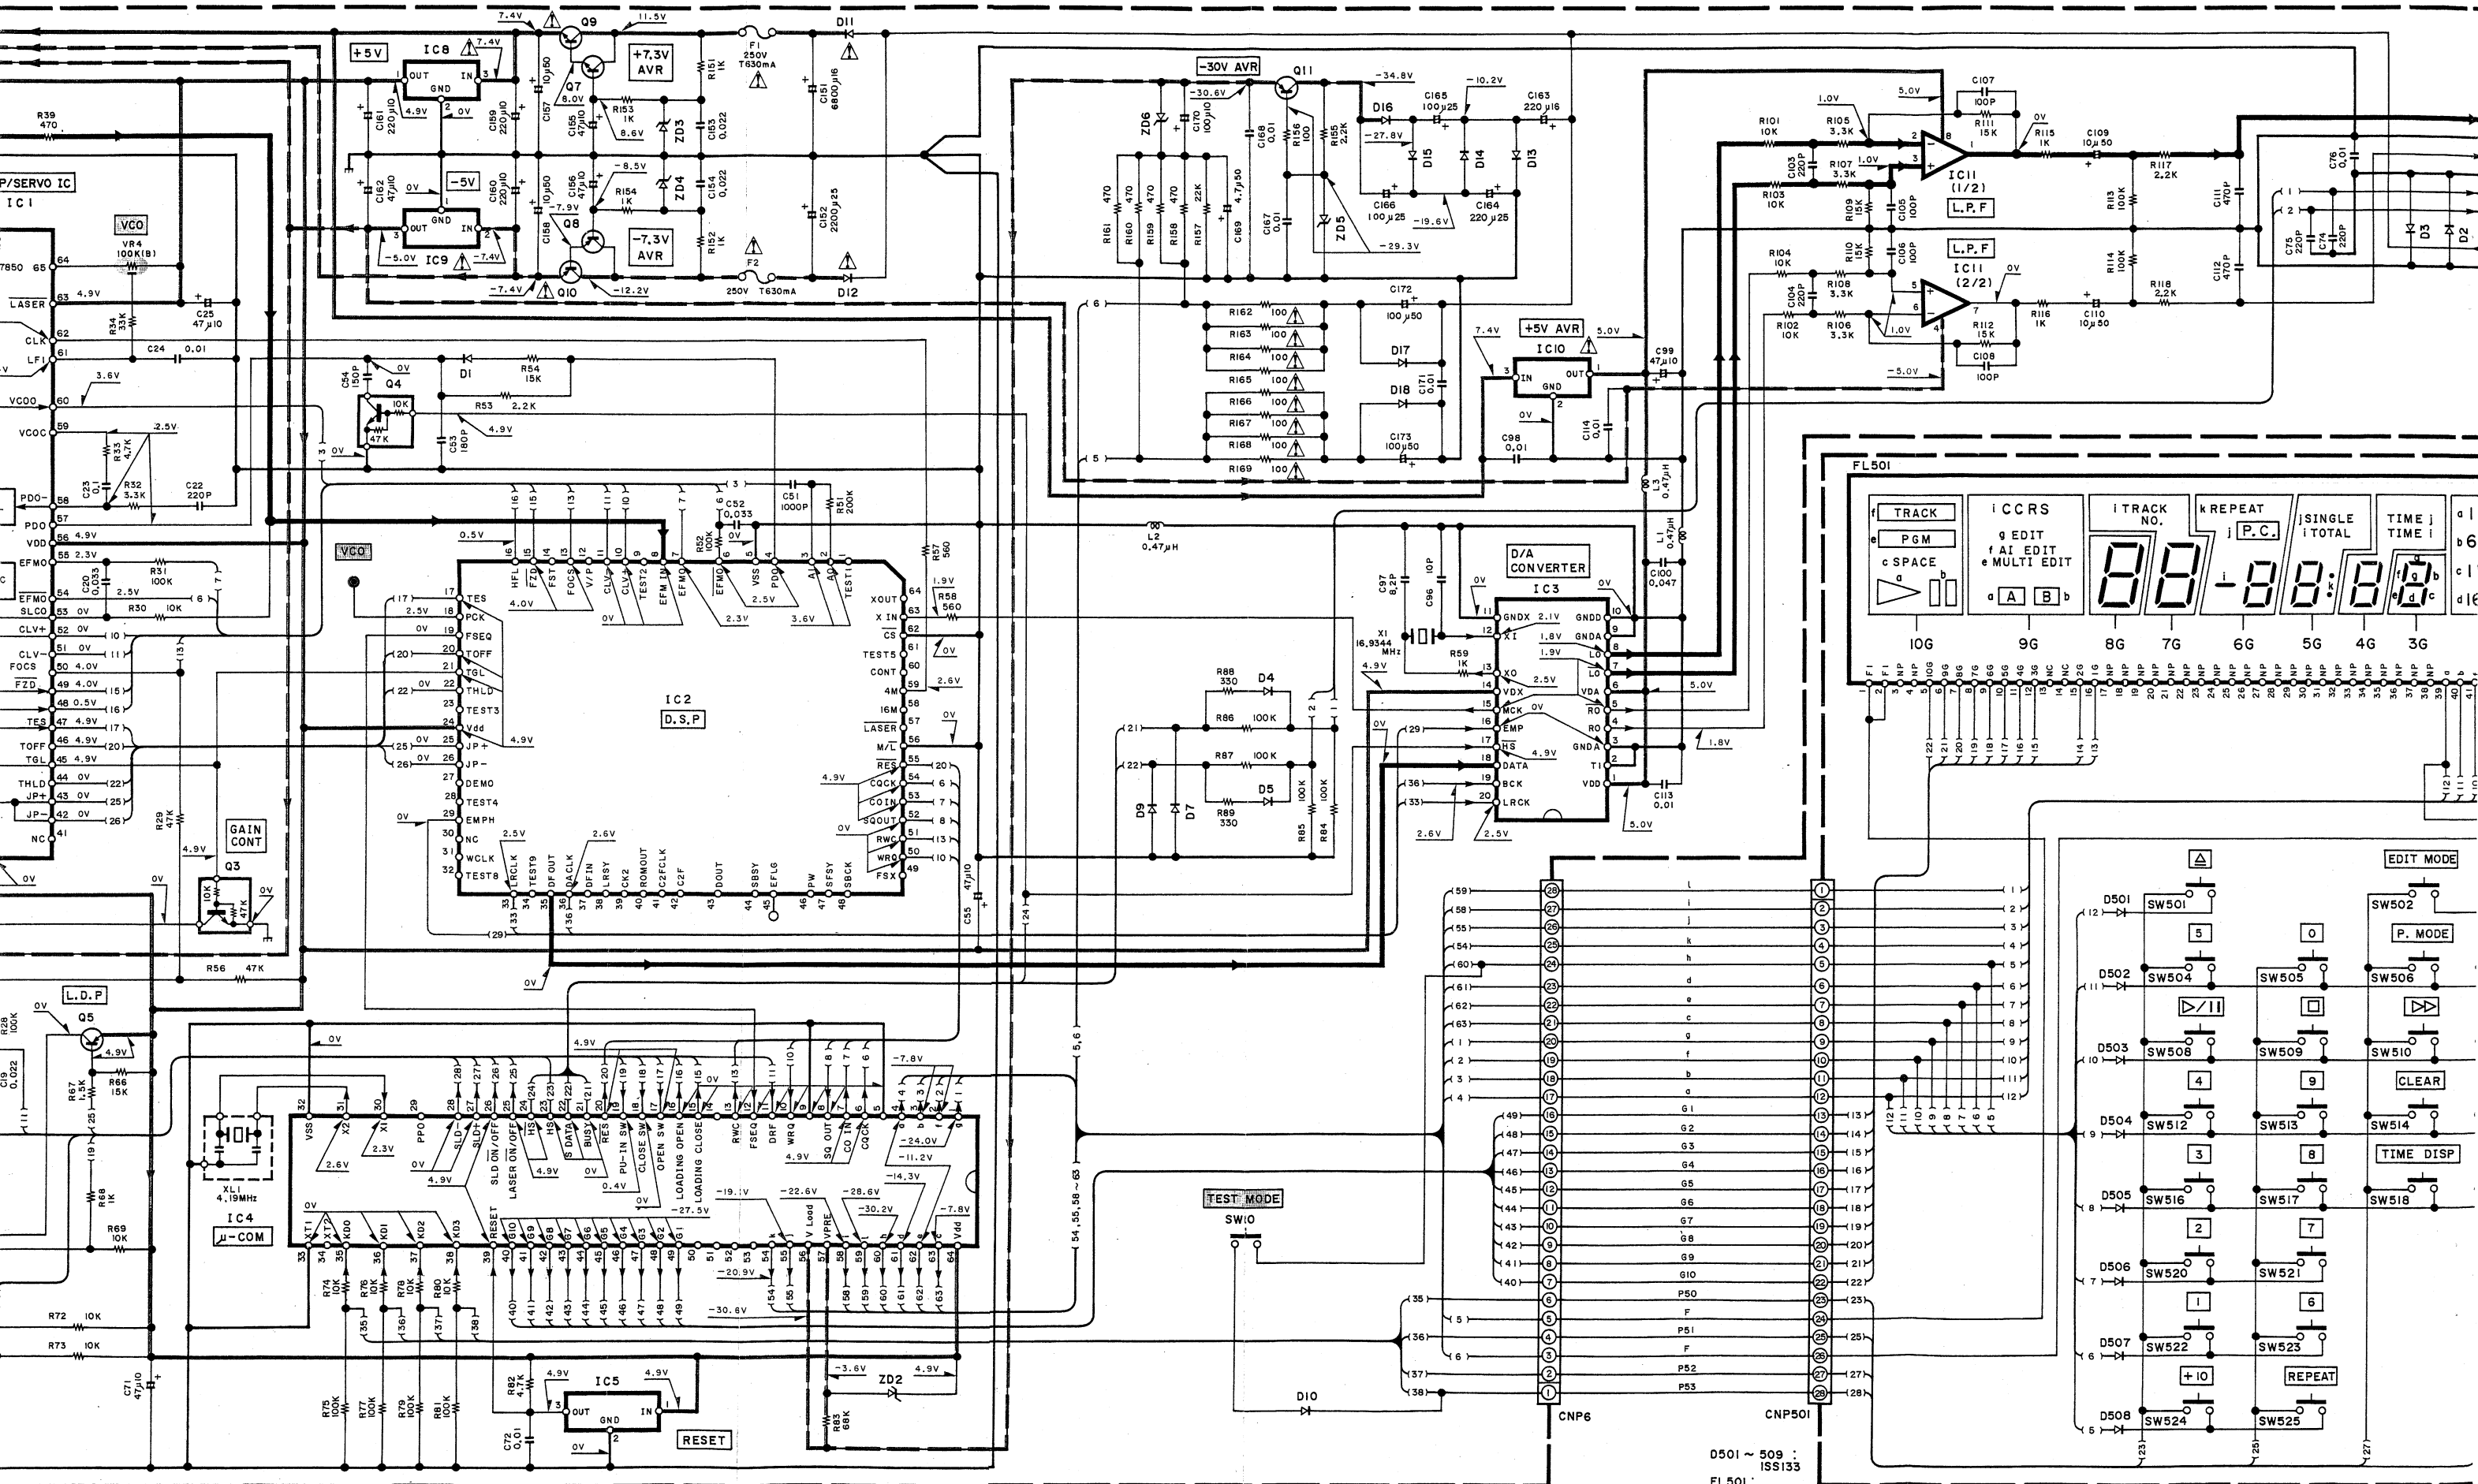

D501 ~ 509 : ISS133
 FL501 : 10-BT-676K

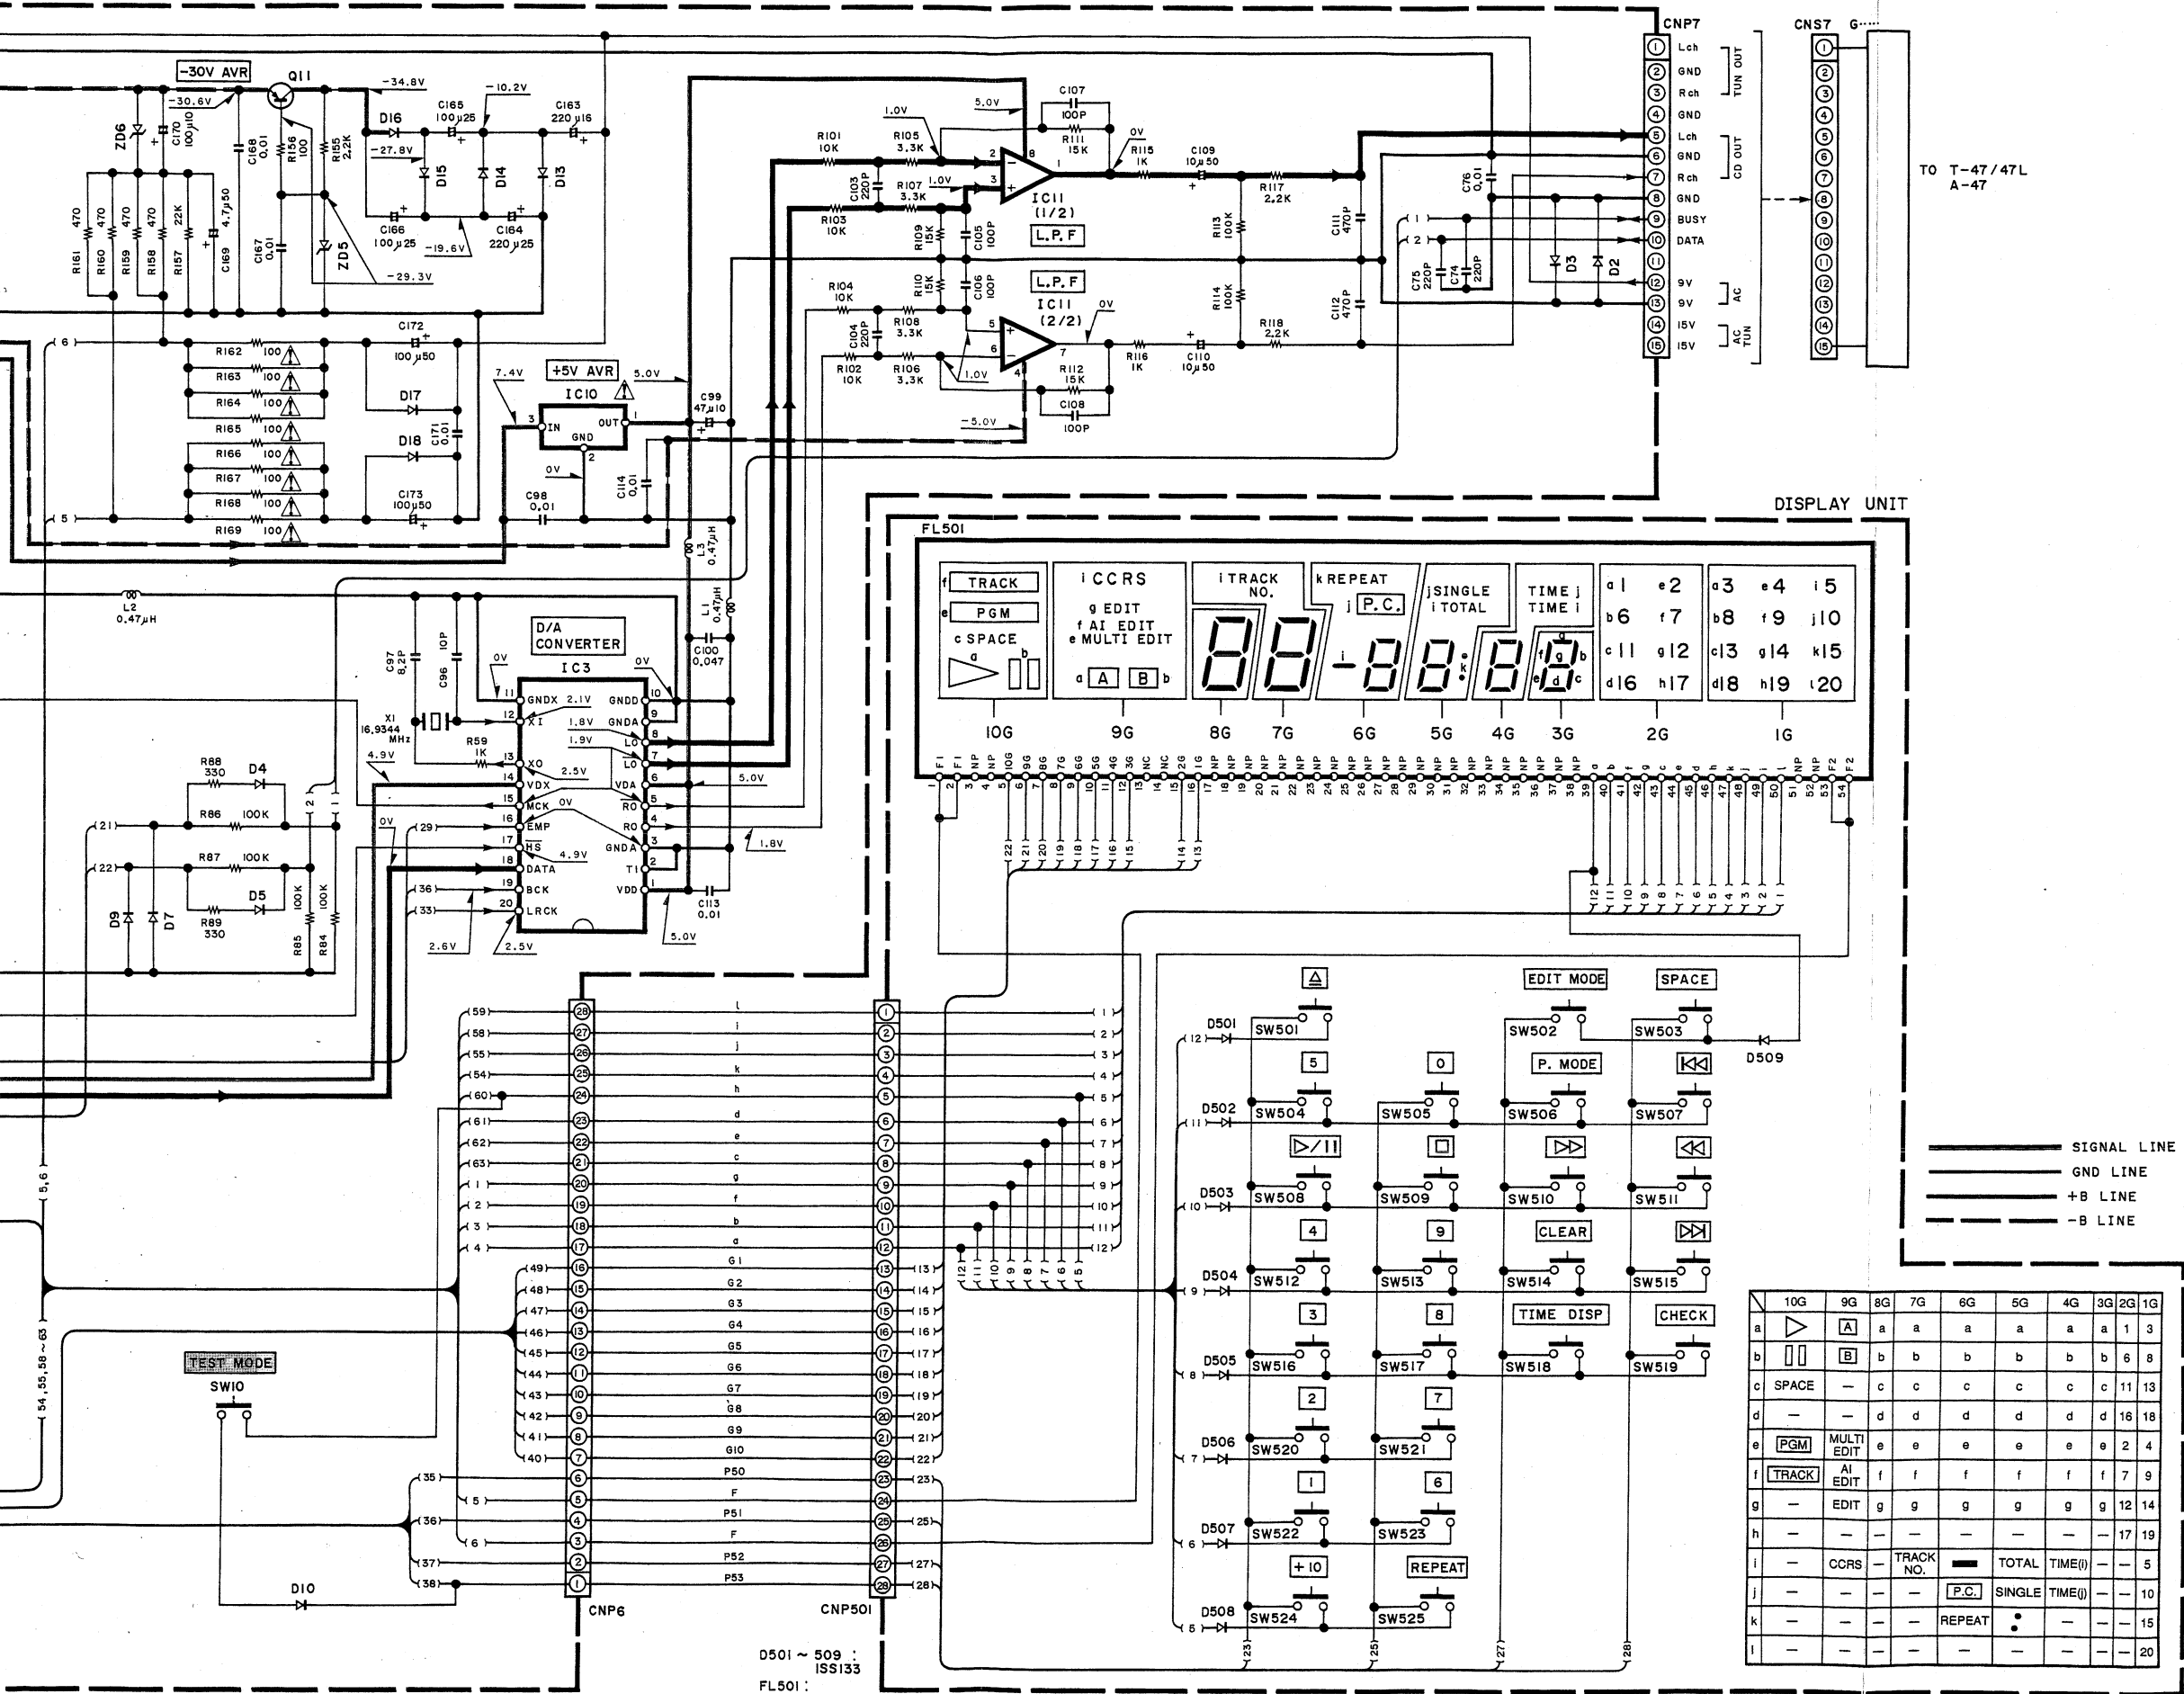

D501 ~ 509 : ISS133
 FL501 : 10-BT-67GK


TO T-47/47L A-47

— SIGNAL LINE
 — GND LINE
 — +B LINE
 — -B LINE


	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G
a	▶	A	a	a	a	a	a	a	a	1 3
b	▯	B	b	b	b	b	b	b	b	6 8
c	SPACE	-	c	c	c	c	c	c	c	11 13
d	-	-	d	d	d	d	d	d	d	16 18
e	PGM	MULTI EDIT	e	e	e	e	e	e	e	2 4
f	TRACK	AI EDIT	f	f	f	f	f	f	f	7 9
g	-	EDIT	g	g	g	g	g	g	g	12 14
h	-	-	-	-	-	-	-	-	-	17 19
i	-	CCRS	-	TRACK NO.	-	TOTAL TIME()	-	-	-	5
j	-	-	-	[P.C.]	-	SINGLE TIME()	-	-	-	10
k	-	-	-	REPEAT	-	•	-	-	-	15
l	-	-	-	-	-	-	-	-	-	20

DP-470 (K)


DTC114YS




2SB1375
2SD2012




NJM4560D



TA78L005AP



UPD75216ACW-A65




• DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.


DP-470
KENWOOD

Y22-3492-70

EXPLODED VIEW (MECHANISM)

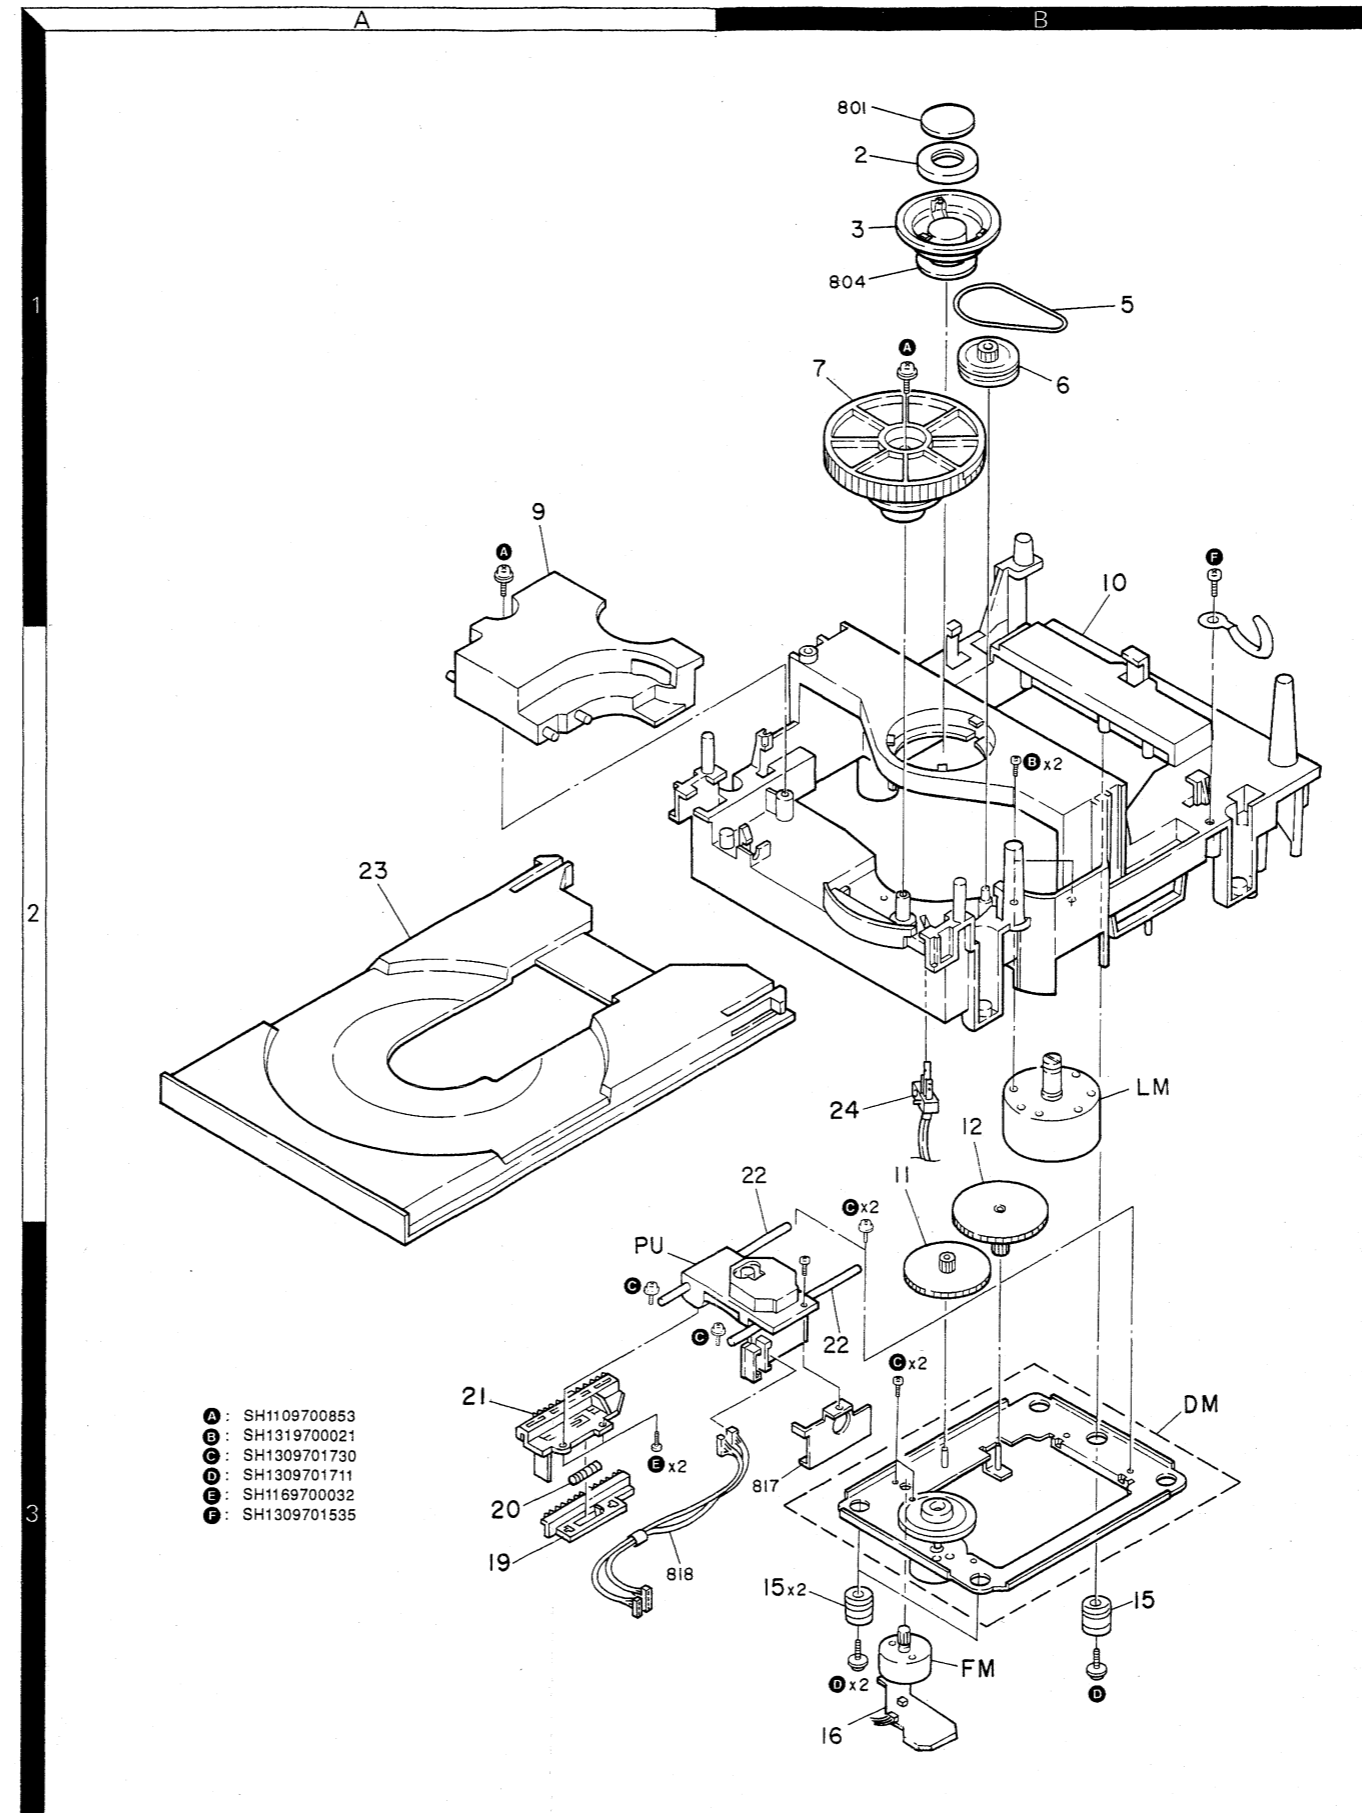

EXPLODED VIEW (UNIT)

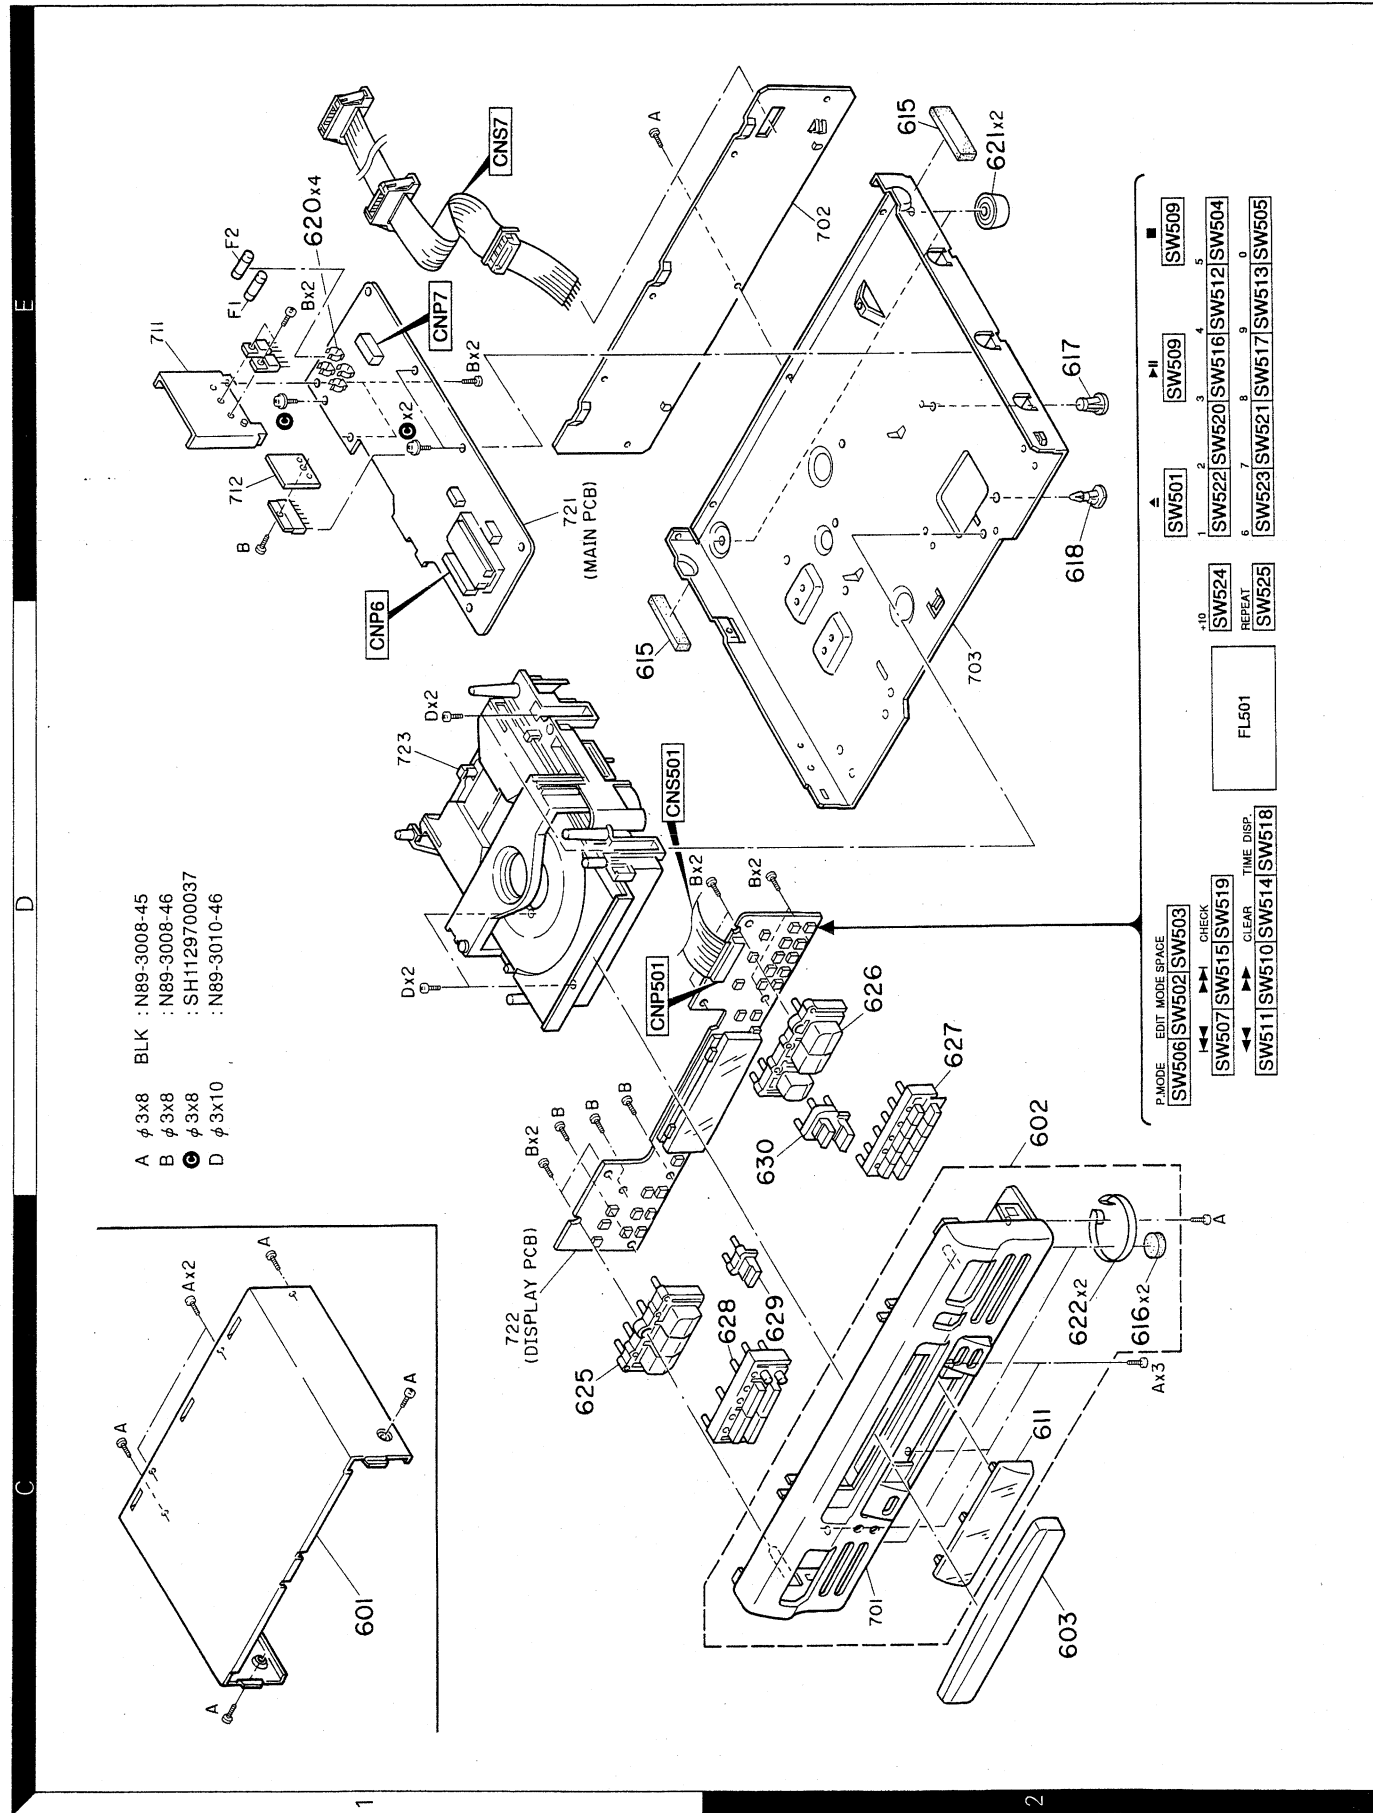

A ϕ 3x8 BLK :N89-3008-45
 B ϕ 3x8 :N89-3008-46
 C ϕ 3x8 :SH1129700037
 D ϕ 3x10 :N89-3010-46

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

* New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新部品	Parts No. 部品番号	Description 部品名/規格	Re- marks 備考
C23		*	SH1425900032	CERAMIC	
C24		*	SH1305900718	CYLNDR CHIP C 0.10UF	K
C25		*	CE04KW1A470M	ELECTR θ 47UF	K 10WV
C26		*	SH115900271	CERAMIC	
C27		*	SH1305900674	CERAMIC	2700PF K 1500PF K
C28		*	CE04KW1H477M	ELECTR θ 4.7UF	50WV
C29		*	CC41DSL1H180C	CYLNDR CHIP C 1.8PF	C
C30		*	CC41DSL1H180J	CYLNDR CHIP C 1.8PF	J
C32		*	CE04KW1A470M	ELECTR θ 47UF	10WV
C33		*	SH1305900718	CYLNDR CHIP C 0.010UF	K
C34		*	CE04KW1H2R2M	ELECTR θ 2.2UF	50WV
C51		*	CK73FB1H102K	CHIP C	1000PF K
C52		*	SH1305900664	CERAMIC	0.033UF K
C53		*	CK73FB1H181K	CHIP C	180PF K
C54		*	CK45FB1H151K	CERAMIC	150PF K
C55		*	CE04KW1A470M	ELECTR θ 47UF	10WV
C61		*	SH1305900673	CYLNDR CHIP C 0.022UF	K
C62		*	CK73FB1H471K	CHIP C	470PF K
C65-66		*	SH1305900689	CERAMIC	0.022UF 25WV
C67, 68		*	CE04KW1A101M	ELECTR θ	10UF 10WV
C70, 71		*	CE04KW1A470M	ELECTR θ 47UF	10WV
C72		*	SH1305900718	CYLNDR CHIP C 0.010UF	K
C74, 75		*	CK73FB1H221K	CHIP C	220PF K
C76		*	CK45FF1H103Z	CERAMIC	0.010UF Z
C96		*	CC41DSL1H100J	CYLNDR CHIP C 10PF	J
C97		*	CC41DSL1H8R2D	CYLNDR CHIP C 8.2PF	D
C98		*	CK45FF1H103Z	CERAMIC	0.010UF Z
C99		*	CE04KW1A470M	ELECTR θ 47UF	10WV
C100		*	CK45FF1H473Z	CERAMIC	0.047UF Z
C103, 104		*	CK73FB1H221K	CHIP C	220PF K
C105-108		*	CK73FB1H101K	CHIP C	100PF K
C109, 110		*	CE04KW1H100M	ELECTR θ	10UF 50WV
C111, 112		*	CK73FB1H471K	CHIP C	470PF K
C113, 114		*	CK45FF1H103Z	CERAMIC	0.010UF Z
C115		*	SH1425910004	CYLNDR CHIP C 0.010UF	K
C151		*	CE04KW1C682M	ELECTR θ	680UF 16WV
C152		*	CE04KW1E222M	ELECTR θ	220UF 25WV
C153, 154		*	SH1305900669	CERAMIC	0.022UF 25WV
C155, 156		*	CE04KW1A470M	ELECTR θ	47UF 10WV
C157, 158		*	CE04KW1H100M	ELECTR θ	10UF 50WV
C159-161		*	CE04KW1A221M	ELECTR θ	220UF 10WV
C162		*	CE04KW1A470M	ELECTR θ	47UF 10WV
C163		*	CE04KW1C221M	ELECTR θ	220UF 16WV
C164, 166		*	CE04KW1E221M	ELECTR θ	220UF 25WV
C165, 166		*	CE04KW1E101M	ELECTR θ	10UF 25WV
C167, 168		*	CK45FF1H103Z	CERAMIC	0.010UF Z
C169		*	CE04KW1H477M	ELECTR θ	4.7UF 10WV
C170		*	CE04KW1A101M	ELECTR θ	10UF 50WV
C171		*	CK45FF1H103Z	CERAMIC	0.010UF Z
C172, 173		*	CE04KW1H101M	ELECTR θ	10UF 50WV
CNP6		*	E40-4168-05	PLUG(28pin)	
CNP7		*	SH1105100685	CONNECTOR ASSY(15pin)	
CNP501		*	E30-2751-08	PLUG(28pin)	
CNP501		*	E40-4208-05	PLUG(28pin)	
CNP501		*	E35-0791-08	CONNECTOR ASSY(28pin)	

L:Scandinavia K:USA P:Canada
 Y:FX(Far East, Hawaii) T:England E:Europe
 X:Australia M:Other Areas
 A indicates safety critical components.

* New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新部品	Parts No. 部品番号	Description 部品名/規格	Re- marks 備考
601		*	A01-3118-08	CABINET TOP	
602		*	A60-0555-08	FRONT PANEL ASSY	
603		*	SH1101100584	PANEL TRAY	
611		*	B10-2015-08	PANEL WINDOW	
615		*	B46-0096-33	WARRANTY CARD	
616		*	B46-0310-03	WARRANTY CARD	
		*	G10-0199-08	CUSHION CHASSIS	
		*	SH1103260268	CUSHION	
		*	H10-5730-08	POLYSTYRENE FOAMED FIXTURE(L)	
		*	H10-5731-08	POLYSTYRENE FOAMED FIXTURE(R)	
		*	H50-0827-08	ITEM CARTON CASE	
		*	H50-0828-08	ITEM CARTON CASE	
		*	SH1109020633	PAD	
		*	SH1109060121	PROTECTION BAG(UNIT)	
617		*	SH104130267	SPACER PWB	
618		*	SH1102140449	BRACKET PWB	
620		*	SH1105160005	FUSE HOLDER	
621		*	SH1101230060	LEG(REAR)	
622		*	SH1101560798	INSULATOR	
625		*	K29-5883-08	KNOB(MODE)	
626		*	K29-5884-08	KNOB(PLAY/EJECT)	
628		*	K29-5885-08	KNOB(10-key)	
629		*	K29-5886-08	KNOB(SKIP)	
629		*	K29-5887-08	KNOB(DISPLAY)	
630		*	K29-5888-08	KNOB(REPEAT)	
A		*	N89-3008-45	SCREW 3X8	
B		*	N89-3008-46	SCREW 3X8	
C		*	SH1129700037	SCREW 3X8	
D		*	N89-3010-46	SCREW 3X10	
MAIN UNIT					
C2		*	CE04KW1A470M	ELECTR θ 47UF	10WV
C3		*	SH1305900678	CYLNDR CHIP C 4700PF	K
C4		*	CC41DSL1H330J	CYLNDR CHIP C 33PF	J
C5		*	CE04KW1A101M	ELECTR θ 10UF	10WV
C6		*	SH1305900683	CERAMIC	0.015UF K
C7		*	SH1105950092	CYLNDR CHIP C 8200PF	K
C8		*	CC41DSL1H350J	CYLNDR CHIP C 35PF	J
C9		*	CE04KW1HR22M	ELECTR θ 0.22UF	50WV
C10		*	CE04KW1A470M	ELECTR θ 47UF	10WV
C11		*	CE04KW1H010M	ELECTR θ 1.0UF	50WV
C12		*	CE04KW1H0R1M	ELECTR θ 0.1UF	50WV
C13		*	SH1305900642	CERAMIC	0.039UF K
C14		*	CE04KW1H100M	ELECTR θ 10UF	50WV
C15		*	CE04KW1H0R1M	ELECTR θ 0.1UF	50WV
C16		*	CK73FB1H221K	CHIP C	220PF K
C17		*	CE04KW1HR47M	ELECTR θ 0.47UF	50WV
C19		*	CK73FB1H102K	CHIP C	1000PF K
C20		*	SH1305900673	CYLNDR CHIP C 0.022UF	M
C22		*	SH1305900664	CERAMIC	0.033UF K
		*	CK73FB1H221K	CHIP C	220PF K

L:Scandinavia K:USA P:Canada
 Y:FX(Far East, Hawaii) T:England E:Europe
 X:Australia M:Other Areas
 A indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

3

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕	Re- marks 備考
F1 ,2		F05-6313-05	FUSE(250V T630mA)		
X1	*	L77-2132-08	CRYSTAL REZONATOR(16.9344MHz)		
XL1		L78-0267-05	REZONATOR(4.19MHz)		
VR1	*	R12-2048-08	TRIMMING POT. 6.8K Ω T. BALANCE		
VR2		R12-1619-05	TRIMMING POT. 4.7K Ω T. GAIN		
VR3		R12-3685-05	TRIMMING POT. 10K Ω T. GAIN		
VR4		R12-5651-05	TRIMMING POT. 100K Ω VCO		
SH10		SH1305301218	TACT SWITCH(TEST MODE)		
SW501-525		SH1305301218	TACT SWITCH(EJECT etc.)		
D1 -5		1SS133	DIODE		
D7 ,10		1SS133	DIODE		
D9 ,11		1SS133	DIODE		
D11 ,12		RL104T	DIODE		
D13 -18		1SS133	DIODE		
D501-509		1SS133	DIODE		
FL501		10-BT-676K	INDICATOR TUBE		
IC1		LA9211M	IC(RF AMP/SERV0)		
IC2	*	LC78481E	IC(D. S.P.)		
IC3	*	TC9248P	IC(O/A CONVERTOR)		
IC4	*	UPD75216ACW-A65	IC(MICROPROCESSOR)		
IC5	*	PST6000	IC(RESET)		
IC6	*	LA6524	IC(DRIVER)		
IC7		TA7291S	IC(BRIDGE DRIVER)		
IC8		TA78L005AP	IC(VOLTAGE REGULATOR/ +5V)		
IC9	*	AN79L05T	IC(VOLTAGE REGULATOR/ -5V)		
IC10	*	AN78L05T	IC(VOLTAGE REGULATOR/ +5V)		
IC11		NJM4560D	IC(OP AMP X2)		
Q1 -4		DTC144YS	DIGITAL TRANSISTOR		
Q5		ZSA1015GR	TRANSISTOR		
Q7		ZSC1740SR	TRANSISTOR		
Q8		ZSA933SR	TRANSISTOR		
Q9		2SD2012	TRANSISTOR		
Q10		2SB1375	TRANSISTOR		
Q11		2SB1237R3	TRANSISTOR		
ZD2 -4		MTZ9.1A	ZENER DIODE		
ZD5		MTZJ30BT	ZENER DIODE		
ZD6		MTZJ6.8B	ZENER DIODE		
MECHANISM ASSY					
2	1B	SH1313730001	MAGNET		
3	1B	T50-1067-08	BRACKET MAGNET		
5	1B	D16-0362-08	BELT DRIVE		
6	1B	D15-0364-08	PULLEY DRIVE		
7	1B	SH1102810098	GEAR PINION		
9	1A	SH1102480607	SHIFT LEVER		
10	1B	A11-1021-08	CHASSIS LOADING		
11	2B	SH1302810228	GEAR(MIDDLE)		
12	2B	SH1302810229	GEAR(DRIVE)		
15	3B	SH1303260448	CUSHION		
16	2B	SH1305301248	PUSH SWITCH(SLT)		
19	3A	SH1302810229	GEAR(RACK MOVE)		
20	3A	SH1252560244	SPRING(RACK)		

L:Scandinavia
Y:PX(Far East, Hawaii)
Y:AAFES(Europe)

K:USA
T:England
X:Australia

P:Canada
E:Europe
M:Other Areas

△ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

4

PARTS LIST

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕	Re- marks 備考
21	3A	SH1302810231	GEAR(RACK FIX)		
22	3B	SH1302900394	SHAFT(CUIDE)		
23	2A	SH1102140395	DISC TRAY		
24	2B	S74-0027-08	SWITCH(OPEN/CLOSE)		
A		SH1109700853	SCREW		
B		SH1319700021	SCREW		
C		SH1309701730	SCREW		
D		SH1309701711	SCREW		
E		SH1169700032	SCREW		
F		SH1309701535	SCREW		
DM	3B	T42-0658-08	DISC MOTOR ASSY		
FM	3B	T42-0657-08	SLIDE MOTOR WITH GEAR		
LM	2B	SH1106300200	MOTOR WITH PULLEY		
PU	3A	T25-0032-08	PICKUP		

L:Scandinavia
Y:PX(Far East, Hawaii)
Y:AAFES(Europe)

K:USA
T:England
X:Australia

P:Canada
E:Europe
M:Other Areas


△ indicates safety critical components.

PARTS LIST

CAPACITORS


CC 45 TH 1H 220 J
1 2 3 4 5 6

- 1 = Type ... ceramic, electrolytic, etc.
- 2 = Shape ... round, square, ect.
- 3 = Temp. coefficient
- 4 = Voltage rating
- 5 = Value
- 6 = Tolerance



Capacitor value

- 010 = 1pF
- 100 = 10pF
- 101 = 100pF
- 102 = 1000pF = 0.001μF
- 103 = 0.01μF

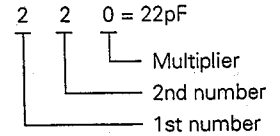

Temperature coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm/°C	±30	±60	±120	±250	±500

Example : CC45TH = -470 ± 60ppm/°C

Tolerance (More than 10pF)

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	±0.25	±0.5	±2	±5	±10	±20	+40 -20	+80 -20	+100 -0	More than 10μF -10 ~ +50 Less than 4.7μF -10 ~ +75

(Less than 10pF)

Code	B	C	D	F	G
(pF)	±0.1	±0.25	±0.5	±1	±2

Voltage rating

2nd word	A	B	C	D	E	F	G	H	J	K	V	
1st word	0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	-
1	10	12.5	16	20	25	31.5	40	50	63	80	35	-
2	100	125	160	200	250	315	400	500	630	800	-	-
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	-	-

Chip capacitors

- (EX) C C 7 3 F S L 1 H 0 0 0 J
1 2 3 4 5 6 7
- (Chip) (CH, RH, UJ, SL)
- (EX) C K 7 3 F F 1 H 0 0 0 Z
1 2 3 4 5 6 7
- (Chip) (B, F)
- Refer to the table above.
- 1 = Type
 - 2 = Shape
 - 3 = Dimension
 - 4 = Temp. coefficient
 - 5 = Voltage rating
 - 6 = Value
 - 7 = Tolerance

Dimension (Chip capacitors)

Dimension code	L	W	T
Empty	5.6 ± 0.5	5.0 ± 0.5	Less than 2.0
A	4.5 ± 0.5	3.2 ± 0.4	Less than 2.0
B	4.5 ± 0.5	2.0 ± 0.3	Less than 2.0
C	4.5 ± 0.5	1.25 ± 0.2	Less than 1.25
D	3.2 ± 0.4	2.5 ± 0.3	Less than 1.5
E	3.2 ± 0.2	1.6 ± 0.2	Less than 1.25
F	2.0 ± 0.3	1.25 ± 0.2	Less than 1.25
G	1.6 ± 0.2	0.8 ± 0.2	Less than 1.0

RESISTORS

Chip resistor (Carbon)


- (EX) R K 7 3 E B 2 B 0 0 0 J
1 2 3 4 5 6 7
- (Chip) (B, F)

Carbon resistor (Normal type)

- (EX) R D 1 4 B B 2 C 0 0 0 J
1 2 3 4 5 6 7

- 1 = Type
- 2 = Shape
- 3 = Dimension
- 4 = Temp. coefficient
- 5 = Rating wattage
- 6 = Value
- 7 = Tolerance

Dimension



Dimension (Chip resistor)

Dimension code	L	W	T
E	3.2 ± 0.2	1.6 ± 0.2	1.0
F	2.0 ± 0.3	1.25 ± 0.2	1.0
G	1.6 ± 0.2	0.8 ± 0.2	0.5 ± 0.1

Rating wattage

Code	Wattage	Code	Wattage	Code	Wattage
1J	1/16W	2C	1/6W	3A	1W
2A	1/10W	2E	1/4W	3D	2W
2B	1/8W	2H	1/2W		

DP-470

SPECIFICATIONS

Format

System Compact disc digital audio system
Laser Semiconductor laser
Number of channels 2 channels
Playing rotation 200rpm~500rpm (CLV)

D/A convertors

D/A conversion 1Bit
Oversampling 8fs (352.8kHz)

Audio

Frequency response 8Hz~20kHz, ± 1.0 dB
Signal to noise ratio More than 94dB

Dynamic range More than 92dB
Total harmonic distortion Less than 0.005%
Channel separation More than 83dB
Wow & flutter Unmeasurable limit
Output level/impedance
Fixed 1.2V/3.3k Ω

General

Dimensions W : 360mm
H : 94mm
D : 307mm
Weight (Net) 3.4kg

Note : KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Note :

Component and circuitry are subject to modification to insure best operation under differing local conditions. This manual is based on, the Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION

Alive Mitake, 2-5, 1-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55-2791, Piso 6 Plaza Chase, Cl. 47 y Aquilino de la Guardia, Panama, Republic de Panama

TRIO-KENWOOD U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker-Str. 15, 63150 Heusenstamm, Germany

TRIO-KENWOOD FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

KENWOOD ESPAÑA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (A.C.N. 001 499 074)

P.O. BOX 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37 Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong N.T. Hong Kong

KENWOOD ELECTRONICS SINGAPORE PTE LTD.

No. 1 Genting Lane #07-00, KENWOOD Building, Singapore, 1334