


DV-5050M/5900M

DVF-J6050/J6050-G

SERVICE MANUAL

© 2001-9 PRINTED IN KOREA
B51-5755-00 (K/K) 3003

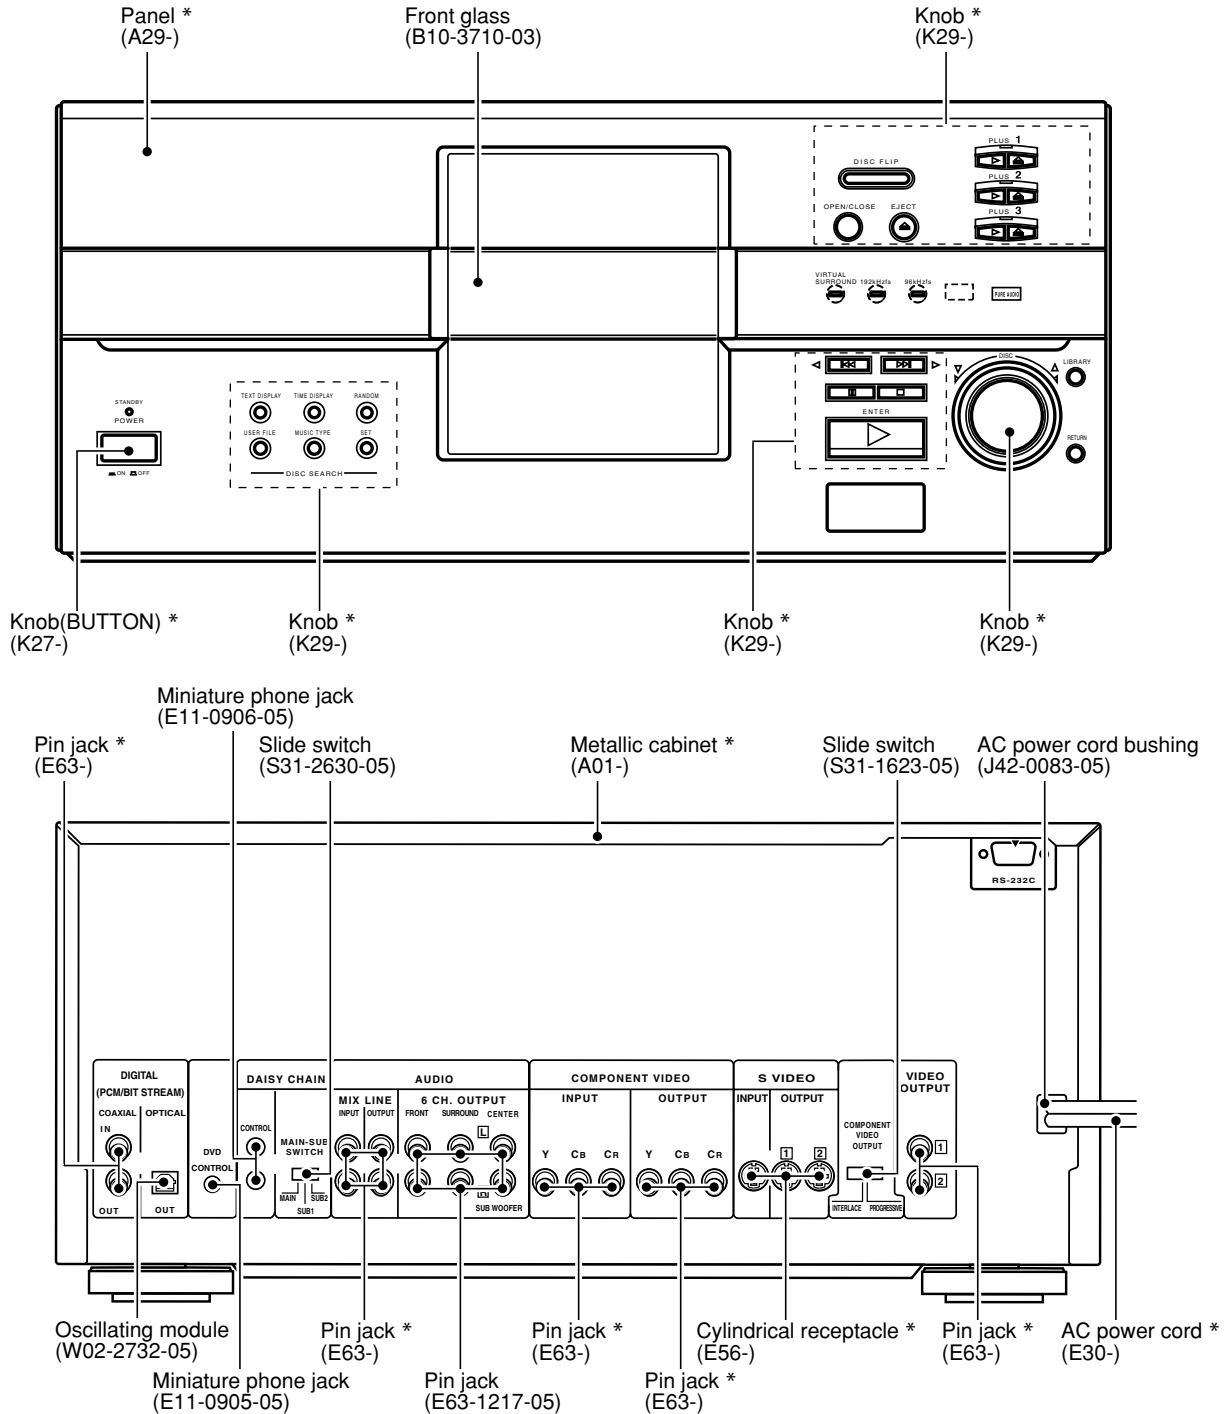

*** Refer to parts list on page 64.**

In compliance with Federal Regulations, following are reproduction of labels on, or inside the product relating to laser product safety.

KENWOOD-Corp. certifies this equipment conforms to DHHS Regulations No.21 CFR 1040. 10, Chapter 1, subchapter J.

DANGER : Laser radiation when open and interlock defeated. AVOID DIRECT EXPOSURE TO BEAM.

Caution : No connection of ground line if disassemble the unit. Please connect the ground line on rear panel, PCBs, Chassis and some others.














DV-5050M/5900M/DVF-J6050/J6050-G

CONTENTS / ACCESSORIES / CAUTIONS

Contents

| | | | |
|--|----|-------------------------|----|
| CONTENTS / ACCESSORIES / CAUTIONS..... | 2 | PC BOARD | 11 |
| BLOCK DIAGRAM | 3 | SCHEMATIC DIAGRAM | 23 |
| CIRCUIT DESCRIPTION | 4 | EXPLODED VIEW | 61 |
| ADJUSTMENT | 7 | PARTS LIST..... | 64 |
| WIRING DIAGRAM | 10 | SPECIFICATIONS | 77 |

Accessories

| | | | |
|---|---|--|--|
| <p>RS-232C cable(1) (E30-7209-05)</p>  | <p>System control cable(2) (E30-2816-05)</p>  | <p>Batteries (R6/AA)(2) (DV-5900M only)</p>  | <p>Batteries (R03/AAA)(2)</p>  |
| <p>Standard remote control unit(1) (A70-1486-05): RC-D0512.....KYEM (A70-1488-15): RC-D0513.....K1</p>  | <p>Video cable(1) (E30-1427-05)</p>  | <p>S-Video cable(1) (E30-2956-05)</p>  | <p>Coaxial cable(1) (E30-2365-05)</p>  |
| <p>Battery cover (A09-1242-08)</p> | <p>Keyboard remote control unit(1) DV-5900M only (A70-1513-05): RC-KB3.....K1</p>  | <p>For countries other than U.S.A., U.S.-Military, AC Plug Adaptor (1) (E03-0115-05)</p>  <p>Use to adapt the plug on the power cord to the shape of the wall outlet. (Accessory only for regions where use is necessary.)</p> | |
| <p>Audio cable DV-5900M.....(3) DV-5050M/DVF-6050.....(1) (E30-0505-05)</p>  | <p>Battery cover (A09-1176-08)</p> | | |

Cautions

The marking of products using lasers
(For countries other than U.S.A., U.S.-
Military and Canada)

**CLASS 1
LASER PRODUCT**

The marking this product has been classified as Class 1.
It means that there is no danger of hazardous radiation
outside the product.

Location: Back panel

CAUTION
VISIBLE LASER RADIATION
WHEN OPEN. DO NOT
STARE INTO BEAM.

Inside this laser product, a laser diode classified as Class
2 laser radiation is contained as alerted by the internal
caution label shown above. Do not stare into beam.

Location: DVD laser pick-up unit covproduct.


DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

1. Initializing

1-1 Initialization Method

- While holding down the "LIBRARY" key depressed, plug the power cord into the socket.

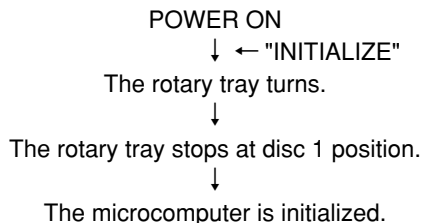

2. Test Mode

- This model has 3 kind of test modes : unit inspection, factory test mode, measurement.
- In this manual, items of repair, test mode and inspection are available.

2-1 Setting Method

2-1-1 FCT Mode (Factory Mode)

- While holding down the MUSIC TYPE key depressed, plug the power cord into the socket.

2-1-2 Inspection Mode

- While holding down the TEXT DISPLAY key depressed, plug the power cord into the socket.

2-2 Cancellation of the Test Mode

- Unplug the power cord from the power socket.

2-3 Key Operation During the Test Mode

- During the test mode, it can be operated in a special manner that is different from an ordinary operation by using the keys on the panel, specifically as shown in the following table.

FCT Mode

| Key | Mode | Display | Operation |
|--------------|----------|---|---|
| PLAY | - | Playback time | Disc playback |
| TEXT DISPLAY | - | All segments light → Niagara mode → Playback time → | Display shows cyclically by pressing key. |
| SKIP UP | Playback | Playback time | Playback next chapter/track #/program # |
| SKIP DOWN | Playback | Playback time | Playback before chapter/track #/program # |
| STOP | - | Playback time | Stop to operate and return to first step of this test mode. |
| RANDOM | Playback | Mute ON →Mute OFF | Mute works cyclically on or off. |
| USER FILE | - | WIDE1→WIDE2 NORMAL | WIDE mode changes cyclically WIDE1 or WIDE2. |
| TIME DISPLAY | - | SCART RGB →SCART YC→SCART Through | Video signal of SCART changes cyclically RGB(DVD)→Y/C(DVD)→Through(AV1 ↔AV2) |
| DISC FLIP | - | OK or *** ERROR | Self check mode (Refer to Servo Error Code) |
| PLUS1 PLAY | - | S-CW | The stocker motor turns clockwise. |
| PLUS1 EJECT | - | S-CCW | The stocker motor turns counterclockwise. |
| PLUS2 PLAY | - | OPEN | The door opens. |
| PLUS2 EJECT | - | CLOSE | The door closes. |
| PLUS3 PLAY | - | 0°→180° | 0°→180°operation of clamper motor. |
| PLUS3 EJECT | - | 180°→0° | 180°→0°operation of clamper motor. |
| OPEN/CLOSE | - | UNLOAD | Unload operation of loading motor. |
| EJECT | - | LOAD | Load operation of loading motor. |

INSPECTION Mode

| Key | Mode | Display | Operation |
|------------|----------|--|---|
| PLAY | - | Playback time | Disc playback |
| SKIP UP | Playback | Playback time | Playback next chapter/track #/program # |
| SKIP DOWN | Playback | Playback time | Playback before chapter/track #/program # |
| STOP | Playback | INSPECTION | Stop to operate and return to first step of this test mode. |
| STOP | Stop | Model/destination/ region code/u-com version | Display shows cyclically by pressing key. |
| RANDOM | Playback | Jitter ****% | Shows jitter value(binary value vs time deviation of PLL-clock) |
| DISC FLIP | - | 180°SW OK(0°→180°) 0°SW OK(180°→0°) | Inverted inversion unit ASSY 0° to 180° or 180° to 0°. |
| MUSIC TYPE | - | CPPM KEY ID | 13 figures. (DVD audio model only) |
| USER FILE | - | Playback time | Indicated DISC No.400 in LCD remote controller. |

CIRCUIT DESCRIPTION

3. ERROR CODE OF CIRCUIT BY SELF CHECK MODE (TEST MODE)

| DEFINITION | CONTENTS | CODE | BLOCK | TIMING |
|------------------------------------|--------------------------------------|-----------|-------------------------|---|
| <i>ODC(Optical Device Control)</i> | | | | |
| MOD_NOT_CRCOK | No CRCOK signal | 0x4303 | (ADSC,ODC,disc ,pickup) | Read address error at lead in or focus jump. |
| MAS_ECC_ERR | Abnormal ODC | ODC ERROR | ODC | No emission OK on disc and host in 5 secs. |
| LAYER_CMP_ERR | Abnormal LAYER in seek mode | - | (ADSC,ODC,disc ,pickup) | |
| OUT_PB_AREA_NG | OUT of PB AREA | - | | |
| DATA_TR_PLAY_NG | DATA Track Play | - | | |
| SEEK_NG_CHGNV | No data caused seek error | - | | |
| UNCORRECT_ERR | No control data by demodulator error | - | | |
| INVALID_CMD_ERR | Out of sector ID | 0xD601 | ODC,disc | Over data from disc(DVD : 0xFF)(VCD : 00:02:00 less)(CD : 0xFF) |
| UNCORRECT_LEADIN | No lead-in data by demodulator error | 0xD602 | | Time over in lead-in. |
| UNCORRECT_KEYDET | No lead-in data by demodulator error | 0xD603 | | |

| DEFINITION | CONTENTS | CODE | BLOCK | TIMING |
|------------------|---|------------|-------------------------------------|--|
| <i>SERVO</i> | | | | |
| TRAY_LOADING_ERR | Tray Loading Error. | 0x4000 | ADSC, TRAY Mechanism, Motor LSI | DCM_TRAYCTL_T(time out 5secs) |
| FOCUS_SVERR | Focus Servo Error. | 0x4100 | ADSC, pickup & actuator, Driver LSI | DCM_FCON_T(time out 5secs), Lock NG, NG of seek. |
| SPINDLE_SVERR | Spindle Servo Error. | 0x4101 | ADSC, Driver LSI, disc Motor | DCM_DMON_T(time out 10 secs),Time out of checking stop,Time out of start to turn. |
| DSC_DM_ERR | DSC Disc Motor Error. Abnormal FG-period in DVD, Abnormal turn of disc motor, | 0x4102 | ADSC, Driver LSI, disc Motor | DCM_DMOF_T(time out 10secs), DCM_DMMODE_T(time out100ms) Abnormal turn of disc motor., |
| CDC_CLV_ERR | 6626 CLVS Failure. Abnormal FG-period in CD | 0x4103 | ADSC, Driver LSI, disc Motor | DCM_DMOF_T(time out 10secs) Setting abnormal CLV |
| TRAVERSE_ERR | Traverse Motor Error. | 0x4104 | ADSC, Driver LSI, feed Motor | DCM_INNER_T(time out 5secs) |
| TRACK_SVERR | Tracking Servo Error | 0x4105 | ADSC, pickup & actuator, Driver LSI | DCM_TRON_T(time out 1sec) Command error,Focus jump Lock NG (ReSartServo) NG of |
| SEEK_TIMEOUT_ERR | Seek Time Out Error | 0x4106 | ADSC, pickup & actuator, Driver LSI | Over 200 seek times |
| DSC_ERROR | DSC Error (status data error) | ADSC ERROR | ADSC | Command error |
| DSC_NOTREADY | DSC Not Ready Error | ADSC ERROR | ADSC | ADSC REDY time out |
| DSC_TIM_ERR | DSC TimeOut Error. | ADSC ERROR | ADSC | Over of CLV OK Over of command end |
| DSC_COM_ERR | DSC Communication Failure. | ADSC ERROR | ADSC | No use |
| DSC_ATN_ERR | DSC Attention Error. | ADSC ERROR | ADSC | Error of CD-trick play and CD/DVD seek. FC jump in DVD-play. |
| INVALID_MDTYP | Out of Media | 0x4300 | ADSC | No check of media, Error after servo retry. Abnormal disc. |
| DONOT_QREAD_ERR | 6626 QCODE do not Read Error. | 0x4302 | ADSC | Read error in Cue or Rev play of CD |
| DSC_ESCAPE | DSC Command Escape | - | ADSC | Stop servo operation after setting the ESC flug in mode register of ADSC. |
| <i>FEP</i> | | | | |
| FEP_IC_ERR | Adjustment error on data slice offset | FEP ERROR | ADSC ,FEP | jitter and data slice offset adjustment error |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION


| DEFINITION | CONTENTS | CODE | BLOCK | TIMING |
|------------------------|--------------------------------------|--------|-------------|--|
| <i>DISC</i> | | | | |
| DISERR_UDF | UDF Bridge NG | 0x2100 | Disc format | 1. No CD-ROM Volume Descriptor Set, No Primary Volume Descriptor 2. No Beginning Extended Area Descriptor 3. No NSR Descriptor of "NSR02" 4. Length error of Main Volume Descriptor Sequence 5. Directry of length error on VIDEO_TS/AUDIO_TS after root |
| DISERR_TT_SRP_NO | TT_SRP=0 | 0x2111 | Disc format | |
| ISERR_TT_SRP_OVER | Value >TT_SRP | 0x2112 | Disc code | |
| DISERR_TT_SRP_MISS | SRP is not meet with VTSN or VTS TTN | 0x2113 | | |
| DISERR_TT_SRP_PTT_OVER | Value >TT_SRP.PTT_Ns | 0x2114 | | |
| DISERR_TTU_SRP_NO | TTU_SRP=0 | 0x2120 | Disc format | |
| DISERR_TTU_SRP_OVER | Value >TTU_SRP | 0x2121 | Disc code | |
| DISERR_PGCi_SRP_NO | PGCI_SRP=0 | 0x2131 | Disc format | |
| DISERR_PGCi_SRP_OVER | Value>PGCI_SRP | 0x2132 | Disc code | |
| DISERR_TMAP_SRP_OVER | Value>TMAP_SRP | 0x2141 | | |
| DISERR_TMAP_SA_NO | TMAP_SA=0 | 0x2142 | | |
| DISERR_TMAP_EN_NO | MAP_EN=0 | 0x2143 | | |
| DISERR_PGC_PGMAP_NO | C_POSIT is OK, No PGMAP in PGC | 0x2150 | Disc format | |
| DISERR_PGC_PG_NO | C_POSIT is OK, PG=0 in PGC. | 0x2151 | Disc code | |
| DISERR_PGC_PG_OVER | Value >PG in PGC | 0x2152 | | |
| DISERR_PGC_C_PBIT_NO | C_POSIT is OK, No C_PBIT in PGC | 0x2153 | Disc format | |
| DISERR_PGC_C_NO | C_POSITis OK, Cell=0 in PGC | 0x2154 | | |
| DISERR_PGC_CN_NO | Cell=0 | 0x2155 | | |
| DISERR_PGC_C_OVER | Value >Cell in PGC | 0x2156 | Disc code | |
| DISERR_PGC_BLK_NO | Block Cell only | 0x2157 | Disc format | |
| DISERR_SEARCH_CN_NO | No Cell# in search. | 0x2160 | | |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

4. Main Microcomputer: uPD784217AGF519(X25, IC1)

4-1 Microcomputer Periphery Block Diagram

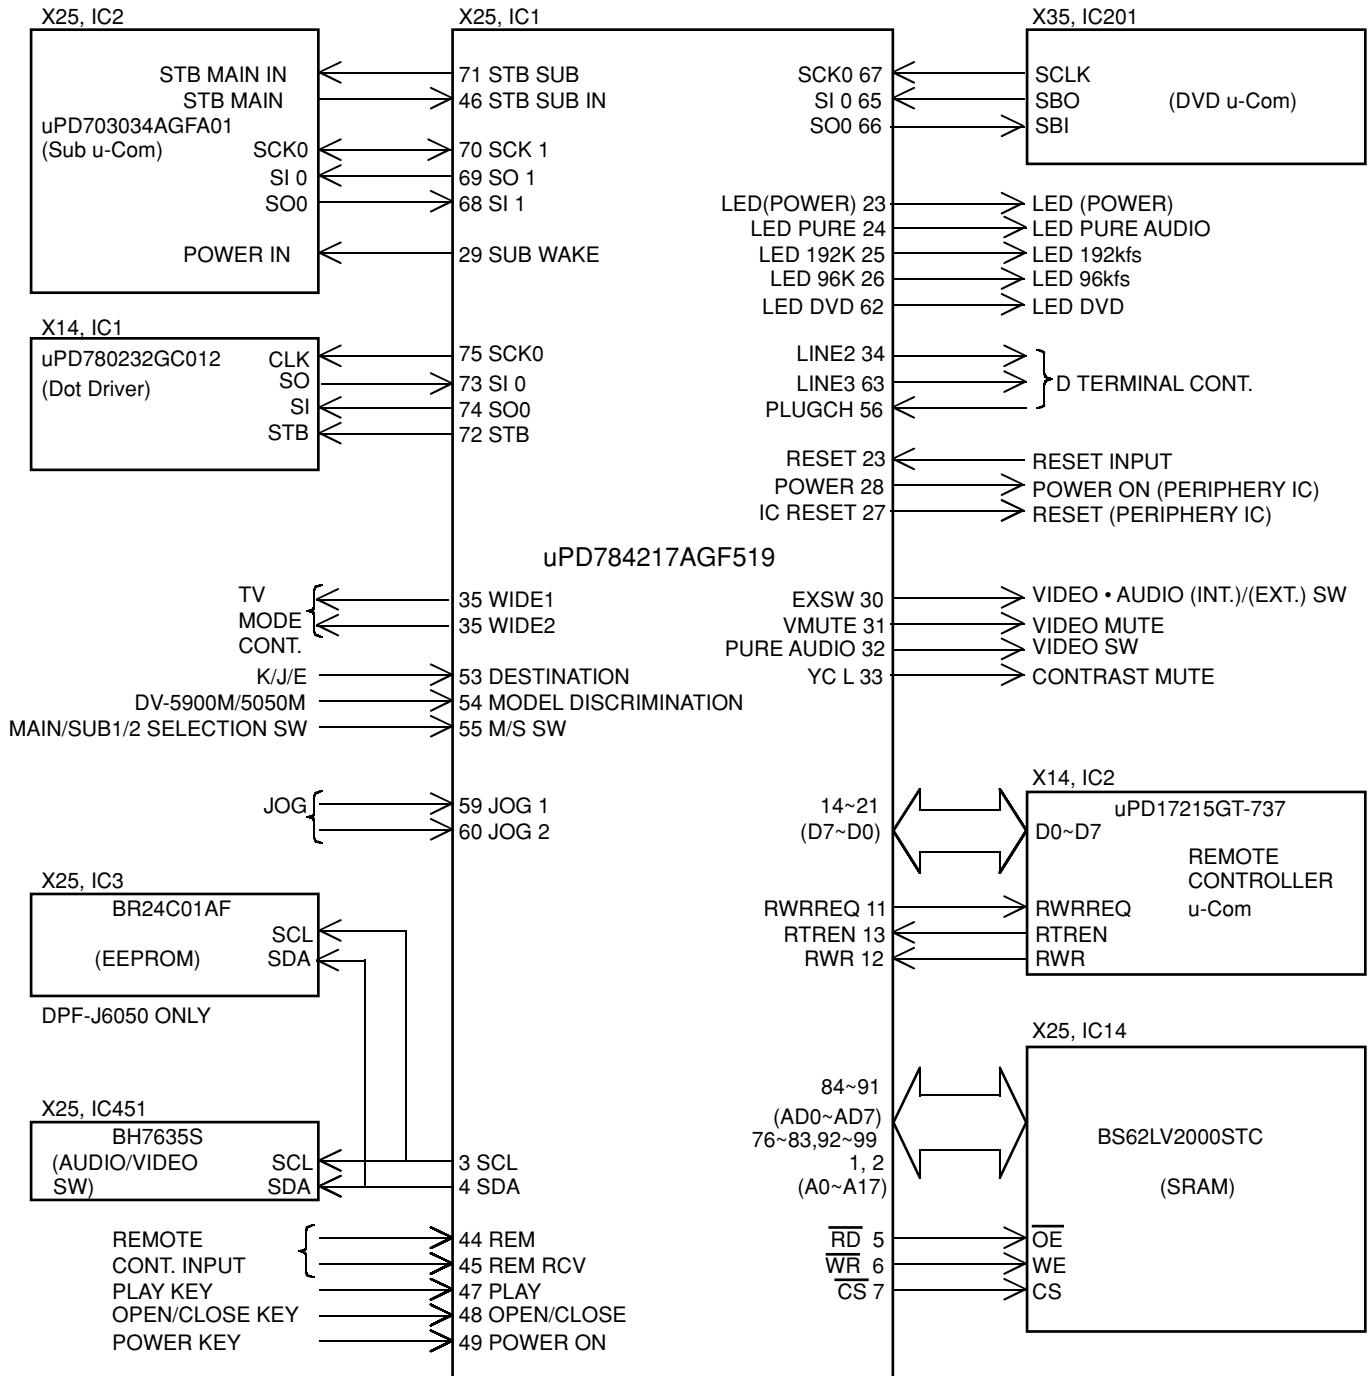

Key Matrix The number inside () is pin number of FL driver & display u-com (X14, IC1).

| | Key0(Pin22) | Key1(Pin21) | Key2(Pin20) | Key3(Pin19) |
|------------|-------------|--------------|-------------|-------------|
| 0 | DVD VIDEO | STOP | PAUSE | PLUS1 PLAY |
| 0.76~0.913 | DVD AUDIO | SKIP DOW | EJECT | PLUS1 EJECT |
| 1.53~1.81 | CD | SKIP UP | DISC FLIP | PLUS2 PLAY |
| 2.32~2.71 | MUSIC TAPE | LIBRARY | - | PLUS2 EJECT |
| 3.12~3.57 | USER FILE | TEXT DISPLAY | - | PLUS3 PLAY |
| 3.93~4.41 | SET | - | - | PLUS3 EJECT |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

4-2 Port Function of Main Microcomputer

| Port No. | Port Name | I/O | Function | Active | |
|----------|------------|-----|--|--------|-------|
| | | | | H | L |
| 1 | A16 | O | Address bus of SRAM (X25, IC14). | | |
| 2 | A17 | O | Address bus of SRAM. | | |
| 3 | SCL | O | Clock output for audio/video switching IC. | | |
| 4 | SDA | I/O | Data input/output for audio/video switching IC. | | |
| 5 | RD | O | Read strobe for SRAM (X25, IC14). | | |
| 6 | WR | O | Write strobe for SRAM (X25, IC14). | | |
| 7 | CS | O | Chip selector for SRAM (X25, IC14). | | |
| 8 | ASTB | - | Unused. | | |
| 9 | VDD | - | Supply voltage (+5V). | | |
| 10 | RGB H | O | RGB signal output. DVF-J6050 (E/T) Only | | |
| 11 | RWRREQ | O | Request of transmission data to remote cont. microcomputer. | | |
| 12 | RWR | I | Read-out the data of remote cont. microcomputer. | | |
| 13 | RTREN | I | Permission of transmission data from remote cont. microcomputer. | | |
| 14~21 | D7~D0 | O | Data output to remote cont. microcomputer (X14, IC2). | | |
| 22 | VPP | - | Unused. | | |
| 23 | STB LED | O | Control port for power led. | ON | |
| 24 | PURE LED | O | Control port for pure audio led. | ON | |
| 25 | 192k LED | O | Control port for 192kfs led. | ON | |
| 26 | 96k LED | O | Control port for 96kfs led. | ON | |
| 27 | ICRESET | O | Reset signal output to display microcomputer (X14, IC1). | | RESET |
| 28 | POWER | O | Power on/off control for regulator (X00, IC3). | ON | |
| 29 | SUB WAKE | O | Output port of power on signal to sub microcomputer. | | |
| 30 | EXSW | O | Switching port of (ext./int.) for video and audio output. | INT. | |
| 31 | VMUTE | O | Video mute control port. | MUTE | |
| 32 | PURE AUDIO | - | Unused. DV-5050M/DVF-J6050 | - | |
| | | O | Pure audio on/off control port. DV-5900M | ON | |
| 33 | YC L | O | YC signal output. DVF-J6050 (E/T) Only | | OUT |
| 34 | LINE2 | - | Unused. | | |
| 35 | WIDE1 | - | Unused. | | |
| 36 | WIDE2 | - | Unused. | | |
| 37 | VDD | - | Supply voltage (+5V). | | |
| 38 | X2 | - | System clock input. | | |
| 39 | X1 | I | System clock input. | | |
| 40 | VSS | - | Connected to GND. | | |
| 41 | XT2 | - | Unused. | | |
| 42 | XT1 | - | Unused. | | |
| 43 | RESET | I | Reset signal input. | | |
| 44 | REM | I | Remote control signal input. | | |
| 45 | REM RCV | I | IR signal input. | | |
| 46 | STB SUB IN | I | Strobe signal input from sub microcomputer. | | |
| 47 | PLAY | I | Key input (PLAY) port. | | ON |
| 48 | OPEN/CLOSE | I | Key input (OPEN/CLOSE) port. | | ON |
| 49 | POWER ON | I | Input port of power on signal from sub microcomputer. | | |
| 50 | NC | - | Unused. | | |
| 51 | AVDD | - | Supply voltage (+5V). | | |
| 52 | AVREFO | - | Connected to VDD. | | |
| 53 | SHIMUKE | I | Discrimination of destination. K : 0V E : 5V | | |
| 54 | KISYU | I | Discrimination of model. DV-5050M : 5V DV-5900M : 2.5V | | |
| 55 | M/S SW | I | Input port of M/S switch. MAIN : 5V SUB1 : 2.5V SUB2 : 0V | | |
| 56 | PLUGCH | - | Unused. | | |
| 57, 58 | NC | - | Unused. | | |
| 59 | JOG1 | I | Encoder signal input. | | |
| 60 | JOG2 | I | Encoder signal input. | | |


DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

| Port No. | Port Name | I/O | Function | Active | |
|----------|-----------|-----|--|--------|---|
| | | | | H | L |
| 61 | AVSS | - | Connected to GND. | | |
| 62 | LED DVD | O | DVD active led control port. | | |
| 63 | LINE3 | - | Unused. | | |
| 64 | AVREF1 | - | Connected to VDD. | | |
| 65 | SI0 | I | Data input from DVD microcomputer. | | |
| 66 | SO0 | O | Data output to DVD microcomputer. | | |
| 67 | SCK0 | I | Clock input from DVD microcomputer. | | |
| 68 | SI1 | I | Data input from sub microcomputer. | | |
| 69 | SO1 | O | Data output to sub microcomputer. | | |
| 70 | SCK1 | I/O | Clock input/output between main/sub microcomputer. | | |
| 71 | STB SUB | O | Strobe signal output to sub microcomputer. | | |
| 72 | STB | O | Strobe signal output to display microcomputer (X14, IC). | | |
| 73 | SI | I | Data input from display microcomputer (X14, IC). | | |
| 74 | SO | O | Data output to display microcomputer (X14, IC). | | |
| 75 | SCK0 | O | Clock output to display microcomputer (X14, IC). | | |
| 76~83 | A0~A7 | O | Address bus of SRAM (X25, IC14). | | |
| 84~91 | AD0~AD7 | I/O | Data bus of SRAM (X25, IC14). | | |
| 92~99 | A8~A15 | O | Address bus of SRAM (X25, IC14). | | |
| 100 | VSS | - | Connected to GND. | | |

5. Sub Microcomputer: 703034AGFA01(X25-644/655, IC2)

5-1 Sub Microcomputer Periphery Block Diagram

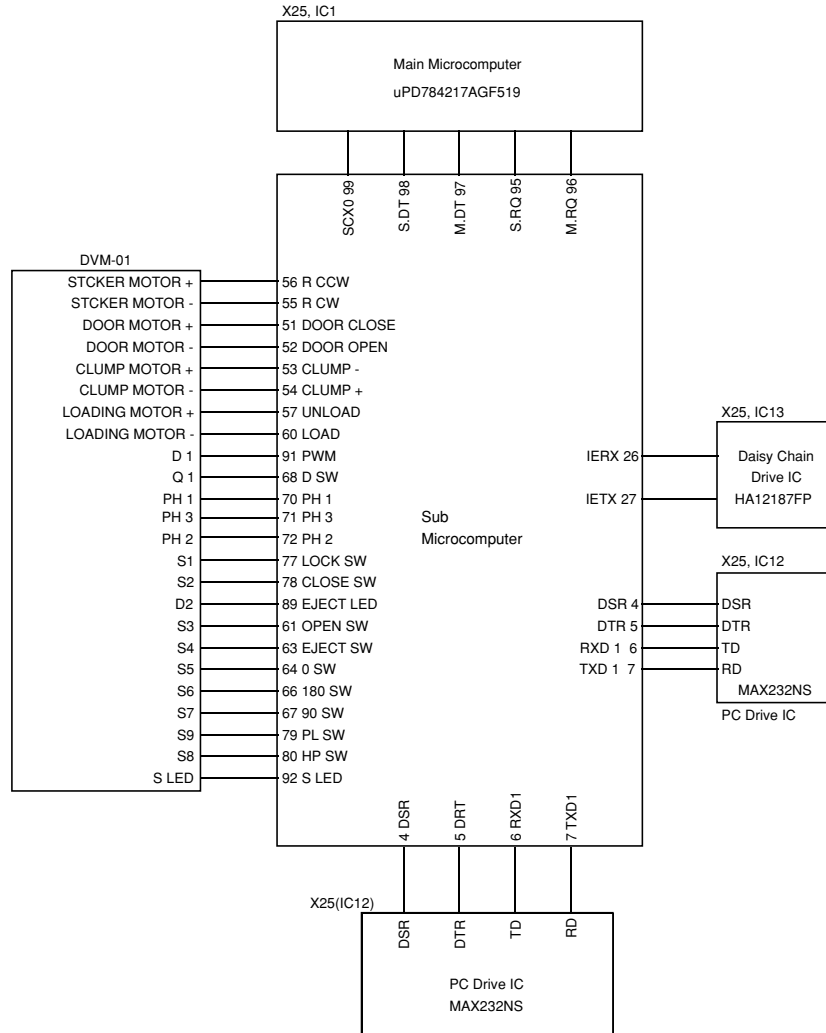

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

5-2 Port Function of Sub Microcomputer

| Port No. | Port Name | I/O | Function | Active | |
|----------|------------|-----|---|--------|---------|
| | | | | H | L |
| 1 | TXD0 | - | No used. | | |
| 2,3 | NC | - | No used. | | |
| 4 | DSR | O | PC link data set ready output. | | READY |
| 5 | DTR | I | PC link data set ready input. | | |
| 6 | TD | I | PC link data input. | | |
| 7 | RD | O | PC link data output. | | |
| 8 | NC | - | No used. | | |
| 9 | EVDD | - | Supply voltage. | | |
| 10 | EVSS | - | GND | | |
| 11~20 | NC | - | No used. | | |
| 21 | IC/VPP | - | Connected to VSS. | | |
| 22~25 | NC | - | No used. | | |
| 26 | IERX | I | Daisy chain IE bus data input. | | |
| 27 | IETX | O | Daisy chain IE bus data output. | | |
| 28~33 | NC | - | No used. | | |
| 34 | RESET | I | Reset signal input. | | |
| 35 | NC | - | GND | | |
| 36 | NC | - | No used. | | |
| 37 | REGC | - | No used. | | |
| 38 | X2 | - | Crystal resonator connection. | | |
| 39 | X1 | I | Crystal resonator connection. | | |
| 40 | VSS | - | GND | | |
| 41 | VDD | - | Supply voltage. | | |
| 42 | CLKOUT | - | No used. | | |
| 43~48 | NC | - | No used. | | |
| 49 | SCL | O | Clock output for ROM correction. | | |
| 50 | SDA | I/O | Data input/output for ROM correction. | | |
| 51 | DOOR CLOSE | O | Control port of door motor for mechanism. | | CLOSE |
| 52 | DOOR OPEN | O | Control port of door motor for mechanism. | | OPEN |
| 53 | CLUMP -M | O | Control port of clump motor for mechanism. | | 180°→0° |
| 54 | CLUMP-P | O | Control port of clump motor for mechanism. | | 0°→180° |
| 55 | R CW | O | Control port of rotary motor for mechanism. | | CW |
| 56 | R CCW | O | Control port of rotary motor for mechanism. | | CCW |
| 57 | UNLOAD | O | Control port of load motor for mechanism. | | UNLOAD |
| 58 | BVDD | - | Supply voltage. | | |
| 59 | BVSS | - | GND | | |
| 60 | LOAD-M | O | Control port of load motor for mechanism. | | LOAD |
| 61 | OPEN SW | I | Input port of open switch for mechanism. | | OPEN |
| 62 | NC | - | No used. | | |
| 63 | EJECT SW | I | Input port of eject switch for mechanism. | | EJECT |
| 64 | 0 SW | I | 0°switch input of mecha, traverse. | | 0° |
| 65 | NC | - | No used. | | |
| 66 | 180 SW | I | 180°switch input of mecha, traverse. | | 180° |
| 67 | 90 SW | I | 90°switch input of mecha, traverse. | | 90° |
| 68 | D SW | I | Input port of disc sensor for mechanism. | | |
| 69 | NC | - | No used. | | |
| 70 | PH 1 | I | Detection port of stocker position. | | |
| 71 | PH 3 | I | Detection port of stocker position. | | |
| 72 | PH 2 | I | Detection port of stocker position. | | |
| 73 | NC | - | No used. | | |
| 74 | AVDD | - | Analog power supply. | | |
| 75 | AVSS | - | Connected to VSS. | | |
| 76 | AVREF | - | Reference voltage. | | |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

| Port No. | Port Name | I/O | Function | Active | |
|----------|-----------|-----|--|---------|---------------|
| | | | | H | L |
| 77 | LOCK SW | I | Input port of stocker lock switch for mechanism. | | LOCK |
| 78 | CLOSE SW | I | Input port of door close switch for mechanism. | | CLOSE |
| 79 | PL SW | I | Mechanism load clump position switch input. | | PLAY POSITION |
| 80 | HP SW | I | Mechanism home position switch input. | | HOME POSITION |
| 81~88 | NC | - | No used. | | |
| 89 | EJECT LED | O | Control port of eject LED. | | LED ON |
| 90 | +B | O | On/off control port of power supply for photo sensor (PH 1~3). | ON | |
| 91 | PWM | O | Disc sensor on/off control. | ON | |
| 92 | S LED | O | Control port of LED in the stocker. | | LED ON |
| 93 | POWER OUT | O | Output port of power on signal to main microcomputer. | | |
| 94 | POWER IN | I | Input port of power on signal from main microcomputer. | | |
| 95 | SUB-STB | I | Request signal input from main microcomputer | REQUEST | |
| 96 | MAIN-STB | O | Request signal output to main microcomputer | REQUEST | |
| 97 | SI0 | I | Serial data input from main microcomputer. | | |
| 98 | SO0 | O | Serial data output to main microcomputer. | | |
| 99 | SCX0 | I | Serial clock input from main microcomputer. | | |
| 100 | RXD0 | - | No used. | | |

6. Port Function of ICs

6-1 AV decoder : MN677521HB (X35, IC300)

• Port Function

| Port No. | Port Name | I/O | Function |
|--|-----------|-----|---|
| 1,9,32,46,53,73,104 116,142,156,160,166 172,179,184,191,197 205 | VDD | - | Digital supply voltage (+3.3V). |
| 2~4,6~8,10,201 203,204,206,207 | MA0~MA11 | O | SDRAM address 0~11 |
| 5,14,27,42,52,60,70 83,92,105,120,147 157,163,169,176,182 186,194,200,208 | VSS | - | Digital ground. |
| 11 | CLK121 | - | Connected to digital ground. |
| 12,37,66,79,96,112 145,174,188,202 | LVDD | - | Digital supply voltage (+2.5V) for internal logic. |
| 13 | XRST | I | System reset input. L : Reset |
| 15 | CLK81 | - | Connected to digital ground. |
| 16 | PLLAVDD | - | Main PLL supply voltage (+3.3v). |
| 17 | TCPOUT | O | Unused. |
| 18 | PLLAVSS | - | Connected to digital ground. |
| 19 | CLK27 | I | System clock input (27MHz). |
| 20 | PLLTEST | I | Test input port for main PLL. L : Fixed |
| 21 | CKIO | I | Decode clock change-over. |
| 22 | PLLVDD | - | Supply voltage (+2.5V) of internal logic for main PLL.. |
| 23,24 | HMD1,HMD0 | - | Connected to digital supply voltage (+3.3V). |
| 25 | XHINT | O | Interruption to DVD microcomputer. L : Active |
| 26 | XDK | O | Acknowledgment to DVD microcomputer. L : Active |
| 28 | XWR | I | Write enable from DVD microcomputer. |
| 29 | XRD | I | Read enable from DVD microcomputer. |
| 30 | XCS | I | Chip select from DVD microcomputer. |
| 31 | HCLK | I | Clock input from DVD microcomputer. |
| 33~36,38~41,43~45 | HA1~HA11 | I | Address input from DVD microcomputer. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION


| Port No. | Port Name | I/O | Function |
|--|--------------------------|-----|---|
| 47~51,54~59,61~65 | HD0~HD15 | I/O | DVD microcomputer data bus 0~15. |
| 67 | AUDSTR | I | Valid signal of bit stream input data. |
| 68 | ARQ | O | Unused. |
| 69 | VSTR | I | Clock signal input for bit stream. |
| 71 | VRQ | O | Request of program stream. |
| 72 | AVRTM | I | Sector separation signal. |
| 74~78,80~82 | STD0~STD7 | I | Bit stream parallel input 0~7. |
| 84 | EXTCK | I | External FS384 input terminal. |
| 85 | APLLVDD | - | Supply voltage (+2.5V) of internal logic for Audio PLL.. |
| 86 | P5481 | - | Audio PLL ground. |
| 87 | PHCOPMO | O | Audio PLL phase comparison output. |
| 88 | APLLAVSS | - | Audio PLL ground. |
| 89 | NC | - | Unused. |
| 90 | APLLAVDD | - | Supply voltage (+3.3V) for Audio PLL.. |
| 91 | ACKIO | - | Connected to digital ground. |
| 92 | VSS | - | Digital ground. |
| 93 | DCTEST | - | Connected to digital ground. |
| 94,95 | TESTSEL1,0 | - | Connected to digital ground. |
| 97~102,106,108,109 | TEST4~TEST9 TEST3,1,0 | O | Unused. |
| 103 | CLKMON | O | Unused. |
| 107 | RFF | O | Unused. |
| 110 | IECOUT | O | IEC958 format data output. |
| 111 | DMIX | O | Audio down mix signal output. |
| 113 | DACCK | O | Over sampling DAC clock output |
| 114 | LRCK | O | LR clock output. |
| 115 | SRCK | O | Bit clock output. |
| 117~119 | ADOUT(0~2) | O | Audio data output (0~2). |
| 121 | XPOWD | I | DAC power down control input. |
| 122 | VREFC | I | DAC reference voltage input for C signal. |
| 123 | IREFC | I | DAC bias current setting port for C signal. |
| 124 | COMPC | I | Capacitance connection for DAC (C signal) stabilization. |
| 125 | VCOUT | O | Unused. |
| 126,136 | AVDD | - | Analog supply voltage (+3.3V) for DAC. |
| 127 | VREFCB | I | DAC reference voltage input for CB signal. |
| 128 | IREFCB | I | DAC bias current setting port for CB signal. |
| 129 | COMPCB | I | Capacitance connection for DAC (CB signal) stabilization. |
| 130 | VCBOUT | O | Unused. |
| 131,141 | AVSS | - | Analog ground for DAC. |
| 132 | VREFCR | I | DAC reference voltage input for CR signal. |
| 133 | IREFCR | I | DAC bias current setting port for CR signal. |
| 134 | COMPCR | I | Capacitance connection for DAC (CR signal) stabilization. |
| 135 | VCROUT | O | Unused. |
| 137 | VREFY | I | DAC reference voltage input for Y signal. |
| 138 | IREFY | I | DAC bias current setting port for Y signal. |
| 139 | COMPY | I | Capacitance connection for DAC (Y signal) stabilization. |
| 140 | VYOUT | O | Unused. |
| 143 | XYSYNCO | I/O | Vertical synchronizing signal input/output. |
| 144 | XHSYNCO | I/O | Horizontal synchronizing signal input/output. |
| 146 | VCLK | O | Clock output for digital video data output. |
| 148~155 | VD0~VD7 | O | Digital video data output (0~7). |
| 158,159,161,162 164,165,167,168 170,171,173,175 177,178,180,181 | MDQ0~MDQ15 | I/O | SDRAM data bus (0~15). |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

| Port No. | Port Name | I/O | Function |
|----------|-----------|-----|---|
| 183 | MCKI | I | Clock input from SDRAM. |
| 185 | MCK | O | Clock output to SDRAM. |
| 187 | DQMLE | O | Lower bite data, mask signal of expander SDRAM. |
| 189 | DQMLM | O | Lower bite data, mask signal of main SDRAM. |
| 190 | DQMUE | O | Upper bite data, mask signal of expander SDRAM. |
| 192 | DQMUM | O | Upper bite data, mask signal of main SDRAM. |
| 193 | XWE | O | Write enable signal of SDRAM. |
| 195 | XCAS | O | CAS signal of SDRAM. |
| 196 | XRAS | O | RAS signal of SDRAM. |
| 198 | XCSE | O | Chip select signal of expander SDARM. |
| 199 | XCSM | O | Chip select signal of main SDARM. |
| 183 | MCKI | I | Clock input from SDRAM. |
| 185 | MCK | O | Clock output to SDRAM. |
| 187 | DQMLE | O | Lower bite data, mask signal of expander SDRAM. |
| 189 | DQMLM | O | Lower bite data, mask signal of main SDRAM. |
| 190 | DQMUE | O | Upper bite data, mask signal of expander SDRAM. |
| 192 | DQMUM | O | Upper bite data, mask signal of main SDRAM. |
| 193 | XWE | O | Write enable signal of SDRAM. |
| 195 | XCAS | O | CAS signal of SDRAM. |
| 196 | XRAS | O | RAS signal of SDRAM. |
| 198 | XCSE | O | Chip select signal of expander SDARM. |
| 199 | XCSM | O | Chip select signal of main SDARM. |

• Block Diagram

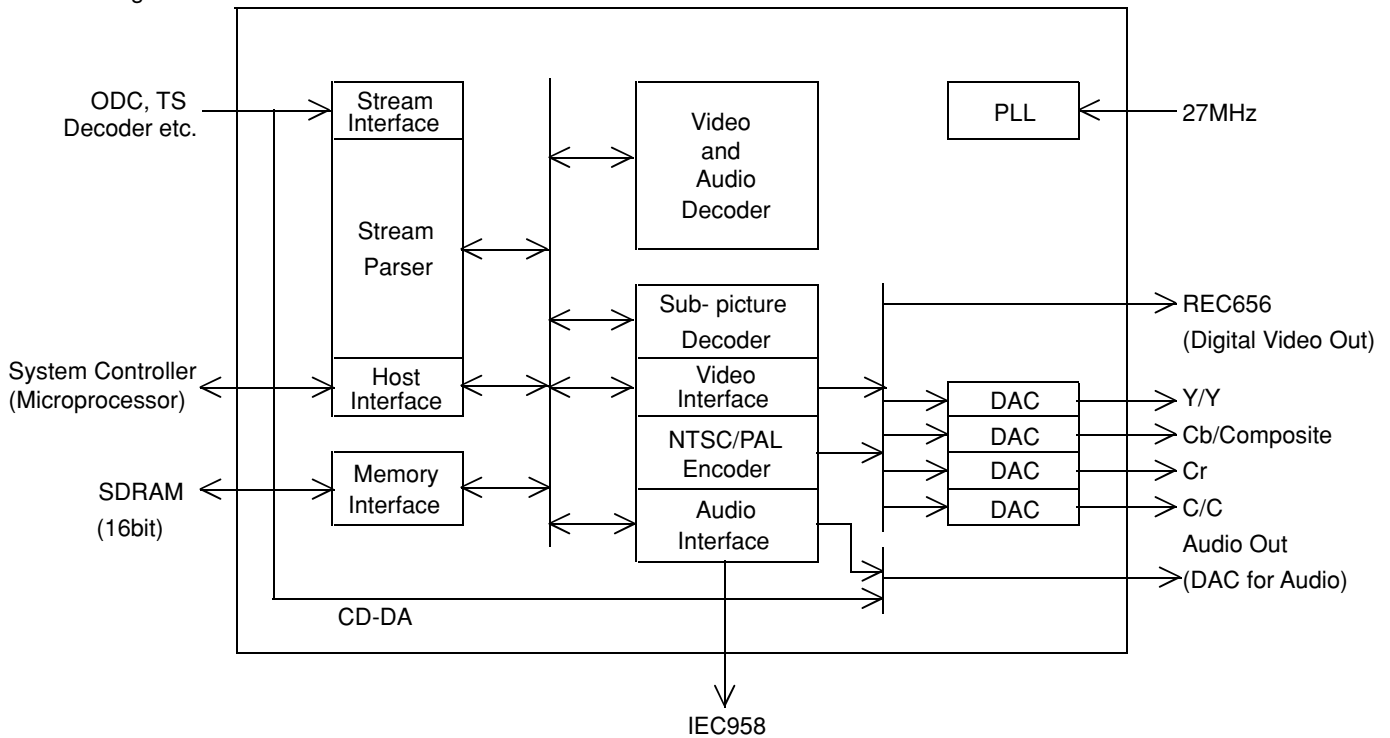

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

6-2 Port Function of AV decoder : MN677533MP (X35, IC301) DV-5050M/DVF-J6050 only

| Port No. | Port Name | I/O | Function |
|--|-------------|-----|--|
| 1,9,34,48,53,74,91,98, 111,156,160,166,172, 179,184,191,197,205 | VDD | - | Digital supply voltage (+3.3V). |
| 2~4,6~8,10,201 203,204,206,207 | MA0~MA11 | O | SDRAM address 0~11 |
| 5,19,24,29,44,52,58, 68,84,95,107,151, 157,163,169,176,182, 186,194,200,208 | VSS | - | Digital ground. |
| 11,13,15~18,20~23 | TEST0~TEST9 | O | Test terminal. |
| 12 | XRST | I | System reset input. L : Reset |
| 14,39,63,79,87,105, 146,174,188,202 | LVDD | - | Digital supply voltage (+1.8V) for internal logic. |
| 25 | HMD1 | I | Select signal 1 from DVD microcomputer. |
| 26 | HMD0 | I | Select signal 0 from DVD microcomputer. |
| 27 | XHINT | O | Interruption to DVD microcomputer. L : Active |
| 28 | XDK | O | Acknowledgment to DVD microcomputer. L : Active |
| 30 | XWR | I | Write enable from DVD microcomputer. |
| 31 | XRD | I | Read enable from DVD microcomputer. |
| 32 | XCS | I | Chip select from DVD microcomputer. |
| 33 | HCLK | I | Clock input from DVD microcomputer. |
| 35~38,40~43,45~47 | HA1~HA11 | I | Address input from DVD microcomputer. |
| 49~51,54~57 59~62,64~67,69 | HD0~HD15 | I/O | DVD microcomputer data bus 0~15. |
| 70 | AUDSTR | I | Valid signal of bit stream input data. |
| 71 | VSTR | I | Clock signal input for bit stream. |
| 72 | VRQ | O | Request of program stream. |
| 73 | AVRTM | I | Sector separation signal. |
| 75~78,80~83 | STD0~STD7 | I | Bit stream parallel input 0~7. |
| 85 | IECOUT | O | IEC958 format data output. |
| 86,92~94 | ADOUT(0~3) | O | Audio data output (0~3). |
| 88 | DACCK | O | Over sampling DAC clock output. |
| 89 | LRCK | O | LR clock output. |
| 90 | SRCK | O | Bit clock output. |
| 96 | CLKMON | O | Clock output. |
| 97 | CLK121 | I | External clock (121.5MHz) input. (Unused) |
| 99 | CLK27 | I | System clock input (27MHz). |
| 100 | PLLAVDD | - | Main PLL supply voltage (+3.3V). |
| 101 | TCPOUT | O | Unused. |
| 102 | PLLAVSS | - | Connected to digital ground. |
| 103 | CKIO | I | Decode clock change-over. |
| 104 | PLLVDV | - | Supply voltage (+1.8V) of internal logic for main PLL. |
| 106 | CLK81 | - | Connected to digital ground. |
| 108 | APLLVDD | - | Supply voltage (+1.8V) of internal logic for Audio PLL. |
| 109 | ATCPOUT | O | Unused. |
| 110 | EXTCK | I | External FS384 input terminal. |
| 112 | APLLAVDD | - | Supply voltage (+3.3V) for Audio PLL. |
| 113 | ATVROUT | O | Unused. |
| 114 | AVCOIN | - | Connected to digital ground. |
| 115 | APLLAVSS | - | Connected to digital ground. |
| 116 | VREFB | I | DAC reference voltage input for C signal. |
| 117 | IREFB | I | DAC bias current setting port for C signal. |
| 118 | COMPB | I | Capacitance connection for DAC (C signal) stabilization. |
| 119 | VBOU | O | C signal output for DAC. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

| Port No. | Port Name | I/O | Function |
|---|------------|-----|--|
| 120,130 | AVDD(1,0) | - | Analog supply voltage (+3.3V) for DAC. |
| 121 | VREFG | I | DAC reference voltage input for Cb signal. |
| 122 | IREFG | I | DAC bias current setting port for Cb signal. |
| 123 | COMPG | I | Capacitance connection for DAC (Cb signal) stabilization. |
| 124 | VGBOUT | O | Cb signal output for DAC.(Unused) |
| 125,135 | AVSS(0,1) | - | Analog ground for DAC. |
| 126 | VREFC | I | DAC reference voltage input for Cr, C signal. |
| 127 | IREFC | I | DAC bias current setting port for Cr, C signal. |
| 128 | COMPC | I | Capacitance connection for DAC (Cr, C signal) stabilization. |
| 129 | VCOOUT | O | Unused. |
| 131 | VREFY | I | DAC reference voltage input for Y signal. |
| 132 | IREFY | I | DAC bias current setting port for Y signal. |
| 133 | COMPY | I | Capacitance connection for DAC (Y signal) stabilization. |
| 134 | VYOUT | O | Y signal output for DAC. |
| 136 | NC | - | Unused. |
| 137 | ACKIO | - | Connected to digital ground. |
| 138 | MODE121 | I | Connected to digital ground. |
| 139 | PLLTEST | I | Connected to digital ground. |
| 140,141 | TESTSEL1,0 | - | Test mode terminal. L : Fixed |
| 142 | DCTEST | - | DC test mode terminal. |
| 143 | XYSYNCO | I/O | Vertical synchronizing signal input/output. |
| 144 | XHSYNCO | I/O | Horizontal synchronizing signal input/output. |
| 145 | VCLK | O | Clock output for digital video data output. |
| 147~150,152~155 | VD0~VD7 | O | Digital video data output (0~7) |
| 158,159,161,162, 164,165,167,168, 170,171,173,175, 177,178,180,181 | MDQ0~MDQ15 | I/O | SDRAM data bus (0~15). |
| 183 | MCKI | I | Clock input from SDRAM. |
| 185 | MCK | O | Clock output to SDRAM. |
| 187 | DQMLE | O | Lower bite data, mask signal of expander SDRAM. |
| 189 | DQMLM | O | Lower bite data, mask signal of main SDRAM. |
| 190 | DQMUE | O | Upper bite data, mask signal of expander SDRAM. |
| 192 | DQMUM | O | Upper bite data, mask signal of main SDRAM. |
| 193 | XWE | O | Write enable signal of SDRAM. |
| 195 | XCAS | O | CAS signal of SDRAM. |
| 196 | XRAS | O | RAS signal of SDRAM. |
| 198 | XCSE | O | Chip select signal of expander SDARM. |
| 199 | XCSM | O | Chip select signal of main SDARM. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

6-3 Port Function of DVD Microcomputer : MN102N62GGB (X35, IC201)

| Port No. | Port Name | I/O | Function | Active | |
|----------|----------------------------|-----|---|-------------|---------|
| | | | | H | L |
| 1 | WAIT | I | Bus wait port. | | |
| 2 | NRD(ODC/AVDEC /SRAM) | O | Bus read port. | | |
| 3 | NWEL | O | Selection port of clock (2:1). 0:0 33MHz, 0:1 36MHz, 1:1 24MHz DV-5050M/DVF-J6050 Unused. DV-5900M | | |
| 4 | NWEH (ODC/AVDEC /SRAM/ROM) | O | Bus read port. | | |
| 5 | RAMCS(SRAM) | O | SRAM chip select. | | |
| 6 | ODCCS | O | ODC chip select. | | |
| 7 | AVCS(AVDEC) | O | AV decoder chip select. | | |
| 8 | ROMCS(ROM) | O | Flash ROM chip select. | | |
| 9 | SCLOCK(VDAC) | O | Clock output to VDAC (IC600). DV-5050M/DVF-J6050 (X25, IC600) DV-5900M (X35, IC600) | | |
| 10 | SDATA(VDAC) | O | Data output to VDAC (IC600). DV-5050M/DVF-J6050 (X25, IC600) DV-5900M (X35, IC600) | | |
| 11 | FRD(ROM) | O | Flash ROM read port. | | |
| 12 | WORD | - | Connected to VDD (+3.3V). | | |
| 13~16 | CPUADR0~3 | O | Bus address (0~3). | | |
| 17 | VDD | - | Supply voltage (+3.3V). | | |
| 18 | SYSCLK(AVDEC) | O | Clock output to AV decoder (X35, IC300). | | |
| 19 | VSS | - | Connected to GND. | | |
| 20 | XI | I | Connected to GND. | | |
| 21 | XO | O | Unused. | | |
| 22 | VDD | - | Supply voltage (+3.3V). | | |
| 23 | OSCI(CLK135) | I | System clock input (13.5MHz). | | |
| 24 | OSCO | O | Unused. | | |
| 25 | MODE | I | Processor mode selection. | Expan. Mode | |
| 26~33 | CPUADR4~11 | O | Bus address (4~11). | | |
| 34 | AVDD | - | Supply voltage (+3.3V). | | |
| 35~42 | CPUADR12~19 | O | Bus address (12~19). | | |
| 43 | VSS | - | Connected to GND. | | |
| 44 | CPUADR20 | O | Bus address (20). | | |
| 45 | 25BSY | O | Busy data output. | Normal | Busy |
| 46 | STBPSL | O | Strobe output to Progressive Convert DAC (X25, IC601). DV-5050M Unused. DV-5900M/DVF-J6050 | | |
| 47 | HFMON | O | HF monitor output. | | |
| 48 | KMODE | O | Selection for writing the ROM. | Writing | Normal |
| 49 | AMUTE | O | Audio mute control. | | |
| 50 | CIRCEN(ENC) | O | Enable to Digital Servo Controller (X35, IC1). | | |
| 51 | PROGSW | I | Unused. DV-5050M/DVF-J6050 Change-over the component terminal. DV-5900M | | |
| 52 | STBTI | O | Unused. DV-5050M/DVF-J6050 Strobe output to MP3 decoder (X35, IC900). DV-5900M | | |
| 53 | FRSW | O | Flash ROM 1, 2 (X35, IC207, 215) change-over. | | Default |
| 54 | VDD | - | Supply voltage (+3.3V). | | |
| 55 | FEPEN | O | Enable to FEP (traverse). | | |
| 56 | CLKSEL | O | Clock selection. | | |
| 57 | STBDAC2 | O | Unused. DV-5050M/DVF-J6050 Strobe output to ADAC (X25, IC205). DV-5900M | | |
| 58 | STBSP1 | O | Unused. DV-5050M/DVF-J6050 Strobe output to serial-parallel converter (X25, IC224). DV-5900M | | |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

| Port No. | Port Name | I/O | Function | Active | |
|----------|-------------|-----|---|--------|------|
| | | | | H | L |
| 59 | STBDAC1 | O | Strobe output to ADAC. X25, IC204 (DV-5900M) X25, IC203 (DV-5050M/DVF-J6050) | | |
| 60 | ADSCEN(ENS) | O | Enable to Digital Servo Controller (X35, IC1). | | |
| 61 | VSS | - | Connected to GND. | | |
| 62 | WMINT | I | Unused. DV-5050M/DVF-J6050 | | |
| | | | Interruption port from Water Mark Detector (X35, IC500). DV-5900M | | |
| 63 | E2CS | O | Chip select to EEPROM (X33, IC206). | | |
| 64 | SCSIBN | O | Enable control to jig for writing the ROM. | | |
| 65 | 196BSY | I | Busy data input. | Normal | Busy |
| 66 | VDD | - | Supply voltage (+3.3V). | | |
| 67 | SCLK0 | O | SIO0 clock output to communicate between main microcomputer and DVD system microcomputer. | | |
| 68 | SIO | I | SIO0 data input to communicate between main microcomputer and DVD system microcomputer. | | |
| 69 | SO0 | O | SIO0 data output to communicate between main microcomputer and DVD system microcomputer. | | |
| 70 | SCLK1 | O | SIO1 clock output for control ICs. | | |
| 71 | SI1 | I | SIO1 data input for control ICs. | | |
| 72 | SO1 | O | SIO1 data output for control ICs. | | |
| 73 | PULL UP0 | I | Unused. | | |
| 74 | PULL UP1 | I | Unused. | | |
| 75 | NMI | I | Unused. | | |
| 76 | ADSCINT | I | Interruption port from Digital Servo Controller (X33, IC1). | | |
| 77 | ODCINT | I | Interruption port from Optical Disc Controller (X33, IC101). | | |
| 78 | AVINT | I | Interruption port from AV decoder (X33, IC301). | | |
| 79 | ICRST | O | Reset signal output to periphery ICs. | | |
| 80 | MP3INT | I | Unused. DV-5050M/DVF-J6050 | | |
| | | | Interruption port from MP3 decoder (X33, IC900). DV-5900M | | |
| 81 | ADSEP | I | Unused. | | |
| 82 | RST | I | Reset signal input. | | |
| 83 | VDD | - | Supply voltage (+3.3V). | | |
| 84~91 | CPUDT0~7 | I/O | Bus data (0~7) input and output. | | |
| 92 | VSS | - | Connected to GND. | | |
| 93~100 | CPUDT8~15 | I/O | Bus data (8~15) input and output. | | |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

6-4 Digital Video Enhancer : FL12220 (X35, IC703) DV-5900M only

• Port Function


| Port No. | Port Name | I/O | Function |
|--|----------------------------|-----|---|
| External OSD Interface | | | |
| 1~5 156~160 | OSDC(0~4) OSDC(5~9) | I | Multiplexed chroma signal is input on this bus. (Connected to ground.) |
| 6 | OSDSEL | - | External OSD select input. (Connected to ground.) |
| 144~153 | OSDY(0~9) | - | External OSD luma input. (Connected to ground.) |
| Test outputs(Not shown on Block diagram) | | | |
| 7~10 13~15 | TEST(03~06) TEST(00~02) | O | Test outputs. These pins should be left unconnected for normal operation. |
| Test inputs(Not shown on Block diagram) | | | |
| 19 | TESTB | I | Active low test input. This pin should be tied to VDD for normal operation. |
| 69,70,143 | TEST (0~2) | I | Active high test inputs. This pin should all be tied to VSS for normal operation. |
| Power Supply Connections(Not shown on Block diagram) | | | |
| 11,28,40,49,59,60,81, 87,93,99,101,107, 113,119,121,127, 131,135,141,154 | VDD | - | Digital power connections. Connect to the digital +3.3 volt power supply and decouple to the digital ground plane. |
| 12,29,41,50,79,80,82, 88,94,100,102,108, 114,120,122,128, 132,136,142,155 | VSS | - | Digital ground connections. Connect to the digital ground plane. |
| 72 | ISINK | - | Analog current sink return for the video DAC circuits. Connect to the analog ground plane. |
| 68 | AVDD | - | Analog power connections for the clock PLL circuits. |
| 74 | AVDD | - | Analog power connections for the video DAC circuits. |
| Control Signals | | | |
| 16 | SDA | I | I ² C compatible serial control bus data. |
| 17 | SCL | I/O | I ² C compatible serial control bus clock. |
| 18,20 | MODE(0,1) | - | I ² C operating MODE(0,1). |
| 21~23 | ADDR(0~2) | - | The setting of ADDR(0~2) allow the I ² C address of the device to be programmed to prevent conflict with the other I ² C devices in the system. |
| 24 | I ² CCLK | I | Clock input for the internal I ² C circuit. |
| 25 | RESETB | I | Reset. When this input is set low it will reset all internal registers to the default states. |
| 67 | CLKIN | I | Master clock input. |
| 139 | ENHOFF | - | When this pin is set low the FL12220 will be in normal enhancement mode. |
| Input Signals | | | |
| 26,27,30~37 | CBIN(0~9) | I | 10-bit non-multiplexed Cb or multiplexed Cb/ Cr signal input bus. |
| 43~48,51~54 | CRIN(0~9) | I | 10-bit non-multiplexed Cr signal input bus. |
| 55~58,61~66 | YIN(0~9) | I | 10bit luminance or multiplexed Y/Cb/Cr signal input bus. |
| Input Signals(cont.) | | | |
| 38 | HBLANKI | I | Horizontal input blanking signal. |
| 39 | VBLANKI | I | Vertical input blanking signal. |
| 42 | FLDIN | I | Odd/Even field designator input. |
| Analog Output Signals | | | |
| 71 | R/Cr-ANA | O | Analog output. |
| 73 | G/Y-ANA | O | Analog output. |
| 75 | B/Cb-ANA | O | Analog output. |
| 76 | COMP | - | Compensation for video DACs. Should be connected to analog ground via a capacitor. |
| 77 | RSET | - | Current setting resistor for video DACs. |
| 78 | VREF | - | Voltage reference for video DACs. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

| Port No. | Port Name | I/O | Function |
|-------------------------------|-------------|-----|------------------------------------|
| Digital Output Signals | | | |
| 83~86,89~92 95,96 | G/YOUT(0~9) | O | Green or luminance output bus. |
| 115~118,123~126 129,130 | CBOUT(0~9) | O | Blue or Cb chrominance output bus. |
| Digital Output Signals(cont.) | | | |
| 97,98,103~106 109~112 | CROUT(0~9) | O | Red or Cr chrominance output bus. |
| 133 | HBLANKO | O | Horizontal output blanking signal. |
| 134 | VBLANKO | O | Vertical output blanking signal. |
| 137 | YCLKO | O | Output luma sampling clock. |
| 138 | FLDO | I | Odd/Even field designator input. |
| 140 | CCLKO | O | Output chroma sampling clock. |

• Simplified Block Diagram

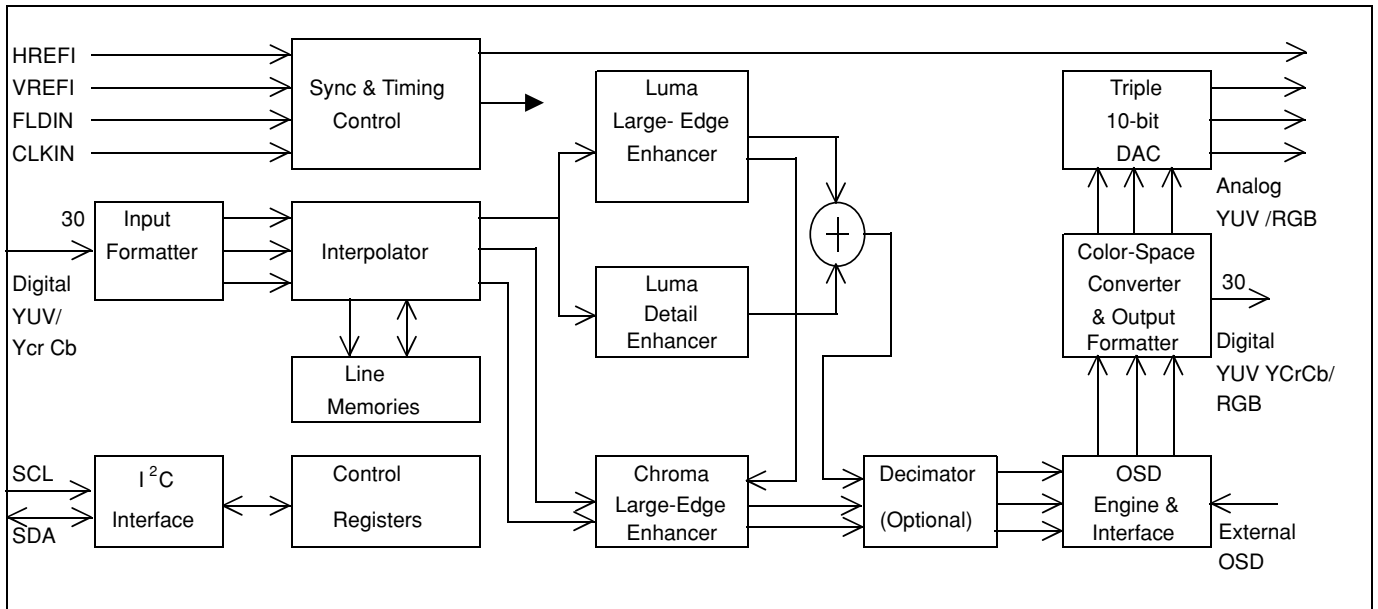

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

6-5 Video Deinterlacer : FL12200(X35, IC700) DV-5900M only

• Port Function


| Port No. | Port Name | I/O | Function |
|---|------------------------------|-----|--|
| Test outputs | | | |
| 112,113 | TEST(00, 01) | O | These pins are test outputs and should be left unconnected in normal operation. |
| Test inputs | | | |
| 41,50,51,108 109,111 | TEST(0~5) | - | These pins are used for test purposes only and should always be tied low for normal operation. |
| Power Supply Connections(Not shown on Block diagram) | | | |
| 1,33,63,73,84,95 105,114,123,137 144,151, 167 | VDD33 | - | Pad Ring digital power connections. Connect to the digital +3.3 volt power supply and decouple to the digital ground plane. |
| 2,17,34,55,64,74 85 ,96,106,115 124,132, 138,145 152,159,168 | VSS | - | Ground connections. Connect to the digital ground plane. |
| 43 | AVSS | - | Ground connection for the clock PLL circuits. Connect to the digital ground plane. |
| 16,54,107,158 | AVDD25 | - | Core Logic digital power connections. Connect to the digital +2.5 volt power supply and decouple to the digital ground plane. |
| 42 | AVDD | - | Analog power connections for the clock PLL circuit. Connect to a separately decoupled +2.5 volt power supply and decouple directly to the AVSS pin. |
| Control Signals | | | |
| 49 | RESETB | I | Reset. When this input is set low it will reset all the internal registers to the default states. |
| 53 | OE | O | When this pin is set high the the outputs of the FL12200 will be enabled ; when it is set low the outputs will be set into a high-impedance state. |
| 56~58 | IFORMAT(2~0) | I | Input signal format control. |
| 59~61 | OFORMAT(2~0) | O | Output signal format control. |
| 44,45 | DADDR(1,0) | - | The settings of DADDR(1,0) allow the device address of the control bus to be programmed to prevent conflict with the other devices connected to the bus. |
| 46 | MODE | - | When this pin is set low the control bus will operate in the slave mode; allowing the device to programmed from an external controller. |
| 47 | SDA | I | 2-wire serial control bus data. |
| 48 | SCL | I/O | 2-wire serial control bus clock. |
| 40 | PIXCLK | I | Pixel clock input. This clock is used to drive all the circuits in the FL12200. |
| 62 | N/P/IN/OUT | I/O | NTSC/PAL input or output. |
| Control Signals(contd.) | | | |
| 52 | NOMEM | I | No memory mode control input. |
| Input Signals | | | |
| 18~27 | G/YIN(0~9) | I | 10-bit green or luminance signal input bus. |
| 6~15 | B/CbIN(0~9) | I | 10-bit blue or Cb chroma signal input bus. |
| 28~32 35~39 | R/CrIN(0~4) R/CrIN(5~9) | I | 10-bit red or Cr chroma signal input bus. |
| 3 | HSYNCREFI | I | Horizontal sync or reference. |
| 4 | VSYNCREFI | I | Vertical sync or reference. |
| 5 | FIELDIN | I | Field identifier input. |
| Output Signals | | | |
| 65~72 75,76 | G/YOUT(2~9) G/YOUT0,1 | O | Green or luminance output bus. |
| 93,94 97~104 | B/CbOUT8,9 B/CbOUT(0~7) | O | Blue or Cb chrominance output bus. |
| 77~83 86~88 | R/CrOUT(3~9) R/CrOUT(0~2) | O | Red or Cr chrominance output bus. |
| 116 | CCLKO | O | Chroma output sampling clock. |
| 117 | YCLKO | O | Luma output sampling clock. |
| 89 | VREFO | - | Start of active field or frame indicator. |
| 90 | HREFO | O | Start of active line indicator output. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

| Port No. | Port Name | I/O | Function |
|---|--|-----|---|
| 91 | VSYNC/CREFO | O | Vertical sync output. This signal provides the vertical sync function for the outputs. |
| 92 | H/CSYNCO | O | Horizontal or composite sync output. This signal provides the horizontal sync function for the outputs. |
| 110 | FILM | O | Film mode detector output. |
| SDRAM Interface Signals | | | |
| 125~131 133~136 | ADDR(4~10) ADDR(0~3) | - | SDRAM address bus. This signal bus is used to address the external SDARM(s) used for field memories. |
| 139~143,146~150 153~157,160~166 169~176 | DATA(0~4) 5~9,10~14, 15~21,22~29 | - | SDRAM data bus. This signal bus is used to transfer the data to and from the external SDRAM(s) used for field memories. |
| 118 | MEMCLKO | O | SDRAM clock and 2x output sampling clock. |
| 119 | WEN | - | SDRAM write enable. This active low signal should be connected to the WE pin(s) on the SDRAM(s). |
| 120 | RASN | - | SDRAM row address select. This active low signal should be connected to the RAS pin(s) on the SDRAM(s). |
| 121 | CASN | - | SDRAM column address select. This active low signal should be connected to the CAS pin(s) on the SDRAM(s). |
| 122 | BSEL | - | SDRAM bank select. |

• Simplified Block Diagram

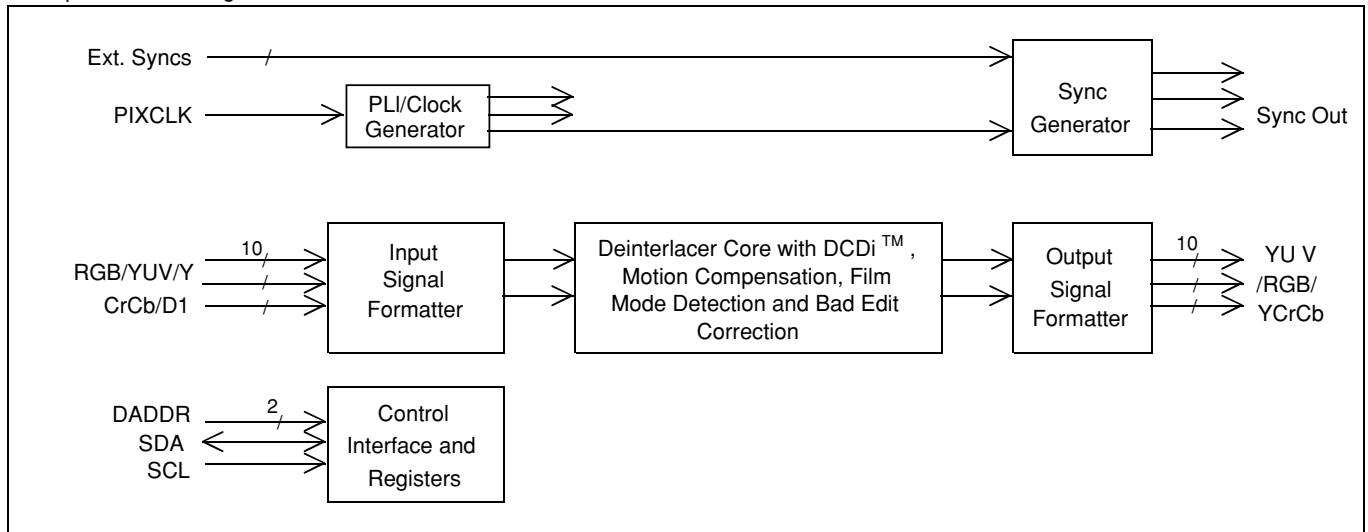

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

6-6 Port Function of Video Encoder /DAC : ADV7190 (X35-229, IC600) DV-5900M only

| Port No. | Port Name | I/O | Function |
|----------------|----------------|-----|--|
| 1~16 | P0~P15 | I | 8 bit or 16 bit 4:2:2 multiplexed Y/Cr/Cb pixel port. |
| 17,25,54,63 | VDD | - | Digital supply voltage (+3.3V). |
| 18,24,33,55,64 | DGND | - | Digital ground. |
| 19 | HSYNC | I/O | Connected to VDD. |
| 20 | VSYNC | I/O | Connected to VDD. |
| 21 | BLANK | I/O | Connected to VDD. |
| 22 | ALSB | I | Connected to digital ground. |
| 23 | TTXREQ | O | Connected to VDD. |
| 26,39,42 | AGND | - | Analog ground. |
| 27 | CLKIN | I | Clock input. |
| 28 | CLKOUT | O | Unused. |
| 29,38,43 | VAA | - | Analog supply voltage (+3.3v). |
| 30 | SCL | I | Serial interface clock input. |
| 31 | SDA | I/O | Serial data input/output. |
| 32 | SCRESET/RTC/TR | I | Connected to analog ground. |
| 34 | RSET2 | I | Used to control full-scale amplitudes of the video signals from the DAC D, E, and F. |
| 35 | COMP2 | O | Compensation pin for DACs D, E and F. |
| 36 | DAC F | O | S-Video C/V /RED analog output. |
| 37 | DAC E | O | S-Video Y/U/ BLUE analog output. |
| 40 | DAC D | O | Composite Y/GREEN analog output. |
| 41 | DAC C | O | S-Video C/V/ RED analog output. |
| 44 | DAC B | O | S-Video Y/U /BLUE analog output. |
| 45 | DAC A | O | Composite Y/GREEN analog output. |
| 46 | COMP1 | O | Compensation pin for DACs A, B and C. |
| 47 | VREF | I/O | Voltage reference input for DACs or voltage reference output. |
| 48 | RSET1 | I | Used to control full-scale amplitudes of the video signals from the DAC A, B, and C. |
| 49 | RESET | I | Reset signal input. |
| 50 | CSO HSO | O | Unused. |
| 51 | VSO/ CLAMP | I/O | Unused. |
| 52 | PAL NTSC | I | Connected to digital ground. |
| 53 | NC | - | Unused. |
| 56 | TTX | I | Connected to digital ground. |
| 57~62 | NC | - | Unused. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

6-7 Progressive Convert DAC : PM0026A (X25, IC601) DV-5050M/DVF-J6050 only


• Port Function

| Port No. | Port Name | I/O | Function |
|----------|-----------------------|-----|---|
| 1 | VDD3 | - | Positive supply voltage (+3.3V) for pad ring. |
| 2~8 | VIB9~VIB3 | I | Connected to digital ground. |
| 9~11 | GND | - | Digital ground for core. |
| 12~14 | VIB2~VIB0 | I | Connected to digital ground. |
| 15,16 | DOS1, DOS0 | I | Connected to digital ground. |
| 17~19 | TEST2~TEST1 | I | Connected to digital ground. |
| 20 | VDD3 | - | Positive supply voltage (+3.3V) for pad ring. |
| 21 | VDD2 | - | Digital positive supply voltage (+2.5V) for core. |
| 22 | AGND | - | Analog ground for D/A converter. |
| 23 | DAO Y | O | Y analog output. |
| 24 | AVDD2 | - | Positive supply voltage (+2.5V) for D/A converter. |
| 25 | DAO B | O | Cb analog output. |
| 26 | AGND | - | Analog ground for D/A converter. |
| 27 | DAO R | O | Cr analog output. |
| 28 | AVDD2 | - | Positive supply voltage (+2.5V) for D/A converter. |
| 29 | VREF | I | Reference voltage input for 3DACs. |
| 30 | FSADJ | I/O | Current source for full scale adjustment of 3DACs. |
| 31 | AVDD2 | - | Positive supply voltage (+2.5V) for D/A converter. |
| 32 | VG | O | Compensation pin for gate voltage of DAC current cells. |
| 33 | AGND | - | Analog ground for D/A converter. |
| 34 | CLMP | O | Unused. |
| 35 | SPR7/V09 | O | Unused. |
| 36 | GND | - | Digital ground for core. |
| 37~39 | SPR4/V06~ SPR6/V08 | O | Multi-purpose parallel output converted from serial data through MPU interface / pixel data output. |
| 40,41 | VDD3 | - | Positive supply voltage (+3.3V) for pad ring. |
| 42 | GND | - | Digital ground for core. |
| 43~45 | SPR1/V03~ SPR3/V05 | O | Multi-purpose parallel output converted from serial data through MPU interface / pixel data output. |
| 46 | SPR0/V02 | O | Multi-purpose parallel output converted from serial data through MPU interface (LSB) / pixel data output. |
| 47 | VO1 | O | Pixel data output. |
| 48 | VO0 | O | Pixel data output (LSB). |
| 49 | VDD3 | - | Positive supply voltage (+3.3V) for pad ring. |
| 50~52 | GND | - | Digital ground for core. |
| 53 | RMA5 | I | Address input for monitoring internal register (MSB). |
| 54~56 | RMA4~RMA2 | I | Address input for monitoring internal register. |
| 57 | GND | - | Digital ground for core. |
| 58 | CLK | I | System clock input (27MHz). |
| 59 | SRP | I | System reset input (negative). |
| 60 | VDD3 | - | Positive supply voltage (+3.3V) for pad ring. |
| 61 | VDD2 | - | Digital positive supply voltage (+2.5V) for core. |
| 62 | CSB | I | Chip select input of MPU serial interface. |
| 63 | SDATA | I | Data input of MPU serial interface. |
| 64 | SCLK | I | Clock input of MPU serial interface. |
| 65 | RMA1 | I | Address input for monitoring internal register. |
| 66 | RMA0 | I | Address input for monitoring internal register (LSB). |
| 67 | CKPOL | - | Internal clock. polarity control input. |
| 68 | VIA9 | I | Pixel port A input (MSB). |
| 69~76 | VIA8~VIA1 | I | Pixel port A input. |
| 77 | VIA0 | I | Pixel port A input (LSB). |
| 78 | NVS | I/O | Active low vertical sync. |
| 79 | NHS | I/O | Active low horizontal sync. |
| 80 | VDD3 | - | Positive supply voltage (+3.3V) for pad ring. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

• Block Diagram for Progressive Convert DAC

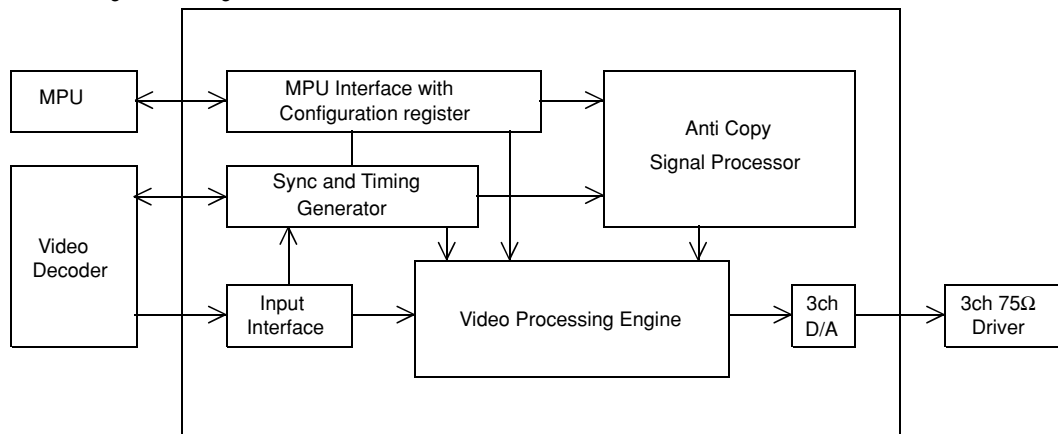

6-8 Port Function of 6ch DAC : PCM1602KY (X25, IC205) DV-5900 only

| Port No. | Port Name | I/O | Function |
|----------|-----------------|-----|--|
| 1~6 | ZERO1~6 /GPO1~6 | O | Zero data flag for Vout 1~6. Can also be used as GPO pin. (Unused) |
| 7, 8 | NC | - | Analog ground. |
| 9 | VOUT6 | O | Voltage output for audio signal corresponding to Rch on data3. Up to 96 kHz |
| 10 | VOUT5 | O | Voltage output for audio signal corresponding to Lch on data3. Up to 96 kHz |
| 11 | VOUT4 | O | Voltage output for audio signal corresponding to Rch on data2. Up to 96 kHz |
| 12 | VOUT3 | O | Voltage output for audio signal corresponding to Lch on data2. Up to 96 kHz |
| 13 | VOUT2 | O | Voltage output for audio signal corresponding to Rch on data1. Up to 192 kHz |
| 14 | VOUT1 | O | Voltage output for audio signal corresponding to Lch on data1. Up to 192 kHz |
| 15 | VCOM | O | Common voltage output. |
| 16 | NC | - | Analog ground. |
| 17 | AGND5 | - | Analog ground. |
| 18 | VCC5 | - | Analog power supply (+5.0V). |
| 19 | AGND6 | - | Analog ground. |
| 20 | NC | - | Analog ground. |
| 21 | AGND4 | - | Analog ground. |
| 22 | VCC4 | - | Analog power supply (+5.0V). |
| 23 | AGND3 | - | Analog ground. |
| 24 | VCC3 | - | Analog power supply (+5.0V). |
| 25 | AGND2 | - | Analog ground. |
| 26 | VCC2 | - | Analog power supply (+5.0V). |
| 27 | AGND1 | - | Analog ground. |
| 28 | VCC1 | - | Analog power supply (+5.0V). |
| 29~32 | NC | - | Analog ground. |
| 33 | MDO | O | Serial data output for function register control port. (Unused) |
| 34 | MDI | I | Serial data input for function register control port. |
| 35 | MC | I | Shift clock for function register control port. |
| 36 | ML | I | Latch enable for function register control port. |
| 37 | RST | I | System reset input. (Active low) |
| 38 | SCKI | I | System clock input. Input frequency is 128, 192, 256, 384, 512 or 768fs. |
| 39 | SCKO | O | Buffered clock output. (Unused) |
| 40 | BCK | I | Shift clock input for serial audio data. |
| 41 | LRCK | I | Left and right clock input. This clock is equal to the sampling rate, fs. |
| 42 | TEST | - | Test pin. |
| 43 | VDD | - | Digital power supply (+3.3V). |
| 44 | DGND | - | Digital ground for +3.3V. |
| 45 | DATA1 | I | Serial audio data input for Vout1 and Vout2. |
| 46 | DATA 2 | I | Serial audio data input for Vout3 and Vout4. |
| 47 | DATA 3 | I | Serial audio data input for Vout5 and Vout6. |
| 48 | ZEROA | O | Zero data flag. Logical "AND " of ZERO1 through ZERO6. |

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

6-9 Port Function of 2ch DAC : PCM1748E

| Port No. | Port Name | I/O | Function |
|----------|-------------|-----|--|
| 1 | BCK | I | Audio data bit clock input. |
| 2 | DATA | I | Audio data digital input. |
| 3 | LRCK | I | L-ch/R-ch audio data latch enable input. |
| 4 | DGND | - | Digital ground. |
| 5 | VDD | - | Digital power supply (+3.3v). |
| 6 | VCC | - | Analog power supply (+5.0V). |
| 7 | VOU TL | O | Analog output for L-ch. |
| 8 | VOU TR | O | Analog output for R-ch. |
| 9 | AGND | - | Analog ground. |
| 10 | VCOM | - | Common voltage decoupling. |
| 11 | ZEROR/ZEROA | O | Zero flag output for R-ch / Zero flag output for L/R-ch. |
| 12 | ZEROL/NA | O | Zero flag output for L-ch / No assign. |
| 13 | MD | I | Mode control data input. |
| 14 | MC | I | Mode control clock input. |
| 15 | ML | I | Mode control latch input. |
| 16 | SCL | I | System clock input. |

PCM1748E : X25-645 (IC203) DV-5050M/DVF-J6050

: X25-644 (IC204) DV-5900M

6-10 Serial-Parallel Converter : NJU3715G (X25, IC224)

| Port No. | Port Name | I/O | Function |
|----------|-----------|-----|--|
| 1 | SURH | O | Surround on/off control |
| 2 | H2CH | O | Front/Mix change-over (X25, IC212, 213) H : DOWN MIX L : L,R |
| 3 | BASS | O | DVD A BASS Management change-over DV-5900M only (X25, IC601) |
| 4 | FRNTH | O | Unused |
| 7 | MP3SW | O | VRQ change-over H:MP3 L:AV |
| 16 | LPFSW | O | Audio out LPF change-over H:60k L:110k |
| 17 | THRU | O | Unused |
| 18 | IW0 | O | Unused |
| 19 | IW1 | O | Unused |
| 20 | DACMUT | O | Unused |
| 21 | MMOD1 | O | Unused |

7. Main Control Port

EXSW, RGB H, Y/C L, PURE AUDIO, VMUTE

| Port of main u-com | EXTERNAL IN | S OUT | COMP OUT | SCART OUT | | PURE AUDIO | STANDBY |
|--------------------|-------------|-------|----------|-----------|---------|------------|---------|
| | | | | RGB OUT | Y/C OUT | | |
| EXT SW(Pin30) | 0 | - | 1 | 1 | 1 | 1 | - |
| RGB-H(Pin10) | 0 | - | 0 | 1 | 0 | - | 1 |
| Y/C-L(Pin33) | 1 | - | 1 | 1 | 0 | - | 1 |
| PURE(Pin32) | 0 | 0 | 0 | 0 | 0 | 1 | - |
| VMUTE(Pin31) | 0 | 0 | 0 | 0 | 0 | 1 | - |

8. Video Signal and Audio Signal

• Relation between IN and OUT on Video Signal

| Condition | IN-Signal | OUT | | |
|-----------|--|---|------------|-----|
| | | AV1 | AV2 | RGB |
| Composite | *Y,C(X25,IC600) | #19(V/Y out) | #19(V out) | - |
| S-Video | *Y,C(X25,IC600) | #19(V/Y out) #15(RC out) | - | - |
| RGB | *RGB(X25,IC600) | #15(R/C out) #11(G out) #7(B out) | #19(V out) | - |
| Standby | <AV2> #20(V in) #15(R in) #11(G in) #7(B in) | #15(R/C out) #11(G out) #7(B out) #19(V/Y out) | IN-SIGNAL | - |

* DVF-J6050 E/T only

DV-5050M/5900M/DVF-J6050/J6050-G

CIRCUIT DESCRIPTION

• Relation between IN and OUT on Audio Signal

| Condition | IN-Signal | OUT | | |
|-----------|-------------|----------------------------|----------------------------|-----|
| | | AV1 | AV2 | RGB |
| Power on | DVD MIX-OUT | | #1(A{B}out) #3(A{A}out) | - |
| Standby | DVD MIX-OUT | #1(A{B}out) #3(A{A}out) | #2(A{B}in) #6(A{A}in) | - |
| | | | #1(A{B}out) #3(A{A}out) | - |

| | |
|-----------|-------------------------|
| Condition | BLK(#16,AV1) |
| RGB | 1V~3V/75Ω |
| Other | 0V |
| Standby | #16 of AV2 : through |


| | |
|----------------------------------|-------------------------|
| Condition | FUNC. SW (#8,AV1) |
| 16 : 9 TV PLAY (Aspect Ratio) | 6V |
| Other | 9.5V |
| Standby | #16 of AV2 : through |

AV1 : X25, CN451(DVF-J6050 E/T only)

AV2 : X25, CN452(DVF-J6050 E/T only)

RGB : X13, J 6

9. Audio Output Block Diagram for DV-5900M

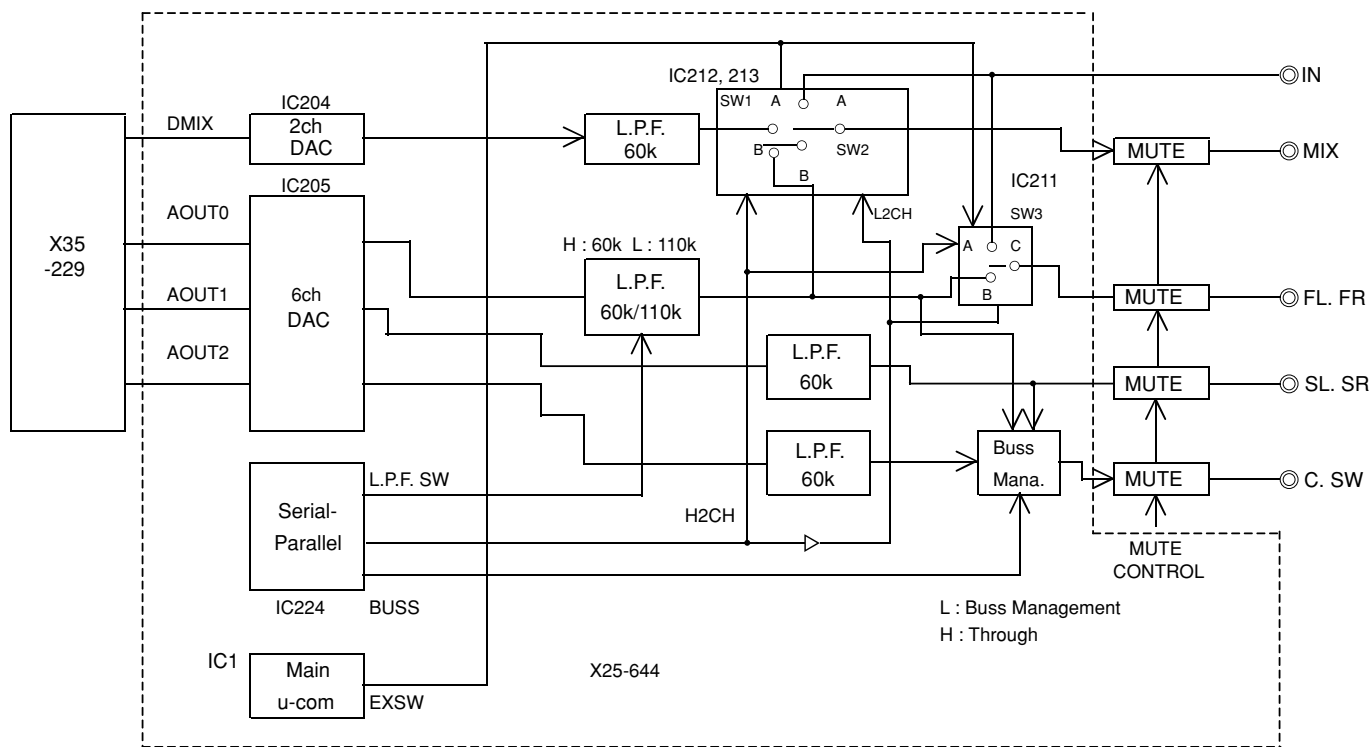

Media vs Switches

| Low Pass Filter | Media |
|-----------------|----------------------------------|
| 110kHz | DVD-Audio(fs : 192kHz, 176.4kHz) |
| 60kHz | All |

| Media | SW1 | SW2 | SW3 |
|--|-----|-----|-----|
| DVD-Audio(fs : 192kHz, 176.4kHz) VCD, CD-DA | B | B | B |
| Others | A | B | B |
| DAISY CHAIN | - | A | A |

DV-5050M/5900M/DVF-J6050/J6050-G

ADJUSTMENT

DVF-J6050
E version

| No. | ITEM | INPUT SETTING | OUTPUT SETTING | ALIGNMENT POINT | ALIGNMENT FOR | FIG. |
|-----|----------------------------------|--|---|-----------------|---------------------------|--------|
| 1 | Y LEVEL | 100% COLOR BAR DISC | Connect the oscilloscope to composite(X13,J4) with 75-ohms resistor | VR301(X35) | Y-signal = 1000mV±30mV | FIG.1. |
| 2 | CHROM LEVEL | <ul style="list-style-type: none"> 100% COLOR BAR DISC PAL DISC (PAL MODE) | Connect the oscilloscope to composite(X13,J4) with 75-ohms resistor | VR304(X35) | Chrom-signal = 300mV±15mV | FIG.2. |
| 3 | YCb Cr LEVEL (DVF-J6050 only) | 100% COLOR BAR DISC | Connect the oscilloscope to Y output(X13,J6) with 75-ohms resistor | VR600(X25) | Y-signal = 1000mV±30mV | FIG.1. |

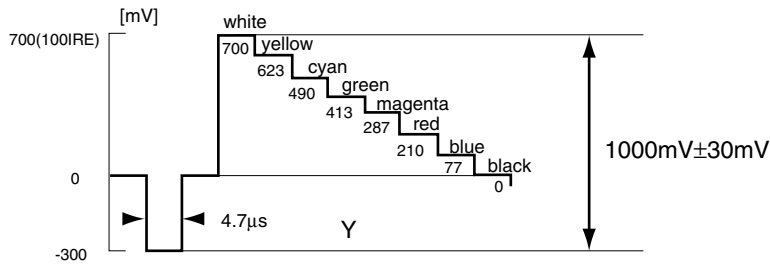


Fig. 1

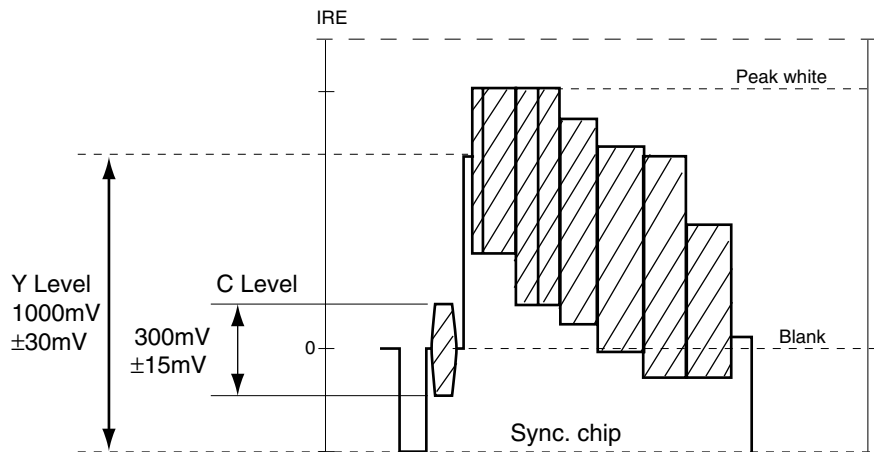


Fig. 2

DV-5050M/5900M/DVF-J6050/J6050-G

ADJUSTMENT

DV-5050M

| No. | ITEM | INPUT SETTING | OUTPUT SETTING | ALIGNMENT POINT | ALIGNMENT FOR | FIG. |
|-----|---|---------------------|---|-----------------|------------------------------|--------|
| 1 | Y LEVEL | 100% COLOR BAR DISC | Connect the oscilloscope to Y output with(X13,J6) 75-ohms resistor ※ Output Mode: Interlace | VR301(X35) | Y-signal = 1000mV±30mV | FIG.1. |
| 2 | CHROM LEVEL | 100% COLOR BAR DISC | Connect the oscilloscope to composite(X13J6) output with 75-ohms resistor | VR304(X35) | Chrom-signal = 286mV±14mV | FIG.2. |
| 3 | Cb LEVEL (DV-5050M only) | 100% COLOR BAR DISC | Connect the oscilloscope to Cb output with(X13,J6) 75-ohms resistor ※ Output Mode: Interlace | VR303(X35) | Cb-signal = 648mV±14mV | FIG.3. |
| 4 | Cr LEVEL (DV-5050M only) | 100% COLOR BAR DISC | Connect the oscilloscope to Cr output with(X13,J6) 75-ohms resistor ※ Output Mode: Interlace | VR302(X35) | Cr-signal = 648mV±14mV | FIG.4. |
| 5 | Progressive YCb Cr LEVEL (DV-5050M only) | 100% COLOR BAR DISC | Connect the oscilloscope to Y output with(X13,J6) 75-ohms resistor ※ Output Mode: Progressive | VR601(X35) | Y-signal = 1000mV±30mV | FIG.1. |

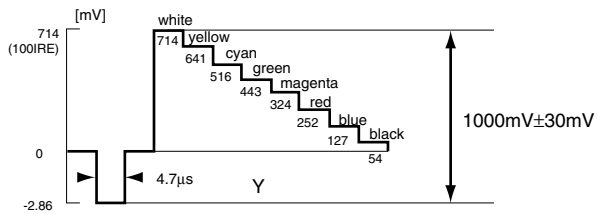


Fig. 1

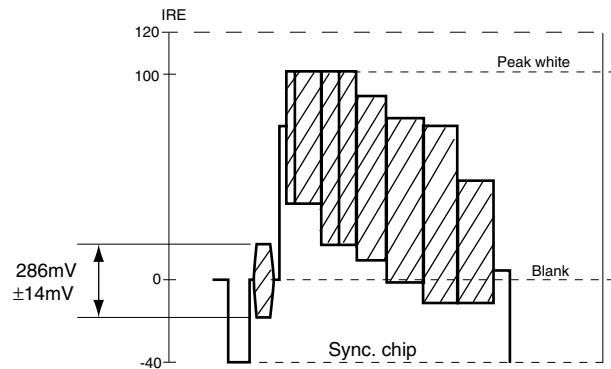


Fig. 2

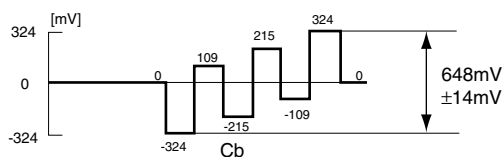


Fig. 3

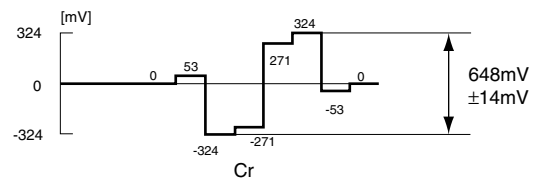


Fig. 4

DV-5050M/5900M/DVF-J6050/J6050-G

ADJUSTMENT

DV-5900M

| No. | ITEM | INPUT SETTING | OUTPUT SETTING | ALIGNMENT POINT | ALIGNMENT FOR | FIG. |
|--|--------------------------------|---------------------|---|-----------------|--------------------------------------|-------|
| 1 | Y,Cb,Cr LEVEL | 100% COLOR BAR DISC | Connect the oscilloscope to Y output with 75-ohms resistor. ※ Output Mode: Interlace | VR601(X35) | Y-signal = 1000mV ±30mV | FIG.1 |
| 2 | Y LEVEL | 100% COLOR BAR DISC | Connect the oscilloscope to COMPOSIT output with 75-ohms resistor. | VR600(X35) | COMPOSIT-signal = 1000mV ±30mV | FIG.2 |
| You need the step 1 and 2 before next step 3 | | | | | | |
| 3 | CHROM LEVEL | 100% COLOR BAR DISC | Connect the oscilloscope to COMPOSIT output with 75-ohms resistor | VR602(X35) | Chrom-signal = 286mV ±14mV | FIG.2 |
| 4 | Progressive Y, Cb, Cr LEVEL | 100% COLOR BAR DISC | Connect the oscilloscope to Y output with 75-ohms resistor. ※ Output Mode: Progressive | VR800(X35) | Y-signal= 1000mV±30mV | FIG.1 |

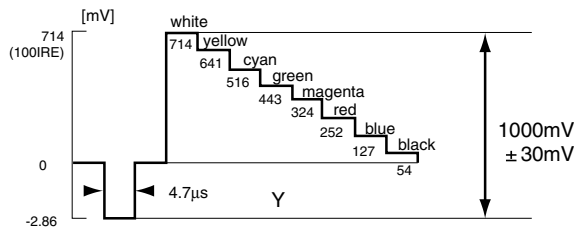


Fig. 1


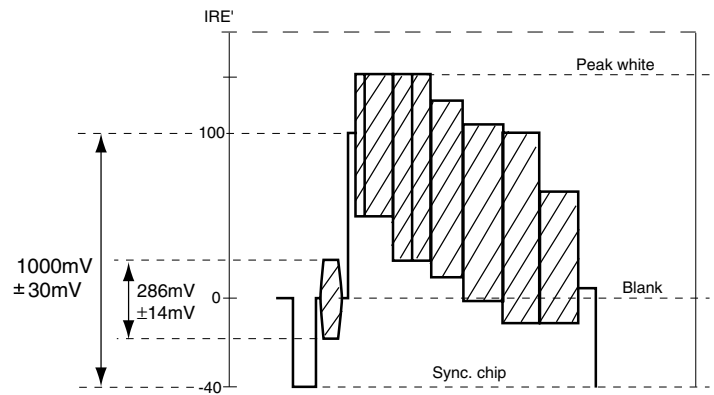


Fig. 2


WIRING DIAGRAM

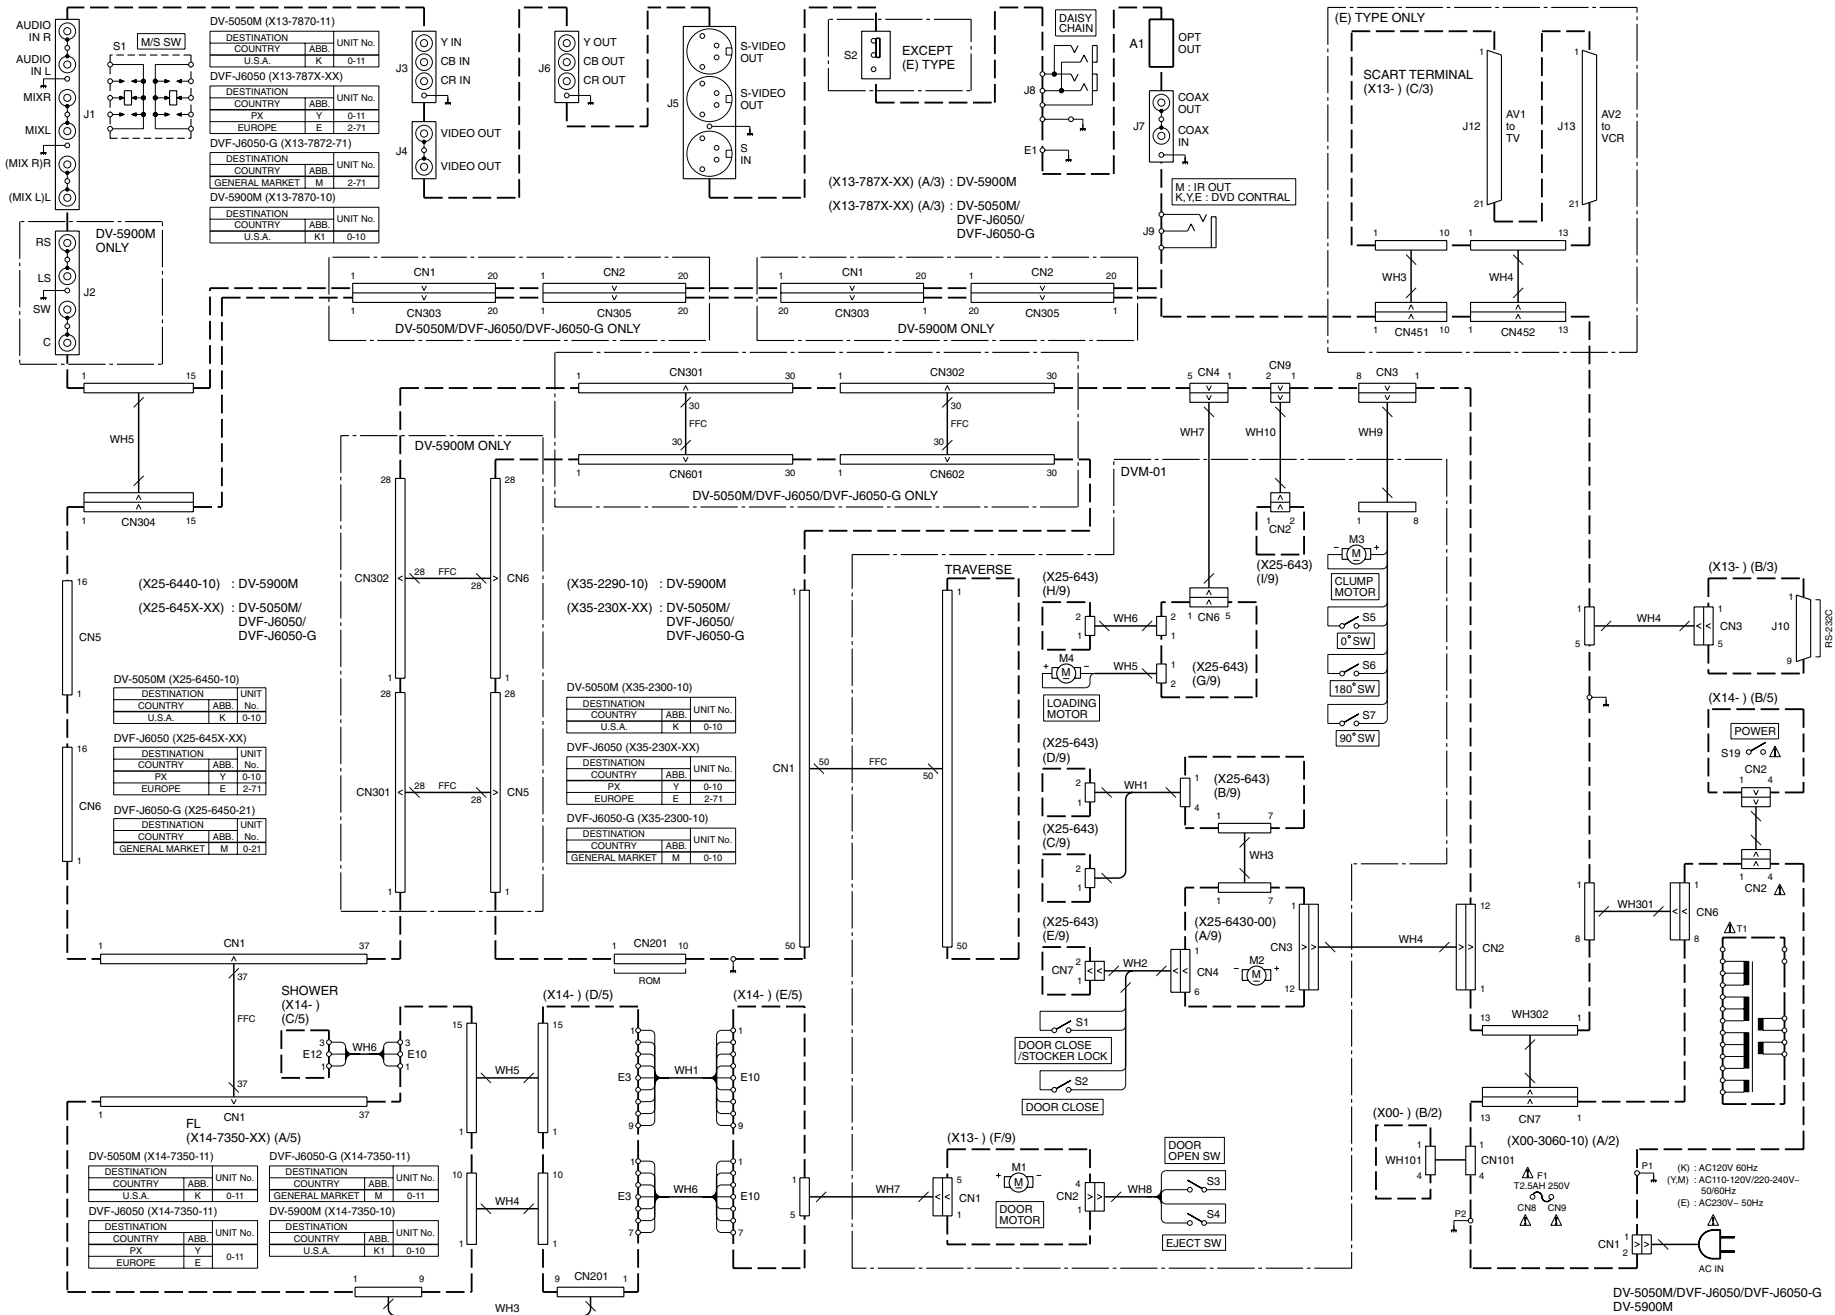


DV-5050M/DVF-J6050/DVF-J6050-G
DV-5900M

PC BOARD (Component side view)


X13-7870-10 A/3 (J70-1526-11)

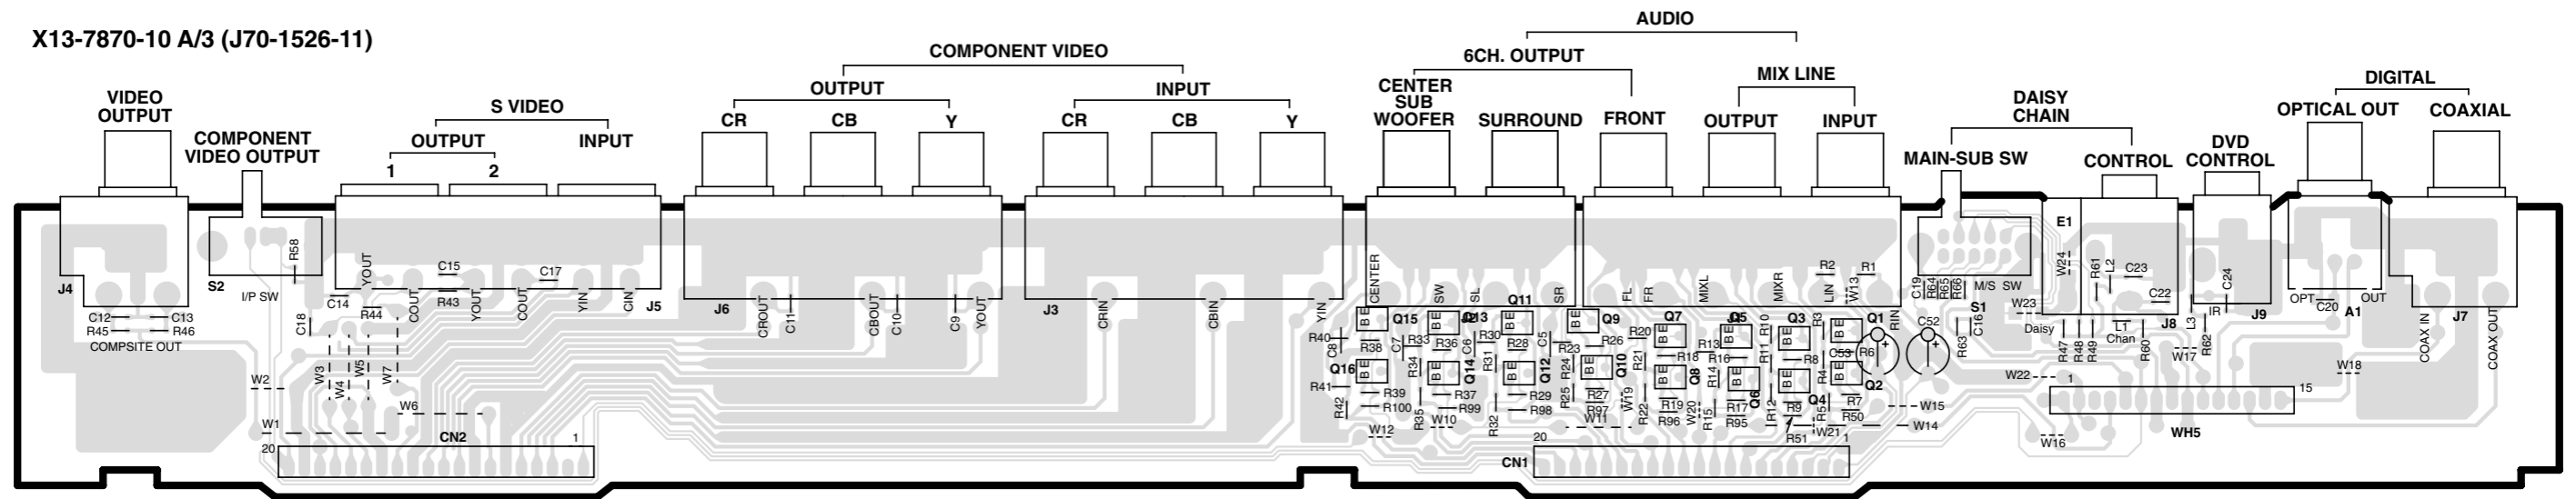


X13 B/3

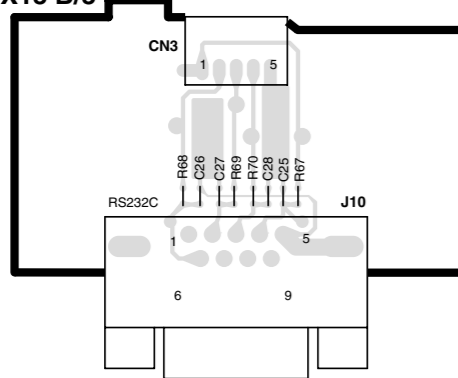


X25 F/9

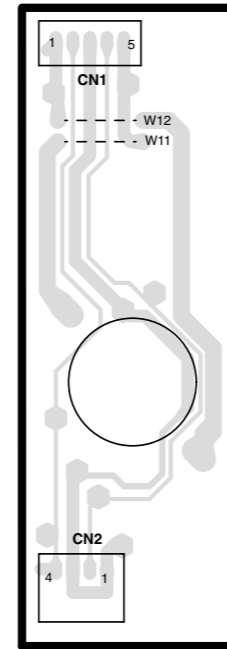


X25-6430-00 A/9 (J70-1474-11)

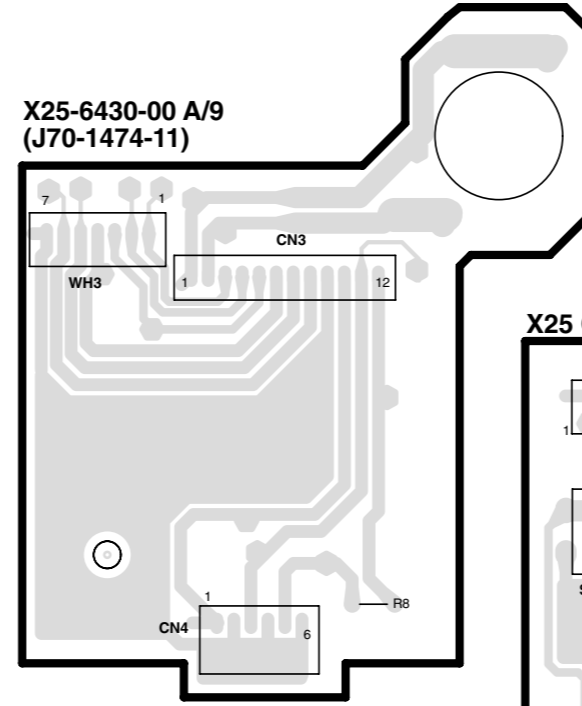


X25 G/9

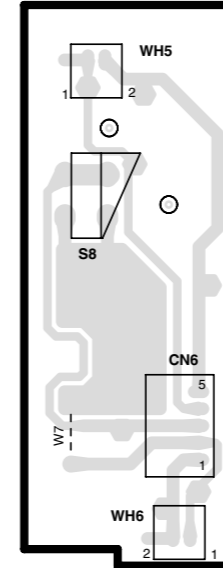


X25 B/9

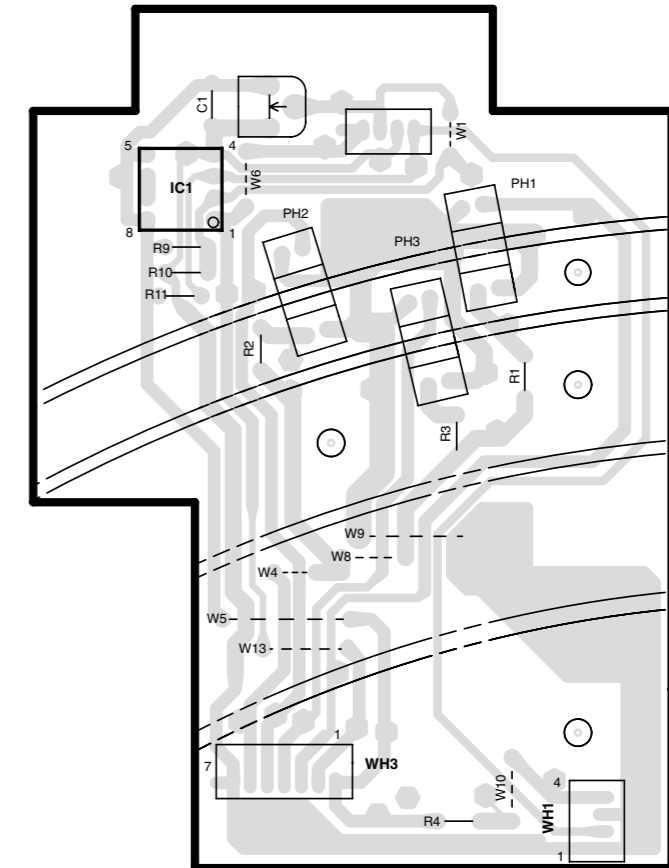


X25 D/9




X25 C/9




X25 E/9




X13 C/3

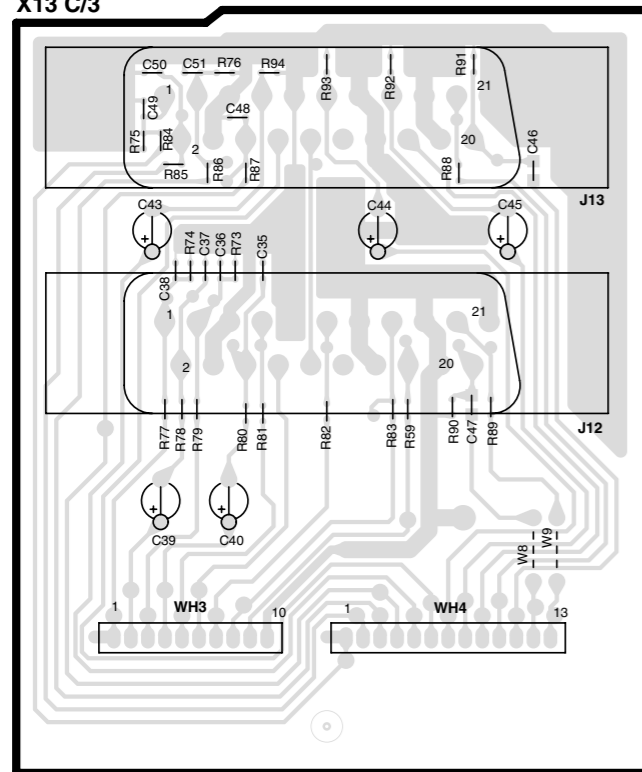

X25 H/9

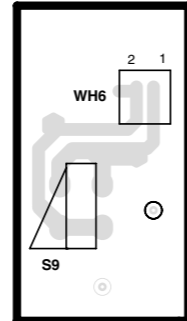


X25 I/9

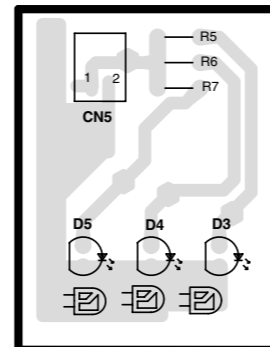


PC BOARD (Component side view)


X14 D/5

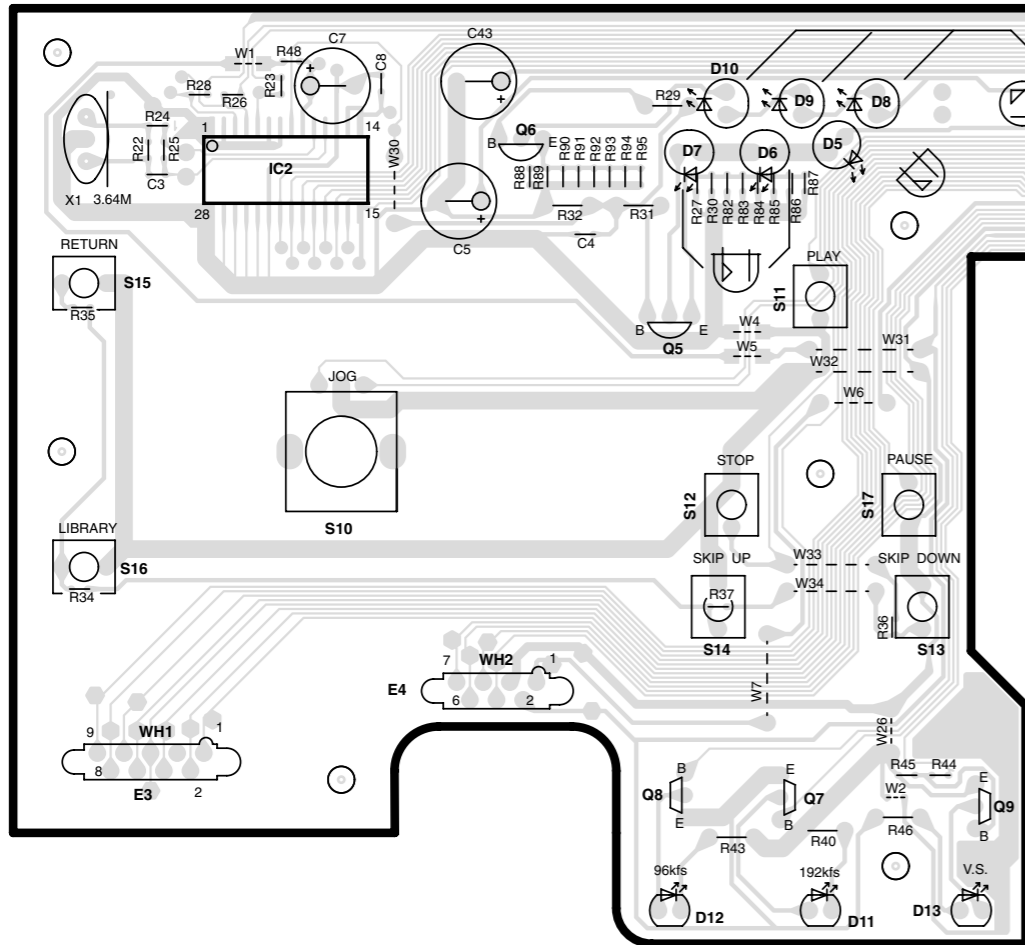


X14-7350-10 A/5 (J70-1524-11)

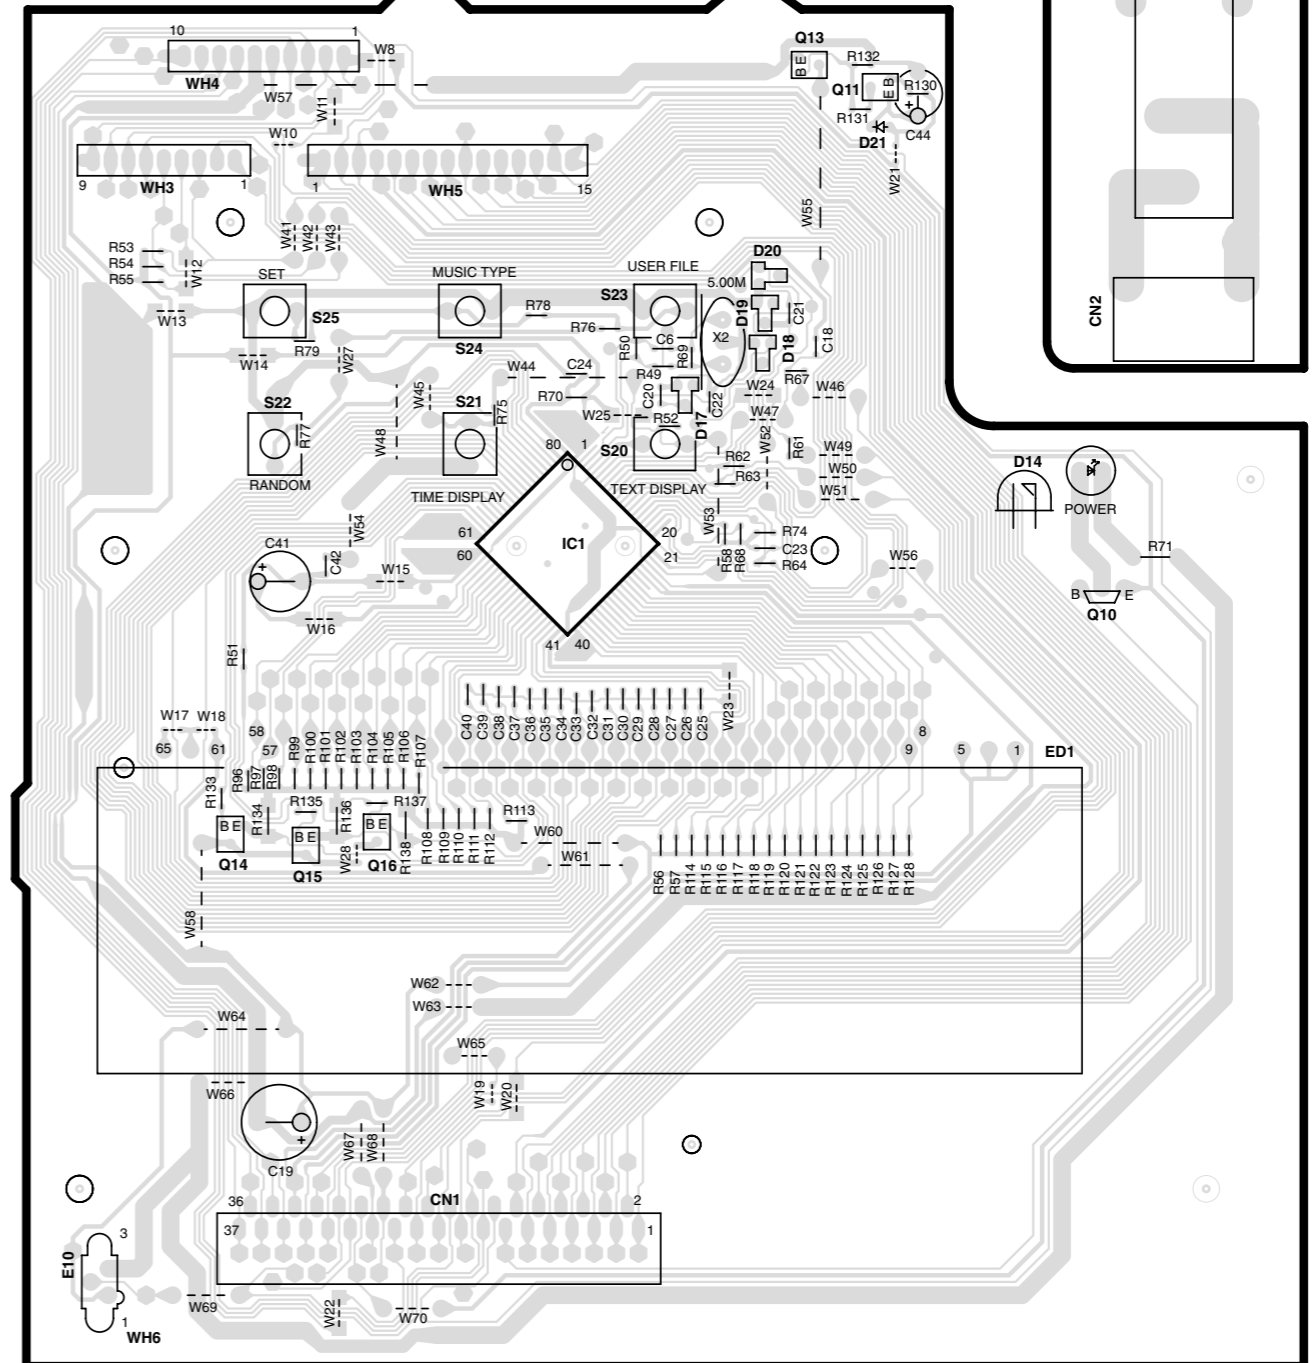

X14 C/5

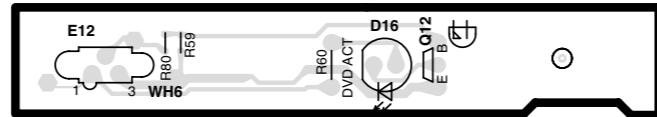


X14 E/5

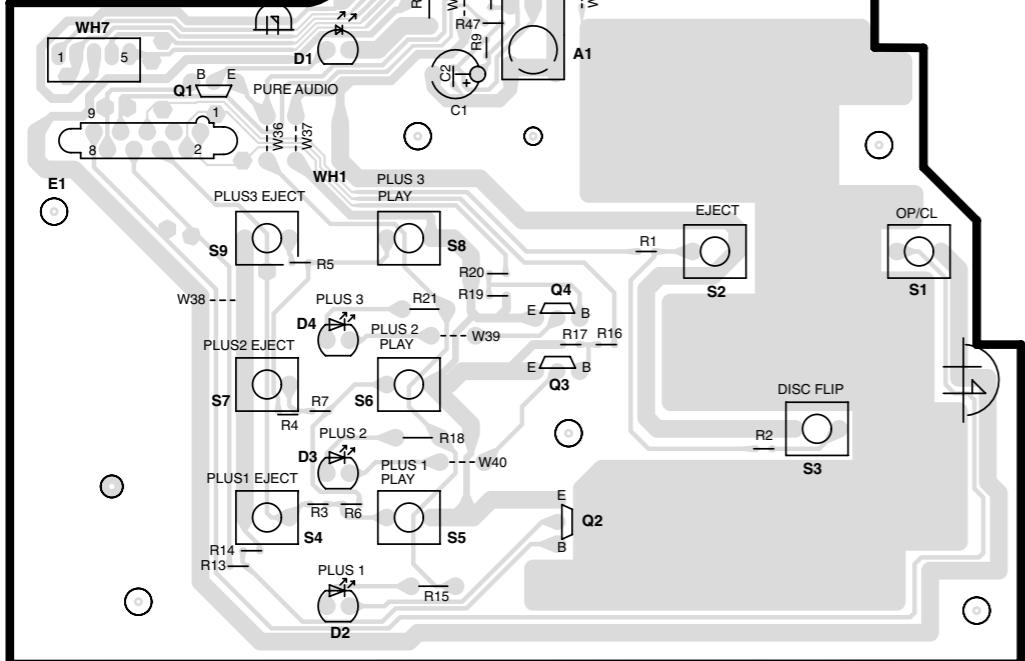

PC BOARD (Component side view)


X25-6440-10 (J70-1522-11): DV-5900M

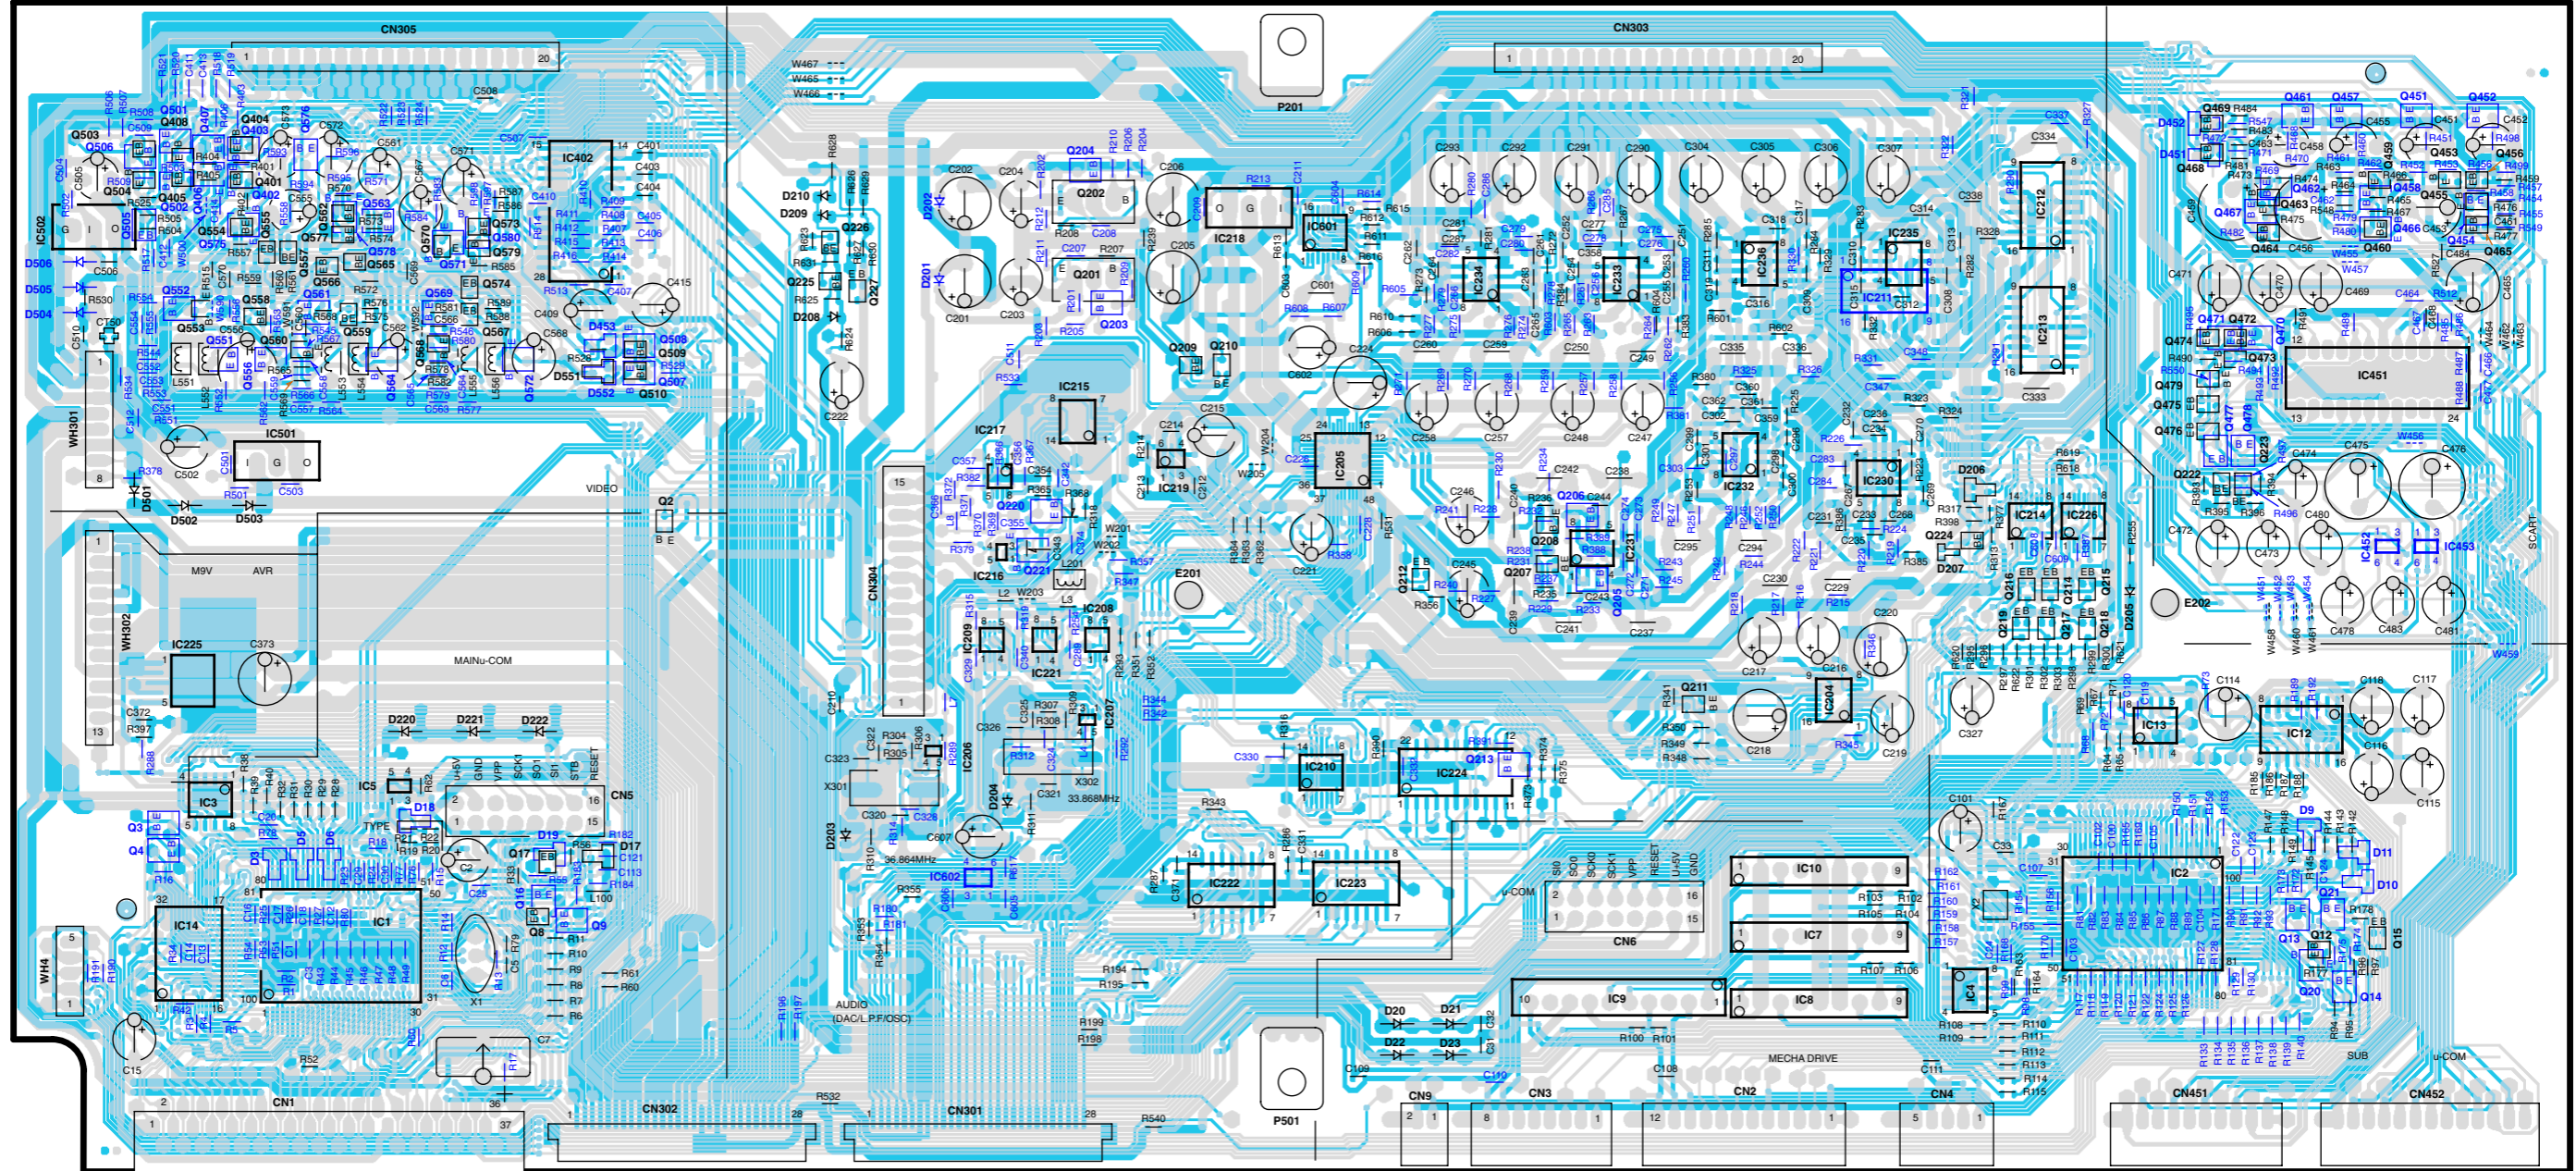

Refer to the schematic diagram for the value of resistors and capacitors.


PC BOARD (Component side view)

X25-6450-10 (J70-1523-11)

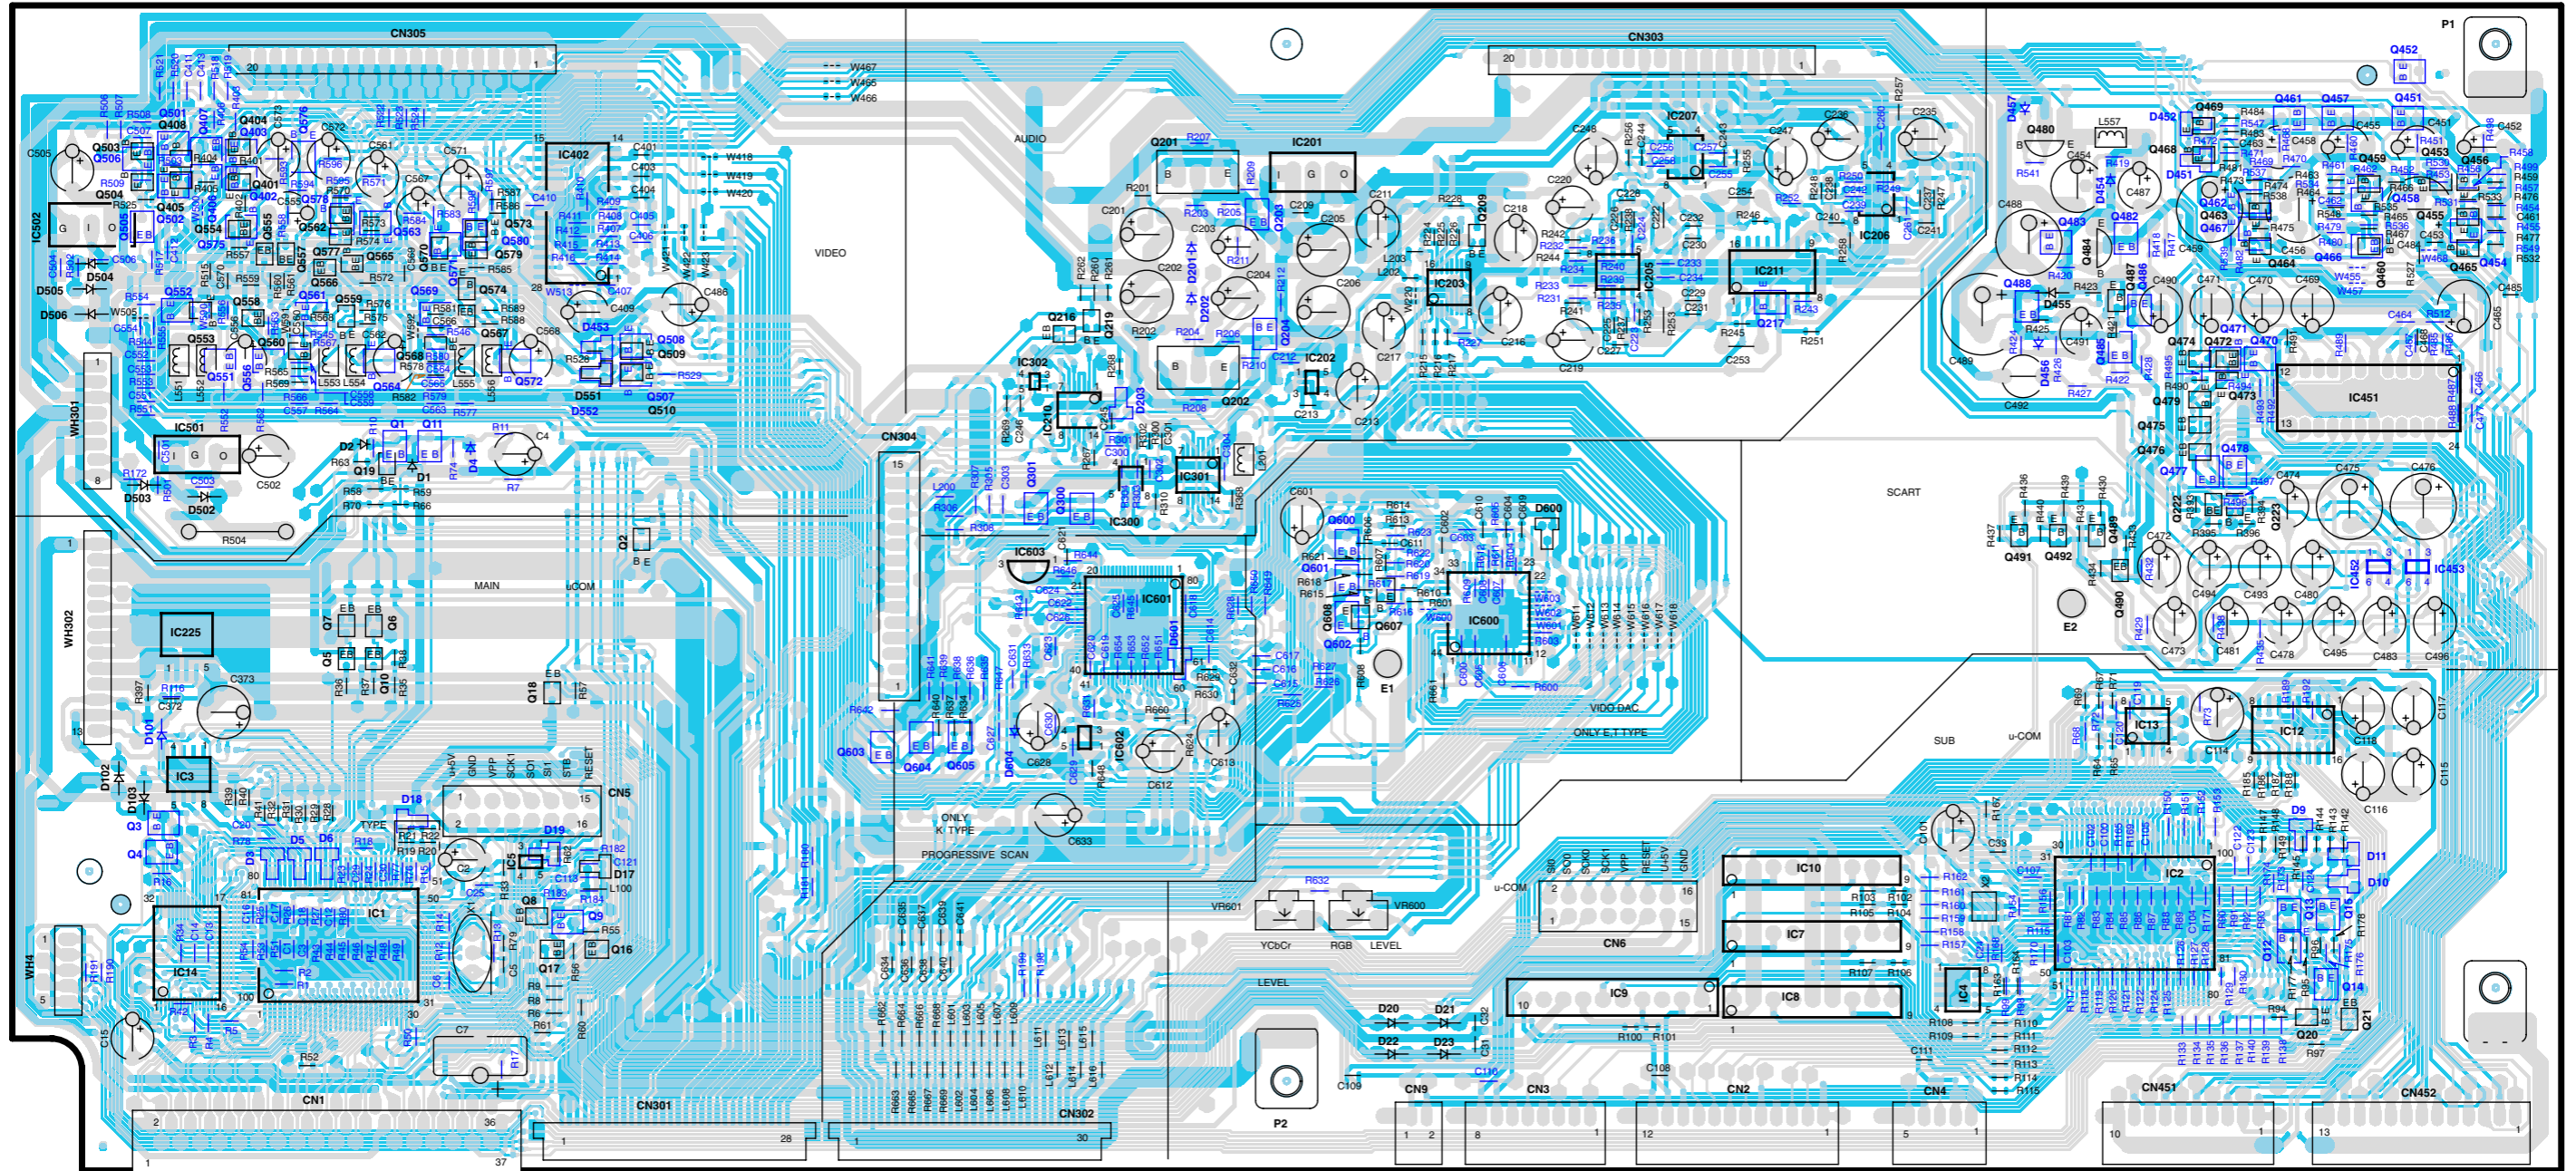


PC BOARD(Component side view)

X35-2290-10 (J70-1520-12)

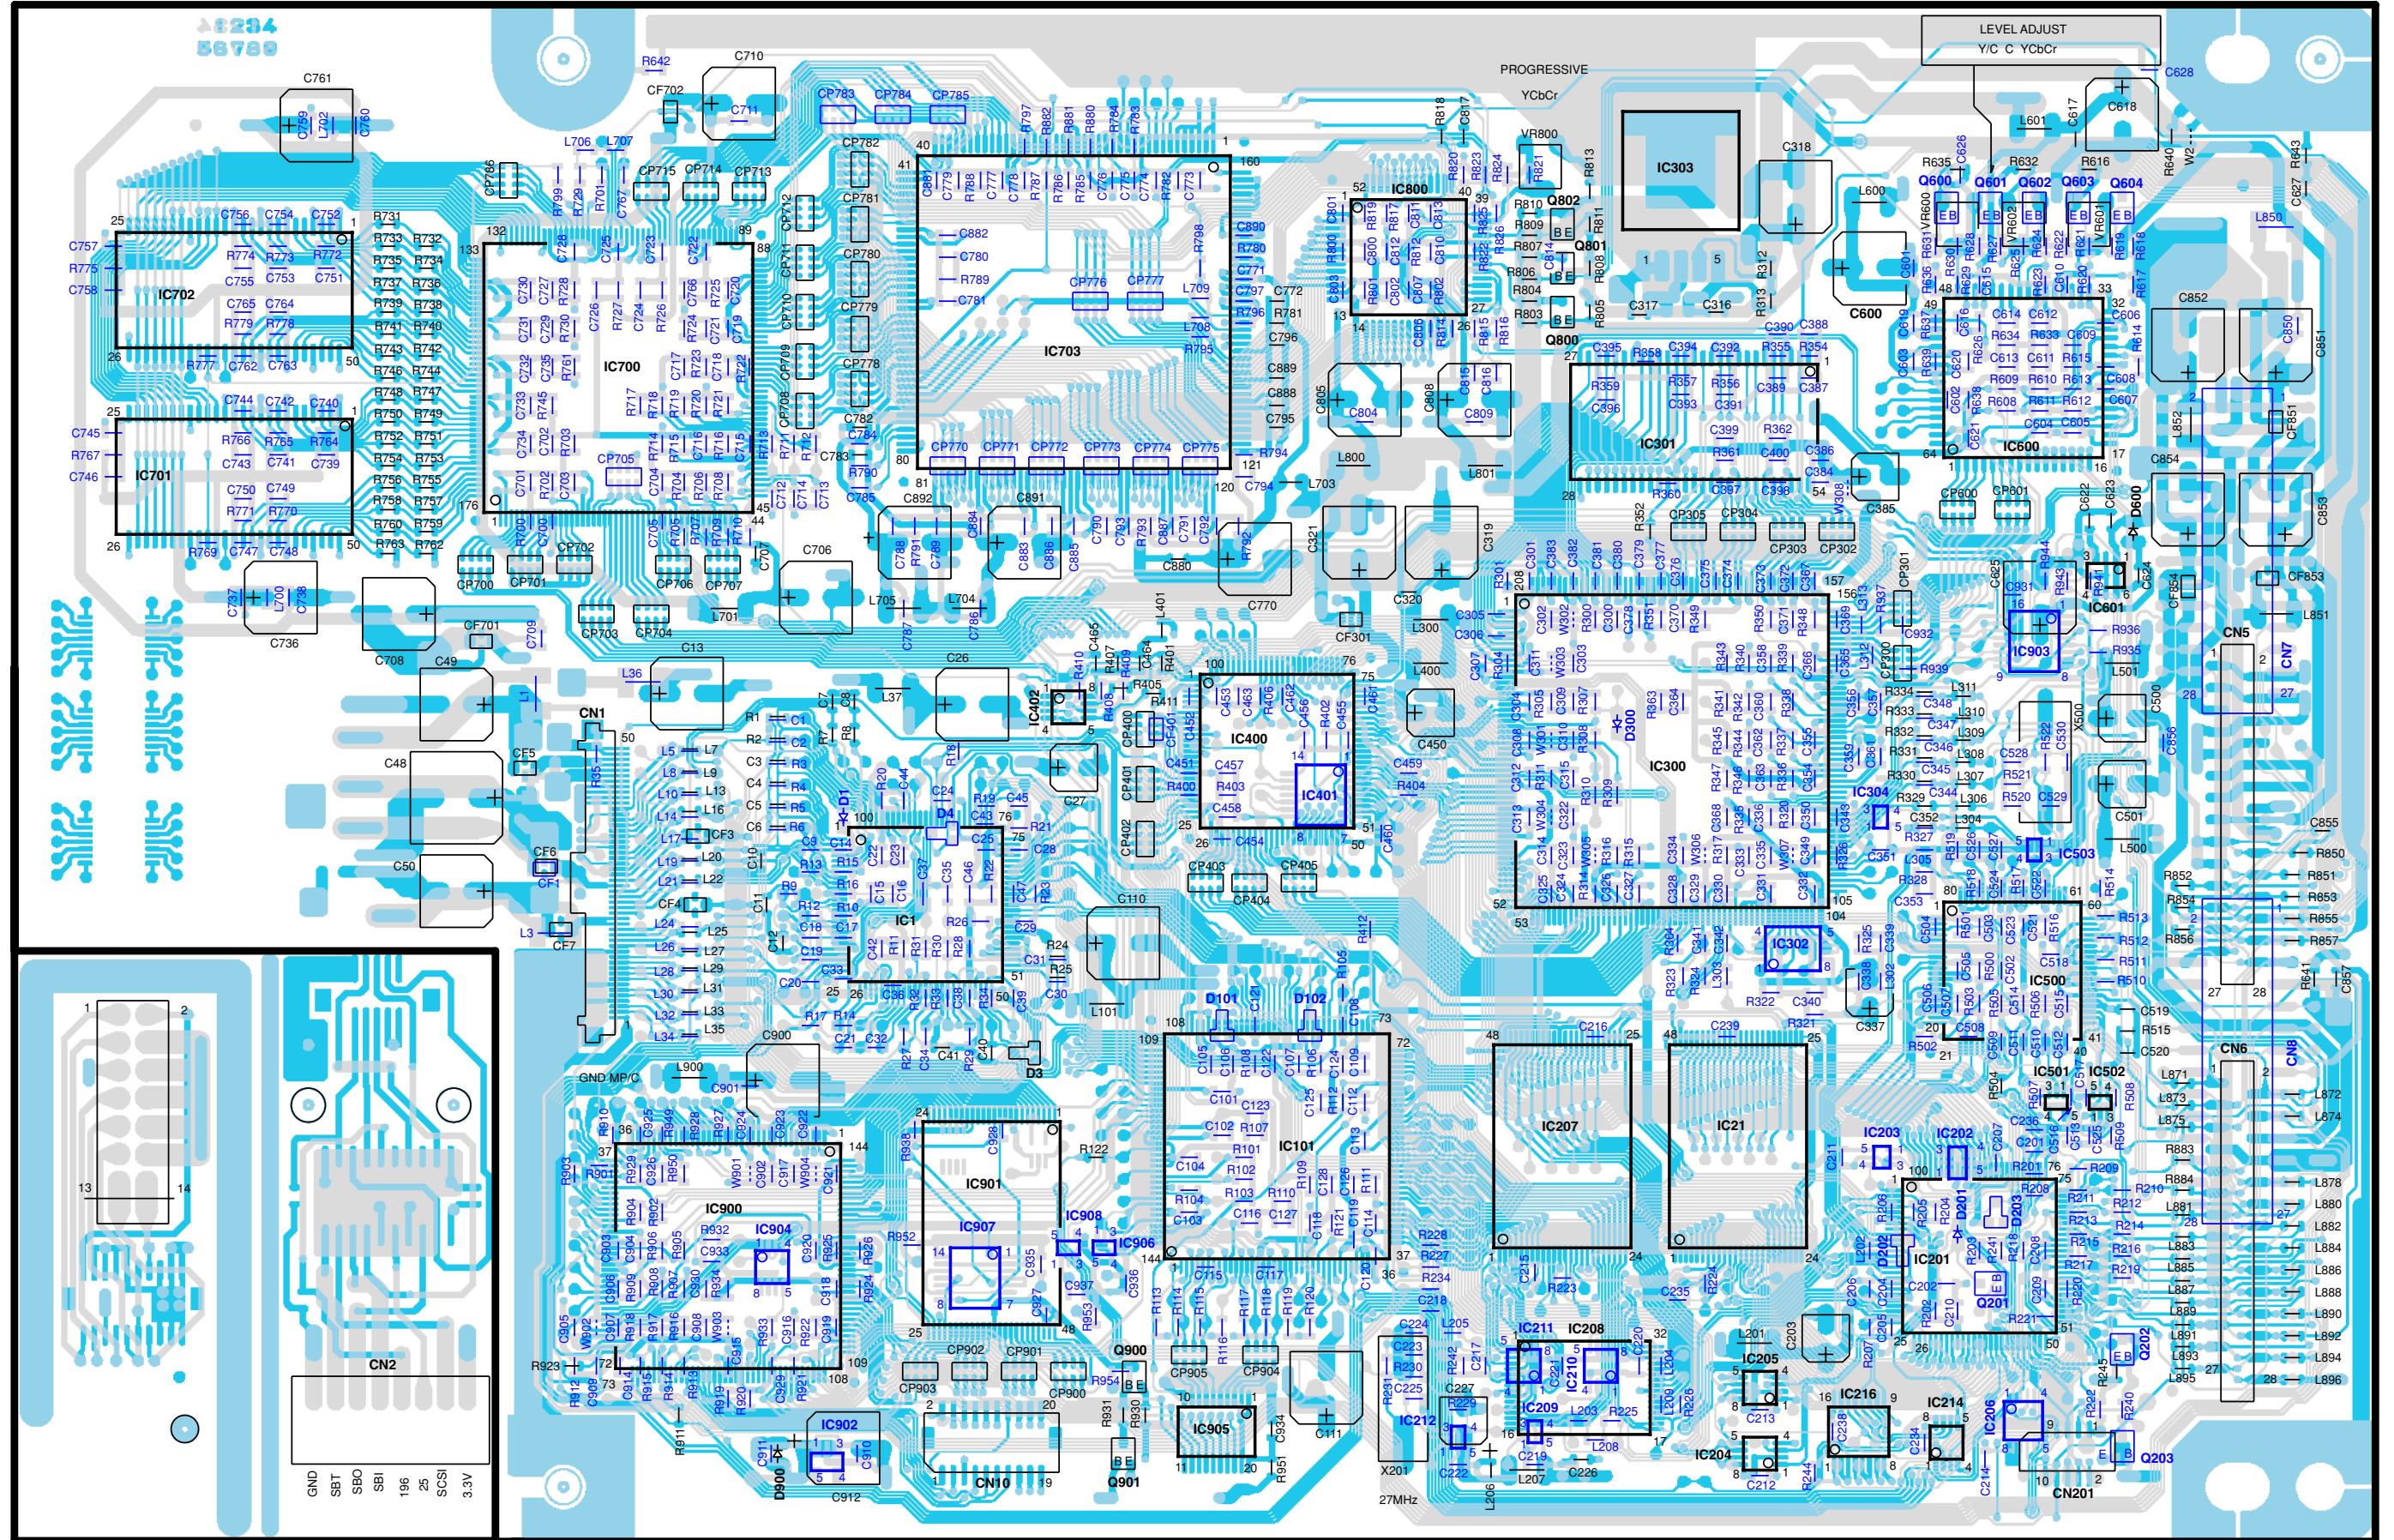


Refer to the schematic diagram for the value of resistors and capacitors.

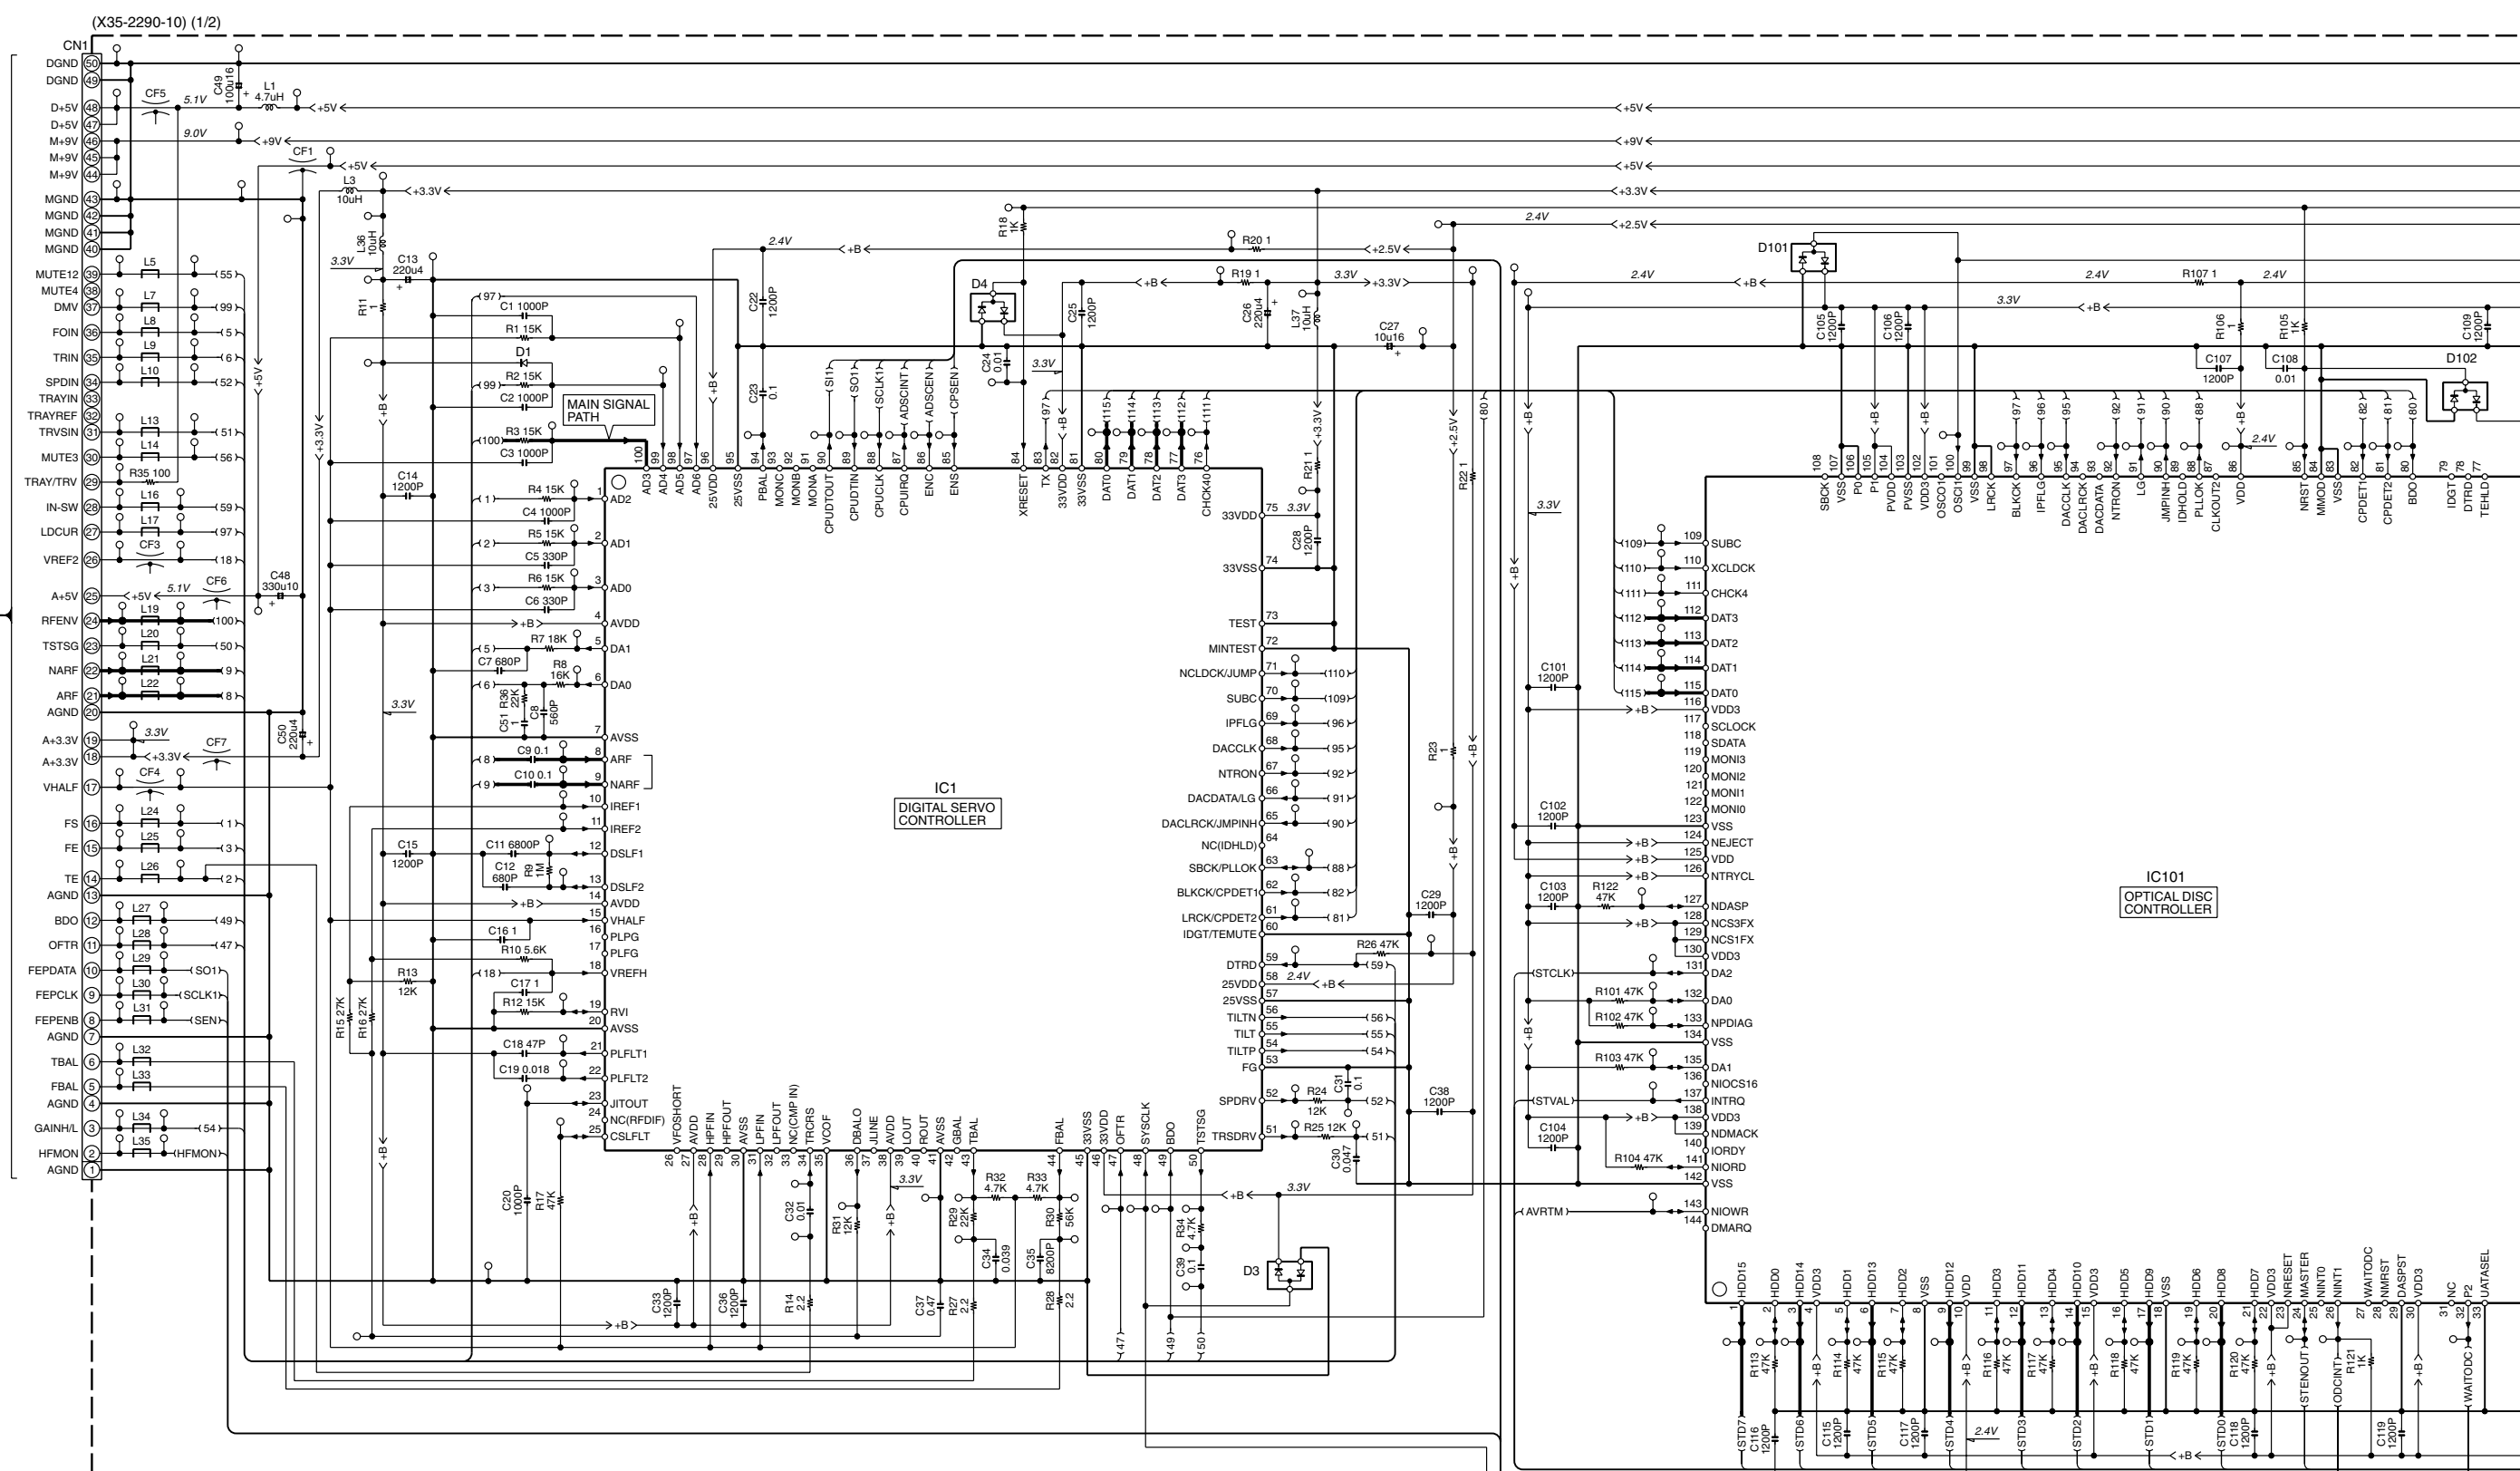


| | | | | | |
|---------------|---------------|-----------|-------------------|----------------------|------------------|
| IC1 | : MN67706EC | IC206 | : X25057M-2.7 | Q201 | : 2SC4081 (R,S) |
| IC101 | : MN103S13BGA | IC207,215 | : 49LV8192A90T | Q202 | : 2SA1576A (R,S) |
| IC201 | : MN102L62GGB | IC208 | : KM68U1000E10 or | Q203 | : DTC124EUA |
| IC202 | : PST596JNR | | BS62LV1024ST70 | | |
| IC203 | : TC7SH08FU | IC209,212 | : TC7SHU04FU | D1,201 | : MA111 |
| IC204,205,214 | : TC3W02FU | IC210,211 | : TC7WH74FU | D3,4,101,102,202,203 | : DA204U |
| | | IC216 | : TC74VHC15FT | | |

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.


The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.




1
2
3
4
5
6
7

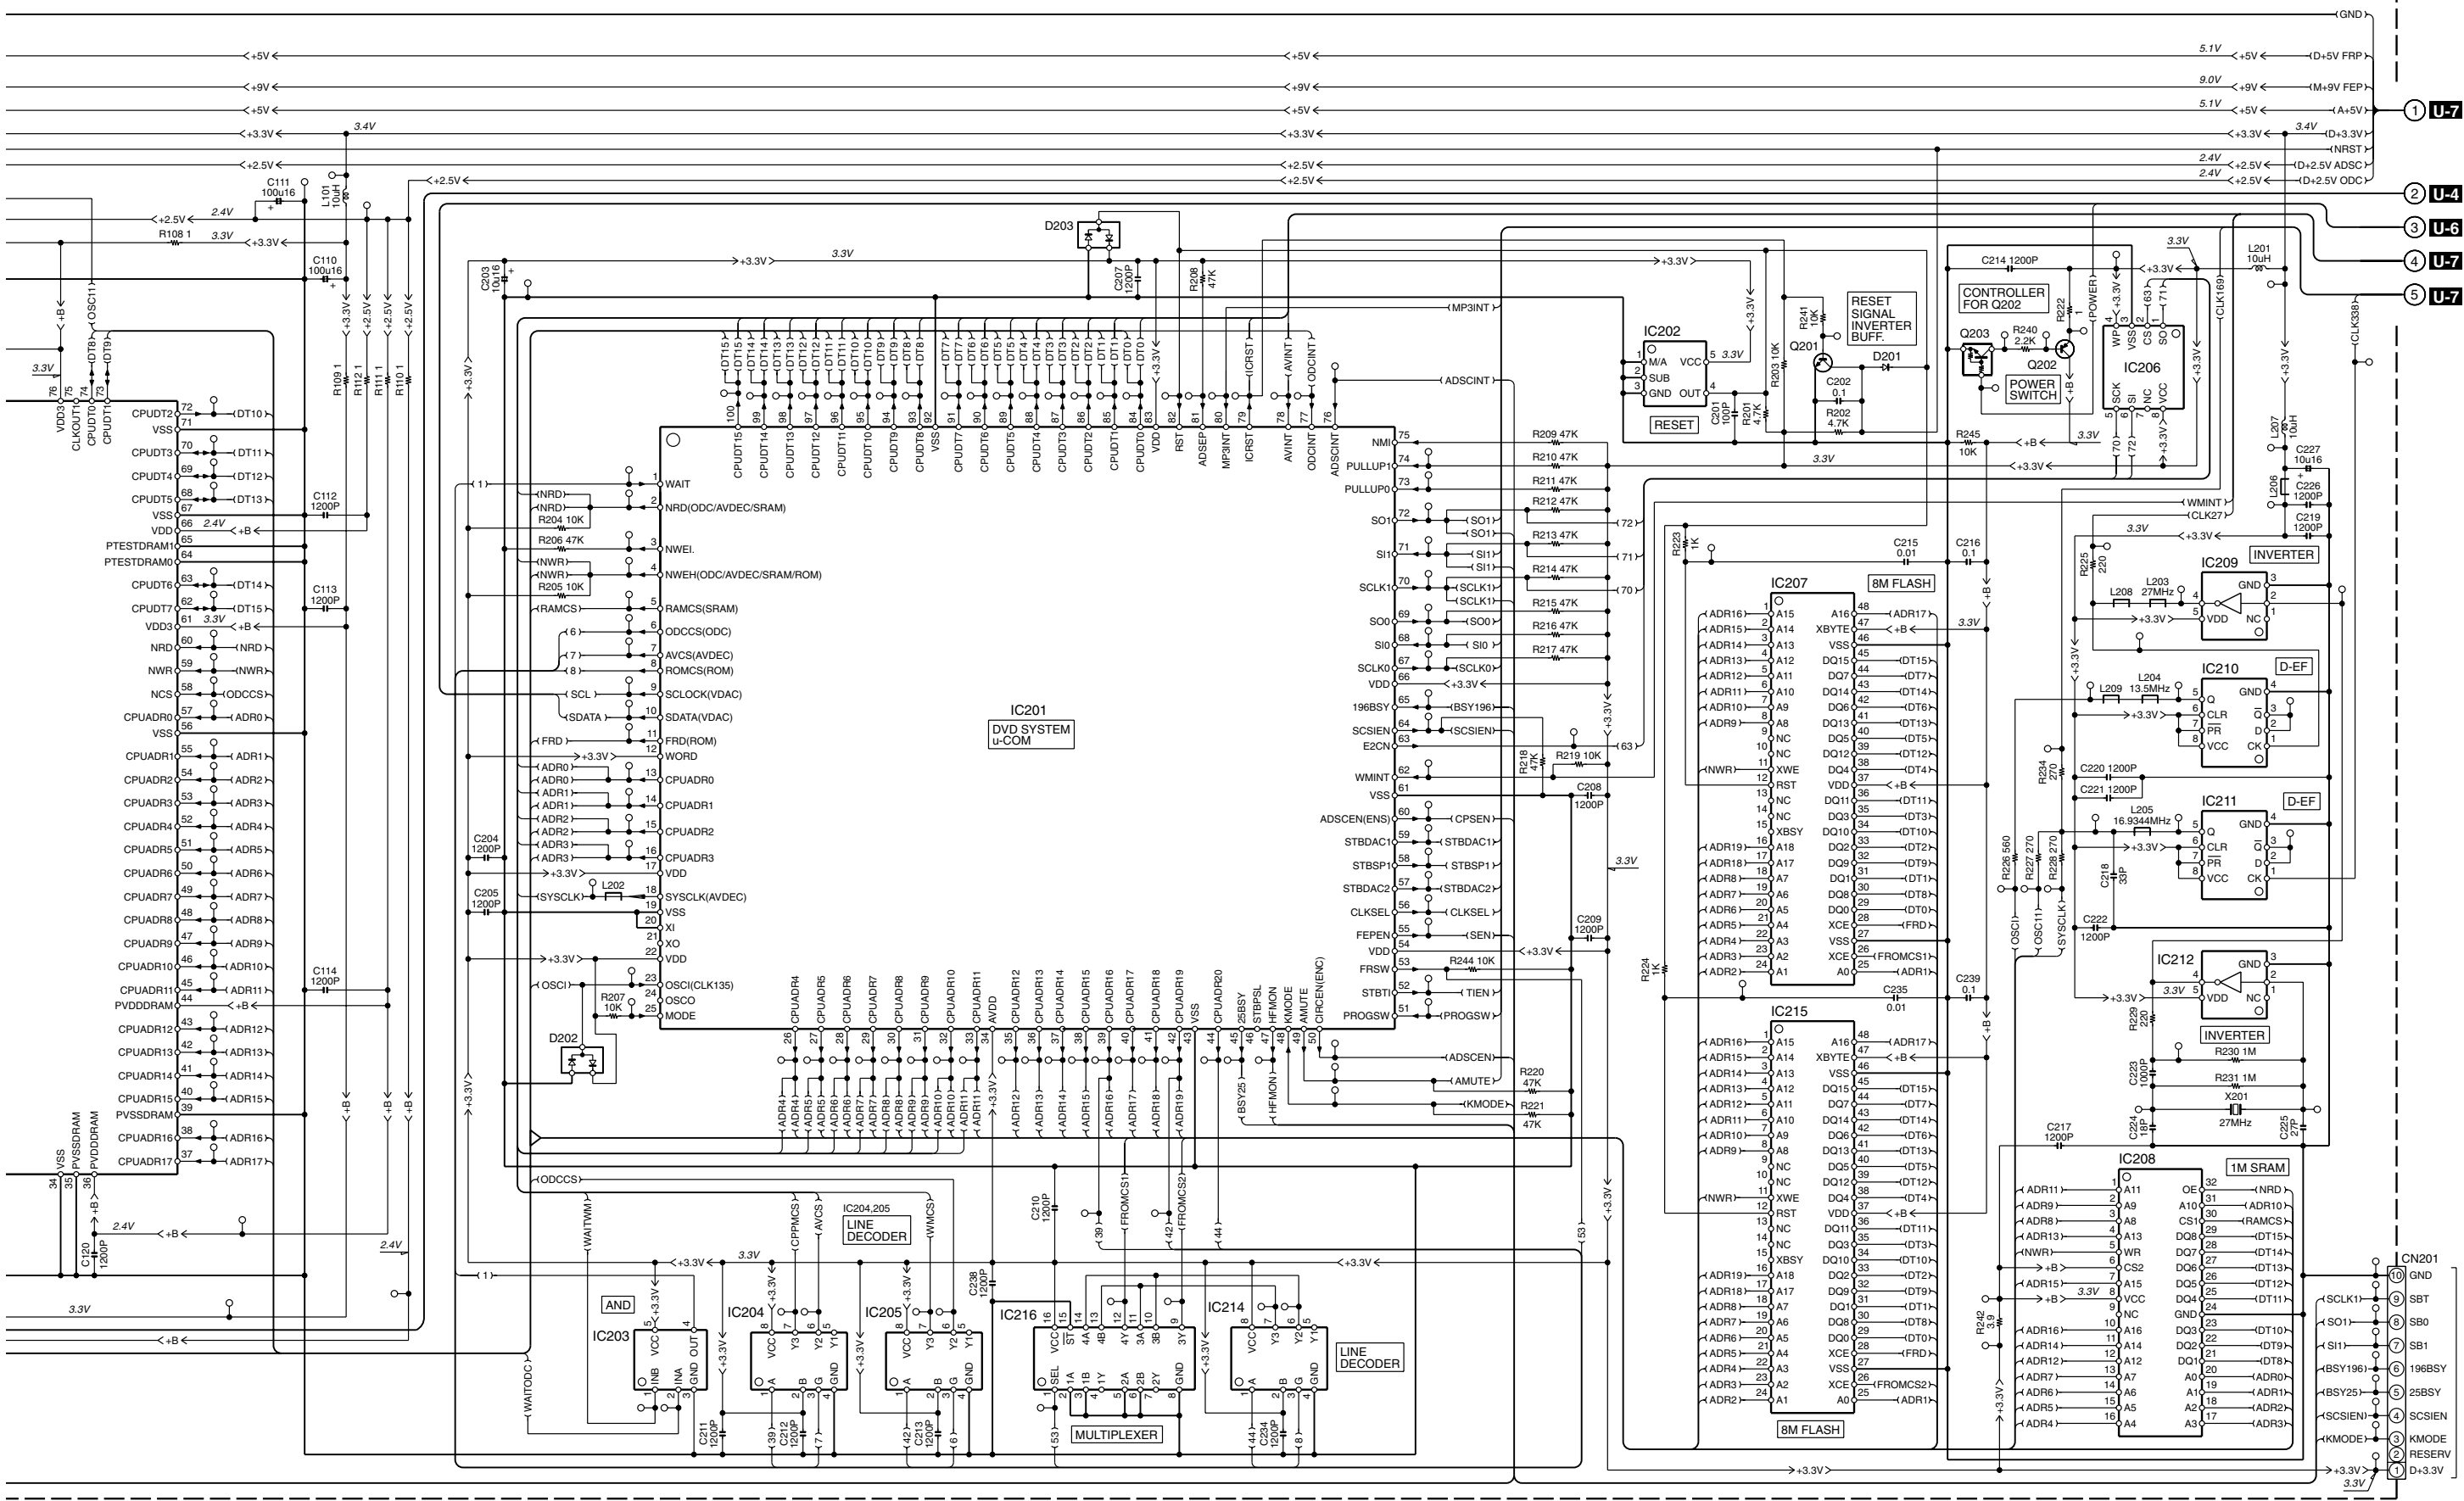

- ① U-7
- ② U-4
- ③ U-6
- ④ U-7
- ⑤ U-7

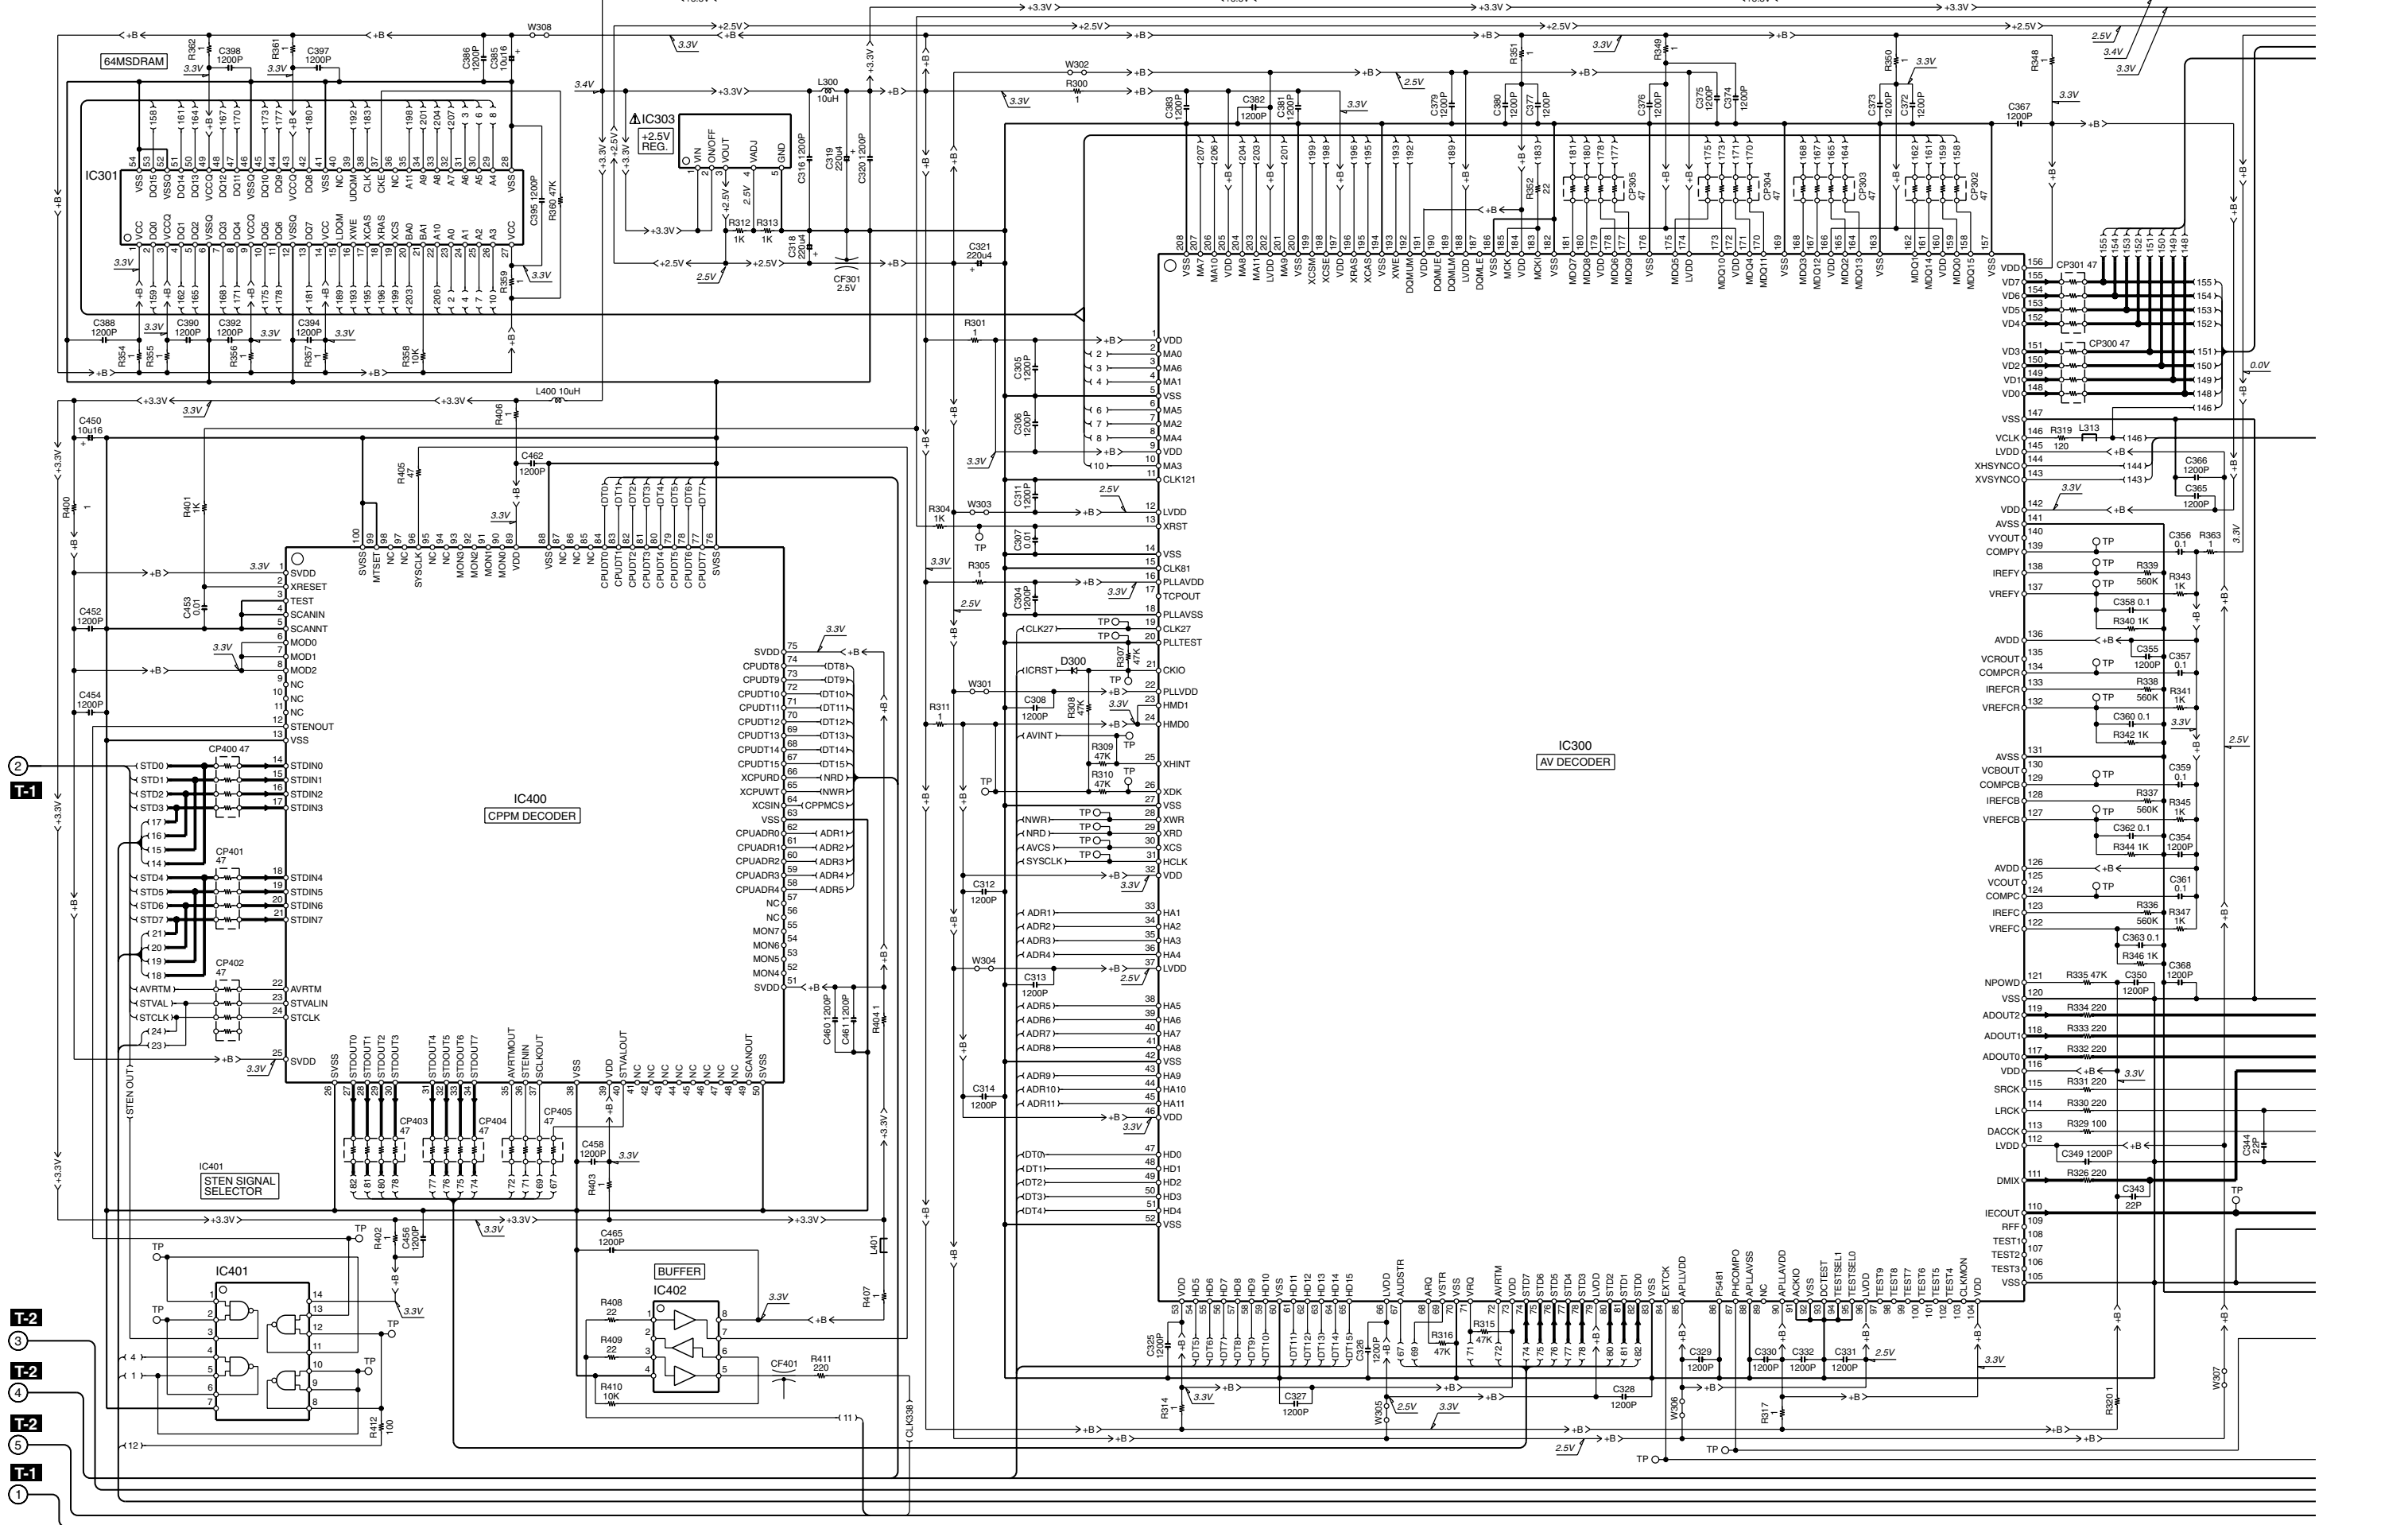

- ① T-1
- ② T-1
- ③ T-2
- ④ T-2
- ⑤ T-2
- ⑥ T-2
- ⑦ T-1

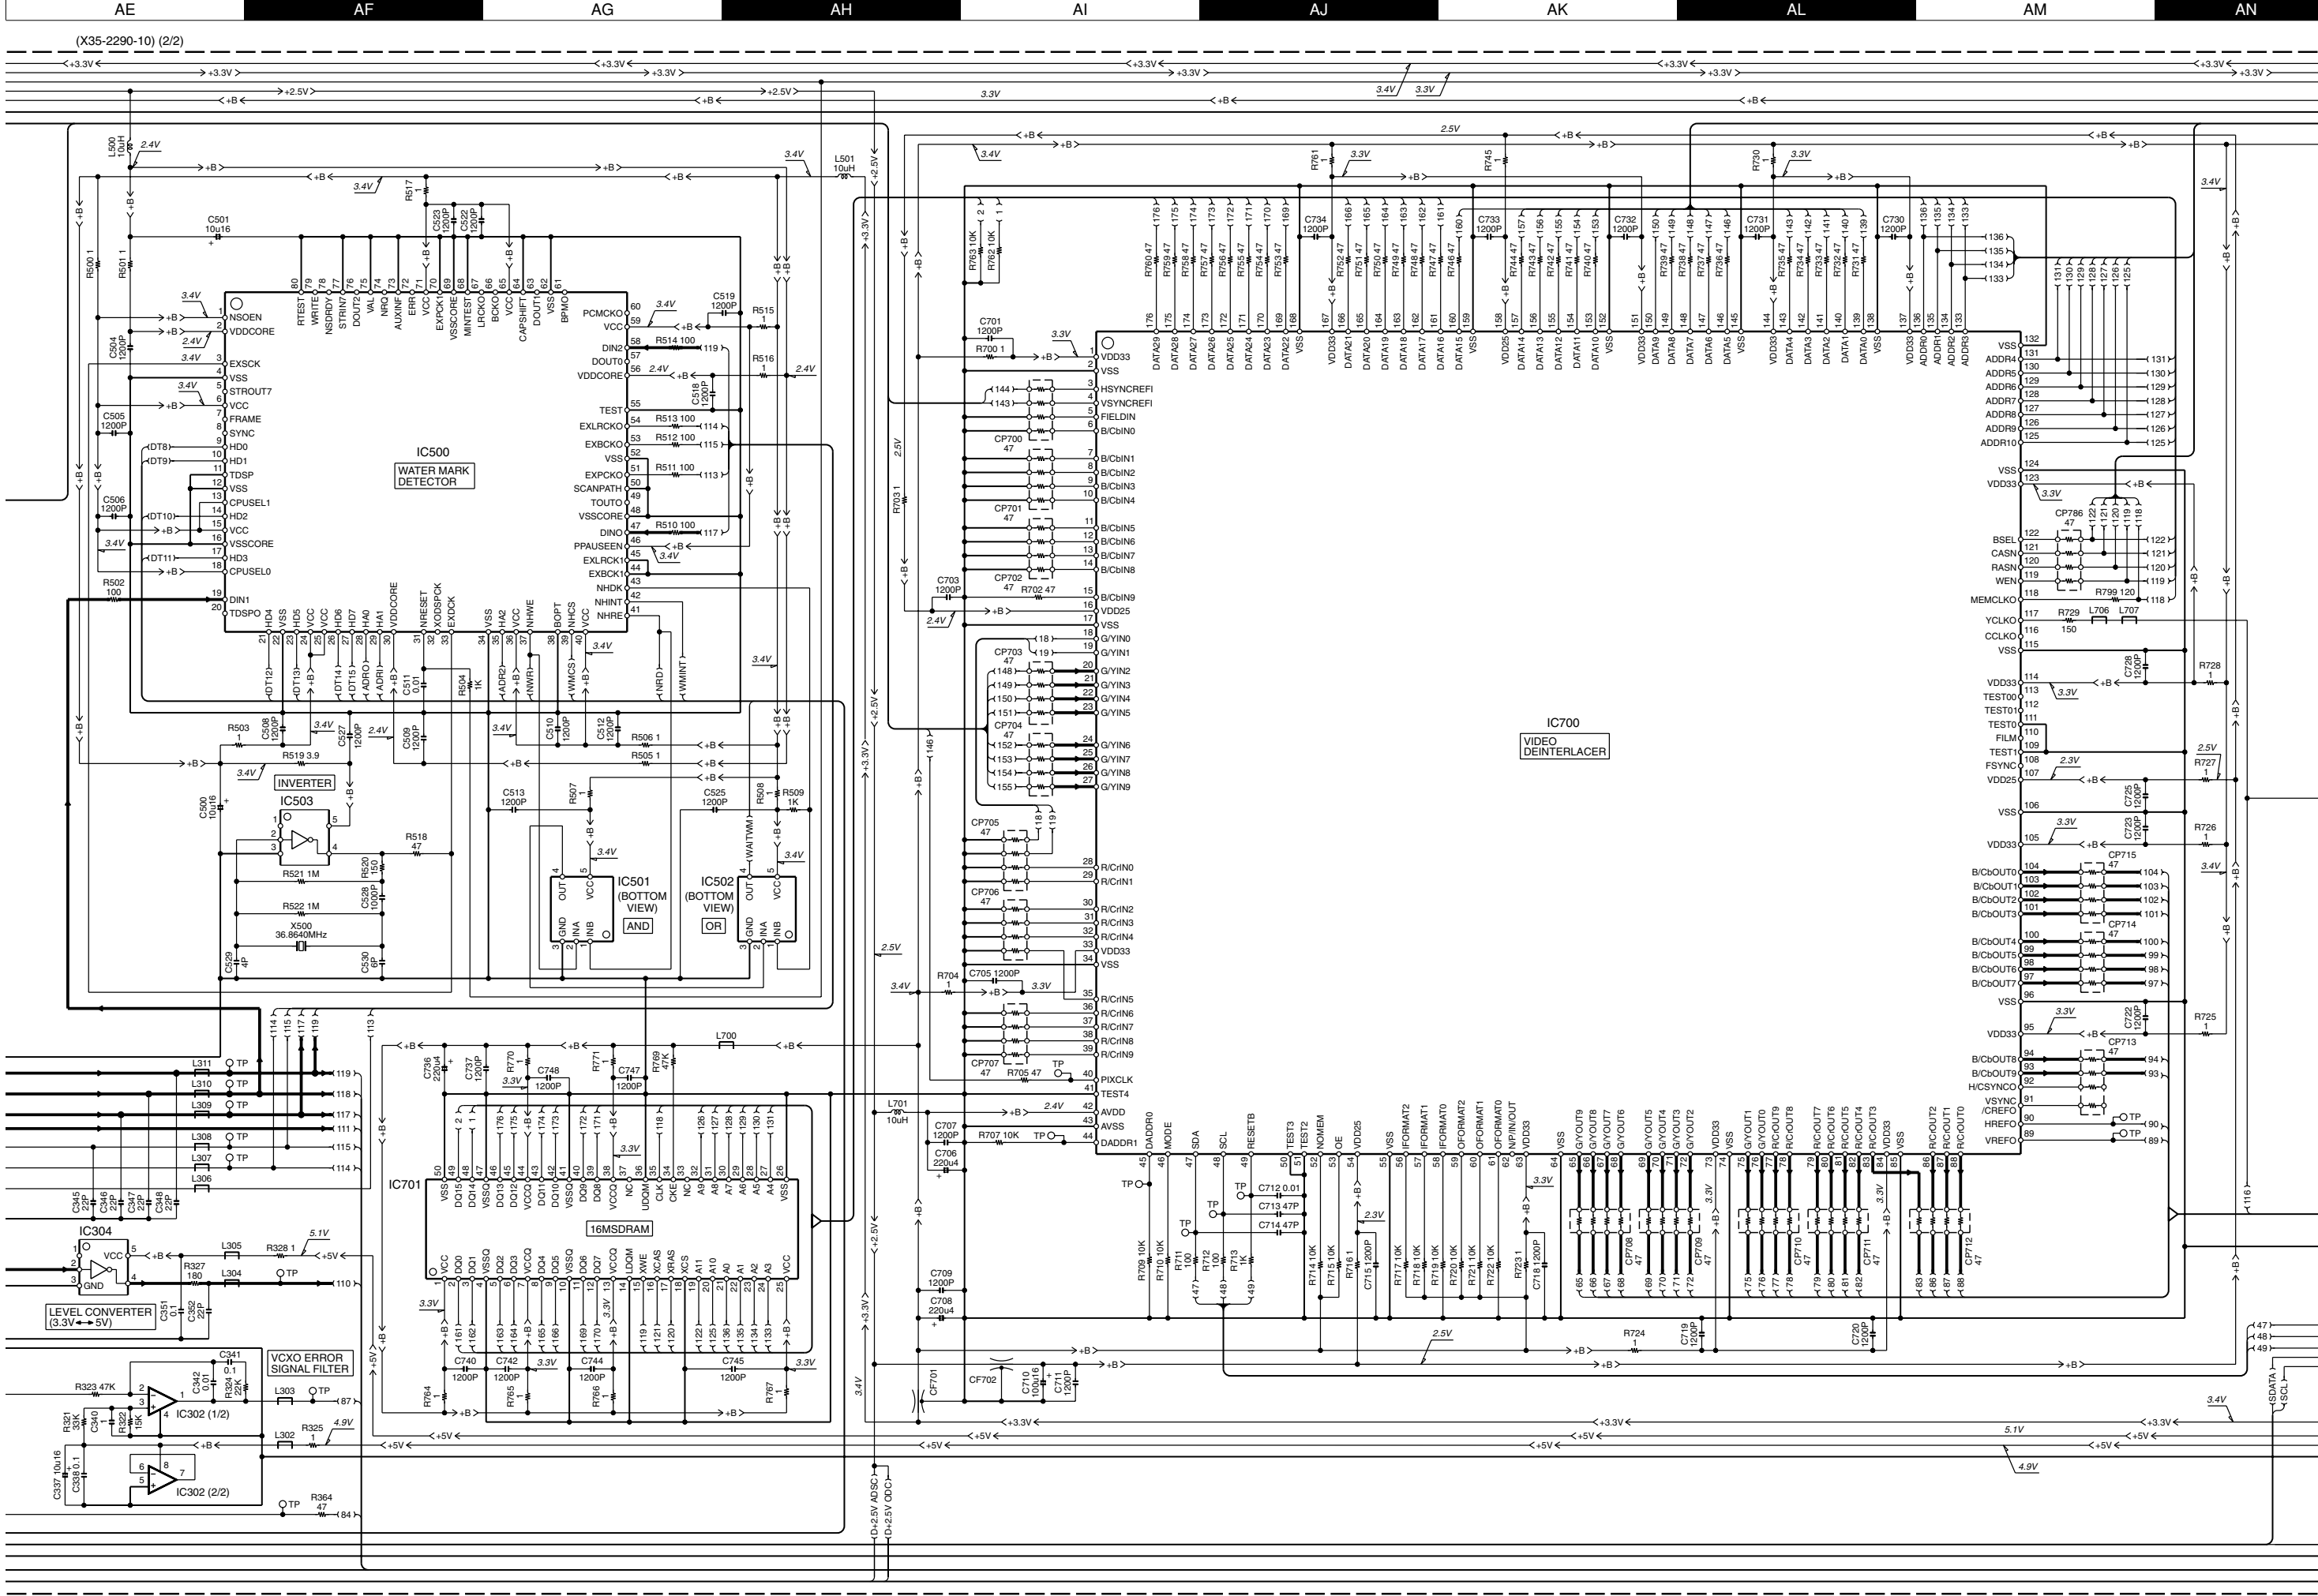

IC500
WATER MARK
DETECTOR

INVERTER
IC503

IC501
AND
(BOTTOM
VIEW)

IC502
OR
(BOTTOM
VIEW)


IC701
16MSDRAM

IC700
VIDEO
DEINTERLACER

VXCO ERROR
SIGNAL FILTER
IC302 (1/2)

LEVEL CONVERTER
(3.3V → 5V)
IC302 (2/2)

D+2.5V AD5C
D+2.5V ODC

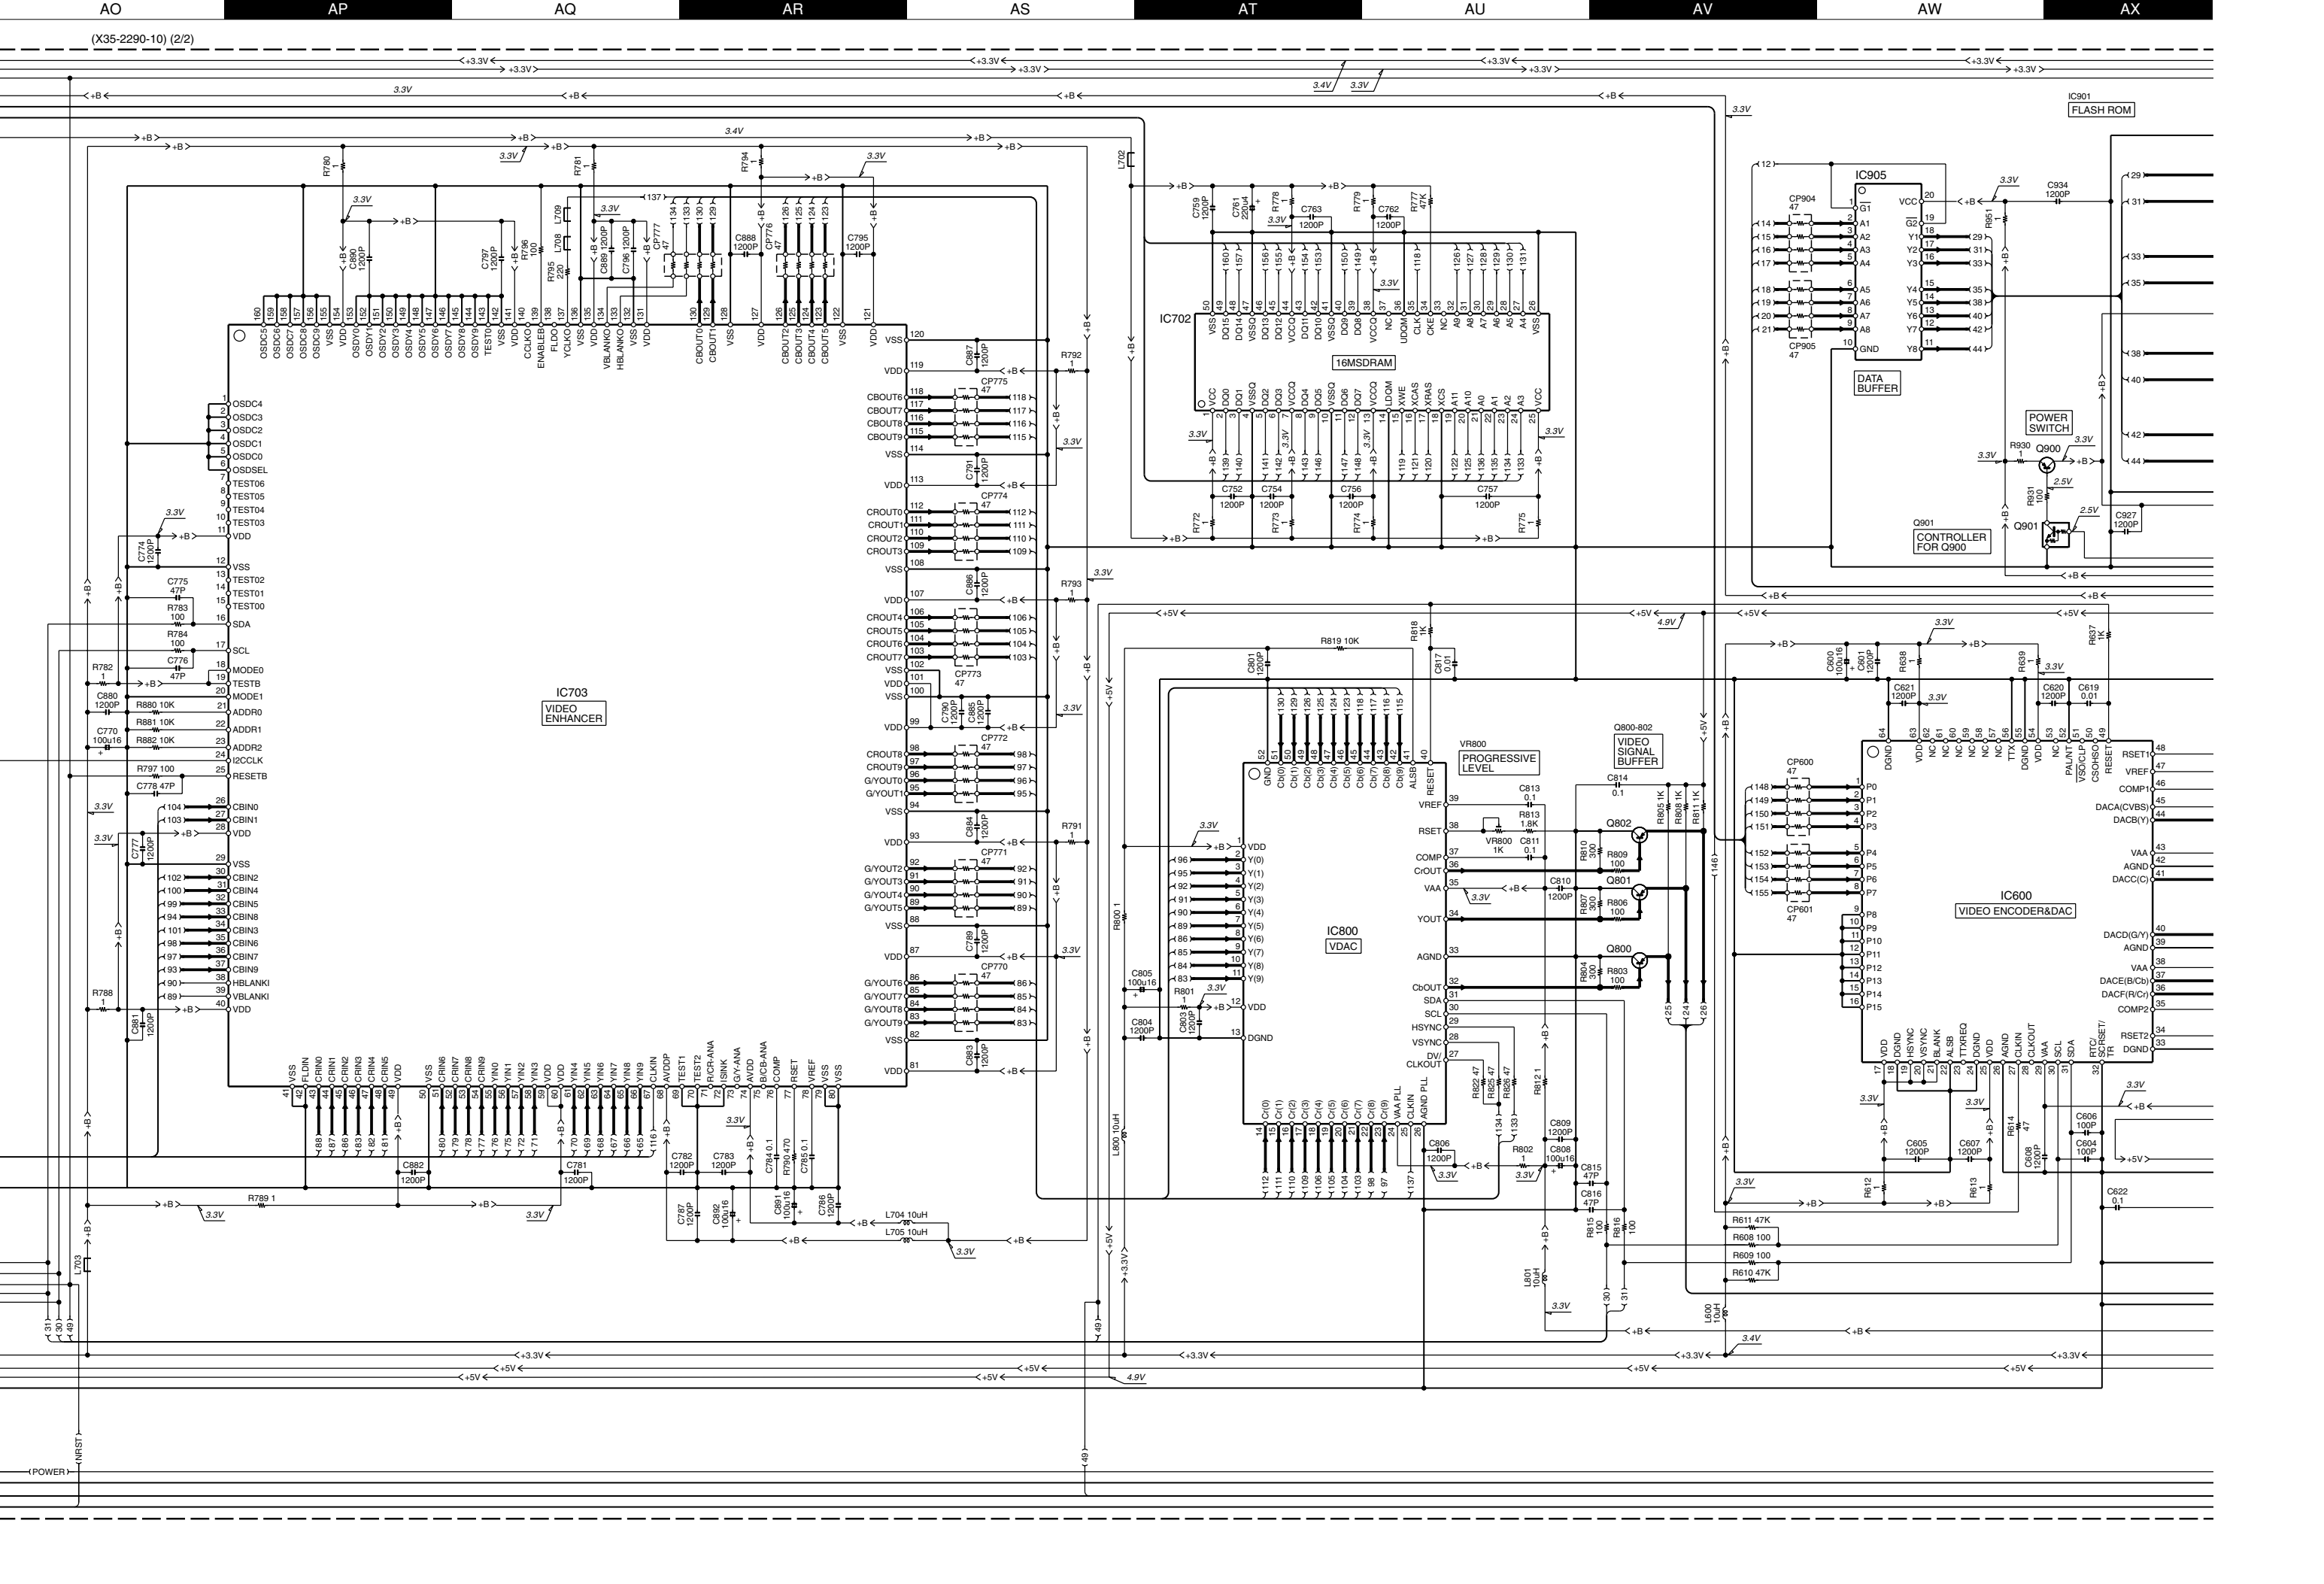

IC703 VIDEO ENHANCER

16MSDRAM

IC800 VDAC

VR800 PROGRESSIVE LEVEL

Q800-802 VIDEO SIGNAL BUFFER


IC600 VIDEO ENCODER&DAC

IC901 FLASH ROM


IC905 DATA BUFFER

Q901 CONTROLLER FOR Q900

POWER SWITCH

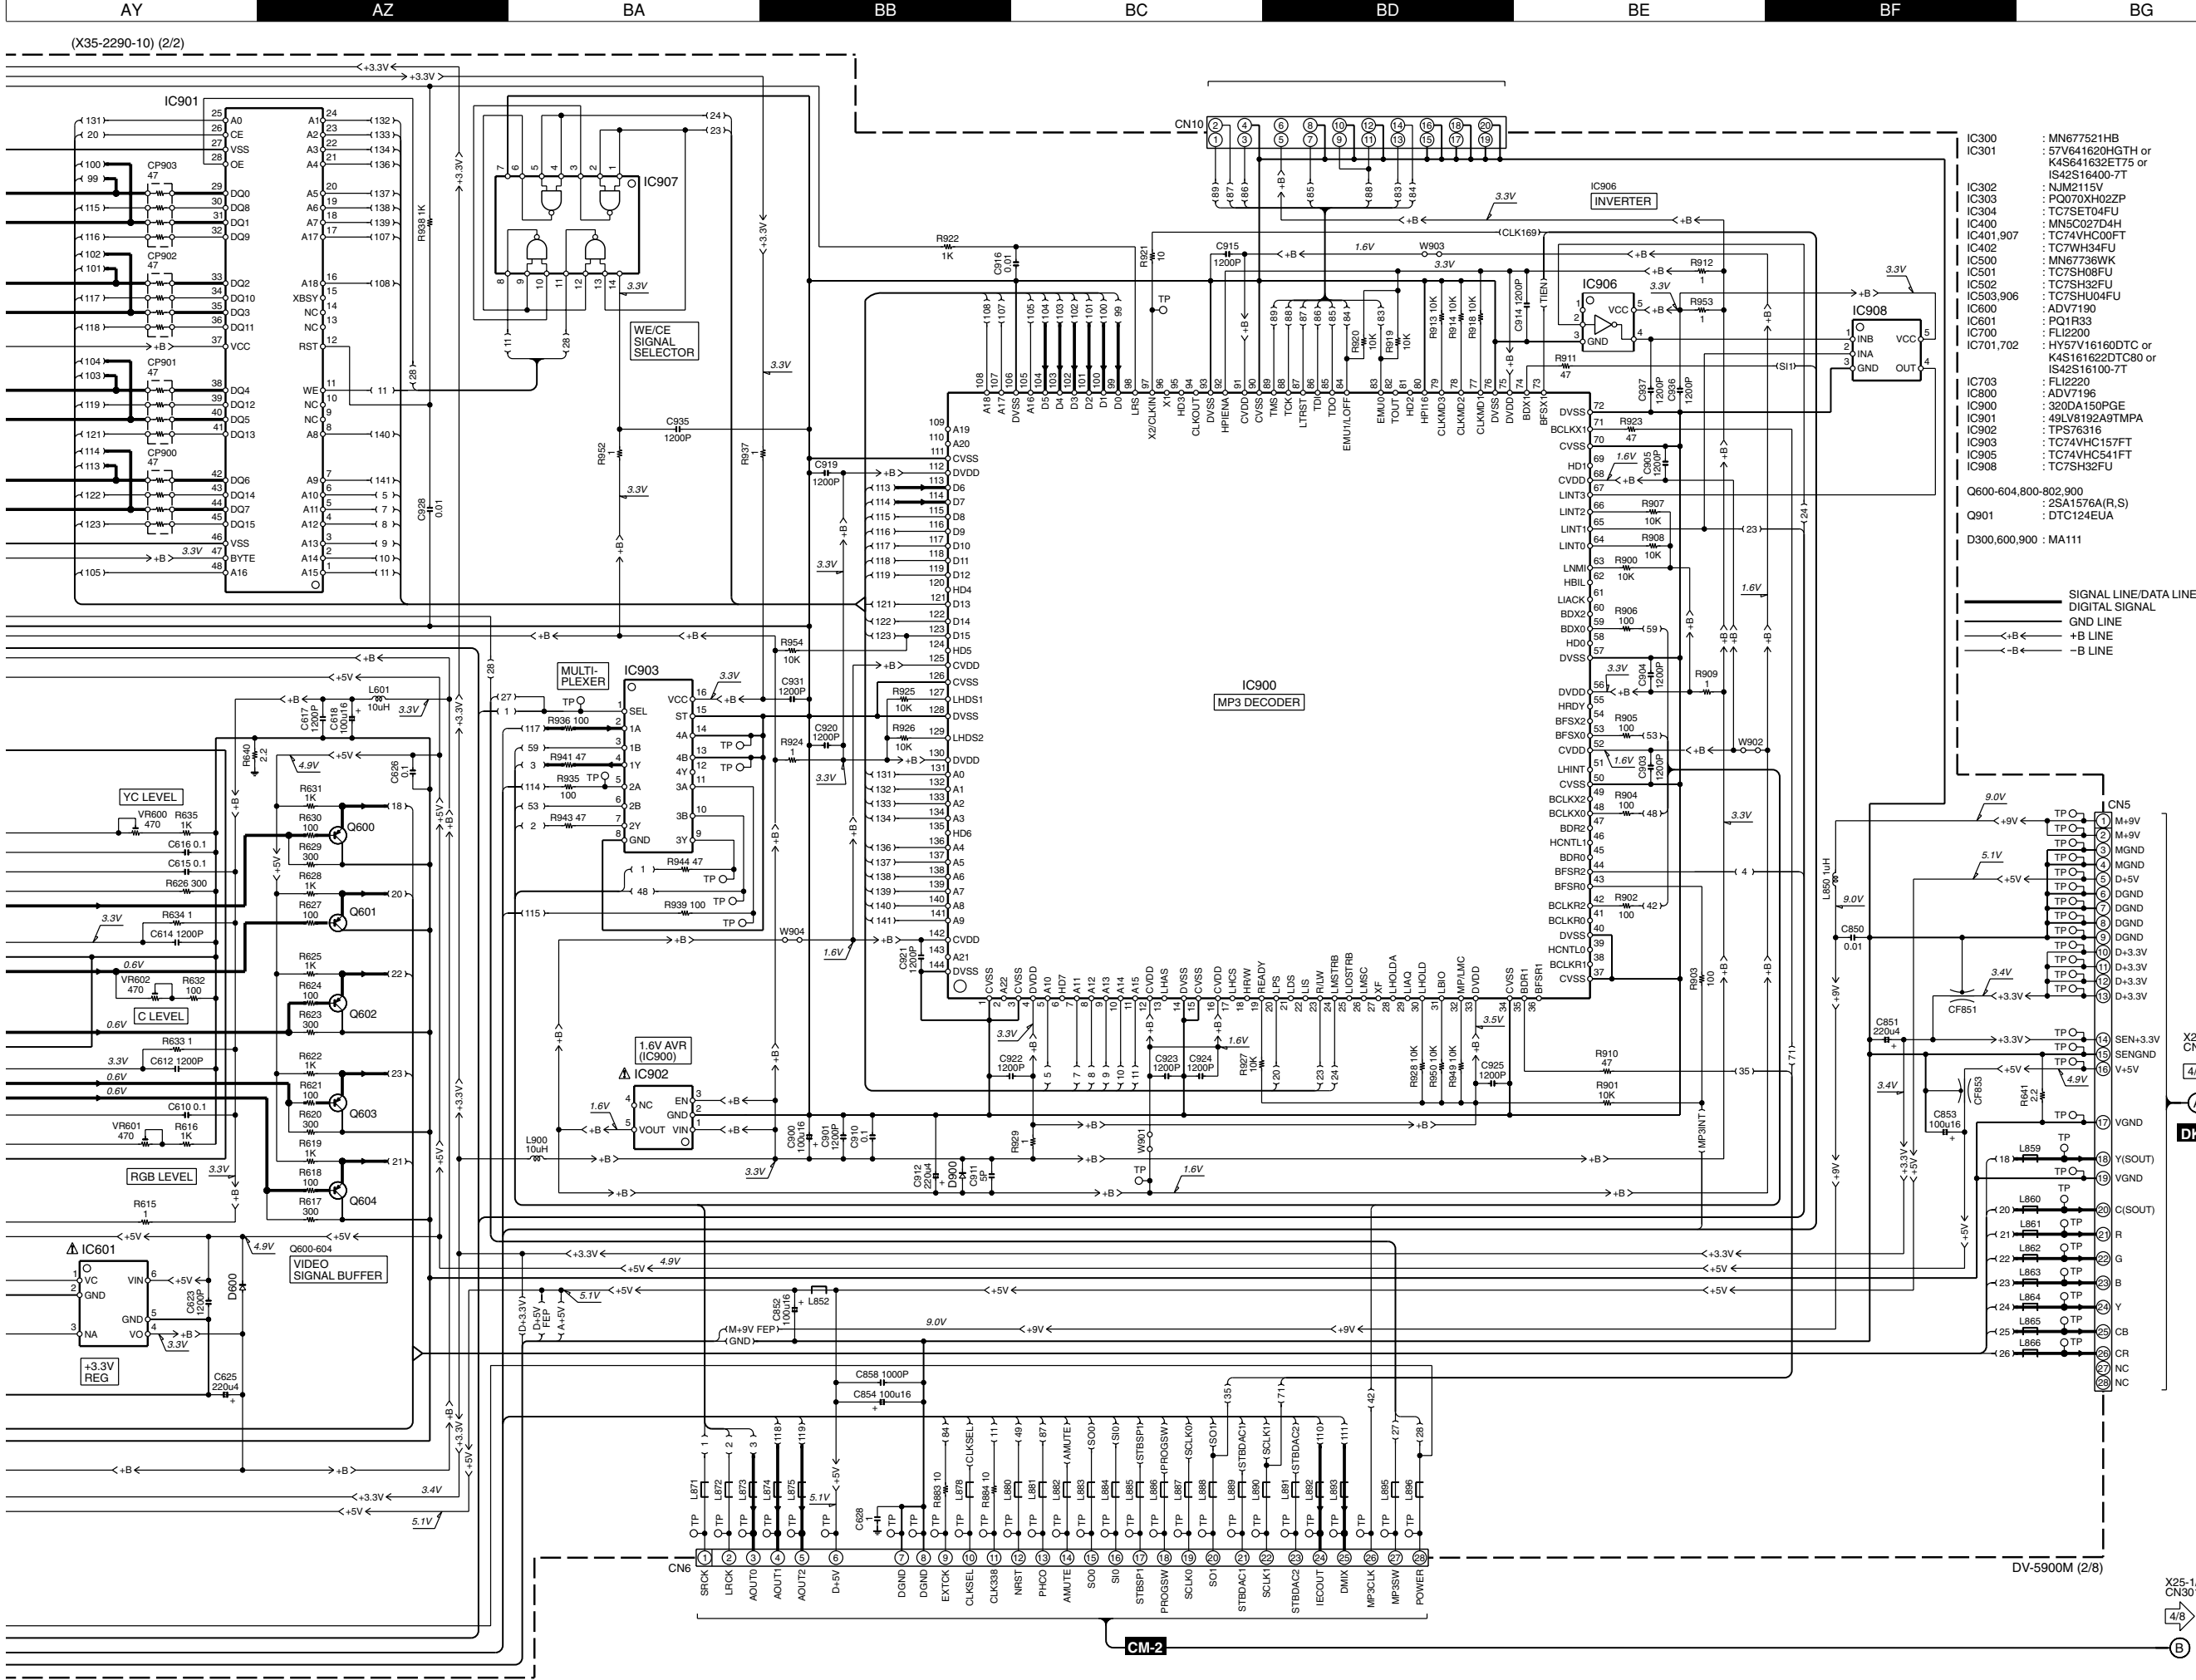

- IC300 : MN67521HB
 - IC301 : 57V641620HGTH or K4S41632E175 or IS42S16400-7T
 - IC302 : NM2115V
 - IC303 : PQ070XH02ZP
 - IC304 : TC7SE04FU
 - IC400 : MNSC027D4H
 - IC401,907 : TC74VHC00FT
 - IC402 : TC74VHC00FT
 - IC500 : MN67736WK
 - IC501 : TC7SH08FU
 - IC502 : TC7SH32FU
 - IC503,906 : TC7SHU04FU
 - IC600 : ADV7190
 - IC601 : PQ1R33
 - IC700 : FL12200
 - IC701,702 : HY57V16160DTC or K4S161622DTC80 or IS42S16100-7T
 - IC703 : FL12220
 - IC800 : ADV7196
 - IC900 : 320A150PGE
 - IC901 : 48LV8192A9TMPA
 - IC902 : TPS76316
 - IC903 : TC74VHC157FT
 - IC905 : TC74VHC541FT
 - IC908 : TC7SH32FU
- Q600-604,800-802,900 : 2SA1576A(R,S)
 Q901 : DTC124EUA
 D300,600,900 : MA111

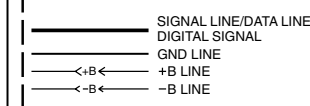



CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.


Y22-8490-10

DV-5050M/5900M/DVF-J6050/J6050-G
KENWOOD



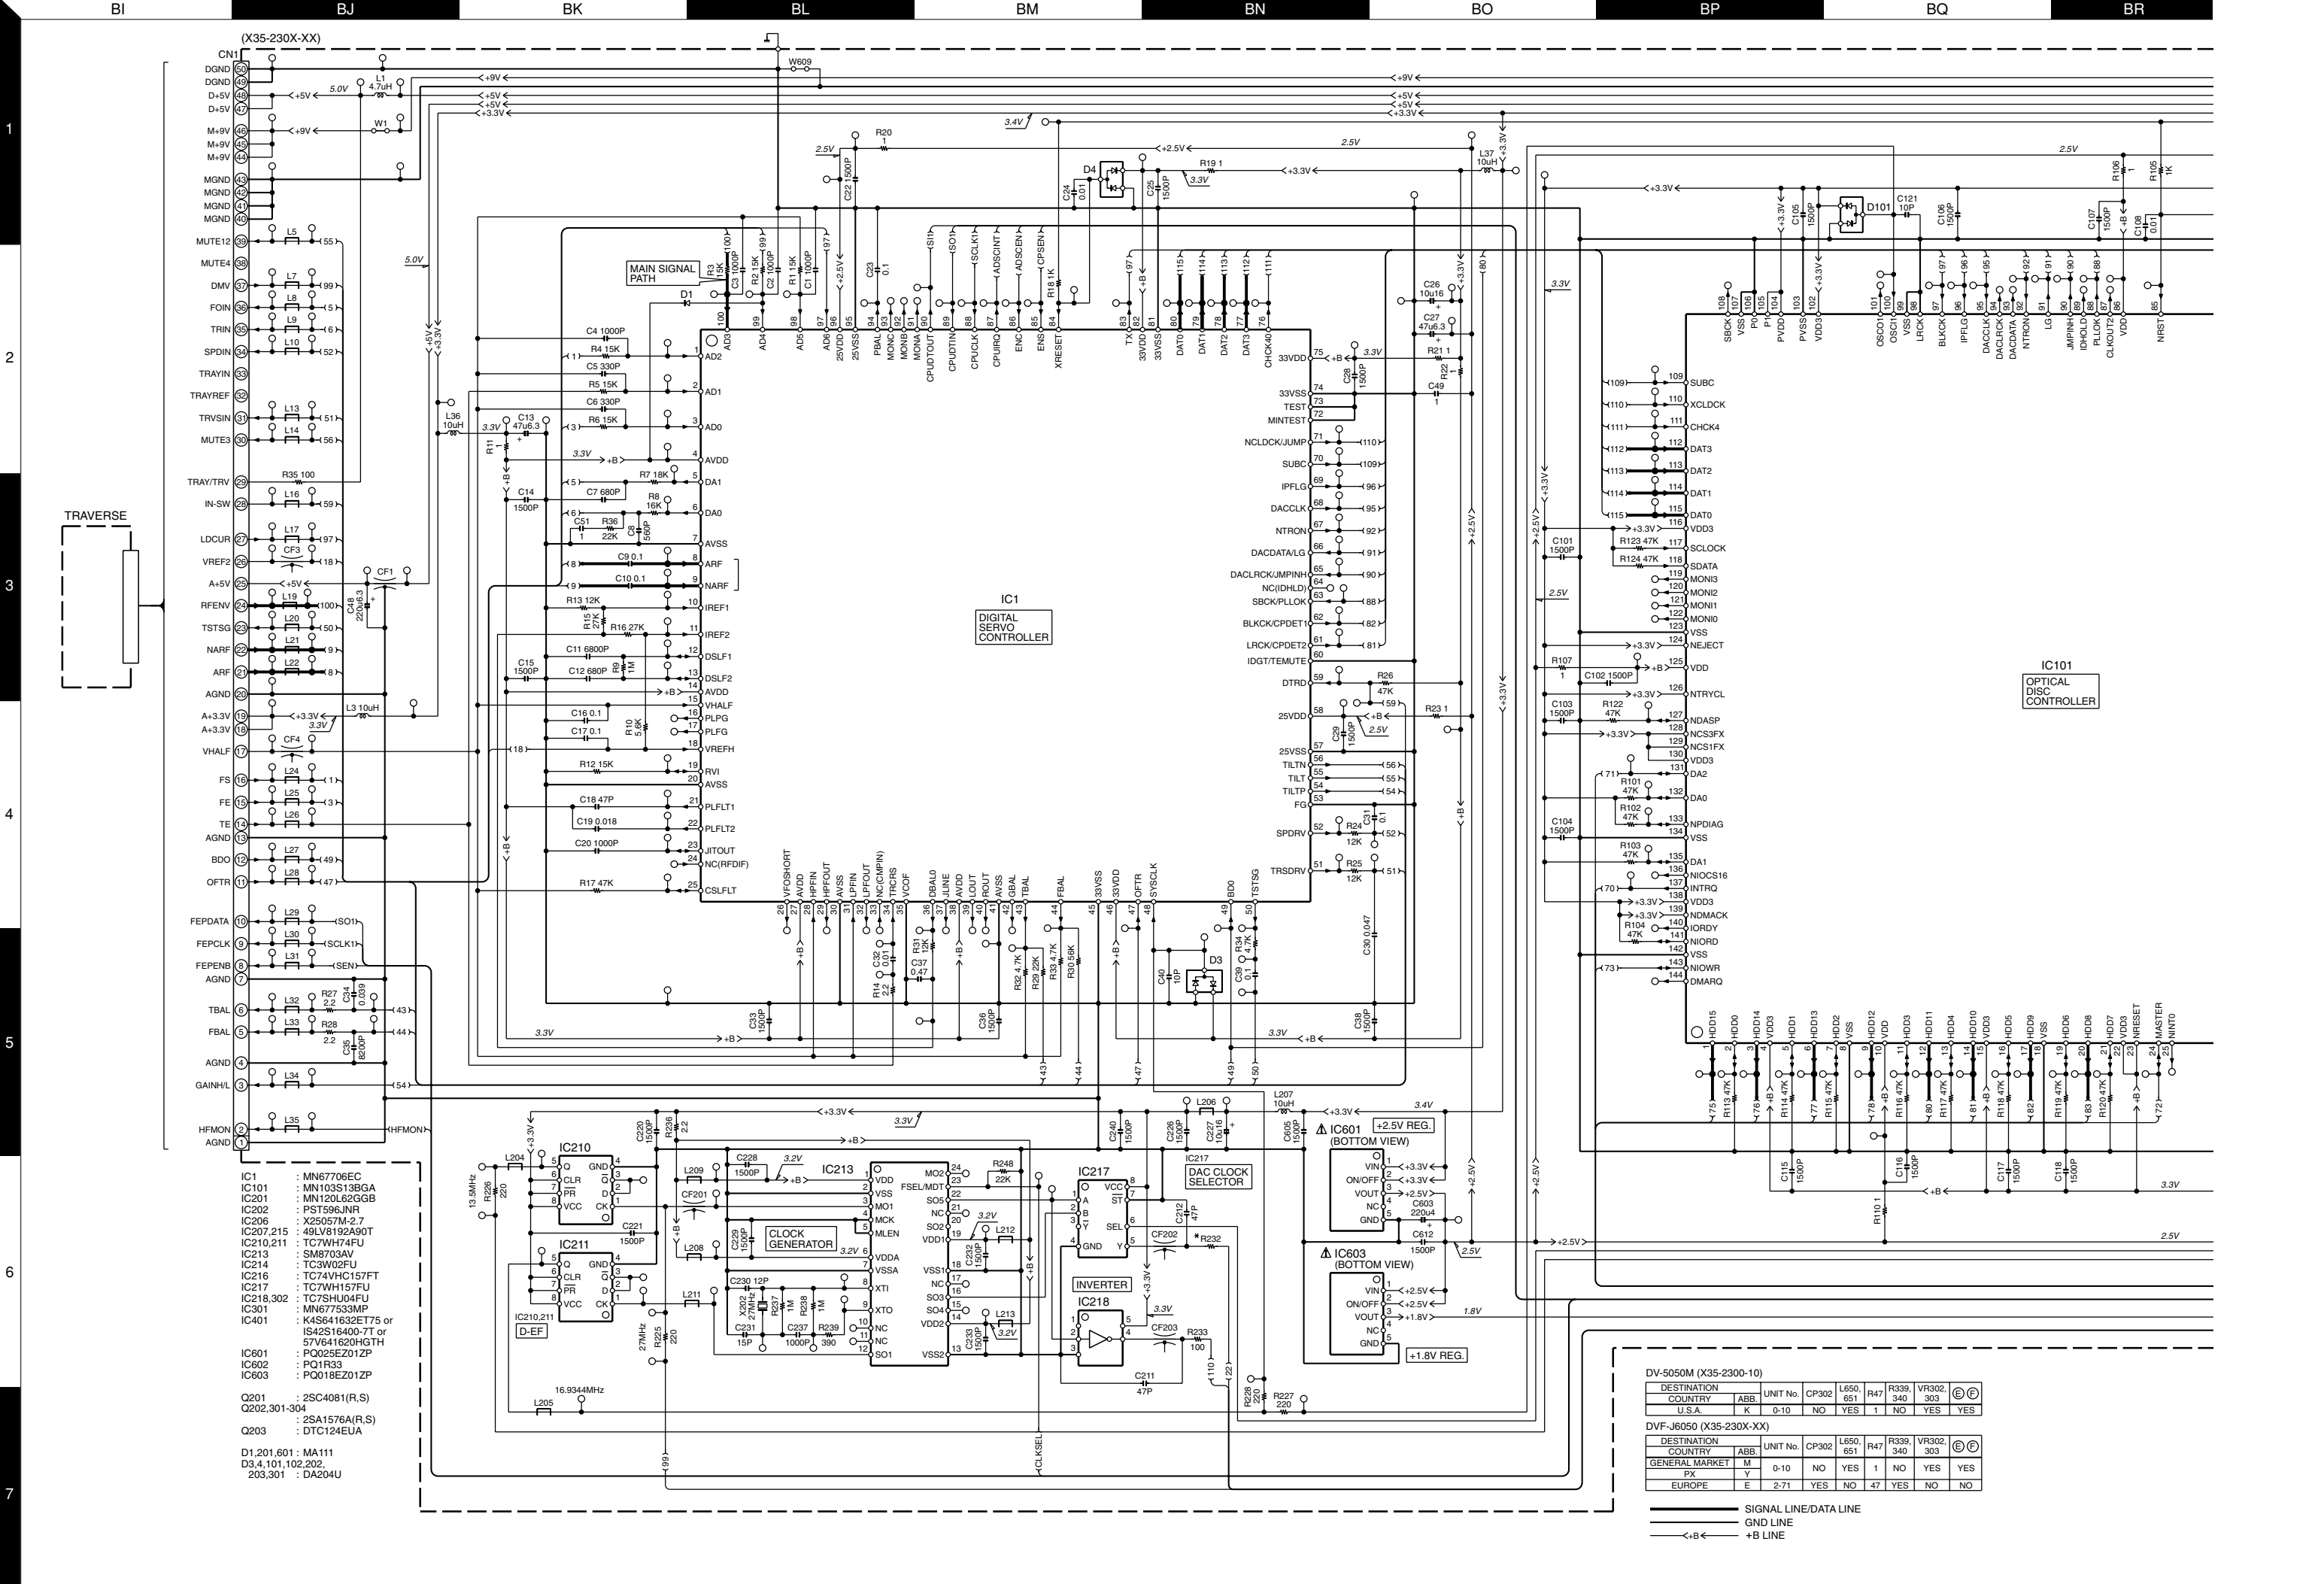

(X35-230X-XX)



MAIN SIGNAL PATH

IC1
DIGITAL SERVO CONTROLLER

IC101
OPTICAL DISC CONTROLLER

- IC1 : MN67706EC
- IC101 : MN103S13BGA
- IC201 : MN120L62GGB
- IC202 : PST596JNR
- IC206 : X25057M-2.7
- IC207,215 : 49LV8192A90T
- IC210,211 : TC7WH74FU
- IC213 : SM8703AV
- IC214 : TC3W02FU
- IC216 : TC74VHC157FT
- IC217 : TC7WH157FU
- IC218,302 : TC7SHU04FU
- IC301 : MN677533MP
- IC401 : K4S641632ET75 or IS42S16400-7T or 57V641620HGTH
- IC601 : PQ025E201ZP
- IC602 : PQ1R33
- IC603 : PQ018E201ZP

- Q201 : 2SC4081(R,S)
- Q202,301-304 : 2SA1576A(R,S)
- Q203 : DTC124EUA

- D1,201,601 : MA111
- D3,4,101,102,202,203,301 : DA204U


DV-5050M (X35-2300-10)


| DESTINATION COUNTRY | ABB. | UNIT No. | CP302 | L650, 651 | R47 | R339, 340 | VR302, 303 | ⓔ ⓕ |
|---------------------|------|----------|-------|-----------|-----|-----------|------------|-----|
| U.S.A. | K | 0-10 | NO | YES | 1 | NO | YES | YES |

DVF-J6050 (X35-230X-XX)

| DESTINATION COUNTRY | ABB. | UNIT No. | CP302 | L650, 651 | R47 | R339, 340 | VR302, 303 | ⓔ ⓕ |
|---------------------|------|----------|-------|-----------|-----|-----------|------------|-----|
| GENERAL MARKET | M | 0-10 | NO | YES | 1 | NO | YES | YES |
| EUROPE | E | 2-71 | YES | NO | 47 | YES | NO | NO |

- SIGNAL LINE/DATA LINE
- GND LINE
- +B LINE

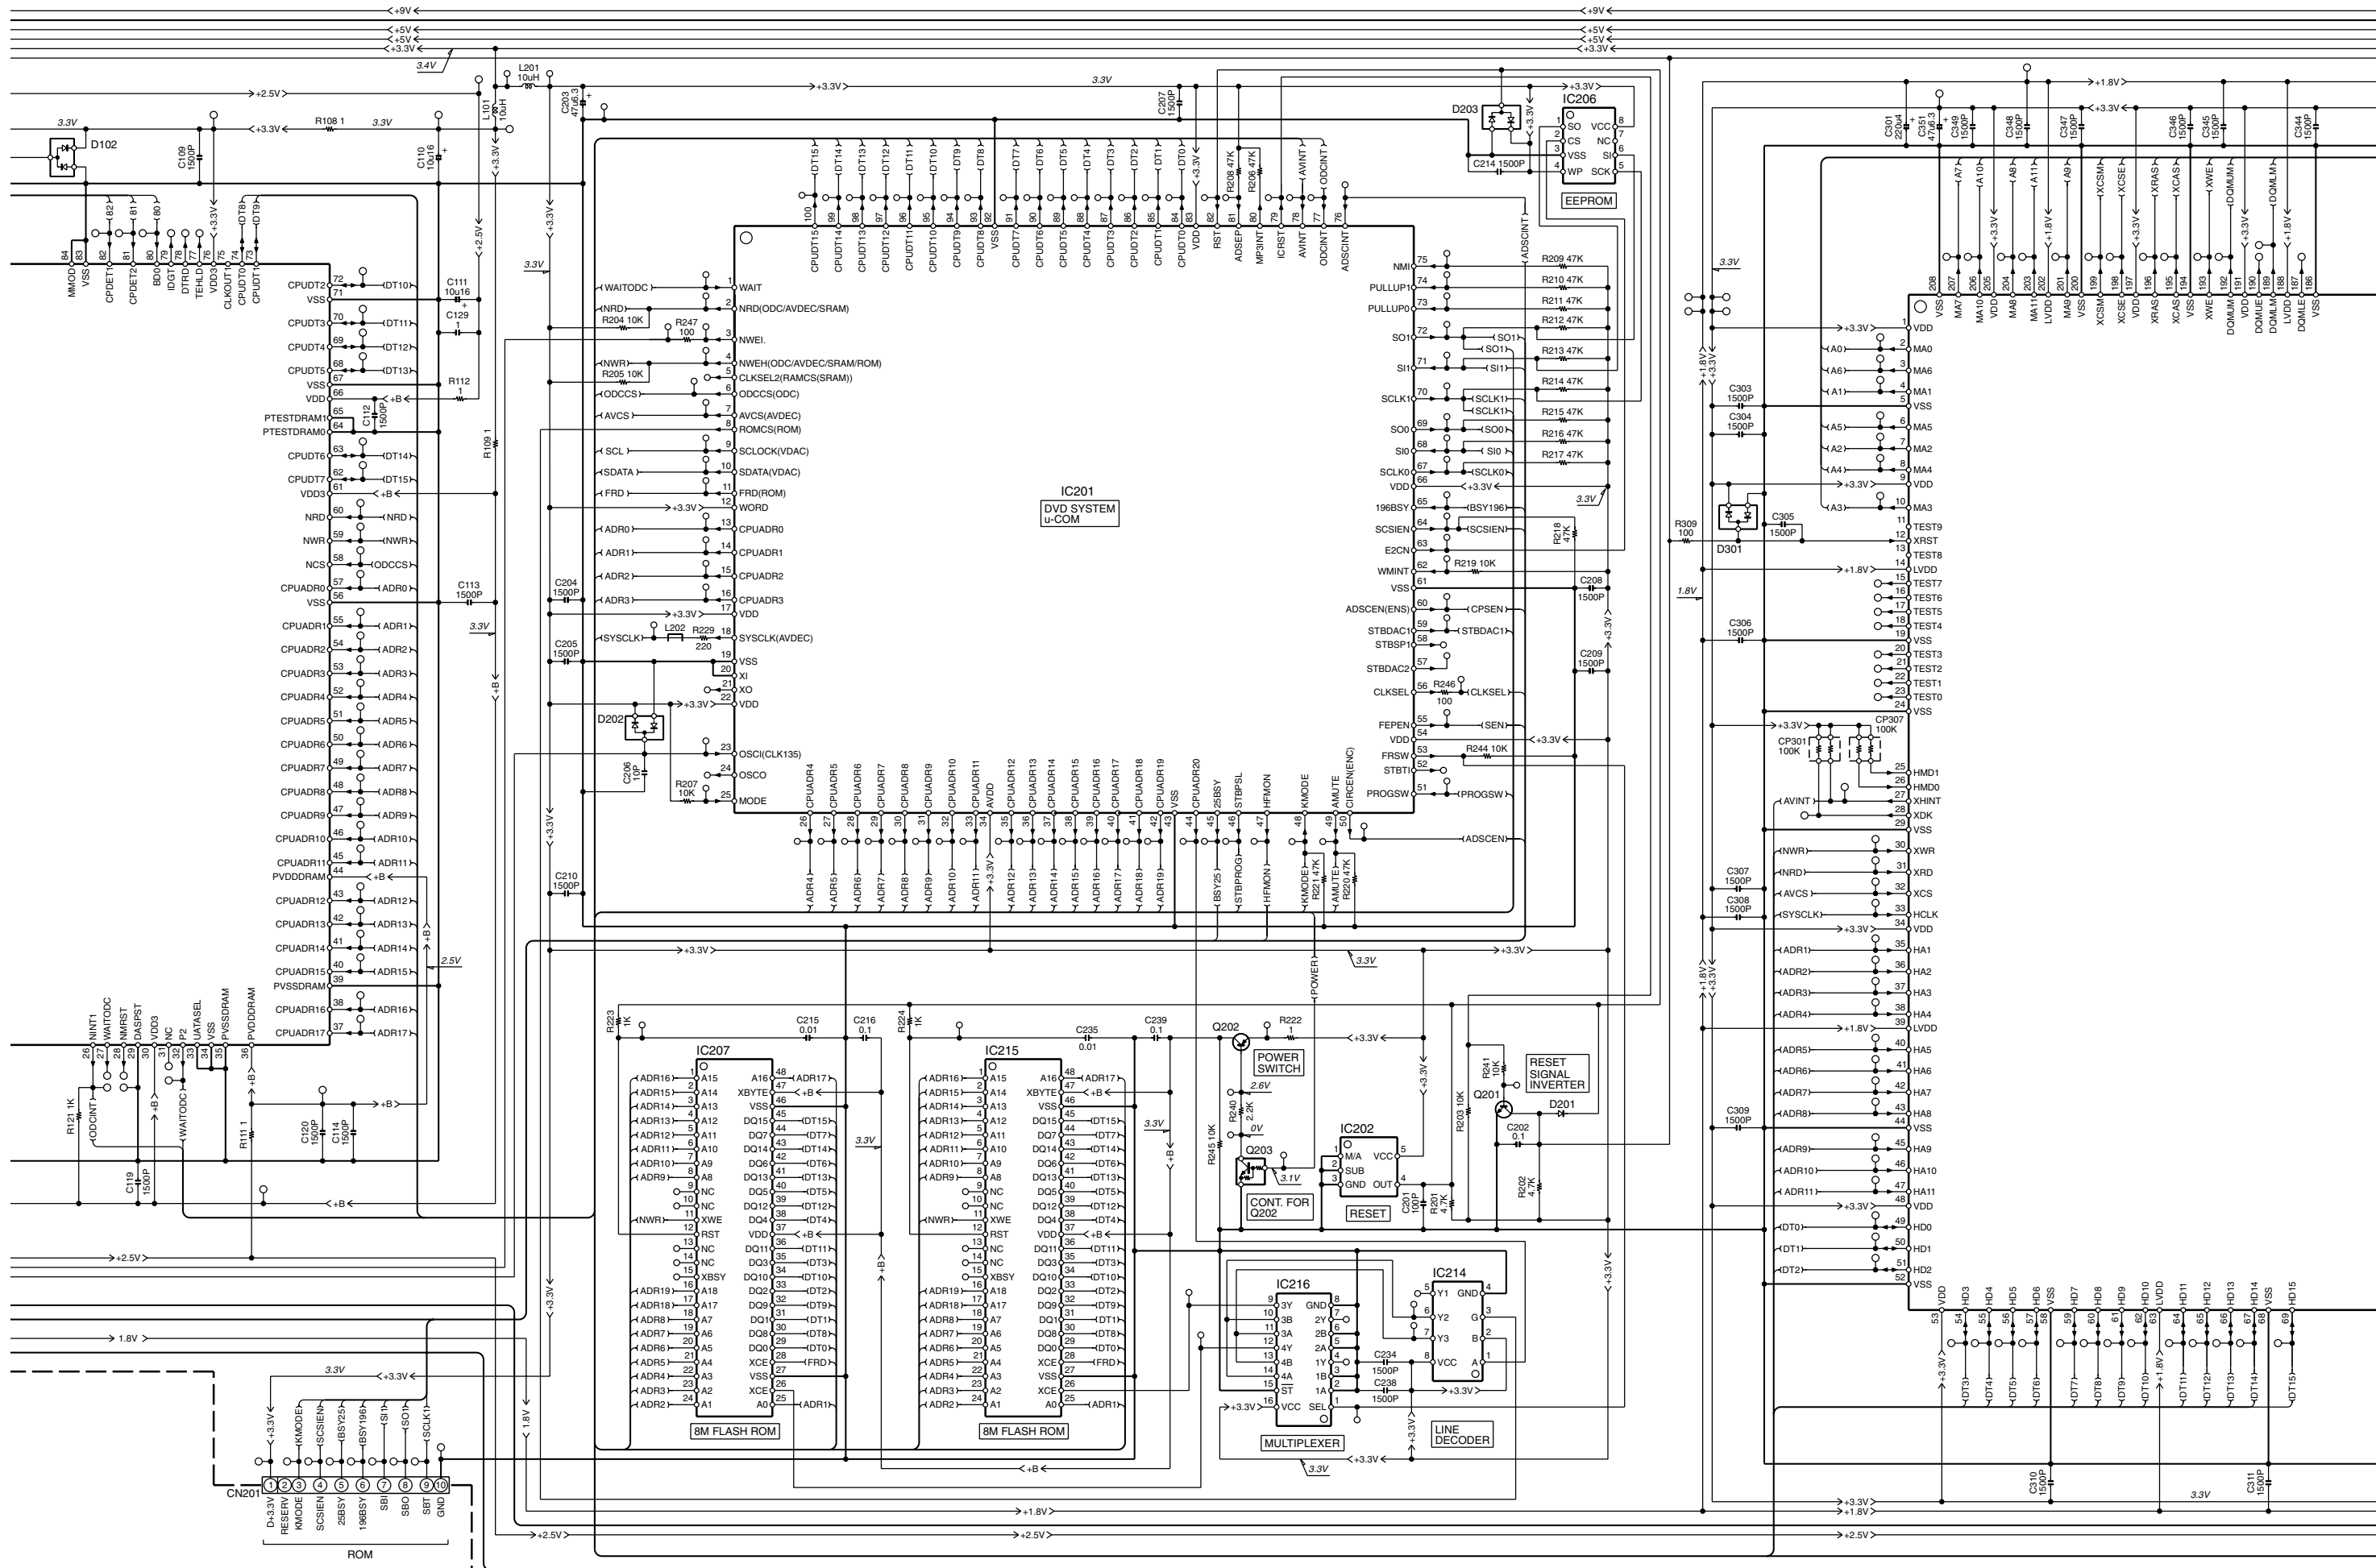

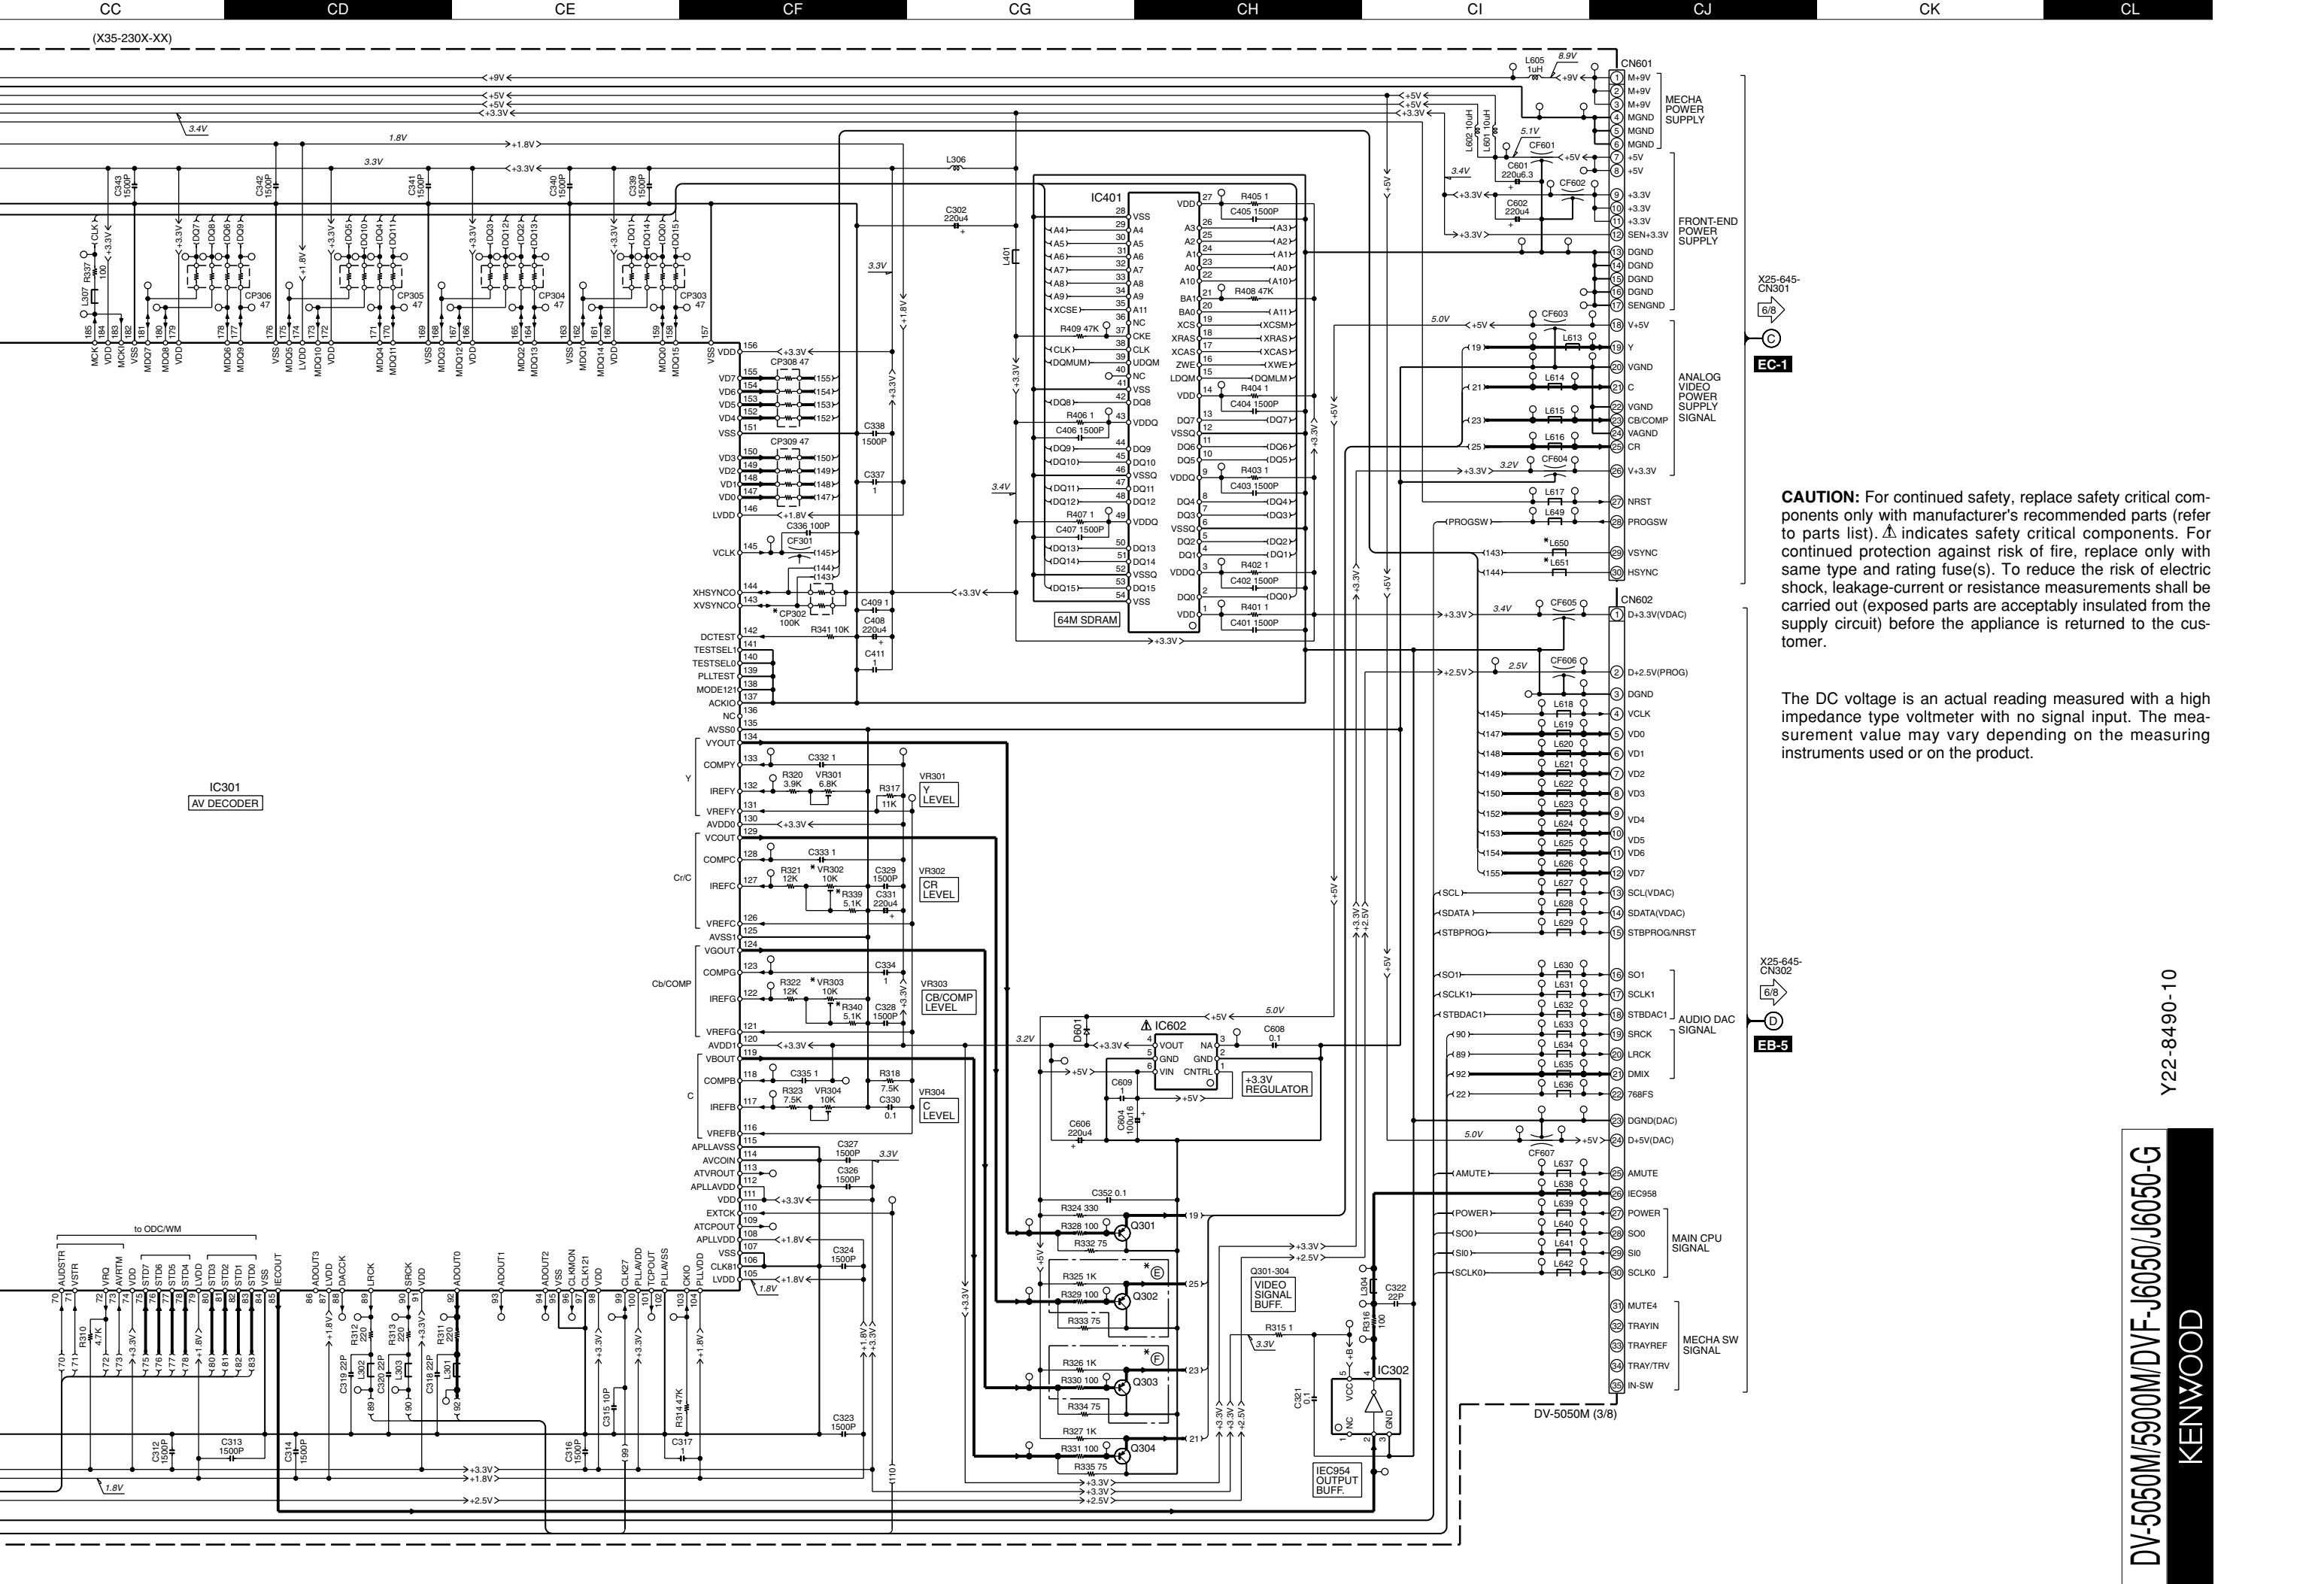

X25-645-
CN301
6/B
EC-1


X25-645-
CN302
6/B
EB-5

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.


Y22-8490-10

DV-5050M/J5900M/DVF-J6050/J6050-G
KENWOOD

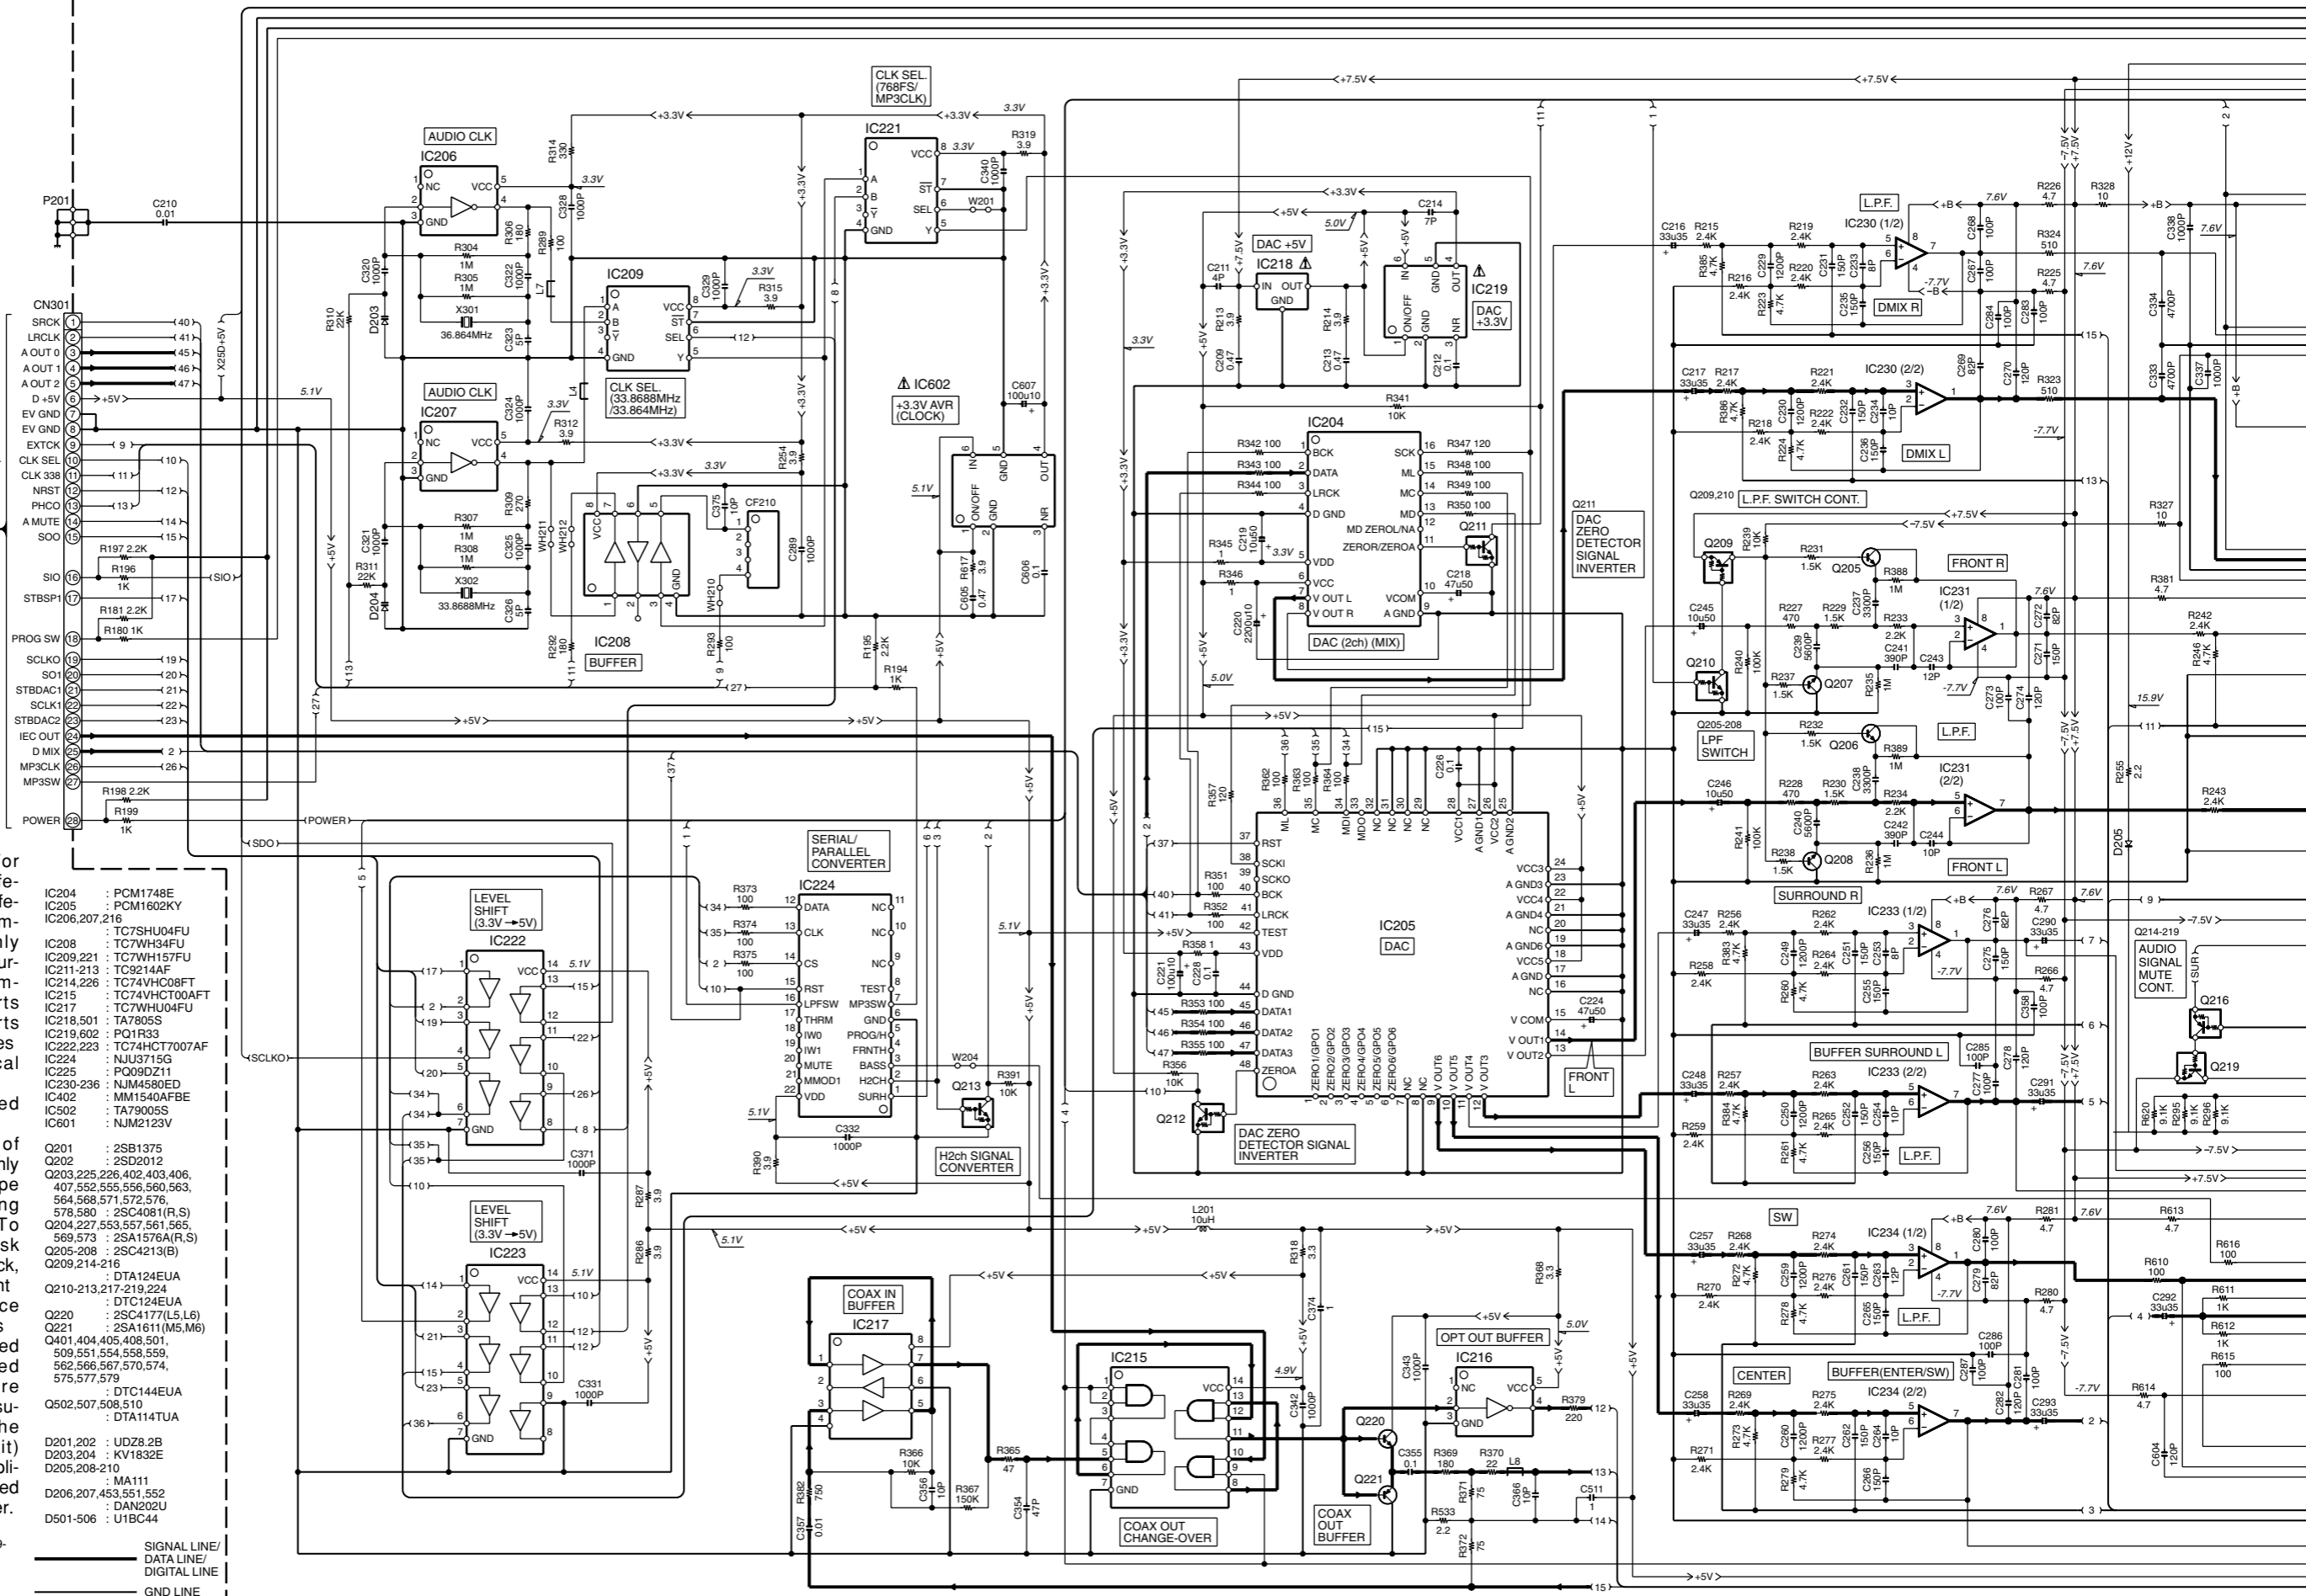


CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.


- | | |
|---------------|-----------------|
| IC204 | : PCM1748E |
| IC205 | : PCM1602KY |
| IC206,207,216 | |
| IC208 | : TC7SHU04FU |
| IC209,221 | : TC7WH157FU |
| IC211-213 | : TC9214AF |
| IC214,226 | : TC7VHC08FT |
| IC215 | : TC7VHCT00AFT |
| IC217 | : TC7WHU04FU |
| IC218,501 | : TA7805S |
| IC219,602 | : PQ1R33 |
| IC222,223 | : TC74HCT7007AF |
| IC224 | : NJU3715G |
| IC225 | : PQ09D21 |
| IC230-236 | : NJM4580ED |
| IC402 | : MM1540AFBE |
| IC502 | : TA79005S |
| IC601 | : NJM2123V |
-
- | | |
|---------------------------|--------------------------|
| Q201 | : 2SB1375 |
| Q202 | : 2SD2012 |
| Q203,225,226,402,403,406, | 407,552,555,556,560,563, |
| 564,568,571,572,576, | 578,580 |
| Q204,227,553,557,561,565, | 569,573 |
| Q205-208 | : 2SC4213(B) |
| Q209,214-216 | |
| Q210-213,217-219,224 | : DTA124EUA |
| Q214 | : DTC124EUA |
| Q220 | : 2SC4177(L5,L6) |
| Q221 | : 2SA1611(M5,M6) |
| Q401,404,405,408,501, | 509,551,554,558,559, |
| 562,566,567,570,574, | 575,577,579 |
| Q502,507,508,510 | : DTC144EUA |
| | : DTA114TUA |
-
- | | |
|----------------------|-----------|
| D201,202 | : UDZ8.2B |
| D203,204 | : KV1832E |
| D205,208-210 | |
| | : MA111 |
| D206,207,453,551,552 | : DAN202U |
| D501-506 | : U1BC44 |

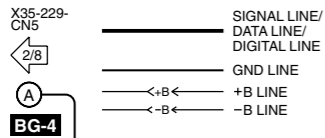

(X25-6440-10) (1/2)

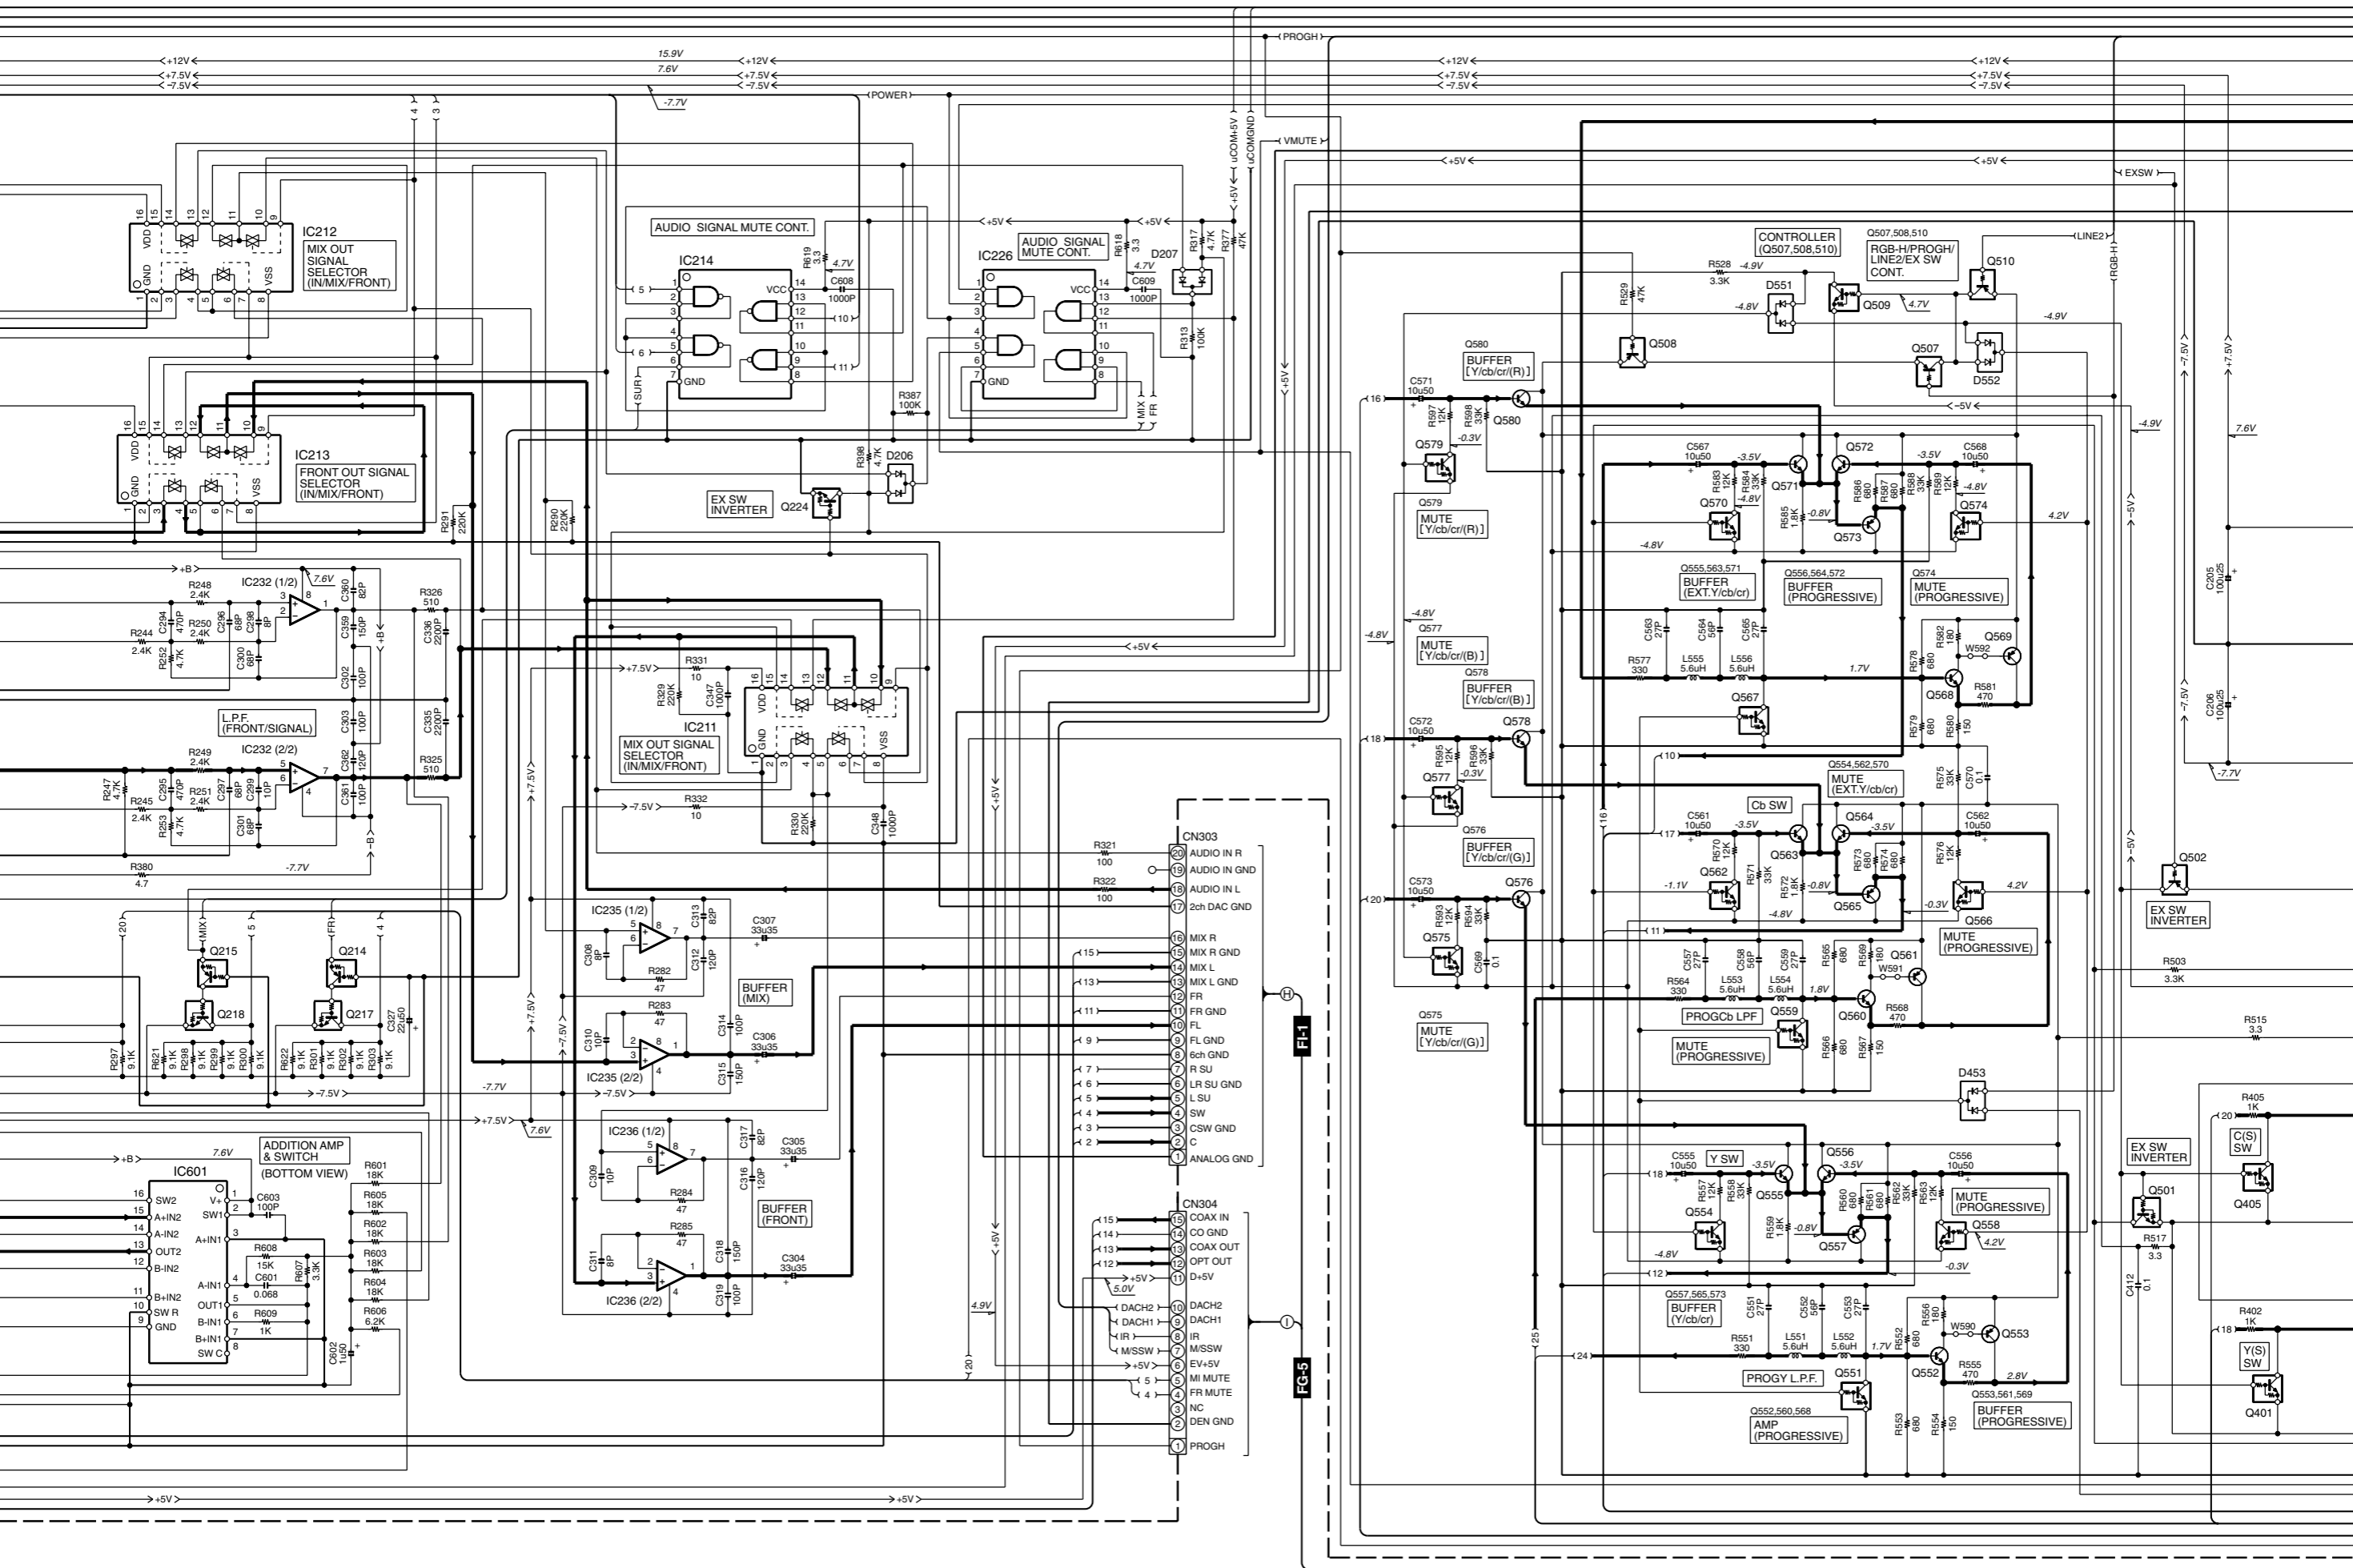


The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

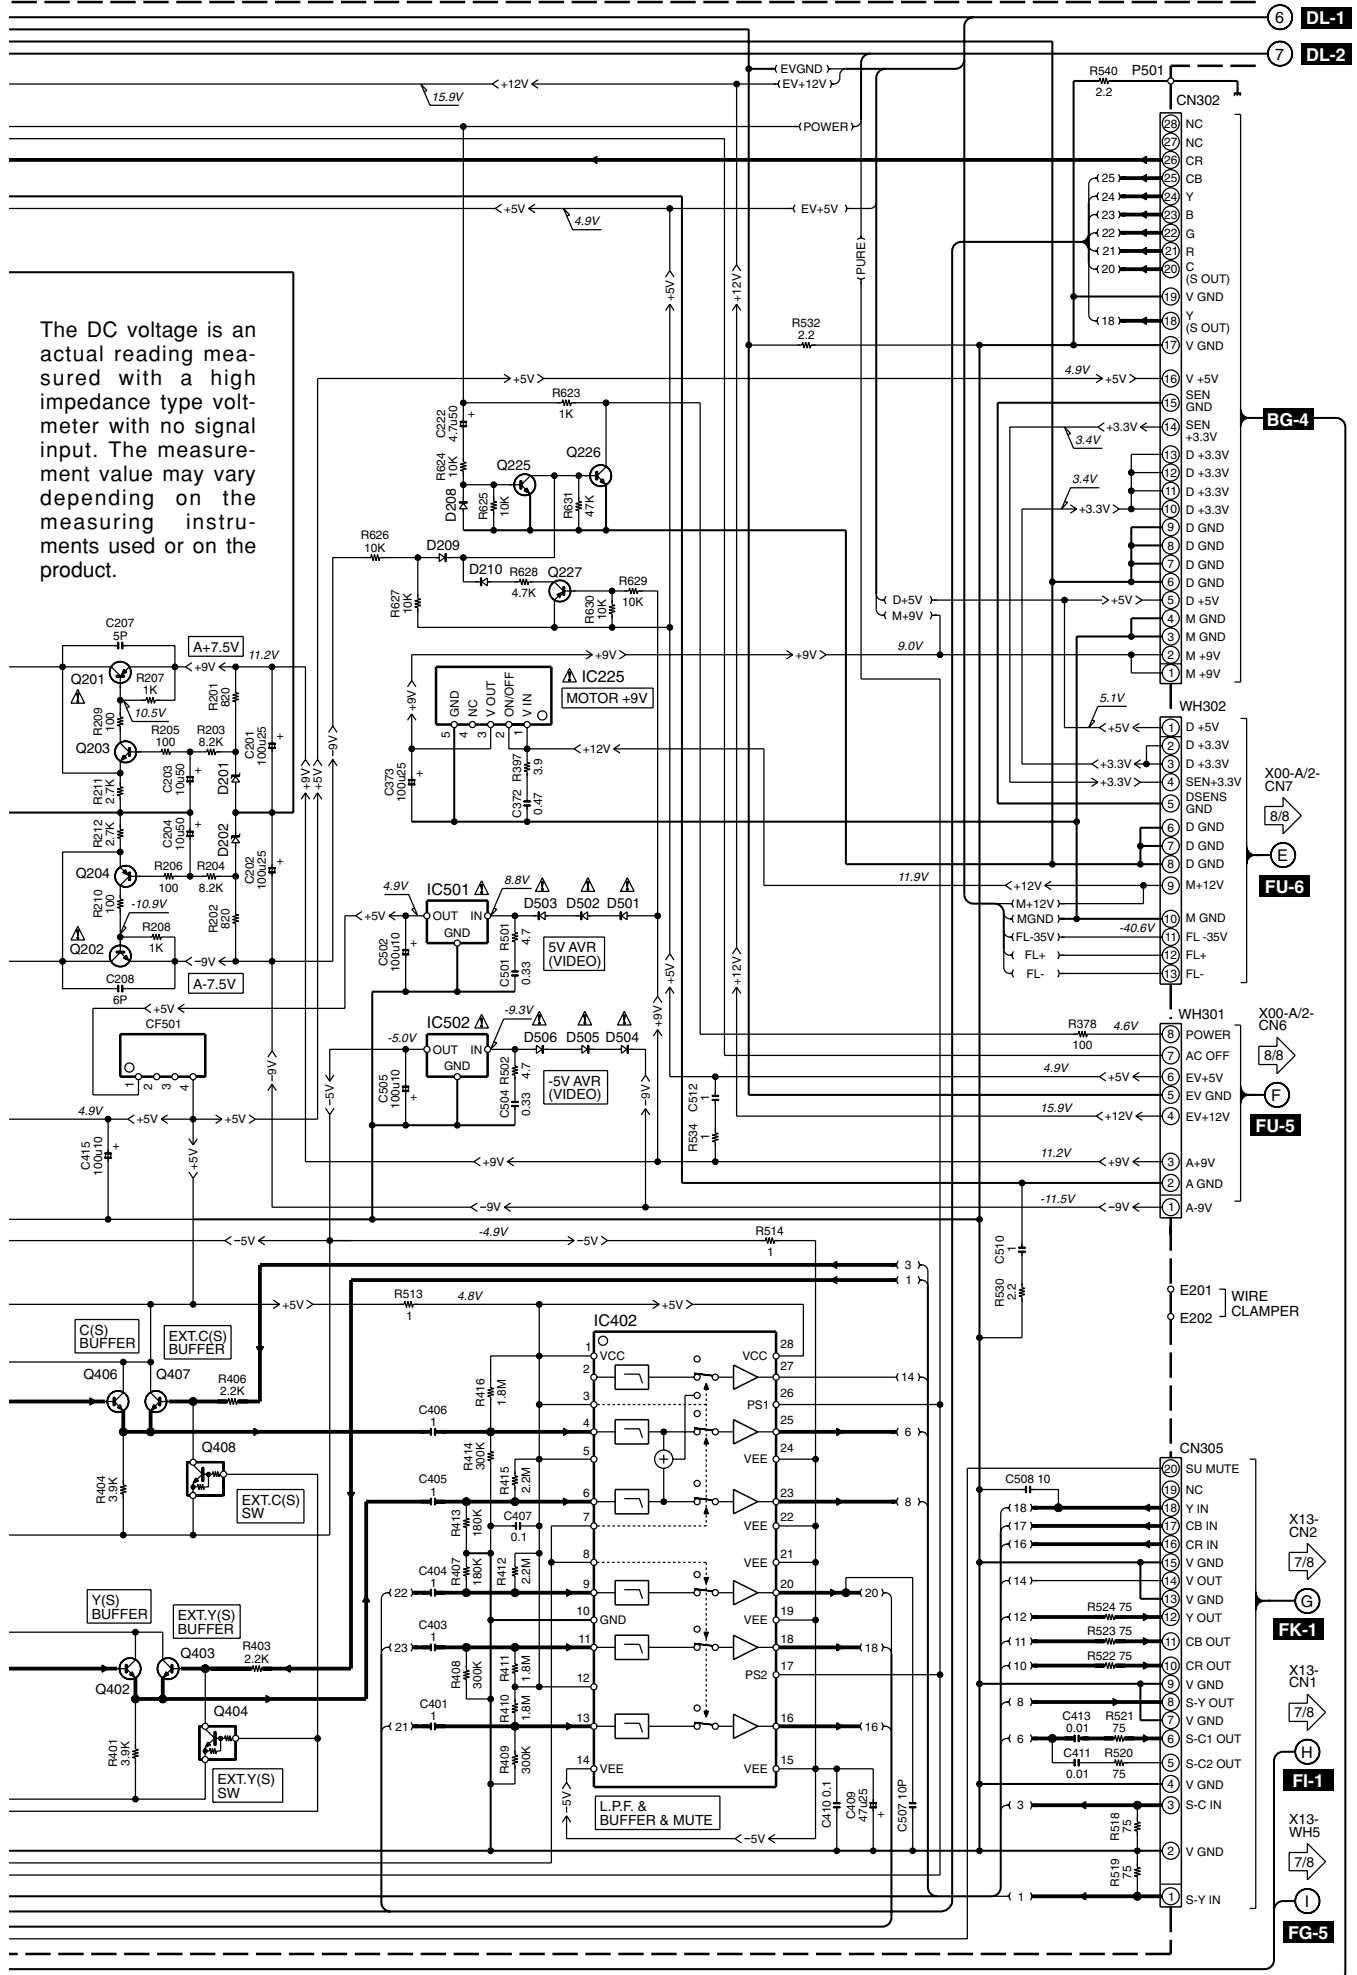

(X25-6440-10) (2/2)

IC1 : NJM2903D PH1-3 : T95-0140-05
 D1 : SIR-34ST3F PH4 : RPT-38PT3F
 D2 : B30-2545-05
 D3-5 : B30-2616-05

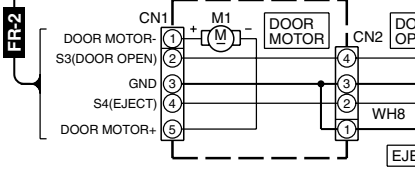

DK-1

(X25-) (F/9)

DK-1

(X25-) (B/9)

(X25-) (D/9)

(X25-) (C/9)

(X25-) (I/9)

(X25-) (A/9)

(X25-) (E/9)

(X25-) (H/9)

(X25-) (G/9)

(X25-) (J/9)

(X25-) (K/9)

(X25-) (L/9)

(X25-) (M/9)

(X25-) (N/9)

(X25-) (O/9)

(X25-) (P/9)

(X25-) (Q/9)

(X25-) (R/9)

(X25-) (S/9)

(X25-) (T/9)

(X25-) (U/9)

(X25-) (V/9)

(X25-) (W/9)

(X25-) (X/9)

(X25-) (Y/9)

(X25-) (Z/9)

(X25-) (AA/9)

(X25-) (AB/9)

(X25-) (AC/9)

(X25-) (AD/9)

(X25-) (AE/9)

(X25-) (AF/9)










(X25-) (AG/9)


(X25-) (AH/9)

(X25-) (AI/9)

(X25-) (AJ/9)

(X25-) (AK/9)

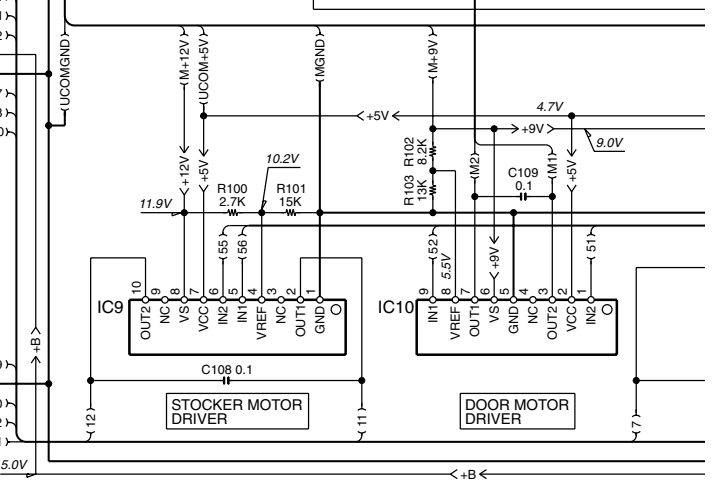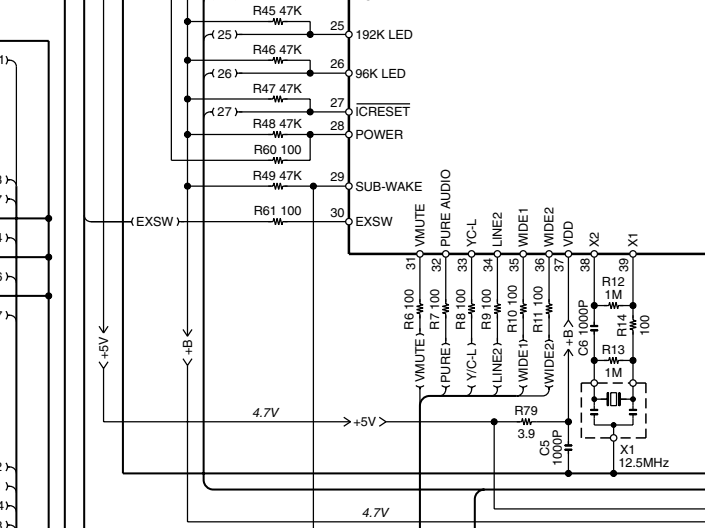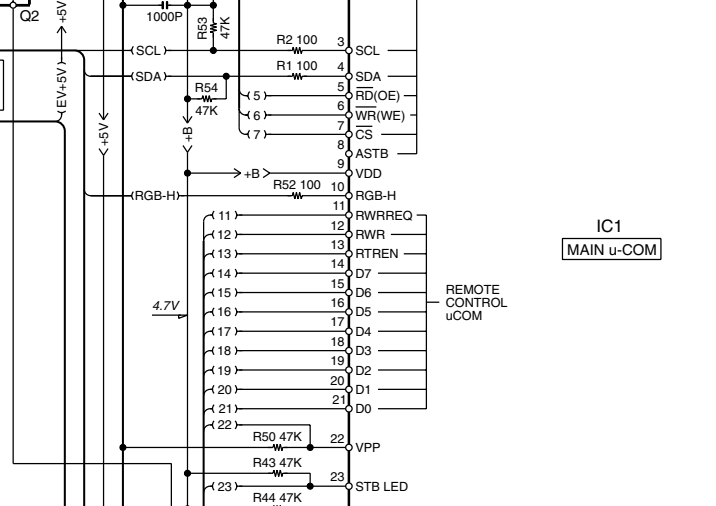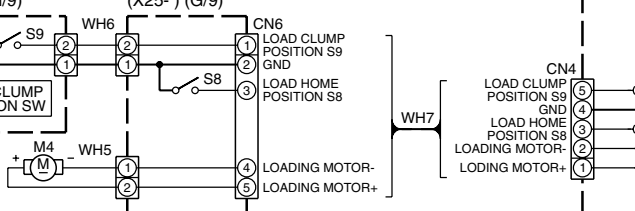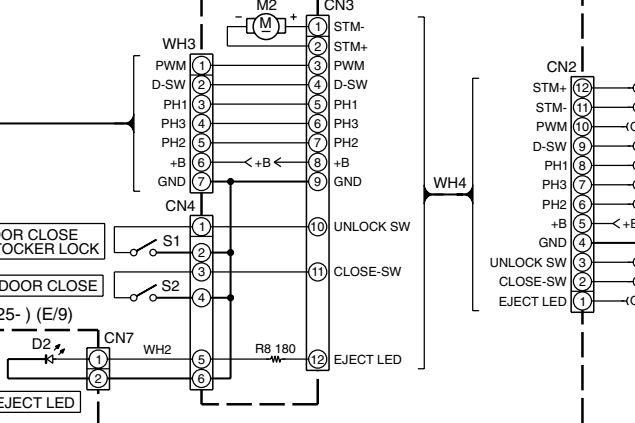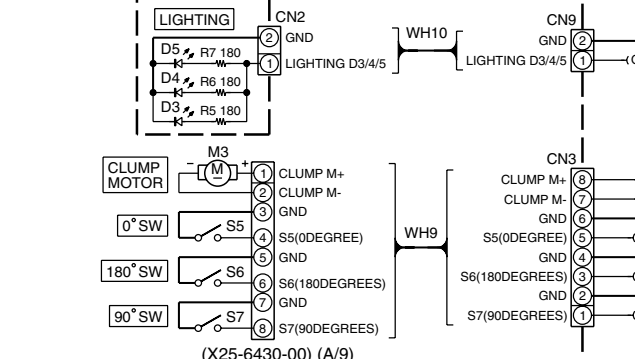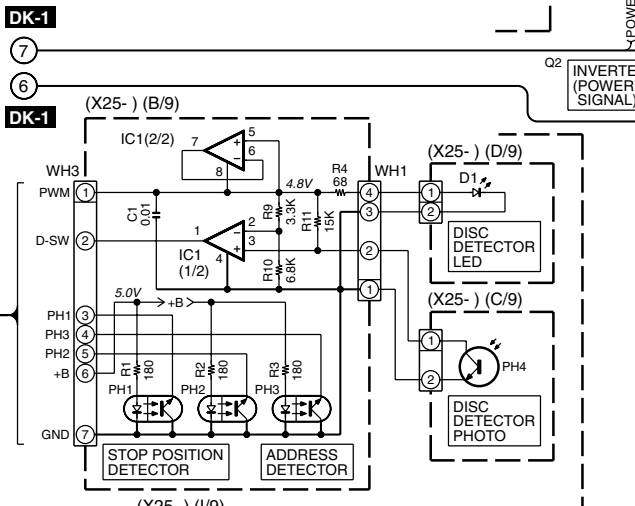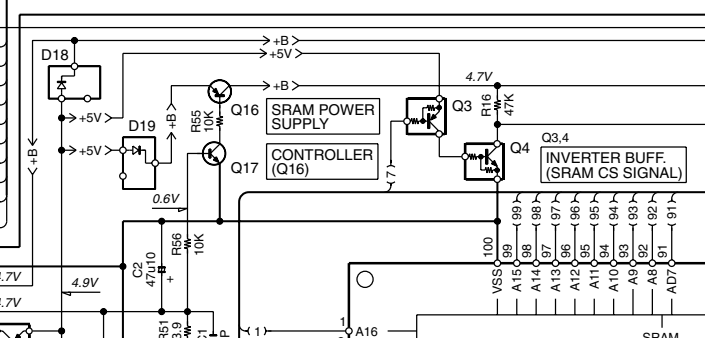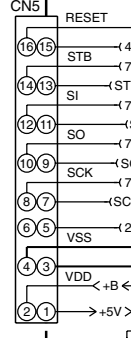


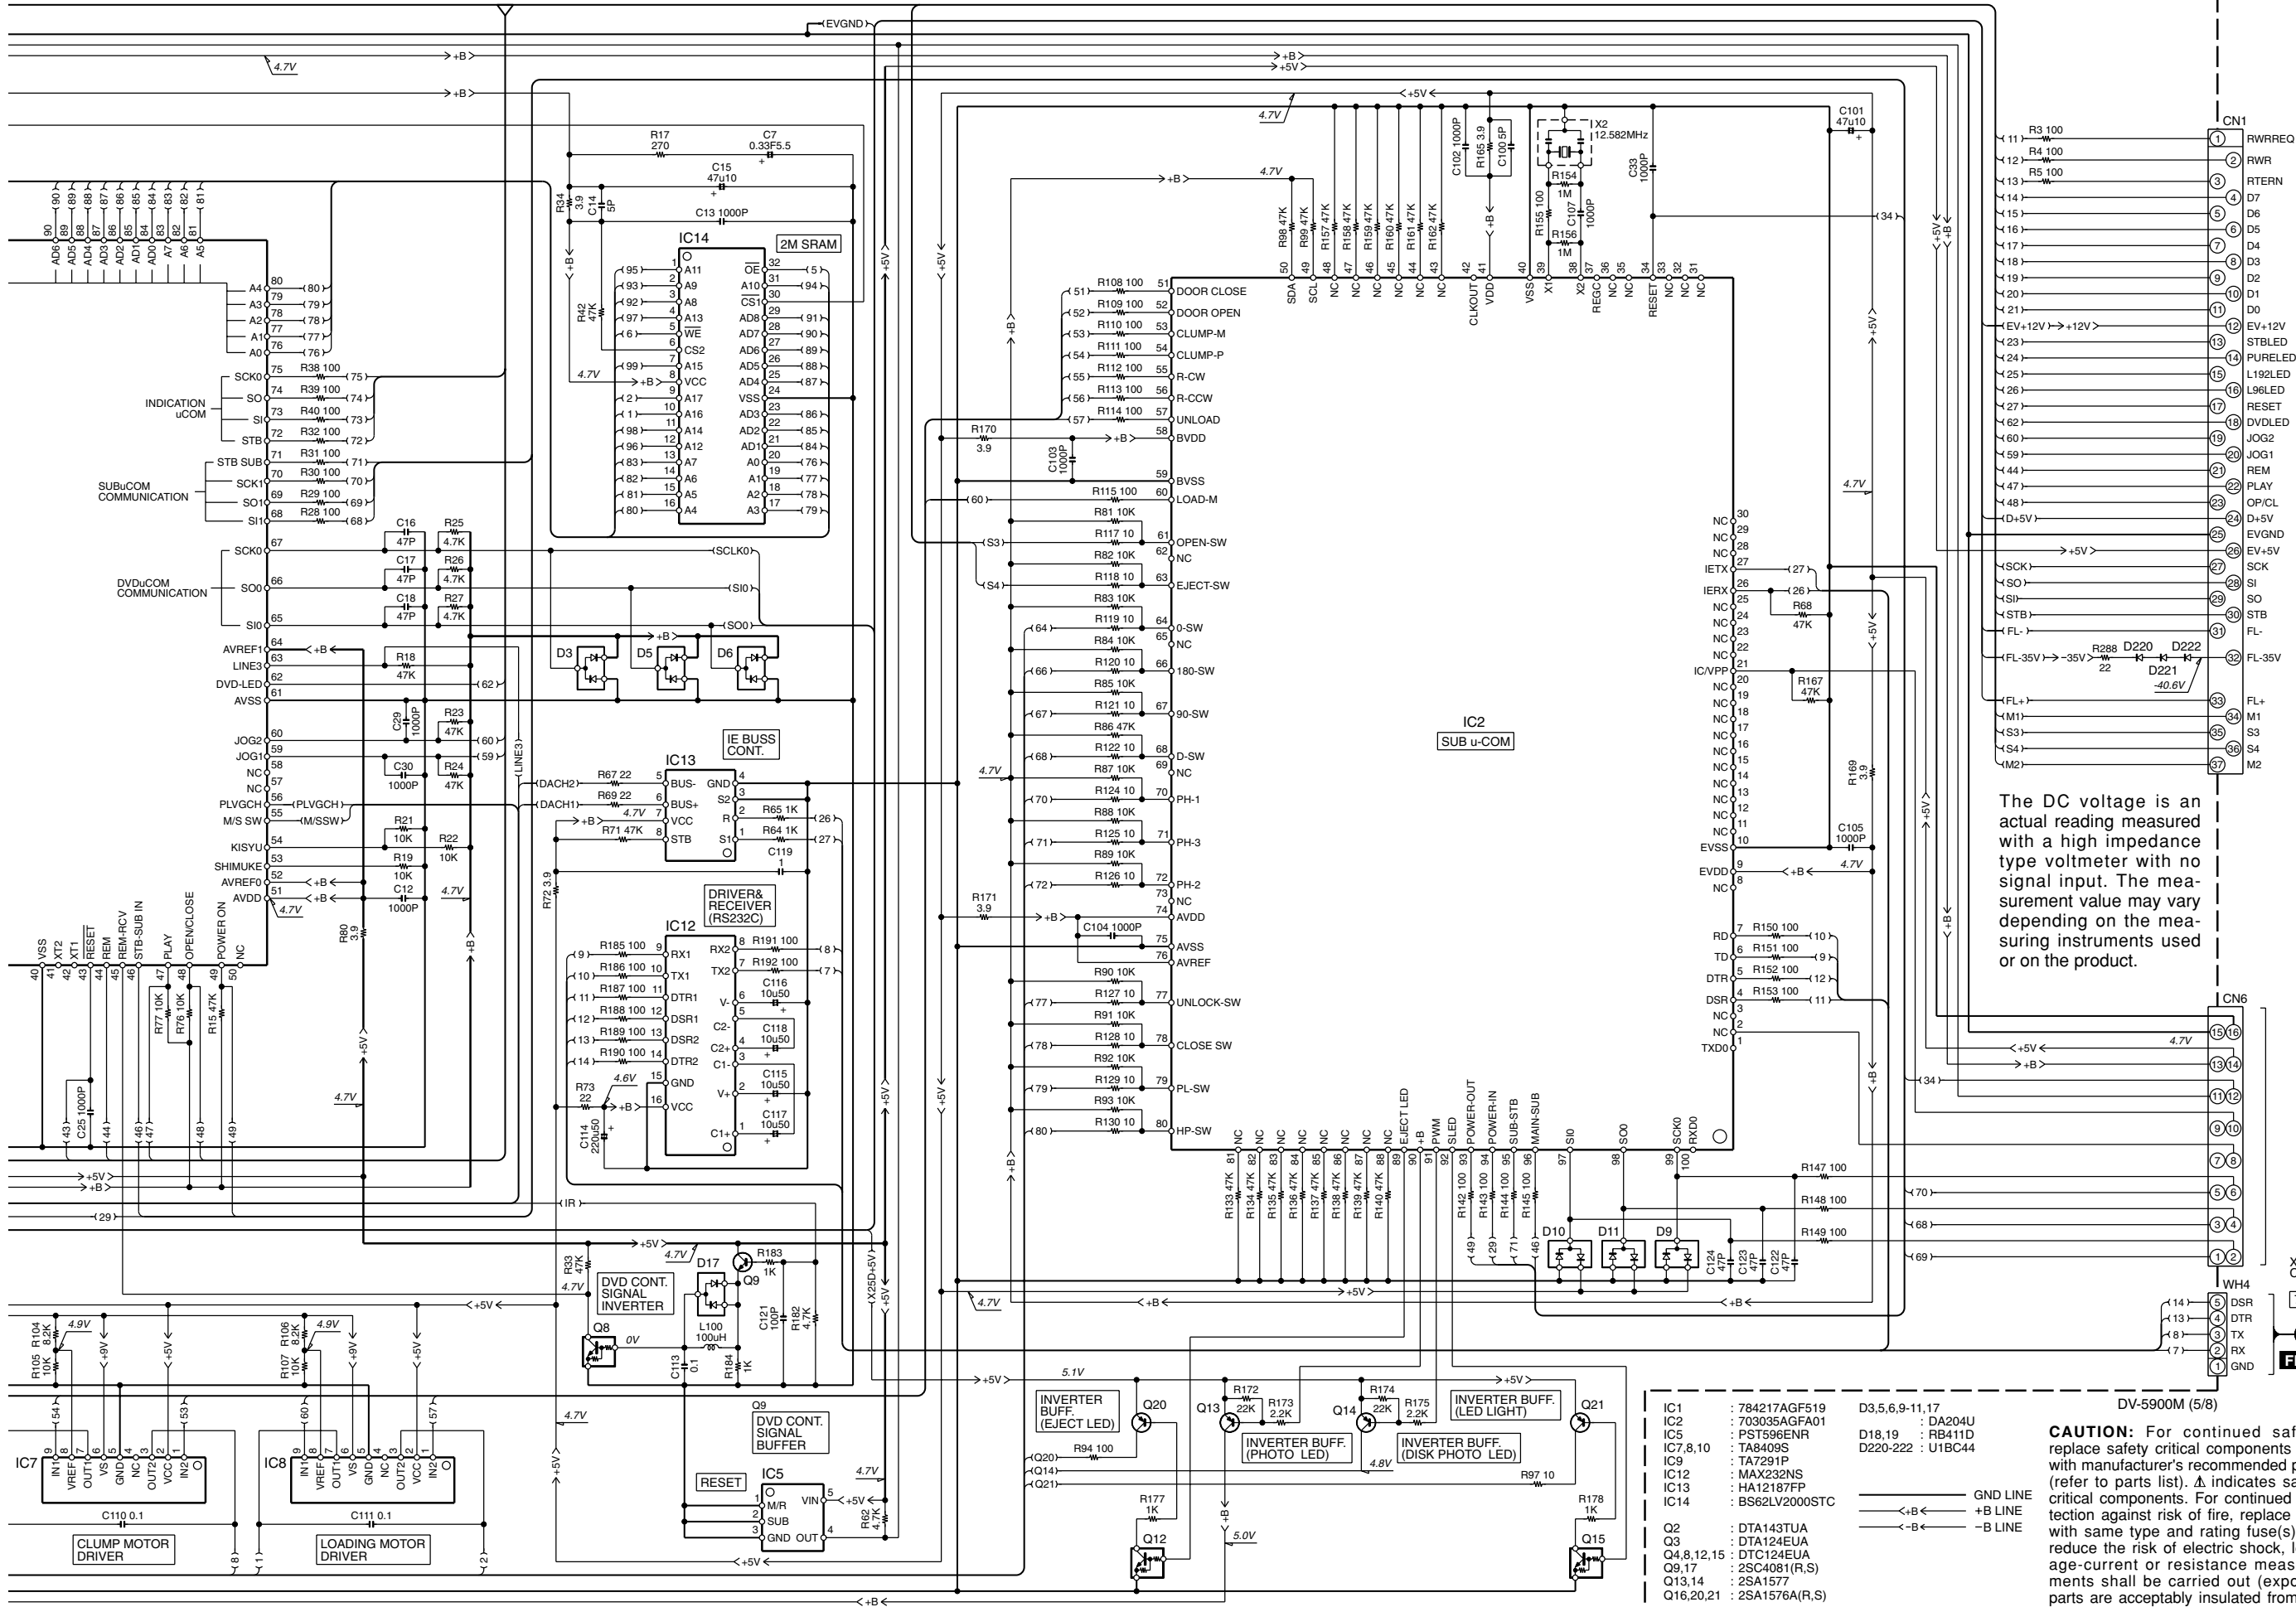


The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

| | | | |
|------------|-----------------|----------------|----------------|
| IC1 | : 784217AGF519 | D3,5,6,9-11,17 | DV-5900M (5/8) |
| IC2 | : 703035AGFA01 | D18,19 | : DA204U |
| IC5 | : PST596ENR | D220-222 | : U1BC44 |
| IC7,8,10 | : TA8409S | | |
| IC9 | : TA7291P | | |
| IC12 | : MAX232NS | | |
| IC13 | : HA12187FP | | |
| IC14 | : BS62LV2000STC | | |
| Q2 | : DTA143TUA | | |
| Q3 | : DTA124EUA | | |
| Q4,8,12,15 | : DTC124EUA | | |
| Q9,17 | : 2SC4081(R,S) | | |
| Q13,14 | : 2SA1577 | | |
| Q16,20,21 | : 2SA1576A(R,S) | | |


CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

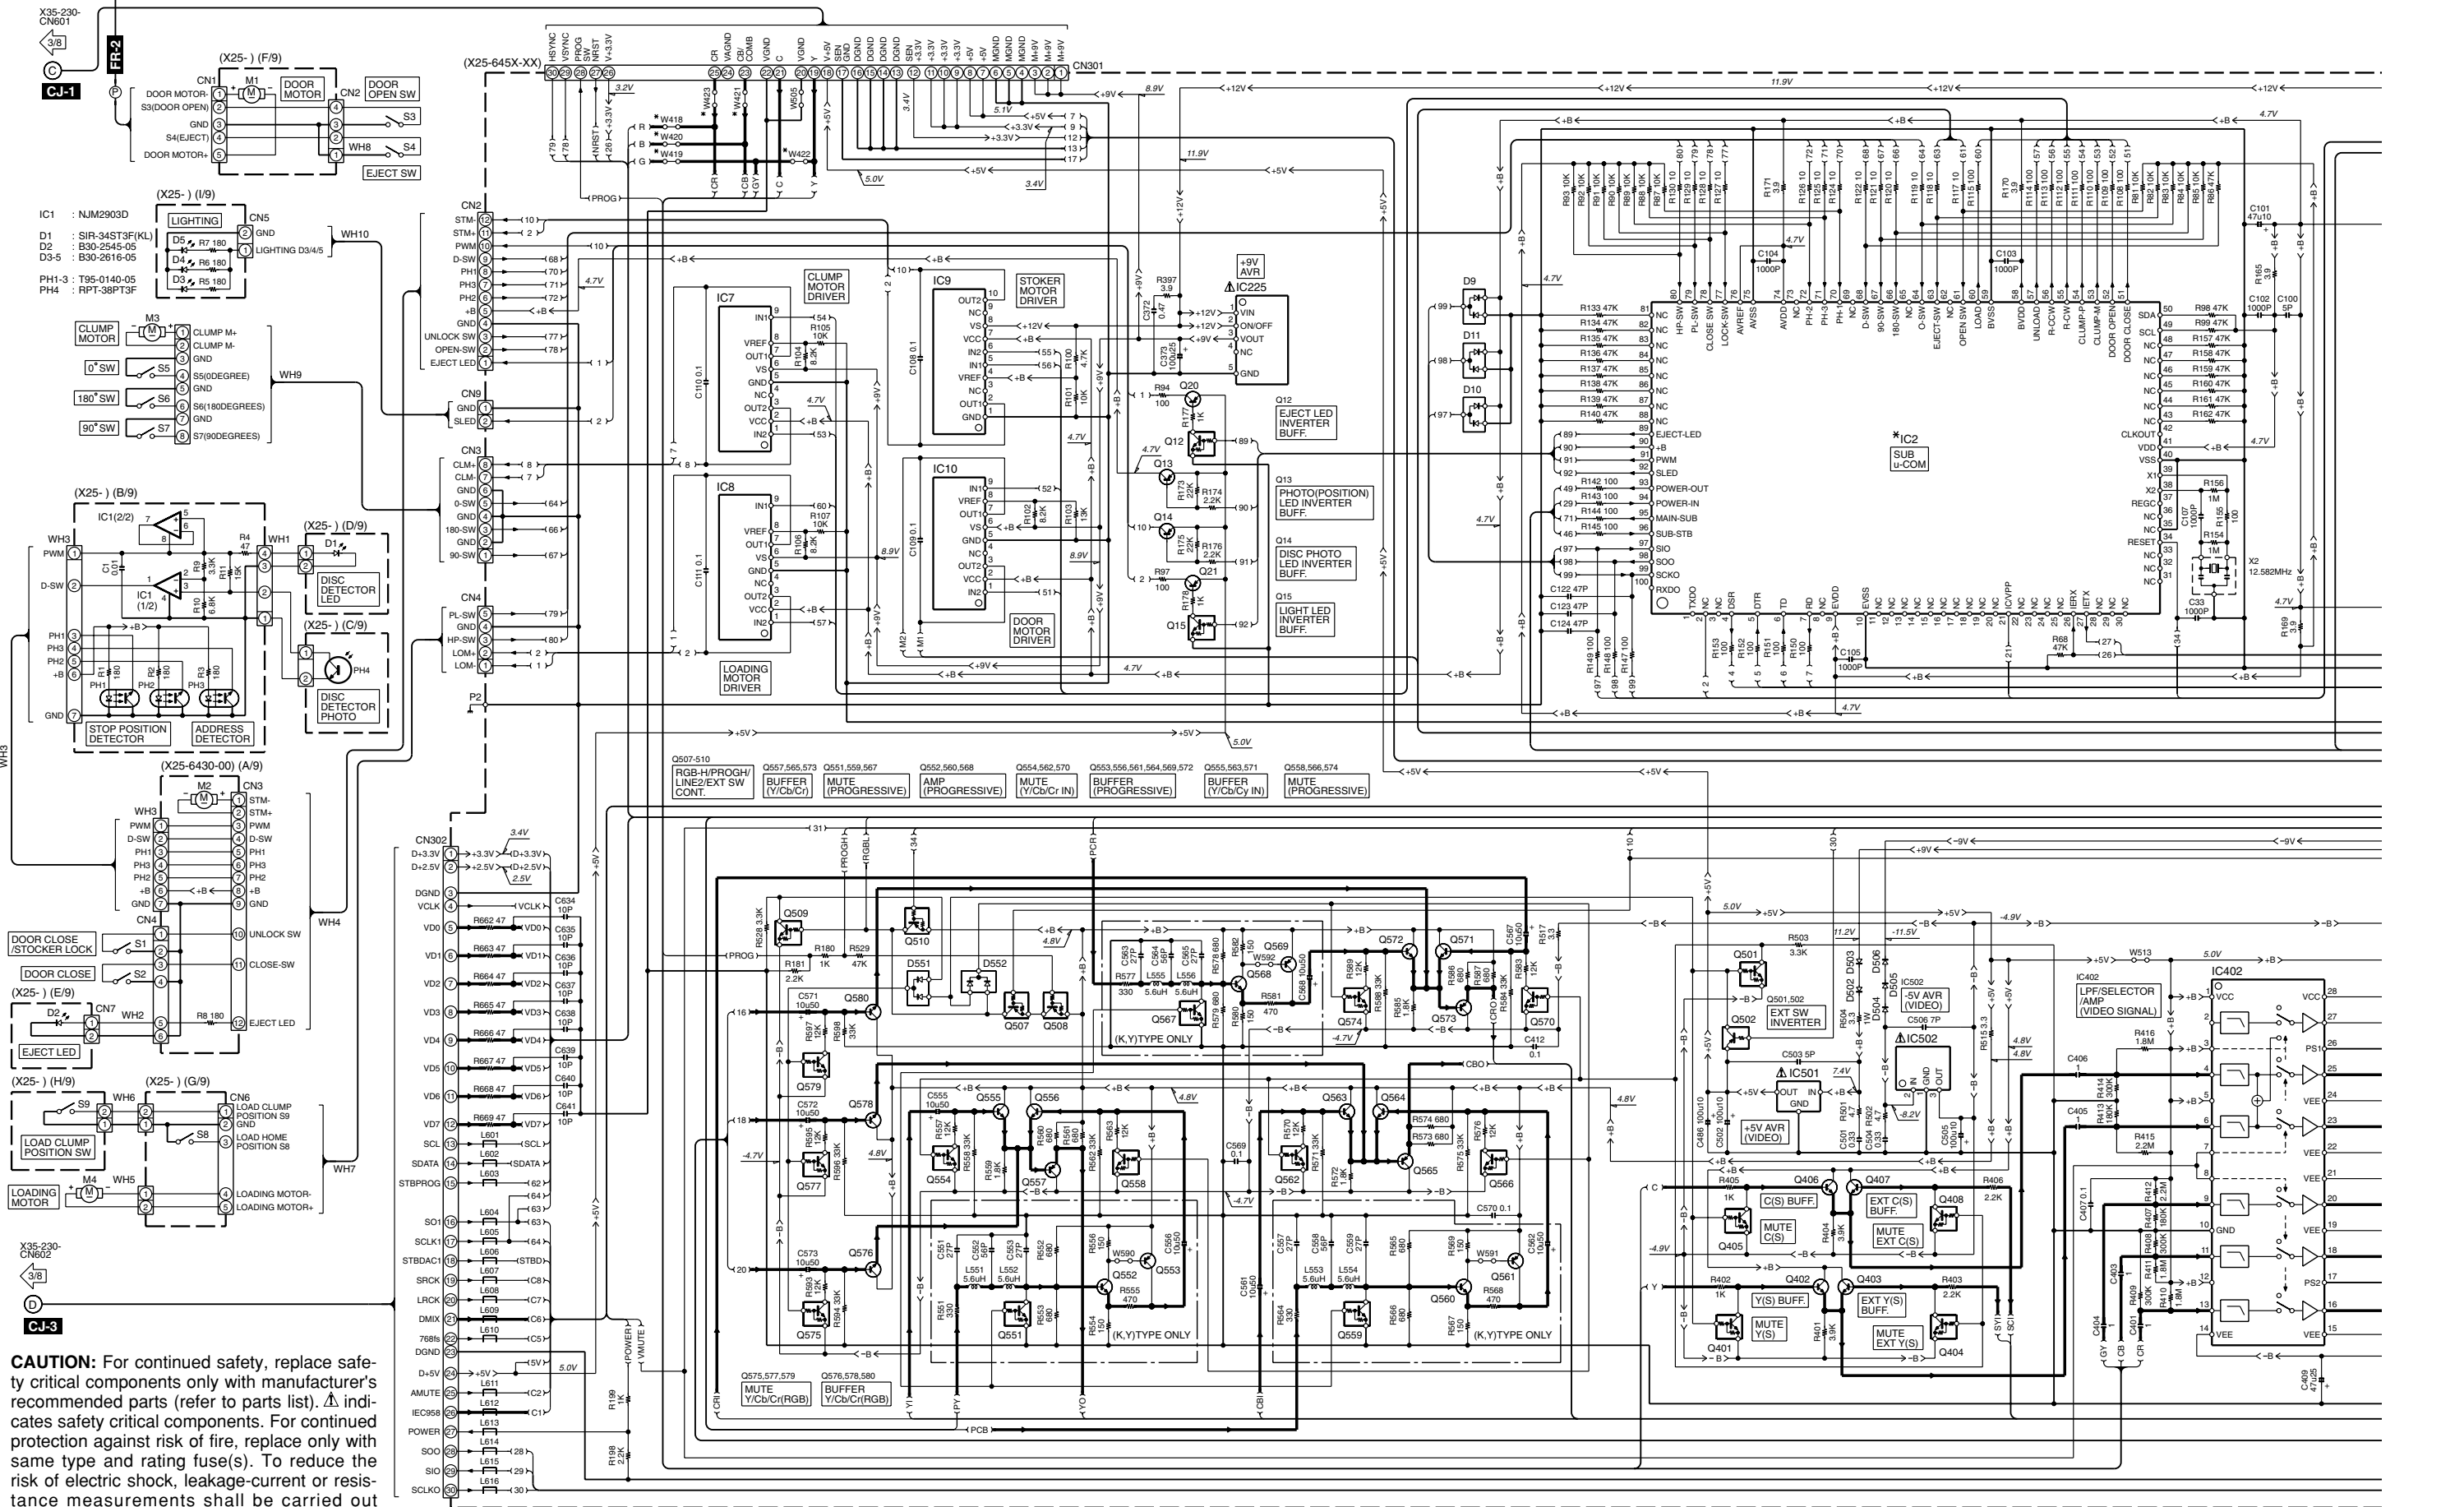

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

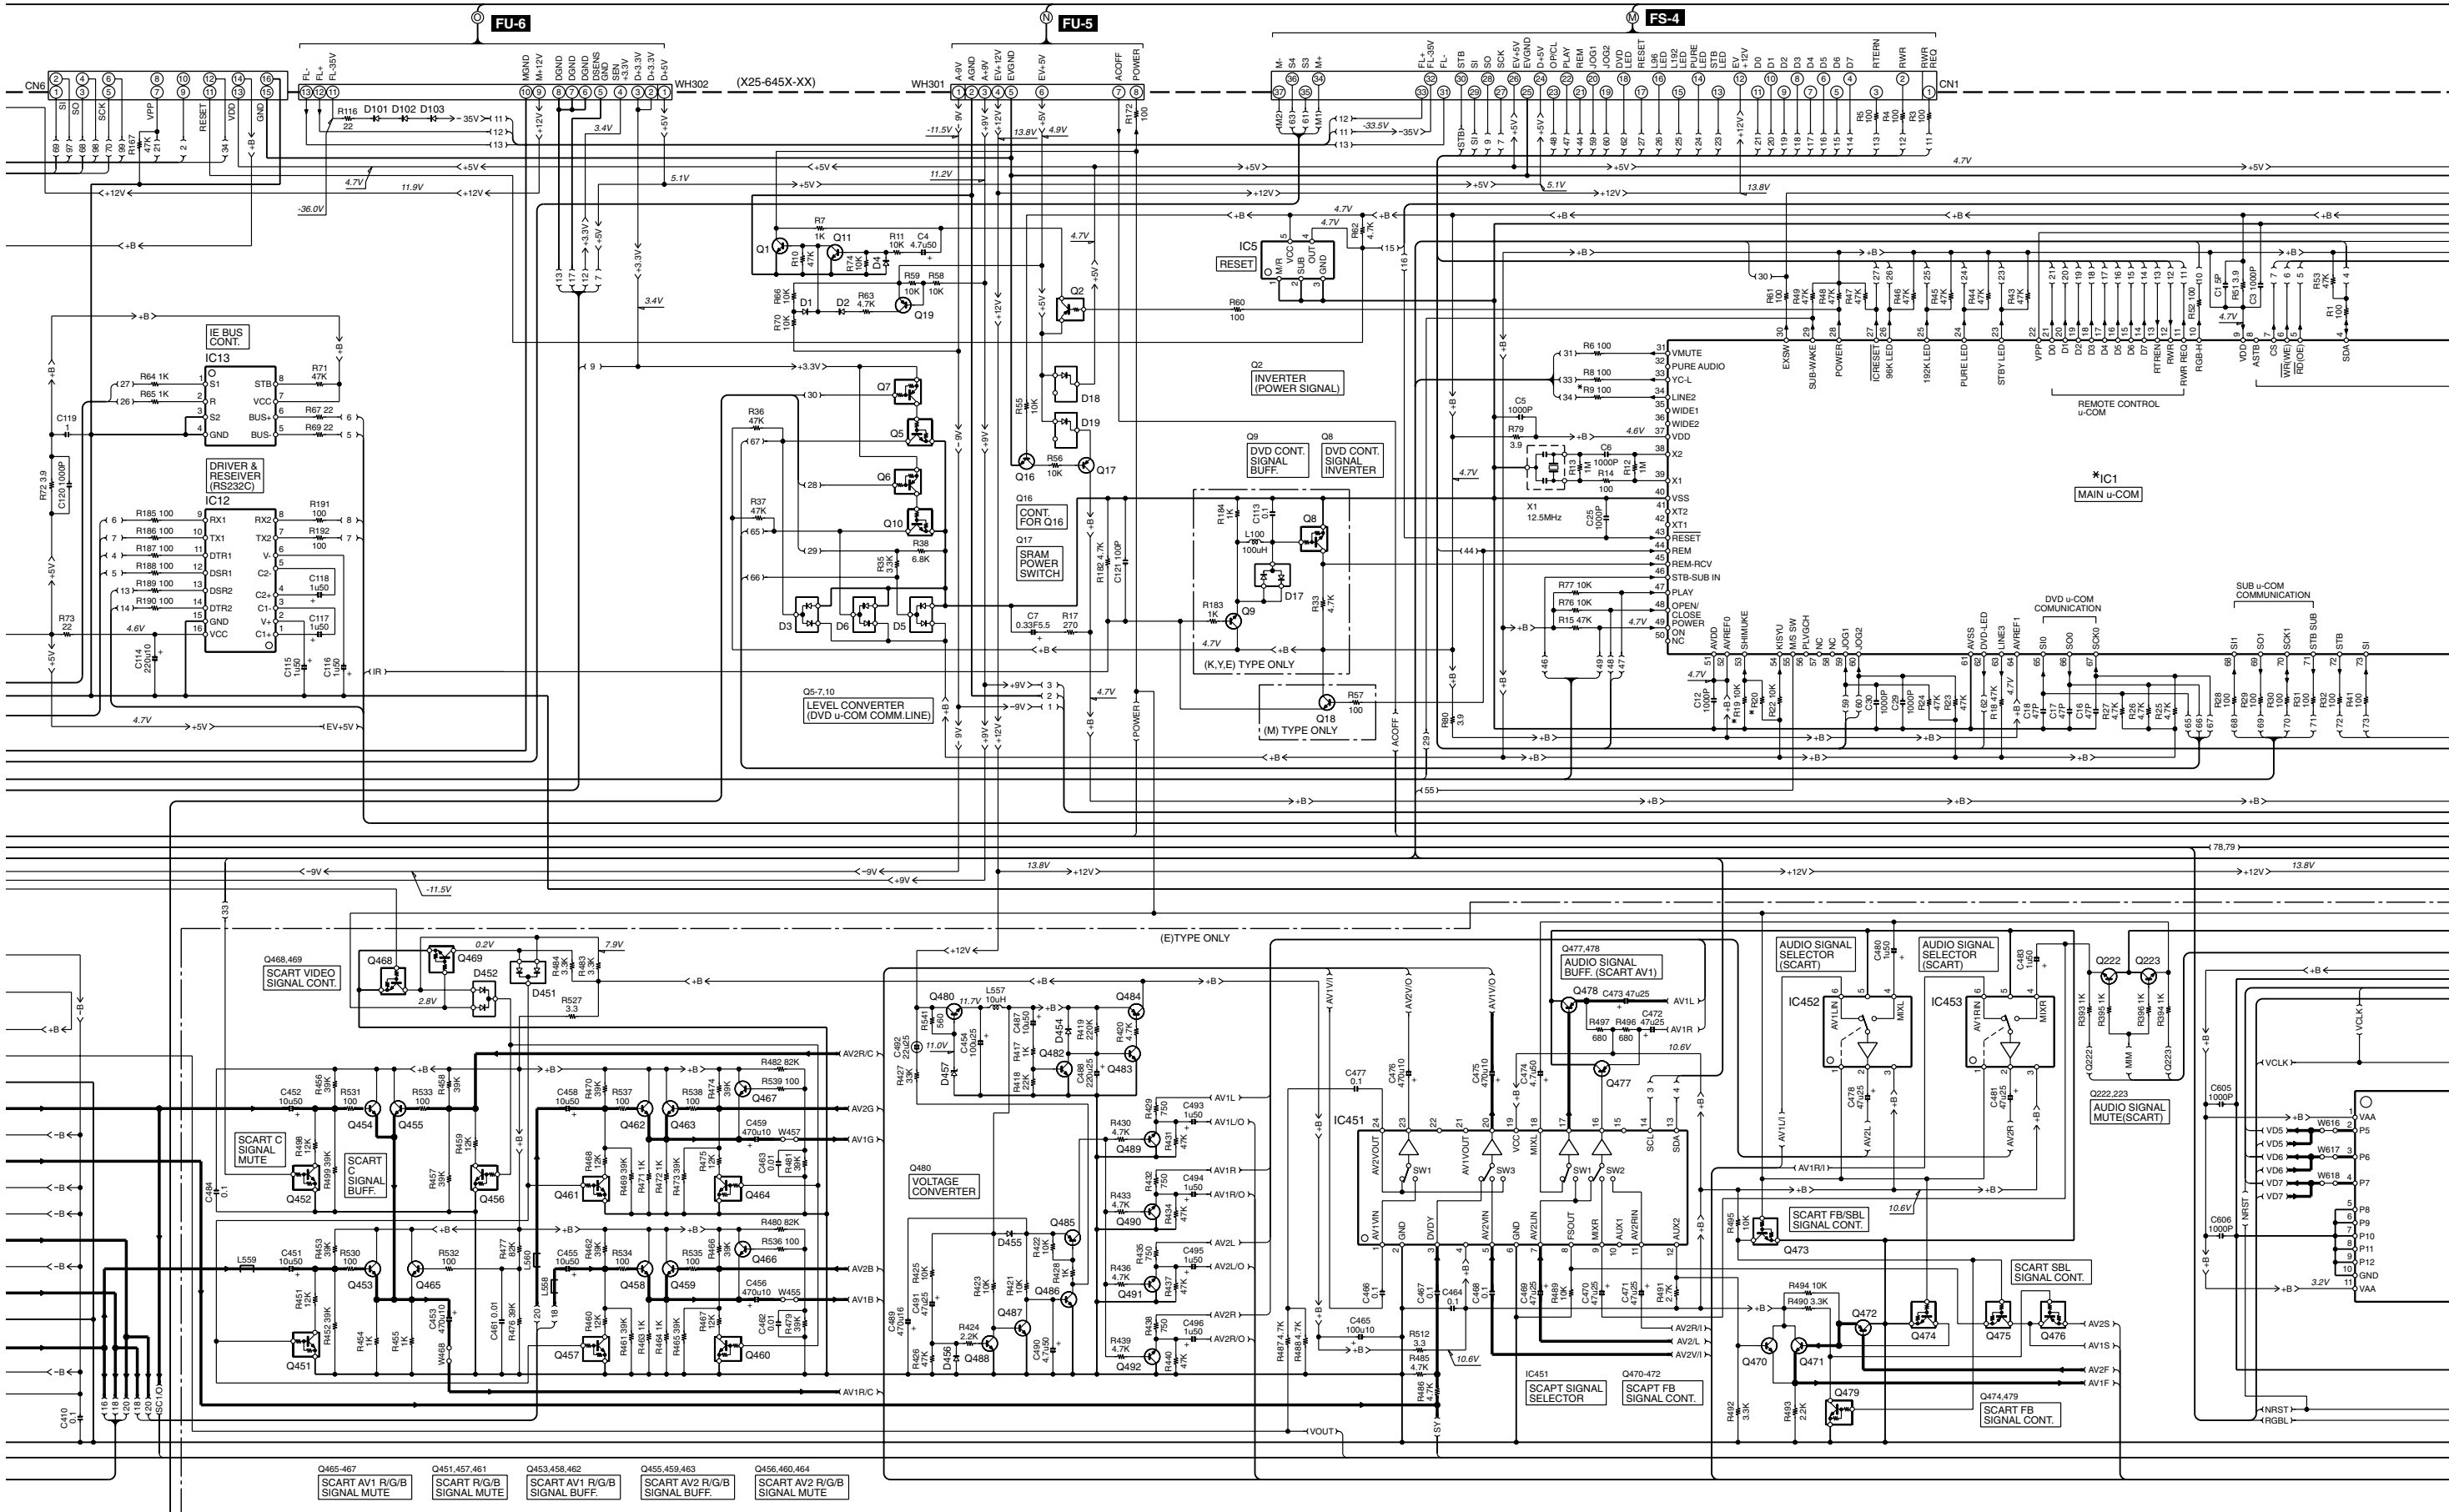

- Q465.467 SCART AV1 R/G/B SIGNAL MUTE
- Q451.457.461 SCART R/G/B SIGNAL MUTE
- Q453.458.462 SCART AV1 R/G/B SIGNAL BUFF.
- Q455.459.463 SCART AV2 R/G/B SIGNAL BUFF.
- Q456.460.464 SCART AV2 R/G/B SIGNAL MUTE

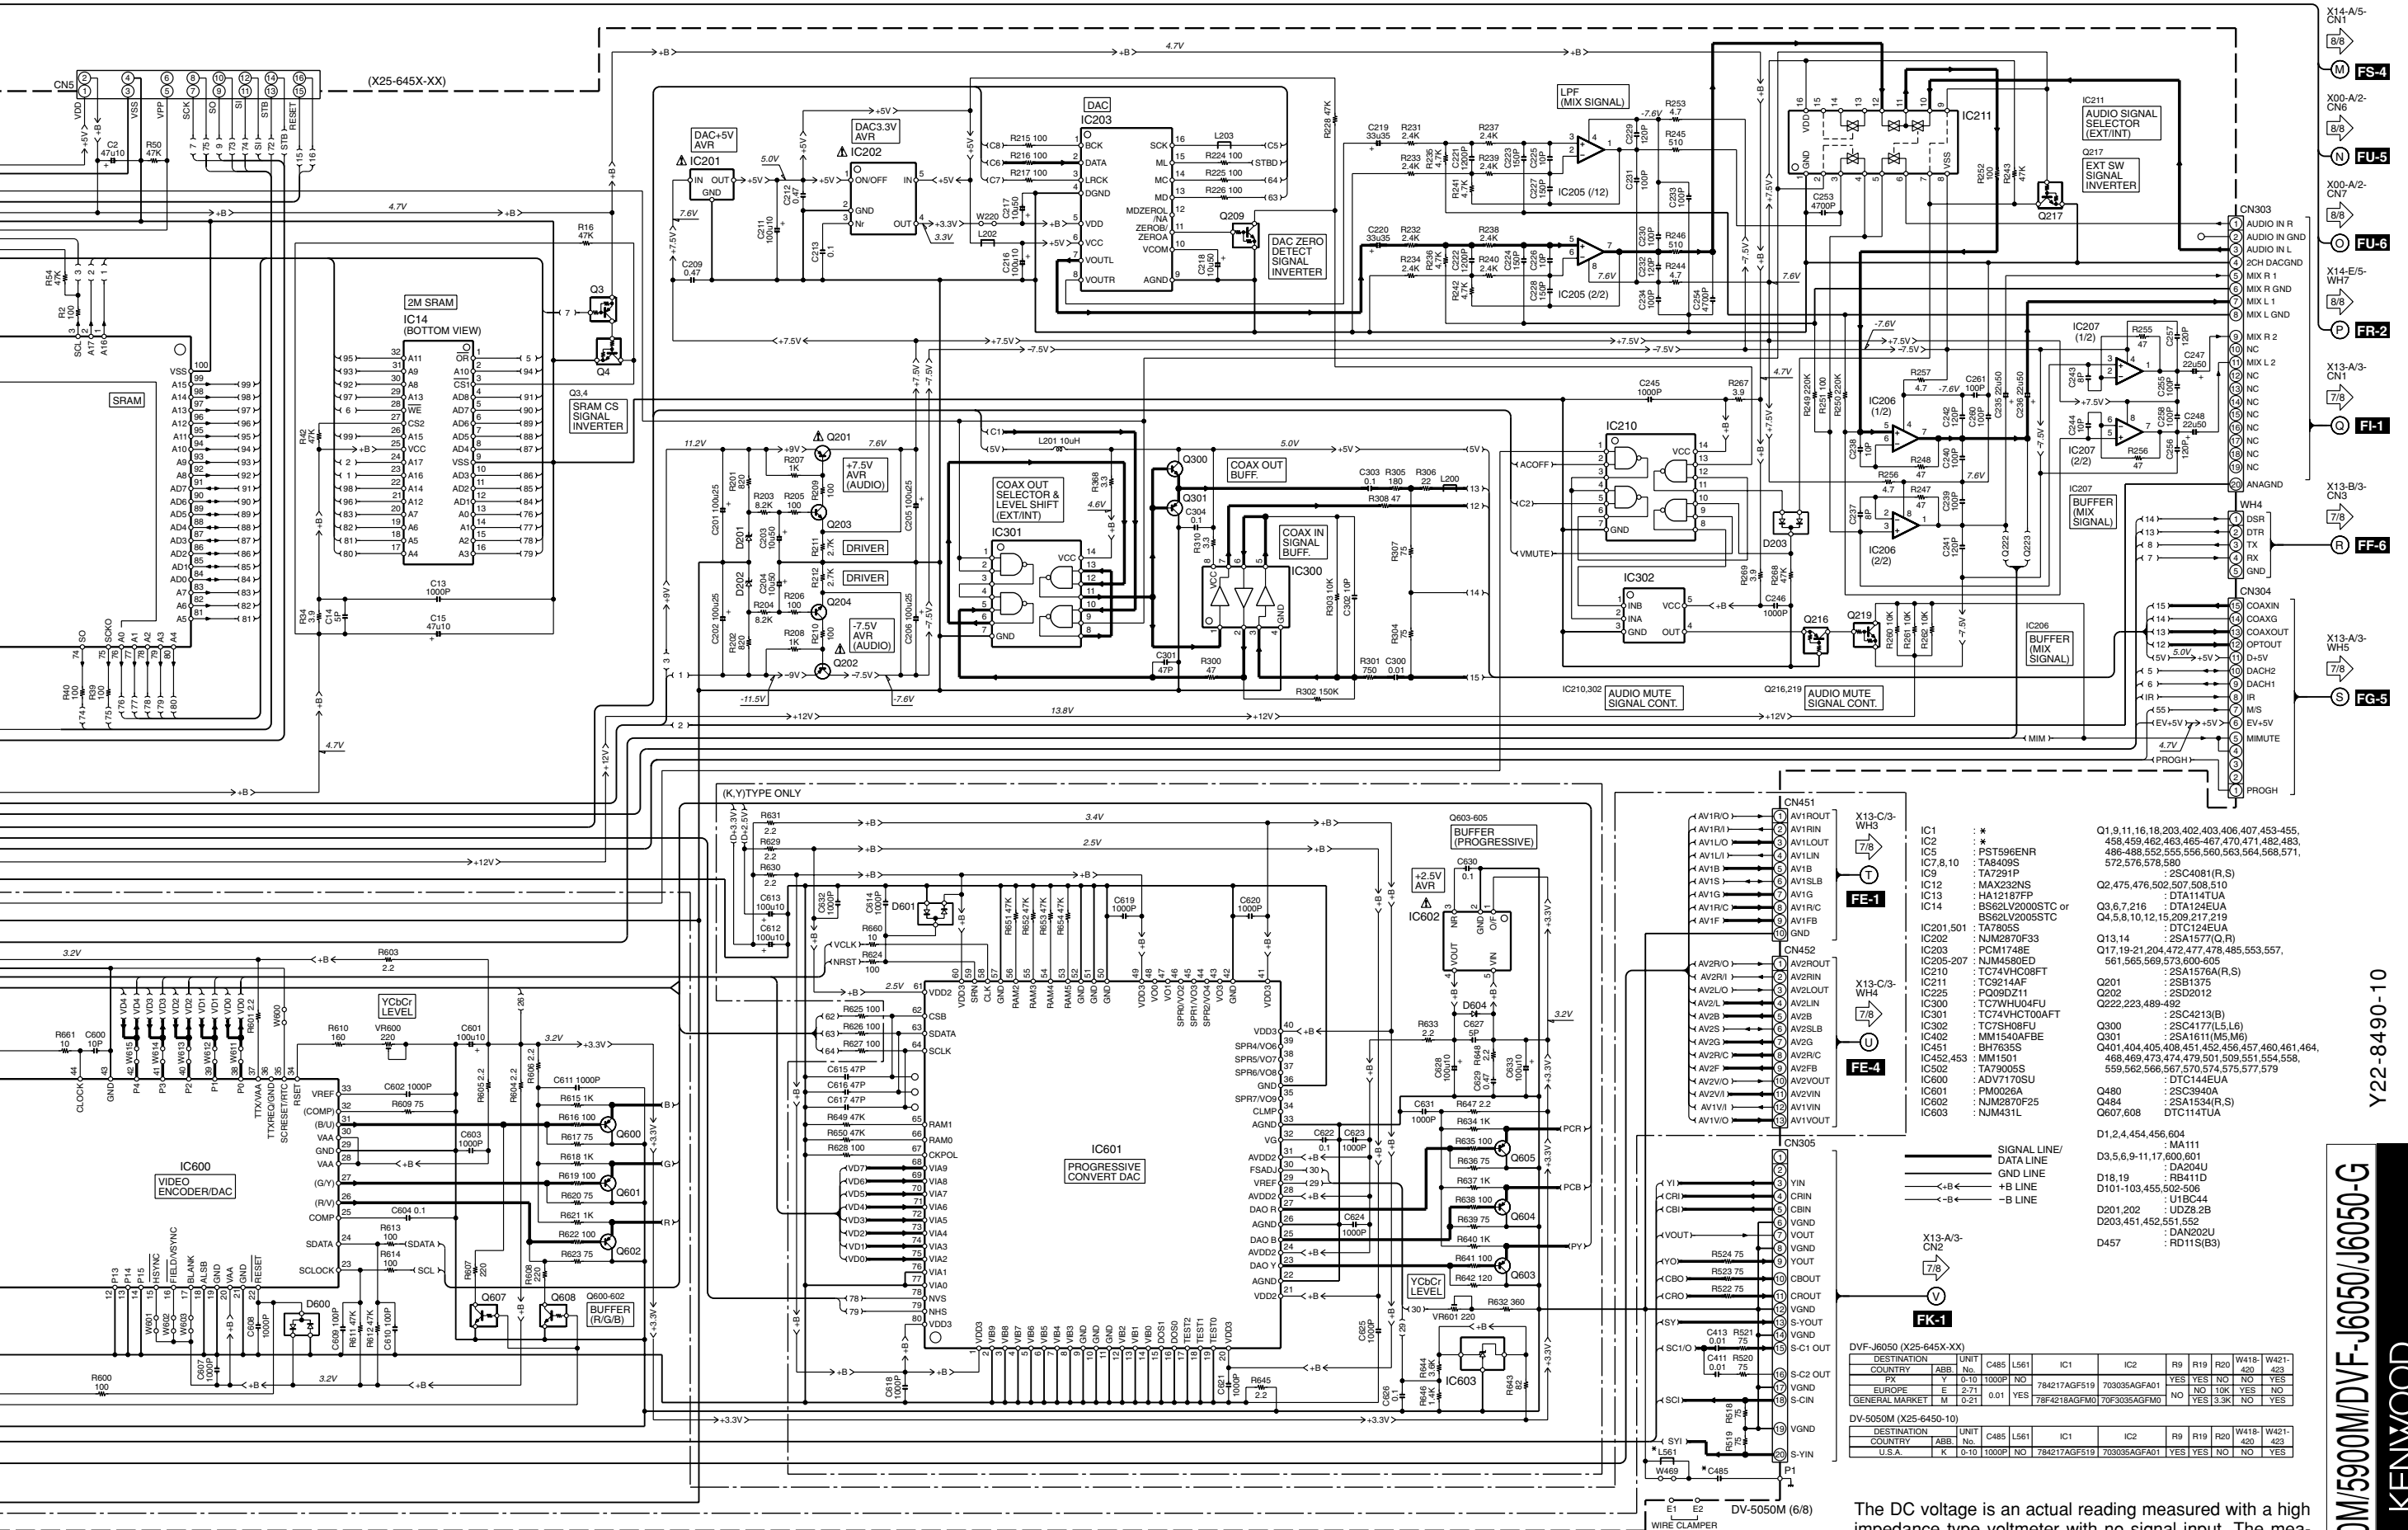

IC1 : *

IC2 : *

IC5 : P5T596ENR

IC7,8,10 : TA8409S

IC9 : TA7291P

IC12 : MAX232NS

IC13 : HA12187FP

IC14 : BS62LV2000STC or BS62LV2005STC

IC201,501 : TA7805S

IC202 : NJM2870F33

IC203 : PCM1749E

IC205-207 : NJM4580ED

IC210 : TC74VHC08FT

IC211 : TC9214AF

IC225 : PO09DZ11

IC300 : TC7WH04FEU

IC301 : TC74VHC100AFT

IC302 : TC7SH08FU

IC402 : MM1540AFBE

IC451 : BH7635S

IC452,453 : MM1501

IC502 : TA79005S

IC600 : ADV7170SU

IC601 : PM0026A

IC602 : NJM2870F25

IC603 : NJM431L

Q1,9,11,16,18,20,302,403,406,407,453,455,458,459,462,463,465-467,470,471,482,483,486,488,552,555,556,558,560,563,564,568,571,572,576,578,580

Q2,475,476,502,507,508,510

Q3,6,7,216 : DTA114TJA

Q4,5,8,10,12,15,209,217,219

Q13,14 : DTC124EUA

Q17,19-21,204,472,477,478,485,553,557,561,565,569,573,600-605

Q201 : 2SB1375

Q202 : 2SD2012

Q222,223,489-492

Q300 : 2SC4213(B)

Q301 : 2SA1611(M5,M6)

Q401,404,405,408,451,452,456,457,460,461,464,468,469,473,474,479,501,509,551,554,558,559,562,566,567,570,574,575,577,579

Q480 : 2SC3940A

Q484 : 2SA1534(R,S)

Q607,608 : DTC114TUA

D1,2,4,454,456,604 : MA111

D3,5,6,9-11,17,600,601 : DA204U

D18,19 : RB411D

D101-103,455,502-506 : U1BC44

D201,202 : UD28,2B

D203,451,452,551,552 : DAN202U

D457 : RD11S(B3)

DVF-J6050 (X25-645X-XX)

| DESTINATION | UNIT | C485 | L561 | IC1 | IC2 | R9 | R19 | R20 | W418 | W421 |
|----------------|------|------|-------|-----|--------------|--------------|-----|-----|------|------|
| COUNTRY | ABB | No. | | | | | | | 420 | 423 |
| PX | Y | 0-10 | 1000P | NO | 784217AGF519 | 703035AGFA01 | YES | YES | NO | YES |
| EUROPE | E | 2-71 | 0.01 | YES | 78F4218AGFM0 | 70F3035AGFM0 | NO | YES | 10K | YES |
| GENERAL MARKET | M | 0-21 | | | | | | | 3.3K | NO |


DV-5050M (X25-6450-10)

| DESTINATION | UNIT | C485 | L561 | IC1 | IC2 | R9 | R19 | R20 | W418 | W421 |
|-------------|------|------|-------|-----|--------------|--------------|-----|-----|------|------|
| COUNTRY | ABB | No. | | | | | | | 420 | 423 |
| U.S.A. | K | 0-10 | 1000P | NO | 784217AGF519 | 703035AGFA01 | YES | YES | NO | YES |

Y22-8490-10

KENWOOD

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

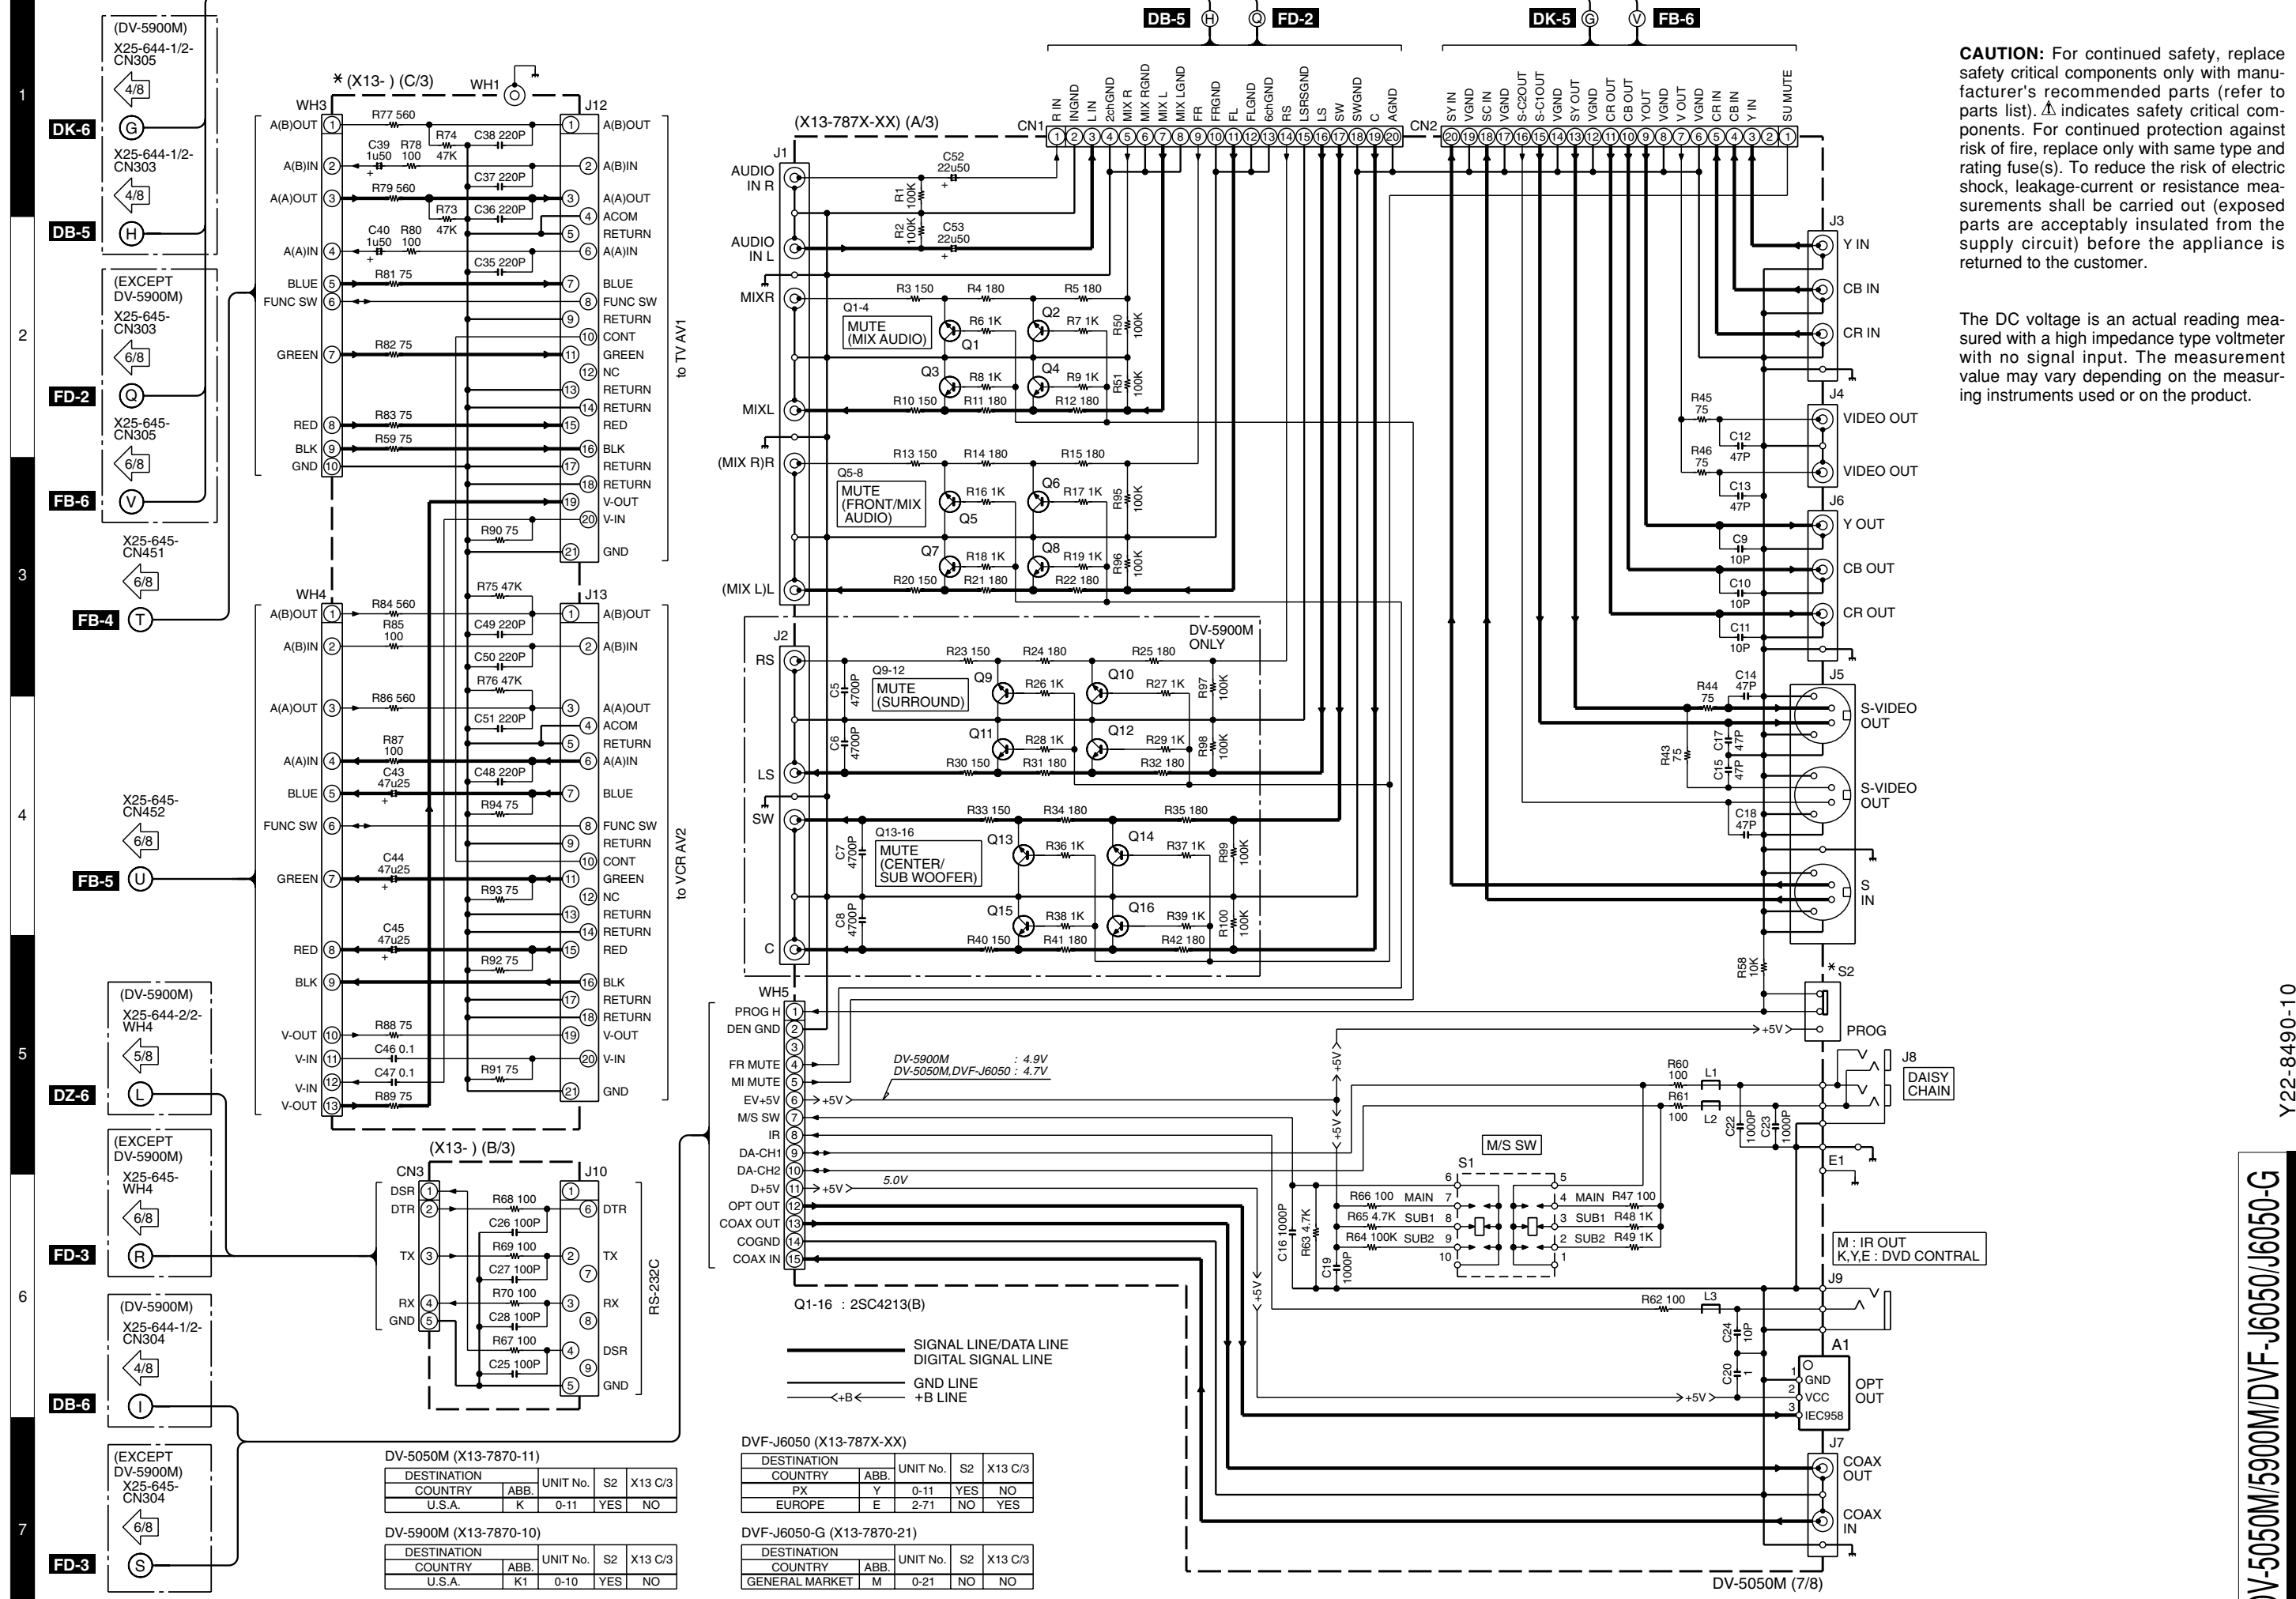

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

Q1-16 : 2SC4213(B)

— SIGNAL LINE/DATA LINE
 — DIGITAL SIGNAL LINE
 — GND LINE
 — +B LINE

| DVF-J6050 (X13-787X-XX) | | | | | |
|-------------------------|---------|------|----------|-----|---------|
| DESTINATION | COUNTRY | ABB. | UNIT No. | S2 | X13 C/3 |
| | PX | Y | 0-11 | YES | NO |
| | EUROPE | E | 2-71 | NO | YES |




| DVF-J6050-G (X13-7870-21) | | | | | |
|---------------------------|----------------|------|----------|----|---------|
| DESTINATION | COUNTRY | ABB. | UNIT No. | S2 | X13 C/3 |
| | GENERAL MARKET | M | 0-21 | NO | NO |

| DV-5050M (X13-7870-11) | | | | | |
|------------------------|---------|------|----------|-----|---------|
| DESTINATION | COUNTRY | ABB. | UNIT No. | S2 | X13 C/3 |
| | U.S.A. | K | 0-11 | YES | NO |

| DV-5900M (X13-7870-10) | | | | | |
|------------------------|---------|------|----------|-----|---------|
| DESTINATION | COUNTRY | ABB. | UNIT No. | S2 | X13 C/3 |
| | U.S.A. | K1 | 0-10 | YES | NO |




Y22-8490-10



DV-5050M/5900M/DVF-J6050/J6050-G
 KENWOOD

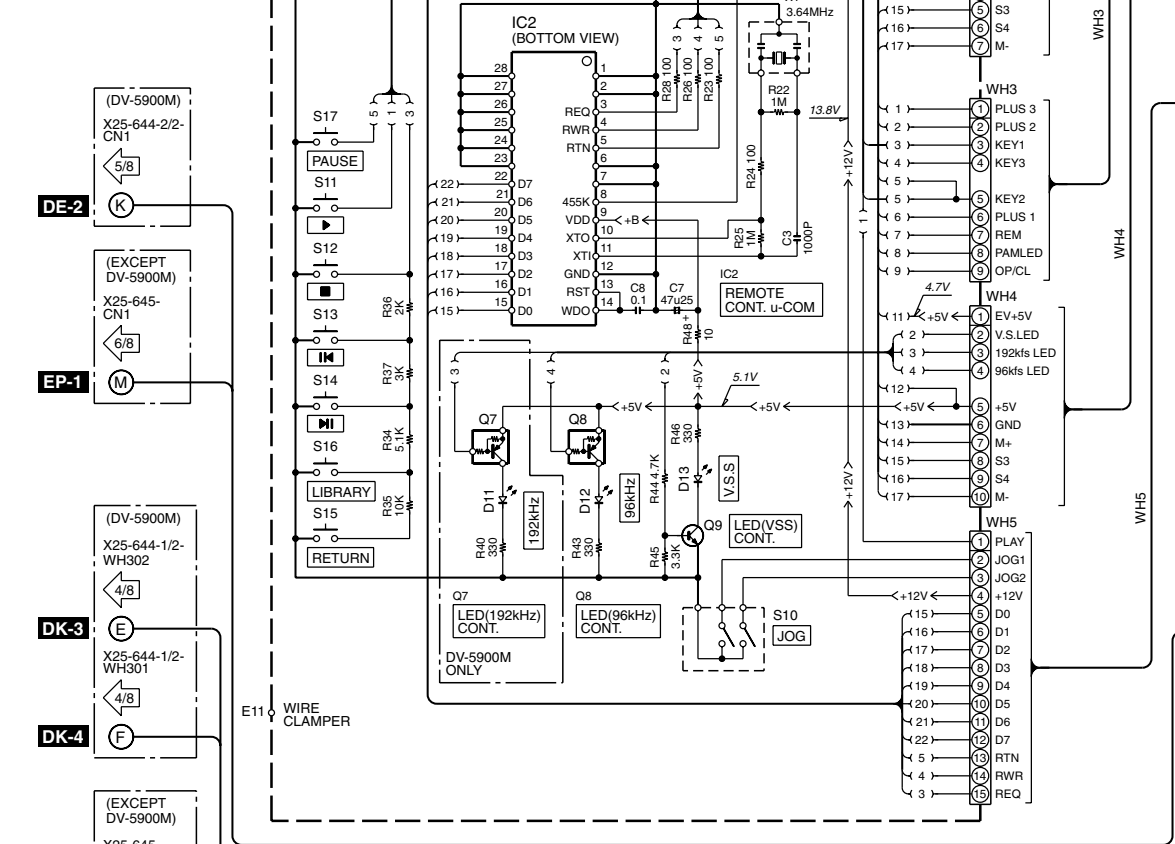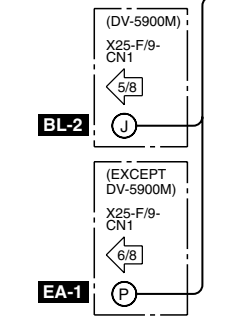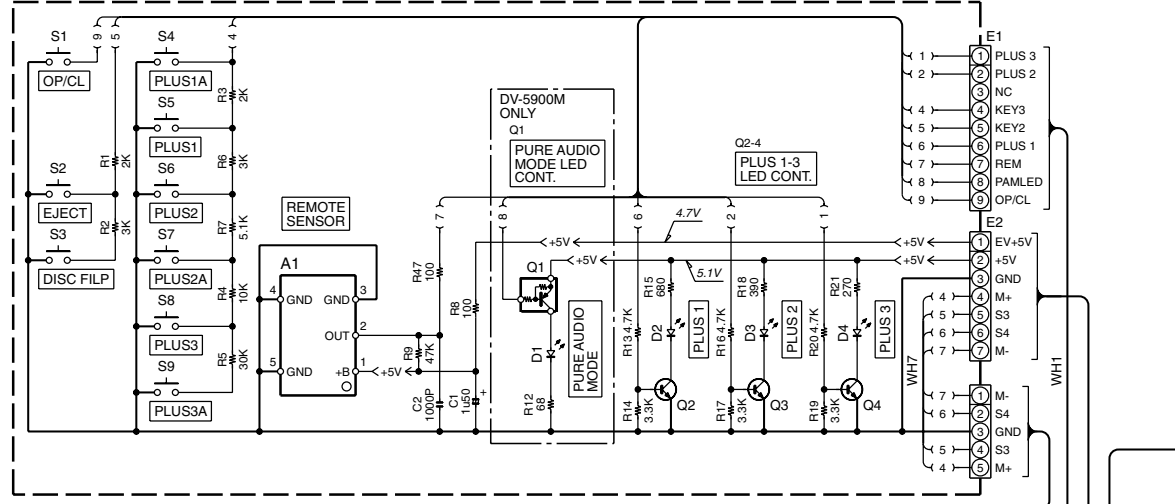

| | | | |
|--------------|---------------------------------|-------------|---------------|
| IC1 | : uPD780232GC012 | D1 | : B30-2610-05 |
| IC2 | : uPD17215GT-737 | D2-4, 11-13 | : B30-2430-05 |
| Q1, 7, 8, 10 | : DTA143TSA or UN4116 | D5-10 | : B30-2532-05 |
| Q2-4, 9, 12 | : 2SC1740S(Q,R) or 2SC2785(F,E) | D14 | : B30-2573-05 |
| Q5, 6 | : 2SC3940A(R,S) | D16 | : B30-2571-05 |
| Q11 | : 2SA1576A(R,S) | D17-20 | : DA204U |
| Q13-16 | : 2SC4081(R,S) | D21 | : MA111 |

←+B → GND LINE
 ←-B → +B LINE
 ←-B → -B LINE

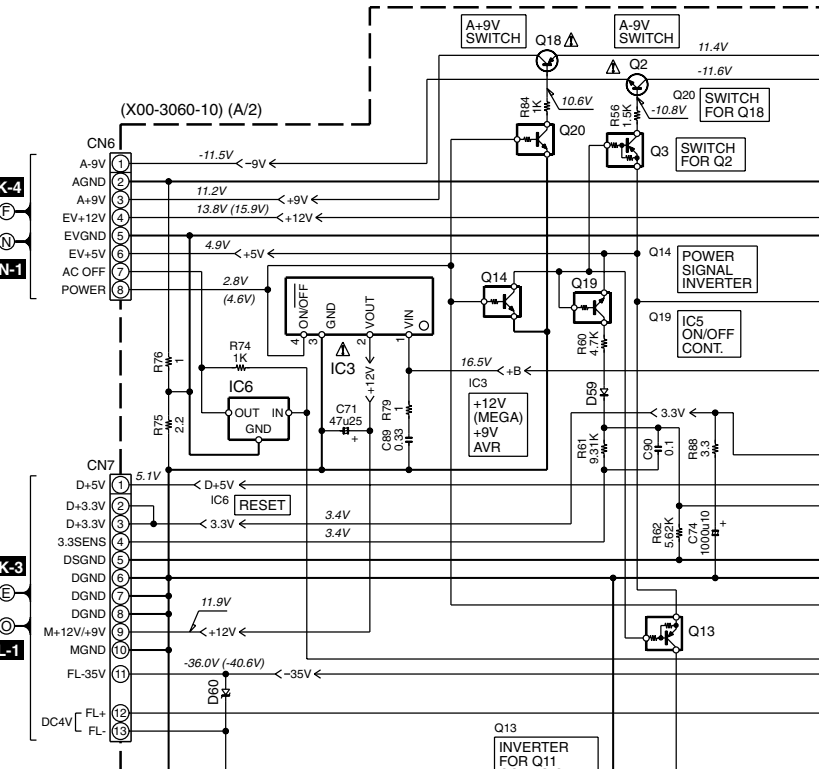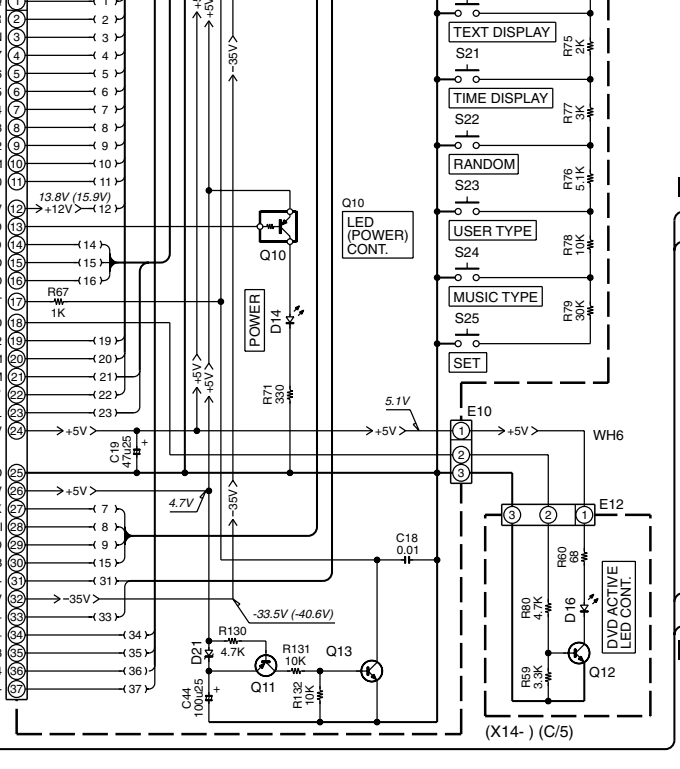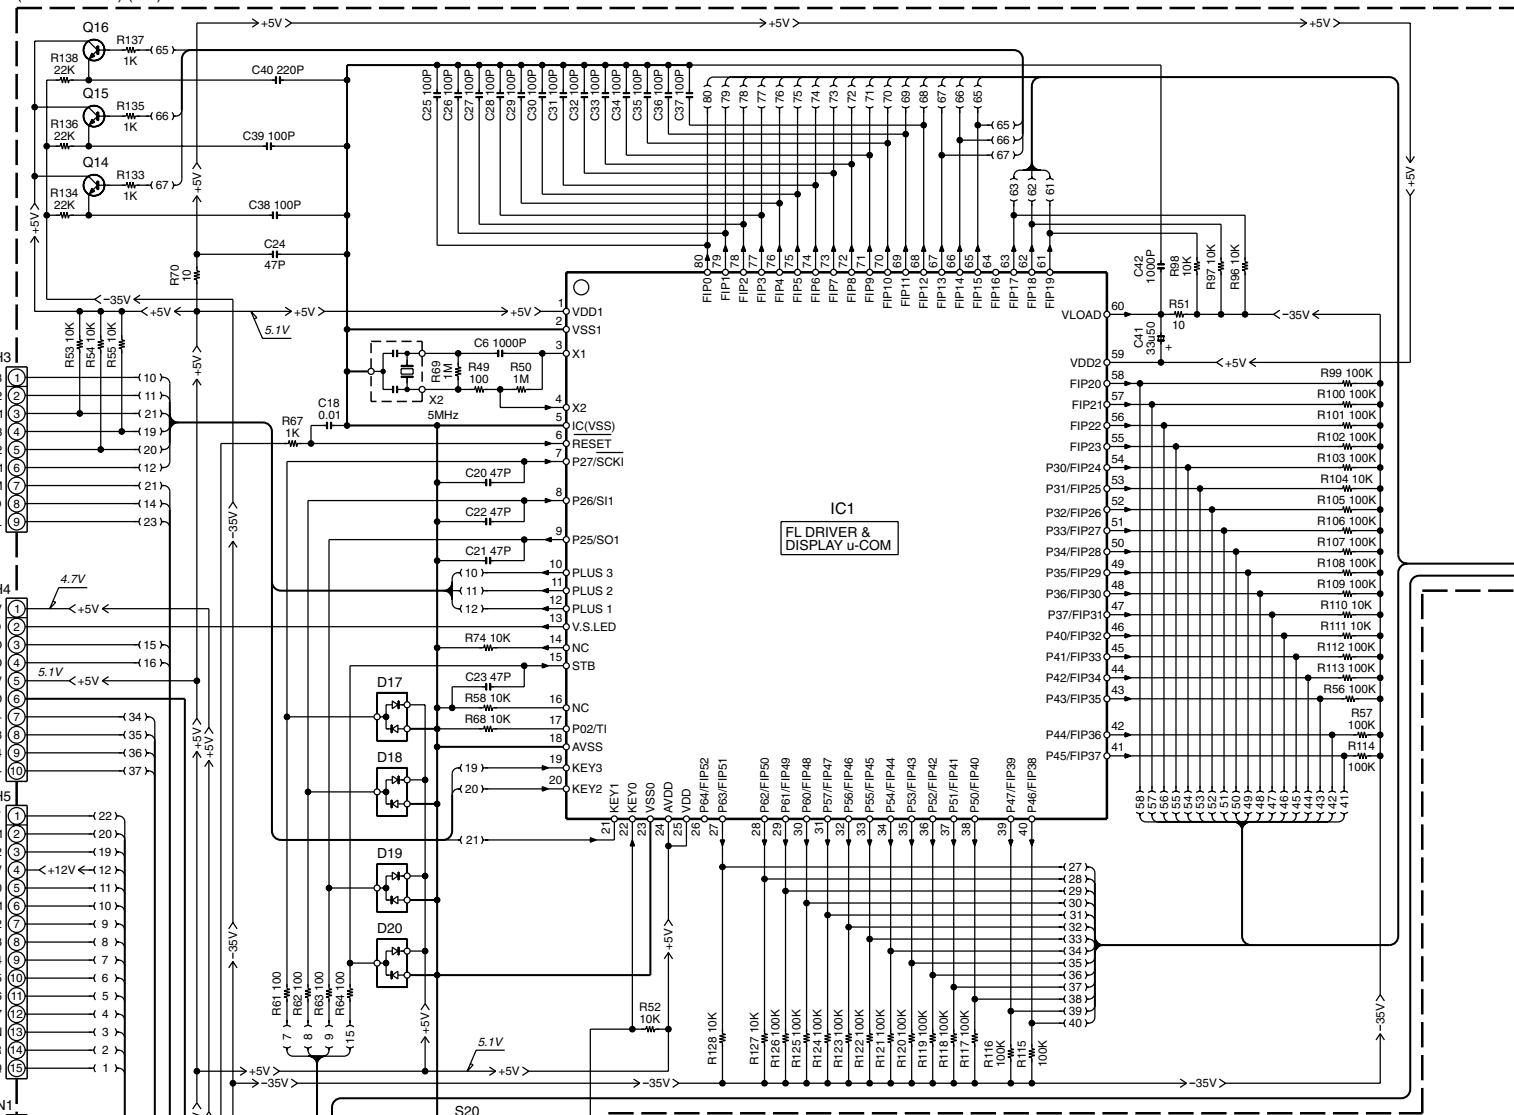

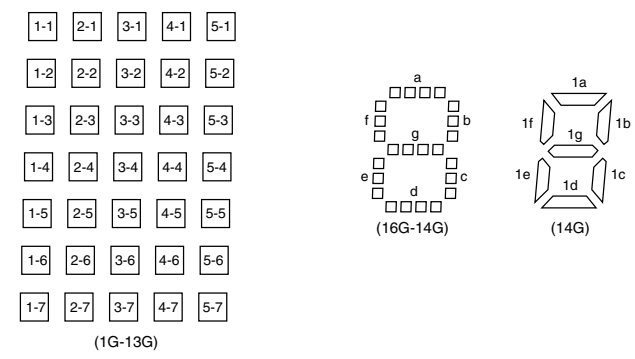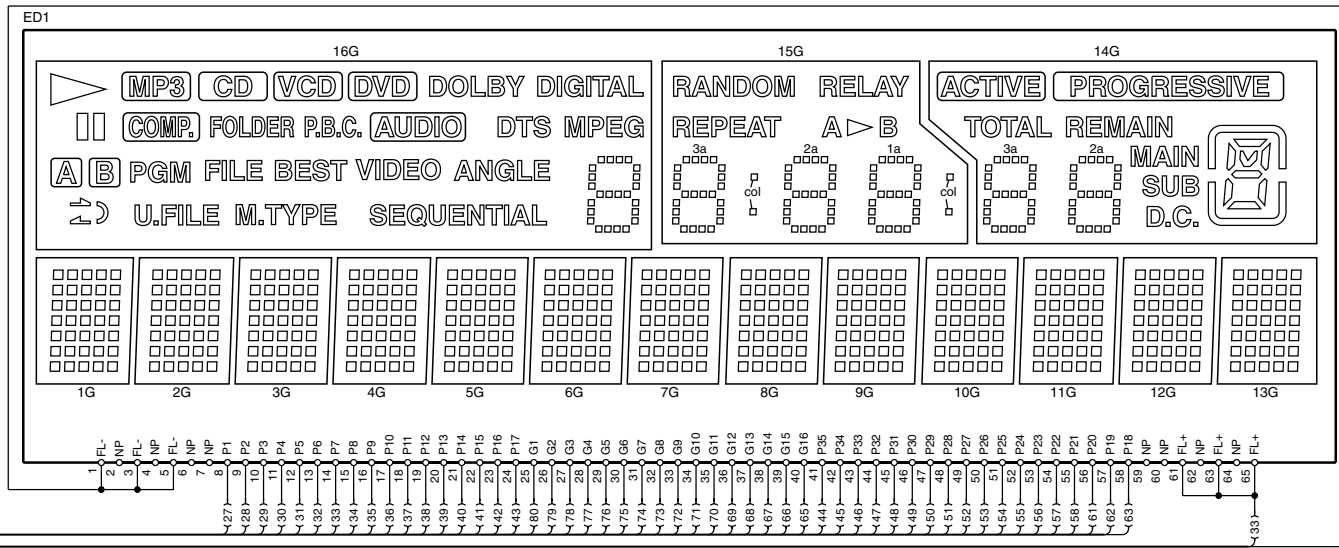


ANODE CONNECTION

| | 1G-13G | 14G | 15G | 16G |
|-----|--------|-------------|-------------|---------------|
| P1 | 1-1 | | col (right) | SEQUENTIAL |
| P2 | 2-1 | D.C. | col (left) | M.TYPE |
| P3 | 3-1 | 1d | 1d | d |
| P4 | 4-1 | 1e | 1e | e |
| P5 | 5-1 | 1c | 1c | c |
| P6 | 1-2 | 1g | 1g | g |
| P7 | 2-2 | 1f | 1f | f |
| P8 | 3-2 | 1b | 1b | b |
| P9 | 4-2 | 1a | 1a | a |
| P10 | 5-2 | | - | U.FILE |
| P11 | 1-3 | SUB | - | |
| P12 | 2-3 | MAIN | - | |
| P13 | 3-3 | PROGRESSIVE | - | |
| P14 | 4-3 | 2d | 2d | ANGLE |
| P15 | 5-3 | 2e | 2e | VIDEO |
| P16 | 1-4 | 2c | 2c | BEST |
| P17 | 2-4 | 2g | 2g | FILE |
| P18 | 3-4 | 2f | 2f | PGM |
| P19 | 4-4 | 2b | 2b | |
| P20 | 5-4 | 2a | 2a | |
| P21 | 1-5 | 3d | 3d | MPEG |
| P22 | 2-5 | 3e | 3e | DTS |
| P23 | 3-5 | 3c | 3c | AUDIO |
| P24 | 4-5 | 3g | 3g | P.B.C. |
| P25 | 5-5 | 3f | 3f | FOLDER |
| P26 | 1-6 | 3b | 3b | COMP |
| P27 | 2-6 | 3a | 3a | |
| P28 | 3-6 | REMAIN | B | DOLBY DIGITAL |
| P29 | 4-6 | TOTAL | A > | DVD |
| P30 | 5-6 | ACTIVE | REPEAT | VCD |
| P31 | 1-7 | - | RELAY | CD |
| P32 | 2-7 | - | RANDOM | MP3 |
| P33 | 3-7 | - | - | |
| P34 | 4-7 | - | - | - |
| P35 | 5-7 | - | - | - |

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.


The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

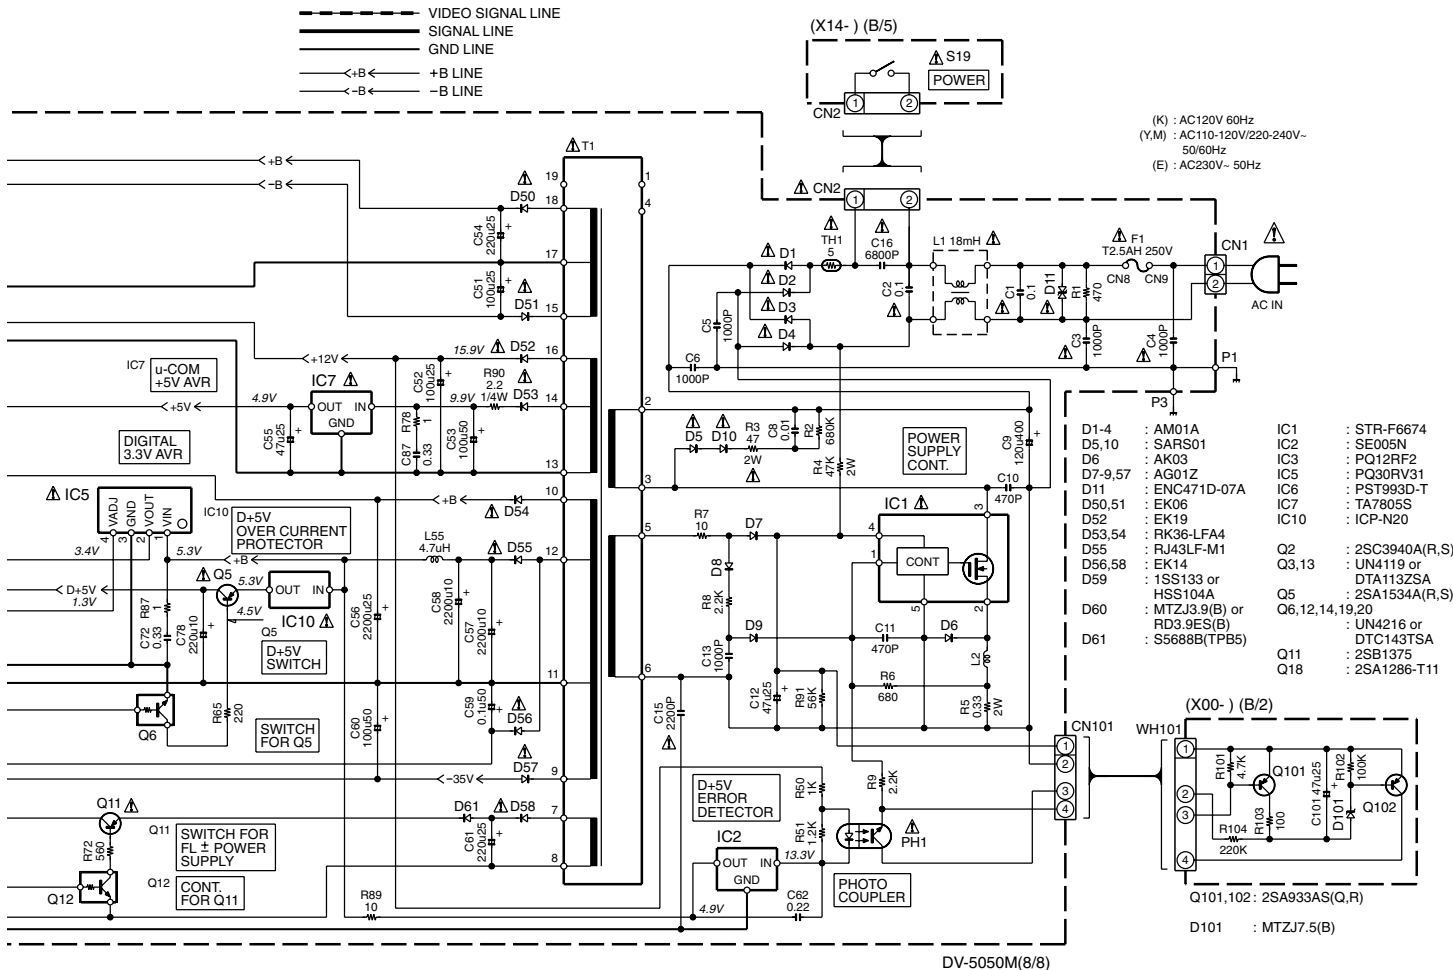


DV-5050M/5900M/DVF-J6050/J6050-G

EXPLODED VIEW(MECHANISM)

- AA $\phi 2 \times 8$: N09-5392-08
- AB M2x5 : N09-5393-08
- AC $\phi 2 \times 6$: N09-5162-08
- AF M1.5x4 : N09-3462-08

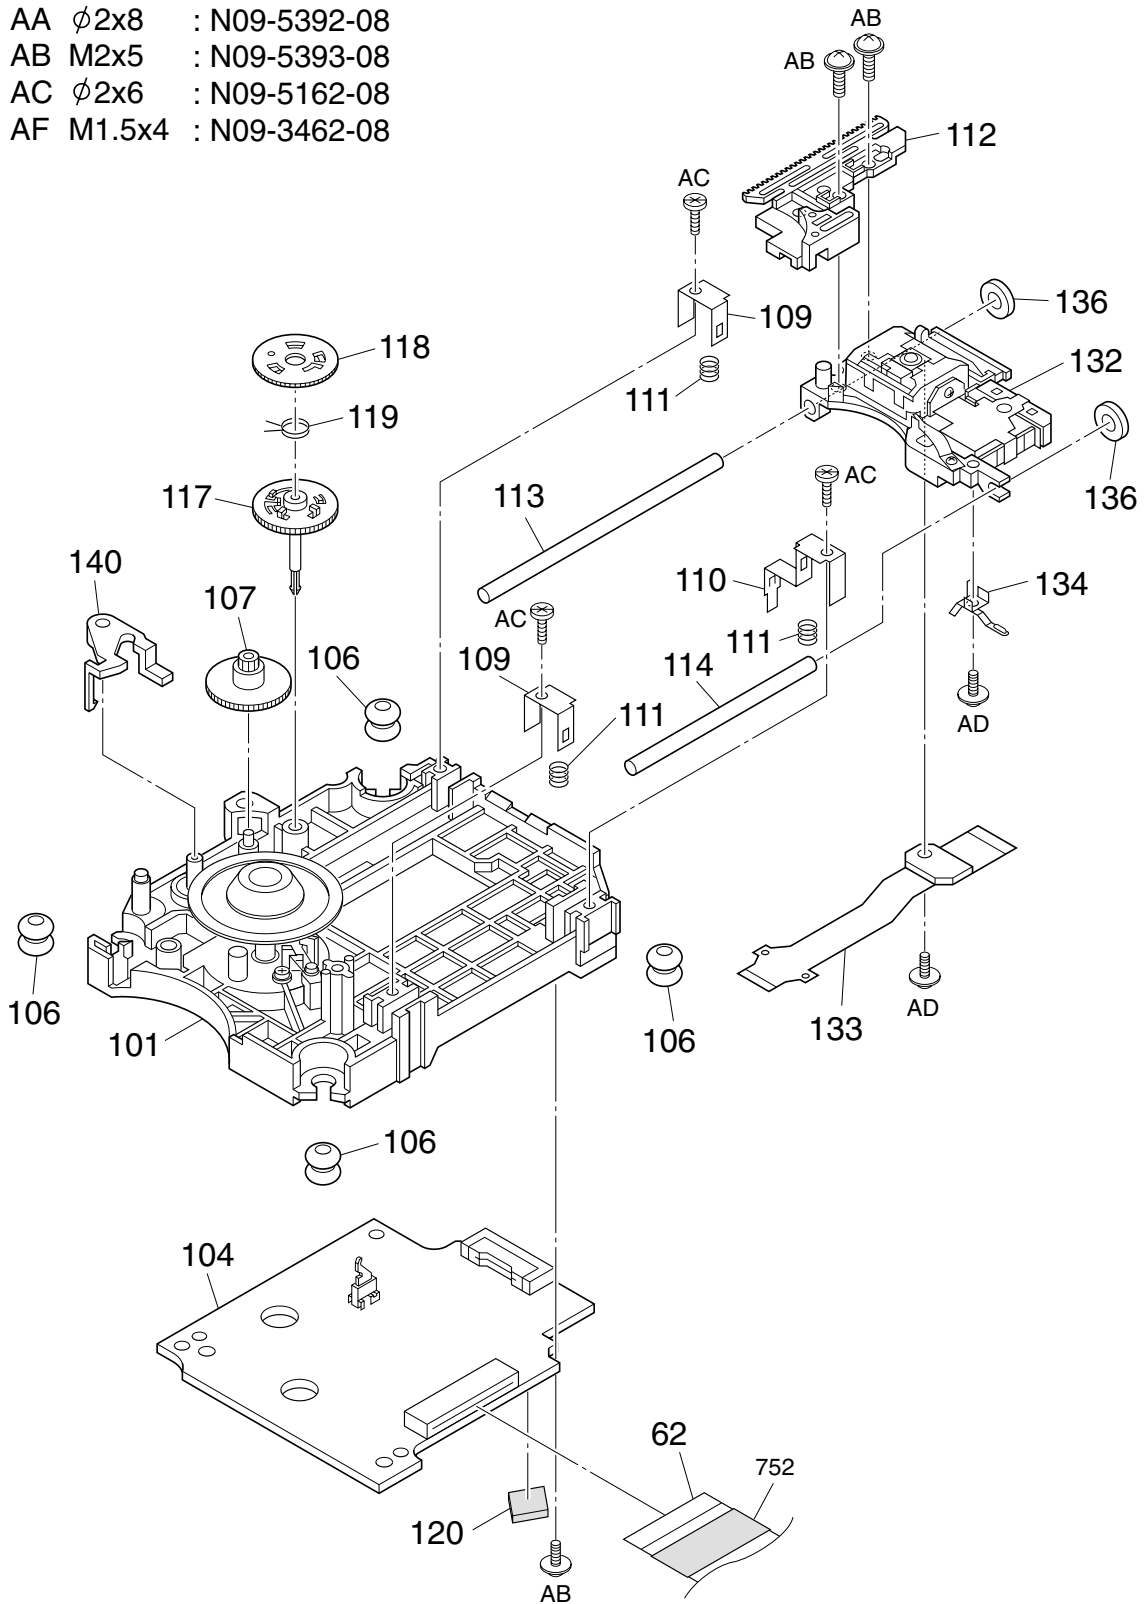

TRAVERSE

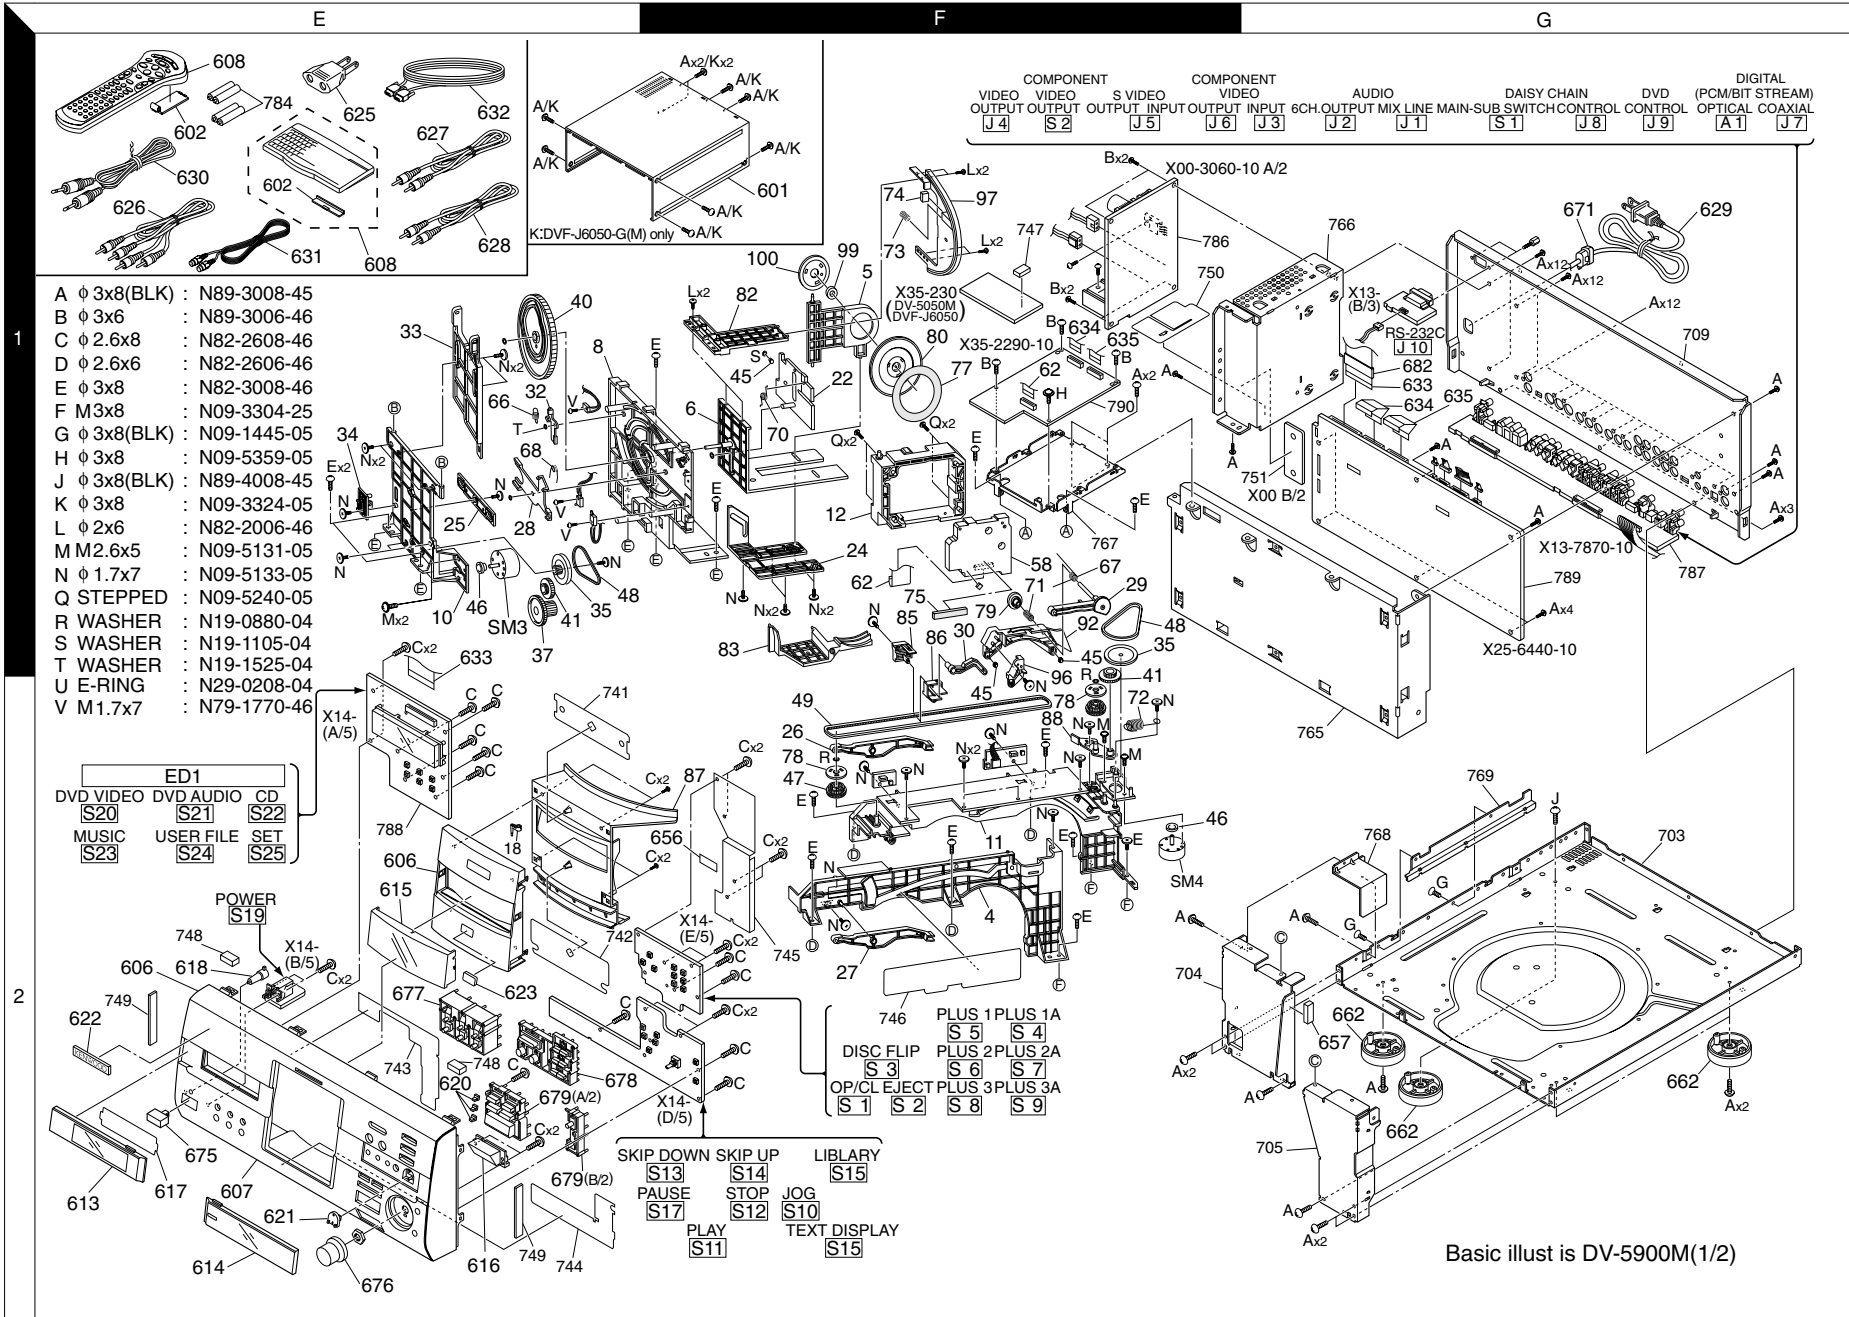

EXPLODED VIEW(UNIT)

DV-5050M/5900M/DVF-J6050/J6050-G

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

①

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|---|----------|-----------|-------------|-------------------------------|--------------|----------|
| DV-5050M/5900M/DVF-J6050/J6050-G | | | | | | |
| 601 | 1F | * | A01-3805-11 | METALLIC CABINET | KYEK1 | |
| 601 | 1F | * | A01-3806-11 | METALLIC CABINET | M | |
| 602 | 1E | * | A09-1176-08 | BATTERY COVER(KEY BOARD) | K1 | |
| 602 | 1E | * | A09-1242-08 | BATTERY COVER | | |
| 606 | 2E | * | A29-1133-02 | PANEL | YE | |
| 606 | 2E | * | A29-1134-02 | PANEL | KK1 | |
| 606 | 2E | * | A29-1135-02 | PANEL | M | |
| 607 | 2E | * | A60-1987-11 | PANEL | K | |
| 607 | 2E | * | A60-1988-11 | PANEL | Y | |
| 607 | 2E | * | A60-1989-21 | PANEL | M | |
| 607 | 2E | * | A60-1990-11 | PANEL | E | |
| 607 | 2E | * | A60-2054-21 | PANEL | K1 | |
| 608 | 1E | * | A70-1486-05 | REMOTE CONTROL ASSY(RC-D0512) | KYEM | |
| 608 | 1E | * | A70-1488-15 | REMOTE CONTROL ASSY(RC-D0513) | K1 | |
| 608 | 1E | * | A70-1513-05 | REMOTE CONTROL ASSY(RC-KB3) | K1 | |
| 613 | 2E | * | B10-3674-13 | FRONT GLASS | KYEM | |
| 613 | 2E | * | B10-3709-13 | FRONT GLASS | K1 | |
| 614 | 2E | * | B10-3708-13 | FRONT GLASS | | |
| 615 | 2E | * | B10-3710-03 | FRONT GLASS | | |
| 616 | 2E | * | B10-3711-04 | FRONT GLASS | | |
| 617 | 2E | * | B11-1523-04 | COLOR FILTER | | |
| 618 | 2E | * | B12-0415-14 | INDICATOR | | |
| 619 | 1C | * | B12-0416-04 | INDICATOR | | |
| 620 | 2E | * | B12-0424-14 | INDICATOR | | |
| 621 | 2E | * | B12-0425-14 | INDICATOR | K1 | |
| 622 | 2E | * | B43-0314-04 | KENWOOD BADGE | YEM | |
| 622 | 2E | * | B43-0322-04 | KENWOOD BADGE | KK1 | |
| 623 | 2E | * | B43-0316-04 | BADGE (DVD VIDEO) | KYEM | |
| 623 | 2E | * | B43-0318-04 | BADGE (DVD AUDIO) | K1 | |
| - | - | - | B46-0310-03 | WARRANTY CARD | E | |
| - | - | - | B46-0328-03 | WARRANTY CARD | Y | |
| - | - | - | B46-0330-03 | WARRANTY CARD | KK1 | |
| - | - | - | B46-0358-00 | QUESTIONNAIRE CARD | KK1 | |
| - | - | - | B46-0359-03 | WARRANTY CARD | KK1 | |
| - | - | - | B58-0964-13 | CAUTION CARD (UL) | KYK1 | |
| - | - | - | B58-0966-13 | CAUTION CARD (ELMtypePL) | EM | |
| - | - | - | B58-0967-03 | CAUTION CARD (PtypePL) | KK1 | |
| - | - | - | B59-1104-00 | SERVICE DIRECTORY | Y | |
| - | - | * | B60-5105-00 | INSTRUCTION MANUAL (EN) | YEM | |
| - | - | * | B60-5106-00 | INSTRUCTION MANUAL (FR) | E | |
| - | - | * | B60-5107-00 | INSTRUCTION MANUAL (IT) | E | |
| - | - | * | B60-5108-00 | INSTRUCTION MANUAL (GE) | E | |
| - | - | * | B60-5109-00 | INSTRUCTION MANUAL (ES) | E | |
| - | - | * | B60-5110-00 | INSTRUCTION MANUAL (NE) | E | |
| - | - | * | B60-5111-00 | INSTRUCTION MANUAL (TC) | M | |
| - | - | * | B60-5165-00 | INST MANUAL (EN-SOVEREIG) | KK1 | |
| - | - | * | B60-5166-00 | INST MANUAL (FR-SOVEREIG) | KK1 | |
| △ 625 | 1E | * | E03-0115-05 | AC PLUG ADAPTER | M | |
| 626 | 1E | * | E30-0505-05 | AUDIO CORD | | |
| 627 | 1E | * | E30-1427-05 | AUDIO CORD | | |
| 628 | 1E | * | E30-2365-05 | CORD WITH PLUG | | |
| △ 629 | 1G | * | E30-2789-05 | AC POWER CORD | Y | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas △ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

②

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|--|----------|-----------|-------------|-------------------------------|--------------|----------|
| △ 629 | 1G | * | E30-2842-05 | AC POWER CORD | EM | |
| △ 629 | 1G | * | E30-2909-05 | AC POWER CORD | KK1 | |
| 630 | 1E | * | E30-2816-05 | CORD WITH PLUG | | |
| 631 | 1E | * | E30-2956-05 | CORD WITH PLUG (S-VIDEO) | | |
| 632 | 1E | * | E30-7209-05 | CORD WITH PLUG (RS-232C) | | |
| 633 | 1E,1G | * | E35-2899-15 | FLAT CABLE (37P) | | |
| 634 | 1F,1G | * | E35-2900-05 | FLAT CABLE (28P) | K1 | |
| 634 | 1F,1G | * | E35-2901-05 | FLAT CABLE (30P) | KYEM | |
| 635 | 1F,1G | * | E35-2901-05 | FLAT CABLE (30P) | EM | |
| 635 | 1F,1G | * | E35-3148-05 | FLAT CABLE (30P) | KY | |
| 635 | 1F,1G | * | E35-3166-05 | FLAT CABLE (28P) | K1 | |
| 639 | 1C | * | F07-1727-04 | COVER | | |
| 656 | 2F | * | G11-2730-04 | SOFT TAPE (40X9) | KYK1 | |
| 657 | 2G | * | G11-2847-04 | CUSHION (30X10X4) | | |
| 658 | 1C | * | G11-2860-04 | CUSHION (30X15X8) | K1 | |
| - | - | * | H10-7745-11 | POLYSTYRENE FOAMED FIXTURE(L) | | |
| - | - | * | H10-7746-01 | POLYSTYRENE FOAMED FIXTURE(R) | | |
| - | - | * | H12-3495-04 | PACKING FIXTURE | K1 | |
| - | - | * | H21-1510-14 | PROTECTION SHEET | | |
| - | - | * | H25-0232-04 | PROTECTION BAG (235X350X0.03) | | |
| - | - | * | H25-1701-04 | PROTECTION BAG | KYEK1 | |
| - | - | * | H25-1718-04 | PROTECTION BAG | M | |
| - | - | * | H50-4022-14 | ITEM CARTON CASE | K | |
| - | - | * | H50-4023-04 | ITEM CARTON CASE | Y | |
| - | - | * | H50-4024-04 | ITEM CARTON CASE | M | |
| - | - | * | H50-4025-04 | ITEM CARTON CASE | E | |
| - | - | * | H50-4131-14 | ITEM CARTON CASE | K1 | |
| 662 | 2G | * | J02-1481-13 | FOOT | | |
| 664 | 1C | * | J19-6212-03 | HOLDER | | |
| △ 671 | 1G | * | J42-0083-05 | POWER CORD BUSHING | | |
| - | - | * | J19-5877-05 | UNIT HOLDER | | |
| - | - | * | J61-0088-05 | WIRE BAND | | |
| - | - | * | J61-0307-05 | WIRE BAND | | |
| 675 | 2E | * | K27-2433-14 | KNOB (BUTTON) | KYEK1 | |
| 675 | 2E | * | K27-2471-04 | KNOB (BUTTON) | M | |
| 676 | 2E | * | K29-7928-04 | KNOB | KYEK1 | |
| 676 | 2E | * | K29-8024-04 | KNOB | M | |
| 677 | 2E | * | K29-7930-03 | KNOB | KYEK1 | |
| 677 | 2E | * | K29-8025-03 | KNOB | M | |
| 678 | 2E | * | K29-7931-03 | KNOB | KYEK1 | |
| 678 | 2E | * | K29-8026-03 | KNOB | M | |
| 679 | 2E | * | K29-7932-13 | KNOB | KYEK1 | |
| 679 | 2E | * | K29-8027-13 | KNOB | M | |
| 682 | 1G | * | L92-0519-05 | FERRITE CORE (FFC 50P) | KYK1 | |
| - | - | * | L92-0069-05 | FERRITE CORE (AC POWER CORD) | | |
| - | - | * | L92-0547-05 | FERRITE CORE (FFC 30P) | EM | |
| △ 786 | 1F | * | X00-3060-10 | POWER SUPPLY UNIT | | |
| POWER SUPPLY UNIT (X00-3060-10) | | | | | | |
| △ C1 ,2 | | * | C91-1542-05 | MF | 0.1UF | 275VAC |
| △ C3 -6 | | * | C91-1565-05 | CERAMIC | 1000PF | 250VAC |
| C8 | | * | C91-1636-05 | MF | 0.01UF | 630VDC |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas △ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

3

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|-----------------------|--------------|----------|
| C9 | | * | C90-5722-05 | ELECTRO 120UF 400WV | | |
| C10 | | * | C91-1638-05 | CERAMIC 470PF 250VAC | | |
| C11 | | | CK45FB1H471K | CERAMIC 470PF K | | |
| C12 | | | CE04KW1E470M | ELECTRO 47UF 25WV | | |
| C13 | | | CQ93FMG1H102J | MYLAR 1000PF J | | |
| Δ C15 | | * | C91-1637-05 | CERAMIC 2200PF 250VAC | | |
| Δ C16 | | | C91-1488-05 | MF 6800PF 250VAC | | |
| C51 | | | C90-3291-05 | ELECTRO 100UF 25WV | | |
| C52 | | | CE04KW1E101M | ELECTRO 100UF 25WV | | |
| C53 | | | CE04KW1H101M | ELECTRO 100UF 50WV | | |
| C54 | | | C90-3292-05 | ELECTRO 220UF 25WV | | |
| C55 | | | CE04KW1E470M | ELECTRO 47UF 25WV | | |
| C56 | | | CE04KW1E222M | ELECTRO 2200UF 25WV | | |
| C57 ,58 | | | CE04KW1A222M | ELECTRO 2200UF 10WV | | |
| C59 | | | CE04KW1H0R1M | ELECTRO 0.1UF 50WV | | |
| C60 | | | CE04KW1H101M | ELECTRO 100UF 50WV | | |
| C61 | | | CE04KW1E221M | ELECTRO 220UF 25WV | | |
| C62 | | | CQ93FMG1H224J | MYLAR 0.22UF J | | |
| C71 | | | CE04KW1E470M | ELECTRO 47UF 25WV | | |
| C72 | | | CF92FV1H334J | MF-C 0.33UF J | | |
| C74 | | | CE04KW1A102M | ELECTRO 1000UF 10WV | | |
| C78 | | | CE04KW1A221M | ELECTRO 220UF 10WV | | |
| C87 | | | CF92FV1H334J | MF-C 0.33UF J | | |
| C89 | | | CF92FV1H334J | MF-C 0.33UF J | | |
| C90 | | | CQ93FMG1H104J | MYLAR 0.10UF J | | |
| C91 | | | CK45FB1H102K | CERAMIC 1000PF K | | |
| C101 | | | CE04KW1E470M | ELECTRO 47UF 25WV | | |
| Δ CN1 | | | E40-4245-05 | PIN ASSY | | |
| Δ CN2 | | | E40-4101-05 | PIN ASSY | | |
| Δ CN6 | | | E40-3252-05 | PIN ASSY | | |
| Δ CN7 | | | E40-3257-05 | PIN ASSY | | |
| Δ CN101 | | | E40-3248-05 | PIN ASSY | | |
| Δ F1 | | * | F50-0194-05 | FUSE(5X20) | | |
| Δ CN8 ,9 | | * | J13-0075-05 | FUSE CLIP | | |
| Δ L1 | | * | L79-1285-05 | LINE FILTER | | |
| Δ L2 | | * | L92-0532-05 | FERRITE CORE | | |
| Δ L55 | | * | L33-1632-05 | CHOKE COIL | | |
| Δ T1 | | * | L07-2996-05 | POWER TRANSFORMER | | |
| Δ R1 | | * | R92-4562-05 | RD 470 J 1/2W | | |
| Δ R3 | | * | RS14KB3D470J | FL-PROOF RS 47 J 2W | | |
| Δ R4 | | * | RS14KB3D473J | FL-PROOF RS 47K J 2W | | |
| Δ R5 | | * | RS14KB3DR33J | FL-PROOF RS 0.33 J 2W | | |
| Δ R61 | | * | RN14BK2C9311F | RN 9.31K F 1/6W | | |
| Δ R62 | | | RN14BK2C5621F | RN 5.62K F 1/6W | | |
| Δ R90 | | | RD14NB2E2R2J | RD 2.2 J 1/4W | | |
| Δ PH1 | | | T95-0152-05 | OPTO ISOLATOR | | |
| Δ D1 -4 | | * | AM01A | DIODE | | |
| Δ D5 | | * | SARS01 | DIODE | | |
| Δ D6 | | * | AK03 | DIODE | | |
| Δ D7 -9 | | * | AG01Z | DIODE | | |
| Δ D10 | | * | SARS01 | DIODE | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

4

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|---------------------------------------|----------|-----------|---------------|--------------------|--------------|----------|
| Δ D11 | | * | ENC471D-07A | VARISTOR | | |
| Δ D50 ,51 | | * | EK06 | DIODE | | |
| Δ D52 | | * | EK19 | DIODE | | |
| Δ D53 ,54 | | * | RK36-LFA4 | DIODE | | |
| Δ D55 | | * | RJ43LF-M1 | DIODE | | |
| Δ D56 | | * | EK14 | DIODE | | |
| Δ D57 | | * | AG01Z | DIODE | | |
| Δ D58 | | * | EK14 | DIODE | | |
| Δ D59 | | | HSS104A | DIODE | | |
| Δ D59 | | | 1SS133 | DIODE | | |
| D60 | | | MTZJ3.9(B) | ZENER DIODE | | |
| D60 | | | RD3.9ES(B) | ZENER DIODE | | |
| D61 | | | S5688B(TPB5) | DIODE | | |
| D101 | | | MTZJ7.5(B) | ZENER DIODE | | |
| Δ IC1 | | * | STR-F6674 | HYBRID IC | | |
| Δ IC2 | | * | SE005N | ANALOGUE IC | | |
| Δ IC3 | | * | PQ12RF2 | ANALOGUE IC | | |
| Δ IC5 | | * | PQ30RV31 | ANALOGUE IC | | |
| Δ IC6 | | | PST993D-T | ANALOGUE IC | | |
| Δ IC7 | | | TA7805S | ANALOGUE IC | | |
| Δ IC10 | | | ICP-N20 | ANALOGUE IC | | |
| Δ Q2 | | | 2SC3940A(R,S) | TRANSISTOR | | |
| Δ Q3 | | | DTA113ZSA | DIGITAL TRANSISTOR | | |
| Δ Q3 | | | UN4119 | DIGITAL TRANSISTOR | | |
| Δ Q5 | | | 2SA1534A(R,S) | TRANSISTOR | | |
| Q6 | | | DTC143TSA | DIGITAL TRANSISTOR | | |
| Q6 | | | UN4216 | DIGITAL TRANSISTOR | | |
| Δ Q11 | | | 2SB1375 | TRANSISTOR | | |
| Q12 | | | DTC143TSA | DIGITAL TRANSISTOR | | |
| Q12 | | | UN4216 | DIGITAL TRANSISTOR | | |
| Q13 | | | DTA113ZSA | DIGITAL TRANSISTOR | | |
| Q13 | | | UN4119 | DIGITAL TRANSISTOR | | |
| Q14 | | | DTC143TSA | DIGITAL TRANSISTOR | | |
| Q14 | | | UN4216 | DIGITAL TRANSISTOR | | |
| Δ Q18 | | | 2SA1286-T11 | TRANSISTOR | | |
| Q19 ,20 | | | DTC143TSA | DIGITAL TRANSISTOR | | |
| Q19 ,20 | | | UN4216 | DIGITAL TRANSISTOR | | |
| Q101,102 | | | 2SA933AS(Q,R) | TRANSISTOR | | |
| Δ TH1 | | * | 05D-11 | THERMISTOR | | |
| SUB-CIRCUIT UNIT (X13-787X-XX) | | | | | | |
| C5 -8 | | | CQ93FMG1H472J | MYLAR 4700PF | J | |
| C9 -11 | | | CC73GCH1H100D | CHIP C 10PF | D | K1 |
| C12 -15 | | | CC73GCH1H470J | CHIP C 47PF | J | |
| C16 | | | CC73GSL1H102J | CHIP C 1000PF | J | |
| C16 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C17 ,18 | | | CC73GCH1H470J | CHIP C 47PF | J | |
| C19 | | | CC73GSL1H102J | CHIP C 1000PF | J | |
| C19 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C20 | | | CK73FF1C105Z | CHIP C 1.0UF | Z | |
| C22 ,23 | | | CC73GSL1H102J | CHIP C 1000PF | J | |
| C22 ,23 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C24 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C25 -28 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C35 -38 | | | CC73GCH1H221J | CHIP C 220PF | J | E |
| C39 ,40 | | | CE04RW1H010M | ELECTRO 1.0UF 50WV | J | E |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

DV-5050M/5900M/DVF-16050/16050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|--|----------|-----------|---|---|----------------|----------|
| C43 -45 C46 -47 C48 -51 C52 -53 | | | CE04RW1E470M CK73FB1C104K CC73GCH1H221J CE04KW1H220M | ELECTRO 47UF 25WV CHIP C 0.10UF K CHIP C 220PF J ELECTRO 22UF 50WV | E E E | |
| CN1 ,2 CN3 | | | E40-9836-05 E40-3263-05 | SOCKET FOR PIN ASSY PIN ASSY | | |
| J1 | | * | E63-1213-05 | PIN JACK | KYEM | |
| J1 | | * | E63-1221-05 | PIN JACK | K1 | |
| J2 | | * | E63-1217-05 | PIN JACK | K1 | |
| J3 | | | E63-1156-05 | PIN JACK | K1 | |
| J3 | | | E63-1159-05 | PIN JACK | KYEM | |
| J4 | | | E63-1157-05 | PIN JACK | KYEM | |
| J4 | | | E63-1158-05 | PIN JACK | K1 | |
| J5 | | | E56-0029-05 | CYLINDRICAL RECEPTACLE | KYEM | |
| J5 | | | E56-0030-05 | CYLINDRICAL RECEPTACLE | K1 | |
| J6 | | | E63-1156-05 | PIN JACK | K1 | |
| J6 | | | E63-1159-05 | PIN JACK | KYEM | |
| J7 | | * | E63-1212-05 | PIN JACK | KYEM | |
| J7 | | * | E63-1216-05 | PIN JACK | K1 | |
| J8 | | | E11-0906-05 | MINIATURE PHONE JACK(3.5MM 2P) | | |
| J9 | | | E11-0905-05 | MINIATURE PHONE JACK(3.5MM 1P) | | |
| J10 | | | E58-0033-05 | RECTANGULAR RECEPTACLE | | |
| J12 ,13 | | | E58-0027-05 | RECTANGULAR RECEPTACLE | E | |
| E1 | | | F10-0816-04 | SHIELDING PLATE | | |
| L1 -3 | | | L92-0515-05 | FERRITE CORE | | |
| R1 ,2 R3 | | | RK73GB1J104J RK73GB1J151J | CHIP R 100K J 1/16W CHIP R 150 J 1/16W | | |
| R4 ,5 R6 -9 R10 | | | RK73GB1J181J RK73GB1J102J RK73GB1J151J | CHIP R 180 J 1/16W CHIP R 1.0K J 1/16W CHIP R 150 J 1/16W | | |
| R11 ,12 R13 | | | RK73GB1J181J RK73GB1J151J | CHIP R 180 J 1/16W CHIP R 150 J 1/16W | | |
| R14 ,15 R16 -19 R20 | | | RK73GB1J181J RK73GB1J102J RK73GB1J151J | CHIP R 180 J 1/16W CHIP R 1.0K J 1/16W CHIP R 150 J 1/16W | | |
| R21 ,22 R23 | | | RK73GB1J181J RK73GB1J151J | CHIP R 180 J 1/16W CHIP R 150 J 1/16W | K1 | |
| R24 ,25 R26 -29 R30 | | | RK73GB1J181J RK73GB1J102J RK73GB1J151J | CHIP R 180 J 1/16W CHIP R 1.0K J 1/16W CHIP R 150 J 1/16W | K1 K1 K1 | |
| R31 ,32 R33 | | | RK73GB1J181J RK73GB1J151J | CHIP R 180 J 1/16W CHIP R 150 J 1/16W | K1 K1 | |
| R34 ,35 R36 -39 R40 | | | RK73GB1J181J RK73GB1J102J RK73GB1J151J | CHIP R 180 J 1/16W CHIP R 1.0K J 1/16W CHIP R 150 J 1/16W | K1 K1 K1 | |
| R41 ,42 R43 -46 R47 | | | RK73GB1J181J RK73GB1J750J RK73GB1J101J | CHIP R 180 J 1/16W CHIP R 75 J 1/16W CHIP R 100 J 1/16W | K1 | |
| R48 ,49 R50 ,51 | | | RK73GB1J102J RK73GB1J104J | CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W | K1 | |
| R58 R59 R60 -62 | | | RK73GB1J103J RK73GB1J750J RK73GB1J101J | CHIP R 10K J 1/16W CHIP R 75 J 1/16W CHIP R 100 J 1/16W | E | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|--|----------|-----------|--|--|-----------------------|----------|
| R63 R64 R65 R66 -70 R73 -76 | | | RK73GB1J472J RK73GB1J104J RK73GB1J472J RK73GB1J101J RK73GB1J473J | CHIP R 4.7K J 1/16W CHIP R 100K J 1/16W CHIP R 4.7K J 1/16W CHIP R 100 J 1/16W CHIP R 47K J 1/16W | E | |
| R77 R78 R79 R80 R81 -83 | | | RK73GB1J561J RK73GB1J101J RK73GB1J561J RK73GB1J101J RK73GB1J750J | CHIP R 560 J 1/16W CHIP R 100 J 1/16W CHIP R 560 J 1/16W CHIP R 100 J 1/16W CHIP R 75 J 1/16W | E E E E E | |
| R84 R85 R86 R87 R88 -94 | | | RK73GB1J561J RK73GB1J101J RK73GB1J561J RK73GB1J101J RK73GB1J750J | CHIP R 560 J 1/16W CHIP R 100 J 1/16W CHIP R 560 J 1/16W CHIP R 100 J 1/16W CHIP R 75 J 1/16W | E E E E E | |
| R95 ,96 R97 -100 W13 W19 -21 W23 ,24 | | | RK73GB1J104J RK73GB1J104J R92-1963-05 R92-1963-05 R92-0679-05 | CHIP R 100K J 1/16W CHIP R 100K J 1/16W JUMPER WIRE (RESISTOR TYPE) JUMPER WIRE (RESISTOR TYPE) CHIP R 0 OHM | K1 | |
| S1 S2 | | | S31-2630-05 S31-1623-05 | SLIDE SWITCH SLIDE SWITCH | KYK1 | |
| Q1 -8 Q9 -16 | | | 2SC4213(B) 2SC4213(B) | TRANSISTOR TRANSISTOR | K1 | |
| A1 | | | W02-2732-05 | OSCILLATING MODULE | | |
| DISPLAY UNIT (X14-7350-1X) | | | | | | |
| D1 D2 -4 D5 -10 D11 D12 ,13 | | * | B30-2610-05 B30-2430-05 B30-2532-05 B30-2430-05 B30-2430-05 | LED(BLUE) LED(RED) LED(INFRARED) LED(RED) LED(RED) | K1 K1 | |
| D14 D16 | | | B30-2573-05 B30-2571-05 | LED(RED5,HI BRT) LED(BLUE) | | |
| C1 C2 -4 C2 -4 C5 C6 | | | CE04KW1H010M CC73GSL1H102J CK73GB1H102K CE04RW1E101M CC73GSL1H102J | ELECTRO 1.0UF 50WV CHIP C 1000PF J CHIP C 1000PF K ELECTRO 100UF 25WV CHIP C 1000PF J | | |
| C6 C7 C8 C18 C19 | | * | CK73GB1H102K CE04RW1E470M CK73GF1E104Z CK73GB1H103K CE04RW1E470M | CHIP C 1000PF K ELECTRO 47UF 25WV CHIP C 0.10UF Z CHIP C 0.010UF K ELECTRO 47UF 25WV | | |
| C20 -24 C25 -39 C40 C41 C42 | | | CC73GCH1H470J CC73GCH1H101J CC73GCH1H221J CE04RW1H330M CC73GSL1H102J | CHIP C 47PF J CHIP C 100PF J CHIP C 220PF J ELECTRO 33UF 50WV CHIP C 1000PF J | | |
| C42 C43 ,44 | | * | CK73GB1H102K CE04RW1E101M | CHIP C 1000PF K ELECTRO 100UF 25WV | | |
| CN1 CN2 | | | E40-4962-05 E40-8614-05 | FLAT CABLE CONNECTOR PIN ASSY | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

PARTS LIST

DV-5050M/5900M/DVF-16050/16050-G

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

7

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|---------|----------|-----------|----------------------------|------------------------|--------------|----------|
| E11 | | | J19-6213-03 J11-0808-05 | HOLDER WIRE CLAMPER | | |
| X1 | | * | L78-0740-05 | RESONATOR (3.64M) | | |
| X2 | | * | L78-0741-05 | RESONATOR (5.00M) | | |
| R1 | | | RK73GB1J202J | CHIP R 2.0K J 1/16W | | |
| R2 | | | RK73GB1J302J | CHIP R 3.0K J 1/16W | | |
| R3 | | | RK73GB1J202J | CHIP R 2.0K J 1/16W | | |
| R4 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R5 | | | RK73GB1J303J | CHIP R 30K J 1/16W | | |
| R6 | | | RK73GB1J302J | CHIP R 3.0K J 1/16W | | |
| R7 | | | RK73GB1J512J | CHIP R 5.1K J 1/16W | | |
| R8 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R9 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R13 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R14 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R16 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R17 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R19 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R20 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R22 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R23 ,24 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R25 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R26 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R27 | | | RK73GB1J200J | CHIP R 20 J 1/16W | | |
| R28 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R30 | | | RK73GB1J200J | CHIP R 20 J 1/16W | | |
| R33 | | | RD14NB2E2R7J | RD 2.7 J 1/4W | | |
| R34 | | | RK73GB1J512J | CHIP R 5.1K J 1/16W | | |
| R35 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R36 | | | RK73GB1J202J | CHIP R 2.0K J 1/16W | | |
| R37 | | | RK73GB1J302J | CHIP R 3.0K J 1/16W | | |
| R44 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R45 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R47 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R48 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R49 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R50 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R51 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R52 -55 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R56 ,57 | | | RK73GB1J104J | CHIP R 100K J 1/16W | | |
| R58 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R59 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R61 -64 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R67 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R68 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R69 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R70 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R74 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R75 | | | RK73GB1J202J | CHIP R 2.0K J 1/16W | | |
| R76 | | | RK73GB1J512J | CHIP R 5.1K J 1/16W | | |
| R77 | | | RK73GB1J302J | CHIP R 3.0K J 1/16W | | |
| R78 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R79 | | | RK73GB1J303J | CHIP R 30K J 1/16W | | |
| R80 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

8

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|----------------|-----------------------------|--------------|----------|
| R81 | | | RD14NB2E2R7J | RD 2.7 J 1/4W | | |
| R82 -95 | | | RK73GB1J200J | CHIP R 20 J 1/16W | | |
| R96 -128 | | | RK73GB1J104J | CHIP R 100K J 1/16W | | |
| R130 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R131,132 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R133 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R134 | | | RK73EB2B223J | CHIP R 22K J 1/8W | | |
| R135 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R136 | | | RK73EB2B223J | CHIP R 22K J 1/8W | | |
| R137 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R138 | | | RK73EB2B223J | CHIP R 22K J 1/8W | | |
| W1 | | | R92-0679-05 | CHIP R 0 OHM | | |
| W2 ,3 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W4 ,5 | | | R92-0679-05 | CHIP R 0 OHM | | |
| W8 | | | R92-0679-05 | CHIP R 0 OHM | | |
| W9 ,10 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W11 -16 | | | R92-0679-05 | CHIP R 0 OHM | | |
| W17 -19 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W20 | | | R92-0679-05 | CHIP R 0 OHM | | |
| W21 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W22 -25 | | | R92-0679-05 | CHIP R 0 OHM | | |
| W28 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W29 | | | R92-0679-05 | CHIP R 0 OHM | | |
| S1 -9 | | | S70-0031-05 | TACT SWITCH | | |
| S11 -17 | | | S70-0031-05 | TACT SWITCH | | |
| S19 | | | S68-0088-05 | PUSH SWITCH (POWER TYPE) | | |
| S20 -25 | | | S70-0031-05 | TACT SWITCH | | |
| S10 | | | T99-0653-05 | ROTARY ENCODER | | |
| D17 -20 | | | DA204U | DIODE | | |
| D21 | | | MA111 | DIODE | | |
| ED1 | | * | 16-BT-90GNK | FLUORESCENT INDICATOR TUBE | | |
| IC1 | | | UPD780232GC012 | MI-COM IC | | |
| IC2 | | | UPD17215GT-737 | MI-COM IC | | |
| Q1 | | | DTA143TSA | DIGITAL TRANSISTOR | | K1 |
| Q1 | | | UN4116 | DIGITAL TRANSISTOR | | K1 |
| Q2 -4 | | | 2SC1740S(Q,R) | TRANSISTOR | | |
| Q2 -4 | | | 2SC2785(F,E) | TRANSISTOR | | |
| Q5 ,6 | | | 2SC3940A(R,S) | TRANSISTOR | | |
| Q7 | | | DTA143TSA | DIGITAL TRANSISTOR | | K1 |
| Q7 | | | UN4116 | DIGITAL TRANSISTOR | | K1 |
| Q8 | | | DTA143TSA | DIGITAL TRANSISTOR | | |
| Q8 | | | UN4116 | DIGITAL TRANSISTOR | | |
| Q9 | | | 2SC1740S(Q,R) | TRANSISTOR | | |
| Q9 | | | 2SC2785(F,E) | TRANSISTOR | | |
| Q10 | | | DTA143TSA | DIGITAL TRANSISTOR | | |
| Q10 | | | UN4116 | DIGITAL TRANSISTOR | | |
| Q11 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q12 | | | 2SC1740S(Q,R) | TRANSISTOR | | |
| Q12 | | | 2SC2785(F,E) | TRANSISTOR | | |
| Q13 -16 | | | 2SC4081(R,S) | TRANSISTOR | | |
| A1 | | | W02-2769-05 | ELECTRIC CIRCUIT MODULE | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

DV-5050M/5900M/DVF-J6050/J6050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

9

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|--|----------|-----------|--|---|--------------|----------|
| ELECTRIC UNIT (X25-6430-00) | | | | | | |
| D2 D3 -5 | | * | B30-2545-05 B30-2616-05 | LED(MARU3 RED) LED(MARU3 AMBER) | | |
| C1 | | | CK45FF1H103Z | CERAMIC 0.010UF Z | | |
| CN1 | | | E40-3249-05 | PIN ASSY | | |
| CN2 | | | E40-3262-05 | PIN ASSY | | |
| CN3 | | | E40-3256-05 | PIN ASSY | | |
| CN4 | | | E40-3264-05 | PIN ASSY | | |
| CN5 | | | E40-3260-05 | PIN ASSY | | |
| CN6 | | | E40-3263-05 | PIN ASSY | | |
| CN7 | | | E40-3260-05 | PIN ASSY | | |
| - | | | J19-6140-04 | HOLDER | | |
| S1 -7 S8 ,9 | | * | S64-0048-05 S64-0053-05 | LEVER SWITCH LEVER SWITCH | | |
| PH1 -3 | | | T95-0140-05 | OPTO ISOLATOR | | |
| D1 IC1 PH4 | | | SIR-34ST3F(KL) NJM2903D RPT-38PT3F | INFRARED LED ANALOGUE IC PHOTO TRANSISTOR | | |
| ELECTRIC UNIT (X25-6440-10) DV-5900M only | | | | | | |
| C1 | | | CC73GCH1H050C | CHIP C 5.0PF C | | |
| C2 | | | CE04KW1A470M | ELECTRO 47UF 10WV | | |
| C3 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C5 ,6 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C7 | | | C90-3623-05 | BACKUP 0.33F 5.5V | | |
| C12 ,13 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C14 | | | CC73GCH1H050C | CHIP C 5.0PF C | | |
| C15 | | | CE04KW1A470M | ELECTRO 47UF 10WV | | |
| C16 -18 | | | CC73GCH1H470J | CHIP C 47PF J | | |
| C25 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C29 ,30 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C33 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C100 | | | CC73GCH1H050C | CHIP C 5.0PF C | | |
| C101 | | | CE04KW1A470M | ELECTRO 47UF 10WV | | |
| C102-105 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C107 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C108-111 | | | CK73GB1C104K | CHIP C 0.10UF K | | |
| C113 | | | CK73GB1C104K | CHIP C 0.10UF K | | |
| C114 | | | CE04KW1A221M | ELECTRO 220UF 10WV | | |
| C115-118 | | | CE04KW1H010M | ELECTRO 1.0UF 50WV | | |
| C119 | | | CK73GF1A105Z | CHIP C 1.0UF Z | | |
| C121 | | | CC73GCH1H101J | CHIP C 100PF J | | |
| C122-124 | | | CC73GCH1H470J | CHIP C 47PF J | | |
| C201,202 | | | CE04KW1E101M | ELECTRO 100UF 25WV | | |
| C203,204 | | | CE04KW1H100M | ELECTRO 10UF 50WV | | |
| C205,206 | | | CE04KW1E101M | ELECTRO 100UF 25WV | | |
| C207 | | | CC73GCH1H050C | CHIP C 5.0PF C | | |
| C208 | | | CC73GCH1H060D | CHIP C 6.0PF D | | |
| C209 | | | CK73FB1C474K | CHIP C 0.47UF K | | |
| C210 | | | CK73GB1H103K | CHIP C 0.010UF K | | |
| C211 | | | CC73GCH1H040C | CHIP C 4.0PF C | | |

L: Scandinavia K: USA P: Canada R: Mexico C: China I: Malaysia
Y: PX(Far East,Hawaii) T: England E: Europe G: Germany V: China(Shanghai)
Y: AAFES(Europe) X: Australia Q: Russia H: Korea M: Other Areas Δ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

10

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|--------------------|--------------|----------|
| C212 | | | CK73GB1C104K | CHIP C 0.10UF K | | |
| C213 | | | CK73FB1C474K | CHIP C 0.47UF K | | |
| C214 | | | CC73GCH1H070D | CHIP C 7.0PF D | | |
| C216,217 | | | CE04KW1V330M | ELECTRO 33UF 35WV | | |
| C218 | | | CE04KW1H470M | ELECTRO 47UF 50WV | | |
| C219 | | | CE04KW1H100M | ELECTRO 10UF 50WV | | |
| C220 | | | CE04KW1A221M | ELECTRO 220UF 10WV | | |
| C221 | | | CE04KW1A101M | ELECTRO 100UF 10WV | | |
| C222 | | | CE04KW1H477M | ELECTRO 4.7UF 50WV | | |
| C224 | | | CE04KW1H470M | ELECTRO 47UF 50WV | | |
| C226 | | | CK73GB1C104K | CHIP C 0.10UF K | | |
| C228 | | | CK73GB1C104K | CHIP C 0.10UF K | | |
| C229,230 | | | CQ93FMG1H122J | MYLAR 1200PF J | | |
| C231,232 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C233 | | | CC73GCH1H080D | CHIP C 8.0PF D | | |
| C234 | | | CC73GCH1H100D | CHIP C 10PF D | | |
| C235,236 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C237,238 | | | CQ93FMG1H332J | MYLAR 3300PF J | | |
| C239,240 | | | CQ93FMG1H562J | MYLAR 5600PF J | | |
| C241,242 | | | CQ93FMG1H391K | MYLAR 390PF K | | |
| C243 | | | CC73GCH1H120J | CHIP C 12PF J | | |
| C244 | | | CC73GCH1H100D | CHIP C 10PF D | | |
| C245,246 | | | CE04KW1H100M | ELECTRO 10UF 50WV | | |
| C247,248 | | | CE04KW1V330M | ELECTRO 33UF 35WV | | |
| C249,250 | | | CQ93FMG1H122J | MYLAR 1200PF J | | |
| C251,252 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C253 | | | CC73GCH1H080D | CHIP C 8.0PF D | | |
| C254 | | | CC73GCH1H100D | CHIP C 10PF D | | |
| C255,256 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C257,258 | | | CE04KW1V330M | ELECTRO 33UF 35WV | | |
| C259,260 | | | CQ93FMG1H122J | MYLAR 1200PF J | | |
| C261,262 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C263 | | | CC73GCH1H120J | CHIP C 12PF J | | |
| C264 | | | CC73GCH1H100D | CHIP C 10PF D | | |
| C265,266 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C267,268 | | | CC73GCH1H101J | CHIP C 100PF J | | |
| C269 | | | CC73GCH1H820J | CHIP C 82PF J | | |
| C270 | | | CC73GCH1H121J | CHIP C 120PF J | | |
| C271 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C272 | | | CC73GCH1H820J | CHIP C 82PF J | | |
| C273 | | | CC73GCH1H101J | CHIP C 100PF J | | |
| C274 | | | CC73GCH1H121J | CHIP C 120PF J | | |
| C275 | | | CC73GCH1H151J | CHIP C 150PF J | | |
| C276 | | | CC73GCH1H820J | CHIP C 82PF J | | |
| C277 | | | CC73GCH1H101J | CHIP C 100PF J | | |
| C278 | | | CC73GCH1H121J | CHIP C 120PF J | | |
| C279 | | | CC73GCH1H820J | CHIP C 82PF J | | |
| C280,281 | | | CC73GCH1H101J | CHIP C 100PF J | | |
| C282 | | | CC73GCH1H121J | CHIP C 120PF J | | |
| C283-287 | | | CC73GCH1H101J | CHIP C 100PF J | | |
| C289 | | | CK73GB1H102K | CHIP C 1000PF K | | |
| C290-293 | | | CE04KW1V330M | ELECTRO 33UF 35WV | | |
| C294,295 | | | CQ93FMG1H471J | MYLAR 470PF J | | |
| C296,297 | | | CC73GCH1H680J | CHIP C 68PF J | | |
| C298 | | | CC73GCH1H080D | CHIP C 8.0PF D | | |

L: Scandinavia K: USA P: Canada R: Mexico C: China I: Malaysia
Y: PX(Far East,Hawaii) T: England E: Europe G: Germany V: China(Shanghai)
Y: AAFES(Europe) X: Australia Q: Russia H: Korea M: Other Areas Δ indicates safety critical components.

PARTS LIST

DV-5050M/5900M/DVF-16050/16050-G

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

11

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|----------------|--------------|----------|
| C299 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C300,301 | | | CC73GCH1H680J | CHIP C 68PF | J | |
| C302,303 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C304-307 | | | CE04KW1V330M | ELECTRO 33UF | 35WV | |
| C308 | | | CC73GCH1H080D | CHIP C 8.0PF | D | |
| C309,310 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C311 | | | CC73GCH1H080D | CHIP C 8.0PF | D | |
| C312 | | | CC73GCH1H121J | CHIP C 120PF | J | |
| C313 | | | CC73GCH1H820J | CHIP C 82PF | J | |
| C314 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C315 | | | CC73GCH1H151J | CHIP C 150PF | J | |
| C316 | | | CC73GCH1H121J | CHIP C 120PF | J | |
| C317 | | | CC73GCH1H820J | CHIP C 82PF | J | |
| C318 | | | CC73GCH1H151J | CHIP C 150PF | J | |
| C319 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C320-322 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C323 | | | CC73GCH1H050C | CHIP C 5.0PF | C | |
| C324,325 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C326 | | | CC73GCH1H050C | CHIP C 5.0PF | C | |
| C327 | | | CE04KW1H220M | ELECTRO 22UF | 50WV | |
| C328,329 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C331,332 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C333,334 | | | CQ93FMG1H472J | MYLAR 4700PF | J | |
| C335,336 | | | CQ93FMG1H222J | MYLAR 2200PF | J | |
| C337,338 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C340 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C342,343 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C347,348 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C354 | | | CC73GCH1H470J | CHIP C 47PF | J | |
| C355 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C356 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C357 | | | CK73GB1H103K | CHIP C 0.010UF | K | |
| C358 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C359 | | | CC73GCH1H151J | CHIP C 150PF | J | |
| C360 | | | CC73GCH1H820J | CHIP C 82PF | J | |
| C361 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C362 | | | CC73GCH1H121J | CHIP C 120PF | J | |
| C366 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C371 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| C372 | | | CK73FB1C474K | CHIP C 0.47UF | K | |
| C373 | | | CE04KW1E101M | ELECTRO 100UF | 25WV | |
| C374 | | | CK73GF1A105Z | CHIP C 1.0UF | Z | |
| C375 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C401 | | | CK73FB1A105K | CHIP C 1.0UF | K | |
| C403-406 | | | CK73FB1A105K | CHIP C 1.0UF | K | |
| C407 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C409 | | | CE04KW1E470M | ELECTRO 47UF | 25WV | |
| C410 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C411 | | | CK73GB1H103K | CHIP C 0.010UF | K | |
| C412 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C413 | | | CK73GB1H103K | CHIP C 0.010UF | K | |
| C415 | | | CE04KW1A101M | ELECTRO 100UF | 10WV | |
| C501 | | | CK73FB1C334K | CHIP C 0.33UF | K | |
| C502 | | | CE04KW1A101M | ELECTRO 100UF | 10WV | |
| C504 | | | CK73FB1C334K | CHIP C 0.33UF | K | |

L: Scandinavia K: USA P: Canada R: Mexico C: China I: Malaysia
 Y: PX(Far East,Hawaii) T: England E: Europe G: Germany V: China(Shanghai)
 Y: AAFES(Europe) X: Australia Q: Russia H: Korea M: Other Areas Δ indicates safety critical components.

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

12

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|---------------|-------------------------------|--------------|----------|
| C505 | | | CE04KW1A101M | ELECTRO 100UF | 10WV | |
| C507,508 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C510-512 | | | CK73GF1A105Z | CHIP C 1.0UF | Z | |
| C551 | | | CC73GCH1H270J | CHIP C 27PF | J | |
| C552 | | | CC73GCH1H560J | CHIP C 56PF | J | |
| C553 | | | CC73GCH1H270J | CHIP C 27PF | J | |
| C555,556 | | | CE04KW1H100M | ELECTRO 10UF | 50WV | |
| C557 | | | CC73GCH1H270J | CHIP C 27PF | J | |
| C558 | | | CC73GCH1H560J | CHIP C 56PF | J | |
| C559 | | | CC73GCH1H270J | CHIP C 27PF | J | |
| C561,562 | | | CE04KW1H100M | ELECTRO 10UF | 50WV | |
| C563 | | | CC73GCH1H270J | CHIP C 27PF | J | |
| C564 | | | CC73GCH1H560J | CHIP C 56PF | J | |
| C565 | | | CC73GCH1H270J | CHIP C 27PF | J | |
| C567,568 | | | CE04KW1H100M | ELECTRO 10UF | 50WV | |
| C569,570 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C571-573 | | | CE04KW1H100M | ELECTRO 10UF | 50WV | |
| C601 | | | CQ93FMG1H683J | MYLAR 0.068UF | J | |
| C602 | | | CE04KW1H010M | ELECTRO 1.0UF | 50WV | |
| C603 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C604 | | | CC73GCH1H121J | CHIP C 120PF | J | |
| C605 | | | CK73FB1C474K | CHIP C 0.47UF | K | |
| C606 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C607 | | | CE04KW1A101M | ELECTRO 100UF | 10WV | |
| C608,609 | | | CK73GB1H102K | CHIP C 1000PF | K | |
| - | | * | E40-8981-05 | SOCKET FOR PIN ASSY | | |
| CN1 | | | E40-4962-05 | FLAT CABLE CONNECTOR | | |
| CN2 | | | E40-3270-05 | PIN ASSY | | |
| CN3 | | | E40-3266-05 | PIN ASSY | | |
| CN4 | | | E40-3263-05 | PIN ASSY | | |
| CN5,6 | | * | E40-8891-05 | PIN ASSY | | |
| CN9 | | | E40-3260-05 | PIN ASSY | | |
| CN301,302 | | * | E40-8899-05 | FLAT CABLE CONNECTOR | | |
| CN303 | | | E40-9853-05 | PIN ASSY | | |
| CN304 | | | E40-3259-05 | PIN ASSY | | |
| CN305 | | | E40-9853-05 | PIN ASSY | | |
| E201,202 | | | J11-0808-05 | WIRE CLAMPER | | |
| CF201 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF501 | | | L72-0780-05 | CERAMIC FILTER | | |
| L4 | | | L92-0515-05 | FERRITE CORE | | |
| L7,8 | | | L92-0515-05 | FERRITE CORE | | |
| L100 | | | L40-1015-34 | SMALL FIXED INDUCTOR(100UH) | | |
| L201 | | | L40-1001-58 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L551-556 | | | L40-5691-58 | SMALL FIXED INDUCTOR(5.6UH,K) | | |
| X1 | | | L78-0615-05 | RESONATOR (12.5MHZ) | | |
| X2 | | | L78-0575-05 | RESONATOR (12.852MHZ) | | |
| X301 | | * | L77-2360-05 | CRYSTAL RESONATOR(36.864M) | | |
| X302 | | * | L77-2359-05 | CRYSTAL RESONATOR(33.8688M) | | |
| R1 -11 | | | RK73GB1J101J | CHIP R 100 | J 1/16W | |
| R12,13 | | | RK73GB1J105J | CHIP R 1.0M | J 1/16W | |
| R14 | | | RK73GB1J101J | CHIP R 100 | J 1/16W | |
| R15,16 | | | RK73GB1J473J | CHIP R 47K | J 1/16W | |
| R17 | | | RK73GB1J271J | CHIP R 270 | J 1/16W | |

L: Scandinavia K: USA P: Canada R: Mexico C: China I: Malaysia
 Y: PX(Far East,Hawaii) T: England E: Europe G: Germany V: China(Shanghai)
 Y: AAFES(Europe) X: Australia Q: Russia H: Korea M: Other Areas Δ indicates safety critical components.

DV-5050M/5900M/DVF-16050/16050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

13

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|-------------|--------------|----------|
| R18 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R19 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R21 ,22 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R23 ,24 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R25 -27 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R28 -32 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R33 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R34 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R38 -40 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R42 -50 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R51 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R52 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R53 ,54 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R55 ,56 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R60 ,61 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R62 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R64 ,65 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R67 | | | RK73GB1J220J | CHIP R | 22 | J 1/16W |
| R68 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R69 | | | RK73GB1J220J | CHIP R | 22 | J 1/16W |
| R71 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R72 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R73 | | | RK73GB1J220J | CHIP R | 22 | J 1/16W |
| R76 ,77 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R79 ,80 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R81 -85 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R86 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R87 -93 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R94 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R97 | | | RK73GB1J100J | CHIP R | 10 | J 1/16W |
| R98 ,99 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R100 | | | RK73GB1J272J | CHIP R | 2.7K | J 1/16W |
| R101 | | | RK73GB1J153J | CHIP R | 15K | J 1/16W |
| R102 | | | RK73GB1J822J | CHIP R | 8.2K | J 1/16W |
| R103 | | | RK73GB1J133J | CHIP R | 13K | J 1/16W |
| R104 | | | RK73GB1J822J | CHIP R | 8.2K | J 1/16W |
| R105 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R106 | | | RK73GB1J822J | CHIP R | 8.2K | J 1/16W |
| R107 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R108-115 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R117-122 | | | RK73GB1J100J | CHIP R | 10 | J 1/16W |
| R124-130 | | | RK73GB1J100J | CHIP R | 10 | J 1/16W |
| R133-140 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R142-145 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R147-153 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R154 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |
| R155 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R156 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |
| R157-162 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R165 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R167 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R169-171 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R172 | | | RK73GB1J223J | CHIP R | 22K | J 1/16W |
| R173 | | | RK73GB1J222J | CHIP R | 2.2K | J 1/16W |
| R174 | | | RK73GB1J223J | CHIP R | 22K | J 1/16W |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

14

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|-------------|--------------|----------|
| R175 | | | RK73GB1J222J | CHIP R | 2.2K | J 1/16W |
| R177,178 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R180 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R181 | | | RK73GB1J222J | CHIP R | 2.2K | J 1/16W |
| R182 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R183,184 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R185-192 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R194 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R195 | | | RK73GB1J222J | CHIP R | 2.2K | J 1/16W |
| R196 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R197,198 | | | RK73GB1J222J | CHIP R | 2.2K | J 1/16W |
| R199 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R201,202 | | | RK73GB1J821J | CHIP R | 820 | J 1/16W |
| R203,204 | | | RK73GB1J822J | CHIP R | 8.2K | J 1/16W |
| R205,206 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R207,208 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R209,210 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R211,212 | | | RK73GB1J272J | CHIP R | 2.7K | J 1/16W |
| R213,214 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R215-222 | | | RK73GB1J242J | CHIP R | 2.4K | J 1/16W |
| R223,224 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R225,226 | | | RK73GB1J4R7J | CHIP R | 4.7 | J 1/16W |
| R227,228 | | | RK73GB1J471J | CHIP R | 470 | J 1/16W |
| R229-232 | | | RK73GB1J152J | CHIP R | 1.5K | J 1/16W |
| R233,234 | | | RK73GB1J222J | CHIP R | 2.2K | J 1/16W |
| R235,236 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |
| R237,238 | | | RK73GB1J152J | CHIP R | 1.5K | J 1/16W |
| R239 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R240,241 | | | RK73GB1J104J | CHIP R | 100K | J 1/16W |
| R242-245 | | | RK73GB1J242J | CHIP R | 2.4K | J 1/16W |
| R246,247 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R248-251 | | | RK73GB1J242J | CHIP R | 2.4K | J 1/16W |
| R252,253 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R254 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R255 | | | RK73GB1J2R2J | CHIP R | 2.2 | J 1/16W |
| R256-259 | | | RK73GB1J242J | CHIP R | 2.4K | J 1/16W |
| R260,261 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R262-265 | | | RK73GB1J242J | CHIP R | 2.4K | J 1/16W |
| R266,267 | | | RK73GB1J4R7J | CHIP R | 4.7 | J 1/16W |
| R268-271 | | | RK73GB1J242J | CHIP R | 2.4K | J 1/16W |
| R272,273 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R274-277 | | | RK73GB1J242J | CHIP R | 2.4K | J 1/16W |
| R278,279 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R280,281 | | | RK73GB1J4R7J | CHIP R | 4.7 | J 1/16W |
| R282-285 | | | RK73GB1J470J | CHIP R | 47 | J 1/16W |
| R286,287 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R288 | | | RK73GB1J220J | CHIP R | 22 | J 1/16W |
| R289 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R290,291 | | | RK73GB1J224J | CHIP R | 220K | J 1/16W |
| R292 | | | RK73GB1J181J | CHIP R | 180 | J 1/16W |
| R293 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R295-303 | | | RK73GB1J912J | CHIP R | 9.1K | J 1/16W |
| R304,305 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |
| R306 | | | RK73GB1J181J | CHIP R | 180 | J 1/16W |
| R307,308 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

PARTS LIST

DV-5050M/5900M/DVF-J6050/J6050-G

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

15

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|---------------------|--------------|----------|
| R309 | | | RK73GB1J271J | CHIP R 270 J 1/16W | | |
| R310,311 | | | RK73GB1J223J | CHIP R 22K J 1/16W | | |
| R312 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R313 | | | RK73GB1J104J | CHIP R 100K J 1/16W | | |
| R314 | | | RK73GB1J331J | CHIP R 330 J 1/16W | | |
| R315 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R317 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R318 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | | |
| R319 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R321,322 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R323-326 | | | RK73GB1J511J | CHIP R 510 J 1/16W | | |
| R327,328 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R329,330 | | | RK73GB1J224J | CHIP R 220K J 1/16W | | |
| R331,332 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R341 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R342-344 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R345,346 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R347 | | | RK73GB1J121J | CHIP R 120 J 1/16W | | |
| R348-355 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R356 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R357 | | | RK73GB1J121J | CHIP R 120 J 1/16W | | |
| R358 | | | RK73GB1J1R0J | CHIP R 1.0 J 1/16W | | |
| R362-364 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R365 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R366 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R367 | | | RK73GB1J154J | CHIP R 150K J 1/16W | | |
| R368 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | | |
| R369 | | | RK73GB1J181J | CHIP R 180 J 1/16W | | |
| R370 | | | RK73GB1J220J | CHIP R 22 J 1/16W | | |
| R371,372 | | | RK73GB1J750J | CHIP R 75 J 1/16W | | |
| R373-375 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R377 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R378 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R379 | | | RK73GB1J221J | CHIP R 220 J 1/16W | | |
| R380,381 | | | RK73GB1J4R7J | CHIP R 4.7 J 1/16W | | |
| R382 | | | RK73GB1J751J | CHIP R 750 J 1/16W | | |
| R383-386 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R387 | | | RK73GB1J104J | CHIP R 100K J 1/16W | | |
| R388,389 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R390 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R391 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R397 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R398 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R401 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | | |
| R402 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R403 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R404 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | | |
| R405 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R406 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R407 | | | RK73GB1J184J | CHIP R 180K J 1/16W | | |
| R408,409 | | | RK73GB1J304J | CHIP R 300K J 1/16W | | |
| R410,411 | | | RK73GB1J185J | CHIP R 1.8M J 1/16W | | |
| R412 | | | RK73GB1J225J | CHIP R 2.2M J 1/16W | | |
| R413 | | | RK73GB1J184J | CHIP R 180K J 1/16W | | |
| R414 | | | RK73GB1J304J | CHIP R 300K J 1/16W | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

16

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|---------------------|--------------|----------|
| R415 | | | RK73GB1J225J | CHIP R 2.2M J 1/16W | | |
| R416 | | | RK73GB1J185J | CHIP R 1.8M J 1/16W | | |
| R501,502 | | | RK73GB1J4R7J | CHIP R 4.7 J 1/16W | | |
| R503 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R513,514 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R515 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | | |
| R517 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | | |
| R518-524 | | | RK73GB1J750J | CHIP R 75 J 1/16W | | |
| R528 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R529 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R530 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | | |
| R532,533 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | | |
| R534 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R540 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | | |
| R551 | | | RK73GB1J331J | CHIP R 330 J 1/16W | | |
| R552,553 | | | RK73GB1J681J | CHIP R 680 J 1/16W | | |
| R554 | | | RK73GB1J151J | CHIP R 150 J 1/16W | | |
| R555 | | | RK73GB1J471J | CHIP R 470 J 1/16W | | |
| R556 | | | RK73GB1J181J | CHIP R 180 J 1/16W | | |
| R557 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R558 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R559 | | | RK73GB1J182J | CHIP R 1.8K J 1/16W | | |
| R560,561 | | | RK73GB1J681J | CHIP R 680 J 1/16W | | |
| R562 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R563 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R564 | | | RK73GB1J331J | CHIP R 330 J 1/16W | | |
| R565,566 | | | RK73GB1J681J | CHIP R 680 J 1/16W | | |
| R567 | | | RK73GB1J151J | CHIP R 150 J 1/16W | | |
| R568 | | | RK73GB1J471J | CHIP R 470 J 1/16W | | |
| R569 | | | RK73GB1J181J | CHIP R 180 J 1/16W | | |
| R570 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R571 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R572 | | | RK73GB1J182J | CHIP R 1.8K J 1/16W | | |
| R573,574 | | | RK73GB1J681J | CHIP R 680 J 1/16W | | |
| R575 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R576 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R577 | | | RK73GB1J331J | CHIP R 330 J 1/16W | | |
| R578,579 | | | RK73GB1J681J | CHIP R 680 J 1/16W | | |
| R580 | | | RK73GB1J151J | CHIP R 150 J 1/16W | | |
| R581 | | | RK73GB1J471J | CHIP R 470 J 1/16W | | |
| R582 | | | RK73GB1J181J | CHIP R 180 J 1/16W | | |
| R583 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R584 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R585 | | | RK73GB1J182J | CHIP R 1.8K J 1/16W | | |
| R586,587 | | | RK73GB1J681J | CHIP R 680 J 1/16W | | |
| R588 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R589 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R593 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R594 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R595 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R596 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R597 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R598 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | |
| R601-605 | | | RK73GB1J183J | CHIP R 18K J 1/16W | | |
| R606 | | | RK73GB1J622J | CHIP R 6.2K J 1/16W | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

DV-5050M/5900M/DVF-J6050/J6050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

17

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|---------------|-----------------------------|--------------|----------|
| R607 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R608 | | | RK73GB1J153J | CHIP R 15K J 1/16W | | |
| R609 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R610 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R611,612 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R613,614 | | | RK73GB1J4R7J | CHIP R 4.7 J 1/16W | | |
| R615,616 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R617 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R618,619 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | | |
| R620-622 | | | RK73GB1J912J | CHIP R 9.1K J 1/16W | | |
| R623 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R624-627 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R628 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R629,630 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R631 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| W201 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W204 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W500 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W590-592 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| D3 | | | DA204U | DIODE | | |
| D5 ,6 | | | DA204U | DIODE | | |
| D9 -11 | | | DA204U | DIODE | | |
| D17 | | | DA204U | DIODE | | |
| D18 ,19 | | | RB411D | DIODE | | |
| D201,202 | | | UDZ8.2B | ZENER DIODE | | |
| D203,204 | | | KV1832E | VARIABLE CAPACITANCE DIODE | | |
| D205 | | | MA111 | DIODE | | |
| D206,207 | | | DAN202U | DIODE | | |
| D208-210 | | | MA111 | DIODE | | |
| D220-222 | | | U1BC44 | DIODE | | |
| D453 | | | DAN202U | DIODE | | |
| D501-506 | | | U1BC44 | DIODE | | |
| D551,552 | | | DAN202U | DIODE | | |
| IC1 | | * | 784217AGF519 | MI-COM IC | | |
| IC2 | | * | 703035AGFA01 | MI-COM IC | | |
| IC5 | | * | PST596ENR | ANALOGUE IC | | |
| IC7 ,8 | | | TA8409S | MOS-IC | | |
| IC9 | | | TA7291P | MOS-IC | | |
| IC10 | | | TA8409S | MOS-IC | | |
| IC12 | | | MAX232NS | MOS-IC | | |
| IC13 | | | HA12187FP | ANALOGUE IC | | |
| IC14 | | * | BS62LV2000STC | MEMORY IC | | |
| IC204 | | * | PCM1748E | MOS-IC | | |
| IC205 | | * | PCM1602KY | MOS-IC | | |
| IC206,207 | | | TC7SHU04FU | MOS-IC | | |
| IC208 | | | TC7WH34FU | MOS-IC | | |
| IC209 | | | TC7WH157FU | MOS-IC | | |
| IC211-213 | | | TC9214AF | MOS-IC | | |
| IC214 | | | TC74VHC08FT | MOS-IC | | |
| IC215 | | * | TC74VHCT00AFT | MOS-IC | | |
| IC216 | | | TC7SHU04FU | MOS-IC | | |
| IC217 | | * | TC7WHU04FU | MOS-IC | | |
| IC218 | | | TA7805S | ANALOGUE IC | | |
| IC219 | | | PQ1R33 | ANALOGUE IC | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

18

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|----------------|----------------------------|--------------|----------|
| IC221 | | | TC7WH157FU | MOS-IC | | |
| IC222,223 | | | TC74HCT7007AF | MOS-IC | | |
| IC224 | | | NJU3715G | MOS-IC | | |
| IC225 | | * | PQ09DZ11 | ANALOGUE IC | | |
| IC226 | | | TC74VHC08FT | MOS-IC | | |
| IC230-236 | | | NJM4580ED | ANALOGUE IC | | |
| IC402 | | * | MM1540AFBE | MOS-IC | | |
| IC501 | | | TA7805S | ANALOGUE IC | | |
| IC502 | | | TA79005S | IC(VOLTAGE REGULATOR/ -5V) | | |
| IC601 | | * | NJM2123V | ANALOGUE IC | | |
| IC602 | | | PQ1R33 | ANALOGUE IC | | |
| Q2 | | | DTA143TUA | DIGITAL TRANSISTOR | | |
| Q3 | | | DTA124EUA | DIGITAL TRANSISTOR | | |
| Q4 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q8 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q9 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q12 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q13 ,14 | | | 2SA1577 | TRANSISTOR | | |
| Q15 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q16 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q17 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q20 ,21 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q201 | | | 2SB1375 | TRANSISTOR | | |
| Q202 | | | 2SD2012 | TRANSISTOR | | |
| Q203 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q204 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q205-208 | | | 2SC4213(B) | TRANSISTOR | | |
| Q209 | | | DTA124EUA | DIGITAL TRANSISTOR | | |
| Q210-213 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q214-216 | | | DTA124EUA | DIGITAL TRANSISTOR | | |
| Q217-219 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q220 | | | 2SC4177(L5,L6) | TRANSISTOR | | |
| Q221 | | | 2SA1611(M5,M6) | TRANSISTOR | | |
| Q224 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q225,226 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q227 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q401 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q402,403 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q404,405 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q406,407 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q408 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q501 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q502 | | | DTA114TUA | DIGITAL TRANSISTOR | | |
| Q507,508 | | | DTA114TUA | DIGITAL TRANSISTOR | | |
| Q509 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q510 | | | DTA114TUA | DIGITAL TRANSISTOR | | |
| Q551 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q552 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q553 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q554 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q555,556 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q557 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q558,559 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q560 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q561 | | | 2SA1576A(R,S) | TRANSISTOR | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

19

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|--|----------|-----------|---------------|--------------------|--------------|----------|
| Q562 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q563,564 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q565 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q566,567 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q568 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q569 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q570 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q571,572 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q573 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q574,575 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q576 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q577 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q578 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q579 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q580 | | | 2SC4081(R,S) | TRANSISTOR | | |
| ELECTRIC UNIT (X25-645X-XX) except DV-5900M | | | | | | |
| C1 | | | CC73GCH1H050C | CHIP C | 5.0PF | C |
| C2 | | | CE04KW1A470M | ELECTRO | 47UF | 10WV |
| C3 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C4 | | | CE04KW1H4R7M | ELECTRO | 4.7UF | 50WV |
| C5 ,6 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C7 | | | C90-3623-05 | BACKUP | 0.33F | 5.5V |
| C12 ,13 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C14 | | | CC73GCH1H050C | CHIP C | 5.0PF | C |
| C15 | | | CE04KW1A470M | ELECTRO | 47UF | 10WV |
| C16 -18 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C25 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C29 ,30 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C33 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C100 | | | CC73GCH1H050C | CHIP C | 5.0PF | C |
| C101 | | | CE04KW1A470M | ELECTRO | 47UF | 10WV |
| C102-105 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C107 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C108-111 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C113 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C114 | | | CE04KW1A221M | ELECTRO | 220UF | 10WV |
| C115-118 | | | CE04KW1H010M | ELECTRO | 1.0UF | 50WV |
| C119 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C120 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C121 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C122-124 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C201,202 | | | CE04KW1E101M | ELECTRO | 100UF | 25WV |
| C203,204 | | | CE04KW1H100M | ELECTRO | 10UF | 50WV |
| C205,206 | | | CE04KW1E101M | ELECTRO | 100UF | 25WV |
| C209 | | | CK73FB1C474K | CHIP C | 0.47UF | K |
| C211 | | | CE04KW1A101M | ELECTRO | 100UF | 10WV |
| C212 | | | CK73FB1C474K | CHIP C | 0.47UF | K |
| C213 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C216 | | | CE04KW1A101M | ELECTRO | 100UF | 10WV |
| C217,218 | | | CE04KW1H100M | ELECTRO | 10UF | 50WV |
| C219,220 | | | CE04KW1V330M | ELECTRO | 33UF | 35WV |
| C221,222 | | | CQ93FMG1H122J | MYLAR | 1200PF | J |
| C223,224 | | | CC73GCH1H151J | CHIP C | 150PF | J |
| C225,226 | | | CC73GCH1H100D | CHIP C | 10PF | D |
| C227,228 | | | CC73GCH1H151J | CHIP C | 150PF | J |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

20

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|-------------|--------------|----------|
| C229 | | | CC73GCH1H121J | CHIP C | 120PF | J |
| C230,231 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C232 | | | CC73GCH1H121J | CHIP C | 120PF | J |
| C233,234 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C235,236 | | | CE04KW1H220M | ELECTRO | 22UF | 50WV |
| C237 | | | CC73GCH1H080D | CHIP C | 8.0PF | D |
| C238 | | | CC73GCH1H100D | CHIP C | 10PF | D |
| C239,240 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C241,242 | | | CC73GCH1H121J | CHIP C | 120PF | J |
| C243 | | | CC73GCH1H080D | CHIP C | 8.0PF | D |
| C244 | | | CC73GCH1H100D | CHIP C | 10PF | D |
| C245,246 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C247,248 | | | CE04KW1H220M | ELECTRO | 22UF | 50WV |
| C253,254 | | | CQ93FMG1H472J | MYLAR | 4700PF | J |
| C255 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C256,257 | | | CC73GCH1H121J | CHIP C | 120PF | J |
| C258 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C260,261 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C300 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C301 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C302 | | | CC73GCH1H100D | CHIP C | 10PF | D |
| C303,304 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C372 | | | CK73FB1C474K | CHIP C | 0.47UF | K |
| C373 | | | CE04KW1E101M | ELECTRO | 100UF | 25WV |
| C401 | | | CK73FB1A105K | CHIP C | 1.0UF | K |
| C403-406 | | | CK73FB1A105K | CHIP C | 1.0UF | K |
| C407 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C409 | | | CE04KW1E470M | ELECTRO | 47UF | 25WV |
| C410 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C411 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C412 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C413 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C451,452 | | | CE04KW1H100M | ELECTRO | 10UF | 50WV |
| C453 | | | CE04KW1A471M | ELECTRO | 470UF | 10WV |
| C454 | | | CE04KW1E101M | ELECTRO | 100UF | 25WV |
| C455 | | | CE04KW1H100M | ELECTRO | 10UF | 50WV |
| C456 | | | CE04KW1A471M | ELECTRO | 470UF | 10WV |
| C458 | | | CE04KW1H100M | ELECTRO | 10UF | 50WV |
| C459 | | | CE04KW1A471M | ELECTRO | 470UF | 10WV |
| C461-463 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C464 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C465 | | | CE04KW1E101M | ELECTRO | 100UF | 25WV |
| C466-468 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C469-471 | | | CE04KW1H4R7M | ELECTRO | 4.7UF | 50WV |
| C472,473 | | | CE04KW1E470M | ELECTRO | 47UF | 25WV |
| C474 | | | CE04KW1H4R7M | ELECTRO | 4.7UF | 50WV |
| C475,476 | | | CE04KW1A471M | ELECTRO | 470UF | 10WV |
| C477 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C478 | | | CE04KW1E470M | ELECTRO | 47UF | 25WV |
| C480 | | | CE04KW1H010M | ELECTRO | 1.0UF | 50WV |
| C481 | | | CE04KW1E470M | ELECTRO | 47UF | 25WV |
| C483 | | | CE04KW1H010M | ELECTRO | 1.0UF | 50WV |
| C484 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C485 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C486 | | | CE04KW1A101M | ELECTRO | 100UF | 10WV |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

DV-5050M/5900M/DVF-16050/16050-G
PARTS LIST

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

21

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|----------------------|--------------|----------|
| C487 | | | CE04KW1H100M | ELECTRO 10UF 50WV | E | |
| C488 | | | CE04KW1E221M | ELECTRO 220UF 25WV | E | |
| C489 | | | CE04KW1C471M | ELECTRO 470UF 16WV | E | |
| C490 | | | CE04KW1H4R7M | ELECTRO 4.7UF 50WV | E | |
| C491 | | | CE04KW1E470M | ELECTRO 47UF 25WV | E | |
| C492 | | | CE04HW1E220M | NP-ELEC 22UF 25WV | E | |
| C493-496 | | | CE04KW1H010M | ELECTRO 1.0UF 50WV | E | |
| C501 | | | CK73FB1C334K | CHIP C 0.33UF K | | |
| C502 | | | CE04KW1A101M | ELECTRO 100UF 10WV | | |
| C503 | | | CC73GCH1H050C | CHIP C 5.0PF C | | |
| C504 | | | CK73FB1C334K | CHIP C 0.33UF K | | |
| C505 | | | CE04KW1A101M | ELECTRO 100UF 10WV | | |
| C506 | | | CC73GCH1H070D | CHIP C 7.0PF D | | |
| C551 | | | CC73GCH1H270J | CHIP C 27PF J | KY | |
| C552 | | | CC73GCH1H560J | CHIP C 56PF J | KY | |
| C553 | | | CC73GCH1H270J | CHIP C 27PF J | KY | |
| C555 | | | CE04KW1H100M | ELECTRO 10UF 50WV | | |
| C556 | | | CE04KW1H100M | ELECTRO 10UF 50WV | KY | |
| C557 | | | CC73GCH1H270J | CHIP C 27PF J | KY | |
| C558 | | | CC73GCH1H560J | CHIP C 56PF J | KY | |
| C559 | | | CC73GCH1H270J | CHIP C 27PF J | KY | |
| C561 | | | CE04KW1H100M | ELECTRO 10UF 50WV | | |
| C562 | | | CE04KW1H100M | ELECTRO 10UF 50WV | KY | |
| C563 | | | CC73GCH1H270J | CHIP C 27PF J | KY | |
| C564 | | | CC73GCH1H560J | CHIP C 56PF J | KY | |
| C565 | | | CC73GCH1H270J | CHIP C 27PF J | KY | |
| C567 | | | CE04KW1H100M | ELECTRO 10UF 50WV | | |
| C568 | | | CE04KW1H100M | ELECTRO 10UF 50WV | KY | |
| C569,570 | | | CK73GB1C104K | CHIP C 0.10UF K | | |
| C571-573 | | | CE04KW1H100M | ELECTRO 10UF 50WV | | |
| C600 | | | CC73GCH1H100D | CHIP C 10PF D | E | |
| C601 | | | CE04KW1A101M | ELECTRO 100UF 10WV | E | |
| C602,603 | | | CK73GB1H102K | CHIP C 1000PF K | E | |
| C604 | | | CK73GB1C104K | CHIP C 0.10UF K | E | |
| C605-608 | | | CK73GB1H102K | CHIP C 1000PF K | E | |
| C609,610 | | | CC73GCH1H101J | CHIP C 100PF J | E | |
| C611 | | | CK73GB1H102K | CHIP C 1000PF K | E | |
| C612,613 | | | CE04KW1A101M | ELECTRO 100UF 10WV | KY | |
| C614 | | | CK73GB1H102K | CHIP C 1000PF K | KY | |
| C615-617 | | | CC73GCH1H470J | CHIP C 47PF J | KY | |
| C618-621 | | | CK73GB1H102K | CHIP C 1000PF K | KY | |
| C622 | | | CK73GB1C104K | CHIP C 0.10UF K | KY | |
| C623-625 | | | CK73GB1H102K | CHIP C 1000PF K | KY | |
| C626 | | | CK73GB1C104K | CHIP C 0.10UF K | KY | |
| C627 | | | CC73GCH1H050C | CHIP C 5.0PF C | KY | |
| C628 | | | CE04KW1A101M | ELECTRO 100UF 10WV | KY | |
| C629 | | | CK73FB1C474K | CHIP C 0.47UF K | KY | |
| C630 | | | CK73GB1C104K | CHIP C 0.10UF K | KY | |
| C631,632 | | | CK73GB1H102K | CHIP C 1000PF K | KY | |
| C633 | | | CE04KW1A101M | ELECTRO 100UF 10WV | KY | |
| C634-641 | | | CC73GCH1H100D | CHIP C 10PF D | | |
| - | | * | E40-8981-05 | SOCKET FOR PIN ASSY | | |
| CN1 | | * | E40-4962-05 | FLAT CABLE CONNECTOR | | |
| CN2 | | * | E40-3270-05 | PIN ASSY | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

22

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|--------------|-------------------------------|--------------|----------|
| CN3 | | | E40-3266-05 | PIN ASSY | | |
| CN4 | | | E40-3263-05 | PIN ASSY | | |
| CN5 ,6 | | * | E40-8981-05 | PIN ASSY | | |
| CN9 | | | E40-3260-05 | PIN ASSY | | |
| CN301,302 | | * | E40-8900-05 | FLAT CABLE CONNECTOR | | |
| CN303 | | | E40-9853-05 | PIN ASSY | | |
| CN304 | | | E40-3259-05 | PIN ASSY | | |
| CN305 | | | E40-9853-05 | PIN ASSY | | |
| CN451 | | | E40-3268-05 | PIN ASSY | E | |
| CN452 | | | E40-3271-05 | PIN ASSY | E | |
| E1 ,2 | | | J11-0808-05 | WIRE CLAMPER | | |
| L100 | | | L40-1015-34 | SMALL FIXED INDUCTOR(100UH) | KYE | |
| L200 | | | L92-0515-05 | FERRITE CORE | | |
| L201 | | | L40-1001-58 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L202,203 | | | L92-0515-05 | FERRITE CORE | | |
| L551-556 | | * | L40-5691-58 | SMALL FIXED INDUCTOR(5.6UH,K) | KY | |
| L557 | | | L40-1001-58 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L558-560 | | | L92-0515-05 | FERRITE CORE | E | |
| L561 | | | L92-0515-05 | FERRITE CORE | EM | |
| L601-616 | | | L92-0515-05 | FERRITE CORE | | |
| X1 | | | L78-0615-05 | RESONATOR (12.5MHZ) | | |
| X2 | | | L78-0575-05 | RESONATOR (12.852MHZ) | | |
| R1 -6 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R7 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R8 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R9 | | | RK73GB1J101J | CHIP R 100 J 1/16W | KY | |
| R10 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R11 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R12 ,13 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R14 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R15 ,16 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R17 | | | RK73GB1J271J | CHIP R 270 J 1/16W | | |
| R18 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R19 | | | RK73GB1J103J | CHIP R 10K J 1/16W | KYM | |
| R20 | | | RK73GB1J103J | CHIP R 10K J 1/16W | E | |
| R20 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | M | |
| R22 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R23 ,24 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R25 -27 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R28 -32 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R33 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | KYE | |
| R34 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R35 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | | |
| R36 ,37 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R38 | | | RK73GB1J682J | CHIP R 6.8K J 1/16W | | |
| R39 -41 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R42 -50 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R51 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R52 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R53 ,54 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R55 ,56 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R57 | | | RK73GB1J101J | CHIP R 100 J 1/16W | M | |
| R58 ,59 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

PARTS LIST

DV-5050M/5900M/DVF-16050/16050-G

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

23

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|--------------|---------------------|--------------|----------|
| R60, 61 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R62, 63 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R64, 65 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R66 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R67 | | | RK73GB1J220J | CHIP R 22 J 1/16W | | |
| R68 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R69 | | | RK73GB1J220J | CHIP R 22 J 1/16W | | |
| R70 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R71 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R72 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R73 | | | RK73GB1J220J | CHIP R 22 J 1/16W | | |
| R74 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R76, 77 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R79, 80 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R81 -85 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R86 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R87 -93 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R94 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R97 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R98, 99 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R100 | | | RK73GB1J272J | CHIP R 2.7K J 1/16W | | |
| R101 | | | RK73GB1J153J | CHIP R 15K J 1/16W | | |
| R102 | | | RK73GB1J822J | CHIP R 8.2K J 1/16W | | |
| R103 | | | RK73GB1J133J | CHIP R 13K J 1/16W | | |
| R104 | | | RK73GB1J822J | CHIP R 8.2K J 1/16W | | |
| R105 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R106 | | | RK73GB1J822J | CHIP R 8.2K J 1/16W | | |
| R107 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R108-115 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R116 | | | RK73GB1J220J | CHIP R 22 J 1/16W | | |
| R117-122 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R124-130 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R133-140 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R142-145 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R147-153 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R154 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R155 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R156 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R157-162 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R165 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R167 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R169-171 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R172 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R173 | | | RK73GB1J223J | CHIP R 22K J 1/16W | | |
| R174 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R175 | | | RK73GB1J223J | CHIP R 22K J 1/16W | | |
| R176 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R177, 178 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R180 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R181 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R182 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R183,184 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R185-192 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R198 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R199 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

24

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|---------------------|--------------|----------|
| R201,202 | | | RK73GB1J821J | CHIP R 820 J 1/16W | | |
| R203,204 | | | RK73GB1J822J | CHIP R 8.2K J 1/16W | | |
| R205,206 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R207,208 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R209,210 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R211,212 | | | RK73GB1J272J | CHIP R 2.7K J 1/16W | | |
| R215-217 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R224-226 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R228 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R231-234 | | | RK73GB1J242J | CHIP R 2.4K J 1/16W | | |
| R235,236 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R237-240 | | | RK73GB1J242J | CHIP R 2.4K J 1/16W | | |
| R241,242 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R243 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R244 | | | RK73GB1J4R7J | CHIP R 4.7 J 1/16W | | |
| R245,246 | | | RK73GB1J511J | CHIP R 510 J 1/16W | | |
| R247,248 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R249,250 | | | RK73GB1J224J | CHIP R 220K J 1/16W | | |
| R251,252 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R253 | | | RK73GB1J4R7J | CHIP R 4.7 J 1/16W | | |
| R255,256 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R257,258 | | | RK73GB1J4R7J | CHIP R 4.7 J 1/16W | | |
| R260-262 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R267 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R268 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R269 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R300 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R301 | | | RK73GB1J751J | CHIP R 750 J 1/16W | | |
| R302 | | | RK73GB1J154J | CHIP R 150K J 1/16W | | |
| R303 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R304 | | | RK73GB1J750J | CHIP R 75 J 1/16W | | |
| R305 | | | RK73GB1J181J | CHIP R 180 J 1/16W | | |
| R306 | | | RK73GB1J220J | CHIP R 22 J 1/16W | | |
| R307 | | | RK73GB1J750J | CHIP R 75 J 1/16W | | |
| R308 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R310 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | | |
| R368 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | | |
| R393-396 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R397 | | | RK73GB1J3R9J | CHIP R 3.9 J 1/16W | | |
| R401 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | | |
| R402 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R403 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R404 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | | |
| R405 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R406 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R407 | | | RK73GB1J184J | CHIP R 180K J 1/16W | | |
| R408,409 | | | RK73GB1J304J | CHIP R 300K J 1/16W | | |
| R410,411 | | | RK73GB1J185J | CHIP R 1.8M J 1/16W | | |
| R412 | | | RK73GB1J225J | CHIP R 2.2M J 1/16W | | |
| R413 | | | RK73GB1J184J | CHIP R 180K J 1/16W | | |
| R414 | | | RK73GB1J304J | CHIP R 300K J 1/16W | | |
| R415 | | | RK73GB1J225J | CHIP R 2.2M J 1/16W | | |
| R416 | | | RK73GB1J185J | CHIP R 1.8M J 1/16W | | |
| R417 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R418 | | | RK73GB1J223J | CHIP R 22K J 1/16W | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

DV-5050M/5900M/DVF-16050/16050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

25

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|----------------------|--------------|----------|
| R419 | | | RK73GB1J224J | CHIP R 220K J 1/16W | E | |
| R420 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | E | |
| R421-423 | | | RK73GB1J103J | CHIP R 10K J 1/16W | E | |
| R424 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | E | |
| R425 | | | RK73GB1J103J | CHIP R 10K J 1/16W | E | |
| R426 | | | RK73GB1J473J | CHIP R 47K J 1/16W | E | |
| R427 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R428 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | |
| R429 | | | RK73GB1J751J | CHIP R 750 J 1/16W | E | |
| R430 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | E | |
| R431 | | | RK73GB1J473J | CHIP R 47K J 1/16W | E | |
| R432 | | | RK73GB1J751J | CHIP R 750 J 1/16W | E | |
| R433 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | E | |
| R434 | | | RK73GB1J473J | CHIP R 47K J 1/16W | E | |
| R435 | | | RK73GB1J751J | CHIP R 750 J 1/16W | E | |
| R436 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | E | |
| R437 | | | RK73GB1J473J | CHIP R 47K J 1/16W | E | |
| R438 | | | RK73GB1J751J | CHIP R 750 J 1/16W | E | |
| R439 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | E | |
| R440 | | | RK73GB1J473J | CHIP R 47K J 1/16W | E | |
| R451 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R452,453 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R454,455 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | |
| R456-458 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R459,460 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R461,462 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R463,464 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | |
| R465,466 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R467,468 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R469,470 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R471,472 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | |
| R473,474 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R475 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R476 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R477 | | | RK73GB1J823J | CHIP R 82K J 1/16W | E | |
| R479 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R480 | | | RK73GB1J823J | CHIP R 82K J 1/16W | E | |
| R481 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R482 | | | RK73GB1J823J | CHIP R 82K J 1/16W | E | |
| R483,484 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | E | |
| R485-488 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | E | |
| R489 | | | RK73GB1J103J | CHIP R 10K J 1/16W | E | |
| R490 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | E | |
| R491 | | | RK73GB1J272J | CHIP R 2.7K J 1/16W | E | |
| R492,493 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | E | |
| R494,495 | | | RK73GB1J103J | CHIP R 10K J 1/16W | E | |
| R496,497 | | | RK73GB1J681J | CHIP R 680 J 1/16W | E | |
| R498 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R499 | | | RK73GB1J393J | CHIP R 39K J 1/16W | E | |
| R501,502 | | | RK73GB1J4R7J | CHIP R 4.7 J 1/16W | E | |
| R503 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | E | |
| R504 | | | RS14KB3A3R3J | FL-PROOF RS 3.3 J 1W | E | |
| R512 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | E | |
| R515 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | E | |
| R517 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | E | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

26

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|---------------------|--------------|----------|
| R518-524 | | | RK73GB1J750J | CHIP R 75 J 1/16W | E | |
| R527 | | | RK73GB1J3R3J | CHIP R 3.3 J 1/16W | E | |
| R528 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | E | |
| R529 | | | RK73GB1J473J | CHIP R 47K J 1/16W | E | |
| R530-539 | | | RK73GB1J101J | CHIP R 100 J 1/16W | E | |
| R541 | | | RK73GB1J561J | CHIP R 560 J 1/16W | E | |
| R551 | | | RK73GB1J331J | CHIP R 330 J 1/16W | E | |
| R552,553 | | | RK73GB1J681J | CHIP R 680 J 1/16W | E | |
| R554 | | | RK73GB1J151J | CHIP R 150 J 1/16W | E | |
| R555 | | | RK73GB1J471J | CHIP R 470 J 1/16W | E | |
| R556 | | | RK73GB1J151J | CHIP R 150 J 1/16W | E | |
| R557 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R558 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R559 | | | RK73GB1J182J | CHIP R 1.8K J 1/16W | E | |
| R560,561 | | | RK73GB1J681J | CHIP R 680 J 1/16W | E | |
| R562 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R563 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R564 | | | RK73GB1J331J | CHIP R 330 J 1/16W | E | |
| R565,566 | | | RK73GB1J681J | CHIP R 680 J 1/16W | E | |
| R567 | | | RK73GB1J151J | CHIP R 150 J 1/16W | E | |
| R568 | | | RK73GB1J471J | CHIP R 470 J 1/16W | E | |
| R569 | | | RK73GB1J151J | CHIP R 150 J 1/16W | E | |
| R570 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R571 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R572 | | | RK73GB1J182J | CHIP R 1.8K J 1/16W | E | |
| R573,574 | | | RK73GB1J681J | CHIP R 680 J 1/16W | E | |
| R575 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R576 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R577 | | | RK73GB1J331J | CHIP R 330 J 1/16W | E | |
| R578,579 | | | RK73GB1J681J | CHIP R 680 J 1/16W | E | |
| R580 | | | RK73GB1J151J | CHIP R 150 J 1/16W | E | |
| R581 | | | RK73GB1J471J | CHIP R 470 J 1/16W | E | |
| R582 | | | RK73GB1J151J | CHIP R 150 J 1/16W | E | |
| R583 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R584 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R585 | | | RK73GB1J182J | CHIP R 1.8K J 1/16W | E | |
| R586,587 | | | RK73GB1J681J | CHIP R 680 J 1/16W | E | |
| R588 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R589 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R593 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R594 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R595 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R596 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R597 | | | RK73GB1J123J | CHIP R 12K J 1/16W | E | |
| R598 | | | RK73GB1J333J | CHIP R 33K J 1/16W | E | |
| R600 | | | RK73GB1J101J | CHIP R 100 J 1/16W | E | |
| R601 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | E | |
| R603-606 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | E | |
| R607,608 | | | RK73GB1J221J | CHIP R 220 J 1/16W | E | |
| R609 | | | RK73GB1J750J | CHIP R 75 J 1/16W | E | |
| R610 | | * | RK73GB1J161J | CHIP R 160 J 1/16W | E | |
| R611,612 | | | RK73GB1J473J | CHIP R 47K J 1/16W | E | |
| R613,614 | | | RK73GB1J101J | CHIP R 100 J 1/16W | E | |
| R615 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | |
| R616 | | | RK73GB1J101J | CHIP R 100 J 1/16W | E | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

PARTS LIST

DV-5050M/5900M/DVF-J6050/J6050-G

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

27

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|-----------------------------|--------------|----------|
| R617 | | | RK73GB1J750J | CHIP R 75 J 1/16W | E | |
| R618 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | |
| R619 | | | RK73GB1J101J | CHIP R 100 J 1/16W | E | |
| R620 | | | RK73GB1J750J | CHIP R 75 J 1/16W | E | |
| R621 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | |
| R622 | | | RK73GB1J101J | CHIP R 100 J 1/16W | E | |
| R623 | | | RK73GB1J750J | CHIP R 75 J 1/16W | E | |
| R624-628 | | | RK73GB1J101J | CHIP R 100 J 1/16W | KY | |
| R629-631 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | KY | |
| R632 | | | RK73GB1J361J | CHIP R 360 J 1/16W | KY | |
| R633 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | KY | |
| R634 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | KY | |
| R635 | | | RK73GB1J101J | CHIP R 100 J 1/16W | KY | |
| R636 | | | RK73GB1J750J | CHIP R 75 J 1/16W | KY | |
| R637 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | KY | |
| R638 | | | RK73GB1J101J | CHIP R 100 J 1/16W | KY | |
| R639 | | | RK73GB1J750J | CHIP R 75 J 1/16W | KY | |
| R640 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | KY | |
| R641 | | | RK73GB1J101J | CHIP R 100 J 1/16W | KY | |
| R642 | | | RK73GB1J121J | CHIP R 120 J 1/16W | KY | |
| R643 | | | RK73GB1J820J | CHIP R 82 J 1/16W | KY | |
| R644 | | | RN73GH1J362D | CHIP R 3.6K D 1/16W | KY | |
| R645 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | KY | |
| R646 | | * | RN73GH1J1401D | CHIP R 1.40K D 1/16W | KY | |
| R647,648 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | KY | |
| R649-654 | | | RK73GB1J473J | CHIP R 47K J 1/16W | KY | |
| R660 | | | RK73GB1J100J | CHIP R 10 J 1/16W | KY | |
| R661 | | | RK73GB1J100J | CHIP R 10 J 1/16W | E | |
| R662-669 | | | RK73GB1J470J | CHIP R 47 J 1/16W | E | |
| VR600 | | * | R12-0096-05 | TRIMMING POT.(220) | E | |
| VR601 | | * | R12-0096-05 | TRIMMING POT.(220) | KY | |
| W220 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W418-420 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W421-423 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | KYM | |
| W455 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W457 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W465-468 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W500 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W505 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W513 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W590-592 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | KYM | |
| W600-603 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| W611-618 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | E | |
| D1 ,2 | | | MA111 | DIODE | | |
| D3 | | | DA204U | DIODE | | |
| D4 | | | MA111 | DIODE | | |
| D5 ,6 | | | DA204U | DIODE | | |
| D9 -11 | | | DA204U | DIODE | | |
| D17 | | | DA204U | DIODE | KYE | |
| D18 ,19 | | | RB411D | DIODE | | |
| D101-103 | | | U1BC44 | DIODE | | |
| D201,202 | | | UD28.2B | ZENER DIODE | | |
| D203 | | | DAN202U | DIODE | | |
| D451,452 | | | DAN202U | DIODE | E | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

28

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|---------------|----------------------------|--------------|----------|
| D453 | | | DAN202U | DIODE | | KY |
| D454 | | | MA111 | DIODE | | E |
| D455 | | | U1BC44 | DIODE | | E |
| D456 | | | MA111 | DIODE | | E |
| D457 | | * | RD11S(B3) | ZENER DIODE | | E |
| D502-506 | | | U1BC44 | DIODE | | |
| D551,552 | | | DAN202U | DIODE | | |
| D600 | | | DA204U | DIODE | | E |
| D601 | | | DA204U | DIODE | | KY |
| D604 | | | MA111 | DIODE | | KY |
| IC1 | | * | 78F4218AGFM0 | MI-COM IC | | M |
| IC1 | | * | 784217AGF519 | MI-COM IC | | KYE |
| IC2 | | * | 70F3035AGFM0 | MI-COM IC | | M |
| IC2 | | * | 703035AGFA01 | MI-COM IC | | KYE |
| IC5 | | * | PST596ENR | ANALOGUE IC | | |
| IC7 ,8 | | | TA8409S | MOS-IC | | |
| IC9 | | | TA7291P | MOS-IC | | |
| IC10 | | | TA8409S | MOS-IC | | |
| IC12 | | | MAX232NS | MOS-IC | | |
| IC13 | | | HA12187FP | ANALOGUE IC | | |
| IC14 | | * | BS62LV2000STC | MEMORY IC | | |
| IC14 | | * | BS62LV2005STC | MEMORY IC | | |
| IC201 | | * | TA7805S | ANALOGUE IC | | |
| IC202 | | * | NJM2870F33 | ANALOGUE IC | | |
| IC203 | | * | PCM1748E | MOS-IC | | |
| IC205-207 | | | NJM4580ED | ANALOGUE IC | | |
| IC210 | | | TC74VHC08FT | MOS-IC | | |
| IC211 | | | TC9214AF | MOS-IC | | |
| IC225 | | * | PQ09DZ11 | ANALOGUE IC | | |
| IC300 | | * | TC7WHU04FU | MOS-IC | | |
| IC301 | | * | TC74VHCT00AFT | MOS-IC | | |
| IC302 | | * | TC7SH08FU | MOS-IC | | |
| IC402 | | * | MM1540AFBE | MOS-IC | | |
| IC451 | | * | BH7635S | ANALOGUE IC | | |
| IC452,453 | | * | MM1501 | ANALOGUE IC | | E |
| IC501 | | | TA7805S | ANALOGUE IC | | |
| IC502 | | | TA79005S | IC(VOLTAGE REGULATOR/ -5V) | | |
| IC600 | | * | ADV7170SU | MOS-IC | | E |
| IC601 | | * | PM0026A | MOS-IC | | KY |
| IC602 | | * | NJM2870F25 | ANALOGUE IC | | KY |
| IC603 | | | NJM431L | IC(REGULATOR) | | KY |
| Q1 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q2 | | | DTA114TUA | DIGITAL TRANSISTOR | | |
| Q3 | | | DTA124EUA | DIGITAL TRANSISTOR | | |
| Q4 ,5 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q6 ,7 | | | DTA124EUA | DIGITAL TRANSISTOR | | |
| Q8 | | | DTC124EUA | DIGITAL TRANSISTOR | | KYE |
| Q9 | | | 2SC4081(R,S) | TRANSISTOR | | KYE |
| Q10 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q11 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q12 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q13 ,14 | | | 2SA1577(Q,R) | TRANSISTOR | | |
| Q15 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q16 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q17 | | | 2SA1576A(R,S) | TRANSISTOR | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

DV-5050M/5900M/DVF-J6050/J6050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

29

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|----------------|--------------------|--------------|----------|
| Q18 | | | 2SC4081(R,S) | TRANSISTOR | M | |
| Q19 -21 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q201 | | | 2SB1375 | TRANSISTOR | | |
| Q202 | | | 2SD2012 | TRANSISTOR | | |
| Q203 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q204 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q209 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q216 | | | DTA124EUA | DIGITAL TRANSISTOR | | |
| Q217 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q219 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q222,223 | | | 2SC4213(B) | TRANSISTOR | E | |
| Q300 | | | 2SC4177(L5,L6) | TRANSISTOR | | |
| Q301 | | | 2SA1611(M5,M6) | TRANSISTOR | | |
| Q401 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q402,403 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q404,405 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q406,407 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q408 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q451,452 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q453-455 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q456,457 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q458,459 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q460,461 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q462,463 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q464 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q465-467 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q468,469 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q470,471 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q472 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q473,474 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q475,476 | | | DTA114TUA | DIGITAL TRANSISTOR | | |
| Q477,478 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q479 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q480 | | | 2SC3940A | TRANSISTOR | | |
| Q482,483 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q484 | | | 2SA1534A(R,S) | TRANSISTOR | | |
| Q485 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q486-488 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q489-492 | | | 2SC4213(B) | TRANSISTOR | | |
| Q501 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q502 | | | DTA114TUA | DIGITAL TRANSISTOR | | |
| Q507,508 | | | DTA114TUA | DIGITAL TRANSISTOR | | |
| Q509 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q510 | | | DTA114TUA | DIGITAL TRANSISTOR | KY | |
| Q551 | | | DTC144EUA | DIGITAL TRANSISTOR | KY | |
| Q552 | | | 2SC4081(R,S) | TRANSISTOR | KY | |
| Q553 | | | 2SA1576A(R,S) | TRANSISTOR | KY | |
| Q554 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q555,556 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q557 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q558 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q559 | | | DTC144EUA | DIGITAL TRANSISTOR | KY | |
| Q560 | | | 2SC4081(R,S) | TRANSISTOR | KY | |
| Q561 | | | 2SA1576A(R,S) | TRANSISTOR | KY | |
| Q562 | | | DTC144EUA | DIGITAL TRANSISTOR | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

30

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|---|----------|-----------|---------------|--------------------|--------------|----------|
| Q563,564 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q565 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q566 | | | DTC144EUA | DIGITAL TRANSISTOR | KY | |
| Q567 | | | DTC144EUA | DIGITAL TRANSISTOR | KY | |
| Q568 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q569 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q570 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q571,572 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q573 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q574,575 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q576 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q577 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q578 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q579 | | | DTC144EUA | DIGITAL TRANSISTOR | | |
| Q580 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q600-602 | | | 2SA1576A(R,S) | TRANSISTOR | E | |
| Q603-605 | | | 2SA1576A(R,S) | TRANSISTOR | KY | |
| Q607,608 | | | DTC114TUA | DIGITAL TRANSISTOR | E | |
| VIDEO UNIT (X35-2290-10) DV-5900M only | | | | | | |
| C1 -4 | | | CC73GCH1H102J | CHIP C | 1000PF | J |
| C5 ,6 | | | CC73GCH1H331J | CHIP C | 330PF | J |
| C7 | | | CC73GCH1H681J | CHIP C | 680PF | J |
| C8 | | | CC73GCH1H561J | CHIP C | 560PF | J |
| C9 ,10 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C11 | | | CK73GB1H682K | CHIP C | 6800PF | K |
| C12 | | | CC73GCH1H681J | CHIP C | 680PF | J |
| C13 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C14 ,15 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C16 ,17 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C18 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C19 | | | CK73GB1E183K | CHIP C | 0.018UF | K |
| C20 | | | CC73GCH1H102J | CHIP C | 1000PF | J |
| C22 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C23 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C24 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C25 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C26 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C27 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C28 ,29 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C30 | | | CK73GB1C473K | CHIP C | 0.047UF | K |
| C31 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C32 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C33 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C34 | | | CK73GB1C393K | CHIP C | 0.039UF | K |
| C35 | | | CK73GB1H822K | CHIP C | 8200PF | K |
| C36 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C37 | | | CK73FB1C474K | CHIP C | 0.47UF | K |
| C38 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C39 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C48 | | * | CE32AC1A331M | CHIP EL | 330UF | 10WV |
| C49 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C50 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C51 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C101-107 | | | CK73GB1H122K | CHIP C | 1200PF | K |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

PARTS LIST

DV-5050M/5900M/DVF-16050/16050-G

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

31

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|-------------|--------------|----------|
| C108 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C109 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C110,111 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C112-120 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C201 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C202 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C203 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C204,205 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C207-214 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C215 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C216 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C217 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C218 | | | CC73GCH1H330J | CHIP C | 33PF | J |
| C219-222 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C223 | | | CC73GCH1H102J | CHIP C | 1000PF | J |
| C224 | | | CC73GCH1H180J | CHIP C | 18PF | J |
| C225 | | | CC73GCH1H270J | CHIP C | 27PF | J |
| C226 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C227 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C234 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C235 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C238 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C239 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C304-306 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C307 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C308 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C311-314 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C316 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C318,319 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C320 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C321 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C325-332 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C337 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C338 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C340 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C341 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C342 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C343-348 | | | CC73GCH1H220J | CHIP C | 22PF | J |
| C349,350 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C351 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C352 | | | CC73GCH1H220J | CHIP C | 22PF | J |
| C354,355 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C356-363 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C365-368 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C372-377 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C379-383 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C385 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C386 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C388 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C390 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C392 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C394,395 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C397,398 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C450 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C452 | | | CK73GB1H122K | CHIP C | 1200PF | K |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

32

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|-------------|--------------|----------|
| C453 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C454 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C456 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C458 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C460-462 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C465 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C500,501 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C504-506 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C508-510 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C511 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C512,513 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C518,519 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C522,523 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C525 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C527 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C528 | | | CC73GCH1H102J | CHIP C | 1000PF | J |
| C529 | | | CC73GCH1H040C | CHIP C | 4.0PF | C |
| C530 | | | CC73GCH1H060D | CHIP C | 6.0PF | D |
| C600 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C601 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C604 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C605 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C606 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C607,608 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C610 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C612 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C614 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C615,616 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C617 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C618 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C619 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C620,621 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C622 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C623 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C625 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C626 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C628 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C701 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C703 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C705 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C706 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C707 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C708 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C709 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C710 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C711 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C712 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C713,714 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C715 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C718-720 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C722,723 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C725 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C728 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C730-734 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C736 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components.

DV-5050M/5900M/DVF-J6050/J6050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

33

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|----------------------|--------------|----------|
| C737 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C740 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C742 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C744,745 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C747,748 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C752 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C754 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C756,757 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C759 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C761 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C762,763 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C770 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C774 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C775,776 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C777 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C778 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C781-783 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C784,785 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C786,787 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C789-791 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C795-797 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C801 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C803,804 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C805 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C806 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C808 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C809,810 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C811 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C813,814 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C815,816 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C817 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C850 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C851 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C852-854 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C858 | | | CC73GCH1H102J | CHIP C | 1000PF | J |
| C880-890 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C891,892 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C900 | | | CE32AP1C101M | CHIP EL | 100UF | 16WV |
| C901 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C903-905 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C910 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C911 | | | CC73GCH1H050C | CHIP C | 5.0PF | C |
| C912 | | | CE32AP0G221M | CHIP EL | 220UF | 4.0WV |
| C914,915 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C916 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C919-925 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C927 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C928 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C931 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| C934-937 | | | CK73GB1H122K | CHIP C | 1200PF | K |
| CN1 | | * | E40-8894-05 | FLAT CABLE CONNECTOR | | |
| CN5 ,6 | | * | E40-8882-05 | FLAT CABLE CONNECTOR | | |
| CN10 | | * | E40-8867-05 | PIN ASSY | | |
| CN201 | | * | E40-8881-05 | SOCKET FOR PIN ASSY | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

34

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|-------------|------------------------------|--------------|----------|
| CF1 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF3 -7 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF301 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF401 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF701,702 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF851 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF853 | | | L72-0780-05 | CERAMIC FILTER | | |
| L1 | | | L40-4792-39 | SMALL FIXED INDUCTOR(4.7UH) | | |
| L3 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L5 | | | L92-0515-05 | FERRITE CORE | | |
| L7 -10 | | | L92-0515-05 | FERRITE CORE | | |
| L13 ,14 | | | L92-0515-05 | FERRITE CORE | | |
| L16 ,17 | | | L92-0515-05 | FERRITE CORE | | |
| L19 -22 | | | L92-0515-05 | FERRITE CORE | | |
| L24 -35 | | | L92-0515-05 | FERRITE CORE | | |
| L36 ,37 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L101 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L201 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L202-206 | | | L92-0515-05 | FERRITE CORE | | |
| L207 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L208,209 | | | L92-0545-05 | CHIP FERRITE | | |
| L300 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L302-311 | | | L92-0515-05 | FERRITE CORE | | |
| L313 | | | L92-0545-05 | CHIP FERRITE | | |
| L400 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L401 | | | L92-0515-05 | FERRITE CORE | | |
| L500,501 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L600,601 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L700 | | | L92-0515-05 | FERRITE CORE | | |
| L701 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L702 | | | L92-0515-05 | FERRITE CORE | | |
| L703 | | | L92-0516-05 | FERRITE CORE | | |
| L704,705 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L706 | | | L92-0515-05 | FERRITE CORE | | |
| L707 | | | L92-0545-05 | CHIP FERRITE | | |
| L708 | | | L92-0515-05 | FERRITE CORE | | |
| L709 | | | L92-0545-05 | CHIP FERRITE | | |
| L800,801 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L850 | | | L40-1092-39 | SMALL FIXED INDUCTOR(1UH) | | |
| L852 | | | L40-4792-39 | SMALL FIXED INDUCTOR(4.7UH) | | |
| L859-866 | | | L92-0515-05 | FERRITE CORE | | |
| L871-875 | | | L92-0545-05 | CHIP FERRITE | | |
| L878 | | | L92-0515-05 | FERRITE CORE | | |
| L880-891 | | | L92-0515-05 | FERRITE CORE | | |
| L892,893 | | | L92-0545-05 | CHIP FERRITE | | |
| L895,896 | | | L92-0515-05 | FERRITE CORE | | |
| L900 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| X201 | | | L77-2298-05 | CRYSTAL RESONATOR(27MHZ) | | |
| X500 | | | L77-2299-05 | CRYSTAL RESONATOR(36.864MHZ) | | |
| CP300-305 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| CP400-405 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| CP600,601 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| CP700-715 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| CP770-777 | | | R90-0978-05 | MULTIPLE RESISTOR | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

PARTS LIST

DV-5050M/5900M/DVF-J6050/J6050-G

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

35

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|--------------|-------------------|--------------|----------|
| CP786 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| CP900-905 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| R1 -6 | | | RK73GB1J153J | CHIP R | 15K | J 1/16W |
| R7 | | | RK73GB1J183J | CHIP R | 18K | J 1/16W |
| R8 | | | RK73GB1J163J | CHIP R | 16K | J 1/16W |
| R9 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |
| R10 | | | RK73GB1J562J | CHIP R | 5.6K | J 1/16W |
| R11 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R12 | | | RN73GH1J153D | CHIP R | 15K | D 1/16W |
| R13 | | | RK73GB1J123J | CHIP R | 12K | J 1/16W |
| R14 | | | RK73GB1J2R2J | CHIP R | 2.2 | J 1/16W |
| R15 -16 | | | RK73GB1J273J | CHIP R | 27K | J 1/16W |
| R17 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R18 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R19 -23 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R24 ,25 | | | RK73GB1J123J | CHIP R | 12K | J 1/16W |
| R26 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R27 ,28 | | | RK73GB1J2R2J | CHIP R | 2.2 | J 1/16W |
| R29 | | | RK73GB1J223J | CHIP R | 22K | J 1/16W |
| R30 | | | RK73GB1J563J | CHIP R | 56K | J 1/16W |
| R31 | | | RN73GH1J123D | CHIP R | 12K | D 1/16W |
| R32 -34 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R35 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R36 | | | RK73GB1J223J | CHIP R | 22K | J 1/16W |
| R101-104 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R105 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R106-112 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R113-120 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R121 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R122 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R201,202 | | | RK73GB1J472J | CHIP R | 4.7K | J 1/16W |
| R203-205 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R206 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R207 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R208-218 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R219 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R220,221 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R222 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R223,224 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R225 | | | RK73GB1J221J | CHIP R | 220 | J 1/16W |
| R226 | | | RK73GB1J561J | CHIP R | 560 | J 1/16W |
| R227,228 | | | RK73GB1J271J | CHIP R | 270 | J 1/16W |
| R229 | | | RK73GB1J221J | CHIP R | 220 | J 1/16W |
| R230,231 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |
| R234 | | | RK73GB1J271J | CHIP R | 270 | J 1/16W |
| R240 | | | RK73GB1J222J | CHIP R | 2.2K | J 1/16W |
| R241 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R242 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R244,245 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R300,301 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R304 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R305 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R307-310 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R311 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R312,313 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

36

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|-------------|--------------|----------|
| R314 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R315,316 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R317 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R319 | | | RK73GB1J121J | CHIP R | 120 | J 1/16W |
| R320 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R321 | | | RK73GB1J333J | CHIP R | 33K | J 1/16W |
| R322 | | | RK73GB1J153J | CHIP R | 15K | J 1/16W |
| R323 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R324 | | | RK73GB1J223J | CHIP R | 22K | J 1/16W |
| R325 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R326 | | | RK73GB1J221J | CHIP R | 220 | J 1/16W |
| R327 | | | RK73GB1J181J | CHIP R | 180 | J 1/16W |
| R328 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R329 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R330-334 | | | RK73GB1J221J | CHIP R | 220 | J 1/16W |
| R335 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R336-339 | | | RK73GB1J564J | CHIP R | 560K | J 1/16W |
| R340-347 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R348-351 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R352 | | | RK73GB1J220J | CHIP R | 22 | J 1/16W |
| R354-357 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R358 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R359 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R360 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R361-363 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R364 | | | RK73GB1J470J | CHIP R | 47 | J 1/16W |
| R400 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R401 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R402-404 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R405 | | | RK73GB1J470J | CHIP R | 47 | J 1/16W |
| R406,407 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R408,409 | | | RK73GB1J220J | CHIP R | 22 | J 1/16W |
| R410 | | | RK73GB1J103J | CHIP R | 10K | J 1/16W |
| R411 | | | RK73GB1J221J | CHIP R | 220 | J 1/16W |
| R412 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R500,501 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R502 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R503 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R504 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R505-508 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R509 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R510-514 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R515-517 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R518 | | | RK73GB1J470J | CHIP R | 47 | J 1/16W |
| R519 | | | RK73GB1J3R9J | CHIP R | 3.9 | J 1/16W |
| R520 | | | RK73GB1J151J | CHIP R | 150 | J 1/16W |
| R521,522 | | | RK73GB1J105J | CHIP R | 1.0M | J 1/16W |
| R608,609 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |
| R610,611 | | | RK73GB1J473J | CHIP R | 47K | J 1/16W |
| R612,613 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R614 | | | RK73GB1J470J | CHIP R | 47 | J 1/16W |
| R615 | | | RK73GB1J1R0J | CHIP R | 1 | J 1/16W |
| R616 | | | RK73GB1J102J | CHIP R | 1.0K | J 1/16W |
| R617 | | | RK73GB1J301J | CHIP R | 300 | J 1/16W |
| R618 | | | RK73GB1J101J | CHIP R | 100 | J 1/16W |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

DV-5050M/5900M/DVF-16050/16050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

37

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|--------------|---------------------|--------------|----------|
| R619 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R620 | | | RK73GB1J301J | CHIP R 300 J 1/16W | | |
| R621 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R622 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R623 | | | RK73GB1J301J | CHIP R 300 J 1/16W | | |
| R624 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R625 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R626 | | | RK73GB1J301J | CHIP R 300 J 1/16W | | |
| R627 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R628 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R629 | | | RK73GB1J301J | CHIP R 300 J 1/16W | | |
| R630 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R631 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R632 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R633,634 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R635 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R637 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R638,639 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R640,641 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | | |
| R700 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R702 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R703,704 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R705 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R707 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R709,710 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R711,712 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R713 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R714,715 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R716 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R717-722 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R723-728 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R729 | | | RK73GB1J151J | CHIP R 150 J 1/16W | | |
| R730 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R731-744 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R745 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R746-760 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R761 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R762,763 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R764-767 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R769 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R770-775 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R777 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R778-782 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R783,784 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R788,789 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R790 | | | RK73GB1J471J | CHIP R 470 J 1/16W | | |
| R791-794 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R795 | | | RK73GB1J221J | CHIP R 220 J 1/16W | | |
| R796,797 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R799 | | | RK73GB1J121J | CHIP R 120 J 1/16W | | |
| R800-802 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R803 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R804 | | | RK73GB1J301J | CHIP R 300 J 1/16W | | |
| R805 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R806 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

38

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|--------------|------------------------------|--------------|----------|
| R807 | | | RK73GB1J301J | CHIP R 300 J 1/16W | | |
| R808 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R809 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R810 | | | RK73GB1J301J | CHIP R 300 J 1/16W | | |
| R811 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R812 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R813 | | | RK73GB1J182J | CHIP R 1.8K J 1/16W | | |
| R815,816 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R818 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R819 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R822 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R825,826 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R880-882 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R883,884 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R900,901 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R902-906 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R907,908 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R909 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R910,911 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R912 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R913,914 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R918-920 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R921 | | | RK73GB1J100J | CHIP R 10 J 1/16W | | |
| R922 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R923 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R924 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R925-928 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R929,930 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R931 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R935,936 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R937 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R938 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R939 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R941 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R943,944 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | |
| R949,950 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R951-953 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R954 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| VR600-602 | | | R32-0102-05 | SEMI FIXED VARIABLE RESISTOR | | |
| VR800 | | * | R32-0112-05 | SEMI FIXED VARIABLE RESISTOR | | |
| W301-308 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W901-904 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| D1 | | | MA111 | DIODE | | |
| D3 ,4 | | | DA204U | DIODE | | |
| D101,102 | | | DA204U | DIODE | | |
| D201 | | | MA111 | DIODE | | |
| D202,203 | | | DA204U | DIODE | | |
| D300 | | | MA111 | DIODE | | |
| D600 | | | MA111 | DIODE | | |
| D900 | | | MA111 | DIODE | | |
| IC1 | | * | MN67706EC | MOS-IC | | |
| IC101 | | | MN103S13BGA | MOS-IC | | |
| IC201 | | * | MN102L62GGB | MI-COM IC | | |
| IC202 | | | PST596JNR | ANALOGUE IC | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

PARTS LIST

DV-5050M/5900M/DVF-J6050/J6050-G

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

39

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|---|----------|-----------|----------------|--------------------|--------------|----------|
| IC203 | | | TC7SH08FU | MOS-IC | | |
| IC204,205 | | | TC3W02FU | MOS-IC | | |
| IC206 | | | X25057M-2.7 | MEMORY IC | | |
| IC207 | | | 49LV8192A90T | MEMORY IC | | |
| IC208 | | | BS62LV1024ST70 | MEMORY IC | | |
| IC208 | | | KM68U1000E10 | MEMORY IC | | |
| IC209 | | | TC7SHU04FU | MOS-IC | | |
| IC210,211 | | | TC7WH74FU | MOS-IC | | |
| IC212 | | | TC7SHU04FU | MOS-IC | | |
| IC214 | | | TC3W02FU | MOS-IC | | |
| IC215 | | * | 49LV8192A90T | MEMORY IC | | |
| IC216 | | * | TC74VHC157FT | MOS-IC | | |
| IC300 | | | MN677521HB | MOS-IC | | |
| IC301 | | * | IS42S16400-7T | MEMORY IC | | |
| IC301 | | * | K4S641632ET75 | MEMORY IC | | |
| IC301 | | * | 57V641620HGTH | MEMORY IC | | |
| IC302 | | * | NJM2115V | ANALOGUE IC | | |
| IC303 | | * | PQ070XH02ZP | ANALOGUE IC | | |
| IC304 | | | TC7SET04FU | MOS-IC | | |
| IC400 | | | MN5C027D4H | MOS-IC | | |
| IC401 | | | TC74VHC00FT | MOS-IC | | |
| IC402 | | | TC7WH34FU | MOS-IC | | |
| IC500 | | | MN67736WK | MOS-IC | | |
| IC501 | | | TC7SH08FU | MOS-IC | | |
| IC502 | | | TC7SH32FU | MOS-IC | | |
| IC503 | | | TC7SHU04FU | MOS-IC | | |
| IC600 | | | ADV7190 | MOS-IC | | |
| IC601 | | | PQ1R33 | ANALOGUE IC | | |
| IC700 | | * | FLI2200 | MOS-IC | | |
| IC701,702 | | | HY57V16160DTC | MEMORY IC | | |
| IC701,702 | | * | IS42S16100-7T | MEMORY IC | | |
| IC701,702 | | * | K4S161622DTC80 | MEMORY IC | | |
| IC703 | | * | FLI2220 | MOS-IC | | |
| IC800 | | * | ADV7196 | MOS-IC | | |
| IC900 | | | 320DA150PGE | MOS-IC | | |
| IC901 | | * | 49LV8192A9TMPA | CUSTOM IC | | |
| IC902 | | * | TPS76316 | ANALOGUE IC | | |
| IC903 | | * | TC74VHC157FT | MOS-IC | | |
| IC905 | | | TC74VHC541FT | MOS-IC | | |
| IC906 | | | TC7SHU04FU | MOS-IC | | |
| IC907 | | | TC74VHC00FT | MOS-IC | | |
| IC908 | | | TC7SH32FU | MOS-IC | | |
| Q201 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q202 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q203 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q600-604 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q800-802 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q900 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q901 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| VIDEO UNIT (X35-230X-XX) except DV-5900M | | | | | | |
| C1 -4 | | | CC73GCH1H102J | CHIP C | 1000PF | J |
| C5 ,6 | | | CC73GCH1H331J | CHIP C | 330PF | J |
| C7 | | | CC73GCH1H681J | CHIP C | 680PF | J |
| C8 | | | CC73GCH1H561J | CHIP C | 560PF | J |
| C9 ,10 | | | CK73GB1C104K | CHIP C | 0.10UF | K |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

40

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|----------|----------|-----------|---------------|-------------|--------------|----------|
| C11 | | | CK73GB1H682K | CHIP C | 6800PF | K |
| C12 | | | CC73GCH1H681J | CHIP C | 680PF | J |
| C13 | | | CE32AP0J470M | CHIP EL | 47UF | 6.3WV |
| C14 ,15 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C16 ,17 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C18 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C19 | | | CK73GB1E183K | CHIP C | 0.018UF | K |
| C20 | | | CC73GCH1H102J | CHIP C | 1000PF | J |
| C22 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C23 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C24 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C25 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C26 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C27 | | | CE32AP0J470M | CHIP EL | 47UF | 6.3WV |
| C28 ,29 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C30 | | | CK73GB1C473K | CHIP C | 0.047UF | K |
| C31 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C32 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C33 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C34 | | | CK73GB1C393K | CHIP C | 0.039UF | K |
| C35 | | | CK73GB1H822K | CHIP C | 8200PF | K |
| C36 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C37 | | | CK73FB1C474K | CHIP C | 0.47UF | K |
| C38 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C39 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C40 | | | CC73GCH1H100D | CHIP C | 10PF | D |
| C48 | | * | CE32AC0J221M | CHIP EL | 220UF | 6.3WV |
| C49 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C51 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C101-107 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C108 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C109 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C110,111 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C112-120 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C121 | | | CC73GCH1H100D | CHIP C | 10PF | D |
| C129 | | | CK73GF1A105Z | CHIP C | 1.0UF | Z |
| C201 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C202 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C203 | | | CE32AP0J470M | CHIP EL | 47UF | 6.3WV |
| C204,205 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C206 | | | CC73GCH1H100D | CHIP C | 10PF | D |
| C207-210 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C211,212 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C214 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C215 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C216 | | | CK73GB1C104K | CHIP C | 0.10UF | K |
| C220,221 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C226 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C227 | | | CE32AP1C100M | CHIP EL | 10UF | 16WV |
| C228,229 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C230 | | | CC73GCH1H120J | CHIP C | 12PF | J |
| C231 | | | CC73GCH1H150J | CHIP C | 15PF | J |
| C232-234 | | | CK73GB1H152K | CHIP C | 1500PF | K |
| C235 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C237 | | | CC73GCH1H102J | CHIP C | 1000PF | J |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

DV-5050M/5900M/DVF-J6050/J6050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

41

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|---------------|------------------------------|--------------|----------|
| C238 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C239 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C240 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C301,302 | | | CE32AP0G221M | CHIP EL 220UF | 4.0WV | |
| C303-314 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C315 | | | CC73GCH1H100D | CHIP C 10PF | D | |
| C316 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C317 | | | CK73GF1A105Z | CHIP C 1.0UF | Z | |
| C318-320 | | | CC73GCH1H220J | CHIP C 22PF | J | |
| C321 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C322 | | | CC73GCH1H220J | CHIP C 22PF | J | |
| C323,324 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C326-329 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C330 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C331 | | | CE32AP0G221M | CHIP EL 220UF | 4.0WV | |
| C332-335 | | | CK73FF1C105Z | CHIP C 1.0UF | Z | |
| C336 | | | CC73GCH1H101J | CHIP C 100PF | J | |
| C337 | | | CK73GF1A105Z | CHIP C 1.0UF | Z | |
| C338-349 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C351 | | | CE32AP0J470M | CHIP EL 47UF | 6.3WV | |
| C352 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C401-407 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C408 | | | CE32AP0G221M | CHIP EL 220UF | 4.0WV | |
| C409 | | | CK73GF1A105Z | CHIP C 1.0UF | Z | |
| C411 | | | CK73GF1A105Z | CHIP C 1.0UF | Z | |
| C601 | | * | CE32AC0J221M | CHIP EL 220UF | 6.3WV | |
| C602,603 | | | CE32AP0G221M | CHIP EL 220UF | 4.0WV | |
| C604 | | | CE32AP1C101M | CHIP EL 100UF | 16WV | |
| C605 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| C606 | | | CE32AP0G221M | CHIP EL 220UF | 4.0WV | |
| C608 | | | CK73GB1C104K | CHIP C 0.10UF | K | |
| C609 | | | CK73FF1C105Z | CHIP C 1.0UF | Z | |
| C612 | | | CK73GB1H152K | CHIP C 1500PF | K | |
| CN1 | | * | E40-8894-05 | FLAT CABLE CONNECTOR | | |
| CN201 | | * | E40-8881-05 | SOCKET FOR PIN ASSY | | |
| CN601,602 | | * | E40-8407-05 | FLAT CABLE CONNECTOR | | |
| CF1 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF3 ,4 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF201-203 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF301 | | | L72-0780-05 | CERAMIC FILTER | | |
| CF601-607 | | | L72-0780-05 | CERAMIC FILTER | | |
| L1 | | | L40-4792-39 | SMALL FIXED INDUCTOR(4.7UH) | | |
| L3 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L5 | | | L92-0515-05 | FERRITE CORE | | |
| L7 -10 | | | L92-0515-05 | FERRITE CORE | | |
| L13 ,14 | | | L92-0515-05 | FERRITE CORE | | |
| L16 ,17 | | | L92-0515-05 | FERRITE CORE | | |
| L19 -22 | | | L92-0515-05 | FERRITE CORE | | |
| L24 -35 | | | L92-0515-05 | FERRITE CORE | | |
| L36 ,37 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L101 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L201 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L202-206 | | | L92-0515-05 | FERRITE CORE | | |
| L207 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

42

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|--------------|------------------------------|--------------|----------|
| L208,209 | | | L92-0515-05 | FERRITE CORE | | |
| L211-213 | | | L92-0515-05 | FERRITE CORE | | |
| L301-304 | | | L92-0515-05 | FERRITE CORE | | |
| L306 | | | L40-1001-93 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L307 | | * | L92-0545-05 | CHIP FERRITE | | |
| L401 | | | L92-0515-05 | FERRITE CORE | | |
| L601,602 | | | L40-1001-39 | SMALL FIXED INDUCTOR(10UH,K) | | |
| L605 | | | L40-1092-39 | SMALL FIXED INDUCTOR(1UH) | | |
| L613-618 | | | L92-0515-05 | FERRITE CORE | | |
| L619-626 | | * | L92-0545-05 | CHIP FERRITE | | |
| L627-635 | | | L92-0515-05 | FERRITE CORE | | |
| L636 | | * | L92-0545-05 | CHIP FERRITE | | |
| L637-642 | | | L92-0515-05 | FERRITE CORE | | |
| L649 | | | L92-0515-05 | FERRITE CORE | | |
| L650,651 | | | L92-0515-05 | FERRITE CORE | | |
| X202 | | * | L77-2358-05 | CRYSTAL RESONATOR(27MHZ) | | |
| CP301 | | | R90-0959-05 | MULTIPLE RESISTOR | | |
| CP302 | | | R90-0959-05 | MULTIPLE RESISTOR | | |
| CP303-306 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| CP307 | | | R90-0959-05 | MULTIPLE RESISTOR | | |
| CP308,309 | | | R90-0978-05 | MULTIPLE RESISTOR | | |
| R1 -6 | | | RK73GB1J153J | CHIP R 15K | J | 1/16W |
| R7 | | | RK73GB1J183J | CHIP R 18K | J | 1/16W |
| R8 | | | RK73GB1J163J | CHIP R 16K | J | 1/16W |
| R9 | | | RK73GB1J105J | CHIP R 1.0M | J | 1/16W |
| R10 | | | RK73GB1J562J | CHIP R 5.6K | J | 1/16W |
| R11 | | | RK73GB1J1R0J | CHIP R 1 | J | 1/16W |
| R12 | | | RN73GH1J153D | CHIP R 15K | D | 1/16W |
| R13 | | | RK73GB1J123J | CHIP R 12K | J | 1/16W |
| R14 | | | RK73GB1J2R2J | CHIP R 2.2 | J | 1/16W |
| R15 ,16 | | | RK73GB1J273J | CHIP R 27K | J | 1/16W |
| R17 | | | RK73GB1J473J | CHIP R 47K | J | 1/16W |
| R18 | | | RK73GB1J102J | CHIP R 1.0K | J | 1/16W |
| R19 -23 | | | RK73GB1J1R0J | CHIP R 1 | J | 1/16W |
| R24 ,25 | | | RK73GB1J123J | CHIP R 12K | J | 1/16W |
| R26 | | | RK73GB1J473J | CHIP R 47K | J | 1/16W |
| R27 ,28 | | | RK73GB1J2R2J | CHIP R 2.2 | J | 1/16W |
| R29 | | | RK73GB1J223J | CHIP R 22K | J | 1/16W |
| R30 | | | RK73GB1J563J | CHIP R 56K | J | 1/16W |
| R31 | | | RN73GH1J123D | CHIP R 12K | D | 1/16W |
| R32 -34 | | | RK73GB1J472J | CHIP R 4.7K | J | 1/16W |
| R35 | | | RK73GB1J101J | CHIP R 100 | J | 1/16W |
| R36 | | | RK73GB1J223J | CHIP R 22K | J | 1/16W |
| R101-104 | | | RK73GB1J473J | CHIP R 47K | J | 1/16W |
| R105 | | | RK73GB1J102J | CHIP R 1.0K | J | 1/16W |
| R106-112 | | | RK73GB1J1R0J | CHIP R 1 | J | 1/16W |
| R113-120 | | | RK73GB1J473J | CHIP R 47K | J | 1/16W |
| R121 | | | RK73GB1J102J | CHIP R 1.0K | J | 1/16W |
| R122-124 | | | RK73GB1J473J | CHIP R 47K | J | 1/16W |
| R201,202 | | | RK73GB1J472J | CHIP R 4.7K | J | 1/16W |
| R203-205 | | | RK73GB1J103J | CHIP R 10K | J | 1/16W |
| R206 | | | RK73GB1J473J | CHIP R 47K | J | 1/16W |
| R207 | | | RK73GB1J103J | CHIP R 10K | J | 1/16W |
| R208-218 | | | RK73GB1J473J | CHIP R 47K | J | 1/16W |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

43

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-----------|----------|-----------|--------------|------------------------------|--------------|----------|
| R219 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R220,221 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R222 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R223,224 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R225-229 | | | RK73GB1J221J | CHIP R 220 J 1/16W | | |
| R232 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R233 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R236 | | | RK73GB1J2R2J | CHIP R 2.2 J 1/16W | | |
| R237,238 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | |
| R239 | | | RK73GB1J391J | CHIP R 390 J 1/16W | | |
| R240 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | |
| R241 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R244,245 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R246,247 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R248 | | | RK73GB1J223J | CHIP R 22K J 1/16W | | |
| R309 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R310 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | |
| R311-313 | | | RK73GB1J221J | CHIP R 220 J 1/16W | | |
| R314 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| R315 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R316 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R317 | | | RK73GB1J113J | CHIP R 11K J 1/16W | | |
| R318 | | | RK73GB1J752J | CHIP R 7.5K J 1/16W | | |
| R320 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | | |
| R321,322 | | | RK73GB1J123J | CHIP R 12K J 1/16W | | |
| R323 | | | RK73GB1J752J | CHIP R 7.5K J 1/16W | | |
| R324 | | | RK73GB1J331J | CHIP R 330 J 1/16W | | |
| R325,326 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | KYM | |
| R327 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | |
| R328 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R329,330 | | | RK73GB1J101J | CHIP R 100 J 1/16W | KYM | |
| R331 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R332-335 | | | RK73GB1J750J | CHIP R 75 J 1/16W | | |
| R337 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | |
| R339,340 | | | RK73GB1J512J | CHIP R 5.1K J 1/16W | E | |
| R341 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | |
| R401-407 | | | RK73GB1J1R0J | CHIP R 1 J 1/16W | | |
| R408,409 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | |
| VR301 | | * | R32-0104-05 | SEMI FIXED VARIABLE RESISTOR | | |
| VR302,303 | | * | R32-0108-05 | SEMI FIXED VARIABLE RESISTOR | KYM | |
| VR304 | | * | R32-0108-05 | SEMI FIXED VARIABLE RESISTOR | | |
| W303 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| W609,610 | | | R92-1963-05 | JUMPER WIRE (RESISTOR TYPE) | | |
| D1 | | | MA111 | DIODE | | |
| D3,4 | | | DA204U | DIODE | | |
| D101,102 | | | DA204U | DIODE | | |
| D201 | | | MA111 | DIODE | | |
| D202,203 | | | DA204U | DIODE | | |
| D301 | | | DA204U | DIODE | | |
| D601 | | | MA111 | DIODE | | |
| IC1 | | * | MN67706EC | MOS-IC | | |
| IC101 | | | MN103S13BGA | MOS-IC | | |
| IC201 | | * | MN102L62GGB | MI-COM IC | | |
| IC202 | | | PST596JNR | ANALOGUE IC | | |

L: Scandinavia K: USA P: Canada R: Mexico C: China I: Malaysia
Y: PX(Far East,Hawaii) T: England E: Europe G: Germany V: China(Shanghai)
Y: AAFES(Europe) X: Australia Q: Russia H: Korea M: Other Areas Δ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

44

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-------------------------------------|----------|-----------|---------------|--------------------|--------------|----------|
| IC206 | | | X25057M-2.7 | MEMORY IC | | |
| IC207 | | * | 49LV8192A90T | MEMORY IC | | |
| IC210,211 | | | TC7WH74FU | MOS-IC | | |
| IC213 | | * | SM8703AV | MOS-IC | | |
| IC214 | | | TC3W02FU | MOS-IC | | |
| IC215 | | * | 49LV8192A90T | MEMORY IC | | |
| IC216 | | * | TC74VHC157FT | MOS-IC | | |
| IC217 | | | TC7WH157FU | MOS-IC | | |
| IC218 | | | TC7SHU04FU | MOS-IC | | |
| IC301 | | * | MN677533MP | MOS-IC | | |
| IC302 | | | TC7SHU04FU | MOS-IC | | |
| IC401 | | * | IS42S16400-7T | MEMORY IC | | |
| IC401 | | * | K4S641632ET75 | MEMORY IC | | |
| IC401 | | * | 57V641620HGH | MEMORY IC | | |
| IC601 | | * | PQ025EZ01ZP | ANALOGUE IC | | |
| IC602 | | | PQ1R33 | ANALOGUE IC | | |
| IC603 | | | PQ018EZ01ZP | ANALOGUE IC | | |
| Q201 | | | 2SC4081(R,S) | TRANSISTOR | | |
| Q202 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q203 | | | DTC124EUA | DIGITAL TRANSISTOR | | |
| Q301 | | | 2SA1576A(R,S) | TRANSISTOR | KYM | |
| Q302,303 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| Q304 | | | 2SA1576A(R,S) | TRANSISTOR | | |
| MECHANISM ASSY (X92-2210-10) | | | | | | |
| 1 | 3D | * | A10-3535-01 | CHASSIS | | |
| 2 | 2C | * | A11-1194-01 | SUB CHASSIS | | |
| 4 | 2F | * | A11-1196-01 | SUB CHASSIS | | |
| 5 | 1F | * | A11-1201-03 | SUB CHASSIS | | |
| 6 | 1F | * | A11-1202-04 | SUB CHASSIS ASSY | | |
| 8 | 1E | * | A11-1204-03 | SUB CHASSIS ASSY | | |
| 10 | 1E | * | A11-1206-02 | SUB CHASSIS | | |
| 11 | 2F | * | A11-1215-03 | SUB CHASSIS ASSY | | |
| 12 | 1F | * | A15-0107-02 | FRAME | | |
| 13 | 1C | * | B12-0419-03 | INDICATOR | | |
| - | - | * | B20-0627-02 | SCALE | | |
| 15 | 2D | * | D10-3966-13 | SLIDER | | |
| 16 | 2D | * | D10-3967-03 | SLIDER | | |
| 17 | 3C | * | D10-3968-14 | ARM | | |
| 18 | 2E | * | D10-3969-14 | ARM | | |
| 19 | 3C | * | D10-3970-04 | SLIDER | | |
| 20 | 3C | * | D10-3971-03 | ARM | | |
| 21 | 3C | * | D10-3972-14 | ARM | | |
| 22 | 1F | * | D10-3973-04 | SLIDER ASSY | | |
| 24 | 1F | * | D10-3975-03 | SLIDER | | |
| 25 | 1E | * | D10-3976-04 | ARM | | |
| 26 | 2F | * | D10-3977-03 | ARM | | |
| 27 | 2F | * | D10-3978-03 | ARM | | |
| 28 | 1E | * | D10-3979-04 | ARM | | |
| 29 | 1F | * | D10-3980-03 | ARM | | |
| 30 | 1F | * | D10-3981-04 | ARM | | |
| 31 | 3D | * | D10-3994-03 | SLIDER | | |
| 32 | 1E | * | D10-3995-04 | ARM | | |
| 33 | 1E | * | D10-3996-03 | SLIDER | | |
| 34 | 1E | * | D10-3997-14 | SLIDER | | |

L: Scandinavia K: USA P: Canada R: Mexico C: China I: Malaysia
Y: PX(Far East,Hawaii) T: England E: Europe G: Germany V: China(Shanghai)
Y: AAFES(Europe) X: Australia Q: Russia H: Korea M: Other Areas Δ indicates safety critical components.

DV-5050M/5900M/DVF-J6050/J6050-G
PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

45

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|---------|----------|-----------|-------------|---------------------------|--------------|----------|
| 35 | 2C,1E | * | D13-2517-04 | GEAR | | |
| 36 | 3C | * | D13-2518-04 | GEAR | | |
| 37 | 3D,1E | * | D13-2519-04 | GEAR | | |
| 38 | 3C | * | D13-2520-04 | GEAR | | |
| 39 | 2C | * | D13-2521-04 | GEAR | | |
| 40 | 1E | * | D13-2523-03 | GEAR | | |
| 41 | 2C,1E | * | D13-2524-04 | GEAR | | |
| 42 | 3C | * | D13-2546-02 | GEAR | | |
| 43 | 3C,3D | * | D14-0811-04 | ROLLER | | |
| 44 | 3C,3D | * | D14-0812-04 | ROLLER | | |
| 45 | 1F,2F | * | D14-0813-04 | ROLLER | | |
| 46 | 2C,3C | * | D15-0433-04 | MOTOR PULLEY | | |
| 47 | 2F | * | D15-0434-03 | PULLEY | | |
| 48 | 2C,1E | * | D16-0756-03 | BELT | | |
| 49 | 2F | * | D16-0757-05 | BELT | | |
| 58 | 1F | * | D40-1707-05 | MECHANISM ASSY (TRAVERSE) | | |
| 62 | 1F | * | E35-2944-15 | FLAT CABLE | | |
| 63 | 3C | * | F19-1118-04 | BLIND PLATE | | |
| 64 | 3D | * | G01-4236-04 | EXTENSION SPRING | | |
| 65 | 3C | * | G01-4237-04 | EXTENSION SPRING | | |
| 66 | 1E | * | G01-4239-04 | EXTENSION SPRING | | |
| 67 | 1F | * | G01-4240-04 | TORSION COIL SPRING | | |
| 68 | 1E | * | G01-4256-04 | TORSION COIL SPRING | | |
| 69 | 3C | * | G01-4257-04 | TORSION COIL SPRING | | |
| 70 | 1F | * | G01-4288-04 | TORSION COIL SPRING | | |
| 71 | 1F | * | G01-4292-04 | COMPRESSION SPRING | | |
| 72 | 2F | * | G01-4298-04 | EXTENSION SPRING | | |
| 73 | 1F | * | G01-4299-04 | COMPRESSION SPRING | | |
| 74 | 1F | * | G10-0542-04 | NON-WOVEN FABRIC | | |
| 75 | 1F | * | G11-2838-04 | CUSHION (10X50) | | |
| 76 | 2D | * | G11-2849-14 | CUSHION (12X12) | | |
| 77 | 1F | * | G16-1247-04 | SHEET | | |
| 78 | 2F | * | J10-0214-04 | FLANGE | | |
| 79 | 1F | * | J10-0215-04 | FLANGE | | |
| 80 | 1F | * | J11-0864-23 | CLAMPER | | |
| 81 | 3D | * | J19-6134-04 | HOLDER | | |
| 82 | 1F | * | J19-6135-03 | BRACKET | | |
| 83 | 1F | * | J19-6136-03 | HOLDER | | |
| 84 | 2D | * | J19-6137-01 | HOLDER | | |
| 85 | 1F | * | J19-6138-03 | HOLDER L | | |
| 86 | 1F | * | J19-6139-03 | HOLDER R | | |
| 87 | 2F | * | J19-6190-01 | HOLDER | | |
| 88 | 2F | * | J21-6857-04 | MOUNTING HARDWARE ASSY | | |
| 90 | 2D | * | J90-0879-23 | GUIDE | | |
| 91 | 2D | * | J90-0881-01 | GUIDE | | |
| 92 | 1F | * | J90-0882-02 | GUIDE | | |
| 93 | 1D | * | J90-0883-02 | GUIDE | | |
| 94 | 1D | * | J90-0884-02 | GUIDE | | |
| 95 | 2D | * | J90-0888-03 | RAIL | | |
| 96 | 2F | * | J90-0889-03 | GUIDE | | |
| 97 | 1F | * | J90-0890-13 | RAIL | | |
| 98 | 1C | * | J90-0891-02 | GUIDE | | |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

46

| Ref. No | Add-ress | New Parts | Parts No. | Description | Desti-nation | Re-marks |
|-------------------------------------|----------|-----------|-------------|----------------|--------------|-------------|
| 99 | 1F | * | T99-0651-05 | MAGNET | | |
| 100 | 1F | * | T50-1088-04 | YOKE | | |
| SM1-4 | 2C,1E | * | T42-0955-05 | DC MOTOR | | |
| MECHANISM ASSY (D40-1707-05) | | | | | | |
| 101 | 2A | * | A10-3570-08 | CHASSIS(T.U) | | CXQ0745 |
| 104 | 3A | * | J26-0143-08 | P.C.B(INTERRU) | | REP3091A-1N |
| 106 | 2A | * | J02-1534-08 | RUBBER | | RMG0545-A |
| 107 | 1A | * | D13-2576-08 | GEAR(A) | | RDG0499 |
| 109 | 2A,1B | * | J19-6289-08 | HOLDER(A) | | RMC0415 |
| 110 | 2B | * | J19-6290-08 | HOLDER(B) | | RMC0416 |
| 111 | 1B,2B | * | G01-4300-08 | SPRING(ADJ) | | RMEC0320 |
| 112 | 1B | * | D13-2577-08 | RACK(DRIVE) | | RMM0234 |
| 113 | 1A | * | D10-5019-08 | SHAFT(DRIVE) | | RMSC0710 |
| 114 | 2B | * | D10-5020-08 | SHAFT(GUIDE) | | RMSC0711 |
| 117 | 1A | * | D13-2578-08 | GEAR(B) | | RDG0500 |
| 118 | 1A | * | D13-2579-08 | GEAR(C) | | RDG0501 |
| 119 | 1A | * | G01-4301-08 | SPRING | | RME0319 |
| 120 | 3A | * | G13-2517-08 | RUBBER(PCB) | | RMGC0558-K |
| 132 | 1B | * | T25-0121-08 | PICK-UP | | RAF3020A-1C |
| 133 | 2B | * | J80-0047-08 | FPC | | RJB2308A-1 |
| 134 | 2B | * | G02-1744-08 | SPRING | | RMC0418-1 |
| 136 | 1B | * | G13-2518-08 | RUBBER | | RMG0561-T |
| 140 | 2A | * | D10-5021-08 | INNER STOPER | | RMX0192 |
| AA | | * | N09-5392-08 | SCREW | | RHD20060 |
| AB | | * | N09-5393-08 | SCREW | | RHD17028 |
| AC | | * | N09-5162-08 | SCREW | | VHD1224 |
| AD | | * | N09-3462-08 | SCREW | | VHD1057 |

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

HOW TO READ THE PARTS LIST

ABBREVIATION OF MODEL AND MASS PRODUCTION'S DESTINATIONS

| MODEL | ABB. | Australia | Canada | China | England | Europe | Germany | Korea | Malaysia |
|-------------|------|-----------|----------|--------|-------------|----------|---------|------------|----------|
| DV-5900M | | - | - | - | - | - | - | - | - |
| DV-5050M | | - | - | - | - | - | - | - | - |
| DVF-J6050 | | - | - | - | - | E | - | - | - |
| DVF-J6050-G | | - | - | - | - | - | - | - | - |
| MODEL | ABB. | Mexico | PX/AAFES | Russia | Scandinavia | Shanghai | USA | Other area | |
| DV-5900M | | - | - | - | - | - | K1 | - | - |
| DV-5050M | | - | - | - | - | - | K | - | - |
| DVF-J6050 | | - | Y | - | - | - | - | - | - |
| DVF-J6050-G | | - | - | - | - | - | - | M | - |

PARTS LIST

DV-5050M/5900M/DVF-J6050/J6050-G

DV-5050M/5900M/DVF-J6050/J6050-G

SPECIFICATIONS

[DV-5050M/DVF-J6050]

Format section

Format DVD video ver. 1.1
Laser Semiconductor laser

Audio section

Frequency response
Sampling frequency: 44.1kHz (CD only)
..... 4 Hz ~ 20 kHz
Sampling frequency: 96 kHz 4 Hz ~ 44 kHz
Signal to noise ratio More than 115 dB
Dynamic range More than 92 dB
Total harmonic distortion Less than 0.0045 % (1kHz)
Channel separation More than 92 dB (1kHz)
Analog output level/impedance
MIX LINE OUTPUT 2 V/ 510 Ω
Digital output level/impedance
COAXIAL 0.5 Vp-p/ 75 Ω
OPTICAL (Wave length 660 nm) -21 dBm ~ -15 dBm

Video Section

Video output format
DV-5050M NTSC
DVF-J6050
For Europe PAL/PAL60
For Asia NTSC/PAL
For U.S. Military NTSC
Composite video output level 1 Vp-p (75 Ω)
S-video output level
(Y-signal) 1 Vp-p (75 Ω)
(C-signal) 0.286 Vp-p (75 Ω)
Component video output level
[DV-5050M]
(Interlace/ "Black Level Setup" =7.5 IRE)
(Y-signal) 1 Vp-p (75 Ω)
(CB-signal) 0.68 Vp-p (75 Ω)
(CR-signal) 0.68 Vp-p (75 Ω)
[DVF-J6050 for Europe, U.S. Military and Asia]
(Y-signal) 1 Vp-p (75 Ω)
(CB-signal) 0.7 Vp-p (75 Ω)
(CR-signal) 0.7 Vp-p (75 Ω)
Video signal to noise ratio 60 dB
Horizontal resolution 500 lines

Laser Section

Wavelength 643 ~ 683 nm (DVD play)
Laser power class class 2 (IEC)

General Section

[DV-5050M]
Power consumption 35 W
Dimensions W : 440 mm (17-5/16")
H : 203 mm (8")
D : 555 mm (21-20/17")
Weight (net) 10.4 kg (22.9 lb)
[DVF-J6050]
Power consumption 35 W
Dimensions W : 440 mm (17-5/16")
H : 203 mm (8")
D : 555 mm (21-20/17")
Weight (net) 10.4 kg (22.9 lb)

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Sufficient performance may not be exhibited at extremely cold locations (Where water freezes).

DV-5050M/5900M/DVF-J6050/J6050-G

SPECIFICATIONS

[DV-5900M]

Format section

Format DVD video ver. 1.1 / DVD audio ver.1.2
Laser Semiconductor laser

Audio section

Frequency response
Sampling frequency: 44.1kHz (CD only)
..... 4 Hz ~20 kHz
Sampling frequency: 96 kHz 4 Hz ~ 44 kHz
Sampling frequency: 192 kHz (DVD AUDIO only)
..... 4 Hz ~ 88 kHz
Signal to noise ratio More than 120 dB
Dynamic range More than 100 dB
Total harmonic distortion Less than 0.003 % (1kHz)
Channel separation More than 95 dB (1kHz)
Analog output level/impedance
MIX LINE OUTPUT 2 V / 510 Ω
6 CH OUTPUT 2 V / 510 Ω
Digital output level/impedance
COAXIAL 0.5 Vp-p / 75 Ω
OPTICAL (Wave length 660 nm) -21 dBm ~ -15 dBm

Video Section

Video output format NTSC
Composite video output level 1 Vp-p (75 Ω)
S-video output level
(Y-signal) 1 Vp-p (75 Ω)
(C-signal) 0.286 Vp-p (75 Ω)
Component video output level
(Interlace/ "Black Level Setup" =7.5 IRE)
(Y-signal) 1 Vp-p (75 Ω)
(CB-signal) 0.68 Vp-p (75 Ω)
(CR-signal) 0.68 Vp-p (75 Ω)
Video signal to noise ratio 65 dB
Horizontal resolution 500 lines

Laser Section

Wavelength 643 ~ 683 nm (DVD play)
Laser power class class 2 (IEC)

General Section

Power consumption 40 W
Dimensions W : 440 mm (17-5/16")
H : 203 mm (8")
D : 555 mm (21-20/17")
Weight (net) 10.4 kg (22.9 lb)

Note:

Component and circuit are subject to modification to insure best operation under differing local conditions. This manual is based on Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION

14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo, 150-8501 Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55-2791, Piso 6 plaza Chase, Cl. 47 y Aquilino de la Guardia Panama, Republic de Panama

KENWOOD ELECTRONICS BRASIL LTDA.

Alameda Ministro Rocha Azevedo No. 456, Edifício Jaú, 10o Andar, Cerqueira César, Cep 0140-001, São Paulo-SP-Brasil

KENWOOD ELECTRONICS U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB., United Kingdom

KENWOOD ELECTRONICS BELGIUM N.V.

Leuvensesteenweg 248 J, 1800 Vilvoorde, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129, Milano, Italy

KENWOOD IBÉRICA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001 499 074)
16 Giffnock Avenue, North Ryde, N.S.W. 2113, Australia

KENWOOD ELECTRONICS (HONG KONG) LTD.

Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hong Fong Road, Kwai Fong N.T., Hong Kong

KENWOOD ELECTRONICS GULF FZE

P.O.Box 61318, Jebel Ali, Dubai, U.A.E.

KENWOOD ELECTRONICS SINGAPORE PTE LTD.

No. 1 Genting Lane #02-02, KENWOOD Building, Singapore, 349544

KENWOOD ELECTRONICS (MALAYSIA) SDN BHD.

#4.01 Level 4, Wisma Academy Lot 4A, Jalan 19/1 46300 Petaling Jaya Selangor Darul Ehsan Malaysia

KENWOOD ELECTRONICS (THAILAND) CO., LTD.

2019 New Pechburi Road, Bangkapi, Huaykwang, Bangkok, 10320 Thailand