
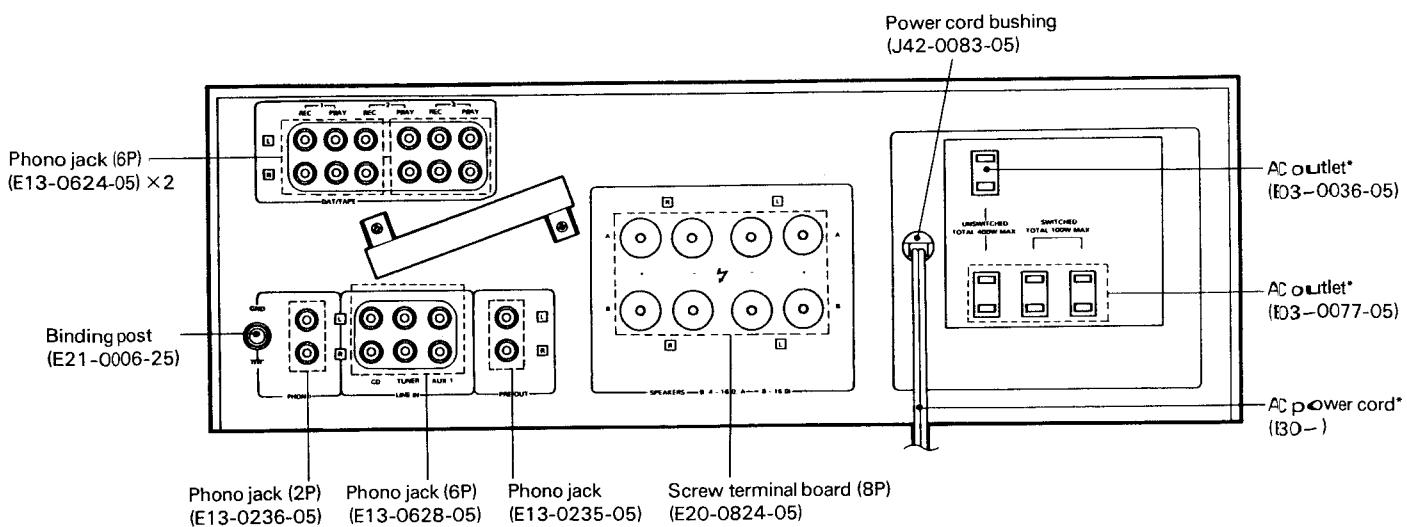


STEREO INTEGRATED AMPLIFIER
KA-1100D
 SERVICE MANUAL

KENWOOD
 KENWOOD CORPORATION

© 1986-7 PRINTED IN JAPAN
 B51-3007-00(B)1154


735

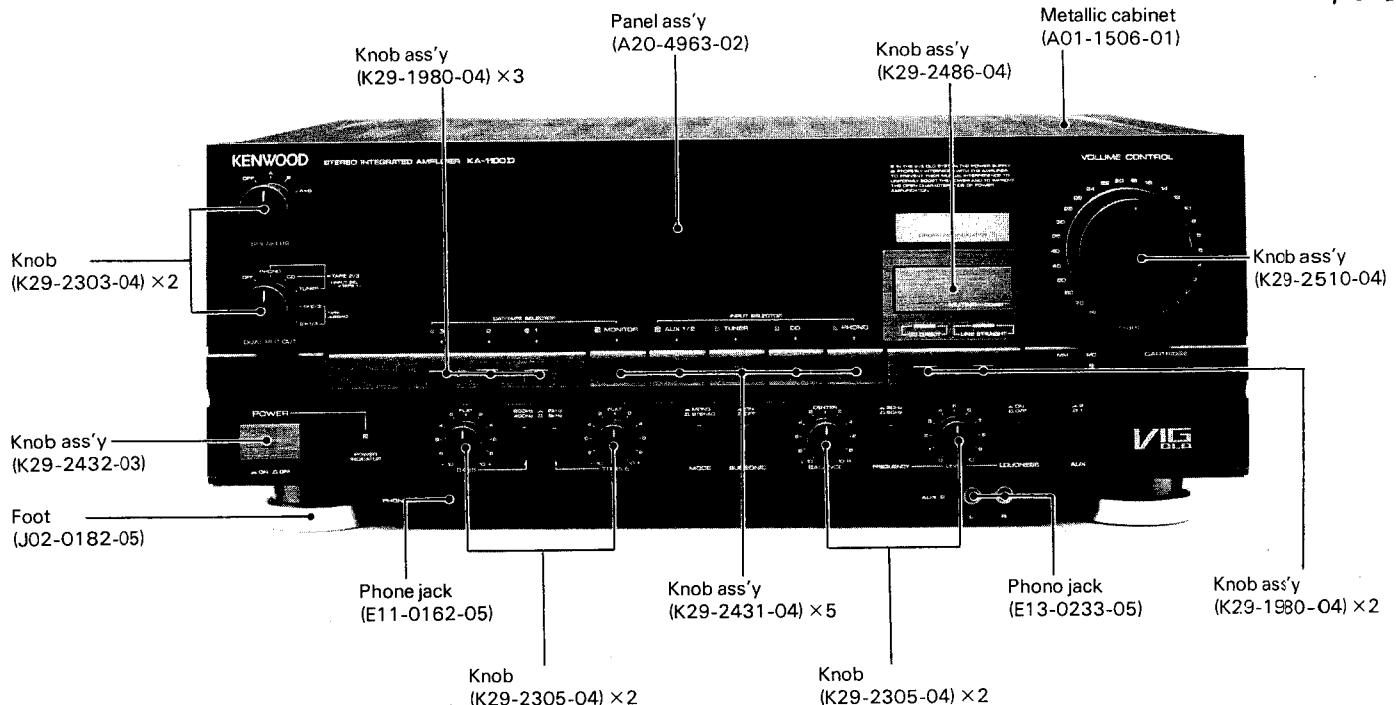


* Refer to parts list on page 11.

DISASSEMBLY FOR REPAIR


- ① Remove the 8 screws on the top cover.
- ② Remove the top cover in the direction of the arrow.
- ③ Remove the 7 screws on the front panel.
- ④ Remove the 7 knobs on the front panel. Remove the nuts from the front panel without damaging the panel itself.
- ⑤ Loosen the 4 screws shown in exploded-view ref. 15.

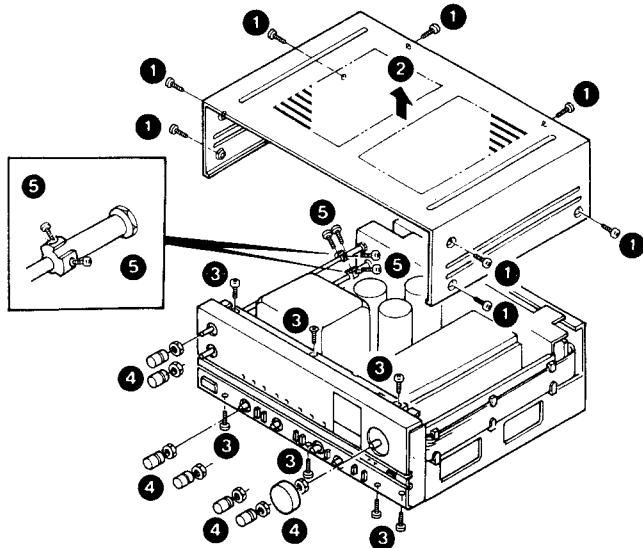

- ⑥ Remove the front panel in the direction of the arrow.
- ⑦ Observe the following cautions when installing the front panel.
- ⑧ Remove the screw on the fitting on the power switch.
- ⑨ When installing the fitting, align it with the sub-chassis groove.
- ⑩ Remove the 4 screws on the terminal cover.
- ⑪ Remove the terminal cover in the direction of the arrow.

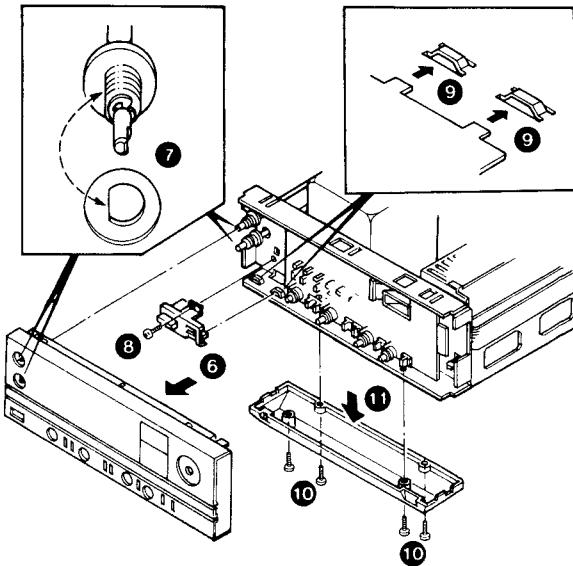


- ⑫ Remove the 3 screws on the (X11) (A/6) PCB.
- ⑬ Remove the CN7 flexible cord on the PCB in the direction of the arrow.
- ⑭ Remove the item pictured in exploded-view ref. 29 using a pair of pliers.
- ⑮ Remove the PCB in the direction of the arrow.

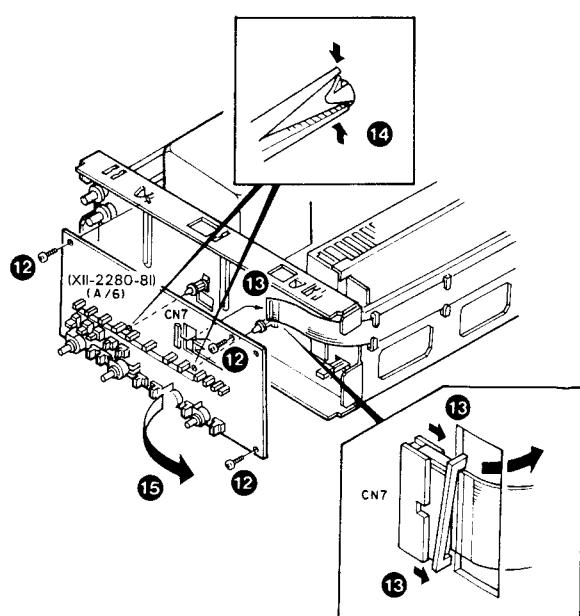


DISASSEMBLY FOR REPAIR

- ① Remove the 4 screws on the terminal cover.
- ② Remove the terminal cover in the direction of the arrow.
- ③ Loosen halfway the 6 screws on the bottom cover.
- ④ Remove the 2 screws on the bottom cover.
- ⑤ Remove the 2 screws on the AUX jack.
- ⑥ Remove the 2 screws on the PHONES jack.

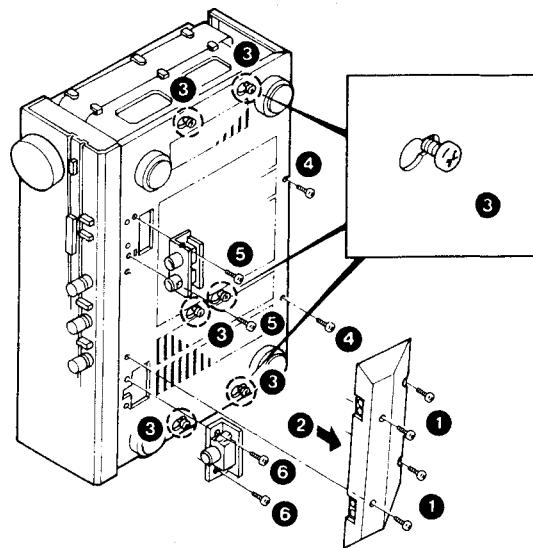


- ⑦ Slide the AUX jack into the slot in the bottom cover in the direction of the arrow.
- ⑧ Slide the PHONES jack into the slot in the bottom cover in the direction of the arrow.
- ⑨ Remove the bottom cover from the main unit in the direction of the arrow.

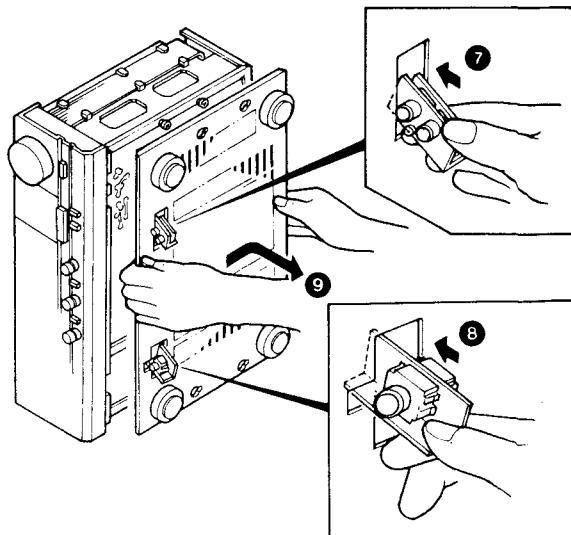

KA-1100D

BLOCK & LEVEL DIAGRAM

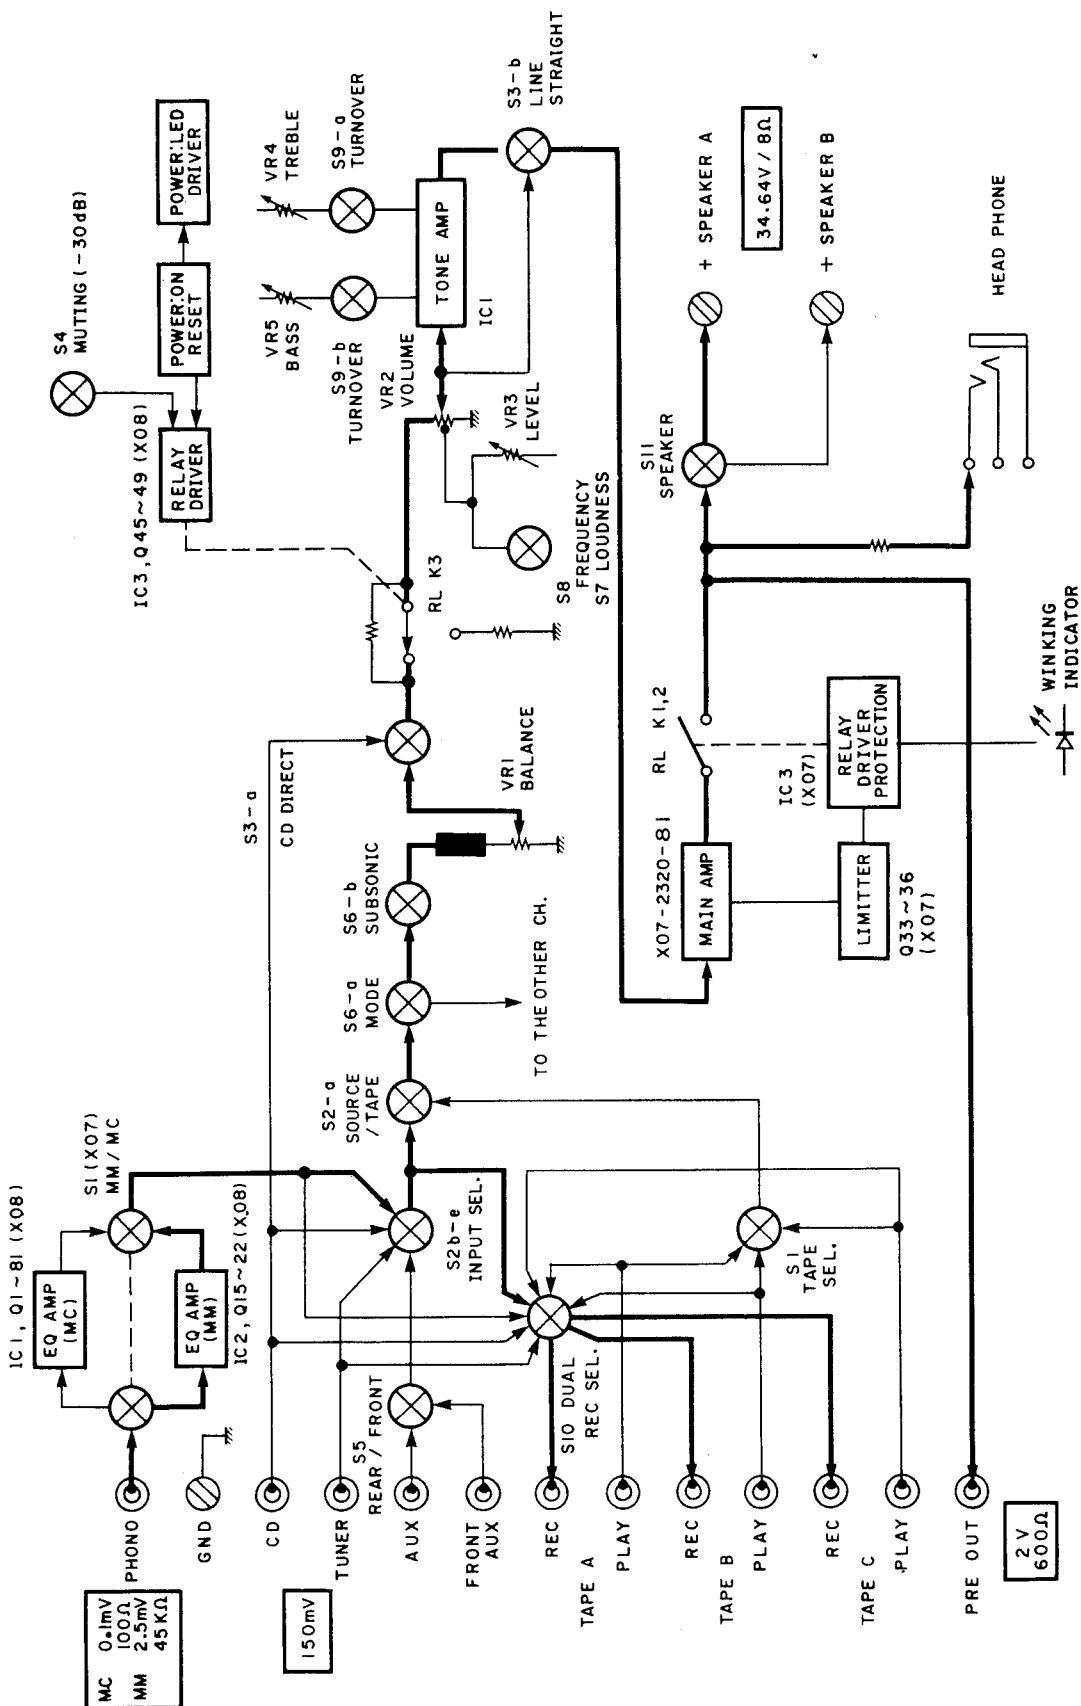

CIRCUIT DESCRIPTION

Main Amplifier Unit (X07-2320-81)

Ref. No.	Application/Function	Description
Q1～4	Predriver	
Q5～8	Predriver	
Q9～20	Cascode bootstrap circuit	Comprises the VIG (Voltage Interface Gate) circuit. Q9, 10, 13 and 14 are the constant voltage circuits. Q11, 12, 15 and 16 are the buffer. Q17～20 is the base ground and comprises the Cascode ground.
Q21, 22	Bias circuit	For final transistor temperature compensation.
Q23, 24	Constant current circuit	Main class A initial differential circuit. Increases CMRR (Common Mode Rejection Ratio) and SVRR (Supression Voltage Rejection Ratio).
Q25～28	High power	High output final transistor.
Q29～32	Low power	Low power final transistor.
Q33～36	Current limiter	Imposes power current control on the final transistor during overload drive.
Q51～54	Constant voltage circuit	Main class A-stage constant voltage circuit. Q51 and 52 are the control transformers. Q53 and 54 comprise the error amplifier.
Q55, 56	Protection driver	Ripple eliminator circuit inserted in the class A initial B line.
Q57	Constant voltage circuit	Transmits Q33 and 34 current limiter operation signals to the protection IC (IC3).
Q58	Constant voltage circuit	Muting relay and tact switch drive circuit constant voltage circuit.
Q59～62	Constant voltage circuit	Equalizer amplifier constant voltage power circuit. Q59 and 60 are the control. Q61 and 62 comprise the error amplifier.
IC1, 2	DLD switching IC	DLD High-Low switching circuit.
IC3	Protection IC	Performs output relay control during limiting when the power is turned on or off, when there is DC leakage to the SP terminal, and if there are overloads.

Preamplifier Unit (X08-2180-81)

Ref. No.	Application/Function	Operation
Q1～4	EQ MC initial differential amplification circuit	
Q5～8	EQ initial Cascode circuit	
Q19～22		
Q9, 10, 23, 24	EQ constant voltage circuit	Improves initial error SVRR and CMRP.
Q11～14	EQ MC output emitter follower circuit	
Q15～18	EQ MM initial differential amplification circuit	
Q25, 26	Class A initial error amplification circuit	
Q27～30	Class A initial Cascode circuit	
Q31～34	Class A second-stage error amplification circuit	
Q35～38	Class A third-stage error amplification circuit	
Q39～42	Class A Cascode circuit	
Q43, 44	Class A current mirror circuit	
Q45～49	Muting control, drive circuit	Muting lamp and relay control and drive.
IC 1, 2	EQ-use OP Amp IC	
IC3	Muting circuit-use	J-K flip-flop.

CIRCUIT DESCRIPTION

Control Unit (X11-2280-81)

Ref. No.	Application/Function	Operation
IC1	Tone control circuit IC	
Q1	Lamp constant voltage, circuit	Keeps the voltage applied to the lamp at 27 volts.
Q2, 3	Winking circuit	The LED lights up when the power display and set are operating properly. The LED flashes during the 5-second interval between the time the power is turned on and when the amplifier stabilizes. The LED also flashes if the main amplifier is not working properly and the protection circuit has been activated.

New VIG DLD Circuit

1. Features

As the successor model to the KA-1100SD, the KA-1100D retains the rich array of functions available on the KA-1100SD, making the KA-1100D the perfect amplifier for a sophisticated model like the KA-990V. The KA-1100D incorporates new technology appropriate for an up-market integrated amplifier, such as:

1. A new VIG DLD (Dynamic Linear Drive) circuit
2. A dual phono equalizer
3. A dual REC OUT switch

2. A New VIG DLD Circuit

Refer to the KA-990V new-product data for an explanation of the principle on which VIG operates.

The configuration of the VIG circuit incorporated in the current KA-990V is depicted in Figure 1.

In addition to preventing the influx of undesirable power source components (such as ripples) into the Q1 driver transistor, the VIG circuit also applies a bootstrap to the output as shown in Figure 1A. The output from the VIG then follows the output from the amplifier in a constant voltage shift pattern. The input signal is no longer absorbed by the power source according to the potential which exists between the input and the power, and high-frequency characteristics and distortion rates are improved.

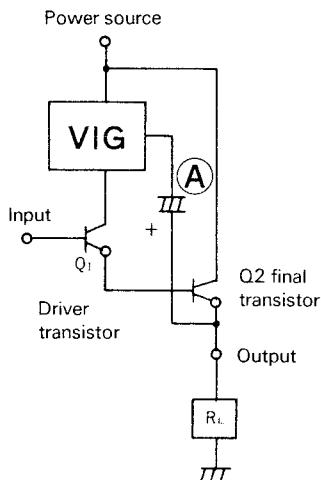


Figure 1 Configuration of a Conventional VIG Circuit

As a result, the voltage across the output of Q1 (the emitter) and the power source (the collector) is held constant whether or not there is a signal (see Figure 2).

This insertion of a VIG circuit in the initial stage of a Darlington connection circuit means that undesirable power source components do not undergo current amplification at Q2, the final transistor. In other words, large-capacity power sources free of ripples become the norm.

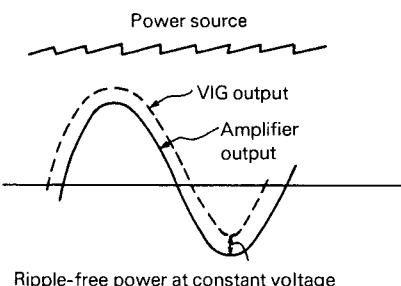


Figure 2 VIG Output and Amplifier Output

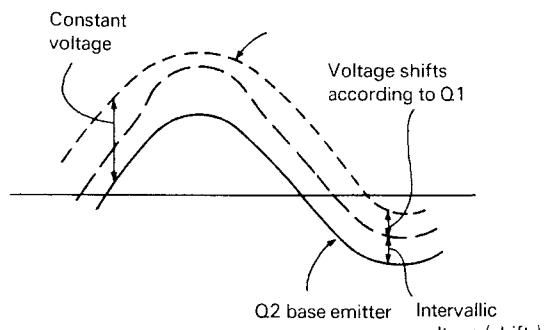


Figure 3 VB-E and VIG Output

KA-1100D KA-1100D

CIRCUIT DESCRIPTION

Upon further investigation, however, doubts arose concerning operation of the Q2 driver transistor at the above-mentioned constant voltage. That is, the voltage across the transistor base and emitter could be thought of as normally about 0.6 volts, but the final transistor voltage shifted between 0.6 to about 2.0 volts in keeping with the output current (see Figure 3). In the conventional configuration depicted in Figure 1, this shift caused the voltage applied to the driver transistor Q1 to shift as well. It became clear that with the conventional configuration undesirable power source components were suppressed, but this in turn produced new voltage shift components. The new VIG circuit applies a bootstrap to the Q2 final transistor base as shown in Figure 4. In addition, a buffer has been inserted so that any undesirable power source components which may leak through the bootstrap do not undergo current amplification at Q2.




Figure 4 Configuration of the New VIG Circuit

With this configuration, the new VIG circuit permits capacities to be utilized to the fullest extent. Undesirable power source components can be suppressed, as can the shift component produced by operation of the circuit itself, for effectiveness 25 times greater than that of conventional circuit configurations. This permits Q1 to operate at an ideal constant voltage and allows only very pure signals to be input to the final transistor, making possible "cleaner" overall amplification.

3. Effects of the New VIG Circuit

1. Effects on the amplifier of ripples and signal components caused by the power source, as well as the cross modulation distortion to which they give rise, are drastically reduced for clear, sharp audio.
2. Power can be boosted accordingly (over 10 times conventional levels) for brilliant audio.
3. Improves raw effects at the pre-negative feedback voltage amplification stage for broad band, low-distortion sound.
4. Reduces dynamic crosstalk and other power source-induced interference.

4. Dual REC OUT



REC 1, 2, 3 output the signals indicated in the chart at right.

REC 1 functions as the source selector, while REC functions as the Rec selector.

During tape dubbing, the source signal is output at the playback TAPE REC-OUT.

POSITION	REC 1	REC 2	REC 3
OFF	OFF	OFF	OFF
PHONO→2,3	SOURCE	PHONO	PHONO
CD →2,3	SOURCEC	CD	CD
TUNER→2,3	SOUREC	TUNER	TUNER
TAPE A→2,3	SOUREC	PLAY 1	PLAY 1
TAPE B→1,3	PLAY 2	SOUREC	PLAY 2

Note: Signal selected by the SOURCE INPUT SEL.

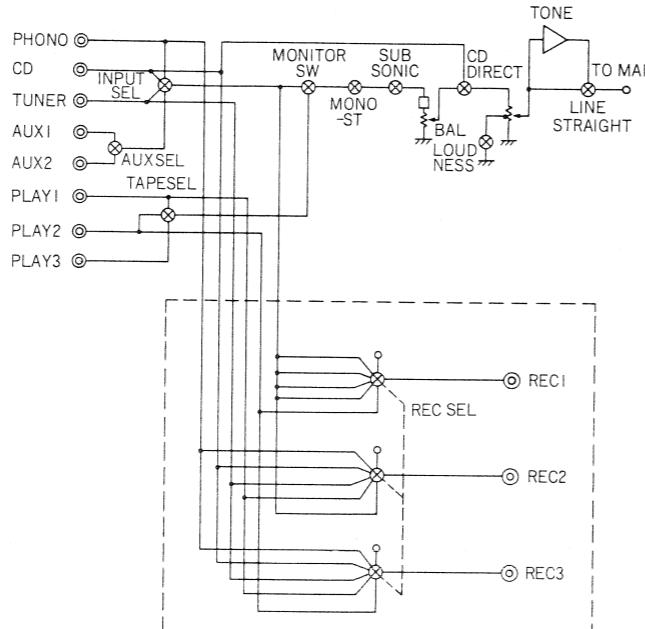

ADJUSTMENT/REGLAGE/ABGLEICH


No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	AMPLIFIER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
1	IDLE CURRENT	-	Connect a DC voltmeter across CP3 (L) CP4 (R)	VOLUME: 0	VR1 (L) VR2 (R)	9mV	

N°	ITEM	REGLAGE DE L'ENTREE	REGLAGE DE LA SORTIE	REGLAGE DE L'AMPLIFICATEUR	POINS L'ALIGNEMENT	ALIGNER POUR	FIG.
1	COURANT DE POLARISATION	-	Conneter un voltmètre de CC sur CP3 (G) CP4 (D)	VOLUME: 0	VR1 (G) VR2 (D)	9mV	

NR.	GEGENSTAND	EINGANGSEINSTELLUNG	AUSGANGSEINSTELLUNG	VERSTÄRKEREINSTELLUNG	ABGLEICH-PUNKTE	ABGLEICHEN FÜR	ABB.
1	LEERLAUFSTROM	-	Einen Gleichspannungs-messer über CP3 (L) CP4 (R) anschließen.	VOLUME: 0	VR1 (L) VR2 (R)	9mV	

CHECKING METHOD OF SUPER DLD CIRCUIT OPERATION

1. Connect an oscilloscope to LOW (+B) and GND. Set the oscilloscope input coupling mode to AC.

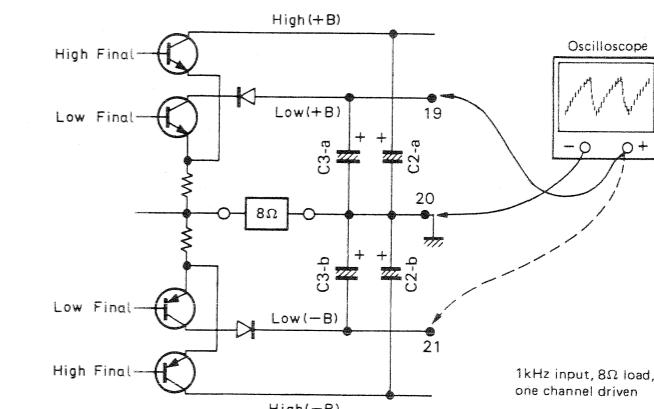

2. Continuously change the output voltage and monitor the ripple waveform at high and low switching.




Photo 1
Volume : 0




Photo 2
Just before switching




Photo 3
Just after switching

3. Connect the oscilloscope to HIGH (-B) and GND. Set the oscilloscope input coupling mode to AC.




Photo 4
Volume : 0




Photo 5
Just before switching





Photo 6
Just after switching

4. Check on the opposite channel's LOW (+B) and HIGH (-B) line in the same way.


KA-1100D KA-1100D

PC BOARD

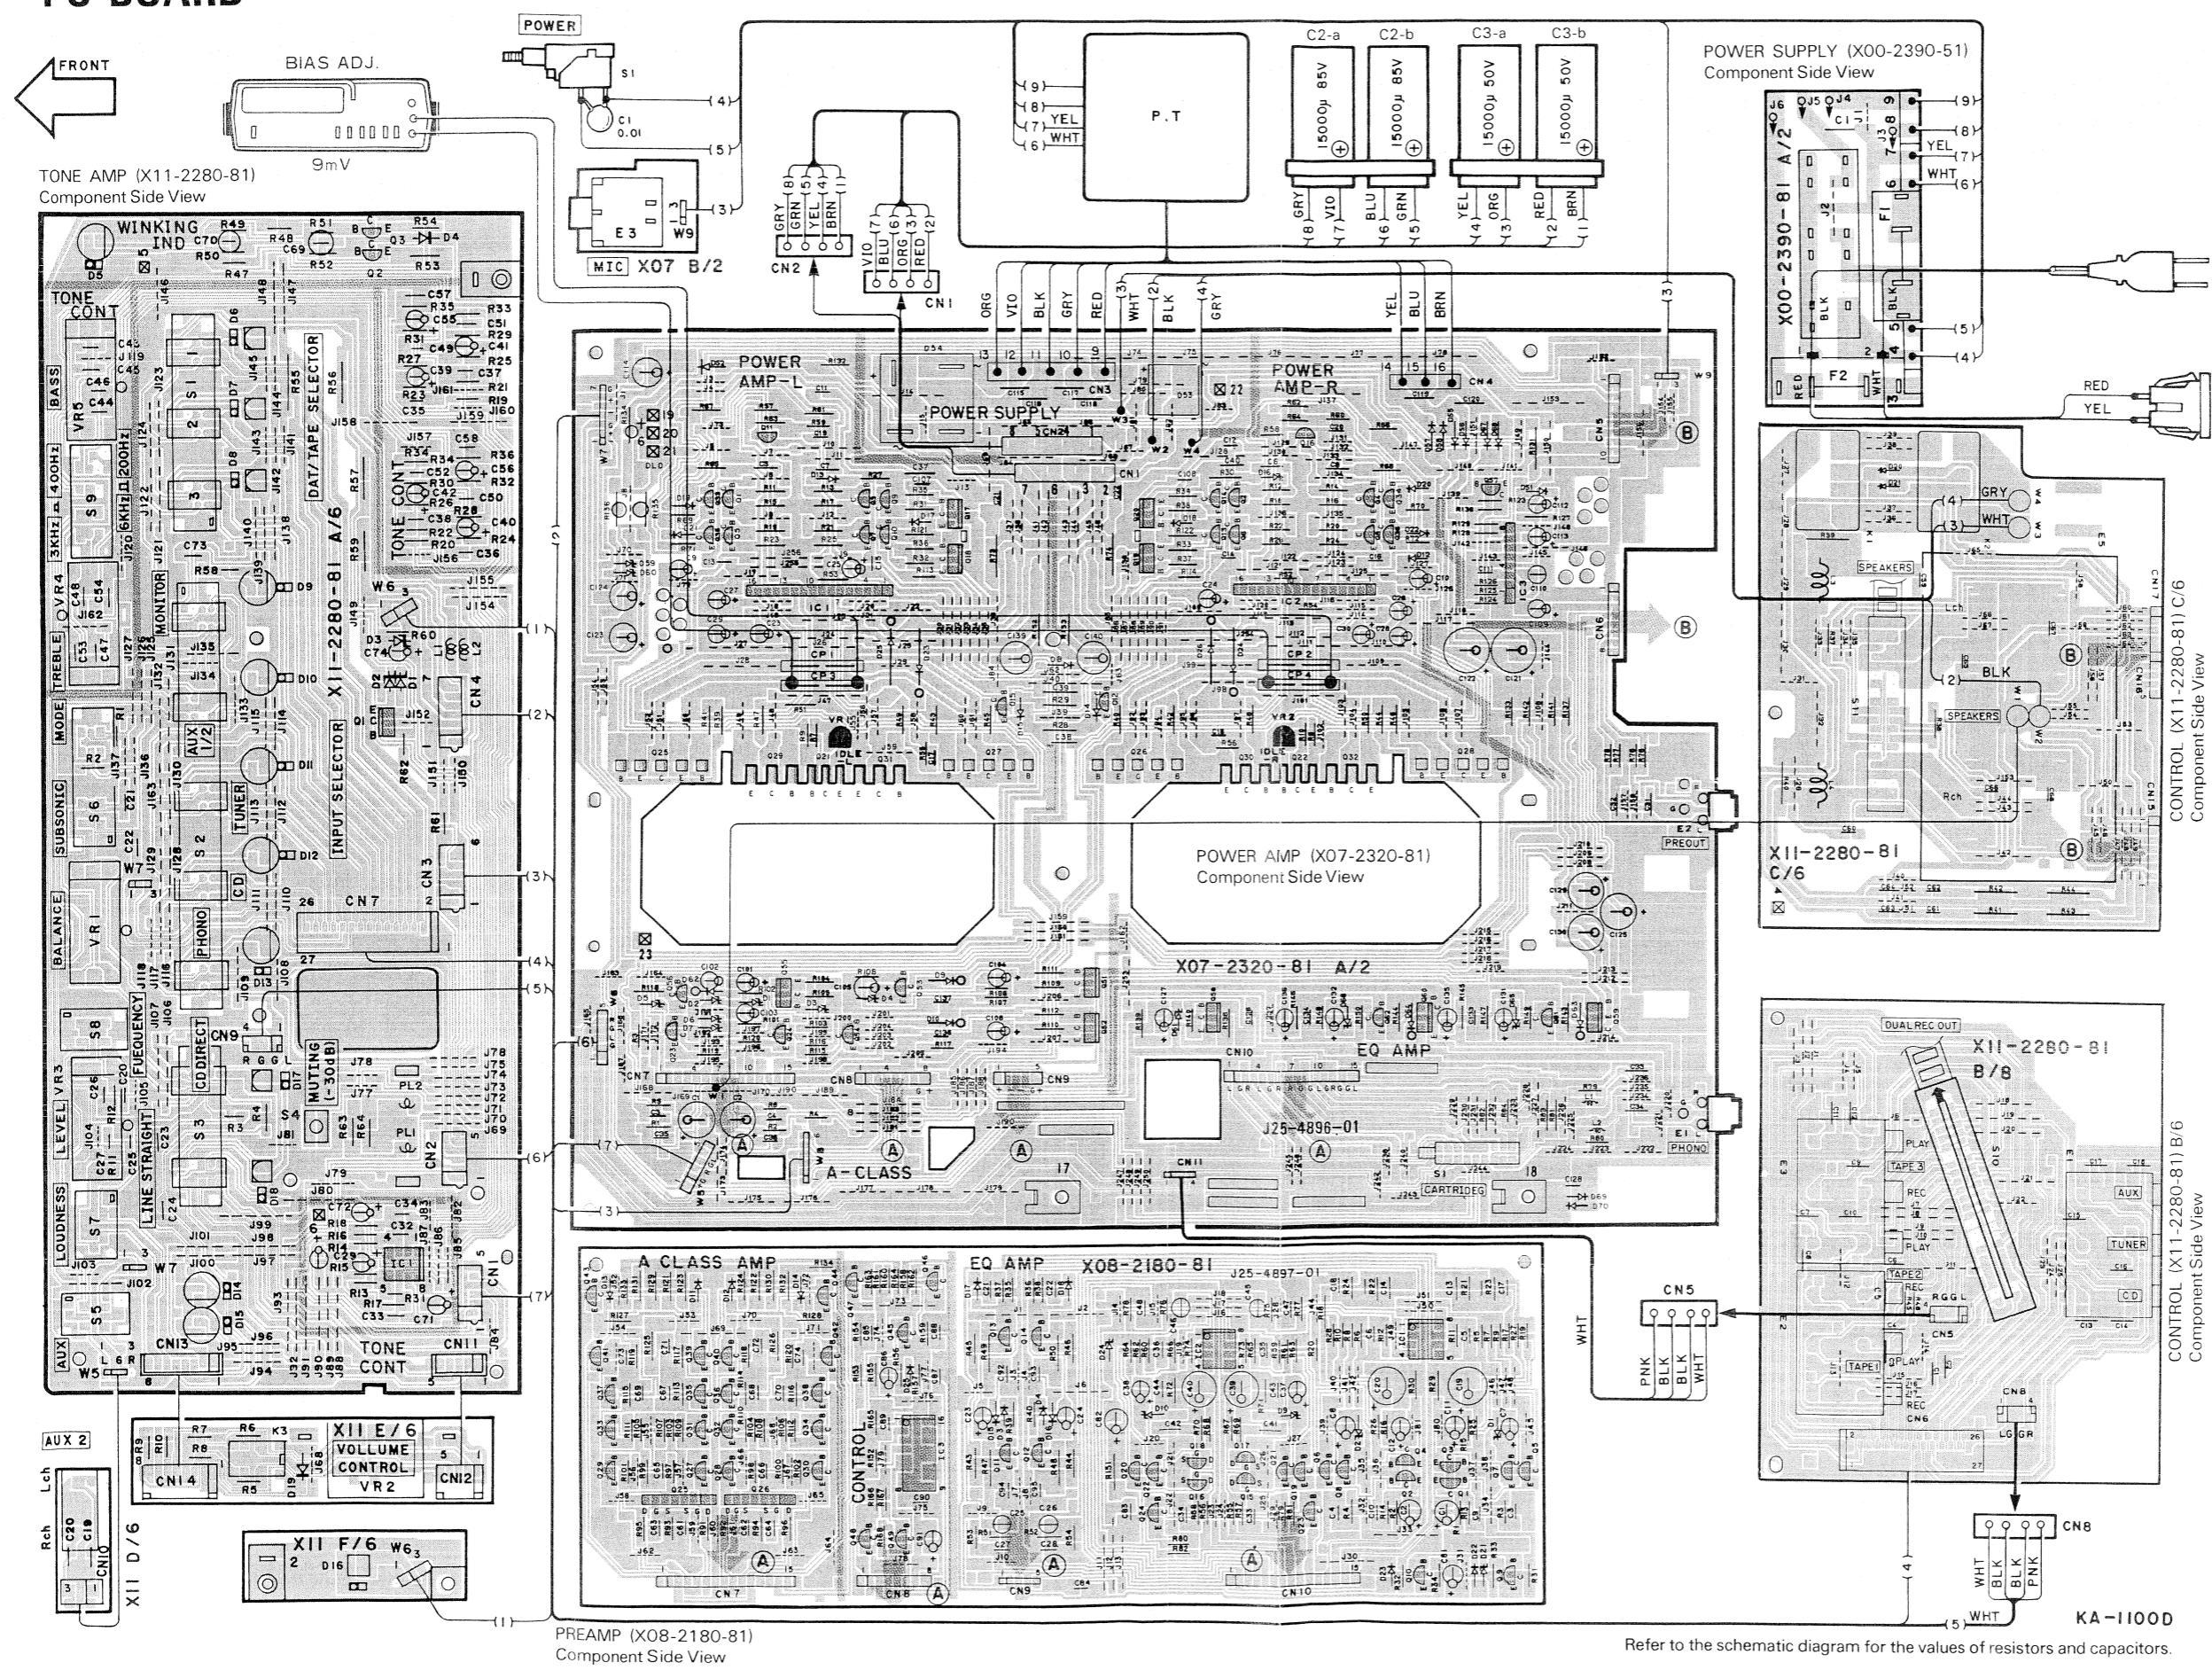

KA-1100D KA-1100D

EXPLODED VIEW

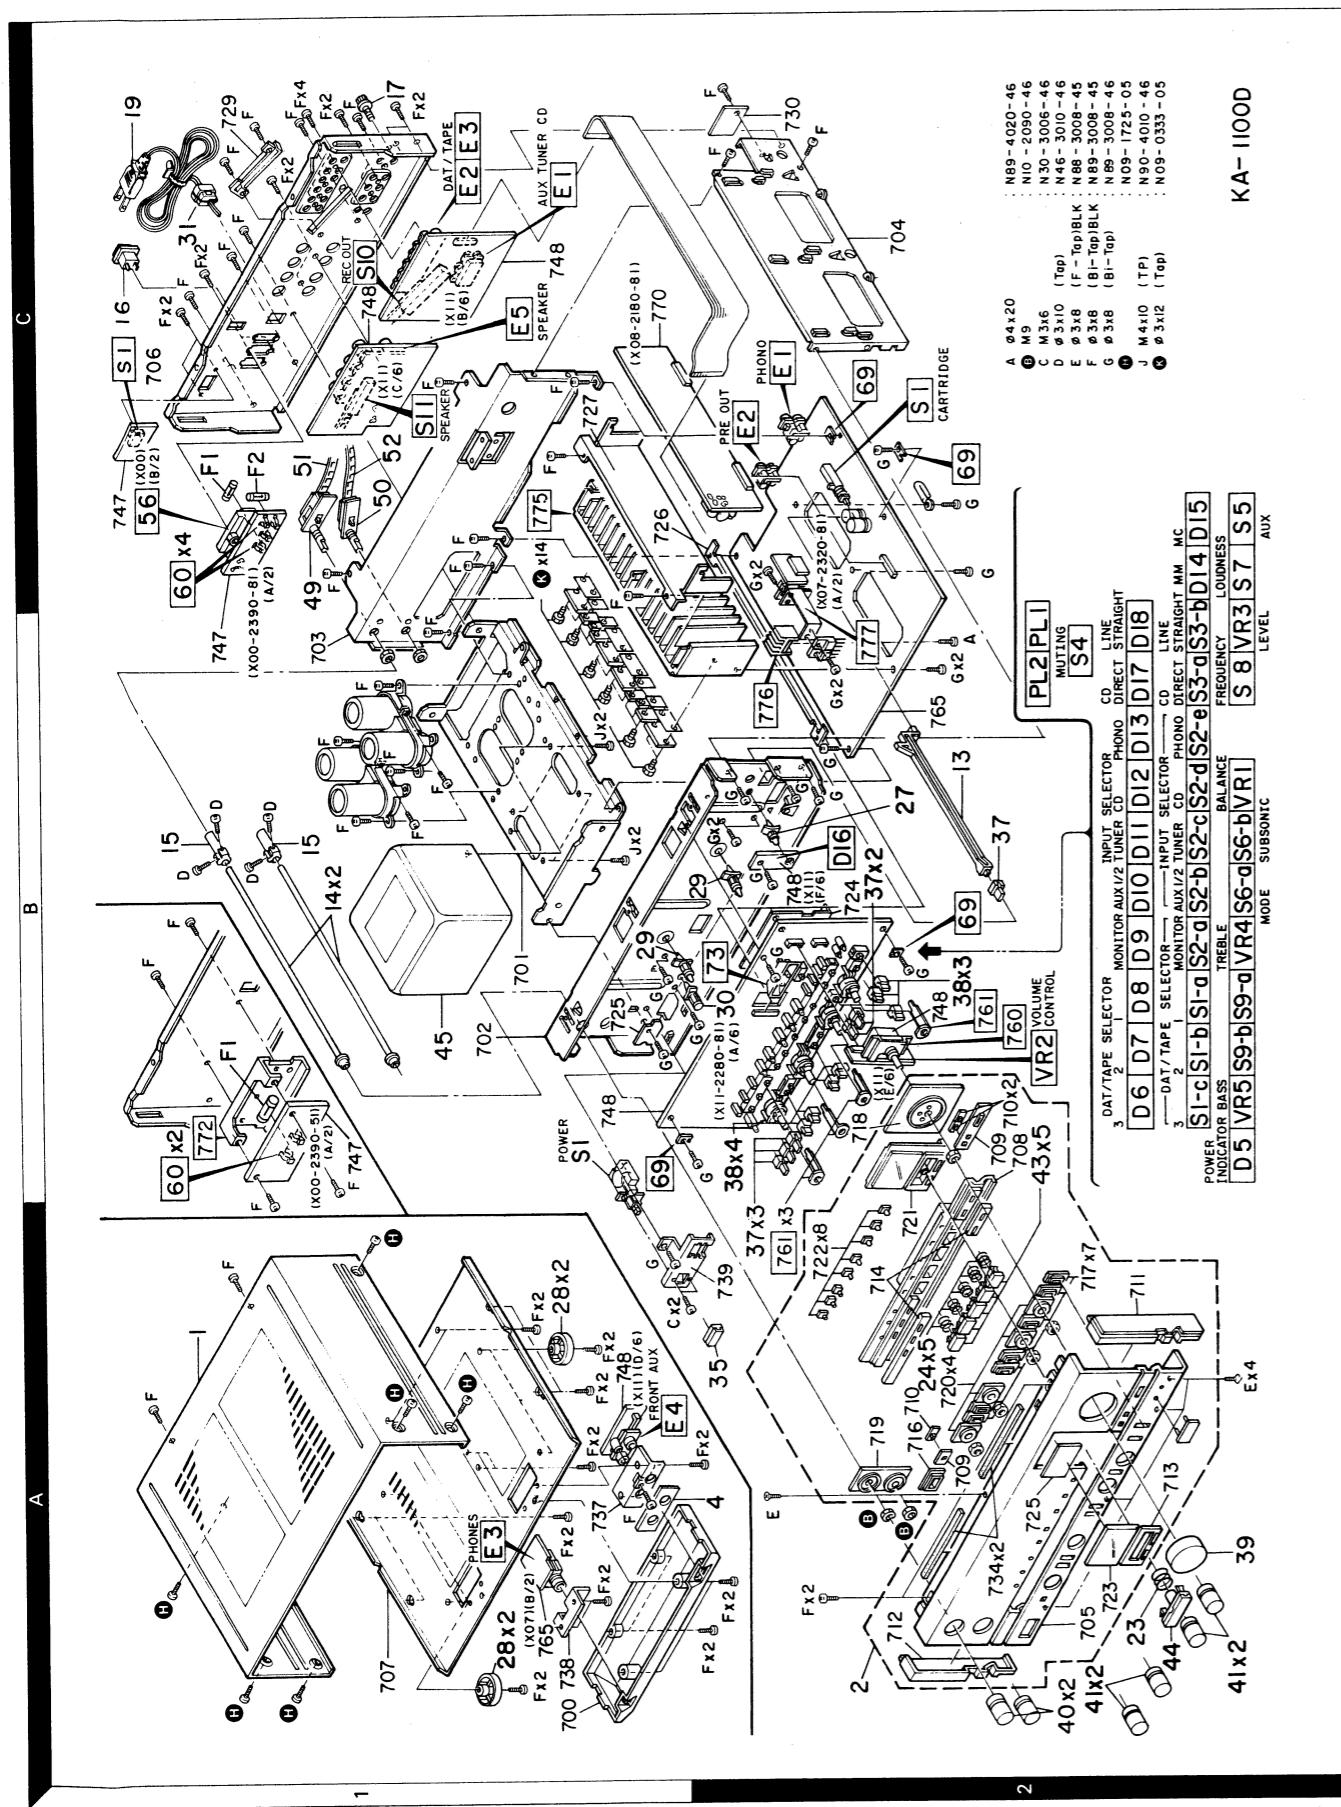

KA-1100D KA-1100D

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No.	Address	New Parts	Parts No.	Description	Desti- nation	Re- marks
参照番号	位置	新	部品番号	部品名／規格	仕向	備考
50	1C		S90-0093-05	REMOTE SWITCH SHAFT(SPEAKERS)		
51	1C		S90-0094-05	REMOTE WIRE (REC OUT)		
52	1C		S90-0095-05	REMOTE WIRE (SPEAKERS)		
-			S59-1055-05	THERMAL SWITCH		
S1	1B		S40-1094-05	PUSH SWITCH (POWER TYPE)		
POWER SUPPLY UNIT (X00-2390-51)						
C1			C91-0023-05	CERAMIC 0.01UF	AC250V	M
C1			C91-0647-05	CERAMIC 0.01UF	P	E
56	1C	*	E03-0077-05	AC OUTLET		M
60	1C		J13-0041-05	FUSE CLIP		M
60	1C		J13-0054-05	FUSE CLIP		E
S1	1C		S31-2083-05	SLIDE SWITCH (POWER TYPE)		M
POWER AMPLIFIER UNIT (X07-2320-81)						
C1 ,2			CE04KW0J102M	ELECTRO 1000UF	6.3WV	
C3 ,4			CC45FSL1H220J	CERAMIC 22PF	J	
C5 -8			C91-0749-05	CERAMIC 220PF	K	
C9 ,10			CE04KW1C220M	ELECTRO 22UF	16WV	
C11 ,12			CF92FV1H153J	MF 0.015UF	J	
C13 -16			CF92FV1H122J	MF 1200PF	J	
C17 ,18			CK45FB2H102K	CERAMIC 1000PF	K	
C19 ,20			CK45FB1H471K	CERAMIC 470PF	K	
C21 ,22			CF92FV1H473J	MF 0.047UF	J	
C23 -30			CE04KW2A010M	ELECTRO 1.0UF	100WV	
C31 -34			C91-0747-05	CERAMIC 150PF	K	
C35 ,36			CC45FSL1H101J	CERAMIC 100PF	J	
C37			C91-0753-05	CERAMIC 470PF	K	
C38 -40			C91-0753-05	CERAMIC 470PF	K	
C101,102			CE04KW1H010M	ELECTRO 1.0UF	50WV	
C103			CE04KW1A470M	ELECTRO 47UF	10WV	
C104			CE04KW2A010M	ELECTRO 1.0UF	100WV	
C105			CE04KW1A101M	ELECTRO 100UF	10WV	
C106			CE04KW2A010M	ELECTRO 1.0UF	100WV	
C107			CF92FV1H392J	MF 3900PF	J	
C108			CF92FV1H392J	MF 3900PF	J	
C109			CE04KW1C220M	ELECTRO 22UF	16WV	
C110			C90-1333-05	NP-ELEC 10UF	25WV	
C111			CF92FV1H223J	MF 0.022UF	J	
C112			CE04KW1V4R7M	ELECTRO 4.7UF	35WV	
C113			CE04KW1C470M	ELECTRO 47UF	16WV	
C114			CE04KW1H101M	ELECTRO 100UF	50WV	
C115-120			CK45FE2H103P	CERAMIC 0.010UF	P	
C121,122			CE04KW1V102M	ELECTRO 1000UF	35WV	
C123,124			CE04KW1E221M	ELECTRO 220UF	25WV	
C125			CE04KW1V221M	ELECTRO 220UF	35WV	
C126			CF92FV1H103J	MF 0.010UF	J	
C127			CE04KW1E470M	ELECTRO 47UF	25WV	
C128			CK45FB1H102K	CERAMIC 1000PF	K	
C129,130			CE04KW1V471M	ELECTRO 470UF	35WV	
C131,132			CE04KW1A470M	ELECTRO 47UF	10WV	
C133,134			CF92FV1H103J	MF 0.010UF	J	
C135,136			CE04KW1HR22M	ELECTRO 0.22UF	50WV	
C137,138			C91-0033-05	MF 1UF	100V	
C139,140			CE04KW2A220M	ELECTRO 22UF	100WV	

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No.	Address	New Parts	Parts No.	Description	Desti- nation	Re- marks
参照番号	位置	新	部品番号	部品名／規格	仕向	備考
C141			CC45SL1H151J	CERAMIC 150PF	J	
69	2C	*	E23-0125-05	TERMINAL		
E1	2C	*	E13-0236-05	PHONE JACK(2P) PHONO		
E2	2C	*	E13-0235-05	PHONE JACK(2P) PRE OUT		
E3	1A	*	E11-0162-05	PHONE JACK(3P) PHONES		
L1 ,2			L40-1011-47	SMALL FIXED INDUCTOR(100UH,K)		
K	1C		N09-0333-05	TAPPING SCREW (Ø3X12)		
CP1 -4			R90-0187-05	MULTI-COMP 0.22X2	K 5W	
R1 ,2			RN14BK2C1960FTS	RN 196.0	F 1/6W	
R3 ,4			RN14BK2C4752FTS	RN 47.5K	F 1/6W	
R11 -14			RD14AB2E821J	FL-PROOF RD 820	J 1/4W	
R15 -18			RD14AB2E561J	FL-PROOF RD 560	J 1/4W	
R19 -22			RD14AB2E150J	FL-PROOF RD 15	J 1/4W	
R23 -26			RD14AB2E151J	FL-PROOF RD 150	J 1/4W	
R27 -30			RD14AB2E331J	FL-PROOF RD 330	J 1/4W	
R31 -34			RD14AB2E221J	FL-PROOF RD 220	J 1/4W	
R35 -38			RD14AB2E271J	FL-PROOF RD 270	J 1/4W	
R39 -46			RD14AB2E220J	FL-PROOF RD 22	J 1/4W	
R47 -50			RD14AB2E4R7J	FL-PROOF RD 4.7	J 1/4W	
R61 -64			RD14AB2E911J	FL-PROOF RD 910	J 1/4W	
R65 -68			RD14AB2E471J	FL-PROOF RD 470	J 1/4W	
R73 ,74			RS14DB3D220JTE	FL-PROOF RS 22	J 2W	
R81 ,82		*	RN14BK2C4752FTS	RN 47.5K	F 1/6W	
R83 ,84		*	RN14BK2C5620FTS	RN 562.0	F 1/6W	
R104,105		*	RD14AB2E471J	FL-PROOF RD 470	J 1/4W	
R109,110			RD14AB2E330J	FL-PROOF RD 33	J 1/4W	
R111,112			RD14AB2E561J	FL-PROOF RD 560	J 1/4W	
R118			RD14AB2E102J	FL-PROOF RD 1.0K	J 1/4W	
R121,122			RD14AB2E471J	FL-PROOF RD 470	J 1/4W	
R131		*	RS14DB3D681JTE	FL-PROOF RS 680	J 2W	
R132			RD14AB2E100J	FL-PROOF RD 10	J 1/4W	
R133			RD14AB2E4R7J	FL-PROOF RD 4.7	J 1/4W	
R134		*	RS14DB3D472JTE	FL-PROOF RS 4.7K	J 2W	
R135,136		*	RS14DB3D182JTE	FL-PROOF RS 1.8K	J 2W	
R137			RD14AB2E330J	FL-PROOF RD 33	J 1/4W	
R138,139			RD14AB2E560J	FL-PROOF RD 56	J 1/4W	
R141,142			RD14AB2E150J	FL-PROOF RD 15	J 1/4W	
R143,144			RD14AB2E101J	FL-PROOF RD 100	J 1/4W	
R152,153			RD14AB2E100J	FL-PROOF RD 10	J 1/4W	
VR1 ,2			R12-0094-05	TRIMMING POT. (470) IDLE CURRENT		
S1	2C		S40-6027-05	PUSH SWITCH (CARTRIDGE)		
D1 ,2		*	HZS20S(B)	ZENER DIODE		
D1 ,2		*	RD20JS(C)	ZENER DIODE		
D3 -5		*	HZS8.2S(B2)	ZENER DIODE		
D3 -5		*	RD8.2JS(B2)	ZENER DIODE		
D6			HZS5.1S(B2)	ZENER DIODE		
D6			RDS1.1JS(B2)	ZENER DIODE		
D7			ISS133	DIODE		
D7			ISS176	DIODE		
D8			E-202	CONSTANT CURRENT DIODE		
D9 ,10			E-152	CONSTANT CURRENT DIODE		

E: Scandinavia & Europe H:Audio Club K:USA P:Canada W:Europe

T:England U:PX(Far East, Hawaii)

UE:AAFES(Europe) X:Australia M:Other Areas

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕	Re- marks 備考
D11 ,12			MA27Q(A)	VARISTOR		
D13 -16			HZS5.1S(B2)	ZENER DIODE		
D13 -16			RDS.1JS(B2)	ZENER DIODE		
D17 -22			ISS133	DIODE		
D17 -22			ISS176	DIODE		
D23 -26			RU4Z	DIODE		
D51			ISS131	DIODE		
D51			ISS178	DIODE		
D52			DSM1A1	DIODE		
D53			DSFB20*1	DIODE		
D54			S15VB20	DIODE		
D55 -58			DSM1A1	DIODE		
D59 ,60			HZS16N(B2)	ZENER DIODE		
D59 ,60			RD16ES(B2)	ZENER DIODE		
D61			HZS18N(B)	ZENER DIODE		
D61			RD18ES(B)	ZENER DIODE		
D62 -64			E-152	CONSTANT CURRENT DIODE		
D65 ,66			HZS8.2S(B2)	ZENER DIODE		
D65 ,66			RD8.2JS(B2)	ZENER DIODE		
D67 ,68			DSM1A1	DIODE		
IC1 ,2			TA2030	IC(LQ/HI SWITCHING)		
IC3			UPC1237H	IC(PROTECTION)		
Q1 ,2			2SC945(A)(Q,P)	TRANSISTOR		
Q3 ,4			2SA733(A)(Q,P)	TRANSISTOR		
Q5 ,6			2SC1384NC(Q,R)	TRANSISTOR		
Q7 ,8			2SA684NC(Q,R)	TRANSISTOR		
Q9 -12			2SA1123(Q,R)	TRANSISTOR		
Q13 -16			2SC2631(Q,R)	TRANSISTOR		
Q17 ,18	*		2SC3944A(Q)	TRANSISTOR		
Q17 ,18	*		2SC3944A(R)	TRANSISTOR		
Q19 ,20	*		2SA1535A(Q)	TRANSISTOR		
Q19 ,20	*		2SA1535A(R)	TRANSISTOR		
Q21 ,22	*		2SC3419(Y)	TRANSISTOR		
Q23 ,24	*		2SC2320(E,F)	TRANSISTOR		
Q23 ,24	*		2SC945(A)(Q,P)	TRANSISTOR		
▲ Q25 ,26	*	*	DAT1018NS*5	TRANSISTOR		
▲ Q27 ,28	*	*	DAT1018PS*5	TRANSISTOR		
Q29 ,30	*		2SC3284*5	TRANSISTOR		
Q31 ,32	*		2SA1303*5	TRANSISTOR		
Q33 ,34	*		2SC2631(Q,R)	TRANSISTOR		
Q35 ,36			2SA1123(Q,R)	TRANSISTOR		
Q51			2SD1266(Q,P)	TRANSISTOR		
Q52	*		2SB941(Q,P)	TRANSISTOR		
Q53	*		2SC1845(F,E)	TRANSISTOR		
Q54	*		2SA992(F,E)	TRANSISTOR		
Q55			2SA1110(Q,R)	TRANSISTOR		
Q56			2SC2632(Q,R)	TRANSISTOR		
Q57			2SA992(F,E)	TRANSISTOR		
Q58 ,59	*		2SD1266(Q,P)	TRANSISTOR		
Q60	*		2SB941(Q,P)	TRANSISTOR		
Q61			2SC2320(E,F)	TRANSISTOR		
Q61			2SC945(A)(Q,P)	TRANSISTOR		
Q62			2SA733(A)(Q,F)	TRANSISTOR		
Q62			2SA999(F,E)	TRANSISTOR		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe)

X: Australia M: Other Areas

▲ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格				Desti- nation 仕向	Re- marks 備考
PREAMPLIFIER UNIT (X08-2180-81)									
C1 ,2			CE04KWOJ331M	ELECTRO	330UF	6.3WV			
C3 ,4			CK45FB1H152K	CERAMIC	1500PF	K			
C5 ,6			CK45FB1H222K	CERAMIC	2200PF	K			
C7 ,8			CE04KW1H010M	ELECTRO	1.0UF	50WV			
C9 ,10			CK45FB1H222K	CERAMIC	2200PF	K			
C11 ,12			CE04KW1A101M	ELECTRO	100UF	10WV			
C13 ,14			C093HP2A683G	MYLAR	0.068UF	G			
C17 ,18			C093HP2A203G	MYLAR	0.020UF	G			
C19 ,20			CE04KWOJ102M	ELECTRO	1000UF	6.3WV			
C21 ,22			CK45FB1H102K	CERAMIC	1000PF	K			
C23 ,24			CE04KW1A101M	ELECTRO	100UF	10WV			
C25 ,26			C90-1332-05	NP-ELEC	10UF	25WV			
C27 ,28			CF92FV1H392J	MF	3900PF	J			
C33 ,34			CC45FSL1H101J	CERAMIC	100PF	J			
C35 ,36			CK45FB1H152K	CERAMIC	1500PF	K			
C37 ,38			CE04KW1HD10M	ELECTRO	1.0UF	50WV			
C39 ,40			CE04KWOJ102M	ELECTRO	1000UF	6.3WV			
C41 ,42			C093HP2A683G	MYLAR	0.068UF	G			
C43 ,44			C093HP2A203G	MYLAR	0.020UF	G			
C45 ,46			C90-1332-05	NP-ELEC	10UF	25WV			
C47 ,48			CF92FV1H392J	MF	3900PF	J			
C61 ,62			CC45FSL1H101J	CERAMIC	100PF	J			
C63 ,64			CC45FSL1H470J	CERAMIC	47PF	J			
C65 ,66			CF92FV1H122J	MF	1200PF	J			
C67 -70			CK45FF1H473Z	CERAMIC	0.047UF	Z			
C71 ,72		*	CK45FB1H152K	CERAMIC	1500PF	K			
C73 ,74		*	CC45FSL2H1B0J	CERAMIC	18PF	J			
C81			CE04KWOJ471M	ELECTRO	470UF	6.3WV			
C82			CE04KW1E101M	ELECTRO	100UF	25WV			
C83 ,84			CF92FV1H103J	MF	0.010UF	J			
C85			CF92FV1H224J	MF	0.22UF	J			
C86			CE04KW1C220M	ELECTRO	22UF	16WV			
C87			CK45FF1H103Z	CERAMIC	0.010UF	Z			
C88			CK45FB1H152K	CERAMIC	1500PF	K			
C89			CK45FB1H222K	CERAMIC	2200PF	K			
C90			CK45FF1H103Z	CERAMIC	0.010UF	Z			
C91			CE04KW1V100M	ELECTRO	10UF	35WV			
C92 -95			CF92FV1H103J	MF	0.010UF	J			
R21 ,22		*	RN14BK2C5112FTS	RN	51.1K	F	1/6W		
R23 ,24		*	RN14BK2C3831FTS	RN	3.83K	F	1/6W		
R29 ,30		*	RN14BK2E3R30FTS	RN	3.30	F	1/4W		
R43 -46		*	RD14AB2E100JTS	FL-PRQOF RD	10	J	1/4W		
R47 -50		*	RS14DB3A101JTE	FL-PRQOF RS	100	J	1W		
R67 ,68		*	RN14BK2C82R0FTS	RN	82.0	F	1/6W		
R69 ,70		*	RN14BK2C4752FTS	RN	47.5K	F	1/6W		
R71 ,72		*	RN14BK2C3831FTS	RN	3.83K	F	1/6W		
R121 ,122			RD14AB2E331JTS	FL-PRQOF RD	330	J	1/4W		
R123 ,124			RD14AB2E101JTS	FL-PRQOF RD	100	J	1/4W		
R125 ,126		*	RD14AB2E122JTS	FL-PRQOF RD	1.2K	J	1/4W		
R127 ,128		*	RD14AB2E181JTS	FL-PRQOF RD	180	J	1/4W		
R129 ,130		*	RD14AB2E331JTS	FL-PRQOF RD	330	J	1/4W		
R131 ,132		*	RD14AB2E101JTS	FL-PRQOF RD	100	J	1/4W		
R151		*	RS14DB3A101JTE	FL-PRQOF RS	100	J	1W		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe) X: Australia M: Other Areas

 indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
D1 ,2			HZS5.1S(B2)	ZENER DIODE		
D1 ,2			RDS.1JS(B2)	ZENER DIODE		
D3 ,4			MA27W(A)	VARISTOR		
D9 ,10			HZS5.1S(B2)	ZENER DIODE		
D9 ,10			RDS.1JS(B2)	ZENER DIODE		
D11 ,12			ISS133	DIODE		
D11 ,12			ISS176	DIODE		
D13 ,14			MA27Q(A)	VARISTOR		
D15 ~18			E-272	CONSTANT CURRENT DIODE		
D21			HZS5.1S(B2)	ZENER DIODE		
D21			RDS.1JS(B2)	ZENER DIODE		
D22			ISS133	DIODE		
D22			ISS176	DIODE		
D23			E-272	CONSTANT CURRENT DIODE		
D24			HZS16N(B2)	ZENER DIODE		
D24			RD16ES(B2)	ZENER DIODE		
D25			ISS133	DIODE		
D25			ISS176	DIODE		
IC1 ,2			NE5532P	IC(OP AMP X2)		
IC1 ,2		*	NJM5532D-D	IC(OP AMP X2)		
IC3		*	UPD4027BC	IC(JK FLIP-FLOP X2)		
Q1 ~4		*	2SD786(R,S)	TRANSISTOR		
Q5 ~10		*	2SC2320(E,F)	TRANSISTOR		
Q5 ~10		*	2SC945(A)(Q,P)	TRANSISTOR		
Q11 ,12		*	2SC2003(L,K)	TRANSISTOR		
Q13 ,14		*	2SA954(L,K)	TRANSISTOR		
Q15 ~18		*	2SK369(BL,V)	FET		
Q15 ~18		*	2SK371(BL,V)	FET		
Q19 ~24		*	2SC2320(E,F)	TRANSISTOR		
Q19 ~24		*	2SC945(A)(Q,P)	TRANSISTOR		
Q25 ,26			UPA68H(K,L)	DUAL FET		
Q27 ~30			2SC2320(E,F)	TRANSISTOR		
Q27 ~30			2SC945(A)(Q,P)	TRANSISTOR		
Q31 ~34			2SA733(A)(Q,P)	TRANSISTOR		
Q31 ~34			2SA999(E,F)	TRANSISTOR		
Q35 ~42			2SC2632(Q,R,S)	TRANSISTOR		
Q43 ,44			2SA1124(Q,R,S)	TRANSISTOR		
Q45 ~47			2SC2320(E,F)	TRANSISTOR		
Q45 ~47			2SC945(A)(Q,P)	TRANSISTOR		
Q48			2SA733(A)(Q,P)	TRANSISTOR		
Q48			2SA999(E,F)	TRANSISTOR		
Q49			2SA954(L,K)	TRANSISTOR		
CONTROL UNIT (X11-2280-81)						
73	2B		A33-0093-04	REFLECTOR		
D5	2B		B30-0431-05	LED(LN21CPH) POWER		
D6 ~8	2B		B30-1010-05	LED(SLP-281F-50U)DATE/TAPE SEL		
D9 ~15	2B,2C		B30-0431-05	LED(LN21CPH)MONI.INPUT SEL,ETC		
D16	2B		B30-1012-05	LED(SLP-981C-50)		
D17 ,18	2B		B30-1010-05	LED(SLP-281F-50U)CD DIR,LINE		
PL1 ,2	2B		B30-1025-05	LAMP (14V 0.08A)		
C1 ~20			C91-0747-05	CERAMIC	150PF K	
C21 ,22			CF92FV1H224J	MF	0.22UF J	
C23 ,24			CC45FSL1H101J	CERAMIC	100PF J	

E:Scandinavia & Europe H:Audio Club K:USA P:Canada W:Europe

T:England U:PX(Far East, Hawaii)

UE:AAFES(Europe)

X:Australia M:Other Areas

▲ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Desti- nation 仕向	Re- marks 備考
C25 ,26			CF92FV1H333J	MF	0.033UF	J		
C27 ,28			CF92FV1H563J	MF	0.056UF	J		
C29 ,30			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C31 ,32			CC45FSL1H101J	CERAMIC	100PF	J		
C33 ,34			CC45FSL1H470J	CERAMIC	47PF	J		
C35 ,38		*	CF92FV1H684J	MF	0.68UF	J		
C39 ,42			CE04KW1C220M	ELECTRO	22UF	16WV		
C43 ,46			CF92FV1H334J	MF	0.33UF	J		
C47 ,52			CF92FV1H393J	MF	0.039UF	J		
C53 ,54			CC45FSL1H221J	CERAMIC	220PF	J		
C55 ,56			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C57 ,58			CK45FB1H102K	CERAMIC	1000PF	K		
C59 ,60			CF92FV1H334J	MF	0.33UF	J		
C61 ,64			CF92FV1H104J	MF	0.10UF	J		
C65 ,68			CK45FF1H472Z	CERAMIC	4700PF	Z		
C69 ,70			C90-1335-05	NP-ELEC	4.7UF	50WV		
C71 ,72			CE04KW1E470M	ELECTRO	47UF	25WV		
C73			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C74			CE04KW1H010M	ELECTRO	1.0UF	50WV		
E1	1B,2B	*	E23-0125-05	TERMINAL				
E2 ,3	1C	*	E13-0628-05	PHONE JACK(6P)	AUX,TUNER,CD			
E4	1C	*	E13-0624-05	PHONE JACK(6P)	DATE/TAPE			
E5	1A	*	E13-0233-05	PHONE JACK(2P)	FRONT AUX			
-	1C	*	E20-0824-05	SCREW TERMINAL	BOARD(8P)SPKRS			
L1 ,2			J61-0307-05	WIRE BAND				
L3 ,4			L40-1021-14	SMALL FIXED INDUCTOR(1.0MH,K)				
L39-0080-15			PHASE-COMPENSATION COIL					
R3 ,4			RN14BK2C3160FTS	RN	316.0	F	1/6W	
R37 ,38			RD14AB2E330JTS	FL-PROOF RD	33	J	1/4W	
R39 ,40			RS14DB3A100JTE	FL-PROOF RS	10	J	1W	
R41 ,42		*	RS14DB3D180JTE	FL-PROOF RS	18	J	2W	
R43 ,44		*	RS14DB3D561JTE	FL-PROOF RS	560	J	2W	
R53			RD14AB2E102JTS	FL-PROOF RD	1.0K	J	1/4W	
R55		*	RS14DB3D222JTE	FL-PROOF RS	2.2K	J	2W	
R56		*	RS14DB3D472JTE	FL-PROOF RS	4.7K	J	2W	
R57		*	RS14DB3D222JTE	FL-PROOF RS	2.2K	J	2W	
R59		*	RS14DB3D102JTE	FL-PROOF RS	1.0K	J	2W	
VR1	2B	*	R06-5143-05	POTENTIOMETER(200K)	BALANCE			
VR2	2B	*	R10-5023-05	POTENTIOMETER	(VOLUME CONTROL			
VR3	2B	*	R06-5154-05	POTENTIOMETER(100KAX2)	LEVEL			
VR4	2B	*	R06-2017-05	POTENTIOMETER(5KBX2)	TREBLE			
VR5	2B	*	R06-2016-05	POTENTIOMETER(5KBX2)	BASS			
K1 ,2			S51-2045-05	MAGNETIC RELAY				
K3			S51-2074-05	MAGNETIC RELAY				
S1	2B		S42-3093-05	MULTIPLE PUSH SWITCH(A,B,C)				
S2	2B		S42-5045-05	MULTIPLE PUSH SWITCH(INPUT SEL				
S3	2B		S42-2135-05	MULTIPLE PUSH SWITCH(CD,LINE)				
S4	2B		S40-1064-05	PUSH SWITCH	(MUTING			
S5	2C		S40-2200-05	PUSH SWITCH	(AUX)			
S6	2B		S42-2109-05	MULTIPLE PUSH SWITCH(MODE)				
S7 ,8	2B,2C		S40-2200-05	PUSH SWITCH	(LOUDNESS,FREQ)			
S9	2B		S42-2137-05	MULTIPLE PUSH SWITCH(BASS,TREB)				
S10	1C		S90-0078-05	SLIDE SWITCH	(REC BUT)			


E: Scandinavia & Europe H:Audio Club K: USA P: Canada W:Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe)

X: Australia M: Other Areas

△ indicates safety critical components.

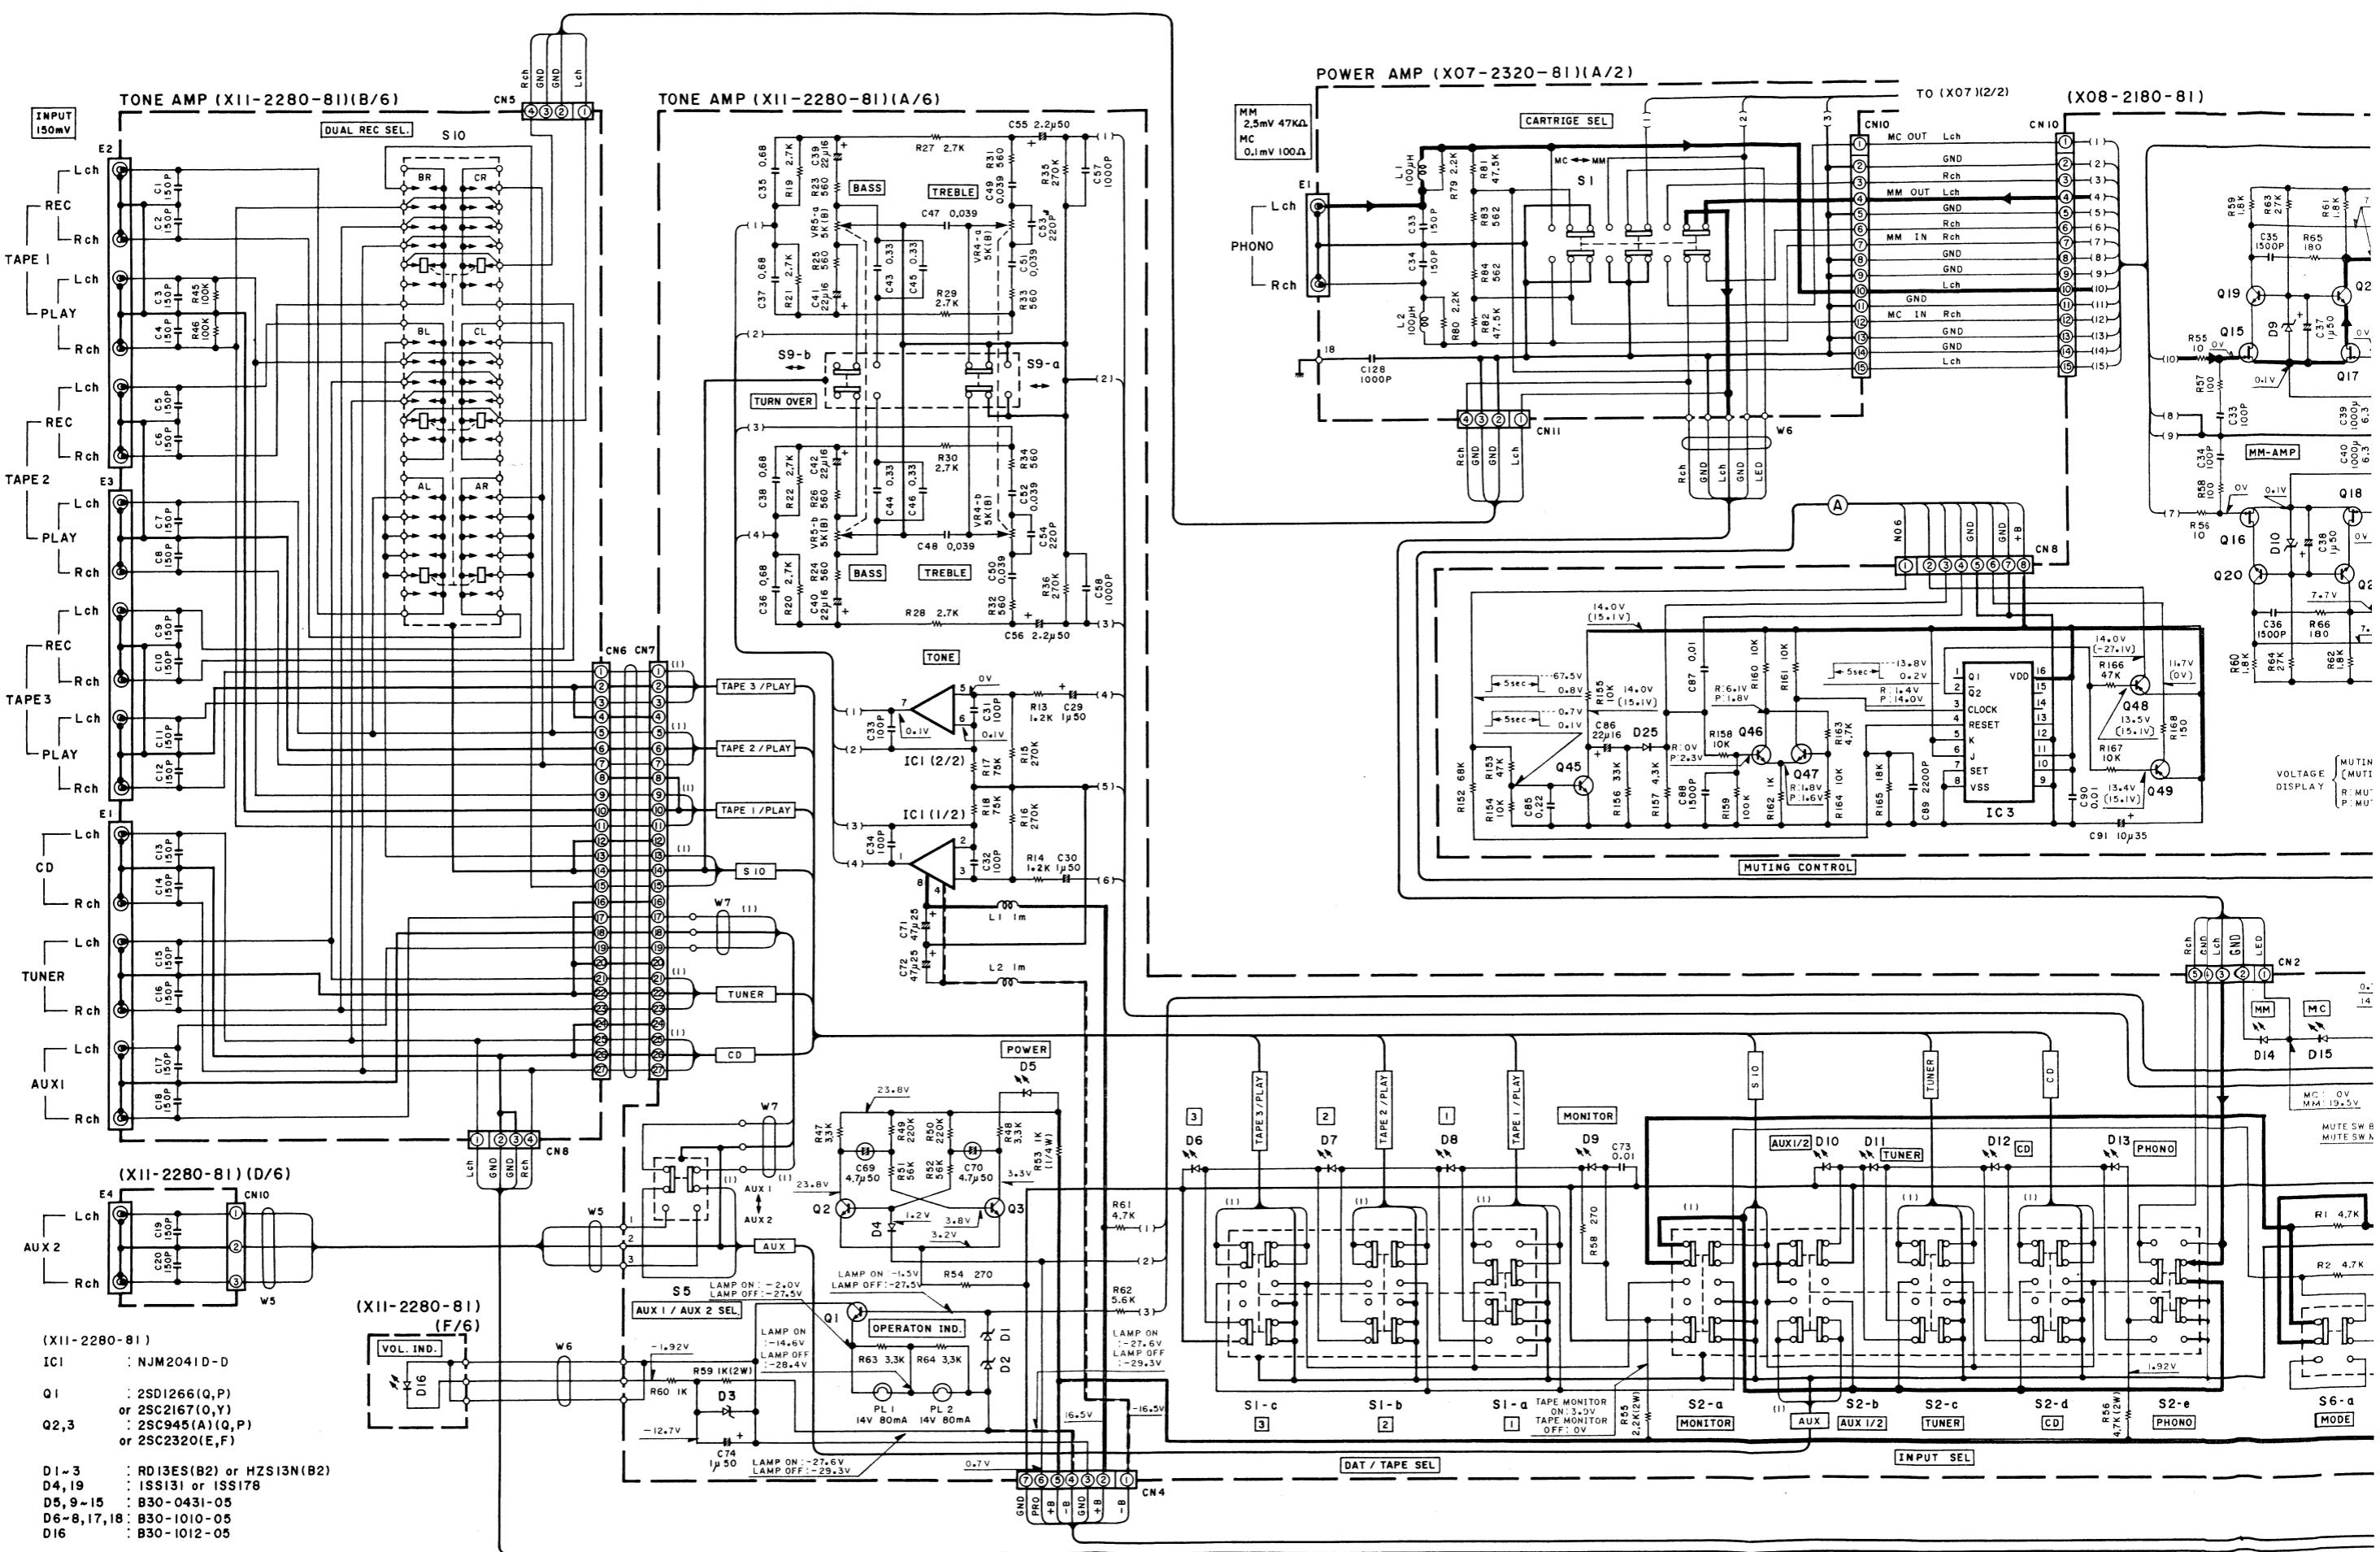

J

K

L

M

N


O

P

Q

R

2180-81)

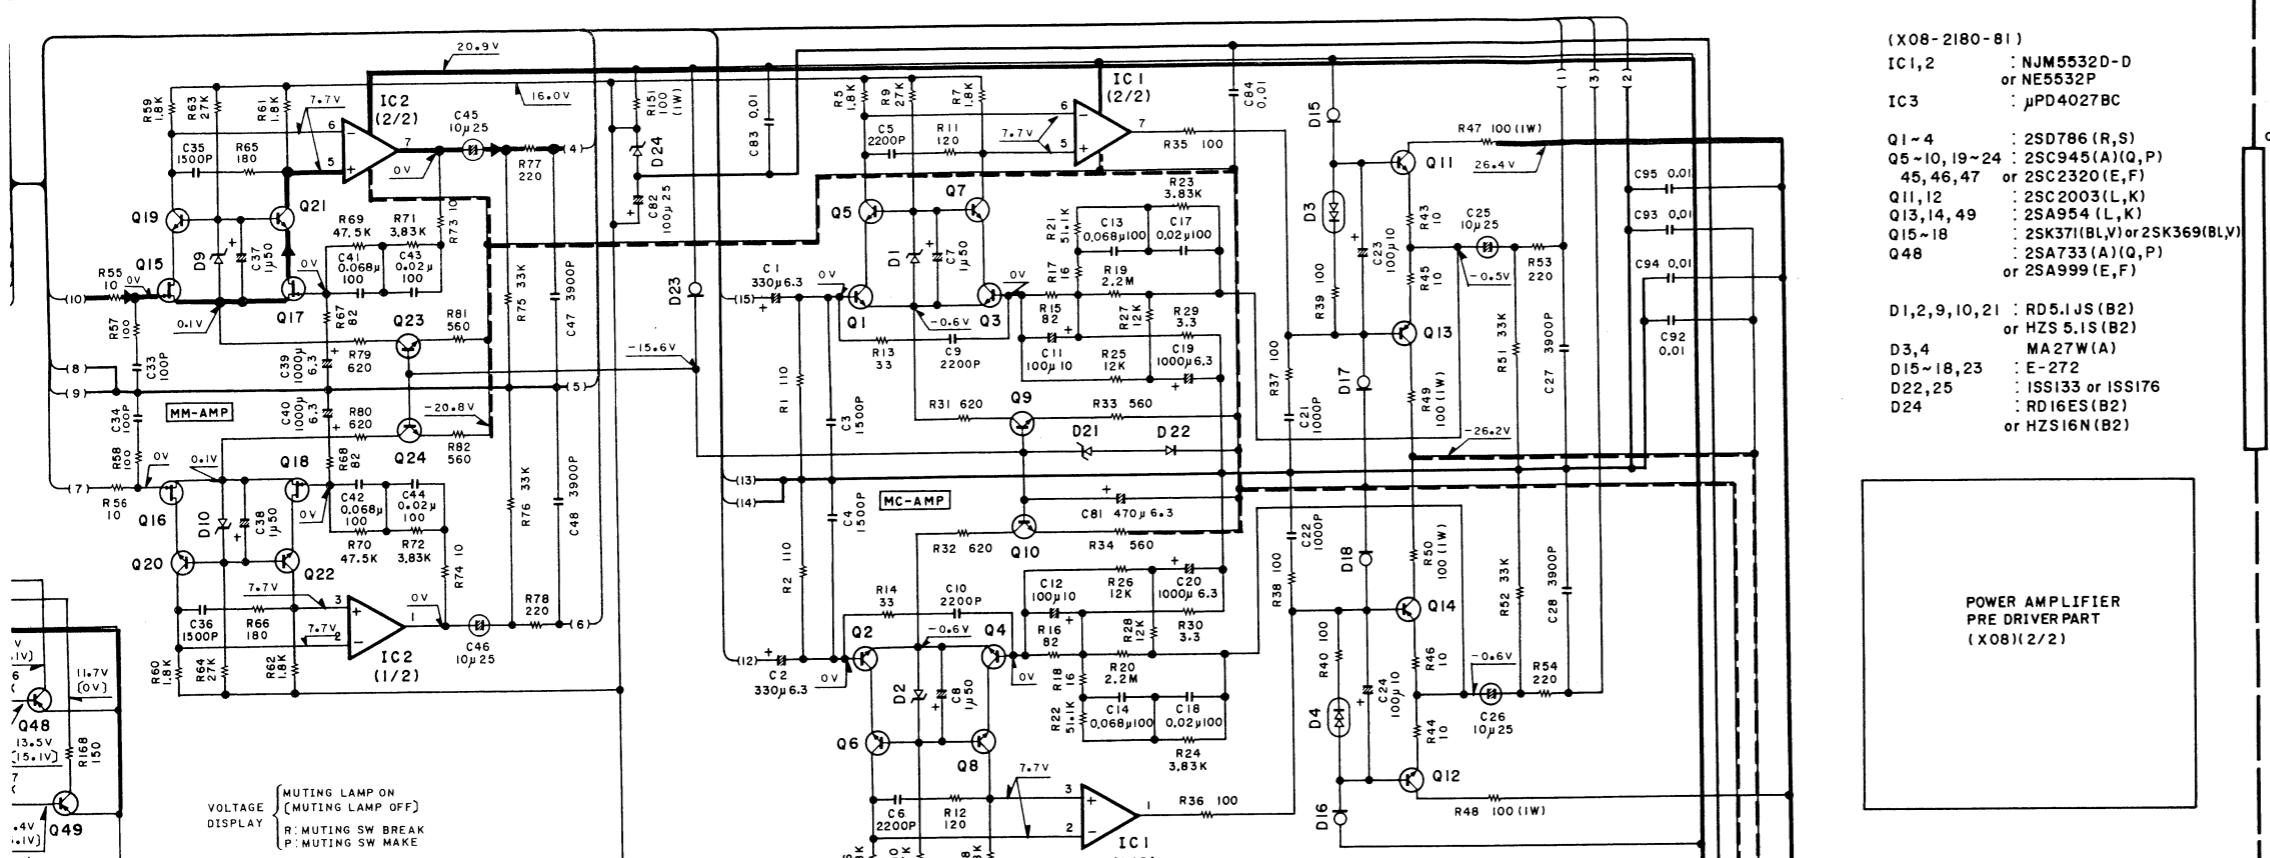


(X08-2180-81)

IC1,2 : NJM5532D-D
or NE5532P
IC3 : μ PD4027BC

Q1~4 : 2SD786(R,S)
Q5~10,19~24 : 2SC945(A)(Q,P)
45,46,47 : 2SC2320(E,F)
Q11,12 : 2SC2003(L,K)
Q13,14,49 : 2SA954(L,K)
Q15~18 : 2SK371(BL,Y) or 2SK369(BLY)
Q48 : 2SA733(A)(Q,P)
or 2SA999(E,F)



D1,2,9,10,21 : RD5.1JS(B2)
or HZS 5.1S(B2)
D3,4 : MA27W(A)
D15~18,23 : E-272
D22,25 : ISSI33 or ISSI76
D24 : RD16ES(B2)
or HZS16N(B2)

POWER AMPLIFIER
PRE DRIVER PART
(X08)(2/2)

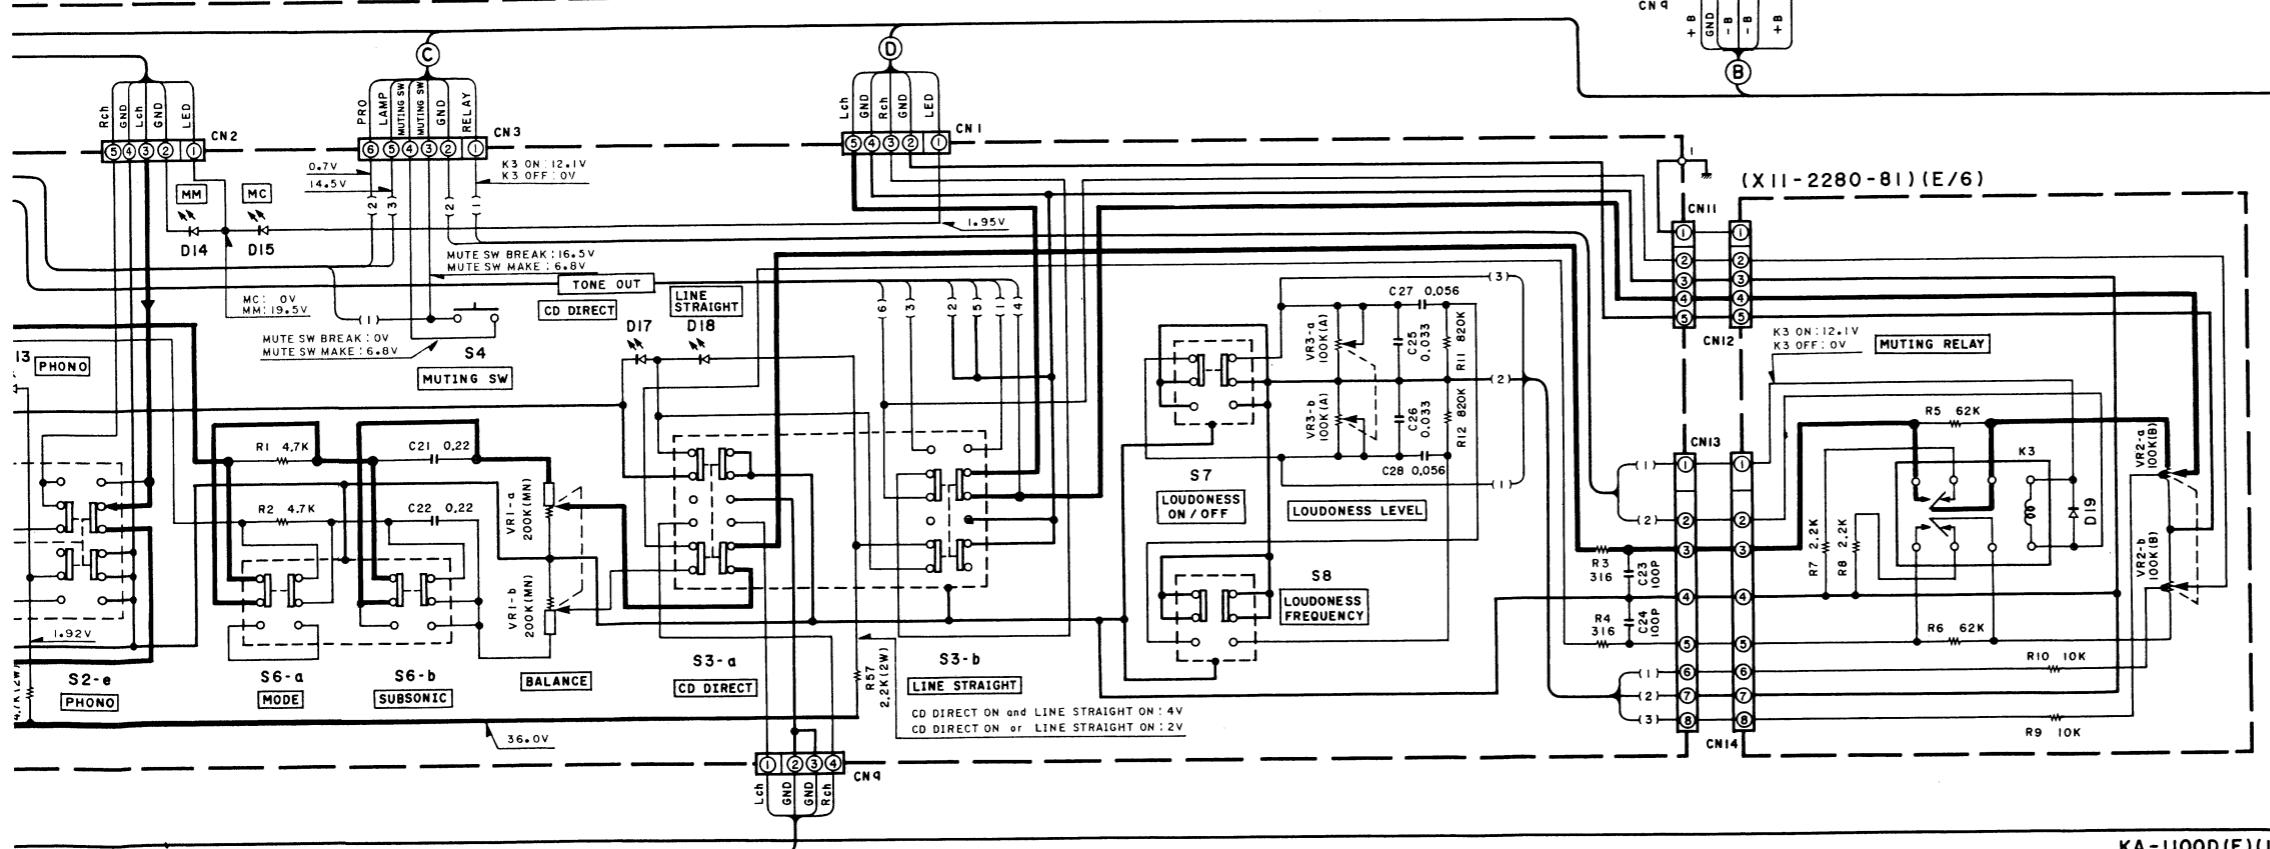

KA-1100D(E)(1/2)



2SA1123
2SA1124
2SA684NC
2SA733(A)
2SA954
2SA992
2SA999
2SC1384NC
2SC1845
2SC2003
2SC2320
2SC2631
2SC2632
2SC945(A)
2SD786

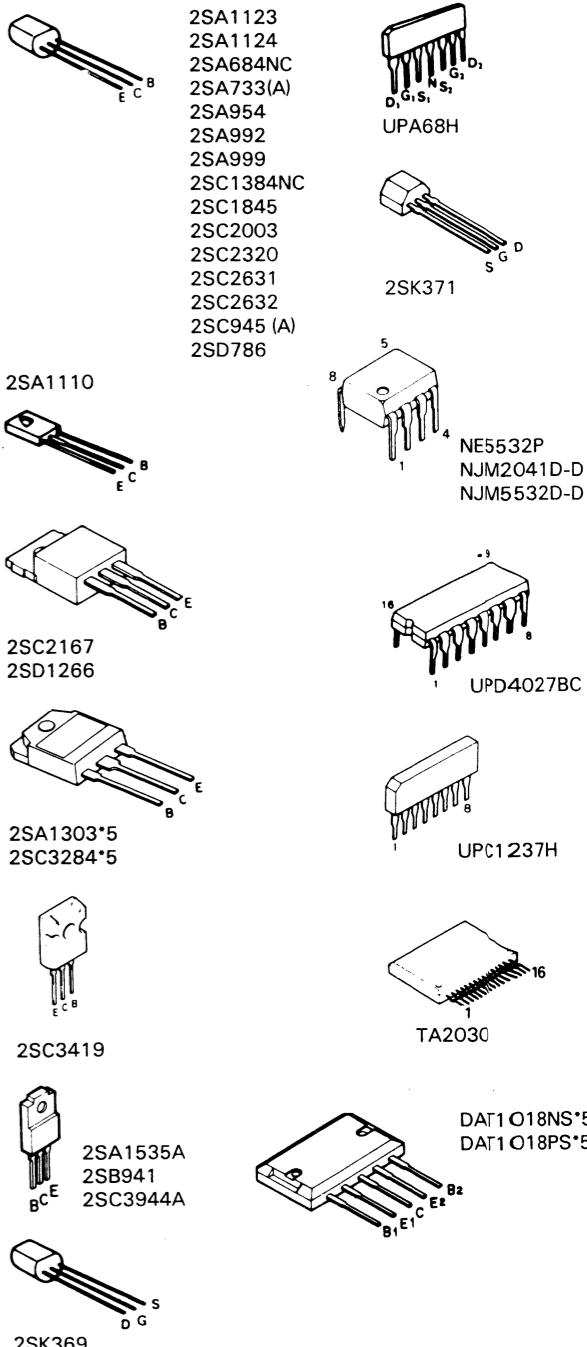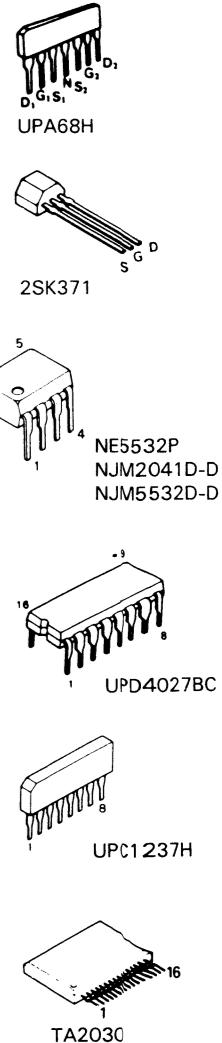


- DC voltages are measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.
- Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.
- Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Voltmeter gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

KA-1100D
KENWOOD

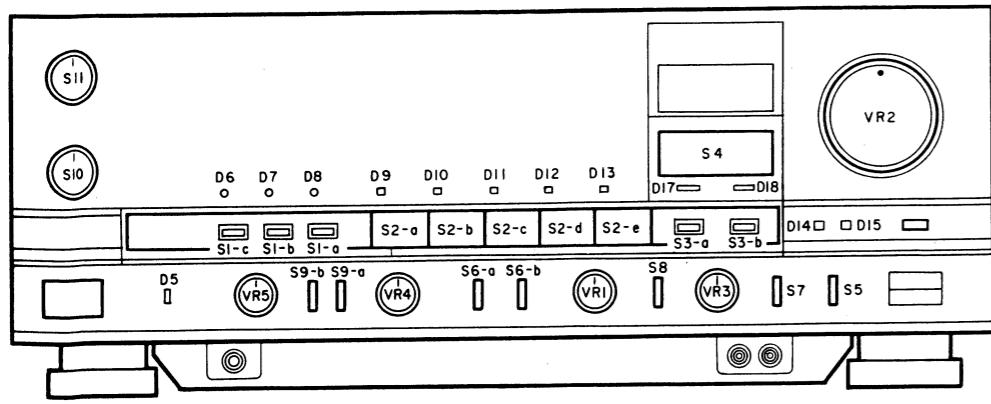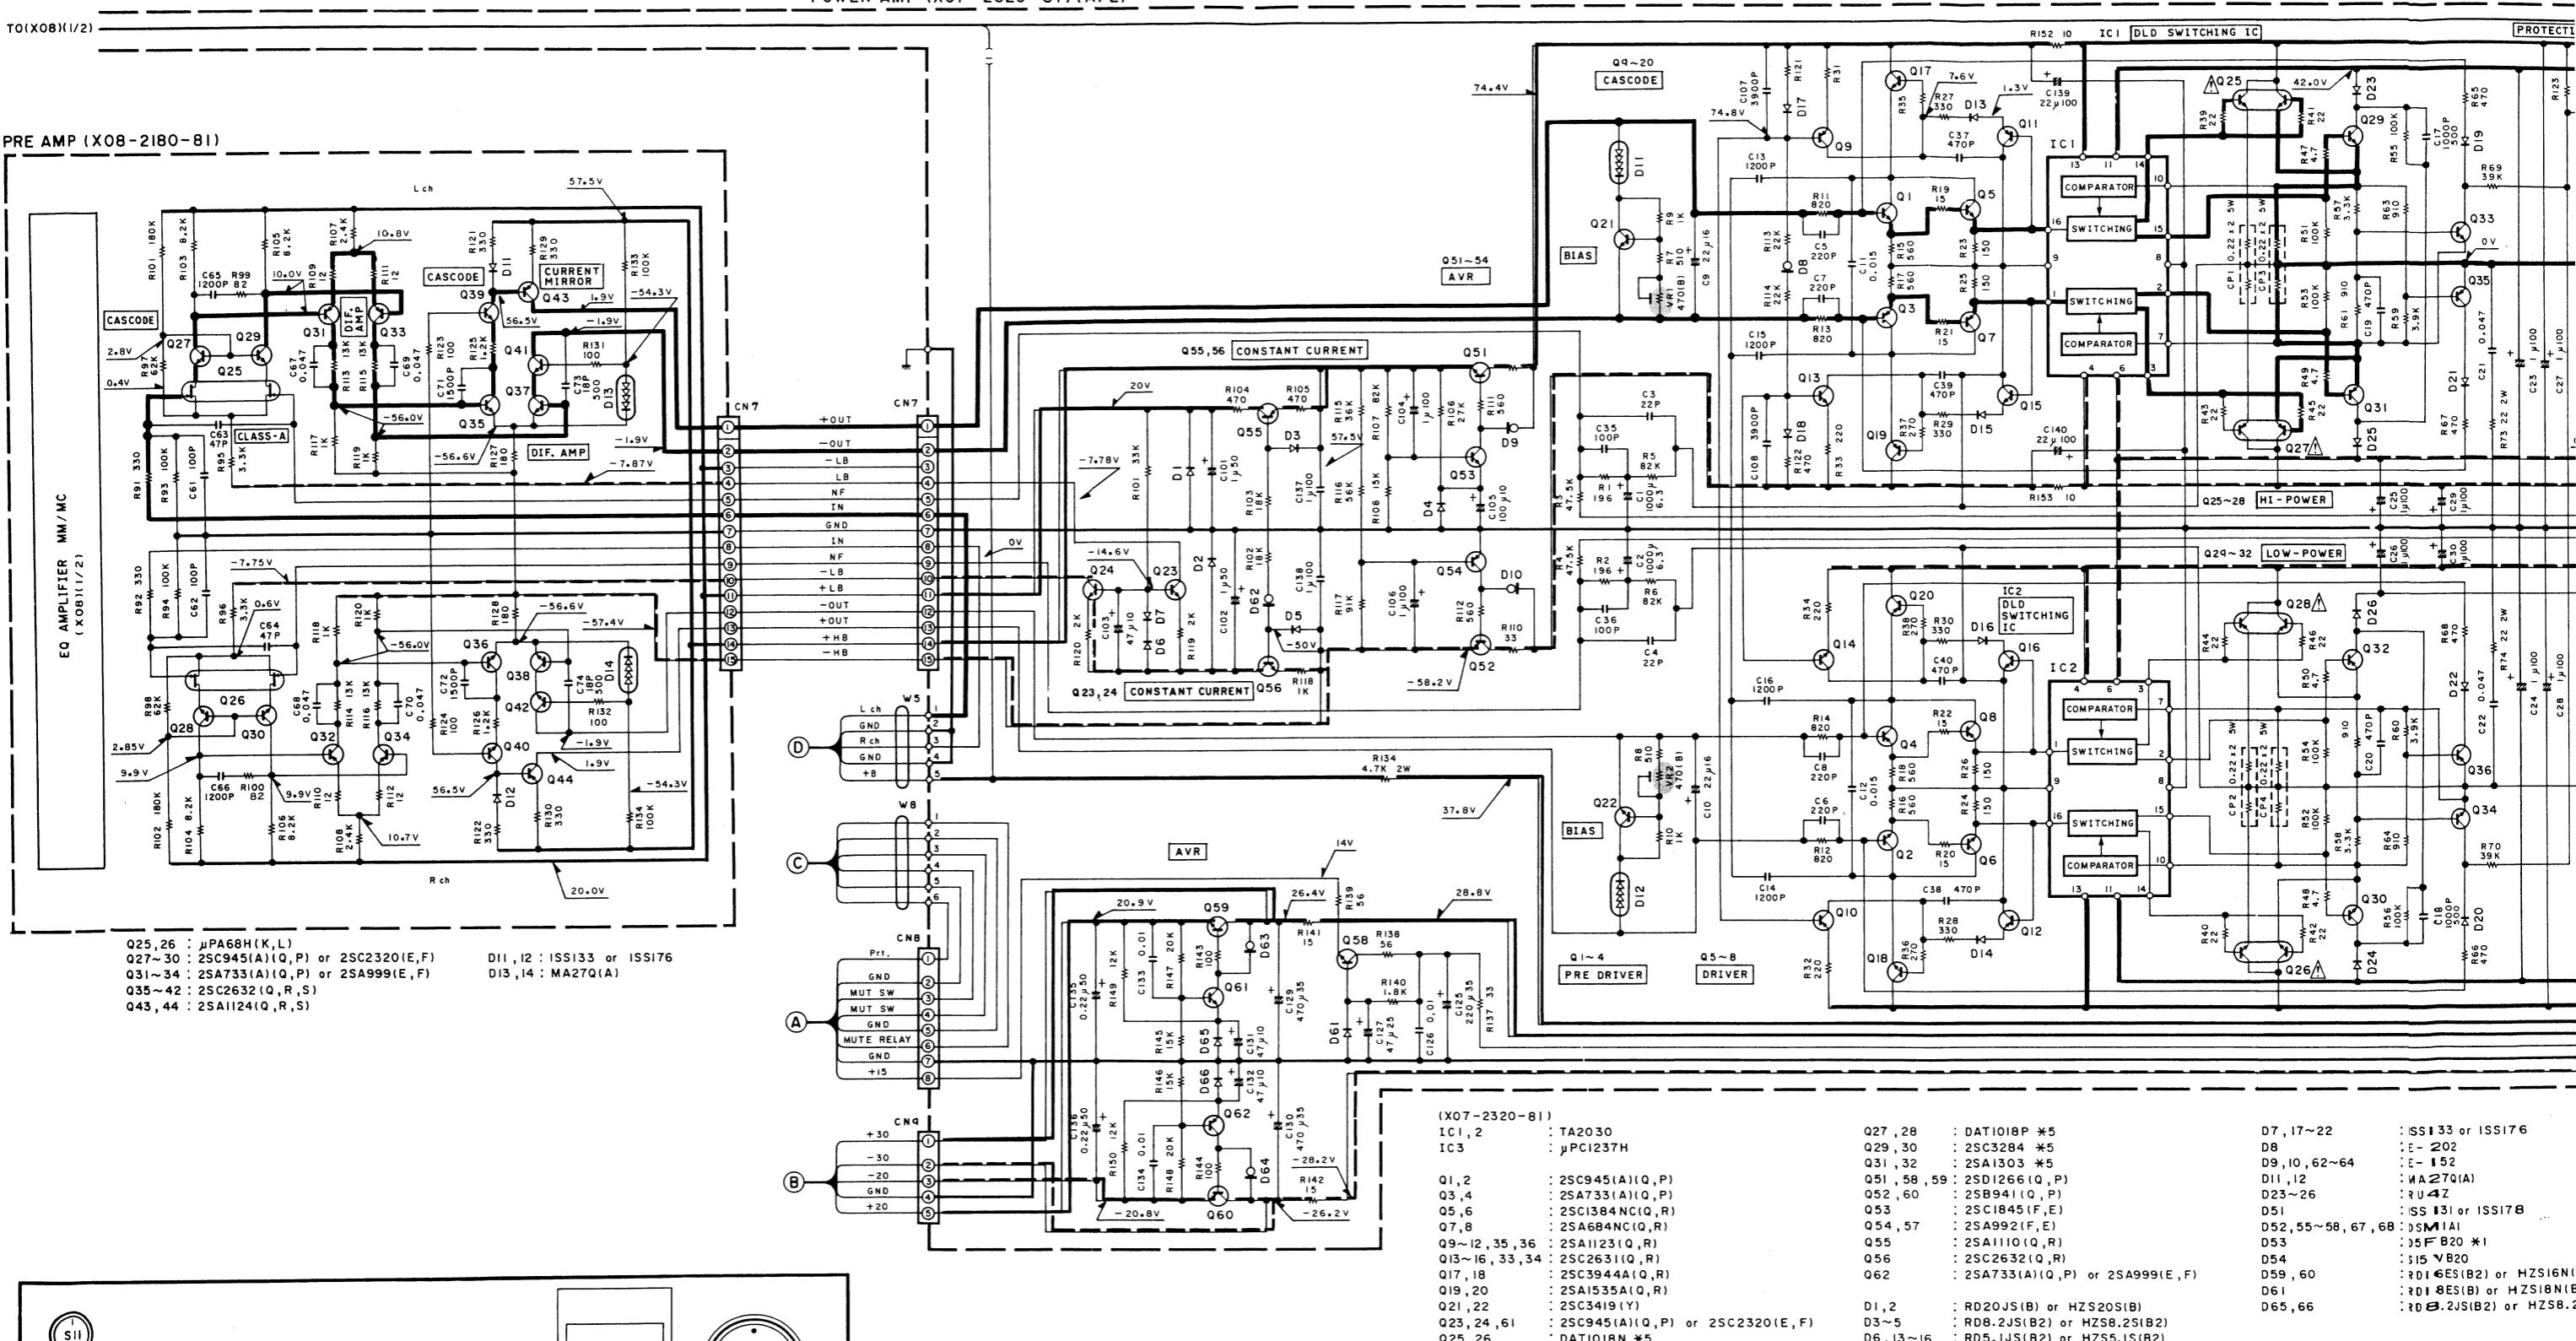

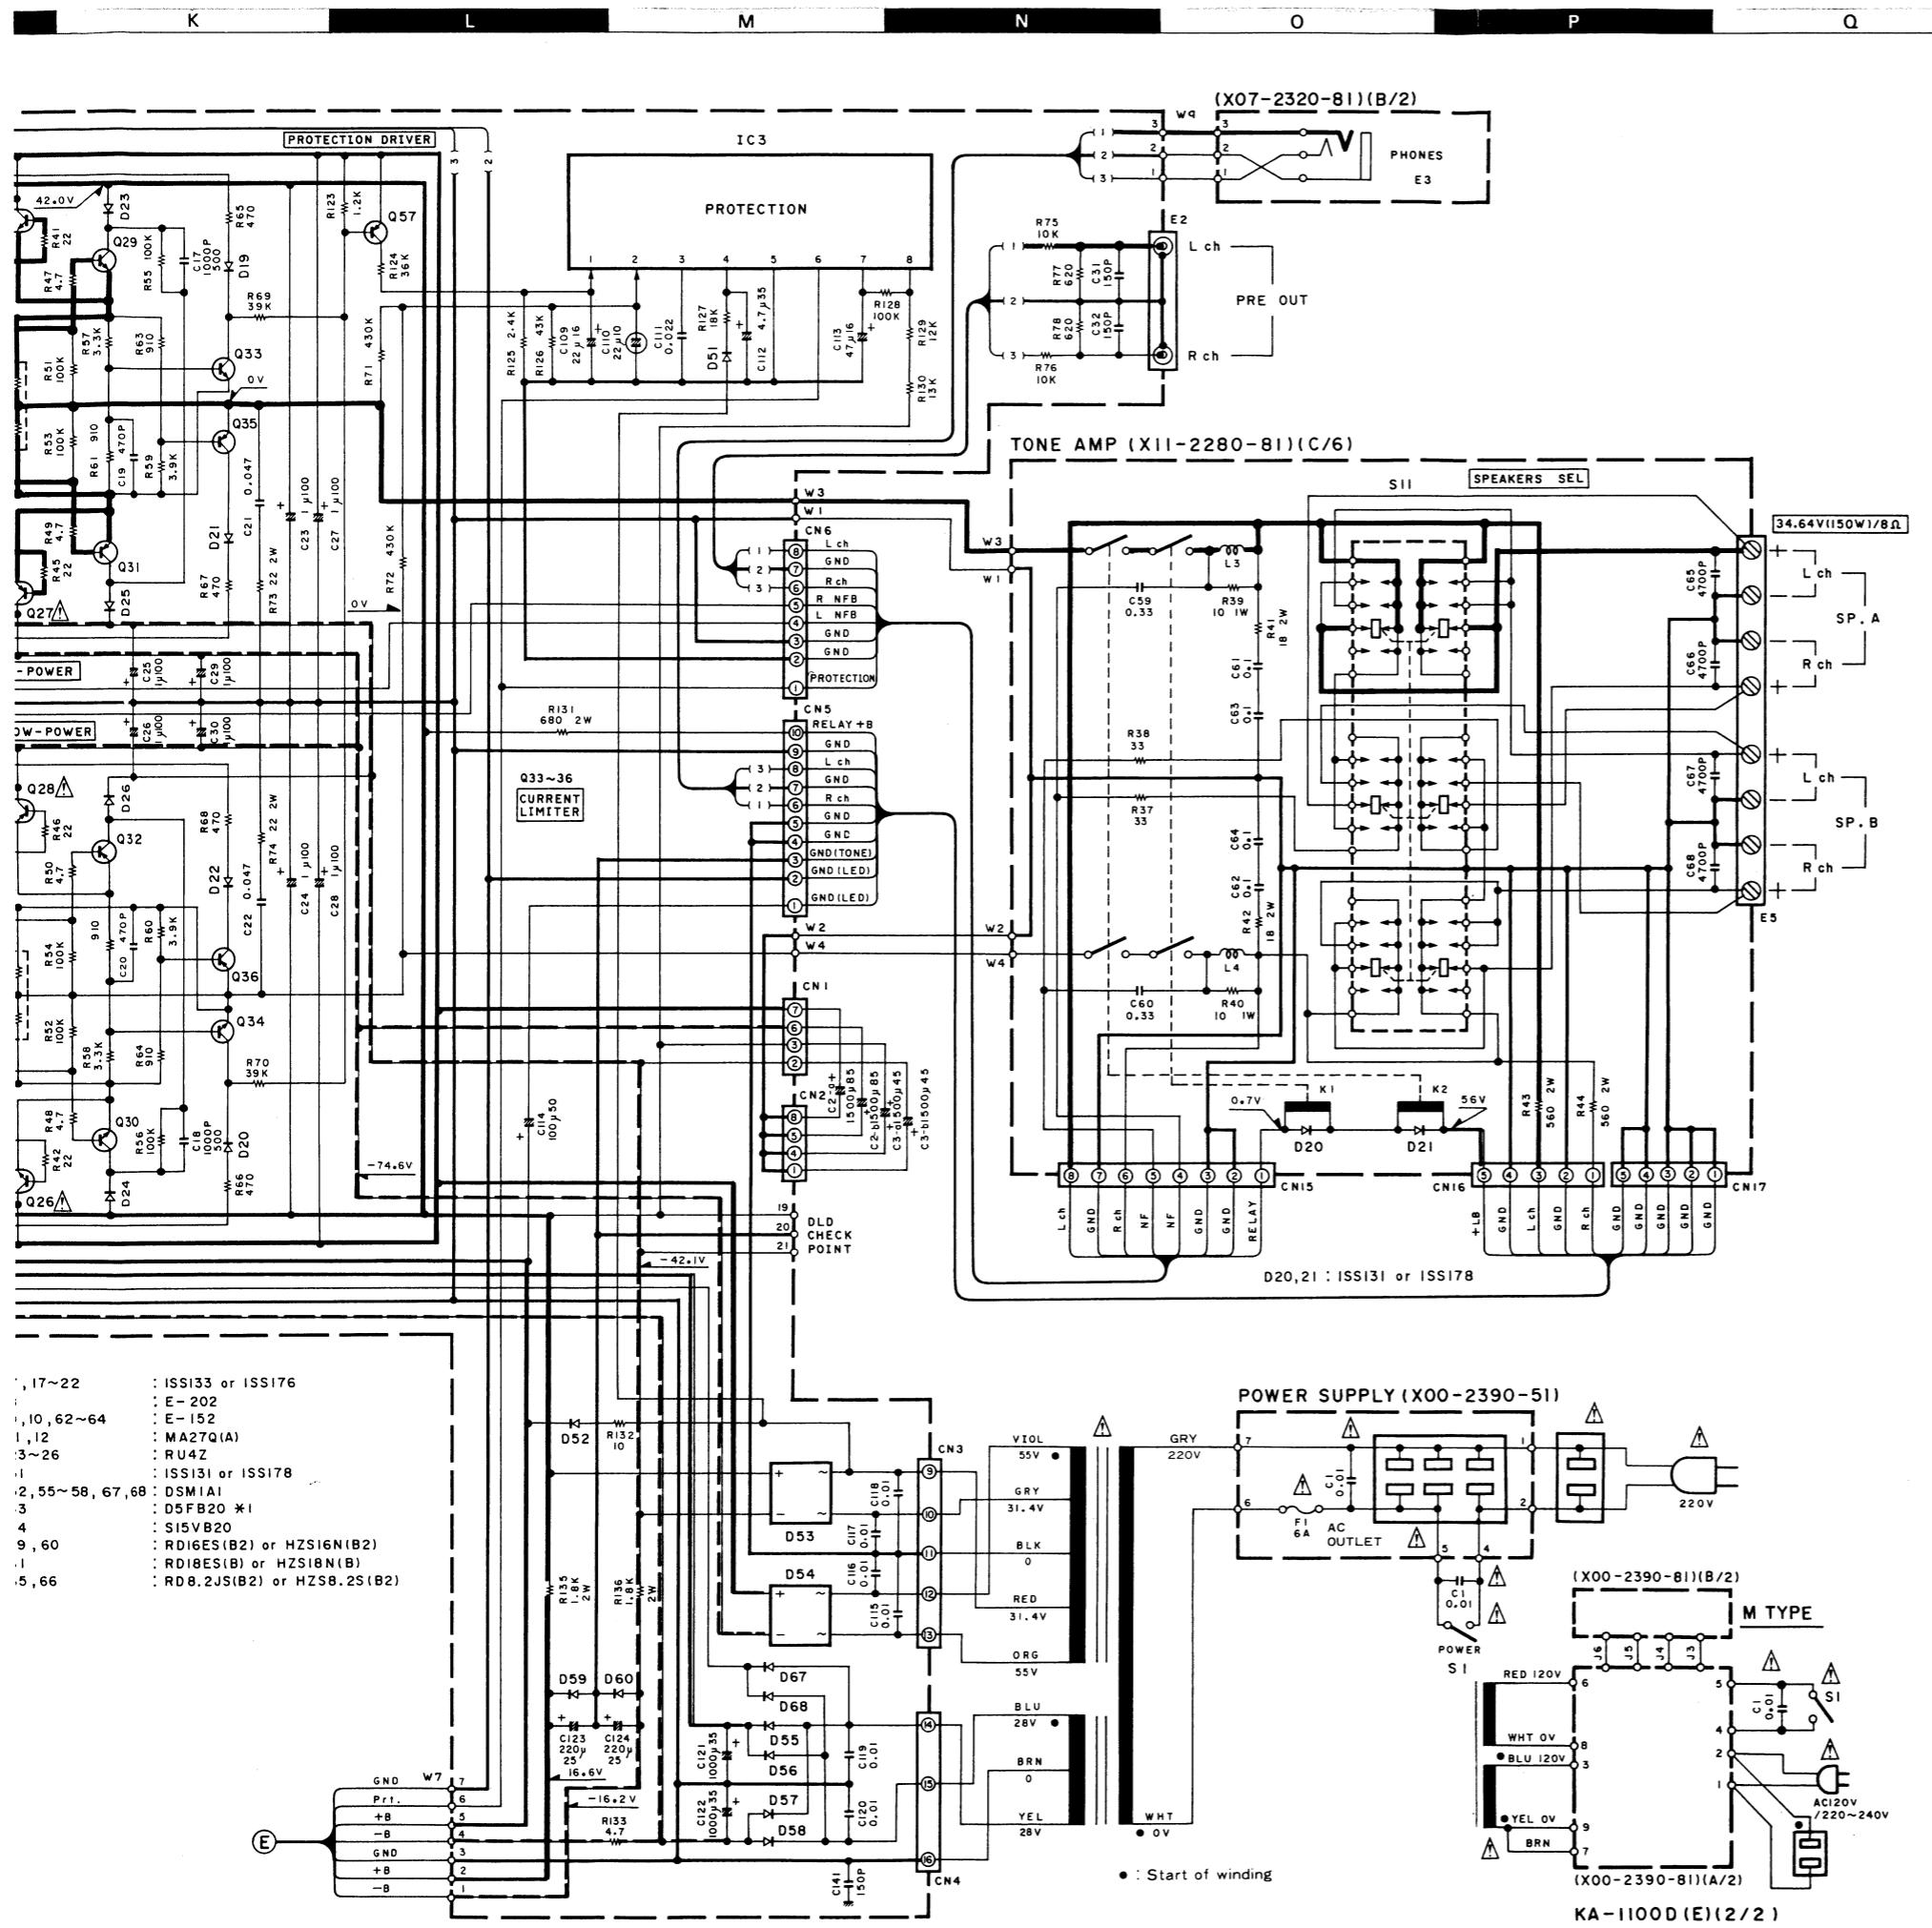

- | | |
|--------------------|------------------------------|
| : 17~22 | : ISSI33 or ISSI76 |
| : | : E-202 |
| : 10, 62~64 | : E-152 |
| : 1, 12 | : MA27Q(A) |
| : 3~26 | : RU4Z |
| : | : ISSI31 or ISSI78 |
| : 2, 55~58, 67, 68 | : DSMIA1 |
| : 3 | : D5FB20 *1 |
| : 4 | : S15VB20 |
| : 9, 60 | : RD16ES(B2) or HZS16N(B2) |
| : | : RD18ES(B) or HZS18N(B) |
| : 5, 66 | : RD8.2JS(B2) or HZS8.2S(B2) |

- DC voltages are measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.
 - Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.
 - Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Voltmeter gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).  Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

KA-1100D

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
S11	1C		590-0062-05	SLIDE SWITCH (SPEAKERS)		
D1 -3			HZS13N(B2)	ZENER DIODE		
D1 -3			RD13ES(B2)	ZENER DIODE		
D4			1SS131	DIODE		
D4			1SS178	DIODE		
D19 -21			1SS131	DIODE		
D19 -21			1SS178	DIODE		
IC1			NJM2041D-D	IC(OP AMP X2)		
Q1			2SC2167(Q,Y)	TRANSISTOR		
Q1			2SD1266(Q,P)	TRANSISTOR		
Q2 ,3			2SC2320(E,F)	TRANSISTOR		
Q2 ,3			2SC945(A)(Q,P)	TRANSISTOR		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe)

X: Australia M: Other Areas

 indicates safety critical components.

KA-1100D

SPECIFICATIONS

Power Output

150 watts per channel minimum RMS, both channels driven at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.004% total harmonic distortion

Maximum continuous Power Output (DIN) 1 kHz at 8 ohms	160 W + 160 W
Maximum continuous Power Output (IEC/NF) from 60 Hz to 12,500 Hz 0.7%	
Total Harmonic Distortion at 4 ohms	200 W + 200 W
Total Harmonic Distortion	
(20 Hz-20,000 Hz, 8 ohms)	: 0.004%
Inter Modulation Distortion	: 0.003%
Frequency Response	
PHONO "RIAA" Response	: 20 Hz-20,000 Hz, ±0.2 dB
TUNER/CD/AUX/DAT/TAPE	: 1 Hz-150,000 Hz, +0 dB, -3 dB
Signal to Noise Ratio (IHF-A)	IHF'66 IHF'78
PHONO (MM)	: 87 dB (2.5 mV) 78 dB (2.5 mV)
PHONO (MC)	: 76 dB (250 µV) 78 dB (250 µV)
TUNER/CD/AUX/DAT/TAPE	: 110 dB 80 dB
Signal to Noise Ratio at Unweighted, 50 mW Output (DIN)	
PHONO (MM)	: 60 dB
TUNER/CD/AUX/DAT/TAPE	: 63 dB
Input Sensitivity/Impedance	
PHONO (MM)	: 2.5 mV/ 47 kohms, 250 pF
PHONO (MC)	: 100 µV/100 ohms, 1650 pF
TUNER/CD/AUX/DAT/TAPE	: 150 mV/ 47 kohms
Phono Maximum Input Level	
(MM)	: 210 mV, 0.003% T.H.D. at 1 kHz
(MC)	: 8 mV, 0.003% T.H.D. at 1 kHz
Output Level/Impedance	
TAPE REC	: 150 mV/220 ohms
REC OUT	: 2 V/600 ohms
Channel Separation (DIN) at 1,000 Hz	
PHONO (Terminated with 2.2 kohms)	: 67 dB
AUX (Terminated with 47 kohms + 250 pF)	: 58 dB
Tone Control	
TREBLE (3 kHz)	: ±10 dB at 10 kHz
(6 kHz)	: ±10 dB at 20 kHz
BASS (400 Hz)	: ±10 dB at 100 Hz
(200 Hz)	: ±10 dB at 50 Hz
Loudness Control (at -30 dB Volume Level)	
Subsonic Filter (-3 dB)	: 0 ~ +8 dB
Damping factor	: 6 dB/oct. at 18 Hz
	: 1000 (50 Hz)

GENERAL

Power Requirements

: 220 V, 50 Hz European Models

120/220-240 V 50/60 Hz switchable Other Models

Power Consumption

: 260 W

Dimensions

: W 440 mm (17-5/16")

H 170 mm (6-16/16")

D 420 mm (16-9/16")

Weight (Net)

: 18 kg (39.6 lb)

(IHF'66)

Note:

Component and circuitry are subject to modification to insure best operation under differing local conditions. This manual is based on the Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION

Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150 Japan

KENWOOD ELECTRONICS

1315 E. Watsoncenter Rd, Carson, California 90745,
75 Seaview Drive, Secaucus, New Jersey 07094, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

1070 Jayson Court, Mississauga, Ontario, Canada L4W 2V5

KENWOOD ELECTRONICS BENELUX N.V.

Leuvensesteenweg 504 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 6056 Heusenstamm, West Germany

TRIO-KENWOOD FRANCE S.A.

5, Boulevard Ney, 75018 Paris, France

TRIO ELECTRONICS (U.K.) LIMITED

17 Bristol Road, The Metropolitan Centre, Greenford, Middx, UB6 8UPE England

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

4E Woodcock Place, Lane Cove, N.S.W. 2066, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Wang Kee Building, 5th Floor, 34-37, Connaught Road, Central, Hong Kong