



97

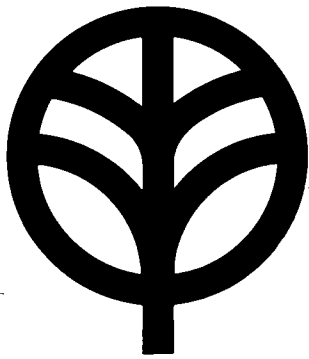

KENWOOD
HI/FI STEREO COMPONENTS

SERVICE MANUAL

KA-7100

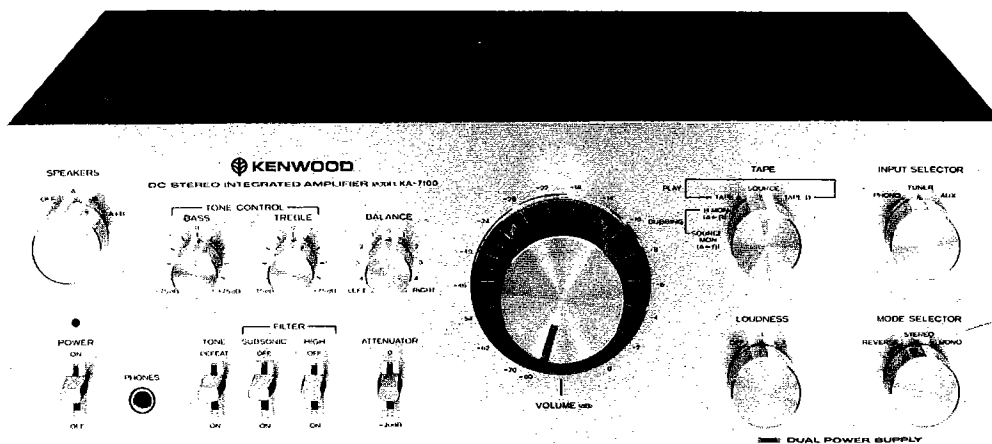

DC STEREO INTEGRATED AMPLIFIER

CONTENTS

EXTERNAL VIEW 3

INTERNAL VIEW 4

DISASSEMBLY FOR REPAIR 5

BLOCK AND LEVEL DIAGRAM 7

CIRCUIT DESCRIPTION 7

DESTINATIONS' PARTS LIST 9

PARTS LIST 10

PC BOARD

POWER AMP (X07-1510-10) 12

CONTROL (X11-1420-10) 14

PREAMP (X08-1570-10) 15

ADJUSTMENT 16

SEMICONDUCTOR SUBSTITUTIONS 18

SCHEMATIC DIAGRAM 19

SPECIFICATIONS 20

Note 1:

The products are subject to modification in components and circuits in different countries and regions. This is because each products must be used under the best condition.



This manual provides information of modification based on the standard in the U.S. for the convenience of ordering associated components and parts.

| | |
|--------------------|---|
| U.S.A. | K |
| Canada | P |
| PX | U |
| Australia | X |
| Europe | W |
| England | T |
| Scandinavia | L |
| South Africa | S |
| Other Areas | M |

Note 2:



Symbol ☆ in parts list means the new parts.

EXTERNAL VIEW

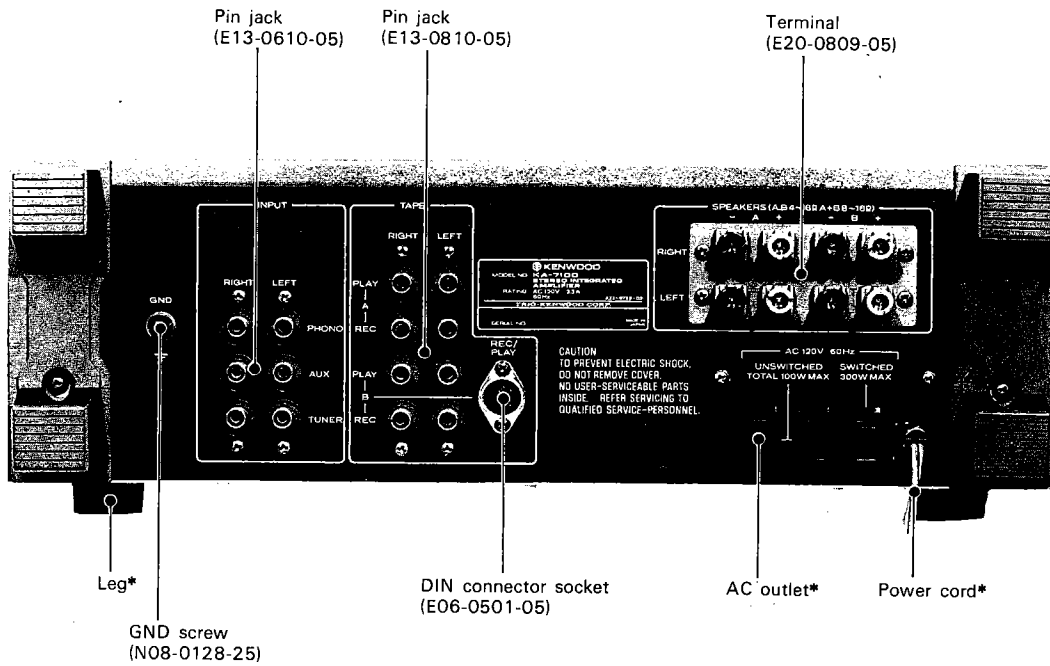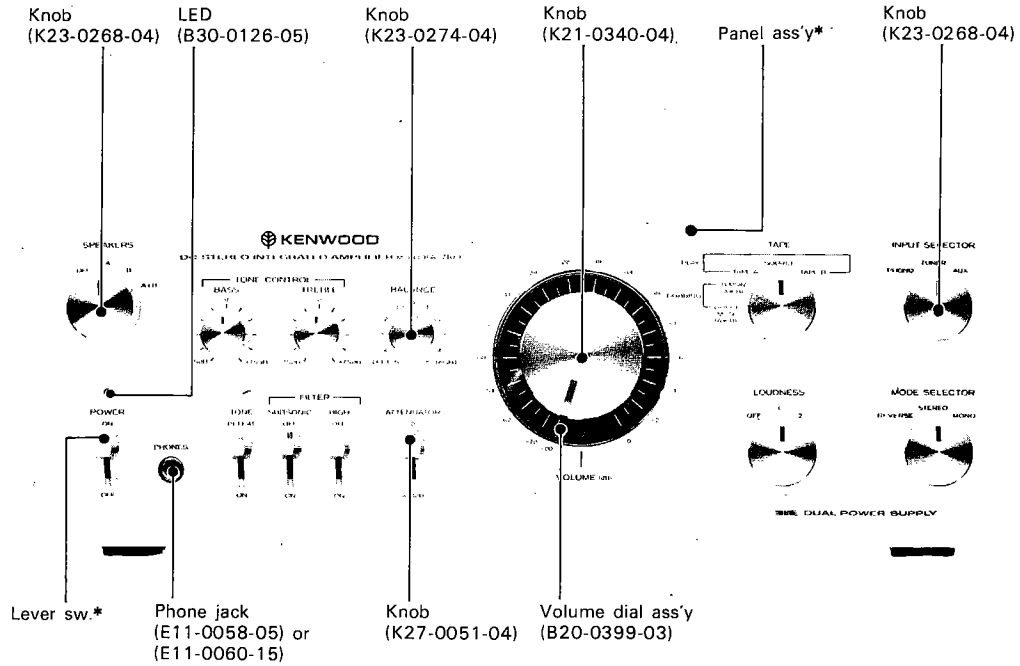

* Refer to Destinations' Parts List.

INTERNAL VIEW

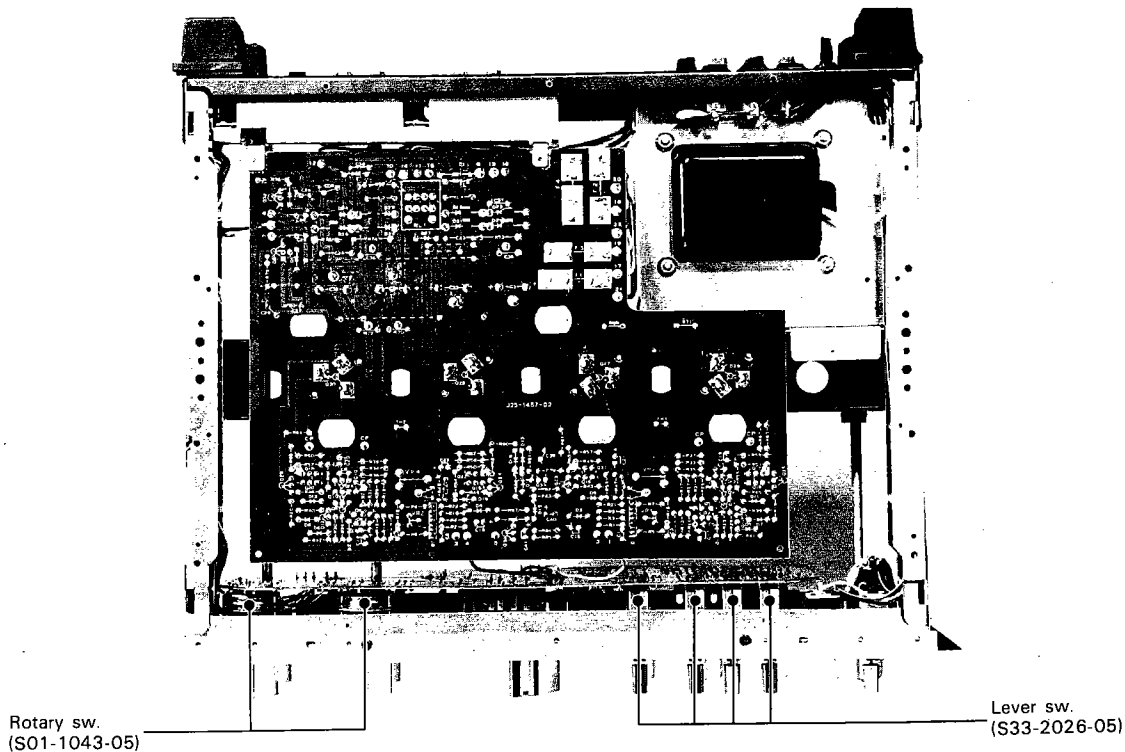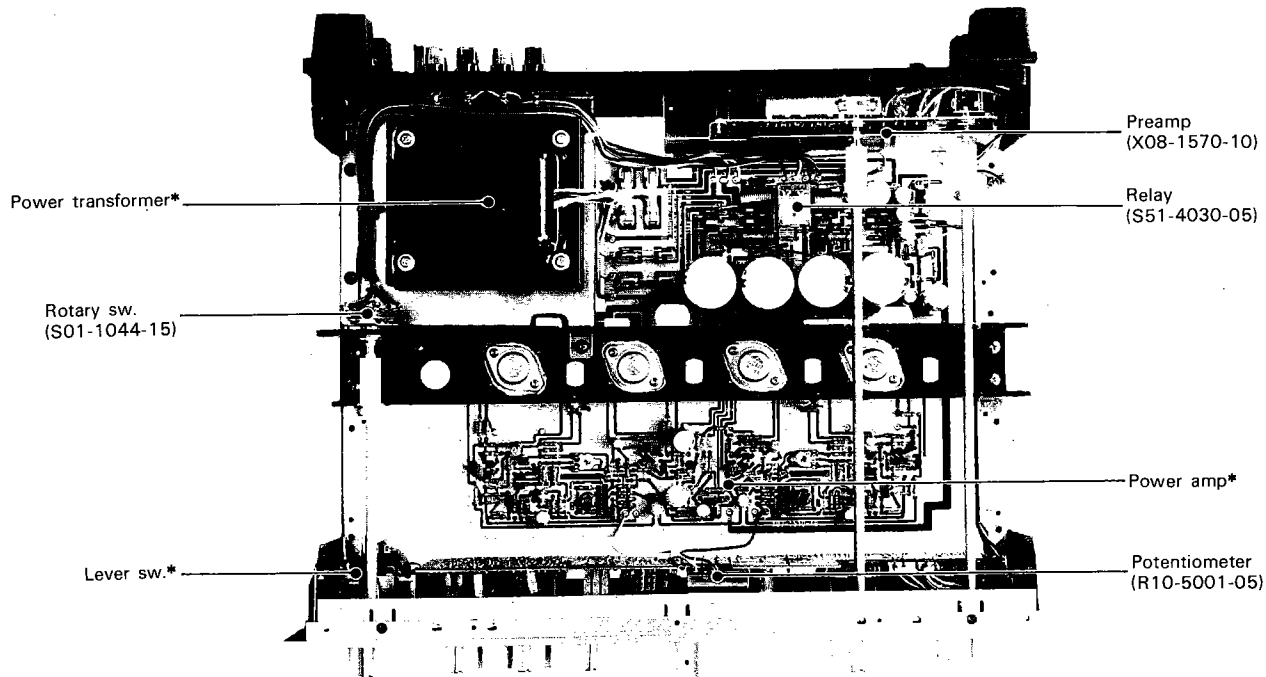

* Refer to Destinations' Parts List.

DISASSEMBLY FOR REPAIR

CONTROL UNIT:

When checking the control unit, perform the following sequences.

- ① Remove the case.
- ② Loosen the screws fixing the sub-panel and remove one pair of screws on each side.
- ③ Remove the shaft-couplers of the selector switch, the tape switch and the speaker switch.
- ④ Remove 2 screws fixing the panel and the bottom plate. (lower side)
- ⑤ Incline the panel frontward. When repairing a PC board detached from the body, remove the panel assembly from the sub-panel.
- ⑥ Pull out the knobs. (For Volume knob, use a hexagon wrench.)
- ⑦ Remove 5 screws fixing the panel assembly on the subpanel.
- ⑧ Remove nuts of Volume and switches.
- ⑨ Remove the screws fixing lever switches.

POWER AMPLIFIER UNIT:

The power amplifier unit includes the power supply and the protection circuit. The power amplifier unit can be checked and repaired with the case and the bottom plate removed. If necessary to take out the unit, remove four screws on the


heat sink and two screws fixing the shield plate of the preamplifier unit. At this time, inclining the control unit frontward facilitates the work. (See the foregoing paragraph.)

PREAMP UNIT:


The equalizer unit includes pin jacks. When disassembling it, perform the following sequences.

- ⑩ Loosen screws of couplers and slide them to the panel side.
- ⑪ Remove 4 screws fixing the pin jacks.
- ⑫ Loosen screws fixing the rear panel on the chassis and remove one pair of them on each side.
- ⑬ Remove the cushion which is on the left side when viewed from the backside. Then, remove screws fixing the shield plate of the preamplifier on the rear panel.
- ⑭ Remove 3 screws fixing the rear panel on the bottom plate.
- ⑮ Remove 2 screws fixing the transformer mounting hardware on the rearpanel.
- ⑯ Incline the rear panel backward.
- ⑰ Take out the preamp unit.



Further, if necessary to take out the PC board from shield plate, remove 3 screws fixing the shield plate.

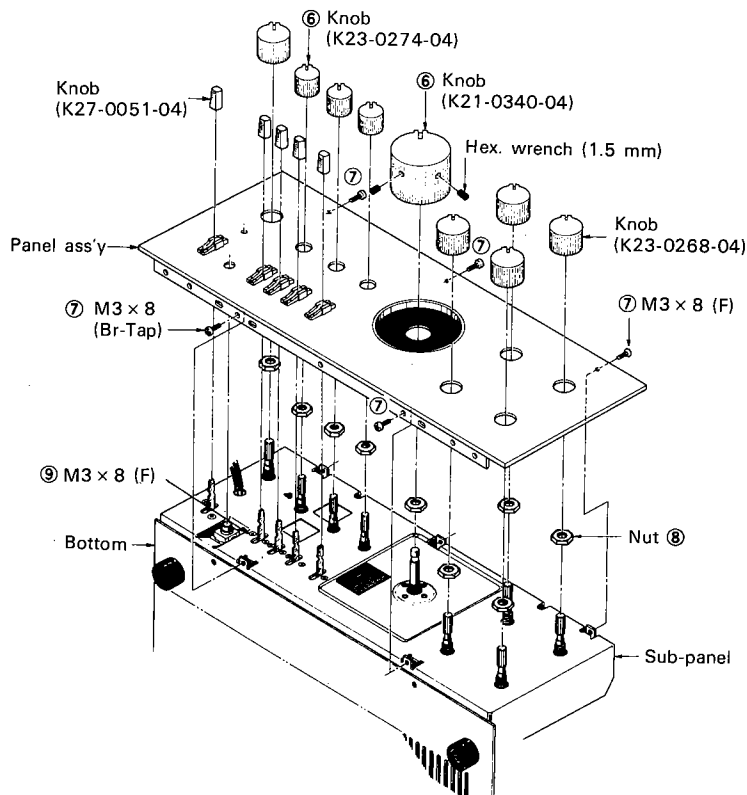

DISASSEMBLY FOR REPAIR

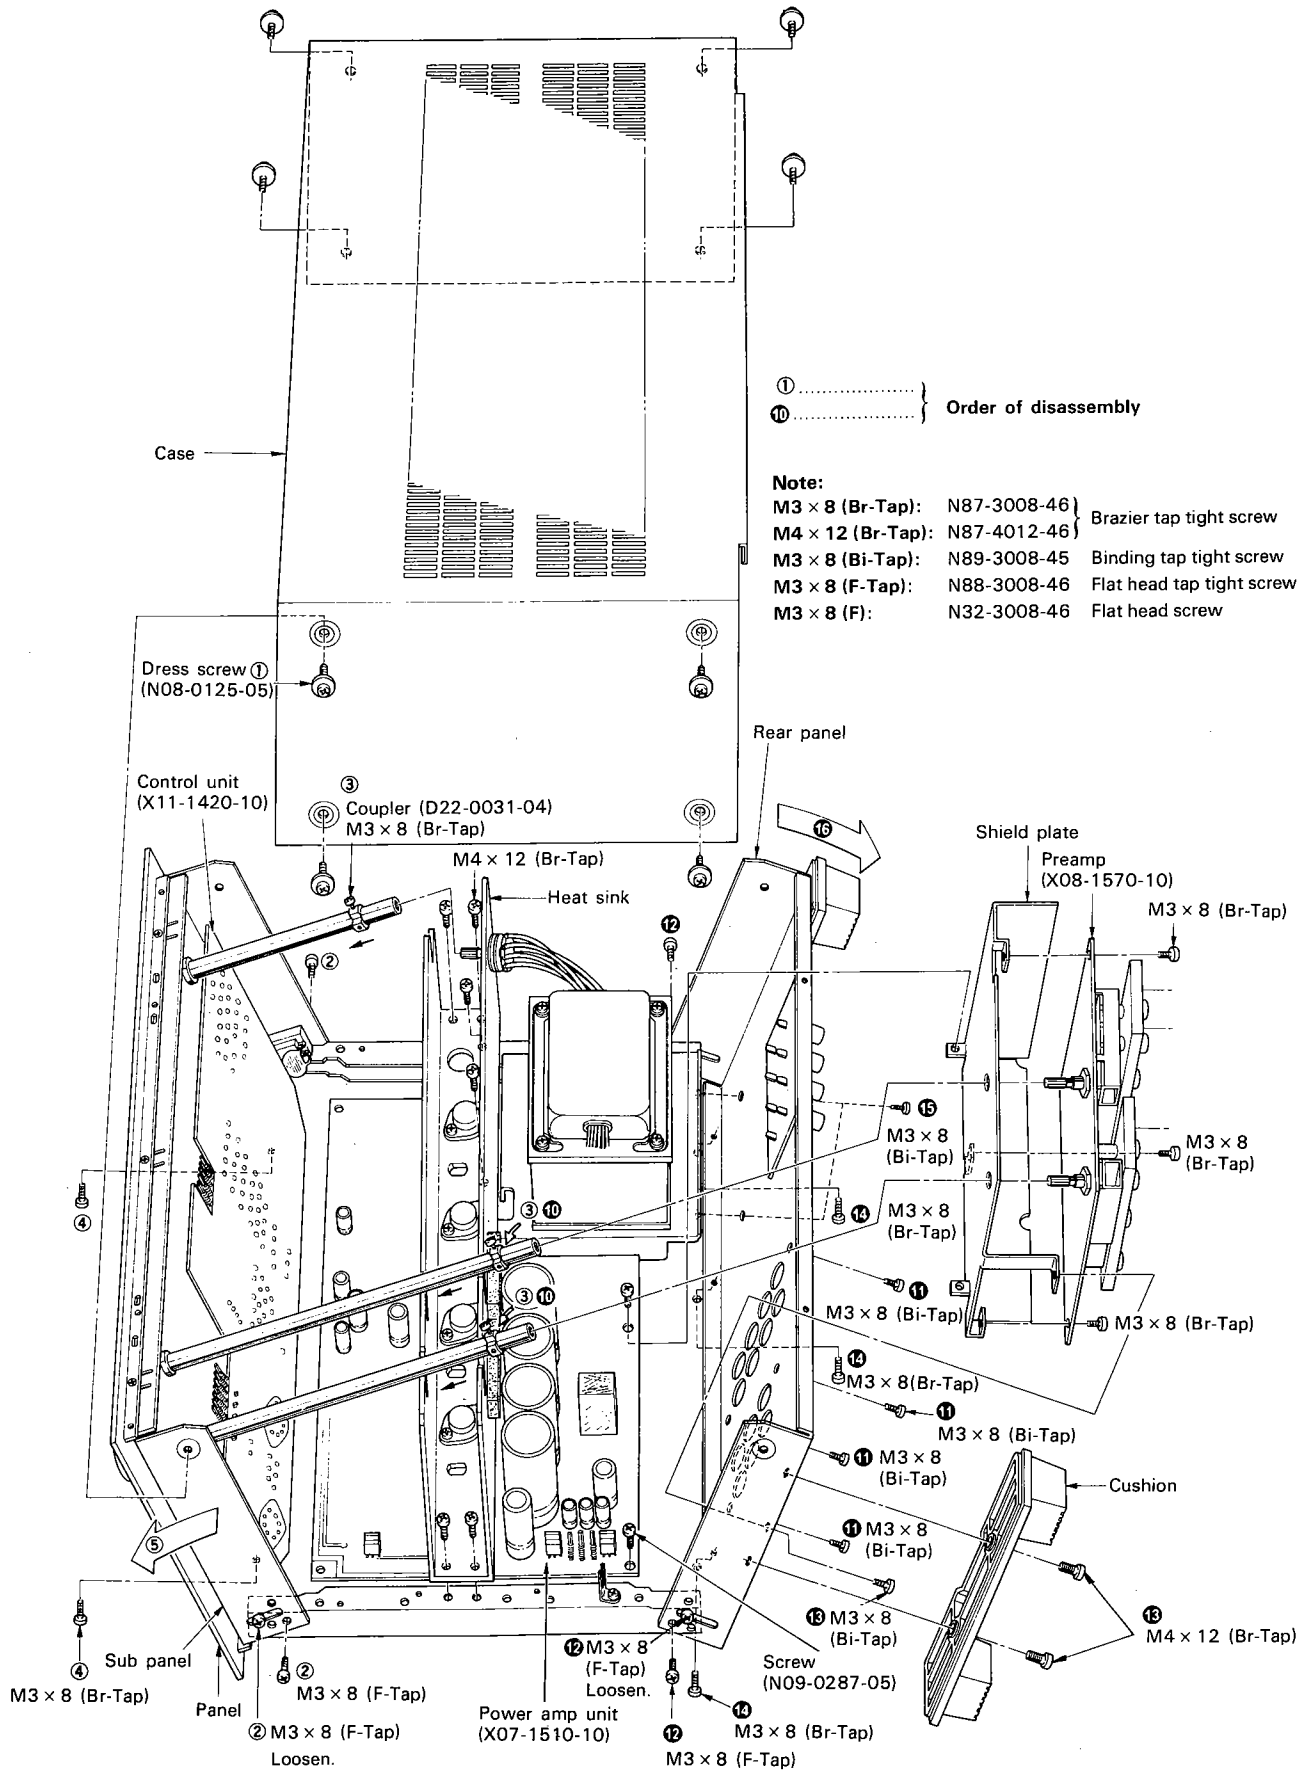

BLOCK AND LEVEL DIAGRAM/CIRCUIT DESCRIPTION

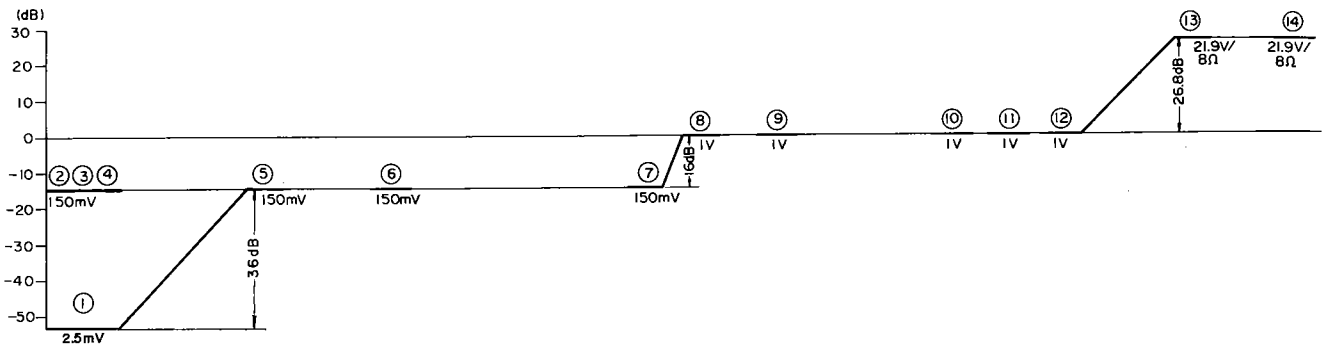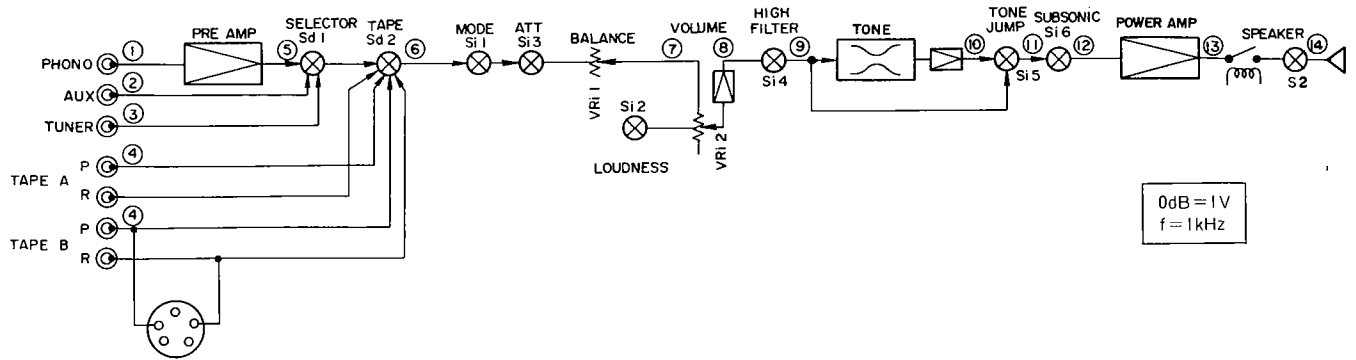


PREAMPLIFIER:

The equalizer consists of a differential amplifier, class A amplifier and a constant current circuit. The ICL circuit using a low-noise FET (refer to KA-9100) is employed in the first stage to improve the phase and transient characteristics. Further, a zener diode is used in the negative voltage supply of the differential amplifier to regulate voltage, so that SVRR is improved.

SVRR (Supply Voltage Rejection Ratio)

SVRR is the ratio of change of output voltage and change of supply voltage when the supply voltage varies. It is generally used to indicate the performance of IC

$$SVRR = \frac{\text{Change of Output Voltage}}{\text{Change of Supply Voltage}}$$

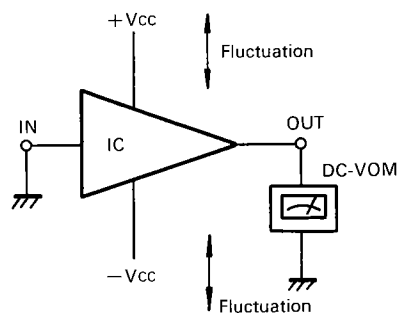

MEASUREMENT OF SVRR

If the supply voltage of equalizer is affected by the power amplifier, the dynamic crosstalk, S/N and the dynamic range will be changed for the worse. To resolve these problems, the dual power supply is used and SVRR is set to a high value.

FLAT-AMPLIFIER:

The flat-amplifier is a 3-stage direct-coupled amplifier consisting of an FET and a transistor inverted-Darlington circuit. The ICL circuit using a low-noise FET is employed in the first stage to improve the distortion factor and the phase characteristic.


Stabilization of Flat-amplifier

The source of the first stage of flat-amplifier is grounded not through a resistor but through a capacitor and resistor, so that the bias is stabilized.

When the collector current of Qi5 is increased by some cause, voltage drop of emitter resistor, Ri27 (2.2K), is increased. This voltage is applied to the source of Qi1 via Ri19 (910). That is to say, 100% of DC is negatively fed back.


When the source voltage of FET is increased, the drain current of Qi1 is decreased since the bias is increased. When the drain current of Qi1 is decreased, voltage drop across Ri23 (12K) is decreased, the base voltage of Qi3 is increased and so the collector current of Qi3 is decreased. Therefore, the collector current of Qi5 is decreased, so that the circuit is stabilized. The gain of circuit is about 16 dB.

CIRCUIT DESCRIPTION

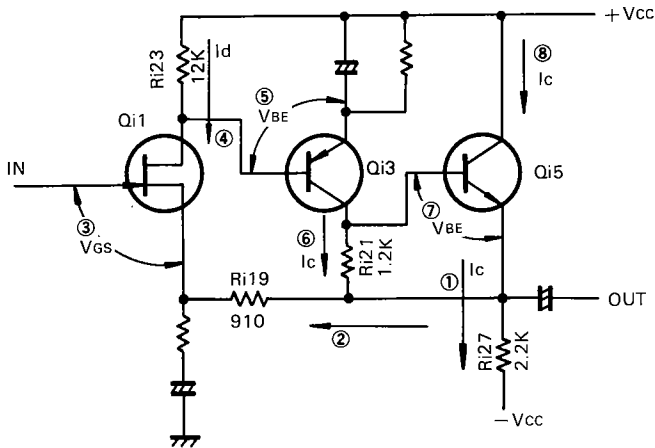

In the case of increasing I_c of Q15.


- ① I_c of Q15 increase
- ② Voltage drop across R127 increase
- ③ V_{GS} of Q1 increase
- ④ I_d of Q1 decrease
- ⑤ V_{BE} of Q3 decrease
- ⑥ I_c of Q3 decrease
- ⑦ V_{BE} of Q5 decrease
- ⑧ I_c of Q5 decrease

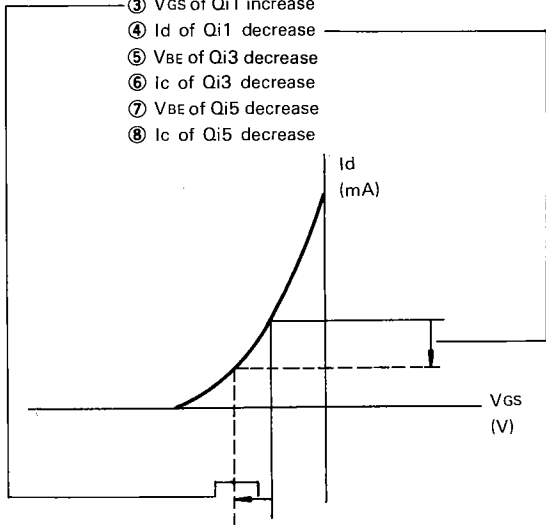


BIAS STABILITY OF FALT AMP

TONE CONTROL:

When an NF type tone control circuit is used, the output may be out of phase with the input. KA-7100 is designed so that phase change does not occur even if the TONE JUMP is used.

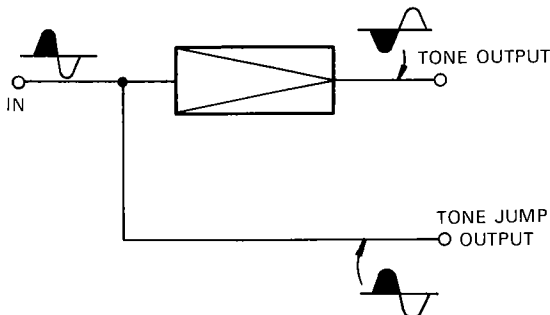

UNCONSIDERATED CIRCUIT FOR PHASE CHARACTERISTIC

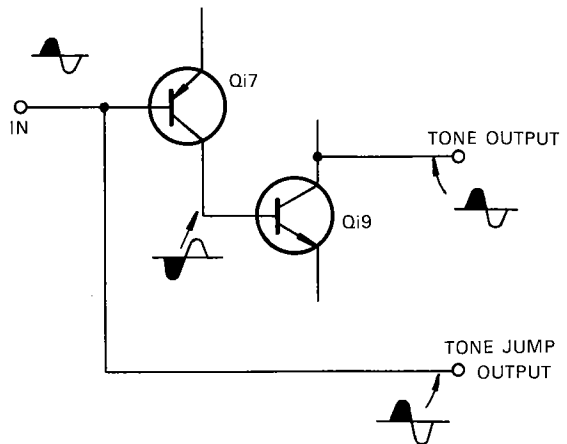

KA-7100

POWER AMPLIFIER:

The power amplifier is a DC power amplifier consisting of three differential amplifiers including a dual FET input, a complementary circuit and a final stage. Further this unit includes ASO and constant-current circuits. A one-chip dual FET μ PA63H is used in the first stage to decrease DC leakage current caused by temperature drift to a very small extent. Furthermore, to improve SVRR, a Zener diode is used. For the differential amplifier, the protection and ICL circuitry, refer to KA-9100 Service Manual.

POWER SUPPLY:

The dual power supply circuit with one transformer is used. Two independent power supply based on the dynamic crosstalk theory are used for both right and left channels of power amplifier. A constant-voltage power supply consisting of a transistor and a Zener diode is used for each channel of preamplifiers to reduce effect of power amplifier.

DESTINATIONS' PARTS LIST

☆ : new parts

| Ref. No. | U.S.A. (K) | Canada (P) | PX (U) | Australia (X) | Europe (W) | Scandinavia (L) | England (T) | South Africa (S) | Other Areas (M) | Description |
|----------|-------------|-------------|--------|---------------|-------------------|-------------------|-------------------|------------------|-----------------|---------------------------------------|
| — | A20-1143-02 | A20-1143-02 | — | A20-1143-02 | A20-1143-02 | A20-1143-02 | A20-1144-02 | A20-1143-02 | A20-1143-02 | Panel ass'y ☆ |
| — | B46-0061-00 | B46-0055-10 | — | — | — | — | B46-0060-00 | — | — | Warranty card |
| — | B50-1620-00 | B50-1621-00 | — | B50-1620-00 | B50-1620-00 | B50-1620-00 | B50-1622-00 | B50-1620-00 | B50-1620-00 | Instruction manual ☆ |
| C1, 2 | C91-0001-05 | C91-0025-05 | — | C91-0023-05 | CK45E3D103 PMU | CK45E3D103 PMU | CK45E3D103 PMU | C91-0023-05 | C91-0023-05 | Capacitor 0.01μF |
| C3 | — | — | — | — | CK45E3D103 PMU | CK45E3D103 PMU | CK45E3D103 PMU | — | — | Capacitor 0.01μF |
| — | — | — | — | D32-0075-04 | D32-0075-04 | — | — | D32-0075-04 | D32-0075-04 | Switch stopper |
| — | E08-0225-05 | E08-0225-05 | — | E08-0225-05 | — | — | — | E08-0225-05 | E08-0225-05 | AC outlet x 3 |
| — | — | — | — | E22-0421-05 | E22-0421-05 | — | — | E22-0421-05 | E22-0421-05 | Lug |
| — | — | — | — | E22-6424-05 | — | E22-0424-05 | E22-0424-05 | — | — | Lug |
| — | E30-0181-05 | E30-0181-05 | — | E30-0185-05 | E30-0580-05 | E30-0292-05 | 040-0306-05 | 040-0306-05 | E30-0515-05 | Power cord |
| — | H01-1682-04 | H01-1683-04 | — | H01-1682-04 | H01-1682-04 | H01-1682-04 | H01-1684-04 | H01-1682-04 | H01-1682-04 | Carton case ☆ |
| — | H20-0444-04 | H20-0444-04 | — | H20-0444-04 | H20-0444-04 | H20-0444-04 | H20-0444-04 | H20-0444-04 | H20-0416-04 | Polyethylene cover |
| — | J02-0088-05 | J02-0089-05 | — | J02-0089-05 | J02-0089-05 | J02-0089-05 | J02-0089-05 | J02-0089-05 | J02-0089-05 | Leg x 4 |
| — | J41-0034-05 | J41-0034-05 | — | J41-0024-15 | J41-0033-05 | J41-0033-05 | J41-0024-15 | J41-0024-15 | J41-0033-05 | Power cord bushing |
| — | L01-1331-05 | L01-1331-05 | — | L01-1335-05 | L01-1336-05 | L01-1332-05 | L01-1337-05 | L01-1335-05 | L01-1335-05 | Power transformer ☆ |
| S1 | S33-2022-05 | S33-2022-05 | — | S33-2021-05 | S33-2023-05 | S33-2023-05 | S33-2023-05 | S33-2021-05 | S33-2021-05 | Lever switch (POWER) |
| S3 | — | — | — | S31-2001-05 | S31-2001-05 | — | — | S31-2001-05 | S31-2001-05 | Slide switch (power voltage selector) |
| — | X07-1510-10 | X07-1510-10 | — | X07-1510-21 | X07-1510-61 | X07-1510-61 | X07-1510-61 | X07-1510-21 | X07-1510-21 | Power amp unit ☆ |

PARTS LIST

☆ : new parts

| Ref. No. | Parts No. | Description | Re- marks |
|----------------------|-------------|---|--------------|
| SWITCH | | | |
| S2 | S01-1044-15 | Rotary (SPEAKERS) | ☆ |
| MISCELLANEOUS | | | |
| — | A01-0318-03 | Case | ☆ |
| — | B07-0205-04 | Escutcheon (lever sw) × 5 | |
| — | B20-0399-03 | Volume dial ass'y | ☆ |
| — | B30-0126-05 | LED ass'y (GD-4-207RD) | ☆ |
| — | B42-0009-04 | Passed sticker | |
| — | D21-0441-04 | Shaft (l: 271 mm) × 2 | ☆ |
| — | D21-0442-04 | Shaft (l: 152 mm) | ☆ |
| — | D22-0031-04 | Coupler × 3 | |
| — | E06-0501-05 | DIN connector socket | |
| — | E20-0809-05 | Terminal (8P) SPEAKER | |
| — | E31-0089-05 | 7 parallel cord | ☆ |
| — | H10-1484-02 | Polyethylene foamed fixture (L) | ☆ |
| — | H10-1485-02 | Polyethylene foamed fixture (R) | ☆ |
| — | H25-0078-00 | Instruction bag | |
| — | J19-0509-04 | LED holder | |
| — | K21-0340-04 | Knob (VOLUME) | ☆ |
| — | K23-0268-04 | Knob (MODE, LOUDNESS, MONITOR, SELECTOR) × 5 | |
| — | K23-0274-04 | Knob (TONE × 2, BALANCE) | ☆ |
| — | K27-0051-04 | Knob (lever) × 5 | |
| — | N08-0125-05 | Dress screw × 8 | |
| — | N08-0128-25 | GND screw | |
| — | X08-1570-10 | Preamp unit | ☆ |
| — | X11-1420-10 | Control unit | ☆ |

POWER AMP (X07-1510-10)

| Ref. No. | Parts No. | Description | Re- marks |
|------------------|----------------|-------------------------------------|--------------|
| CAPACITOR | | | |
| Ce1.2 | CK45B1H471K | Ceramic 470pF ±10% | |
| Ce3.4 | CC45SL1H101K | Ceramic 100pF ±10% | |
| Ce5.6 | CC45SL1H050D | Ceramic 5pF ±0.5pF | |
| Ce7.8 | CC45SL1H101K | Ceramic 100pF ±10% | |
| Ce9,10 | CC45SL1H150K | Ceramic 15pF ±10% | |
| Ce11,12 | CC45SL1H050D | Ceramic 5pF ±0.5pF | |
| Ce13,14 | CC45SL1H100D | Ceramic 10pF ±0.5pF | |
| Ce15~18 | CE04W1H100EL | Electrolytic 10μF 50WV | |
| Ce19~22 | CE04W1E100EL | Electrolytic 10μF 25WV | |
| Ce23,24 | CQ93M1H224M | Mylar 0.22μF ±20% | |
| Ce25~28 | CE04W1V101EL | Electrolytic 100μF 35WV | |
| Ce29,30 | CE04W1H471EL | Electrolytic 470μF 50WV | |
| Ce31~34 | C90-0354-05 | Electrolytic 6800μF 50WV | ☆ |
| Ce35~38 | CK45E2H103P | Ceramic 0.01μF +100%—0% | |
| Ce39 | CE04BW1C101MEL | Non-pole electrolytic 100μF 16WV | |
| Ce40 | C90-0349-05 | Electrolytic 100μF 25WV | |
| Ce41 | C90-0344-05 | Electrolytic 10μF 50WV | |

| Ref. No. | Parts No. | Description | Re- marks |
|----------------------|----------------|---|--------------|
| RESISTOR | | | |
| Re17,18 | RD14GY2E182JMA | Carbon 1.8kΩ ±5% 1/4W | |
| Re19,20 | RD14GY2E152JMA | Carbon 1.5kΩ ±5% 1/4W | |
| Re29,30 | RD14GY2E102JMA | Carbon 1kΩ ±5% 1/4W | |
| Re31,32 | RD14GY2E121JMA | Carbon 120Ω ±5% 1/4W | |
| Re39,40 | RD14GY2E121JMA | Carbon 120Ω ±5% 1/4W | |
| Re43~46 | RD14GY2E271JMA | Carbon 270Ω ±5% 1/4W | |
| Re57~60 | RD14GY2E331JMA | Carbon 330Ω ±5% 1/4W | |
| Re61~64 | RD14GY2E4R7JMA | Carbon 4.7Ω ±5% 1/4W | |
| Re69~72 | R92-0111-05 | Cement 0.47Ω ±5% 3W | |
| Re73,74 | RS14GB3D4R7JMA | Metal film 4.7Ω ±5% 2W | |
| Re75,76 | RD14GY2E102JMA | Carbon 1kΩ ±5% 1/4W | |
| Re77,78 | RD14GY2E101JMA | Carbon 100Ω ±5% 1/4W | |
| Re86 | RS14GB3A561JMA | Metal film 560Ω ±5% 1W | |
| Re87 | RS14GB3A182JMA | Metal film 1.8kΩ ±5% 1W | |
| Re88 | RD14GY2E681JMA | Carbon 680Ω ±5% 1/4W | |
| Re89,90 | RC05GF2H221K | Carbon 220Ω ±10% 1/2W | |
| Re91,92 | RS14GB3A100JMA | Metal film 10Ω ±5% 1W | |
| SEMICONDUCTOR | | | |
| Qe1,2 | V30-0232-05 | Dual FET μPA 63H (L) or (M) | |
| Qe3~6 | V03-0500-05 | Transistor 2SC1775 (E) or (F) | |
| Qe7~10 | V01-0218-05 | Transistor 2SA915 (L) or (K) or | ☆ |
| | V01-0188-05 | Transistor 2SA912 (R) or (S) | |
| Qe11,12 | V03-0506-05 | Transistor 2SC1940 (L) or (K) or | ☆ |
| | V03-0439-05 | Transistor 2SC1885 (R) or (S) | |
| Qe13,14 | V01-0219-05 | Transistor 2SA842 or | |
| | V01-0220-05 | Transistor 2SA721 | |
| Qe15~18 | V01-0084-05 | Transistor 2SA733 | |
| Qe19~22 | V03-0270-05 | Transistor 2SC945 | |
| Qe23,24 | V03-0467-05 | Transistor 2SC1567 (Q) or (R) or (S) | |
| Qe25,26 | V01-0187-05 | Transistor 2SA794 (Q) or (R) or (S) | |
| Qe27,28 | V04-0086-05 | Transistor 2SD427 | |
| Qe29,30 | V02-0064-05 | Transistor 2SB557 | |
| Qe31 | V03-0344-05 | Transistor 2SC1419 (B) or (C) or | |
| | V04-0042-05 | Transistor 2SD234 (O) or (Y) | |
| Qe32 | V01-0116-05 | Transistor 2SA755 (B) or (C) | |
| Qe33 | V03-0447-05 | Transistor 2SC1681 or | |
| | V03-0456-05 | Transistor 2SC1222 | |
| Qe34 | V03-0215-05 | Transistor 2SC1213A (C) | |
| De1,2 | D11-0435-05 | Zener diode EQA01-24R | |
| De3,4 | V11-0467-05 | Zener diode EQA01-28R | |
| De5~8 | V11-0271-05 | Diode 1S2076 | |
| De9~12 | V11-0273-05 | Diode 1S2076A | |
| De13~15 | V11-0271-05 | Diode 1S2076 | |
| De16 | V11-0273-05 | Diode 1S2076A | |
| De17,18 | V11-0467-05 | Zener diode EQA01-28R | |
| De19~26 | V11-0465-05 or | Diode GP25D or | ☆ |
| | V11-0466-05 or | Diode S3V10 or | ☆ |
| | V11-2100-10 | Diode U05C (S) | |
| De27 | V11-0295-05 | Diode V06B | |
| Th1,2 | V22-0016-05 | Thermistor 5TP-41L | |
| POTENTIOMETER | | | |
| VRe1,2 | R12-0058-05 | PC trimmer 470Ω (Center voltage) | |
| VRe3,4 | R12-0047-05 | PC trimmer 500Ω (Bias) | |
| MISCELLANEOUS | | | |
| — | E02-0209-05 | Transistor socket (To-3) × 4 | |
| Fe1~4 | F05-4021-05 | Fuse (4A) (X07-1510-10) | |
| | F05-4022-05 | Fuse (4A) (X07-1510-21) | |
| | F05-4024-05 | Fuse (4A) (X07-1510-61) | |

PARTS LIST

☆: new parts

| Ref. No. | Parts No. | Description | Re- marks |
|----------|-------------|-----------------------|--------------|
| — | F20-0066-05 | Mica plate (To-3) × 4 | |
| — | J13-0052-05 | Fuse clip × 8 | |
| Le1.2 | L39-0080-05 | Coil | |
| RLe1 | S51-4030-05 | Relay | |

PRE AMP (X08-1570-10)


| Ref. No. | Parts No. | Description | Re- marks |
|----------------------|----------------|---------------------------|--------------|
| CAPACITOR | | | |
| Cd1.2 | CC45SL1H101K | Ceramic 100pF ±10% | |
| Cd3 | CE04W1C101EL | Electrolytic 100μF 16WV | |
| Cd5.6 | CE04W1A470EL | Electrolytic 47μF 10WV | |
| Cd7.8 | CQ09FS1H822G | Polystyrene 8200pF ±2% | |
| Cd9.10 | CQ09FS1H222G | Polystyrene 2200pF ±2% | |
| Cd11.12 | CC45SL1H101J | Ceramic 100pF ±5% | |
| Cd13.14 | CC45SL1H050D | Ceramic 5pF ±0.5pF | |
| Cd15.16 | CE04W0J221EL | Electrolytic 220μF 6.3WV | |
| Cd17.18 | CE04AW1E3R3MEL | Electrolytic 3.3μF 25WV | |
| Cd19.20 | CE04W1E221EL | Electrolytic 220μF 25WV | |
| Cd21~23 | CK45F1H403Z | Ceramic 0.04μF +80%—20% | |
| Cd24 | CK45D1H561M | Ceramic 560pF ±20% | |
| RESISTOR | | | |
| Rd15.16 | RN14BK2H4303F | Metal film 430kΩ ±1% 1/2W | |
| Rd17.18 | RN92BC2E333F | Metal film 33kΩ ±1% 1/4W | |
| Rd31 | RD14GY2E391JMA | Carbon 390Ω ±5% 1/4W | |
| Rd32 | RD14GY2E331JMA | Carbon 330Ω ±5% 1/4W | |
| SEMICONDUCTOR | | | |
| Qd1.2 | V09-0098-05 | FET 2SK68A (L) or (K) | |
| Qd3.4 | V09-0094-05 | FET 2SK68A (N) or (M) | |
| Qd5.6 | V01-0191-05 | Transistor 2SA872 | |
| Qd7.8 | V03-0456-05 | Transistor 2SC1222 | |
| Dd1~4 | V11-0271-05 | Diode 1S2076 | |
| Dd5 | V11-0349-05 | Zener diode EQA01-10 | |
| SWITCH | | | |
| Sd1 | S29-1097-05 | Slide-rotary (SELECTOR) | ☆ |
| Sd2 | S29-1098-05 | Slide-rotary (TAPE) | ☆ |
| MISCELLANEOUS | | | |
| — | E13-0610-05 | Pin jack (6P) | ☆ |
| — | E13-0810-05 | Pin jack (8P) | ☆ |


CONTROL (X11-1420-10)

| Ref. No. | Parts No. | Description | Re- marks |
|------------------|----------------|-------------------------|--------------|
| CAPACITOR | | | |
| Ci1.2 | CQ93M1H393M | Mylar 0.039μF ±20% | |
| Ci3.4 | CE04W1A331EL | Electrolytic 330μF 10WV | |
| Ci5.6 | CE04W1A470EL | Electrolytic 47μF 10WV | |
| Ci7.8 | CE04AW1C100MEL | Electrolytic 10μF 16WV | |
| Ci9.10 | CQ93M1H154M | Mylar 0.15μF ±20% | |


| Ref. No. | Parts No. | Description | Re- marks |
|----------------------|----------------|---|--------------|
| Ci11.12 | CQ93M1H392M | Mylar 0.0039μF ±20% | |
| Ci13~16 | CQ93M1H393M | Mylar 0.039μF ±20% | |
| Ci17.18 | CE04AW1C100MEL | Electrolytic 10μF 16WV | |
| Ci19.20 | CE04AW1E3R3MEL | Electrolytic 3.3μF 25WV | |
| Ci21.22 | CE04AW1C100MEL | Electrolytic 10μF 16WV | |
| Ci23.24 | CE04AW1E3R3MCC | Electrolytic 3.3μF 25WV | |
| Ci25.26 | CS15E1ER33M | Tantalum 0.33μF 25WV | |
| Ci27.28 | CE04W1E331EL | Electrolytic 330μF 25WV | |
| Ci29~32 | CC45SL1H100D | Ceramic 10pF ±0.5pF | |
| Ci33.34 | CQ93M1H152M | Mylar 0.0015μF ±20% | |
| RESISTOR | | | |
| Ri65.66 | RS14GB3A221J | Metal film 220Ω ±5% 1W | |
| SEMICONDUCTOR | | | |
| Qi1.2 | V09-0092-05 | FET 2SK68A (K) or (L) or (M) | |
| Qi3.4 | V01-0146-05 | Transistor 2SA640 (E) or (F) | |
| Qi5.6 | V03-0424-05 | Transistor 2SC1400 (E) or (U) | |
| Qi7.8 | V01-0146-05 | Transistor 2SA640 (E) or (F) | |
| Qi9.10 | V03-0424-05 | Transistor 2SC1400 (E) or (F) | |
| Di1.2 | V11-4100-10 | Zener diode WZ-182 | |
| POTENTIOMETER | | | |
| Vri1 | R06-5025-05 | Potentiometer 200kΩ (MN) BALANCE | ☆ |
| Vri2 | R10-5001-05 | Potentiometer 150kΩ (B) VOLUME | ☆ |
| Vri3.4 | R06-3013-05 | Potentiometer 20kΩ (B) × 2 TONE | ☆ |
| SWITCH | | | |
| Si1.2 | S01-1043-05 | Rotary × 2 (MODE, LOUDNESS) | ☆ |
| Si3~6 | S33-2026-05 | Lever × 4 (ATT, HIGH FILTER, TONE JUMP, SUBSONIC FILTER) | |

POWER AMP (X07-1510-10)

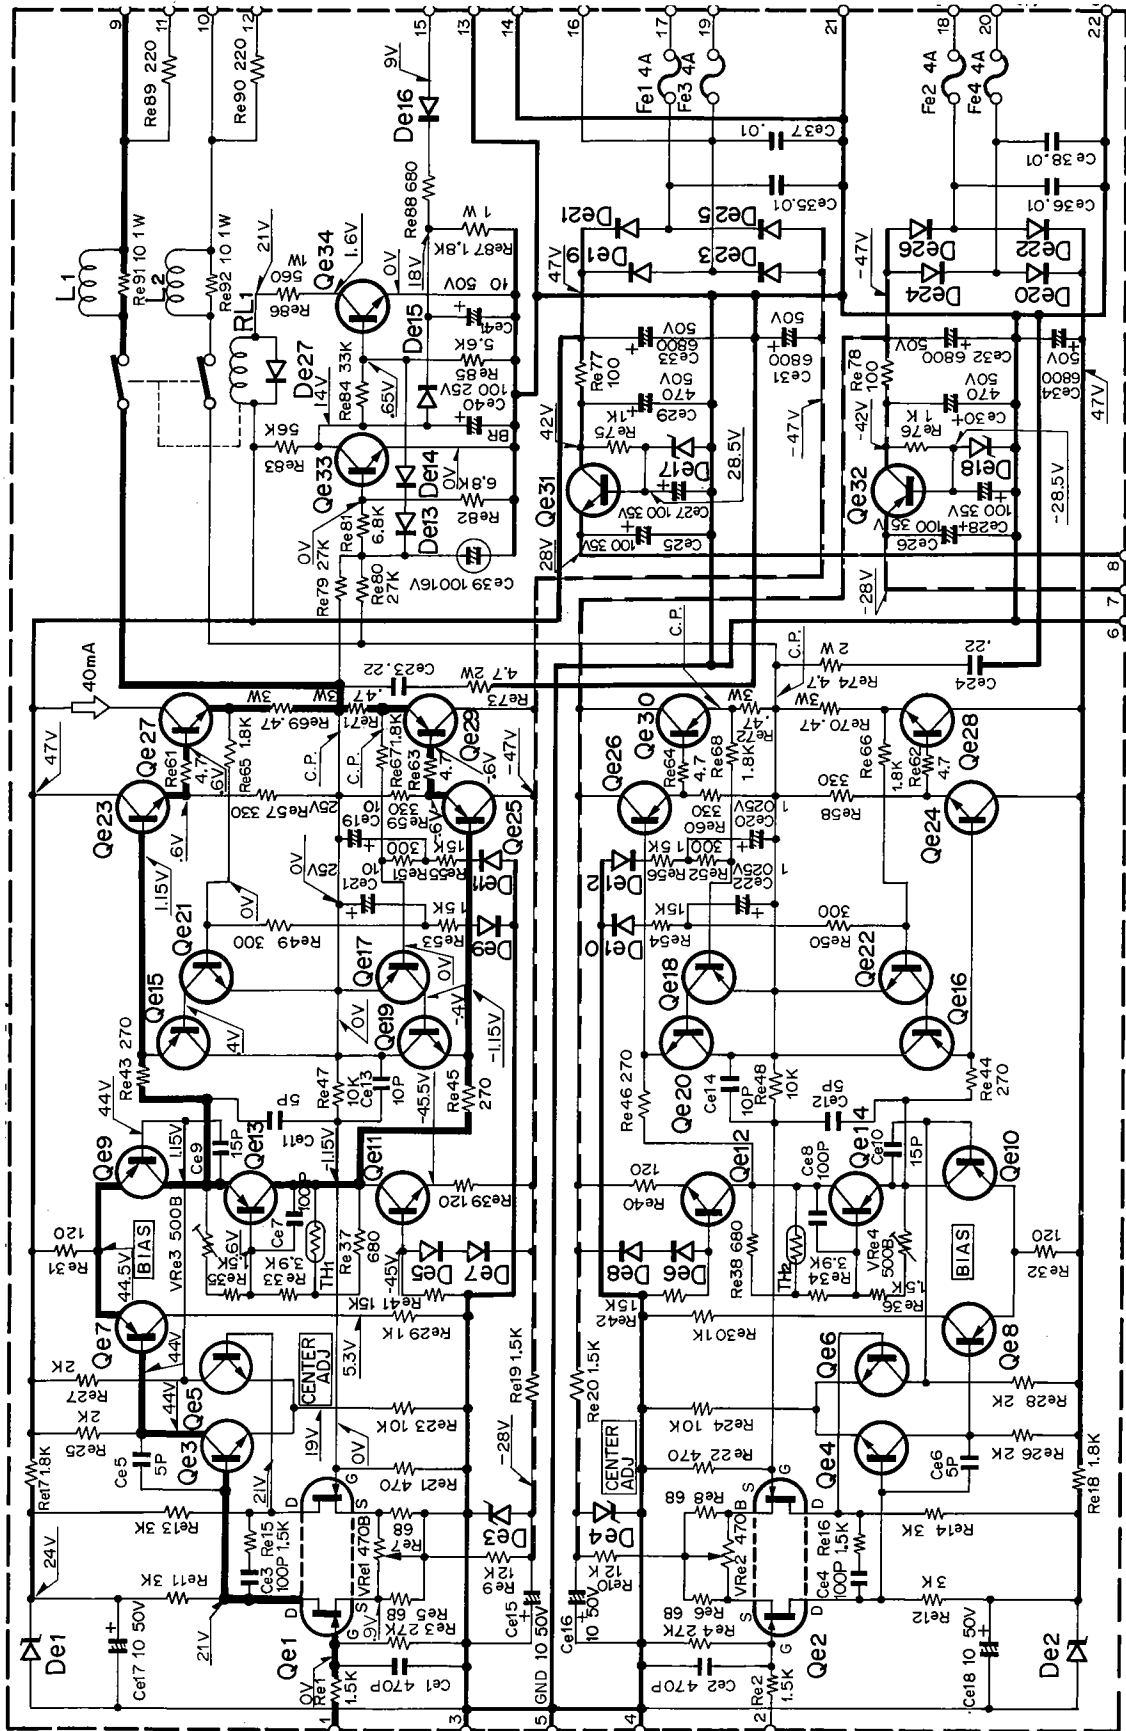

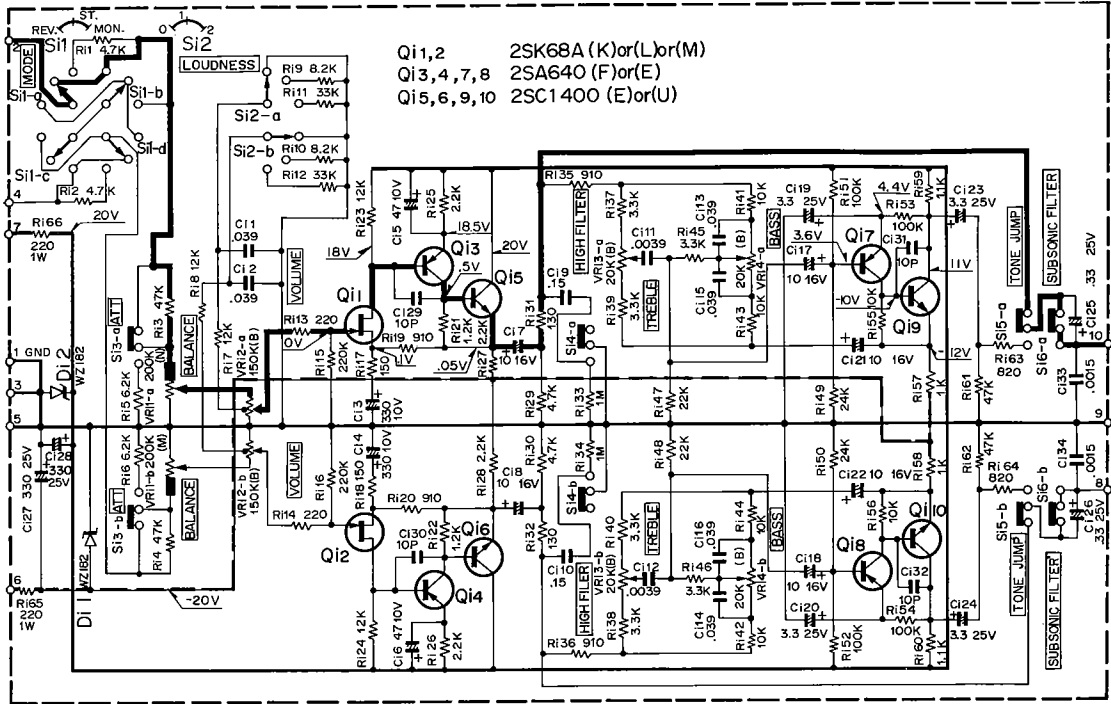


— Audio Signal (Reference value).
 DC voltages indicated here are measured with 20 kΩ/V meter.

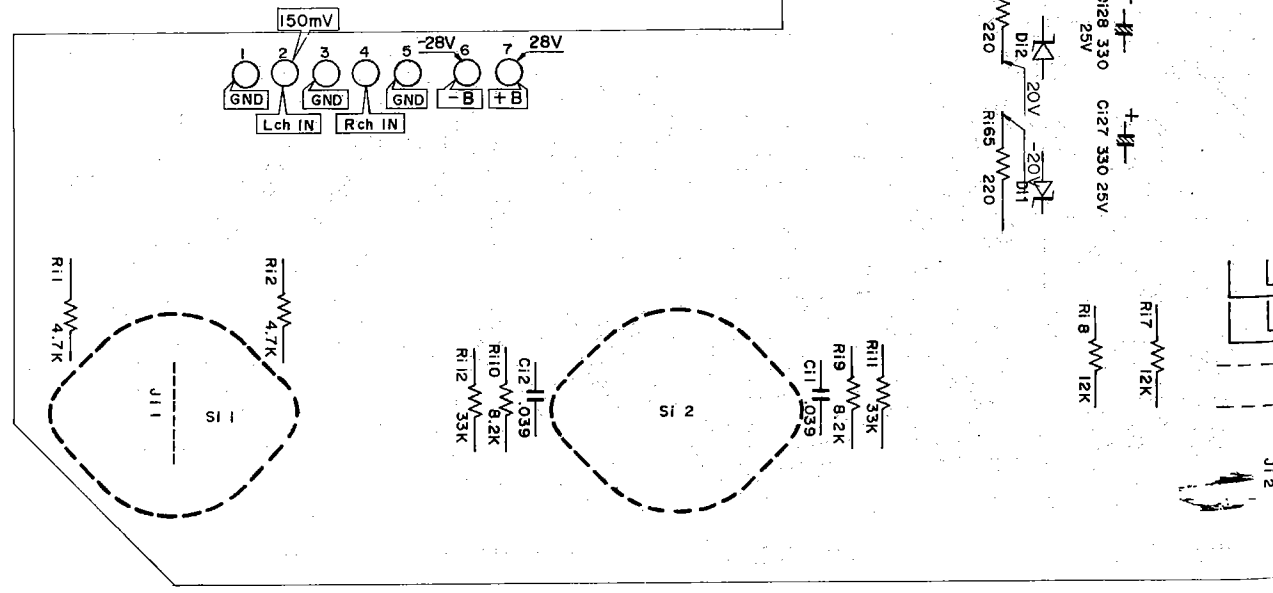


Q1,2: 2SK68(K) or (L) or (M), Q3,4,7,8: 2SA640(E) or (F), Q5,6,9,10: 2SC1400(E) or (U), D1,2: WZ-182

KA-7100 KA-7100


CONTROL (X11-1420-10)

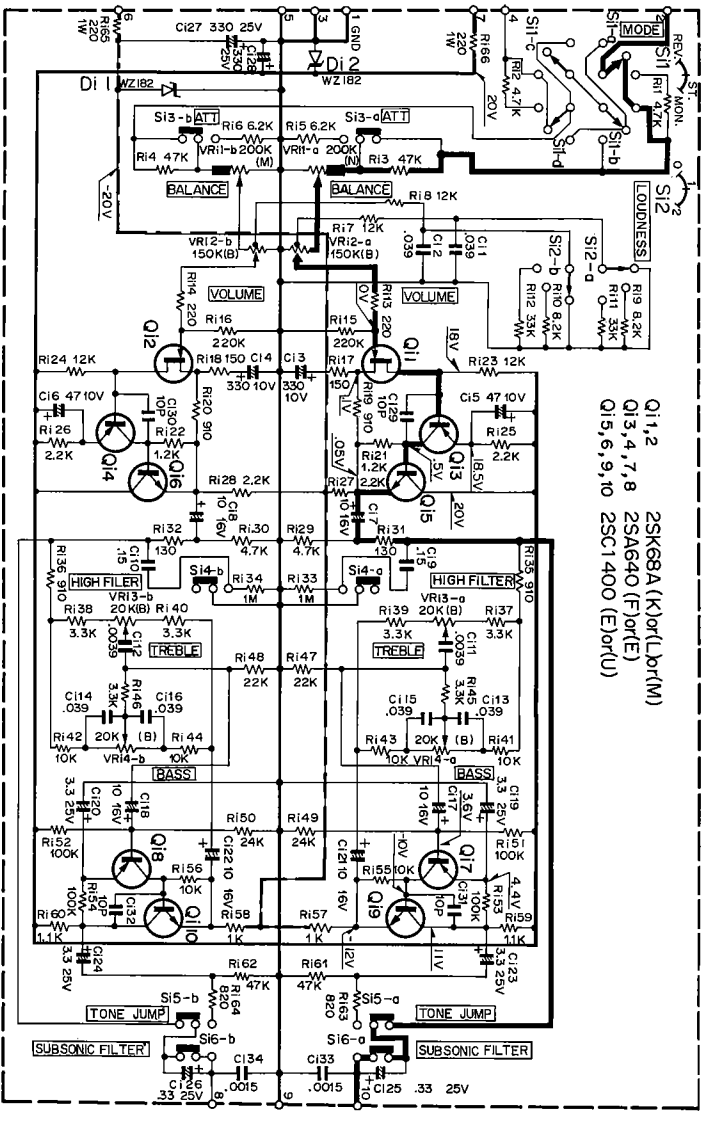

Q1,2 2SK68A (K) or (L) or (M)
 Q3,4,7,8 2SA640 (F) or (E)
 Q15,6,9,10 2SC1400 (E) or (U)

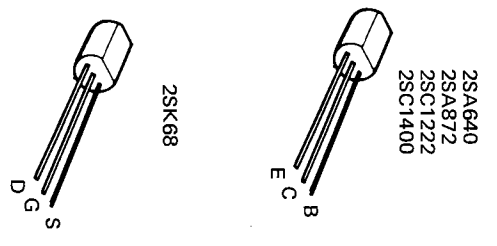



Audio Signal (Reference value)
 DC voltages indicated here are measured with 20 KΩ/V meter.

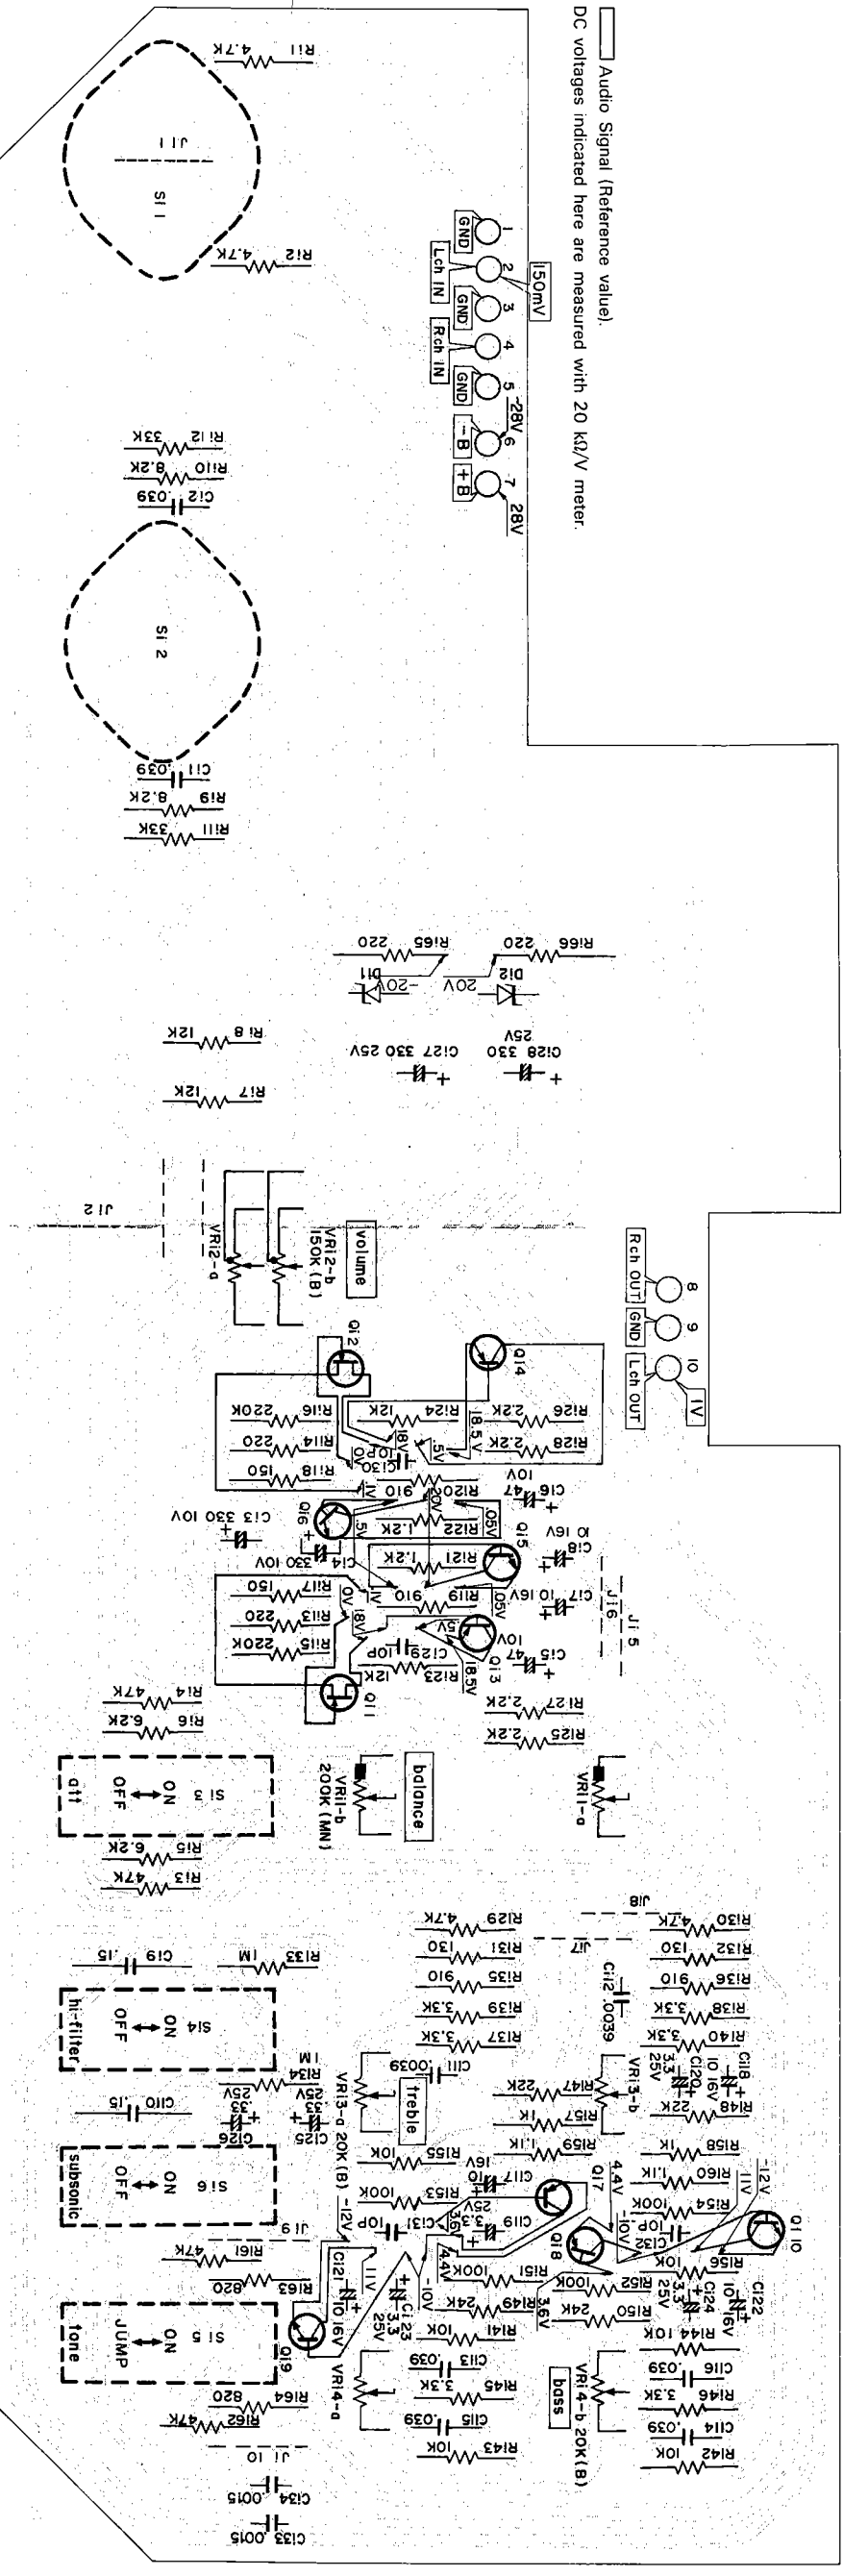


Q1,2: 2SK68(K) or (L) or (M), Q3,4,7,8: 2SA640(E) or (F), Q15,6,9,10: 2SC1400(E) or (U), D1,2: WZ-182

POWER AMP (X07-1510-10)


Audio Signal (Reference value).
DC voltages indicated here are measured with 20K Ω /V meter.

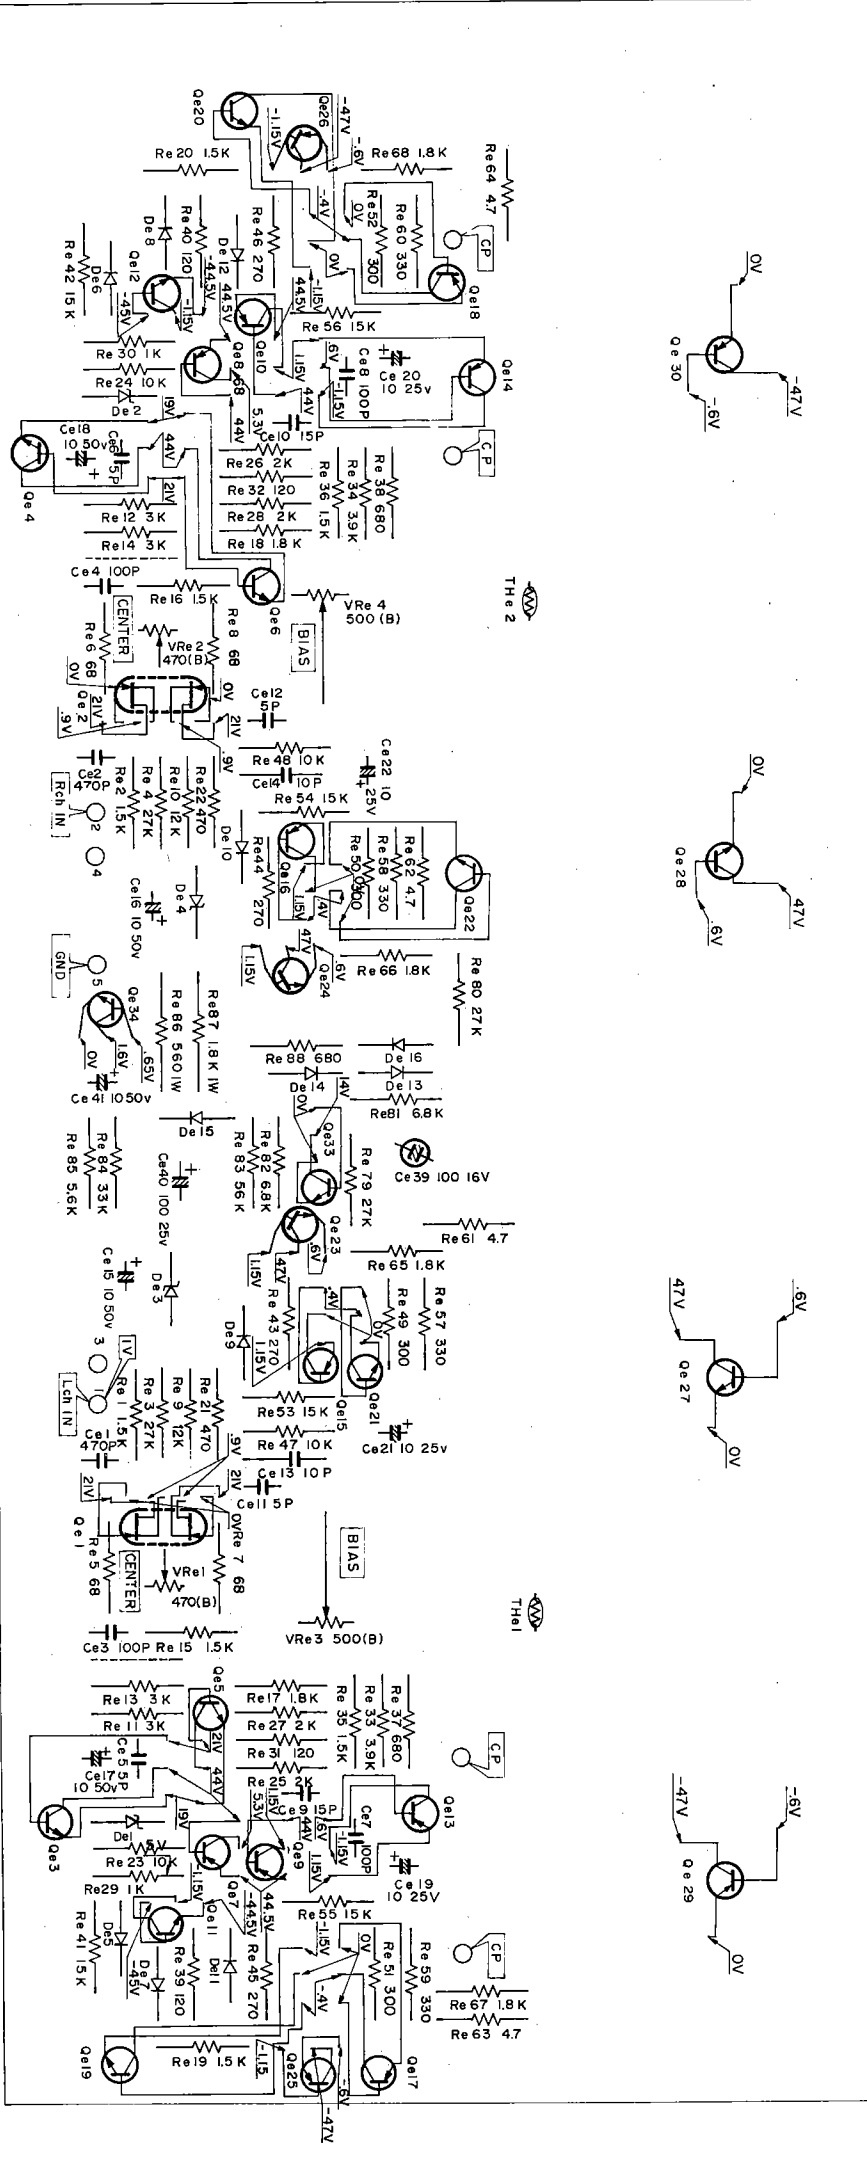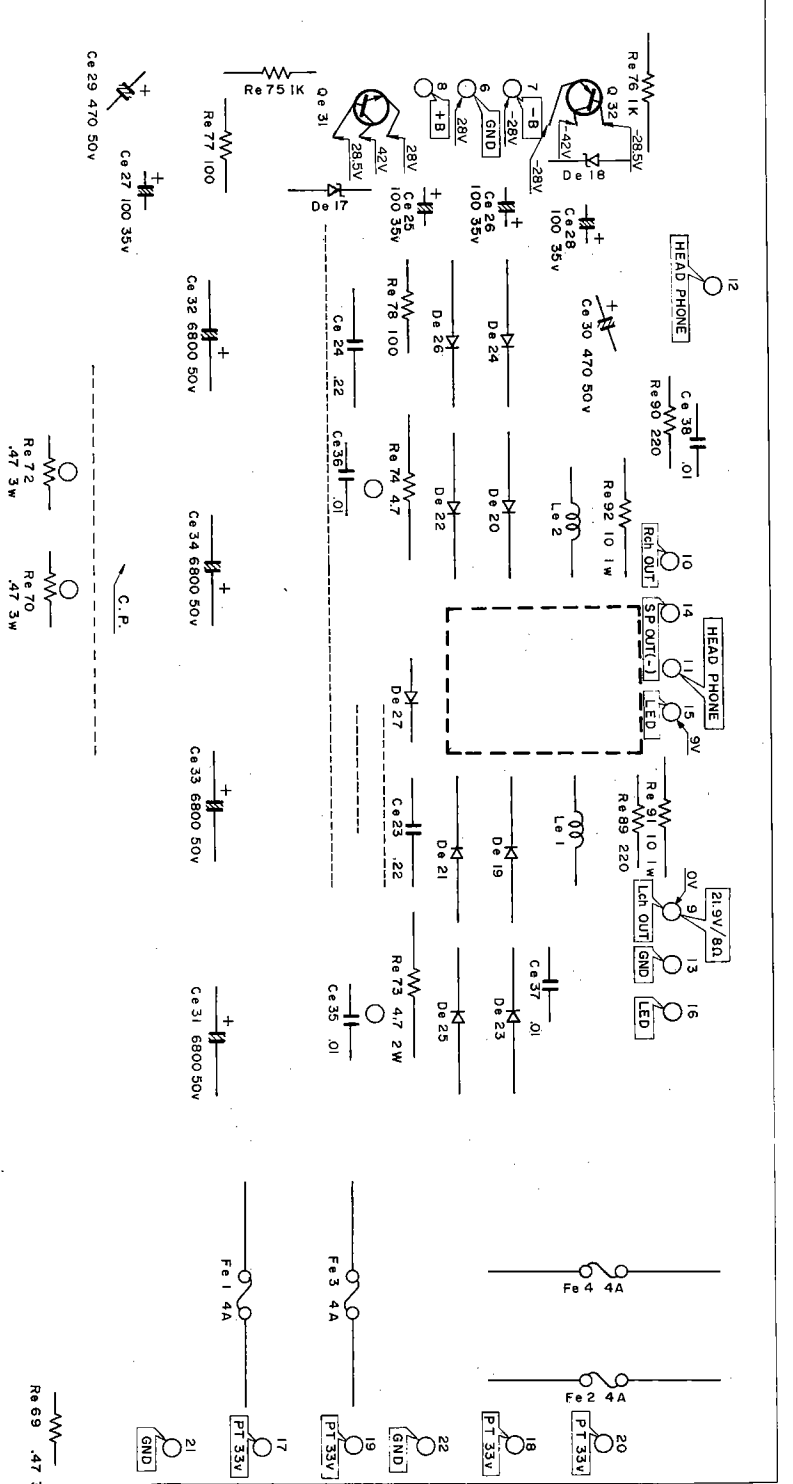


Qe1, 2: μ PA63H(L) or (M), Qe3~6: 2SC1775(E) or (F), Qe7~10: 2SA915(L) or (K) or 2SA912(R) or (S), Qe11, 12: 2SC1940(L) or (K) or 2SC1885(R) or (S), Qe13, 14: 2SA842 or 2SA721, Qe15~18: 2SA733, Qe19~22: 2SC945, Qe23, 24: 2SC1567(O) or (R) or (S), Qe25, 26: 2SA794(O) or (R) or (S), Qe27, 28: 2SD427, Qe29, 30: 2SB557, Qe31: 2SC1419(B) or (C) or 2SD234(O) or (Y), Qe32: 2SA155(B) or (C), Qe33: 2SC1681 or 2SC1222, Qe34: 2SC1213A(C), Del: 2: EOA01-24R, De3, 4, 17, 18: EOA01-28R, De5~8, 13~15: 1S2076, De9~12, 16: 1S2076A, De19~26: GP25D or 3V10 or U05C(S), De27: W06B, The1, 2: 5TP-41L

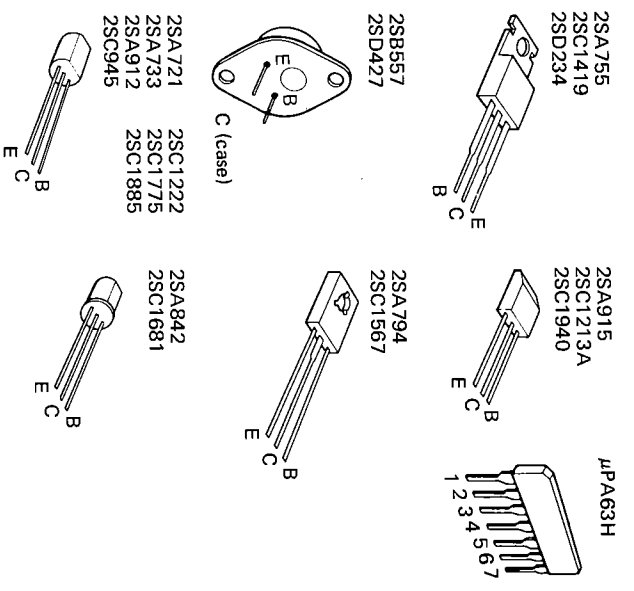

PREAMP (X08-1570-10)

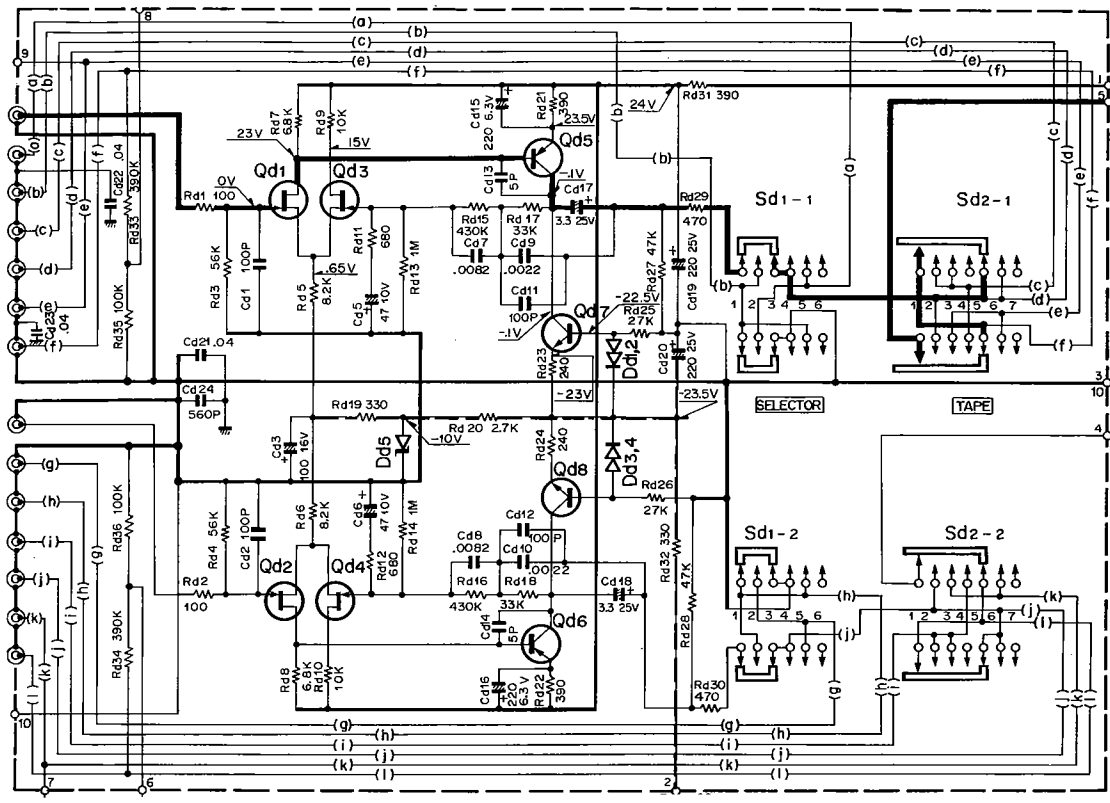



□ Audio Signal (Reference value).
 DC voltages indicated here are measured with 20 kΩ/V meter.

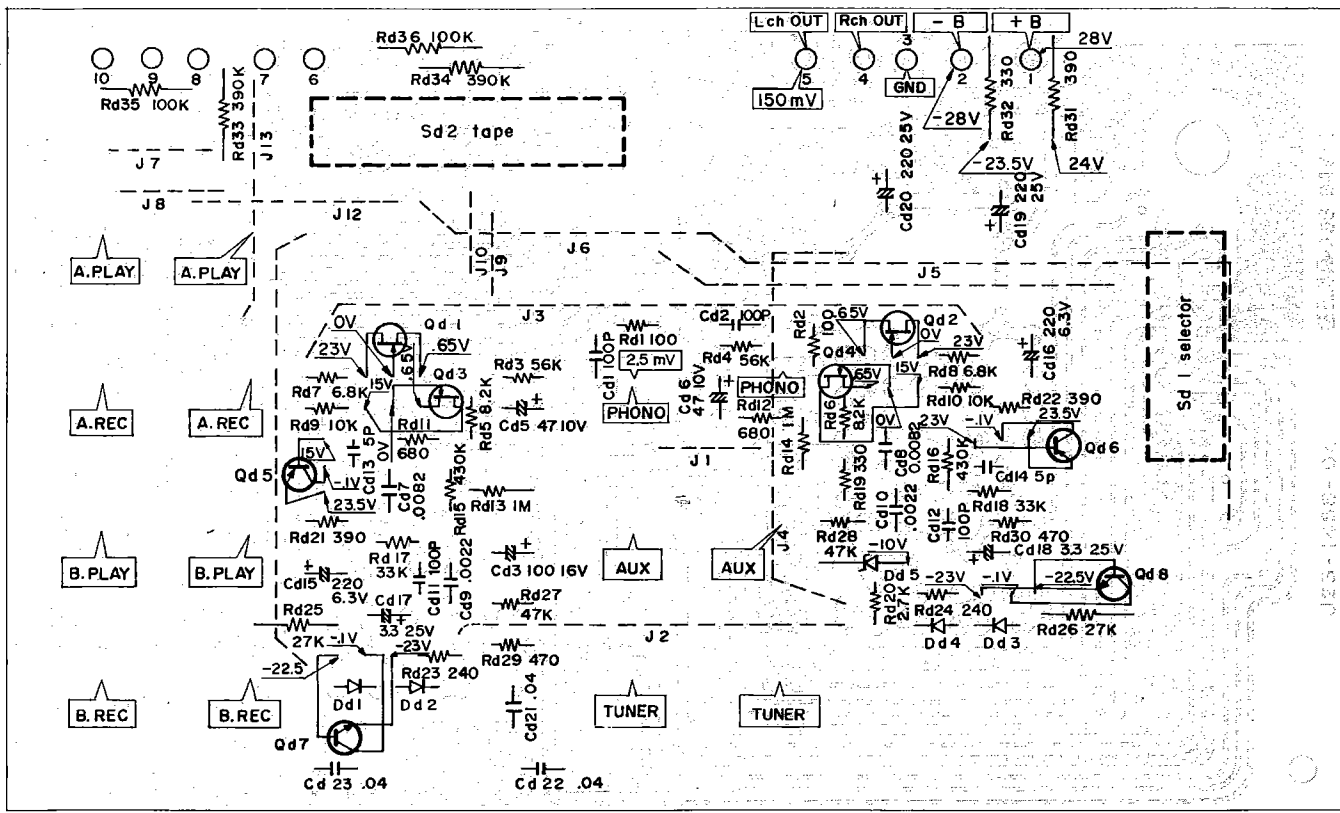

Qd1, 2: 2SK68A(L) or (K), Qd3, 4: 2SK68A(M) or (N), Qd5, 6: 2SA872, Qd7, 8: 2SC1222, Dd1~4: 1S2076, Dd5: EQA01-10


ADJUSTMENT (1)

CENTER VOLTAGE

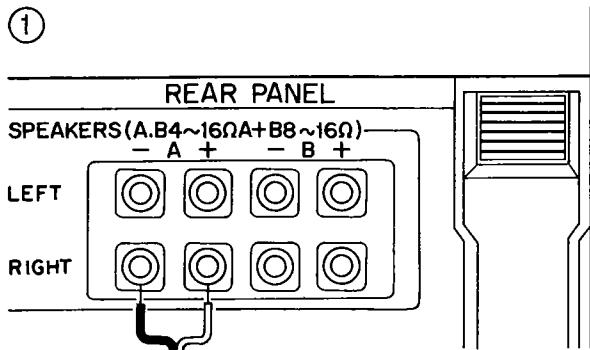


* Bias current meter (B31-0125-05) or VOM set to DC 0.3V range.

②
BALANCE




BALANCE : CEN.
VOLUME : MIN.

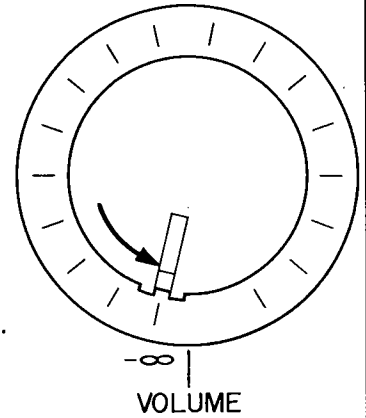

③

SPEAKERS



SPEAKERS : A


④

POWER ON



POWER : ON

⑤

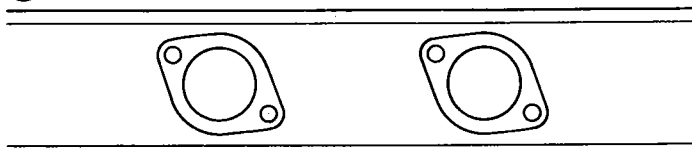

X07-1510-10



L-ch

R-ch


Turn the pc trimmer potentiometer until meter indicates 0 mV.

ADJUSTMENT (2)

Caution: You must adjust the center voltage, referring previous page, before this adjustment.

BIAS CURRENT

①


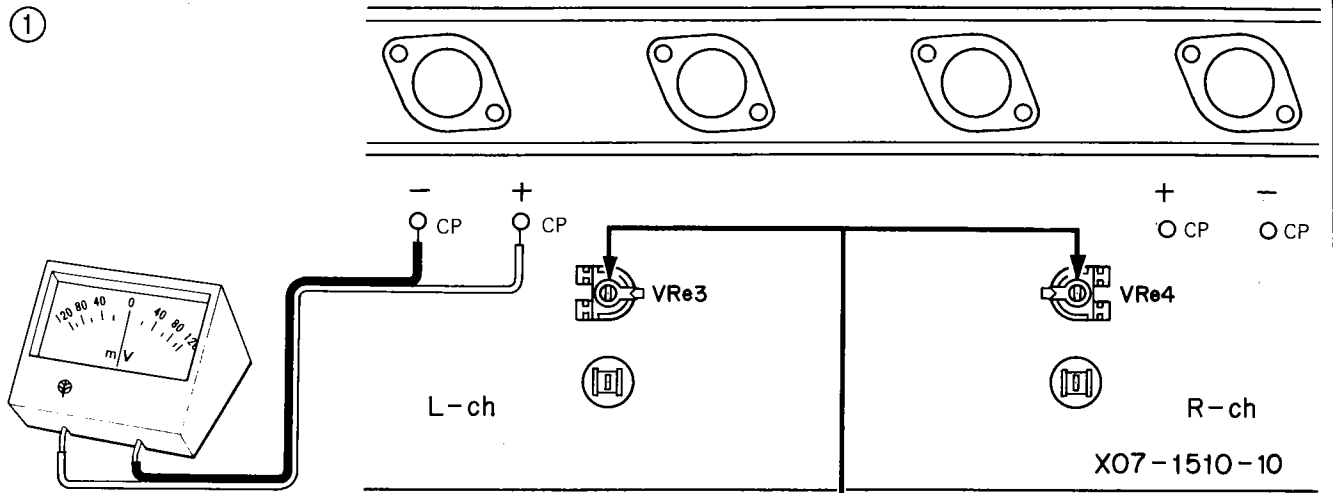


* Bias current meter (B31-0125-05)
or VOM set to DC 0.3V range.

CP: Check Point.

②

BALANCE




BALANCE: CEN.
VOLUME: MIN.

-∞ |
VOLUME

③

POWER

ON



POWER: ON


④

Turn the pc trimmer potentiometer until
meter indicates 20 mV.


SEMICONDUCTOR SUBSTITUTIONS

| SEMI-CONDUCTOR | SUBSTITUTIONS |
|---|---|
| (X07-1510-10) 2SA733 2SA755 2SA794 (Q), (R), (S) 2SA842 2SA915 (L), (K) 2SB557 2SC945 2SC1213A 2SC1419 (B), (C) 2SC1567 (Q), (R), (S) 2SC1681 2SC1775 (E), (F) 2SC1940 (L), (K) 2SD427 μPA63H (L), (M) | 2SA640, 2SA750, 2SA841 2SB595 — 2SA721 2SA912 (R), (S), 2SA899 2SA745, 2SA747 2SC having more than 50V of V _{CEO} . — 2SD234 (O), (Y), 2SD525 — 2SC1222 2SC1345 {2SC1885 (R), (S), 2SC1904, 2SC1451, 2SC1452 2SC1403, 2SC1116 — |
| (X08-1570-10) 2SA872 2SC1222 2SK68A (L), (K) 2SK68A (M), (N) | — 2SC1400, 2SC1345, 2SC1681, 2SC1775 — — |
| (X11-1420-10) 2SA640 (E), (F) 2SC1400 (E), (U) 2SK68A (L), (M), (K) | {2SA620WL (4), (5), 2SA763WL, 2SA750, 2SA841, 2SA872 2SC1775, 2SC1681 |


2SA745 2SC1116
2SA747 2SC1403
2SB557 2SD427




2SA640 2SA872
2SA721 2SA912
2SA733 2SC945
2SA750 2SC1222
2SA763 2SC1400
2SC1775
2SC1885




2SC1451
2SC1452




2SK68




2SA915
2SC1213A
2SC1940




2SA841
2SA842
2SC1681




2SA794 2SC1212A
2SA899 2SC1567
2SC1904




2SA755 2SD234
2SB595 2SD525
2SC1419




μPA63H



2SC1345



2SA620WL






When replacing the power transistors 2SB557 and 2SD427 to substitutions, power transistor should be paired as shown in the right table.



| PNP | NPN | Remarks |
|--------|---------|---|
| 2SB557 | 2SD427 | Ce 11, 12..... 5 pF Ce 13, 14..... 10 pF |
| 2SA745 | 2SC1403 | Ce 11, 12..... 8 pF Ce 13, 14..... 5 pF |
| 2SA747 | 2SC1116 | Ce 11, 12..... 8 pF Ce 13, 14..... 5 pF |

ABSOLUTE MAX. RATINGS

| TRANSISTOR | V _{CB0} | V _{EB0} | V _{CEO} | I _C | P _C | T _j | T _{stg} | f _T |
|------------|------------------|------------------|------------------|----------------|--------------------|----------------|------------------|------------------|
| 2SA915 | -120V | -5V | -120 | -50 mA | 800 mW | 150°C | -55 ~ +150°C | — |
| 2SC1940 | 120V | 5V | 120V | 50 mA | 800 mW | 150°C | -55 ~ +150°C | — |
| DIODE | V _{RM} | V _R | I _F | I _o | I _{surge} | P | T _j | T _{stg} |
| GP-25D | 200V | 200V | — | 2.5A | 100A | — | — | — |
| S3V10 | 100V | — | — | 2.6A | 120A | — | +150°C | -30 ~ +150°C |

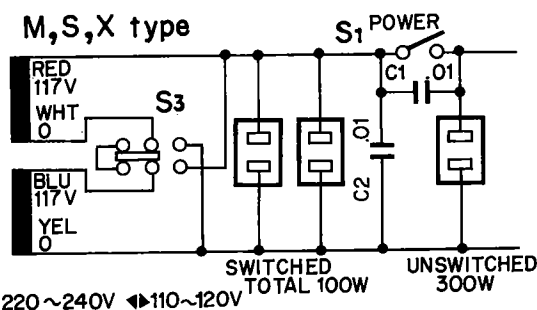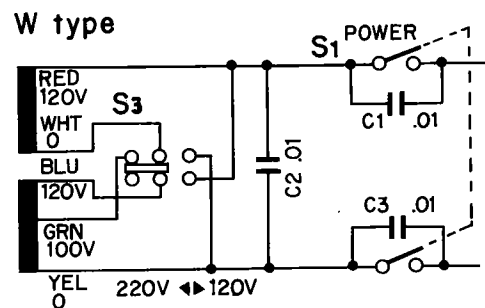

SCHEMATIC DIAGRAM

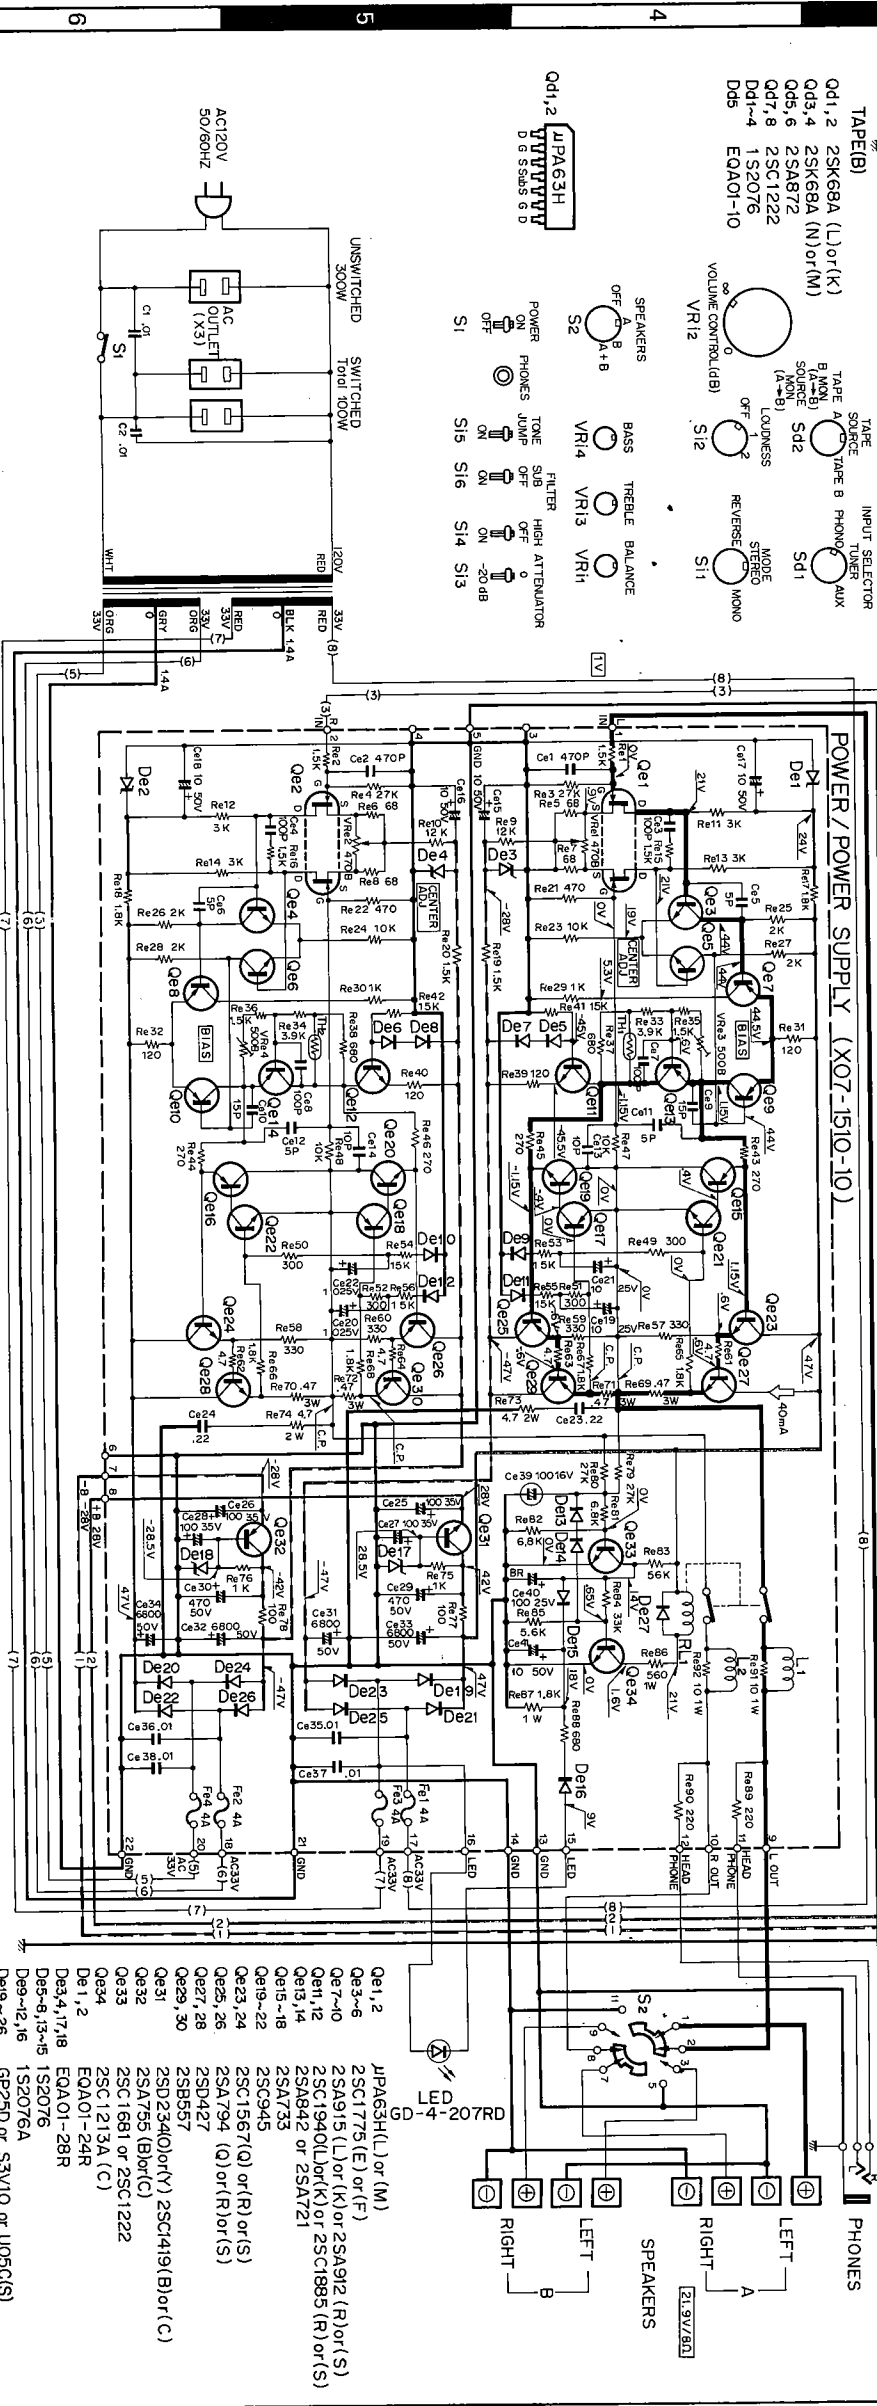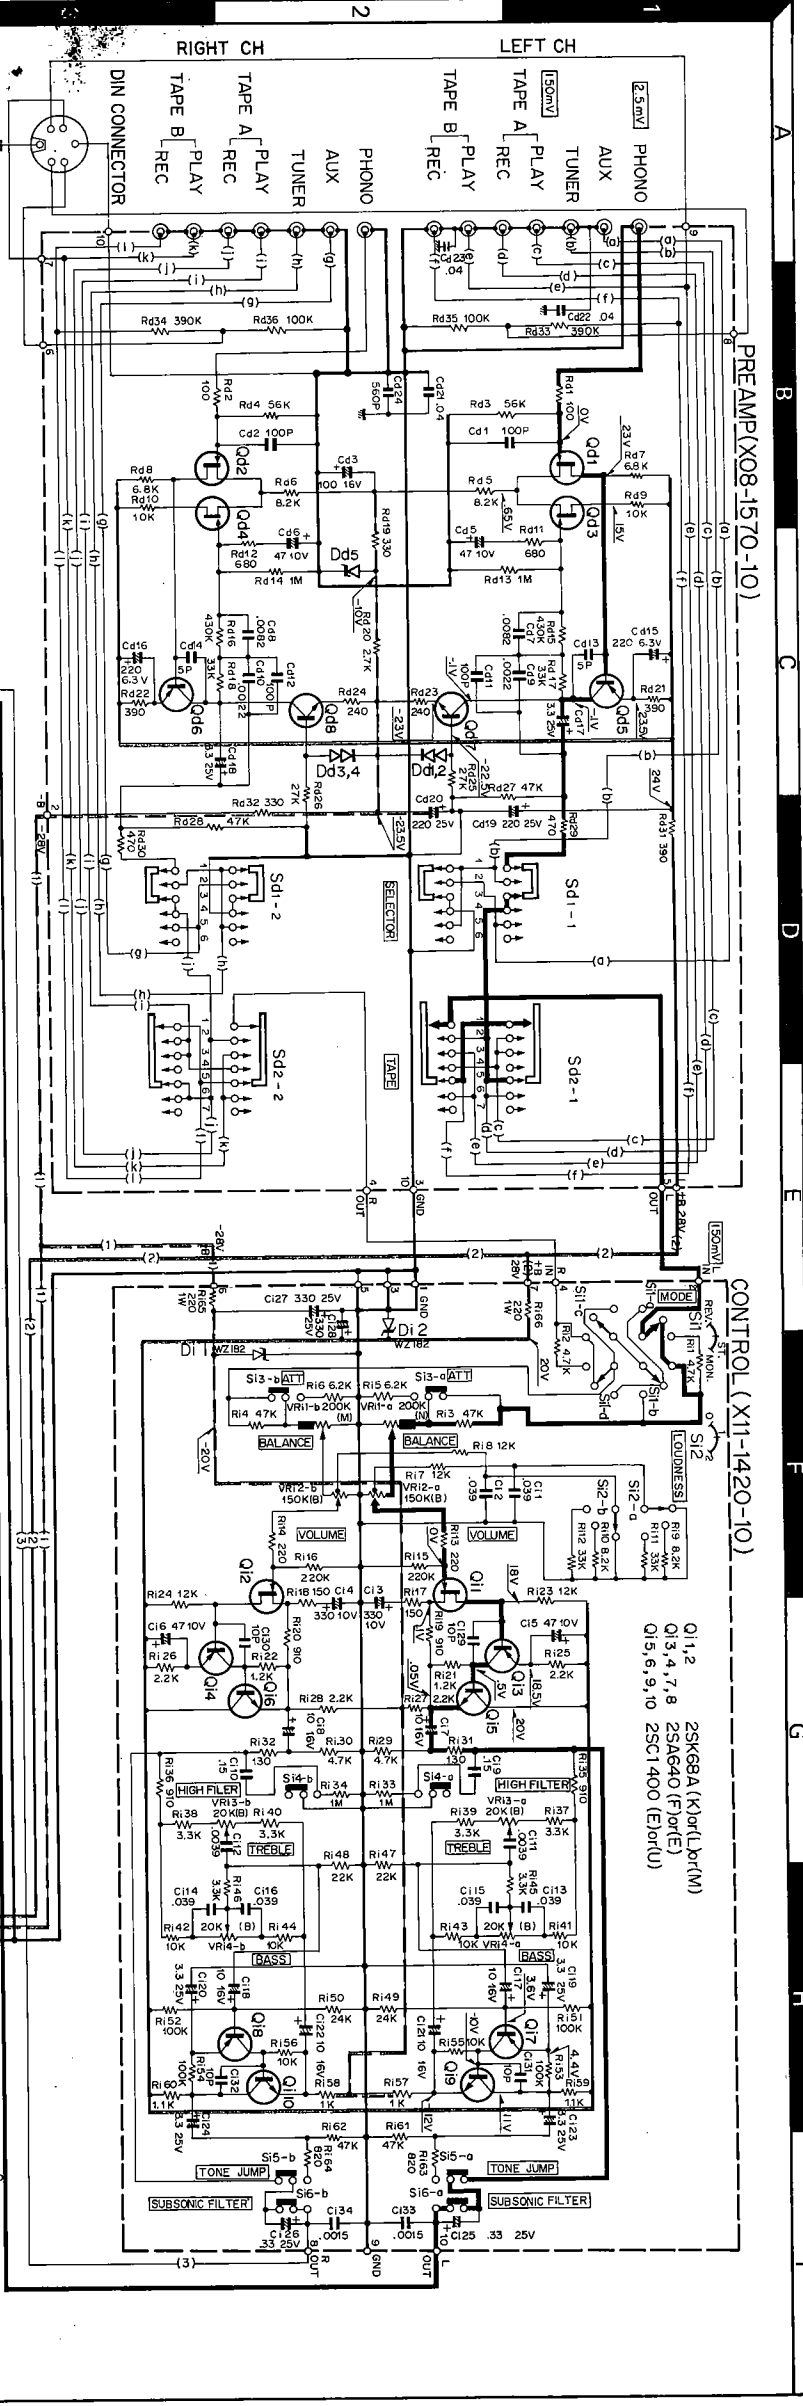

Note: Resistor values are in ohms. K = 1000 ohms. M = 1000K ohms.
 Capacitor values are in μF unless specified. P = pF = $\mu\text{F} \times 10^{-6}$.
 DC voltage are measure with 20K Ω /V under no signal.

SPECIFICATIONS

POWER AMPLIFIER SECTION

POWER OUTPUT

60 watts* per channel, minimum RMS, at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.02% total harmonic distortion.

Both Channel Driven

60 + 60 watts 8 ohms at 1,000 Hz
80 + 80 watts 4 ohms at 1,000 Hz

Dynamic Power Output

250 watts 4 ohms

Total Harmonic Distortion

0.02% at rated power into 8 ohms
0.02% at 1 watt into 8 ohms

Intermodulation Distortion

0.01% at rated power into 8 ohms
0.01% at 1 watt into 8 ohms

(60 Hz : 7 KHz = 4 : 1)

Power Bandwidth

5 Hz to 45,000 Hz

Frequency Response

D.C. to 100,000 Hz +0 dB, -1.5 dB

Signal to Noise Ratio

120 dB (short circuited)

Damping Factor

50 at 8 ohms

Speaker Impedance

Accept 4 ohms to 16 ohms

PRE AMPLIFIER SECTION

Input Sensitivity/Impedance/Signal to Noise Ratio (IHF A curve)

Phono

2.5 mV/ 50 k ohms/ 80 dB

Tuner

150 mV/ 50 k ohms/ 110 dB

AUX

150 mV/ 50 k ohms/ 110 dB

Tape

150 mV/ 50 k ohms/ 110 dB

Maximum Input Level for Phono

200 mV (rms), T.H.D. 0.02% at 1,000 Hz

Output Level/Impedance

Tape REC (Pin)

150 mV/ 450 ohms

(DIN)

30 mV 80 k ohms

Frequency Response

RIAA standard curve +0.2 dB, -0.2 dB
10 Hz to 100,000 Hz +0 dB, -1.8 dB

AUX & Tape

Tone Control

± 7.5 dB at 100 Hz

Bass

± 7.5 dB at 10,000 Hz

Treble

+ 3 dB at 100 Hz.

Loudness Control (-30 dB)

(1) + 6 dB at 100 Hz

(2) + 6 dB at 100 Hz

Subsonic Filter

20 Hz, 6 dB/oct

High Filter

8 kHz, 6 dB/oct

GENERAL

Power Consumption

460 watts at full power

A.C. Outlet

Switched 2, Unswitched 1

Dimensions

W 16-15/16" (430 mm)

H 5-7/8" (149 mm)

D 14-15/16" (379 mm)

Weight (Net)

25.4 lbs. (11.5 kg)

* Measured pursuant to Federal Trade Commission's Trade Regulation rule on Power Output Claims for Amplifier.

Specifications and the design subject to possible modification without notice due to improvements.

KENWOOD ELECTRONICS, INC.

15777 SOUTH BROADWAY, GARDENA, CALIFORNIA 90248 U.S.A.

72-02 51ST AVENUE, WOODSIDE, N.Y. 11377 U.S.A.

TRIO-KENWOOD ELECTRONICS N.V.

LEUVENSESTEENWEG 184, B-1930 ZAVENTEM, BELGIUM.

TRIO-KENWOOD ELECTRONICS GmbH.

6056 HEUSENSTAMM, RUDOLF-BRAAS-STR. 20, WEST GERMANY.

TRIO-KENWOOD FRANCE S.A.

15, RUE PAUL BERT, 94200 NRY-SUR-SEINE, PARIS, FRANCE.

TRIO-KENWOOD CORPORATION

3-6-17 AOBADAI, MEGURO-KU, TOKYO, JAPAN.