


# DIGITAL INTEGRATED AMPLIFIER KA-D1100EX SERVICE MANUAL


# KENWOOD

©1988-1 PRINTED IN JAPAN  
B51-3420-00(B)1531

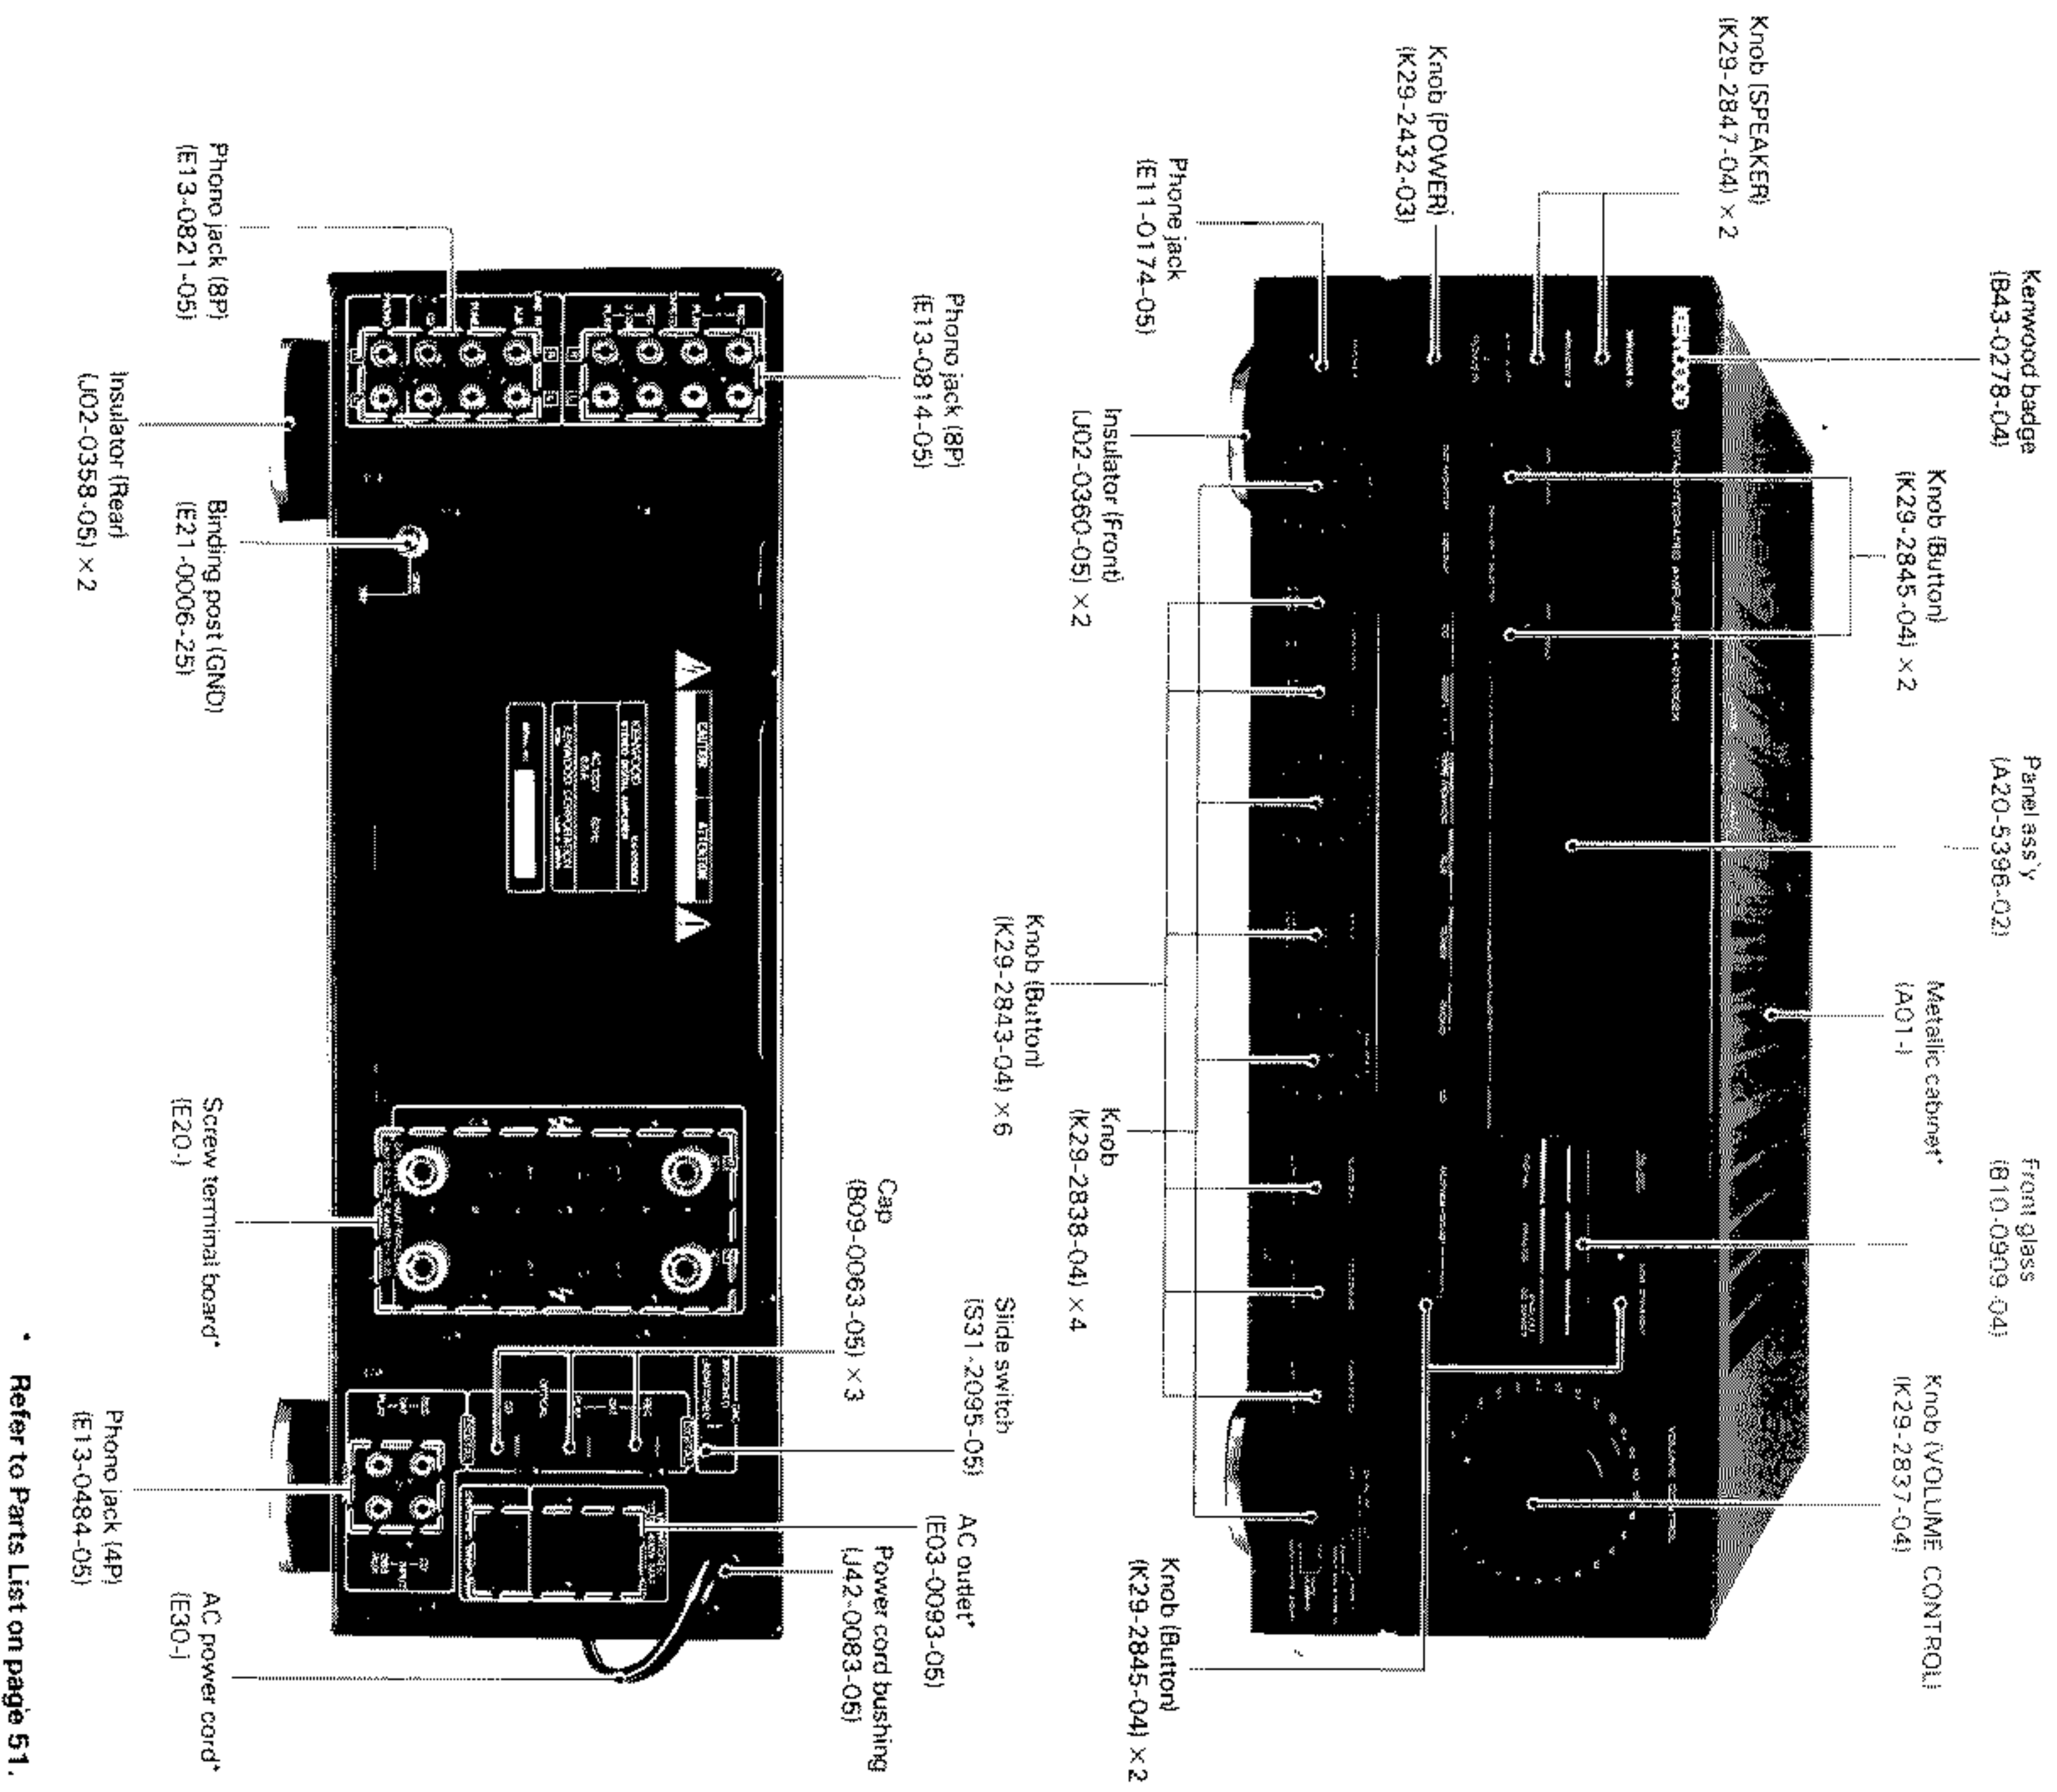

Refer to Parts List on page 51.

- Remove the 17 screws holding the bottom plate, and remove the bottom plate (1).
- When removing the two insulators (U02-0360-05) at the front side, remove the three screws for each (2).
- When removing the two insulators (U02-0358-05) at the rear, remove the three screws for each (3).
- Remove the knobs and nuts for the BASS, TREBLE, BALANCE, DUAL REC OUT and VOLUME VRS (4).
- Remove the six screws (three at the top, and three at the bottom) retaining the panel ass'y to the frame (5).
- Remove the panel ass'y in the direction of the arrow (6).
- Remove the two screws retaining the Tone Unit (X11-1) (7).
- Remove the two unit holders retaining the Tone Unit (X11-1) (8).
- Remove the flexible cord from the CN1 of the Tone Unit (X11-1) as shown in the figure (9).
- Remove the Tone Unit (X11-1) in the direction of the arrow (10).

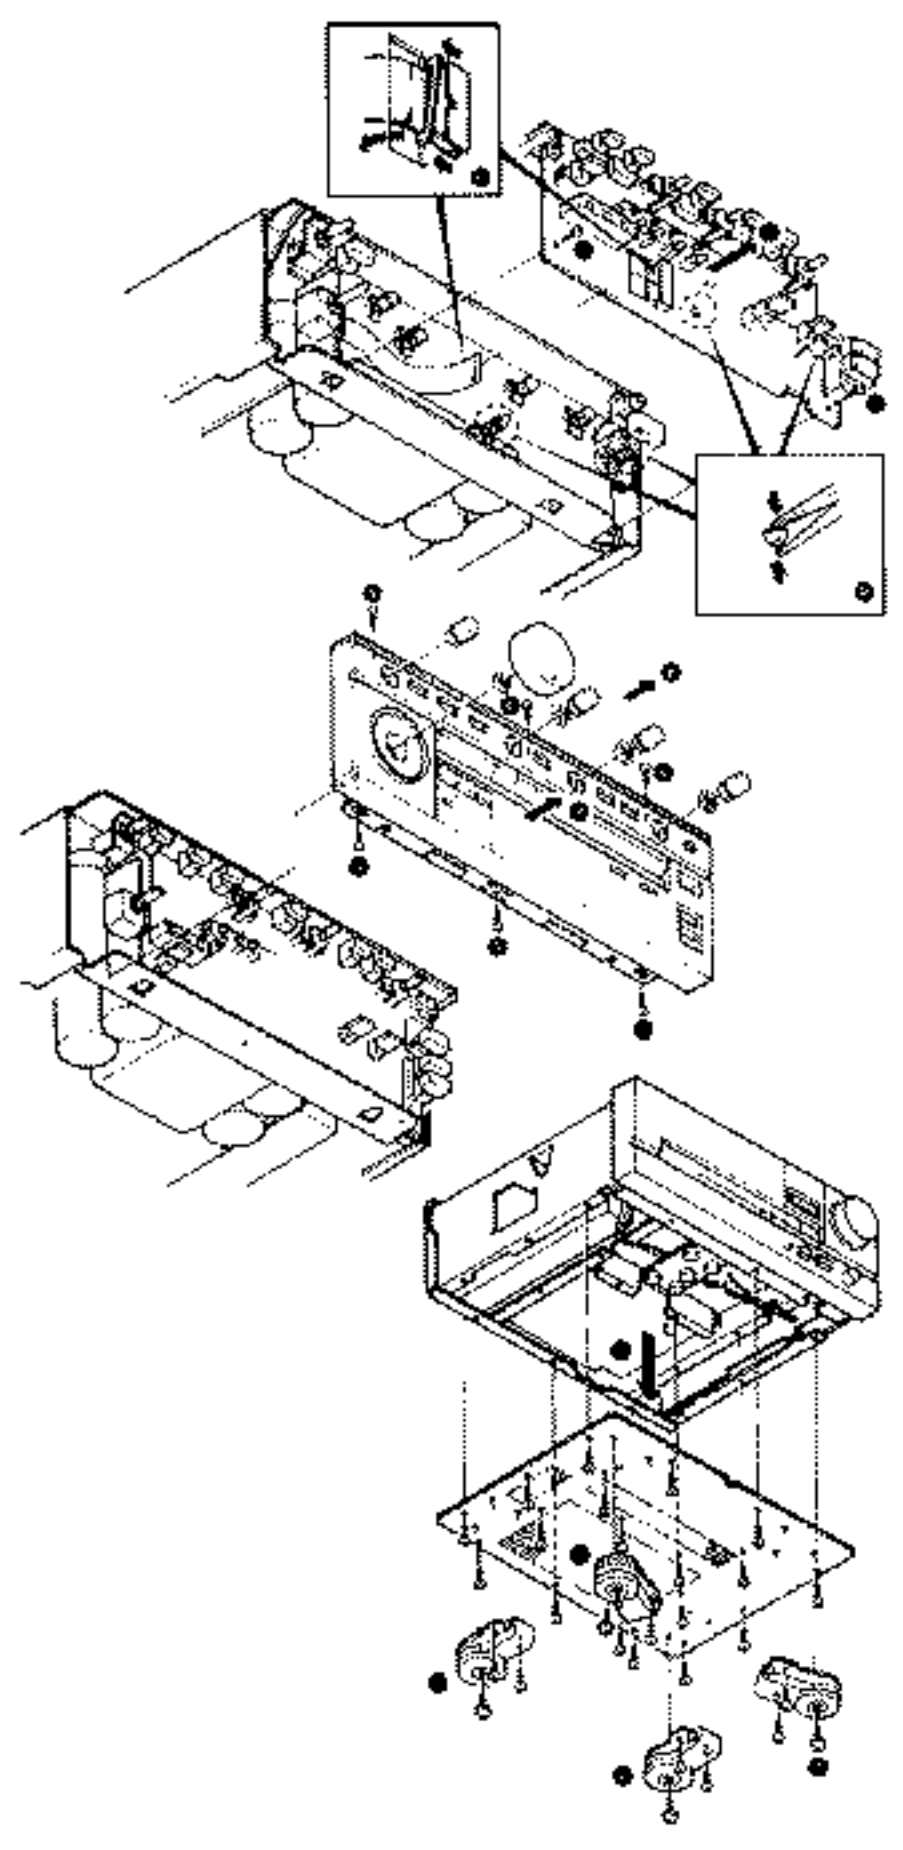

## DISASSEMBLY FOR REPAIR


**CAUTION** Never connect an audio connection cord between the digital input/output jack and a PHONO, CD, TUNER, AUX or TAPE line input/output jack.

**CAUTION** DISASSEMBLY FOR REPAIR BLOCK DIAGRAM CIRCUIT DESCRIPTION ADJUSTMENT REGAGE

|    |                   |
|----|-------------------|
| 28 | ABGLEICH          |
| 29 | PC BOARD          |
| 30 | SCHEMATIC DIAGRAM |
| 31 | EXPLODED VIEW     |
| 32 | PARTS LIST        |
| 33 | SPECIFICATION     |
| 34 |                   |
| 35 |                   |
| 36 |                   |
| 37 |                   |
| 38 |                   |
| 39 |                   |
| 40 |                   |
| 41 |                   |
| 42 |                   |
| 43 |                   |
| 44 |                   |
| 45 |                   |
| 46 |                   |
| 47 |                   |
| 48 |                   |
| 49 |                   |
| 50 |                   |
| 51 |                   |
| 52 |                   |

- Taking cautious of the four lugs at the rear panel (13), remove the rear panel in the direction of the arrow (14).
- When installing the rear panel to the body, carefully place the Audio Unit (X09-1A/3) on the two lugs at the bottom of the rear panel (15).
- After setting the CARTRIDGE switch to the "MM" position, remove the shaft as shown in the figure (16). Remove the six screws retaining the rear panel, and the three screws retaining the side frames (17).

## Disassembling the Pre-Amplifier Unit, Processor Unit and Digital I/O Unit.

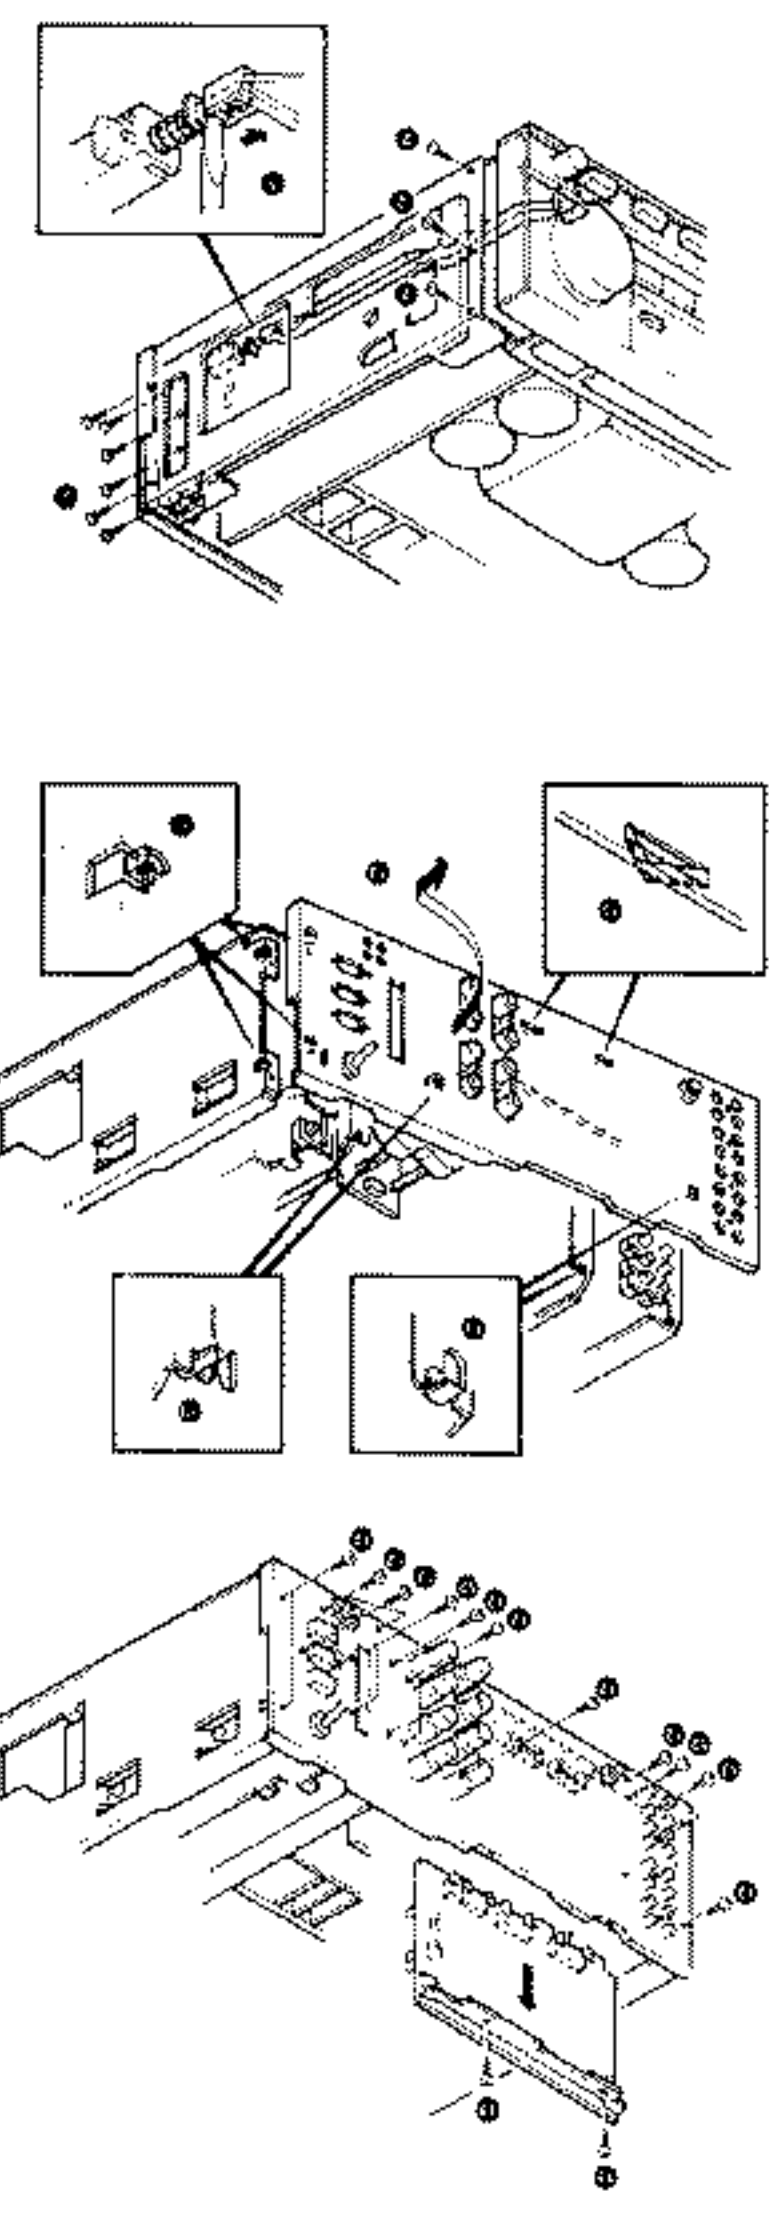

## DISASSEMBLY FOR REPAIR

Refer to Parts List on page 51.

KA-D1100EX

## PARTS LIST

\* New Parts  
Parts without Parts No. are not supplied.  
Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
Teile ohne Parts No. werden nicht geliefert.

| Ref. No.<br>参照番号                      | Address<br>位置 | New Parts<br>新部品 | Parts No.<br>部品番号 | Description<br>部品名 / 規格         | Desti-<br>nation<br>仕 | Re-<br>marks<br>備考 |
|---------------------------------------|---------------|------------------|-------------------|---------------------------------|-----------------------|--------------------|
| A1 ~2                                 |               |                  | S51-2074-05       | MAGNETIC RELAY                  |                       |                    |
| S1                                    |               |                  | S31-2095-05       | SLIDE SWITCH (DAC)              |                       |                    |
| PH1                                   |               |                  | T95-0101-05       | NFTN ISOLATOR                   |                       |                    |
| D1 ~24                                |               |                  | 1S3133            | DIODE                           |                       |                    |
| D1 ~24                                |               |                  | 1S3176            | DIODE                           |                       |                    |
| D27 ~29                               |               |                  | 1S3133            | DIODE                           |                       |                    |
| D27 ~29                               |               |                  | 1S3176            | DIODE                           |                       |                    |
| D32                                   |               |                  | HZ55.15(B2)       | ZENER DIODE                     |                       |                    |
| D32                                   |               |                  | R05.115(B2)       | ZENER DIODE                     |                       |                    |
| D33 ~40                               |               |                  | DSM1A1            | DIODE                           |                       |                    |
| D41 ~42                               |               |                  | KV1310-1          | VARIABLE CAPACITANCE DIODE      |                       |                    |
| D43                                   |               |                  | HZ52.7N(B2)       | ZENER DIODE                     |                       |                    |
| D43                                   |               |                  | R02.7E5(B2)       | ZENER DIODE                     |                       |                    |
| D44 ~57                               |               |                  | 1S3133            | DIODE                           |                       |                    |
| D44 ~57                               |               |                  | 1S3176            | DIODE                           |                       |                    |
| IC1 ~2                                |               |                  | PCM56P-K          | IC(DA CONVERTER)                |                       |                    |
| IC3 ~10                               |               |                  | NJM5532D-D        | IC(OP AMP X2)                   |                       |                    |
| IC21 ~22                              |               |                  | TC74HC04F         | IC(HEX INVERTER)                |                       |                    |
| IC23 ~24                              |               |                  | TC74HC153F        | IC(4CH MPX)                     |                       |                    |
| IC25                                  |               |                  | SM58040-T         | IC(DIGITAL FILTER)              |                       |                    |
| IC26                                  |               |                  | TC175005AF-0053   | IC(VCX8)                        |                       |                    |
| IC27                                  |               |                  | M5223P            | IC(OP AMP X2)                   |                       |                    |
| IC28                                  |               |                  | M5F78M05L         | IC(VOLTAGE REGULATOR/ +5V)      |                       |                    |
| IC29                                  |               |                  | M5F79M05L         | IC(VOLTAGE REGULATOR/ -5V)      |                       |                    |
| IC30                                  |               |                  | M5F78M06L         | IC(VOLTAGE REGULATOR/ +6V)      |                       |                    |
| IC31                                  |               |                  | M5F79M06L         | IC(VOLTAGE REGULATOR/ -6V)      |                       |                    |
| IC32                                  |               |                  | P005R04           | IC(VOLTAGE REGULATOR/ +5V)      |                       |                    |
| IC33                                  |               |                  | M5220P            | IC(OP AMP X2)                   |                       |                    |
| IC34                                  |               |                  | TC74HC04F         | IC(HEX INVERTER)                |                       |                    |
| IC35                                  |               |                  | M51251AGL         | IC(SYSTEM RESET)                |                       |                    |
| 01 ~4                                 |               |                  | 2SC1923(R,N)      | TRANSISTOR                      |                       |                    |
| 05                                    |               |                  | 2SC2320(E,F)      | TRANSISTOR                      |                       |                    |
| 05                                    |               |                  | 2SC945(A)(B,P)    | TRANSISTOR                      |                       |                    |
| 06                                    |               |                  | 2SD1266(O,F)      | TRANSISTOR                      |                       |                    |
| 07                                    |               |                  | 2SB941(O,F)       | TRANSISTOR                      |                       |                    |
| 08                                    |               |                  | 2SK170(BL,V)      | FET                             |                       |                    |
| 010 ~13                               |               |                  | DTC114YFF         | DIGITAL TRANSISTOR              |                       |                    |
| A1                                    | IC            |                  | W02-0784-05       | ELECTRIC CIRCUIT MODULE(REC)    |                       |                    |
| A2 ~3                                 | IC            |                  | W02-0774-05       | ELECTRIC CIRCUIT MODULE(FLA.CD) |                       |                    |
| <b>DIGITAL I/O UNIT (X88-1010-00)</b> |               |                  |                   |                                 |                       |                    |
| C1                                    |               |                  | CC45FSL1H270J     | CERAMIC                         |                       |                    |
| C2                                    |               |                  | CF92FV1H273J      | MF 0.327UF J                    |                       |                    |
| C3                                    |               |                  | CF92FV1H272J      | MF 2700PF J                     |                       |                    |
| C4                                    |               |                  | CF92FV1H683J      | MF 0.068UF J                    |                       |                    |
| C5                                    |               |                  | C9D-1602-05       | MF-ELEC 10UF 10MV               |                       |                    |
| C6                                    |               |                  | CF92FV1H103J      | MF 0.010UF J                    |                       |                    |
| C7                                    |               |                  | CE04JW1H010M      | ELECTRO 1.0UF 500V              |                       |                    |
| C8 ~10                                |               |                  | CE04JW1A101M      | ELECTRO 100UF 10MV              |                       |                    |
| C11 ~14                               |               |                  | CK45FF1H103Z      | CERAMIC 0.010UF Z               |                       |                    |
| C15                                   |               |                  | CC45FSL1H100D     | CERAMIC 10PF D                  |                       |                    |
| L1 ~2                                 |               |                  | L92-0018-05       | FERRITE (SRF)                   |                       |                    |
| R4 ~5                                 |               |                  | RD14AB2E100JTS    | FL-PRONF RD 10 J 1/4W           |                       |                    |

E: Scandinavia & Europe K: USA P: Canada  
U: PX(Far East, Hawaii) T: England M: Other Areas  
UE: AAFES(Europe) X: Australia

## PARTS LIST

\* New Parts  
Parts without Parts No. are not supplied.  
Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
Teile ohne Parts No. werden nicht geliefert.


| Ref. No.<br>参照番号                         | Address<br>位置 | New Parts<br>新部品 | Parts No.<br>部品番号 | Description<br>部品名 / 規格 | Desti-<br>nation<br>仕 | Re-<br>marks<br>備考 |
|--|---------------|------------------|-------------------|-------------------------|-----------------------|--------------------|
| D1                                       |               |                  | 1S3133            | DIODE                   |                       |                    |
| D2 ~10                                   |               |                  | 1S3133            | DIODE                   |                       |                    |
| D2 ~10                                   |               |                  | 1S3176            | DIODE                   |                       |                    |
| IC1                                      |               |                  | TC175014AF-N073   | IC(DUAL MONO. MULT.)    |                       |                    |
| IC2                                      |               |                  | SN74LS624N        | IC(PUR)                 |                       |                    |
| IC3                                      |               |                  | M5223P            | IC(OP AMP X2)           |                       |                    |
| IC4                                      |               |                  | TC74HC04F         | IC(HEX INVERTER)        |                       |                    |
| IC5                                      |               |                  | TC74HC123F        | IC(DUAL MONO. MULT.)    |                       |                    |
| <b>COMPOUND ASS'Y UNIT (X90-2672-71)</b> |               |                  |                   |                         |                       |                    |
| C  |               |                  | N09-0301-05       | TAPPIE SCREW (Ø3X8)     |                       |                    |

E: Scandinavia & Europe K: USA P: Canada  
U: PX(Far East, Hawaii) T: England M: Other Areas  
UE: AAFES(Europe) X: Australia




## DISASSEMBLY FOR REPAIR


3. Slide the right side frame to that which the Pre-amplifier Unit (X08-222X-XX) (A/4) is attached so that there is a clearance at section (A) (3).
4. Lift the side frame diagonally in the direction of the arrow from the rear (4).
5. Remove the flexible cord from CN3 of the Pre-amplifier Unit (X08-) (A/4) (5).

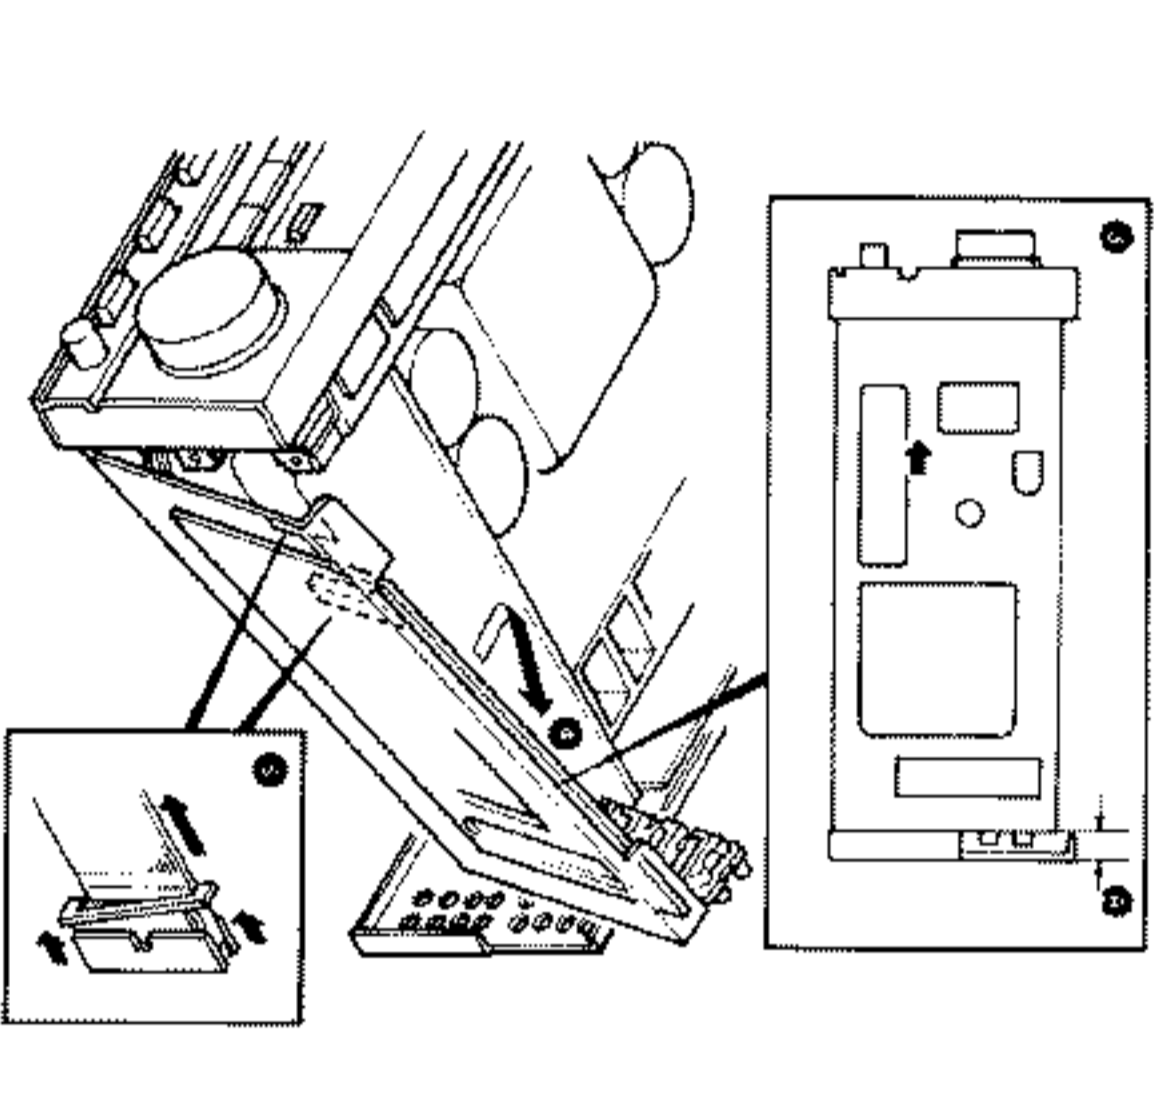

6. Remove the three screws retaining the Pre-amplifier Unit (X08-) (A/4) to the side frame (6), and remove it in the direction of the arrow.
7. When installing the Pre-amplifier Unit (X08-) (A/4), first pass the flexible cord through the notch of the front frame so as not to get in the way of the front frame (7).

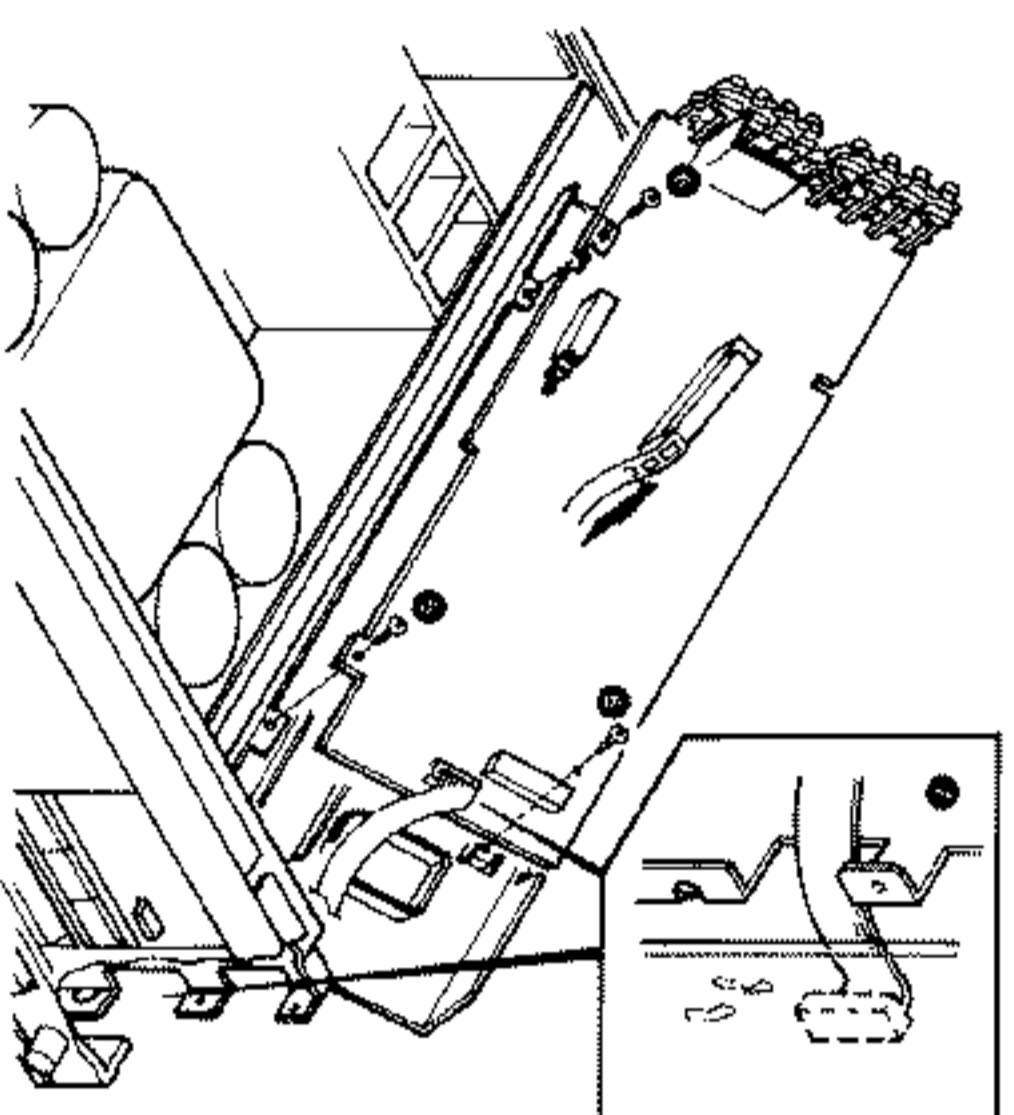


8. After confirming that the POWER switch is set to OFF, remove the shaft as shown in the figure (8).
9. Remove the screw retaining the left side frame (9).
10. Remove the four screws retaining the rear panel, and the two screws retaining the side frame (10).
11. Taking care of the two lugs on the rear panel (11), remove the side frame in the direction of the arrow.
12. Remove the push rivet and the screw retaining the Pre-amplifier Unit (X08-) (C/4) (12), to remove the Pre-amplifier Unit.

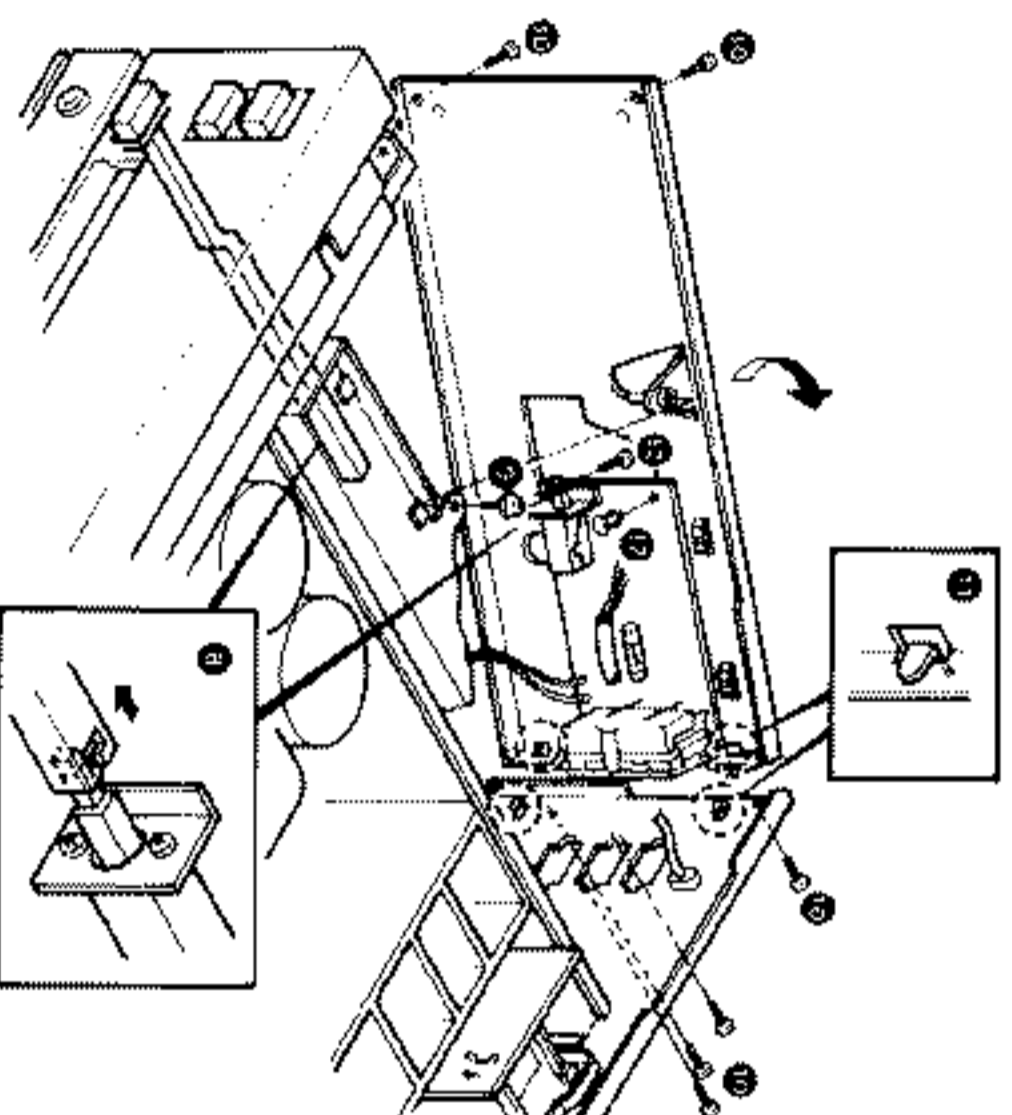


## DISASSEMBLY FOR REPAIR


13. Remove the two screws retaining the DAC frame (13).
14. Remove the three screws retaining the DAC frame to the rear panel (14), and remove the Processor Unit (X32-1202-71) (A/2, B/2) with the frame in the direction of the arrow.

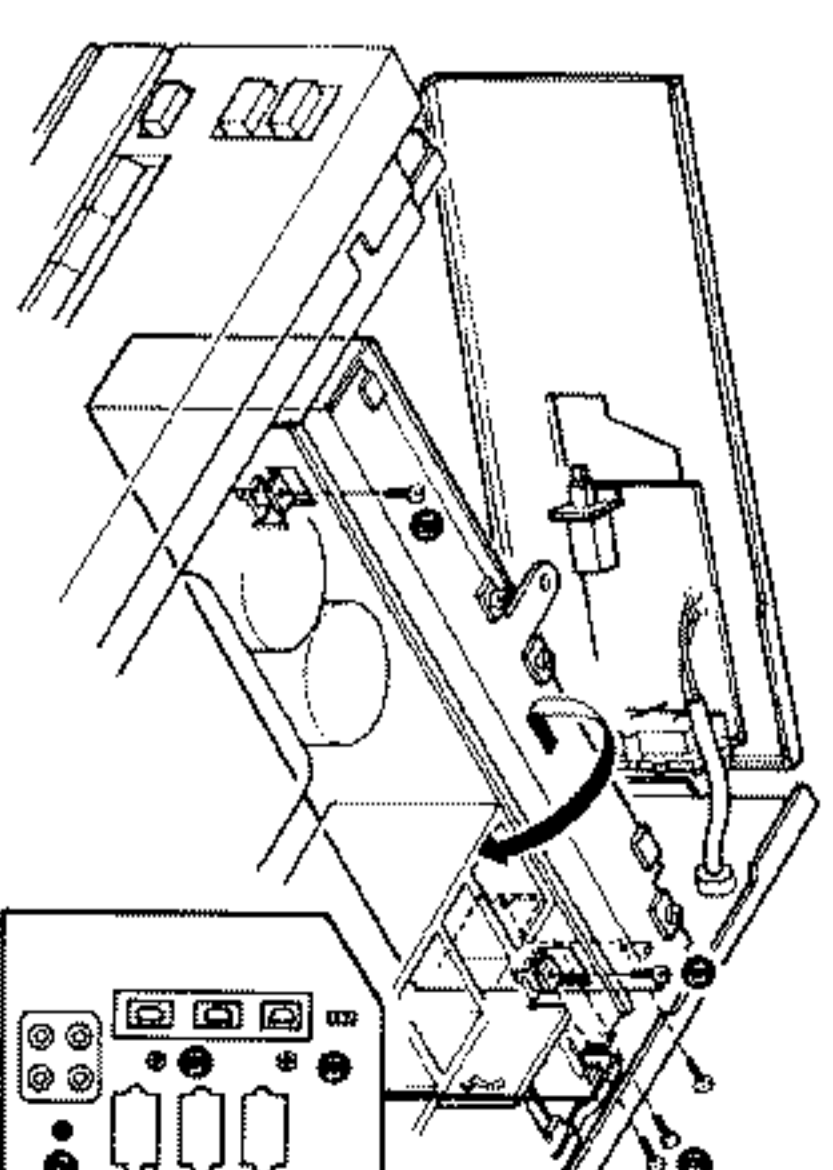


15. Spread a cloth on the top plate of the set, and place the Processor Unit (X32) (A/2, B/2) with the frame, then remove the four screws retaining the B/2 PC board to the frame (15) to remove the B/2 PC board.
16. Remove the eight screws retaining the shield plate (16) to remove it.

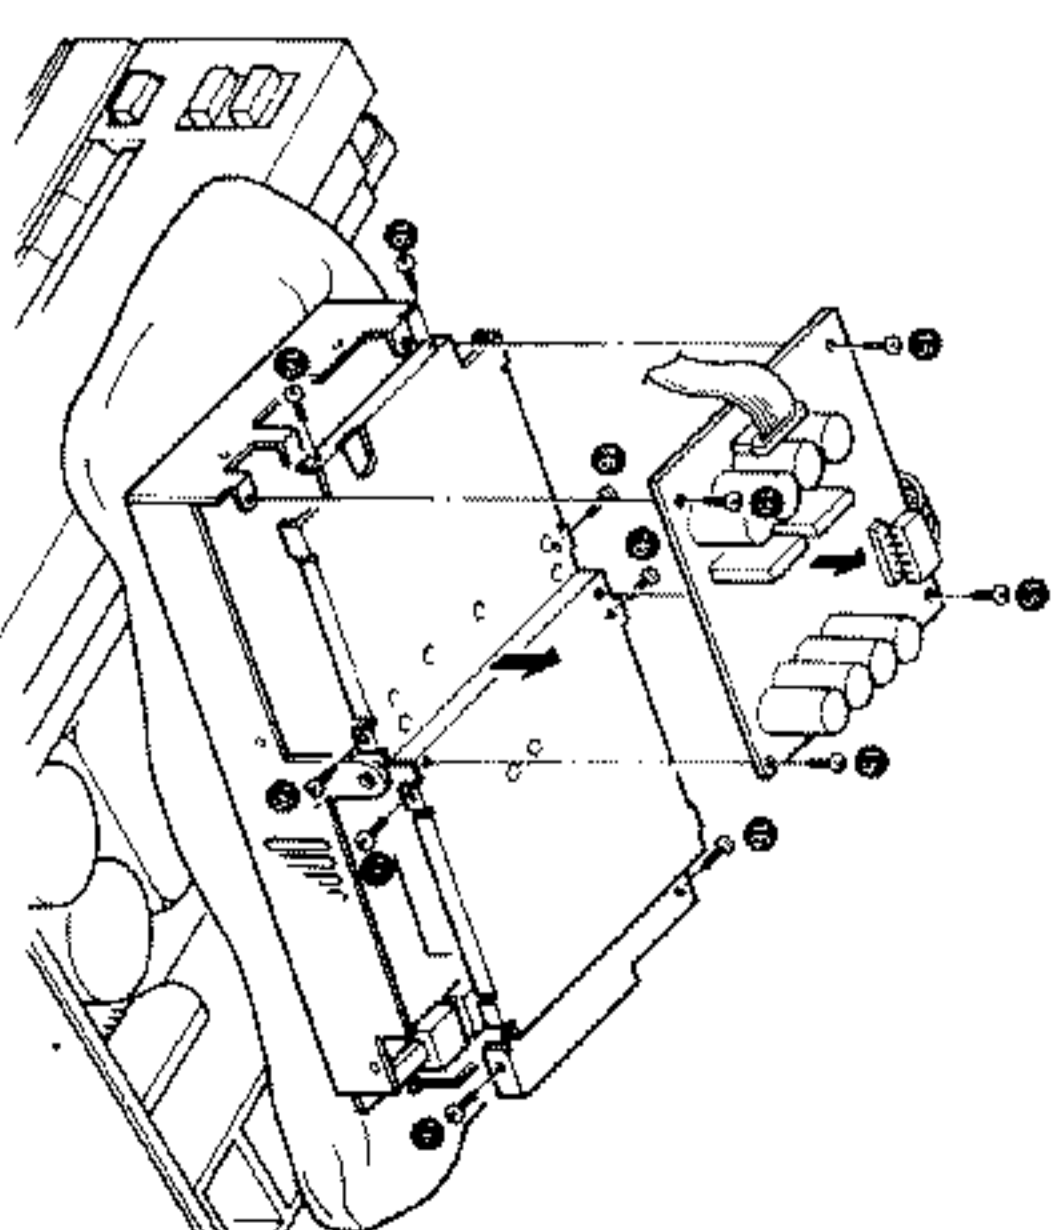

17. Remove the four screws and two unit holders retaining the Processor Unit (A/2) to the frame (17), and remove it in the direction of the arrow.
18. Unsolder the CN1 and CN2 holding the Digital I/O Unit (X88-1010-00) from the soldered surface of the Processor Unit (A/2) (18).
19. Remove the cover of the Digital I/O Unit (X88-) case by opening the lugs as shown in the figure (19).

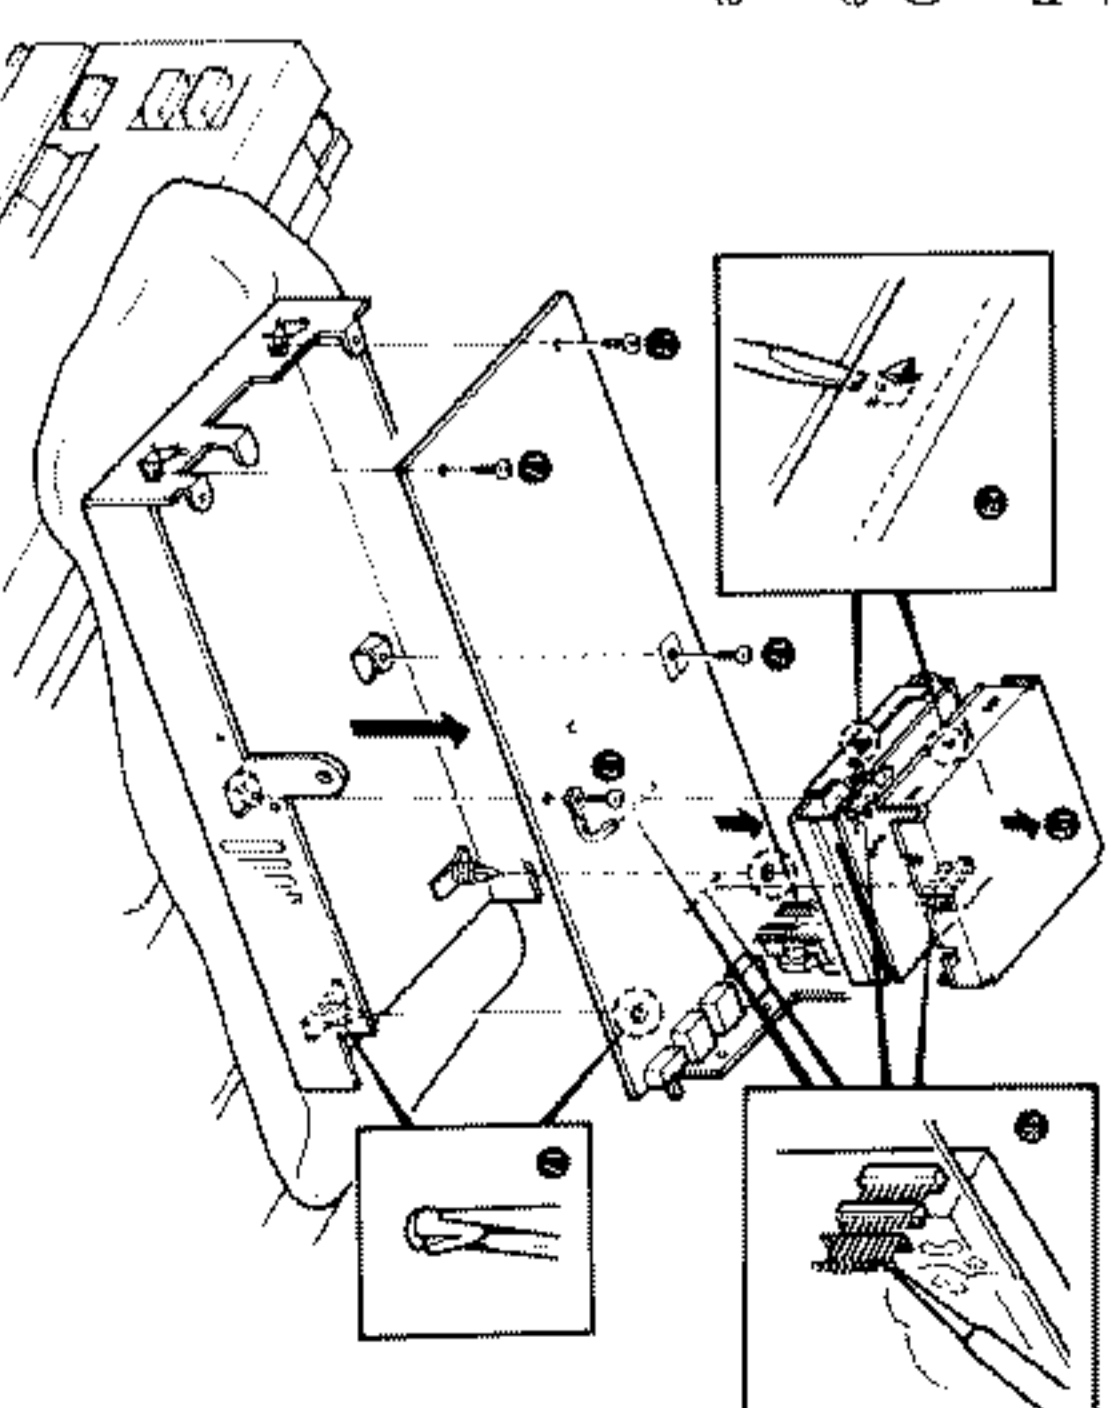

BLOCK DIAGRAM

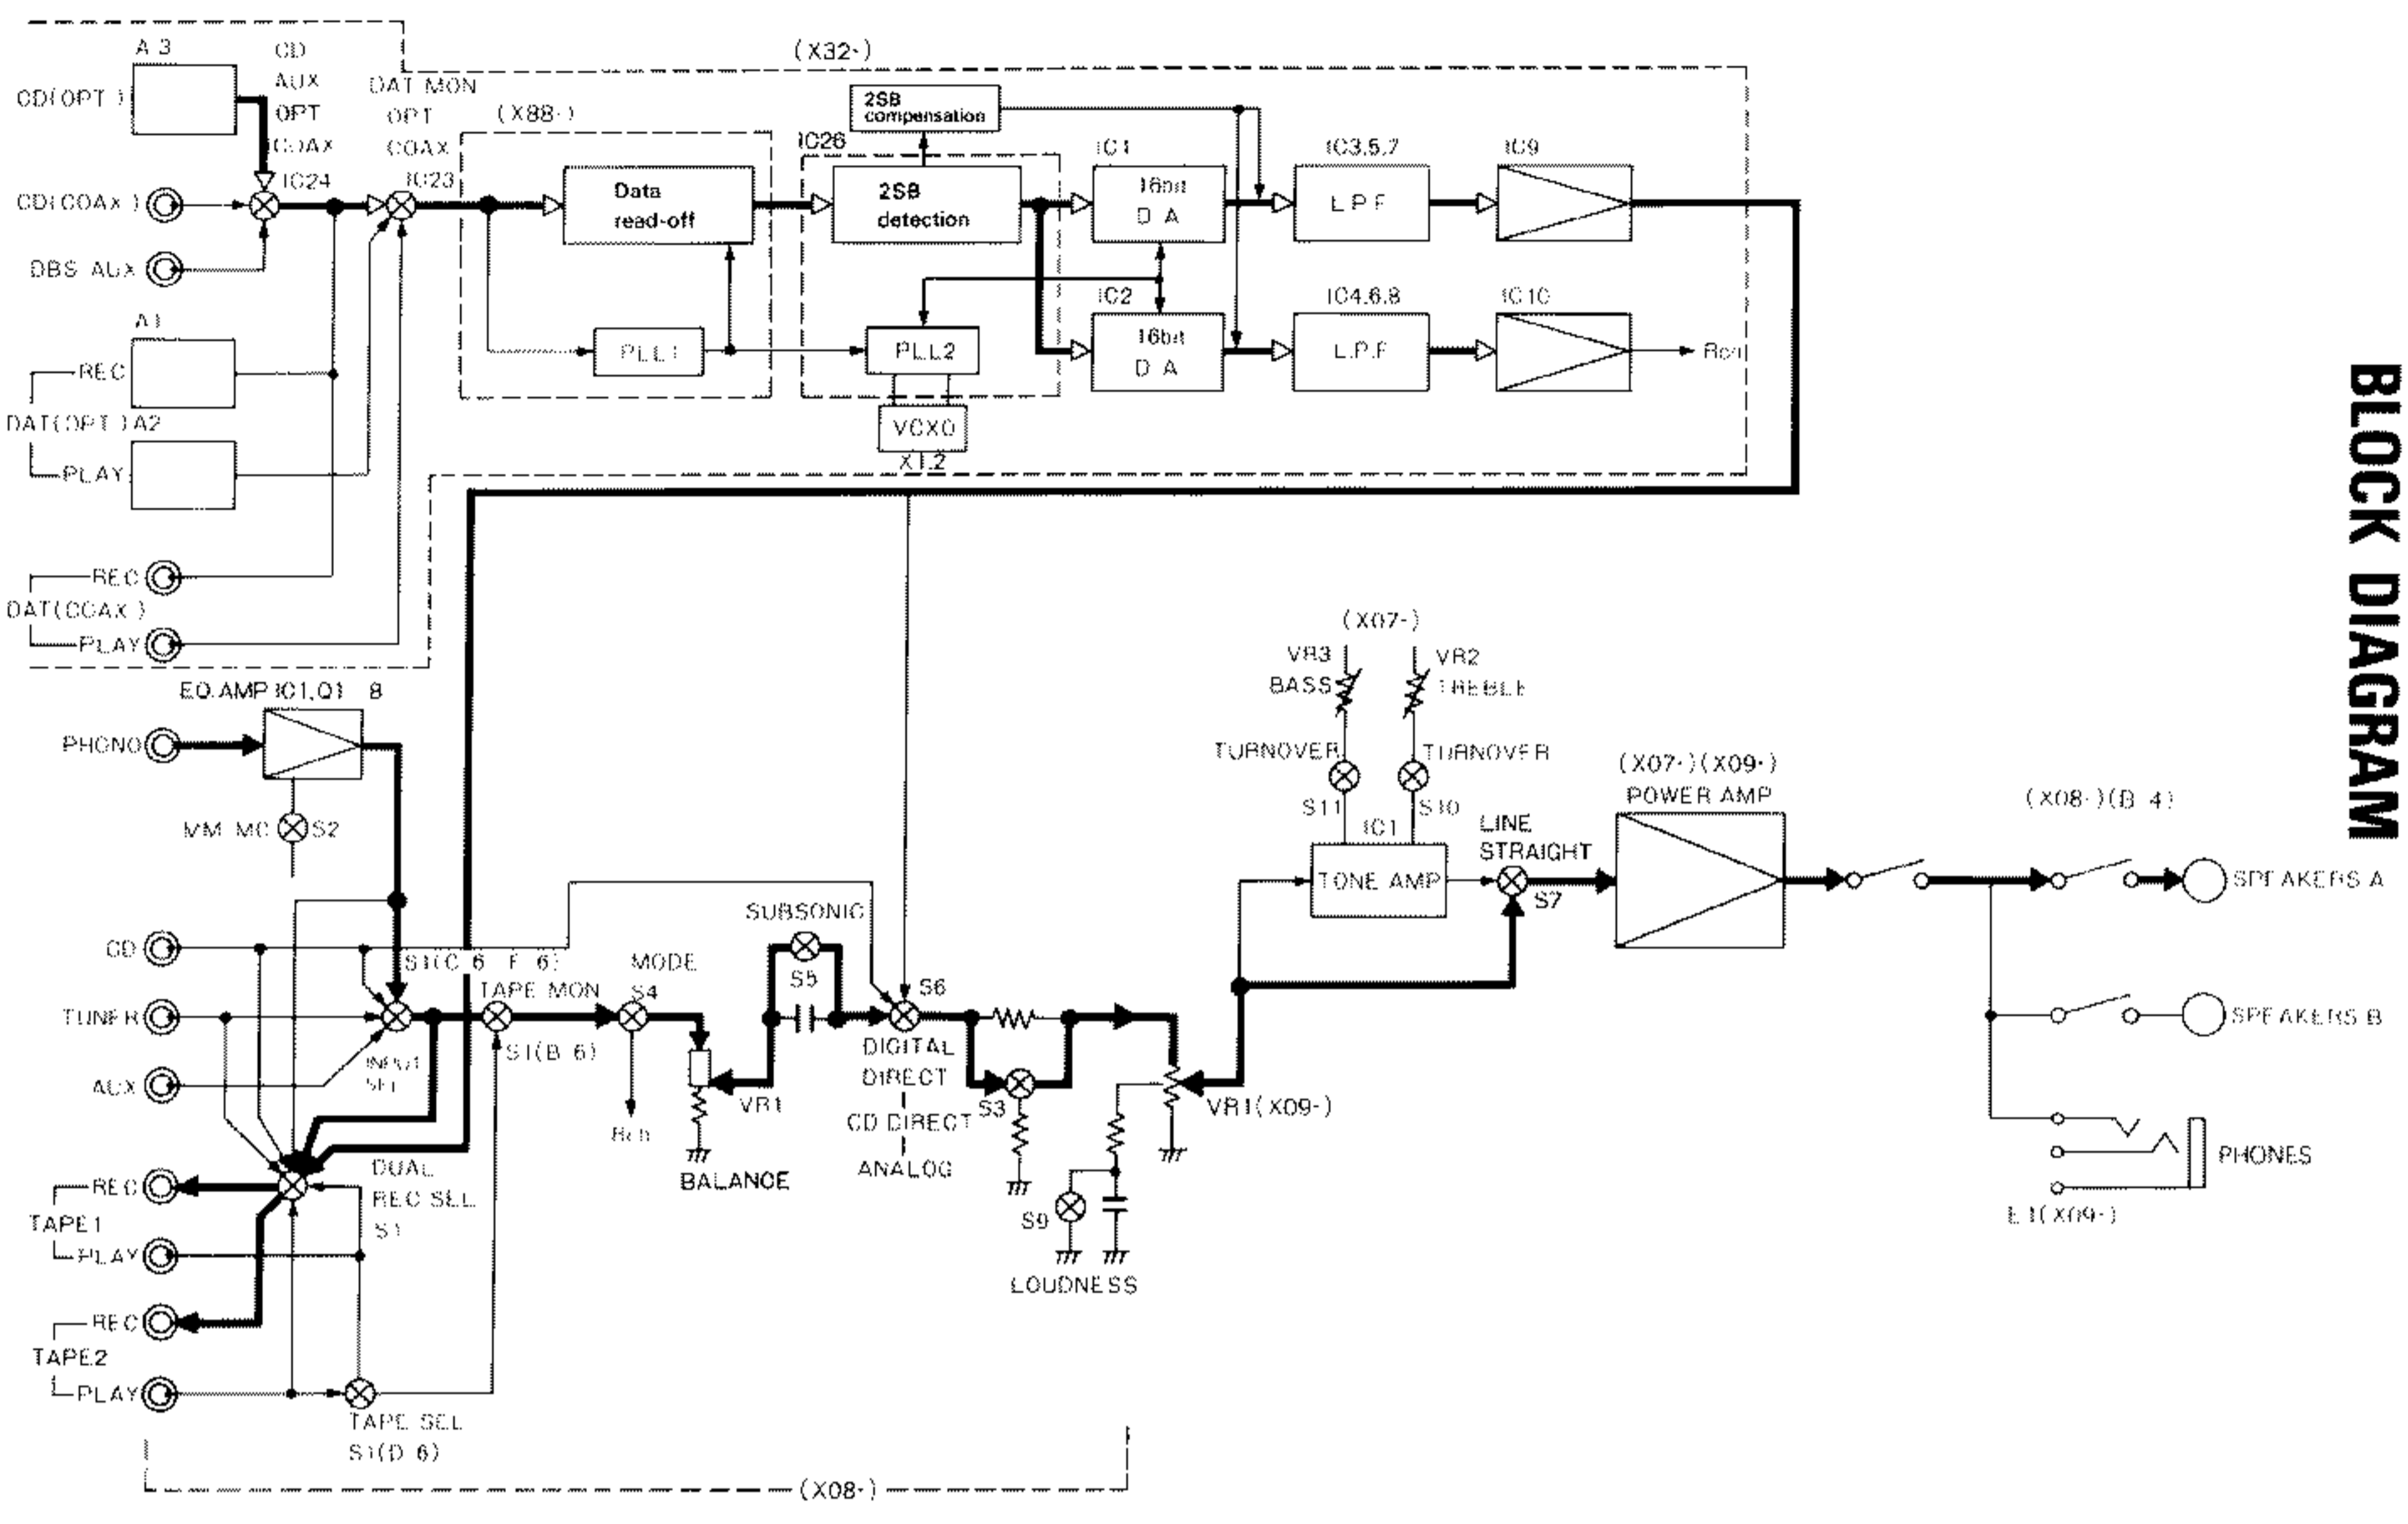

CIRCUIT DESCRIPTION

Description of Components  
POWER AMPLIFIER UNIT (X07-239X-XX)

| Component       | Use/Function   | Operation/Condition/Interchangeability   |
|-----------------|--|--|
| Q1, 2           | Class A primary stage differential amplifier circuit   |  |
| Q3~6            | Class A primary stage cascode circuit                  |  |
| Q7, 8           | Constant current circuit                               | Constant current circuit for class A primary stage differential amplifier circuit                    |
| Q9~12           | Class A secondary stage differential amplifier circuit |  |
| Q13, 14         | Class A cascode circuit                                |  |
| Q15~18          | Class A third stage differential amplifier circuit     |  |
| Q19, 20         | Class A current mirror circuit                         |  |
| Q21, 22         | Class A cascode circuit                                |  |
| Q23~30          | Cascode bootstrap circuit                              | Consisting the VIG circuit; Q23~26 are constant current circuit, and Q27~30 are base ground          |
| Q31~34          | For pre-driver   |  |
| Q35~38          | For driver   |  |
| Q39~42          | Cascode bootstrap circuit                              | Consisting the VIG circuit; Q39~42 are buffers   |
| Q43~46          | Current limiter  | Limits the current supplied to the final transistor when overload driven.                            |
| Q71             | Constant voltage circuit                               | Transmits the operation signal of the current limiter; limiter Q43 and 44 to the protection IC (IC1) |
| IC1 (µPCT237HA) | Protection IC  |  |

PRE-AMPLIFIER UNIT (X08-222X-XX)

| Component      | Use/Function                                      | Operation/Condition/Interchangeability                                   |
|----------------|---|--|
| Q1~4           | EQ circuit primary stage differential amplifier   |  |
| Q5~8           | EQ circuit primary stage cascode circuit          |  |
| Q9, 10         | EQ circuit primary stage constant current circuit |  |
| Q11, 12        | For stabilized power supply regulator             |  |
| Q13            | Deck oscillation prevention circuit               | Oscillation prevention circuit against a loop when the deck is connected |
| Q14, 15        | For relay drive                                   |  |
| IC1 (NJM4532D) | Op amp for EQ circuit                             |  |
| IC2 (M5218P)   | Op amp for stabilized power supply for EQ         |  |



## CIRCUIT DESCRIPTION

## CIRCUIT DESCRIPTION

### AUDIO UNIT (X09-256X-XX)

| Component       | Use/Function             | Operation/Condition/Interchangeability  |
|-----------------|--------------------------|---|
| Q1~6            | Constant voltage circuit | Constant voltage circuit for main class A stage.                                    |
| Q7, 8           | Constant current circuit | Ripple elimination circuit inserted into the B line to the primary stage of class A |
| Q9              | For relay drive          |   |
| IC1, 2 (KA802)  | Power IC                 |   |
| IC3, 4 (TA2030) | LED switch IC            | High/Low select circuit of LED  |

### PHONE UNIT (X11-246X-XX)

| Component        | Use/Function                              | Operation/Condition/Interchangeability  |
|------------------|---|---|
| Q1, 2            | Winking circuit                           | The LED lights when the power indication and the set operates correctly, and blinks until the amplifier is operable (for about 5 seconds) after power is turned ON, or when the protection circuit functions because of the abnormal operation occurs in the power amplifier. |
| Q3               | LED ON/OFF circuit for digital indication |   |
| Q4               | Lamp blinking prevention circuit          | Constant voltage circuit for preventing the lamp from blinking when the power is output.  |
| IC1 (NUM2041D-D) | IC for tone circuit                       | 1/2 for L-channel, 2/2 for R-channel  |

### PROCESSOR UNIT (X32-1202-71)

| Component              | Use/Function   | Operation/Condition/Interchangeability |
|------------------------|--|--|
| Q1, 2                  | Diode  |  |
| Q3, 4                  | Crystal oscillator   |  |
| Q5                     | LED driver   |  |
| Q6                     | Constant voltage power supply                                    |  |
| Q7                     | Constant voltage power supply                                    |  |
| Q8                     | Constant voltage power supply                                    |  |
| Q10~13                 | Relay control  |  |
| IC1, 2 (PCMS6P-K)      | For D/A conversion   |  |
| IC3, 4 (NUM5532D-D)    | I-V conversion, addition for compensation of 2nd significant bit | Compatible with NE5532P, NJM5532D      |
| IC5~8 (NJM5532D-D)     | Low pass filter  | Compatible with NE5532P, NJM5532D      |
| IC9, 10 (NJM5532D-D)   | Output amplifier   | Compatible with NE5532P, NJM5532D      |
| IC21 (TC74HC04F)       | Amplifier  |  |
| IC22 (TC74HC04F)       | Inverter   |  |
| IC23, 24 (TC74HC153F)  | Digital input select   |  |
| IC25 (SM5804D-T)       | Digital filter   |  |
| IC26 (TC17G005AF-0053) | Twin quartz PLL control circuit<br>Phase comparator for VCXO     |  |
| IC27 (M6223P)          | Loop filter for VCXO   |  |
| IC28 (M6F78M05L)       | Constant voltage power supply                                    | Compatible with AN7805F                |
| IC29 (M6F79M05L)       | Constant voltage power supply                                    | Compatible with AN7905F                |

| Pin No. | Pin name | Function                     | Pin No. | Pin Name | Function                         |
|---------|----------|------------------------------|---------|----------|----------------------------------|
| 1       | -Vcc     | Analog negative power supply | 9       | VOUT     | Voltage output                   |
| 2       | DIG GND  | Digital grounding            | 10      | RF       | Feedback resistance              |
| 3       | +VL      | Logic positive power supply  | 11      | S, J     | Summing junction (top amp input) |
| 4       | NC       | No connection                | 12      | ANA GND  | Analog grounding                 |
| 5       | CK       | Clock input                  | 13      | Iout1    | Current output                   |
| 6       | LEC      | Latch enable control input   | 14      | MSB ADJ  | MSB adjustment pin               |
| 7       | DATA     | Data input                   | 15      | VPOT     | Potentiometer pin                |
| 8       | -VL      | Logic negative power supply  | 16      | +Vcc     | Analog positive power supply     |

### Difference of Rank between PCMS6P, PCMS6P-J and PCMS6P-K


|  | PCMS6P   |            | PCMS6P-J  |                          | PCMS6P-K  |            | Unit       |   |
|--|--|------------|-----------|--------------------------|-----------|------------|------------|---|
|  | MIN  | TYP        | MIN       | TYP                      | MIN       | MAX        |            |   |
| Power voltage                              | $\pm V_{cc}$ , $\pm V_L$ (Note 1)  | $\pm 4.75$ |           | $\pm 12.0$               |           | $\pm 13.2$ | V          |   |
| Non-load supply current (Note 2)           | +Vcc (Vcc = +5.0V)<br>-Vcc (Vcc = -5.0V)<br>+Vcc (Vcc = +12.0V)<br>-Vcc (Vcc = -12.0V) |            |           | 10<br>-25<br>12<br>-27   |           | 17<br>-35  | mA         |   |
| Analog output (Bipolar mode)               | Voltage range  | $\pm 20$   |           | $\pm 30$                 |           |            | V          |   |
| Voltage output                             | Output impedance   |            |           | 0.1                      |           |            | mA         |   |
| Current output                             | Output current range   |            |           | $\pm 1.0$ ( $\pm 30\%$ ) |           |            | mA         |   |
| Output short-circuit period                | Output impedance   |            |           | 12                       |           |            | K          |   |
| Total harmonic distortion                  |  | TYP 0.002  | MAX 0.008 | TYP 0.002                | MAX 0.004 | TYP 0.002  | MAX 0.0025 | % |
| $V_o = FS$ at $f = 991\text{Hz}$           |  | 0.02       | 0.04      | *                        | *         | *          | *          | % |
| $V_o = -20\text{dB}$ at $f = 991\text{Hz}$ |  | 1.8        | 4.0       | *                        | *         | *          | *          | % |
| $V_o = -60\text{dB}$ at $f = 991\text{Hz}$ |  |            |           |                          |           |            |            | % |

**Note 1:** Since the -Vcc is sub-straight connected, the potential of -Vcc should be set at equal to or lower than -VL.

**Note 2:** Shows the value when  $\pm V_{cc} \pm V_L$  (logic) is commonly connected.

**Note 3:** (\*) shows the same rank as that at the left.

### Timing Diagram

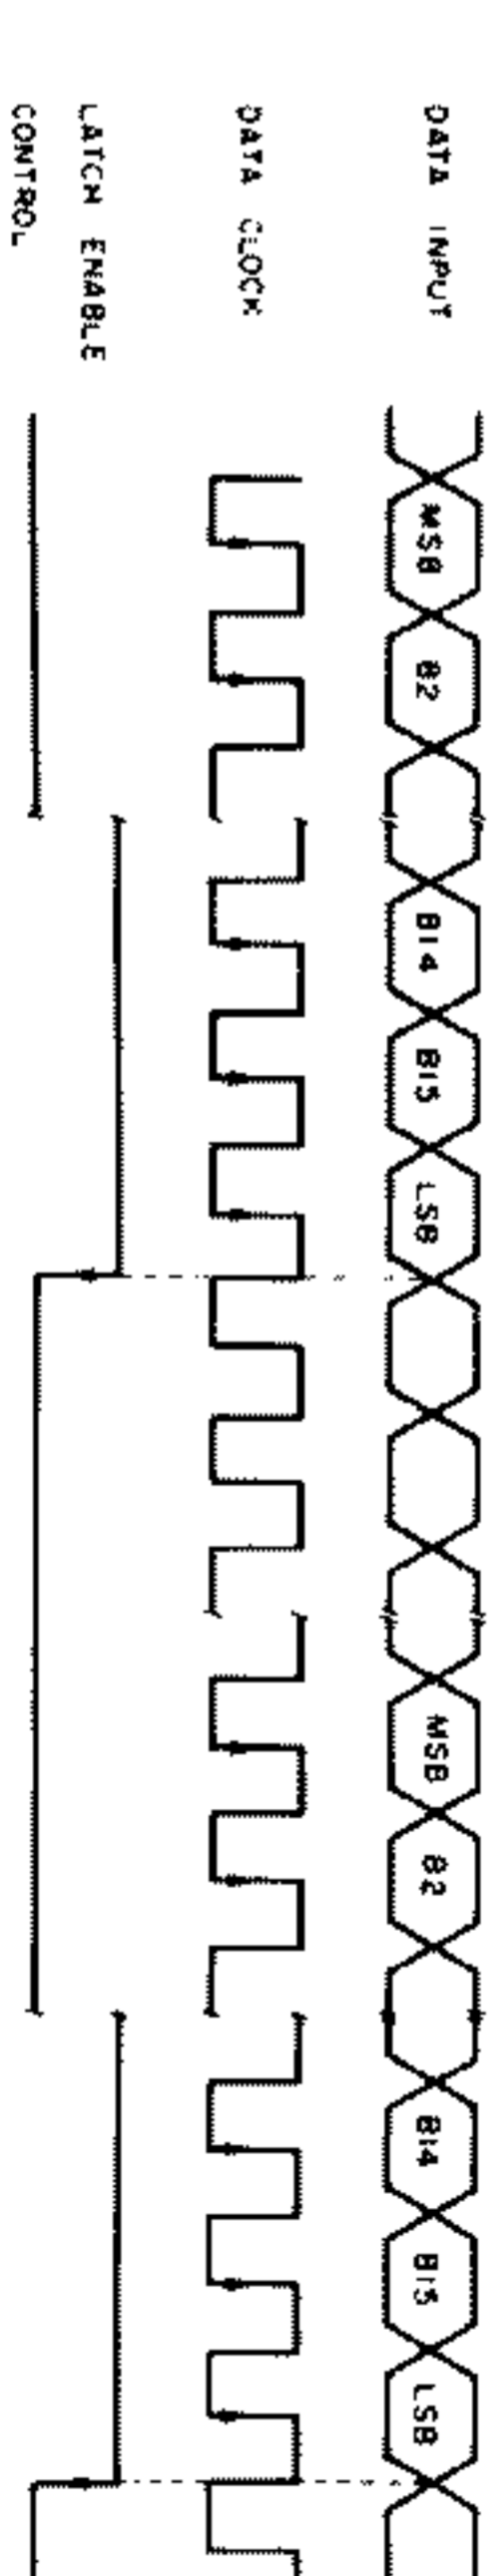

- The data format is 2's complement, MSB-first.
- Data is latched in the shift register at the rise of data clock.
- Latch enable control is performed by the frequency twice the L/R clock, and the LSB corresponds to its rise. It shall be synchronized with the fall of data clock.







| Symbol | Item                      | Buffer Name | Condition       | Min  | Typ | Max | Unit    |
|--------|---------------------------|-------------|-----------------|------|-----|-----|---------|
| VIH    | High-level input voltage  | SMT1        |                 | 4.0  |     |     | V       |
|        |                           | SMT1U       |                 | 4.0  |     |     | V       |
| VIL    | Low-level input voltage   | SMT1        |                 | 1.0  |     |     | V       |
|        |                           | SMT1U       |                 | 1.0  |     |     | V       |
| VOH    | High-level output voltage | B1          | IOH = -4.0 (mA) | 2.4  |     |     | V       |
|        |                           | B18         | IOH = -4.0 (mA) | 2.4  |     |     | V       |
| VOL    | Low-level output voltage  | B1          | IOL = 4.0 (mA)  | 0.4  |     |     | V       |
|        |                           | B18         | IOL = 4.0 (mA)  | 0.4  |     |     | V       |
| IHI    | High-level input current  | SMT1U       | VIN = VDD       | 10   |     |     | $\mu$ A |
|        |                           | SMT1D       | VIN = VDD       | 200  |     |     | $\mu$ A |
| ILI    | Low-level input current   | SMT1U       | VIN = VSS       | -10  |     |     | $\mu$ A |
|        |                           | SMT1D       | VIN = VSS       | -200 |     |     | $\mu$ A |
| IOZ    | Output leakage current    | INPAD(BUFB) | VIN = VSS       |      |     |     | $\mu$ A |
|        |                           | INPAD(BUFB) | VIN = VSS       |      |     |     | $\mu$ A |
| IDD(S) | Static consuming current  |             | VOUT = VDD, VSS | -10  |     |     | $\mu$ A |
|        |                           |             | VIN = VDD, VSS  | 36   |     |     | $\mu$ A |
| IDD(D) | Consuming current         |             |                 |      |     | 20  | mA      |

| Item                | Symbol | Specifications | Unit |
|---------------------|--------|----------------|------|
| Power voltage       | VDD    | 4.75-5.25      | V    |
| Operate temperature | Ta     | 0-70           | °C   |

| Item                | Symbol | Specifications  | Unit |
|---------------------|--------|-----------------|------|
| Power voltage       | VDD    | VSS-0.3-VSS+7.0 | V    |
| Input voltage       | Vin    | VSS-0.3-VDD+0.3 | V    |
| Input current       | Iin    | ±20             | mA   |
| Storage temperature | Tsig   | -40-125         | °C   |

Maximum rating (VSS=0V)

**IC26 (X32-1202-7): TC17G005AF-0053**  
Twin Quartz PLL Control Circuit  
Phase Comparator for VCXO

**CIRCUIT DESCRIPTION**

| Item                | Symbol | Specifications  | Unit |
|---------------------|--------|-----------------|------|
| Power voltage       | VDD    | VSS-0.3-VSS+7.0 | V    |
| Input voltage       | Vin    | VSS-0.3-VDD+0.3 | V    |
| Input current       | Iin    | ±20             | mA   |
| Storage temperature | Tsig   | -40-125         | °C   |

Maximum rating (VSS=0V)

| Symbol | Item                      | Buffer Name | Condition       | Min  | Typ | Max | Unit    |
|--------|---------------------------|-------------|-----------------|------|-----|-----|---------|
| VIH    | High-level input voltage  | SMT1        |                 | 4.0  |     |     | V       |
|        |                           | SMT1U       |                 | 4.0  |     |     | V       |
| VIL    | Low-level input voltage   | SMT1        |                 | 1.0  |     |     | V       |
|        |                           | SMT1U       |                 | 1.0  |     |     | V       |
| VOH    | High-level output voltage | B1          | IOH = -4.0 (mA) | 2.4  |     |     | V       |
|        |                           | B18         | IOH = -4.0 (mA) | 2.4  |     |     | V       |
| VOL    | Low-level output voltage  | B1          | IOL = 4.0 (mA)  | 0.4  |     |     | V       |
|        |                           | B18         | IOL = 4.0 (mA)  | 0.4  |     |     | V       |
| IHI    | High-level input current  | SMT1U       | VIN = VDD       | 10   |     |     | $\mu$ A |
|        |                           | SMT1D       | VIN = VDD       | 200  |     |     | $\mu$ A |
| ILI    | Low-level input current   | SMT1U       | VIN = VSS       | -10  |     |     | $\mu$ A |
|        |                           | SMT1D       | VIN = VSS       | -200 |     |     | $\mu$ A |
| IOZ    | Output leakage current    |             | VOUT = VDD, VSS | -10  |     |     | $\mu$ A |
|        |                           |             | VIN = VDD, VSS  | 36   |     |     | $\mu$ A |
| IDD(S) | Static consuming current  |             | VIN = VDD, VSS  | -10  |     |     | $\mu$ A |
|        |                           |             | VIN = VDD, VSS  | 36   |     |     | $\mu$ A |
| IDD(D) | Consuming current         |             |                 |      |     | 20  | mA      |

| Item                | Symbol | Specifications | Unit |
|---------------------|--------|----------------|------|
| Power voltage       | VDD    | 4.75-5.25      | V    |
| Operate temperature | Ta     | 0-70           | °C   |

| Item                | Symbol | Specifications  | Unit |
|---------------------|--------|-----------------|------|
| Power voltage       | VDD    | VSS-0.3-VSS+7.0 | V    |
| Input voltage       | Vin    | VSS-0.3-VDD+0.3 | V    |
| Input current       | Iin    | ±20             | mA   |
| Storage temperature | Tsig   | -40-125         | °C   |

Maximum rating (VSS=0V)

**IC1 (X88-1010-00): TC17G014AF-0073**  
Digital Audio Data Decoding IC


**CIRCUIT DESCRIPTION**

| Item                | Symbol | Specifications  | Unit |
|---------------------|--------|-----------------|------|
| Power voltage       | VDD    | VSS-0.3-VSS+7.0 | V    |
| Input voltage       | Vin    | VSS-0.3-VDD+0.3 | V    |
| Input current       | Iin    | ±20             | mA   |
| Storage temperature | Tsig   | -40-125         | °C   |

Maximum rating (VSS=0V)

| Pin No. | Pin Name | Buffer Name | I/O | Pin No. | Pin Name | Buffer Name | I/O |
|---------|----------|-------------|-----|---------|----------|-------------|-----|
| 2       | DLD      | B18         | I   | 23      | DOWN1    | B1          | O   |
| 3       | SEL      | SMT1        | I   | 24      | DOWN     | B1          | O   |
| 4       | VSS      |             |     | 25      | UP       | B1          | O   |
| 5       | BACKD    | B18         | O   | 26      | UNLOCK   | SMT1        | O   |
| 6       | BACKD    | B18         | O   | 27      | VAR      | B18         | O   |
| 7       | VSS2     |             |     | 28      | VSS      |             |     |
| 8       | VSS      |             |     | 29      | REF      | SMT1        | O   |
| 9       | RGH      | B18         | O   | 30      | C10      | B18         | O   |
| 10      | TEST1    | SMT1D       | I   | 31      | INV      | SMT1        | O   |
| 11      | D0D      | B18         | O   | 32      | F44      | SMT1        | O   |
| 12      | CK1      | B1          | O   | 33      | F32      | SMT1        | O   |
| 13      | CK10     | B1          | O   | 34      | RSI      | SMT1U       | O   |
| 14      | CK11     | B1          | O   | 35      | C11      | SMT1        | O   |
| 15      | CK12     | B1          | O   | 36      | MUJ      | SMT1U       | O   |
| 16      | INPAD    | INPAD       | I   | 37      | X111     | SMT1        | O   |
| 17      | F5961    | B18         | O   | 38      | CSEL1    | SMT1        | O   |
| 18      | F596     | B18         | O   | 39      | VDD      |             |     |
| 19      | AVP20    | B18         | O   | 40      | LR       | SMT1        | O   |
| 20      | AVP10    | B18         | O   | 41      | BCK      | SMT1        | O   |
| 21      | AVP11    | B18         | O   | 42      | DR       | SMT1        | O   |
| 22      | AVP11    | B18         | O   | 43      | DL       | SMT1        | O   |
|         |          |             |     | 44      | L1CK     | SMT1        | O   |

Terminal description

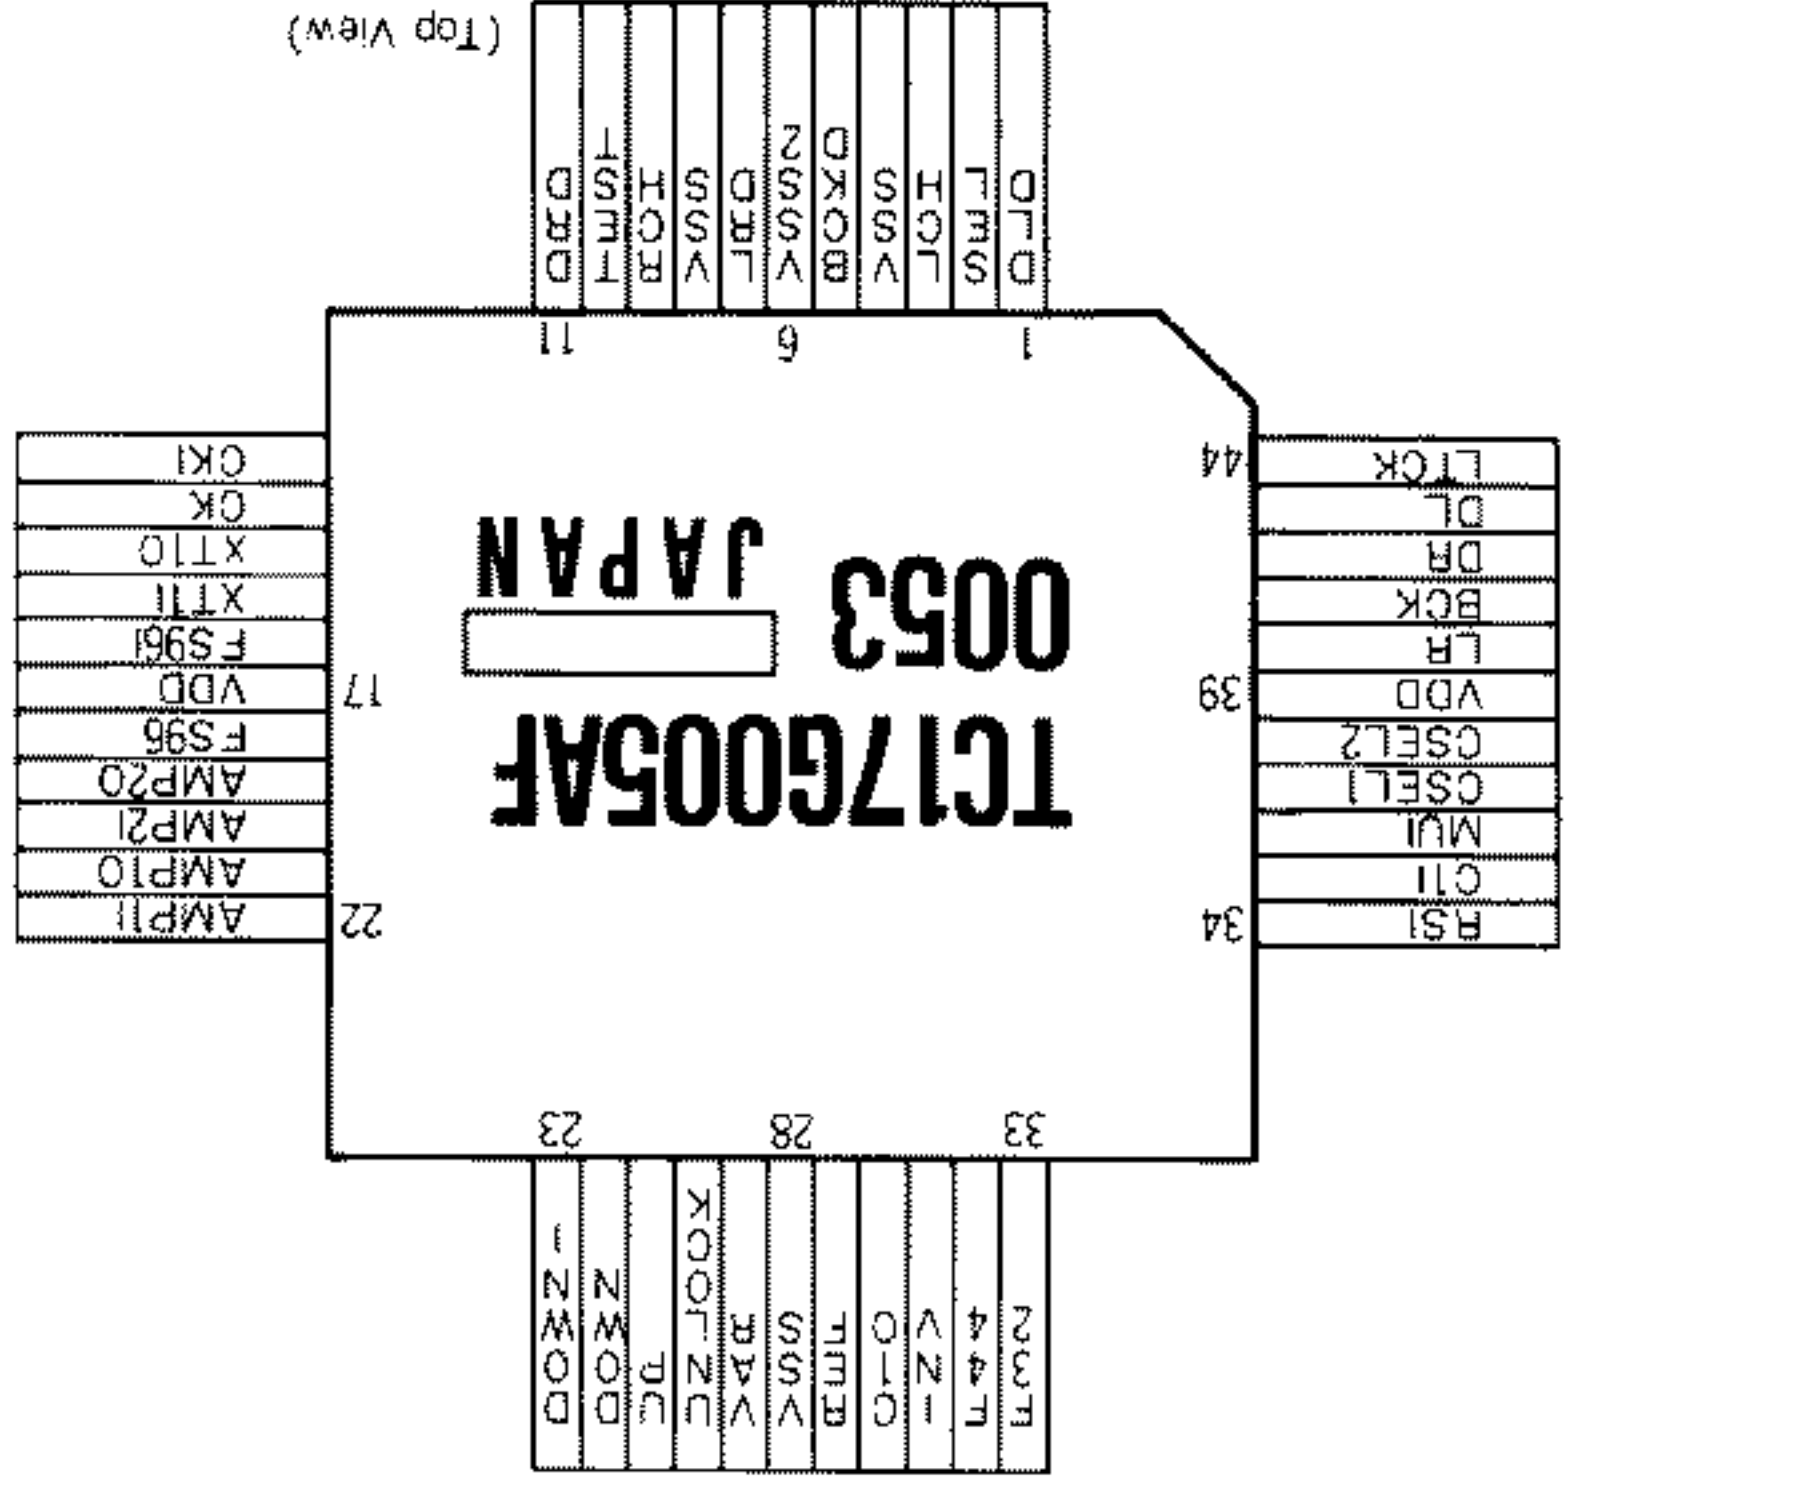


Terminal connection diagram

**CIRCUIT DESCRIPTION**

**KA-D1100EX**

| Pin No. | Pin Name | Buffer Name | I/O | Pin No. | Pin Name | Buffer Name | I/O |
|---------|----------|-------------|-----|---------|----------|-------------|-----|
| 1       | VSS      |             |     | 23      | ECT4     | B1          | O   |
| 2       | EDN      | B18         | O   | 24      | ECT3     | B1          | O   |
| 3       | EUP      | B18         | O   | 25      | ECT2     | B18         | O   |
| 4       | EFC      | B18         | O   | 26      | ECT1     | B18         | O   |
| 5       | EFC1     | B18         | O   | 27      | ECT0     | B18         | O   |
| 6       | VSS2     |             |     | 28      | VSS      |             |     |
| 7       | ETEST1   | SMT1D       | I   | 29      | EF48     | B18         | O   |
| 8       | ETEST2   | SMT1D       | I   | 30      | EF44     | B18         | O   |
| 9       | ENDAI    | SMT1D       | I   | 31      | EF32     | B18         | O   |
| 10      | VDD      |             |     | 32      | ECB1T    | B18         | O   |
| 11      | VSS      |             |     | 33      | ECG5NC   | B18         | O   |
| 12      | ELOCK    | B1          | O   | 34      | VSS      |             |     |
| 13      | EAP1L    | B18         | O   | 35      | ERSI     | SMT1U       | O   |
| 14      | EAP1R    | B18         | O   | 36      | N.C      |             |     |
| 15      | EWCK     | B18         | O   | 37      | N.C      |             |     |
| 16      | EDATA    | B18         | O   | 38      | N.C      |             |     |
| 17      | VDD      |             |     | 39      | VDD      |             |     |
| 18      | VSS      |             |     | 40      | VSS2     |             |     |
| 19      | ENMP     | B1          | O   | 41      | N.C      |             |     |
| 20      | ELOCK    | B18         | O   | 42      | N.C      |             |     |
| 21      | ELOCK    | B18         | O   | 43      | EMDATA   | SMT1        | O   |
| 22      | EF384    | B1          | O   | 44      | EVCD     | SMT1        | O   |

Terminal description

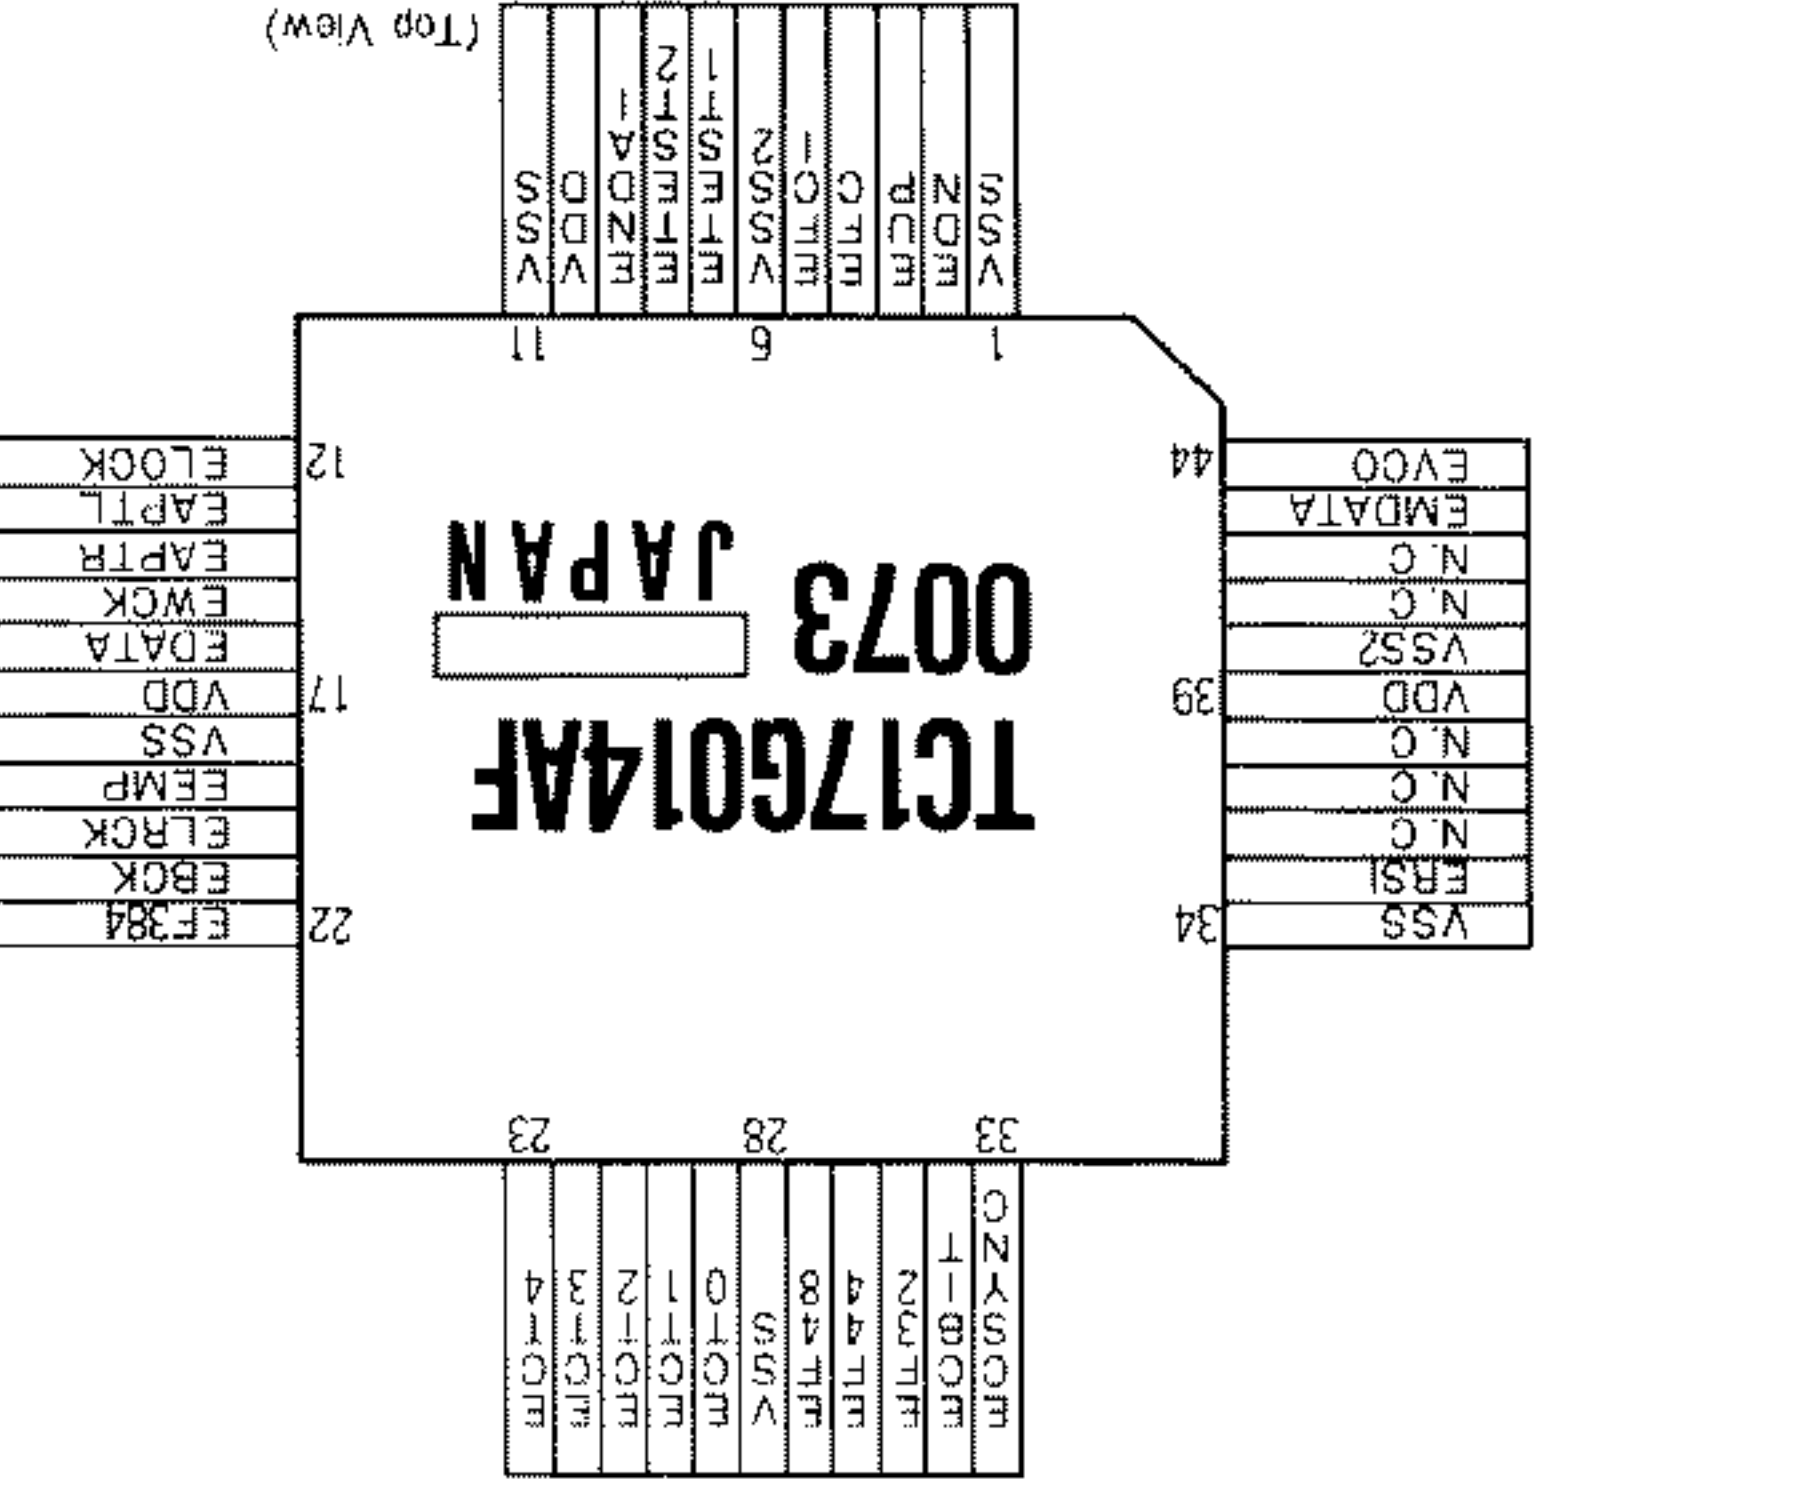



Terminal connection diagram

**CIRCUIT DESCRIPTION**

**KA-D1100EX**





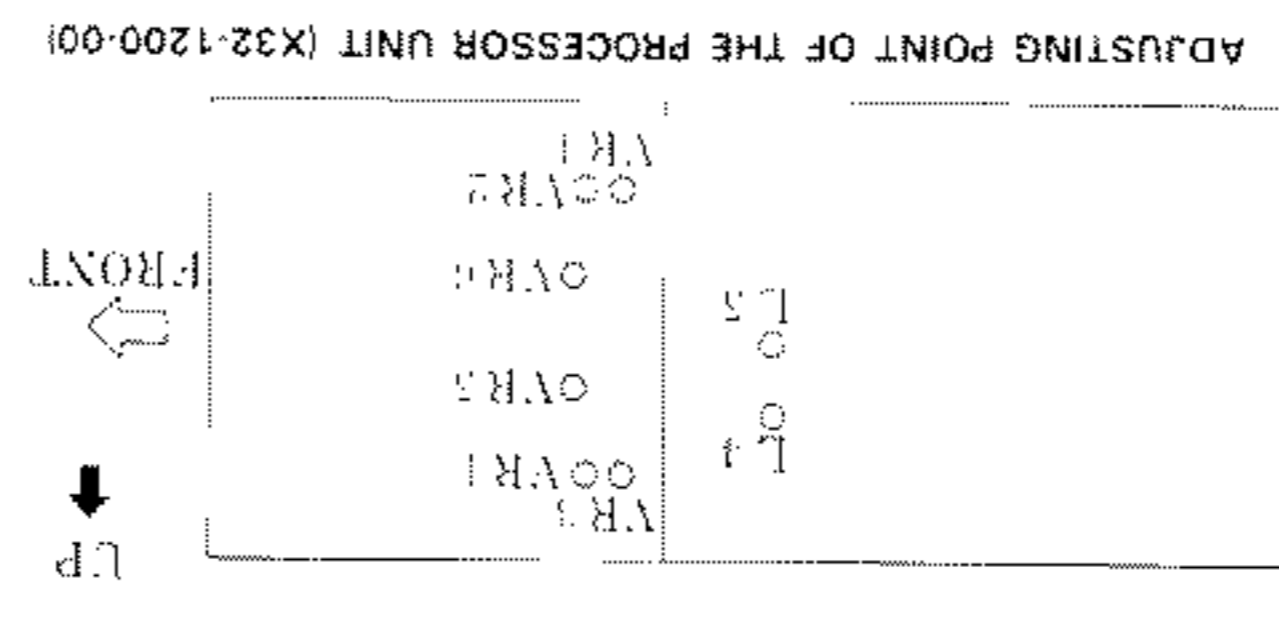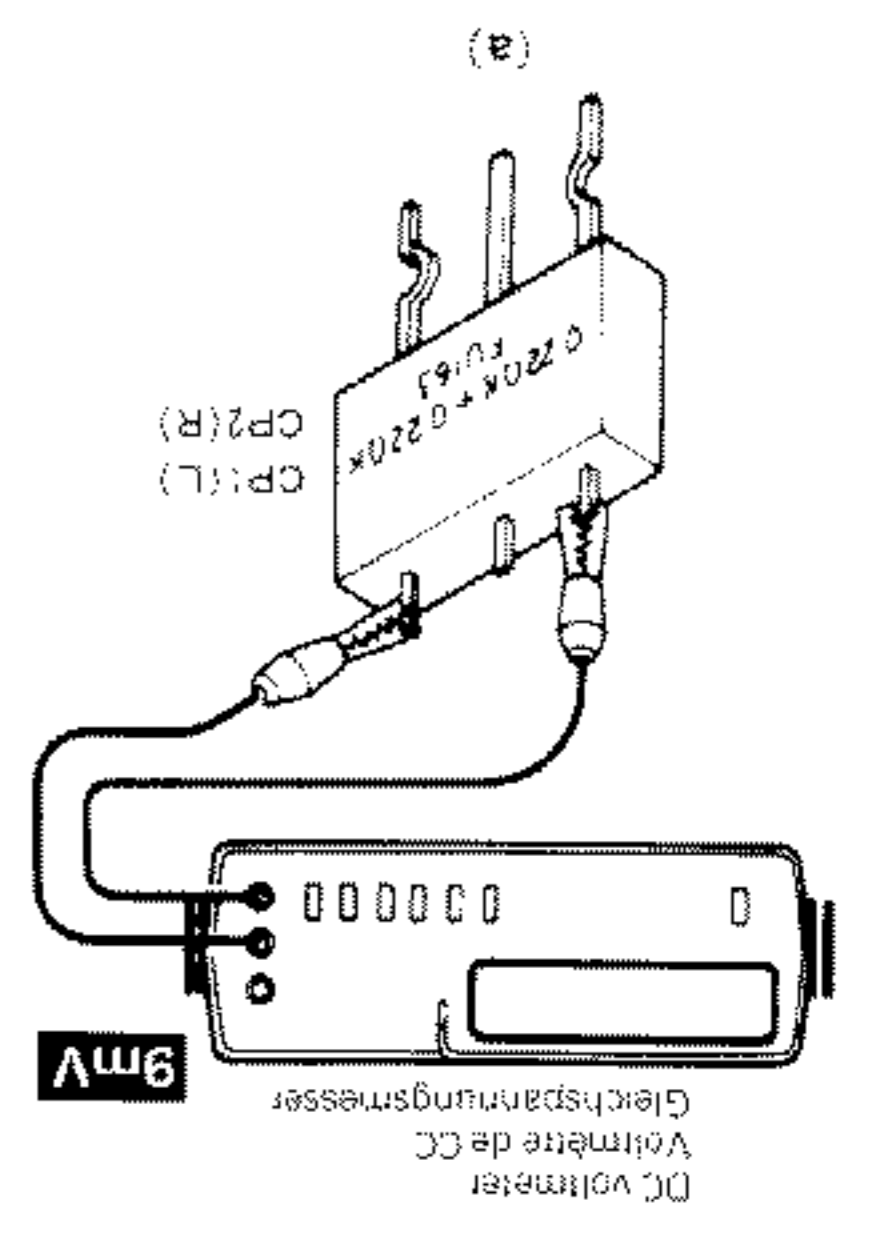

| No. | ITEM         | INPUT  | SETTINGS  | OUTPUT   | AMPLIFIER | ALIGNMENT | POINTS | ALOX FOR | FIG. |
|-----|--------------|--|-----------|--|-----------|-----------|--------|----------|------|
| 1   | TABLE        | -  | VOLUME: 0 | VR1 (L)<br>VR2 (R)<br>VR3 (L)<br>VR4 (R)                               | 9AV       | (a)       |        |          |      |
| 2   | VCO          | Remove J107<br>and apply<br>2.5V DC to TP4.<br>(X32-)<br>Connect a frequency<br>counter to TP6.  | -         | LS<br>(After adjustment,<br>attach J107 again.)<br>(X32-)<br>16.984MHz | (b)       |           |        |          |      |
| 3   | VCO          | Remove J107<br>and apply<br>2.5V DC to TP4.<br>(X32-)<br>Connect a frequency<br>counter to TP5.  | -         | L4<br>(After adjustment,<br>attach J107 again.)<br>(X32-)<br>18.432MHz | (c)       |           |        |          |      |
| 4   | OUTPUT LEVEL | Connect a digital<br>multimeter across<br>the digital input.<br>of 10KΩ<br>and AC voltmeter<br>to REC OUT.<br>Adjust VR5 and VR6<br>to minimize<br>the distortion<br>rate figure.                                    | -         | VR1, 2<br>(X32-)<br>Output level: 2V                                   |           |           |        |          |      |
| 5   | DISTORTION   | Connect a digital<br>multimeter across<br>the digital input.<br>of 10KΩ<br>and distortion meter<br>to REC OUT.<br>Adjust VR5 and VR6<br>alternately for a few<br>times to minimize<br>the distortion<br>rate figure. | -         | VR3, 4<br>(X32-)   |           |           |        |          |      |

### ADJUSTMENT



| NR. | GEGENSTAND                | EINGANGS-EINSTELLUNG   | AUSGANGS-EINSTELLUNG | VERSTÄRKER-EINSTELLUNG   | ABGLEICH-PUNKTE | ABB. |
|-----|---------------------------|--|----------------------|--|-----------------|------|
| 1   | LEERLAUFSTROM             | -  | VOLUME: 0            | VR1 (L)<br>VR2 (R)<br>VR3 (L)<br>VR4 (R)                                   | 9AV             | (a)  |
| 2   | VCO                       | J107 entfernen und an TP4 anschließen.<br>Einen Frequenzzähler an TP6 anschließen.<br>(X32-)<br>16,984MHz  | -                    | LS<br>(Nach der Einstellung J107 wieder abtrennen.)<br>(X32-)<br>16,984MHz | (b)             |      |
| 3   | VCO                       | J107 entfernen und an TP5 anschließen.<br>Einen Frequenzzähler an TP5 anschließen.<br>an TP4 anschließen.<br>(X32-)<br>18,432MHz   | -                    | L4<br>(Nach der Einstellung J107 wieder abtrennen.)<br>(X32-)<br>18,432MHz | (c)             |      |
| 4   | AUSGANGSPEGEL-EINSTELLUNG | Eine Last an den Digital-Spieler oder CD-Spieler anschließen.<br>Einen Voltmeter an den Digital-Spieler oder CD-Spieler anschließen.<br>Spannungsmesser an REC OUT anschließen.<br>SIGNAL erzeugen.<br>SONY Typ 4, (Testdisc: SONY Typ 4, Titel 2) | -                    | VR1, 2<br>(X32-)<br>Ausgangspiegel: 2V                                     |                 |      |
| 5   | VERZERRUNGSEINSTELLUNG    | Eine Last an den Digital-Spieler oder CD-Spieler anschließen.<br>Einen digitalen Signalgenerator oder CD-Spieler anschließen.<br>Einen Verzerrungsmeter an REC OUT anschließen.<br>SIGNAL erzeugen.<br>SONY Typ 4, (Testdisc: SONY Typ 4, Titel 2) | -                    | VR3, 4<br>(X32-)<br>VR5, 6   |                 |      |

### ABGLEICH



| No. | ITEM                    | REGLAGE DE  | REGLAGE DE                               | REGLAGE DE   | REGLAGE DE | REGLAGE DE |
|-----|-------------------------|---|--|--|------------|------------|
| 1   | COURANT DE POLARISATION | VOLUME: 0   | VR1 (L)<br>VR2 (R)<br>VR3 (L)<br>VR4 (R) | 9AV  | (a)        |            |
| 2   | VCO                     | Retirer J107 et appliquer de fréquence à TP5.<br>(X32-)   | -  | LS<br>(Après l'ajustement, fixer J107 à nouveau.)<br>(X32-)<br>16,984MHz   | (b)        |            |
| 3   | VCO                     | Retirer J107 et appliquer de fréquence à TP5.<br>(X32-)   | -  | L4<br>(Après l'ajustement, fixer J107 à nouveau.)<br>(X32-)<br>18,432MHz   | (c)        |            |
| 4   | NIVEAU DE SORTIE        | Reconnecter un récepteur de signal numérique à l'entrée d'un lecteur CD (Disque test: SONY Type 4, (Disque test: SONY Type 4, Titre 2)) | -  | VR1, 2<br>(X32-)<br>Niveau de sortie: 2V   |            |            |
| 5   | LA DISTORSION           | Reconnecter un récepteur de signal numérique à l'entrée d'un lecteur CD (Disque test: SONY Type 4, (Disque test: SONY Type 4, Titre 2)) | -  | VR3, 4<br>(X32-)<br>Ajuster les VR3 alternativement et 4 (ou 5 et 6) plusieurs fois pour minimiser le chiffre de taux de distorsion. |            |            |

### REGLAGE











**62 Note:** KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

| Item   | Specification   |
|--|---|
| Power Output   | 125 watts per channel minimum RMS, both channels driven, at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.004% total harmonic distortion   |
| Maximum Continuous Power Output (DIN) 1 kHz at 4 ohms                  | 190 W   |
| Maximum Continuous Power Output (IEC/NF) from 63 Hz to 12,500 Hz, 0.7% | 150 W + 150 W   |
| Total Harmonic Distortion at 8 ohms                                    | 150 W per channel at 4 ohms   |
| Dynamic Power  | 150 W per channel at 2 ohms   |
| Maximum Continuous Power Output (DIN) 1 kHz at 8 ohms                  | 150 W   |
| Maximum Continuous Power Output (DIN) 1 kHz at 4 ohms                  | 150 W   |
| Maximum Continuous Power Output (DIN) 1 kHz at 8 ohms                  | 150 W   |
| Frequency Response   | 0.004% at rated output power at 8 ohms<br>0.003% at 1/2 rated output power at 8 ohms<br>0.006% at rated output power at 8 ohms<br>0.004% at rated output power at 8 ohms  |
| Line Input to Speaker Output   | 0.004% at 18 Hz<br>6 dB/Oct. at 18 Hz<br>Subsonic Filter  |
| Tone Control   | BASS (at 200 Hz)<br>TREBLE (at 3 kHz)<br>Loudness Control (at 30 dB Volume Level)   |
| Damping Factor   | 1,000 (50 Hz at 8 ohms)   |
| Input Sensitivity/Impedance  | 2.5 mV/47 kohms<br>PHONO (MM)<br>PHONO (MC)<br>TUNER/AUX/TAPE   |
| Phono Maximum Input Level (PHONO to TAPE REC)                          | 200 mV, at 1 kHz<br>150 mV, at 1 kHz  |
| Output Level/Impedance   | 150 mV/330 ohms   |
| < D/A Converter Section >  | Input Sampling Frequencies: 32 kHz/44.1 kHz/48 kHz<br>Signal to Noise Ratio: 108 dB<br>Total Harmonic Distortion: 0.0025% at 1 kHz<br>Channel Separation: 103 dB at 1 kHz<br>Digital Inputs: Optical: -15 ~ -25 dbm<br>Coaxial: 0.5 Vp-p/75 ohms<br>DAT Monitor: 0.5 Vp-p/75 ohms<br>Digital Output: Optical: -15 ~ -25 dbm |
| General >  | Power Consumption: 350 W<br>Dimensions: W 440 mm (17.5/16")<br>H 171 mm (6.3/4")<br>D 441 mm (17.3/8")<br>Weight (Net): 19.5 kg (42.9 lb)   |
| Accessories >  | Optical fiber cable: 1<br>RCA pin-plug cord: 1  |

### SPECIFICATIONS










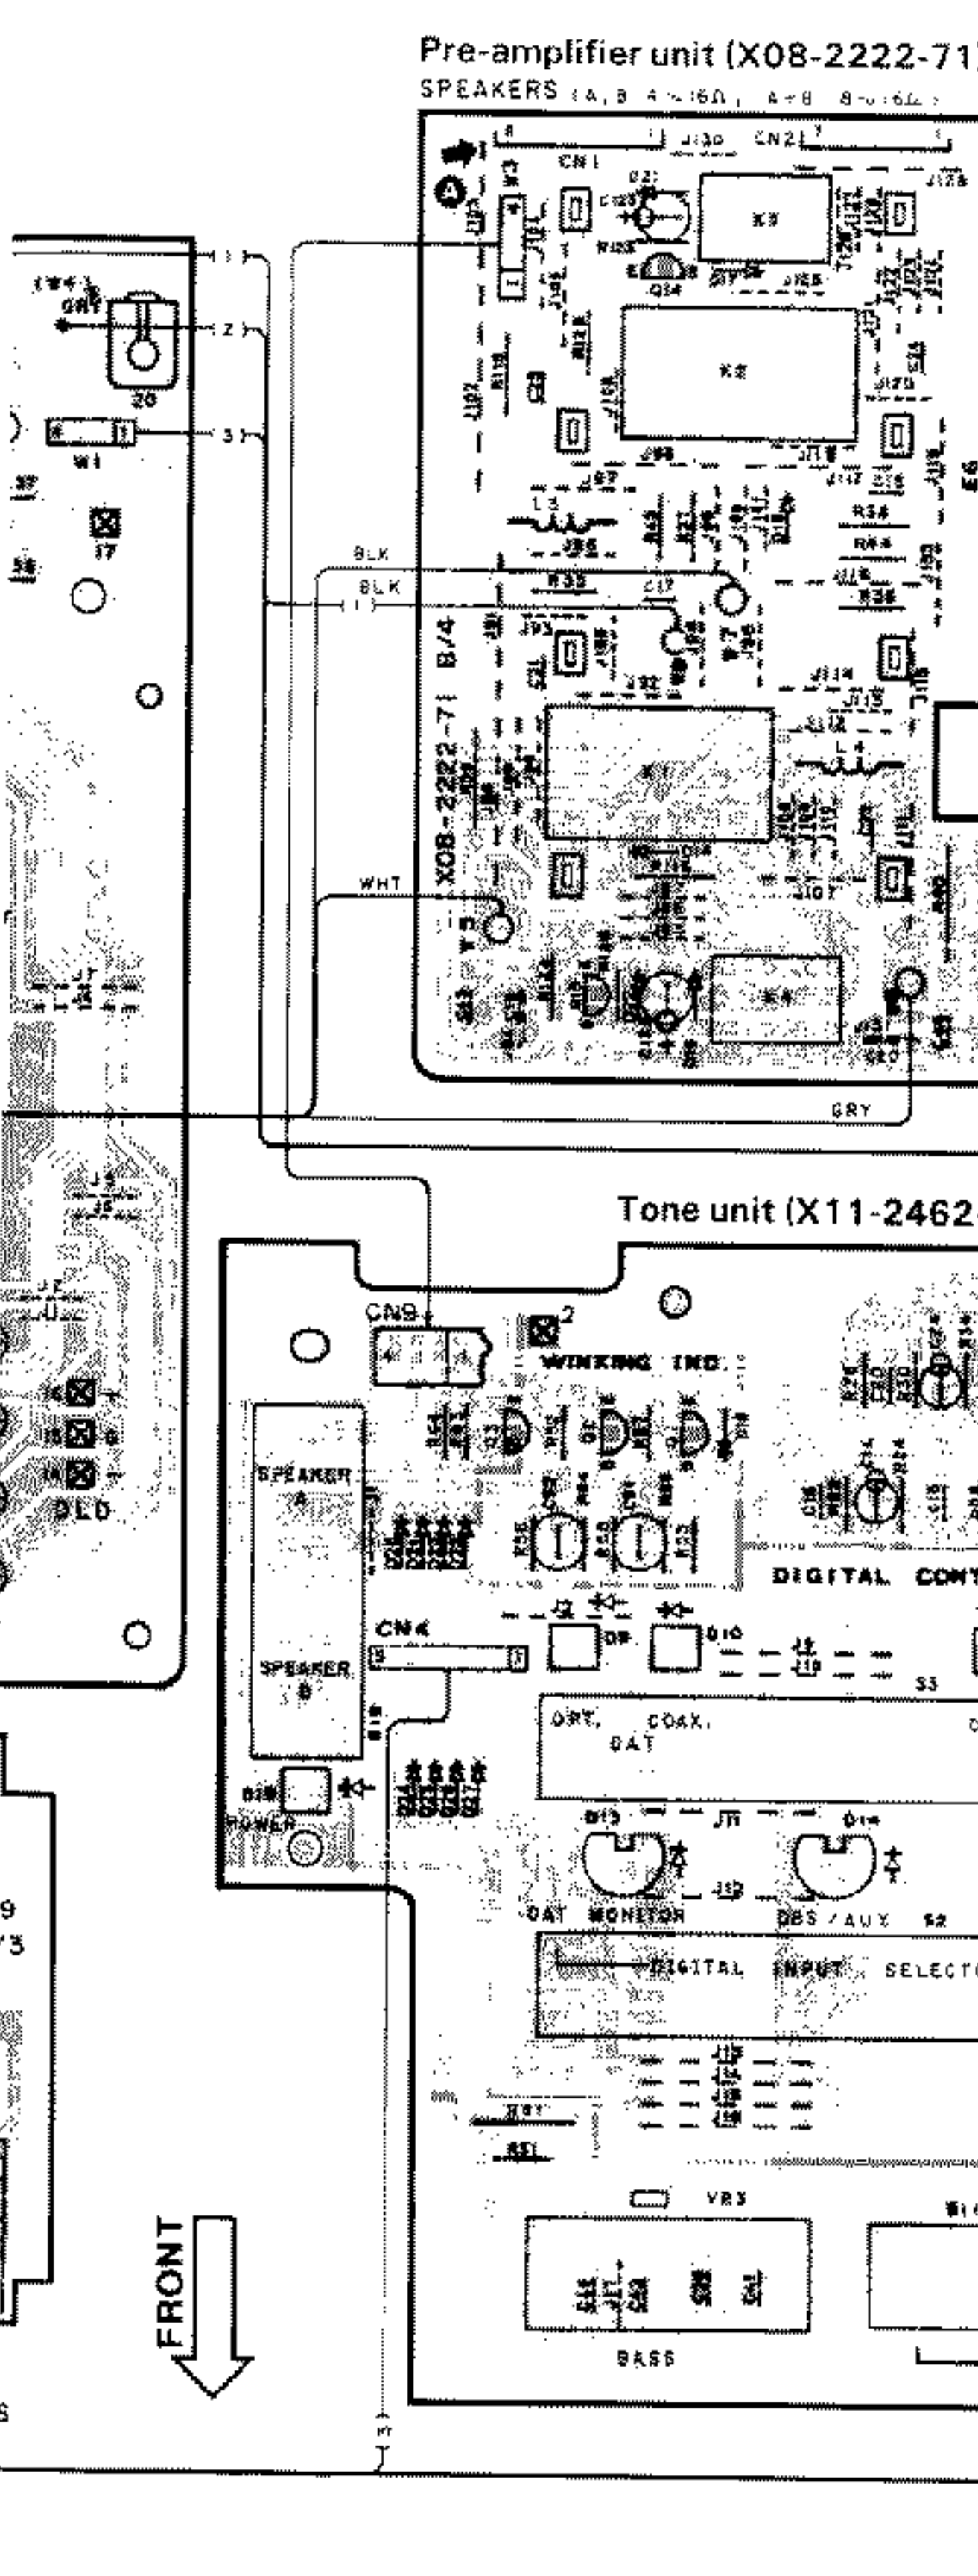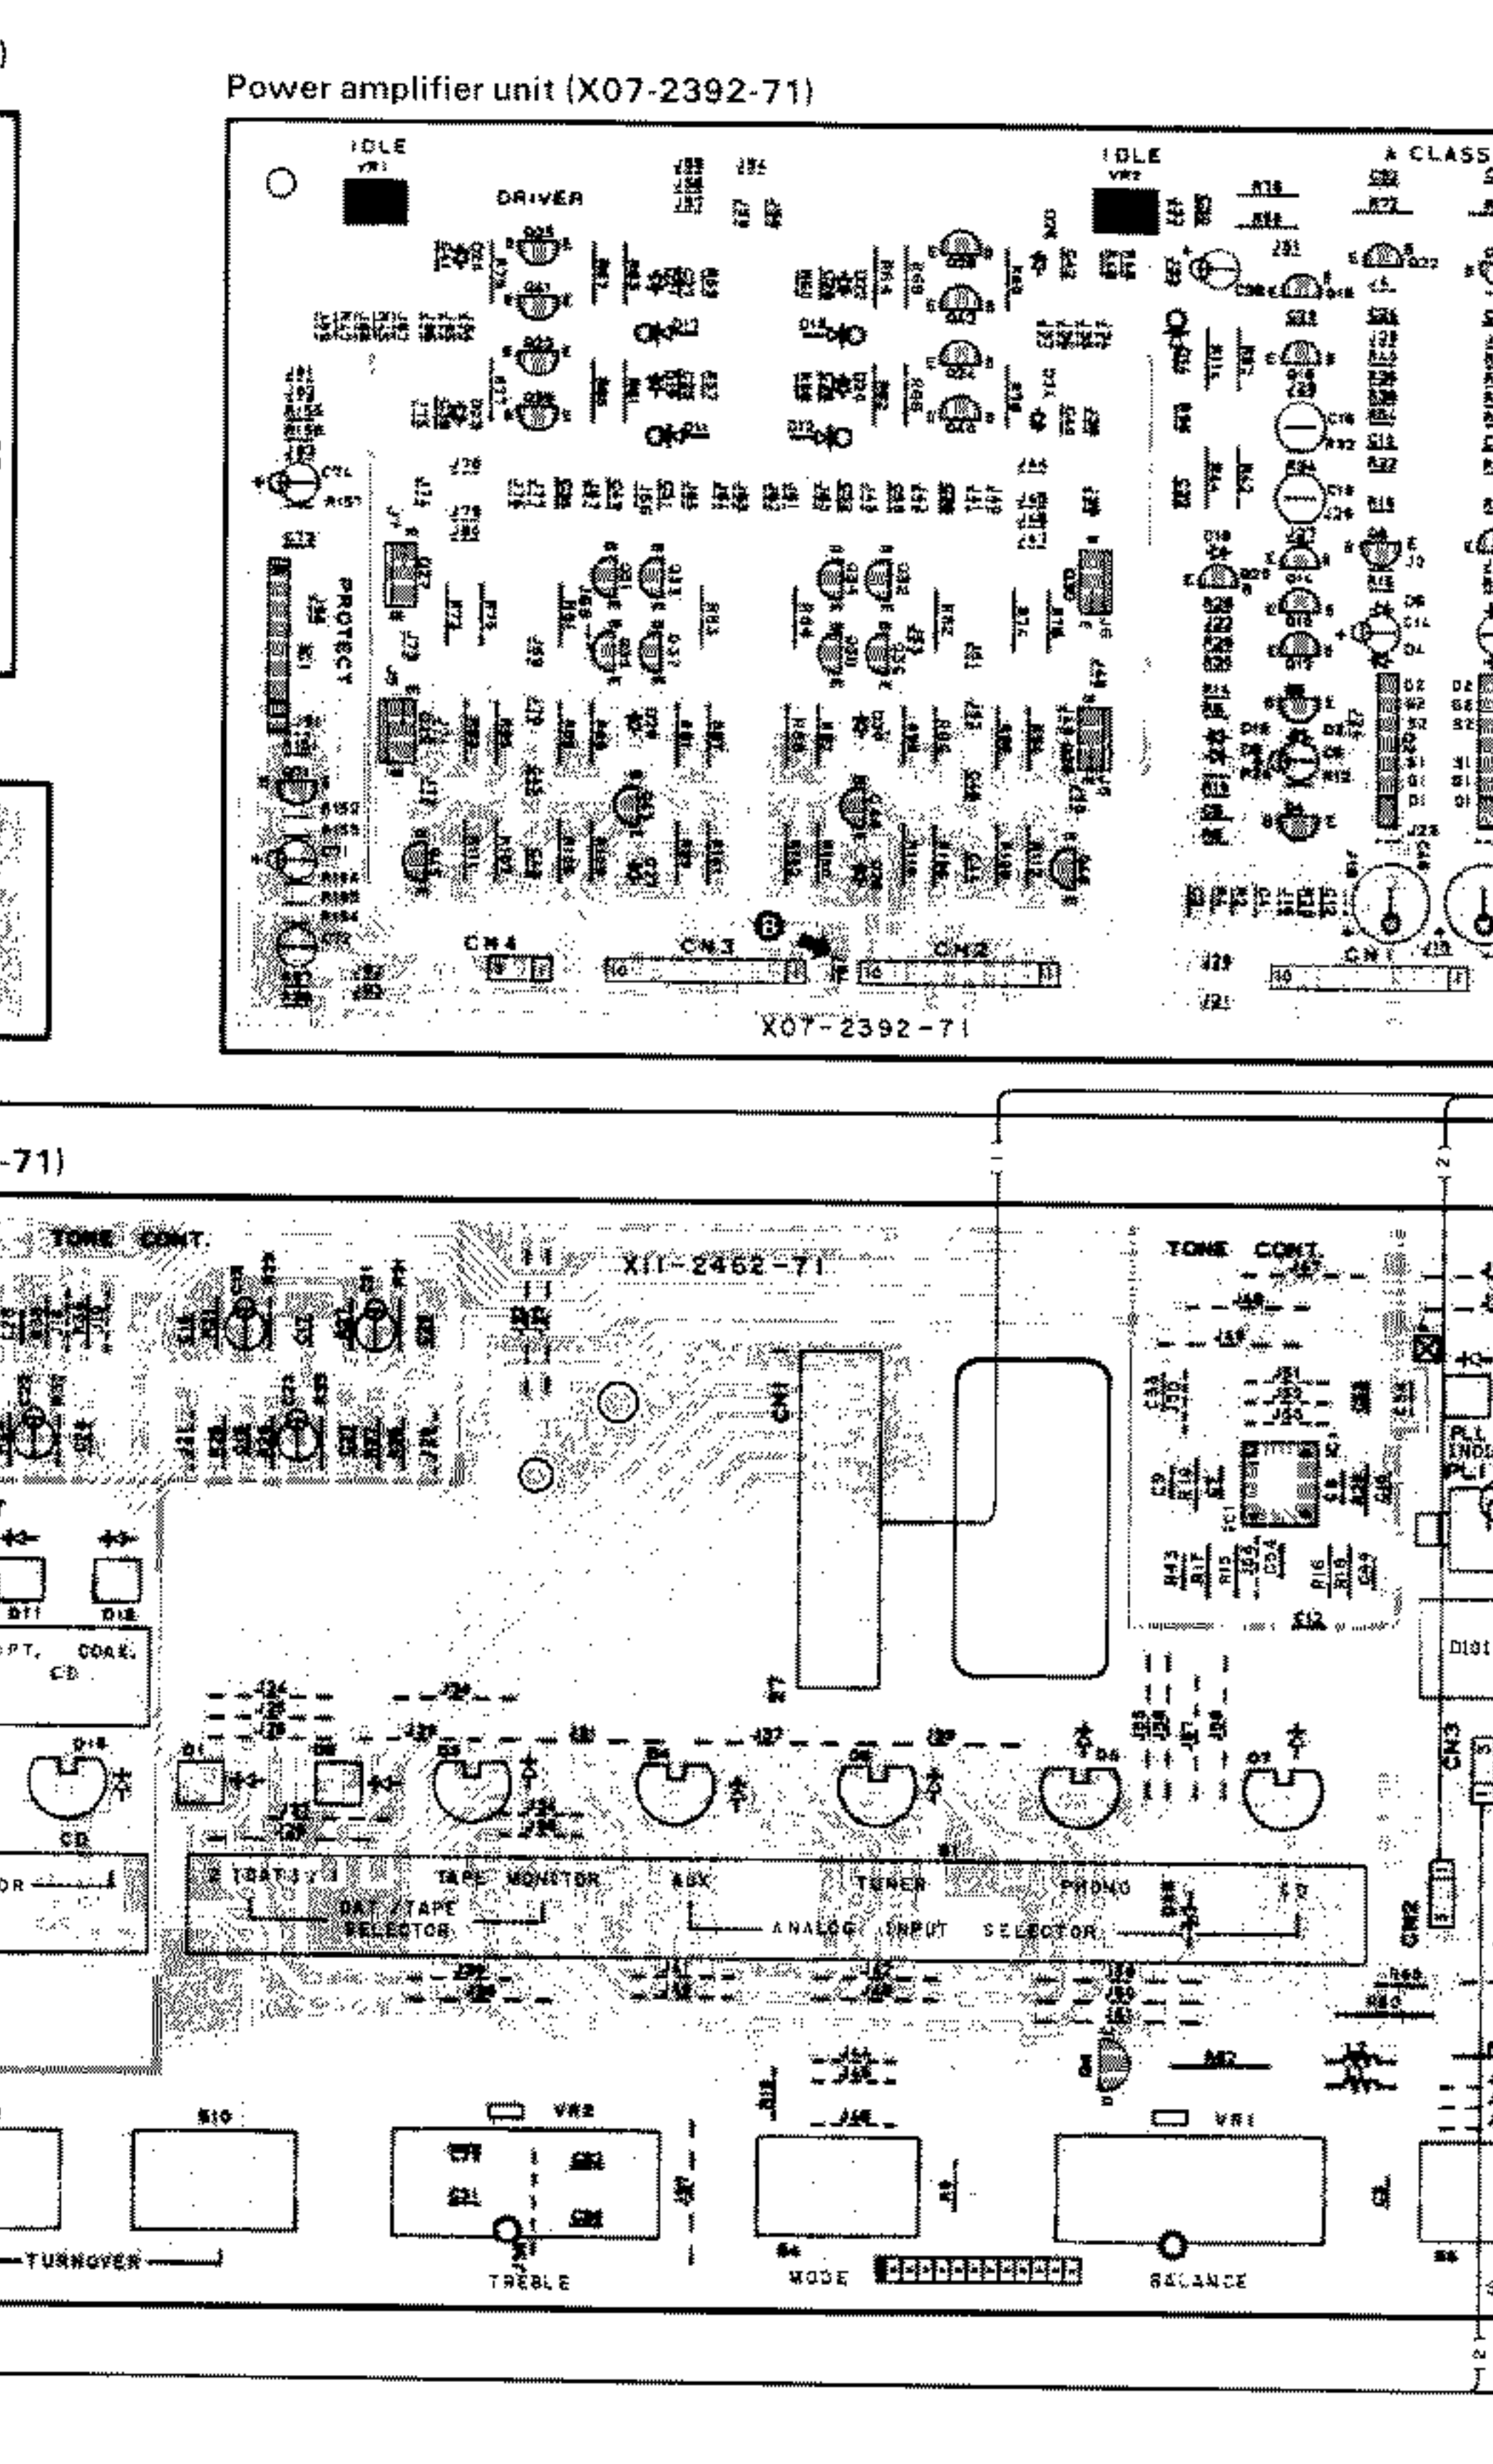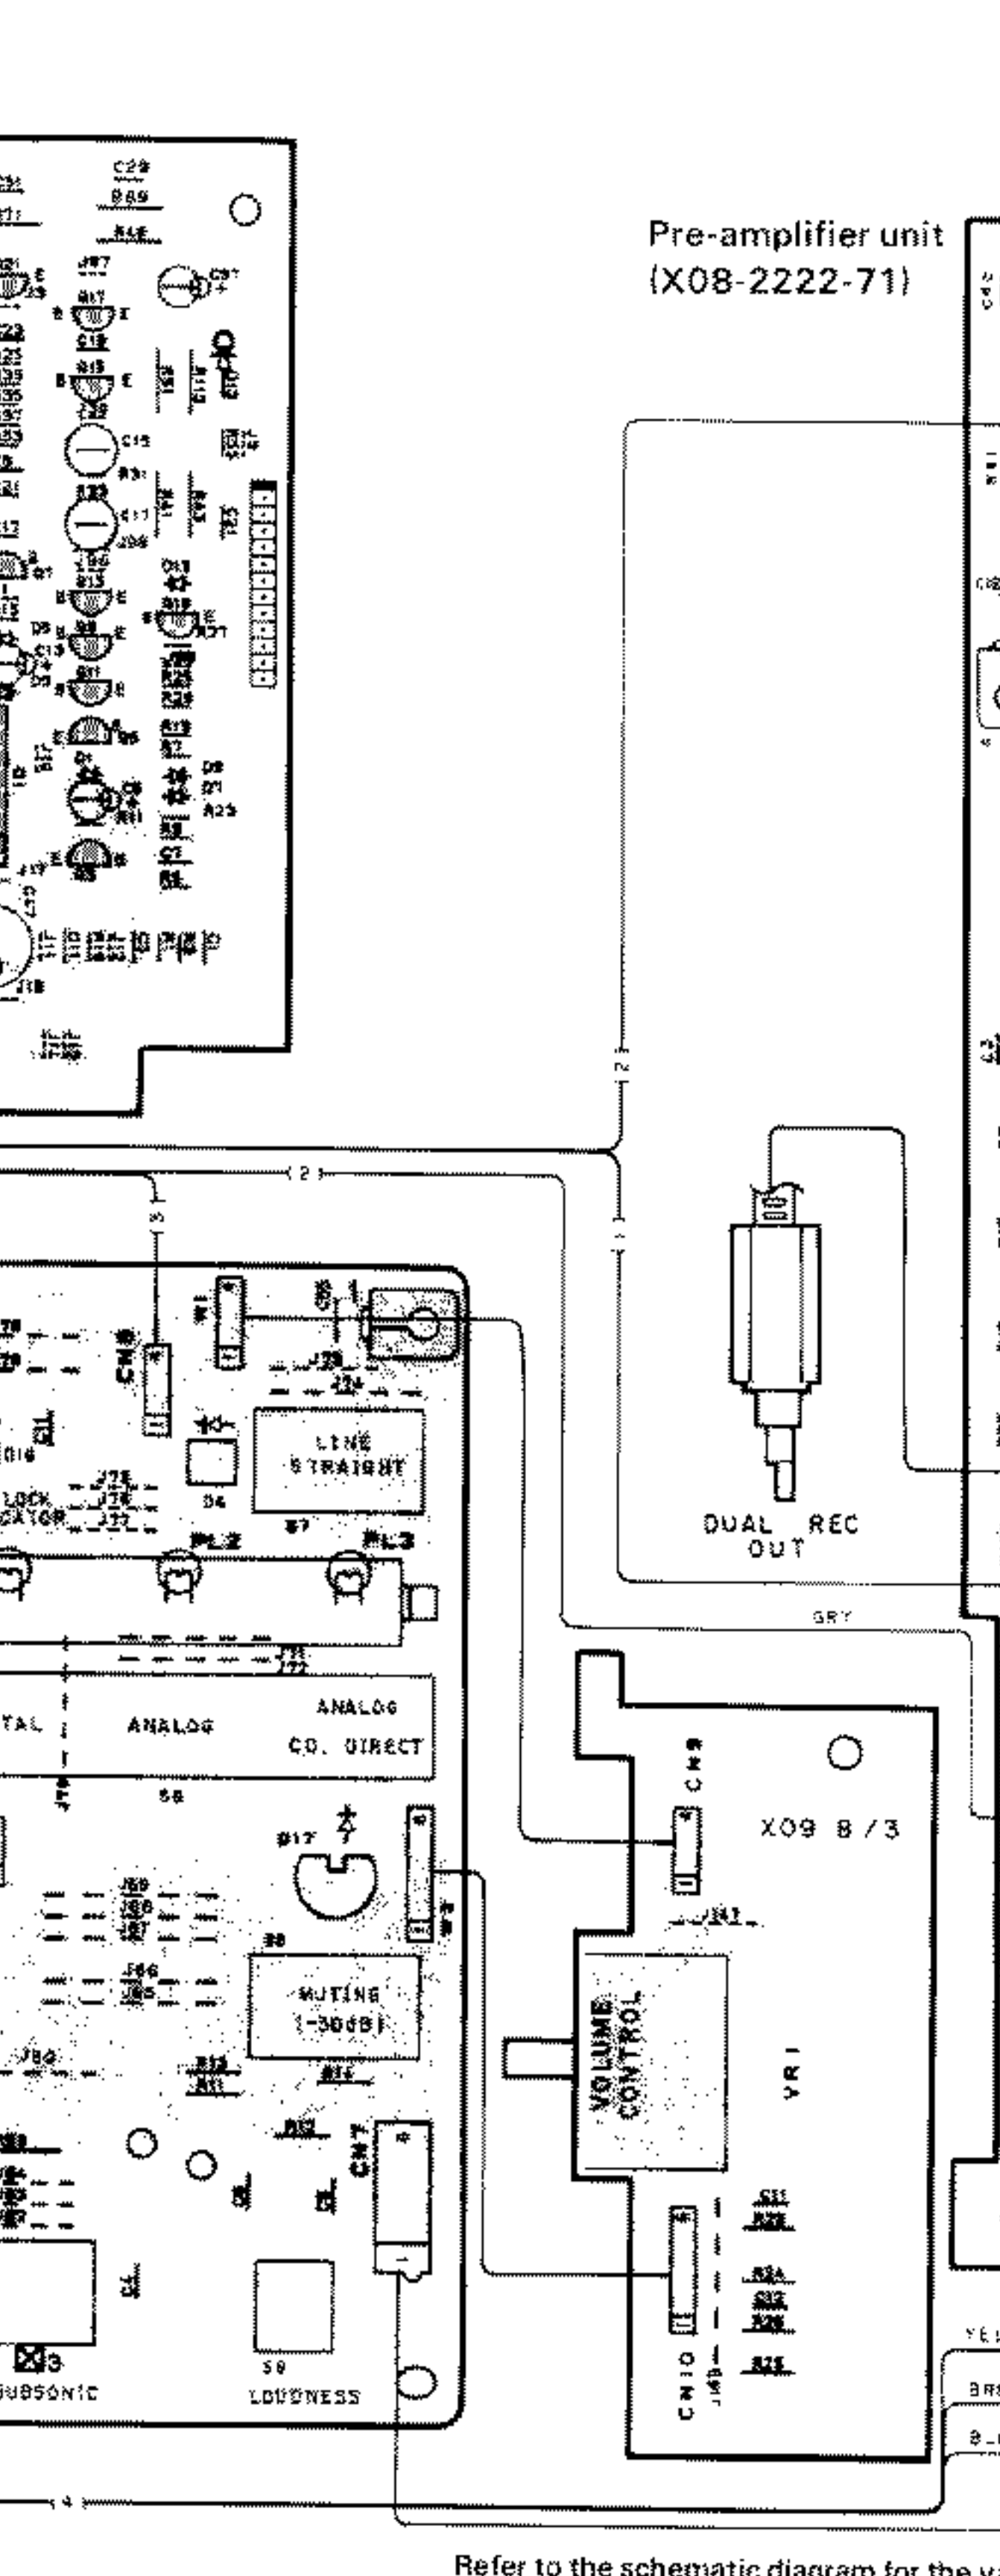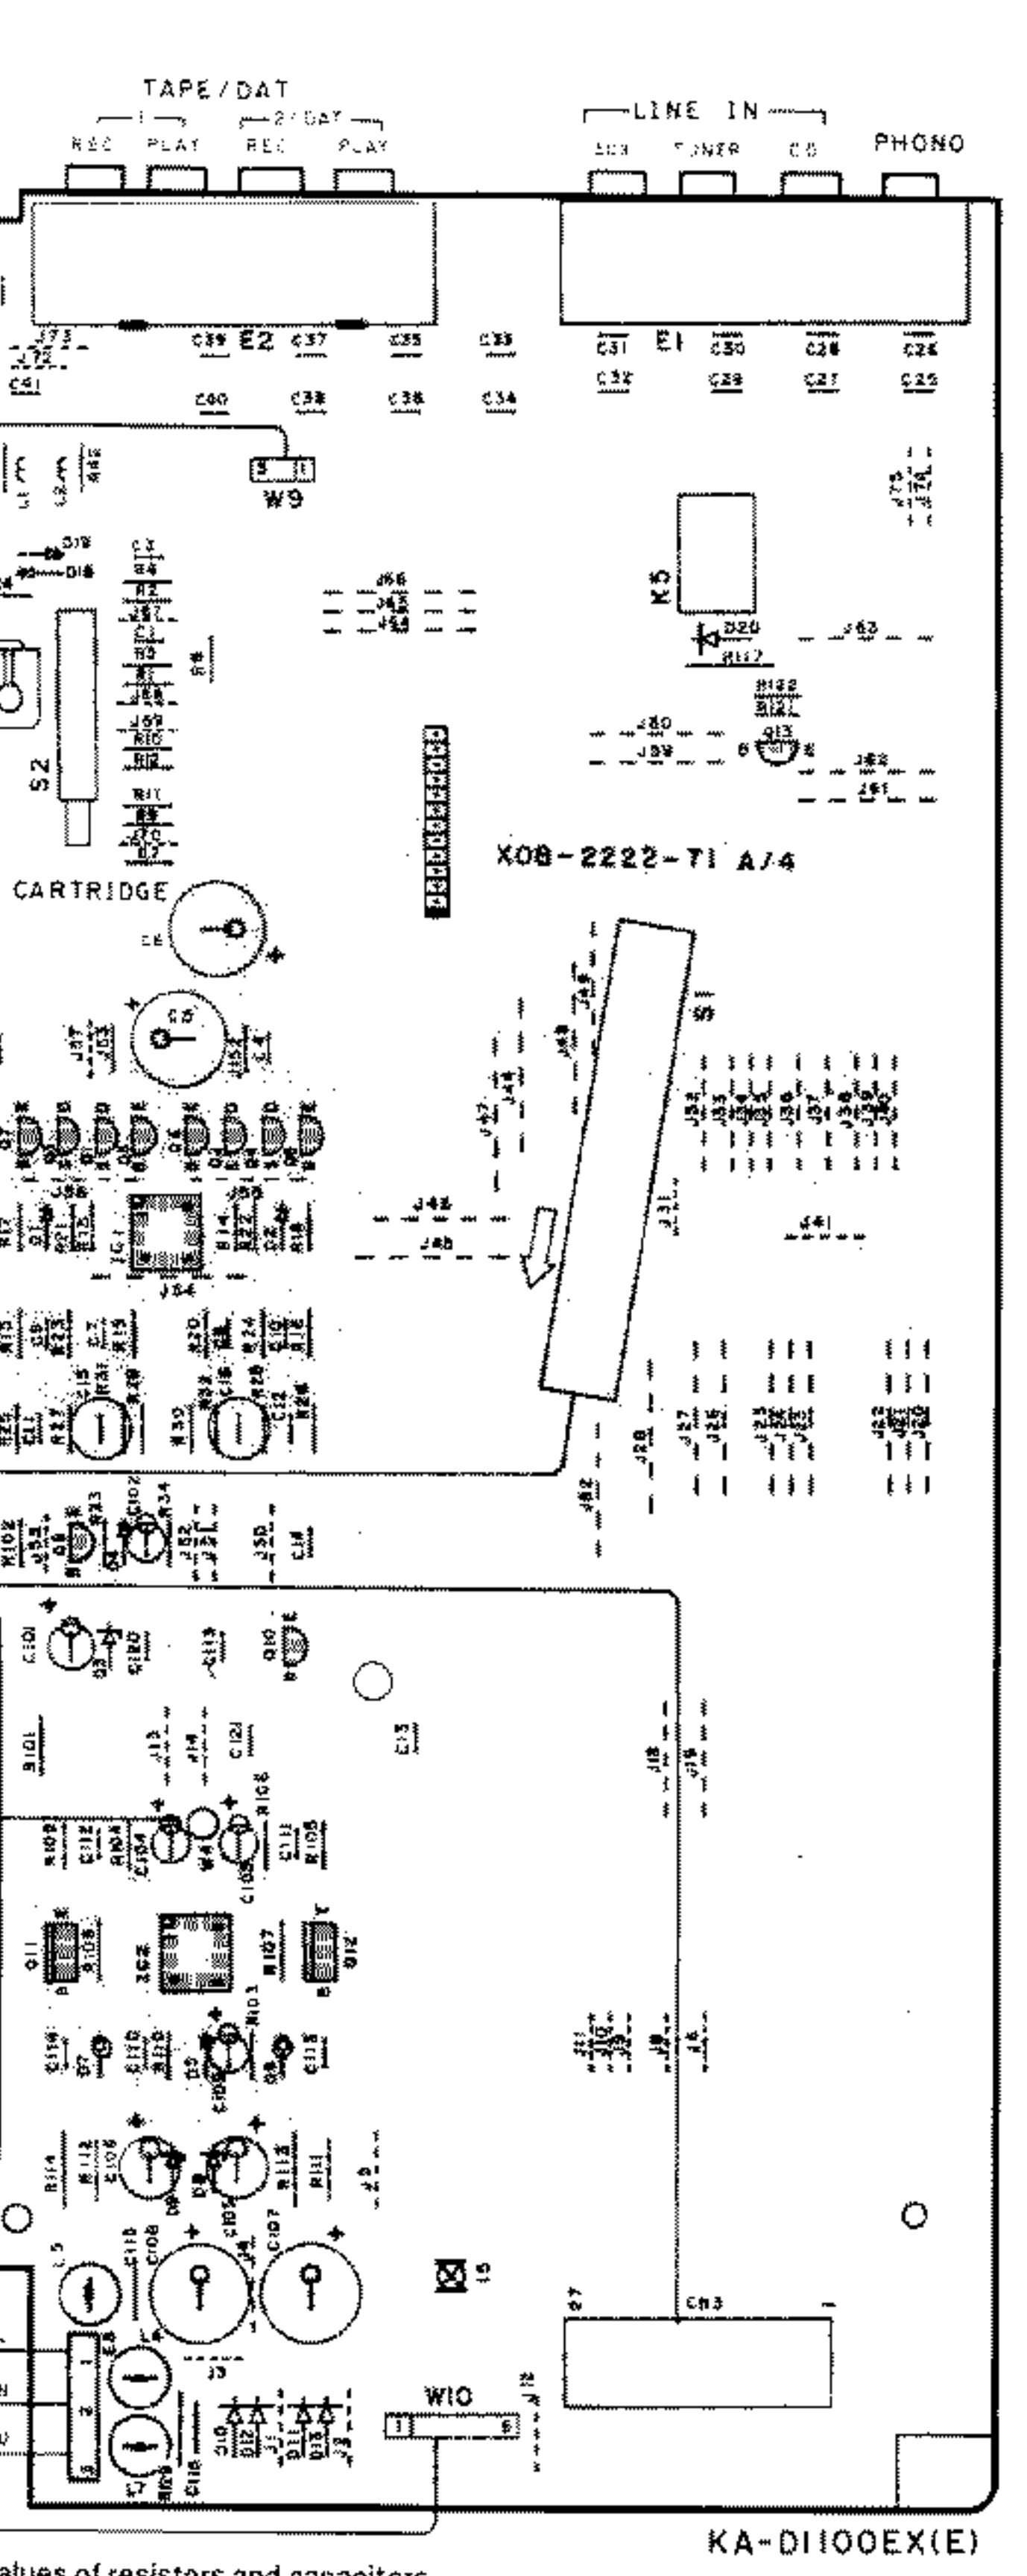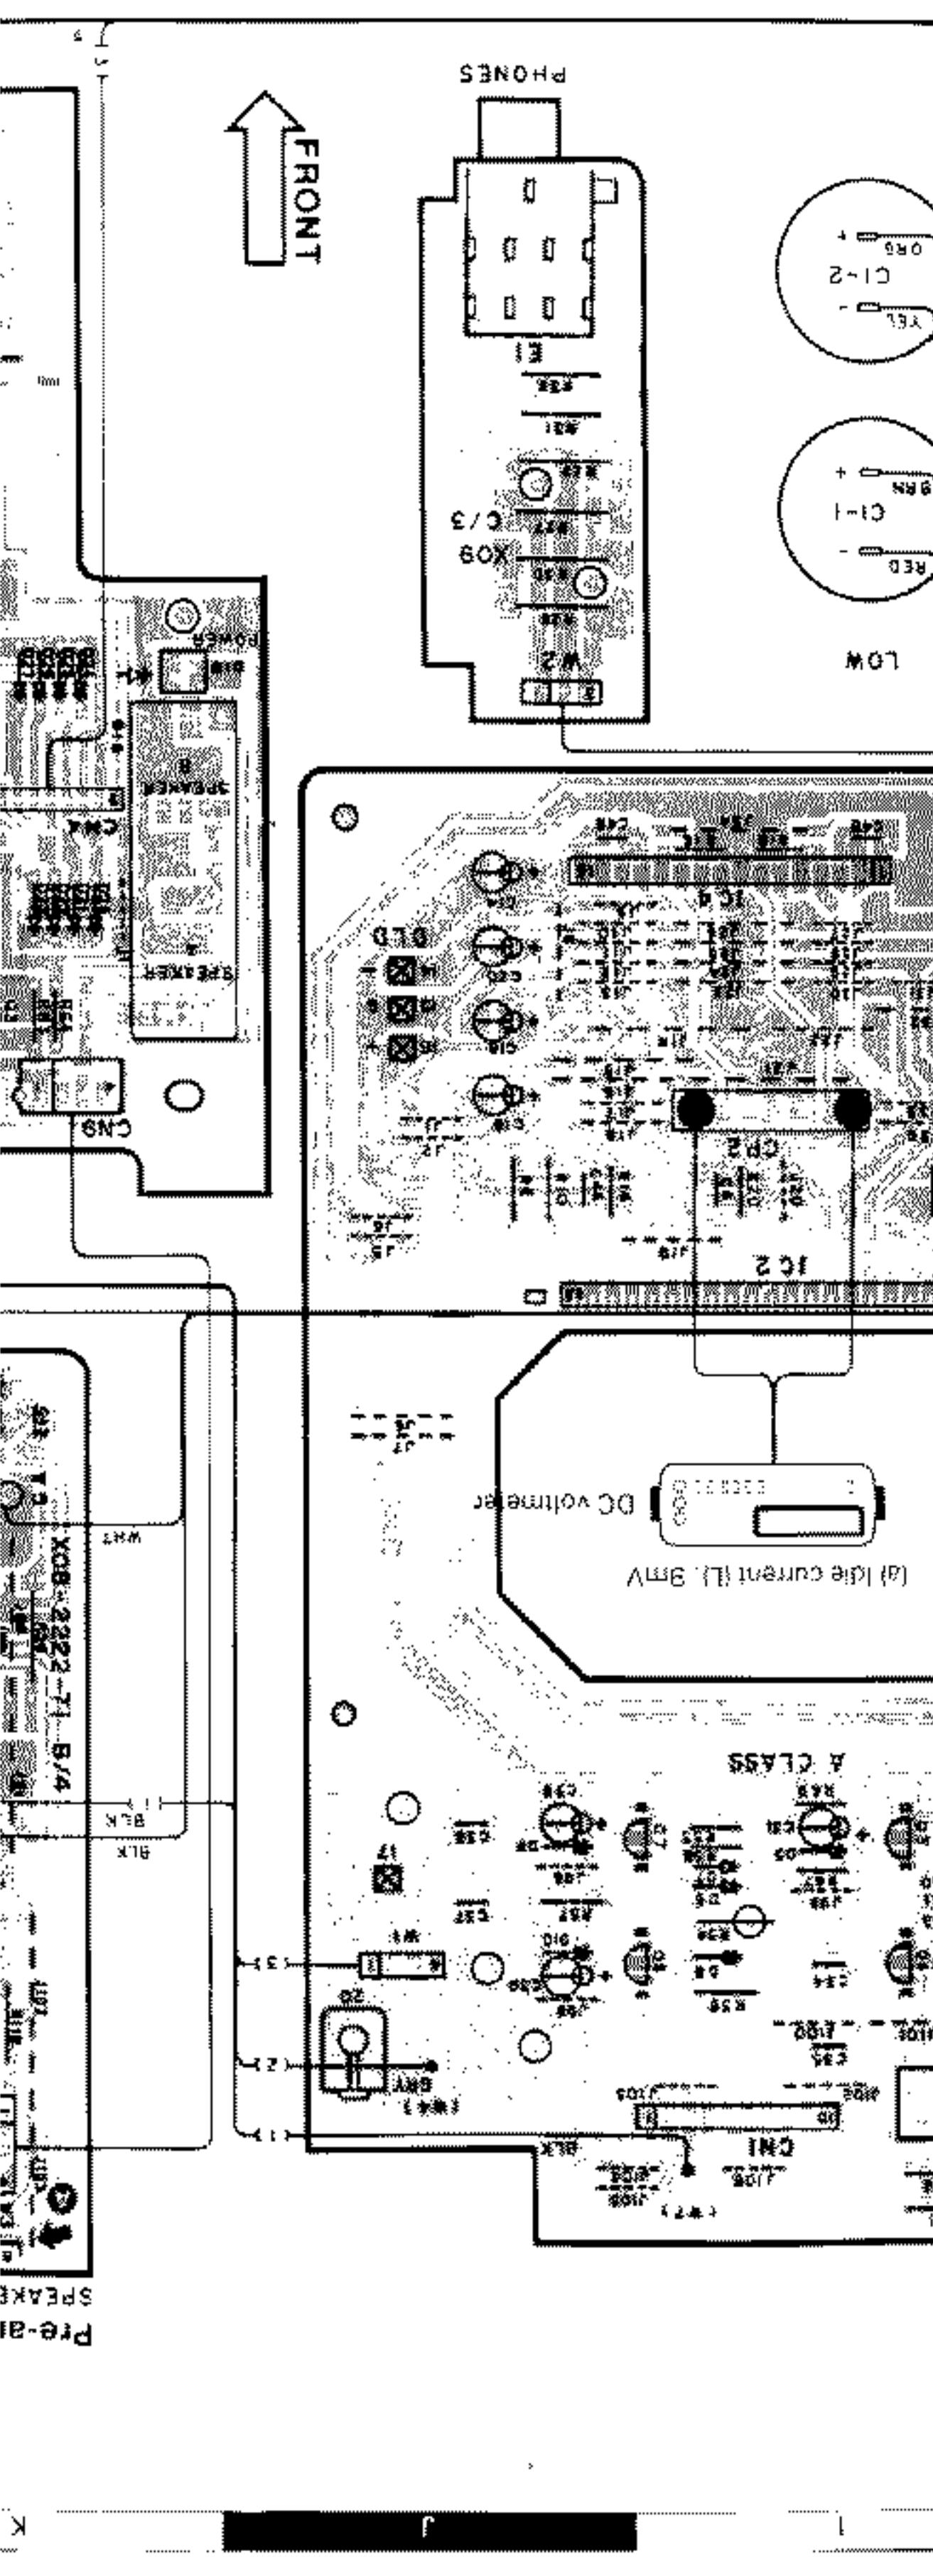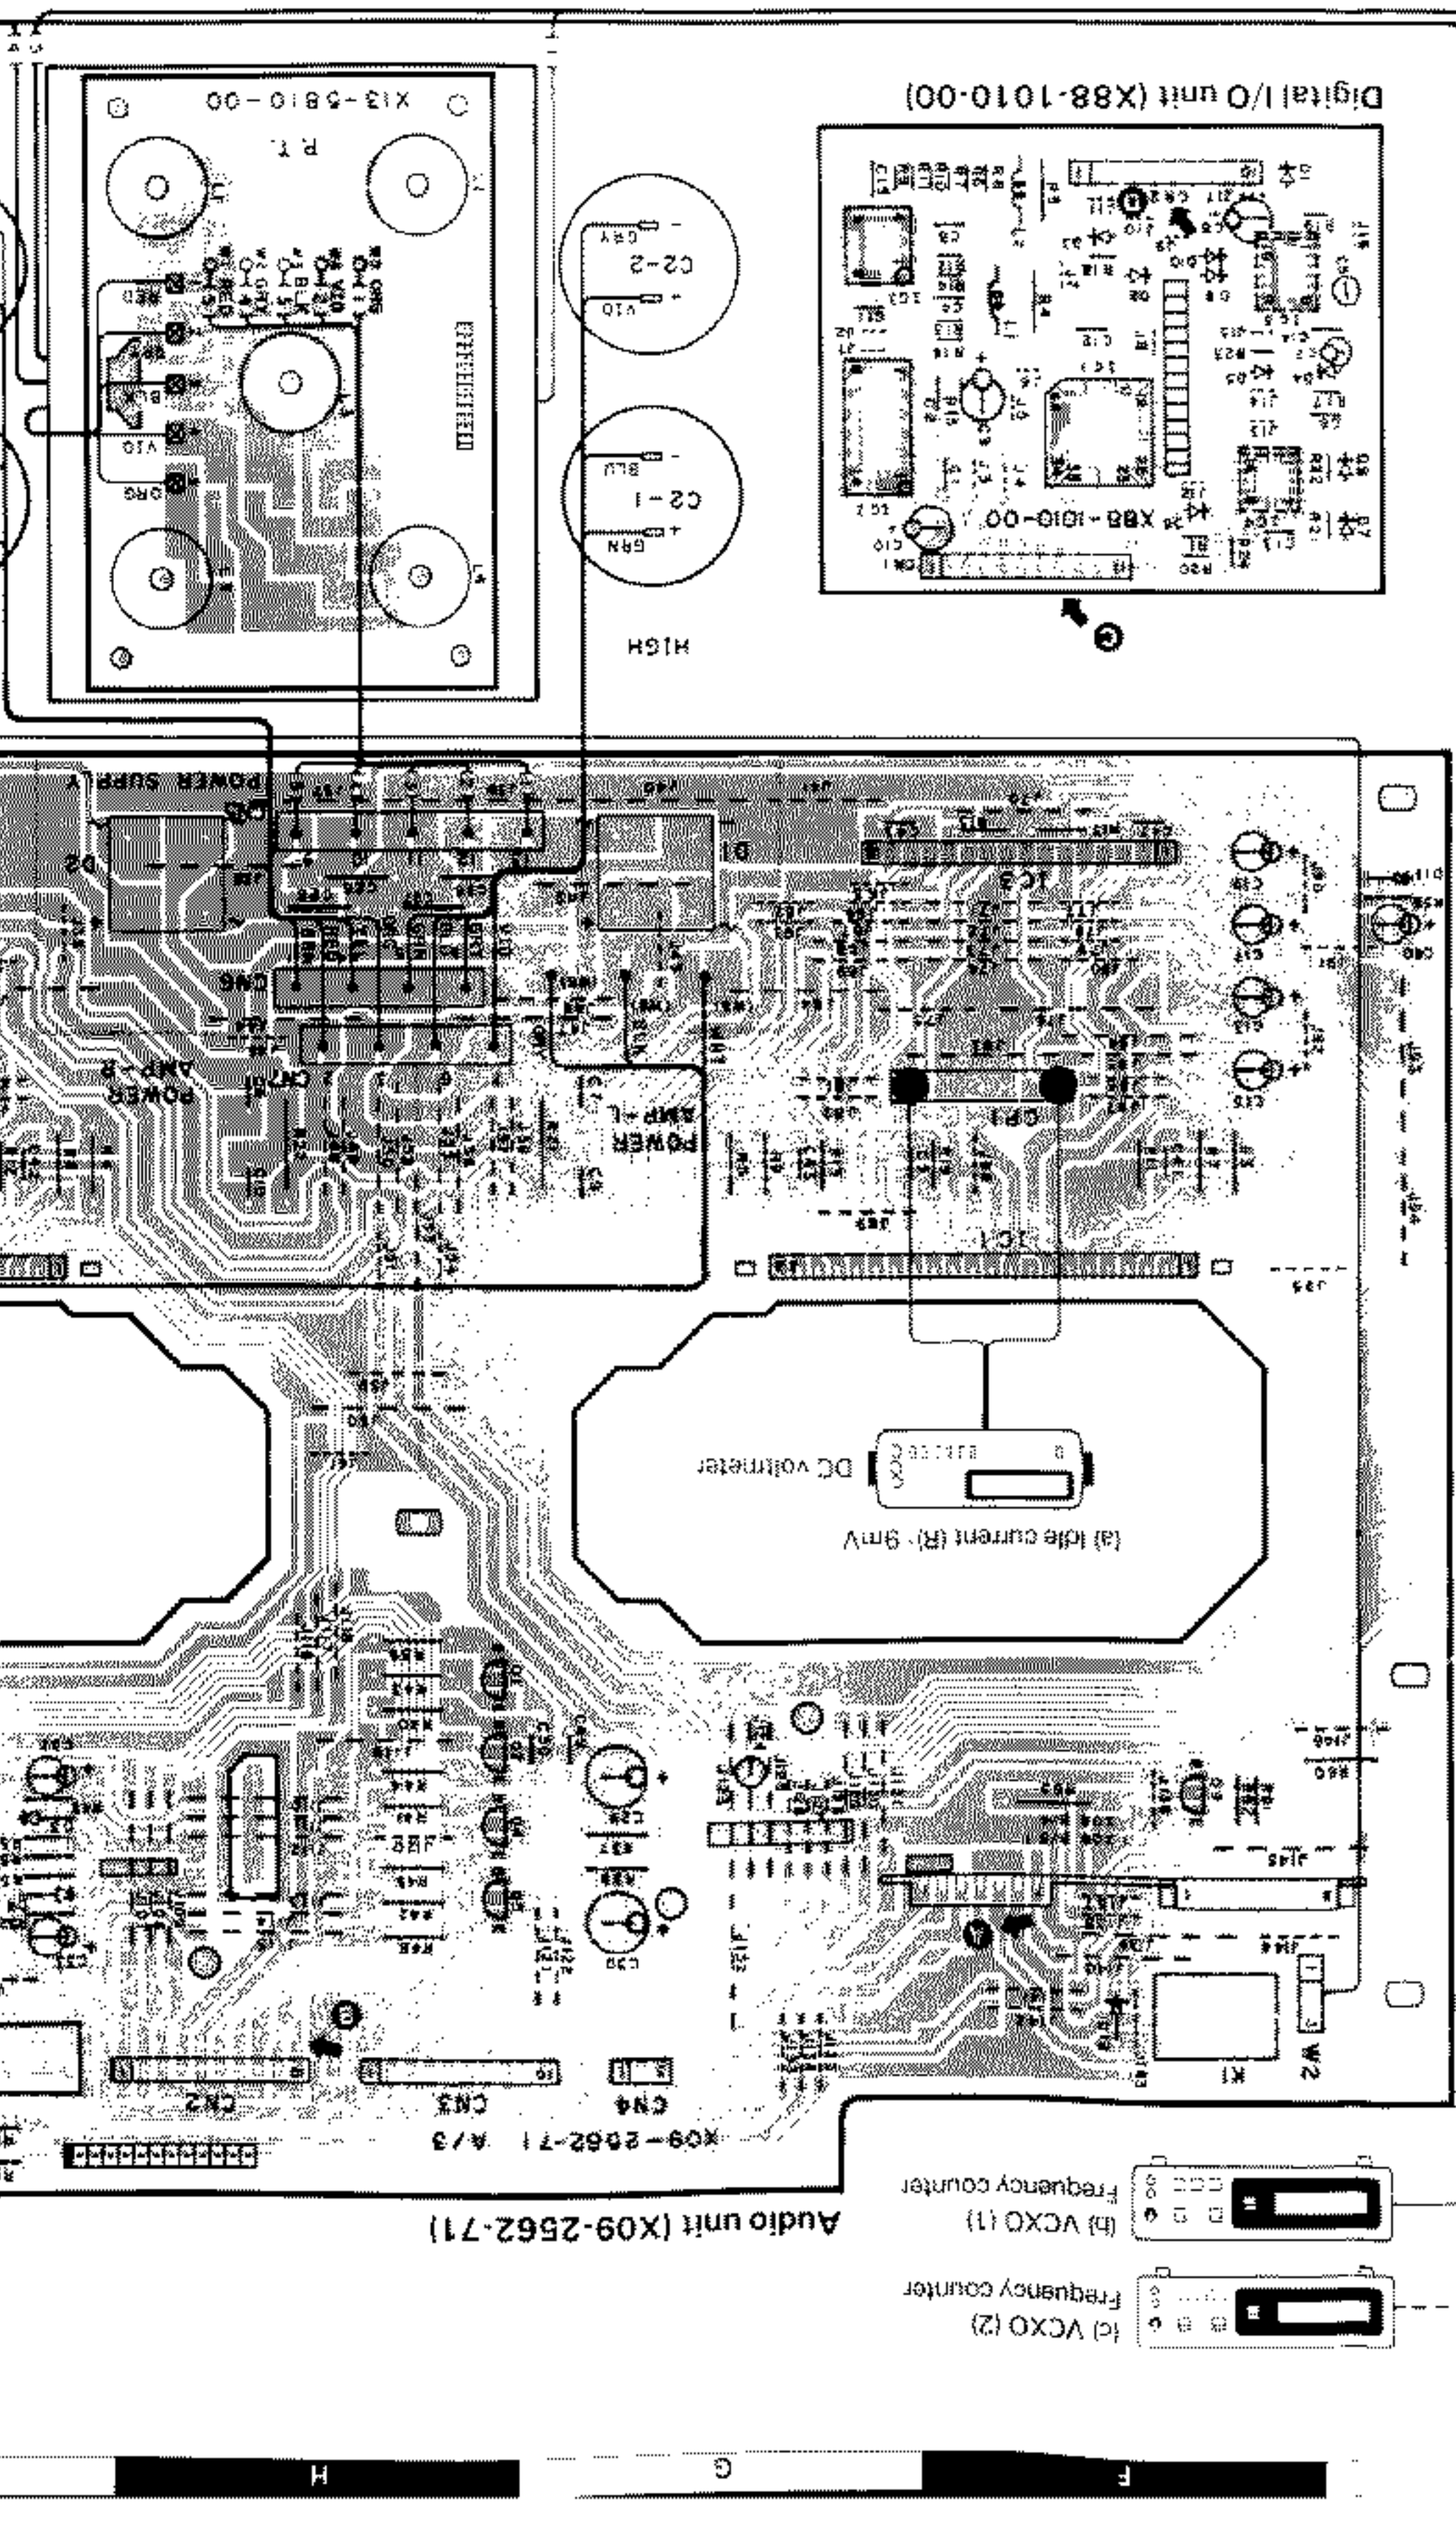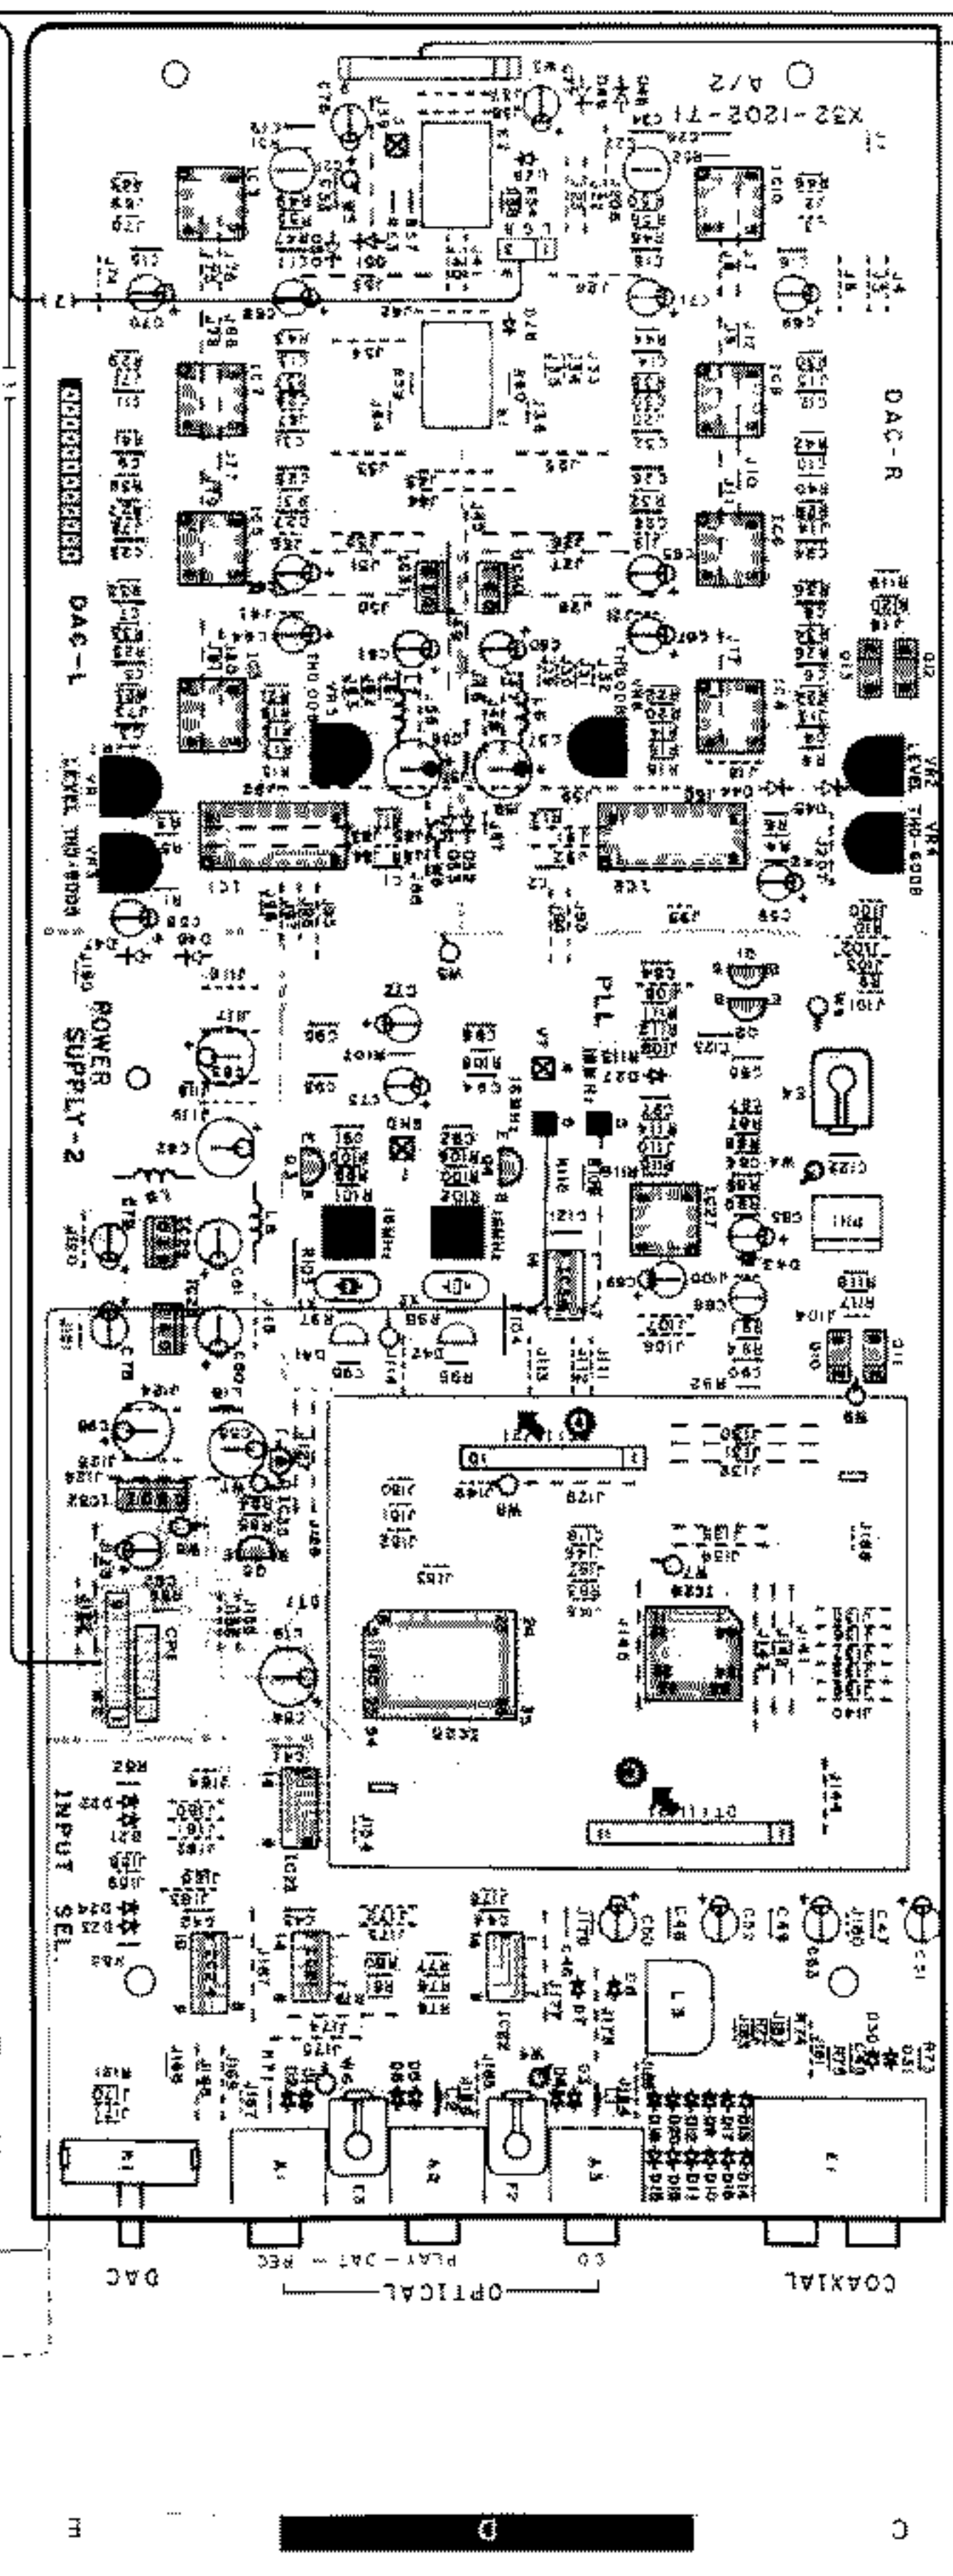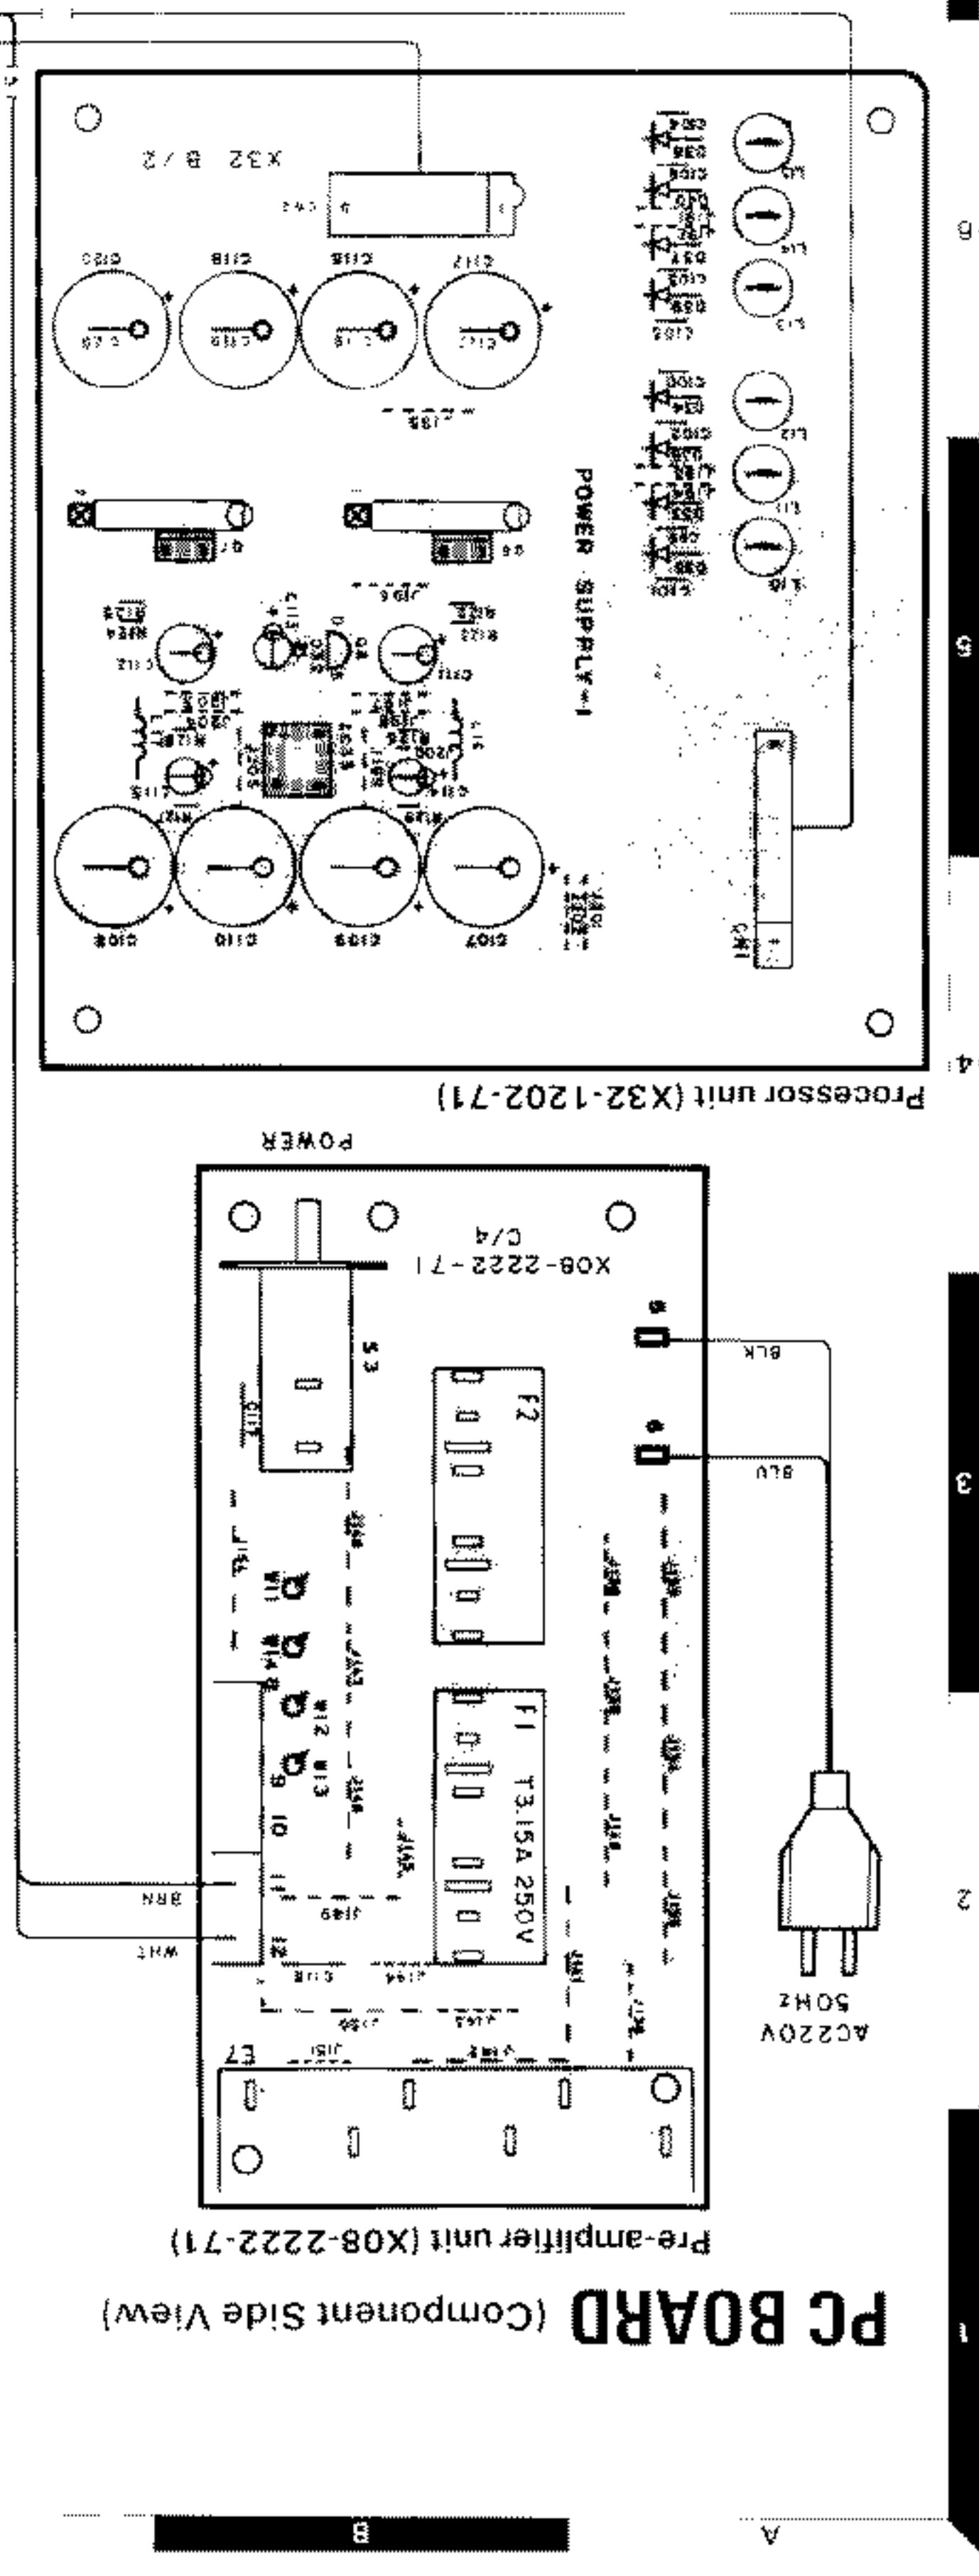


Refer to the schematic diagram for the values of resistors and capacitors. KA-D1100EX(E)



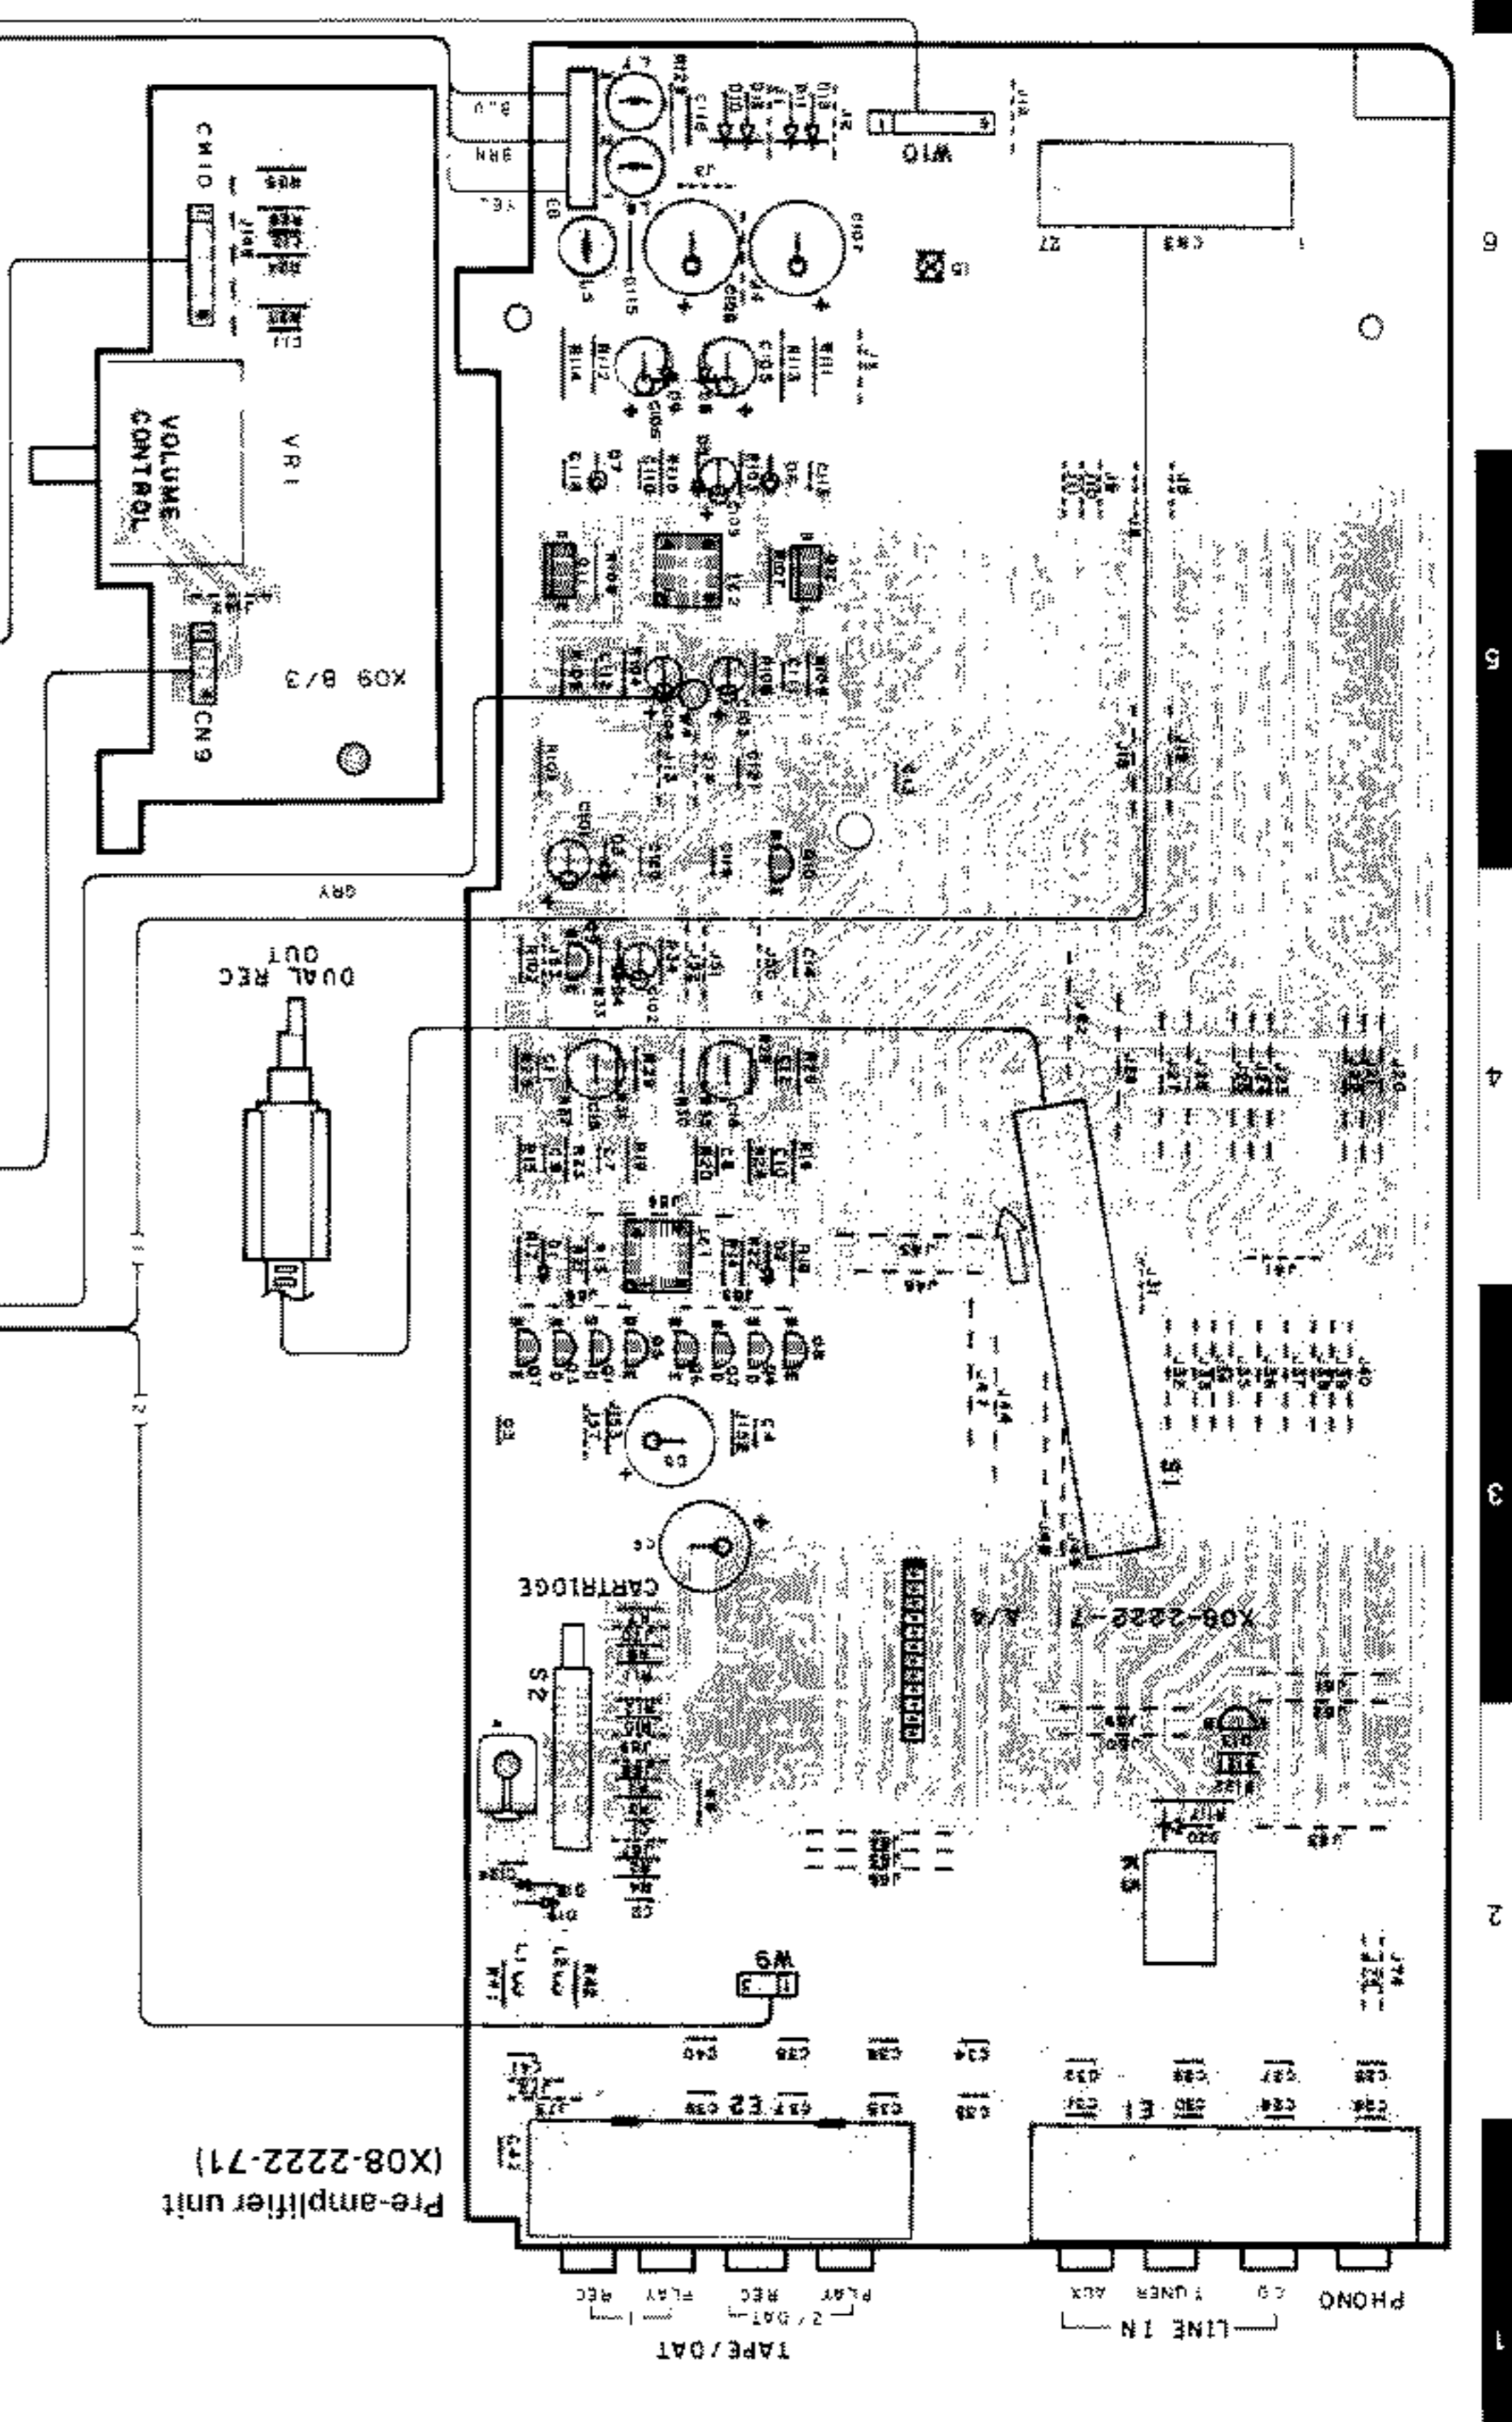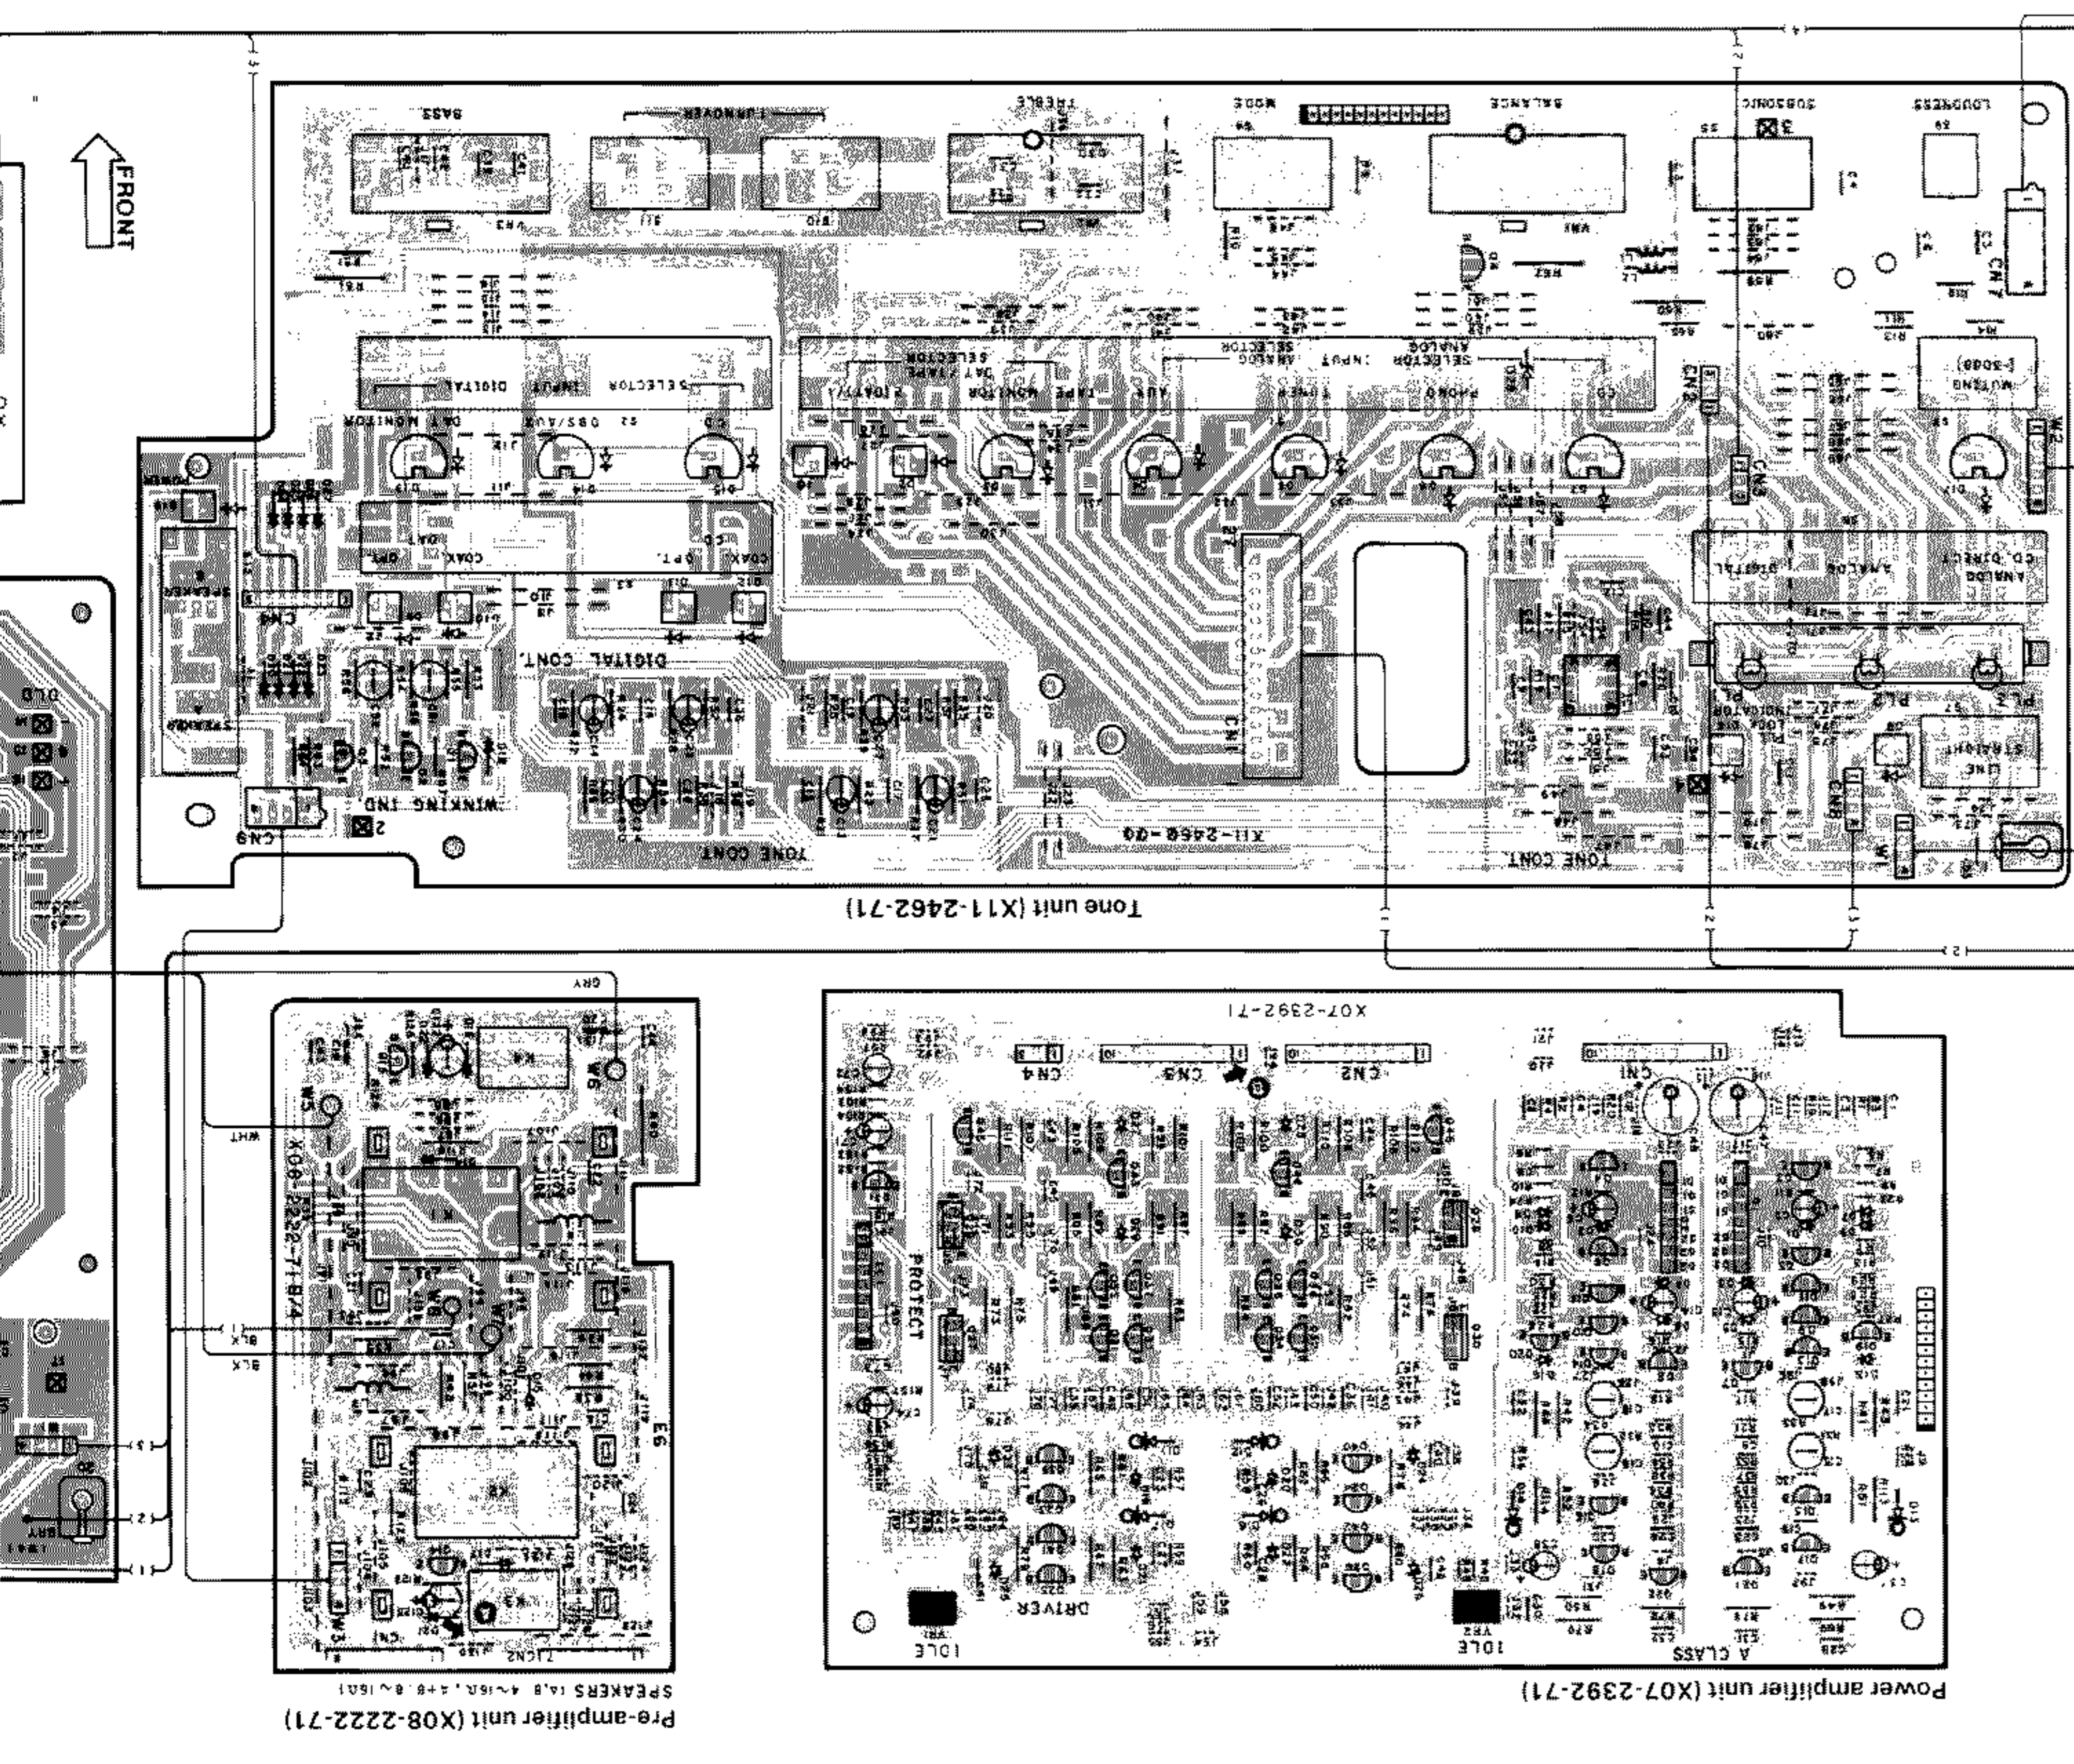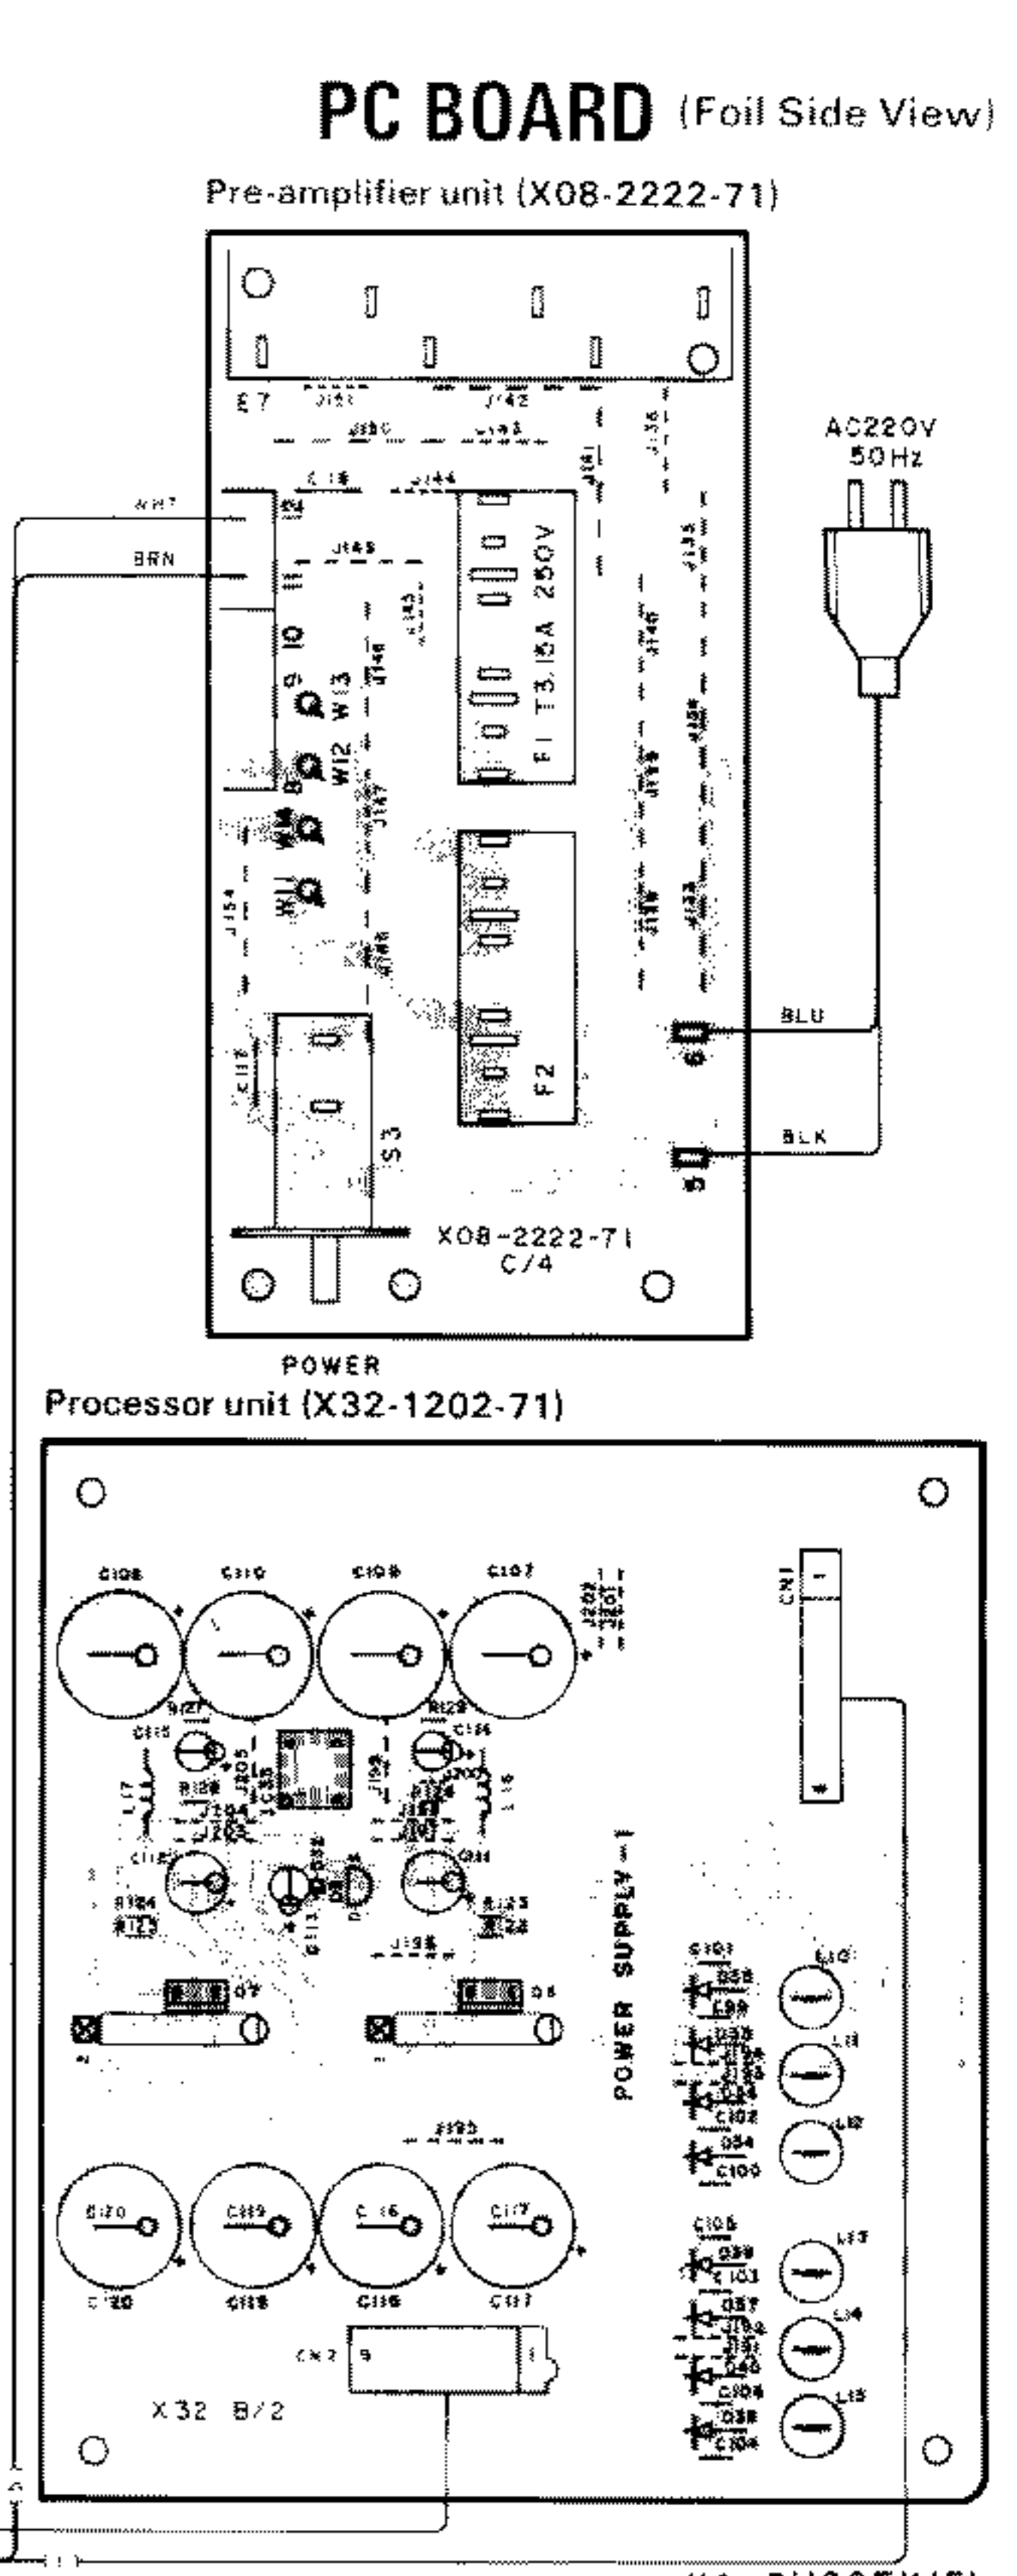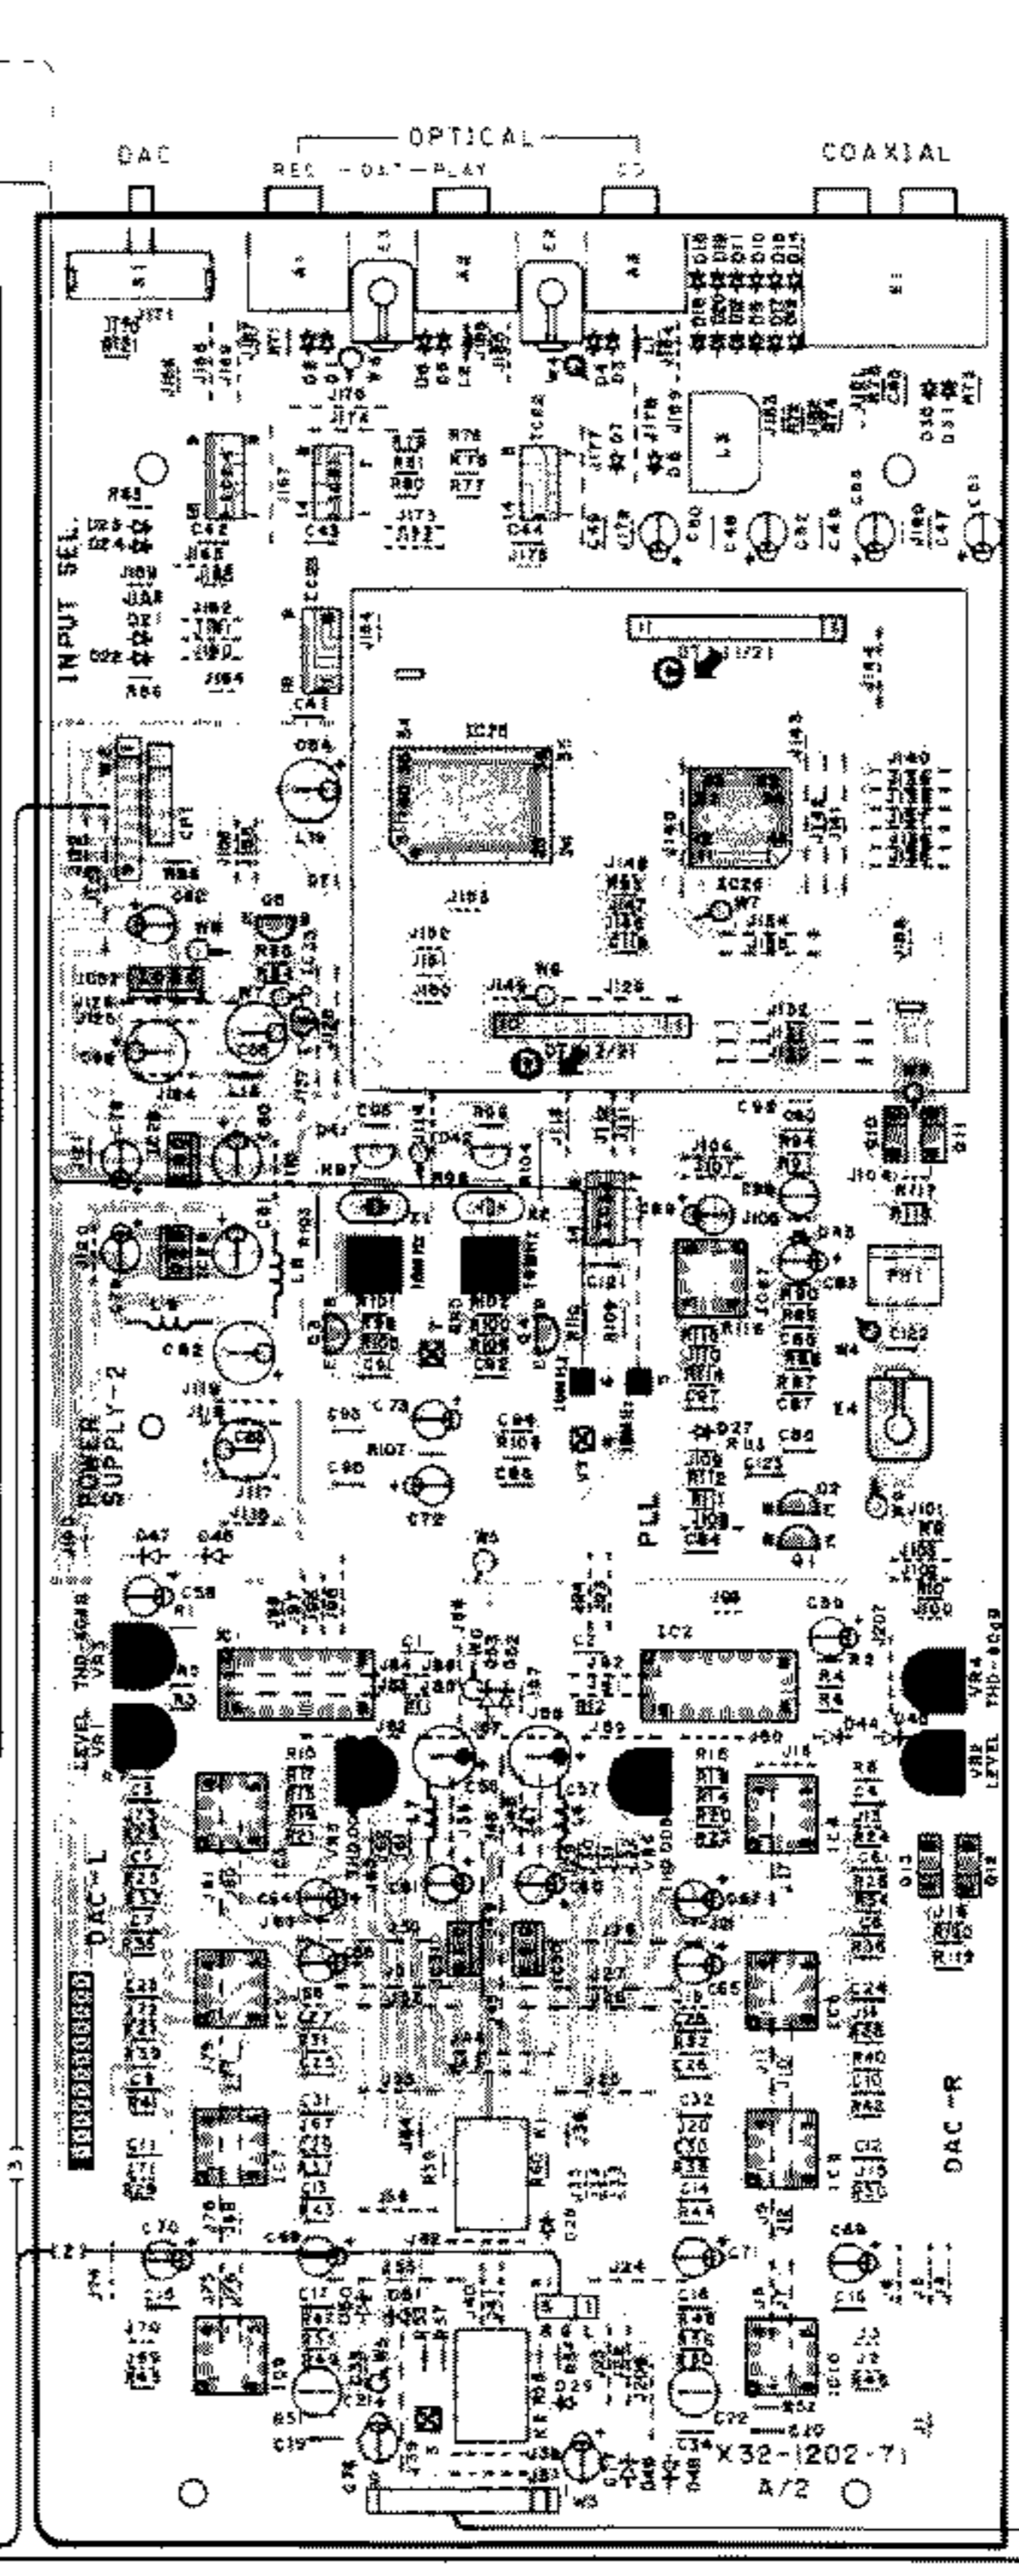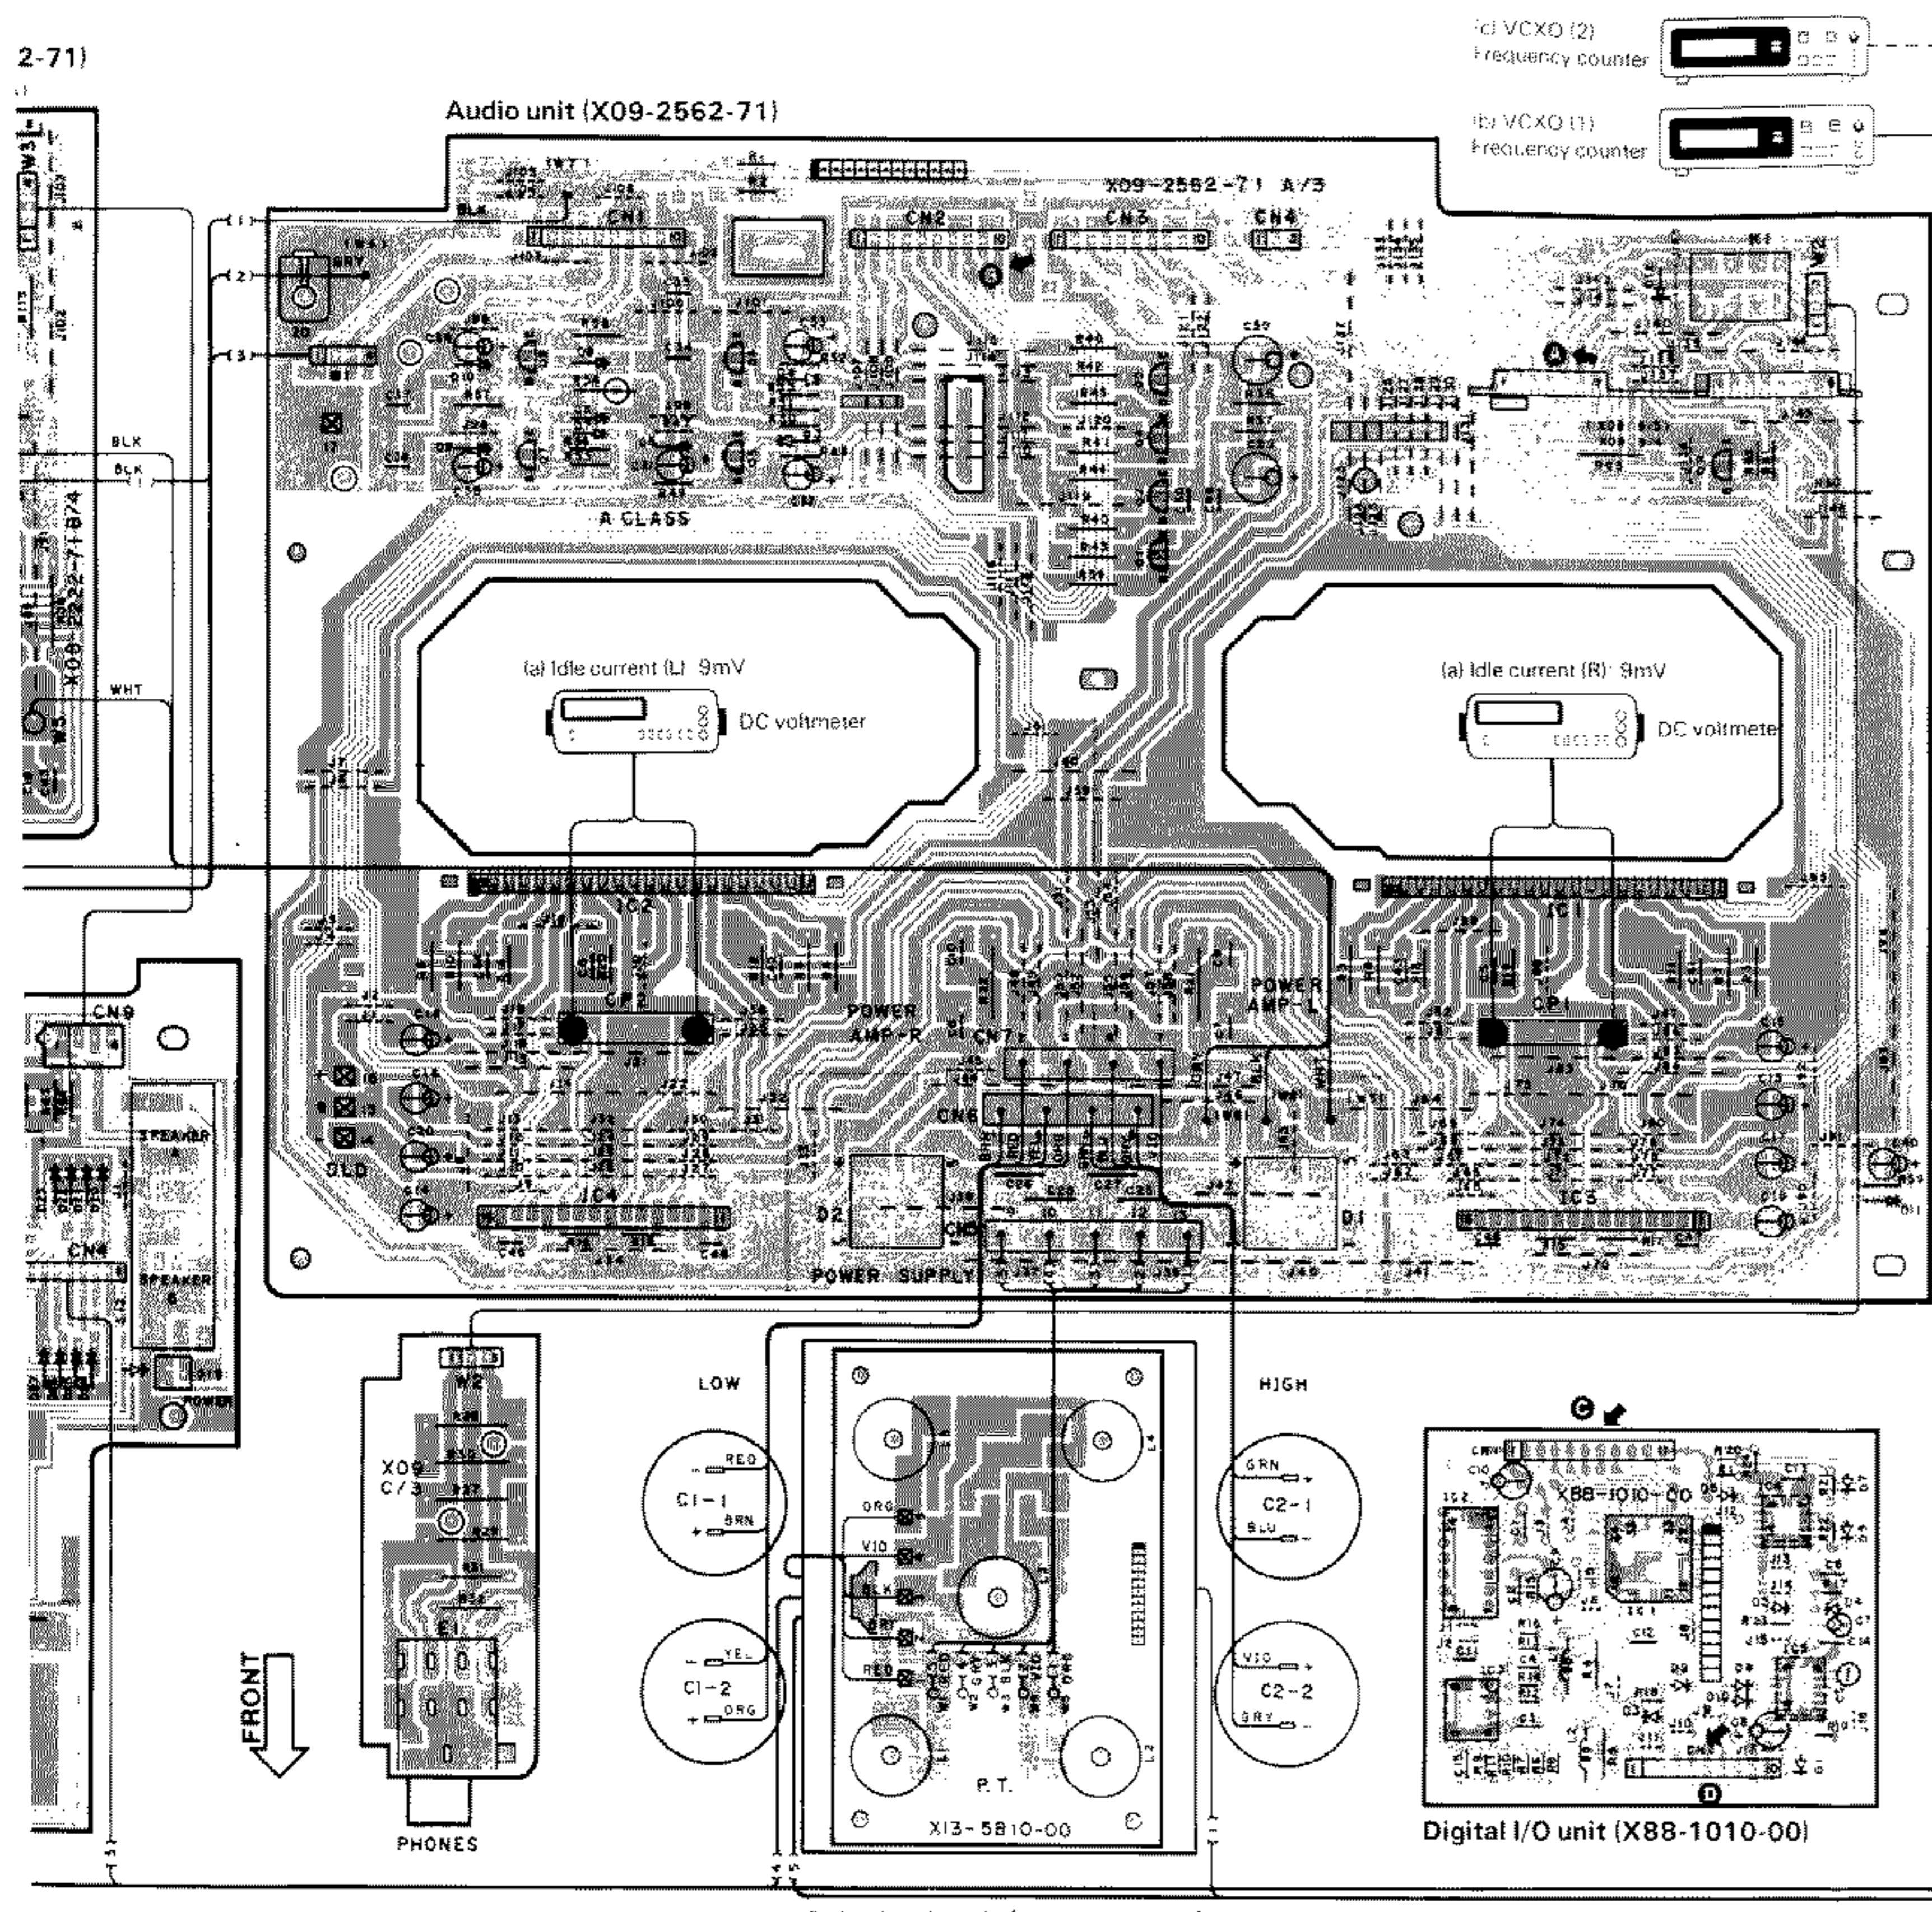

Refer to the schematic diagram for the values of resistors and capacitors.



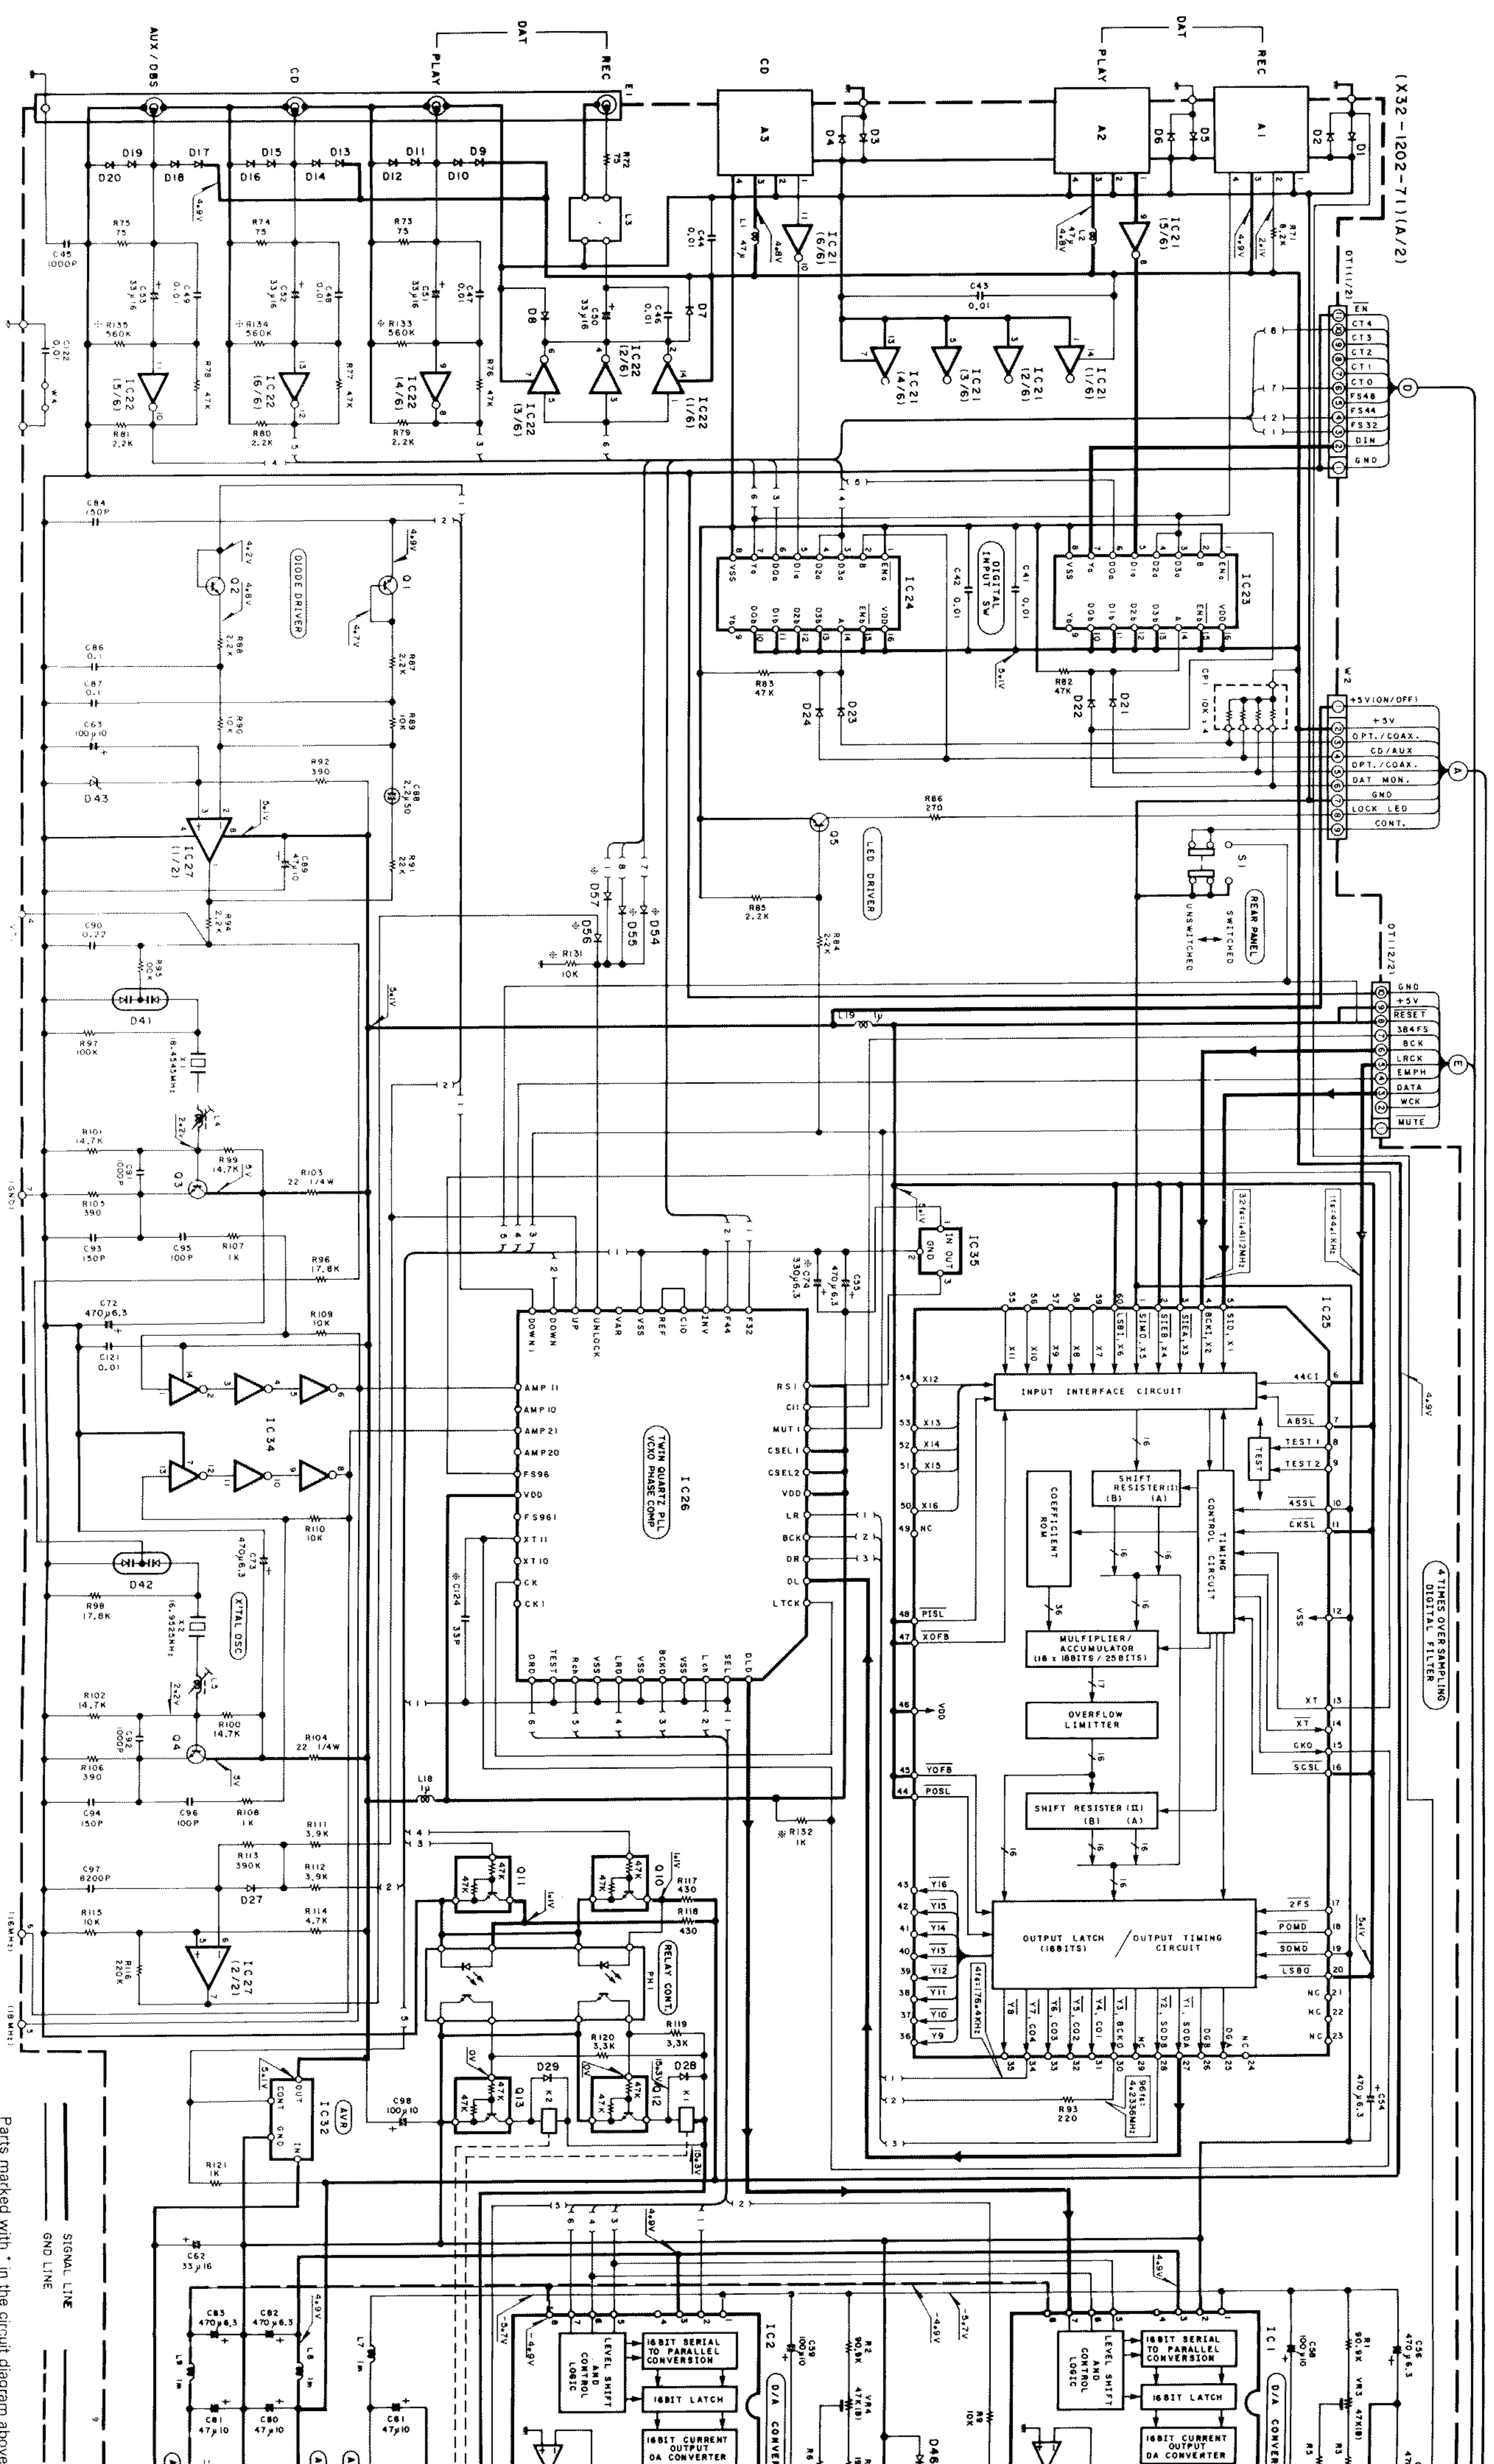

X32-1202-711(A/2)

4 TIMES OVERSAMPLING  
DIGITAL FILTER


SIGNAL LINE  
GND LINE

Parts marked with \* in the circuit diagram above C74, C124 and R131 to R135) are attached to the PC board of only the units produced in the period 1987 to January 1988, therefore not shown in the diagram. Except for C74, these parts are expected from the units produced from February 1988 a







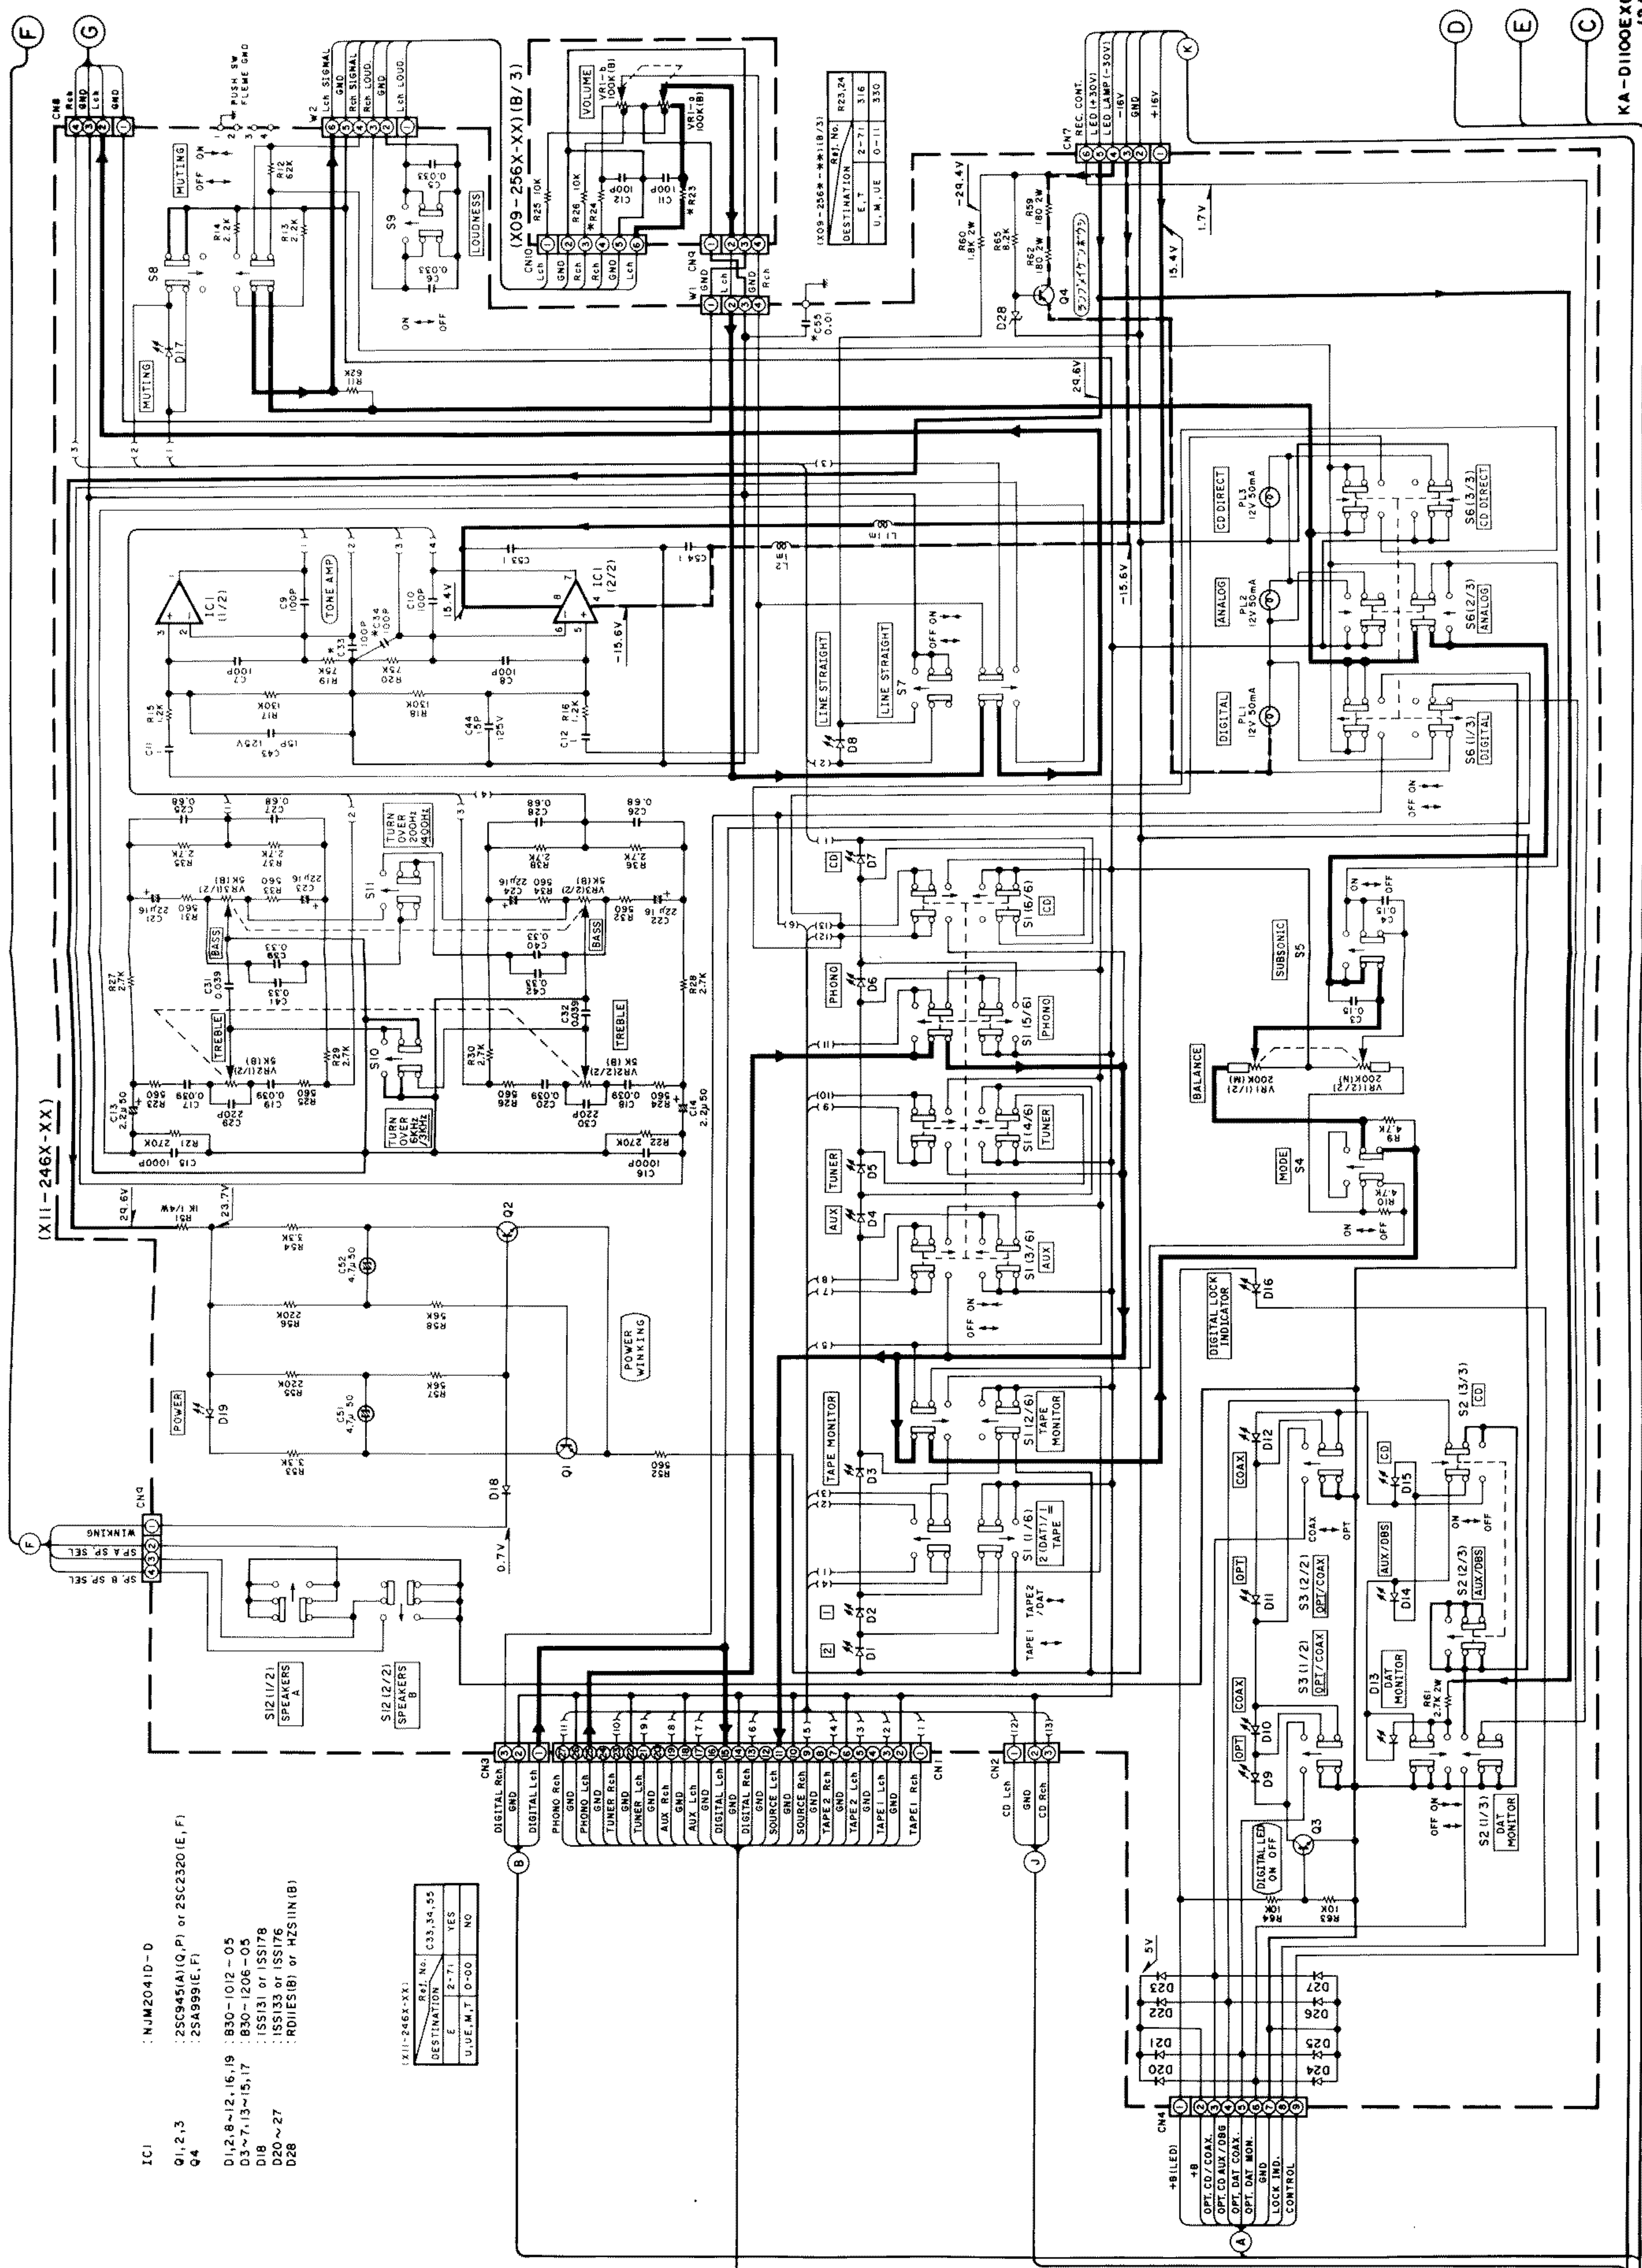

- 2SA1123  
2SA1124  
2SA1534A  
2SA733(A)  
2SA954  
2SA992  
2SA999  
2SC1845  
2SC1923  
2SC2003  
2SC2320  
2SC2631  
2SC2632  
2SC3940A  
2SC945(A)
- TA2030  
KAB02  
TC74HC123F  
TC74HC153F  
M51951ASL  
M51951ASL  
2SK170  
2SK369  
2SK371  
TC74HCU04F  
TC17G005AF-005  
TC17G014AF-007  
SM5804D-T  
M5F78M05L  
M5F78M06L  
PQ05R04  
M5218P  
M5220P  
M5223P  
UPC1237HA
- 25A1110  
25C2590  
2SD1266  
DTC114YFF  
2SA1535A  
2SB941  
2SC3944A  
NUM2041D-D  
NUM5532D  
NUM5532D-D  
SN74LS24N  
PCM56P-K  
M5218P  
M5220P  
M5223P  
UPC1237HA
- TA2030  
KAB02  
TC74HC123F  
TC74HC153F  
M51951ASL  
M51951ASL  
2SK170  
2SK369  
2SK371  
TC74HCU04F  
TC17G005AF-005  
TC17G014AF-007  
SM5804D-T  
M5F78M05L  
M5F78M06L  
PQ05R04  
M5218P  
M5220P  
M5223P  
UPC1237HA

IC1 : NUM2041D-D  
Q1, 2, 3 : 2SC945(A)(Q,P) or 2SC2320 (E, F)  
Q4 : 2SA999(E, F)

D1, 2, 8 ~ 12, 16, 19 : 830-1012-05  
D3 ~ 7, 13 ~ 15, 17 : 830-1206-05  
D18 : ISS131 or ISS178  
D20 ~ 27 : ISS133 or ISS176  
D28 : RD1E5(B) or HZ51(H)(B)

XII-246X-XX

|             |             |     |
|-------------|-------------|-----|
| REF. NO.    | C33, 34, 35 | YES |
| DESTINATION | 2-71        | YES |
| U.M.M.T     | 0-00        | NO  |

all be carried out (exposed parts are acceptably insulated from a supply circuit) before the appliance is returned to the customer.

• DC voltages are measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.


• Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

• Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Voltmeter gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

KA-D1100E(XIE)  
(2/3)






(X08 - 222X-XX) (A/4)

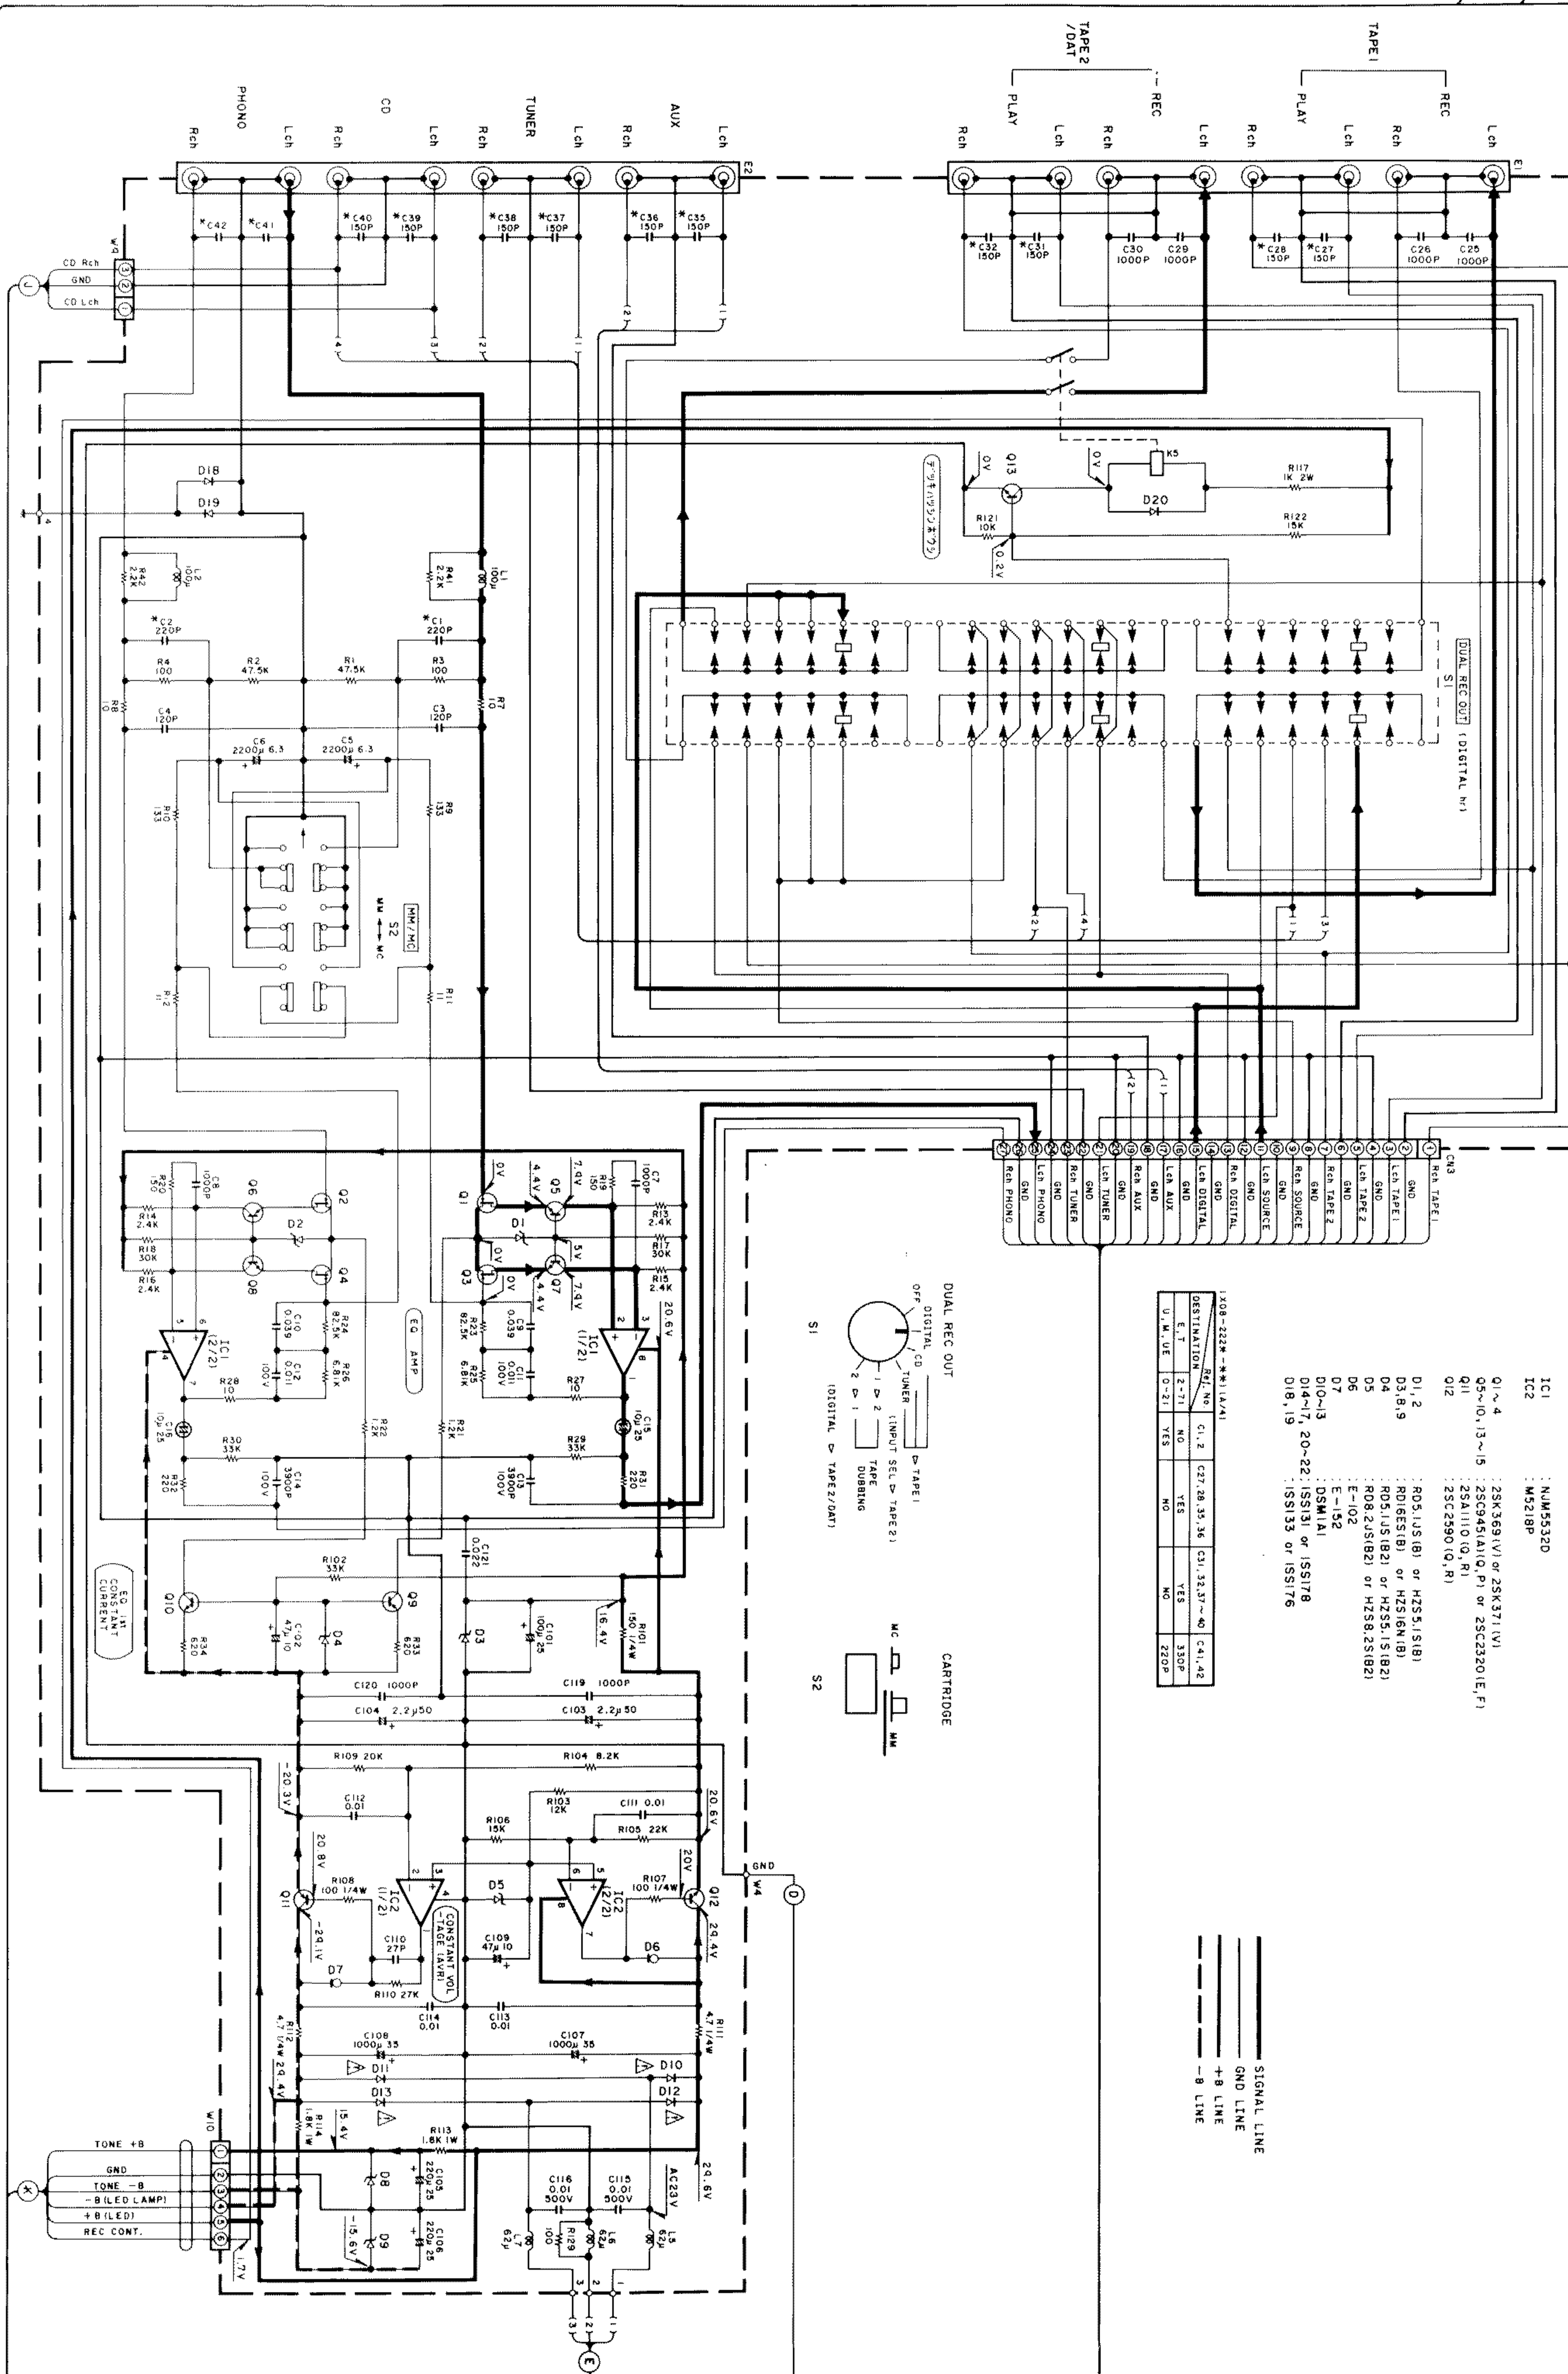

1X08-222X-XX(1A/4)




| DESTINATION | REL. NO. | Q1,2 | C27,28,35,36 | C31,32,37-40 | C41,42 |
|-------------|----------|------|--------------|--------------|--------|
| E, T        | 2-71     | NO   | YES          | YES          | 350P   |
| U, M, UE    | 0-21     | YES  | NO           | NO           | 220P   |

- IC1 : NUM55320
- IC2 : M521BP
- Q1 ~ 4 : 2SK369(V) or 2SK371(V)
- Q5 ~ 10, 13 ~ 15 : 2SC945(A1)(Q, P) or 2SC230(E, F)
- Q11 : 2SA1110(Q, R)
- Q12 : 2SC2590(Q, R)
- D1, 2 : RD5JUS(B) or HZS5J(SB)
- D3, 6, 9 : RD6ES(B) or HZS6M(B)
- D4 : RD5JUS(B2) or HZS5J(SB2)
- D5 : RD8JUS(B2) or HZS8J(SB2)
- D6 : E-102
- D7 : E-152
- D10 ~ 13 : DSM1A1
- D14 ~ 17, 20 ~ 22 : ISS131 or ISS178
- D18, 19 : ISS133 or ISS176

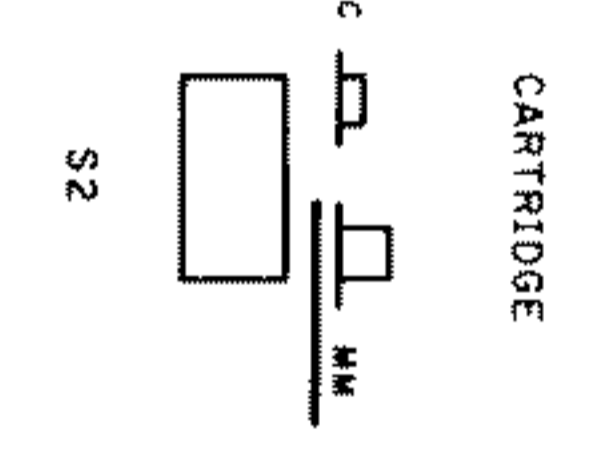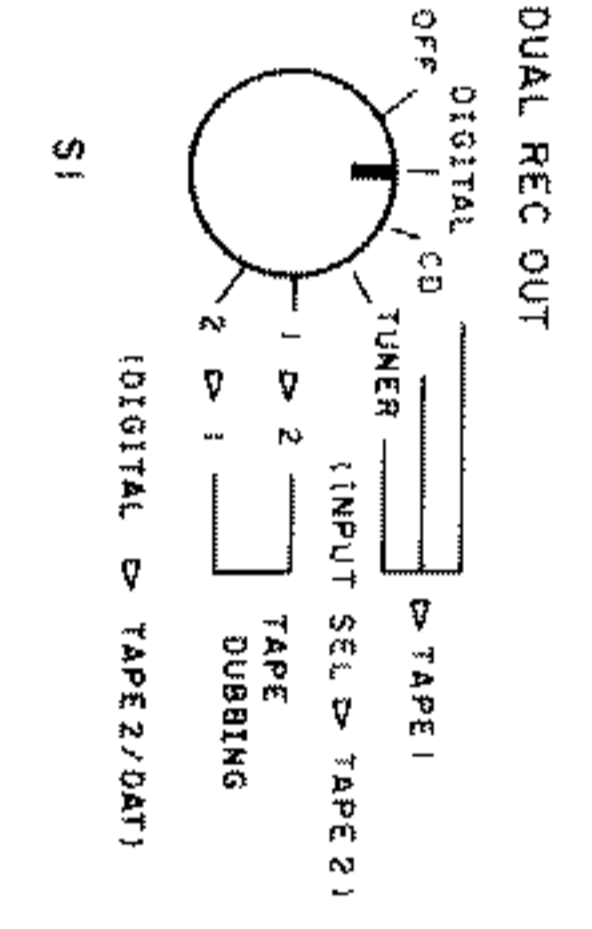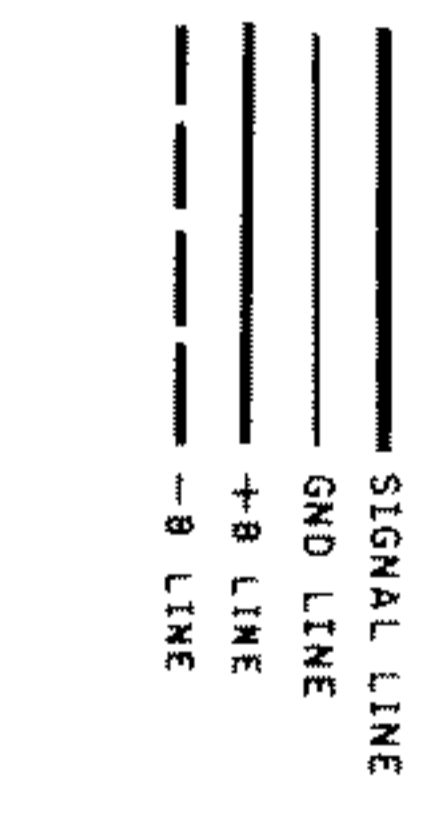

**CAUTION:** For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). **⚠** Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are accessible) before the appliance is re-assembled.



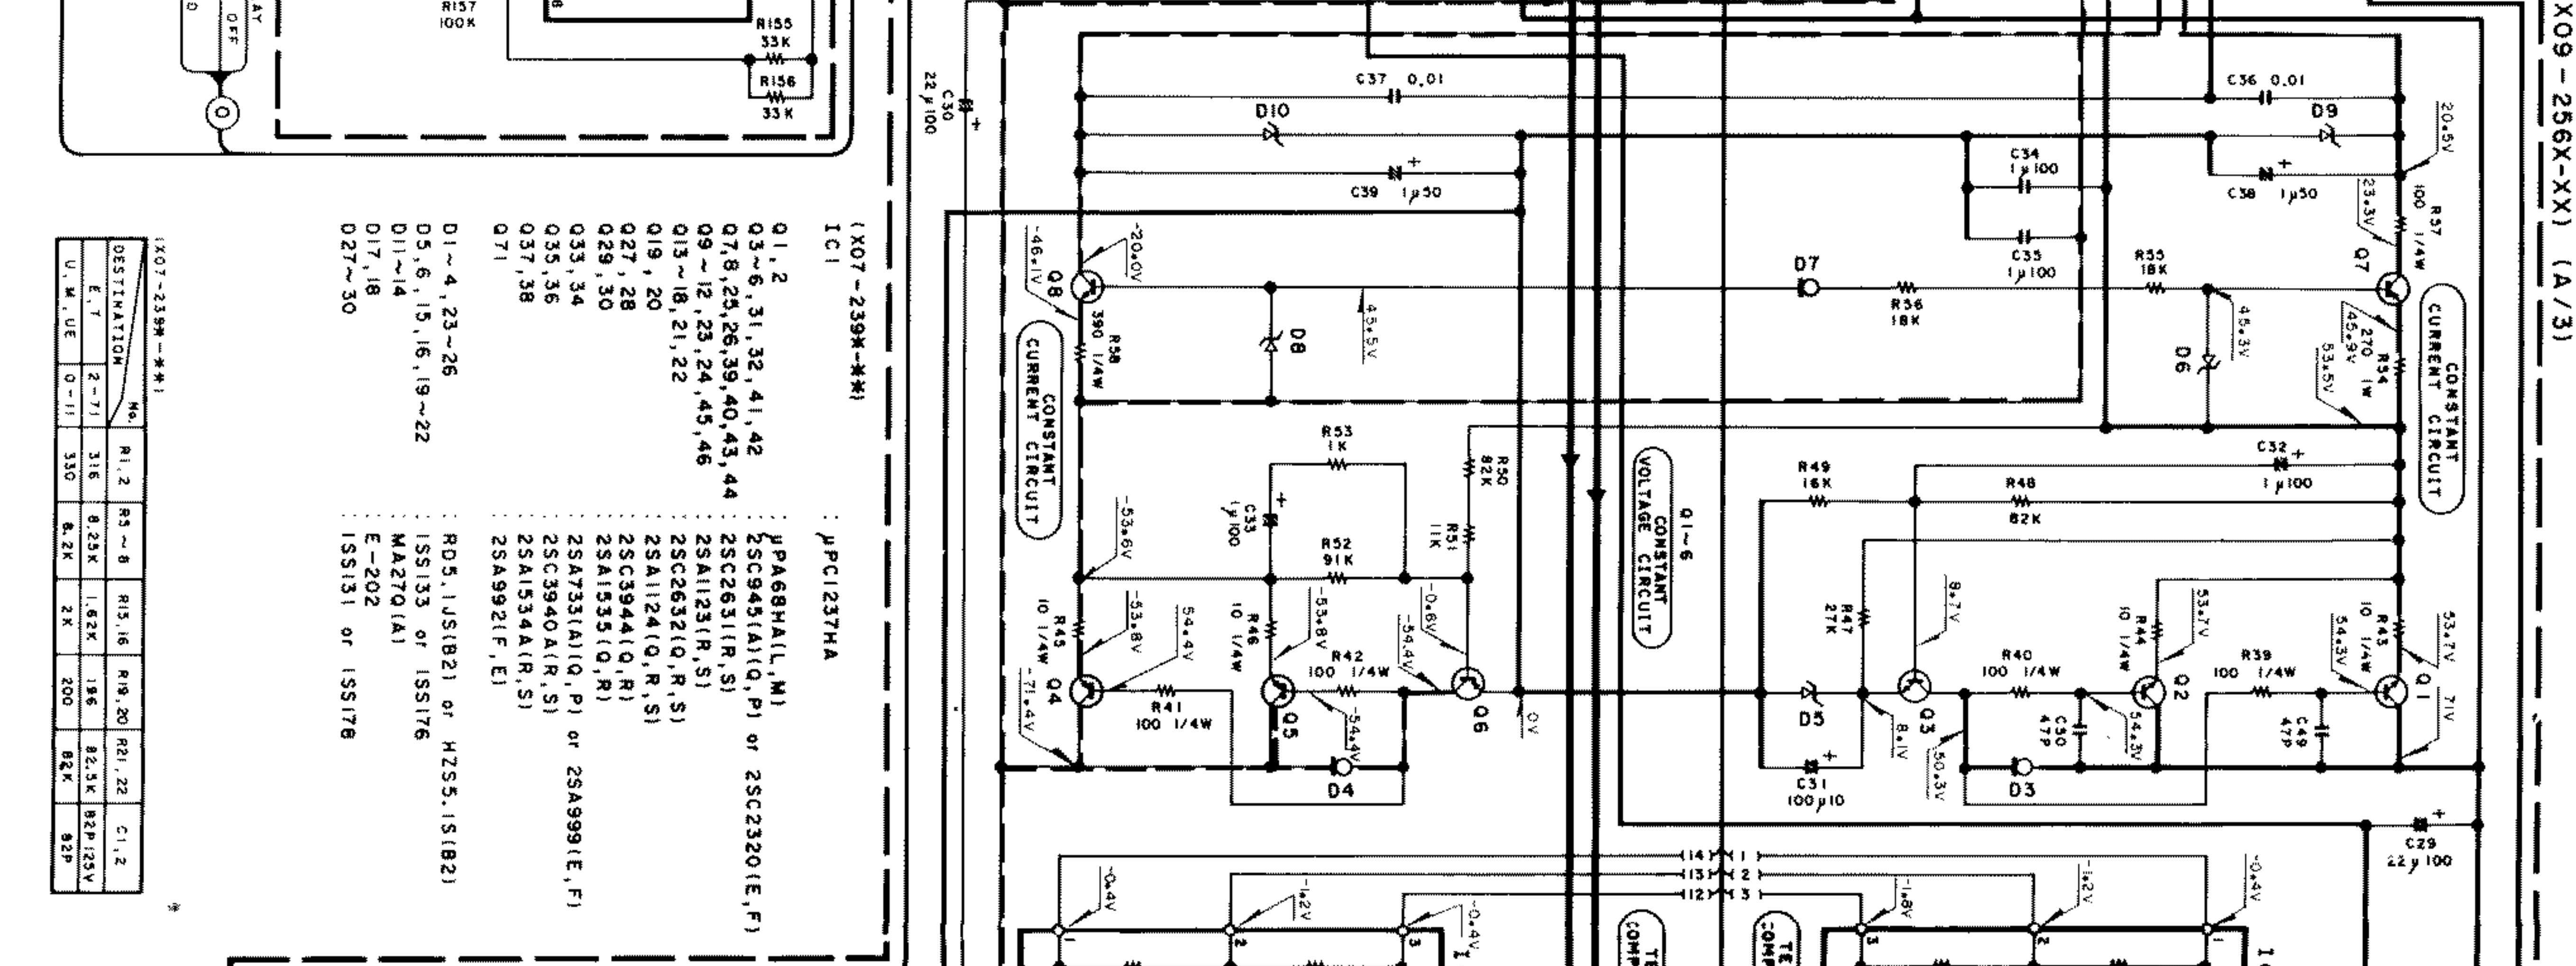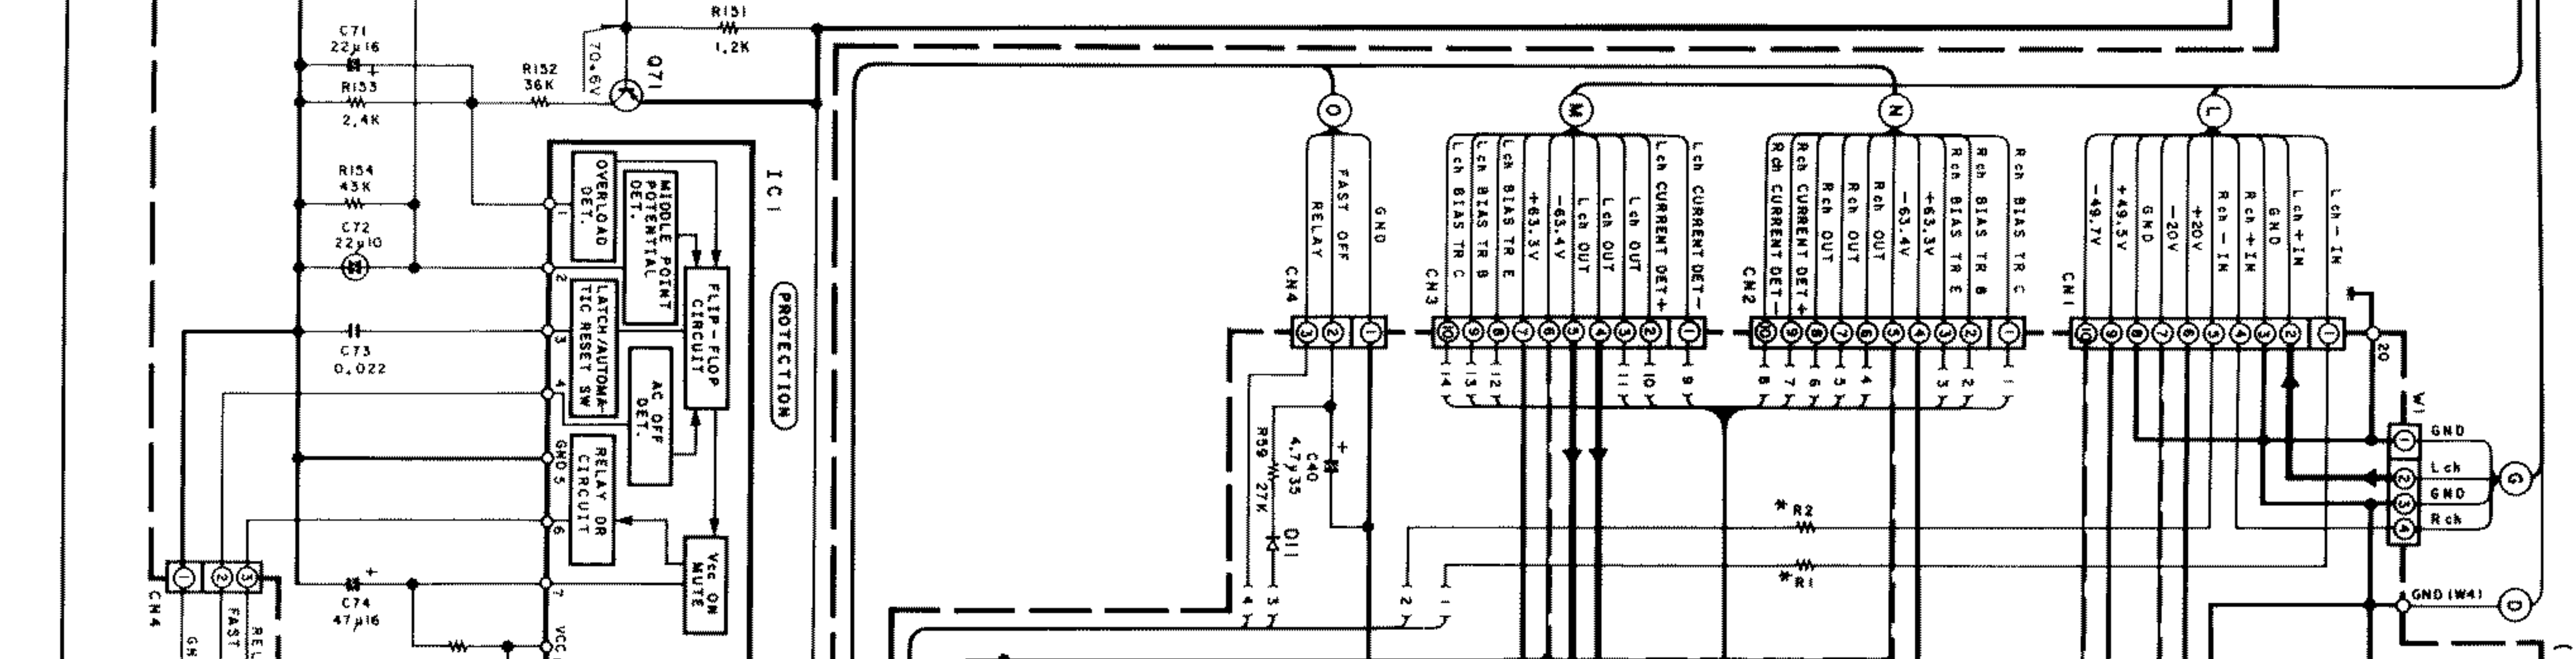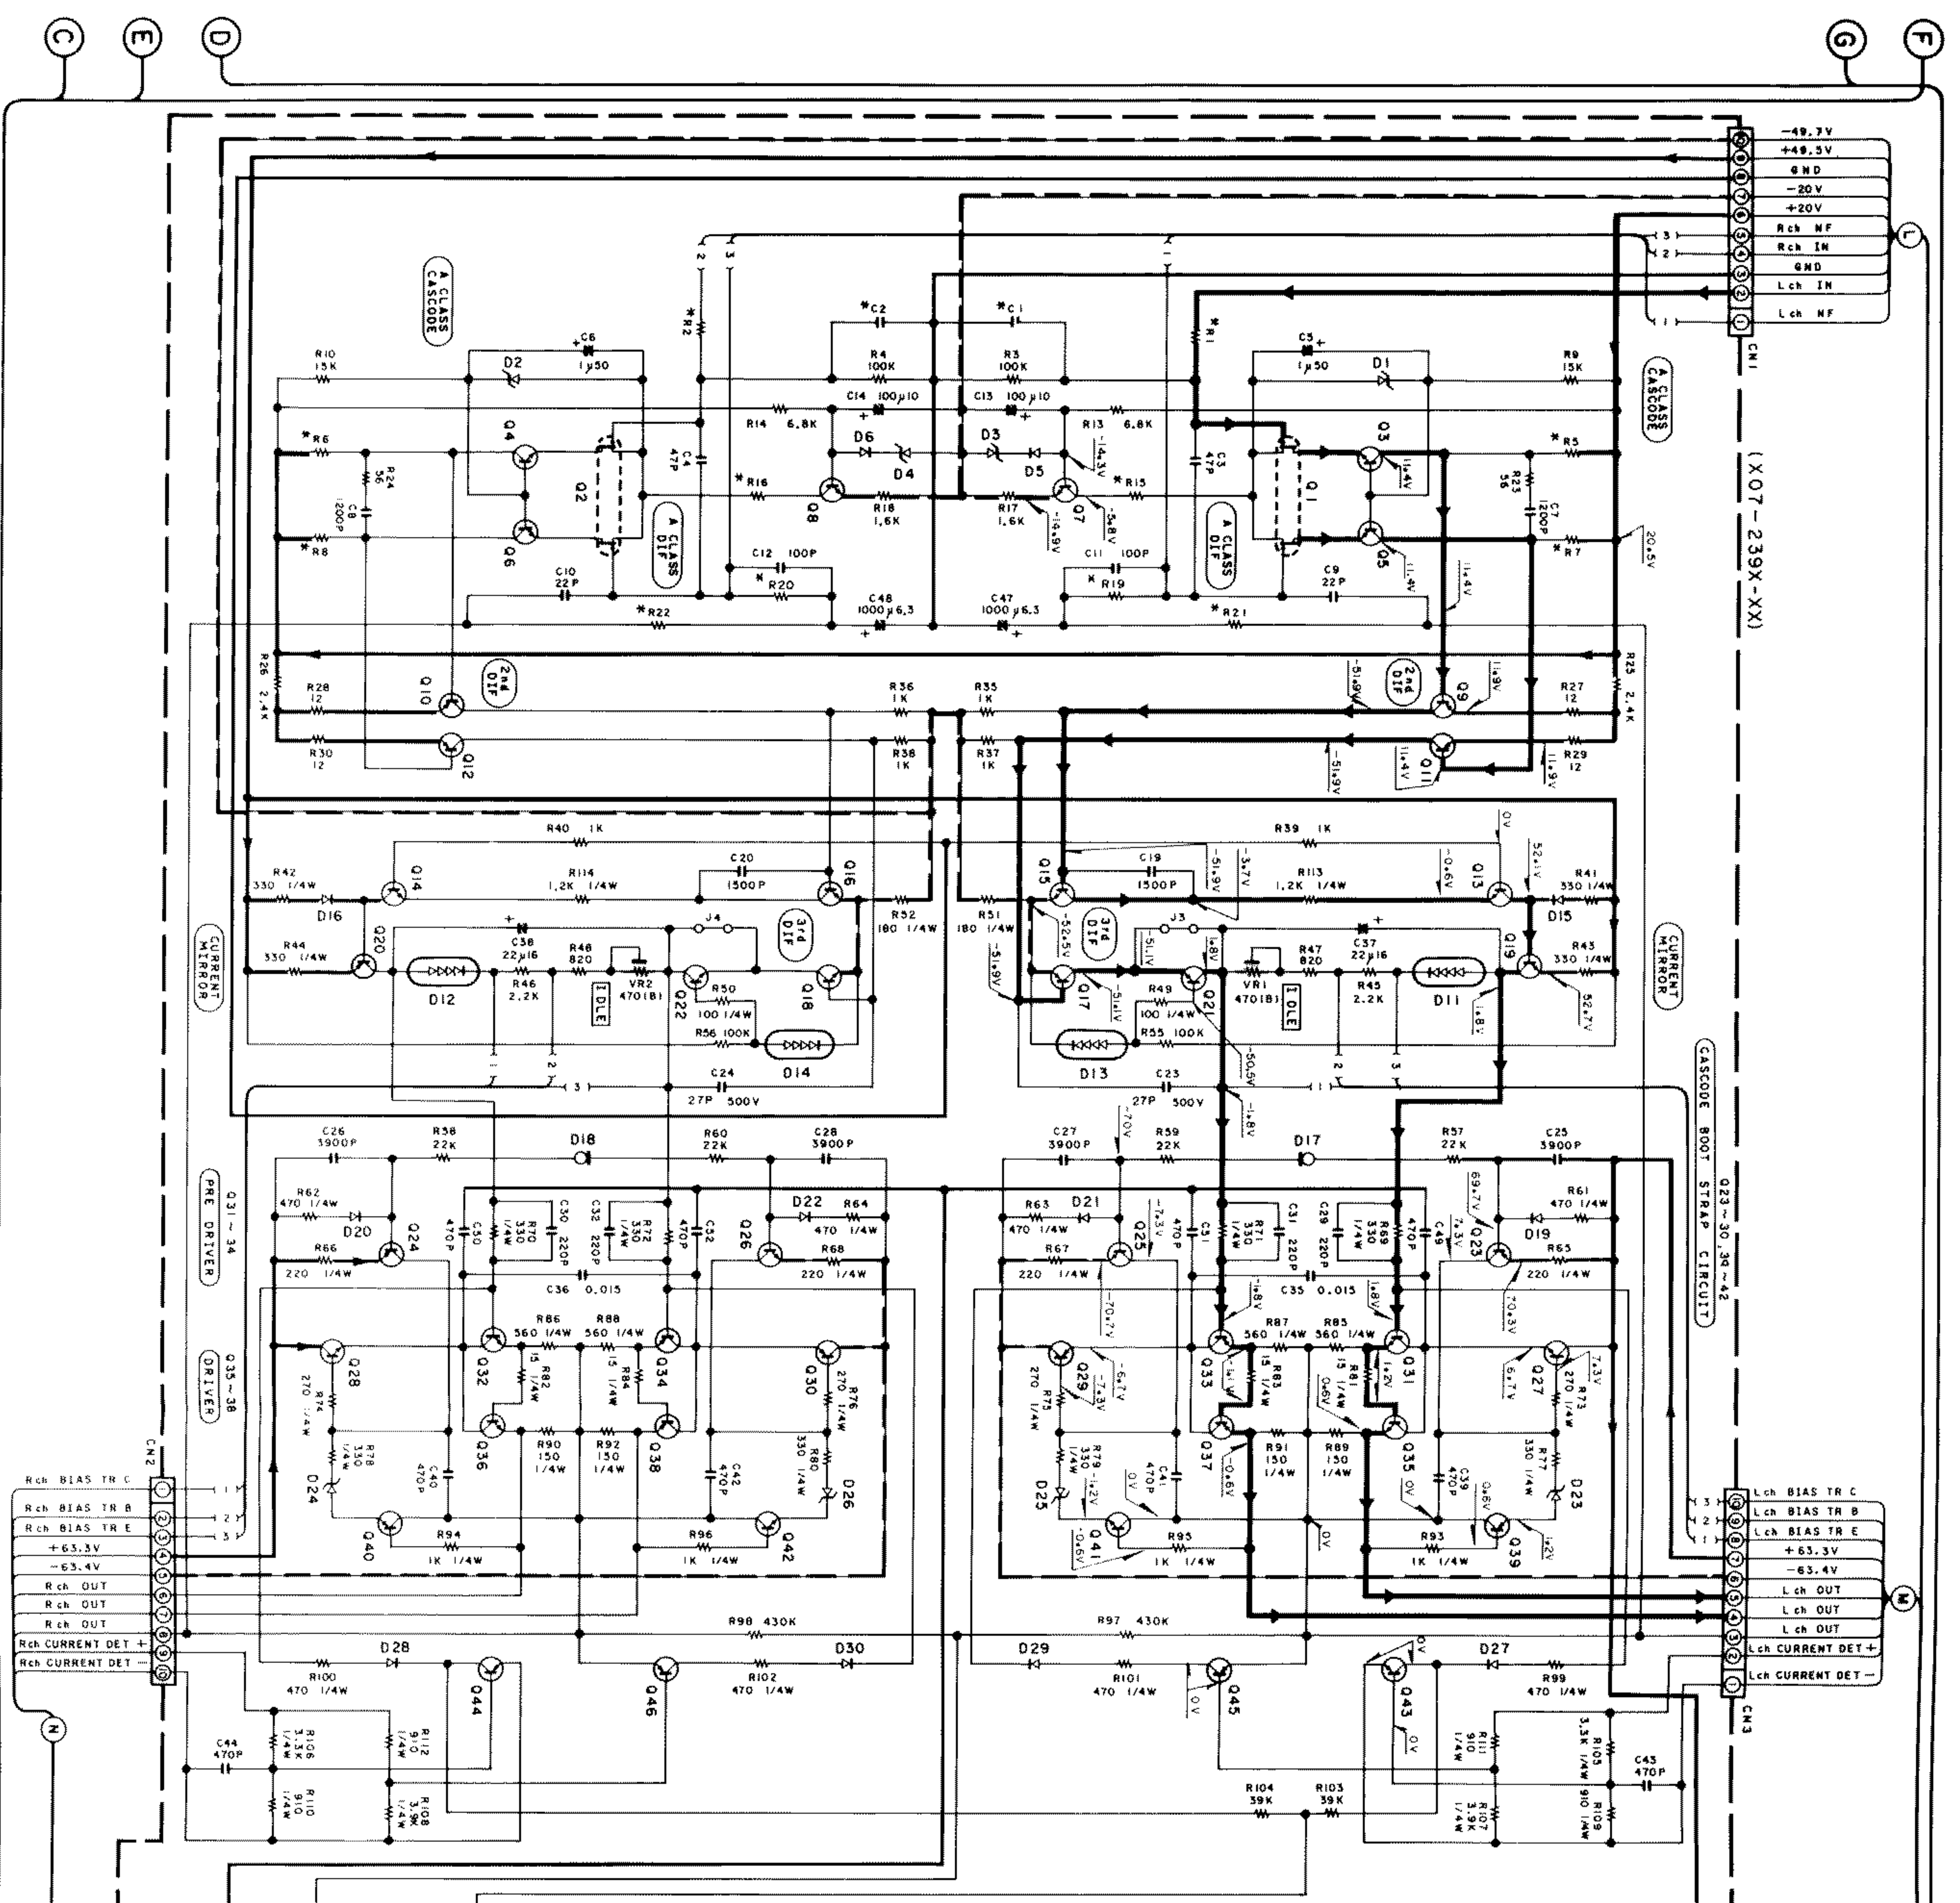


(X07-239X-XX)

| DESTINATION | NO.  | R1-2 | R3-4  | R5-6  | R7-8 | R9-10 | R11-12  | C1-2 |
|-------------|------|------|-------|-------|------|-------|---------|------|
| E-T         | 2-71 | 316  | 6.25K | 1.82K | 38K  | 82.5K | 82P/25V |      |
| V.M.U.E     | 0-11 | 350  | 8.2K  | 2K    | 200  | 82K   | 82P     |      |

- (X07-239X-XX)
- IC1 :  $\mu$ PC1237HA
- Q1-2 :  $\mu$ PA68H(L,M)
  - Q3-6, 31, 32, 41, 42 : 2SC945(A)(Q,P) or 2SC2320(E,F)
  - Q7, 8, 29, 36, 39, 40, 43, 44 : 2SC6531(R,S)
  - Q9-12, 23, 24, 45, 46 : 2SA1123(R,S)
  - Q13-18, 21, 22 : 2SC6522(Q,R,S)
  - Q19, 20 : 2SA1124(Q,R,S)
  - Q27, 28 : 2SC3944(Q,R)
  - Q29, 30 : 2SA1535(Q,R)
  - Q33, 34 : 2SA733(A)(Q,P) or 2SA999(E,F)
  - Q35, 36 : 2SC3940(A,R,S)
  - Q37, 38 : 2SA1534(A,R,S)
  - Q71 : 2SA992(F,E)
  - D1-4, 23-26 : RD5.1US1821 or HZ55.1S1821
  - D5, 6, 15, 16, 19-22 : SS153 or ISS176
  - D11-14 : MAZ70(A)
  - D17, 18 : E-202
  - D27-30 : ISS131 or ISS178



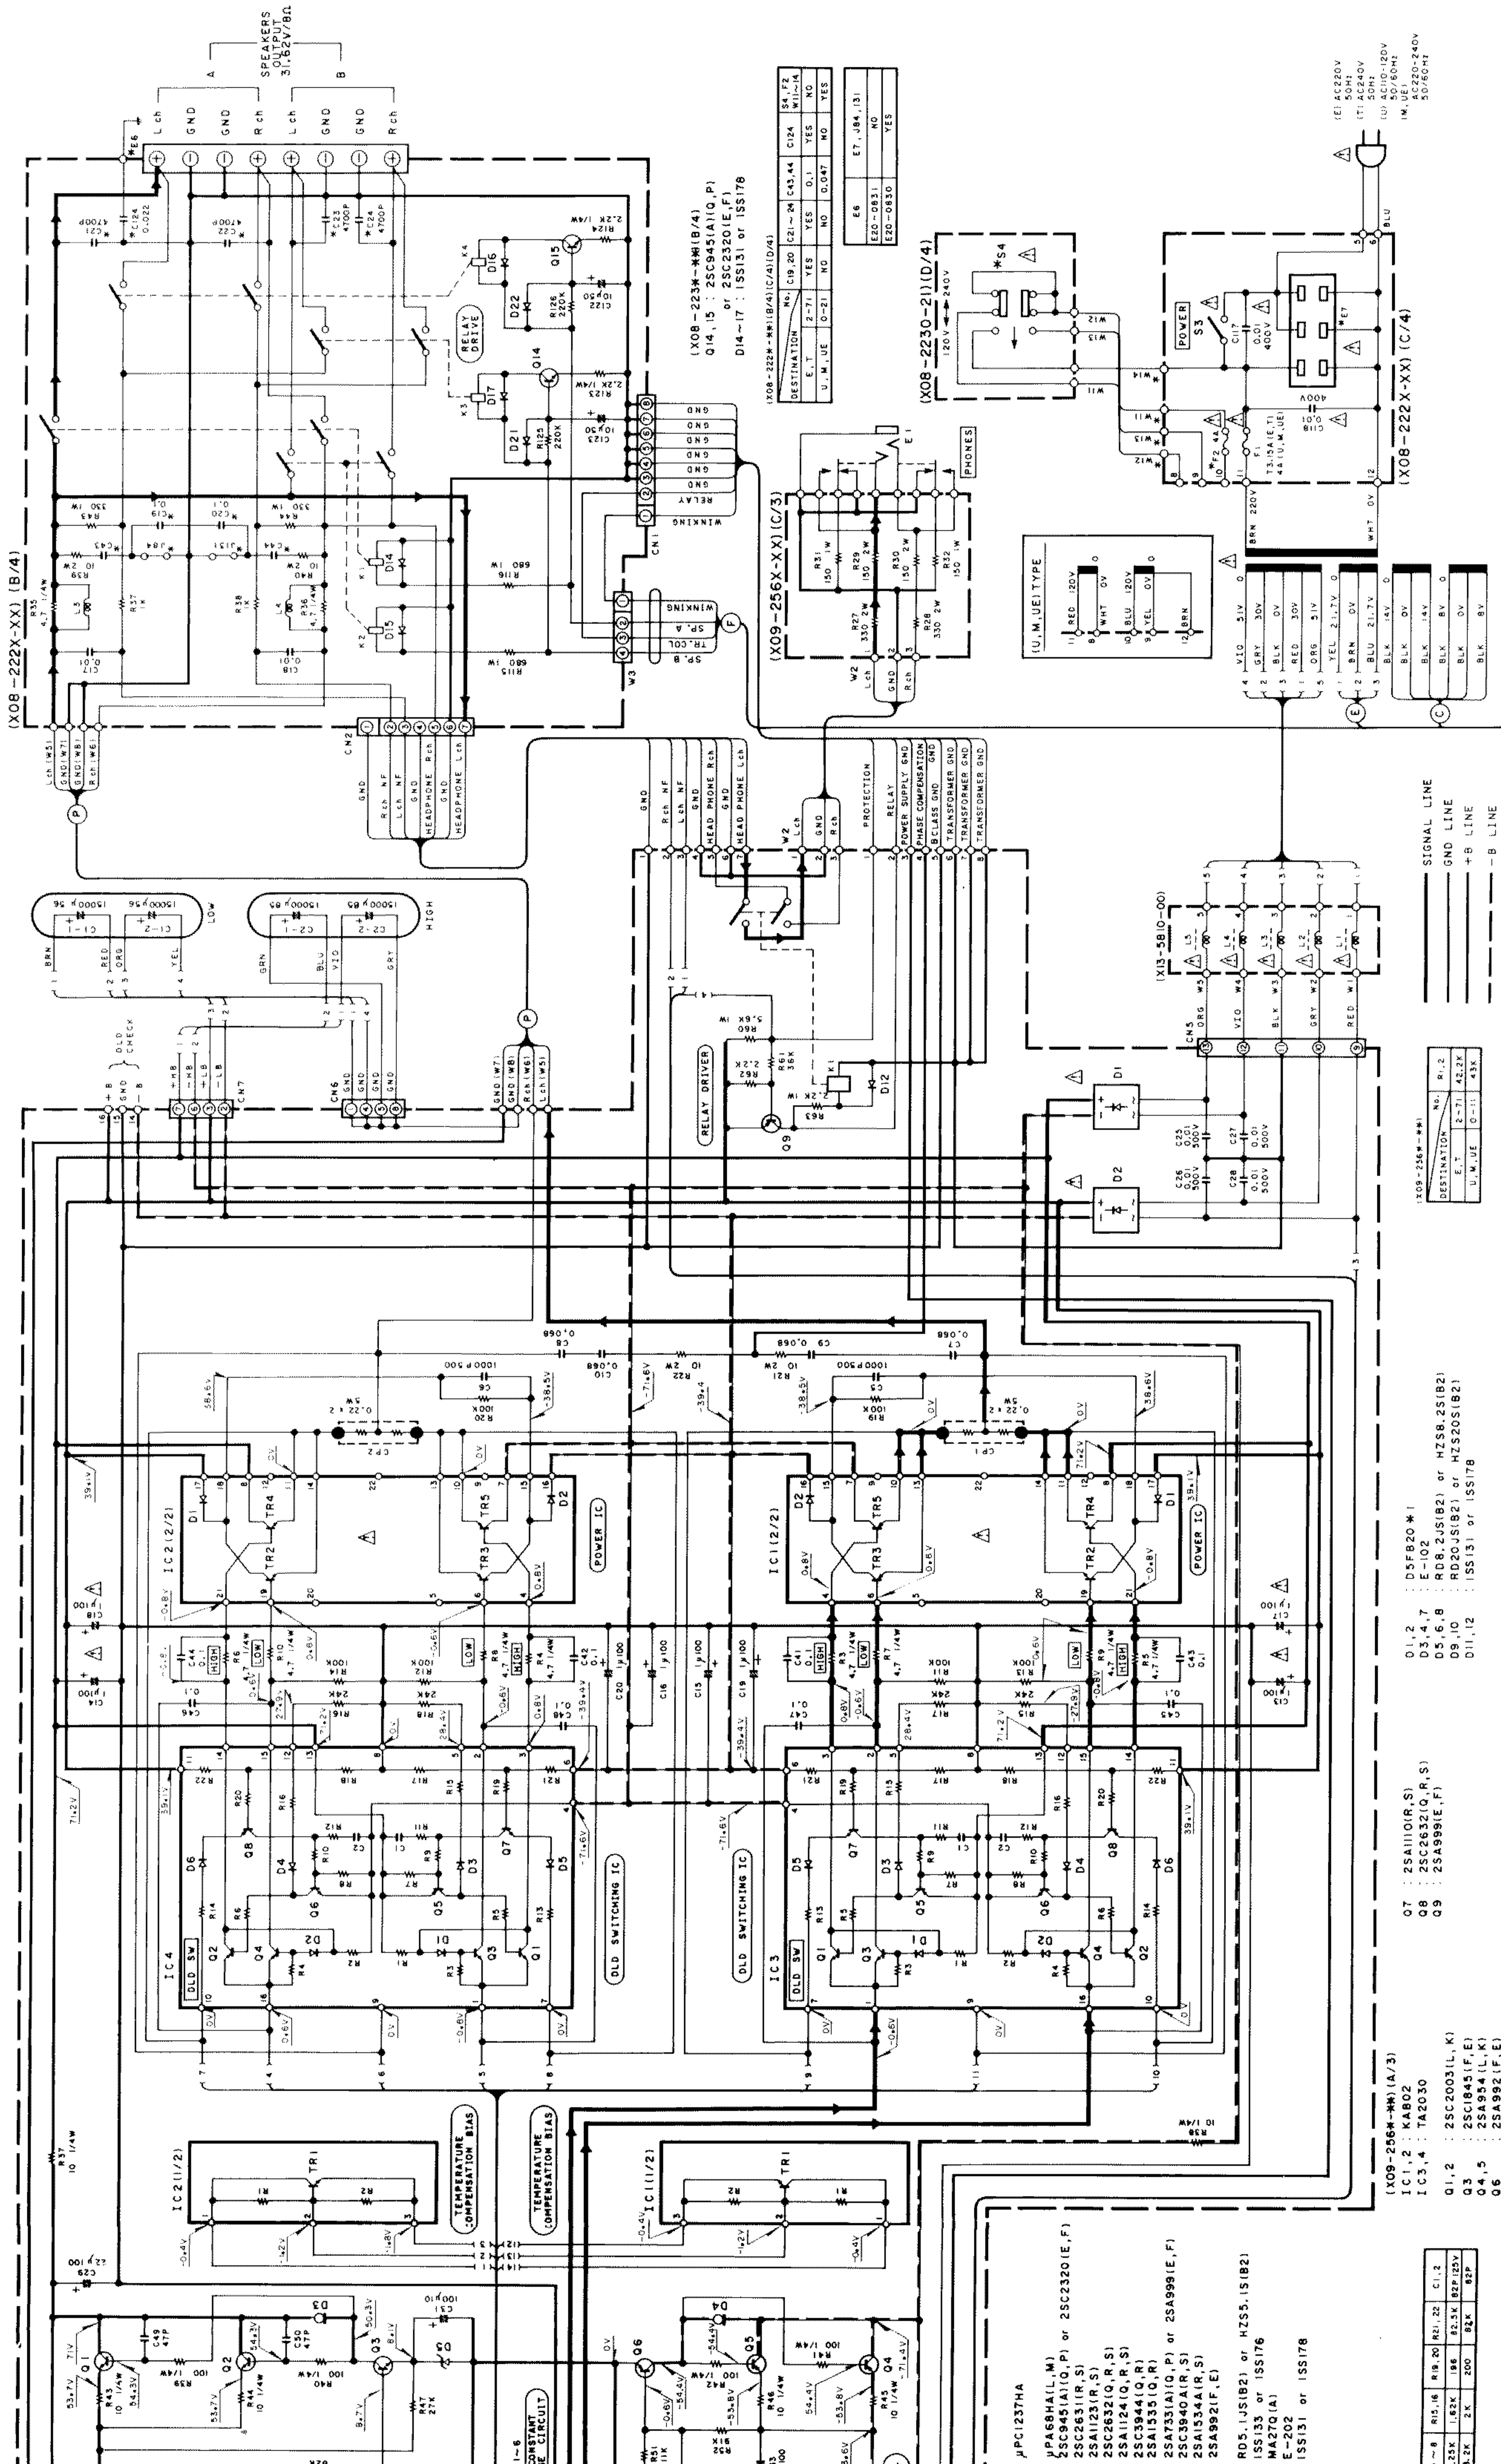

**CAUTION:** For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).  $\Delta$  Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

• DC voltages are measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or units.  
Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

• Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Voltmeter gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**  
**IC 14 : 25A992(F, E)**

**IC 1, 2 : 25A1101(R, S)**  
**IC 3, 4 : 25A999(E, F)**  
**IC 5, 6, 7 : 25C2632(I, R, S)**  
**IC 8, 9 : 25A999(E, F)**  
**IC 10, 11 : 25C2003(L, K)**  
**IC 12 : 25C1845(F, E)**  
**IC 13 : 25A954(L, K)**



PARTS LIST

\* New Parts  
Parts without Parts No. are not supplied.  
Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
Teile ohne Parts No. werden nicht geliefert.

| Ref. No.          | Address | New Parts | Parts No.   | Description                    | Destination | Remarks |
|-------------------|---------|-----------|-------------|--------------------------------|-------------|---------|
| 参照番号              | 位置      | 新         | 部品番号        | 部品名/規格                         | 仕向          | 備考      |
| <b>KAD-1100EX</b> |         |           |             |                                |             |         |
| 1                 | 1A      |           | A01-1605-01 | METALLIC CABINET               | TE          |         |
| 1                 | 1A      | *         | A01-1621-01 | METALLIC CABINET               | UMUE        |         |
| 2                 | 2A      | *         | A20-5396-02 | PANEL ASSY                     |             |         |
| 6                 | 3B      |           | B10-0909-04 | FRONT GLASS                    |             |         |
| 7                 | 1A      |           | B19-0531-05 | OPTICAL FIBER ASSY             | UMUETE      |         |
| 8                 | 3A      |           | B43-0278-04 | KENWOOD BADGE                  |             |         |
| 9                 | 1D      |           | B09-0063-05 | CAP                            |             |         |
|                   |         |           | B46-0094-03 | WARRANTY CARD                  | UUE         |         |
|                   |         |           | B46-0095-03 | WARRANTY CARD                  | UUE         |         |
|                   |         |           | B46-0122-13 | WARRANTY CARD                  | E           |         |
|                   |         |           | B46-0143-03 | WARRANTY CARD                  | T           |         |
|                   |         | *         | B50-8653-00 | INSTRUCTION MANUAL (ENGLISH)   |             |         |
|                   |         | *         | B50-8654-00 | INSTRUCTION MANUAL (FRENCH)    | ME          |         |
|                   |         | *         | B50-8655-00 | INSTRUCTION MANUAL (SPANISH)   | M           |         |
|                   |         | *         | B50-8657-00 | INSTRUCTION MANUAL (G.D.I.)    | E           |         |
|                   |         |           | B58-0223-04 | CAUTION CARD (PRE-SET 120V)    | U           |         |
|                   |         |           | B58-0513-04 | CAUTION CARD (PRESET 220-240V) | U           |         |
|                   |         |           | B58-0803-13 | CAUTION CARD                   | E           |         |
|                   |         |           | B58-0862-00 | CAUTION CARD                   | E           |         |
|                   |         |           | B59-0092-00 | SERVICE DIRECTORY              | UUE         |         |
| C1                | 2C      | *         | C90-1595-05 | ELECTRON 15000UFX256WV         |             |         |
| C2                | 2C      | *         | C90-1596-05 | ELECTRON 15000UFX285WV         |             |         |
| 11                | 3C      |           | D21-1415-03 | EXTENSION SHAFT (CARTRIDGE)    |             |         |
| 12                | 1B      |           | D21-1416-03 | EXTENSION SHAFT (POWER SW)     |             |         |
| 16                | 1D      |           | E21-0006-25 | BINDING POST                   |             |         |
| 17                | 1D      |           | E30-0459-05 | AC POWER CORD                  | E           |         |
| 17                | 1D      |           | E30-0812-05 | AC POWER CORD                  | UMUE        |         |
| 17                | 1D      |           | E30-1416-05 | AC POWER CORD                  | T           |         |
| 18                | 1A      | *         | E30-2350-05 | AUDIO CORD                     |             |         |
| 22                | 1D      | *         | F19-0562-05 | HOLE CAP                       | E           |         |
| F1                | 1B      |           | F05-3121-05 | FUSE (SEMKO) (250V T3, 15A)    | TE          |         |
| F1                | 2       |           | F05-4022-05 | FUSE (250V 4A)                 | UMUE        |         |
| 26                | 2A      |           | G01-2138-04 | COMPRESSION SPRING (DAT)       |             |         |
| 27                | 3B      |           | G01-2139-04 | COMPRESSION SPRING (DIGITAL)   |             |         |
| 28                | 1A      |           | G11-0153-04 | SOFT TAPE (80X12X3) CASE       |             |         |
| 29                | 2A      |           | G11-0155-14 | SOFT TAPE (40X9X2) PANEL       |             |         |
|                   |         | *         | H01-7723-04 | ITEM CARTON CASE               |             |         |
|                   |         |           | H10-3519-12 | POLYSTYRENE FOAMED FIXTURE     |             |         |
|                   |         |           | H10-3520-02 | POLYSTYRENE FOAMED FIXTURE     |             |         |
|                   |         |           | H25-0232-04 | PROTECTION BAG (235X350X0.03)  |             |         |
|                   |         |           | H25-0274-04 | PROTECTION BAG (900X500X0.05)  |             |         |
| 33                | 3D      |           | J02-0358-05 | INSULATOR ASSY (4K6)           |             |         |
| 34                | 3C, 3D  |           | J02-0360-05 | INSULATOR ASSY (6K6)           |             |         |
| 35                | 1C, 2C  |           | J19-0506-05 | UNIT HOLDER (H=8, 3)           |             |         |
| 36                | 2B      |           | J19-0514-05 | UNIT HOLDER (H=11, 3)          |             |         |
| 37                | 2B      |           | J19-0515-05 | UNIT HOLDER (H=8, 3)           |             |         |
| 38                | 2B, 2C  |           | J19-2536-05 | UNIT HOLDER                    |             |         |
| 40                | 1D      |           | J42-0083-05 | POWER CORD BUSHING             |             |         |
|                   |         |           | J61-0307-05 | WIRE BAND                      | UMUETE      |         |

E: Scandinavia & Europe K: USA P: Canada  
U: PX(Far East, Hawaii) T: England M: Other Areas  
UE: AAFES(Europe) X: Australia

△ indicates safety critical components.

PARTS LIST

\* New Parts  
Parts without Parts No. are not supplied.  
Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
Teile ohne Parts No. werden nicht geliefert.

| Ref. No.                                  | Address | New Parts | Parts No.      | Description                        | Destination | Remarks |
|---|---------|-----------|----------------|------------------------------------|-------------|---------|
| 参照番号                                      | 位置      | 新         | 部品番号           | 部品名/規格                             | 仕向          | 備考      |
| 44  | 2B      |           | K29-2432-03    | KNOB ASSY (BUTTON) POWER           |             |         |
| 45  | 3A      |           | K29-2837-04    | KNOB (VOLUME CONTROL)              |             |         |
| 46  | 3A      |           | K29-2838-04    | KNOB (BASS, TREBLE, BAL, REC. BUT) |             |         |
| 47  | 2B, 3B  |           | K29-2843-04    | KNOB ASSY (BUTTON) TURNOVER, MUTE  |             |         |
| 48  | 2B      |           | K29-2845-04    | KNOB ASSY (BUTTON) DAT, CD, MUTE   |             |         |
| 49  | 2B      |           | K29-2847-04    | KNOB ASSY (BUTTON) SPEAKER         |             |         |
| 50  | 3A, 3B  |           | K29-2849-04    | KNOB ASSY (BUTTON) CD              |             |         |
| 51  | 3B      |           | K29-2850-04    | KNOB ASSY (BUTTON) PHONE           |             |         |
| 52  | 3B      |           | K29-2851-04    | KNOB ASSY (BUTTON) TUNER           |             |         |
| 53  | 3A      |           | K29-2852-04    | KNOB ASSY (BUTTON) AUX             |             |         |
| 54  | 3A      |           | K29-2853-04    | KNOB ASSY (BUTTON) TAPE MONI       |             |         |
| 55  | 3A      |           | K29-2854-04    | KNOB ASSY (BUTTON) 2(DAT)/1        |             |         |
| 56  | 3A      |           | K29-2855-04    | KNOB ASSY (BUTTON) DBS/AUX         |             |         |
| 57  | 3A      |           | K29-2856-04    | KNOB ASSY (BUTTON) DAT MONITOR     |             |         |
| 58  | 3B      |           | K29-2862-04    | KNOB ASSY (BUTTON) ANALG, CD DIR   |             |         |
| 59  | 3B      |           | K29-2863-04    | KNOB ASSY (BUTTON) ANALOG          |             |         |
| 60  | 3B      |           | K29-2864-04    | KNOB ASSY (BUTTON) DIGITAL         |             |         |
| △ 64                                      | 2C      | *         | L01-4872-05    | POWER TRANSFORMER                  |             | E       |
| △ 64                                      | 2C      | *         | L01-4875-05    | POWER TRANSFORMER                  |             | UMUE    |
| △ 64                                      | 2C      | *         | L01-4877-05    | POWER TRANSFORMER                  |             | T       |
|   |         |           | L92-0019-05    | FERRITE CORE                       |             |         |
| 75  | 1C      |           | N14-0179-05    | BUILD-IN NUT                       |             |         |
| B   | 2A      |           | N09-1445-05    | SET SCREW (M3X8) PANEL             |             |         |
| C   | 1C, 1D  |           | N09-0301-05    | TAPTITE SCREW (Ø3X8)X32            |             | UMUETE  |
| D   | 3C, 3D  |           | N09-1905-05    | STEPPED SCREW FOOT                 |             |         |
| E   | 1A      |           | N09-1729-05    | TAPTITE SCREW (Ø4X8)CASE           |             |         |
| F   | 1C      | *         | N09-1960-05    | STEPPED SCREW X32                  |             |         |
| G   | 3C      | *         | N09-1964-05    | MACHINE SCREW TRANS                |             |         |
| J   | 1B      |           | N29-0216-05    | RIVET                              |             |         |
| 80  | 2C      |           | S90-0106-05    | REMOTE SWITCH SHAFT                |             |         |
| <b>POWER AMPLIFIER UNIT (X07-2392-71)</b> |         |           |                |                                    |             |         |
| C1  | 2       |           | CC45FSL1H820J  | CERAMIC                            | 82PF        | J       |
| C1  | 2       |           | C91-0177-05    | POLYSTY                            | 82PF        | K       |
| C3  | 4       |           | CC45FSL1H470J  | CERAMIC                            | 47PF        | J       |
| C3  | 4       | *         | C91-0979-05    | CERAMIC                            | 47PF        | G       |
| C5  | 6       |           | CE04KW1H010MEL | ELECTRON                           | 1.0UF       | 50WV    |
| C7  | 8       |           | CF92FV1H122J   | MF                                 | 1200PF      | J       |
| C9  | 10      |           | CC45FSL1H220J  | CERAMIC                            | 22PF        | J       |
| C9  | 10      | *         | C91-0978-05    | CERAMIC                            | 22PF        | G       |
| C11                                       | 12      |           | CC45FSL1H101J  | CERAMIC                            | 100PF       | J       |
| C11                                       | 12      |           | C009FS1H101JZS | POLYSTY                            | 100PF       | J       |
| C13                                       | 14      |           | CE04KW1A101MEL | ELECTRON                           | 100UF       | 10WV    |
| C19                                       | 20      |           | CK45FB1H152K   | CERAMIC                            | 1500PF      | K       |
| C23                                       | 24      |           | CC45FSL2H270J  | CERAMIC                            | 27PF        | J       |
| C25                                       | 28      |           | CF92FV1H392J   | MF                                 | 3900PF      | J       |
| C29                                       |         |           | CC45FSL1H221J  | CERAMIC                            | 220PF       | J       |
| C31                                       | 32      |           | CC45FSL1H221J  | CERAMIC                            | 220PF       | J       |
| C35                                       | 36      |           | CF92FV1H153J   | MF                                 | 0.015UF     | J       |
| C37                                       | 38      |           | CE04KW1C220MEL | ELECTRON                           | 22UF        | 16WV    |
| C39                                       | 44      |           | CK45FB1H471K   | CERAMIC                            | 470PF       | K       |
| C47                                       | 48      |           | CE04KW0J102MEL | ELECTRON                           | 1000UF      | 6.3WV   |
| C49                                       | 52      |           | CK45FB1H471K   | CERAMIC                            | 470PF       | K       |

E: Scandinavia & Europe K: USA P: Canada  
U: PX(Far East, Hawaii) T: England M: Other Areas  
UE: AAFES(Europe) X: Australia

△ indicates safety critical components.

PARTS LIST

\* New Parts  
Parts without Parts No. are not supplied.  
Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
Teile ohne Parts No. werden nicht geliefert.

| Ref. No. | Address | New Parts | Parts No.        | Description              | Destination | Remarks |
|----------|---------|-----------|------------------|--------------------------|-------------|---------|
| 参照番号     | 位置      | 新         | 部品番号             | 部品名/規格                   | 仕向          | 備考      |
| C71      |         |           | CE04KW1C220MEL   | ELECTRON 22UF 16WV       |             |         |
| C72      |         |           | C90-1333-05      | NP-ELEC 22UF 10WV        |             |         |
| C73      |         |           | CF92FV1H223J     | MF 0.022UF J             |             |         |
| C74      |         |           | CE04KW1C470MEL   | ELECTRON 47UF 16WV       |             |         |
| L        | 1D      |           | N29-0035-05      | PUSH RIVET (3, 5X5, S)   |             |         |
| R1       | 2       |           | RN14BK2C3160FTS  | RN 316.0 F 1/6W          | TE          |         |
| R3       | 4       |           | RN14BK2C1003FTS  | RN 100K F 1/6W           | TE          |         |
| R5       | 8       |           | RN14BK2C8251FTS  | RN 8.25K F 1/6W          | TE          |         |
| R6       | 16      |           | RN14BK2C1621FTS  | RN 1.62K F 1/6W          | TE          |         |
| R19      | 28      |           | RN14BK2C1960FTS  | RN 196.0 F 1/6W          | TE          |         |
| R21      | 22      |           | RN14BK2C8252FTS  | RN 82.5K F 1/6W          | TE          |         |
| R41      | 44      |           | RD14AB2E331JTS   | FL-PROOF RD 330 J 1/4W   |             |         |
| R49      | 58      |           | RD14AB2E101JTS   | FL-PROOF RD 100 J 1/4W   |             |         |
| R51      | 52      |           | RD14AB2E181JTS   | FL-PROOF RD 180 J 1/4W   |             |         |
| R61      | 64      |           | RD14AB2E471JTS   | FL-PROOF RD 470 J 1/4W   |             |         |
| R65      | 68      |           | RD14AB2E221JTS   | FL-PROOF RD 220 J 1/4W   |             |         |
| R69      | 72      |           | RD14AB2E331JTS   | FL-PROOF RD 330 J 1/4W   |             |         |
| R73      | 76      |           | RD14AB2E271JTS   | FL-PROOF RD 270 J 1/4W   |             |         |
| R77      | 80      |           | RD14AB2E331JTS   | FL-PROOF RD 330 J 1/4W   |             |         |
| R81      | 84      |           | RD14AB2E150JTS   | FL-PROOF RD 15 J 1/4W    |             |         |
| R85      | 88      |           | RD14AB2E561JTS   | FL-PROOF RD 560 J 1/4W   |             |         |
| R89      | 92      |           | RD14AB2E151JTS   | FL-PROOF RD 150 J 1/4W   |             |         |
| R93      | 96      |           | RD14AB2E102JTS   | FL-PROOF RD 1.0K J 1/4W  |             |         |
| R97      | 100     |           | RD14AB2E471JTS   | FL-PROOF RD 470 J 1/4W   |             |         |
| R105     | 106     |           | RD14AB2E332JTS   | FL-PROOF RD 3.3K J 1/4W  |             |         |
| R107     | 108     |           | RD14AB2E392JTS   | FL-PROOF RD 3.9K J 1/4W  |             |         |
| R109     | 112     |           | RD14AB2E911JTS   | FL-PROOF RD 910 J 1/4W   |             |         |
| R113     | 114     |           | RD14AB2E122JTS   | FL-PROOF RD 1.2K J 1/4W  |             |         |
| VR1      | 2       |           | R12-0109-05      | TRIMMING PNT. (470B) IDE |             |         |
| D1       | 4       |           | HZ55.1S(B2)      | ZENER DIODE              |             |         |
| D1       | 4       |           | R05.1JS(B2)      | ZENER DIODE              |             |         |
| D5       | 6       |           | 1SS133           | DIODE                    |             |         |
| D5       | 6       |           | 1SS176           | DIODE                    |             |         |
| D11      | 14      |           | MA270(A)         | VARIABLE                 |             |         |
| D15      | 16      |           | 1SS133           | DIODE                    |             |         |
| D15      | 16      |           | 1SS176           | DIODE                    |             |         |
| D17      | 18      |           | E-202            | CONSTANT CURRENT DIODE   |             |         |
| D19      | 22      |           | 1SS133           | DIODE                    |             |         |
| D19      | 22      |           | 1SS176           | DIODE                    |             |         |
| D23      | 26      |           | HZ55.1S(B2)      | ZENER DIODE              |             |         |
| D23      | 26      |           | R05.1JS(B2)      | ZENER DIODE              |             |         |
| D27      | 30      |           | 1SS133           | DIODE                    |             |         |
| D27      | 30      |           | 1SS176           | DIODE                    |             |         |
| TC1      |         |           | UFC1237HA        | IC (POWER AMP)           |             |         |
| O1       | 2       |           | UPA68HA(L, M)    | IC                       |             |         |
| O3       | 6       |           | 2SC2320(E, F)    | TRANSISTOR               |             |         |
| O3       | 6       |           | 2SC945(A) (D, P) | TRANSISTOR               |             |         |
| O7       | 8       |           | 2SC2631(R, S)    | TRANSISTOR               |             |         |
| O9       | 12      |           | 2SA1123(R, S)    | TRANSISTOR               |             |         |
| O13      | 18      |           | 2SC2632(O, R, S) | TRANSISTOR               |             |         |
| O19      | 20      |           | 2SA1124(O, R, S) | TRANSISTOR               |             |         |
| O21      | 22      |           | 2SC2632(O, R, S) | TRANSISTOR               |             |         |
| O23      | 24      |           | 2SA1123(R, S)    | TRANSISTOR               |             |         |
| O25      | 26      |           | 2SC2631(R, S)    | TRANSISTOR               |             |         |

E: Scandinavia & Europe K: USA P: Canada  
U: PX(Far East, Hawaii) T: England M: Other Areas  
UE: AAFES(Europe) X: Australia

△ indicates safety critical components.

PARTS LIST

\* New Parts  
Parts without Parts No. are not supplied.  
Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
Teile ohne Parts No. werden nicht geliefert.

| Ref. No. | Address | New Parts | Parts No.        | Description | Destination | Remarks |
|----------|---------|-----------|------------------|-------------|-------------|---------|
| 参照番号     | 位置      | 新         | 部品番号             | 部品名/規格      | 仕向          | 備考      |
| O27      | 28      |           | 2SC3944A(O, R)   | TRANSISTOR  |             |         |
| O29      | 30      |           | 2SA1535A(O, R)   | TRANSISTOR  |             |         |
| O31      | 32      |           | 2SC2320(E, F)    | TRANSISTOR  |             |         |
| O31      | 32      |           | 2SC945(A) (D, P) | TRANSISTOR  |             |         |
| O33      | 34      |           | 2SA733(A) (D, P) |             |             |         |



| Ref. No.                        | Address | Parts No.       | Description                    | Destination | Remarks |
|---------------------------------|---------|-----------------|--------------------------------|-------------|---------|
| 05                              | -10     | 25C945(A)(0.P)  | TRANSISTOR                     |             |         |
| 01                              | -12     | 25A1110(O.R)    | TRANSISTOR                     |             |         |
| 012                             | -15     | 25C2320(E.F)    | TRANSISTOR                     |             |         |
| 013                             | -15     | 25C2320(E.F)    | TRANSISTOR                     |             |         |
| 013                             | -15     | 25C945(A)(0.P)  | TRANSISTOR                     |             |         |
| <b>AUDIO UNIT (X09-2562-71)</b> |         |                 |                                |             |         |
| C5                              | -6      | CK45F2H103P     | CERAMIC                        | 1000PF      | K       |
| C7                              | -10     | CF92FV1H683J    | MF                             | 0.068UF     | J       |
| C11                             | -12     | CC45FSL1H101J   | CERAMIC                        | 100PF       | J       |
| C11                             | -12     | CC09FSL1H101JZS | POLYSTY                        | 100PF       | J       |
| C13                             | -20     | CE04W2A010M     | ELECTRS                        | 1.0UF       | 100WV   |
| C25                             | -28     | CK45FE2H103P    | CERAMIC                        | 0.010UF     | P       |
| C29                             | -30     | CE04W2A220M     | ELECTRS                        | 22UF        | 100WV   |
| C31                             | -33     | CE04W1A101M     | ELECTRS                        | 1.0UF       | 10WV    |
| C34                             | -35     | CE04W2A010M     | ELECTRS                        | 1.0UF       | 100WV   |
| C36                             | -37     | CF92FV1H103J    | MF                             | 0.010UF     | J       |
| C38                             | -39     | CF04K1H101M     | ELECTRS                        | 1.0UF       | 50WV    |
| C40                             | -40     | CE04W1V4R7M     | ELECTRS                        | 4.7UF       | 35WV    |
| C41                             | -48     | CF92FV1H104J    | MF                             | 0.10UF      | J       |
| C49                             | -50     | CC45FSL1H470J   | CERAMIC                        | 47PF        | J       |
| E1                              | -2      | R23-0149-05     | TERMINAL                       |             |         |
| E1                              | -2      | E11-0174-05     | PHONE JACK                     | (PHONES)    |         |
| N                               | 1C, 1D  | N09-1236-05     | TAPPING SCREW                  | (Ø3X16)     |         |
| CP1                             | -2      | R90-0187-05     | MULTI-COMP                     | 0.22X2      | K 5W    |
| R1                              | -2      | RN14BK2C4222F   | RN                             | 42.2K       | F 1/4W  |
| R3                              | -10     | RS14AB2E4R7JTS  | FL-PR00F RD                    | 4.7         | J 1/4W  |
| R21                             | -22     | RS14DB3D100JTS  | FL-PR00F RS                    | 10          | J 2W    |
| R23                             | -24     | RN14BK2C3160F   | RN                             | 316.0       | F 1/6W  |
| R27                             | -28     | RS14DB3D331JTE  | FL-PR00F RS                    | 330         | J 2W    |
| R29                             | -30     | RS14DB3D151JTE  | FL-PR00F RS                    | 150         | J 2W    |
| R31                             | -32     | RS14DB3A151JTE  | FL-PR00F RS                    | 150         | J 1W    |
| R37                             | -38     | RD14AB2E100JTS  | FL-PR00F RD                    | 10          | J 1/4W  |
| R39                             | -42     | RD14AB2E101JTS  | FL-PR00F RD                    | 100         | J 1/4W  |
| R43                             | -46     | RD14AB2E100JTS  | FL-PR00F RD                    | 10          | J 1/4W  |
| R54                             | -       | RS14DB3A271JTE  | FL-PR00F RS                    | 270         | J 1W    |
| R57                             | -       | RD14AB2E101JTS  | FL-PR00F RD                    | 100         | J 1/4W  |
| R58                             | -       | RD14AB2E391JTS  | FL-PR00F RD                    | 390         | J 1/4W  |
| R60                             | -       | RS14DB3A562JTE  | FL-PR00F RS                    | 5.6K        | J 1W    |
| R63                             | -       | RS14DB3A222JTE  | FL-PR00F RS                    | 2.2K        | J 1W    |
| VR1                             | 3C      | R10-5021-05     | POTENTIOMETER(100K)VOLUME CONT |             |         |
| K1                              | -       | SS1-2075-05     | MAGNETIC RELAY                 |             |         |
| D1                              | -2      | DSFB20+1        | DISC                           |             |         |
| D3                              | -4      | E-102           | CONSTANT CURRENT DISC          |             |         |
| D5                              | -6      | HZ58.2S(B2)     | ZENER DISC                     |             |         |
| D5                              | -6      | RD8.2S(B2)      | ZENER DISC                     |             |         |
| D7                              | -       | E-102           | CONSTANT CURRENT DISC          |             |         |
| D8                              | -       | HZ58.2S(B2)     | ZENER DISC                     |             |         |
| D8                              | -       | RD8.2S(B2)      | ZENER DISC                     |             |         |
| D9                              | -10     | HZ50S(B2)       | ZENER DISC                     |             |         |
| D9                              | -10     | RD20JS(B2)      | ZENER DISC                     |             |         |
| D11                             | -12     | 15S131          | DISC                           |             |         |

Parts without Parts No. are not supplied.  
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
 Teile ohne Parts No. werden nicht geliefert.

**PARTS LIST**

\* New Parts

Parts without Parts No. are not supplied.  
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
 Teile ohne Parts No. werden nicht geliefert.

| Ref. No.                        | Address | Parts No.       | Description                    | Destination | Remarks |
|---------------------------------|---------|-----------------|--------------------------------|-------------|---------|
| 05                              | -10     | 25C945(A)(0.P)  | TRANSISTOR                     |             |         |
| 01                              | -12     | 25A1110(O.R)    | TRANSISTOR                     |             |         |
| 012                             | -15     | 25C2320(E.F)    | TRANSISTOR                     |             |         |
| 013                             | -15     | 25C2320(E.F)    | TRANSISTOR                     |             |         |
| 013                             | -15     | 25C945(A)(0.P)  | TRANSISTOR                     |             |         |
| <b>AUDIO UNIT (X09-2562-71)</b> |         |                 |                                |             |         |
| C5                              | -6      | CK45F2H103P     | CERAMIC                        | 1000PF      | K       |
| C7                              | -10     | CF92FV1H683J    | MF                             | 0.068UF     | J       |
| C11                             | -12     | CC45FSL1H101J   | CERAMIC                        | 100PF       | J       |
| C11                             | -12     | CC09FSL1H101JZS | POLYSTY                        | 100PF       | J       |
| C13                             | -20     | CE04W2A010M     | ELECTRS                        | 1.0UF       | 100WV   |
| C25                             | -28     | CK45FE2H103P    | CERAMIC                        | 0.010UF     | P       |
| C29                             | -30     | CE04W2A220M     | ELECTRS                        | 22UF        | 100WV   |
| C31                             | -33     | CE04W1A101M     | ELECTRS                        | 1.0UF       | 10WV    |
| C34                             | -35     | CE04W2A010M     | ELECTRS                        | 1.0UF       | 100WV   |
| C36                             | -37     | CF92FV1H103J    | MF                             | 0.010UF     | J       |
| C38                             | -39     | CF04K1H101M     | ELECTRS                        | 1.0UF       | 50WV    |
| C40                             | -40     | CE04W1V4R7M     | ELECTRS                        | 4.7UF       | 35WV    |
| C41                             | -48     | CF92FV1H104J    | MF                             | 0.10UF      | J       |
| C49                             | -50     | CC45FSL1H470J   | CERAMIC                        | 47PF        | J       |
| E1                              | -2      | R23-0149-05     | TERMINAL                       |             |         |
| E1                              | -2      | E11-0174-05     | PHONE JACK                     | (PHONES)    |         |
| N                               | 1C, 1D  | N09-1236-05     | TAPPING SCREW                  | (Ø3X16)     |         |
| CP1                             | -2      | R90-0187-05     | MULTI-COMP                     | 0.22X2      | K 5W    |
| R1                              | -2      | RN14BK2C4222F   | RN                             | 42.2K       | F 1/4W  |
| R3                              | -10     | RS14AB2E4R7JTS  | FL-PR00F RD                    | 4.7         | J 1/4W  |
| R21                             | -22     | RS14DB3D100JTS  | FL-PR00F RS                    | 10          | J 2W    |
| R23                             | -24     | RN14BK2C3160F   | RN                             | 316.0       | F 1/6W  |
| R27                             | -28     | RS14DB3D331JTE  | FL-PR00F RS                    | 330         | J 2W    |
| R29                             | -30     | RS14DB3D151JTE  | FL-PR00F RS                    | 150         | J 2W    |
| R31                             | -32     | RS14DB3A151JTE  | FL-PR00F RS                    | 150         | J 1W    |
| R37                             | -38     | RD14AB2E100JTS  | FL-PR00F RD                    | 10          | J 1/4W  |
| R39                             | -42     | RD14AB2E101JTS  | FL-PR00F RD                    | 100         | J 1/4W  |
| R43                             | -46     | RD14AB2E100JTS  | FL-PR00F RD                    | 10          | J 1/4W  |
| R54                             | -       | RS14DB3A271JTE  | FL-PR00F RS                    | 270         | J 1W    |
| R57                             | -       | RD14AB2E101JTS  | FL-PR00F RD                    | 100         | J 1/4W  |
| R58                             | -       | RD14AB2E391JTS  | FL-PR00F RD                    | 390         | J 1/4W  |
| R60                             | -       | RS14DB3A562JTE  | FL-PR00F RS                    | 5.6K        | J 1W    |
| R63                             | -       | RS14DB3A222JTE  | FL-PR00F RS                    | 2.2K        | J 1W    |
| VR1                             | 3C      | R10-5021-05     | POTENTIOMETER(100K)VOLUME CONT |             |         |
| K1                              | -       | SS1-2075-05     | MAGNETIC RELAY                 |             |         |
| D1                              | -2      | DSFB20+1        | DISC                           |             |         |
| D3                              | -4      | E-102           | CONSTANT CURRENT DISC          |             |         |
| D5                              | -6      | HZ58.2S(B2)     | ZENER DISC                     |             |         |
| D5                              | -6      | RD8.2S(B2)      | ZENER DISC                     |             |         |
| D7                              | -       | E-102           | CONSTANT CURRENT DISC          |             |         |
| D8                              | -       | HZ58.2S(B2)     | ZENER DISC                     |             |         |
| D8                              | -       | RD8.2S(B2)      | ZENER DISC                     |             |         |
| D9                              | -10     | HZ50S(B2)       | ZENER DISC                     |             |         |
| D9                              | -10     | RD20JS(B2)      | ZENER DISC                     |             |         |
| D11                             | -12     | 15S131          | DISC                           |             |         |

**KA-D1100EX**

**PARTS LIST**

\* New Parts  
 Parts without Parts No. are not supplied.  
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.  
 Teile ohne Parts No. werden nicht geliefert.

| Ref. No.                        | Address | Parts No.      | Description                        | Destination | Remarks |
|---------------------------------|---------|----------------|------------------------------------|-------------|---------|
| D11                             | -12     | 15S17B         | DISC                               |             |         |
| IC1                             | -2      | K4802          | (C) DRIVER, POWER                  |             |         |
| IC3                             | -4      | 7A2030         | (C) (B/F) SWITCHING                |             |         |
| 01                              | -2      | 25C2003(L.K)   | TRANSISTOR                         |             |         |
| 03                              | -       | 25C1845(F.E)   | TRANSISTOR                         |             |         |
| D4                              | -5      | 25A954(L.K)    | TRANSISTOR                         |             |         |
| 06                              | -       | 25A992(F.E)    | TRANSISTOR                         |             |         |
| 07                              | -       | 25A1110(O.R.S) | TRANSISTOR                         |             |         |
| 08                              | -       | 25C2637(O.R.S) | TRANSISTOR                         |             |         |
| 09                              | -       | 25A992(F.E)    | TRANSISTOR                         |             |         |
| <b>PHONE UNIT (X11-2462-71)</b> |         |                |                                    |             |         |
| L09                             | 2B      | A33-0098-05    | REFLECTOR                          |             |         |
| D1                              | -2      | B30-1012-05    | LED(SLIP-981C-50)DAT/TAPE SEL      |             |         |
| D3                              | -7      | B30-1206-05    | LED(SLIP-981C-50)INPT SEL          |             |         |
| D8                              | -12     | B30-1012-05    | LED(SLIP-981C-50)INPT, DAT, CD     |             |         |
| D13                             | -15     | B30-1206-05    | LED(DIGITAL INPUT) COLLECTOR       |             |         |
| D16                             | -       | B30-1012-05    | LED(SLIP-981C-50)PLL LOCK IND      |             |         |
| D17                             | -       | B30-1206-05    | LED                                |             |         |
| D19                             | -       | B30-1012-05    | LED(SLIP-981C-50)POWER             |             |         |
| PL1                             | -3      | B30-1212-05    | LAMP(BLU) DIGITAL, ANALOG          |             |         |
| C3                              | -4      | CF92FV1H154J   | MF                                 | 0.15UF      | J       |
| C5                              | -6      | CF92FV1H333J   | MF                                 | 0.033UF     | J       |
| C7                              | -10     | CF92FV1H101K   | MF                                 | 100PF       | K       |
| C11                             | -12     | CF92FV1H105J   | MF                                 | 1.0UF       | J       |
| C13                             | -14     | CE04K1H4R7M    | ELECTRS                            | 2.2UF       | 50WV    |
| C15                             | -16     | CK45F2H103P    | CERAMIC                            | 1000PF      | K       |
| C17                             | -20     | CF92FV1H393J   | MF                                 | 0.039UF     | J       |
| C21                             | -24     | CE04K1C220M    | ELECTRS                            | 22UF        | 16WV    |
| C25                             | -28     | CF92FV1H684J   | MF                                 | 0.68UF      | J       |
| C29                             | -30     | CC45FSL1H221J  | CERAMIC                            | 220PF       | J       |
| C31                             | -32     | CF92FV1H393J   | MF                                 | 0.039UF     | J       |
| C33                             | -34     | CF92FV1H101K   | MF                                 | 100PF       | K       |
| C39                             | -42     | CF92FV1H334J   | MF                                 | 0.33UF      | J       |
| C43                             | -44     | C91-0168-05    | POLYSTY                            | 15PF        | K       |
| C51                             | -52     | C90-1335-05    | MF-ELEC                            | 4.7UF       | 50WV    |
| C53                             | -54     | CF92FV1H105J   | MF                                 | 1.0UF       | J       |
| C55                             | -       | CF92FV1H103J   | MF                                 | 0.010UF     | J       |
| 110                             | -       | J11-0111-05    | CLAMPER                            |             |         |
| -                               | -       | J61-0039-05    | WIRE BAND                          |             |         |
| L1                              | -2      | L40-1021-14    | SMALL FIXED INDUCTOR(1.0MH-K)      |             |         |
| R51                             | -       | RD14B2E102JTS  | FL-PR00F RD                        | 1.0K        | J 1/4W  |
| R59                             | -       | RS14K3D181JTE  | FL-PR00F RS                        | 180         | J 2W    |
| R60                             | -       | RS14K3D182JTE  | FL-PR00F RS                        | 1.8K        | J 2W    |
| R61                             | -       | RS14K3D272JTE  | FL-PR00F RS                        | 2.7K        | J 2W    |
| R62                             | -       | RS14K3D181JTE  | FL-PR00F RS                        | 180         | J 2W    |
| VR1                             | 3C      | R06-5166-05    | POTENTIOMETER (BALANCE) 200K       |             |         |
| VR2                             | 3B      | R06-2018-05    | POTENTIOMETER (BASS, TREBLE) 5K    |             |         |
| S1                              | 3B      | S42-6022-05    | MULTIPLE PUSH SWITCH (SELECTOR)    |             |         |
| S2                              | 3B      | S42-3107-05    | MULTIPLE PUSH SWITCH (DAT/TAPE)    |             |         |
| S3                              | 3B      | S42-2160-05    | MULTIPLE PUSH SWITCH (DAT, CD)     |             |         |
| S4                              | 3B, 3C  | S40-2351-05    | PUSH SWITCH (MODE, SUBSONIC)       |             |         |
| S6                              | 3C      | S42-3106-05    | MULTIPLE PUSH SWITCH (DIGI, ANALG) |             |         |



