

AM-FM STEREO RECEIVER



# KR-V45

## SERVICE MANUAL

# KENWOOD

KENWOOD CORPORATION

©1986-6 PRINTED IN JAPAN  
B51-3001-00(B)2096

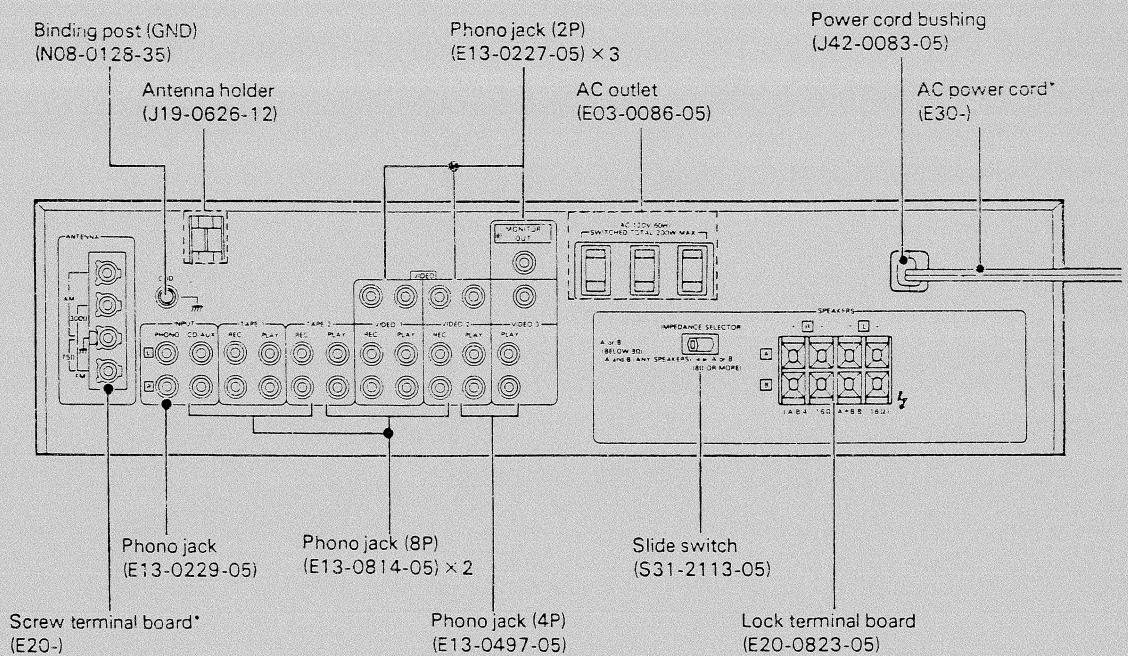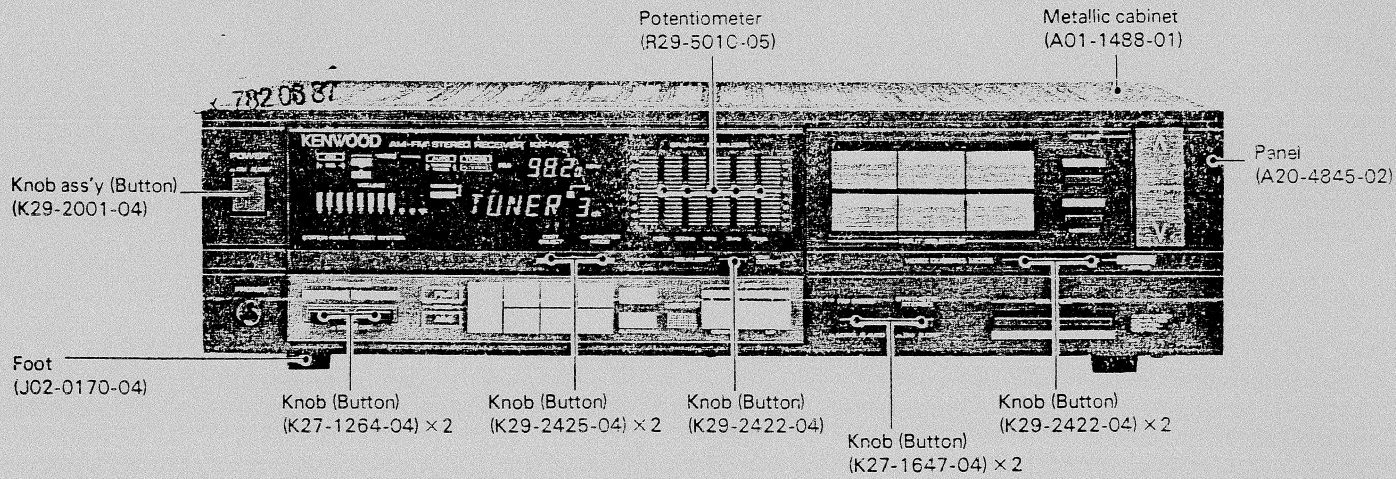


\*Refer to parts list on page 14.


# KR-V45

## DISASSEMBLY FOR REPAIR

- 1 Remove 6 screws retaining the front pannel ①
- 2 Pull the front pannel toward to arrow direction ②
- 3 Remove screw retaining the sub-pannel ③
- 4 Remove the sub-pannel from hooks carefully ④

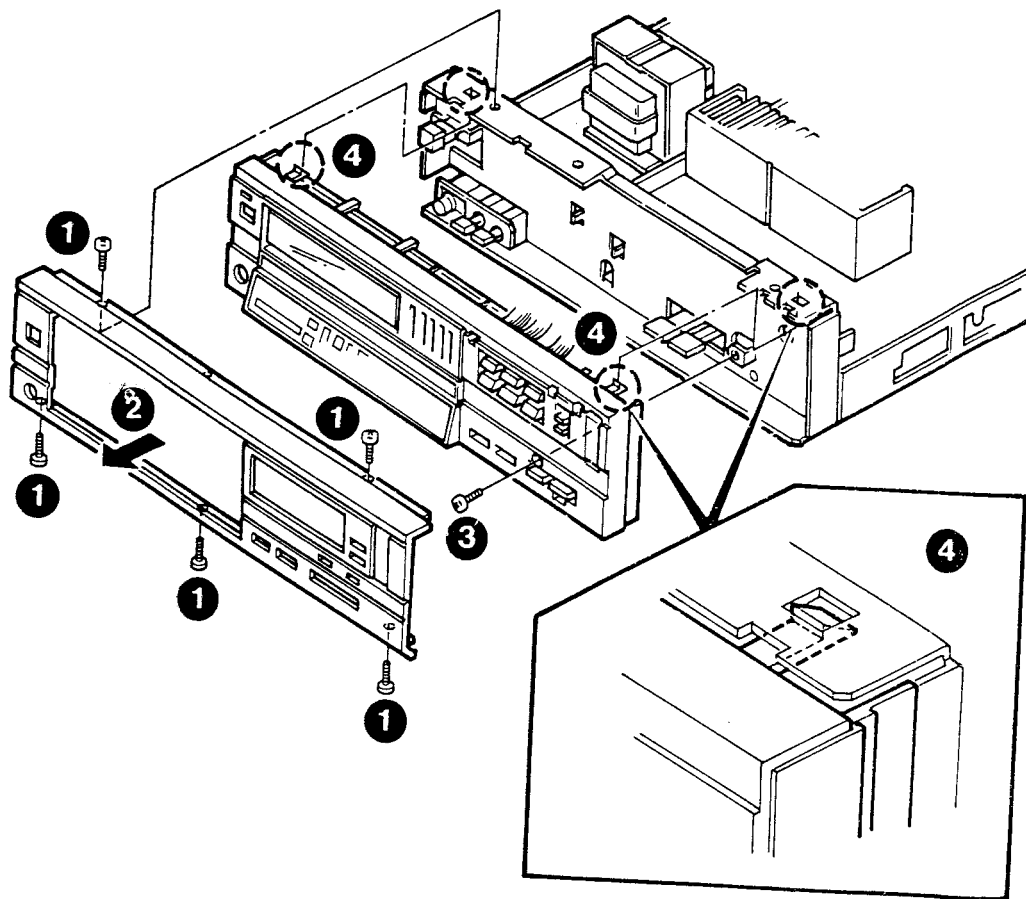

## BLOCK DIAGRAM

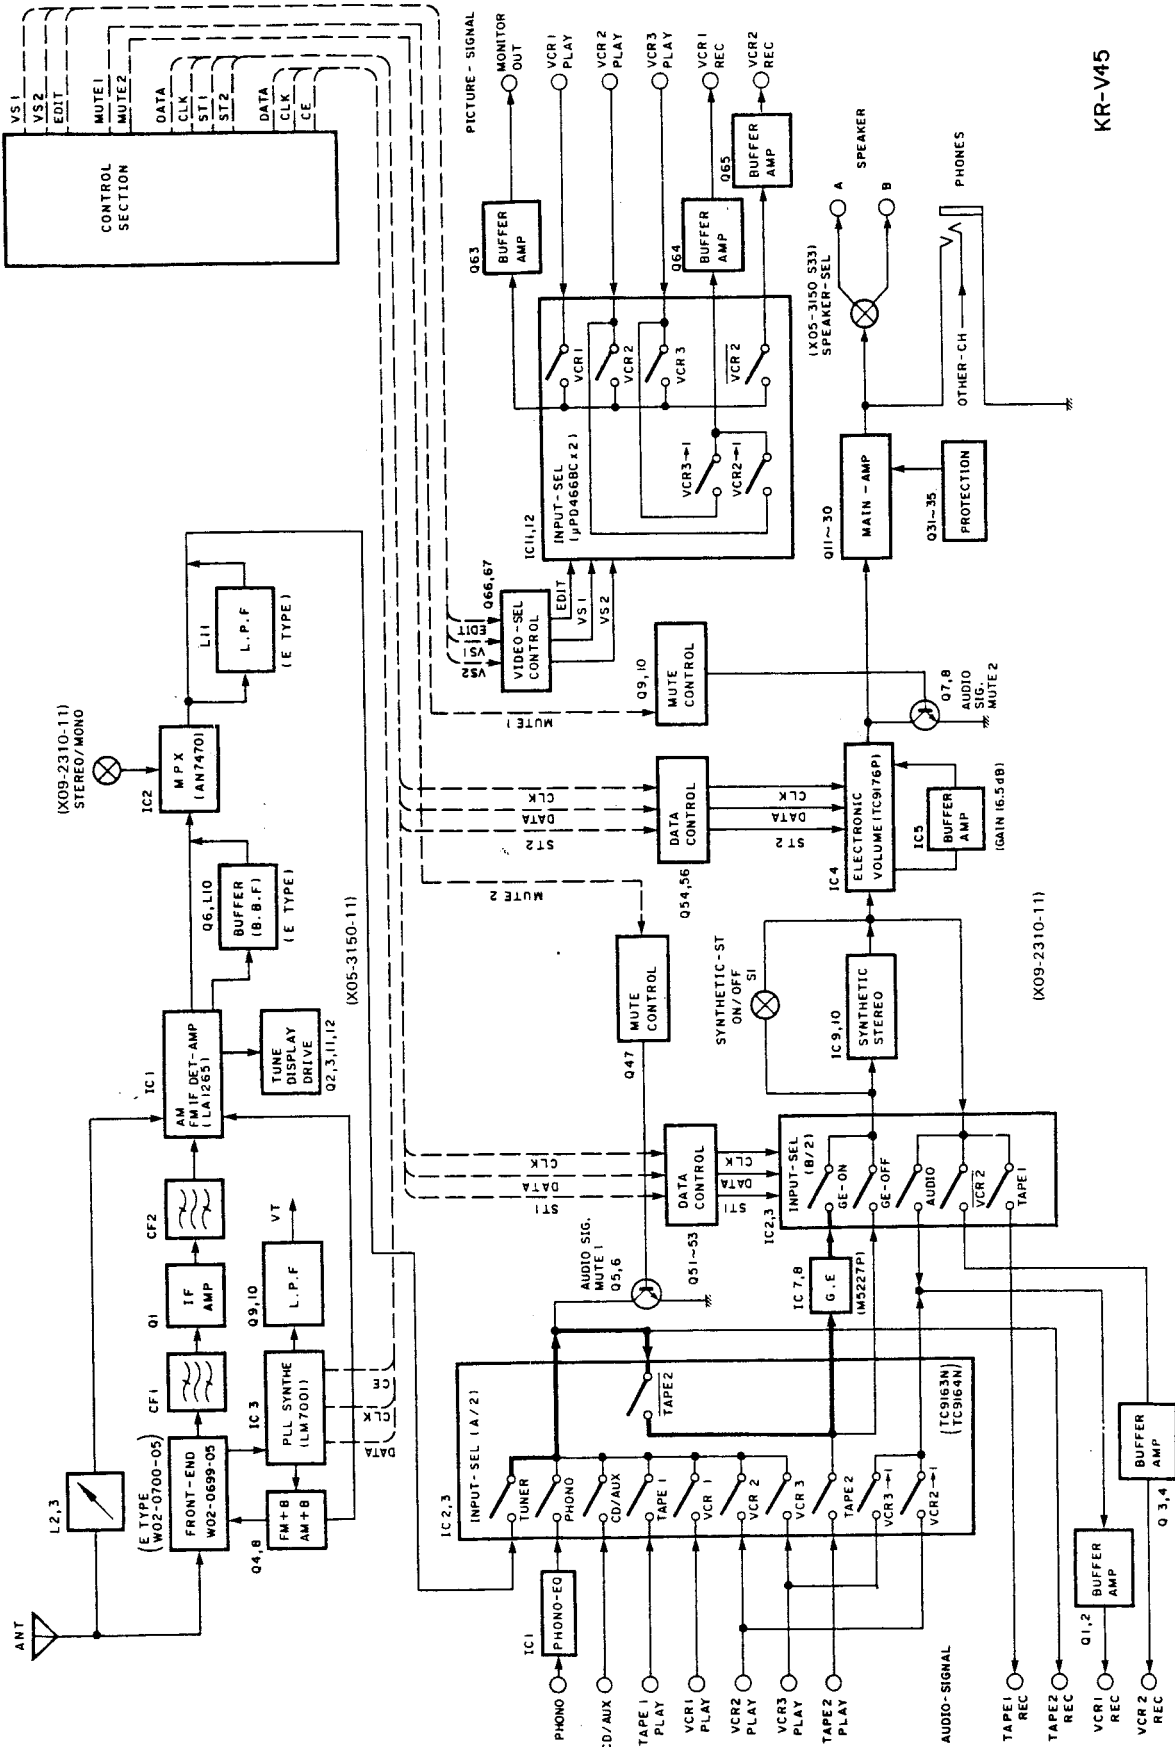

KR-V45

## CIRCUIT DESCRIPTION

### Description of components.

#### AUDIO UNIT (X09-2310-11)

Components	Application/Function	Operation/Condition/Compatibility												
IC1	Phono EQ AMP	MM cartridge												
IC2	Input selecting	selector Phono/CD/TAPE1/TAPE2												
IC3	Input selecting	selector audio sig. of VIDEO 1/2/3												
IC4	Electronic Volume													
IC5	Buffer AMP	(Voltage gain: 16 dB)												
IC7, 8	Graphic EQ	5 freq. points												
IC9, 10	Synthetic Stereo	Buffer AMP/3 stage B.P.F.												
IC11, 12	Picture sig. selecting	VIDEO 1/2/3												
Q1~4	Buffer AMP (audio sig.)	VIDEO 1/2 (emitter follower)												
Q5, 6	Audio sig. mute 1 (TAPE REC)	MUTE-ON at Q47 ON.												
Q7, 8	Audio sig. mute 2 (Electronic VOL out)	MUTE-ON at Q9 ON.												
Q9, 10	Audio sig. mute control of Q7, 8													
Q11~14	Power AMP (1st diff AMP)													
Q15~18	Power AMP (2nd diff AMP)													
Q19, 20	Power AMP (Current mirror configuration in A-class stage)													
Q21, 22	Power AMP (Bias)													
Q23~26	Power AMN (driver stage)													
Q27~30	Power AM (Final stage)													
Q31~33	Current limiter	Q31 (Q32) detects terminal voltage of emitter resistor CP1 (CP2). When SP terminal is shorted to ground, Q31 (Q32) becomes to ON and Q33 goes to ON. So that regulator circuit (Q34, 35) does not function.												
Q34, 35	Power supply to 1st stage of Power AMP	Q35 works as ripple filter when Q34 is OFF.												
Q36	Re-set of IC 11 (—picture sig. selecting)	Q36 cuts VIDEO 3 selecting signal to IC11, when POWER SW is ON/OFF.												
Q37	—30 V AVR	Display												
Q38~40	+14 V AVR													
Q41~44	—14 V AVR	<table border="1"> <thead> <tr> <th>Status</th> <th>Q45</th> <th>Q46</th> </tr> </thead> <tbody> <tr> <td>POWER ON</td> <td>off</td> <td>on</td> </tr> <tr> <td>POWER OFF</td> <td>on</td> <td>off</td> </tr> </tbody> </table>	Status	Q45	Q46	POWER ON	off	on	POWER OFF	on	off			
Status	Q45	Q46												
POWER ON	off	on												
POWER OFF	on	off												
Q45, 46	+5 V AVR (for microprocessor)													
Q51	store sig. control (IC2, 3)													
Q52	data sig. control (IC2, 3)													
Q53	clock sig. control (IC2, 3)													
Q54	store sig. control (IC4)													
Q55	store sig. control (IC4)													
Q56	clock sig. control (IC4)													
Q57~59	Relay (KI) control													
Q60~62	+5 V AVR	<p>Fip</p> <table border="1"> <thead> <tr> <th>Status</th> <th>Q60</th> <th>Q61</th> <th>Q62</th> </tr> </thead> <tbody> <tr> <td>POWER ON</td> <td>on</td> <td>off</td> <td>working</td> </tr> <tr> <td>POWER OFF</td> <td>off</td> <td>on</td> <td>off</td> </tr> </tbody> </table>	Status	Q60	Q61	Q62	POWER ON	on	off	working	POWER OFF	off	on	off
Status	Q60	Q61	Q62											
POWER ON	on	off	working											
POWER OFF	off	on	off											
Q63	Buffer AMP (picture sig. output)	VIDEO 1 (emitter follower)												
Q64		VIDEO 2 (emitter follower)												
Q65		Monitor out (emitter follower)												
Q66, 67	Control of picture sig. selecting													

## CIRCUIT DESCRIPTION

TUNER,  $\mu$ -COM UNIT (X05-3150-11)

Components	Application/Function	Operation/Condition/Compatibility									
IC1	FM IF/DET, AM MIX/IF/DET										
IC2	FM MPX										
IC3	PLL synthe										
IC4	Microprocessor	system control									
IC5	Microprocessor	remote control									
IC6~10	FIP driver	(transistor array)									
IC11	Frequency display control	conv. to display frequency (static display)									
Q1	FM IF AMP										
Q2, 3	TUNE indicating signal	<table border="1"> <tr> <td>status</td> <td>Q2</td> <td>Q3</td> </tr> <tr> <td>TUNE</td> <td>OFF</td> <td>ON</td> </tr> <tr> <td>not TUNE</td> <td>ON</td> <td>OFF</td> </tr> </table>	status	Q2	Q3	TUNE	OFF	ON	not TUNE	ON	OFF
status	Q2	Q3									
TUNE	OFF	ON									
not TUNE	ON	OFF									
Q4	AM/FM switching	<table border="1"> <tr> <td></td> <td>FM</td> <td>AM</td> </tr> <tr> <td>Q4</td> <td>ON</td> <td>OFF</td> </tr> </table>		FM	AM	Q4	ON	OFF			
	FM	AM									
Q4	ON	OFF									
Q5	Prevention of wrong STEREO indicating	Q5 ON when FM TUNE indicator lights on.									
Q6	Buffer AMP	(emitter follower)									
Q7	Ripple filter										
Q8	FM + B switching										
Q9, 10	L. P. F in PLL synthe										
Q11	FIP driver (TUNE)	working when TUNE indicator lights on.									
Q12	FIP driver (STEREO)	working when STEREO indicator lights on.									

## ADJUSTMENT

No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
<b>FM SECTION</b> Unless otherwise specified, the individual switches should be set as following: SELECTOR: FM MODE: STEREO							
1	DISCRIMINATOR (1)	(A) 98.0MHz 1kHz, ±75kHz dev 60dB(ANT input)	Connect a DC voltmeter between TP8 and TP9.	MONO 98.0MHz	(X05-3150) T2	0V	
2	DISCRIMINATOR (2)	(A) 98.0MHz 1kHz, ±75kHz dev 60dB(ANT input)	(B)	MONO 98.0MHz	(X05-3150) T3	Minimum distortion.	
Repeat alignments 1 and 2 several times.							
3	VCO	(A) 98.0MHz 0 dev 60dB(ANT input)	Connect a 330kΩ resistor to TP7. Connect a frequency counter to the resistor via an AC voltmeter.	98.0MHz	(X05-3150) VR3	76.00kHz	
4	DISTORTION (STEREO)	(C) 98.0MHz 1kHz, ±68.25kHz dev Selector:L or R Pilot: ±6.75kHz dev 60dB(ANT input)	(B)	98.0MHz	(X05-3150) Front end IFT	Minimum distortion.	
5	SEPARATION	(C) 98.0MHz 1kHz, ±68.25kHz dev Selector:L or R Pilot: ±6.75kHz dev 60dB(ANT input)	(B)	98.0MHz	(X05-3150) VR4	Minimum crosstalk. A compromise adjustment may be required if left-to-right and right-to-left separations are unequal.	
<b>AM SECTION</b> Keep the loop antenna installed. INPUT SELECTOR: AM							
(1)	BAND EDGE (1)	—	Connect a DC voltmeter to TP2.	530kHz (531kHz)	(X05-3150) L3	1.5V	
(2)	BAND EDGE (2)	—	Connect a DC voltmeter to TP2.	1610kHz (1602kHz)	(X05-3150) TC1	8.0V	
Repeat alignments (1) and (2) several times.							
(3)	RF ALIGNMENT (1)	(D) 600(603)kHz 400Hz, 30% mod	(B)	600kHz (603kHz)	(X05-3150) L2	Maximum amplitude and symmetry of the oscilloscope display.	
(4)	RF ALIGNMENT (2)	(D) 1400(1404)kHz 400Hz, 30% mod	(B)	1400kHz (1404kHz)	(X05-3150) TC2	Maximum amplitude and symmetry of the oscilloscope display.	
Repeat alignments (3) and (4) several times.							
(5)	IF TRANSFORMER	(D) 1000(999)kHz 400Hz, 30% mod	(B)	1000kHz (999kHz)	(X05-3150) T1	Maximum amplitude and symmetry of the oscilloscope display.	
<b>AM/FM COMMON SECTION</b>							
6	TUNE INDICATOR THRESHOLD LEVEL	(A) 98.0MHz 0 dev 18dB(ANT input)	—	FM reception 98.0MHz	(X05-3150) VR2	Light	
(6)	TUNE INDICATOR THRESHOLD LEVEL	(D) 1000(999)kHz 20~24dB(ANT input)	—	AM reception 1000(999)kHz	(X05-3150) VR1	Light	
<b>AUDIO SECTION</b>							
7	IDLE CURRENT	—	(E) DC voltmeter CP1(CP2)	Volume: 0	(X09-2310) VR1 (L) VR2 (R)	18mV	

## REGLAGE


N°	ITEM	REGLAGE DE L'ENTREE	REGLAGE DE LA SORTIE	REGLAGE DU TUNER	POINT DE L'ALIGNEMENT	ALIGNER POUR	FIG.
SECTION MF Sauf en cas d'indications spéciales, régler chaque commutateur comme suit: SELECTEUR DES ENTRESS: MF MODE: STEREO							
1	DISCRIMINATEUR (1)	(A) 98,0MHz 1kHz, ±75kHz dév 60dB(Entrée ANT)	Relier un voltmètre CC entre les TP8 et TP9.	MONO 98,0MHz	(X05-3150) T2	0V	
2	DISCRIMINATEUR (2)	(A) 98,0MHz 1kHz, ±75kHz dév 60dB(Entrée ANT)	(B)	MONO 98,0MHz	(X05-3150) T3	Distorsion minimale.	
Répéter les points 1 et 2 plusieurs fois.							
3	OSCILLATEUR CONTROLE PAR LA TENSION	(A) 98,0MHz 0 dév 60dB(Entrée ANT)	Relier une résistance de 330kΩ à TP7. Raccorder un compteur de fréquence à une résistance par l'intermédiaire d'un voltmètre CA.	98,0MHz	(X05-3150) VR3	76,00kHz	
4	DISTORSION (STEREO)	(C) 98,0MHz 1kHz, ±68,25kHz dév Selection: L ou R Signal pilote: ±6,75kHz dév 60dB(Entrée ANT)	(B)	98,0MHz	(X05-3150) Tête H.F. IFT	Distorsion minimale.	
5	SEPARATION	(C) 98,0MHz 1kHz, ±68,25kHz dév Selection: L ou R Signal pilote: ±6,75kHz dév 60dB(Entrée ANT)	(B)	98,0MHz	(X05-3150) VR4	Diaphonie minimale. Un compromis de réglage peut être nécessaire si les séparation de gauche à droite et droite à gauche sont inégale.	
SECTION MA Laisser l'antenne MA installée. SELECTEUR: AM							
(1)	BORD DE BANDE (1)	—	Relier un voltmètre CC au TP2.	530kHz (531kHz)	(X05-3150) L3	1,5V	
(2)	BORD DE BANDE (2)	—	Relier un voltmètre CC au TP2.	1610kHz (1602kHz)	(X05-3150) TC1	8,0V	
Répéter les points (1) et (2) plusieurs fois.							
(3)	ALIGNEMENT H.T. (1)	(D) 600(603)kHz 400Hz, 30% mod	(B)	600kHz (603kHz)	(X05-3150) L2	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.	
(4)	ALIGNEMENT H.T. (2)	(D) 1400(1404)kHz 400Hz, 30% mod	(B)	1400kHz (1404kHz)	(X05-3150) TC2	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.	
Répéter les points (3) et (4) plusieurs fois.							
(5)	TRANSFORMATEUR F.I.	(D) 1000(999)kHz 400Hz, 30% mod	(B)	1000kHz (999kHz)	(X05-3150) T1	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.	
SECTION COMMUNE MA/MF							
6	INDICATEUR DE SYNTONISATION NIVEAU DE SEUIL	(A) 98,0MHz 0 dév 18dB(Entrée ANT)	—	Reception MF 98,0MHz	(X05-3150) VR2	Arrume	
(6)	INDICATEUR DE SYNTONISATION NIVEAU DE SEUIL	(D) 1000(999)kHz 20~24dB(Entrée ANT)	—	Reception MA 1000(999)kHz	(X05-3150) VR1	Arrume	
SECTION AUDIO							
7	COURANA DE POLARISATION	—	(E) Connecter un voltmètre CC CPI(CP2)	Volume: 0	(X09-2310) VR1 (C) VR2 (D)	18µV	

## ABGLEICH


NR.	GEGENSTAND	EINGANGS-EINSTELLUNG	AUSGANGS-EINSTELLUNG	TUNER-EINSTELLUNG	ABGLEICH-PUNKTE	ABGLEICHEN FÜR	ABB.
<b>UKW-EMPfangSABTEILUNG</b> Außer wenn anders angegeben, die verschiedenen Schalter wie folgt einstellen: <b>EINGANGSUMSCHALTER: FM</b>							
1	DISKRIMINATOR (1)	(A) 98,0MHz 1kHz.±75kHz Hub 60dB(ANT-Eingang)	Einen Gleichspannungsmesser zwischen TP8 und TP9 anschließen.	MONO 98,0MHz	(X05-3150) T2	0V	
2	DISKRIMINATOR (2)	(A) 98,0MHz 1kHz.±75kHz Hub 60dB(ANT-Eingang)	(B)	MONO 98,0MHz	(X05-3150) T3	Minimal Klirrfaktor.	
Abstimmungen 1 und 2 mehrere Male wiederholen.							
3	SPANNUNGS-GEREGELTER OSZILLATOR	(A) 98,0MHz 0 Hub 60dB(ANT-Eingang)	Einen 330kΩ Widerstand zu TP7 anschließen. Einen Frequenzzähler über einen Wechselspannungsmesser an den Widerstand anschließen.	98,0MHz	(X05-3150) VR3	76,00kHz	
4	KLIRRFAKTOR (STEREO)	(C) 98,0MHz 1kHz.±68,25kHz Hub Wähler:L oder R Pilotten: ±6,75kHz Hub 60dB(ANT-Eingang)	(B)	98,0MHz	(X05-3150) Frontende IFT	Minimal Klirrfaktor.	
5	STEREO KANAL TRENNUNG	(C) 98,0MHz 1kHz.±68,25kHz Hub Wähler:L oder R Pilotten: ±6,75kHz Hub 60dB(ANT-Eingang)	(B)	98,0MHz	(X05-3150) VR4	Minimales Übersprechen. Eine Ausgleichregelung kann notwendig sein, falls links-zu-rechts und rechts-zu-links. Trennungen ungleich sind.	
<b>MW-EMPfangSABTEILUNG</b> Die MW-Rahmenantenne angebracht lassen. <b>WÄHLER: AM</b>							
(1)	BANDKANTE (1)	—	Einen Gleichspannungsmesser zu TP2 anschließen.	530kHz (531kHz)	(X05-3150) L3	1.5V	
(2)	BANDKANTE (2)	—	Einen Gleichspannungsmesser zu TP2 anschließen.	1610kHz (1602kHz)	(X05-3150) TC1	8.0V	
Abstimmungen (1) und (2) mehrere Male wiederholen.							
(3)	HF-ABGLEICH (1)	(D) 600(603)kHz 400Hz.30% mod	(B)	600kHz (603kHz)	(X05-3150) L2	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
(4)	HF-ABGLEICH (2)	(D) 1400(1404)kHz 400Hz.30% mod	(B)	1400kHz (1404kHz)	(X05-3150) TC2	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
Abstimmungen (3) und (4) mehrere Male wiederholen.							
(5)	ZF-ÜBERTRAGER	(D) 1000(999)kHz 400Hz.30% mod	(B)	1000kHz (999)kHz	(X05-3150) T1	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
<b>MW/UKW-EMPfangSABTEILUNG</b> Die MW/UKW-Rahmenantenne angebracht lassen. <b>WÄHLER: AM/FM</b>							
6	ABSTIMMANZEIGE SCHWELLENPEGEL	(A) 98,0MHz 0 Hub 18dB(ANT-Eingang)	—	UKW-empfang 98,0MHz	(X05-3150) VR2	Einschalen	
(6)	ABSTIMMANZEIGE SCHWELLENPEGEL	(D) 1000(999)kHz 20~24dB(ANT-Eingang)	—	MW-empfang 1000(999)kHz	(X05-3150) VR1	Einschalen	
<b>AUDIO-ABTEILUNG</b>							
7	LEERLAUFSTROM	—	(E) Einen Gleichspannungsmesser über CP1(CP2)	Volume: 0	(X09-2310) VR1 (L) VR2 (R)	18mV	



(X05-3150-11) (C/5)

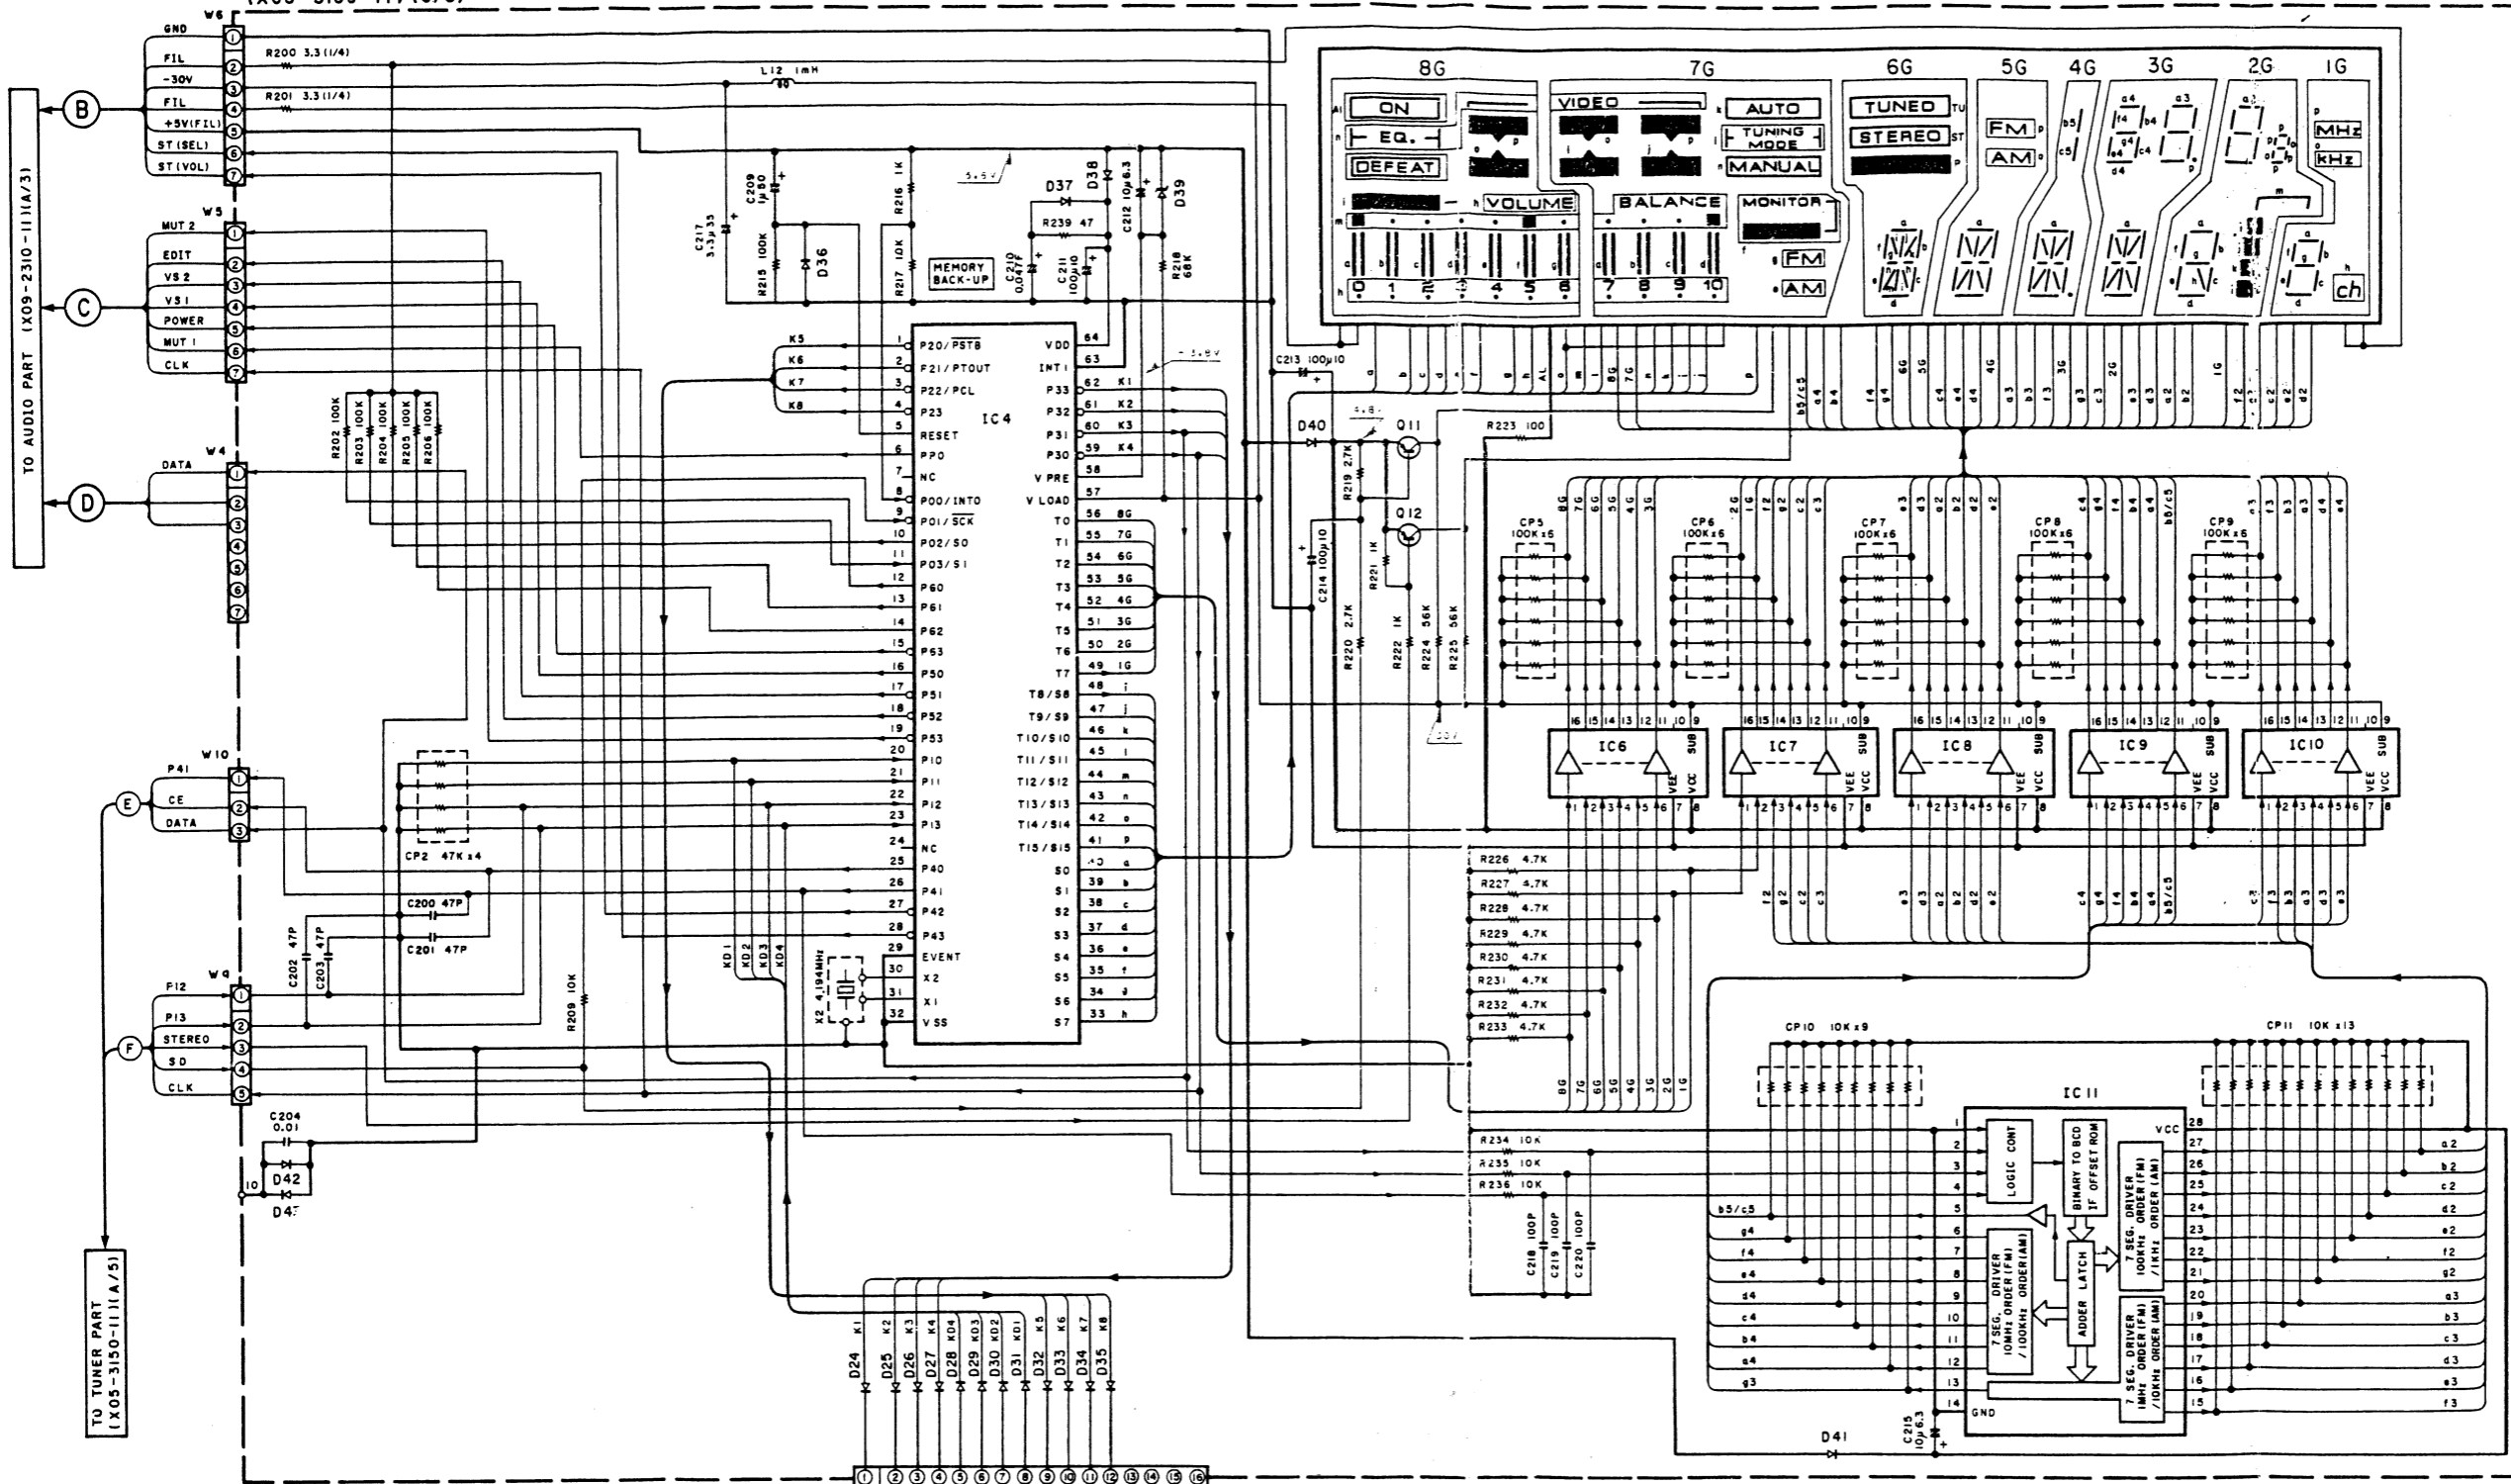

(X05-3150-11) (B/5)

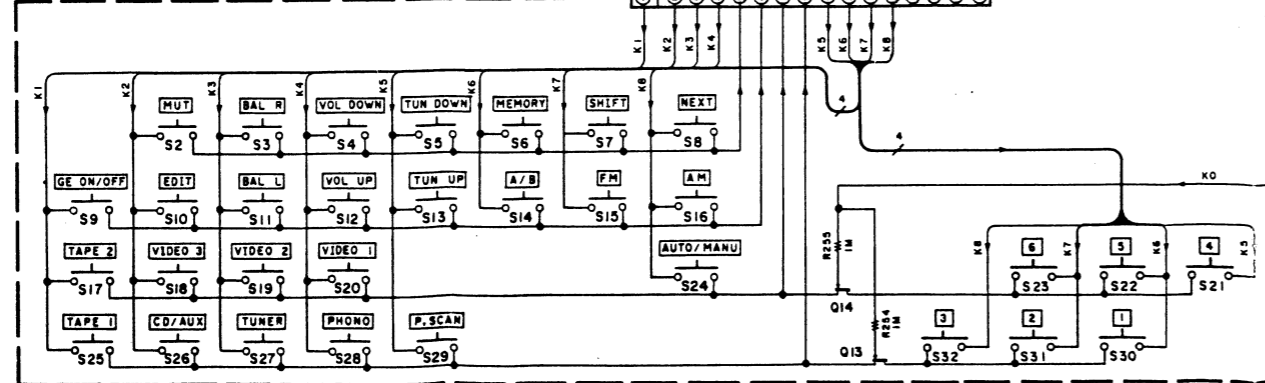


sig.	Function	TUNER	OTHER
x		12.0V	0V

(X05-3150-11)

IC 1	: LA1265
IC 2	: AN7470
IC 3	: LM7001
IC 4	: $\mu$ D7516HG-031-36
IC 6-10	: LB1294
IC 11	: TD6301AP
Q1	: 2SC1923 (R,O)
Q2-6	: 2SC945 (A) (Q,P)

Q7	: 2SC2003 (L, K)
Q8, 11, 12	: 2SA733 (A) (Q,P)
Q9, 10	: 2SC1945 (F, E)
Q13, 14	: 2SK163 (K)
D1, 4-6, 8-11, 24-38, 40-43, 51	: 1SS133 or 1SS176
D2	: KV1236Z2
D3	: RD6.8E(B2) or HZS.6.8N(B2)
D39	: RD102E(B) or HZS.10M(B)

(X05-3150-11) (A/5)

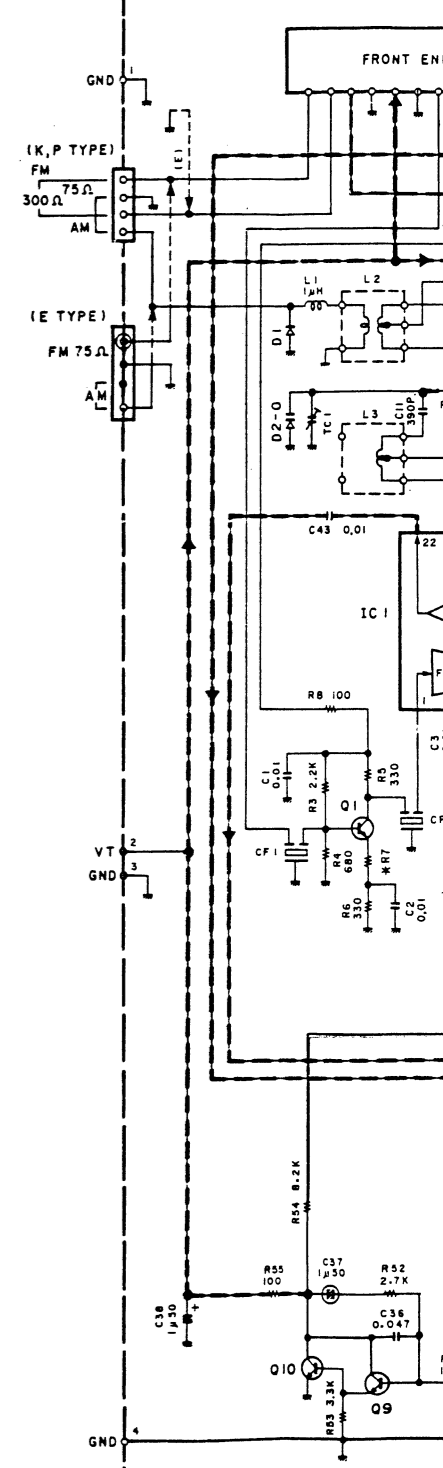

(X05-3150-11) (A/3)

DESTINATION	Ref. NO.	R1,2	R7
K, P	O-11	NO	22
E	2-71	YES	10

TO TUNER PART (X05-3150-11)(A/5)

TO AUDIO PART (X05-3150-11)(A/3)

TO TUNER PART (X05-3150-11)(A/5)

TO TUNER PART (X05-3150-11)(A/5)


TO TUNER PART (X05-3150-11)(A/5)

TO TUNER PART (X05-3150-11)(A/5)

TO TUNER PART (X05-3150-11)(A/5)

TO TUNER PART (X05-3150-11)(A/5)

TO TUNER PART (X05-3150-11)(A/5)

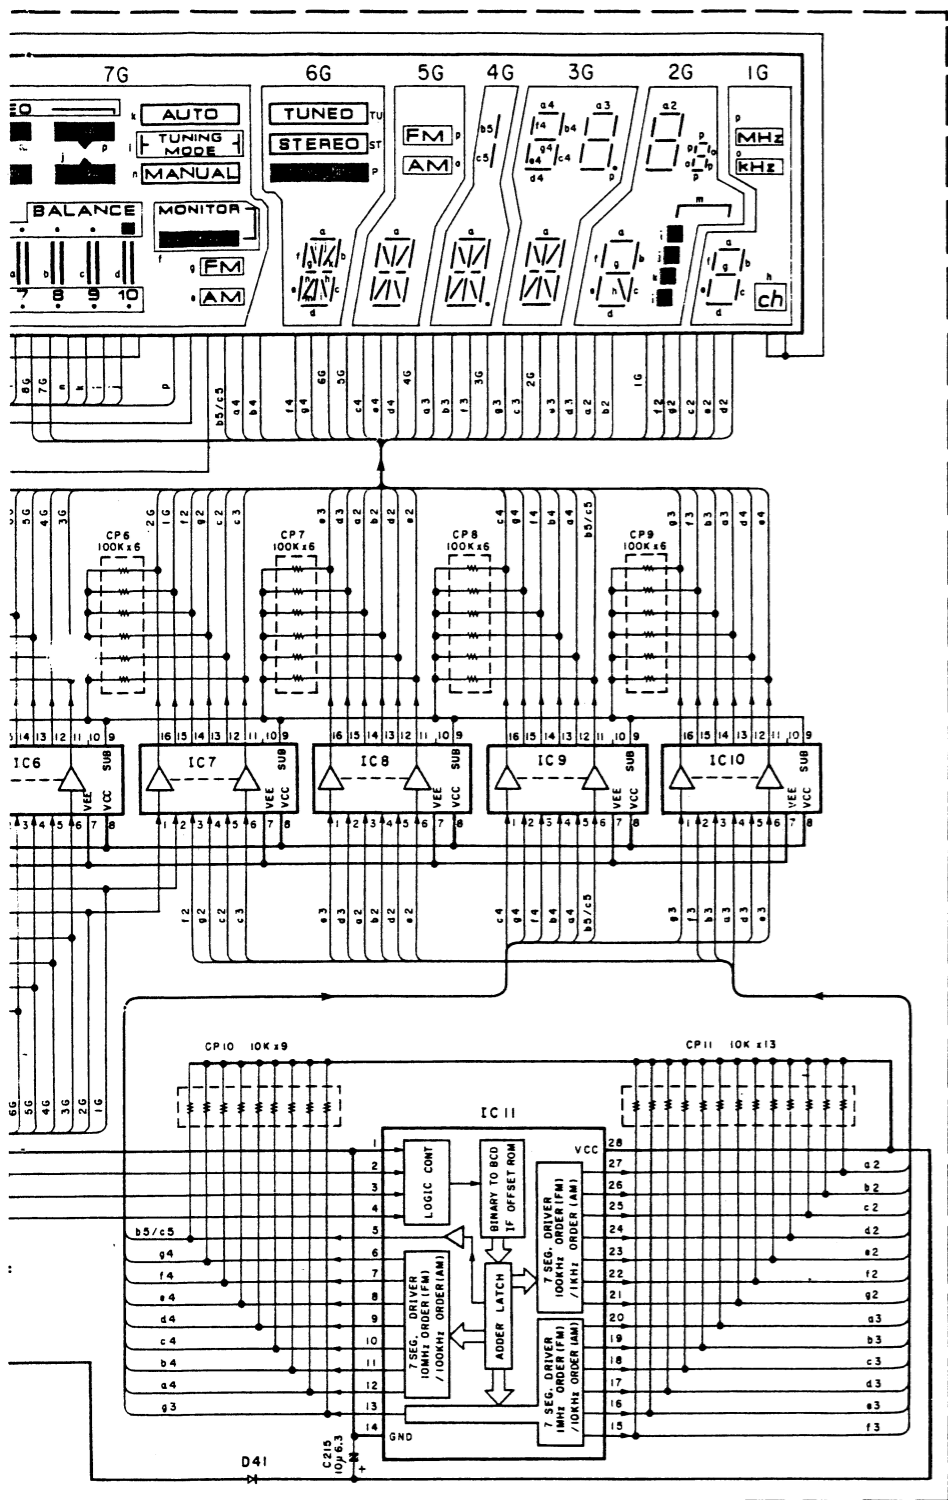


IC#	TUNER	OTHER
Q1	12.8V	0V

- (X05-3150-11)
- IC1 : LA1265
  - IC2 : AN7470
  - IC3 : LM7001
  - IC4 :  $\mu$ PD7516HG-031-36
  - IC6-10 : LB1294
  - IC11 : TD6301AP

- Q7 : 25C2003(L, K)
- Q8, 11, 12 : 2SA733(A)(Q, P)
- Q9, 10 : 25C1845(F, E)
- Q13, 14 : 2SK163(K)
- D1, 4-6, 8-11, 24-38, 40-43, 51 : 1SS133 or 1SS176
- D2 : KV1236Z2
- D3 : RD6.8E(B2) or HZ56.8N(B2)
- D39 : RD10E(B) or HZ510N(B)

- Q1 : 25C1923(R, O)
- Q2-6 : 25C945(A)(Q, P)

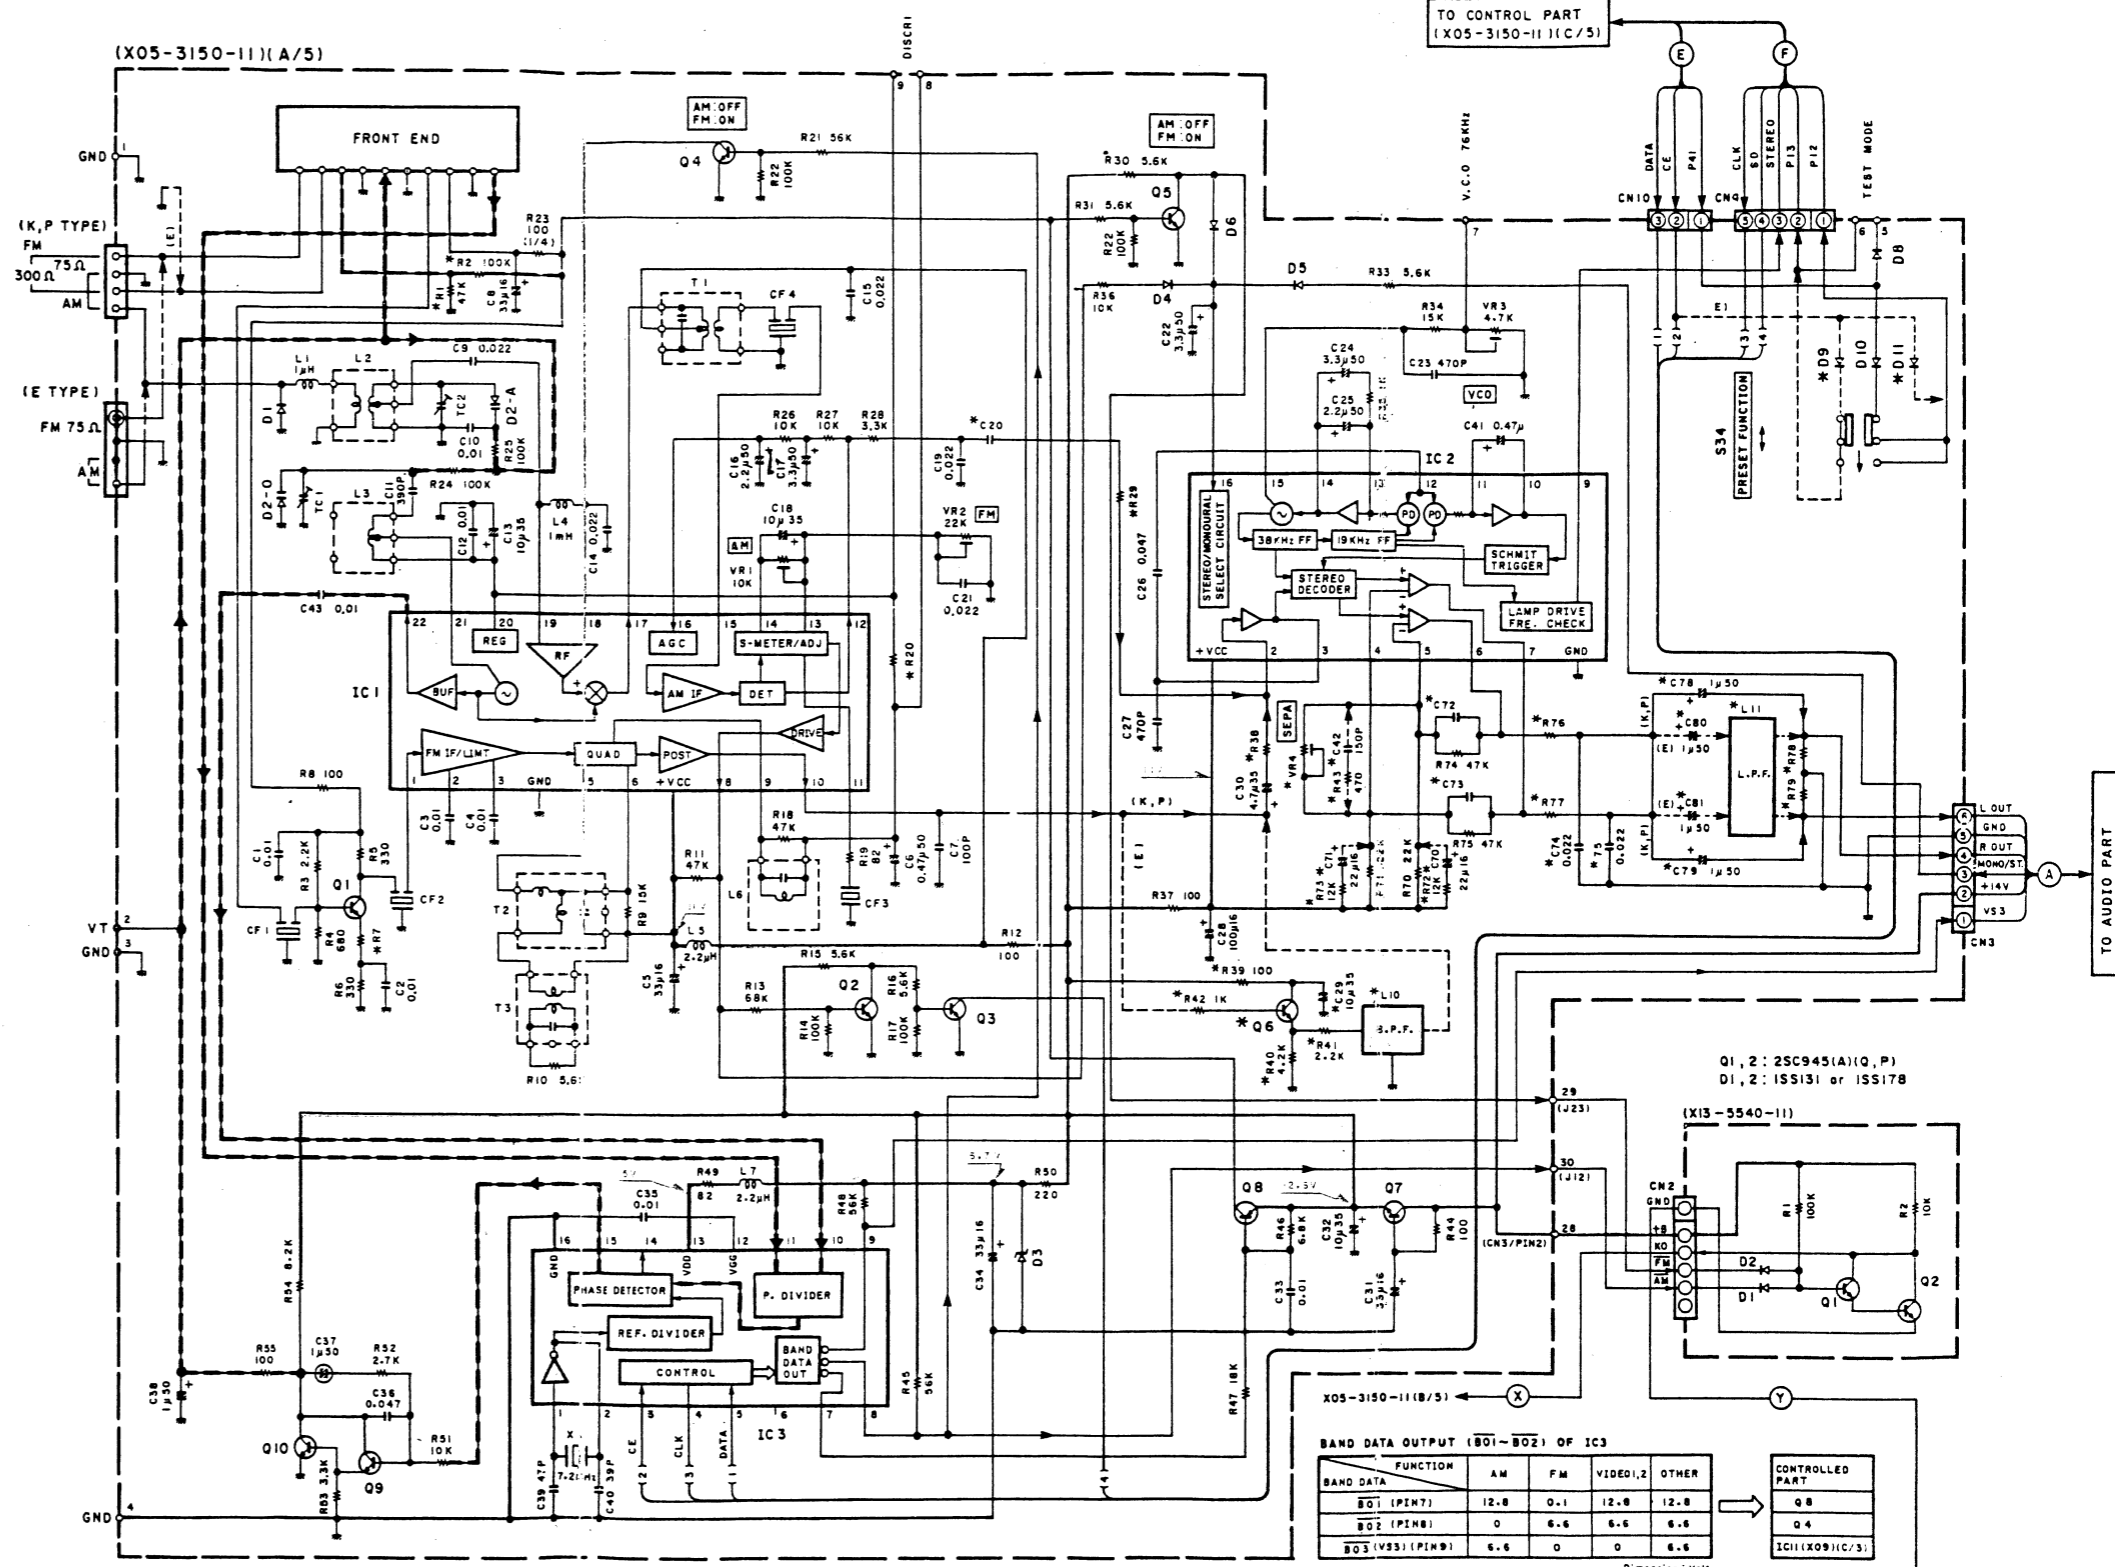


(X05-3150-11)(A/5)

DESTINATION	Ref. NO.	R1,2	R7	R20	R29	R38	R39-43, 72,73	R76,77	R78,79	C20	C29,42 70,71	C72,73	C74,75	C78,79	C80,81	D9,11	Q6	L10,11	VR4
K, P	0-11	NO	22	15K	51K	39K	NO	3.6K	220K	0.027	NO	150P	YES	YES	NO	NO	NO	NO	470K
E	2-71	YES	10	43K	68K	47K	YES	3.3K	3.3K	0.022	YES	1000P	NO	NO	YES	YES	YES	YES	330K

BAND DATA OUTPUT (B01-B02) OF IC3					CONTROLLED PART
BAND DATA	FUNCTION	AM	FM	VIDEO,2	
B01 (P1M7)		12.8	0.1	12.8	12.8
B02 (P1M8)		0	6.6	6.6	6.6
B03 (V53) (P1M9)		6.6	0	0	6.6

Dimension: Volt

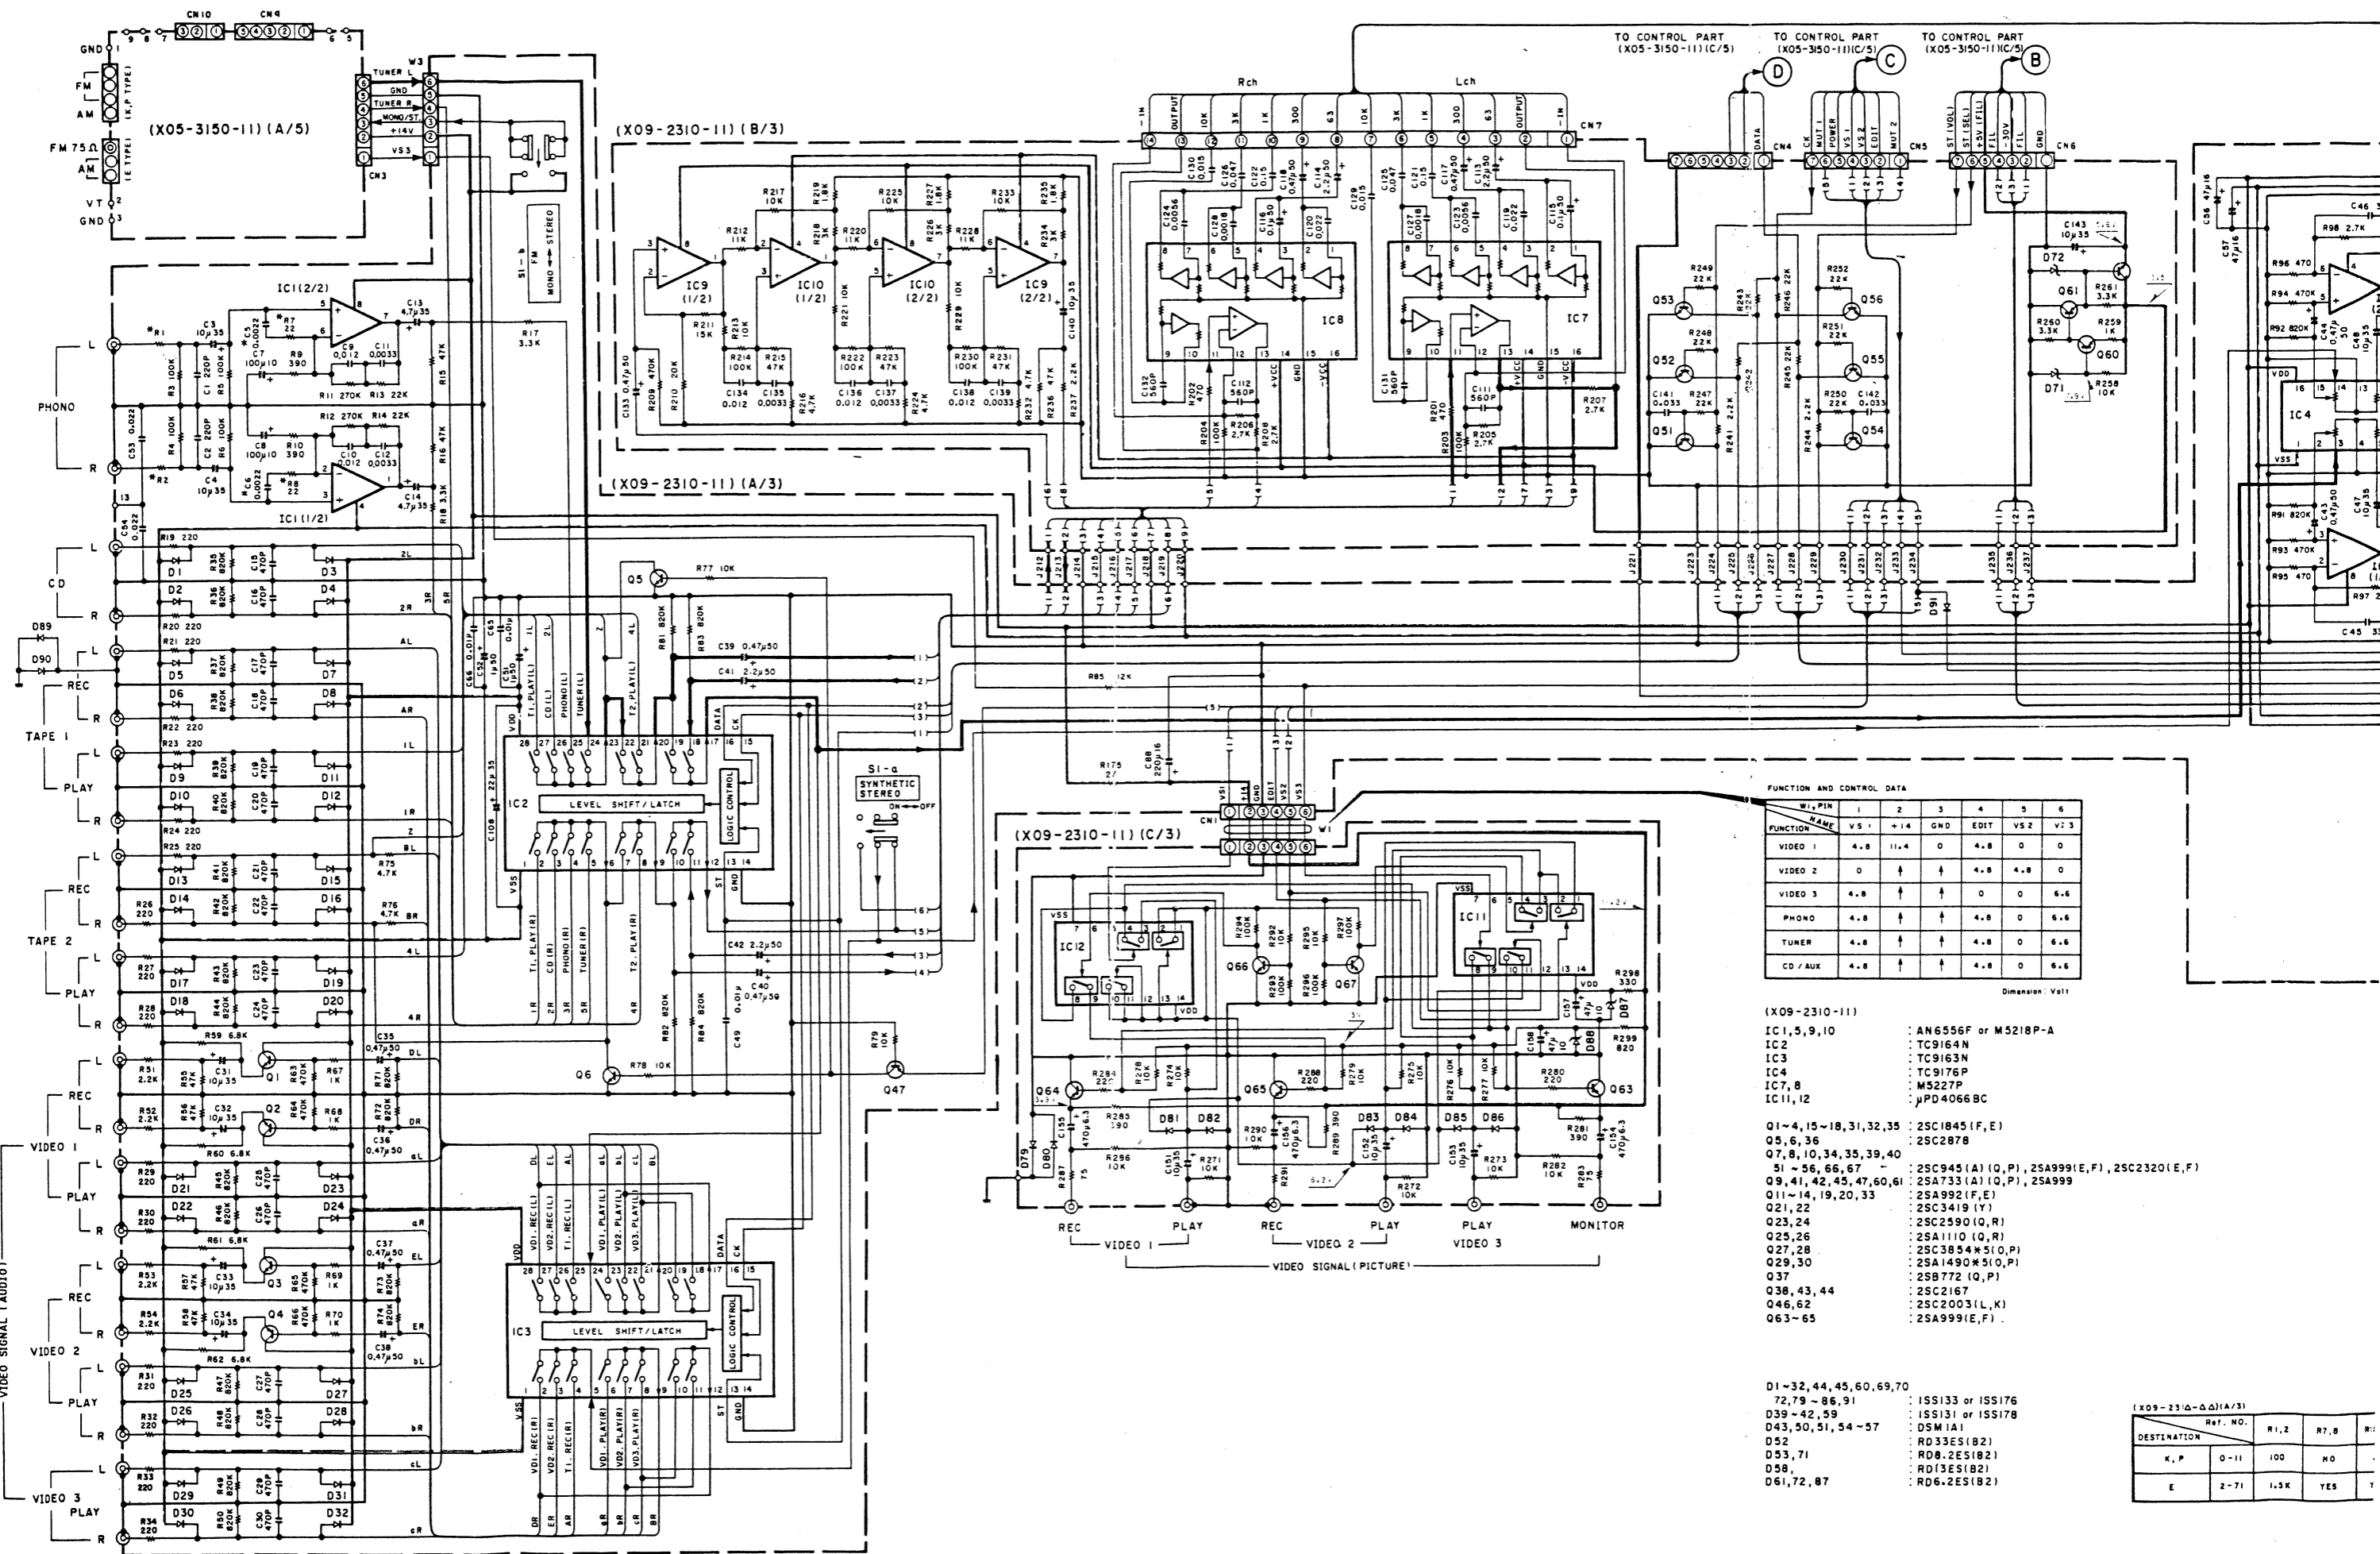

FUNCTION AND CONTROL DATA

FUNCTION	V1	V2	V3	V4	V5	V6	V7
VIDEO 1	4.8	11.4	0	4.8	0	0	
VIDEO 2	0			4.8	4.8	0	
VIDEO 3	4.8			0	0	6.6	
PHONO	4.8			4.8	0	6.6	
TUNER	4.8			4.8	0	6.6	
CD / AUX	4.8			4.8	0	6.6	


Dimension: Volt

- (X09-2310-11)
- IC1, 5, 9, 10 : AN6556F or M5218P-A
  - IC2 : TC9164N
  - IC3 : TC9163N
  - IC4 : TC9176P
  - IC7, 8 : M5227P
  - IC11, 12 :  $\mu$ PD40668C
- Q1-4, 15-18, 31, 32, 35 : 2SC1845 (F, E)
  - Q5, 6, 36 : 2SC2878
  - Q7, 8, 10, 34, 35, 39, 40 : 2SC945 (A) (Q, P), 2SA999 (E, F), 2SC2320 (E, F)
  - Q9-11, 56, 66, 67 : 2SA733 (A) (Q, P), 2SA999
  - Q11-14, 19, 20, 33 : 2SA992 (F, E)
  - Q21, 22 : 2SC3419 (Y)
  - Q23, 24 : 2SC2590 (Q, R)
  - Q25, 26 : 2SA1110 (Q, R)
  - Q27, 28 : 2SC3854\*5 (O, P)
  - Q29, 30 : 2SA1490\*5 (O, P)
  - Q37 : 2SB772 (Q, P)
  - Q38, 43, 44 : 2SC2167
  - Q46, 62 : 2SC2003 (L, K)
  - Q63-65 : 2SA999 (E, F)


- D1-32, 44, 45, 60, 69, 70 : ISS133 or ISS176
- 72, 79-86, 91 : ISS131 or ISS178
- D39-42, 59 : DSM1A1
- D43, 50, 51, 54-57 : RD33ES (B2)
- D52 : RD08.2ES (B2)
- D53, 71 : RD13ES (B2)
- D58 : RD13ES (B2)
- D61, 72, 87 : RD6.2ES (B2)

(X09-2310-11) (A/3)

DESTINATION	Ref. NO.	R1, 2	R7, 8	R9
K, P	0-11	100	NO	
E	2-71	1.5K	YES	Y

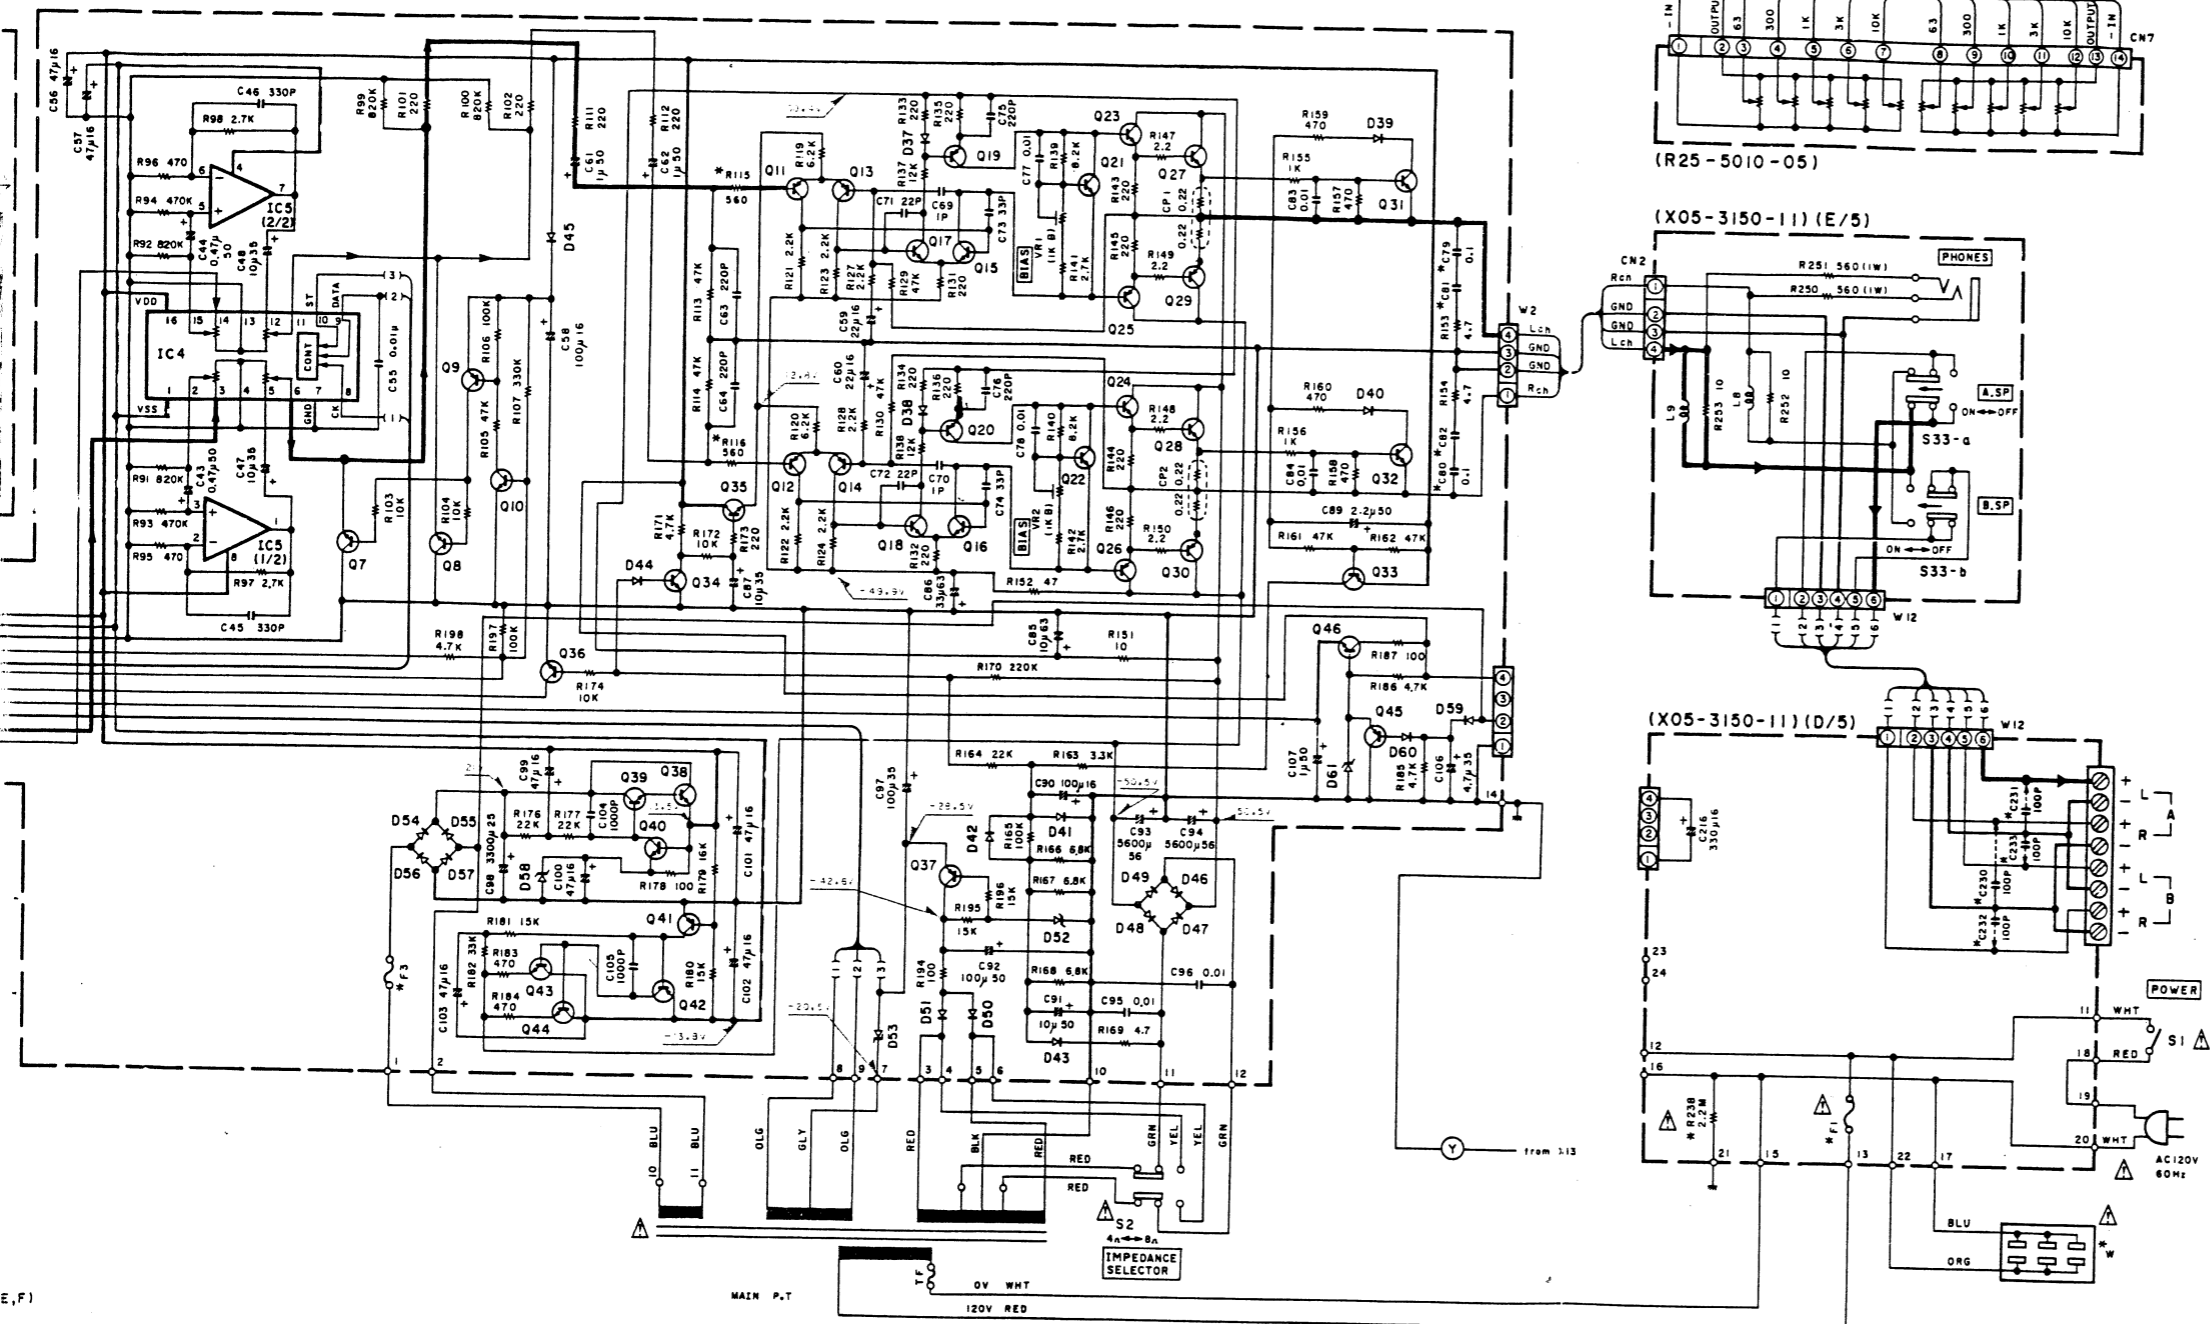

(E,F)

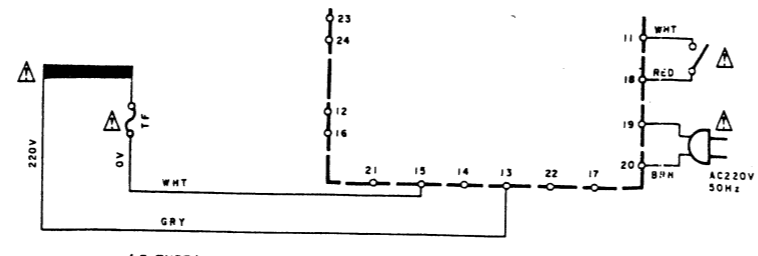

(E TYPE)

(X05-3150-01) (D/S1/E/S)

DESTINATION	Ref. NO.	R238	C230-233	F 1	W
K, P	0-11	YES	NO	5A	YES
E	2-71	NO	YES	2.5A	NO

- 2SA733(A)
- 2SA992
- 2SA999
- 2SC1845
- 2SC1923
- 2SC2003
- 2SC2320
- 2SC2878
- 2SC535
- 2SC945(A)
- 2SC3419
- AN7470
- 2SA1110
- 2SB772
- 2SC2590
- 2SC2839
- 2SC2167
- 2SA1490\*5
- 2SC3854\*5
- 2SC3391
- 2SC3494
- 2SK163
- 2SK241
- 3SK85
- TD6301AP
- LB1294
- LM7001
- TC9176P
- M5227P
- AN6556F
- M5218P-A
- 7516HG-031-36
- TC9163N
- TC9164N
- LA1265

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).  $\Delta$  Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.


• DC voltages are measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.  
 • Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.  
 • Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Voltmeter gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

7310-01(A/3)

NATION	Ref. NO.	R1,2	R7,8	R11,18	C5,6	C79,80	C81,82	F3
K, P	0-11	100	NO	JP	NO	JP	0.047	1.5A
E	2-71	1.5K	YES	YES	YES	YES	0.1	T1.6A

# KR-V45 KR-V45

## PC BOARD

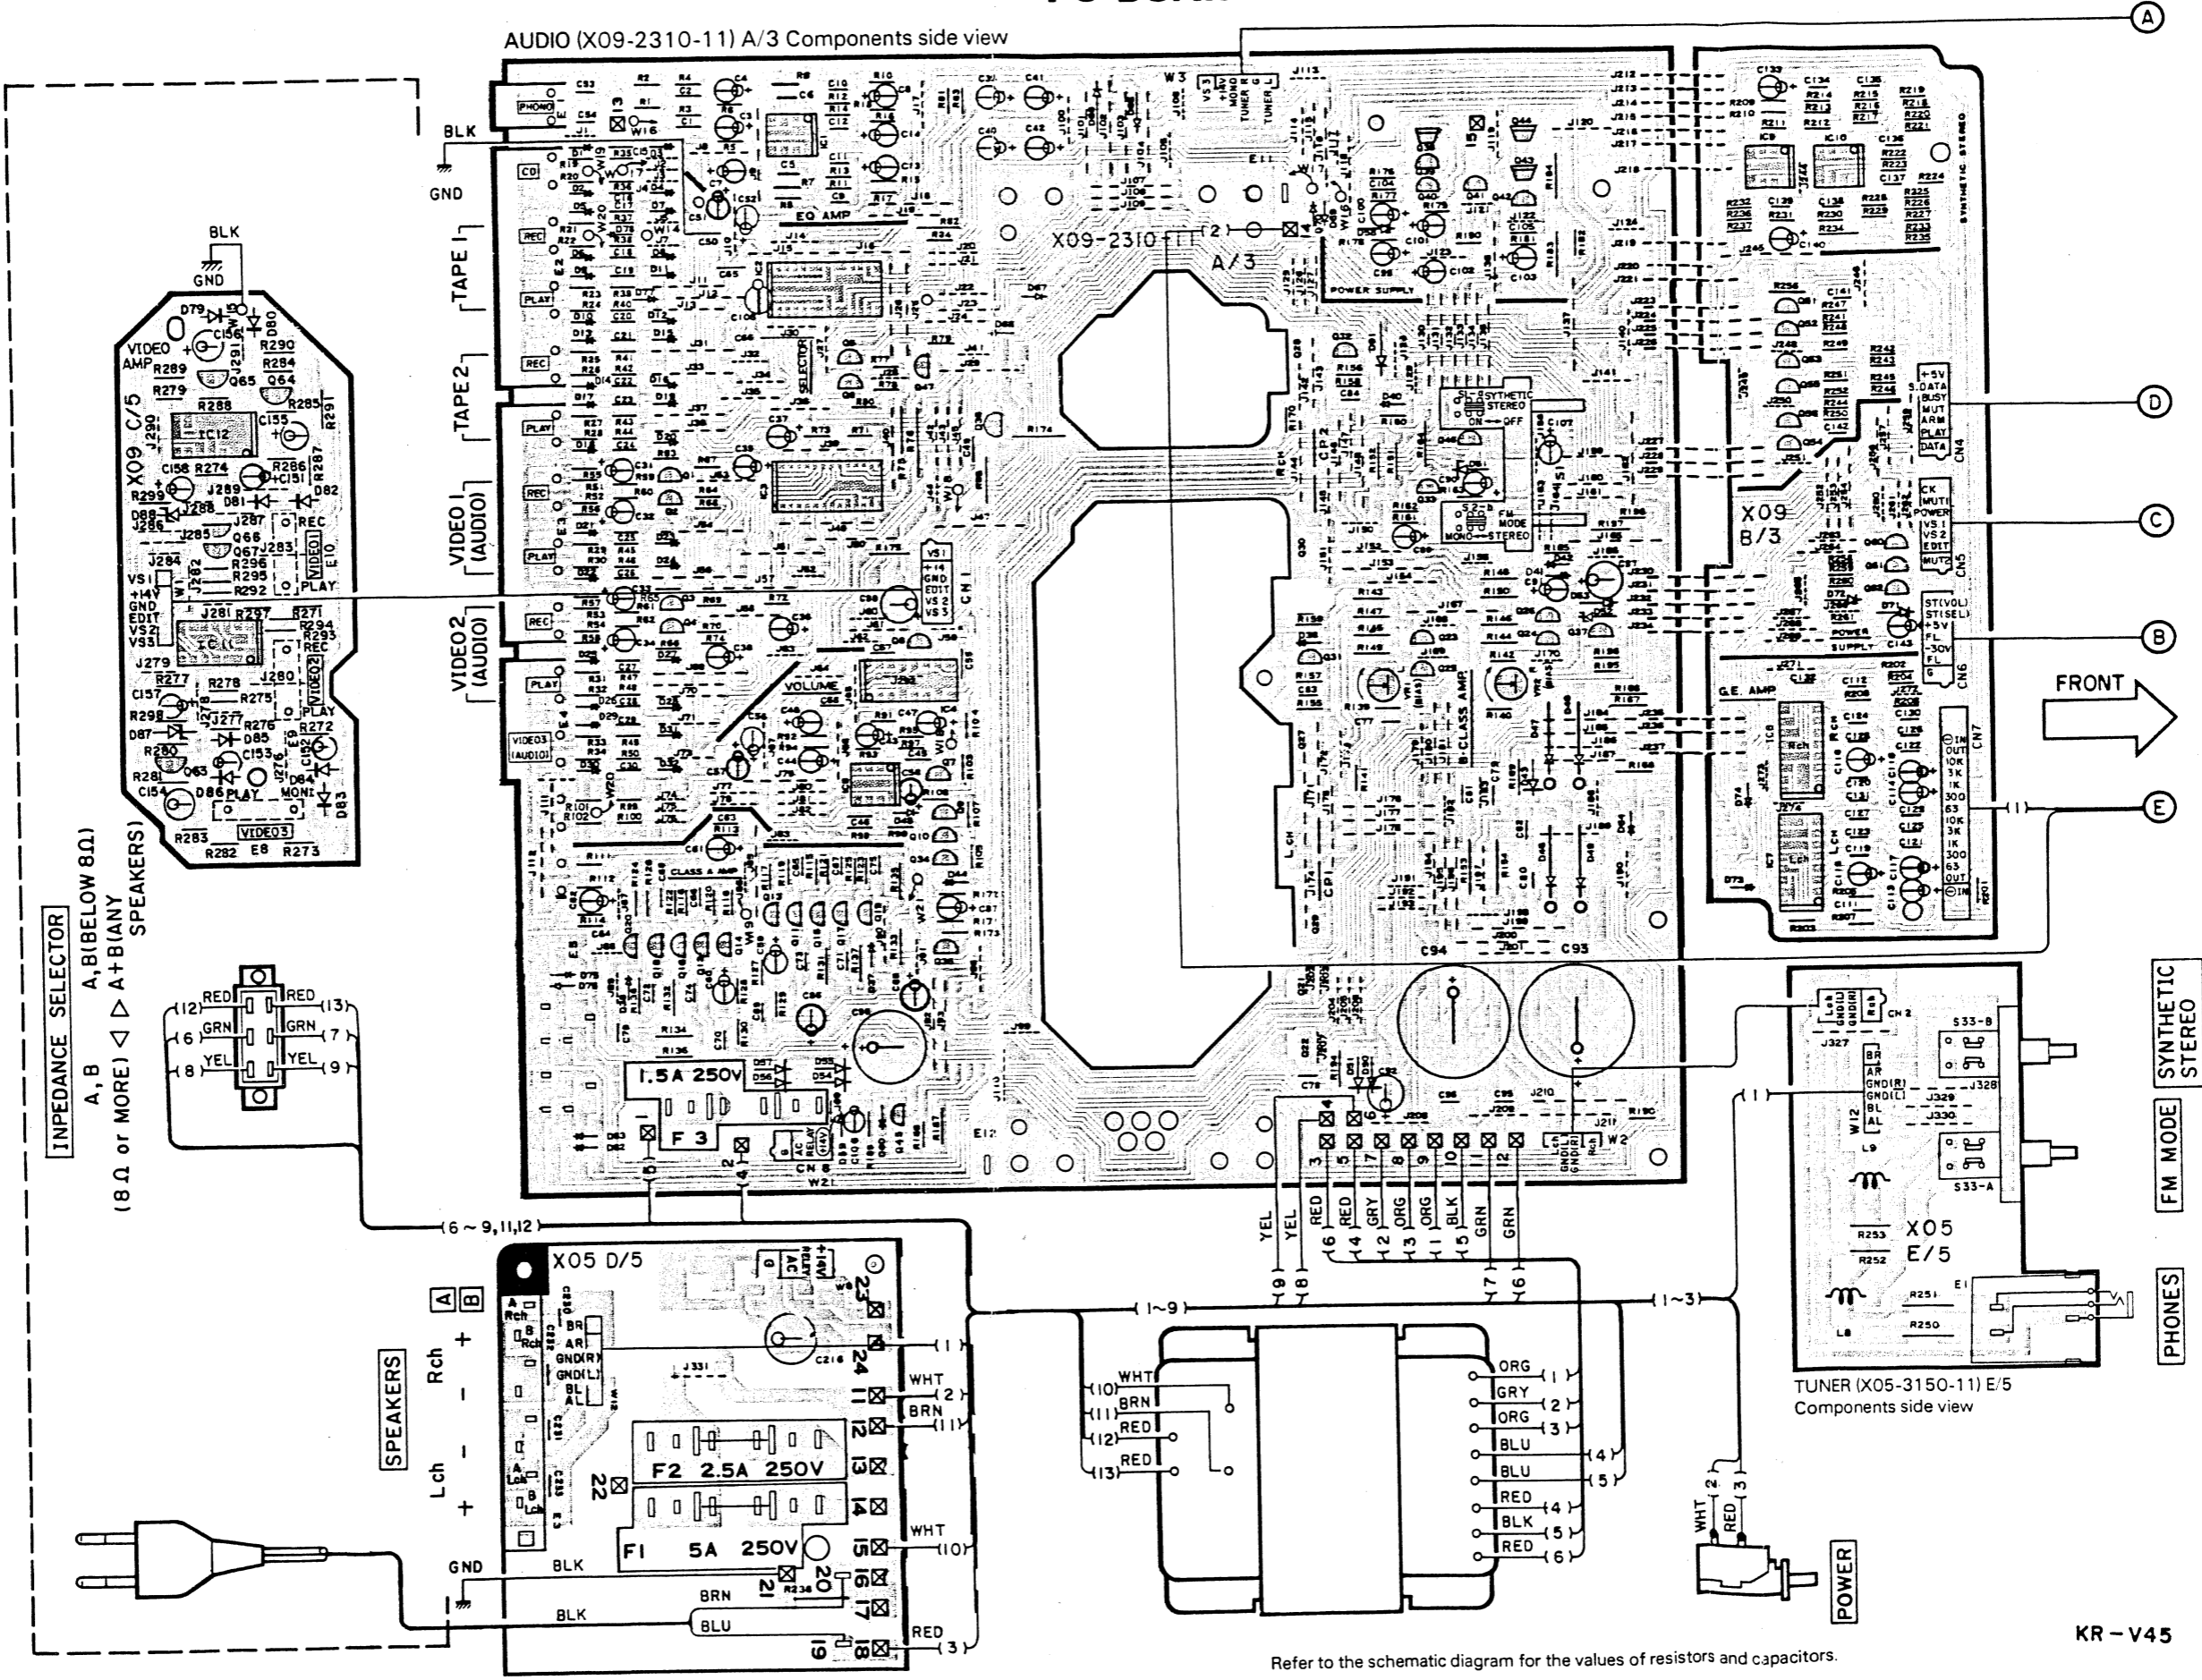

AUDIO (X09-2310-11) A/3 Components side view


TUNER (X05-3150-11) E/5 Components side view

Refer to the schematic diagram for the values of resistors and capacitors.

KR-V45

# KR-V45 KR-V45


## PC BOARD

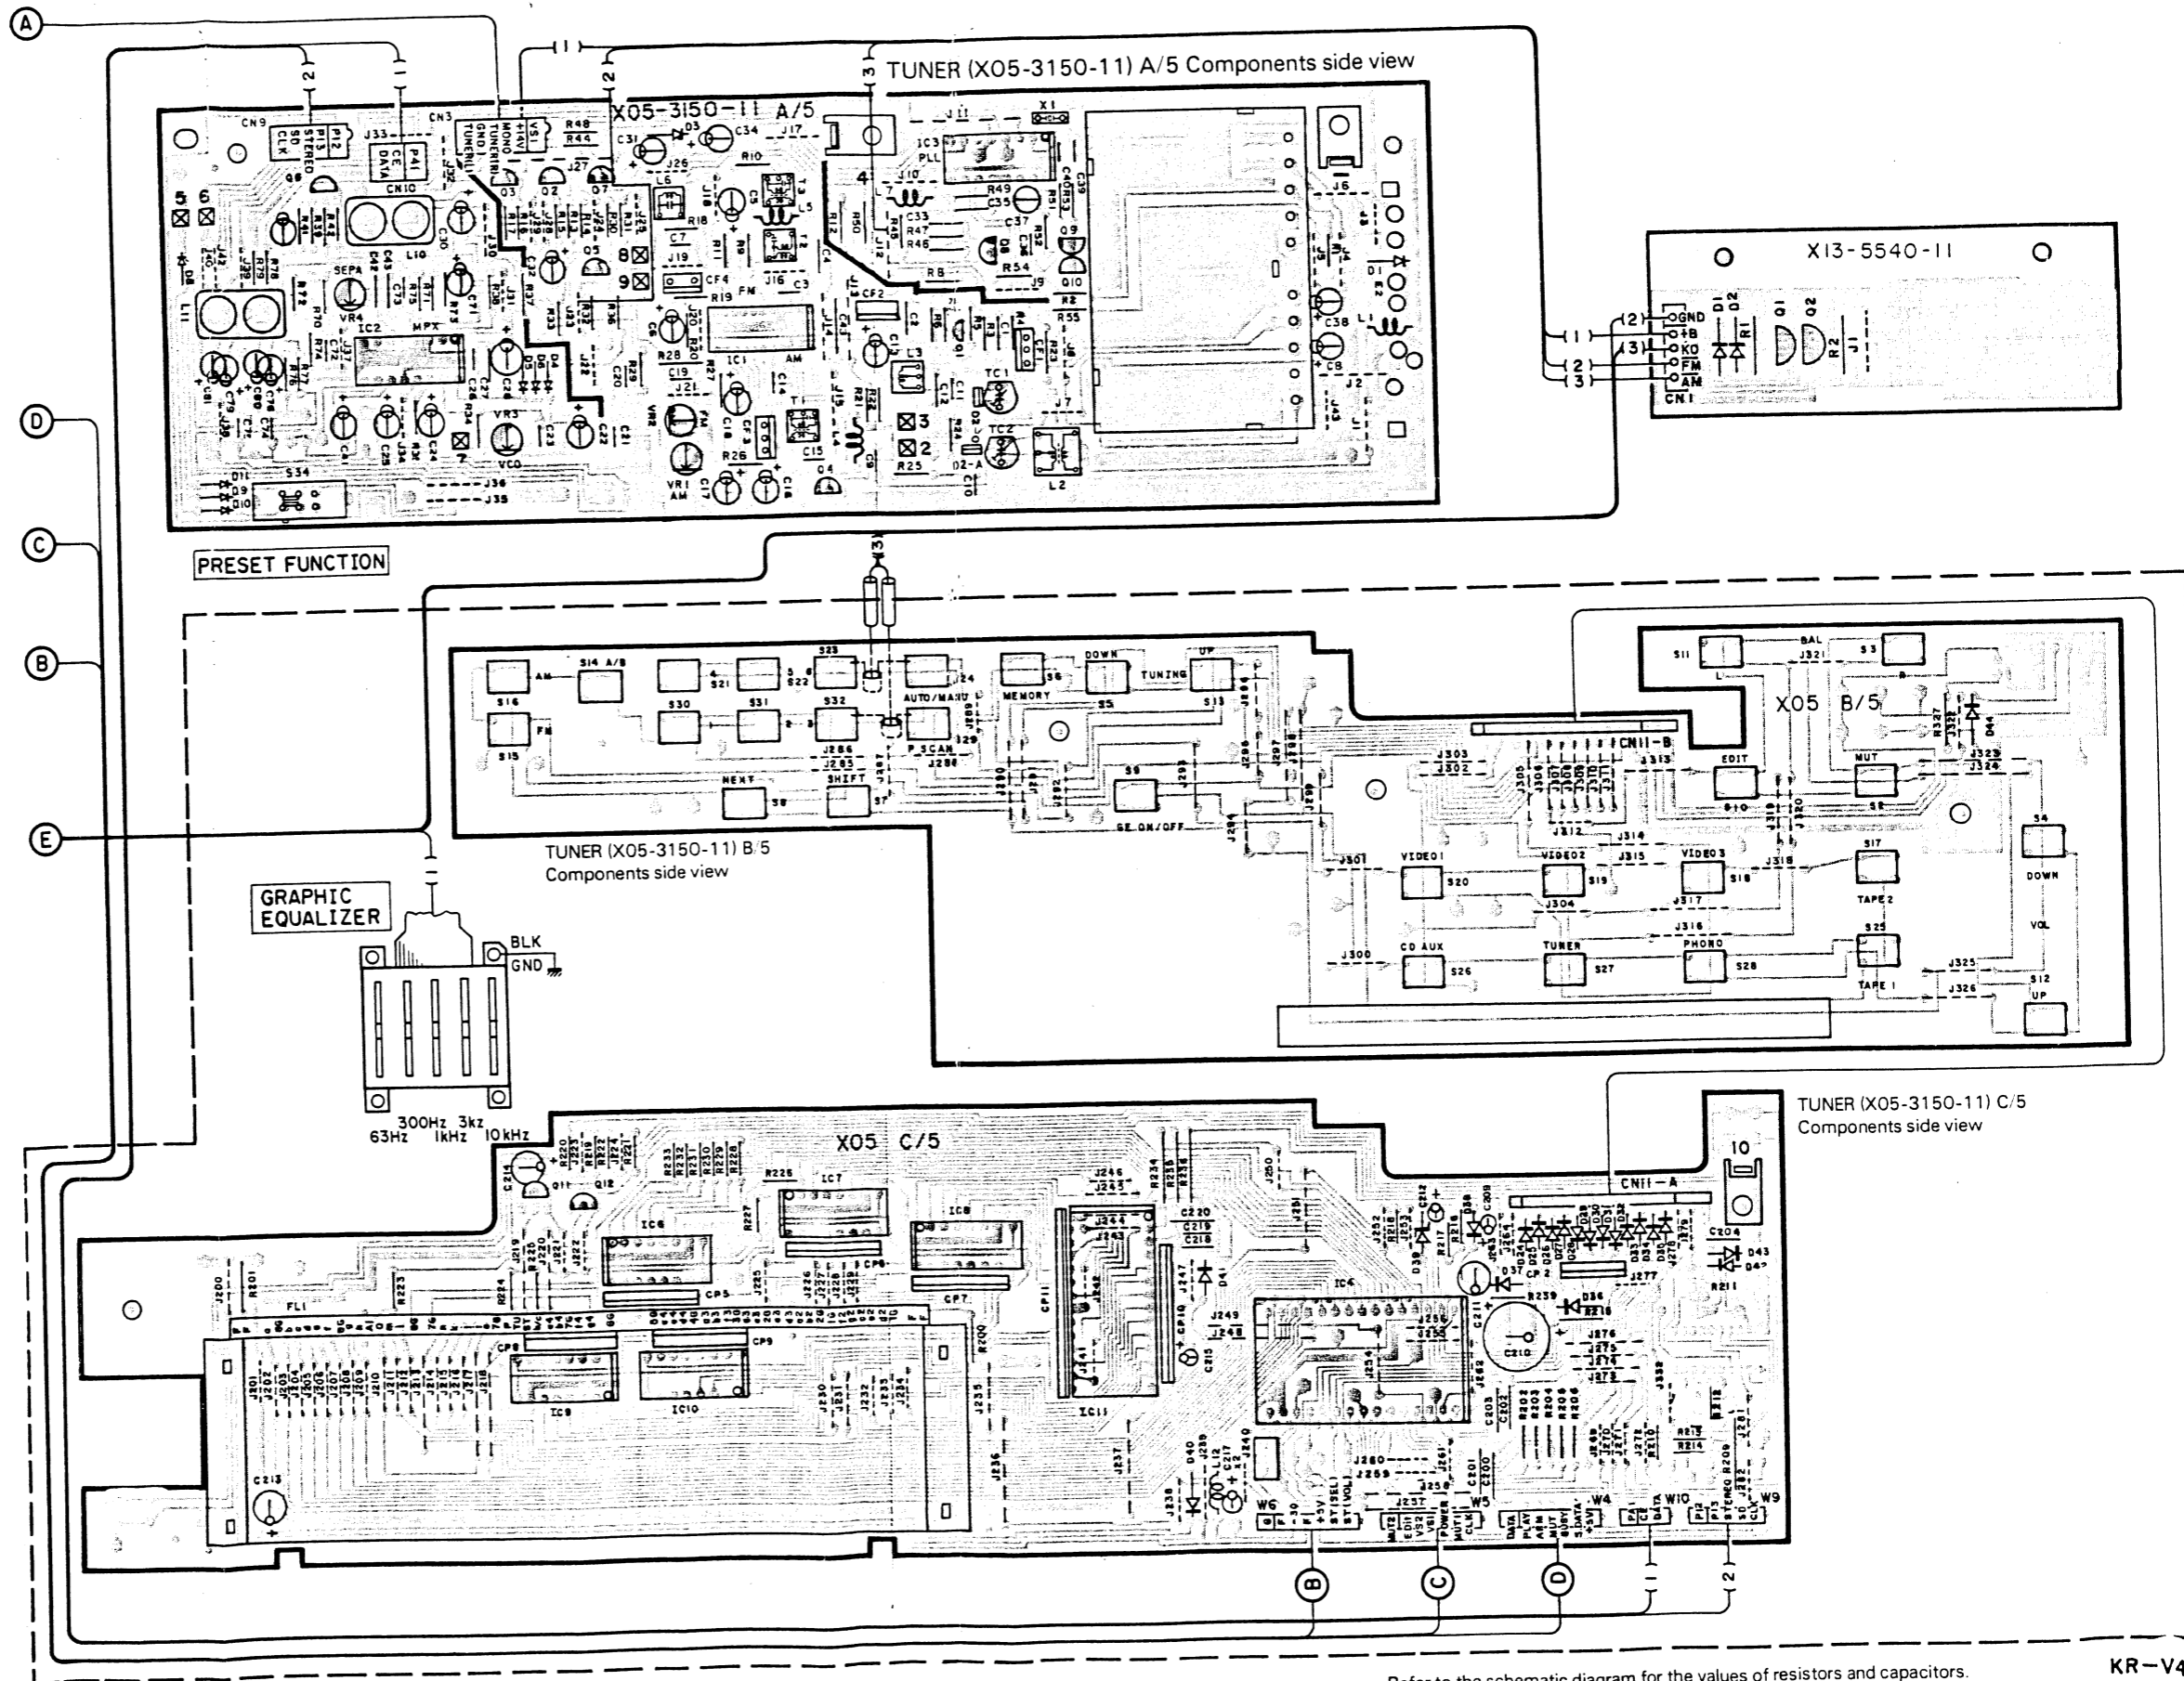


Refer to the schematic diagram for the values of resistors and capacitors.

EXPLODED VIEW (MAIN UNIT)

KR-V45

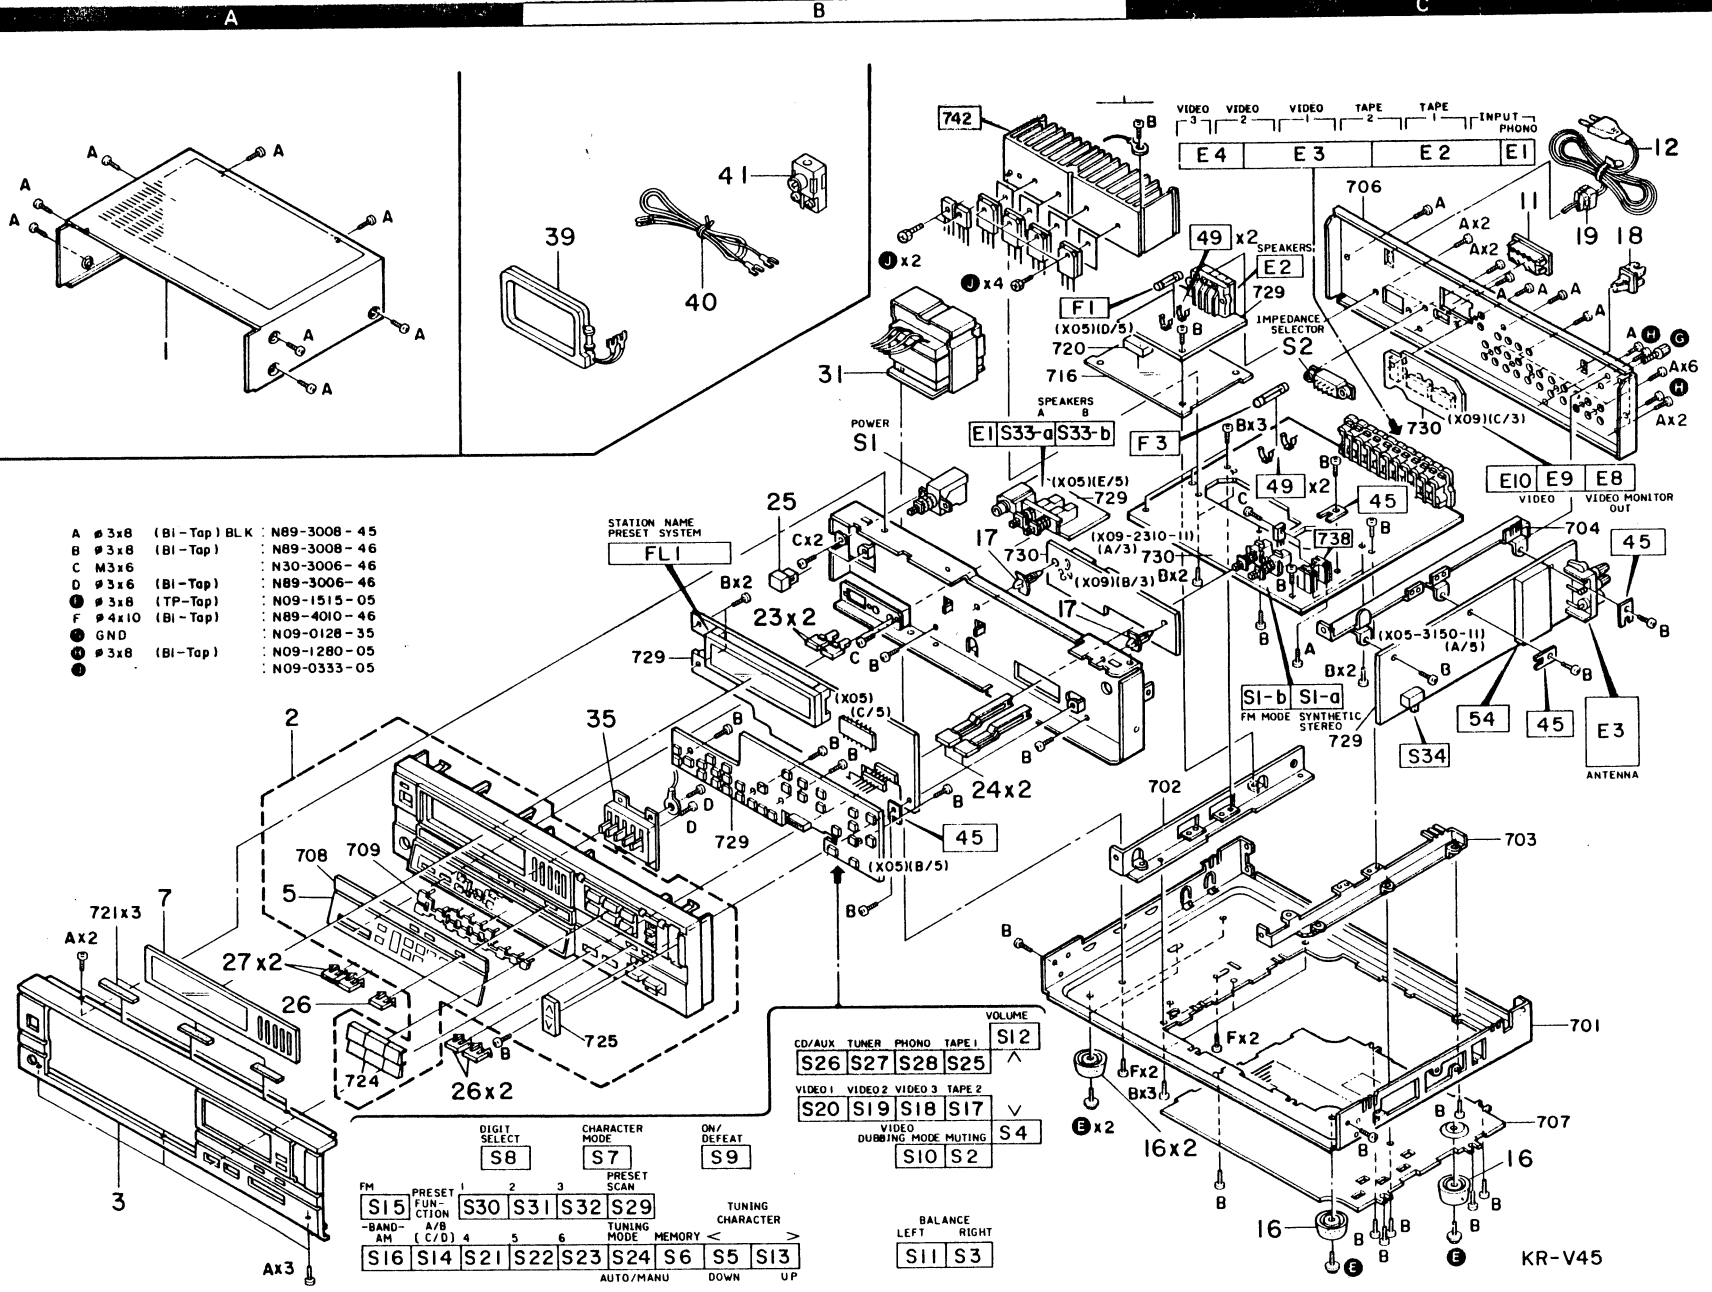

- A # 3x8 (BI-Tap) BLK : N89-3008 - 45
- B # 3x8 (BI-Tap) : N89-3008 - 46
- C M3x6 : N30-3006 - 46
- D # 3x6 (BI-Tap) : N89-3006 - 46
- # 3x8 (TP-Tap) : N09-1515 - 05
- F # 4x10 (BI-Tap) : N89-4010 - 46
- GND : N09-0128 - 35
- # 3x8 (BI-Tap) : N09-1280 - 05
- : N09-0333 - 05

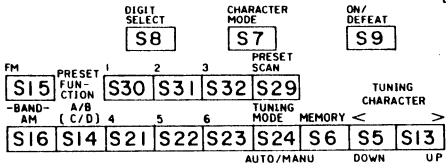

Parts with the exploded numbers larger than 700 are not supplied. 13

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
<b>KR-V45</b>						
1	1A	*	A01-1488-01	METALLIC CABINET		
2	2A	*	A22-0574-02	SUB PANEL ASSY		
3	2A	*	A20-4845-02	PANEL		
5	2A	*	B03-2057-03	DRESSING PLATE		
7	2A	*	B03-2055-03	DRESSING PLATE		
-			B46-0092-03	WARRANTY CARD	K	
-			B46-0121-03	WARRANTY CARD	P	
-			B46-0122-13	WARRANTY CARD	E	
-		*	B50-6186-00	INSTRUCTION MANUAL(ENGLISH)	K	
-		*	B50-6187-00	INSTRUCTION MANUAL(ENG,FRE)	P	
-		*	B50-6190-00	INSTRUCTION MANUAL(G,D,F)	E	
-			B58-0245-33	CAUTION CARD (FTZ)	E	
-			B58-0269-04	CAUTION CARD	K	
△	11		E03-0086-05	AC OUTLET	KP	
△	12		E30-0459-05	AC POWER CORD	E	
△	12		E30-0974-05	AC POWER CORD	KP	
-		*	H01-7192-04	ITEM CARTON CASE		
-		*	H10-1889-02	POLYSTYRENE FOAMED FIXTURE		
-			H25-0181-04	PROTECTION BAG (150X260X0.05)		
-			H25-0224-04	PROTECTION BAG (800X400)		
-			H25-0232-04	PROTECTION BAG (235X350)		
16	2C		J02-0170-04	FOOT		
17	1B		J19-0506-05	UNIT HOLDER		
18	1C		J19-0626-12	ANTENNA HOLDER		
△	19		J42-0083-05	POWER CORD BUSHING	KP	
-			J61-0307-05	WIRE BAND		
23	1B		K27-1264-04	KNØB (BUTTON) SPEAKERS		
24	2B	*	K27-1647-04	KNØB (BUTTON) FM MODE,SYNTH		
25	1B		K29-2001-04	KNØB ASSY(BUTTON)POWER		
26	2A	*	K29-2422-04	KNØB (BUTTON)EQ,DUBBING,MUTING		
27	2A	*	K29-2425-04	KNØB (BUTTON)SEL,CHAR MODE		
△	31		L01-7141-05	POWER TRANSFORMER	K	
△	31		L01-7142-05	POWER TRANSFORMER	E	
△	31		L01-7147-05	POWER TRANSFORMER	P	
E	2B,2C		N09-1515-05	TAPPING SCREW (Ø3X8)		
G	1C		N08-0128-35	BINDING POST (GND)		
H	1C		N09-1280-05	TAPTITE SCREW (Ø3X8)		
35	2B	*	R29-5010-05	POTENTIOMETER(5KEY,20K)EQ		
△	S1		S40-1073-05	PUSH SWITCH (POWER)		
△	S2		S31-2113-05	SLIDE SWITCH (IMPEDANCE SEL)		
39	1B		T90-0104-25	LOOP ANTENNA		
40	1B		T90-0132-05	T TYPE ANTENNA		
41	1B		T90-0136-05	ANTENNA ADAPTOR	E	
<b>TUNER UNIT (X05-3150-11)</b>						
C1	.2		C91-0769-05	CERAMIC	0.01UF	M
C3			CK45FF1H103Z	CERAMIC	0.010UF	Z
C4			C91-0769-05	CERAMIC	0.01UF	M
C5			CE04KW1C330M	ELECTRØ	33UF	16WV
C6			CE04KW1HR47M	ELECTRØ	0.47UF	50WV
C7			CC45FSL1H101J	CERAMIC	100PF	J

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East Hawaii)

UE: AAFES(Europe) X: Australia M: Other Areas

△ indicates safety critical components.



## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 规格	Desti- nation 仕 向	Re- marks 備考
C8			CE04KW1C330M	ELECTRØ 33UF 16WV		
C9			CK45FF1H223Z	CERAMIC 0.022UF Z		
C10			CK45FF1H103Z	CERAMIC 0.010UF Z		
C11			CQ09FS1H391JYØ	PØLYSTY 390PF J		
C12			C91-0769-05	CERAMIC 0.01UF M		
C13			CE04KW1V100M	ELECTRØ 10UF 35WV		
C14 ,15			CK45FF1H223Z	CERAMIC 0.022UF Z		
C16			CE04KW1H2R2M	ELECTRØ 2.2UF 50WV		
C17			CE04KW1H3R3M	ELECTRØ 3.3UF 50WV		
C18			CE04KW1V100M	ELECTRØ 10UF 35WV		
C19			CF92FV1H223J	MF 0.022UF J	KP	
C19 ,20			CF92FV1H223J	MF 0.022UF J	E	
C20			CF92FV1H273J	MF 0.027UF J	KP	
C21			CK45FF1H223Z	CERAMIC 0.022UF Z		
C22			CE04KW1H3R3M	ELECTRØ 3.3UF 50WV		
C23			CQ09FS1H471JYØ	PØLYSTY 470PF J		
C24			CE04KW1H3R3M	ELECTRØ 3.3UF 50WV		
C25			CE04KW1H2R2M	ELECTRØ 2.2UF 50WV		
C26			CF92FV1H473J	MF 0.047UF J		
C27			C91-0753-05	CERAMIC 470PF K		
C28			CE04KW1C101M	ELECTRØ 100UF 16WV		
C29			CE04KW1V100M	ELECTRØ 10UF 35WV	E	
C30			CE04KW1V4R7M	ELECTRØ 4.7UF 35WV		
C31			CE04KW1C330M	ELECTRØ 33UF 16WV		
C32			CE04KW1V100M	ELECTRØ 10UF 35WV		
C33			C91-0769-05	CERAMIC 0.01UF M		
C34			CE04KW1C330M	ELECTRØ 33UF 16WV		
C35			C91-0769-05	CERAMIC 0.01UF M		
C36			CF92FV1H473J	MF 0.047UF J		
C37			C90-1349-05	ALMINIUM ELECTRØLYTIC C.		
C38			CE04KW1H010M	ELECTRØ 1.0UF 50WV		
C39			CC45FCH1H470J	CERAMIC 47PF J		
C40			CC45FCH1H390J	CERAMIC 39PF J		
C41			CE04KW1HR47M	ELECTRØ 0.47UF 50WV		
C42			C91-0747-05	CERAMIC 150PF K	E	
C43			C91-0769-05	CERAMIC 0.01UF M		
C70 ,71			CE04KW1C220M	ELECTRØ 22UF 16WV	E	
C72 ,73			CC45FSL1H151J	CERAMIC 150PF J	KP	
C72 ,73			CF92FV1H102J	MF 1000PF J	E	
C74 ,75			CF92FV1H223J	MF 0.022UF J	KP	
C78 ,79			CE04KW1H010M	ELECTRØ 1.0UF 50WV	KP	
C80 ,81			CE04KW1H010M	ELECTRØ 1.0UF 50WV	E	
C200-203			C91-0737-05	CERAMIC 47PF J		
C204			C91-0769-05	CERAMIC 0.01UF M		
C209			CE04JW1H010M	ELECTRØ 1.0UF 50WV		
C210			C91-0789-05	BACKUP C 0.047F		
C211		*	CE04JW1A101M	ELECTRØ 100UF 10WV		
C212			CE04JW0J100M	ELECTRØ 10UF 6.3WV		
C213,214		*	CE04JW1A101M	ELECTRØ 100UF 10WV		
C215			CE04JW0J100M	ELECTRØ 10UF 6.3WV		
C216			CE04KW1C331M	ELECTRØ 330UF 16WV		
C217		*	CE04JW1V3R3M	ELECTRØ 3.3UF 35WV		
C218-220			C91-0745-05	CERAMIC 100PF K		
C230-233			CK45FB1H471K	CERAMIC 470PF K	E	
TC1 ,2			C05-0303-05	CERAMIC TRIMMER CAPACITØR(20PF		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe) X: Australia M: Other Areas

⚠ indicates safety critical components.

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
45	1C, 2C		E23-0125-05	TERMINAL (GND)		
E1	1B		E11-0162-05	PHONE JACK (3P)		
E2	1C		E20-0823-05	LOCK TERMINAL BOARD(8P)SPEAKER		
E3	2C		E20-0318-05	SCREW TERMINAL BOARD(2P)ANT	E	
E3	2C		E20-0452-05	SCREW TERMINAL BOARD(4P)ANT	KP	
△ F1	1B		F05-2525-05	FUSE (SEMΚ0) (250V T2.5A)	E	
△ F1	1B		F06-5022-05	FUSE (UL) (250V 5A)	KP	
49	1C		J13-0041-05	FUSE CLIP (φ6)	KP	
49	1C		J13-0054-05	FUSE CLIP (φ5)	E	
CF1 ,2			L72-0140-05	CERAMIC FILTER	KP	
CF1 ,2			L72-0190-05	CERAMIC FILTER	E	
CF3			L72-0099-05	CERAMIC FILTER		
CF4			L72-0096-05	CERAMIC FILTER		
L1			L40-1092-14	SMALL FIXED INDUCTOR(1.0UH,M)		
L2			L31-0509-05	MW-RF COIL		
L3			L32-0277-15	MW OSCILLATING COIL		
L4			L40-1021-14	SMALL FIXED INDUCTOR(1.0MH,K)		
L5			L40-2292-14	SMALL FIXED INDUCTOR(2.2UH,M)		
L6			L39-0128-05	PEAKING COIL		
L7			L40-2292-14	SMALL FIXED INDUCTOR(2.2UH,M)		
L8 ,9			L39-0085-05	PHASE-COMPENSATION COIL	E	
L10			L79-0125-05	LC FILTER	E	
L11			L79-0140-05	LC FILTER		
L12			L40-1021-14	SMALL FIXED INDUCTOR(1.0MH,K)		
T1			L30-0362-05	AM IFT		
T2		*	L30-0447-05	FM IFT		
T3		*	L30-0448-05	FM IFT		
X1			L77-0578-05	CRYSTAL RESONATOR(7.2MHZ)		
X2			L78-0209-05	RESONATOR (4.194000MHZ)		
CP2			R90-0202-05	MULTI-COMP 47KX4 J 1/6W		
CP5 -9			R90-0426-05	MULTI-COMP 100KX6 J 1/6W		
CP10			R90-0441-05	MULTI-COMP 10KX9 J 1/6W		
CP11			R90-0416-05	MULTI-COMP 10KX13 J 1/6W		
R12			RD14AB2E101J	FL-PROOF RD 100 J 1/4W		
R23			RD14AB2E101J	FL-PROOF RD 100 J 1/4W		
R37			RD14AB2E101J	FL-PROOF RD 100 J 1/4W		
R50			RD14AB2E221J	FL-PROOF RD 220 J 1/4W		
R238			R92-0173-05	RC 2.2M M 1/2W	KP	
R250,251			RS14DB3A561J	FL-PROOF RS 560 J 1W		
R252,253			RD14AB2E100J	FL-PROOF RD 10 J 1/4W		
VR1			R12-3096-05	TRIMMING PQT.(10K) AM		
VR2			R12-3097-05	TRIMMING PQT.(22K) FM		
VR3			R12-1069-05	TRIMMING PQT.(4.7K)VC0		
VR4		*	R12-6011-05	TRIMMING PQT.(330K)SEPARATION	E	
VR4		*	R12-8015-05	TRIMMING PQT.(1M) SEPARATION	KP	
S2 -32	2A,2B		S40-1064-05	PUSH SWITCH (OPERATION KEY)		
S33	1B	*	S42-2139-05	MULTIPLE PUSH SWITCH(SPEAKERS)		
S34	2C		S31-2094-05	SLIDE SWITCH (PRESET)		
D1			1SS133	DIODE		
D1			1SS176	DIODE		
D2			KV1236(Z2)	VARIABLE CAPACITANCE DIODE		
D3		*	HZS6.8N(B2)	ZENER DIODE		
D3		*	RD6.8ES(B2)	ZENER DIODE		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe) X: Australia M: Other Areas

△ indicates safety critical components.

## PARTS LIST

\* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
D4 -6			1SS133	DIODE		
D4 -6			1SS176	DIODE		
D8			1SS133	DIODE	KP	
D8			1SS176	DIODE	E	
D8 -11			1SS133	DIODE		
D9			1SS176	DIODE	E	
D10			1SS133	DIODE	KP	
D10			1SS176	DIODE		
D11			1SS176	DIODE	E	
D24 -38			1SS133	DIODE		
D24 -38			1SS176	DIODE		
D39		*	HZS10N(B)	ZENER DIODE		
D39		*	RD10ES(B)	ZENER DIODE		
D40 -43			1SS133	DIODE		
D40 -43			1SS176	DIODE		
FL1		*	FIP9AM24	FLUORESCENT INDICATOR TUBE		
IC1			LA1265	IC(FM/AM TUNER)		
IC2			AN7470	IC(FM MPX)		
IC3			LM7001	IC(PLL FREQUENCY SYNTHESIZER)		
IC4		*	7516HG-031-36	IC(MICROPROCESSOR)		
IC6 -10			LB1294	IC(6CH DARLINGTON DRIVER)		
IC11			TD6301AP	IC(FL/LED/LCD FREQ DISPLAY DR)		
Q1			2SC1923(R,Ø)	TRANSISTOR		
Q2 -5			2SC945(A)(Q,P)	TRANSISTOR	KP	
Q2 -6			2SC945(A)(Q,P)	TRANSISTOR	E	
Q7			2SC2003(L,K)	TRANSISTOR		
Q8			2SA733(A)(Q,P)	TRANSISTOR		
Q9 ,10			2SC1845(F,E)	TRANSISTOR		
Q11 ,12			2SA733(A)(Q,P)	TRANSISTOR		
Q13 ,14			2SK163(K)	TRANSISTOR		
54	2C		W02-0699-05	FM FRONT-END ASSY	KP	
54	2C		W02-0700-05	FM FRONT-END ASSY	E	
<b>AUDIO UNIT (X09-2310-11)</b>						
C1 ,2			C91-0749-05	CERAMIC 220PF K		
C3 ,4			CE04KW1V100M	ELECTRO 10UF 35WV		
C5 ,6			CK45FB1H222K	CERAMIC 2200PF K	E	
C7 ,8			CE04KW1A101M	ELECTRO 100UF 10WV		
C9 ,10			CF92FV1H123J	MF 0.012UF J		
C11 ,12			CF92FV1H332J	MF 3300PF J		
C13 ,14			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C15 -30			C91-0753-05	CERAMIC 470PF K		
C31 -34			CE04KW1V100M	ELECTRO 10UF 35WV		
C35 -40			CE04KW1HR47M	ELECTRO 0.47UF 50WV		
C41 ,42			CE04KW1H2R2M	ELECTRO 2.2UF 50WV		
C43 ,44			CE04KW1HR47M	ELECTRO 0.47UF 50WV		
C45 ,46			C91-0751-05	CERAMIC 330PF K		
C47 ,48			CE04KW1V100M	ELECTRO 10UF 35WV		
C49			C91-0769-05	CERAMIC 0.01UF M		
C51			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C52			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C53 ,54			CK45FF1H223Z	CERAMIC 0.022UF Z		
C55			C91-0769-05	CERAMIC 0.01UF M		
C56			CE04KW1C470M	ELECTRO 47UF 16WV		
C57			CE04KW1C470M	ELECTRO 47UF 16WV		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe)

X: Australia M: Other Areas

▲ indicates safety critical components.

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C58			CE04DW1C101M	ELECTRØ 100UF 16WV		
C59 ,60			CE04KW1C220M	ELECTRØ 22UF 16WV		
C61 ,62			CE04KW1H010M	ELECTRØ 1.0UF 50WV		
C63 ,64			C91-0749-05	CERAMIC 220PF K		
C65 -68			C91-0769-05	CERAMIC 0.01UF M		
C69 ,70			CC45FSL1H010C	CERAMIC 1.0PF C		
C71 ,72			CC45FSL1H220J	CERAMIC 22PF J		
C73 ,74			CC45FSL1H330J	CERAMIC 33PF J		
C75 ,76			CC45FSL1H221J	CERAMIC 220PF J		
C77 ,78			CK45FF1H103Z	CERAMIC 0.010UF Z		
C79 -82			CF92FV1H104J	MF 0.10UF J	E KP	
C81 ,82			CF92FV1H473J	MF 0.047UF J		
C83 ,84			CK45FF1H103Z	CERAMIC 0.010UF Z		
C85			CE04KW1J100M	ELECTRØ 10UF 63WV		
C86		*	CE04KW1J330M	ELECTRØ 33UF 63WV		
C87			CE04KW1V100M	ELECTRØ 10UF 35WV		
C88			CE04KW1C221M	ELECTRØ 220UF 16WV		
C89			CE04KW1H2R2M	ELECTRØ 2.2UF 50WV		
C90			CE04KW1C101M	ELECTRØ 100UF 16WV		
C91			CE04KW1H100M	ELECTRØ 10UF 50WV		
C92			CE04KW1H101M	ELECTRØ 100UF 50WV		
C93 ,94		*	C90-1315-05*	ALMINIUM ELECTRØLYTIC C.		
C95 ,96			CK45FF1H103Z	CERAMIC 0.010UF Z		
C97			CE04KW1V101M	ELECTRØ 100UF 35WV		
C98			CE04KW1E332M	ELECTRØ 3300UF 25WV		
C99 -103			CE04KW1C470M	ELECTRØ 47UF 16WV		
C104,105			C91-0757-05	CERAMIC 0.001UF K		
C106			CE04KW1V4R7M	ELECTRØ 4.7UF 35WV		
C107			CE04KW1H010M	ELECTRØ 1.0UF 50WV		
C108		*	CE04DW1V220M	ELECTRØ 22UF 35WV		
C111,112			CK45FB1H561K	CERAMIC 560PF K		
C113,114			CE04KW1H2R2M	ELECTRØ 2.2UF 50WV		
C115,116			CE04KW1HOR1M	ELECTRØ 0.1UF 50WV		
C117,118			CE04KW1HR47M	ELECTRØ 0.47UF 50WV		
C119,120			CF92FV1H223J	MF 0.022UF J		
C121,122			CF92FV1H154J	MF 0.15UF J		
C123,124			CF92FV1H562J	MF 5600PF J		
C125,126			CF92FV1H473J	MF 0.047UF J		
C127,128		*	CF92FV1H182J	MF 1800PF J		
C129			CF92FV1H153J	MF 0.015UF J		
C130			CF92FV1H153J	MF 0.015UF J		
C131,132			CK45FB1H561K	CERAMIC 560PF K		
C133			CE04KW1HR47M	ELECTRØ 0.47UF 50WV		
C134			CF92FV1H123J	MF 0.012UF J		
C135			CF92FV1H332J	MF 3300PF J		
C136			CF92FV1H123J	MF 0.012UF J		
C137			CF92FV1H332J	MF 3300PF J		
C138			CF92FV1H123J	MF 0.012UF J		
C139			CF92FV1H332J	MF 3300PF J		
C140			CE04KW1V100M	ELECTRØ 10UF 35WV		
C141,142			CF92FV1H333J	MF 0.033UF J		
C143			CE04KW1V100M	ELECTRØ 10UF 35WV		
C151			CE04KW1V100M	ELECTRØ 10UF 35WV		
C152			CE04JW1C100M	ELECTRØ 10UF 16WV		
C153			CE04KW1V100M	ELECTRØ 10UF 35WV		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe)

X: Australia M: Other Areas

⚠ indicates safety critical components.

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C154-156 C157,158			CE04DWOJ471M CE04KW1A470M	ELECTRO 470UF 6.3WV ELECTRO 47UF 10WV		
45	1C		E23-0125-05	TERMINAL		
E1	1C		E13-0229-05	PHONE JACK (2P)PHONE		
E2 ,3	1C		E13-0814-05	PHONE JACK (8P)TAPE,VIDEO		
E4	1C		E13-0497-05	PHONE JACK (4P)VIDEO		
E8 -10	1C		E13-0227-05	PHONE JACK (2P)VIDEO MNTR OUT		
△ F3	1C		F05-1623-05	FUSE (SEMKO) (250V T1.6A)	E	
△ F3	1C		F06-1521-05	FUSE (UL) (250V 1.5A)	KP	
49	1C		J13-0041-05	FUSE CLIP (ø6)	KP	
49	1C		J13-0054-05	FUSE CLIP (ø5)	E	
J	1B		N09-0333-05	TAPPING SCREW (ø3X12)		
CP1 ,2			R90-0187-05	MULTI-COMP 0.22X2 K 5W		
R131-136			RD14AB2E221J	FL-PROOF RD 220 J 1/4W		
R143-146			RD14AB2E221J	FL-PROOF RD 220 J 1/4W		
R147-150			RD14AB2E2R2J	FL-PROOF RD 2.2 J 1/4W		
R151			RD14AB2E100J	FL-PROOF RD 10 J 1/4W		
R152			RD14AB2E470J	FL-PROOF RD 47 J 1/4W		
R153,154			RS14KB3D4R7J	FL-PROOF RS 4.7 J 2W		
R169			RD14AB2E4R7J	FL-PROOF RD 4.7 J 1/4W		
R175			RD14AB2E270J	FL-PROOF RD 27 J 1/4W		
R183,184		*	RS14DB3A471J	FL-PROOF RS 470 J 1W		
R187			RD14AB2E101J	FL-PROOF RD 100 J 1/4W		
R194			RD14AB2E101J	FL-PROOF RD 100 J 1/4W		
VR1 ,2			R12-1066-05	TRIMMING POT. (1K) IDLE CURRENT		
S1	2C	*	S42-2140-05	MULTIPLE PUSH SWITCH(FM,SYNTH)		
D1 -32			1SS133	DIODE		
D1 -32			1SS176	DIODE		
D37 ,38			1SS133	DIODE		
D37 ,38			1SS176	DIODE		
D39 -42			1SS131	DIODE		
D39 -42			1SS178	DIODE		
D43			DSM1A1	DIODE		
D44 ,45			1SS133	DIODE		
D44 ,45			1SS176	DIODE		
D46 -49		*	DSA3A2	SURGE ABSORBER		
D50 ,51			DSM1A1	DIODE		
D52		*	RD33ES(B2)	ZENER DIODE		
D53		*	HZ58.2N(B2)	ZENER DIODE		
D53		*	RD8.2ES(B2)	ZENER DIODE		
D54 -57			DSM1A1	DIODE		
D58		*	HZ513N(B2)	ZENER DIODE		
D58		*	RD13ES(B2)	ZENER DIODE		
D59			1SS131	DIODE		
D59			1SS178	DIODE		
D60			1SS133	DIODE		
D60			1SS176	DIODE		
D61			HZ56.2N(B2)	ZENER DIODE		
D61			RD6.2ES(B2)	ZENER DIODE		
D67 ,70			1SS133	DIODE		
D67 ,70			1SS176	DIODE		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East Hawaii)

UE: AAFES(Europe)

X: Australia M: Other Areas

△ indicates safety critical components.

## PARTS LIST

\* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
D71		*	HZS8. 2N(B2)	ZENER DIODE		
D71		*	RDB. 2ES(B2)	ZENER DIODE		
D72			HZS6. 2N(B2)	ZENER DIODE		
D72			RD6. 2ES(B2)	ZENER DIODE		
D79 -86			1SS133	DIODE		
D79 -86			1SS176	DIODE		
D87			HZS6. 2N(B2)	ZENER DIODE		
D87			RD6. 2ES(B2)	ZENER DIODE		
D88		*	HZS3. 3N(B)	ZENER DIODE		
D88		*	RD3. 3ES(B)	ZENER DIODE		
D89 ,90			1SS133	DIODE		
D91			1SS133	DIODE		
D91			1SS176	DIODE		
IC1			AN6556F	IC(OP AMP X2)		
IC1		*	M5218P-A	IC(OP AMP X2)		
IC2			TC9164N	IC(16CH BILATERAL SELECTOR SW)		
IC3		*	TC9163N	IC(BILATERAL SWITCH X16)		
IC4			TC9176P	IC(2CH ELECTRONIC VOLUME)		
IC5			AN6556F	IC(OP AMP X2)		
IC5		*	M5218P-A	IC(OP AMP X2)		
IC7 ,8			M5227P	IC(5CH GRAPHIC EQUALIZER)		
IC9 ,10			AN6556F	IC(OP AMP X2)		
IC9 ,10		*	M5218P-A	IC(OP AMP X2)		
IC11,12			UPD4066BC	IC(BILATERAL SWITCH X4)		
Q1 -4			2SC1845(F,E)	TRANSISTOR		
Q5 ,6			2SC2878	TRANSISTOR		
Q7 ,8			2SC945(A)(Q,P)	TRANSISTOR		
Q9			2SA733(A)(Q,P)	TRANSISTOR		
Q9			2SA999(E,F)	TRANSISTOR		
Q10			2SC2320(E,F)	TRANSISTOR		
Q10			2SC945(A)(Q,P)	TRANSISTOR		
Q11 -14			2SA992(F,E)	TRANSISTOR		
Q15 -18			2SC1845(F,E)	TRANSISTOR		
Q19 ,20			2SA992(F,E)	TRANSISTOR		
Q21 ,22			2SC3419(Y)	TRANSISTOR		
Q23 ,24			2SC2590(Q,R)	TRANSISTOR		
Q25 ,26			2SA1110(Q,R)	TRANSISTOR		
Q27 ,28		*	2SC3854*5(Q,P)	TRANSISTOR		
Q29 ,30		*	2SA1490*5(Q,P)	TRANSISTOR		
Q31 ,32			2SC1845(F,E)	TRANSISTOR		
Q33			2SA992(F,E)	TRANSISTOR		
Q34 ,35			2SC2320(E,F)	TRANSISTOR		
Q34 ,35			2SC945(A)(Q,P)	TRANSISTOR		
Q36			2SC2878	TRANSISTOR		
Q37			2SB772(Q,P)	TRANSISTOR		
Q38			2SC2167	TRANSISTOR		
Q39 ,40			2SC2320(E,F)	TRANSISTOR		
Q39 ,40			2SC945(A)(Q,P)	TRANSISTOR		
Q41 ,42			2SA733(A)(Q,P)	TRANSISTOR		
Q41 ,42			2SA999(E,F)	TRANSISTOR		
Q43 ,44			2SC2167	TRANSISTOR		
Q45			2SA733(A)(Q,P)	TRANSISTOR		
Q45			2SA999(E,F)	TRANSISTOR		
Q46			2SC2003(L,K)	TRANSISTOR		
Q47			2SA733(A)(Q,P)	TRANSISTOR		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East, Hawaii)

UE: AAFES(Europe) X: Australia M: Other Areas

⚠ indicates safety critical components.

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.


Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
Q47 Q51 -56 Q51 -56 Q60 ,61 Q60 ,61			2SA999(E,F) 2SC2320(E,F) 2SC945(A)(Q,P)	TRANSISTOR TRANSISTOR TRANSISTOR		
Q62 Q63 -65 Q66 ,67 Q66 ,67			2SA733(A)(Q,P) 2SA999(E,F) 2SC2320(E,F) 2SC945(A)(Q,P)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		
<b>SUB-CIRCUIT UNIT (X13-5540-11)</b>						
D1 ,2 D1 ,2 Q1 ,2			1SS131 1SS178 2SC945(A)(Q,P)	DIODE DIODE		
<b>FM FRONT END UNIT (W02-0699-05)</b>						
D1 -3 TR1 TR2 ,3 TR4			1SV110 2SK439 2SC3391 2SC3494	VARICAP FET TRANSISTOR TRANSISTOR		
<b>FM FRONT END UNIT (W02-0700-05)</b>						
D1 -4 TR1 TR2 ,3 TR2 ,3 TR4  TR5 TR5			1SV110 3SK85 2SC3391 2SC535 2SC2839  2SK241 2SK439	VARICAP FET TRANSISTOR TRANSISTOR TRANSISTOR  FET FET		

E: Scandinavia & Europe H: Audio Club K: USA P: Canada W: Europe

T: England U: PX(Far East Hawaii)

UE: AAFES(Europe)

X: Australia M: Other Areas

 indicates safety critical components.

# KR-V45

## SPECIFICATIONS

(IHF'66)

### AUDIO SECTION

#### Power Output

55 watts per channel minimum RMS, both channel driven at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.03 % total harmonic distortion

58 watts per channel minimum RMS, both channel driven at 8 ohms at 1 kHz with no more than 0.03 % total harmonic distortion

#### Total Harmonic Distortion

(20 Hz-20,000 Hz,  
8 ohms) ..... 0.03 % at 55 watts  
(1 kHz, 8 ohms) ..... 0.007 % at 55 watts

Inter modulation Distortion ... 0.03 % at 55 watts

#### Input Sensitivity/Impedance

PHONO (MM) ..... 2.5 mV/47 kohms  
CD/AUX, TAPE, VIDEO .. 150 mV/47 ohms

#### Frequency Response

PHONO (RIAA standard  
Curve) ..... 20 Hz-20,000 Hz... ±0.5 dB  
TAPE, CD/AUX ..... 10 Hz-60,000 Hz... +0 dB,  
-3 dB

#### Signal to Noise Ratio

PHONO (MM) ..... 73 dB  
CD/AUX, TAPE ..... 100 dB  
VIDEO ..... 90 dB

#### Graphic Equalizer

Center Frequency ..... 63 Hz, 300 Hz, 1 kHz,  
3 kHz, 10 kHz  
Control Range ..... ±12 dB

### VIDEO SECTION

Inputs VIDEO 1,2,3 ..... 1 Vp-p, 75 ohms unbalanced  
Output VIDEO 1,2 ..... 1 Vp-p, 75 ohms unbalanced  
MONITOR VIDEO  
OUT ..... 1 Vp-p, 75 ohms unbalanced

### FM TUNER SECTION

Tuning Frequency Range... 87.5 MHz-108 MHz  
Antenna Impedance ..... 300 ohms balanced & 75  
ohms unbalanced

Usable Sensitivity ..... 10.8 dBf (1.9 μV)

#### 50 dB Quieting Sensitivity

MONO ..... 14.2 dBf (2.8 μV)  
STEREO ..... 37.1 dBf (39 μV)

#### Signal to Noise Ratio at 65 dBf

MONO ..... 78 dB  
STEREO ..... 72 dB

#### Total Harmonic Distortion at 1,000 Hz

MONO ..... 0.09 %  
STEREO ..... 0.12 %

Frequency Response ..... 30 Hz-15,000 Hz  
+0.5 dB, -2 dB

Stereo Separation ..... 45 dB at 1,000 Hz

Selectivity ..... 55 dB at 400 kHz

Capture Ratio ..... 1.2 dB

Image Rejection Ratio ..... 43 dB

IF Rejection Ratio ..... 86 dB

Spurious Rejection Ratio ... 84 dB

AM Suppression Ratio ..... 65 dB

### AM TUNER SECTION

#### Tuning Range

530 kHz-1,610 kHz

Usable Sensitivity ..... 10 μV (400 μV/m)

Signal to Noise Ratio ..... 50 dB

Total Harmonic Distortion . 0.3 %

Selectivity ..... 25 dB

### GENERAL

Power Requirement ..... 60 Hz, 120 V...USA &  
CANADA Model

Power Consumption ..... 2.2 A...USA & Canada

AC Outlet ..... Switched × 3 (200 W)

Dimensions ..... 420(W) × 111(H) × 319.5(D)mm  
(16-9/16 × 4-3/8" × 12-9/16")

Weight (Net) ..... KR-V45...6.7 kg (14.8 lb)