
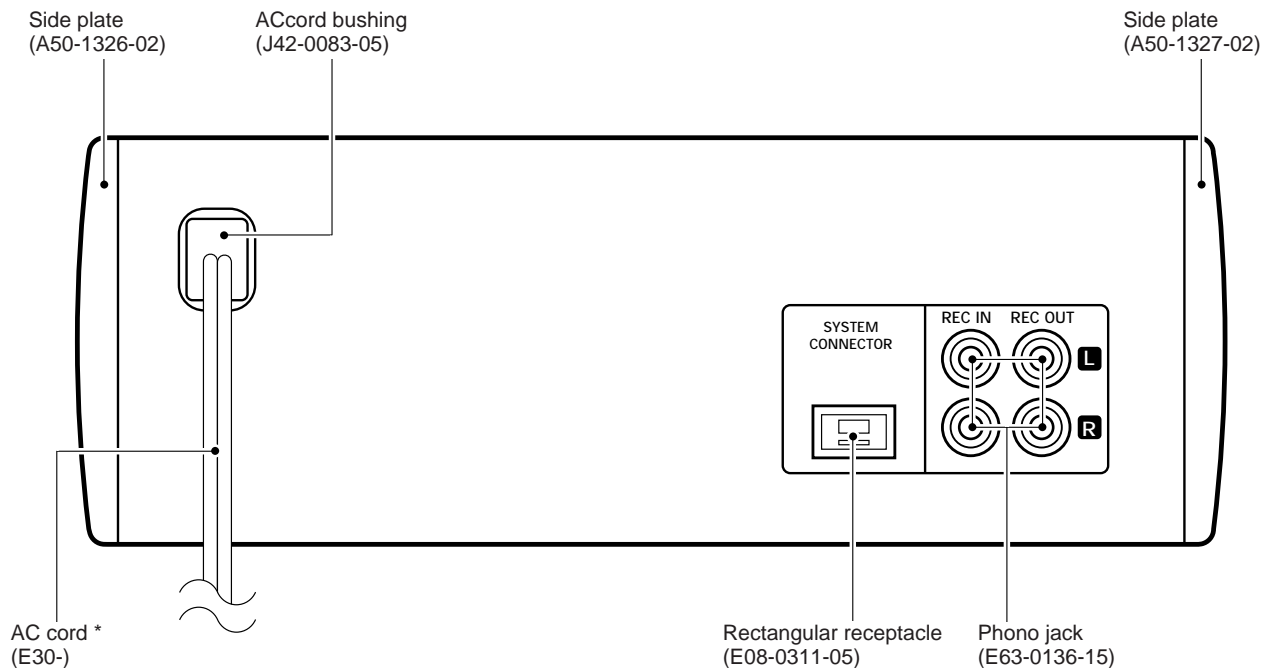


X-VH7

SERVICE MANUAL

(VH-700)

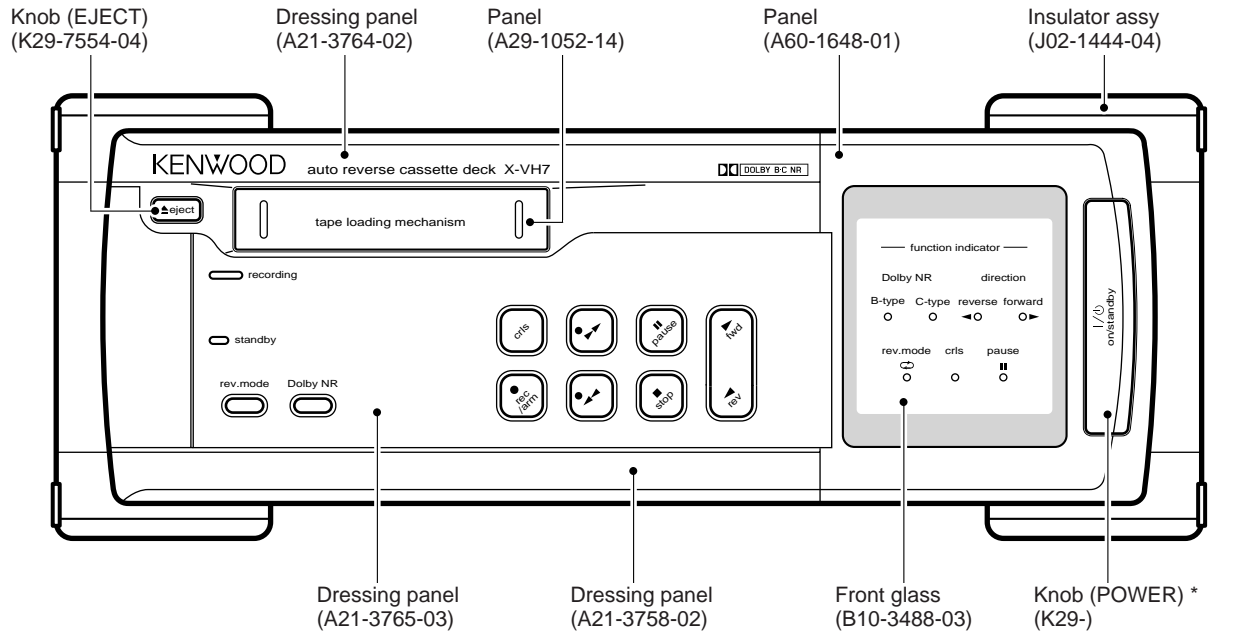

* Refer to parts list on page 13.

Refer to **X-E9** and **X-SA7** service manuals (**B51-4926-00/B51-5214-00**), if you require in detail.




X-VH7

CONTENTS / ACCESSORIES

Contents

CONTENTS / ACCESSORIES	2	SCHEMATIC DIAGRAM	9
DISASSEMBLY FOR REPAIR	2	EXPLODED VIEW	12
CIRCUIT DESCRIPTION	3	PARTS LIST	13
ADJUSTMENT	6	SPECIFICATIONS	Back cover
PC BOARD	7		

Accessories

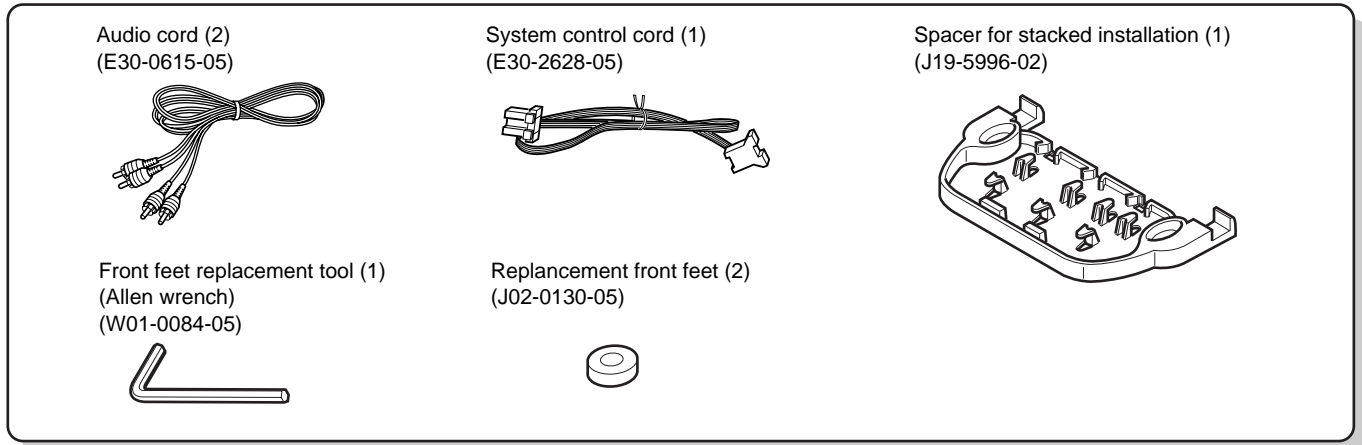

System configurations

SYSTEM	RECEIVER	CASSETTE	SPEAKER
VH-600	RD-VH7	-	LS-VH7
VH-700	RD-VH7	X-VH7	LS-VH7

Operation to reset

The microcomputer may fall into malfunction (impossibility to operate, erroneous display, etc.) when the power cord is unplugged while power is ON or due to an external factor. In this case, execute the following procedure to reset the microcomputer and return it to normal condition.

- Please note that resetting the microcomputer clears the contents stored in it returns it to condition when it left the factory.

Unplug the power cord from the AC outlet and, while holding the "▲eject" key depressed, plug the power cord again.

- If a tape is loaded in the deck, it will be ejected now.

DISASSEMBLY FOR REPAIR

ELECTRIC CHECK


- 1) Remove insulator a'ssy, then remove some screw of L,R side board(①). Next remove the top and the bottom boards, then remove the power transformer and the rear panel assembling PCB.
- 2) Connect GND between PCB and the deck mechanism with a alligator clip lead weir (②).

REMOVE EARTH METAL

Support the earth metal by your finger to keep the shape, then pull up (③) and remove (④) the earth metal .

ASSEMBLE EARTH METAL

Insert the tip of the earth metal (⑤), then support the earth metal by your finger, push down it (⑥).

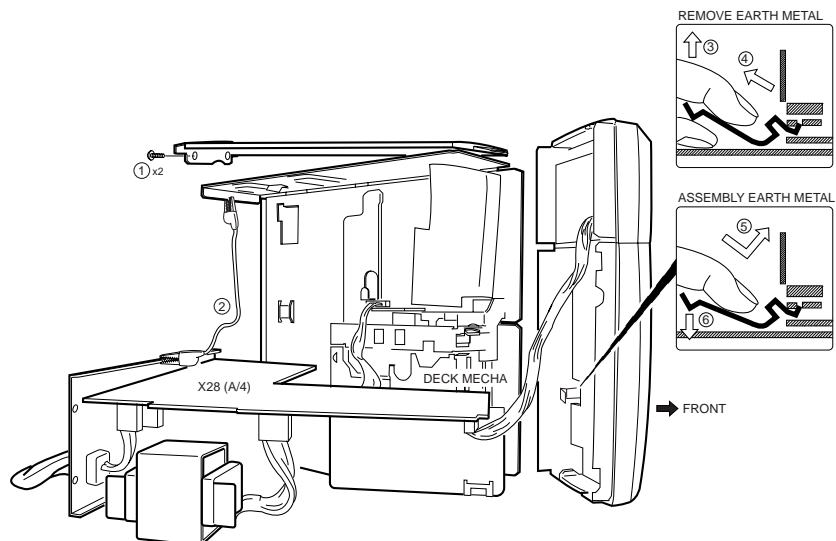

CIRCUIT DESCRIPTION


1. Deck Microprocessor :

CXP 84124-150 (X28 : IC1)

1-1 Features

- | | |
|---|----------------------------------|
| 1) Single loading cassette deck. | 3) Dolby NR B/C |
| 2) Equipped with DPSS. UP search, DOWN search, 1 tune repeat, RWD play, dash and play, REREC standby. | 4) One touch edit.(only remocon) |
| | 5) CRLS |
| | 6) One touch operation |

1-2 Microprocessor periphery block diagram

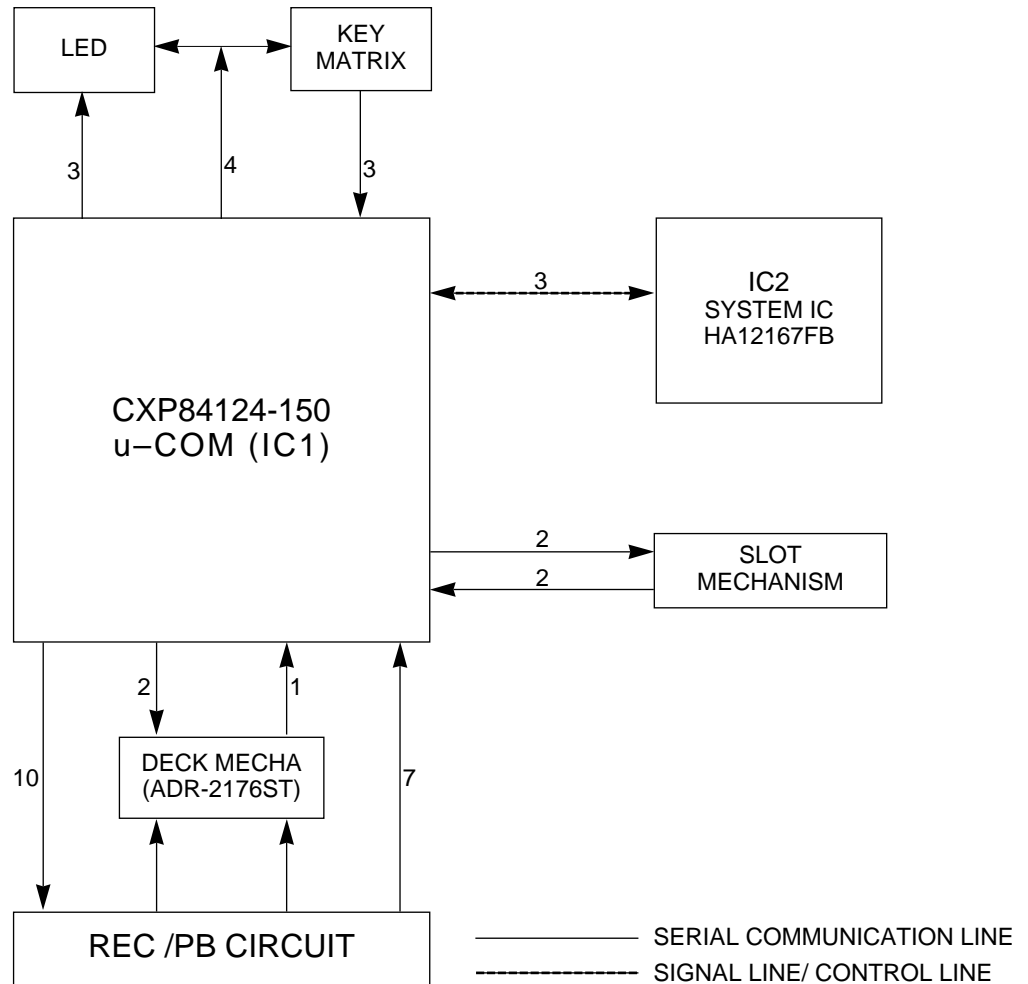

1-3 KEY matrix, LED matrix

1-3-1 KEY matrix

{{ () u-COM IC PORT}

	KS0(6)	KS1(7)	KS2(9)	KS3(8)
KR0(15)	POWER	■	REV. MODE	CRLS
KR1(16)	◀	◀◀	▲	●
KR2(14)	▶	▯	DOLBY	▶▶

1-3-2 LED matrix

	KS0(6)	KS1(7)	KS2(9)	KS3(8)
LED0(19)	EJECT	STANDBY	DOLBY B	RECORDING
LED1(20)	PAUSE	CRLS	REV. MODE	DOLBY C
LED2(18)	-----	REVERSE	FORWARD	-----

CIRCUIT DESCRIPTION

1-4 Pin description

Pin	Name	I/O	Connect	Description
1	S.BUSY	I/O	OPEN	Serial communication BUSY signal H: BUSY L: READY
2~5	—	I	OPEN	No used
6~9	$\overline{\text{KS0,1,3,2}}$	O	PU	KEY SCAN 0,1,3,2
14~16	KR2,0,1	I	PD	KEY RETURN 2,0,1
17	—	I	OPEN	No used
18~20	$\overline{\text{LED2,0,1}}$	O	OPEN	LED drive output2,0,1 L: ON
21	BACKLIGHT_ON	O	PD	BACK LIGHT LED drive output H: ON
22~29	—	O	OPEN	No used
30	$\overline{\text{RESET}}$	I	PU	u-com RESET signal detect L: RESET
31	EXTAL	I	OPEN	MAIN CLOCK(10MHz)
32	XTAL	—	OPEN	
33	VSS(GND)	—	GND	GND
34	TX	—	OPEN	No used
35	TEX(GND)	I	GND	GND
36	AVSS(GND)	—	GND	A/D converter GND
37	AVREF	I	+5V	A/D converter reference voltage
38	SOL	O	PD	MECHA solenoid control H: ON
39	$\overline{\text{R_INH_F}}$	I	PU	FWD REC permission detect signal input L: REC
40	PHOTO SW	I	PU	REAL drive pulse input
41	$\overline{\text{HALF_SW}}$	I	PU	Cassette half detect signal input L: CASSETTE EXIST
42	$\overline{\text{PLAY SW}}$	I	PU	MECHA HEAD position detect L: ON
43	$\overline{\text{TYPE II}}$	I	PU	TYPE II detect signal input L: TYPE II
44,45	LEVEL L/R	I	PD	Lch/Rch level input
46	$\overline{\text{R_INH_R}}$	I	PU	RVS. REC permission detect signal input L: REC
47	CPM	O	PD	Capstan motor control H: ON
48	CLOCK	O	OPEN	System IC CLOCK output
49	REC/PLAY	O	OPEN	REC/PLAY changeover H: REC L: PLAY
50	ERASE	O	PD	ERASE HEAD control output H: ON
51	DATA	O	OPEN	System IC DATA output
52	STB	O	OPEN	System IC STROBE signal output
53~59	—	O	OPEN	No used
60	BIAS NOR	O	PD	BIAS CONTROL H: NORMAL TAPE
61~63	—	I	OPEN	No used
64	SLOT OPEN	O	OPEN	SLOT OPEN motor control H: ON
65	SLOT CLOSE	O	OPEN	SLOT CLOSE motor control H: ON
66	$\overline{\text{CLOSE SW}}$	O	PU	SLOT CLOSE detect SW input L: ON
67	$\overline{\text{OPEN SW}}$	O	PU	SLOT OPEN detect SW input L: ON
68	—	O	OPEN	No used
69	CE	O	PU	AC OFF detect signal input L: AC OFF
70	DOLBY_RESET	O	OPEN	DOLBY IC RESET control L: RESET
71	—	O	OPEN	No used
72	VDD(+5V)	—	+5V	power supply
73	—	—	+5V	No used(Connect to VDD(+5V))
74	70/120	O	PD	PLAY equalizer control output H: 70μs L: 120μs
75,76	—	O	OPEN	No used
77	AVR_OFF	O	PD	Circuit AVR ON/OFF control H: AVR ON
78	$\overline{\text{LINE MUTE}}$	O	PD	LINE MUTE control output L: MUTE ON
79	$\overline{\text{REC MUTE}}$	O	PD	REC MUTE control output L: MUTE ON
80	S.DATA	I/O	OPEN	Serial communication DATA signal

CIRCUIT DESCRIPTION

2. DEFAULT STATES

2-1 Main unit default states

ITEM	STATE
POWER	OFF
DOLBY	OFF
R/P	PLAY
REC MUTE	ON
LINE MUTE	ON
BIAS	OFF
ERASE	OFF
REC LEVEL(E. VOL)	-15dB
SOL	OFF
CPM	ON(500ms) → OFF
DIRECTION	FORWARD
REVERSE MODE	ENDLESS MODE

3-5 Set inspection test mode

3-5-1 REC/PB inspection

Press the REC key: ①REC(4sec.)→ ②REVERSE(4sec.)
→ ③Start PLAY automatically.

But press the REC key with recording again, the recording time be extended for 4 sec per one press.

3-5-2 Test mode initializing condition

Press the STOP key, then be stopped the mechanism movement.

(But no change of the system IC/IC2 setting up)

And LEDs display normal with the leaf SW.

3-5-3 REC level changeover

Press the CRLS key, changeover REC level.

- LEVEL display: -15dB(LED CRLS blinking) ↔ 0dB(LED REV.MODE blinking)

3. TEST MODE

3-1 Setting method

While pressing the FWD key, plug the power cord to the AC wall outlet.(Setting up: MUTE ON)

Set up REC level : -15dB

All LED lighting, then be cancelled to press a key and insert a tape.

Insert a tape or press the STOP key, then LEDs display the leaf SW movement of the mechanism.

(ON:LED lighting, OFF:No LED lighting)

DOLBY-B: Mistake REC FWD

DOLBY-C: Mistake REC REV

REV-MODE: PACK DETECT SW

CRLS: CrO2 DETECT SW

3-2 Initializing method

While pressing the EJECT key, plug the power cord to the AC wall outlet.

Jump out a tape compulsion, then LED STANDBY be blinked and lighted .

3-3 Cancel test mode


- 1) AC power OFF: initialize and cancel the test mode.
- 2) Press the PAUSE key ,then be stopped the mechanism and be cancelled the test mode on POWER ON.
(No jump out a tape compulsion)

3-4 TEST MODE specifications


- 1) The keys are activated normal except the test mode indicating key .
- 2) No mute control by the mode changeover. But mute on by POWER ON/OFF.


ADJUSTMENT

CASSETTE DECK


NO.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	CASSETTE DECK SETTINGS	ALIGNMENT	ALIGN FOR	FIG.
Unless otherwise specified, set the respective switches as follows: TAPE: NORMAL DOLBY: OFF INPUT: REC IN OUTPUT: PLAY OUT 0dBm=0.775V							
ø. Cassette mechanism (REC/PB head adjustment)							
[1]	Demagnetization and cleaning	-	-	(POWER OFF) demagnetization (PLAY) cleaning	REC/PB head erase head capstan pinch roller	Demagnetize the REC/PB head by head eraser. Clean the REC/PB head ,eraser head, capstan and pinch roller with a cotton swab immersed in alcohol.	
[2]	REC/PB head azimuth	TCC-153 MTT-114 10kHz,-10dB	(B)	PLAY		Adjust the output to maximum and adjust the azimuth adjustment screw for the Lissajous waveform pattern of the oscilloscope to become close to a 45° straight line.	
II. Capstan motor adjustment							
[1]	Tape speed (NORMAL)	TCC-110 MTT-111 3kHz	(B)	PLAY	VR. inside motor	Adjust so that the frequency 3kHz at the center of the tape.	
III. PC board adjustment							
<1>	Playback level	TCC-130	(B)	PLAY	VR1,2	-1dBm	
<2>	Recording level	TCC-108 400Hz -21dBm (A)	(B)	REC ⇔ PLAY	VR5,6	-21dBm	
<3>	Bias current	TCC-108 12.5kHz -21dBm (A)			VR3,4	-21dBm	

Measurement equipment connection

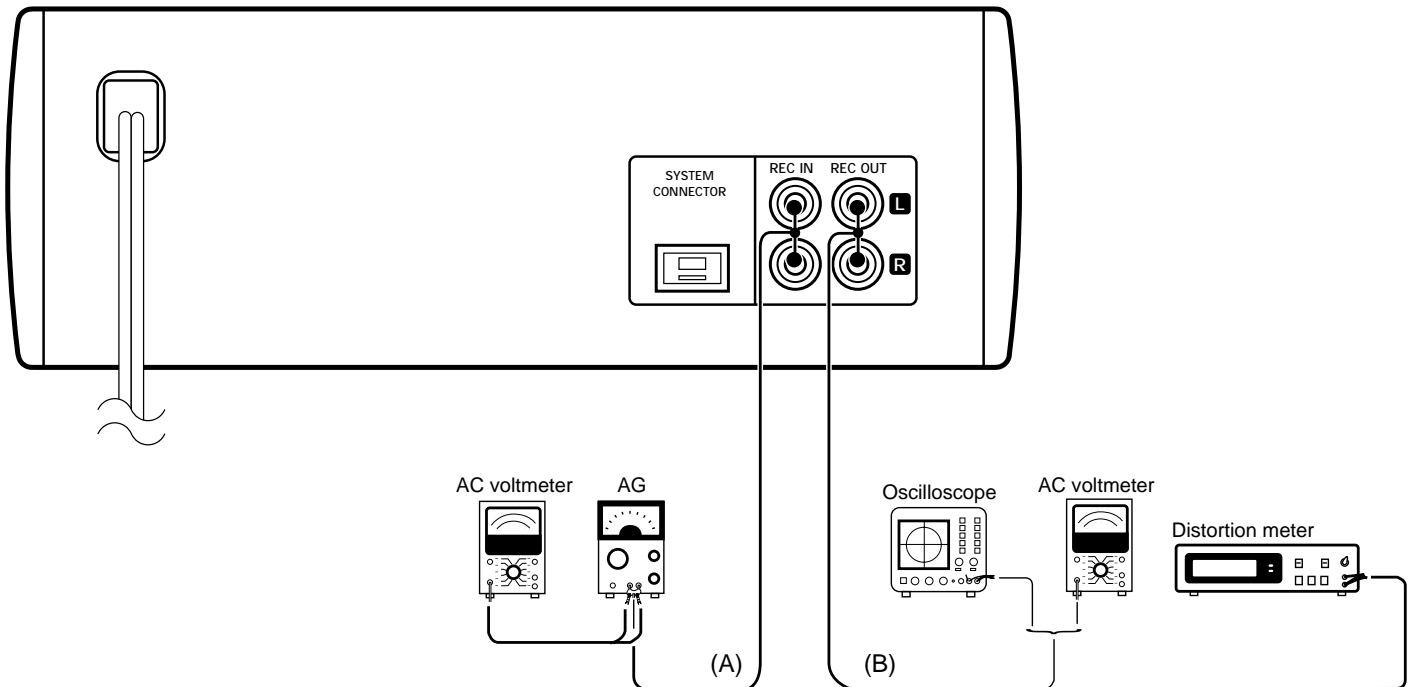

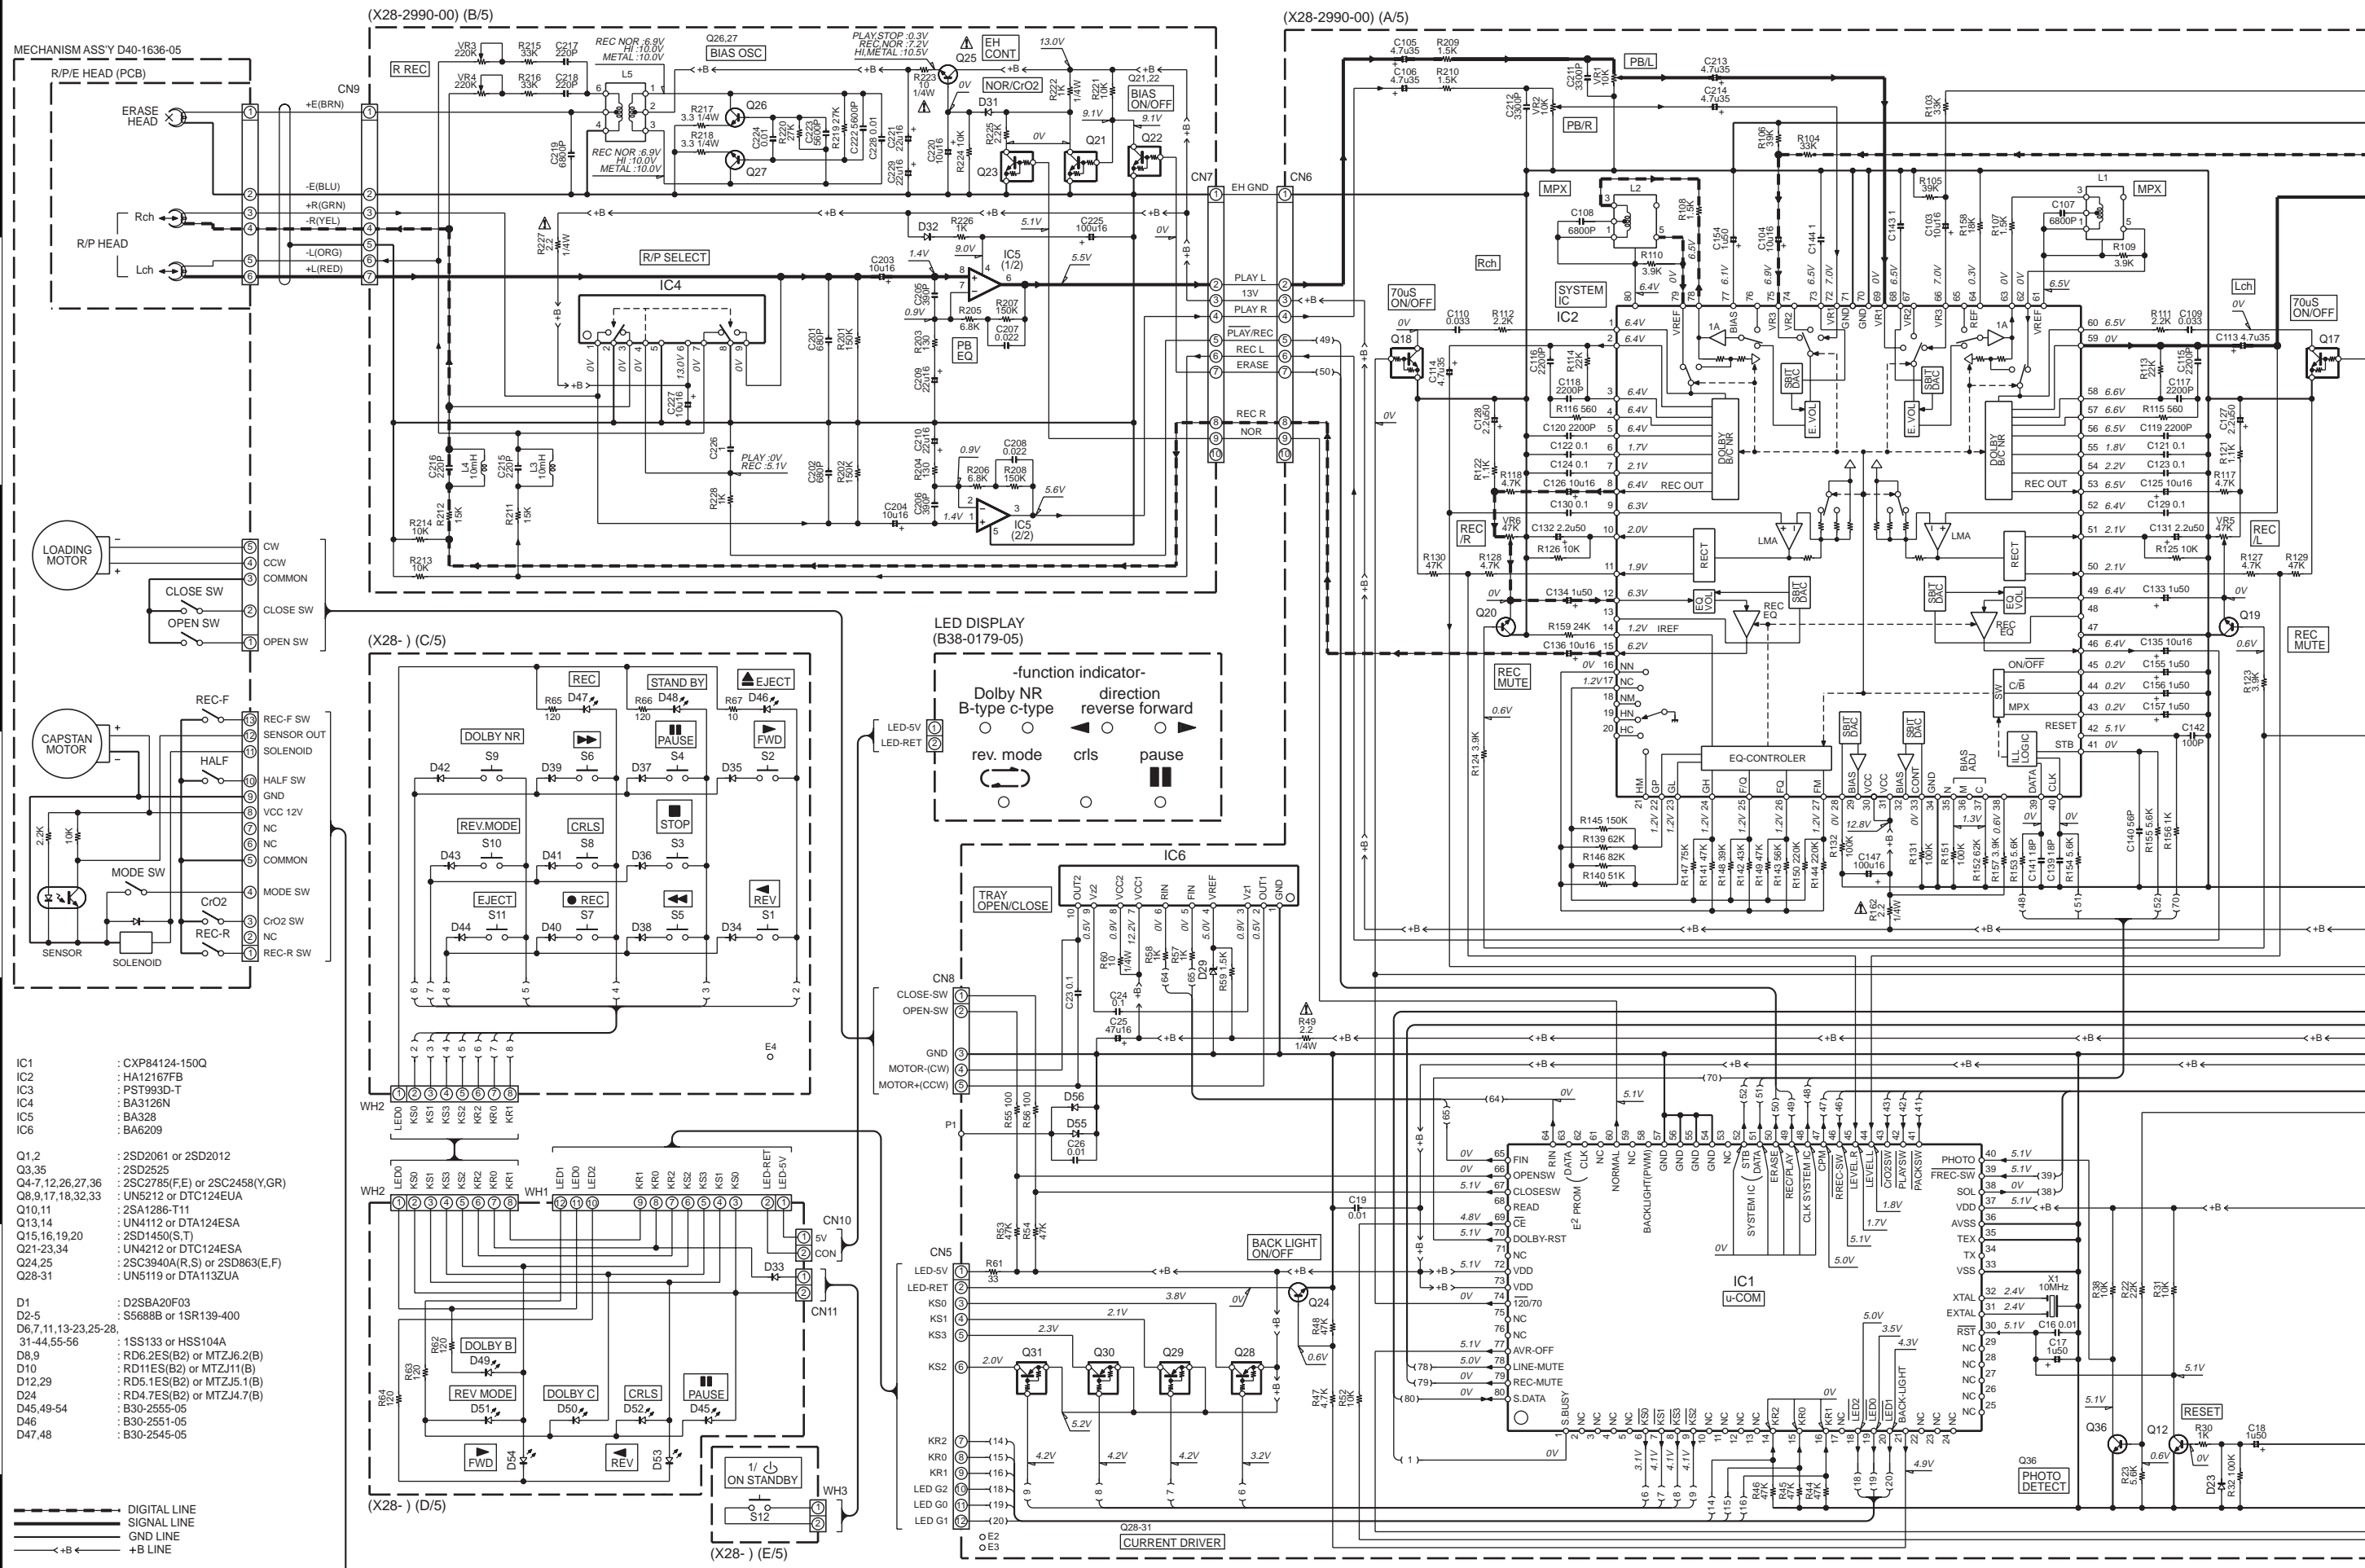


- IC1 : CXP84124-150Q
 IC2 : HA12167FB
 IC3 : PST993D-T
 IC4 : BA3126N
 IC5 : BA328
 IC6 : BA6209
- Q1,2 : 2SD2061 or 2SD2012
 Q3,35 : 2SD2525
 Q4-7,12,26,27,36 : 2SC2785(F,E) or 2SC2458(Y,GR)
 Q8,9,17,18,32,33 : UN5212 or DTC124EUA
 Q10,11 : 2SA1286-T11
 Q13,14 : UN4112 or DTA124ESA
 Q15,16,19,20 : 2SD1450(S,T)
 Q21-23,34 : UN4212 or DTC124ESA
 Q24,25 : 2SC3940(A,R,S) or 2SD863(E,F)
 Q28-31 : UN5119 or DTA113ZUA
- D1 : D2SBA20F03
 D2-5 : S5688B or 1SR139-400
 D6,7,11,13-23,25-28,31-44,55-56 : 1SS133 or HSS104A
 D8,9 : RD6.2ES(B2) or MTZJ6.2(B)
 D10 : RD11ES(B2) or MTZJ11(B)
 D12,29 : RD5.1ES(B2) or MTZJ5.1(B)
 D24 : RD4.7ES(B2) or MTZJ4.7(B)
 D45,49-54 : B30-2555-05
 D46 : B30-2551-05
 D47,48 : B30-2545-05



CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.



The DC voltage is an actual reading measured with a high impedance type voltmeter with a cassette loaded at playback mode. The measurement value may vary depending on the measuring instruments used or on the product. Bias circuit DC voltage is measured while in the record mode.

(X28-2990-00) (A/5)

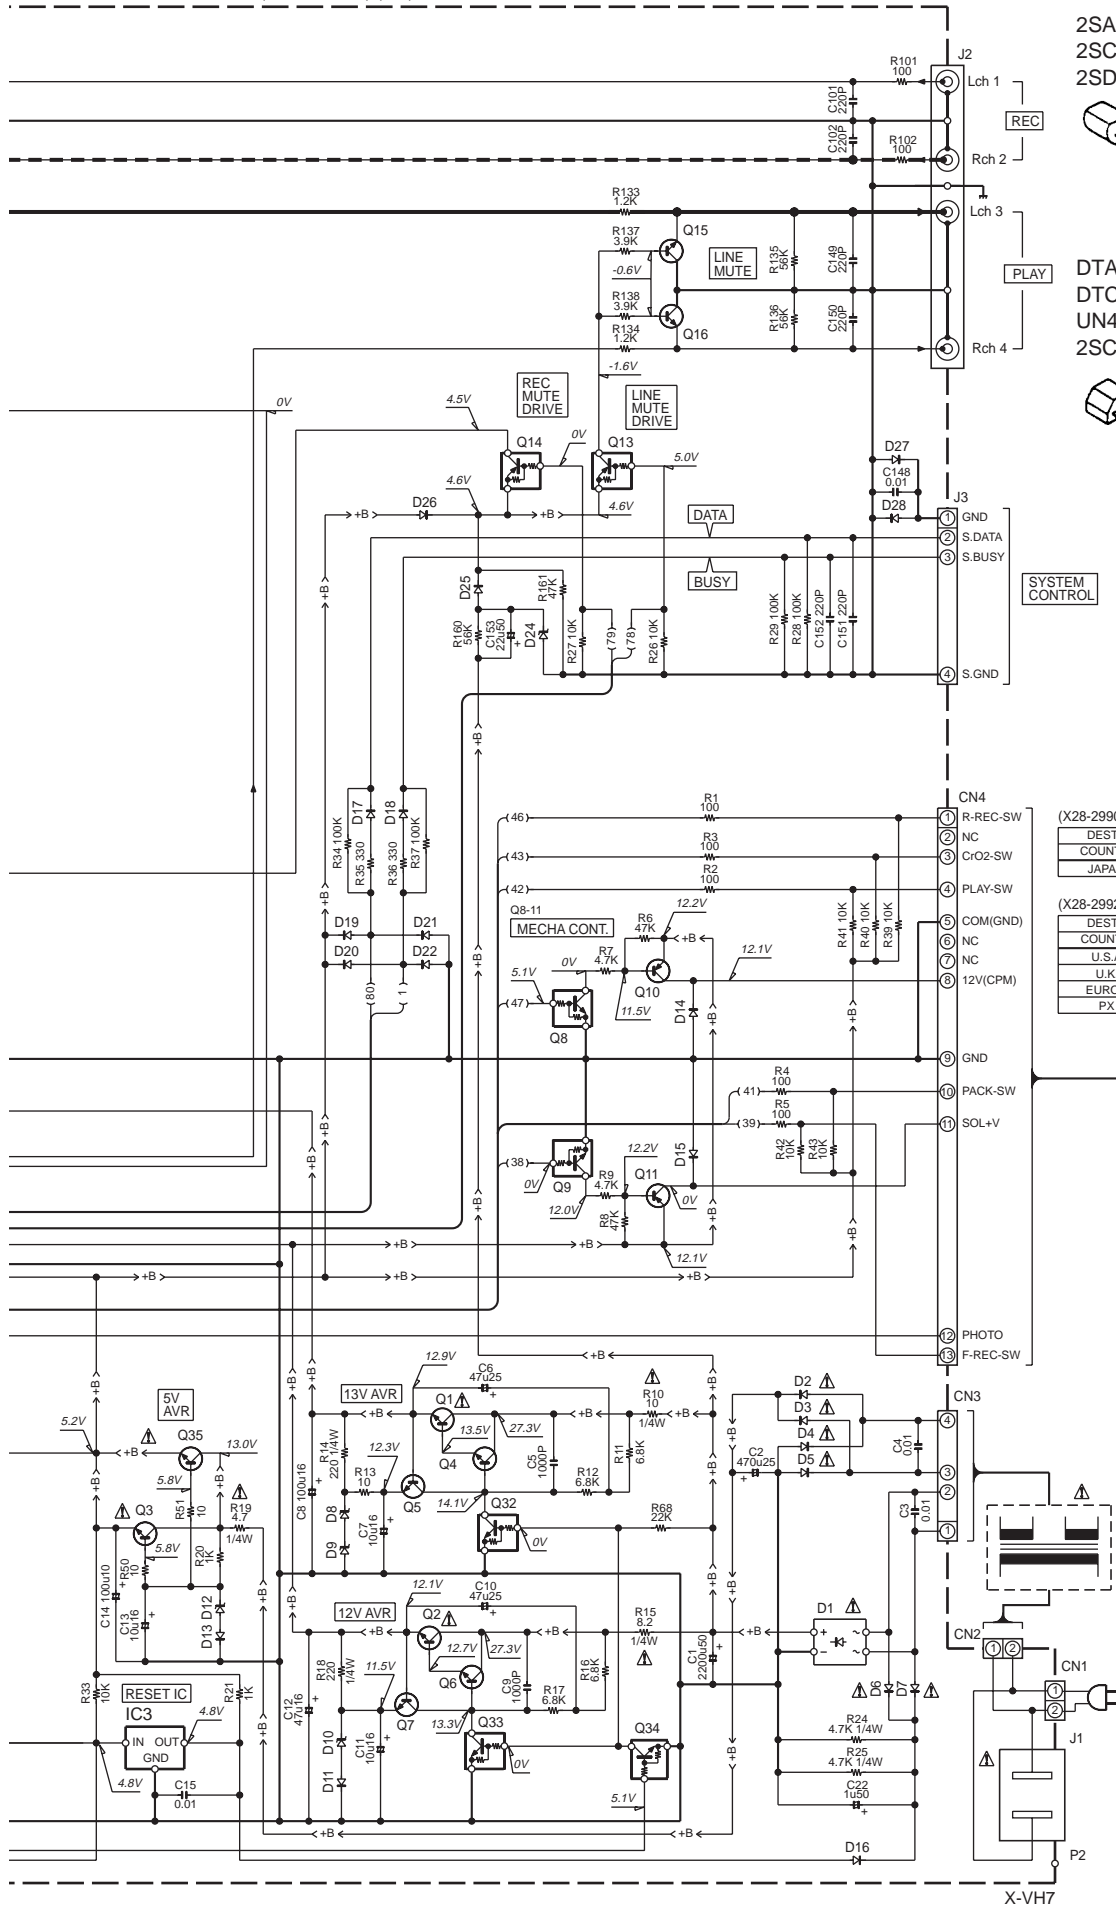



2SA1286-T11
2SC3940A
2SD863

2SC2785



DTA124ESA
DTC124ESA
UN4112
2SC2458


UN5119



SYSTEM CONTROL

2SD2012


BA6209




(X28-2990-00)					
DESTINATION	COUNTRY	ABB.	UNIT No.	J1	P2
JAPAN	J		0-00	YES	NO

(X28-2992-71)					
DESTINATION	COUNTRY	ABB.	UNIT No.	J1	P2
U.S.A.	K				
U.K.	T		2-71	NO	YES
EUROPE	E				
PX	Y				


UN4212



DTC124EUA




BA3126N




UN5212



2SD2061



HA12167FB



X-VH7

KENWOOD

DOLBY and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.
Noise reduction circuit made under license from Dolby Laboratories Licensing Corporation.

Y26-4420-11

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

①

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
X-VH7						
601	1A		A01-3696-01	METALLIC CABINET, TOP		
602	2C		A01-3698-01	METALLIC CABINET, BOTTOM		
604	2A		A21-3758-02	DRESSING PANEL BOTTOM		
605	1A	*	A21-3764-02	DRESSING PANEL TOP		
606	2A	*	A21-3765-03	DRESSING PANEL ALUMI		
607	1A	*	A29-1052-14	PANEL		
608	1A		A50-1326-02	SIDE PLATE		
609	1A		A50-1327-02	SIDE PLATE		
610	2A	*	A60-1648-01	PANEL		
615	1A		B09-0267-04	CAP		
616	2B	*	B10-3488-03	FRONT GLASS		
617	2A		B12-0361-04	INDICATOR REC		
618	1B	*	B12-0365-04	INDICATOR INDICATOR		
619	1B	*	B38-0179-05	LED DISPLAY ASSY		
-			B46-0310-03	WARRANTY CARD	TE	
-			B46-0328-03	WARRANTY CARD	KY	
-			B46-0347-03	WARRANTY CARD	K	
-		*	B60-4177-00	INSTRUCTION MANUAL(EN)	KTY	
-		*	B60-4178-00	INSTRUCTION MANUAL(5-LAN)	E	
-		*	B60-4179-00	INSTRUCTION MANUAL(FR)	K	
625	2B	*	D40-1636-05	MECHANISM ASSY		
631	1A		E30-0615-05	AUDIO CORD		
632	1A		E30-2628-05	CORD WITH CONNECTOR		
633	1C		E30-2788-05	AC POWER CORD	E	
633	1C		E30-2791-05	AC POWER CORD	T	
633	1C		E30-2883-05	AC POWER CORD	KY	
640	1A		G01-4122-04	TORSION COIL SPRING		
641	1B,2B		G10-0489-04	NON-WOVEN FABRIC		
642	2A,1B		G11-2272-04	SOFT TAPE		
643	2A		G02-1681-04	LEAF SPRING		
-		*	H10-7568-02	POLYSTYRENE FOAMED FIXTURE		
-		*	H10-7569-02	POLYSTYRENE FOAMED FIXTURE		
-		*	H12-2465-04	PACKING FIXTURE	T	
-			H25-0681-04	PROTECTION BAG		
-			H25-1595-04	PROTECTION BAG		
-			H30-0610-04	ADHESIVE DOUBLE-COATED TAPE		
-		*	H50-3361-04	ITEM CARTON CASE	E	
-		*	H50-3362-04	ITEM CARTON CASE	K	
-		*	H50-3363-04	ITEM CARTON CASE	T	
-		*	H50-3546-04	ITEM CARTON CASE	Y	
645	1A		J02-0130-05	FOOT		
646	1B		J02-1444-04	INSULATOR ASSY		
647	2C		J02-1445-04	FOOT		
648	1B	*	J19-5981-03	HOLDER		
649	1A		J19-5994-04	HOLDER		
650	1A		J19-5995-04	HOLDER		
651	1A		J19-5996-02	BRACKET		
654	1C		J42-0083-05	POWER CORD BUSHING		
-			J61-0098-05	WIRE BAND		
660	2A		K29-7554-04	KNOB EJECT		
661	1B	*	K29-7557-03	KNOB POWER	TE	
661	1B	*	K29-7564-03	KNOB POWER	KY	

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East, Hawaii) T : Europe G : Germany V : China (Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

* New Parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

②

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
Δ 665	1C	*	L07-2731-05	POWER TRANSFORMER	TE	
Δ 665	1C	*	L07-2733-05	POWER TRANSFORMER	KY	
670	1A		W01-0084-05	HEXAGON WRENCH KEY		
REC/PLAY (X28-2990-11)						
D45		*	B30-2555-05	LED(RED,3)		
D46			B30-2551-05	LED(BLUE,PHAI 3)		
D47 ,48			B30-2545-05	LED(RED3(160))		
D49 -54		*	B30-2555-05	LED(RED,3)		
C1			CE04KW1H222M	ELECTRO	2200UF	50WV
C2			CE04KW1E471M	ELECTRO	470UF	25WV
C3 ,4			CK45FF1H103Z	CERAMIC	0.010UF	Z
C5			CC73FSL1H102J	CHIP C	1000PF	J
C6			CE04KW1E470M	ELECTRO	47UF	25WV
C7			CE04KW1C100M	ELECTRO	10UF	16WV
C8			CE04KW1C101M	ELECTRO	100UF	16WV
C9			CC73FSL1H102J	CHIP C	1000PF	J
C10			CE04KW1E470M	ELECTRO	47UF	25WV
C11			CE04KW1C100M	ELECTRO	10UF	16WV
C12			CE04KW1C470M	ELECTRO	47UF	16WV
C13			CE04KW1C100M	ELECTRO	10UF	16WV
C14			CE04KW1A101M	ELECTRO	100UF	10WV
C15 ,16			CK73FB1H103K	CHIP C	0.010UF	K
C17 ,18			CE04KW1H010M	ELECTRO	1.0UF	50WV
C19			CK73FB1H103K	CHIP C	0.010UF	K
C22			CE04KW1H010M	ELECTRO	1.0UF	50WV
C23 ,24			CK73FB1C104K	CHIP C	0.10UF	K
C25			CE04KW1C470M	ELECTRO	47UF	16WV
C26			CK73FB1H103K	CHIP C	0.010UF	K
C101,102			CC73FSL1H221J	CHIP C	220PF	J
C103,104			CE04KW1C100M	ELECTRO	10UF	16WV
C105,106			CE04KW1V4R7M	ELECTRO	4.7UF	35WV
C107,108			CK73FB1H682K	CHIP C	6800PF	K
C109,110			CK73FB1H333K	CHIP C	0.033UF	K
C113,114			CE04KW1V4R7M	ELECTRO	4.7UF	35WV
C115-120			CQ93FMG1H222J	MYLAR	2200PF	J
C121-124			CK73FB1C104K	CHIP C	0.10UF	K
C125,126			CE04KW1C100M	ELECTRO	10UF	16WV
C127,128			CE04KW1H2R2M	ELECTRO	2.2UF	50WV
C129,130			CK73FB1C104K	CHIP C	0.10UF	K
C131,132			CE04KW1H2R2M	ELECTRO	2.2UF	50WV
C133,134			CE04KW1H010M	ELECTRO	1.0UF	50WV
C135,136			CE04KW1C100M	ELECTRO	10UF	16WV
C139			CC73FSL1H180J	CHIP C	18PF	J
C140			CC73FSL1H560J	CHIP C	56PF	J
C141			CC73FSL1H180J	CHIP C	18PF	J
C142			CC73FSL1H101J	CHIP C	100PF	J
C143,144			CK73FF1C105Z	CHIP C	1.0UF	Z
C147			CE04KW1C101M	ELECTRO	100UF	16WV
C148			CK73FB1H103K	CHIP C	0.010UF	K
C149-152			CC73FSL1H221J	CHIP C	220PF	J
C153			CE04KW1H220M	ELECTRO	22UF	50WV
C154-157			CE04KW1H010M	ELECTRO	1.0UF	50WV
C201,202			CC73FSL1H681J	CHIP C	680PF	J

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
 Y : PX(Far East, Hawaii) T : Europe G : Germany V : China (Shanghai)
 Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

PARTS LIST

X-VH7

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

③

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C203,204			CE04KW1C100M	ELECTRO 10UF 16WV		
C205,206			CC73FSL1H391J	CHIP C 390PF J		
C207,208			CQ93FMG1H223J	MYLAR 0.022UF J		
C209,210			CE04KW1C220M	ELECTRO 22UF 16WV		
C211,212			CQ93FMG1H332J	MYLAR 3300PF J		
C213,214			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C215-218			CC45FSL1H221J	CERAMIC 220PF J		
C219			CQ93HP2A682J	MYLAR 6800PF J		
C220			CE04KW1C100M	ELECTRO 10UF 16WV		
C221			CE04KW1C220M	ELECTRO 22UF 16WV		
C222,223			CQ93FMG1H562J	MYLAR 5600PF J		
C224			CQ93FMG1H103J	MYLAR 0.010UF J		
C225			CE04KW1C101M	ELECTRO 100UF 16WV		
C226			CK73FF1C105Z	CHIP C 1.0UF Z		
C227			CE04KW1C100M	ELECTRO 10UF 16WV		
C228			CQ93FMG1H103J	MYLAR 0.010UF J		
C229			CE04KW1C220M	ELECTRO 22UF 16WV		
CN1 ,2			E40-4245-05	PIN ASSY		
CN3			E40-4101-05	PIN ASSY		
CN4			E40-3257-05	PIN ASSY		
CN5			E40-3256-05	PIN ASSY		
CN6			E40-8164-05	PIN ASSY		
CN7			E40-8169-05	SOCKET FOR PIN ASSY		
CN8			E40-3249-05	PIN ASSY		
CN9			E40-3265-05	PIN ASSY		
CN10,11	1C		E40-3260-05	PIN ASSY		
J2			E63-0136-15	PHONO JACK		
J3	1C		E08-0311-05	RECTANGULAR RECEPTACLE		
E1 -4			J11-0808-05	WIRE CLAMPER		
L1 ,2			L79-1242-05	LC FILTER		
L3 ,4			L40-1035-29	SMALL FIXED INDUCTOR(10MH, J)		
L5		*	L32-1010-05	BIAS OSCILLATING COIL		
X1			L78-0294-05	RESONATOR (10.000M)		
R2 -5			RK73FB2A101J	CHIP R 100 J 1/10W		
R6			RK73FB2A473J	CHIP R 47K J 1/10W		
R7			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R8			RK73FB2A473J	CHIP R 47K J 1/10W		
R9			RK73FB2A472J	CHIP R 4.7K J 1/10W		
Δ R10			RD14NB2E100J	RD 10 J 1/4W		
R11 ,12			RK73FB2A682J	CHIP R 6.8K J 1/10W		
R13			RK73FB2A100J	CHIP R 10 J 1/10W		
R14			RD14NB2E221J	RD 220 J 1/4W		
Δ R15			RD14NB2E8R2J	RD 8.2 J 1/4W		
R16 ,17			RK73FB2A682J	CHIP R 6.8K J 1/10W		
R18			RD14NB2E221J	RD 220 J 1/4W		
Δ R19			RD14NB2E4R7J	RD 4.7 J 1/4W		
R20 ,21			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R22			RK73FB2A223J	CHIP R 22K J 1/10W		
R23			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R24 ,25			RD14NB2E472J	RD 4.7K J 1/4W		
R26 ,27			RK73FB2A103J	CHIP R 10K J 1/10W		
R28 ,29			RK73FB2A104J	CHIP R 100K J 1/10W		
R30			RK73FB2A102J	CHIP R 1.0K J 1/10W		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East, Hawaii) T : Europe E : Europe G : Germany V : China (Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

④

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R31			RK73FB2A103J	CHIP R 10K J 1/10W		
R32			RK73FB2A104J	CHIP R 100K J 1/10W		
R33			RK73FB2A103J	CHIP R 10K J 1/10W		
R34			RK73FB2A104J	CHIP R 100K J 1/10W		
R35 ,36			RK73FB2A331J	CHIP R 330 J 1/10W		
R37			RK73FB2A104J	CHIP R 100K J 1/10W		
R38 -43			RK73FB2A103J	CHIP R 10K J 1/10W		
R44 -46			RK73FB2A473J	CHIP R 47K J 1/10W		
R47			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R48			RK73FB2A473J	CHIP R 47K J 1/10W		
Δ R49			RD14NB2E2R2J	RD 2.2 J 1/4W		
R50 ,51			RK73FB2A100J	CHIP R 10 J 1/10W		
R53 ,54			RK73FB2A473J	CHIP R 47K J 1/10W		
R55 ,56			RK73FB2A101J	CHIP R 100 J 1/10W		
R57 ,58			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R59			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R60			RD14NB2E100J	RD 10 J 1/4W		
R67			RK73FB2A100J	CHIP R 10 J 1/10W		
R68			RK73FB2A223J	CHIP R 22K J 1/10W		
R101,102			RK73FB2A101J	CHIP R 100 J 1/10W		
R103,104			RK73FB2A333J	CHIP R 33K J 1/10W		
R105,106			RK73FB2A393J	CHIP R 39K J 1/10W		
R107,108			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R109,110			RK73FB2A392J	CHIP R 3.9K J 1/10W		
R111,112			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R113,114			RK73FB2A223J	CHIP R 22K J 1/10W		
R115,116			RK73FB2A561J	CHIP R 560 J 1/10W		
R117,118			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R121,122			RK73FB2A112J	CHIP R 1.1K J 1/10W		
R123			RK73FB2A392J	CHIP R 3.9K J 1/10W		
R125,126			RK73FB2A103J	CHIP R 10K J 1/10W		
R127,128			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R129,130			RK73FB2A473J	CHIP R 47K J 1/10W		
R131,132			RK73FB2A104J	CHIP R 100K J 1/10W		
R133,134			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R135,136			RK73FB2A563J	CHIP R 56K J 1/10W		
R137,138			RK73FB2A392J	CHIP R 3.9K J 1/10W		
R151			RK73FB2A104J	CHIP R 100K J 1/10W		
R152			RK73FB2A623J	CHIP R 62K J 1/10W		
R154,155			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R156			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R158			RK73FB2A183J	CHIP R 18K J 1/10W		
R159			RK73FB2A243J	CHIP R 24K J 1/10W		
R160			RK73FB2A563J	CHIP R 56K J 1/10W		
R161			RK73FB2A473J	CHIP R 47K J 1/10W		
Δ R162			RD14NB2E2R2J	RD 2.2 J 1/4W		
R201,202			RK73FB2A154J	CHIP R 150K J 1/10W		
R203,204			RK73FB2A131J	CHIP R 130 J 1/10W		
R205,206			RK73FB2A682J	CHIP R 6.8K J 1/10W		
R207,208			RK73FB2A154J	CHIP R 150K J 1/10W		
R209,210			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R211,212			RK73FB2A153J	CHIP R 15K J 1/10W		
R213,214			RK73FB2A103J	CHIP R 10K J 1/10W		
R215,216			RK73FB2A333J	CHIP R 33K J 1/10W		
R219,220			RK73FB2A273J	CHIP R 27K J 1/10W		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East, Hawaii) T : Europe E : Europe G : Germany V : China (Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

* New Parts

Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R221			RK73FB2A103J	CHIP R 10K J 1/10W		
R222			RD14NB2E102J	RD 1.0K J 1/4W		
R223			RD14NB2E100J	RD 10 J 1/4W		
R224			RK73FB2A103J	CHIP R 10K J 1/10W		
R225			RK73FB2A222J	CHIP R 2.2K J 1/10W		
Δ R227			RD14NB2E2R2J	RD 2.2 J 1/4W		
VR1 ,2		*	R32-0037-05	TRIMMING POT.		
VR3 ,4			R12-5049-05	TRIMMING POT.		
VR5 ,6			R32-0040-05	TRIMMING POT.		
W100			R92-0670-05	CHIP R 0 OHM		
W101,102			R92-0679-05	CHIP R 0 OHM		
W103			R92-0670-05	CHIP R 0 OHM		
W104			R92-0679-05	CHIP R 0 OHM		
W105			R92-0670-05	CHIP R 0 OHM		
W106			R92-0679-05	CHIP R 0 OHM		
W107,108			R92-0670-05	CHIP R 0 OHM		
S1 -10	1B		S70-0031-05	TACT SWITCH		
S11	1B		S70-0072-05	TACT SWITCH		
S12	1B		S70-0031-05	TACT SWITCH		
Δ D1			D2SBA20F03	DIODE		
Δ D2 -5			S5688B	DIODE		
Δ D2 -5			1SR139-400	DIODE		
Δ D6 ,7			HSS104A	DIODE		
Δ D6 ,7			1SS133	DIODE		
D8 ,9			MTZJ6.2(B)	ZENER DIODE		
D8 ,9			RD6.2ES(B2)	ZENER DIODE		
D10			MTZJ11(B)	ZENER DIODE		
D10			RD11ES(B2)	ZENER DIODE		
D11			HSS104A	DIODE		
D11			1SS133	DIODE		
D12			MTZJ5.1(B)	ZENER DIODE		
D12			RD5.1ES(B2)	ZENER DIODE		
D13 -23			HSS104A	DIODE		
D13 -23			1SS133	DIODE		
D24			MTZJ4.7(B)	ZENER DIODE		
D24			RD4.7ES(B)	ZENER DIODE		
D25 -28			HSS104A	DIODE		
D25 -28			1SS133	DIODE		
D29			MTZJ5.1(B)	ZENER DIODE		
D29			RD5.1ES(B2)	ZENER DIODE		
D31 -44			HSS104A	DIODE		
D31 -44			1SS133	DIODE		
D55 ,56			HSS104A	DIODE		
D55 ,56			1SS133	DIODE		
IC1		*	CXP84124-150Q	MI-COM IC		
IC2			HA12167FB	ANALOGUE IC		
IC3			PST993D-T	ANALOGUE IC		
IC4			BA3126N	ANALOGUE IC		
IC5			BA328	IC		
IC6			BA6209	ANALOGUE IC		
Δ Q1 ,2			2SD2012	TRANSISTOR		
Δ Q1 ,2			2SD2061	TRANSISTOR		
Δ Q3			2SD2525	TRANSISTOR		
Δ Q4 -7			2SC2458(Y,GR)	TRANSISTOR		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East, Hawaii) T : Europe E : Europe G : Germany V : China (Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

* New Parts

Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

6

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
Q4 -7			2SC2785(F,E)	TRANSISTOR		
Q8 ,9			DTC124EUA	DIGITAL TRANSISTOR		
Q8 ,9			UN5212	DIGITAL TRANSISTOR		
Q10 ,11			2SA1286-T11	TRANSISTOR		
Q12			2SC2458(Y,GR)	TRANSISTOR		
Q12			2SC2785(F,E)	TRANSISTOR		
Q13 ,14			DTA124ESA	DIGITAL TRANSISTOR		
Q13 ,14			UN4112	DIGITAL TRANSISTOR		
Q15 ,16			2SD1450(S,T)	TRANSISTOR		
Q17 ,18			DTC124EUA	DIGITAL TRANSISTOR		
Q17 ,18			UN5212	DIGITAL TRANSISTOR		
Q19 ,20			2SD1450(S,T)	TRANSISTOR		
Q21 -23			DTC124ESA	DIGITAL TRANSISTOR		
Q21 -23			UN4212	DIGITAL TRANSISTOR		
Δ Q24 ,25			2SC3940A(R,S)	TRANSISTOR		
Δ Q24 ,25			2SD863(E,F)	TRANSISTOR		
Q26 ,27			2SC2458(Y,GR)	TRANSISTOR		
Q26 ,27			2SC2785(F,E)	TRANSISTOR		
Q28 -31			DTA113ZUA	DIGITAL TRANSISTOR		
Q28 -31			UN5119	DIGITAL TRANSISTOR		
Q32 ,33			DTC124EUA	DIGITAL TRANSISTOR		
Q32 ,33			UN5212	DIGITAL TRANSISTOR		
Q34			DTC124ESA	DIGITAL TRANSISTOR		
Q34			UN4212	DIGITAL TRANSISTOR		
Δ Q35			2SD2525	TRANSISTOR		
Q36			2SC2458(Y,GR)	TRANSISTOR		
Q36			2SC2785(F,E)	TRANSISTOR		
MECHANISM (D40-1636-05) The following are repair parts only.						
BM	2A		D16-0740-08	MAIN BELT		
BS	2A		D16-0705-08	SUB BELT		
PF	2B		D14-0380-08	FWD PINCH ROLLER		
PR	2B		D14-0381-08	REW PINCH ROLLER		
625	2B		D40-1636-05	MECHANISM ASSY		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East, Hawaii) T : Europe E : Europe G : Germany V : China (Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components.

PARTS LIST

X-VH7

X-VH7

SPECIFICATIONS

Track 4-track, 2-channel stereo
Recording system AC bias system (Frequency:105 kHz)
Heads
Playback/recording head 1
Erasing head 1
Motors 1
Wow and flutter 0.15 % (W.RMS)
Fast winding time Approx.110seconds (C-60 tape)

Frequency response
TYPE I tape 40 Hz~18 kHz, ± 3 dB
TYPE II tape 40 Hz~19 kHz, ± 3 dB
Signal to noise ratio
DOLBY NR OFF 60 dB
DOLBY B NR ON 67 dB
DOLBY C NR ON 73 dB
Input sensitivity / Impedence
Line (REC) 77.5 mV/47 k Ω
Output level / Impedence
Line (PLAY) 775 mV/10 k Ω

General

Power consumption15 W
Dimensions (Parallel setting) W : 247 mm
H : 96 mm
D : 279 mm
Weight(net) 3.2 kg



KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

- Sufficient performance may not be exhibited at extremely cold locations (where water freezes).

Note:

Component and circuit are subject to modification to insure best operation under differing local conditions. This manual is based on Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION

14-6,Dogenzaka 1-chome, Shibuya-ku, Tokyo, 150-8501 Japan

KENWOOD SERVICE CORPORATION

P.O BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O BOX 55-2791, Piso 6 plaza Chase, Cl. 47 y Aquilino de la Guardia Panama, Republic de Panama

KENWOOD ELECTRONICS BRASIL LTDA.

Av. Moema, 170-17", Andar-Cobertura "B", Ed. Maximum Service Center, 04077-020 Moema, São Paulo-SP-Brasil

KENWOOD ELECTRONICS U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB., United Kingdom

KENWOOD ELECTRONICS BELGUM N.V.

Meachelsesteenweg 418, B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129, Milano, Italy

KENWOOD IBÉRICA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001499 074)

P.O.Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong N.T., Hong Kong

KENWOOD ELECTRONICS GULF FZE

P.O.Box 61318, Jebel Ali, Dubai, U.A.E.

KENWOOD ELECTRONICS SINGAPORE PTE LTD.

No. 1 Genting Lane #02-02, KENWOOD Building, Singapore, 349544

KENWOOD ELECTRONICS (MALAYSIA) SDN BHD.

#4.01 Level 4, Wisma Academy Lot 4A, Jalan 19/1 46300 Petaling Jaya Selangor Darul Ehsan Malaysia

KENWOOD ELECTRONICS (THAILAND) CO., LTD.

2019 New Pechburi Road, Bangkapi, Huaykwang, Bangkok, 10320 Thailand