

CONTENTS

SECTION 1SUMMARY

SECTION 2CABINET & MAIN CHASSIS

SECTION 3ELECTRICAL

SECTION 4REPLACEMENT PARTS LIST

SECTION 1

SUMMARY

CONTENTS

PRODUCT SAFETY SERVICING GUIDELINES FOR VIDEO PRODUCTS	1-3
SERVICING PRECAUTIONS	1-4
• General Servicing Precautions	
• Insulation Checking Prodedure	
• Electrostatically Sensitive Devices	
SPECIFICATIONS	1-5

PRODUCT SAFETY SERVICING GUIDELINES FOR VIDEO PRODUCTS

CAUTION : DO NOT ATTEMPT TO MODIFY THIS PRODUCT IN ANY WAY. NEVER PERFORM CUSTOMIZED INSTALLATIONS WITHOUT MANUFACTURER'S APPROVAL. UNAUTHORIZED MODIFICATIONS WILL NOT ONLY VOID THE WARRANTY, BUT MAY LEAD TO YOUR BEING LIABLE FOR ANY RESULTING PROPERTY DAMAGE OR USER INJURY.

SERVICE WORK SHOULD BE PERFORMED ONLY AFTER YOU ARE THOROUGHLY FAMILIAR WITH ALL OF THE FOLLOWING SAFETY CHECKS AND SERVICING GUIDELINES. TO DO OTHERWISE, INCREASES THE RISK OF POTENTIAL HAZARDS AND INJURY TO THE USER.


WHILE SERVICING, USE AN ISOLATION TRANSFORMER FOR PROTECTION FROM A.C. LINE SHOCK.

SAFETY CHECKS

AFTER THE ORIGINAL SERVICE PROBLEM HAS BEEN CORRECTED, A CHECK SHOULD BE MADE OF THE FOLLOWING.

SUBJECT : FIRE & SHOCK HAZARD

1. BE SURE THAT ALL COMPONENTS ARE POSITIONED IN SUCH A WAY AS TO AVOID POSSIBILITY OF ADJACENT COMPONENT SHORTS. THIS IS ESPECIALLY IMPORTANT ON THOSE MODULES WHICH ARE TRANSPORTED TO AND FROM THE REPAIR SHOP.
2. NEVER RELEASE A REPAIR UNLESS ALL PROTECTIVE DEVICES SUCH AS INSULATORS, BARRIERS, COVERS, SHIELDS, STRAIN RELIEFS, POWER SUPPLY CORDS, AND OTHER HARDWARE HAVE BEEN REINSTALLED PER ORIGINAL DESIGN. BE SURE THAT THE SAFETY PURPOSE OF THE POLARIZED LINE PLUG HAS NOT BEEN DEFEATED.
3. SOLDERING MUST BE INSPECTED TO DISCOVER POSSIBLE COLD SOLDER JOINTS, SOLDER SPLASHES OR SHARP SOLDER POINTS. BE CERTAIN TO REMOVE ALL LOOSE FOREIGN PARTICLES.
4. CHECK FOR PHYSICAL EVIDENCE OF DAMAGE OR DETERIORATION TO PARTS AND COMPONENTS. FOR FRAYED LEADS, DAMAGED INSULATION (INCLUDING A.C. CORD). AND REPLACE IF NECESSARY FOLLOW ORIGINAL LAYOUT, LEAD LENGTH AND DRESS.
5. NO LEAD OR COMPONENT SHOULD TOUCH A RECEIVING TUBE OR A RESISTOR RATED AT 1 WATT OR MORE. LEAD TENSION AROUND PROTRUDING METAL SURFACES MUST BE AVOIDED.
6. ALL CRITICAL COMPONENTS SUCH AS FUSES, FLAMEPROOF RESISTORS, CAPACITORS, ETC. MUST BE REPLACED WITH EXACT FACTORY TYPES, DO NOT USE REPLACEMENT COMPONENTS OTHER THAN THOSE SPECIFIED OR MAKE UNRECOMMENDED CIRCUIT MODIFICATIONS.
7. AFTER RE-ASSEMBLY OF THE SET ALWAYS PERFORM AN A.C. LEAKAGE TEST ON ALL EXPOSED METALLIC PARTS OF THE CABINET, (THE CHANNEL SELECTOR KNOB, ANTENNA TERMINALS, HANDLE AND SCREWS) TO BE SURE THE SET IS SAFE TO OPERATE WITHOUT DANGER OF ELECTRICAL SHOCK. DO NOT USE A LINE ISOLATION TRANSFORMER DURING THIS TEST USE AN A.C. VOLT-METER, HAVING 5000 OHMS PER VOLT OR MORE SENSITIVITY, IN THE FOLLOWING MANNER; CONNECT A 1500 OHM 10 WATT RESISTOR, PARALLELED BY A .15 MFD. 150.V A.C TYPE CAPACITOR BETWEEN A KNOWN GOOD EARTH GROUND (WATER PIPE, CONDUIT, ETC.) AND THE EXPOSED METALLIC PARTS, ONE AT A TIME. MEASURE THE A.C. VOLTAGE ACROSS THE COMBINATION OF 1500 OHM RESISTOR AND .15 MFD CAPACITOR. REVERSE THE A.C. PLUG AND REPEAT A.C. VOLTAGE MEASUREMENTS FOR EACH EXPOSED METALLIC PART. VOLTAGE MEASURED MUST NOT EXCEED 75 VOLTS R.M.S. THIS CORRESPONDS TO 0.5 MILLIAMPS A.C ANY VALUE EXCEEDING THIS LIMIT CONSTITUTES A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED IMMEDIATELY.

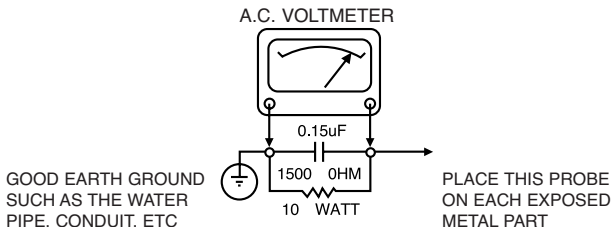

SUBJECT: GRAPHIC SYMBOLS



THE LIGHTNING FLASH WITH ARROWHEAD SYMBOL, WITHIN AN EQUILATERAL TRIANGLE, IS INTENDED TO ALERT THE SERVICE PERSONNEL TO THE PRESENCE OF UNINSULATED "DANGEROUS VOLTAGE" THAT MAY BE OF SUFFICIENT MAGNITUDE TO CONSTITUTE A RISK OF ELECTRIC SHOCK.



THE EXCLAMATION POINT WITHIN AN EQUILATERAL TRIANGLE IS INTENDED TO ALERT THE SERVICE PERSONNEL TO THE PRESENCE OF IMPORTANT SAFETY INFORMATION IN SERVICE LITERATURE.

SUBJECT : X-RADIATION

1. BE SURE PROCEDURES AND INSTRUCTIONS TO ALL SERVICE PERSONNEL COVER THE SUBJECT OF X-RADIATION. THE ONLY POTENTIAL SOURCE OF X-RAYS IN CURRENT T.V. RECEIVERS IS THE PICTURE TUBE. HOWEVER, THIS TUBE DOES NOT EMIT X-RAYS WHEN THE HIGH VOLTAGE IS AT THE FACTORY SPECIFIED LEVEL. THE PROPER VALUE IS GIVEN IN THE APPLICABLE SCHEMATIC. OPERATION AT HIGHER VOLTAGES MAY CAUSE A FAILURE OF THE PICTURE TUBE OR HIGH VOLTAGE SUPPLY AND, UNDER CERTAIN CIRCUMSTANCES, MAY PRODUCE RADIATION IN EXCESS OF DESIRABLE LEVELS.
2. ONLY FACTORY SPECIFIED C.R.T. ANODE CONNECTORS MUST BE USED. DEGAUSSING SHIELDS ALSO SERVE AS X-RAY SHIELD IN COLOR SETS, ALWAYS RE-INSTALL THEM.
3. IT IS ESSENTIAL THAT SERVICE PERSONNEL HAVE AVAILABLE AN ACCURATE AND RELIABLE HIGH VOLTAGE METER. THE CALIBRATION OF THE METER SHOULD BE CHECKED PERIODICALLY AGAINST A REFERENCE STANDARD, SUCH AS THE ONE AVAILABLE AT YOUR DISTRIBUTOR.
4. WHEN THE HIGH VOLTAGE CIRCUITRY IS OPERATING PROPERLY THERE IS NO POSSIBILITY OF AN X-RADIATION PROBLEM. EVERY TIME A COLOR CHASSIS IS SERVICED, THE BRIGHTNESS SHOULD BE RUN UP AND DOWN WHILE MONITORING THE HIGH VOLTAGE WITH A METER TO BE CERTAIN THAT THE HIGH VOLTAGE DOES NOT EXCEED THE SPECIFIED VALUE AND THAT IT IS REGULATING CORRECTLY. WE SUGGEST THAT YOU AND YOUR SERVICE ORGANIZATION REVIEW TEST PROCEDURES SO THAT VOLTAGE REGULATION IS ALWAYS CHECKED AS A STANDARD SERVICING PROCEDURE. AND THAT THE HIGH VOLTAGE READING BE RECORDED ON EACH CUSTOMER'S INVOICE.
5. WHEN TROUBLESHOOTING AND MAKING TEST MEASUREMENTS IN A PRODUCT WITH A PROBLEM OF EXCESSIVE HIGH VOLTAGE, AVOID BEING UNNECESSARILY CLOSE TO THE PICTURE TUBE AND THE HIGH VOLTAGE SUPPLY. DO NOT OPERATE THE PRODUCT LONGER THAN IS NECESSARY TO LOCATE THE CAUSE OF EXCESSIVE VOLTAGE.
6. REFER TO HV. B+ AND SHUTDOWN ADJUSTMENT PROCEDURES DESCRIBED IN THE APPROPRIATE SCHEMATIC AND DIAGRAMS (WHERE USED).

SUBJECT: IMPLOSION

1. ALL DIRECT VIEWED PICTURE TUBES ARE EQUIPPED WITH AN INTEGRAL IMPLOSION PROTECTION SYSTEM, BUT CARE SHOULD BE TAKEN TO AVOID DAMAGE DURING INSTALLATION, AVOID SCRATCHING THE TUBE. IF SCRATCHED REPLACE IT.

2. USE ONLY RECOMMENDED FACTORY REPLACEMENT TUBES.

SUBJECT : TIPS ON PROPER INSTALLATION

1. NEVER INSTALL ANY PRODUCT IN A CLOSED-IN RECESS, CUBBY-HOLE OR CLOSELY FITTING SHELF SPACE. OVER OR CLOSE TO HEAT DUCT, OR IN THE PATH OF HEATED AIR FLOW.
2. AVOID CONDITIONS OF HIGH HUMIDITY SUCH AS: OUTDOOR PATIO INSTALLATIONS WHERE DEW IS A FACTOR, NEAR STEAM RADIATORS WHERE STEAM LEAKAGE IS A FACTOR, ETC.
3. AVOID PALCEMENT WHERE DRAPERIES MAY OBSTRUCT REAR VENTING. THE CUSTOMER SHOULD ALSO AVOID THE USE OF DECORATIVE SCARVES OR OTHER COVERINGS WHICH MIGHT OBSTRUCT VENTILATION.
4. WALL AND SHELF MOUNTED INSTALLATIONS USING A COMMERCIAL MOUNTING KIT. MUST FOLLOW THE FACTORY APPROVED MOUNTING INSTRUCTIONS A PRODUCT MOUNTED TO A SHELF OR PLATFORM MUST RETAIN ITS ORIGINAL FEET (OR THE EQUIVALENT THICKNESS IN SPACERS) TO PROVIDE ADEQUATE AIR FLOW ACROSS THE BOTTOM, BOLTS OR SCREWS USED FOR FASTENERS MUST NOT TOUCH ANY PARTS OR WIRING. PERFORM LEAKAGE TEST ON CUSTOMIZED INSTALLATIONS.
5. CAUTION CUSTOMERS AGAINST THE MOUNTING OF A PRODUCT ON SLOPING SHELF OR A TILTED POSITION, UNLESS THE PRODUCT IS PROPERLY SECURED.
6. A PRODUCT ON A ROLL-ABOUT CART SHOULD BE STABLE ON ITS MOUNTING TO THE CART. CAUTION THE CUSTOMER ON THE HAZARDS OF TRYING TO ROLL A CART WITH SMALL CASTERS ACROSS THRESHOLDS OR DEEP PILE CARPETS.
7. CAUTION CUSTOMERS AGAINST THE USE OF A CART OR STAND WHICH HAS NOT BEEN LISTED BY UNDERWRITERS LABORATORIES, INC. FOR USE WITH THEIR SPECIFIC MODEL OF TELEVISION RECEIVER OR GENERALLY APPROVED FOR USE WITH T.V.'S OF THE SAME OR LARGER SCREEN SIZE.
8. CAUTION CUSTOMERS AGAINST THE USE OF EXTENSION CORDS, EXPLAIN THAT A FOREST OF EXTENSIONS SPROUTING FROM A SINGLE OUTLET CAN LEAD TO DISASTROUS CONSEQUENCES TO HOME AND FAMILY.

SERVICING PRECAUTIONS

CAUTION : Before servicing the DVD covered by this service data and its supplements and addends, read and follow the SAFETY PRECAUTIONS. **NOTE :** if unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions in this publication, always follow the safety precautions.

Remembers Safety First:

General Servicing Precautions

1. Always unplug the DVD AC power cord from the AC power source before:
 - (1) Removing or reinstalling any component, circuit board, module, or any other assembly.
 - (2) Disconnection or reconnecting any internal electrical plug or other electrical connection.
 - (3) Connecting a test substitute in parallel with an electrolytic capacitor.
Caution : A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.
2. Do not spray chemicals on or near this DVD or any of its assemblies.
3. Unless specified otherwise in this service data, clean electrical contacts by applying an appropriate contact cleaning solution to the contacts with a pipe cleaner, cotton-tipped swab, or comparable soft applicator. Unless specified otherwise in this service data, lubrication of contacts is not required.
4. Do not defeat any plug/socket B+ voltage interlocks with which instruments covered by this service manual might be equipped.
5. Do not apply AC power to this DVD and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
6. Always connect test instrument ground lead to the appropriate ground before connection the test instrument positive lead. Always remove the test instrument ground lead last.

Insulation Checking Procedure

Disconnect the attachment plug from the AC outlet and turn the power on. Connect an insulation resistance meter(500V) to the blades of the attachment plug. The insulation resistance between each blade of the attachment plug and accessible conductive parts (Note 1) should be more than 1M-ohm.

Note 1 : Accessible Conductive Parts including Metal panels, Input terminals, Earphone jacks, etc.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field effect transistors and semiconductor chip components.

The following techniques should be used to help reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified a "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charge sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil, or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution : Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Normally harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

SPECIFICATIONS

• GENERAL

Power requirements:	AC 110-240 V , 50/60 Hz
Power consumption:	8W
Dimensions (Approx.):	430 x 35 x 242 mm (W x H x D) without foot
Weight (Approx.):	1.9 kg
Operating temperature:	5 °C to 35 °C (41 °F to 95 °F)
Operating humidity:	5 % to 90 %

• OUTPUTS

VIDEO OUT:	1 Vp-p 75 Ω, sync negative, RCA jack x 1 / SCART (TO TV)
COMPONENT VIDEO OUT:	(Y) 1.0 V (p-p), 75 Ω, negative sync, RCA jack x 1 (Pb)/(Pr) 0.7 V (p-p), 75 Ω, RCA jack x 2
AUDIO OUT:	2.0 Vrms (1 KHz, 0 dB), 600 Ω, RCA jack (L, R) x 1 / SCART (TO TV)
DIGITAL OUT (COAXIAL):	0.5 V (p-p), 75 Ω, RCA jack x 1

• SYSTEM

Laser:	Semiconductor laser, wavelength 650 nm
Signal system:	PAL / NTSC
Frequency response:	DVD (PCM 96 kHz): 8 Hz to 44 kHz DVD (PCM 48 kHz): 8 Hz to 22 kHz CD: 8 Hz to 20 kHz
Signal-to-noise ratio:	More than 100 dB (ANALOG OUT connectors only)
Harmonic distortion:	Less than 0.008%
Dynamic range:	More than 95 dB (DVD/CD)

• ACCESSORIES


Remote control (1), Batteries (2)

SECTION 2
CABINET & MAIN CHASSIS
CONTENTS


EXPLODED VIEWS	2-2
1. Cabinet and Main Frame Section	2-2
2. Deck Mechanism Section(DP-9)	2-3
3. Packing Accessory Section	2-4

EXPLODED VIEWS


1. Cabinet and Main Frame Section

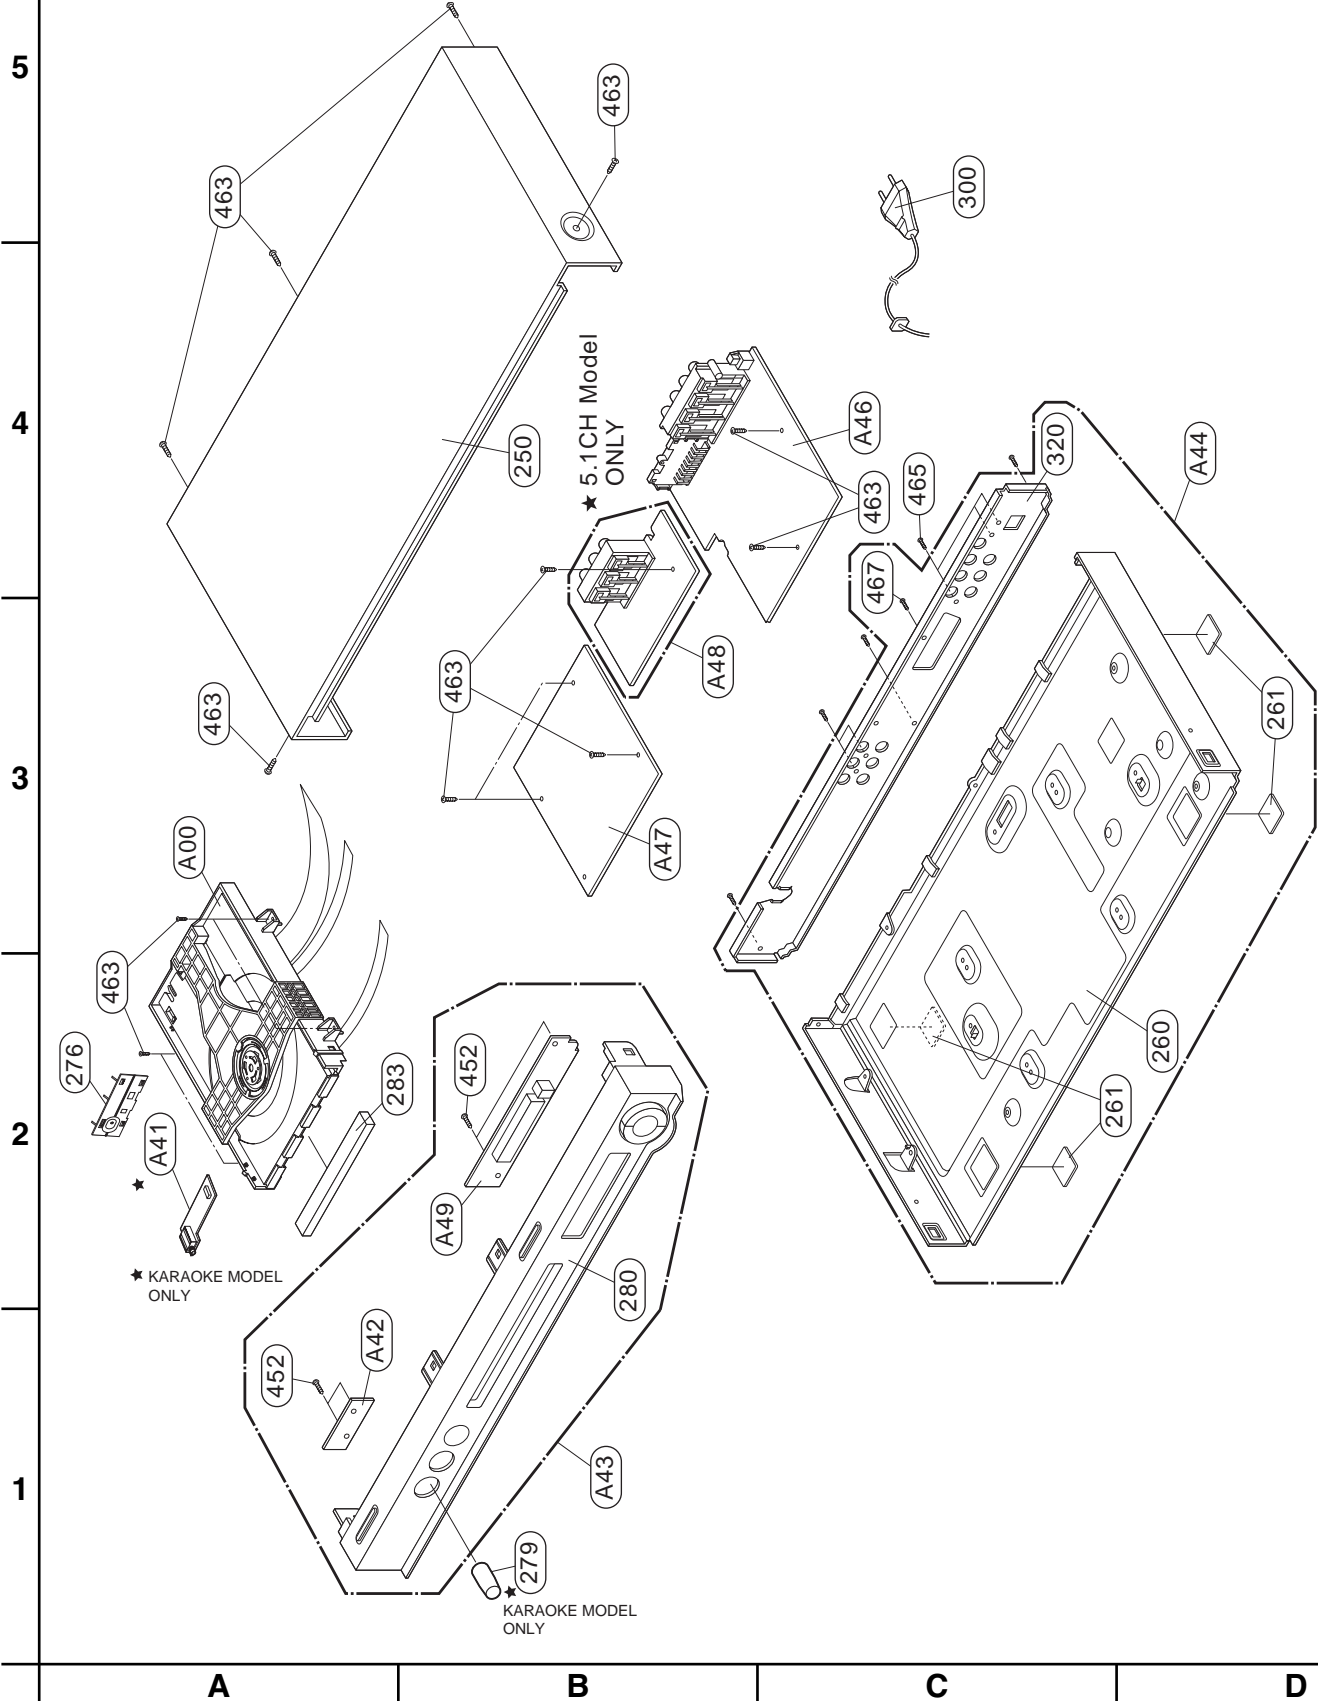

2. Deck Mechanism Section(DP-9)

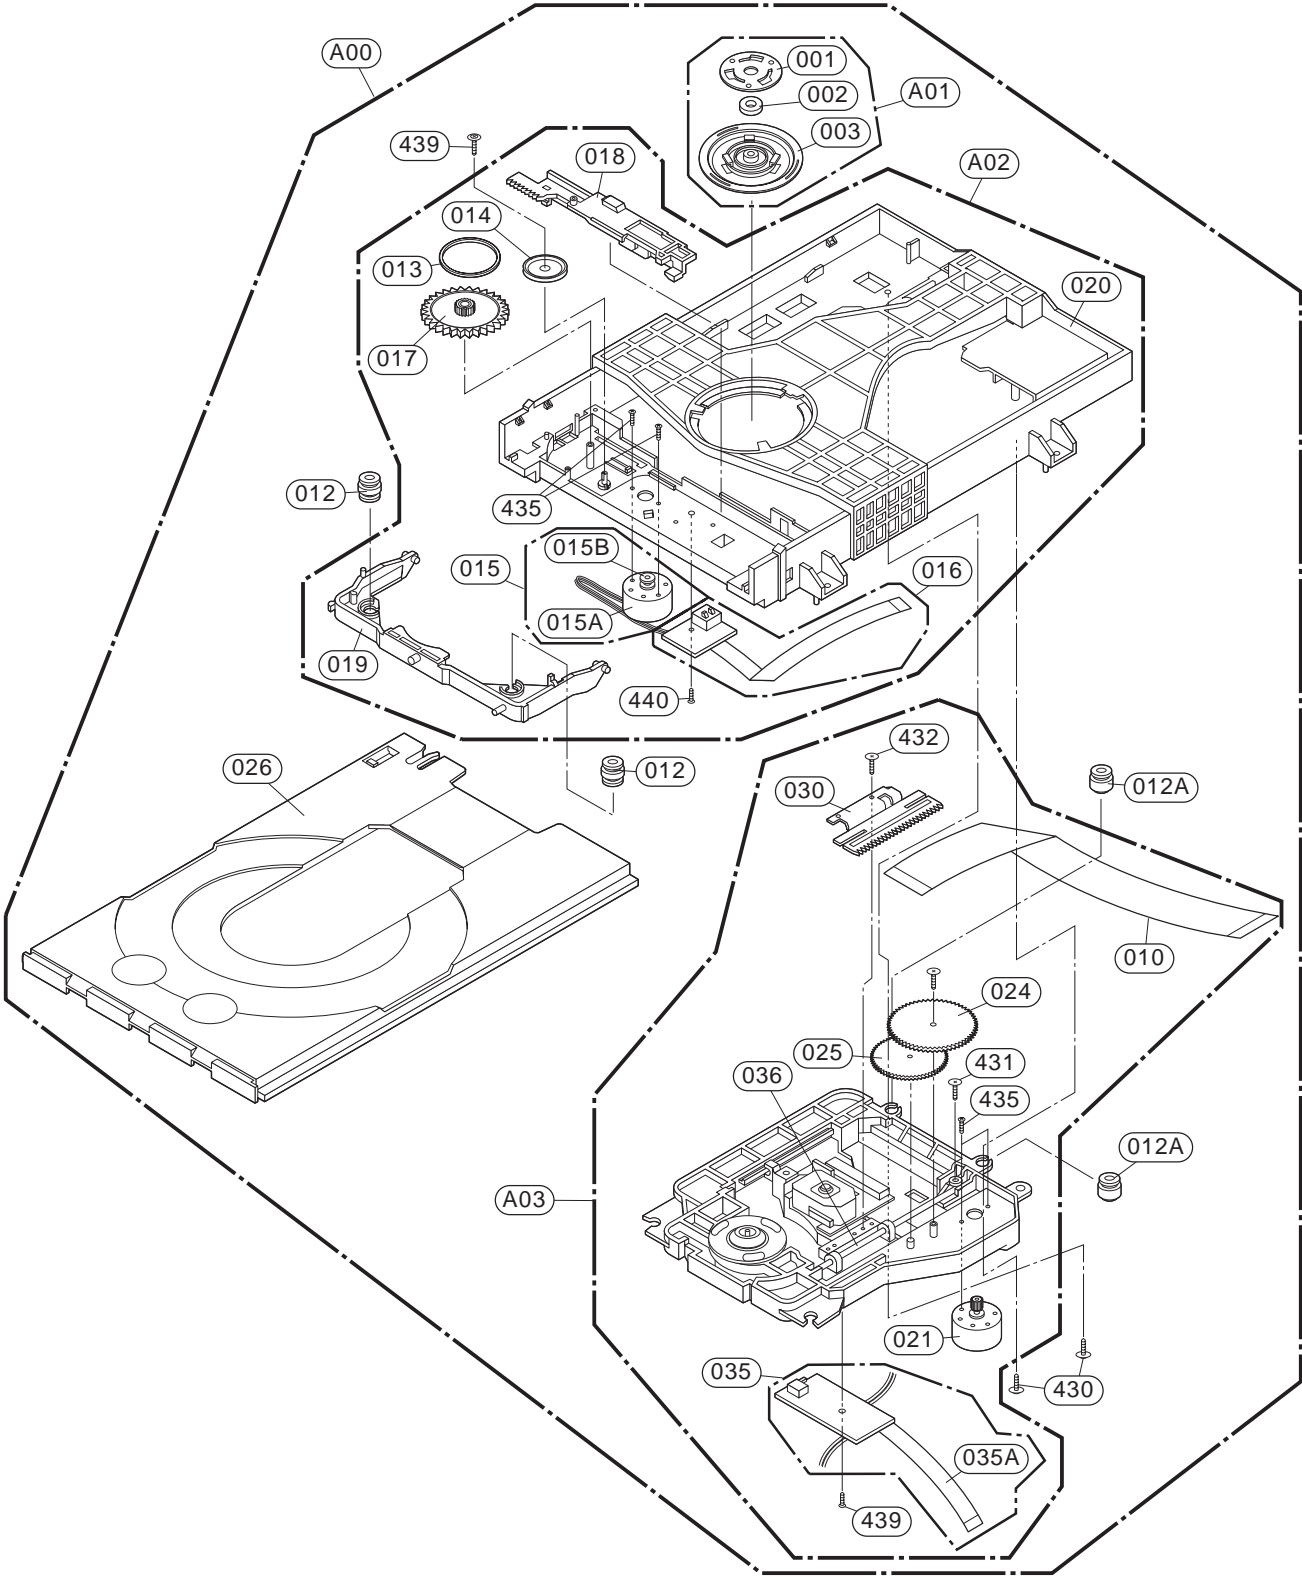

3. Packing Accessory Section

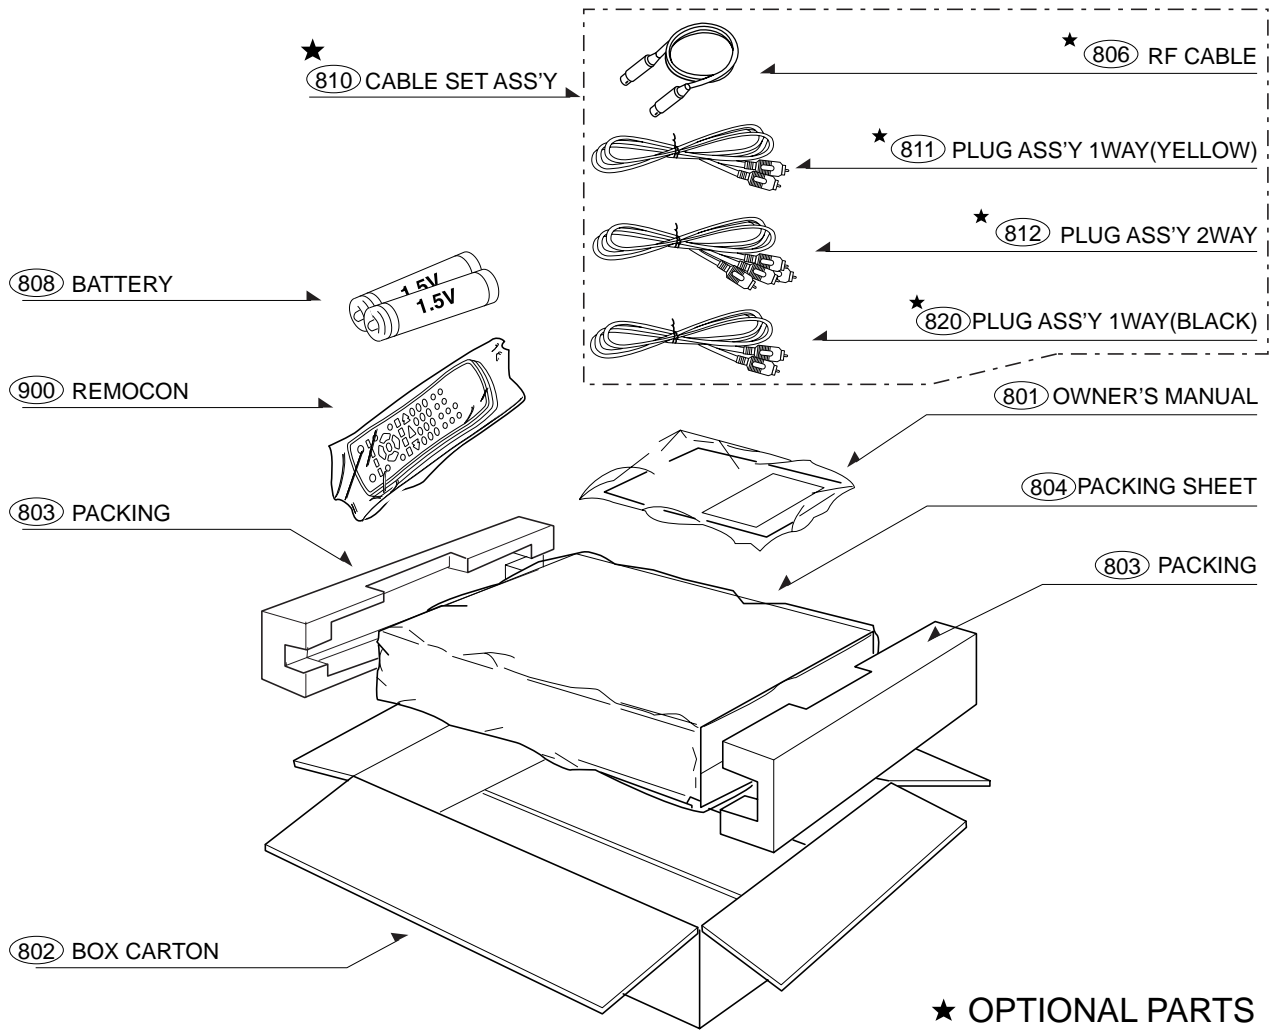


SECTION 3 ELECTRICAL CONTENTS


ELECTRICAL TROUBLESHOOTING GUIDE.....	3-2
1. Power check flow.....	3-2
2. System operation flow	3-3
3. Test & debug flow	3-4
4. KARAOKE Flow (KARAOKE MODEL ONLY).....	3-10
DETAILS AND WAVEFORMS ON SYSTEM TEST AND DEBUGGING	3-11
1. SYSTEM 27MHz CLOCK, RESET, FLASH R/W SIGNAL.	3-11
2. SDRAM CLOCK.....	3-13
3. TRAY OPEN/CLOSE SIGNAL	3-13
4. SLED CONTROL RELATED SIGNAL(NO DISC CONDITION)	3-14
5. LENS CONTROL RELATED SIGNAL(NO DISC CONDITION)	3-14
6. LASER POWER CONTROL RELATED SIGNAL(NO DISC CONDITION).....	3-15
7. DISC TYPE JUDGEMENT WAVEFORM	3-15
8. FOCUS ON WAVEFORM.....	3-17
9. SPINDLE CONTROL WAVEFORM(NO DISC CONDITION).....	3-18
10. TRACKING CONTROL RELATED SIGNAL(System checking).....	3-19
11. MT1389 AUDIO OPTICAL AND COAXIAL OUTPUT (SPDIF).....	3-20
12. MT1389 VIDEO OUTPUT WAVEFORM.....	3-20
13. MT1389 AUDIO OUTPUT TO AUDIO DAC.....	3-21
14. AUDIO OUTPUT FROM AUDIO DAC	3-22
BLOCK DIAGRAMS	3-23
1. Overall Block Diagram	3-23
2. Power(SMPS) Block Diagram	3-24
3. SERVO Block Diagram	3-25
4. MPEG & MEMORY Block Diagram	3-26
5. VIDEO & AUDIO Block Diagram	3-27
6. KARAOKE Block Diagram(KARAOKE MODEL ONLY)	3-28
CIRCUIT DIAGRAMS	3-29
1. Power(SMPS) Circuit DIAGRAM.....	3-29
2. AV/JACK Circuit DIAGRAM.....	3-31
3. SYSTEM Circuit DIAGRAM	3-33
4. DRIVER Circuit DIAGRAM.....	3-35
5. TIMER Circuit DIAGRAM	3-37
6. 5.1CH & KARAOKE(KARAOKE MODEL ONLY) Circuit DIAGRAM	3-39
7. SCART Circuit DIAGRAM	3-41
• CIRCUIT VOLTAGE CHART	3-43
PRINTED CIRCUIT DIAGRAMS	3-45
1. MAIN P.C.BOARD	3-45
2. KEY P.C.BOARD.....	3-47
3. TIMER P.C.BOARD	3-48
4. SMPS P.C.BOARD	3-49
5. KARAOKE P.C.BOARD	3-50

ELECTRICAL TROUBLESHOOTING GUIDE


1. Power check flow

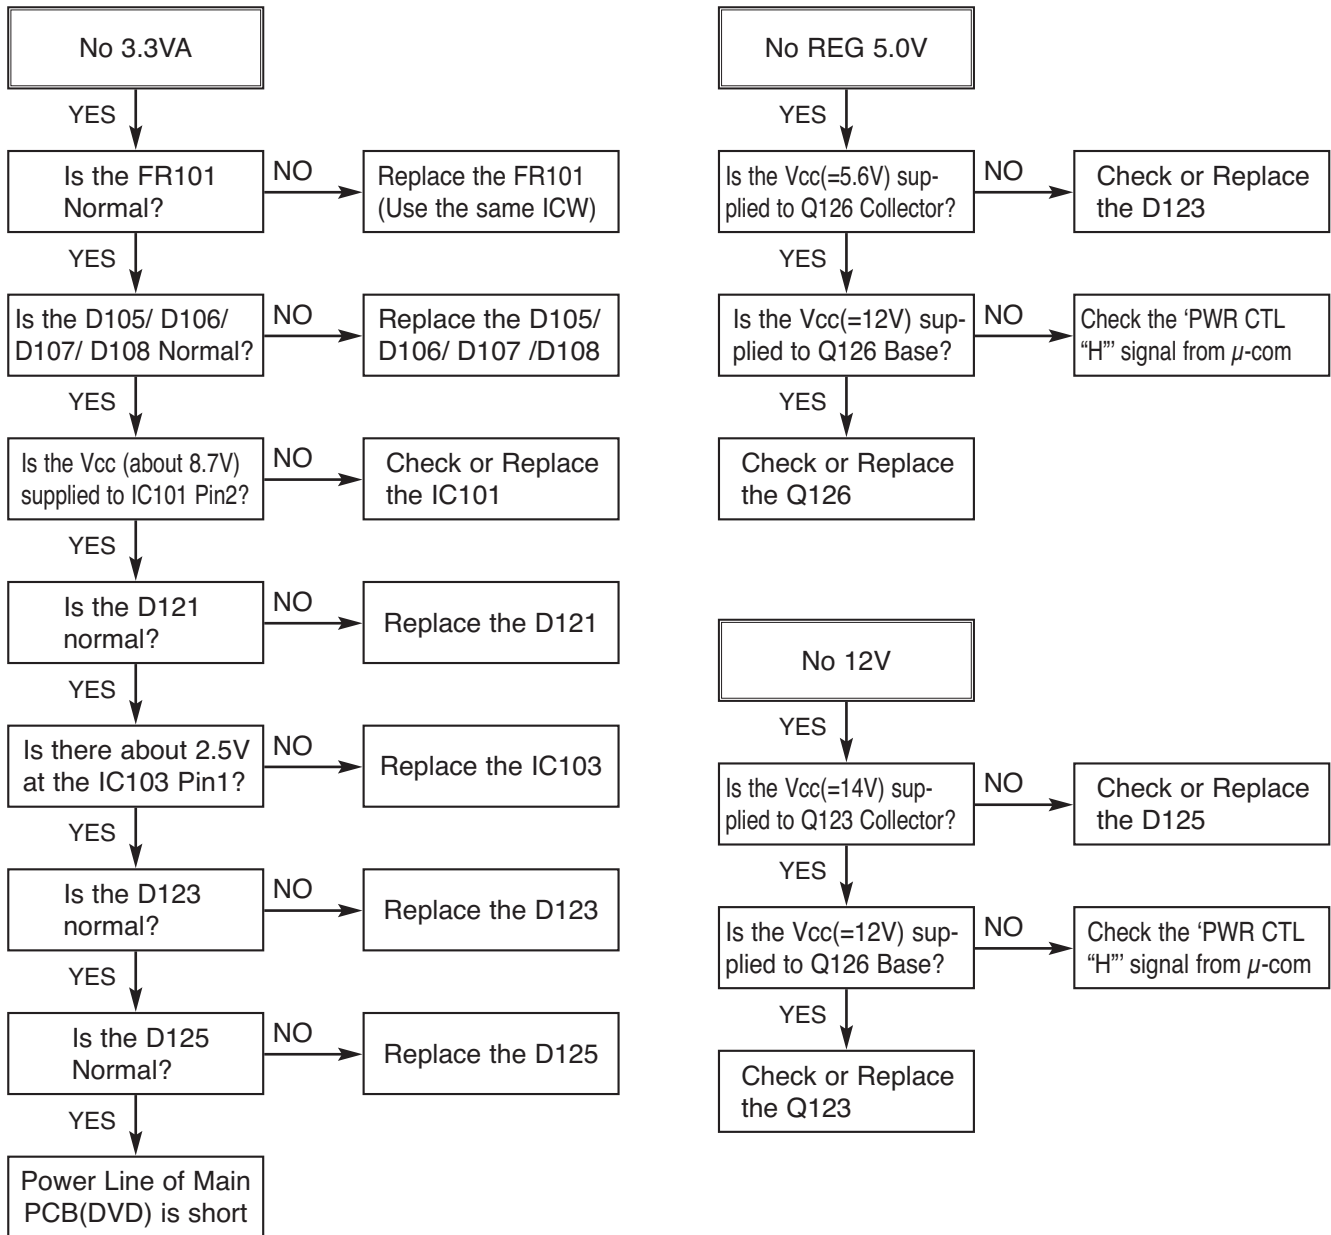



2. System operation flow

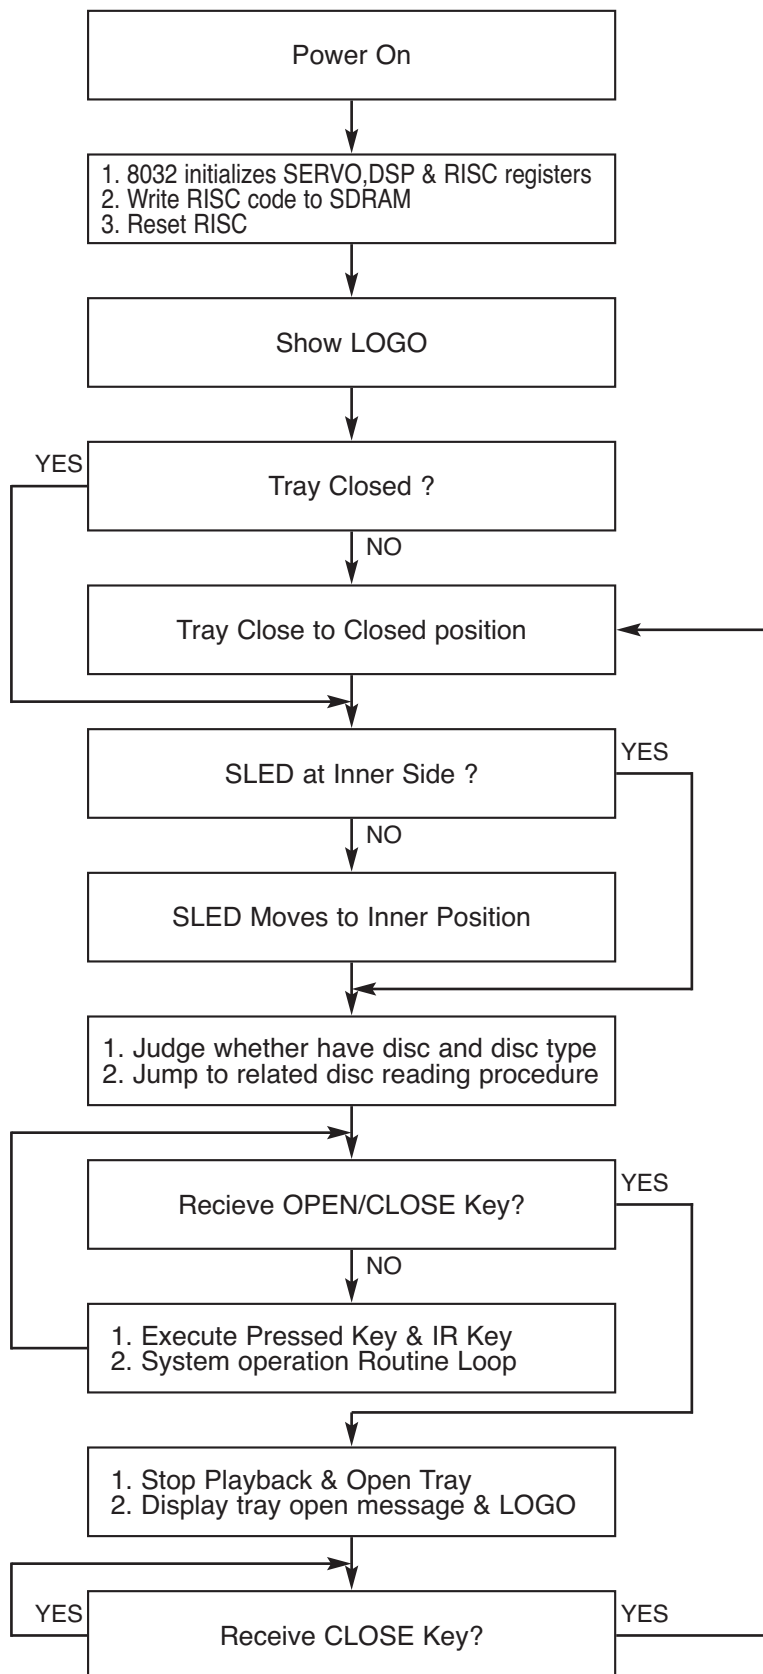



3. Test & debug flow

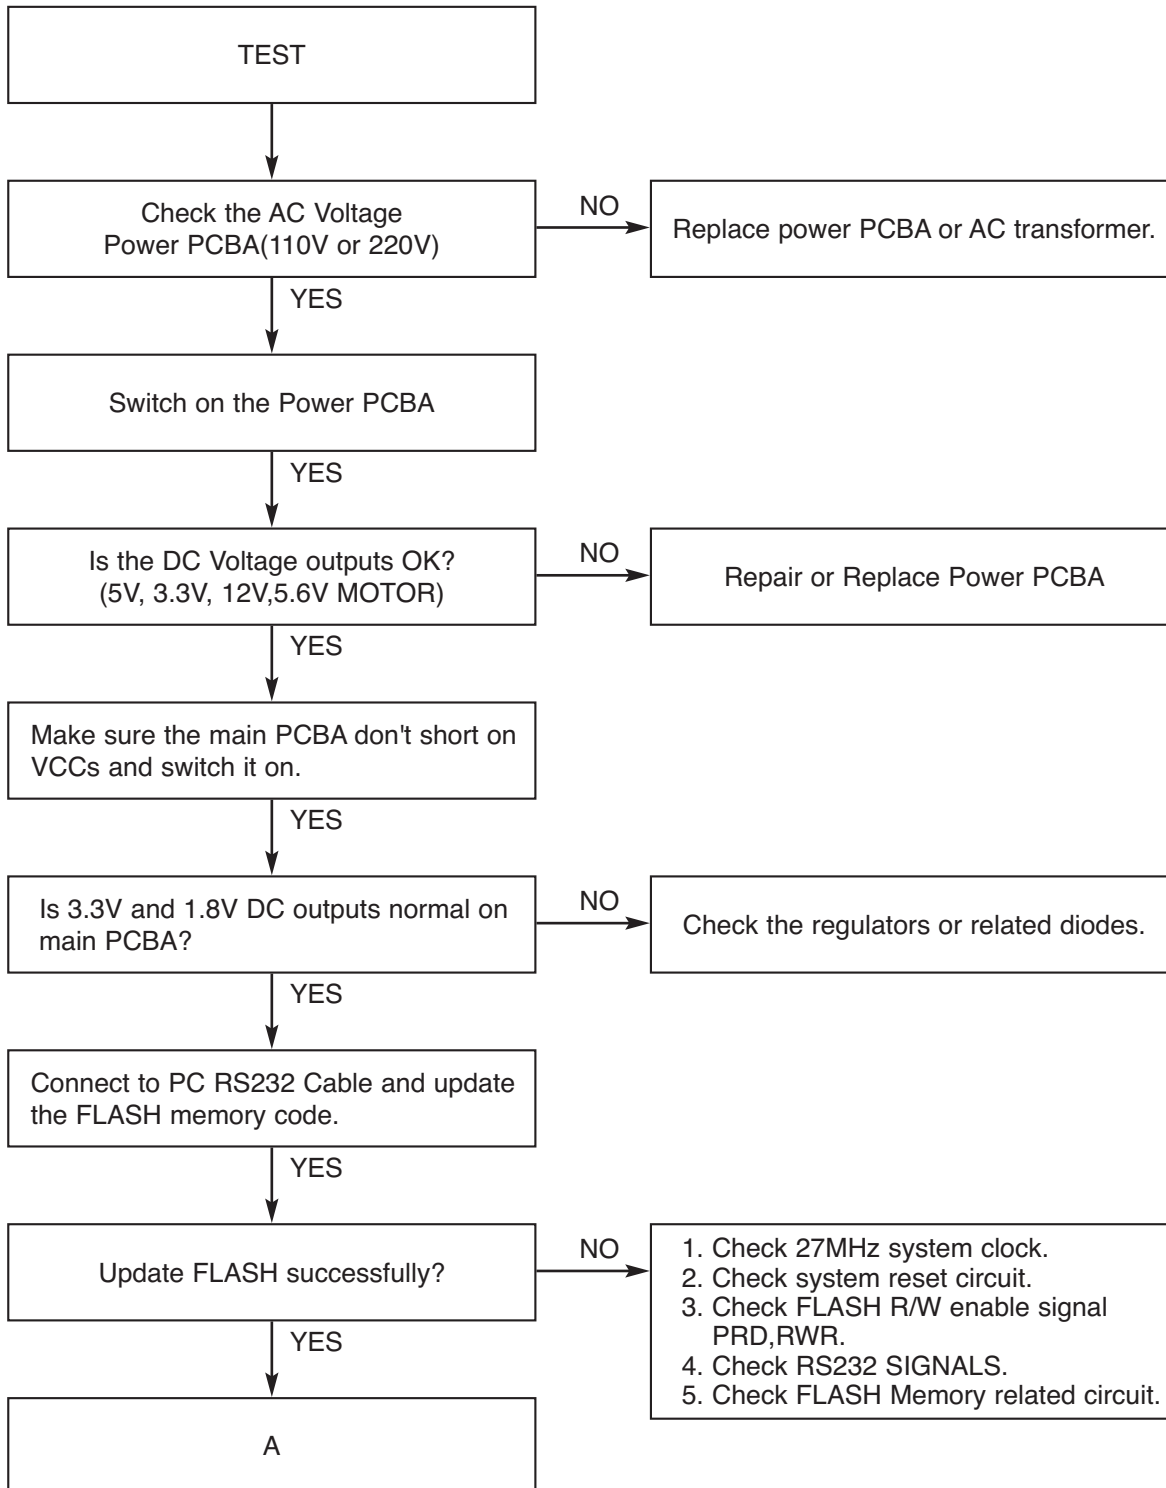


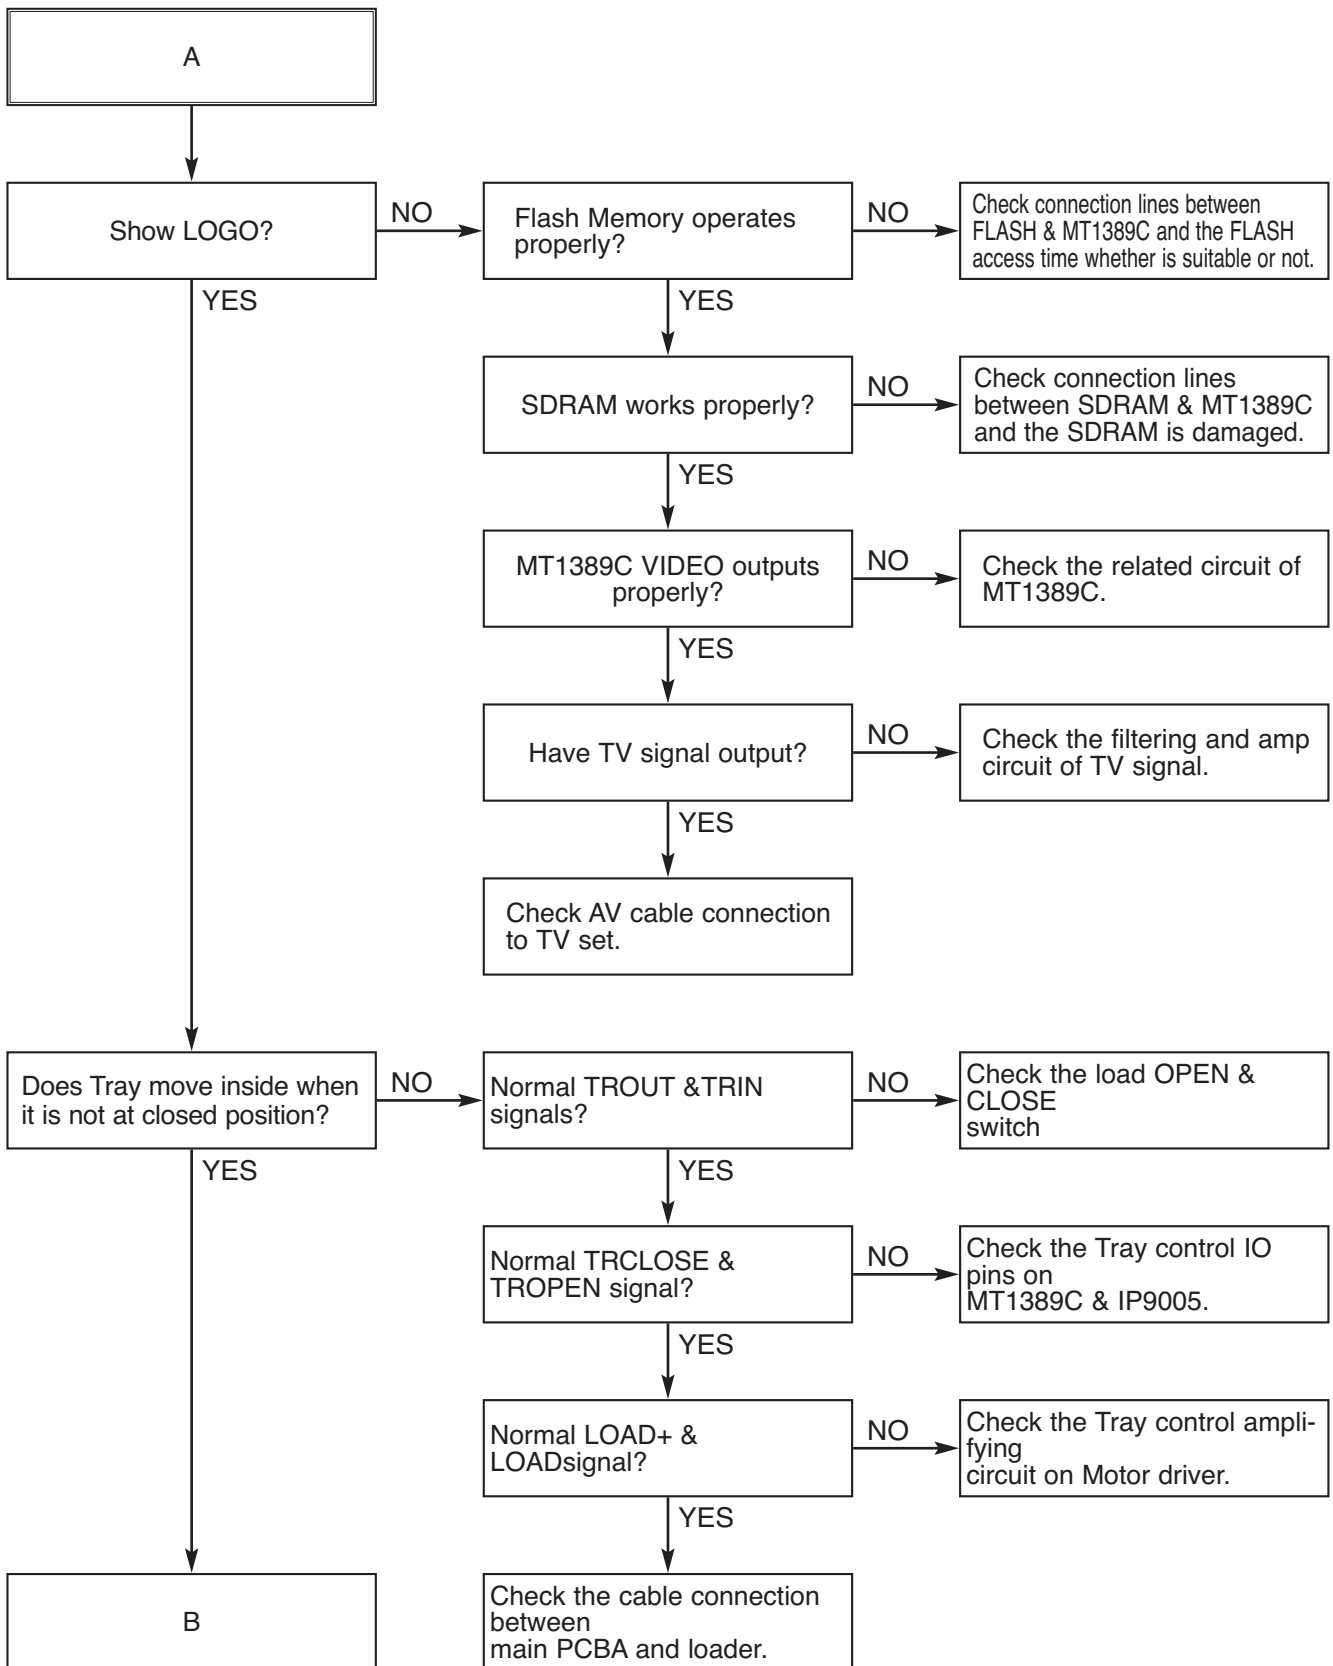

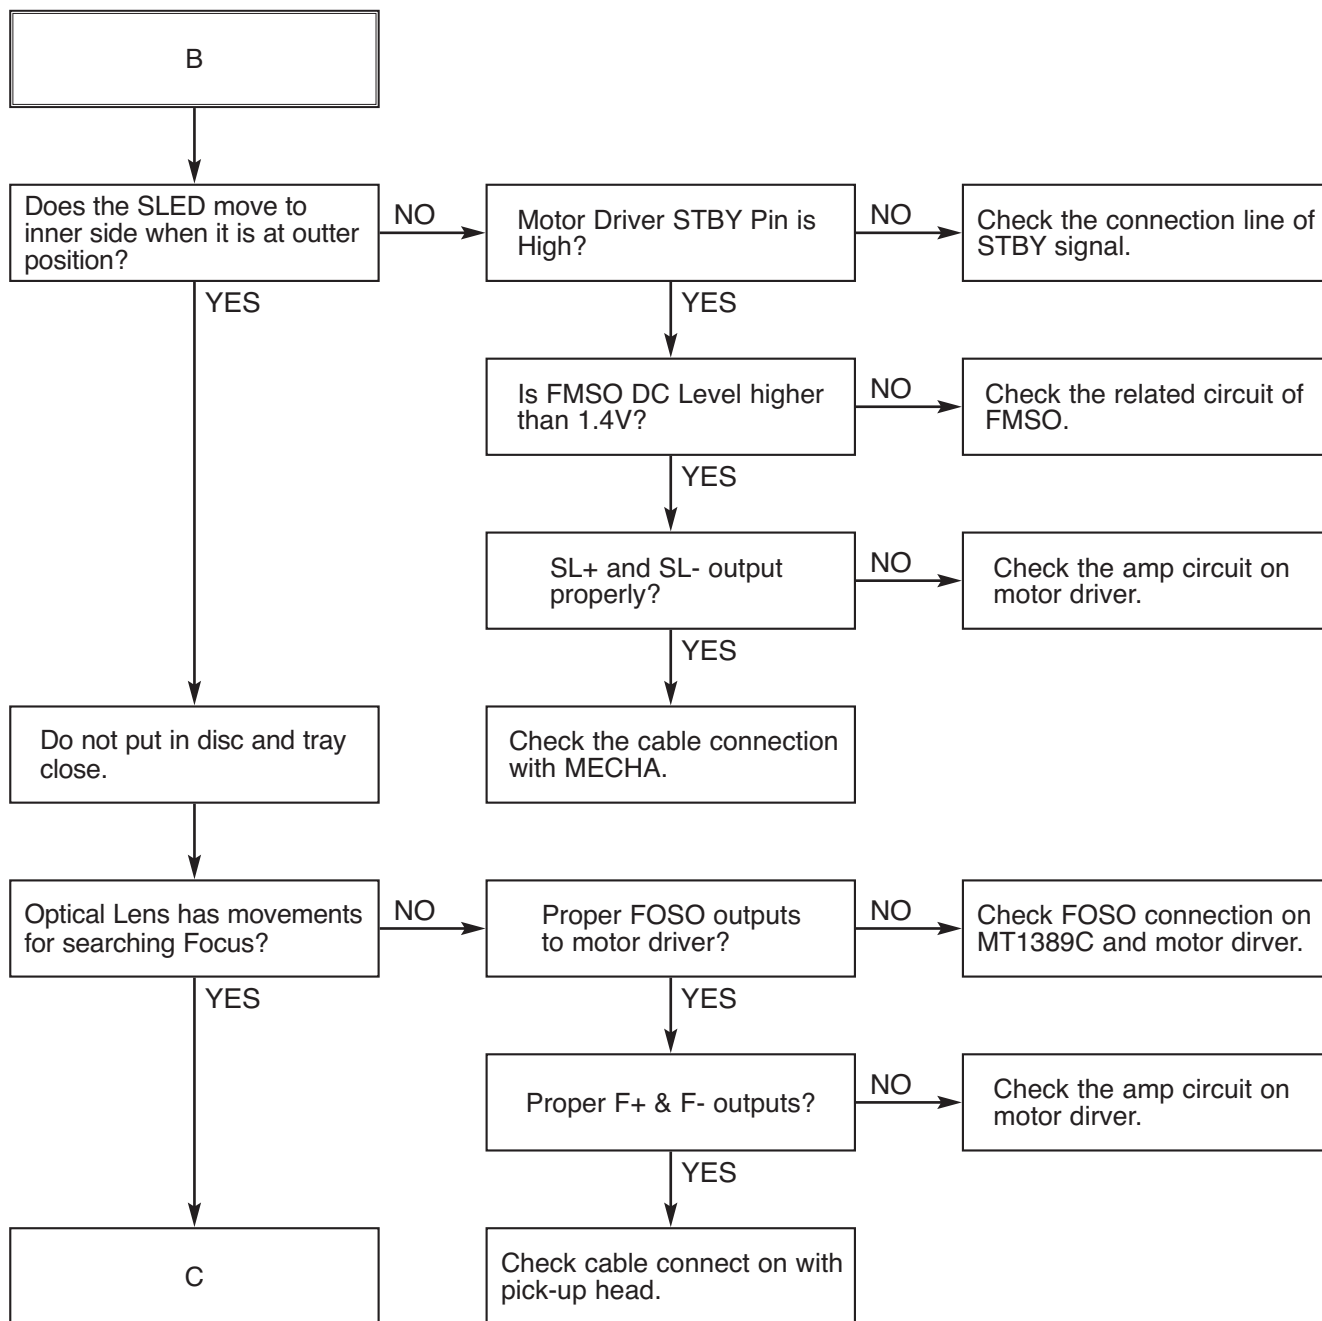


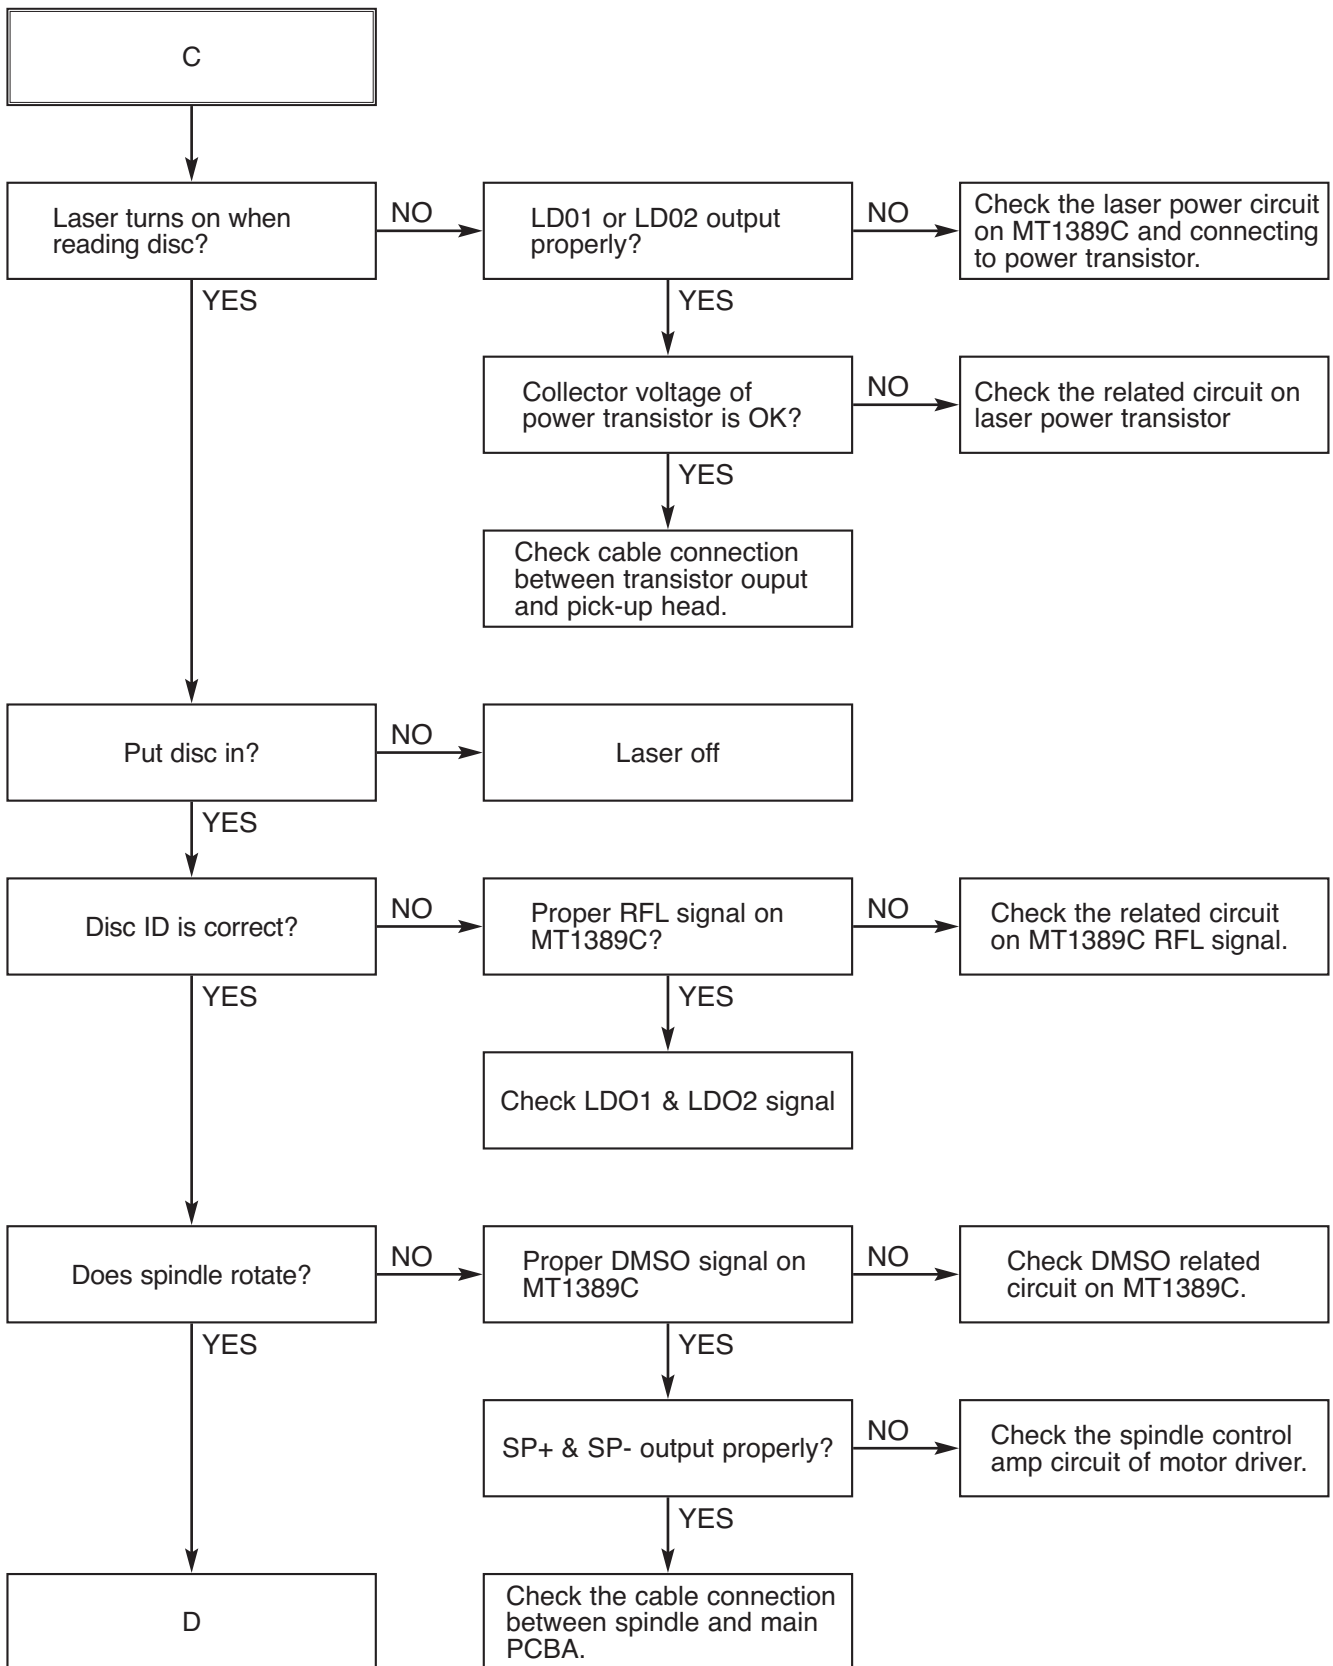

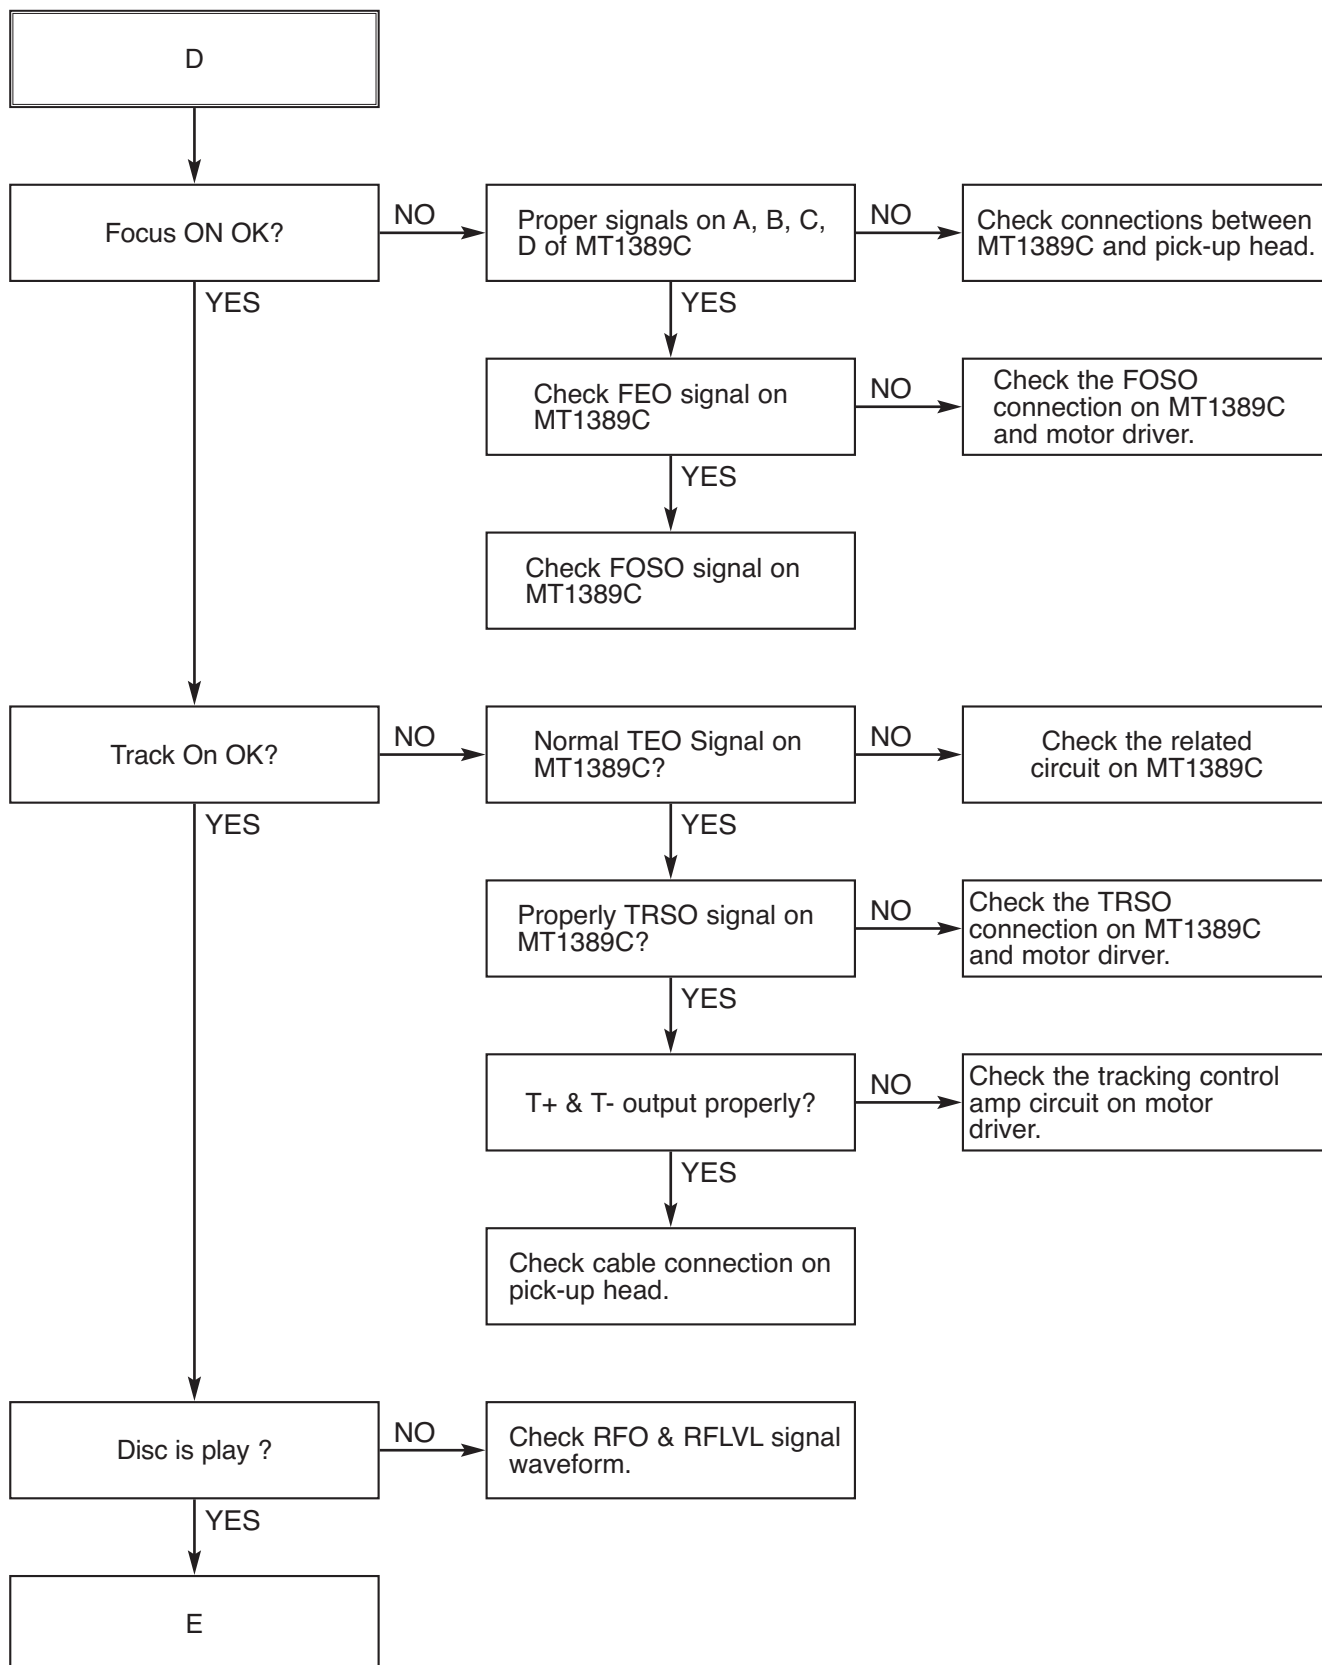

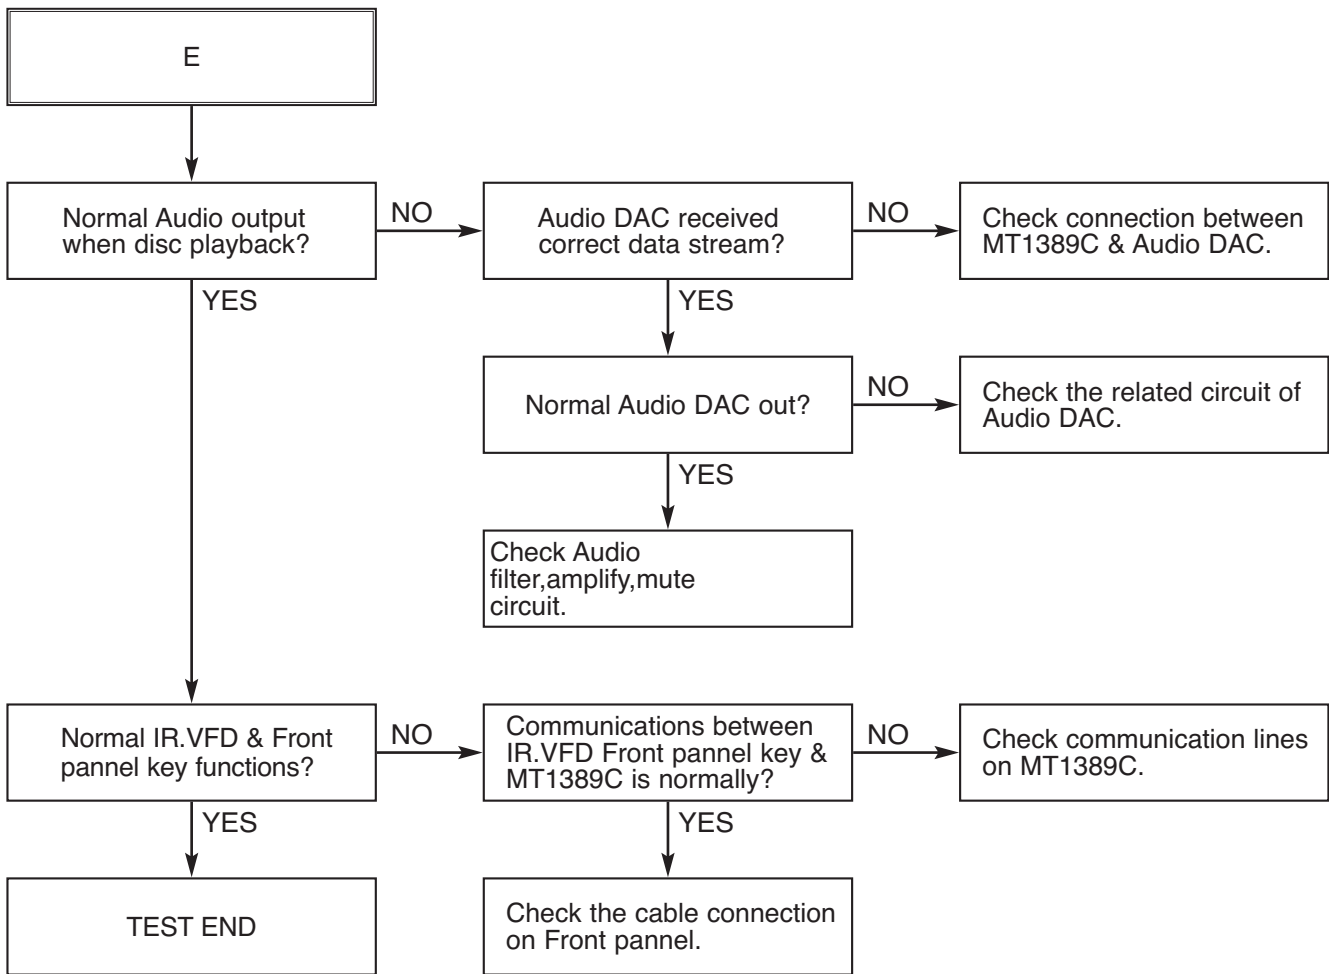

4. KARAOKE Flow (KARAOKE MODEL ONLY)

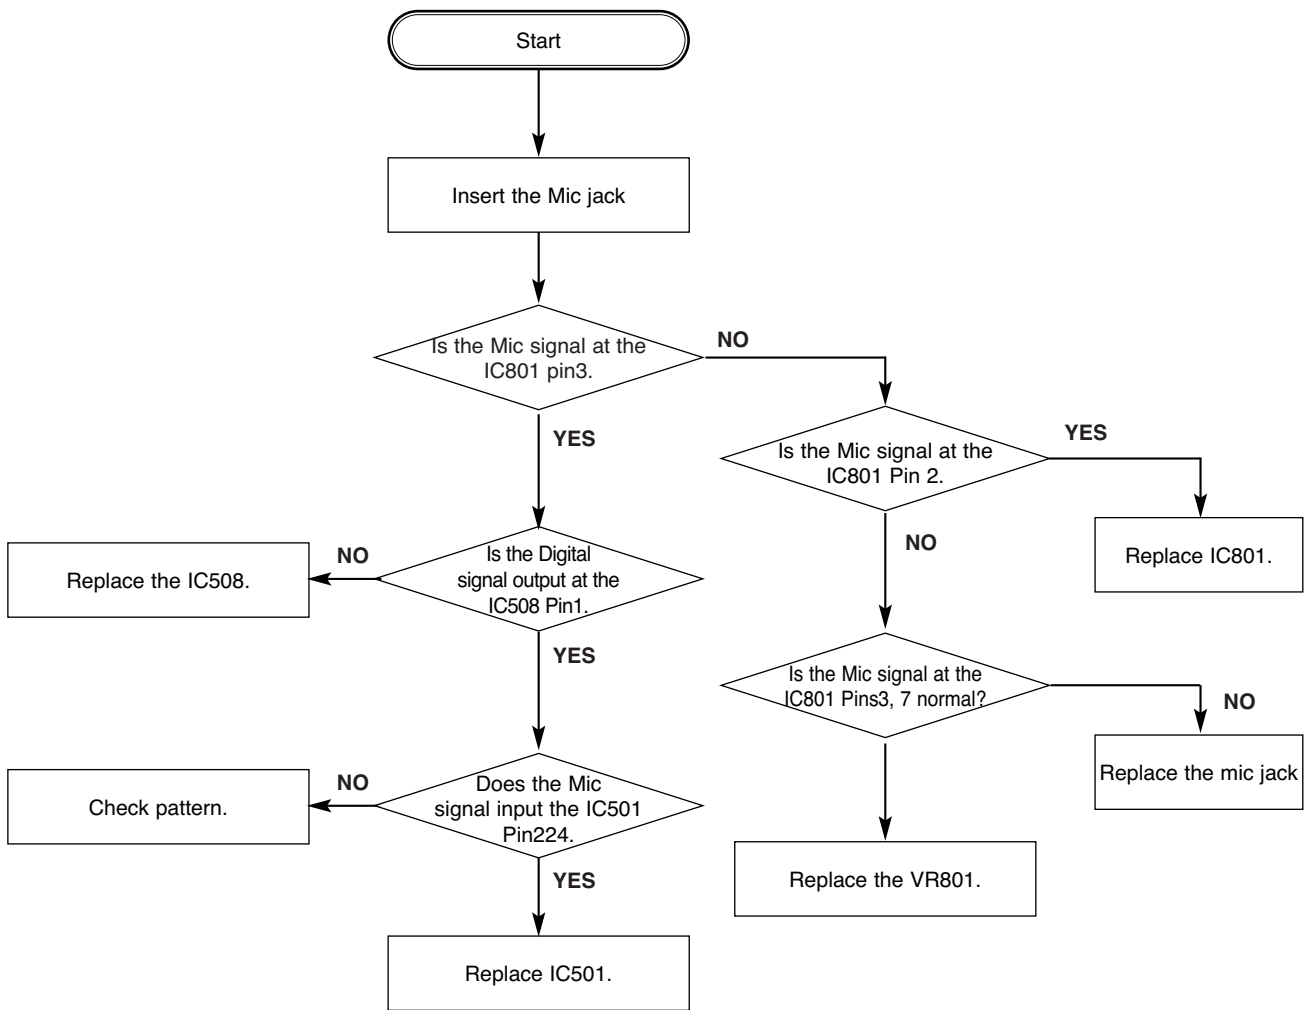

DETAILS AND WAVEFORMS ON SYSTEM TEST AND DEBUGGING

1. SYSTEM 27MHz CLOCK,RESET,FLASH R/W SIGNAL.

1) MT1389C main clock is at 27MHz(X501)

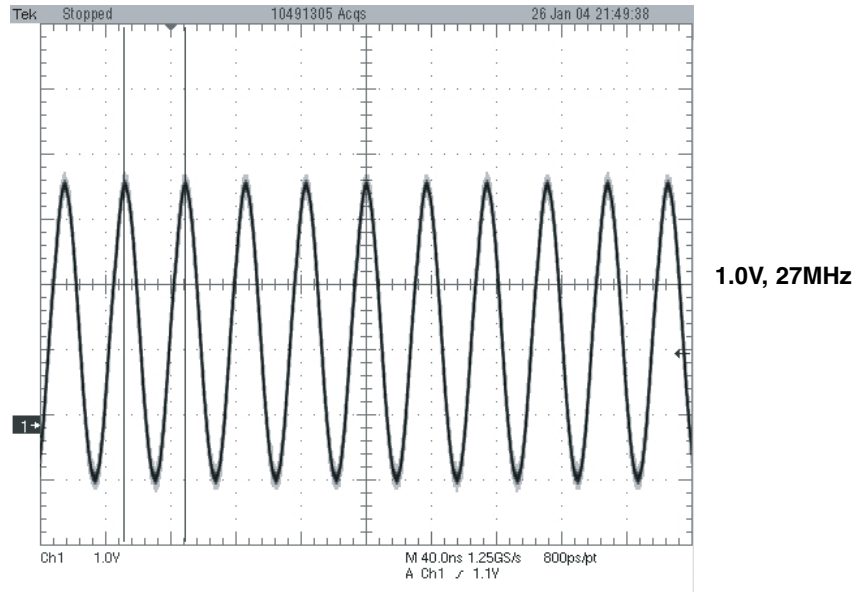


FIG 1-1

2) MT1389 reset is low active.

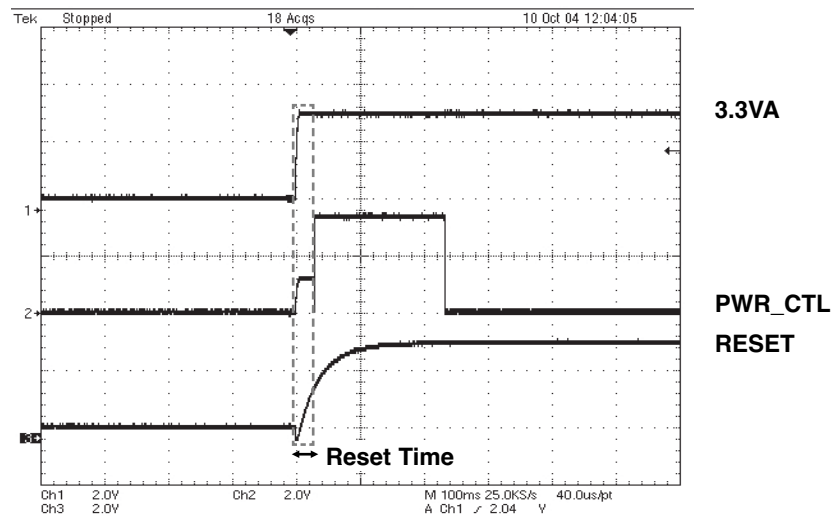


FIG 1-2

3) RS232 waveform during procedure(Downloading)

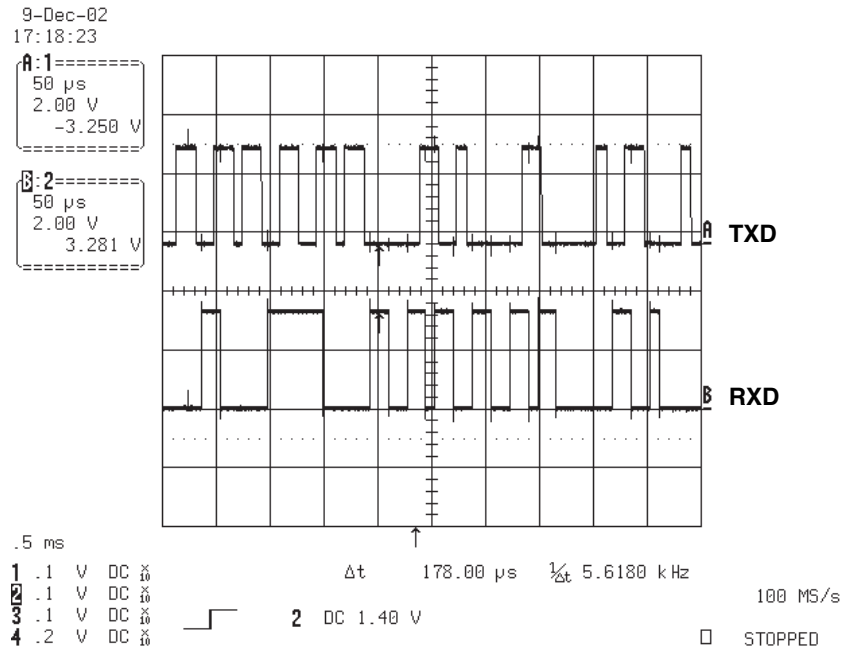


FIG 1-3

4) Flash R/W enable signal during download(Downloading)

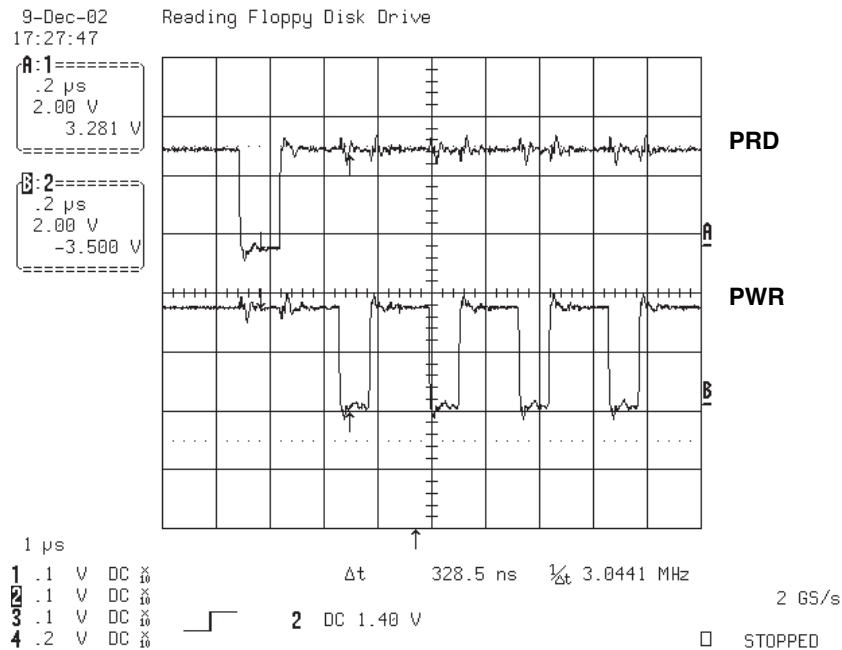


FIG 1-4

2. SDRAM CLOCK

DCLK = 128MHz, Vp-p=2.2, Vmax=2.7V

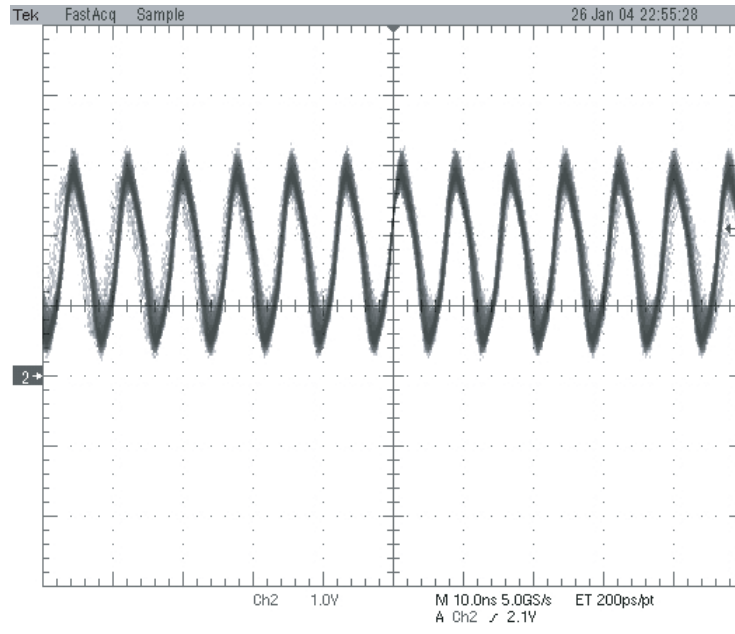


FIG 2-1

3. TRAY OPEN/CLOSE SIGNAL

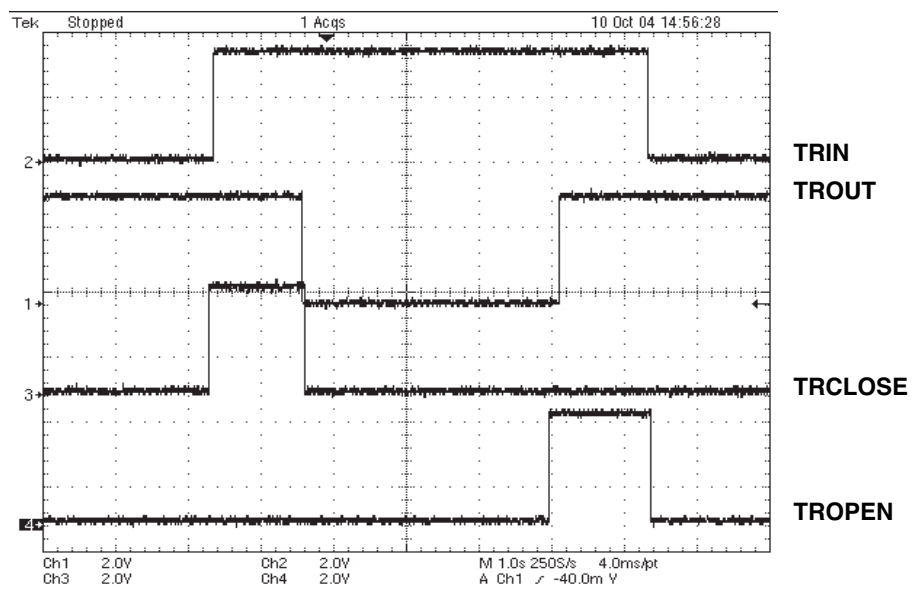


FIG 3-1

4. SLED CONTROL RELATED SIGNAL (NO DISC CONDITION)

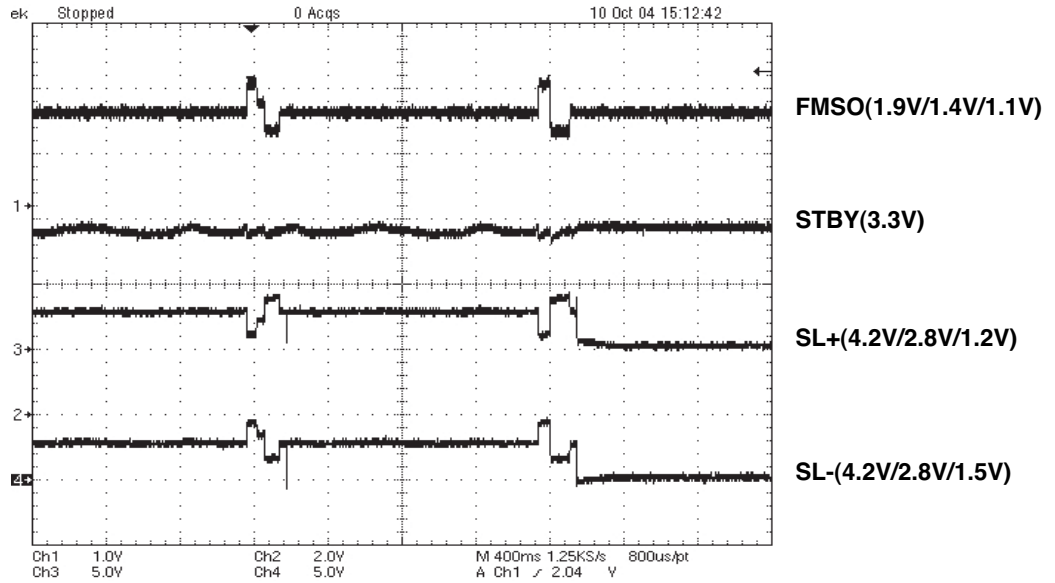


FIG 4-1

5. LENS CONTROL RELATED SIGNAL(NO DISC CONDITION)

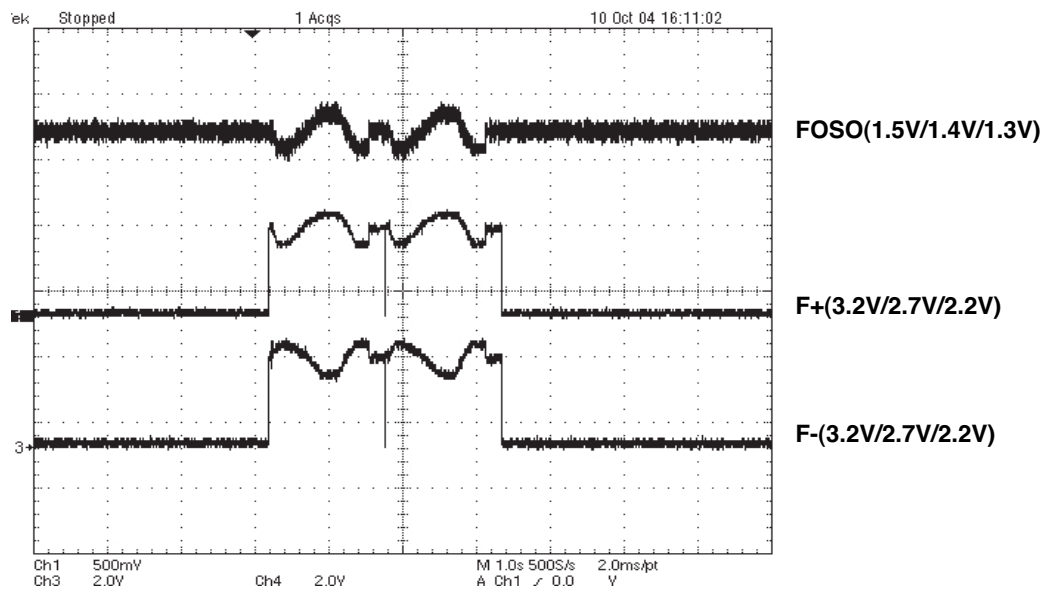


FIG 5-1

6. LASER POWER CONTROL RELATED SIGNAL(NO DISC CONDITION)

DCLK = 128MHz, Vp-p=2.2, Vmax=2.7V

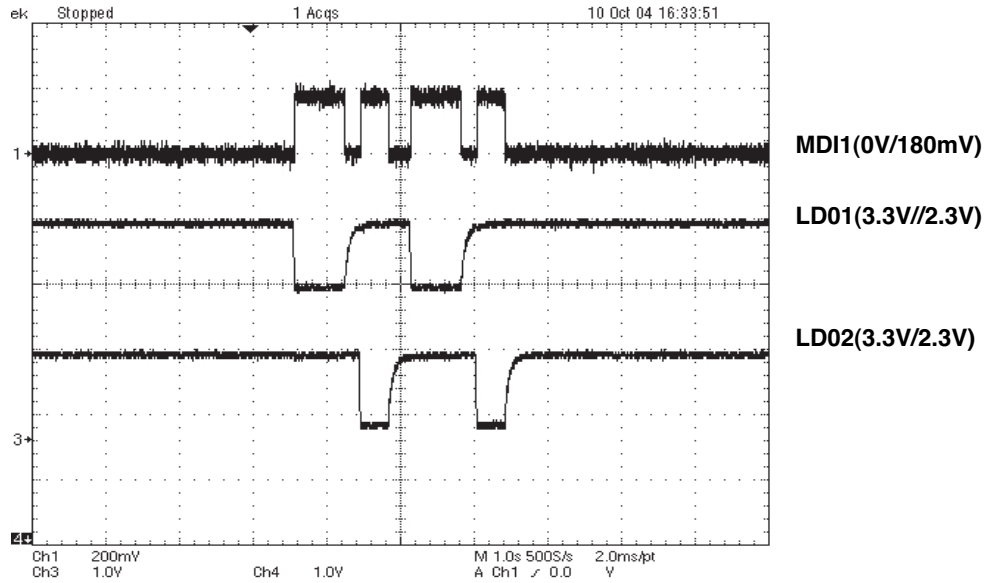


FIG 7-2 (DVD)

7. DISC TYPE JUDGEMENT WAVEFORM

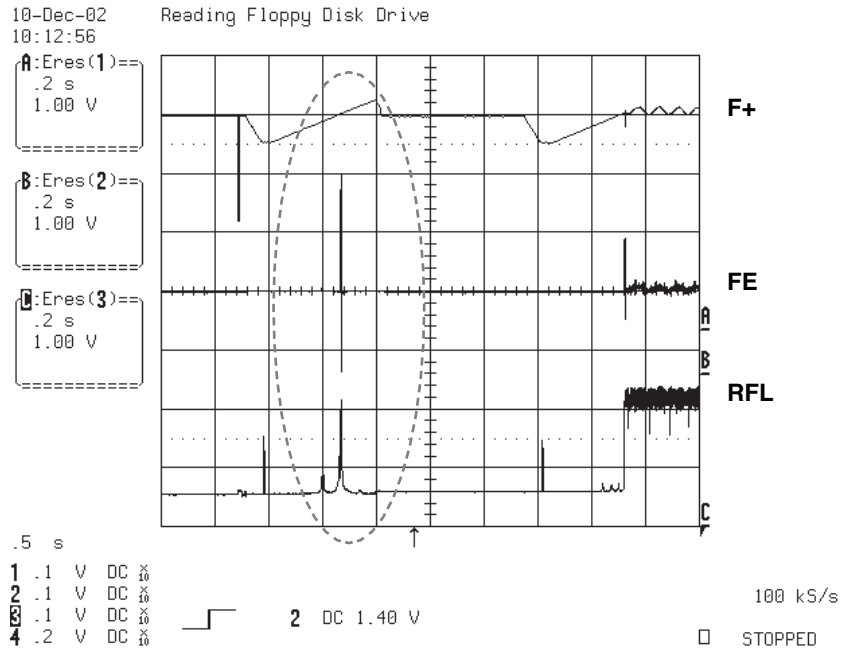


FIG 7-1

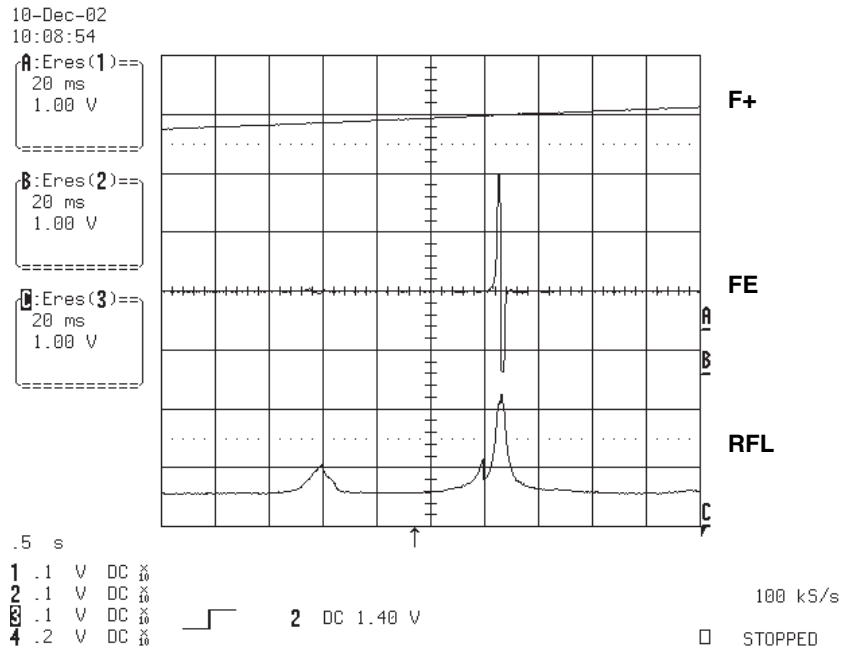


FIG 7-2 (DVD)

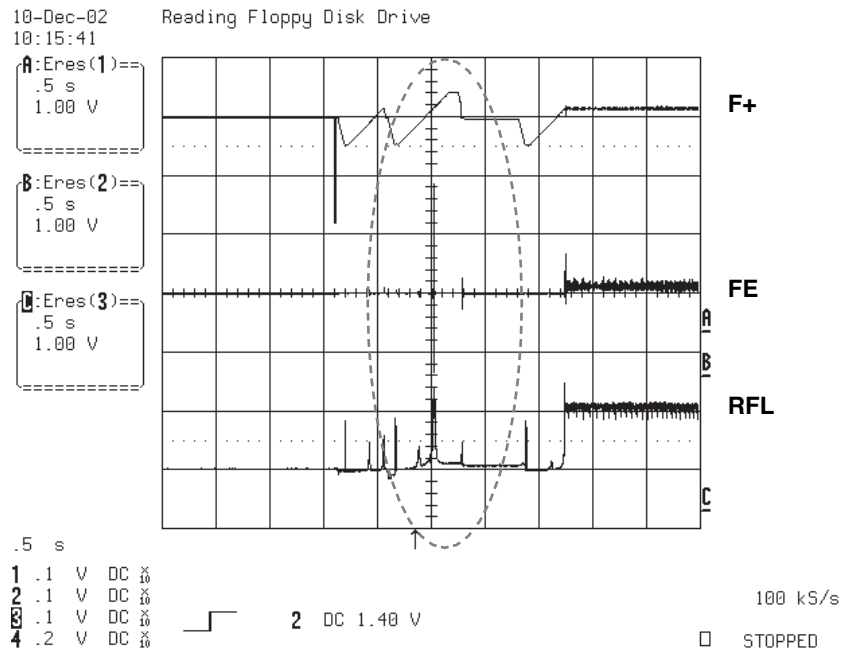


FIG 7-3 (CD)

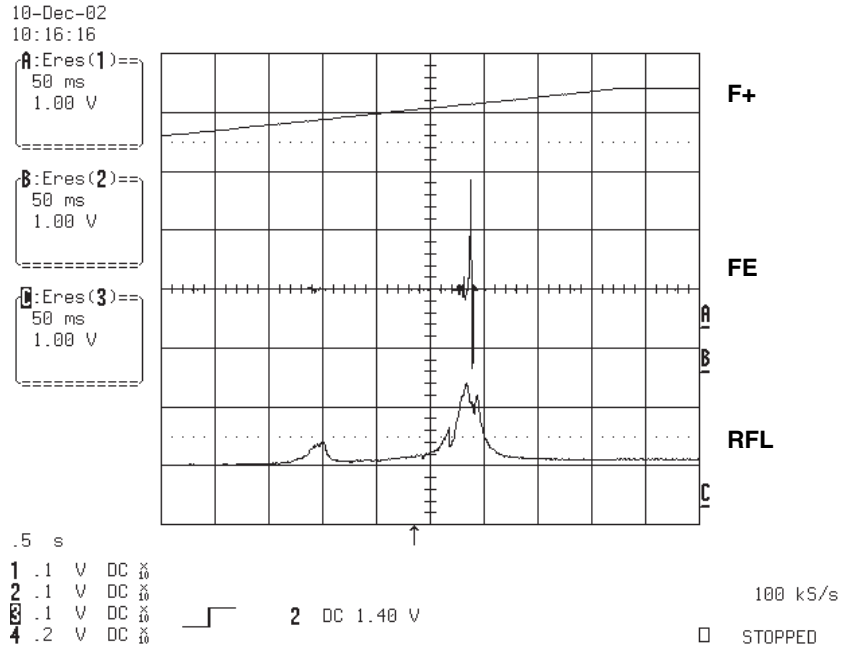


FIG 7-4 (CD)

8. FOCUS ON WAVEFORM

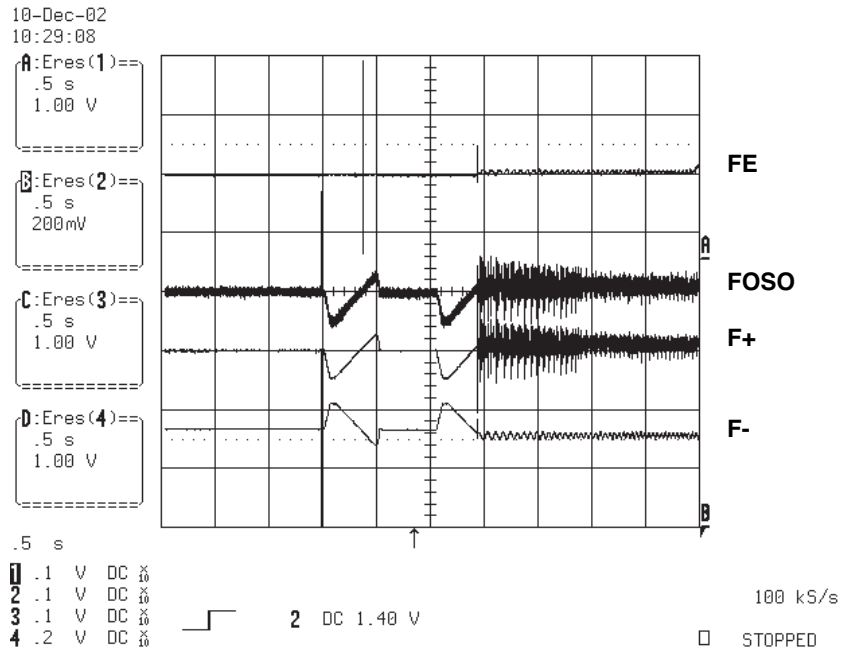


FIG 8-1 (DVD)

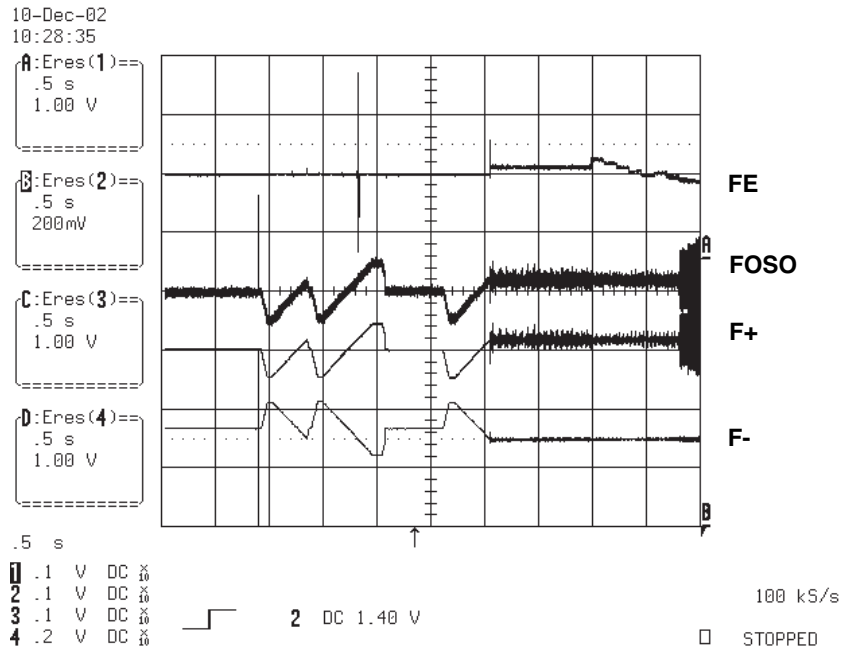


FIG 8-2 (CD)

9) SPINDLE CONTROL WAVEFORM (NO DISC CONDITION)

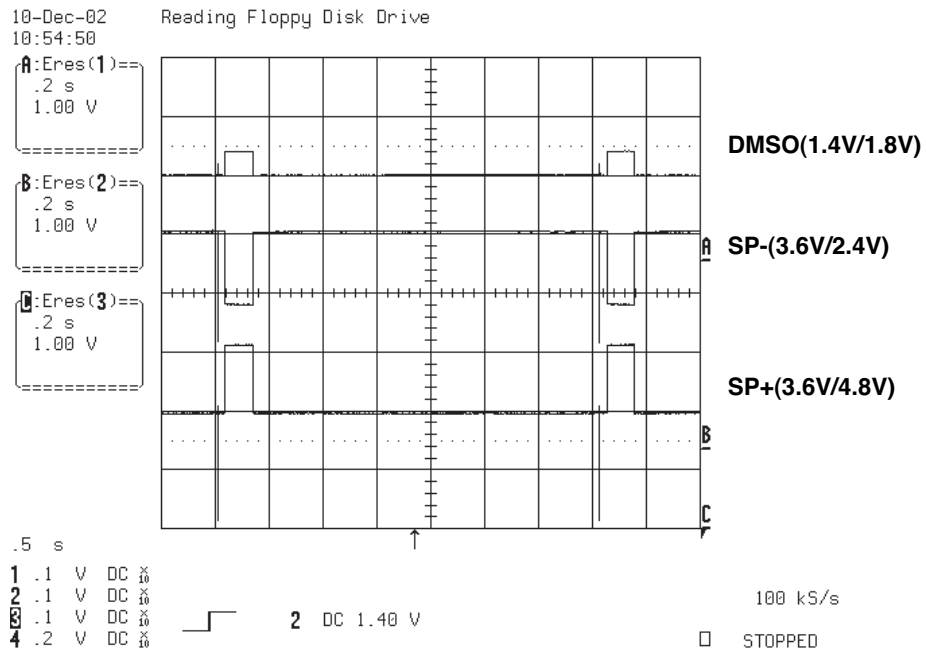


FIG 9-1

10. TRACKING CONTROL RELATED SIGNAL(System checking)

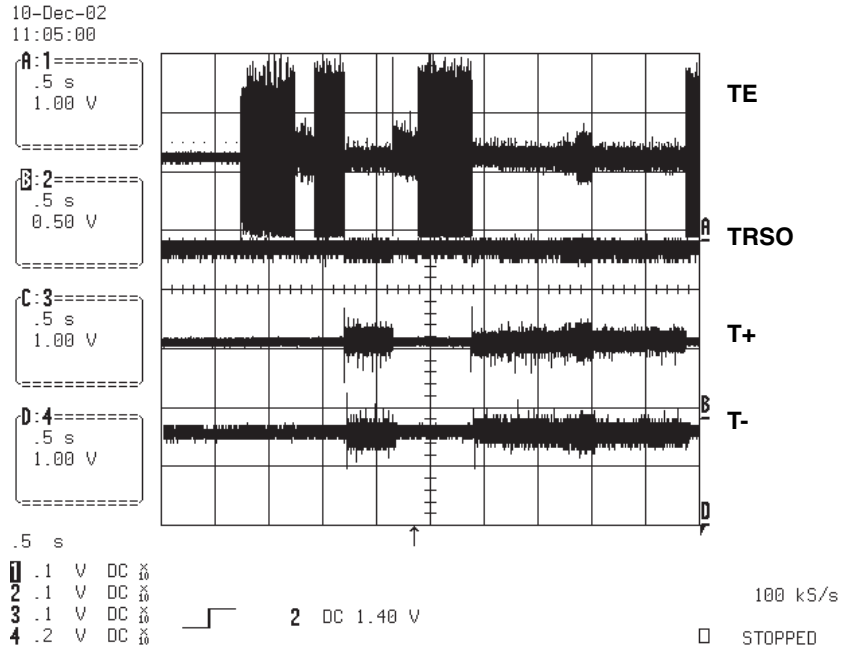


FIG 10-1 (DVD)

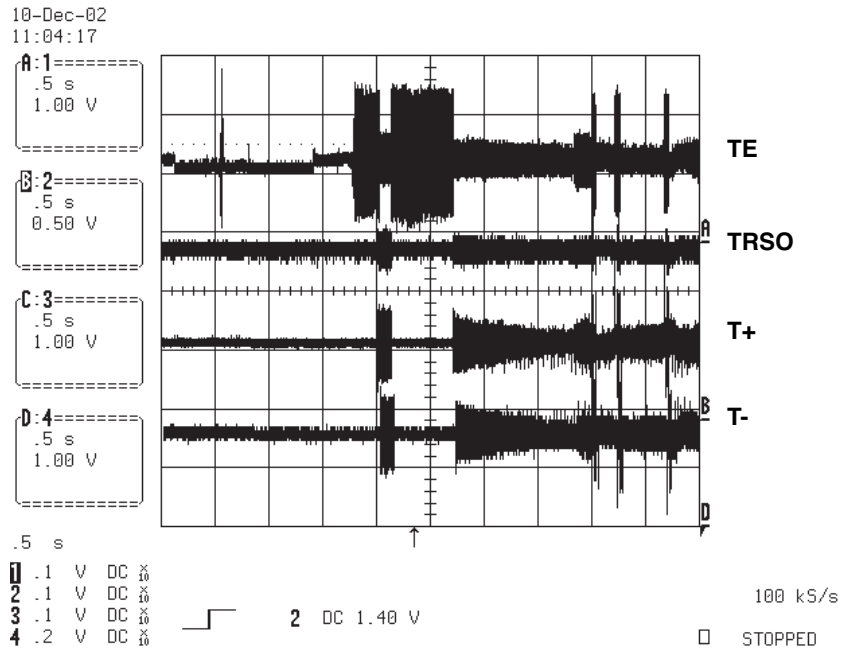


FIG 10-2 (CD)

11. MT1389C AUDIO OPTICAL AND COAXIAL OUTPUT (SPDIF)

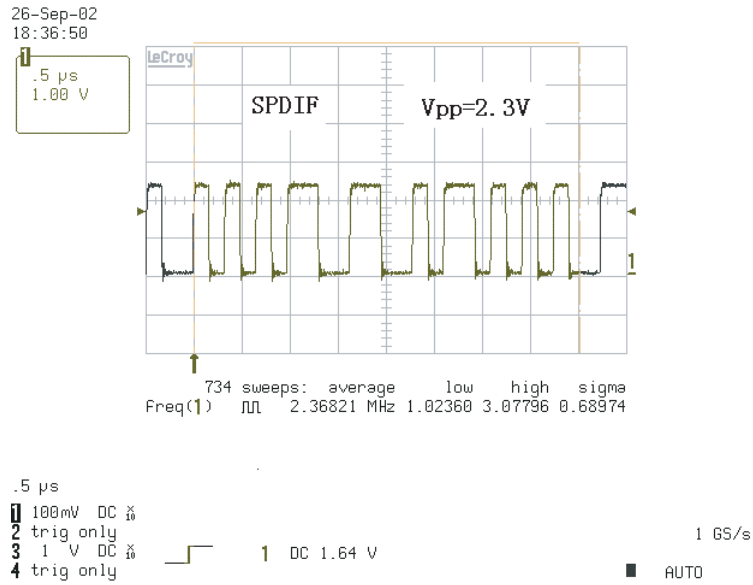


FIG 12-1

13. MT1389C VIDEO OUTPUT WAVEFORM

1) 100%

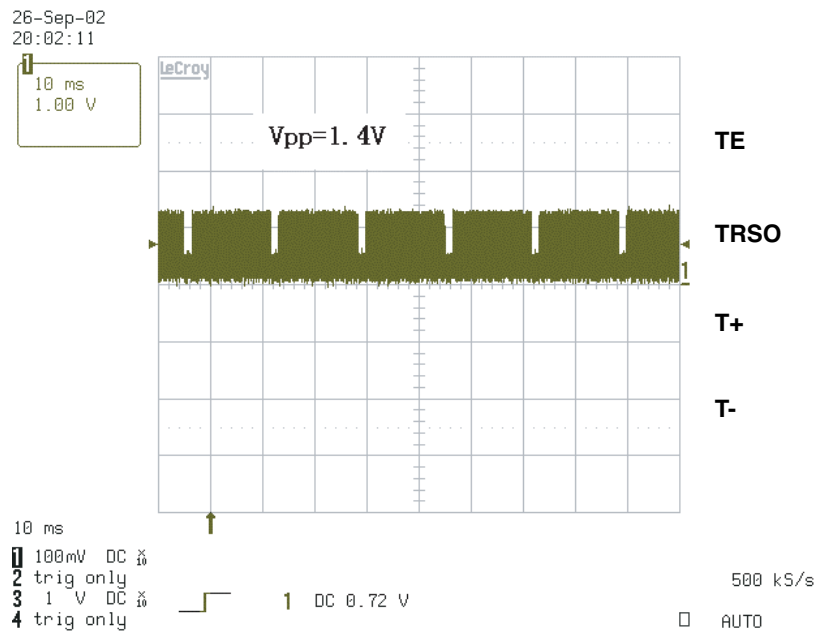


FIG 13-1

2) COMPOSITE VIDEO SIGNAL

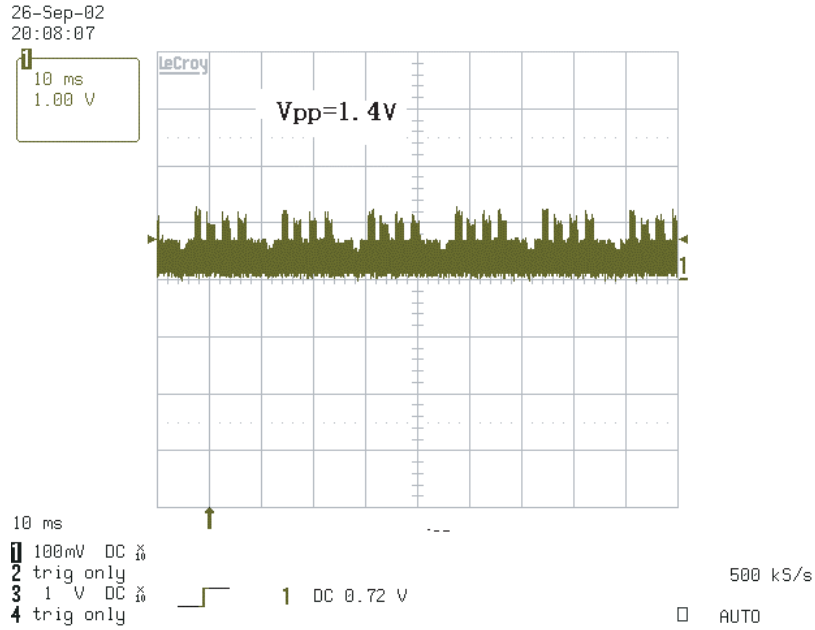


FIG 13-2

14. MT1389C AUDIO OUTPUT TO AUDIO DAC

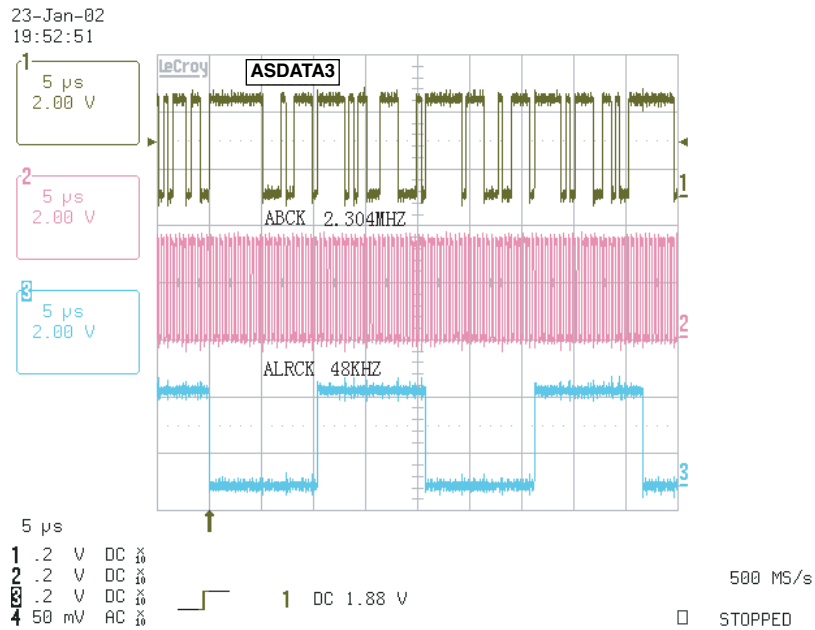


FIG 14-1

15. AUDIO OUTPUT FROM AUDIO DAC


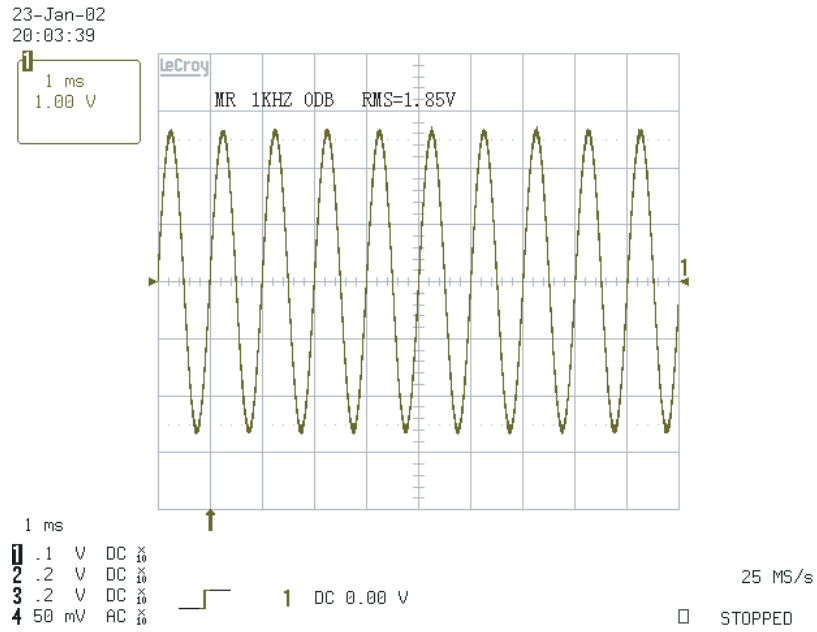



FIG 15-1

BLOCK DIAGRAMS


1. Overall Block Diagram

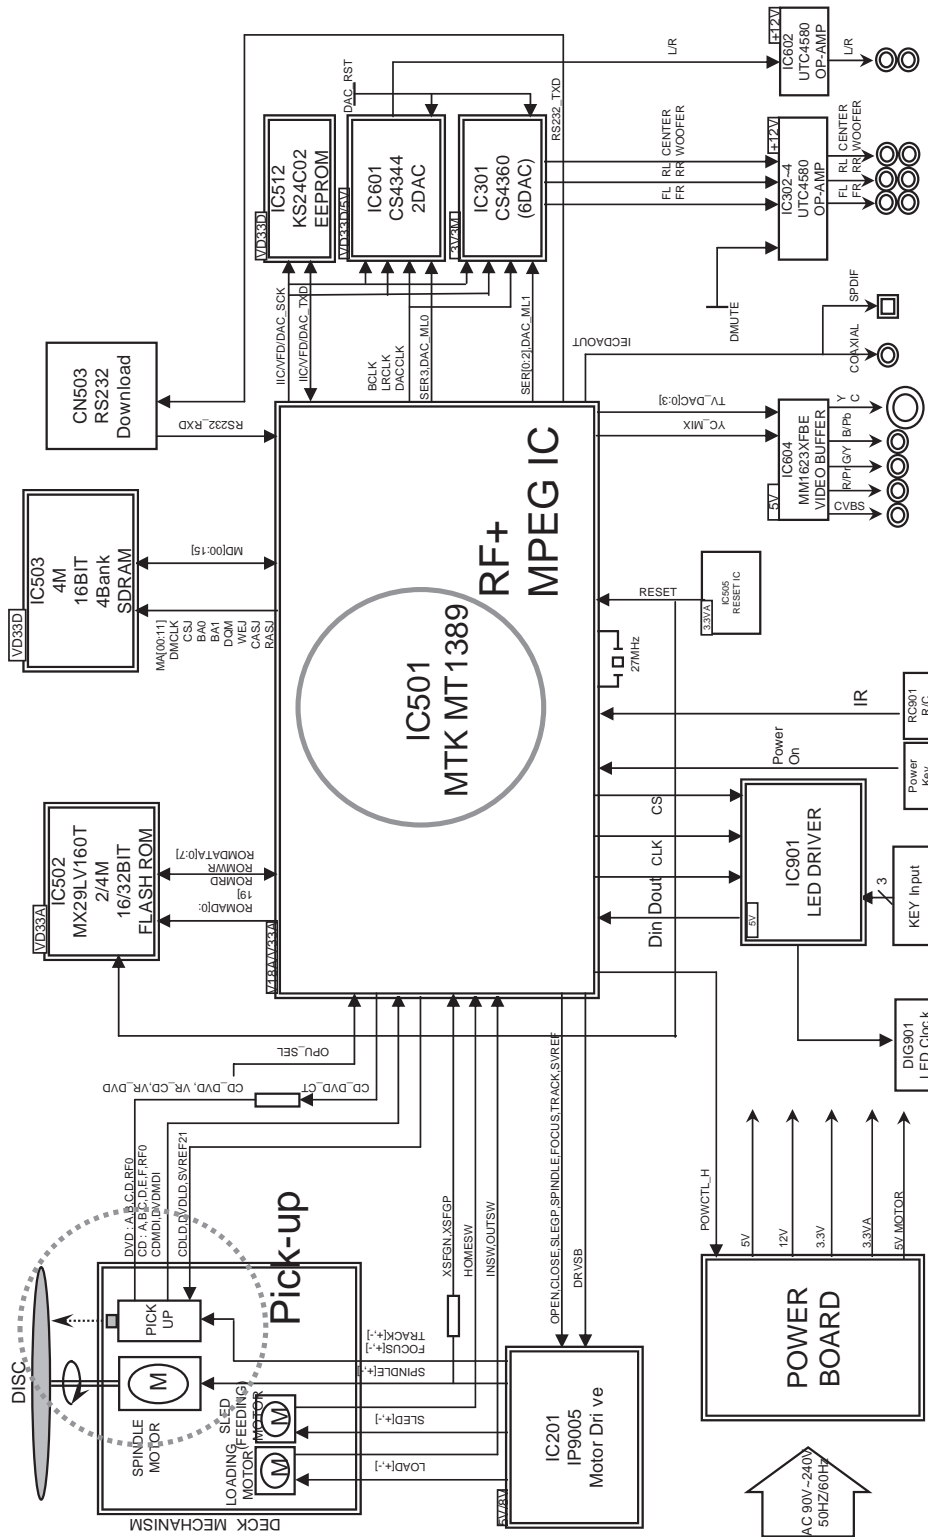


2. Power(SMPS) Block Diagram

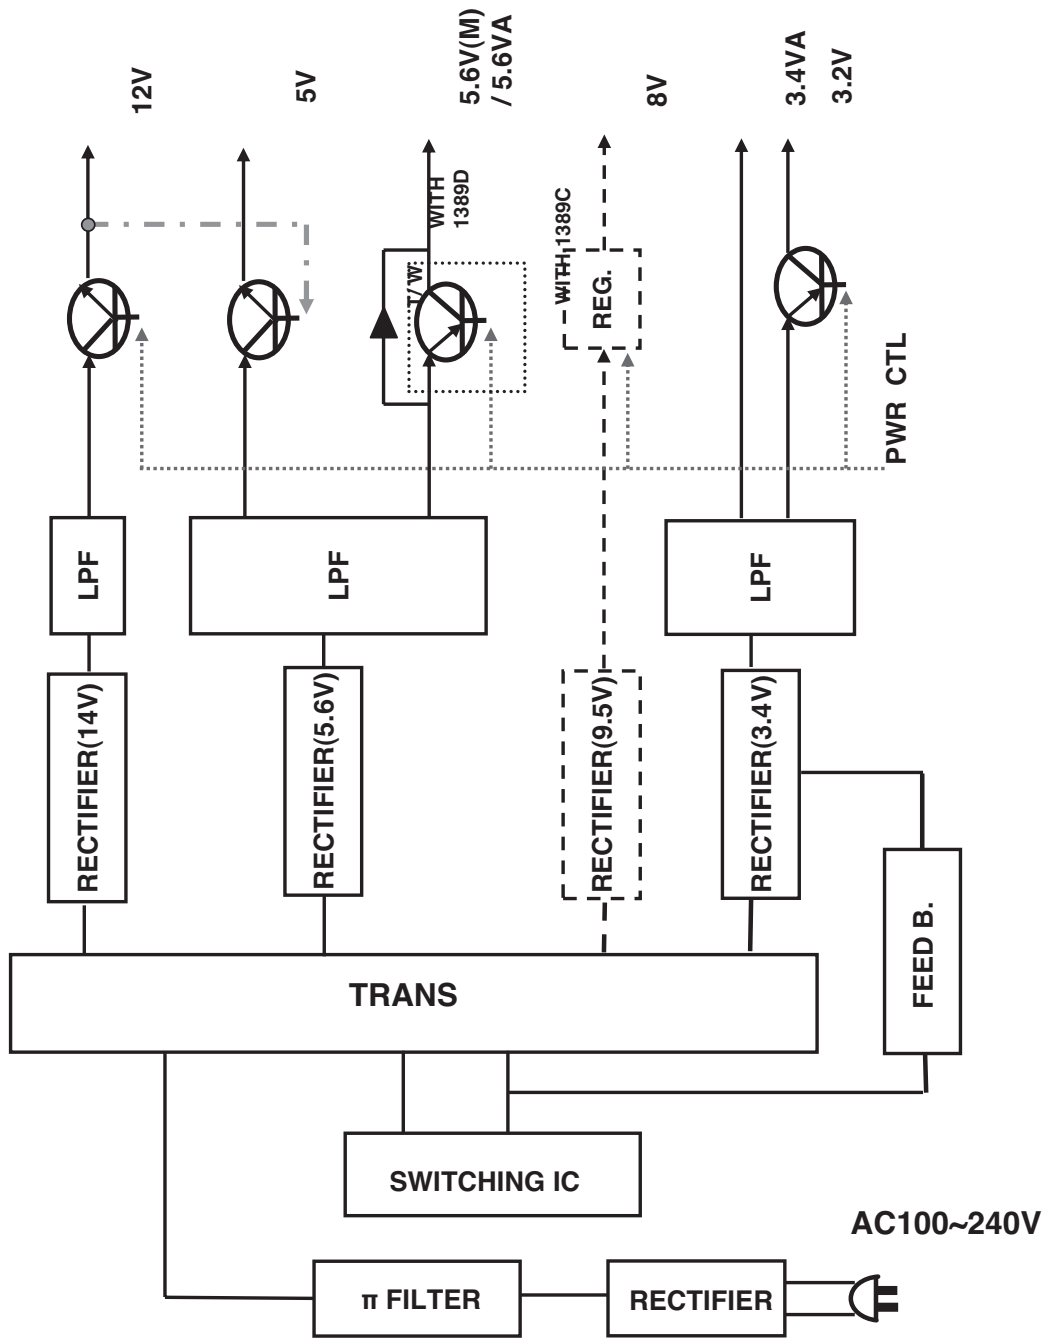


3. SERVO Block Diagram

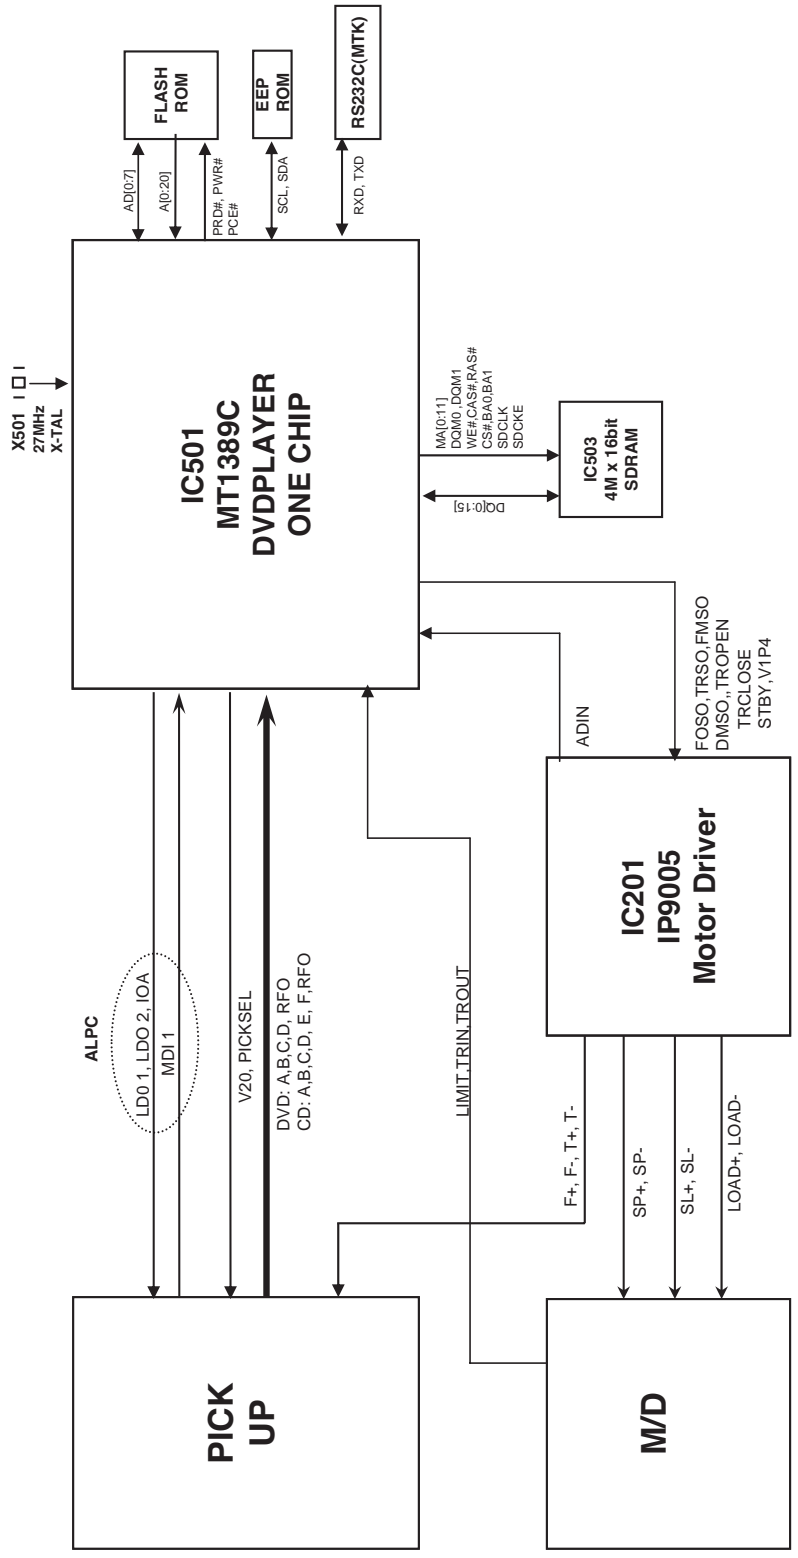


4. MPEG & MEMORY Block Diagram

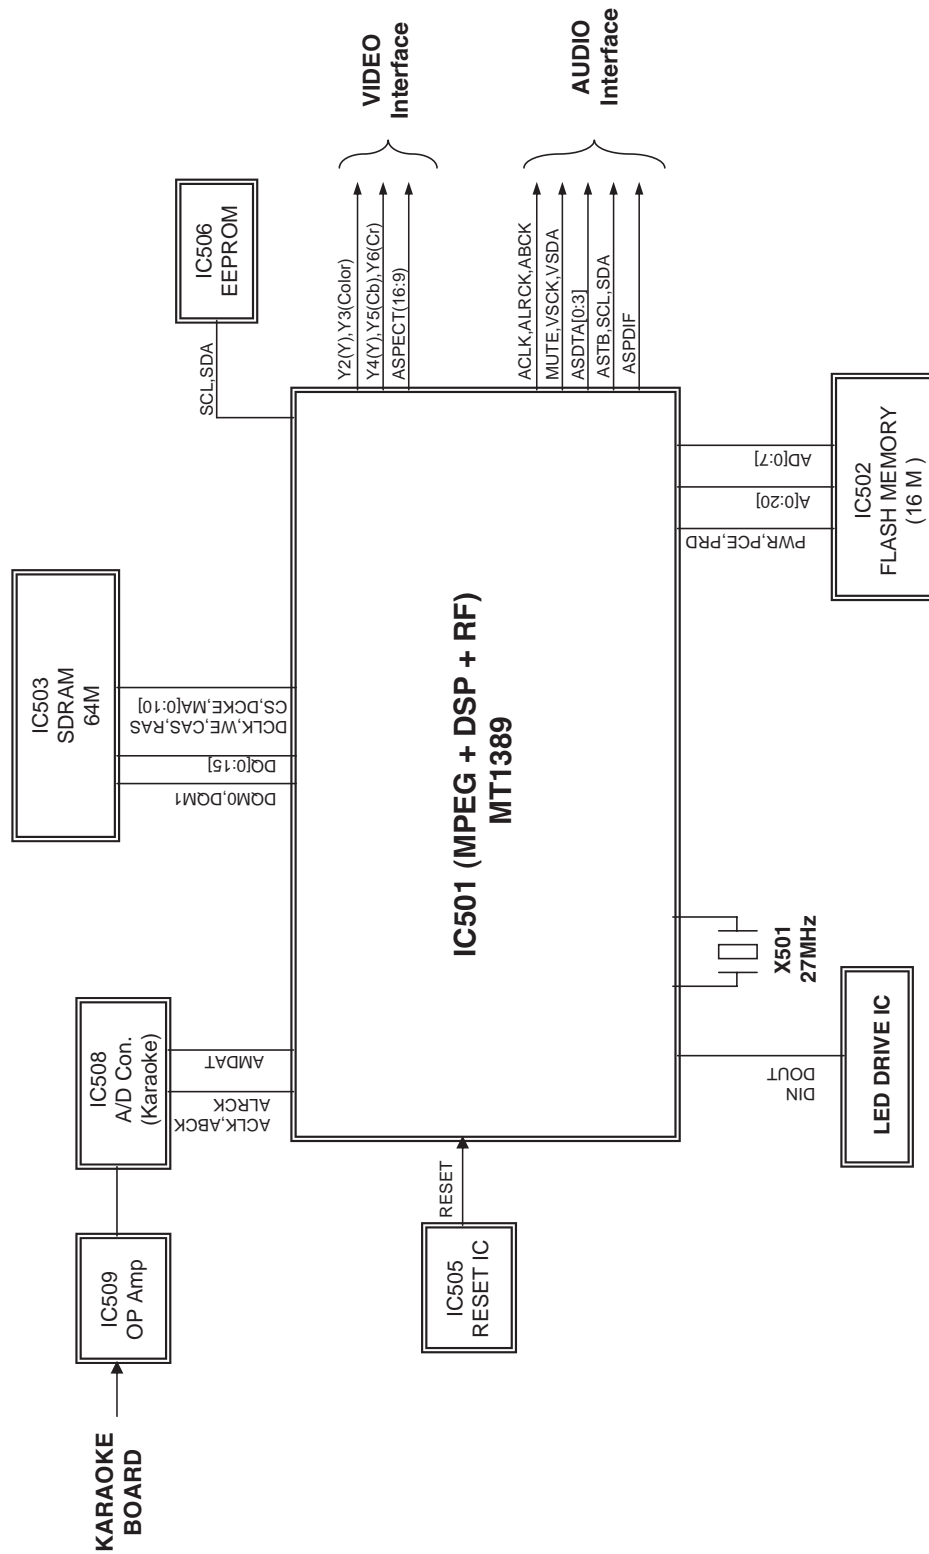

5. VIDEO & AUDIO Block Diagram

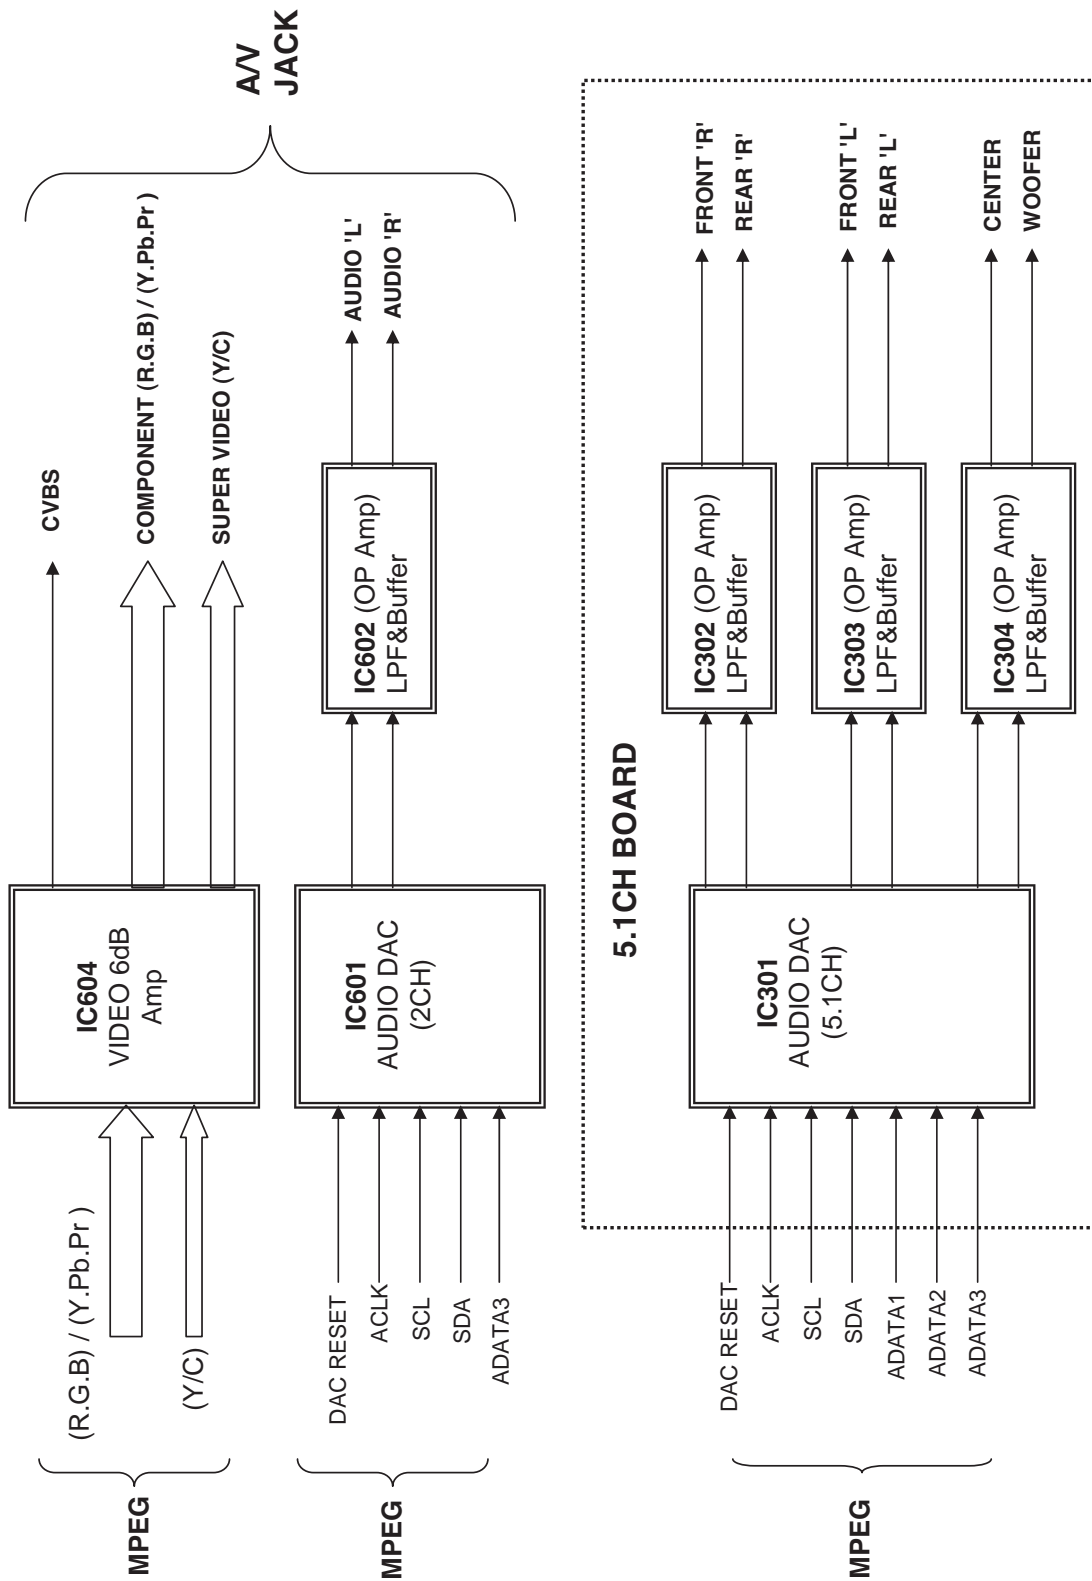

6. KARAOKE Block Diagram(KARAOKE MODEL ONLY)

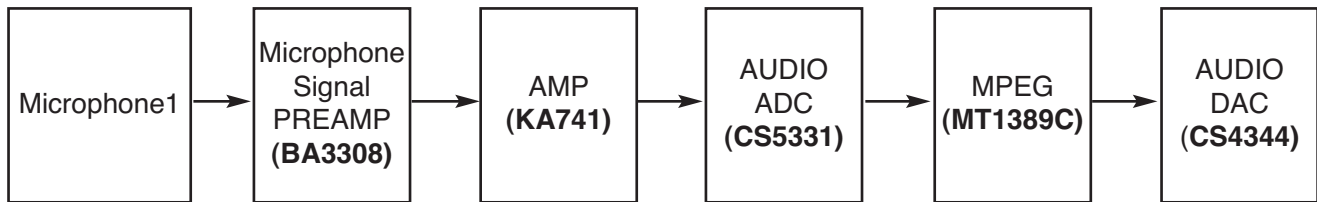

(Block Diagram)

- 1 The unit turns to KARAOKE MODE with on-screen lyrics display and melody sound when it plays back VCD or DVD KARAOKE DISC.
2. IF a microphone is connected at this time, MICON recognizes the connection and prepares the composition of external voice and internal melody.
3. The weak signal of the microphone is converted to the digital signal after voice output that has passed through PREAMP(BA3308) and AMP(KA741) passes through(CS5331) that is Audio ADC(Analog to Digital convertor).
4. This digital signal enters MT1389C that is MPEG IC
5. This mixed signal is output to AV JACK after passing through AUDIO DAC(CS4344).

CIRCUIT DIAGRAMS

1. POWER(SMPS) CIRCUIT DIAGRAM


IMPORTANT SAFETY NOTICE

WHEN SERVICING THIS CHASSIS, UNDER NO CIRCUMSTANCES SHOULD THE ORIGINAL DESIGN BE MODIFIED OR ALTERED WITHOUT PERMISSION FROM THE LG ELECTRONICS CORPORATION. ALL COMPONENTS SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL CIR-

CUIT. SPECIAL COMPONENTS ARE SHADED ON THE SCHEMATIC FOR EASY IDENTIFICATION. THIS CIRCUIT DIAGRAM MAY OCCASIONALLY DIFFER FROM THE ACTUAL CIRCUIT USED. THIS WAY, IMPLEMENTATION OF THE LATEST SAFETY AND PERFORMANCE IMPROVEMENT CHANGES INTO THE SET IS NOT DELAYED UNTIL THE NEW SERVICE LITERATURE IS PRINTED.


NOTE :

1. Shaded(■) parts are critical for safety. Replace only with specified part number.
2. Voltages are DC-measured with a digital voltmeter during Play mode.

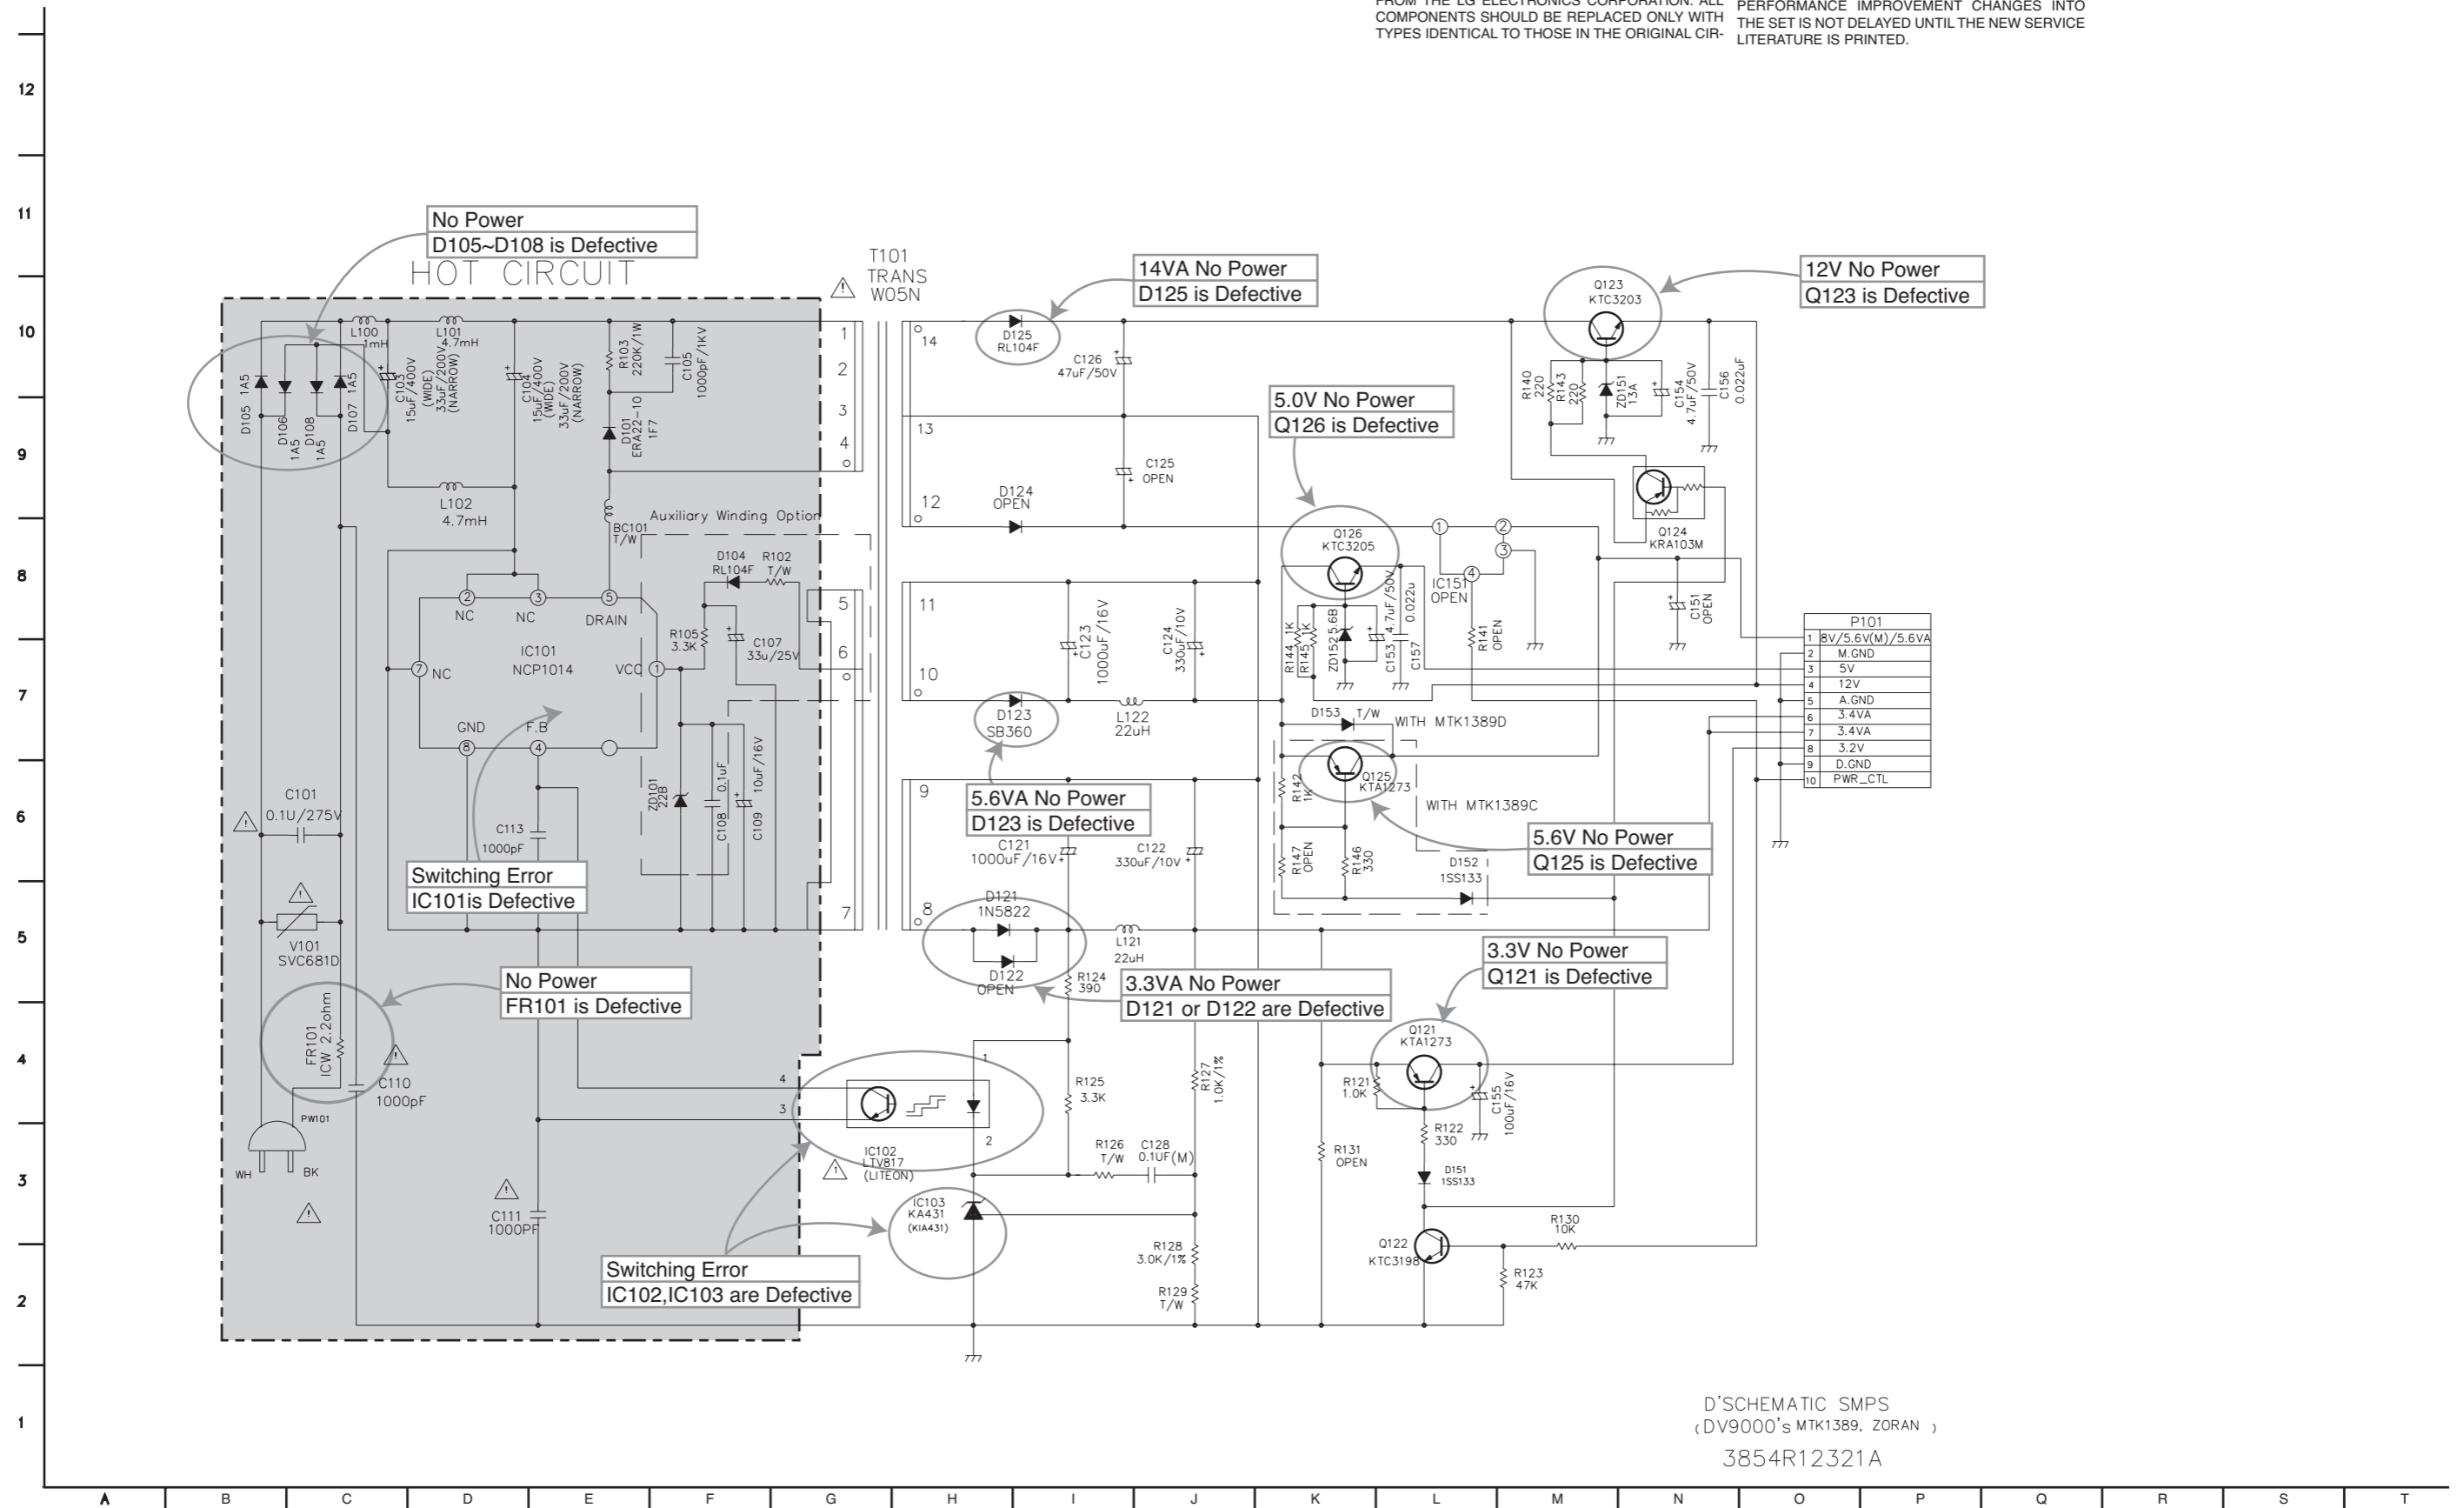


D'SCHEMATIC SMPS
(DV9000's MTK1389, ZORAN)
3854R12321A

2. AV/JACK CIRCUIT DIAGRAM

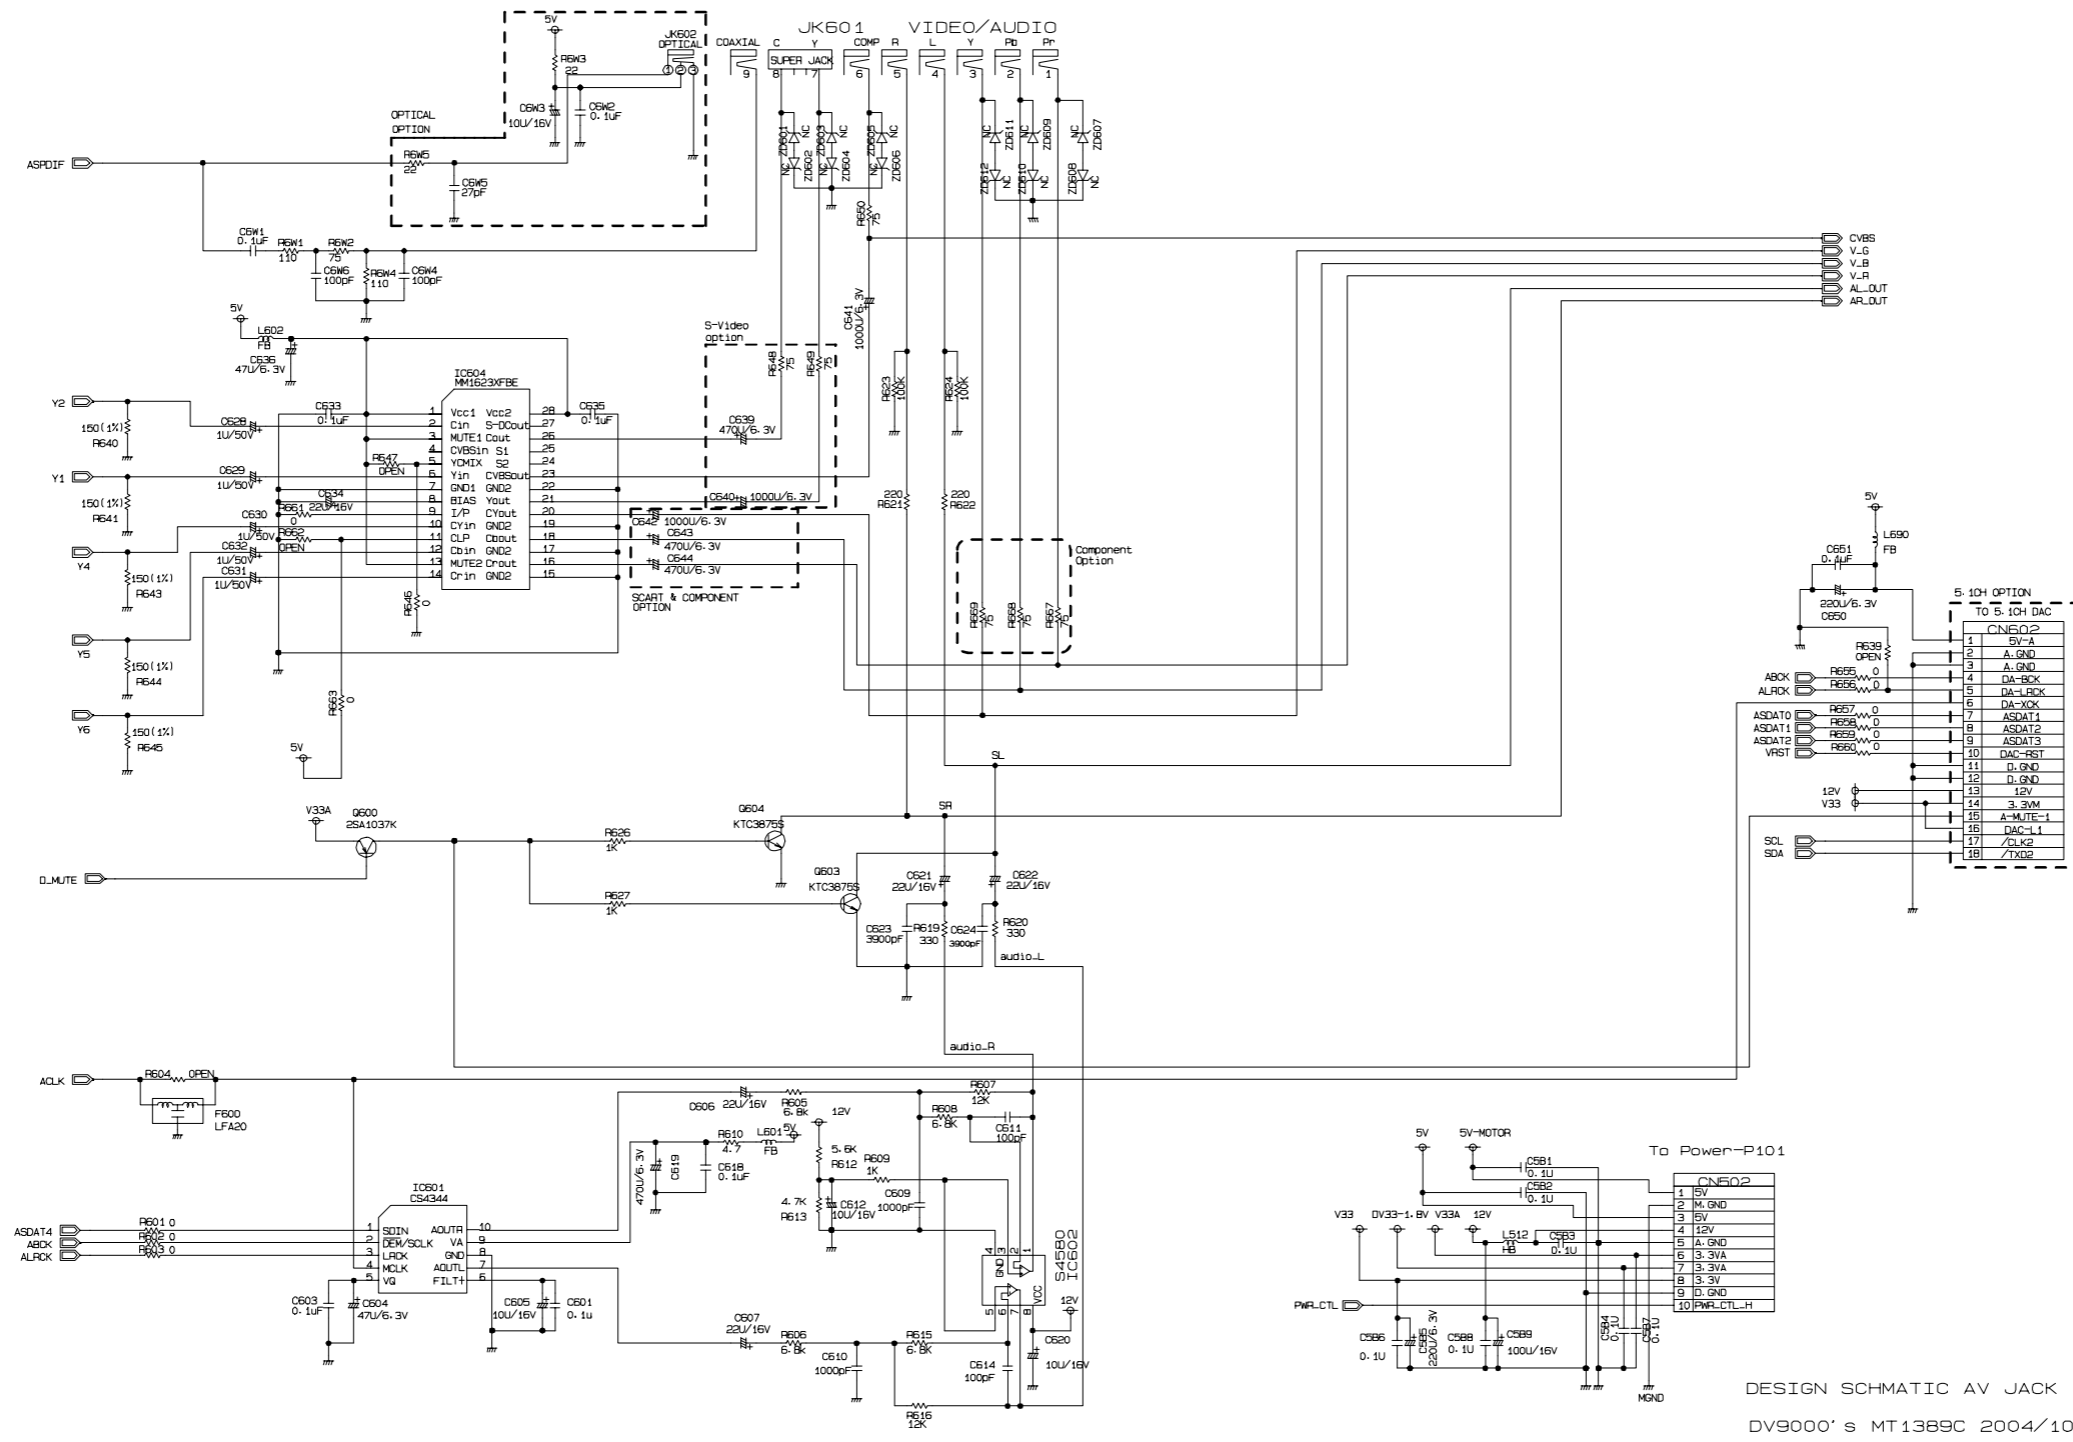


DESIGN SCHMATIC AV JACK
 DV9000' s MT1389C 2004/10/5
 3854R16003B (1.12)

3. SYSTEM CIRCUIT DIAGRAM

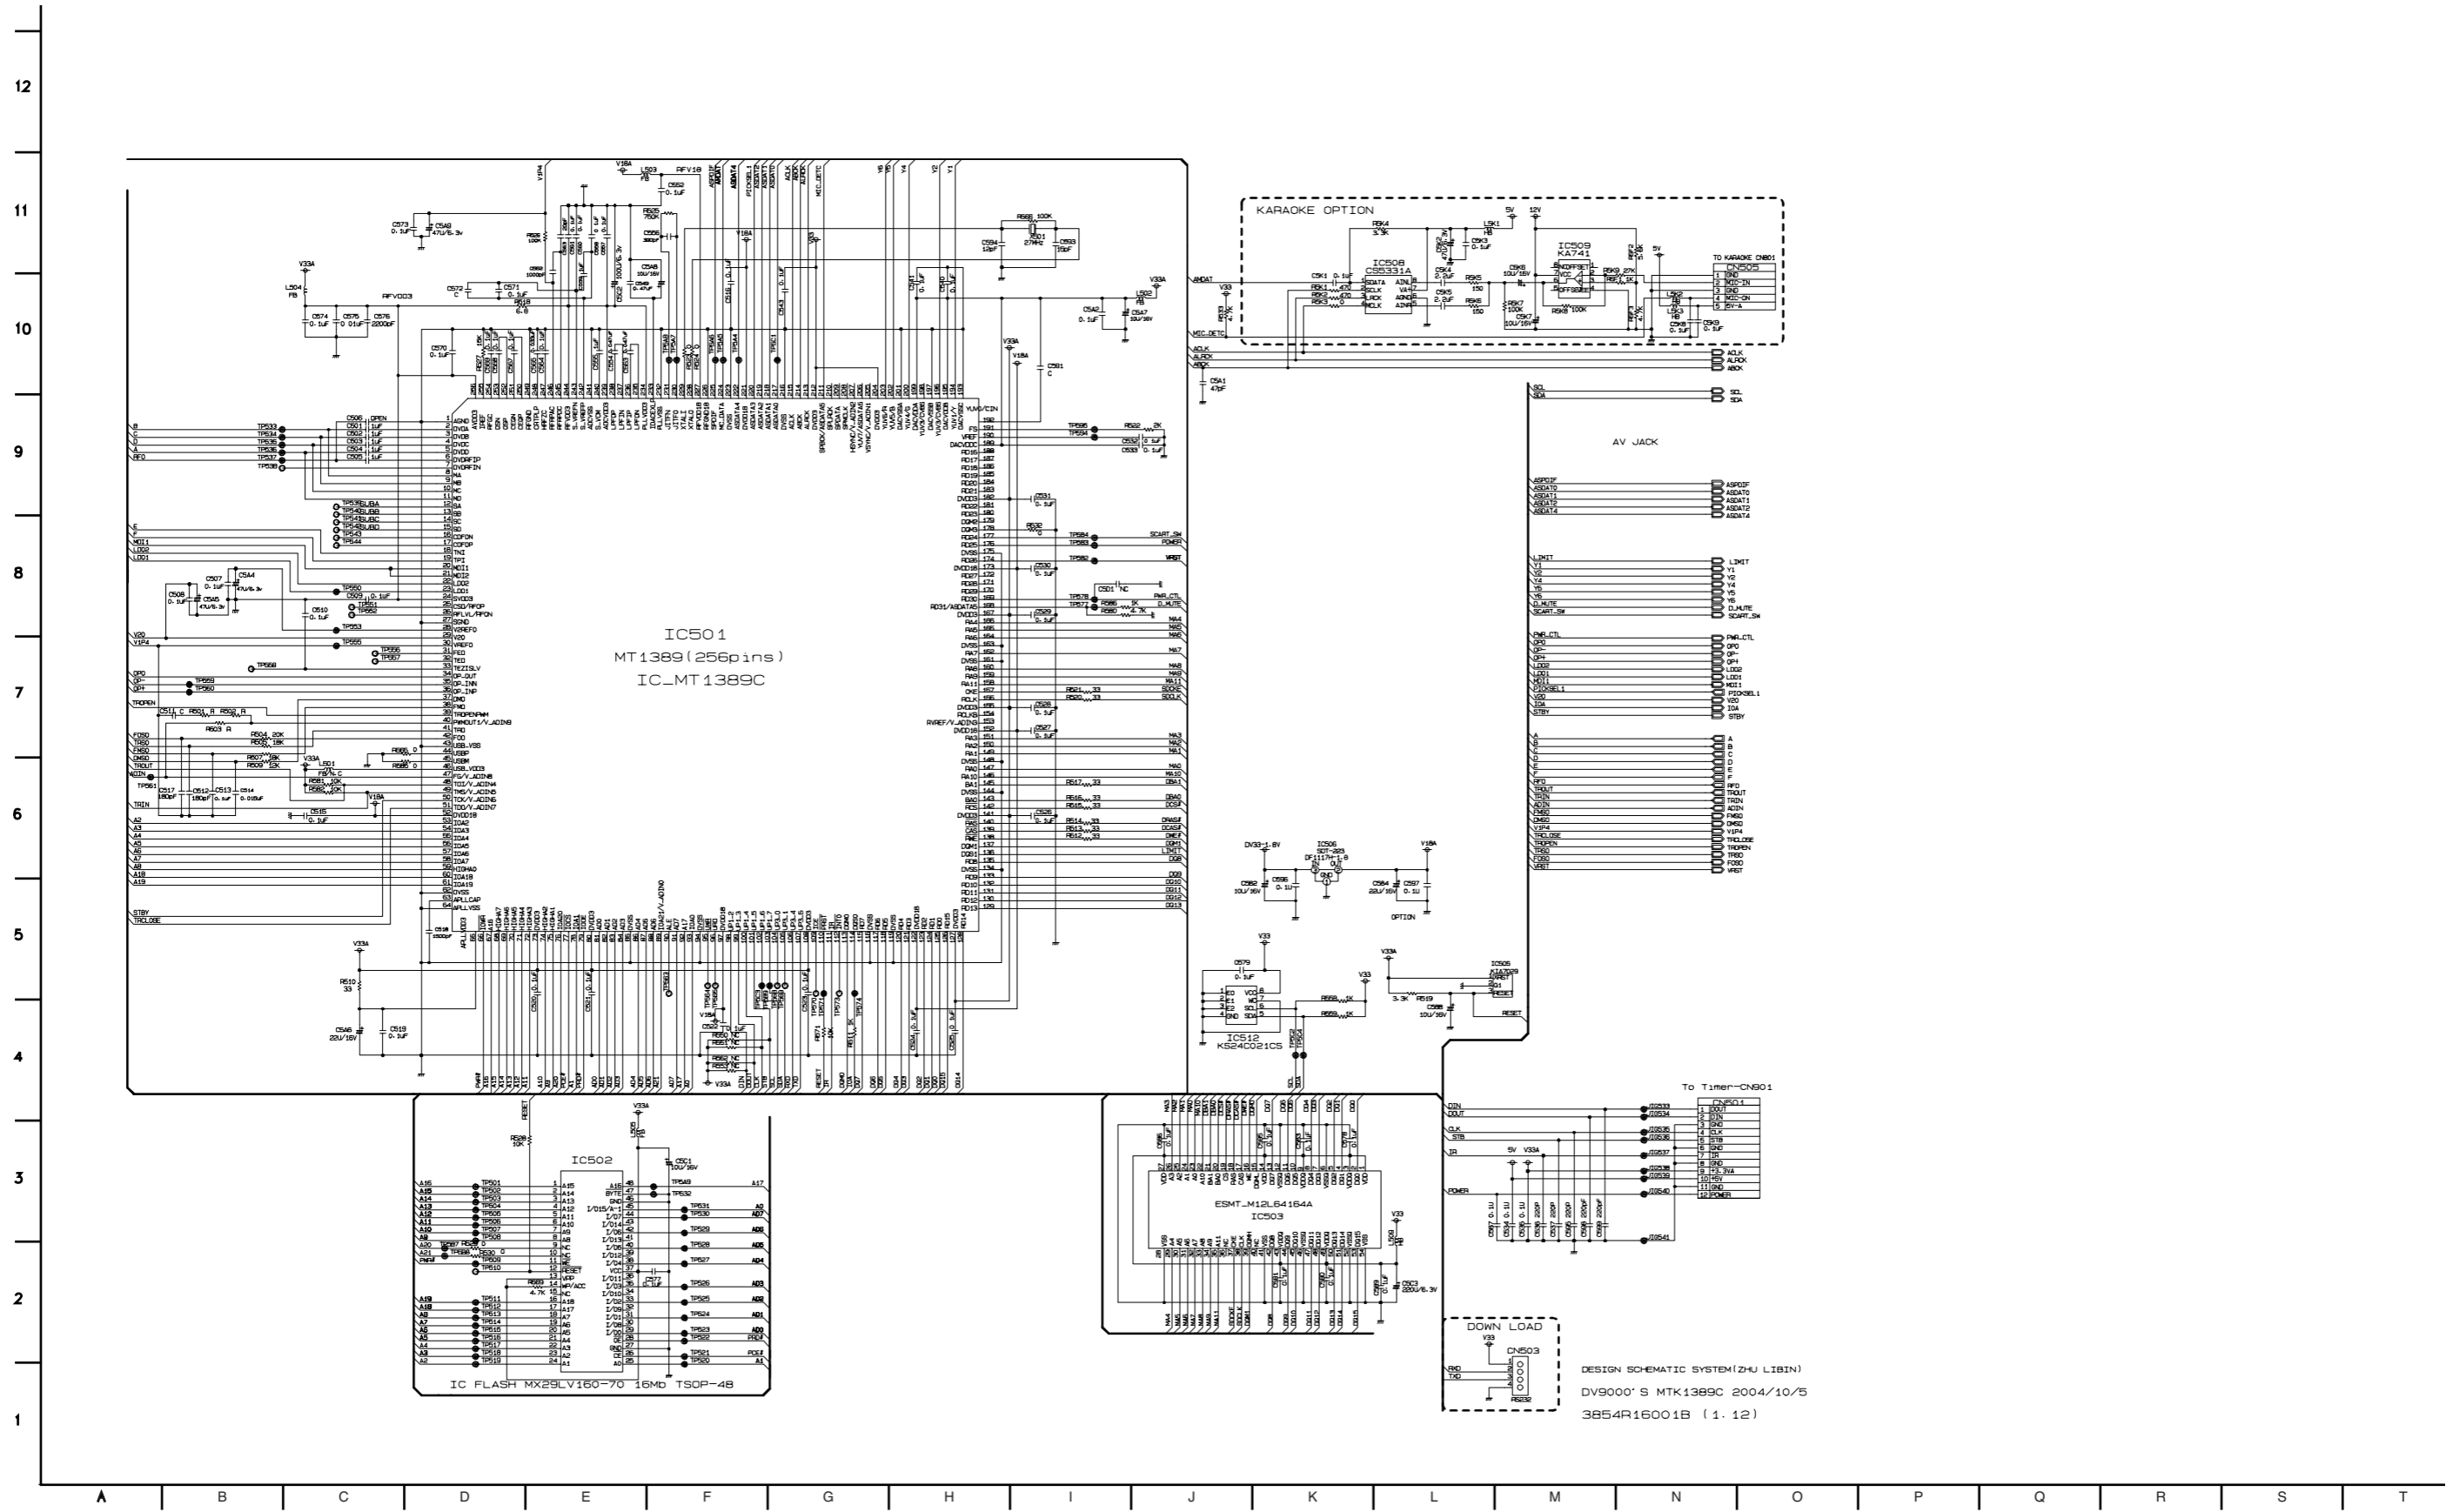

4. DRIVER CIRCUIT DIAGRAM


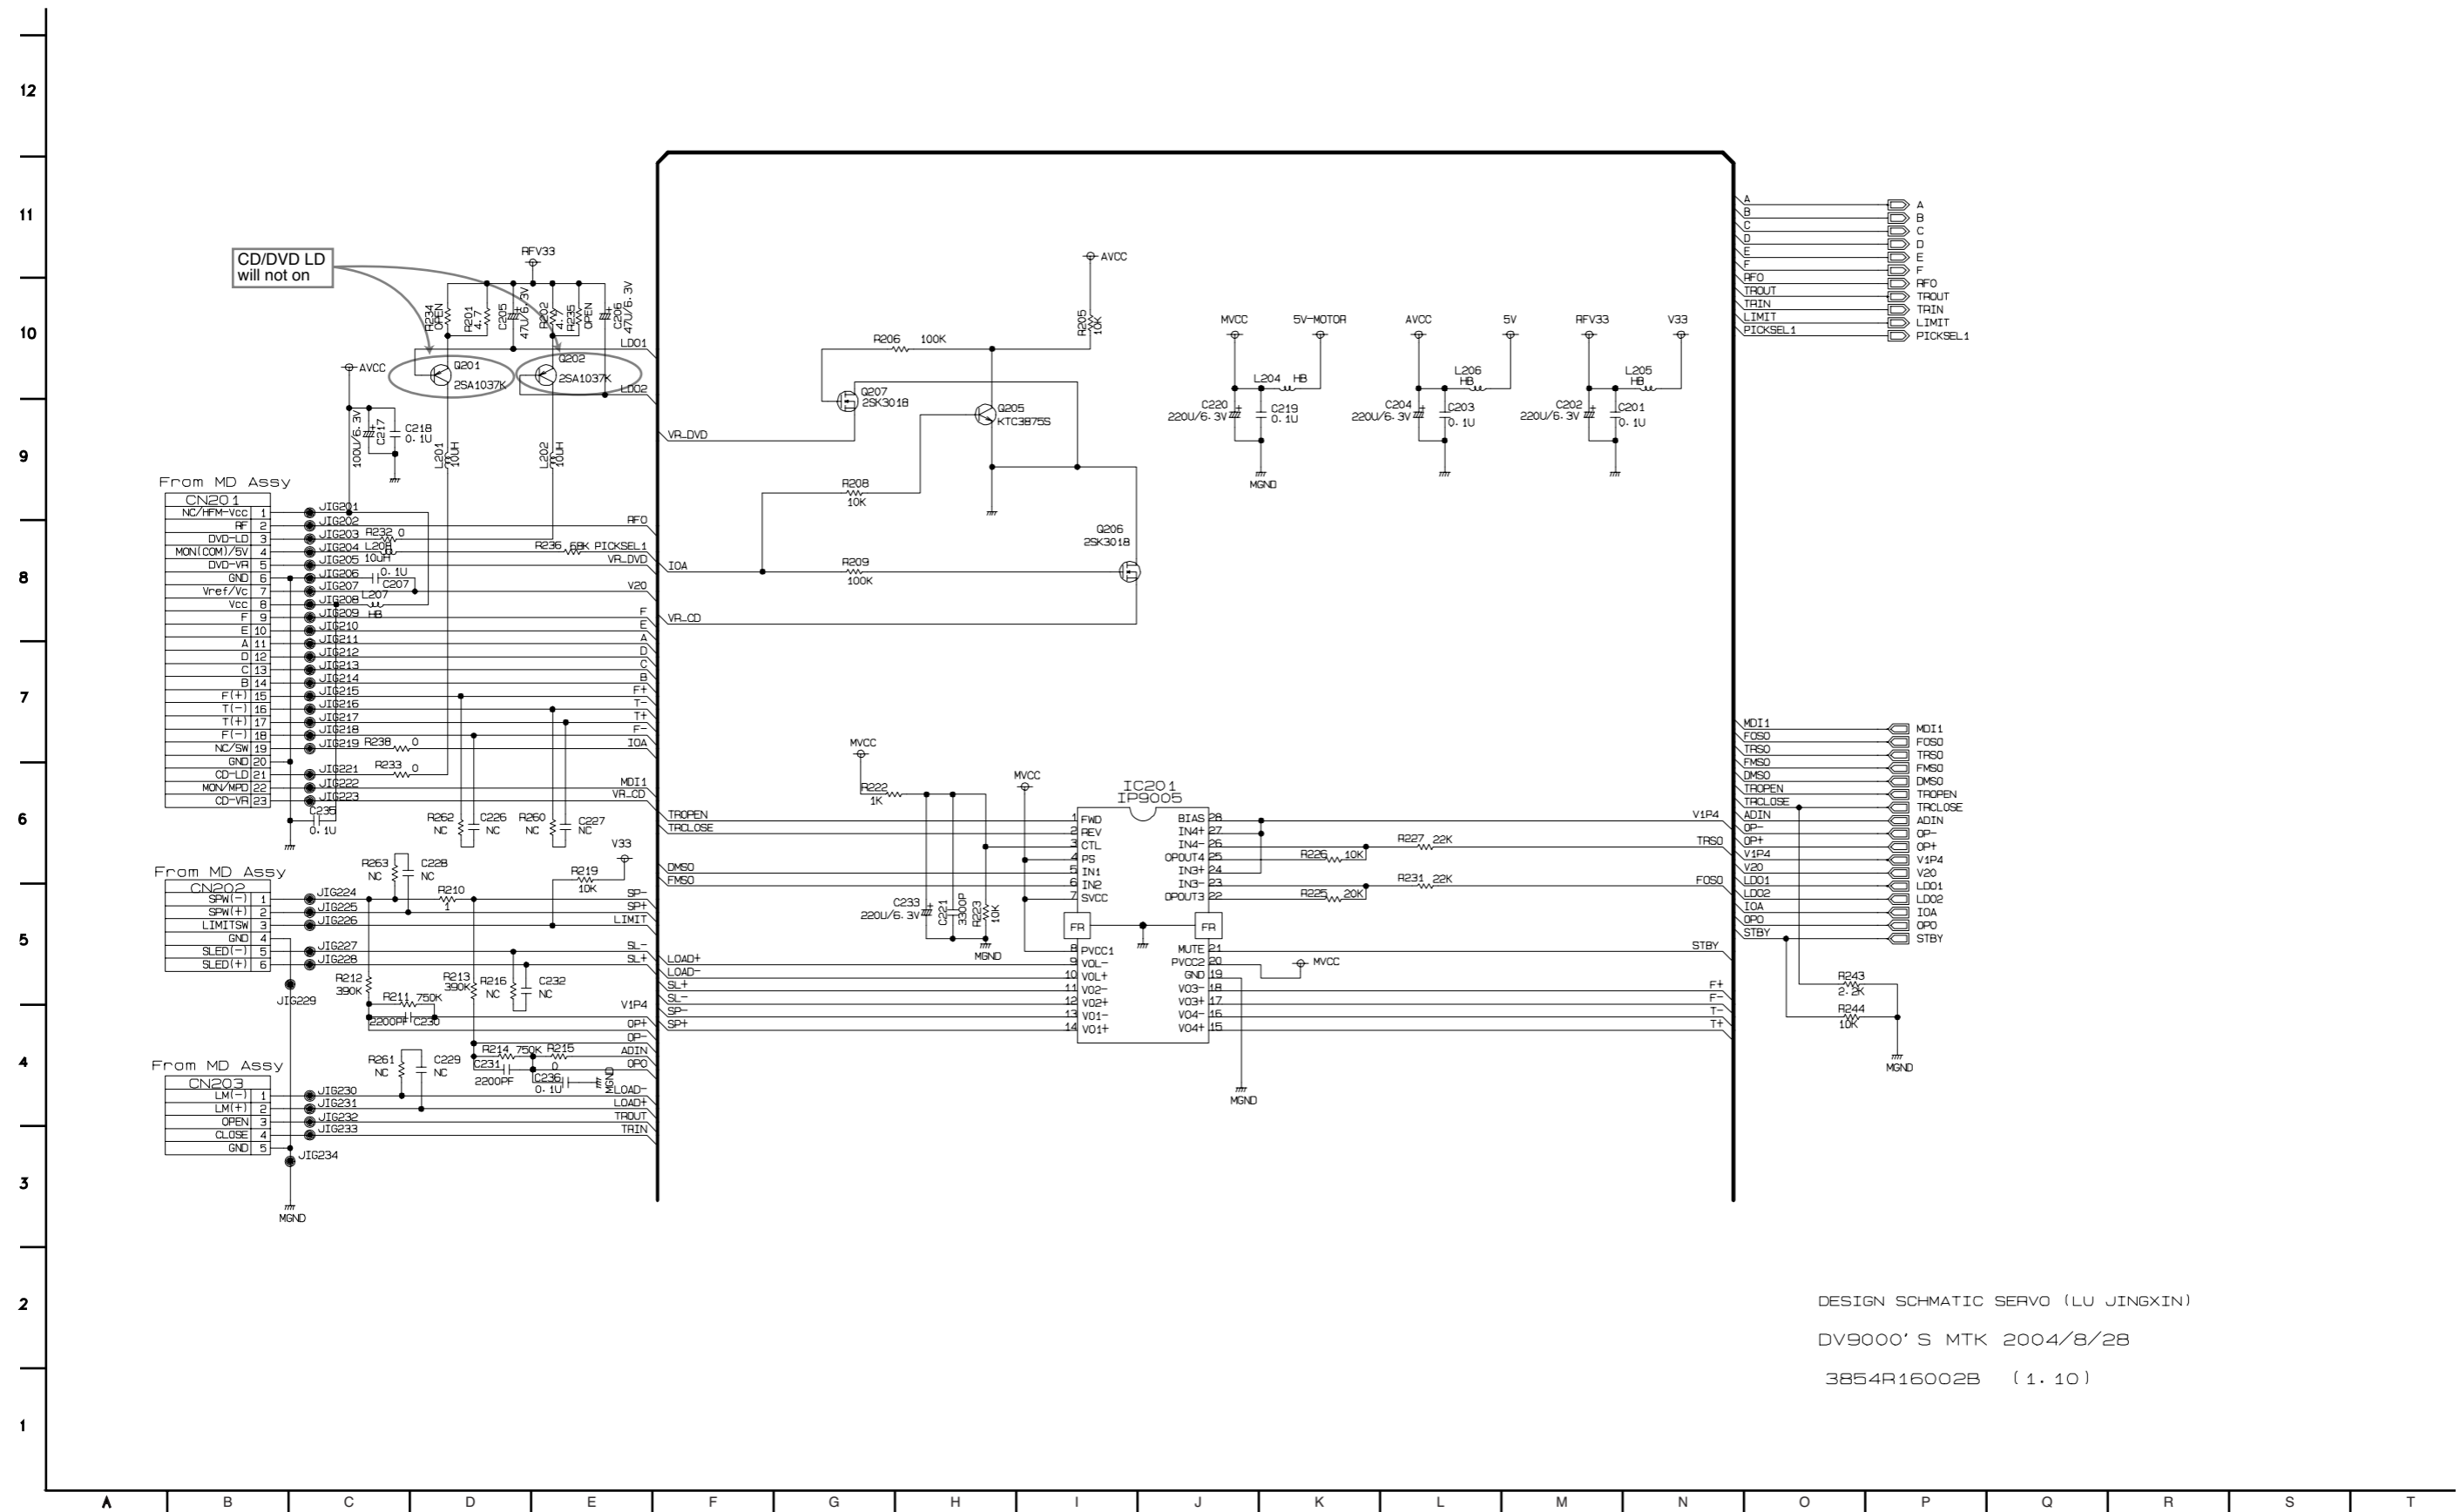


DESIGN SCHEMATIC SERVO (LU JINGXIN)

DV9000' S MTK 2004/8/28

3854R16002B (1.10)

5. TIMER CIRCUIT DIAGRAM

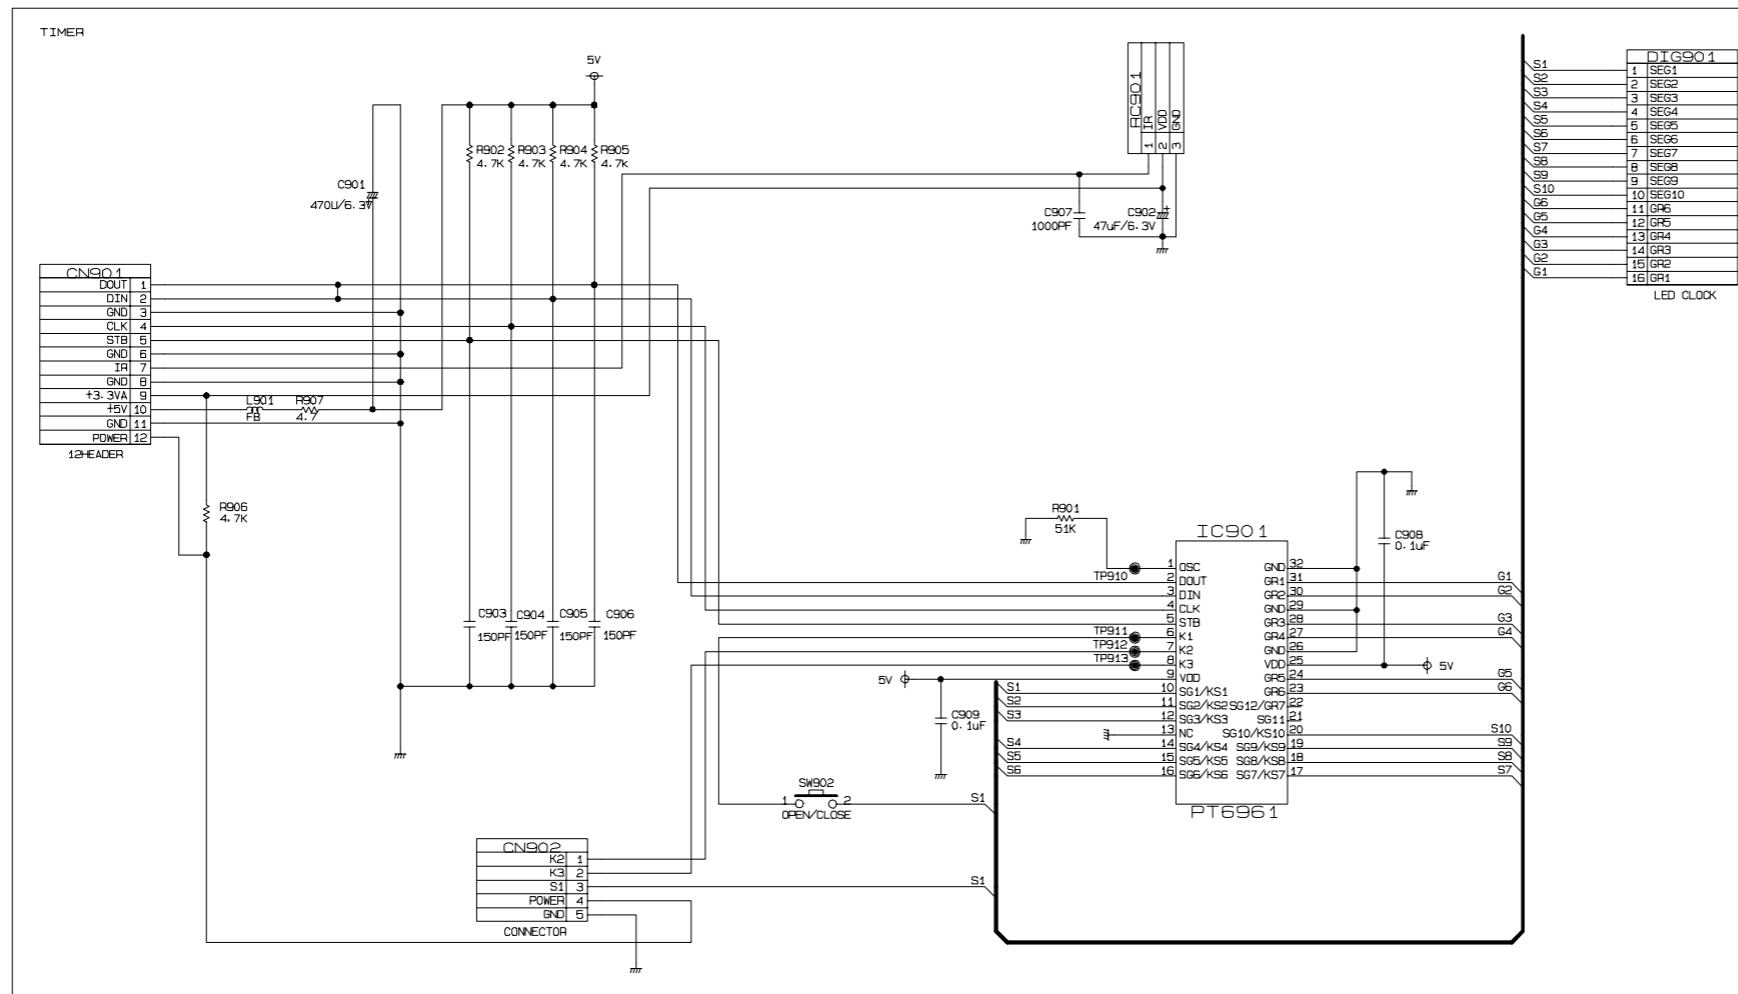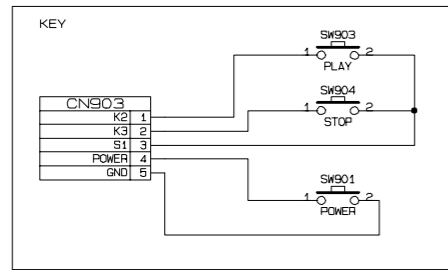


Pin	Label
S1	DIG901
S2	SEG1
S3	SEG2
S4	SEG3
S5	SEG4
S6	SEG5
S7	SEG6
S8	SEG7
S9	SEG8
S10	SEG9
S11	SEG10
G6	GR6
G5	GR5
G4	GR4
G3	GR3
G2	GR2
G1	GR1

LED CLOCK

DESIGN SCHEMATIC TIMER (ZHANG YU)
 DV9000' S MTK1389C 2004/10/5
 3854R16005A (1. 12)


6. 5.1CH(OPIONAL PART) & KARAOKE(KARAOKE MODEL ONLY) CIRCUIT DIAGRAM

12
11
10
9
8
7
6
5
4
3
2
1

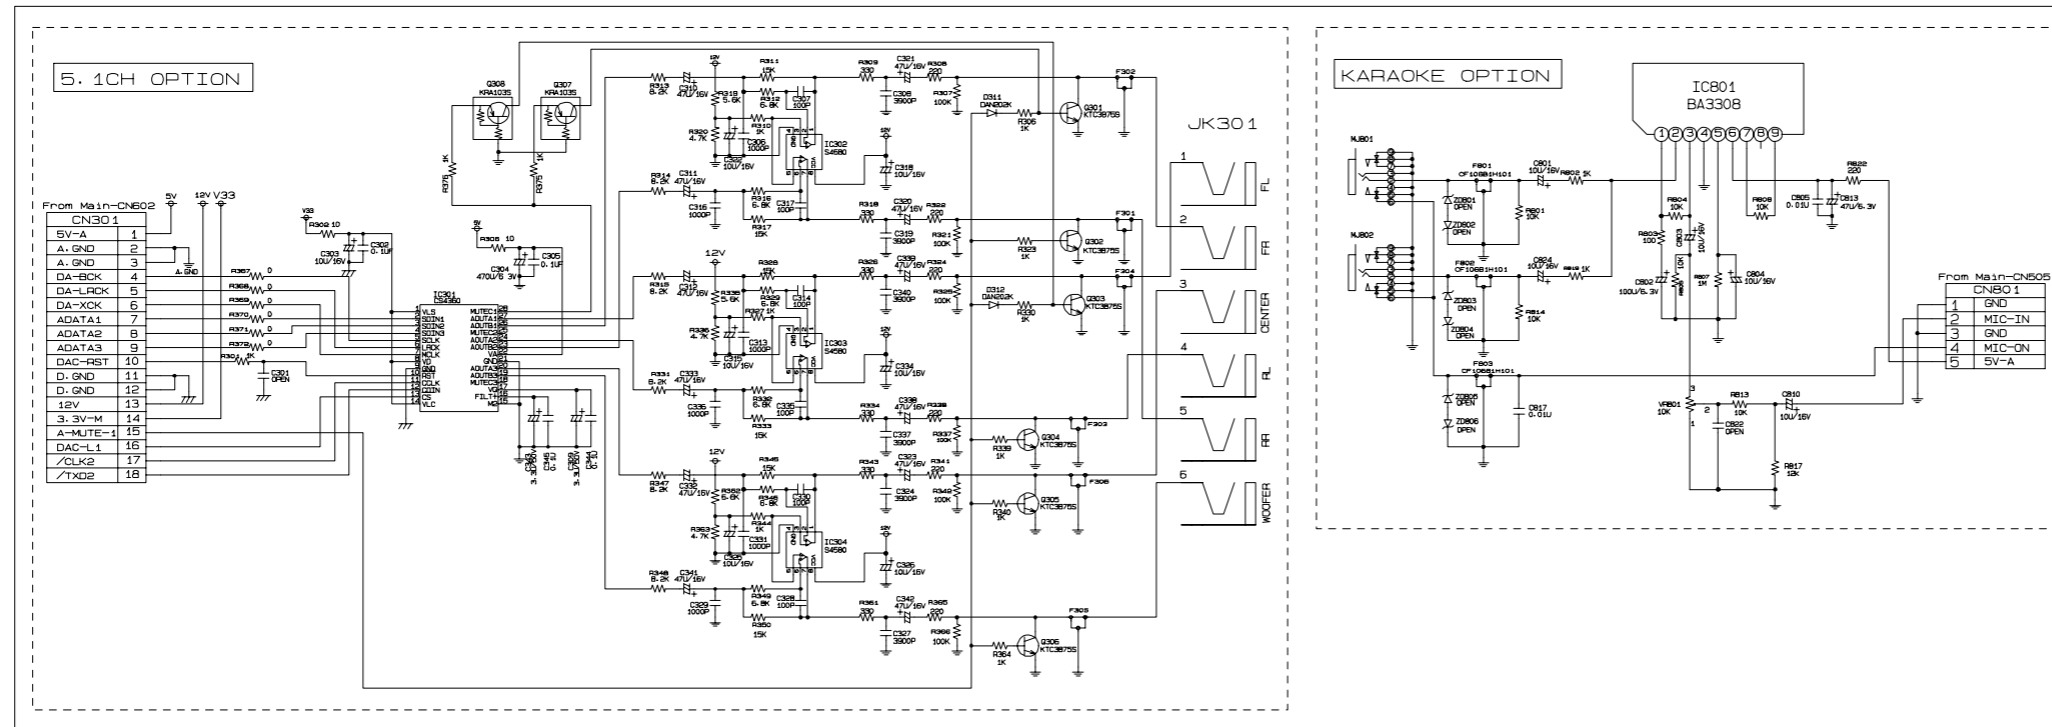

DESIGN SCHMATIC KARAOKE 5.1CH
DV9000'S MTK1389C 2004/B/28
3B54R1600BA(1.08)

7. SCART CIRCUIt DIAGRAM

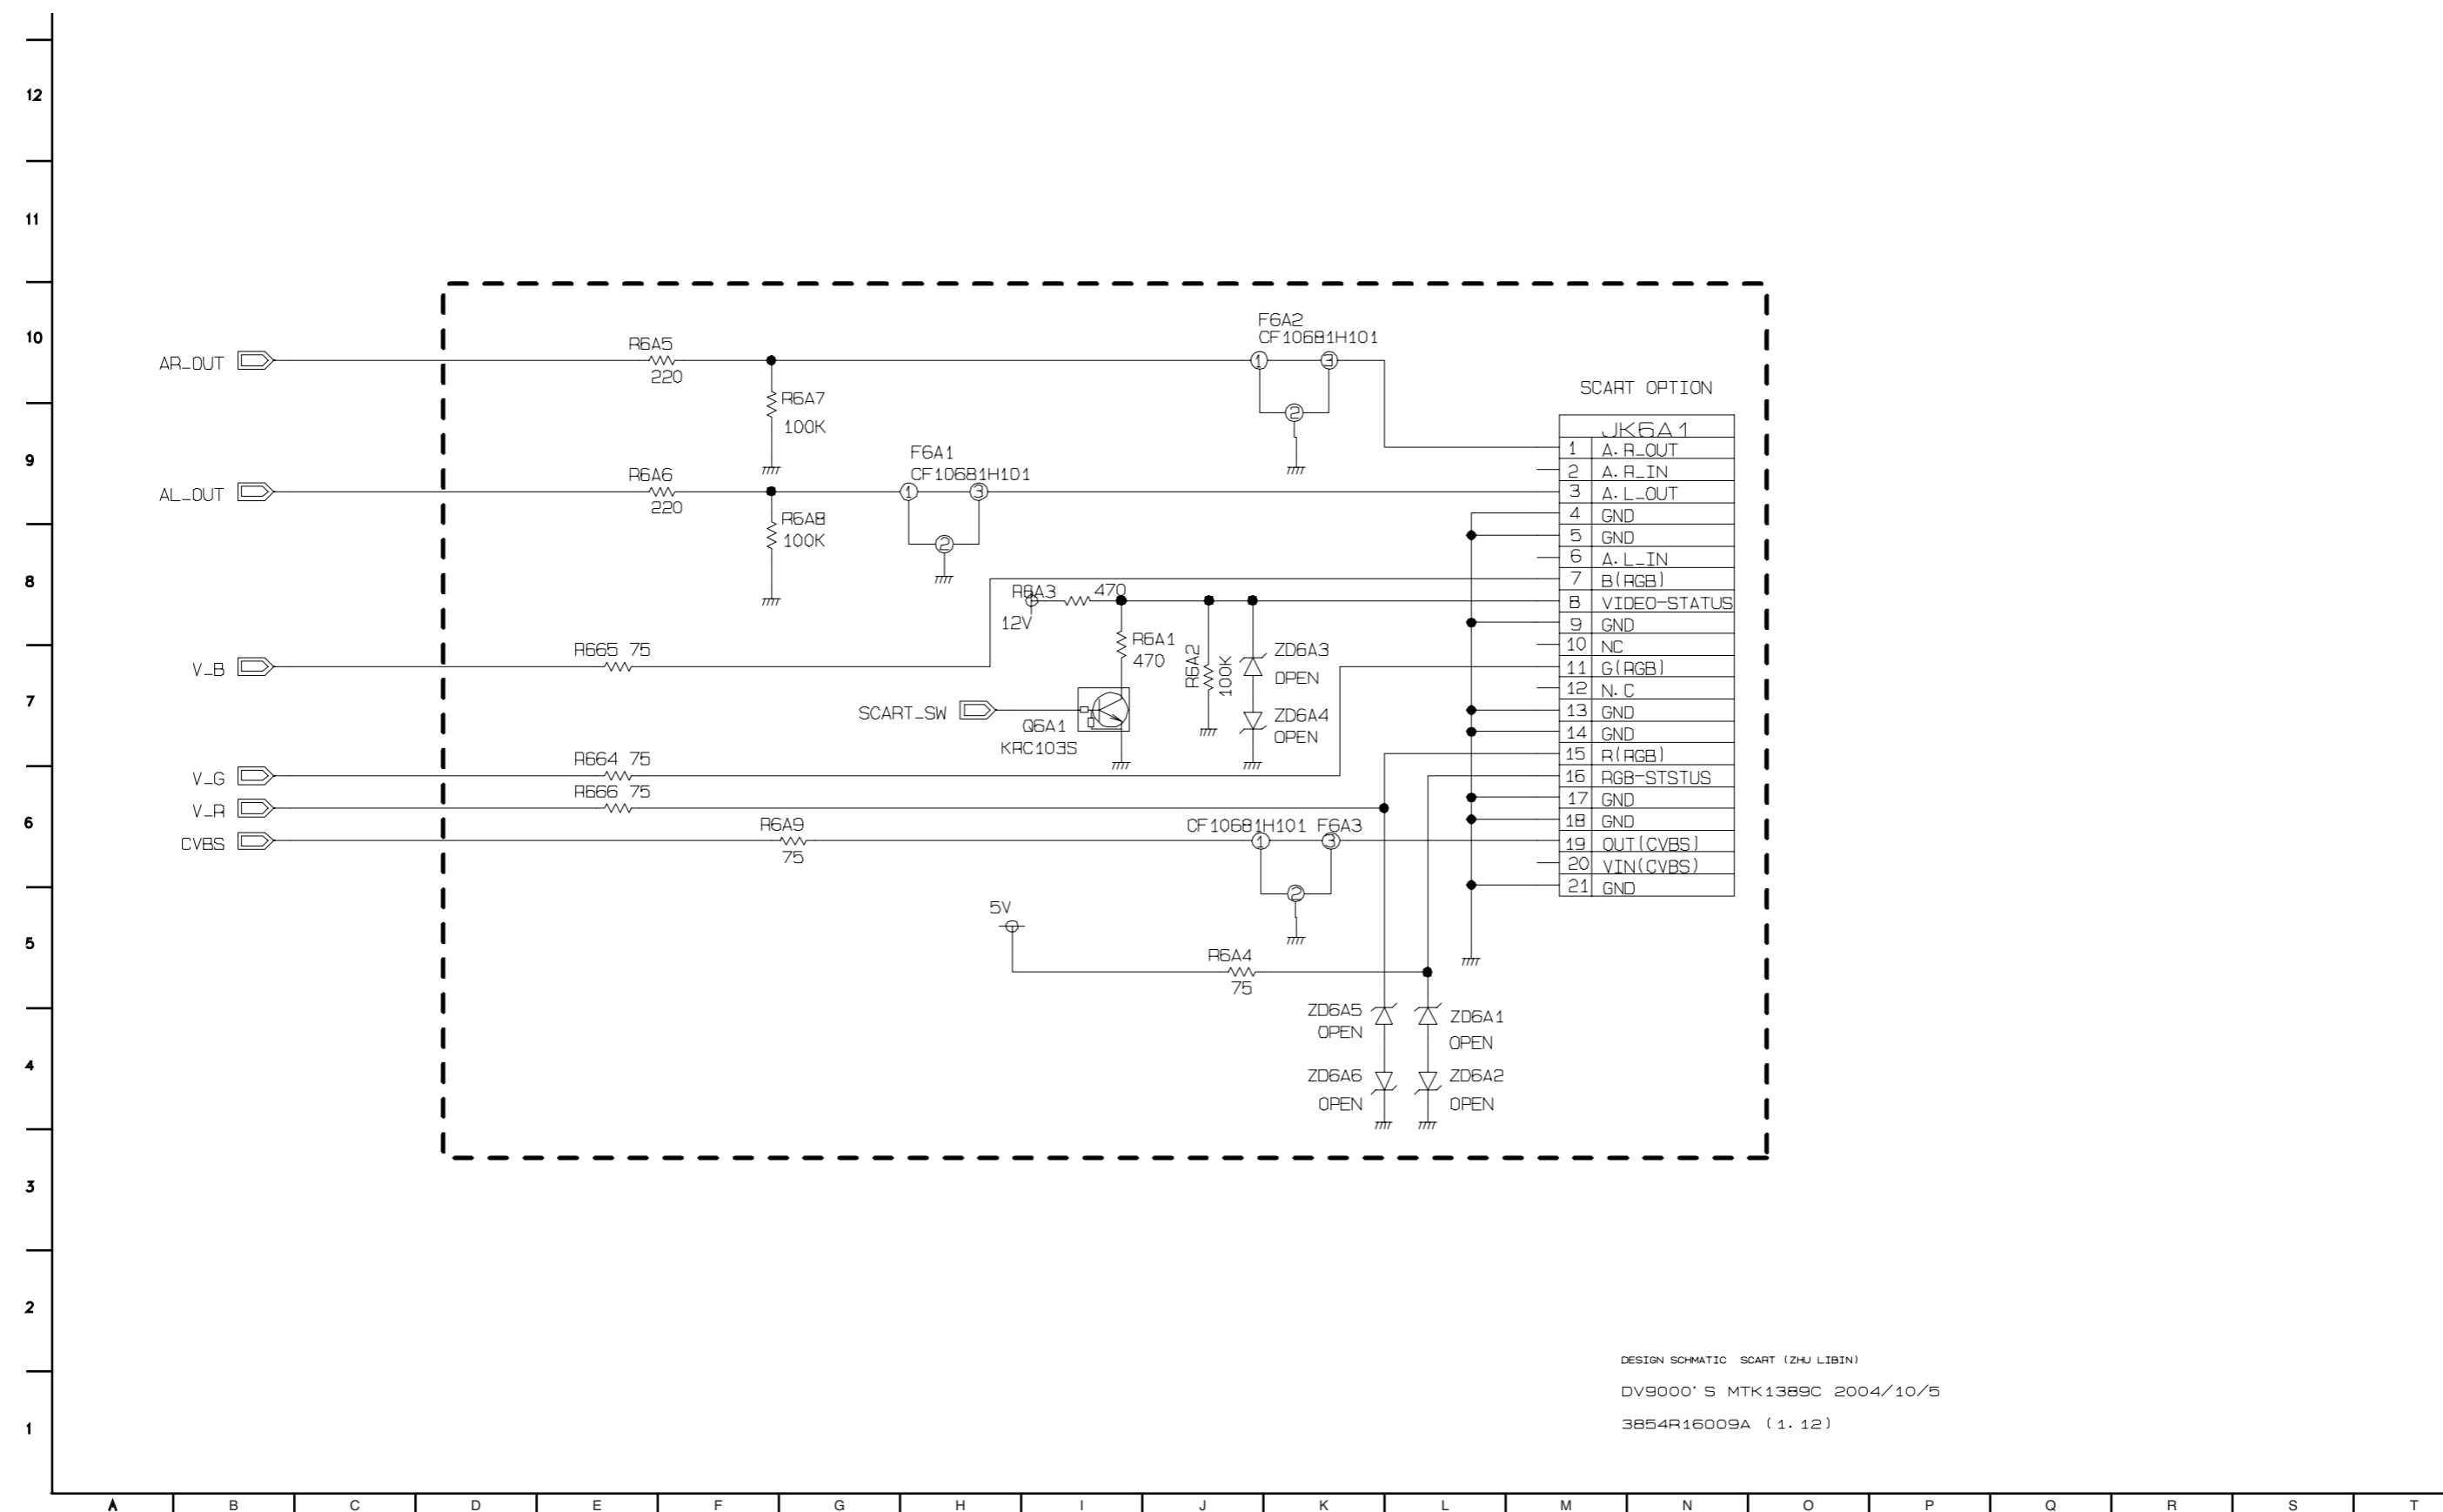

DESIGN SCHEMATIC SCART (ZHU LIBIN)
 DV9000'S MTK1389C 2004/10/5
 3854R16009A (1.12)

• CIRCUI T VOLTAGE CHART

MODE PIN NO.	STOP	PLAY
IC201(9005)		
1	0	0
2	0	0
3	5.01	5.04
4	5.52	5.55
5	1.8	1.76
6	1.42	1.42
7	5.52	5.55
8	5.52	5.54
9	0	0
10	0	0
11	2.65	2.69
12	2.61	2.63
13	1.2	1.46
14	4.08	3.85
15	2.66	2.69
16	2.66	2.68
17	2.68	2.71
18	2.63	2.66
19	0	0
20	5.53	5.56
21	3.29	3.29
22	1.43	1.43
23	1.43	1.43
24	1.43	1.43
25	1.42	1.43
26	1.43	1.43
27	1.43	1.43
28	1.43	1.43
IC501		
1	0	0
2	1.73	0
3	1.73	1.73
4	1.73	1.73
5	1.73	1.73
6	1.75	1.73
7	2.15	1.74
8	2.2	2.21
9	2.18	2.18
10	2.16	0
11	2.14	2.14
12	1.74	1
13	1.04	1
14	1.03	1
15	0.12	1
16	0.13	0
17	0.12	1
18	0.13	2.05
19	2.05	0
20	2.05	0
21	2.05	0
22	2.38	0
23	3.29	0
24	3.3	3.3
25	0.21	1

MODE PIN NO.	STOP	PLAY
26	2.34	0
27	0	0
28	2.8	2.8
29	2	0
30	1.4	0
31	1.52	0
32	1.38	0
33	1.38	0
34	2.62	0
35	2.62	2.73
36	2.25	0
37	2.2	2.11
38	1.37	1.36
38	0	0
40	1.4	0
41	1.43	0
42	1.4	141
43	0	0
44	0	0
45	0	0
46	3.3	3.3
47	2.64	0
48	3.32	0
49	0.01	0
50	3.3	0
51	0	0
52	1.76	1.8
53	2.13	0
54	2.14	2.12
55	2.13	1.74
56	1.81	1.34
57	2.12	0
58	1.83	1.52
59	0	1.63
60	0	2.99
61	0	0
62	0	0
63	0	2.05
64	0	0
65	3.3	3.3
66	3.3	3.32
67	1.29	0
68	2.36	0.32
69	0	0.37
70	0.56	0.46
71	0	3.2
72	1.27	1.42
73	3.3	3.3
74	2.23	1.93
75	1.39	0
76	0	0
77	0	0
78	2.06	0
79	0	0
80	3.3	3.3

MODE PIN NO.	STOP	PLAY
81	1.2	1.07
82	0	0.82
83	1.17	0.77
84	0.64	0.54
85	0	0
86	1.44	0.53
87	1.65	1.77
88	1.4	1.53
89	0	0
90	1.21	1.2
91	1.02	1.03
92	0	0
93	2.06	1.93
94	0	0
95	3	2.74
96	3.28	3.25
97	1.8	1.8
98	3	2.7
99	3	2.7
100	2.97	2.67
101	0	2.68
102	3.33	3.32
103	3.33	3.32
104	3	2.7
105	5.18	5.18
106	3.32	3.31
107	2.76	2.75
108	3.3	3.3
109	0	0
110	5.2	5.2
111	2.67	2.92
112	3.14	3.18
113	2.28	1.6
114	0	0
115	1.06	0.85
116	0	0
117	1.04	1.09
118	1.28	0.94
119	0	0
120	1.18	1.65
121	1.36	1.7
122	1.8	1.75
123	1.26	1.51
124	1.23	1.4
125	1.28	1.16
126	0	0.86
127	3.3	3.3
128	2.35	1.28
129	1.8	1.05
130	0	1.1
131	1.39	1.25
132	1.37	1.27
133	1.31	1.3
134	0	0
135	1.33	1.37

MODE PIN NO.	STOP	PLAY
136	3.3	3.3
137	2.63	1.65
138	3.27	3.1
139	3	2.63
140	3.2	3.1
141	3.3	3.3
142	2.9	2.38
143	1.59	1.7
144	0	0
145	1.38	1.55
146	0.07	0
147	0.31	0.78
148	0	0
149	1.51	1.95
150	1.49	1.93
151	1.49	1.62
152	1.8	1.75
153	0	0
154	0	0
155	3.3	3.3
156	1.72	1.72
157	0.92	2.29
158	0	0
159	0	0
160	0	0
161	0	0
162	1.56	1.4
163	0	0
164	2.36	1.54
165	2.32	1.61
166	1.49	1.61
167	3.3	3.3
168	3.25	3.24
169	3.3	3.27
170	0	0
171	0	0
172	0	0
173	1.8	1.8
174	3.33	3.3
175	0	0
176	2.73	2.73
177	0	0
178	3.32	3.32
179	2.75	0
180	0	0
181	0	0
182	3.3	3.3
183	0	0
184	0	0
185	0	0
186	0	0
187	0	0
188	0	0
189	3.3	3.3
190	1.24	1.24

MODE PIN NO.	STOP	PLAY
191	1.25	1.24
192	2.26	2.25
193	0	0
194	0.46	0.47
195	3.3	3.3
196	0.7	0.7
197	0	0
198	3.28	3.29
199	3.3	3.3
200	0.42	0.43
201	0	0
202	0.57	0.38
203	0	0.42
204	3.3	3.3
205	0.25	2.62
206	2.72	2.64
207	2.71	2.63
208	0	0
209	0	0
210	0	0
211	0.1	3.3
212	3.3	3.3
213	1.31	1.66
214	1.67	1.64
215	1.58	1.57
216	0	0
217	0	1.24
218	0	1.1
219	0	0
220	0	0
221	1.76	1.76
222	0	1.24
223	0	0
224	0	0
225	1.66	1.65
226	0	0
227	1.8	1.76
228	3.3	3.3
229	3.3	3.3
230	0.85	0.86
231	0.81	0.82
232	0	0
233	0.83	0.89
234	3.19	3.18
235	1.74	1.72
236	1.71	1.71
237	1.71	1.71
238	1.72	1.75
239	3.19	3.18
240	0	0
241	0	0
242	0	0
243	0	0
244	3.19	3.19
245	1.55	1.55


MODE PIN NO.	STOP	PLAY
246	1.39	1.39
247	1.45	1.44
248	1.93	1.94
249	0	0
250	0	0
251	0	0
252	1.75	1.75
253	1.71	1.71
254	1.37	1.37
255	0.94	0.94
256	3.3	3.3
IC502 (MX29LV160-70)		
1	3.2	3.17
2	0	3.17
3	3.2	3.17
4	3.2	0.97
5	3.2	3.16
6	3.2	3.16
7	0	3.16
8	0	3.16
9	0	3.16
10	0	1.02
11	3.2	3.16
12	5.25	5.25
13	0	2.73
14	1.54	3.19
15	1.33	1.71
16	3.2	2.43
17	3.2	3.17
18	3.2	3.16
19	1.7	3.17
20	2.2	3.17
21	0	3.17
22	0	3.17
23	0	0
24	0	0
25	0	0
26	0	0
27	0	0
28	3.2	3.17
29	3.2	3.17
30	0	0
32	0	0
33	0	0
34	0	0
35	3.2	0
36	0	0
37	3.2	3.23
38	3.26	0
39	3.2	3.17
40	0	0
41	3.2	3.17
42	0	0
43	0	3.17
44	0	0

MODE PIN NO.	STOP	PLAY
45	0	0
46	0	0
47	0	0
48	3.2	3.17
IC503 (M12L64164A)		
1	3.25	3.23
2	2.85	2.86
3	3.25	3.22
4	2.87	2.87
5	2.85	2.5
6	0	0
7	2.81	2.1
8	2.9	2.04
9	3.25	3.22
10	2.85	2.1
11	2.87	2.91
12	1.9	0
13	2.8	
14	3.25	3.22
15	0	0
16	3.18	3.1
17	3.07	2.58
18	3.14	0.61
19	2.95	2.97
20	2.9	2.96
21	2.6	0.32
22	2.81	2.83
23	0.05	0.06
24	0.16	0.18
25	0.16	0.18
26	0.16	0.17
27	3.26	3.24
28	0	0.59
29	0.16	0.17
30	0.15	0.53
31	0.16	0.53
32	0.12	0.5
33	0.05	0.16
34	0.05	0.17
35	0.04	0.5
36	2.85	0.08
37	3.26	3.236
38	1.79	1.78
39	0	0
40	2.7	0.1
41	2.7	0
42	2.9	2
43	3.26	3.23
44	2.92	1.95
45	2.92	2.01
46	0	0
47	2.92	2.03
48	2.94	2.17
49	3.26	3.23
50	2.91	2

MODE PIN NO.	STOP	PLAY
51	2.94	2
52	0	0
53	2.9	1.85
54	0	0
IC601		
1	0	1.23
2	1.65	1.64
3	1.65	1.65
4	1.64	1.63
5	2.37	2.382
6	4.7	4.69
7	2.4	2.39
8	0	0
9	4.79	1.91
10	2.38	1.72
IC604(MM1623)		
1	5.17	5.16
2	2.52	2.47
3	5.17	5.16
4	1.36	1.27
5	0	0
6	1.68	1.55
7	0	0
8	2.52	2.51
9	0	0
10	1.68	1.53
11	0	0
12	2.49	2.47
13	5.17	5.16

PRINTED CIRCUIT DIAGRAMS

1. MAIN P.C.BOARD

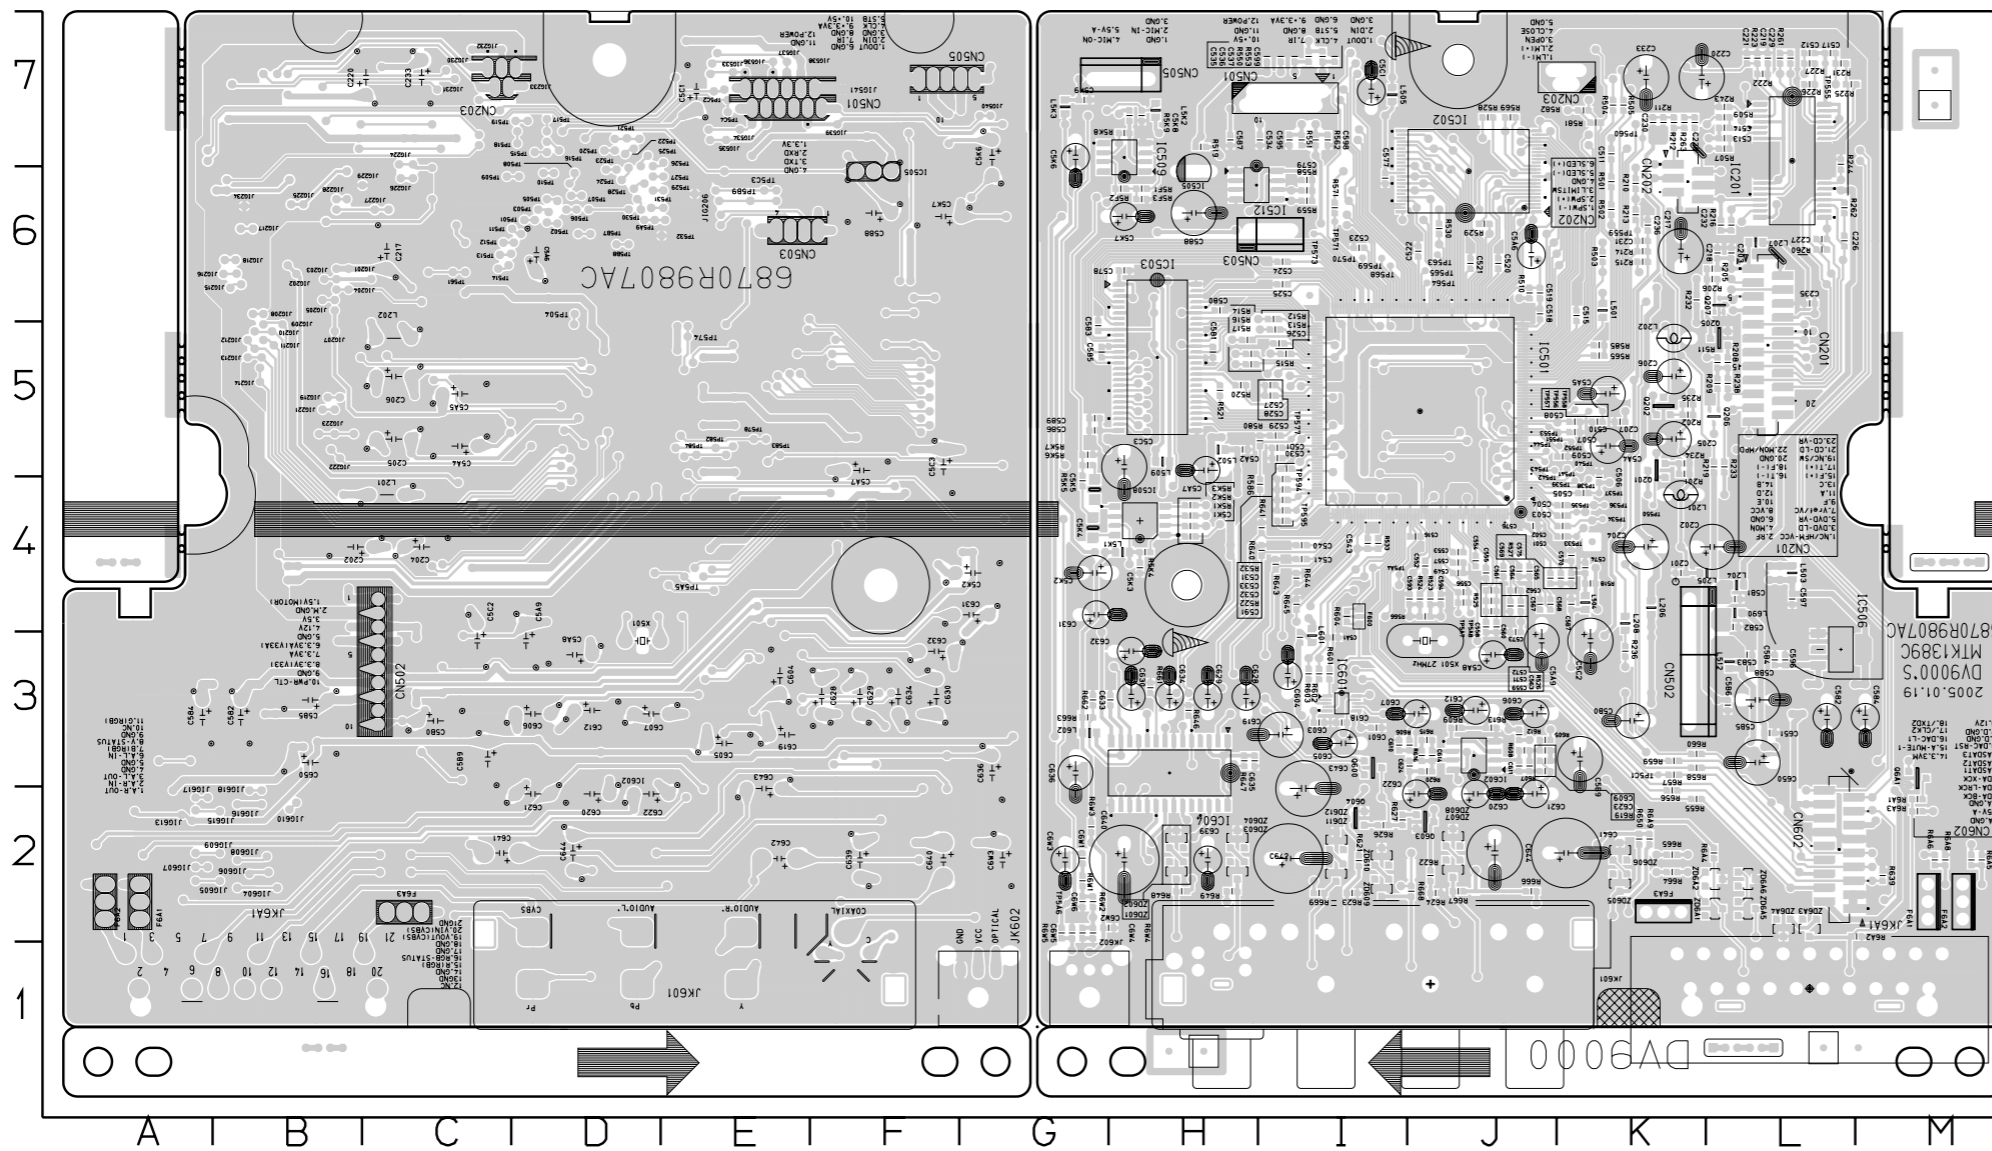


LOCATION GUIDE

J1G201	J1G015	C201	K4	C529	I5	C591	I4	C618	I3	IC512	H6	R222	L7	R553	I7	R643	I4	TP551	K5		
J1G202	J1G016	B2	C202	L4	C530	I5	C592	I4	C619	I3	IC601	I3	R223	L7	R554	I6	R644	I4	TP552	K5	
J1G203	J1G017	A2	C203	L6	C531	I4	C593	I4	C620	J2	IC602	J3	R225	L7	R559	I6	R645	I4	TP553	J5	
J1G204	J1G018	B2	C204	K4	C532	I4	C595	I7	C621	J2	IC604	H3	R226	L7	R562	I7	R646	H3	TP555	L7	
J1G205	TP501	D6	C205	K5	C533	I4	C596	L3	C622	J2	JK601	J1	R227	L7	R565	K5	R647	H3	TP556	K5	
J1G206	E1	TP502	D6	C206	K5	C534	I7	C597	L4	C623	J3	JK602	G1	R228	L7	R566	J4	R648	H2	TP557	K5
J1G207	TP503	D6	C207	K5	C535	I7	C598	I7	C624	J3	JK601	L1	R232	K6	R569	J7	R649	H2	TP558	K5	
J1G208	TP504	D6	C217	K6	C536	I7	C599	I7	C628	H3	L201	K4	R233	L5	R571	I6	R650	K2	TP559	K6	
J1G209	TP505	D6	C218	L6	C537	I7	C5A1	I3	C629	H3	L202	K5	R234	K5	R580	I5	R655	K2	TP560	K7	
J1G210	TP506	D6	C219	L7	C540	I4	C5A2	H5	C630	H3	L204	L4	R235	K5	R581	K7	R656	K2	TP563	J6	
J1G211	TP507	D6	C220	K7	C541	I4	C5A4	K5	C631	G4	L205	L4	R236	K5	R582	K7	R657	K3	TP564	J6	
J1G212	TP508	D6	C221	L7	C543	I4	C5A5	K5	C632	H3	L206	K4	R238	L5	R585	K5	R658	K3	TP565	J6	
J1G213	TP509	D6	C226	L6	C549	J4	C5A6	J6	C633	H3	L207	L6	R243	L7	R586	I4	R659	K3	TP568	I6	
J1G214	TP510	D6	C227	L6	C552	J4	C5A7	H5	C634	H3	L208	K4	R244	L7	R5F1	H6	R660	K3	TP569	I6	
J1G215	TP511	D6	C228	K7	C553	J4	C5A8	J3	C635	H3	L501	K6	R260	L6	R5F2	H6	R661	H3	TP570	I6	
J1G216	TP512	D6	C229	L7	C554	J4	C5A9	J3	C636	G3	L502	H5	R261	L7	R5F3	H6	R662	G3	TP571	I6	
J1G217	TP513	D6	C230	K7	C555	J4	C5B0	K3	C639	H2	L503	L4	R262	L6	R5K1	H4	R663	G3	TP573	I6	
J1G218	TP514	D6	C231	K6	C556	J4	C5B1	L4	C640	H2	L504	K4	R263	K7	R5K2	H4	R664	K2	TP577	I5	
J1G219	TP515	D6	C232	L1	C557	J4	C5B2	L4	C641	K2	L505	I7	R501	K6	R5K3	H4	R665	K2	TP594	I4	
J1G221	TP516	D7	C233	K7	C558	J4	C5B3	L3	C642	J2	L509	H5	R502	K6	R5K4	H4	R666	J2	TP595	I4	
J1G222	TP517	D7	C235	L1	C559	J4	C5B4	L3	C643	J2	L512	L3	R503	K6	R5K5	G4	R667	J2	TP5A4	I4	
J1G223	TP518	D7	C236	K6	C560	J4	C5B5	L3	C644	J2	L5K1	H4	R504	K7	R5K6	G5	R668	J2	TP5A6	G2	
J1G224	TP519	D7	C501	K4	C561	J4	C5B6	L3	C650	L3	L5K2	H7	R505	K7	R5K7	G5	R669	I2	TP5A7	J4	
J1G225	TP520	D7	C502	K4	C562	J4	C5B7	K4	C651	L3	L5K3	G7	R507	L7	R5K8	H7	R6A1	M2	TP5AB	J4	
J1G226	TP521	D7	C503	K4	C563	J4	C5B8	L3	C6W1	G2	L601	I3	R509	L7	R5K9	H7	R6A2	M2	TP5C1	K3	
J1G227	TP522	D7	C504	K4	C564	J4	C5B9	K3	C6W2	H2	L602	G3	R510	J6	R601	I3	R6A3	M2	TP5O1	J3	
J1G228	TP523	D6	C505	K4	C565	J4	C5C1	I5	C6W3	G2	L690	L4	R511	L5	R602	I3	R6A4	L2	TP5O1	H2	
J1G229	TP524	D6	C506	K4	C567	J4	C5C2	K3	C6W4	G2	Q201	K5	R512	I6	R603	I3	R6A5	M2	TP5O2	H2	
J1G230	TP525	D7	C507	K5	C568	J4	C5C3	H5	C6W5	G2	Q202	K5	R513	I5	R604	I4	R6A6	M2	TP5O3	H2	
J1G231	TP526	E6	C508	K5	C569	J4	C5C4	I5	C6W6	G2	Q205	L5	R514	I5	R605	J3	R6A7	M2	TP5O4	H2	
J1G232	TP527	E6	C509	K5	C570	K4	C5K1	H4	CN201	L5	Q206	L5	R515	I5	R606	J3	R6A8	M2	TP5O5	K2	
J1G233	TP528	D6	C510	K5	C571	J4	C5K2	G4	CN202	K6	Q207	L6	R516	H5	R607	J3	R6A9	K2	TP5O6	K2	
J1G234	TP529	E6	C511	K7	C572	J4	C5K3	K4	CN203	K7	Q600	I3	R517	H5	R608	J3	R6W1	G2	TP5O7	J2	
J1G235	TP530	D6	C512	L7	C573	J3	C5K4	G4	CN501	I7	Q603	J2	R518	H4	R609	J3	R6W2	G2	TP5O8	J2	
J1G237	TP531	E6	C513	L7	C574	K4	C5K5	G4	CN502	L4	Q604	I2	R519	H7	R610	I3	R6W3	G2	TP5O9	I2	
J1G238	TP532	E6	C514	L7	C575	K4	C5K6	G7	CN503	H6	Q6A1	M3	R520	H5	R612	J3	R6W4	G2	TP510	I2	
J1G239	TP533	E6	C515	K6	C576	J4	C5K7	H6	CN505	H7	R201	K5	R521	H5	R613	J3	R6W5	G2	TP511	I2	
J1G240	TP534	E7	C516	J4	C577	I6	C5K8	H7	CN902	L2	R202	K5	R522	I4	R615	I3	TP533	K4	TP512	L2	
J1G241	TP535	E7	C517	L7	C578	H6	C5K9	G7	F600	I4	R205	L6	R523	J4	R616	J3	TP534	K4	TP513	L2	
J1G242	TP536	E5	C518	J6	C579	I6	C601	I3	F6A1	M2	R206	L6	R524	J4	R619	J3	TP535	K4	TP514	L2	
J1G243	TP537	E5	C519	J6	C580	H6	C603	I3	F6A2	M2	R208	L5	R525	J4	R620	J3	TP536	K4	TP515	L2	
J1G244	TP538	E5	C520	J6	C581	H6	C604	I3	F6A3	K2	R209	L5	R526	J4	R621	J2	TP537	K4	TP516	L2	
J1G245	TP539	E4	C521	J6	C582	L3	C605	I3	IC201	L7	R210	K6	R527	K4	R622	J2	TP538	K4	TP517	L2	
J1G246	TP540	E5	C522	J6	C583	G5	C606	J3	IC501	J5	R211	K7	R528	J7	R623	I2	TP539	K4	TP518	L2	
J1G247	TP541	E5	C523	I6	C584	M3	C607	J3	IC502	J6	R212	K7	R529	J6	R624	J2	TP540	K5	TP519	L2	
J1G248	TP542	E5	C524	I6	C585	G5	C608	I3	IC503	H5	R213	K6	R530	J6	R626	I2	TP541	K5	TP520	L2	
J1G249	TP543	E5	C525	I6	C586	G5	C610	I3	IC505	H6	R214	K6	R532	I5	R627	I2	TP542	J5	TP521	L2	
J1G250	TP544	E5	C526	I6	C587	H7	C611	J3	IC506	L3	R215	K6	R533	I4	R629	M2	TP543	J5	TP522	L2	
J1G251	TP545	E5	C527	I5	C588	H6	C612	J3	IC508	H4	R216	L6	R550	I7	R640	I4	TP544	J5	TP523	L2	
J1G252	TP546	E5	C528	L7	C589	G5	C614	I3	IC509	H7	R219	L5	R551	I7	R641	I4	TP545	K4	TP524	L2	

2. KEY P.C.BOARD


(7 TOOL ONLY)

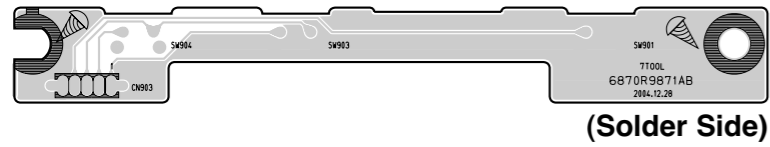


3. TIMER P.C.BOARD

(7 TOOL ONLY)


(TOP VIEW)

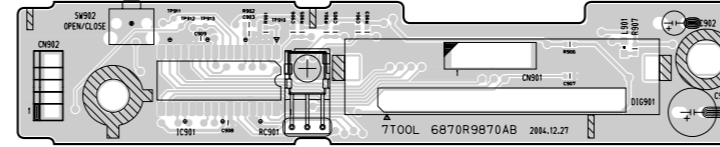

(BOTTOM VIEW)

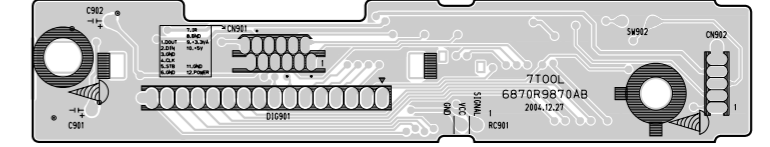


(8 TOOL ONLY)

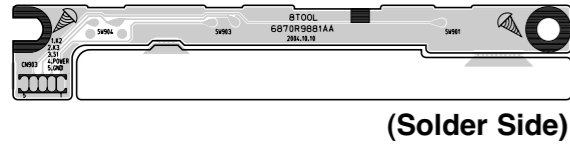


(8 TOOL ONLY)


(TOP VIEW)

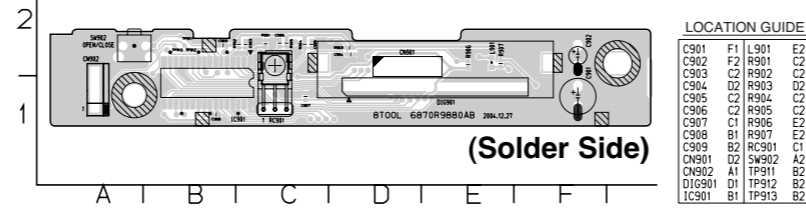

(BOTTOM VIEW)

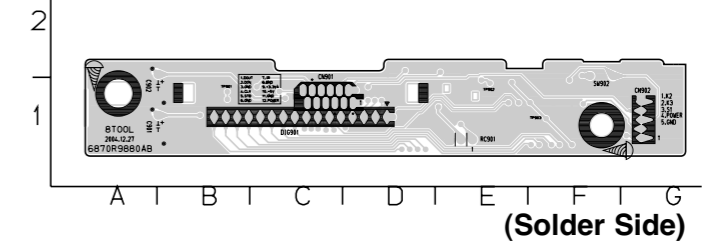


(9 TOOL ONLY)




(9 TOOL ONLY)


(TOP VIEW)

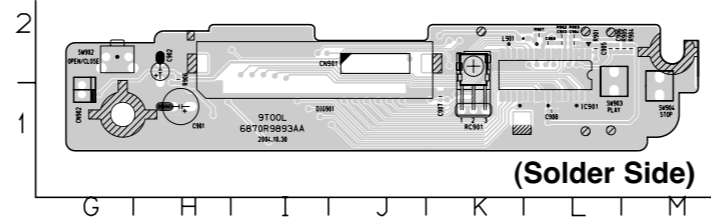

(BOTTOM VIEW)

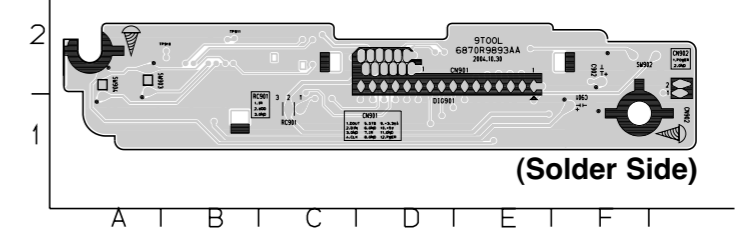

4. SMPS P.C.BOARD

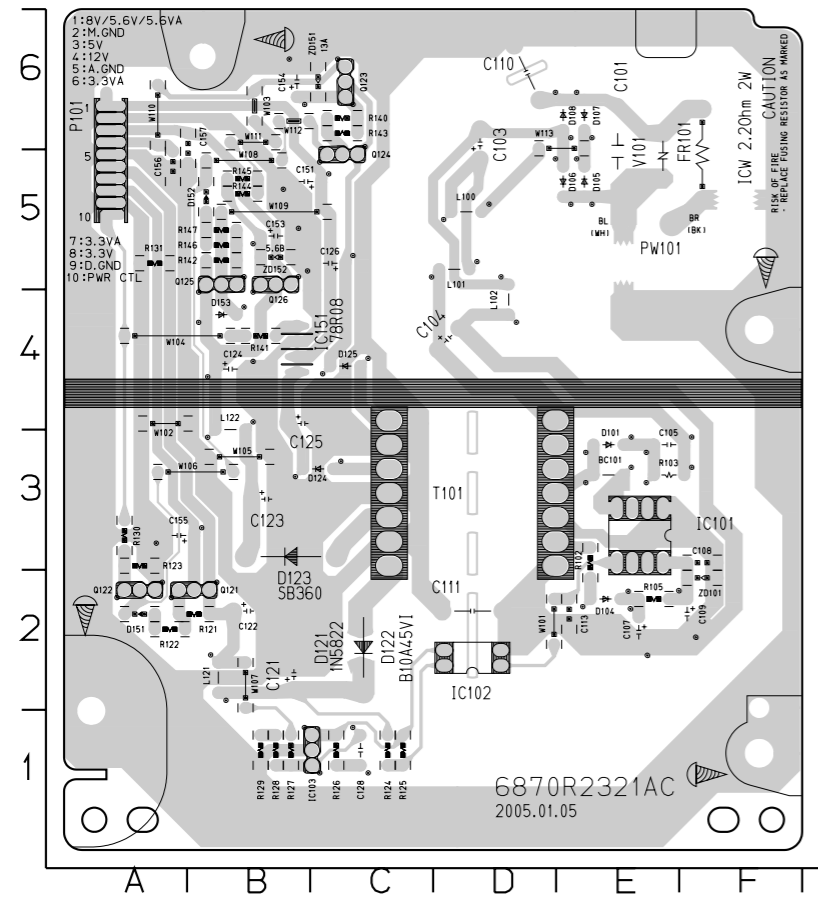


LOCATION GUIDE

BC101	E3	IC151	B4
C101	E5	L100	D5
C103	D6	L101	D5
C104	D4	L102	D4
C105	E3	L121	B2
C107	E2	L122	B3
C108	F3	P101	A6
C109	F2	PW101	E5
C110	D6	Q121	B2
C111	D2	Q122	A2
C113	E2	Q123	C6
C121	B2	Q124	C5
C122	B2	Q125	B5
C123	B3	Q126	B5
C124	B4	R102	E3
C125	B4	R103	E3
C126	C5	R105	E2
C128	C1	R121	B2
C151	B5	R122	A2
C153	B5	R123	A3
C154	B6	R124	C1
C155	A3	R125	C1
C156	A5	R126	C1
C157	B6	R127	B1
D101	E3	R128	B1
D104	E2	R129	B1
D105	E5	R130	A3
D106	E5	R131	A5
D107	E6	R140	C6
D108	E6	R141	B4
D121	C2	R142	B5
D122	C2	R143	C6
D123	B3	R144	B5
D124	C3	R145	B5
D125	C4	R146	B5
D151	A2	R147	B5
D152	B5	T101	D3
D153	B4	V101	E5
FR101	F5	ZD101	F2
IC101	E3	ZD151	C6
IC102	D2	ZD152	B5
IC103	C1		

(Solder Side)

5. 5.1CH & VGA P.C.BOARD(OPTIONAL PART)

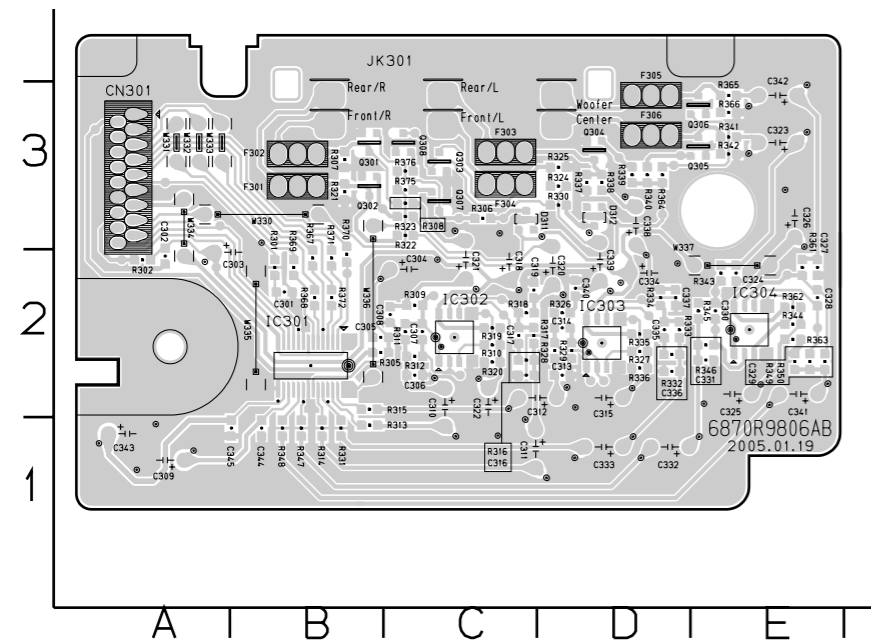


LOCATION GUIDE

C303	B2	C333	D1
C304	C2	C334	D2
C309	A1	C338	D3
C310	C2	C339	D2
C311	C1	C341	E2
C312	D2	C342	E3
C315	D2	C343	A1
C318	C2	CN301	A3
C320	D2	F301	B3
C321	C2	F302	B3
C322	C2	F303	C3
C323	E3	F304	C3
C325	E2	F305	D3
C326	E3	F306	D3
C332	D1	JK301	C4

(Solder Side)

6. KARAOKE P.C.BOARD


(7 TOOL ONLY)

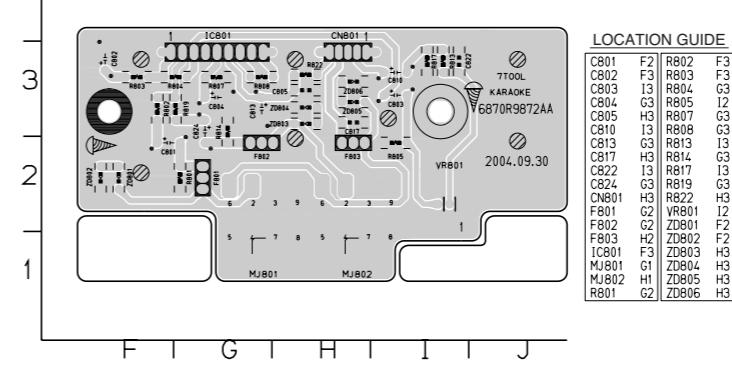

LOCATION GUIDE

C801	F2	R802	F3
C802	F3	R803	F3
C803	I3	R804	G3
C804	G3	R805	I2
C805	H3	R807	G3
C810	I3	R808	G3
C813	G3	R813	I3
C817	H3	R814	G3
C822	I3	R817	I3
C824	G3	R819	G3
CN801	H3	R822	H3
F801	G2	VR801	I2
F802	G2	ZD801	F2
F803	H2	ZD802	F2
IC801	F3	ZD803	H3
MJ801	G1	ZD804	H3
MJ802	H1	ZD805	H3
R801	G2	ZD806	H3


(8 TOOL ONLY)

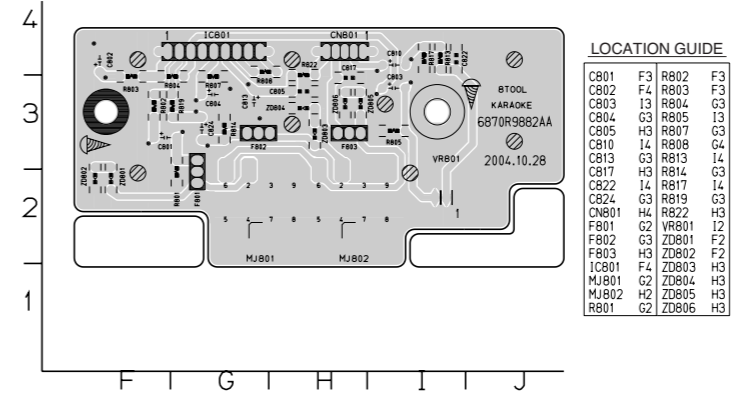

LOCATION GUIDE

C801	F3	R802	F3
C802	F4	R803	F3
C803	I3	R804	G3
C804	G3	R805	I3
C805	H3	R807	G3
C810	I4	R808	G4
C813	G3	R813	I4
C817	H3	R814	G3
C822	I4	R817	I4
C824	G3	R819	G3
CN801	H4	R822	H3
F801	G2	VR801	I2
F802	G3	ZD801	F2
F803	H3	ZD802	F2
IC801	F4	ZD803	H3
MJ801	G2	ZD804	H3
MJ802	H2	ZD805	H3
R801	G2	ZD806	H3

(9 TOOL ONLY)

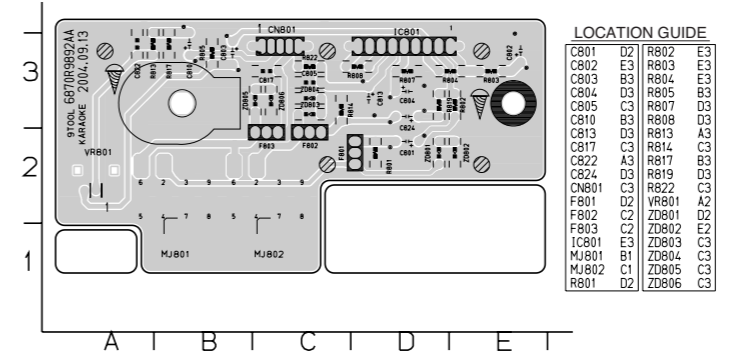

LOCATION GUIDE

C801	D2	R802	E3
C802	E3	R803	E3
C803	B3	R804	E3
C804	D3	R805	B3
C805	C3	R807	D3
C810	B3	R808	D3
C813	D3	R813	A3
C817	C3	R814	C3
C822	A3	R817	B3
C824	D3	R819	D3
CN801	C3	R822	C3
F801	D2	VR801	A2
F802	C2	ZD801	D2
F803	C2	ZD802	E2
IC801	E3	ZD803	C3
MJ801	B1	ZD804	C3
MJ802	C1	ZD805	C3
R801	D2	ZD806	C3

