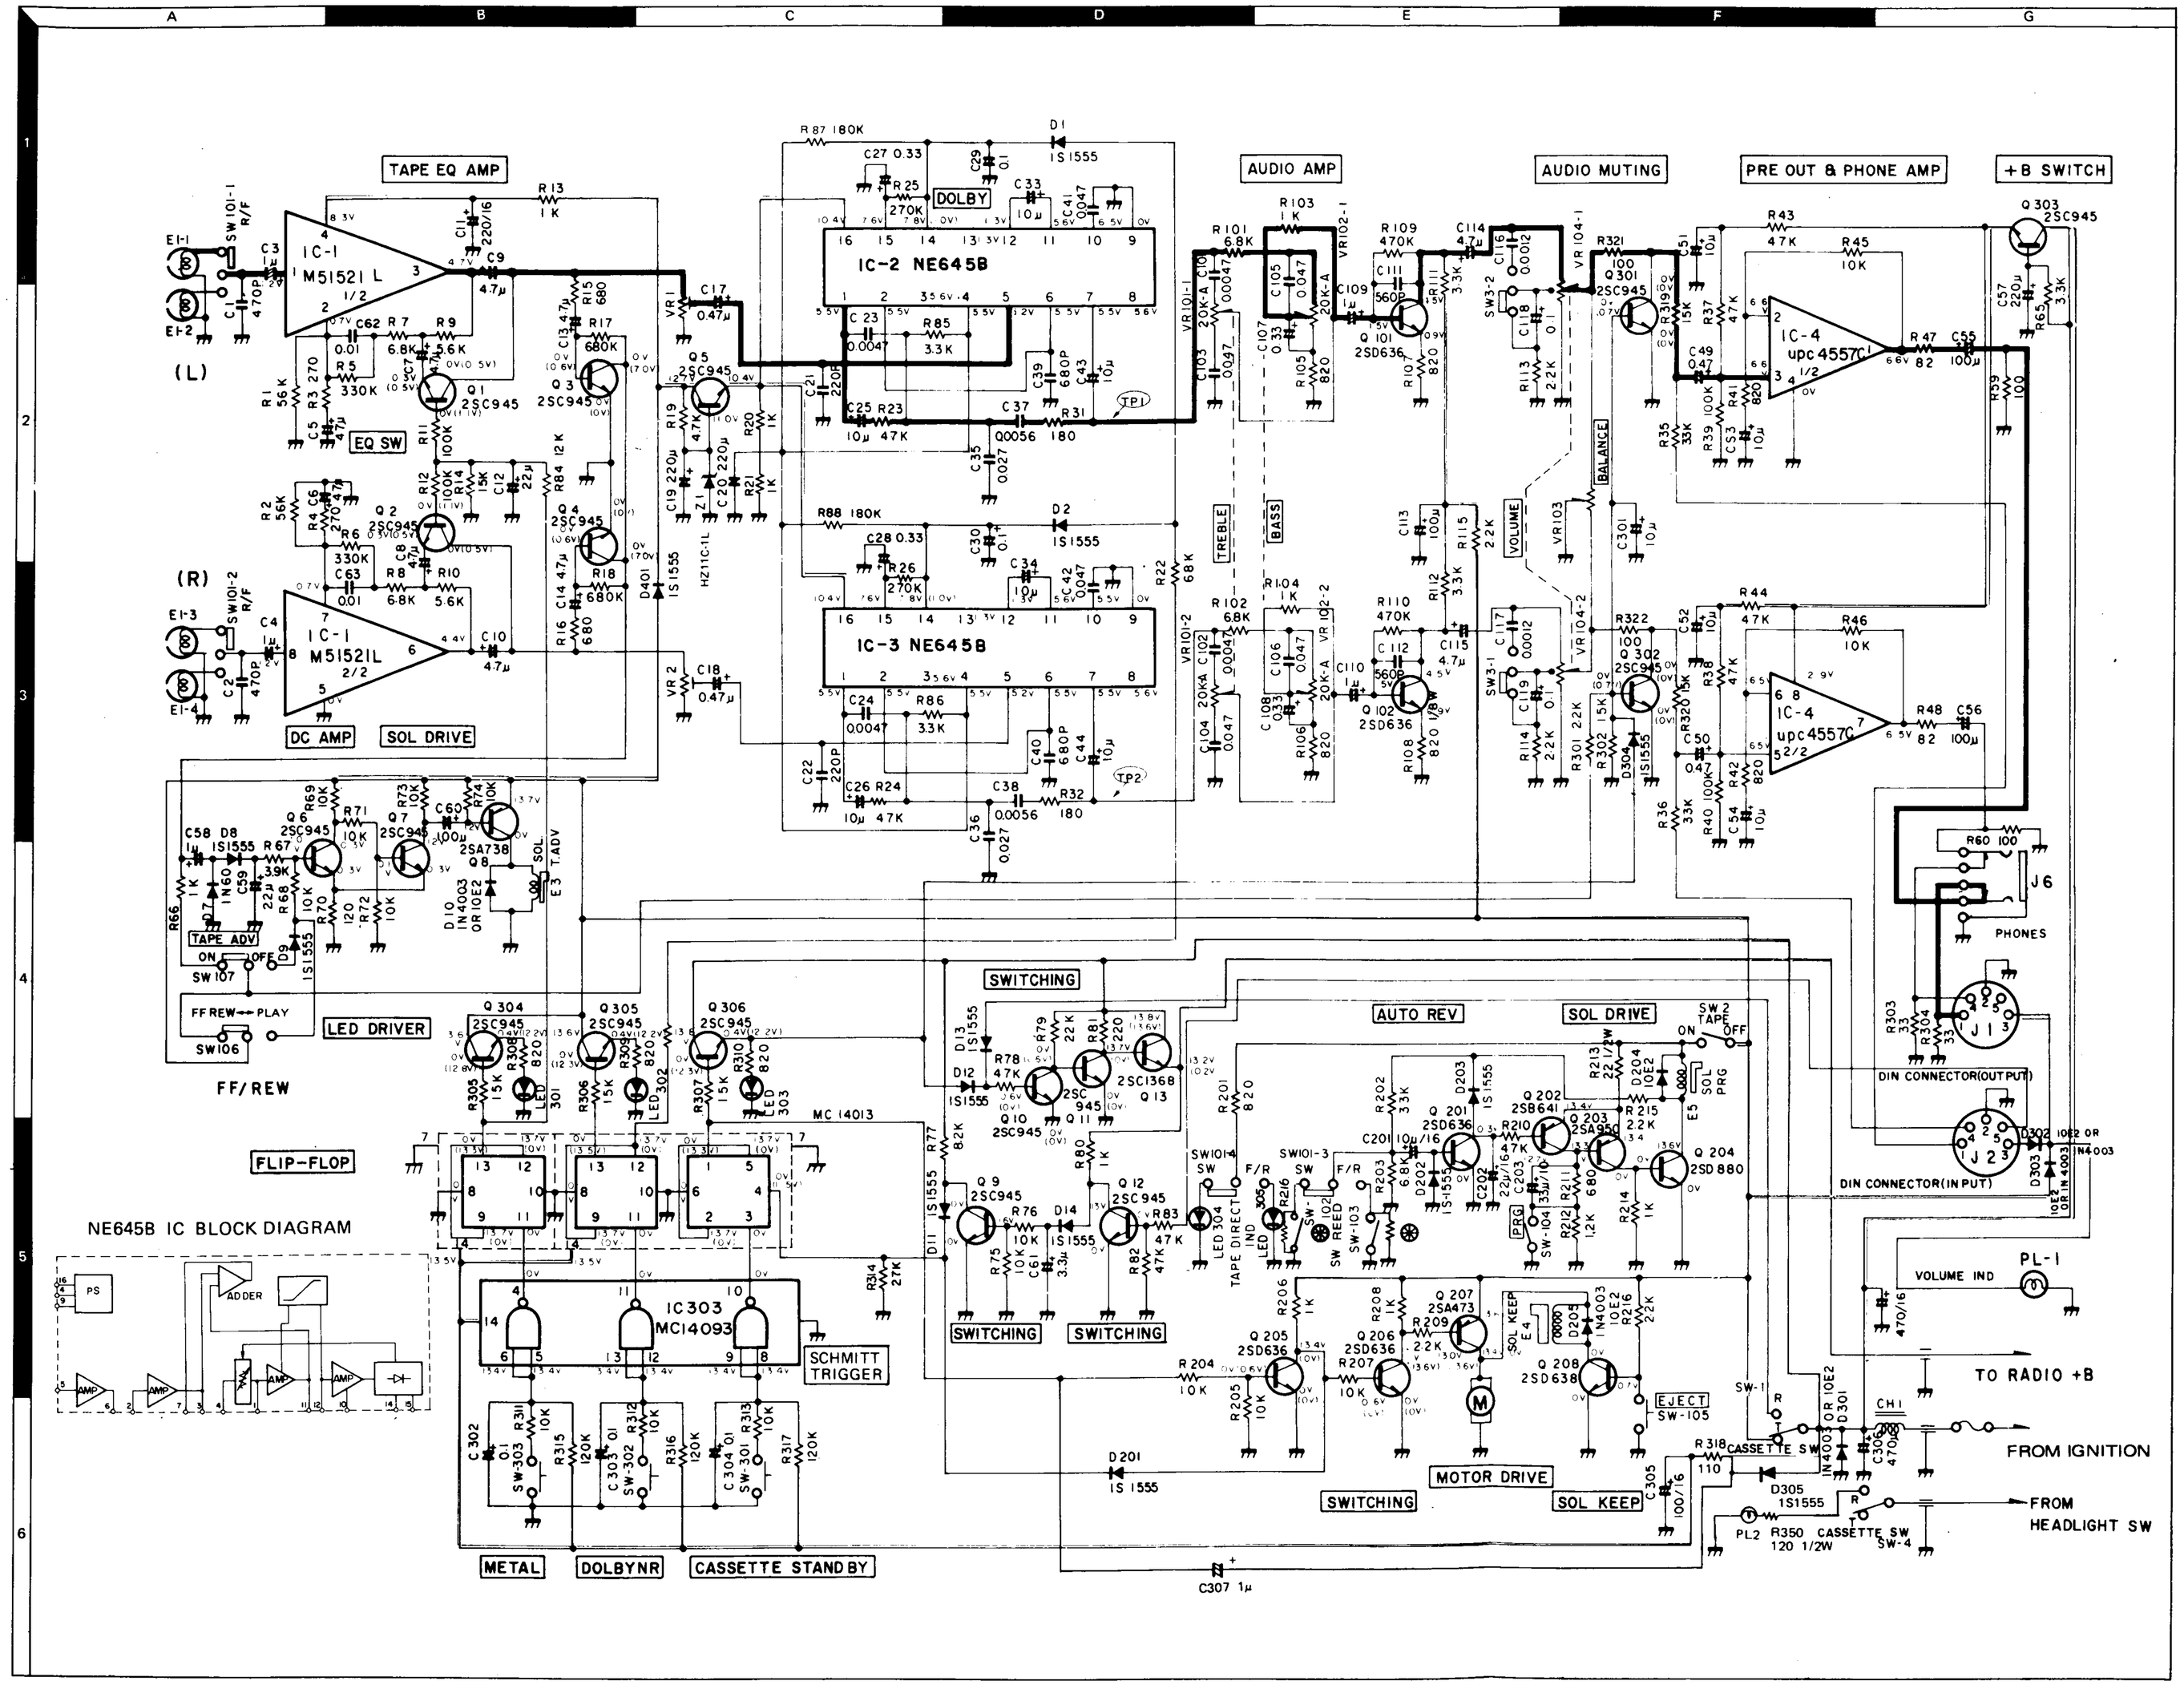

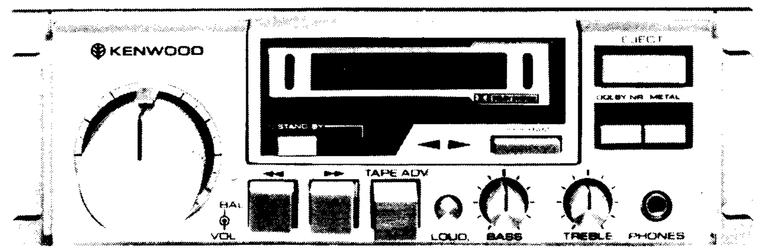

SPECIFICATIONS

Tape Speed	4.76 cm/s (1-7/8 ips) +3%, −1%
Wow and Flutter (WRMS)	0.12%
Signal to Noise Ratio (Weighted)	
Dolby ON	60 dB
Dolby OFF	52 dB
Frequency Response	30～16,000 Hz
FF and REW Time (C-60)	80 sec
Bass (100 Hz)	±10 dB
Treble (10 kHz)	±10 dB
Output Level/Impedance 250 nwb/m Reference Level	Max 300 mV/20Ω
Headphone Output Level (8Ω)	100 mV
Operating Voltage	DC 13.8V (11～16V allowable) Negative Ground
Dimentions (W×H×D)	170×54×165 mm (6-11/16″×2-1/8″×6-1/2″)
Body Size (W×H×D)	150×50×150 mm (5-15/16″×2″×5-15/16″)
Weight	1.5 kg (3.3 lbs)

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood strebt ständige Verbesserungen in der Entwicklung an Daher bleiben Änderrungen der technischen Daten Jederzeit vorbehalten.

Kenwood pousuit une politique de progrè constants en ce qui concerne le dévelopement. Pour cette raison les spécifications sont sujettes à modifications sans préavis.

2SA950
2SC509
2SC945



2SA473
2SD880



2SD636
2SD638
2SB641



2SA738



UPC4557C



M51521L



MC14013B
MC14093BCP



NE645B