KENWOOD®

CASSETTE DECK AMPLIFIER

KZC-657

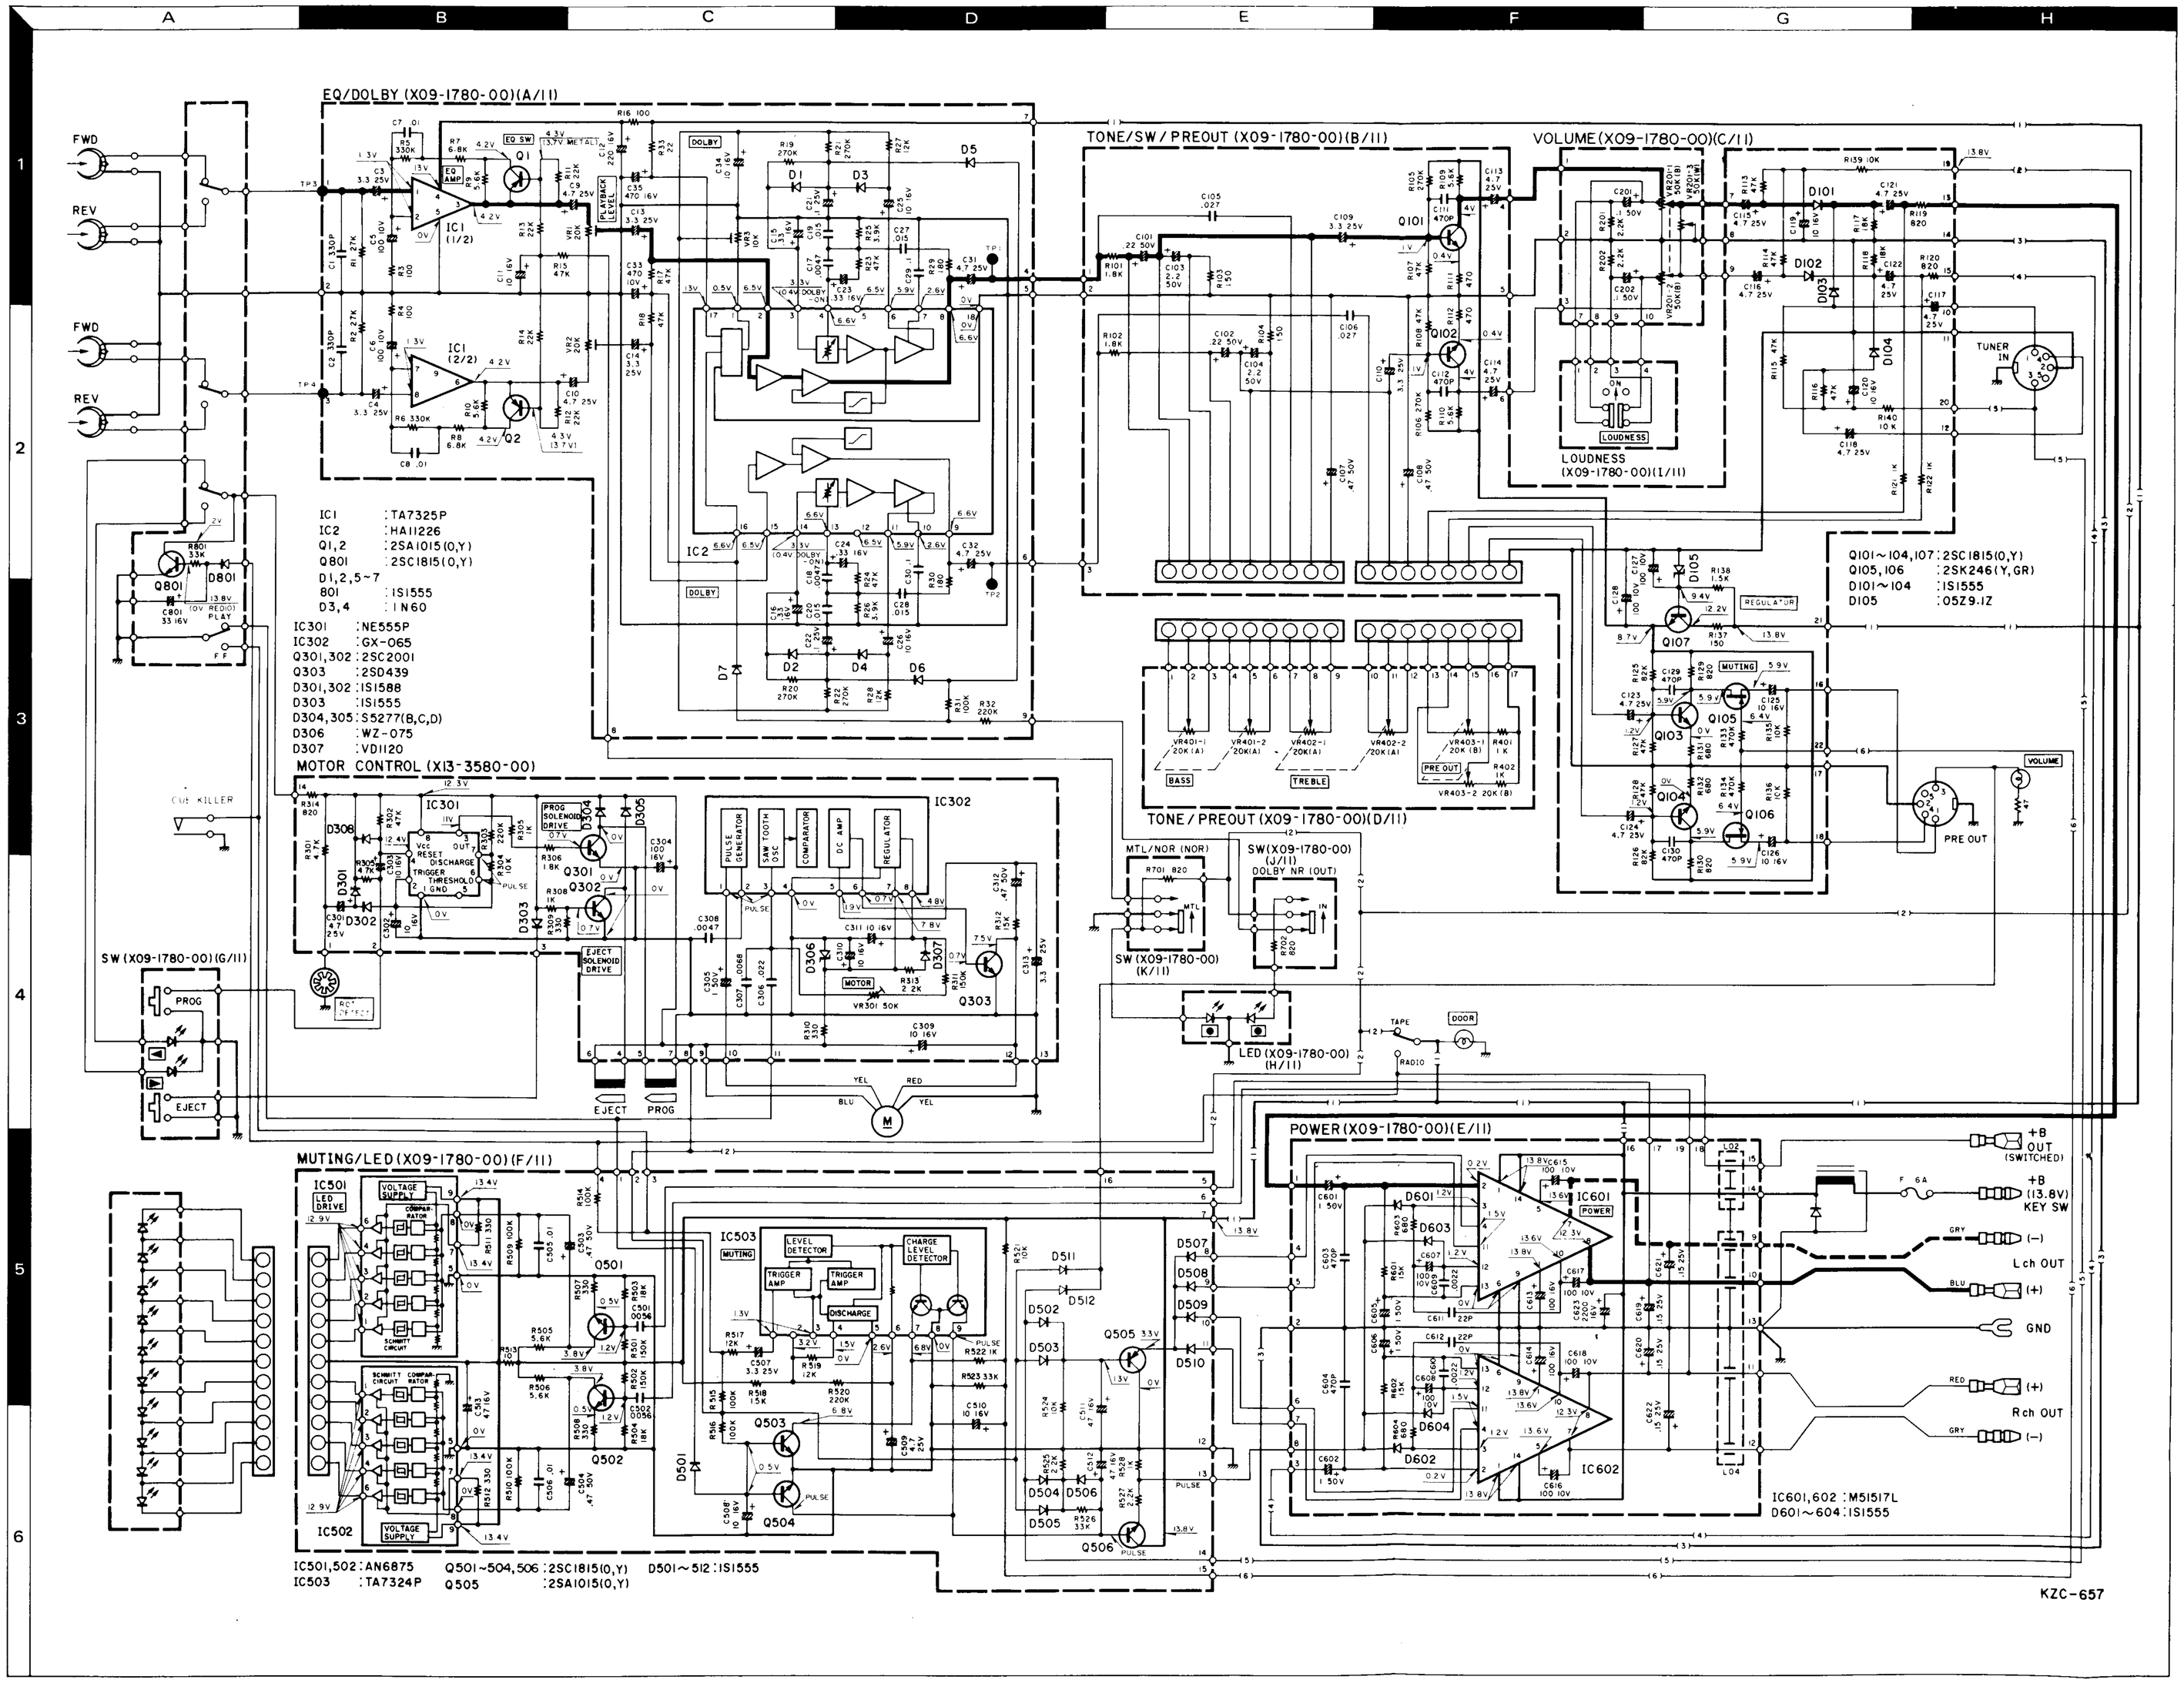

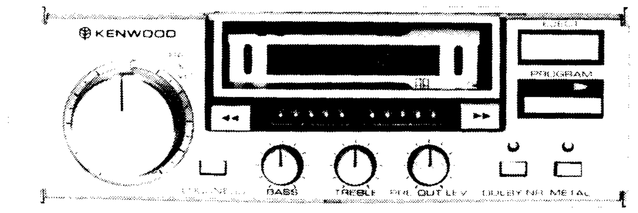

CASSETTE DECK SECTION

Tape Speed	4.76cm/sec. (1-7/8ips.)
Wow & Flutter	0.12% (WRMS)
Fast Winding Time (with C-60)	About 90 sec.
Signal to Noise Ratio	
(With Dolby)	60dB
(Without Dolby)	52dB
Frequency Response (−3dB)	30Hz ~ 16,000Hz

AUDIO SECTION

Tone Control	
Bass (100Hz)	±10dB
Treble (10kHz)	±10dB
Total Output Power	40W
Output Power per Channel	
10% THD, 1kHz, 4Ω	20W
1% THD, 1kHz, 4Ω	14W
Total Harmonic Distortion	0.06% (at 1kHz, 4W)
Load Impedance	4Ω ~ 8Ω
Operating Voltage	D.C. 14.4V Negative Ground (11V ~ 16V allowable)
Dimensions W×H×D	170×54×165mm (6-11/16×2-1/8×6-1/2in.)
(Body Size) W×H×D	150×50×150mm (5-15/16×2×5-15/16in.)
Weight	1.9kg (4.2lb.)

Specifications subject to change without notice.

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

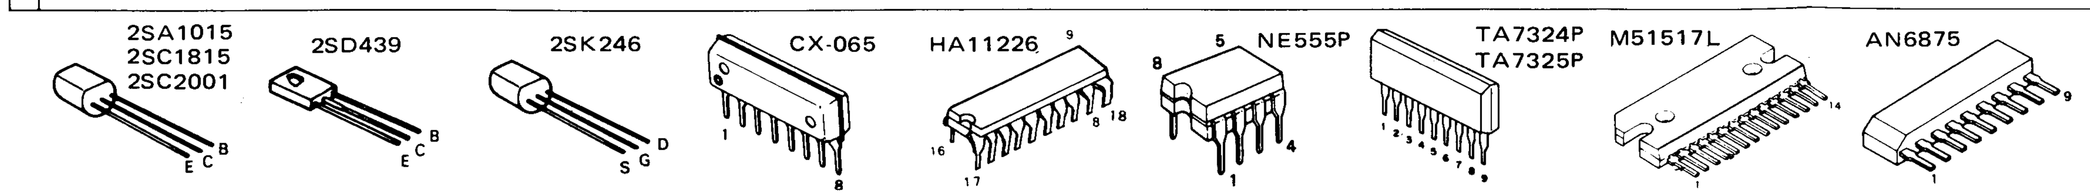

DC voltage are measured by VOM of 20 kΩ/V input impedance.
Les tensions de courant continu sont mesurées par un multimètre d'une impédance d'entrée de 20 kΩ/V.
Die Gleichstrom-Spannungen werden durch ein Vielfachmeßgerät von 20 kΩ/V Eingangs-Impedanz gemessen.