



2SA850
2SC1735




2SA733 2SC945
2SA954 2SC1845
2SA992 2SC2003
2SA999 2SC2320
2SA1023 2SC2545
2SA1083 2SC2631
2SA1123 2SC2632
2SA1124

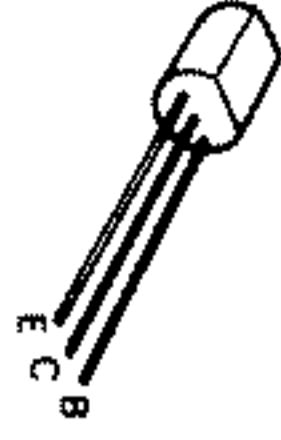


2SA1111
2SB124
2SC5591
2SD762

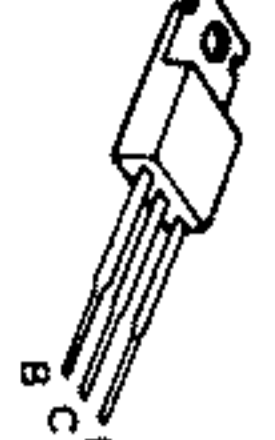


2SD855

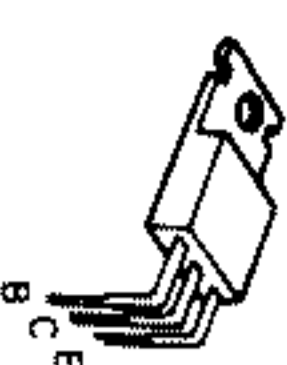


2SA995
2SC2291

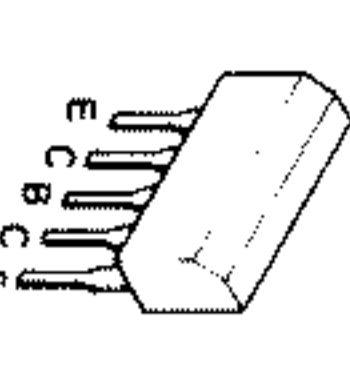


2SK146

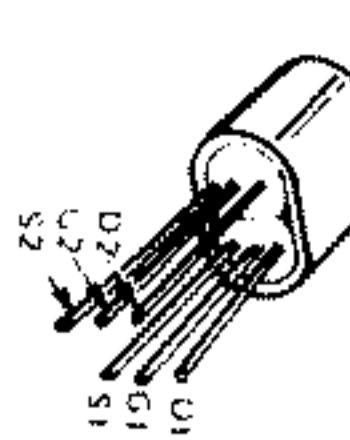


HA12002

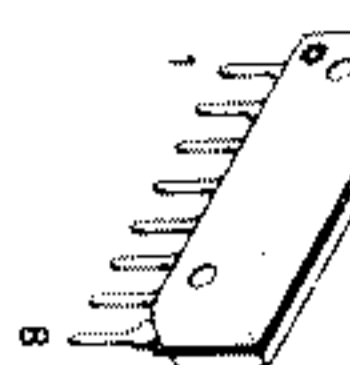



2SC2259

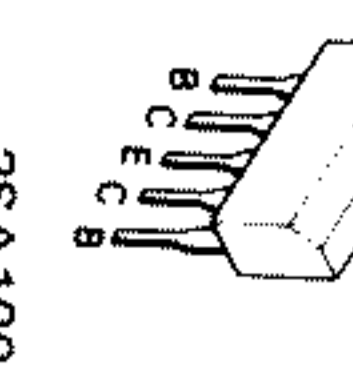


2SA1095
2SC2565

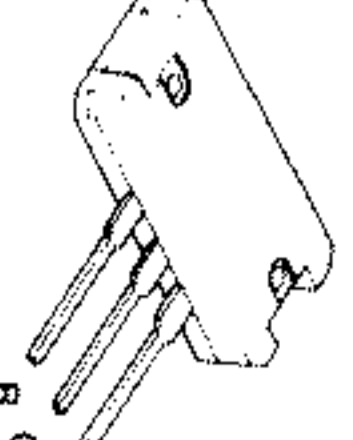

JPA68H

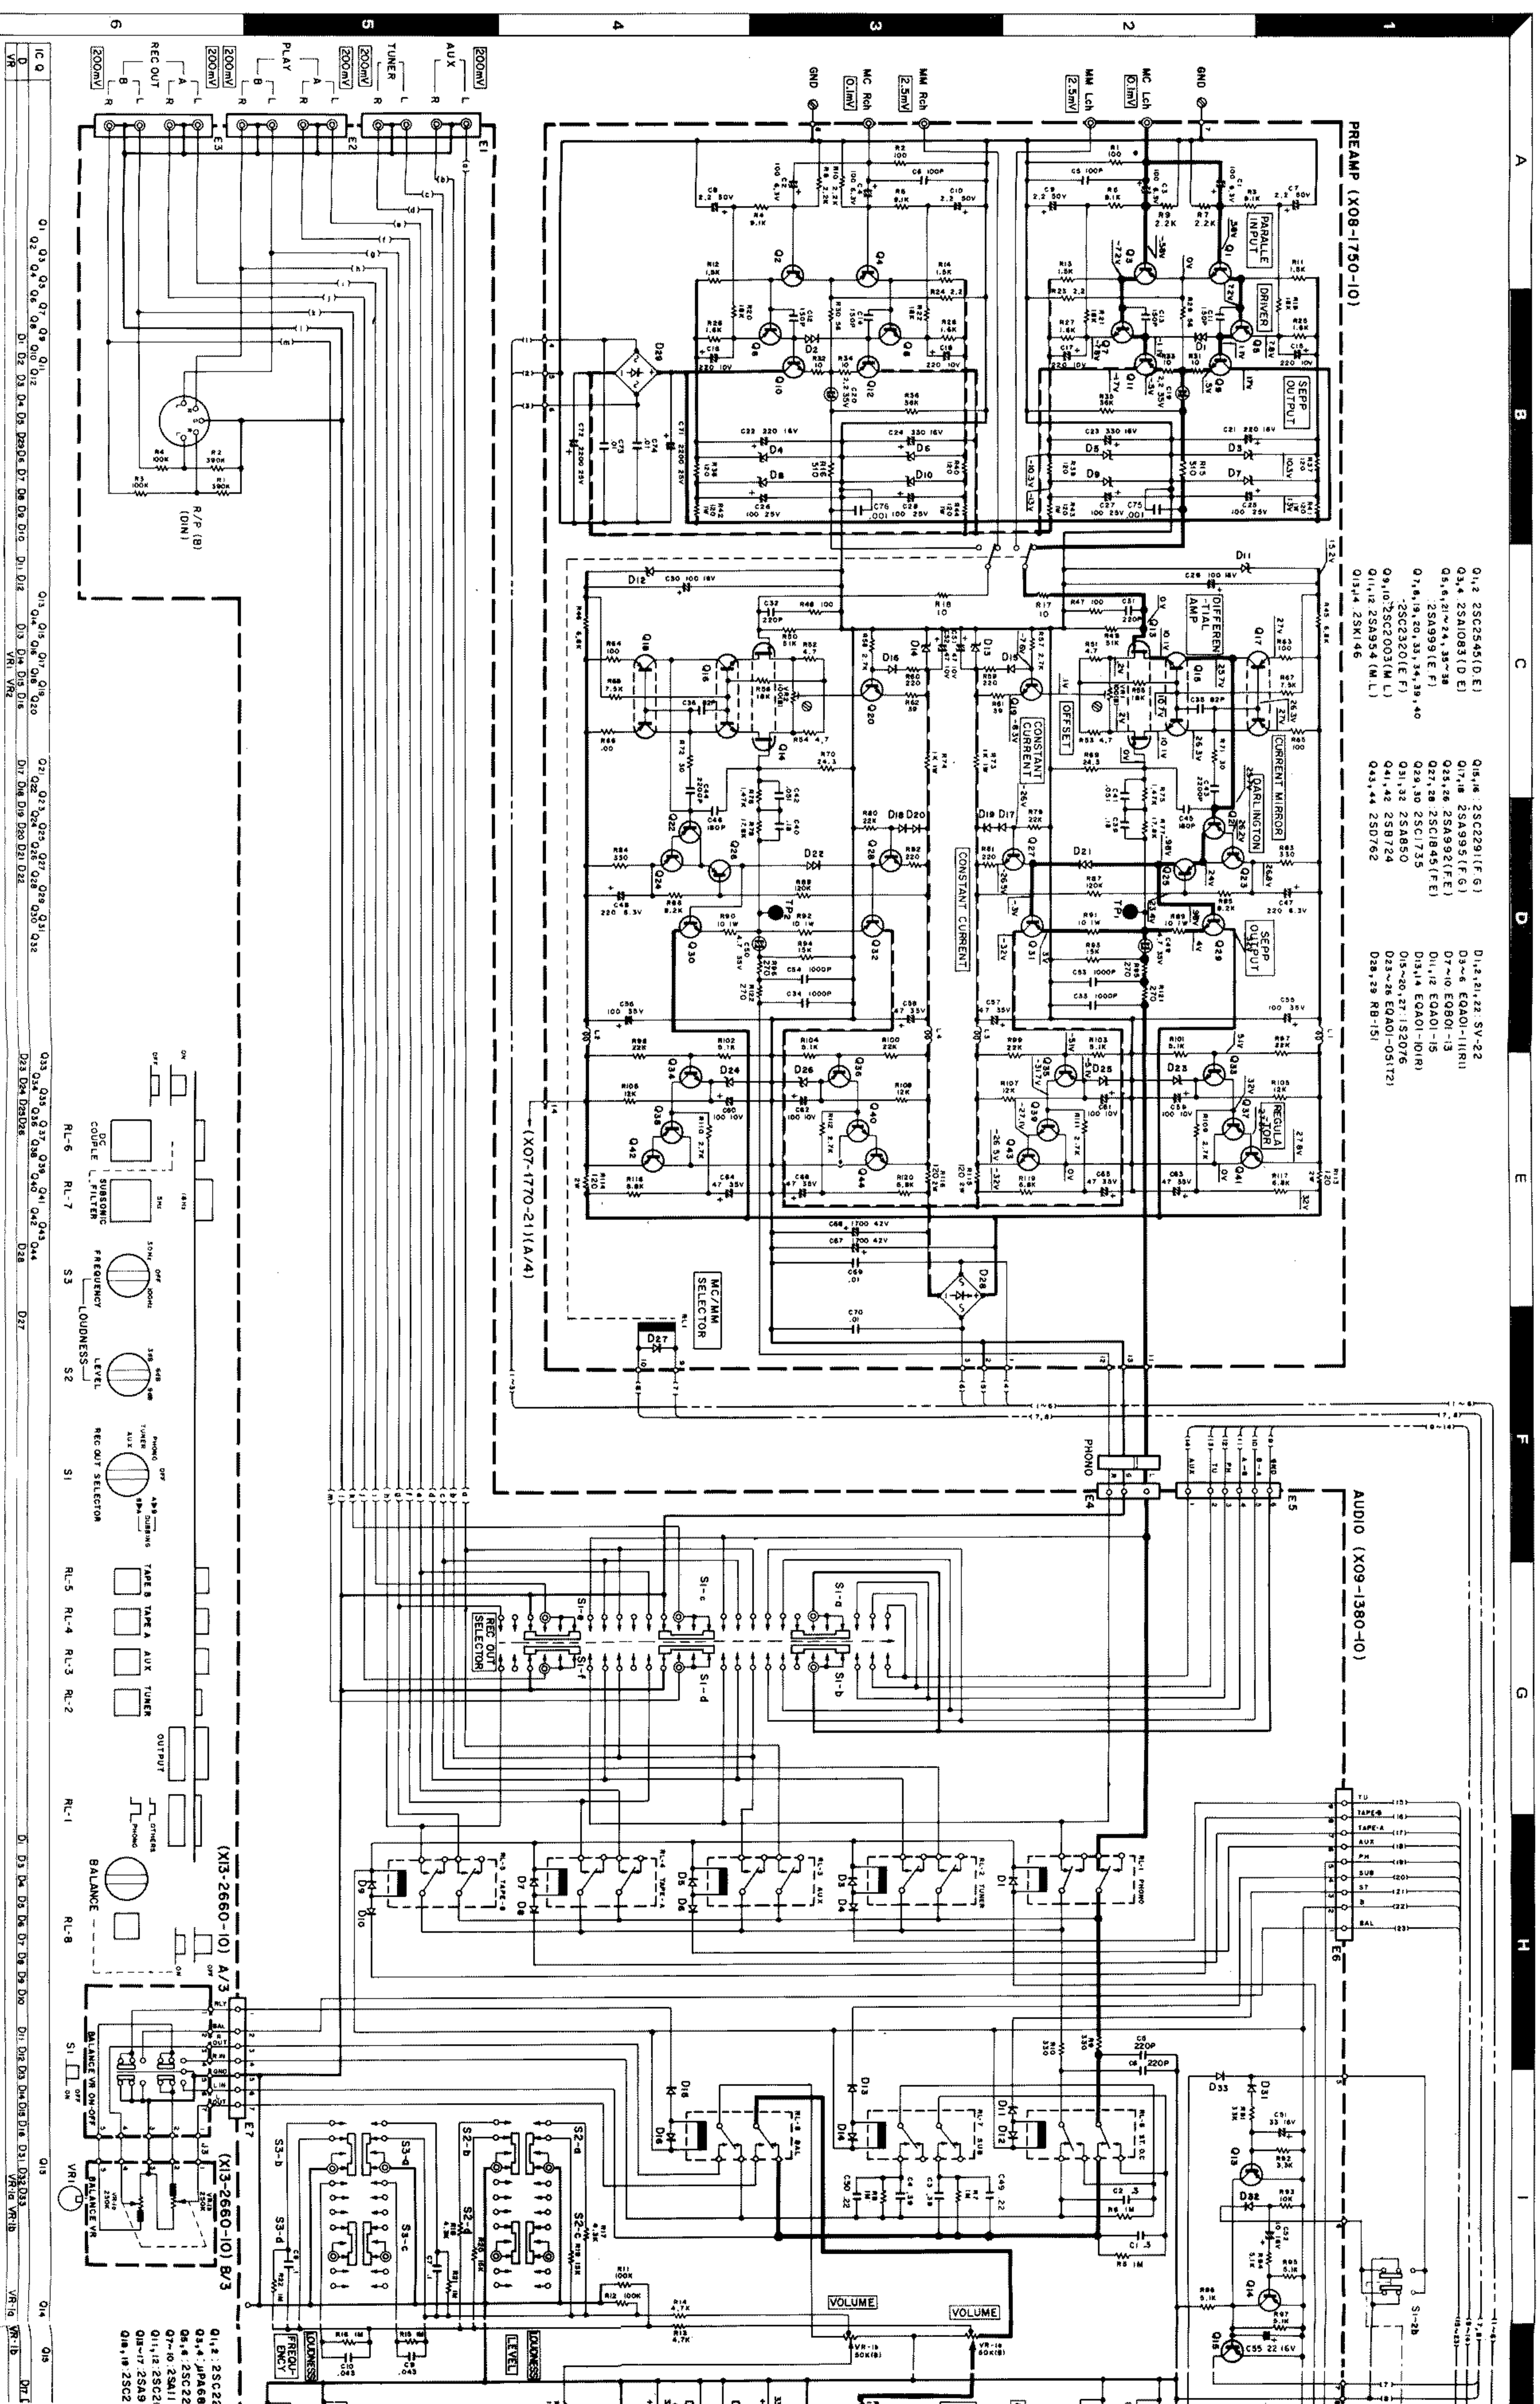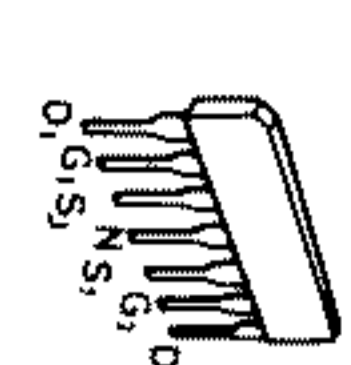

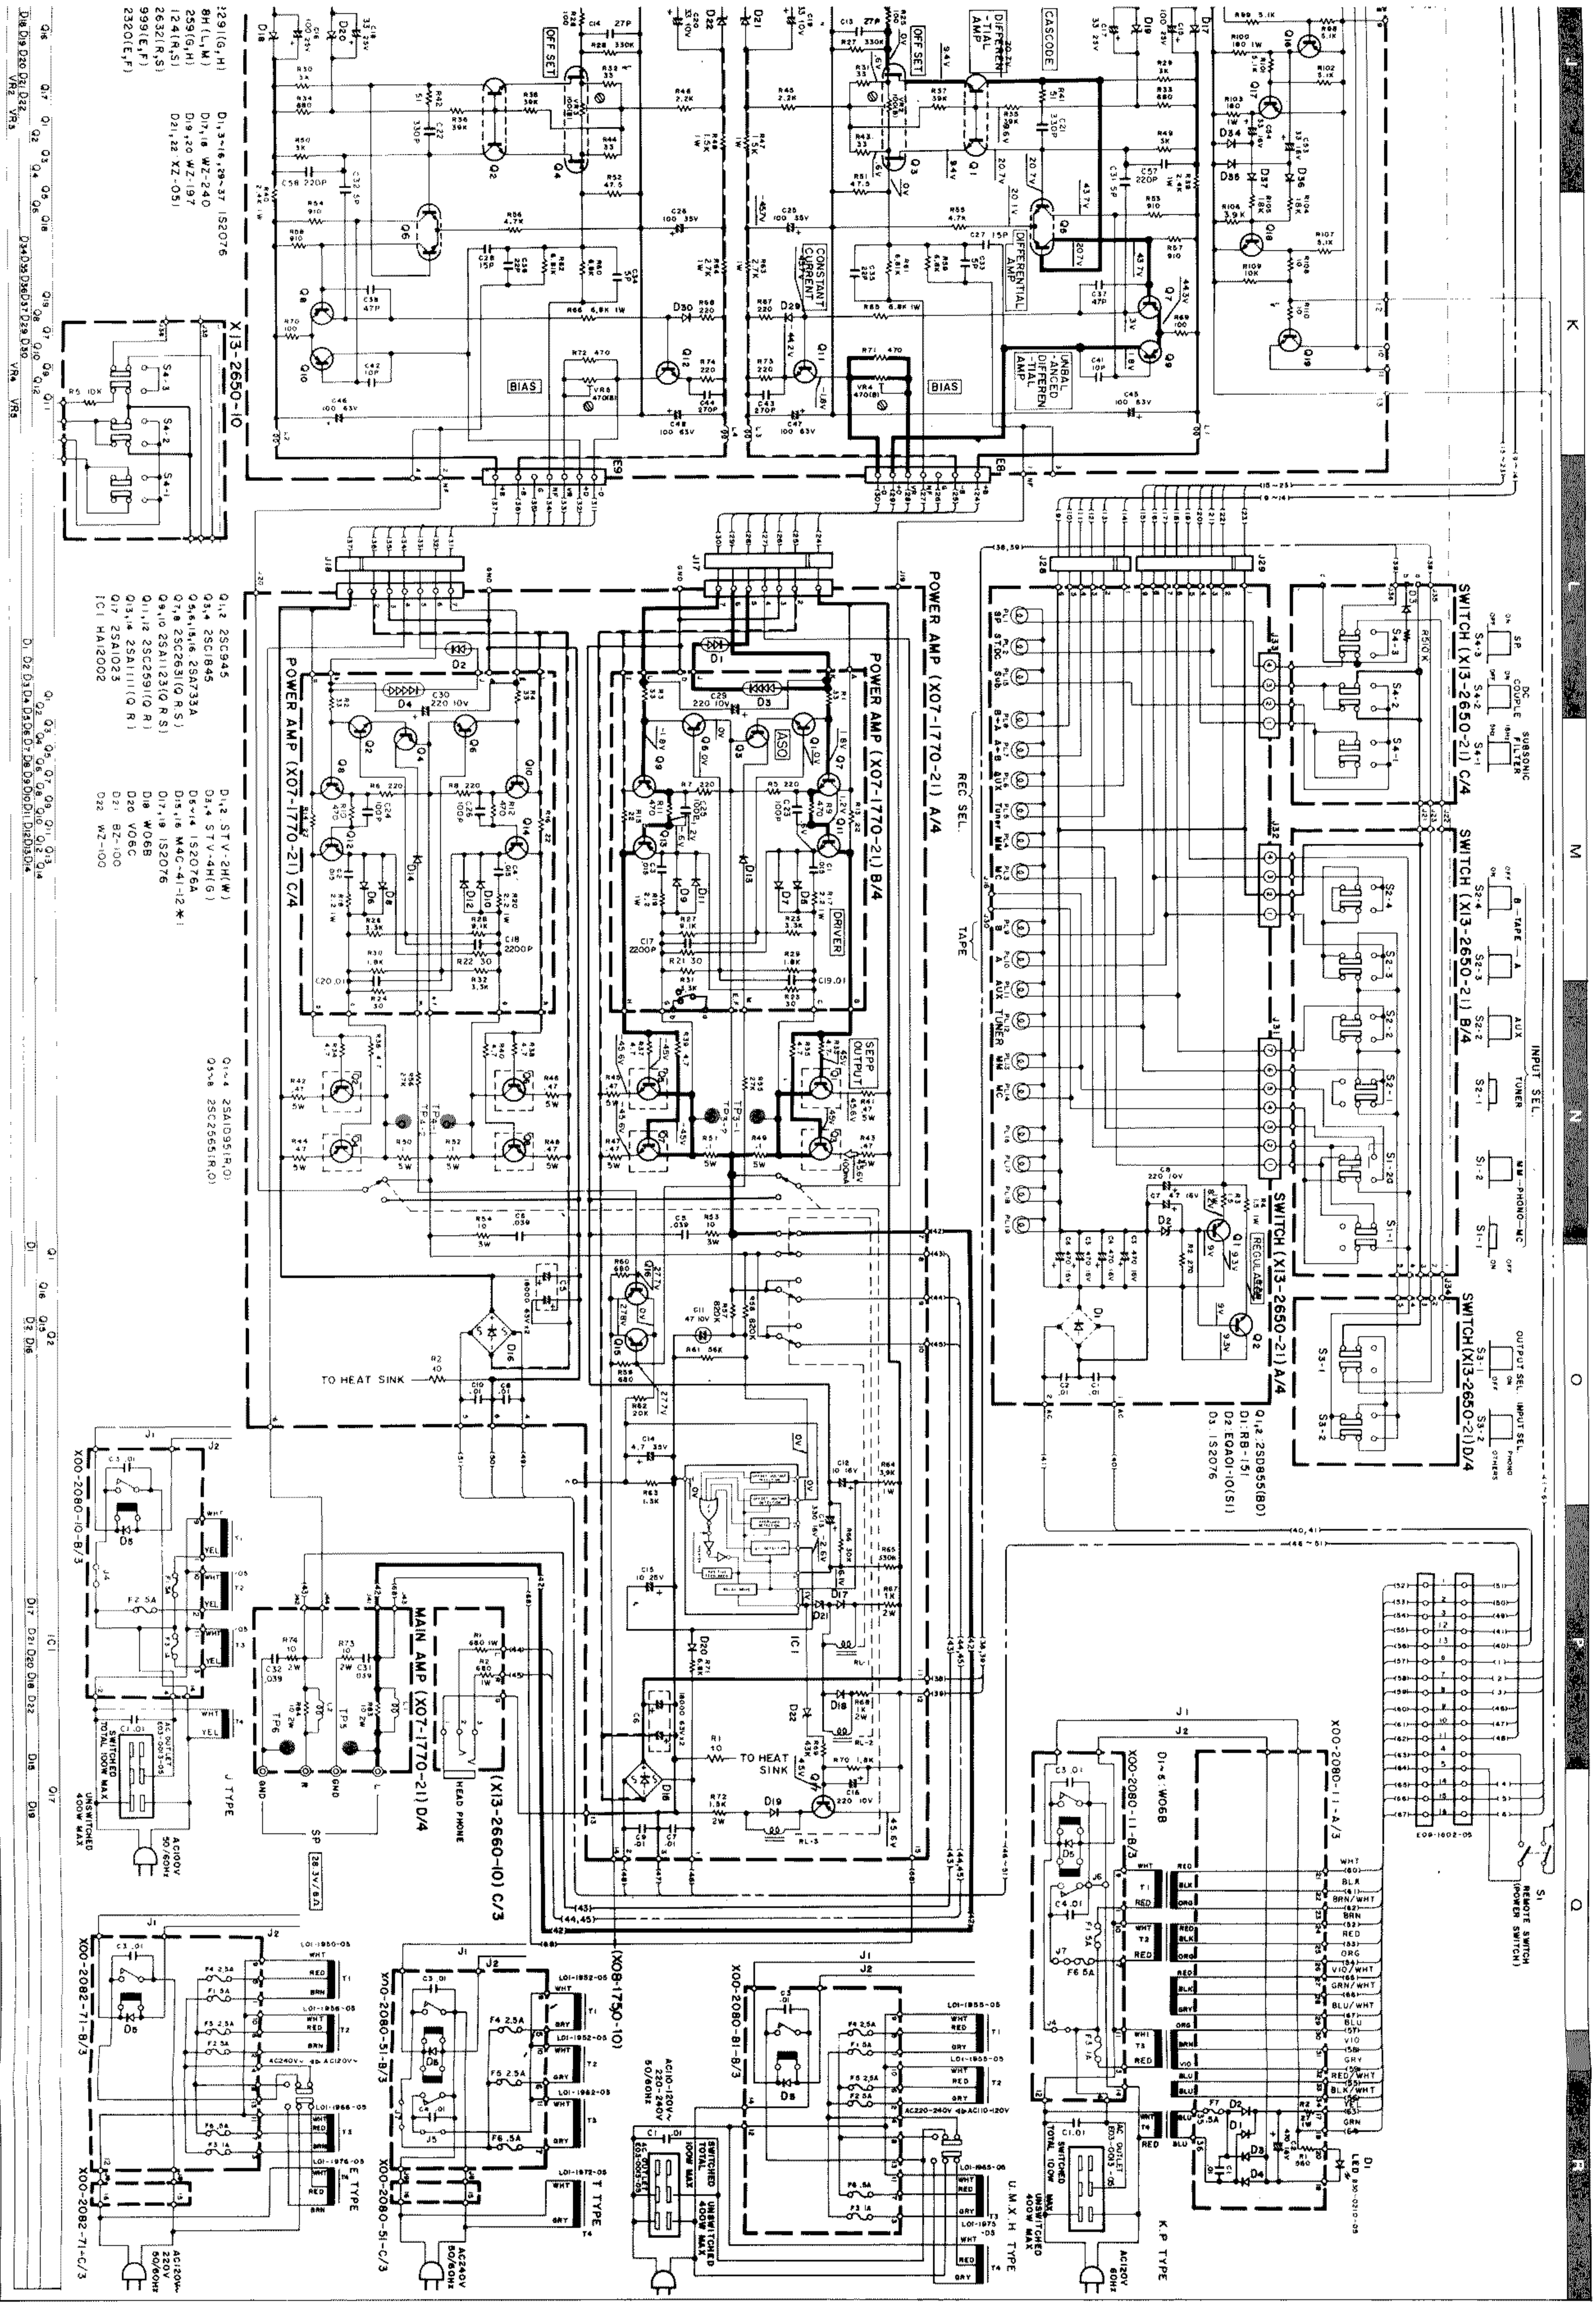

DC voltages are measured by a VOM with 20 kΩ/V input impedance.

SPECIFICATIONS

POWER OUTPUT

110 watts* per channel minimum RMS, both channels driven, at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.006% total harmonic distortion.

Both Channels Driven: 120 * 120 watts B ohms at 1,000 Hz; 170 * 170 watts 4 ohms at 1,000 Hz

Total Harmonic Distortion: 0.006% at rated power into 8 ohms; 0.006% at 1/2 rated power into 8 ohms; 0.003% at rated power with VOLUME - 20 dB; 0.003% at rated power into 8 ohms

Frequency Response: 1000, 1,000 Hz into 8 ohms

Transient Response: 0.7 S

Power Bandwidth: 5 Hz to 100 kHz at 0.03% THD; DC to 400 kHz, -3 dB; 5 Hz to 18 Hz to 400 kHz, -3 dB; Accepts 4 ohms to 16 ohms

Speaker Impedance: 2.5 mV/50 kohms; 0.1 mV/100 kohms; 0.2 mV/50 kohms; 200 mV/180 kohms

Input Sensitivity/Impedance: 90 dB for 2.5 mV input; 96 dB for 5.0 mV input; 102 dB for 1.0 mV input; 112 dB for 0.1 mV input; 112 dB for 200 mV input; 250 mV (RMS), THD 0.01% at 1,000 Hz; 9 mV (RMS), THD 0.01% at 1,000 Hz

Output Leveling/Impedance: 200 mV/180 kohms; 40 mV/80 kohms; RIAA standard curve ± 0.2 dB; 120 Hz to 20,000 Hz; ± 3 dB, -6 dB, -9 dB at 30 Hz and 100 Hz

Frequency Response for Phono: 60 dB at 5 Hz and 18 Hz

Loudness Control: at -30 dB VOLUME level; at -30 dB VOLUME level; at -30 dB VOLUME level; at -30 dB VOLUME level

General: 5.5A UL/CSA; 430 watts, rated power at 8 ohms; 115 watts, non signal; Switched 2, Unswitched 1; Amplifier IL 0.1A; Power Supply IL 0.1A; W 440 mm (17 3/8"); H 170 mm (6 11/16"); D 450 mm (17 3/4"); Weight 17.5 kg (38.5 lb); 9.5 kg (20.9 lb)

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

