

SERVICE
MANUAL 2226

marantz

model 2226

Stereophonic Receiver

TABLE OF CONTENTS

Section	Title	Page
1.	SERVICE NOTES	1
2.	TEST EQUIPMENT REQUIRED FOR SERVICING	2
3.	AM ALIGNMENT PROCEDURE	2
3.1	AM IF Alignment	2
3.2	AM Frequency Range and Tracking Alignment	2
4.	FM ALIGNMENT PROCEDURE	2
4.1	FM Frequency Range and Tracking Alignment	2
4.2	Stereo Separation Alignment	3
4.3	Muting Threshold Adjustment	3
4.4	FM Dolby Level Adjustment	3
5.	POWER AMPLIFIER ADJUSTMENT	4
6.	POWER SUPPLY ADJUSTMENT	4
7.	VOLTAGE CONVERSION FOR EUROPEAN MODEL	4
8.	DIAGRAMS	5
8.1	Block Diagram	5
8.2	Inter Connection Diagram - U.S.A. & CANADA	7
8.3	Inter Connection Diagram - EUROPE	9
8.4	Schematic Diagram - U.S.A. & CANADA	11
8.5	Schematic Diagram - EUROPE	13
8.6	Tuner Board Schematic Diagram and Component Locations	15
8.7	FM Front End Board Schematic Diagram and Component Locations	19
8.8	Phono Equalizer Amp. Board Schematic Diagram and Component Locations	20
8.9	Main Amp. Board Schematic Diagram and Component Locations	22
8.10	Power Supply Board Schematic Diagram and Component Locations	24
8.11	Pre., Tone Amp. Board Schematic Diagram and Component Locations	25
8.12	Mono, Hi Filter, Tape 1 Mon., FM 25 μ S Switches Board Schematic Diagram and Component Locations	26
8.13	Mono, Hi Filter, Low Filter, Tape 1 Mon., Switches Board Schematic Diagram and Component Locations - EUROPE	26
8.14	Pops Noise Muting Board Schematic Diagram and Component Locations	27
8.15	Speaker Switch Board Schematic Diagram and Component Locations	27
8.16	Dial Lamp Board Schematic Diagram and Component Locations	27
9.	MAJOR COMPONENT LOCATIONS	28
9.1	Cabinet-Front View	28
9.2	Chassis-Top View	28
9.3	Cabinet-Rear View	29
9.4	Chassis-Bottom View	29
9.5	Cabinet-Front View - EUROPE	30
9.6	Chassis-Top View - EUROPE	30
9.7	Cabinet-Rear View - EUROPE	31
10.	EXPLODED VIEW	32
10.1	Packing Material Exploded View	32
10.2	Mechanical Exploded View	33
11.	PARTS LIST	35
12.	TECHNICAL SPECIFICATIONS	44

INTRODUCTION

This service manual was prepared for use by Authorized Warranty Stations and contains service information for Marantz Model 2226 Stereophonic Receiver.

Service information and voltage data included in this manual are intended for use by the knowledgeable and experienced technician only. All instructions should be read carefully. No attempt should be made to proceed without a good understanding of the operations in the receiver.

The parts list furnishes information by which replacement parts may be ordered from the Marantz Company. A simple description is included for parts which can usually be obtained through local suppliers.

1. SERVICE NOTES

As can be seen from the circuit diagram, the chassis of Model 2226 consists of the following units. Each unit mounted on a printed circuit board is described within the square enclosed by a bold dotted line on the circuit diagram.

1. FM Front End mounted on P.W. Board P100
2. Tuner mounted on P.W. Board P200
3. Phono Equalizer Amp. mounted on P.W. Board P400
4. Main Amp. mounted on P.W. Board P700
5. Power Supply mounted on P.W. Board P800
6. Pre & Tone Amp. mounted on P.W. Board PE01
7. Mono, Hi Filter, Tape 1 Monitor &
FM 25 μ S Switches mounted on P.W. Board PH01
8. Pops Noise Muting. mounted on P.W. Board PJ01
9. Speaker Switch mounted on P.W. Board PT01
10. Dial Lamp mounted on P.W. Board PZ01

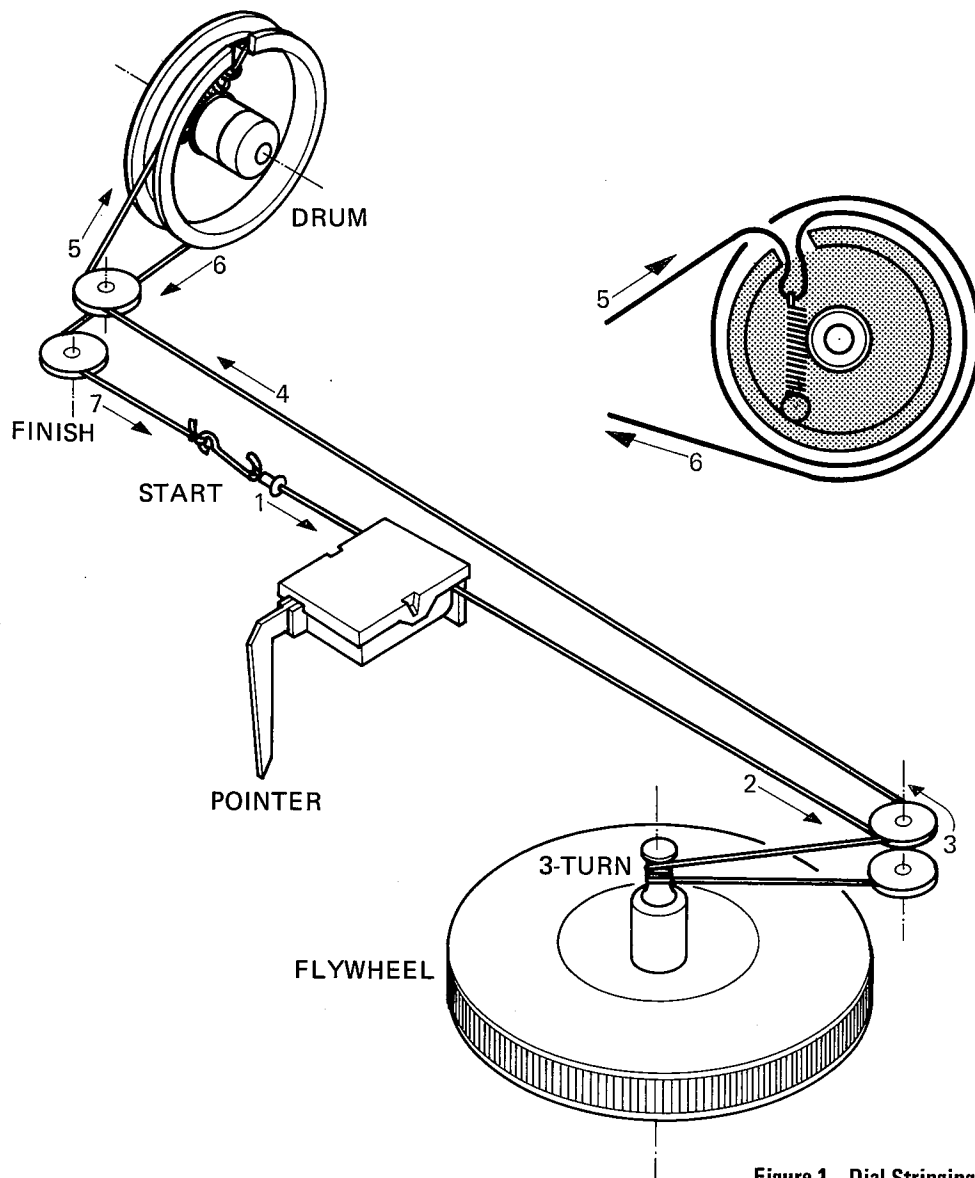


Figure 1. Dial Stringing

2. TEST EQUIPMENT REQUIRED FOR SERVICING

This table lists the test equipment required for servicing the Model 2226 Receiver.

Item	Manufacturer and Model No.	Use
AM Signal Generator		Signal source for AM alignment
Test Loop		Use with AM Signal Generator
FM Signal Generator MPX Signal Generator	Sound Technology Model 1000A	Signal source for FM alignment Stereo separation alignment and trouble shooting
Distortion Analyzer Audio Oscillator AC VTVM	Sound Technology Model 1700A	Distortion measurements Sinewave and squarewave signal source Voltage measurements (AC)
Oscilloscope	Tektronix Model T932 Philips Model 3232	Waveform analysis and trouble shooting and ASO alignment
Frequency Counter	Fluke Model 1900A	MPX Oscillator adjustment (VCO)
Circuit Tester		Trouble shooting
DC VTVM	Fluke Model 8000 "Digital" Simpson Model 313, Triplet Model 801	Voltage measurements (DC)
AC Wattmeter	Simpson Model 1379	Monitors primary power to amplifier
AC Ammeter	Commercial Grade (1-10A)	Monitors amplifier output under short circuit condition
Line Voltmeter	Simpson Model 1359	Monitors potential of primary power to amplifier
Variable Autotransformer	Superior Electronic Co., Powerstat Model 116B-10A	Adjusts level of primary power to amplifier
Shorting Plug	Use phono plug with 600-ohm across center pin and shell	Shorts amplifier input to eliminate noise pickup
Output Load (8 ohms, 0.5%, 100W)	Commercial Grade	Provides 8-ohm load for amplifier output termination
Output Load (4 ohms, 0.5%, 100W)	Commercial Grade	Provides 4-ohm load for amplifier output termination

3. AM ALIGNMENT PROCEDURE

3.1 AM IF ALIGNMENT

1. Connect a sweep generator to the L153 and an alignment scope to the resistor R162 (out side).
2. Rotate each core of IF transformers L155 and L156 for the maximum height and flat top symmetrical response.

3.2 AM FREQUENCY RANGE AND TRACKING ALIGNMENT

1. Set AM signal generator to 515 kHz. Turn the tuning capacitor fully closed (place the tuning pointer at the low end) and adjust the oscillator coil L154 for maximum audio output.
2. Set the signal generator to 1650 kHz. Place the tuning pointer in the high frequency end and adjust the oscillator trimmer on the oscillator tuning capacitor for maximum audio output.
3. Repeat steps 1 and 2 until no further adjustment is necessary.
4. Set the generator to 600 kHz, tune the receiver to the same frequency and adjust a slug core of AM ferrite-rod antenna L001 for maximum output.

5. Set the generator to 1400 kHz and tune the receiver to the same frequency and adjust the trimming capacitor on the antenna tuning capacitor for maximum output.
6. Repeat procedures 4 and 5 until no further adjustment is necessary.

NOTE: During tracking alignment reduce the signal generator output as necessary to avoid AGC action.

4. FM ALIGNMENT PROCEDURE

4.1 FM FREQUENCY RANGE AND TRACKING ALIGNMENT

1. Connect an FM signal generator to the FM antenna terminals and an oscilloscope and an audio distortion analyzer to the TAPE OUT jacks on the rear panel.
2. Set the generator to 87.4 MHz and provide about 3 to 5 μ V. Place the tuning pointer at the low frequency end by rotating the tuning knob and adjust the pitch of oscillator coil L107 to obtain maximum audio output.

3. Set the generator to 109 MHz and provide about 3 to 5 μV . Rotate the tuning knob and place the tuning pointer at the high frequency end and adjust the trimming capacitor C121 for maximum output.
4. Repeat steps 2 and 3 until no further adjustment is necessary.
5. Set the generator to 90 MHz and tune the receiver to the same frequency. Decrease signal generator output until the audio output level decreases with the decreasing generator output. Adjust the pitch of antenna coil L102 and RF coil L104 for maximum output.
6. Set the generator to 106 MHz and tune the receiver to the same frequency. Decrease the signal generator output until the audio output level decreases with the decreasing generator output. Adjust the trimming capacitors of antenna and RF tuning circuits for maximum output.
7. Repeat steps 5 and 6 until no further adjustment is necessary.
8. Adjust the primary core (lower core) of discriminator transformer L202 so that the center tuning meter pointer indicates its center at no signal applied. Set the FM signal generator to 98 MHz and increase its output level 1 $\text{K}\mu\text{V}$ and tune the receiver to the same frequency so that the center tuning meter pointer indicates its center. Adjust the secondary core (upper core) of L202 for minimum distortion.

4.2 STEREO SEPARATION ALIGNMENT

1. Set the FM signal generator to provide 1 $\text{K}\mu\text{V}$ at 98 MHz. Tune the receiver to the same frequency so that the center tuning meter pointer indicates its center. Then turn off the modulation of the generator, connect a frequency counter to test point J229 and adjust R301 so that the frequency counter may precisely read 76 kHz.
2. Modulate the generator with stereo composite signal consisting of only L or R channel (of course a pilot signal must be included).
3. Adjust the trimming resistor R317 for maximum and same separation in both channels.

4.3 MUTING THRESHOLD ADJUSTMENT

1. Set the FM signal generator output to provide 12.5 μV (IHF) at 98 MHz and tune receiver to the same frequency. Adjust the trimming resistor R212 for the threshold level of 12.5 μV . (During this adjustment turn the FM MUTING pushswitch "on".)

4.4 FM DOLBY LEVEL ADJUSTMENT

1. Set the FM signal generator to provide a 400 Hz, 50% modulated 98 MHz mono signal, at 1 $\text{K}\mu\text{V}$ output. Precisely tune the receiver to 98 MHz.
2. Depress the FM 25 μS pushswitch, and adjust R215 until the outputs of both channels are 580 mV.

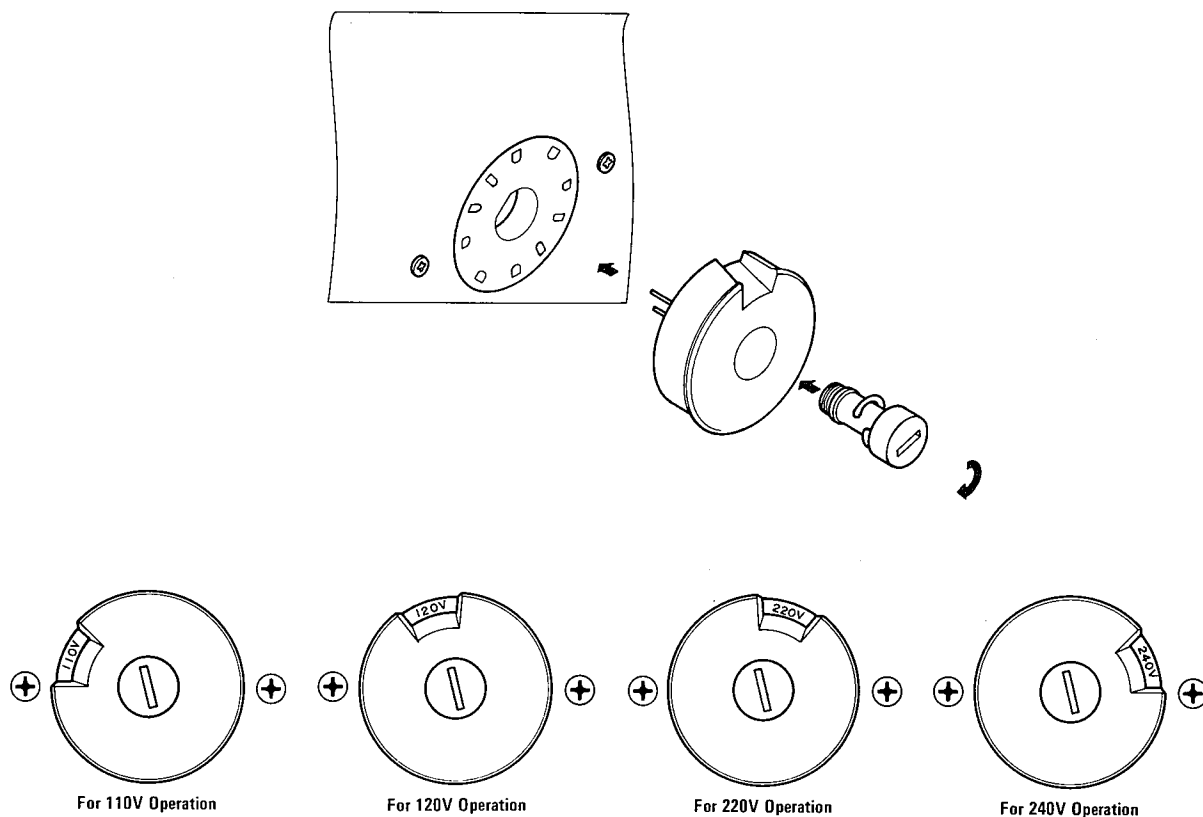


Figure 2. Voltage Conversion Chart

5. POWER AMPLIFIER ADJUSTMENT

Connect a VTVM between J709(+) and J711(−) and adjust the trimming resistor R763 until the VTVM reads 20 mV DC. And next, connect a VTVM between J707 and J714 (GROUND) and adjust the trimming resistor R761 until the VTVM reads 0 mV DC. Do over again. For the other channel, connect the VTVM between J720(+) and J721(−) and adjust the R764 for the same reading, and connect the VTVM between J718 and J714 and adjust the R762 for the same reading. Do over again.

6. POWER SUPPLY ADJUSTMENT

Connect a VTVM between J805(+) and J814(−) and adjust R808 until the VTVM reads 35.0 V under no signal condition.

7. VOLTAGE CONVERSION FOR EUROPEAN MODEL

The European version of the Model 2226 is equipped with a universal power transformer that may be adjusted to operate at 110V, 120V, 220V, or 240V AC at 50 to 60 Hz. To convert the unit to a different power source voltage, reposition conversion plug as shown in Figure 2.

CAUTION: DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE.


FTZ REGULATION

Instruction for the use in the range other than specified in FTZ codes


Achtung für die Leute, die in dem Gebiet wohnen, wo die FTZ-Bestimmungen vorherrschend sind.


Sollte das Gerät auch für Frequenzen ausserhalb des in den FTZ-Bestimmungen angegebenen Bereiches empfangebereit sein, bitten wir, den Bereich durch Nachstellen des Kernes in der Oszillatortspule (in der Abbildung mit "FTZ" gekennzeichnet) so zu korrigieren, dass er den Bestimmungen entspricht.


8. DIAGRAMS
8.1 BLOCK DIAGRAM

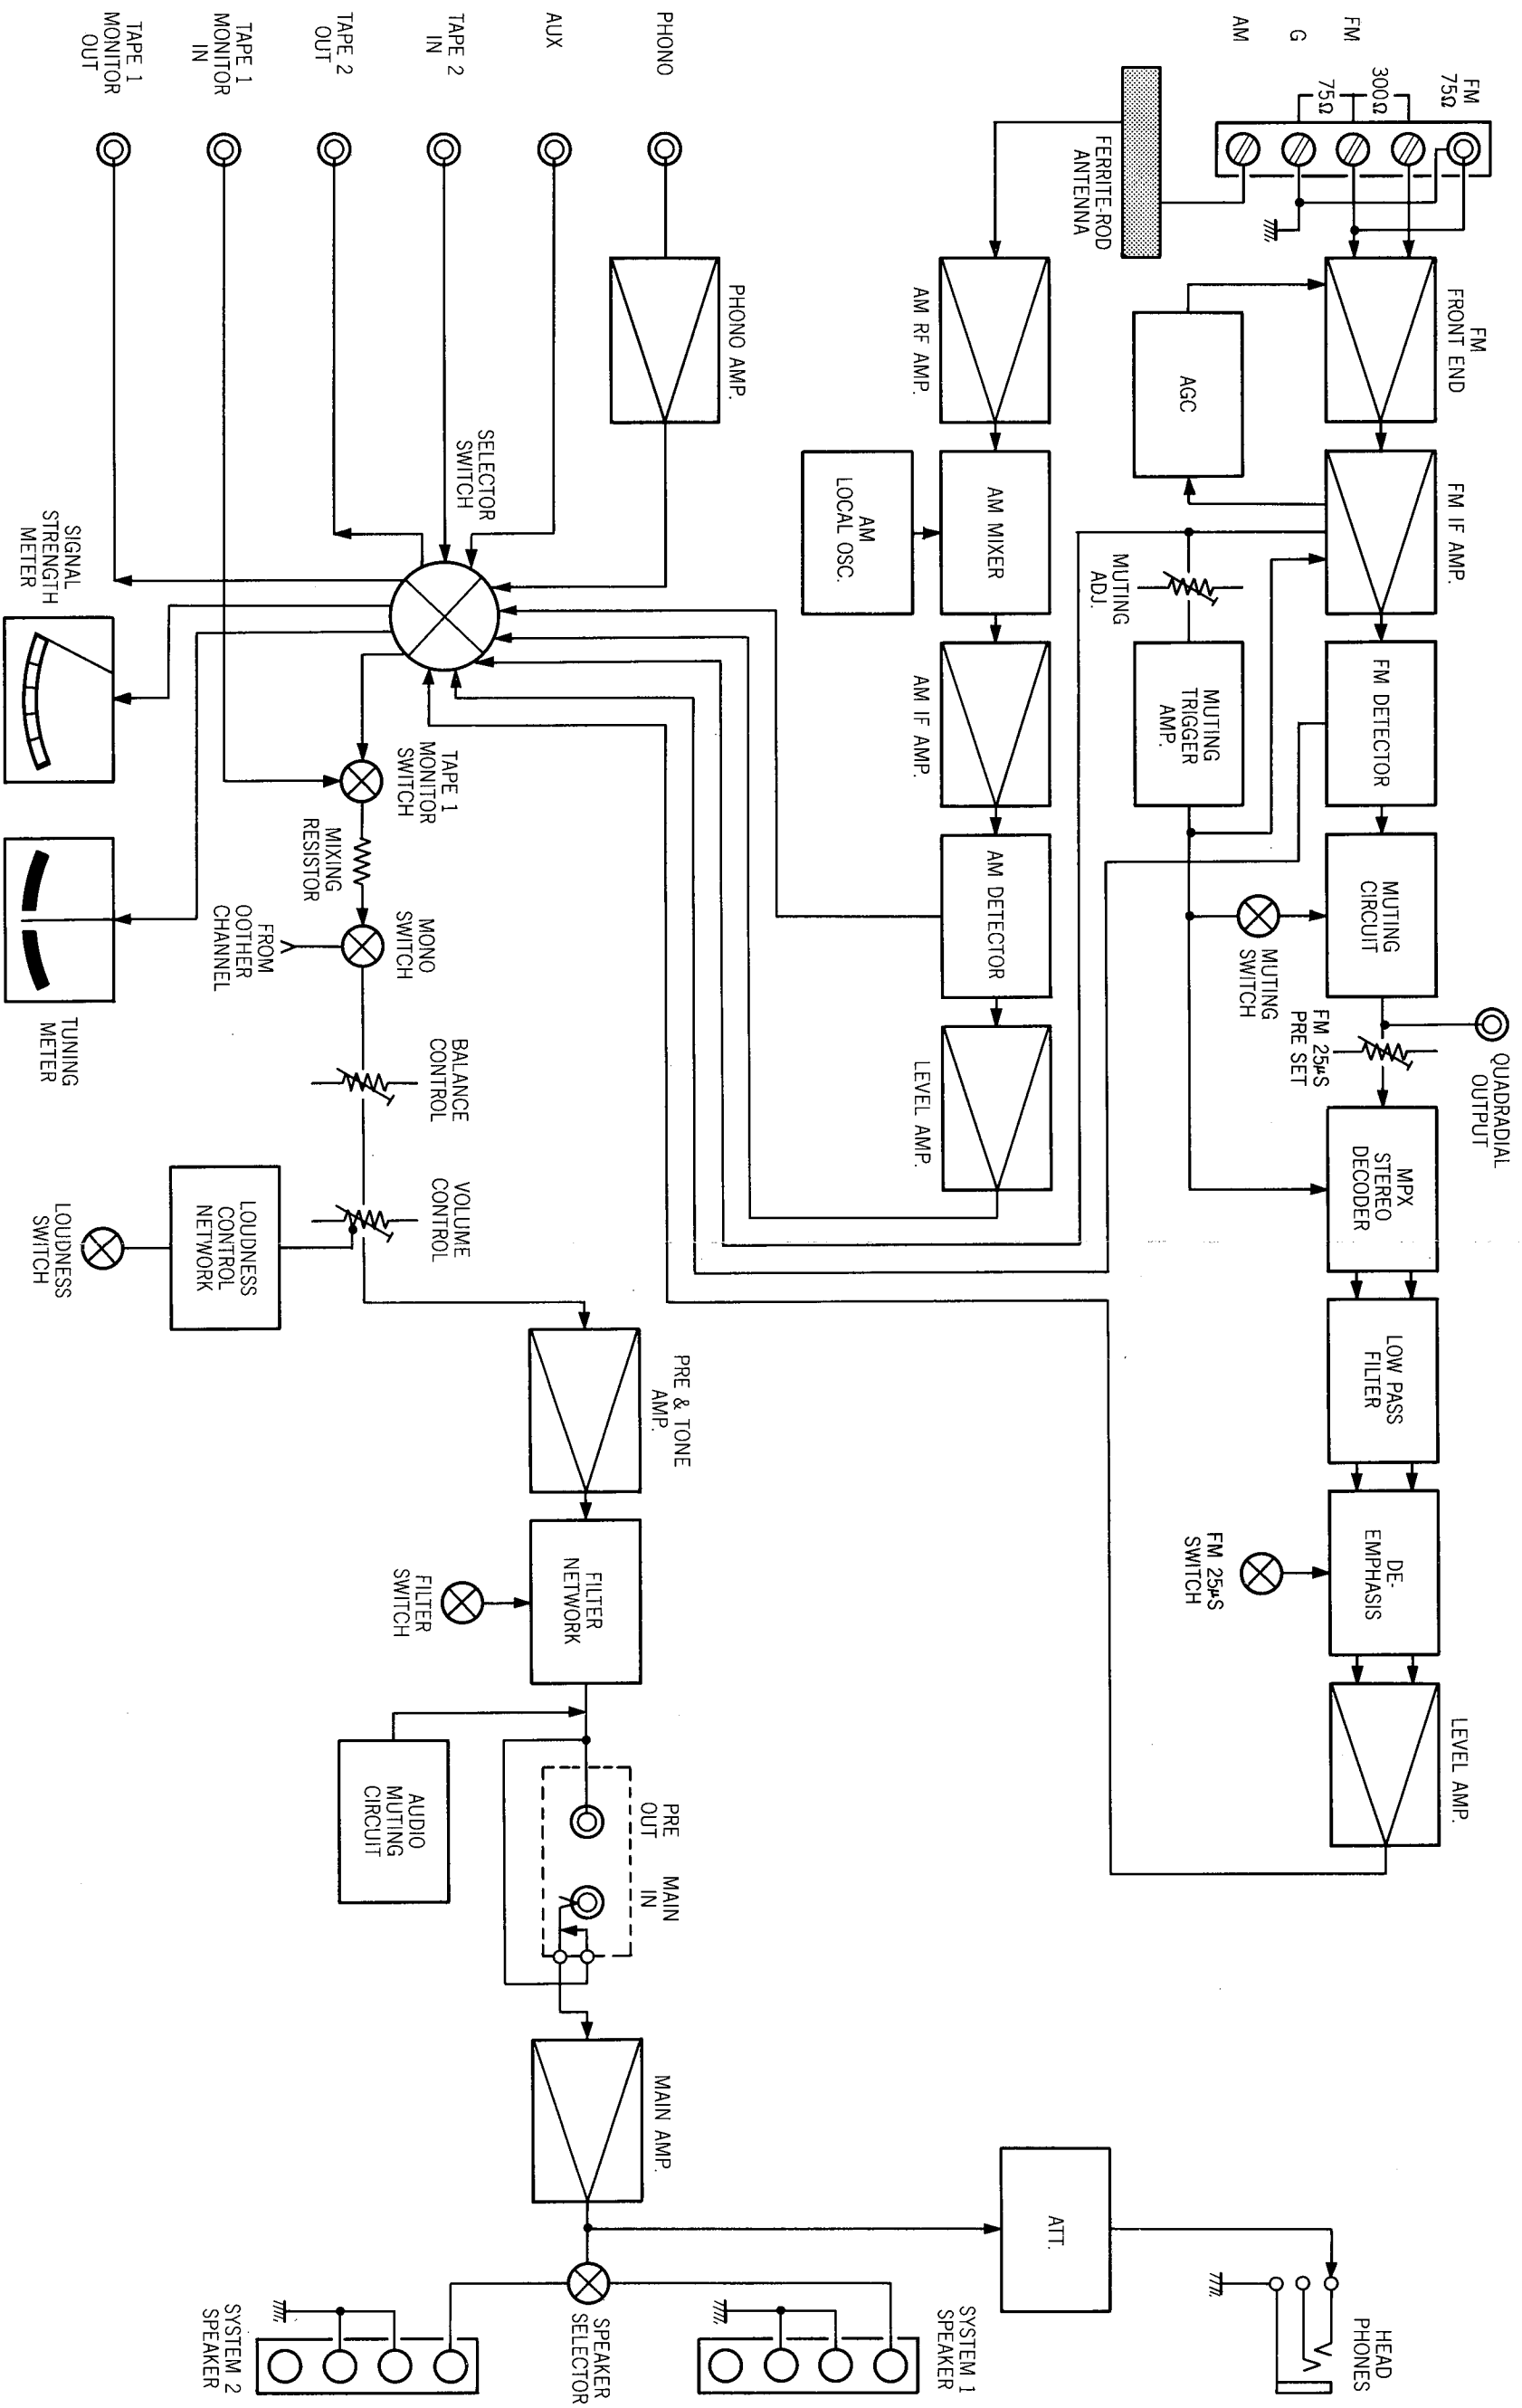


8.2 INTER CONNECTION DIAGRAM - U.S.A. & CANADA

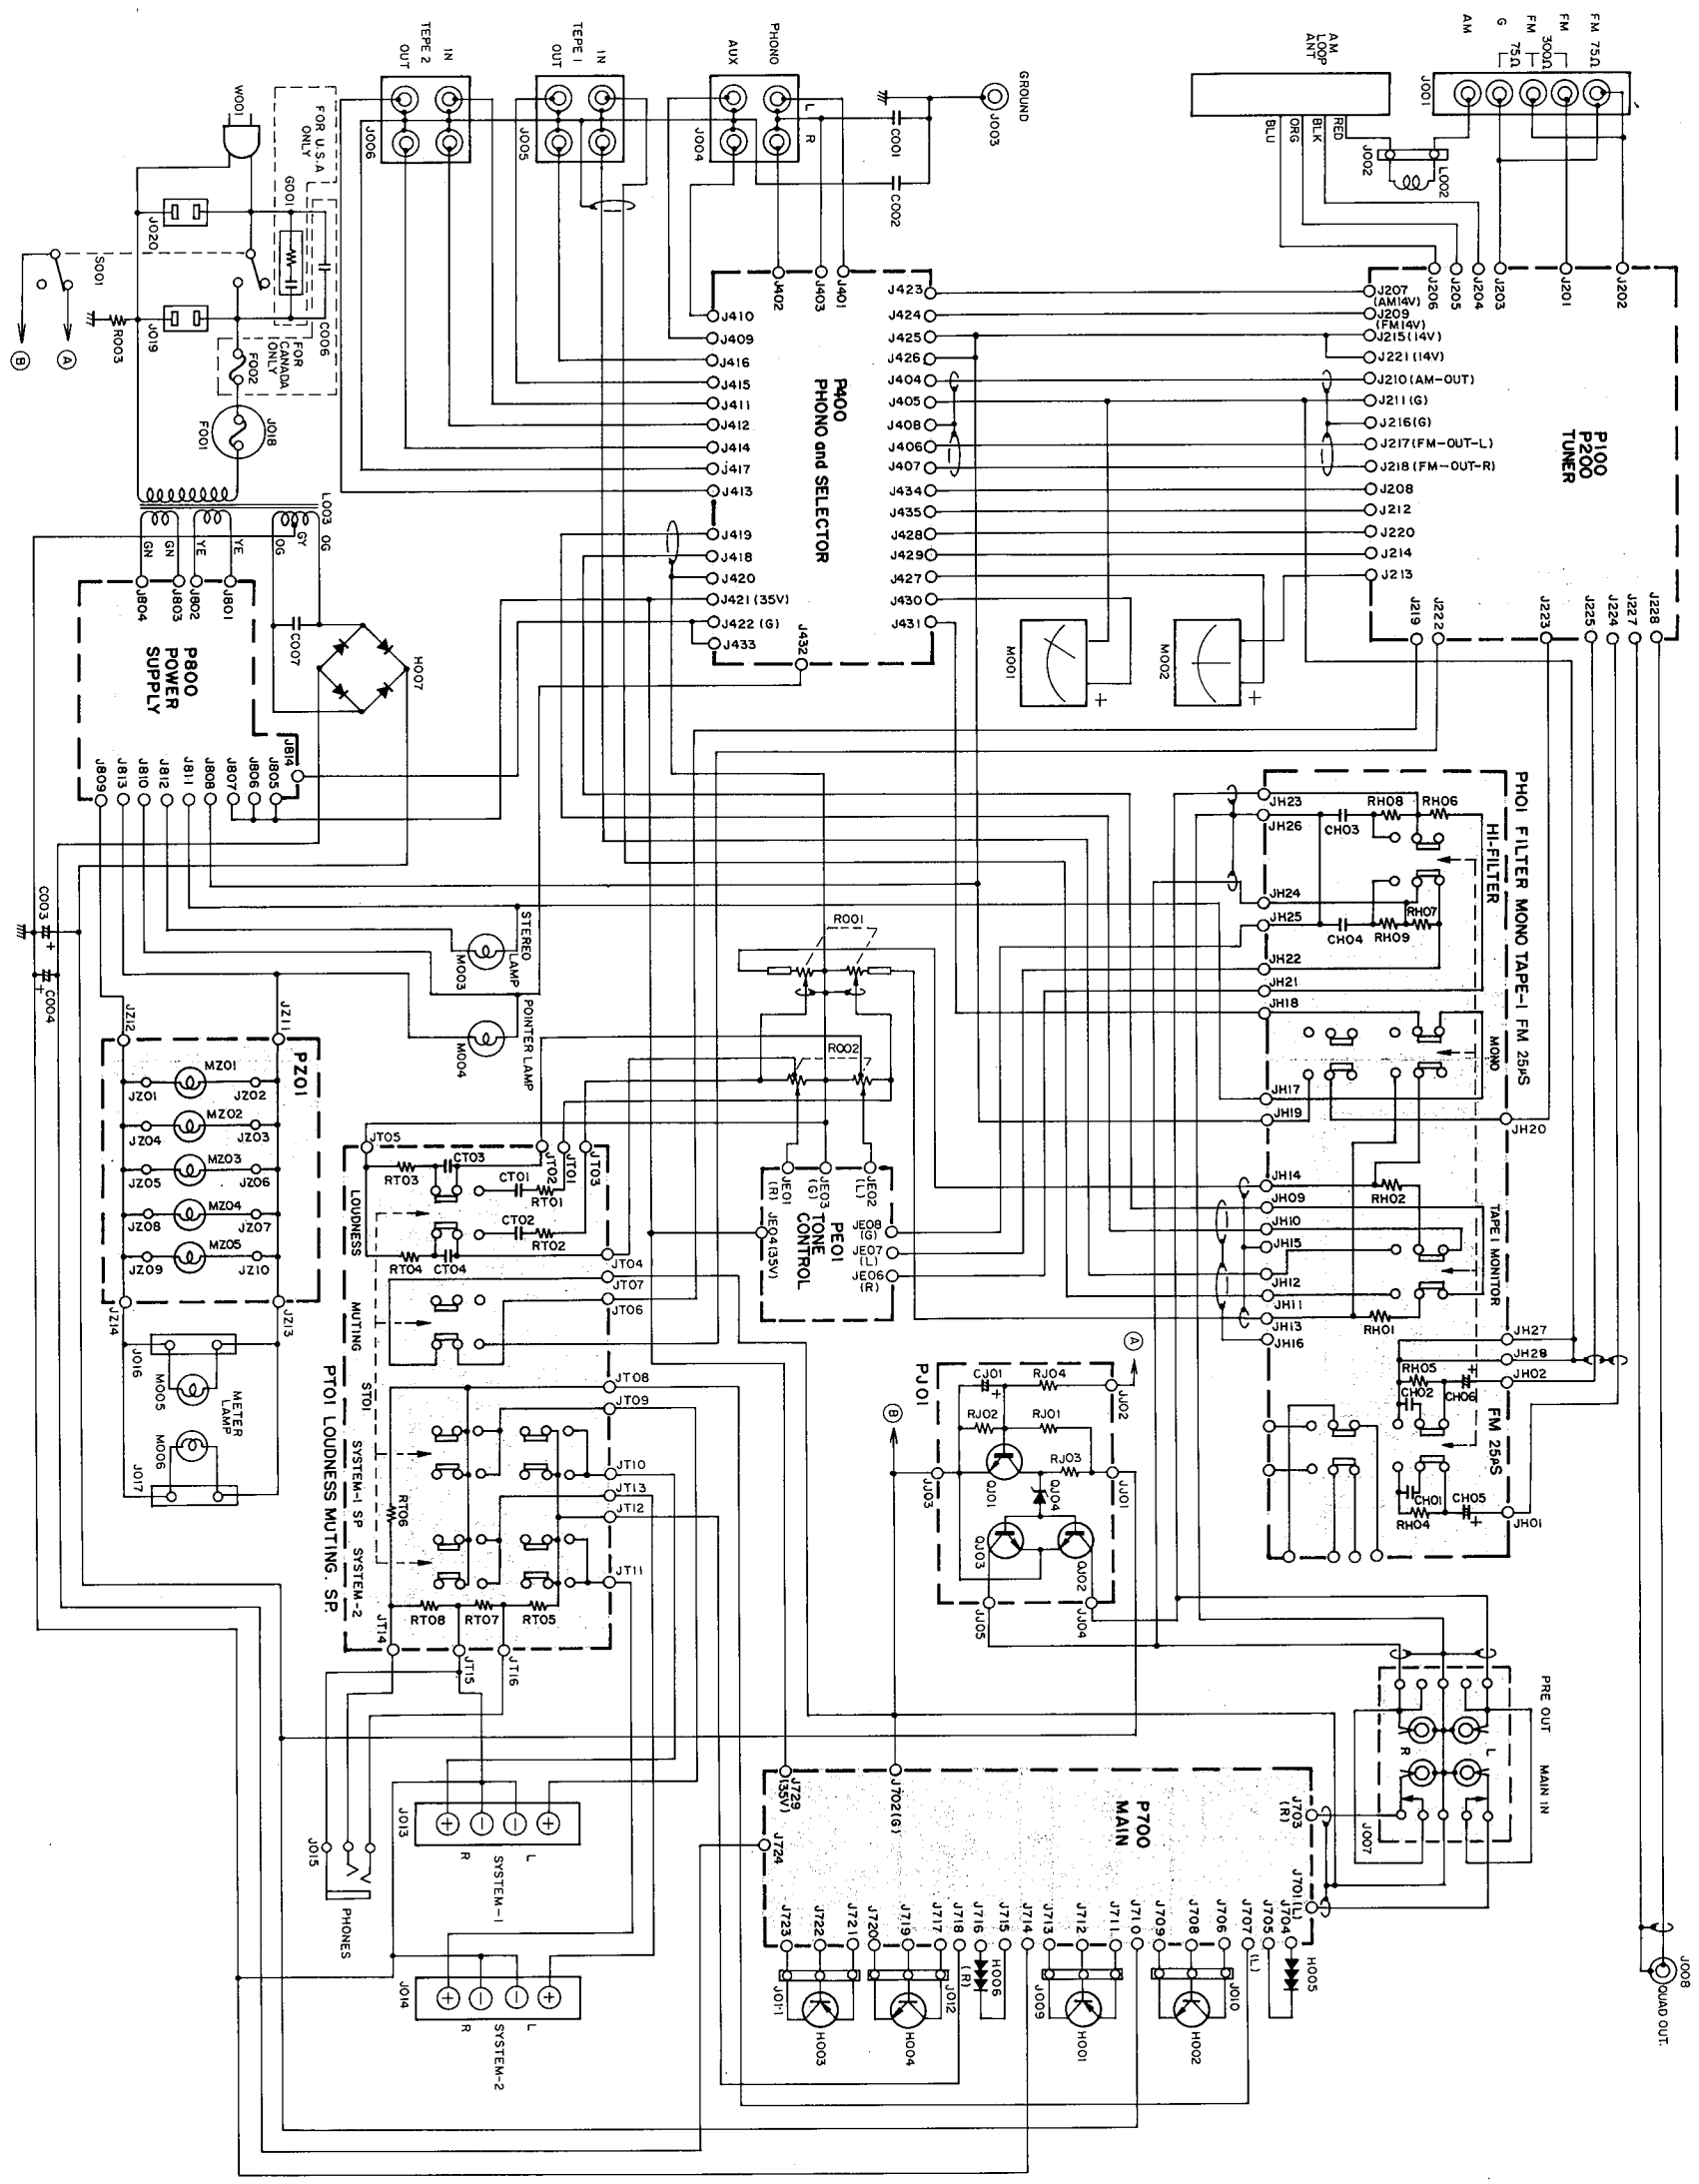

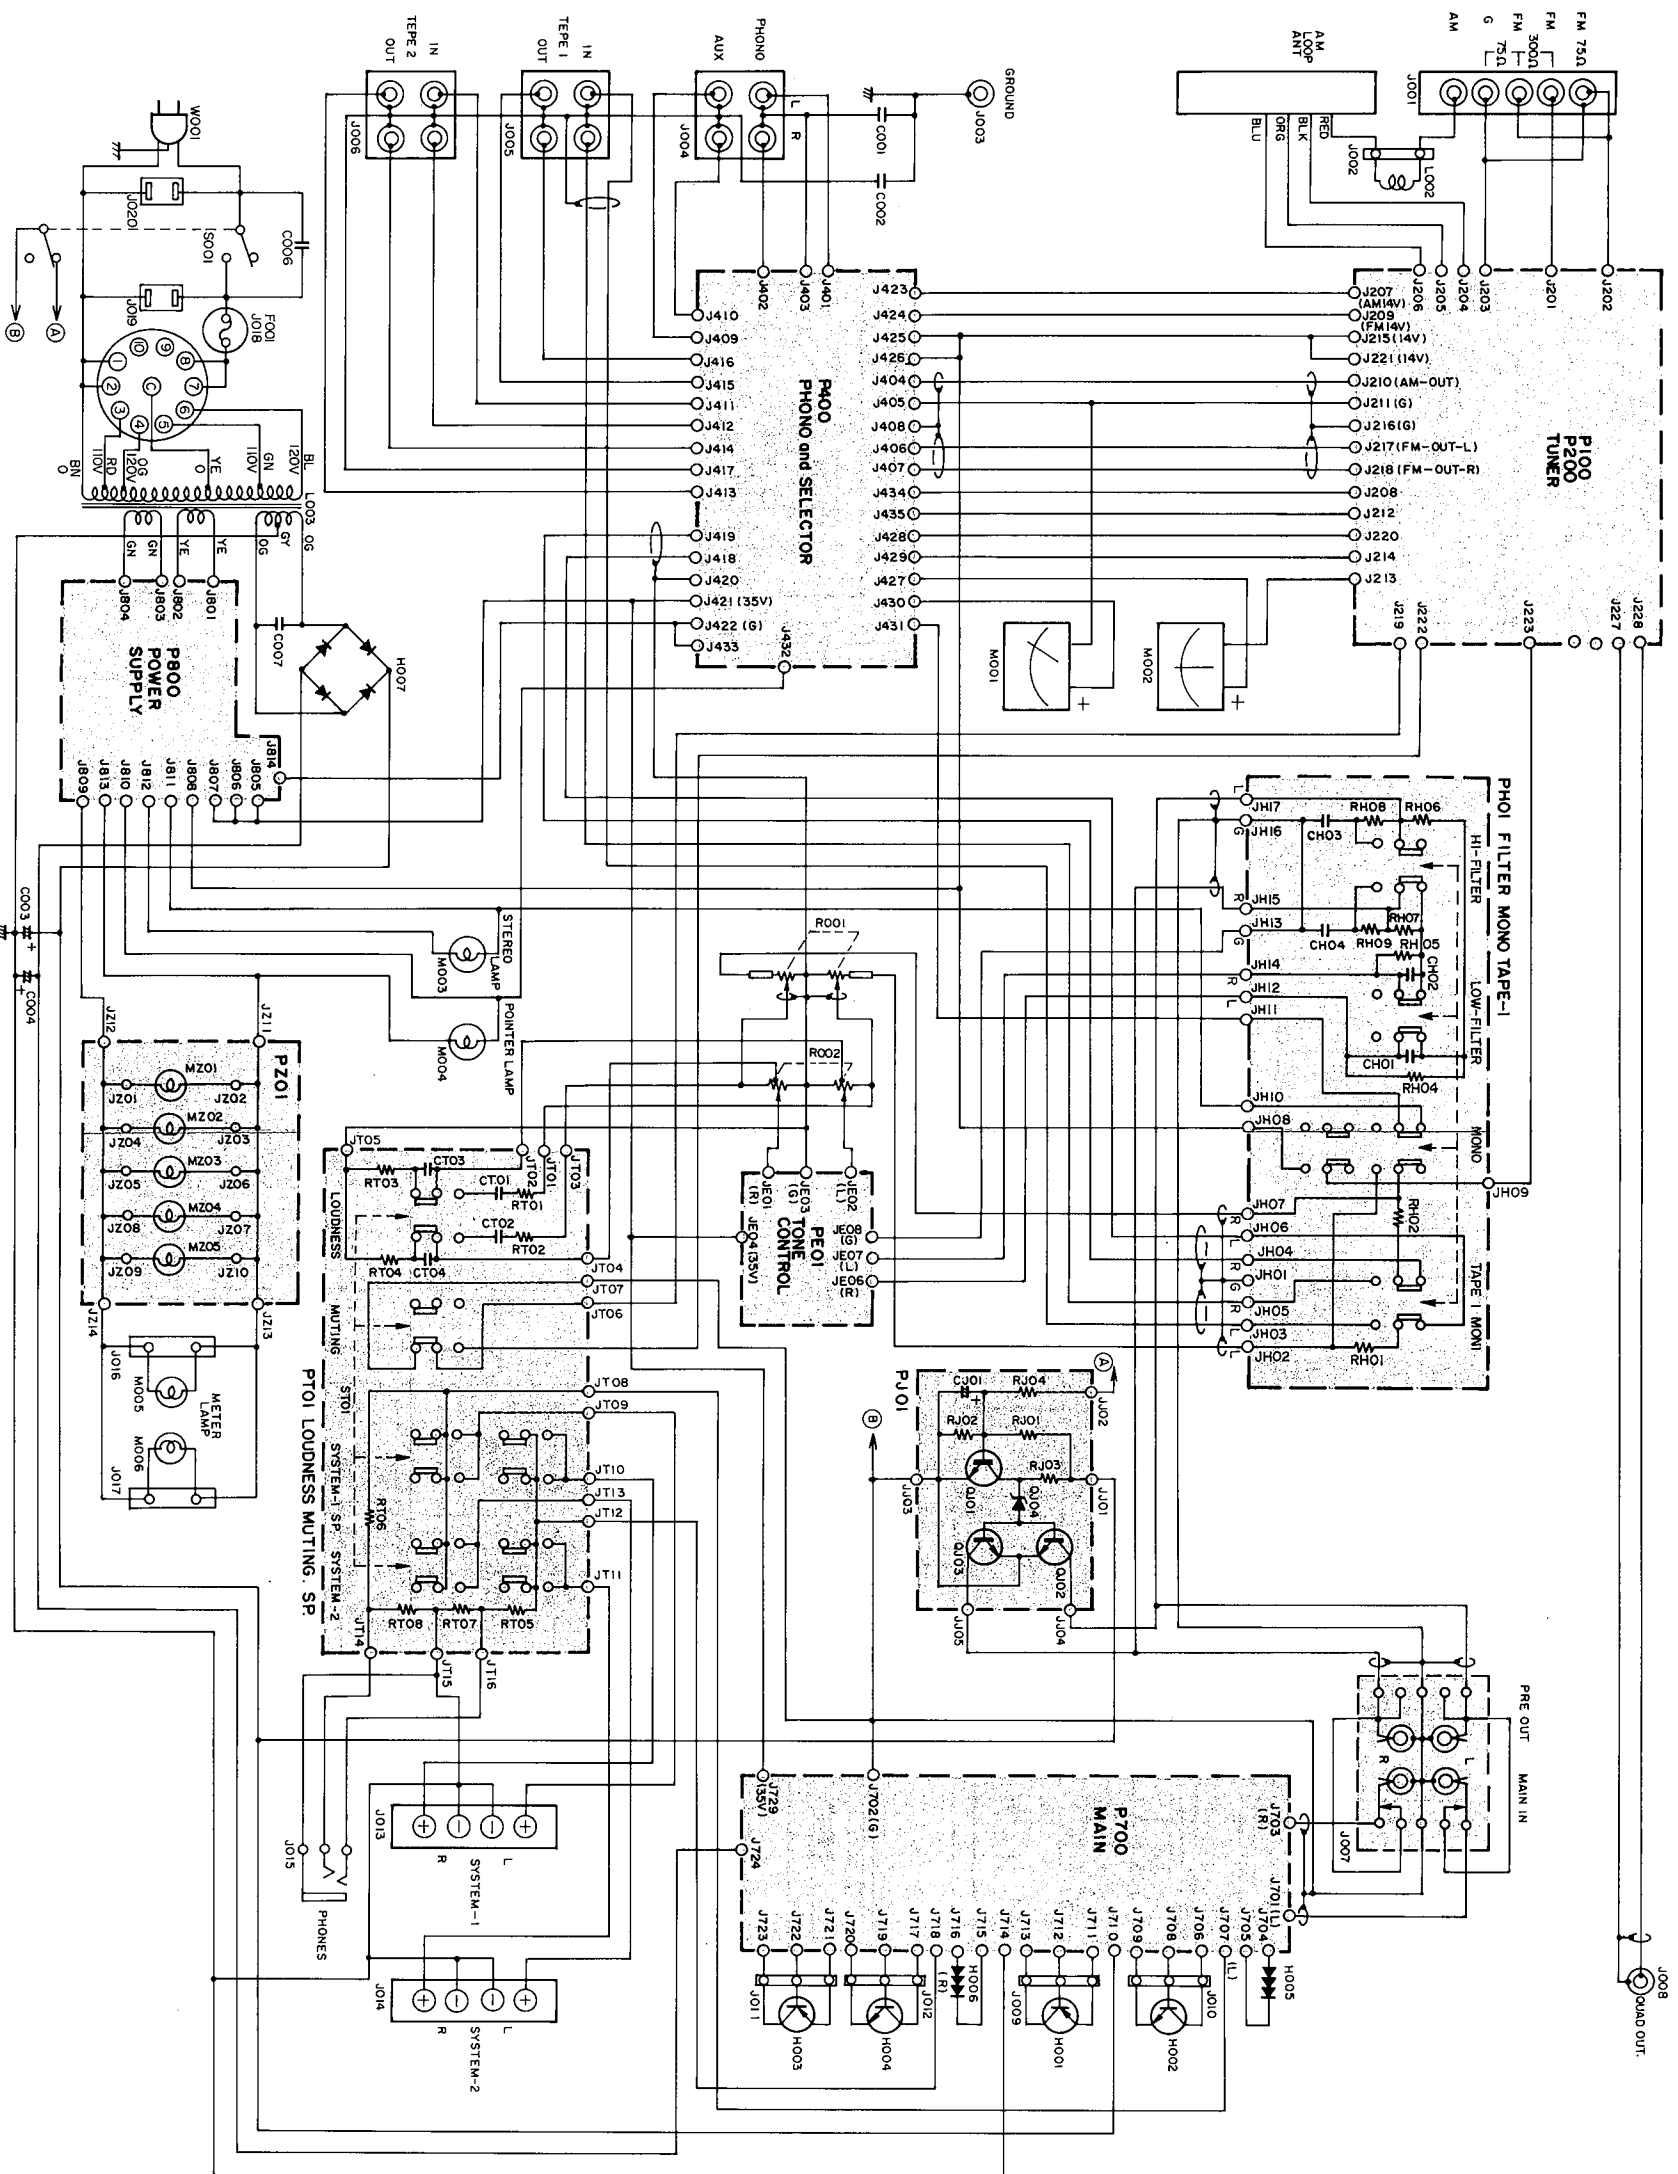

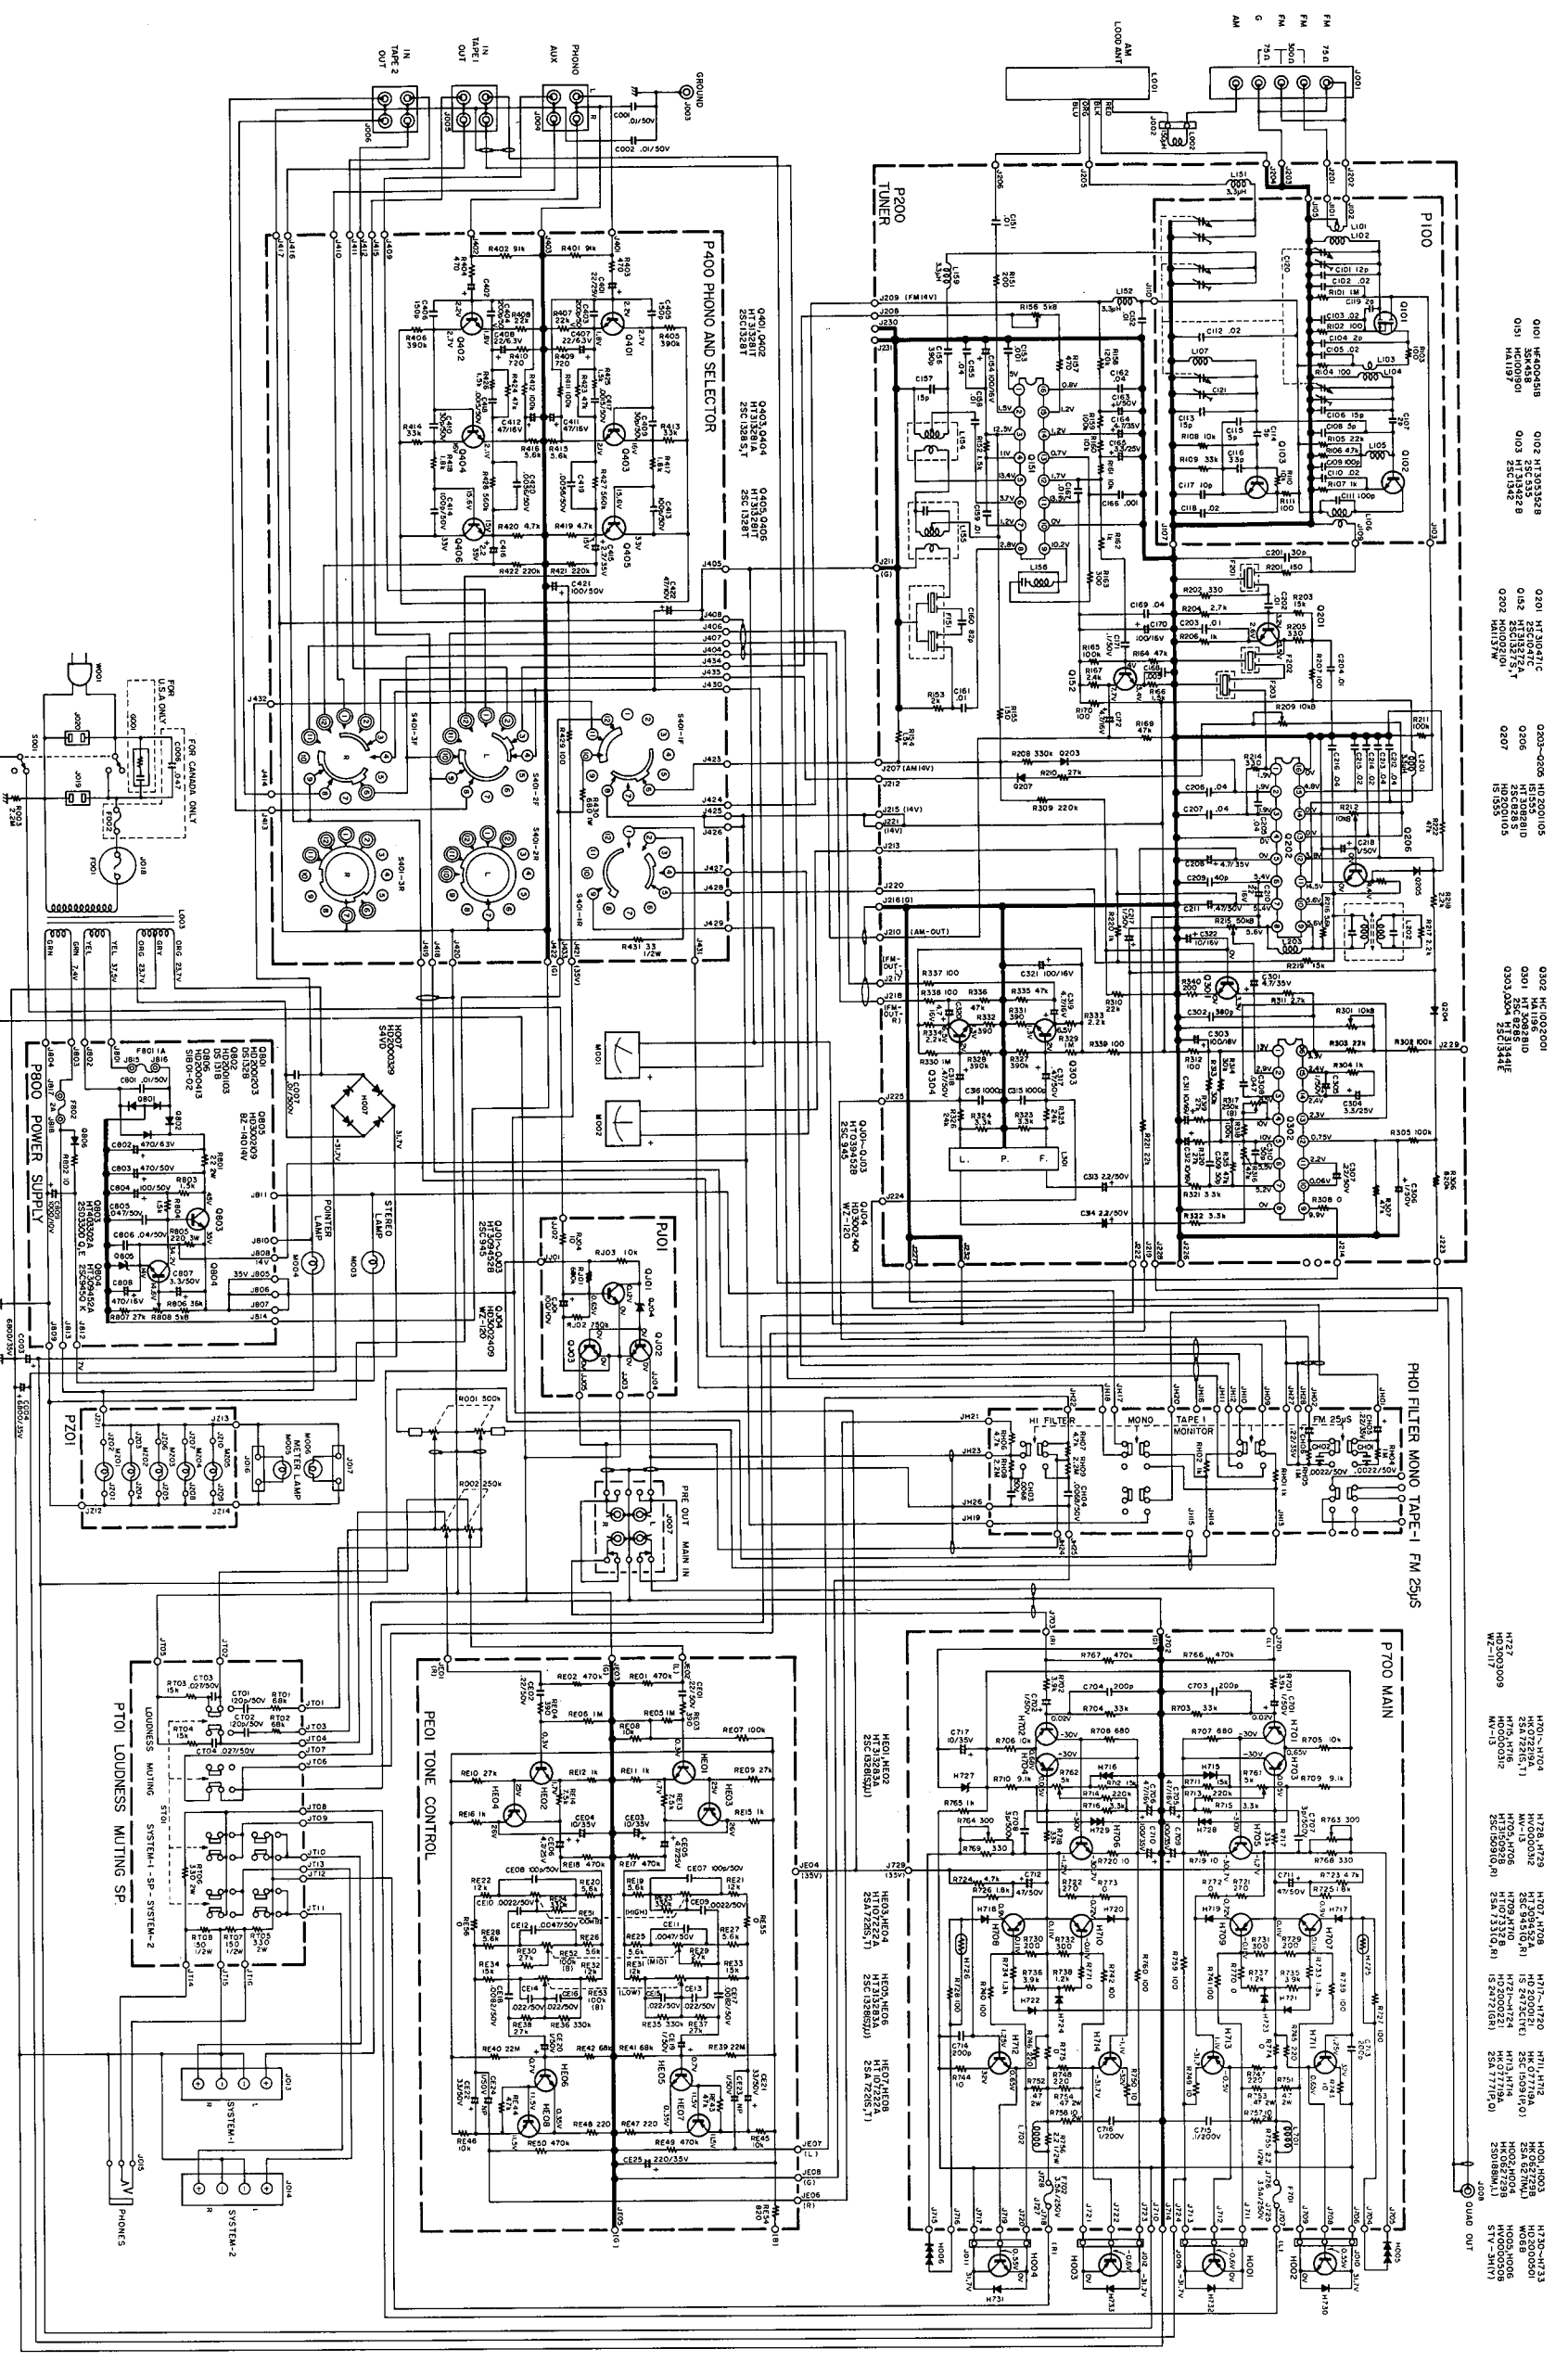



- Q101 6X4PQ
- Q102 6X4PQ
- Q103 6X4PQ
- Q104 6X4PQ
- Q105 6X4PQ
- Q106 6X4PQ
- Q107 6X4PQ
- Q108 6X4PQ
- Q109 6X4PQ
- Q110 6X4PQ
- Q111 6X4PQ
- Q112 6X4PQ
- Q113 6X4PQ
- Q114 6X4PQ
- Q115 6X4PQ
- Q116 6X4PQ
- Q117 6X4PQ
- Q118 6X4PQ
- Q119 6X4PQ
- Q120 6X4PQ
- Q121 6X4PQ
- Q122 6X4PQ
- Q123 6X4PQ
- Q124 6X4PQ
- Q125 6X4PQ
- Q126 6X4PQ
- Q127 6X4PQ
- Q128 6X4PQ
- Q129 6X4PQ
- Q130 6X4PQ
- Q131 6X4PQ
- Q132 6X4PQ
- Q133 6X4PQ
- Q134 6X4PQ
- Q135 6X4PQ
- Q136 6X4PQ
- Q137 6X4PQ
- Q138 6X4PQ
- Q139 6X4PQ
- Q140 6X4PQ
- Q141 6X4PQ
- Q142 6X4PQ
- Q143 6X4PQ
- Q144 6X4PQ
- Q145 6X4PQ
- Q146 6X4PQ
- Q147 6X4PQ
- Q148 6X4PQ
- Q149 6X4PQ
- Q150 6X4PQ
- Q151 6X4PQ
- Q152 6X4PQ
- Q153 6X4PQ
- Q154 6X4PQ
- Q155 6X4PQ
- Q156 6X4PQ
- Q157 6X4PQ
- Q158 6X4PQ
- Q159 6X4PQ
- Q160 6X4PQ
- Q161 6X4PQ
- Q162 6X4PQ
- Q163 6X4PQ
- Q164 6X4PQ
- Q165 6X4PQ
- Q166 6X4PQ
- Q167 6X4PQ
- Q168 6X4PQ
- Q169 6X4PQ
- Q170 6X4PQ
- Q171 6X4PQ
- Q172 6X4PQ
- Q173 6X4PQ
- Q174 6X4PQ
- Q175 6X4PQ
- Q176 6X4PQ
- Q177 6X4PQ
- Q178 6X4PQ
- Q179 6X4PQ
- Q180 6X4PQ
- Q181 6X4PQ
- Q182 6X4PQ
- Q183 6X4PQ
- Q184 6X4PQ
- Q185 6X4PQ
- Q186 6X4PQ
- Q187 6X4PQ
- Q188 6X4PQ
- Q189 6X4PQ
- Q190 6X4PQ
- Q191 6X4PQ
- Q192 6X4PQ
- Q193 6X4PQ
- Q194 6X4PQ
- Q195 6X4PQ
- Q196 6X4PQ
- Q197 6X4PQ
- Q198 6X4PQ
- Q199 6X4PQ
- Q200 6X4PQ

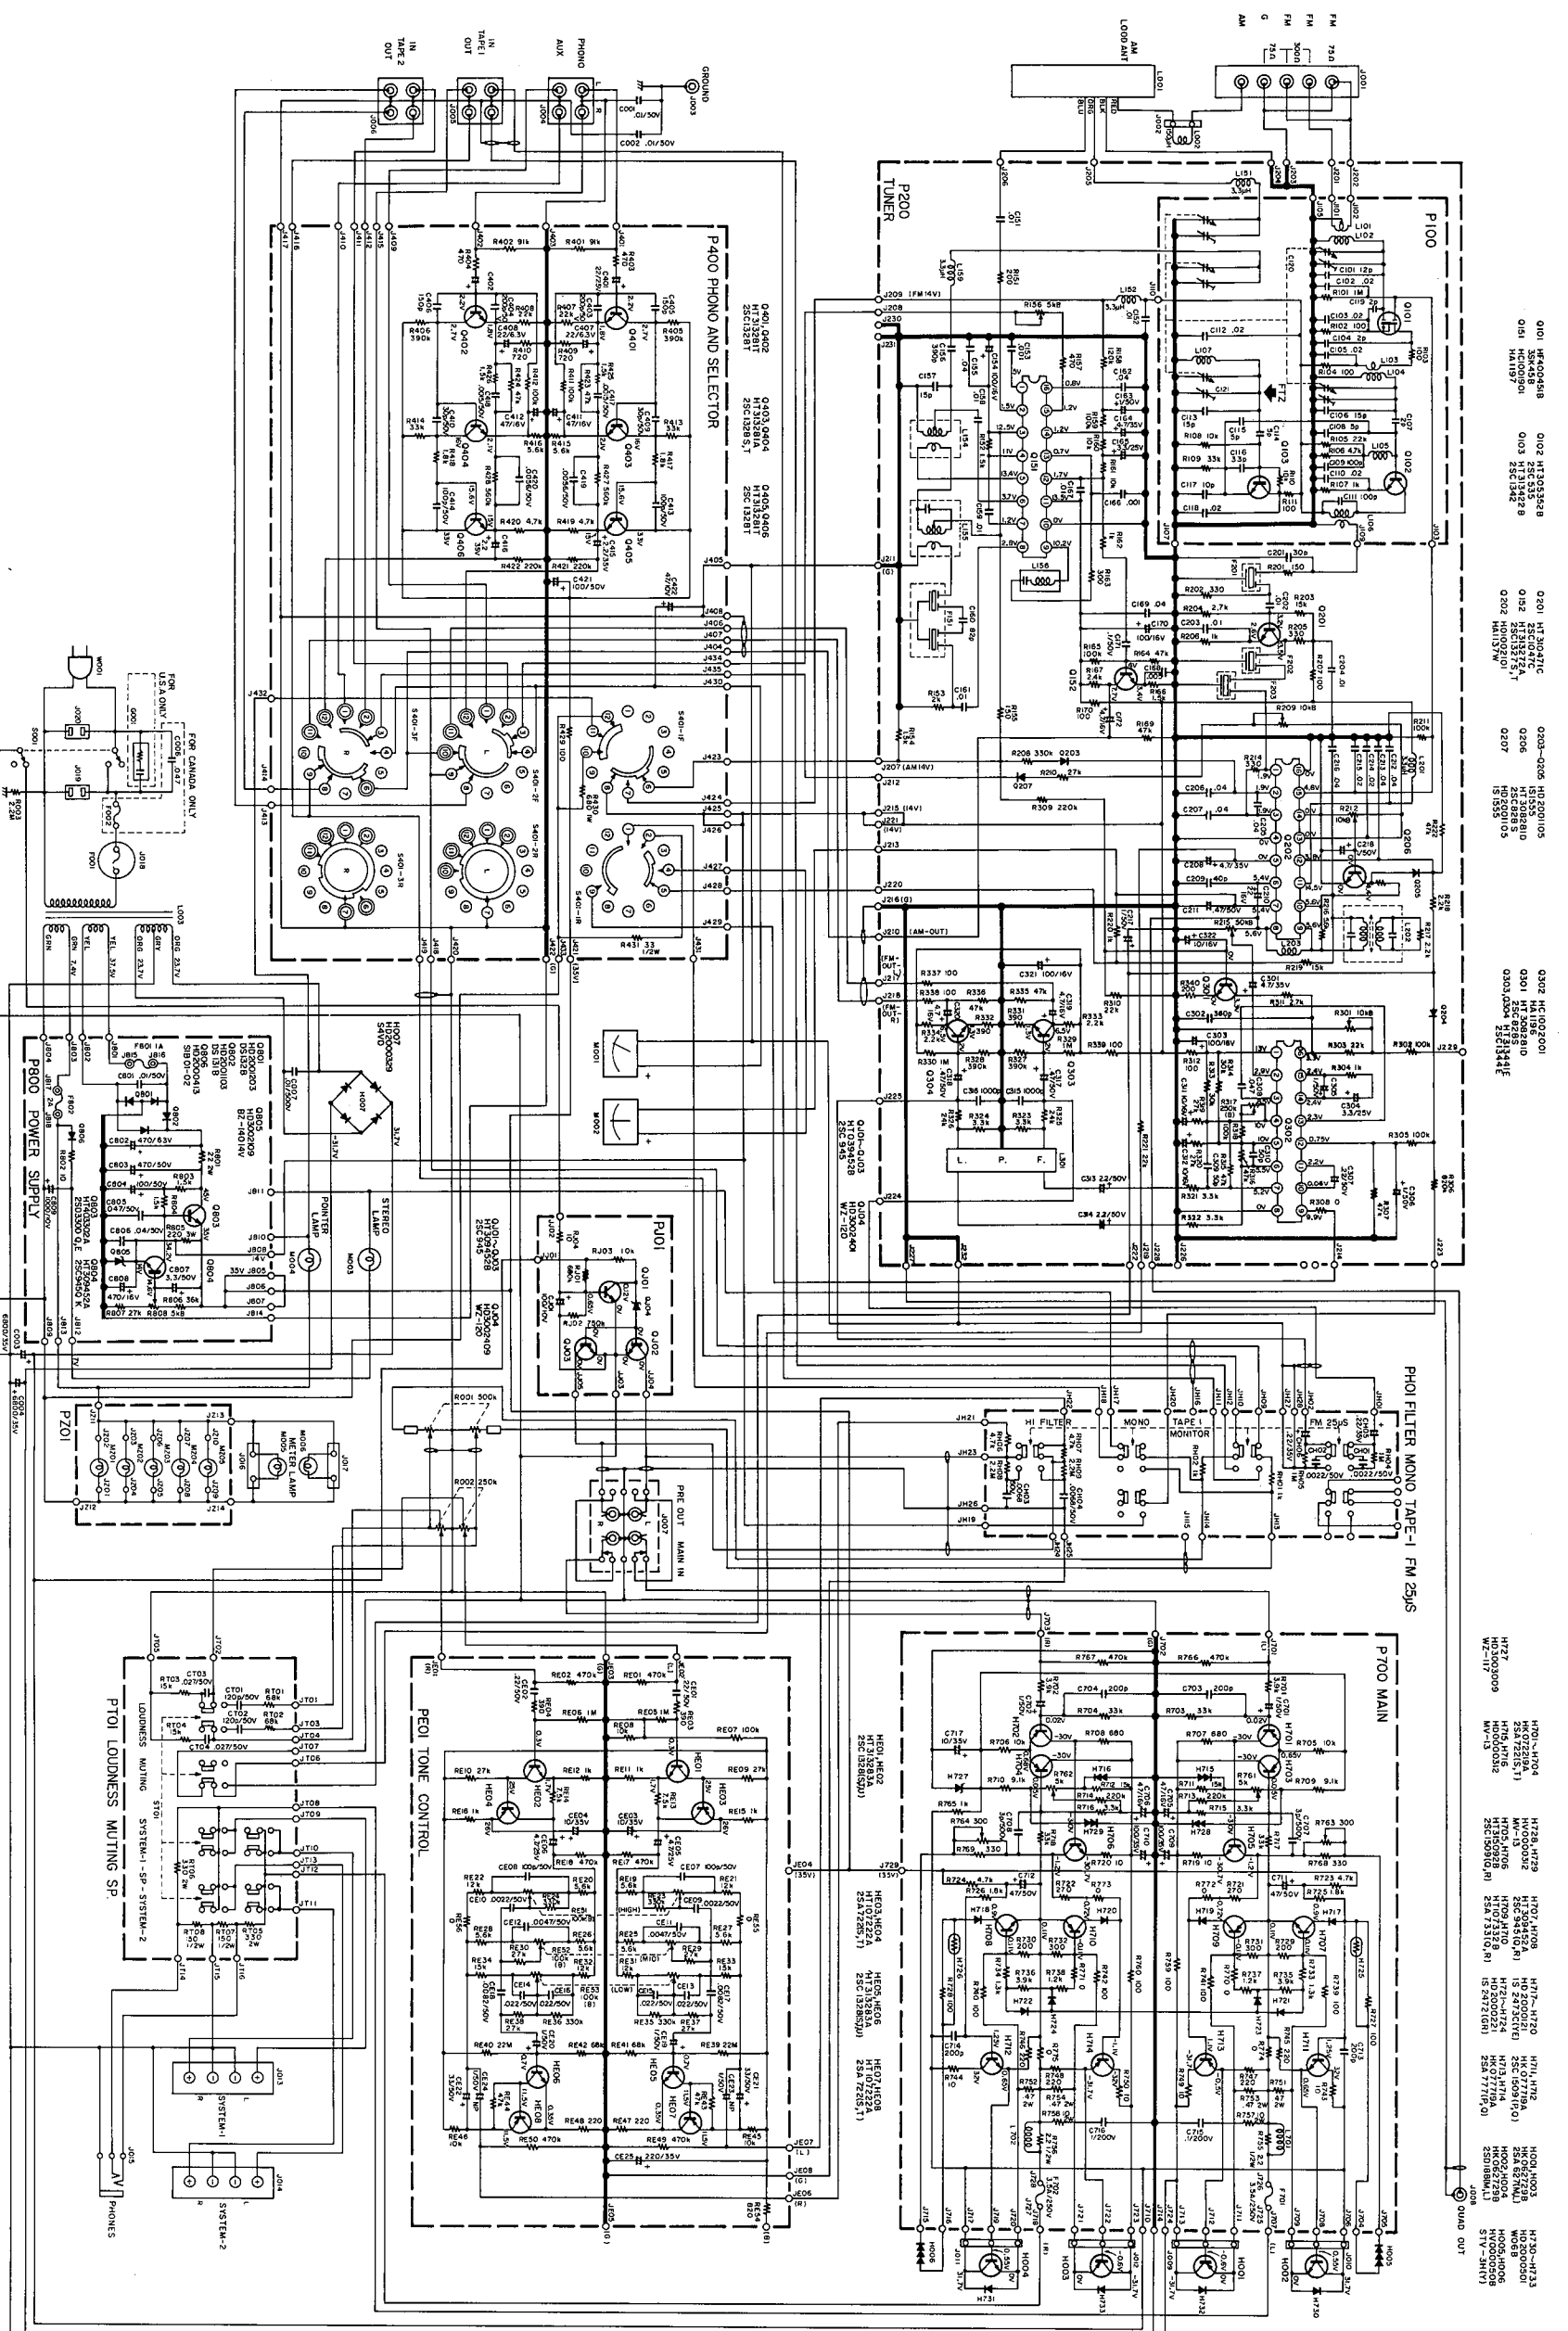



- 0101 6X40A88
- 0102 6X41A88
- 0103 6X42A88
- 0104 6X43A88
- 0105 6X44A88
- 0106 6X45A88
- 0107 6X46A88
- 0108 6X47A88
- 0109 6X48A88
- 0110 6X49A88
- 0111 6X50A88
- 0112 6X51A88
- 0113 6X52A88
- 0114 6X53A88
- 0115 6X54A88
- 0116 6X55A88
- 0117 6X56A88
- 0118 6X57A88
- 0119 6X58A88
- 0120 6X59A88
- 0121 6X60A88
- 0122 6X61A88
- 0123 6X62A88
- 0124 6X63A88
- 0125 6X64A88
- 0126 6X65A88
- 0127 6X66A88
- 0128 6X67A88
- 0129 6X68A88
- 0130 6X69A88
- 0131 6X70A88
- 0132 6X71A88
- 0133 6X72A88
- 0134 6X73A88
- 0135 6X74A88
- 0136 6X75A88
- 0137 6X76A88
- 0138 6X77A88
- 0139 6X78A88
- 0140 6X79A88
- 0141 6X80A88
- 0142 6X81A88
- 0143 6X82A88
- 0144 6X83A88
- 0145 6X84A88
- 0146 6X85A88
- 0147 6X86A88
- 0148 6X87A88
- 0149 6X88A88
- 0150 6X89A88
- 0151 6X90A88
- 0152 6X91A88
- 0153 6X92A88
- 0154 6X93A88
- 0155 6X94A88
- 0156 6X95A88
- 0157 6X96A88
- 0158 6X97A88
- 0159 6X98A88
- 0160 6X99A88
- 0161 6X100A88

8.6 TUNER BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

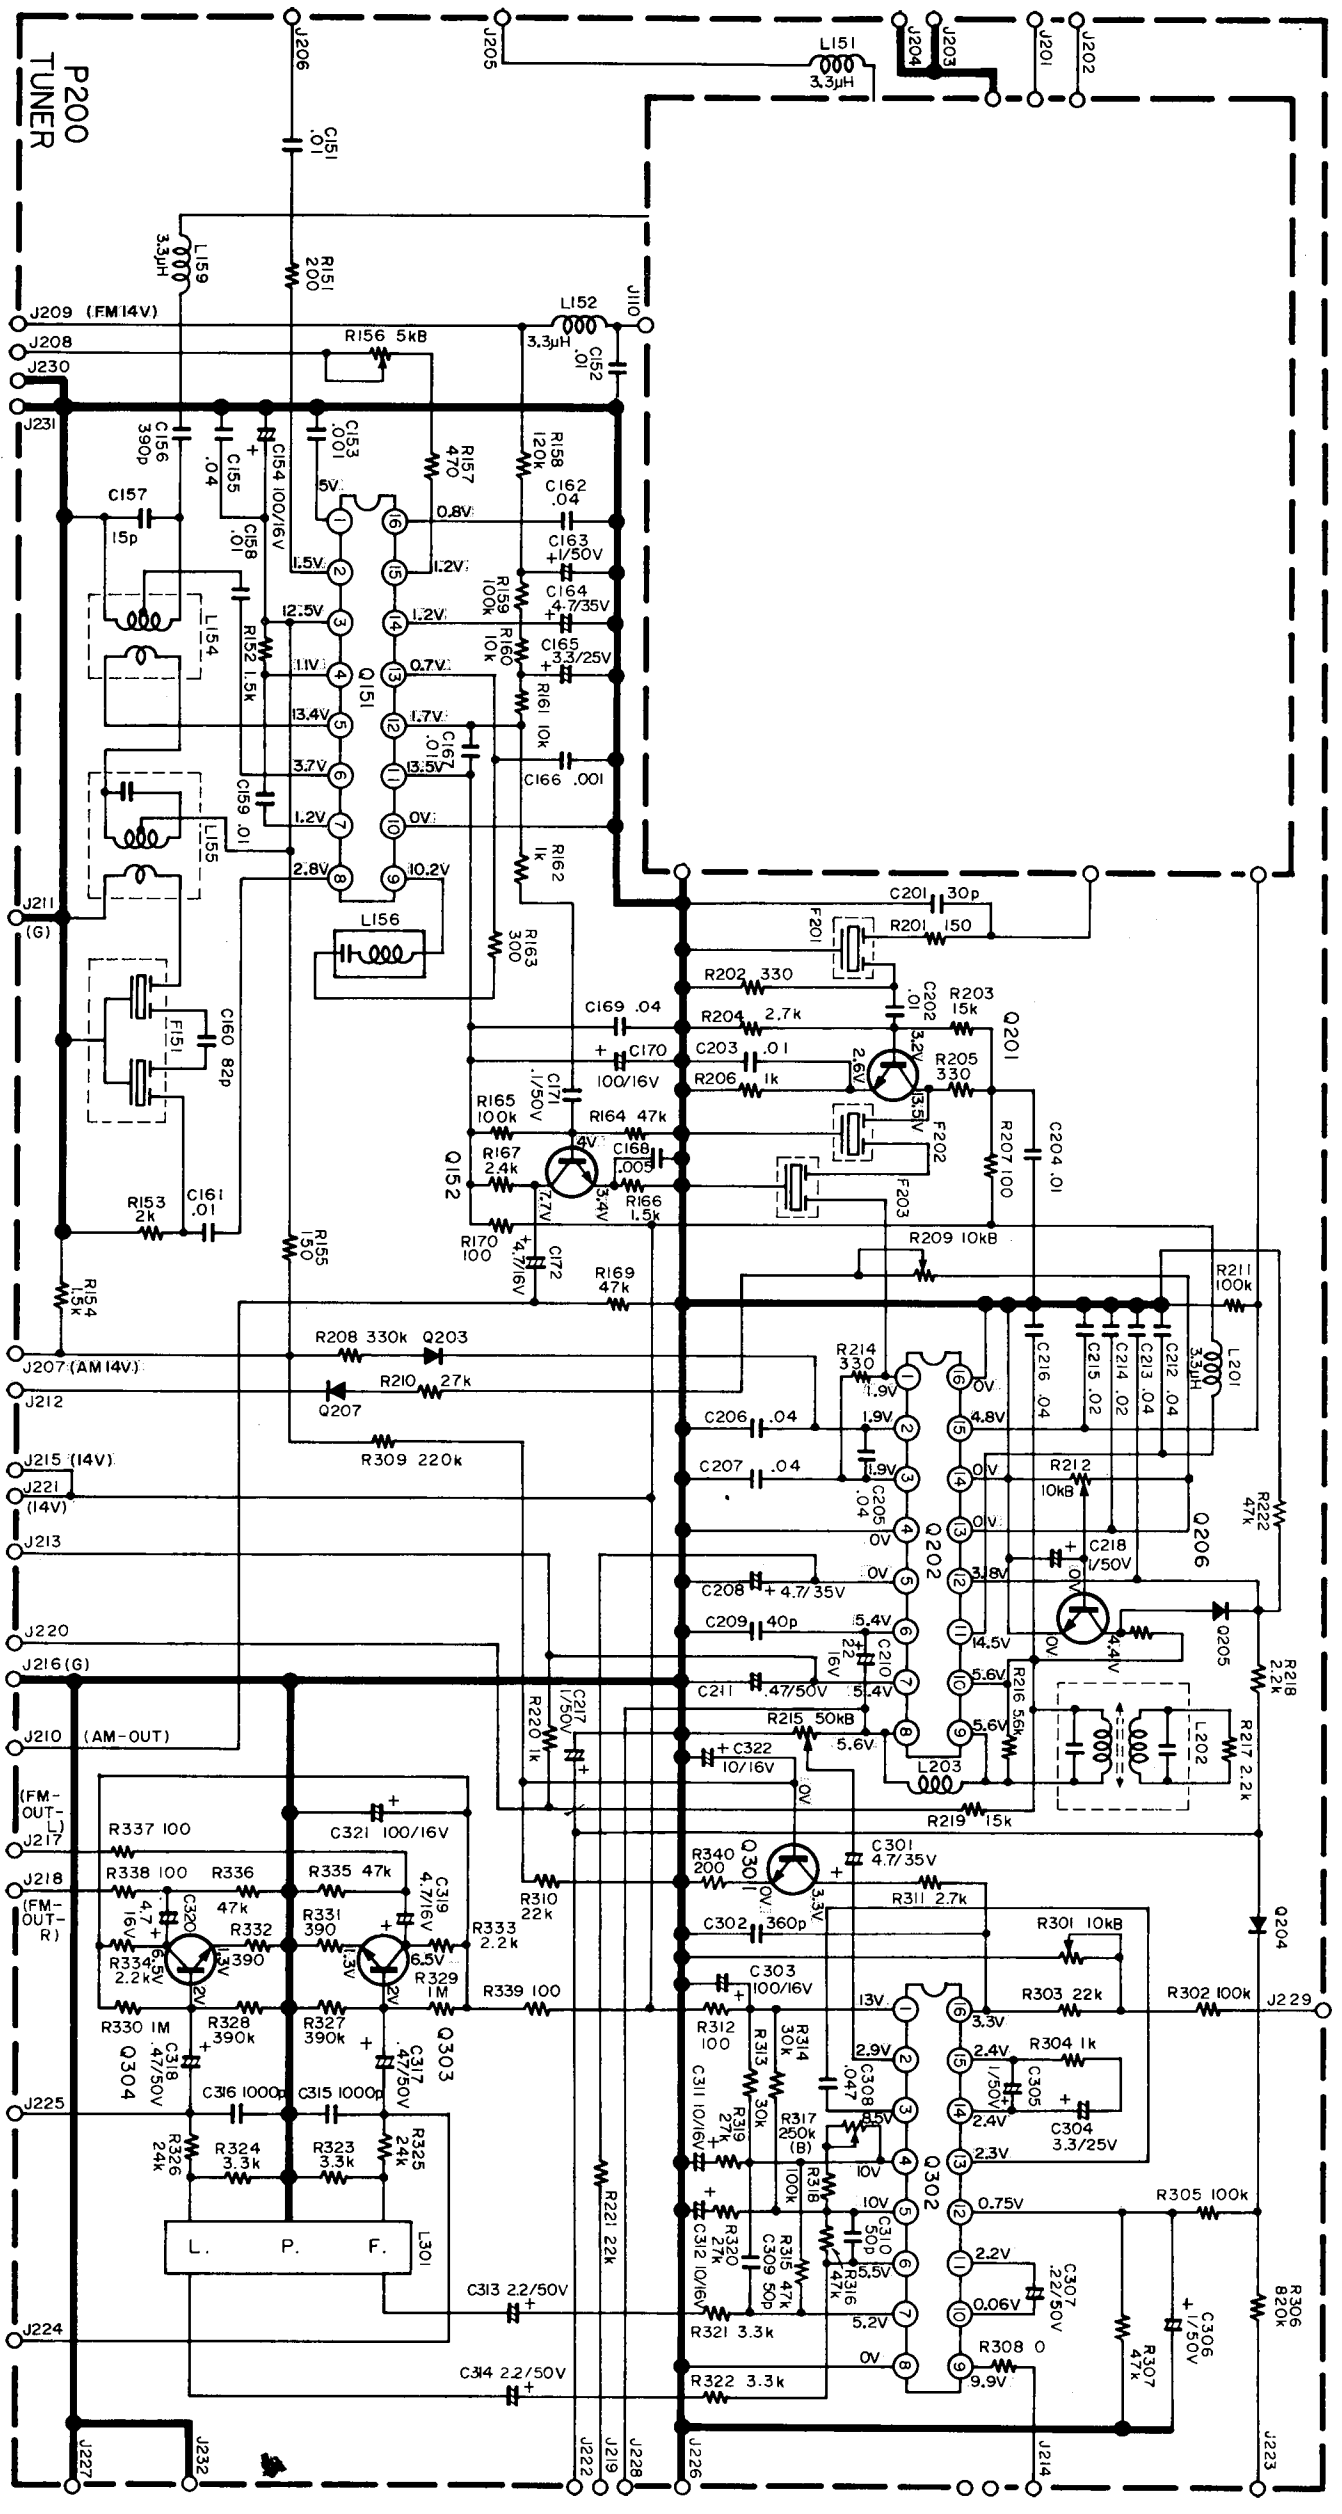


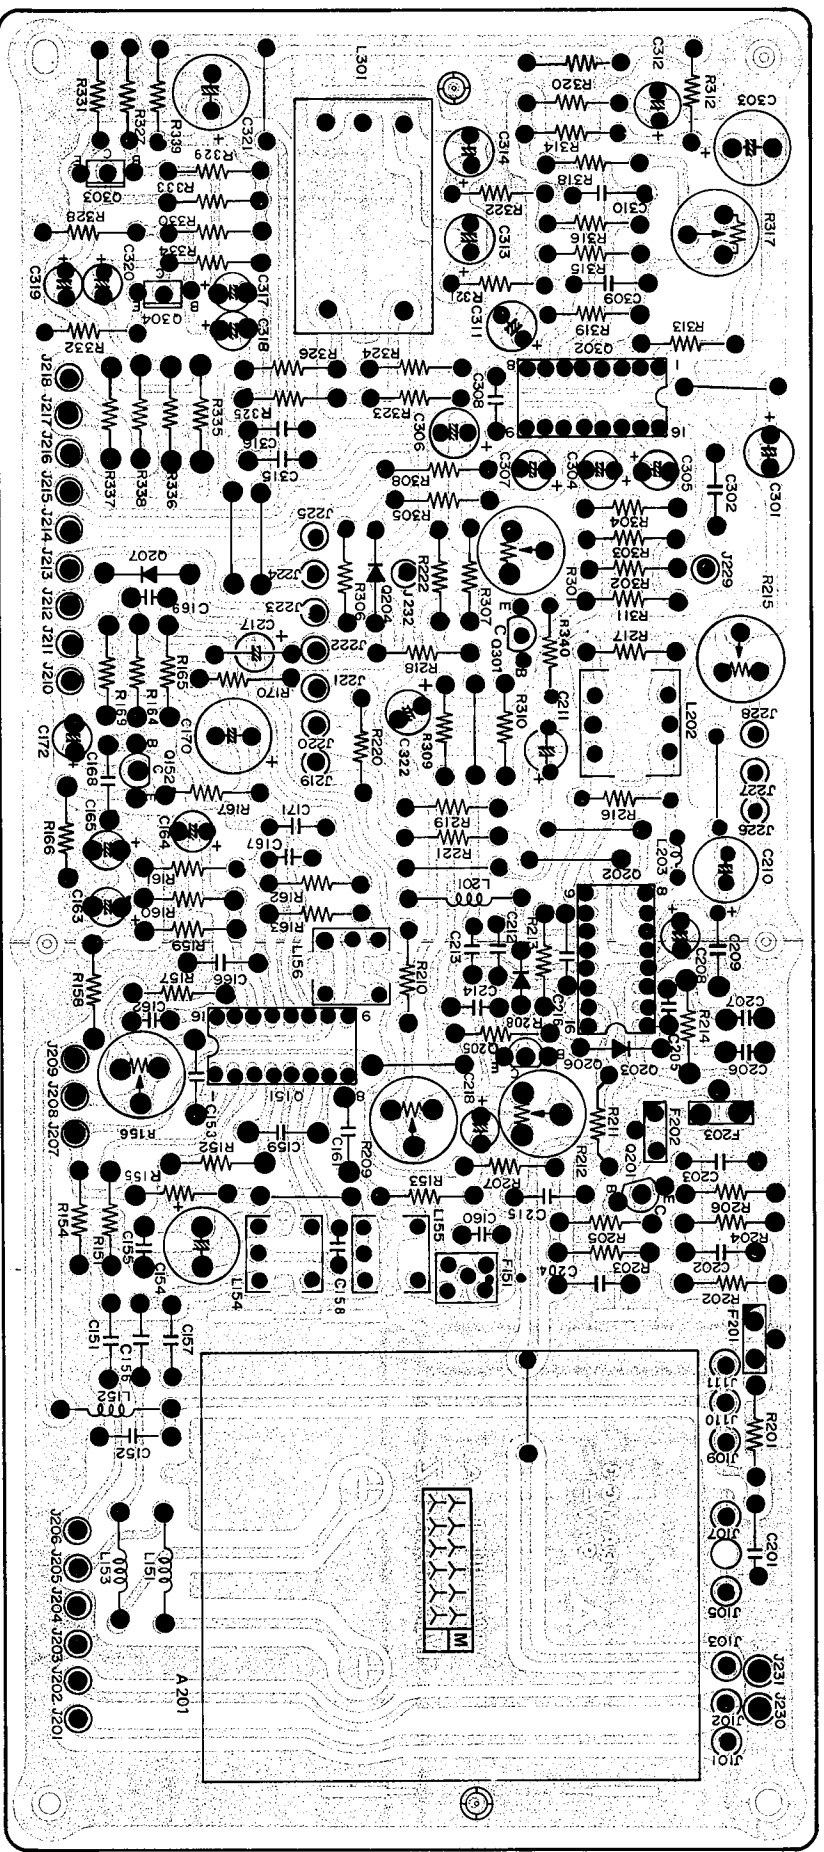


8.7 FM FRONT END BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

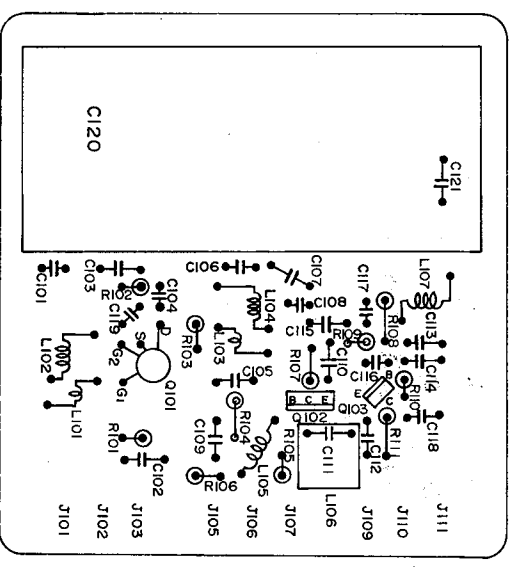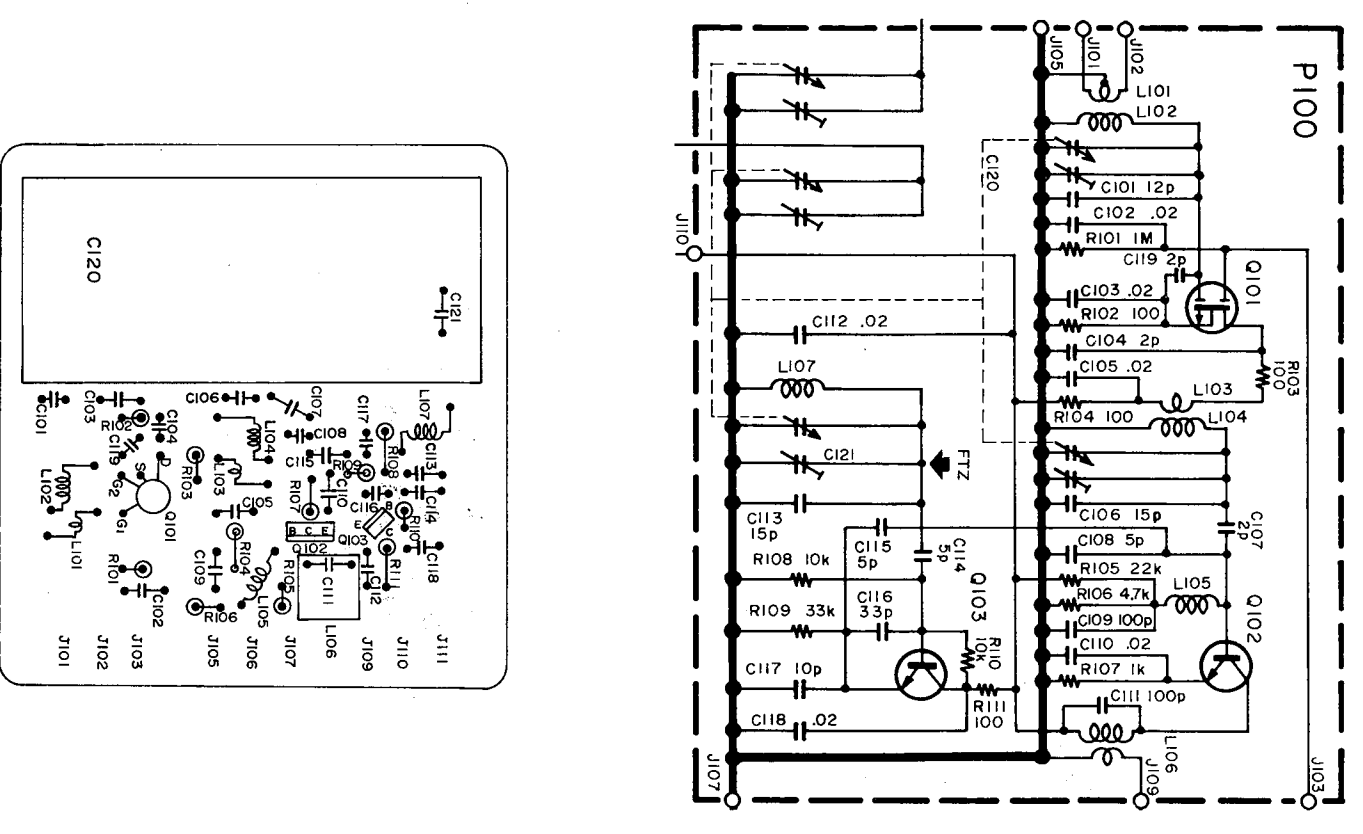


8.8 PHONO EQUALIZER AMP. BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS


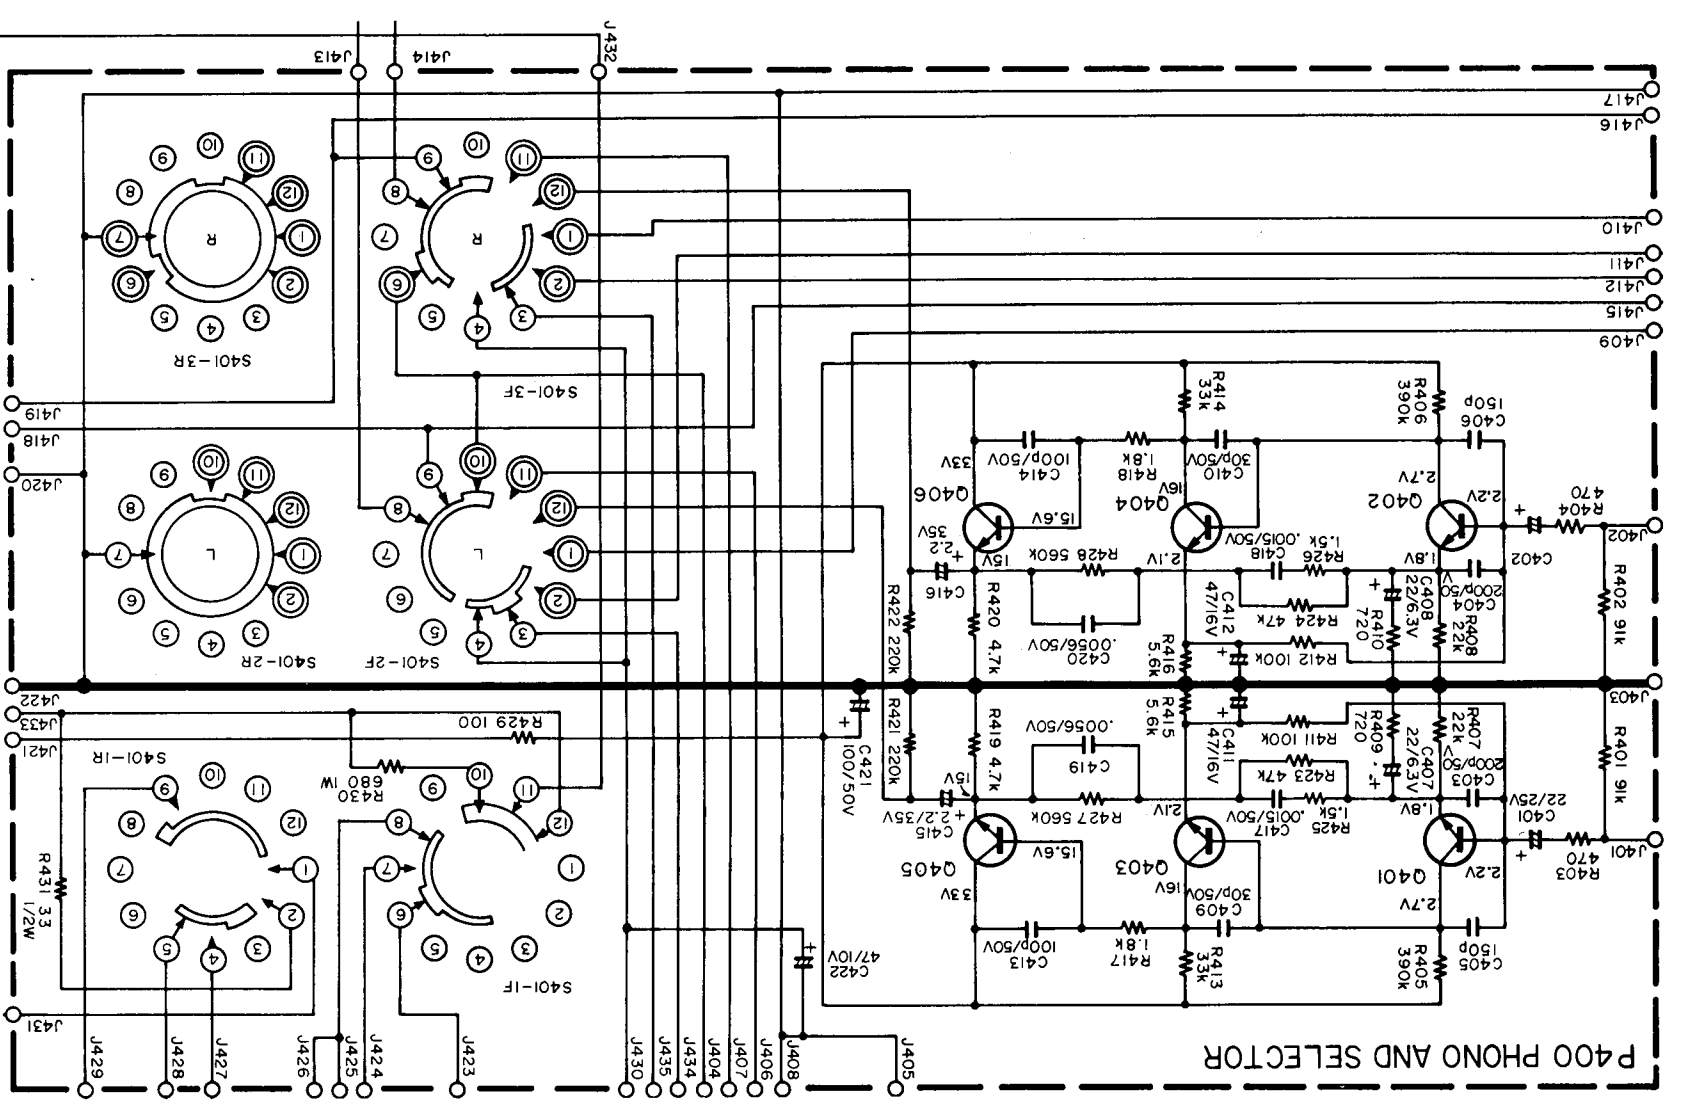


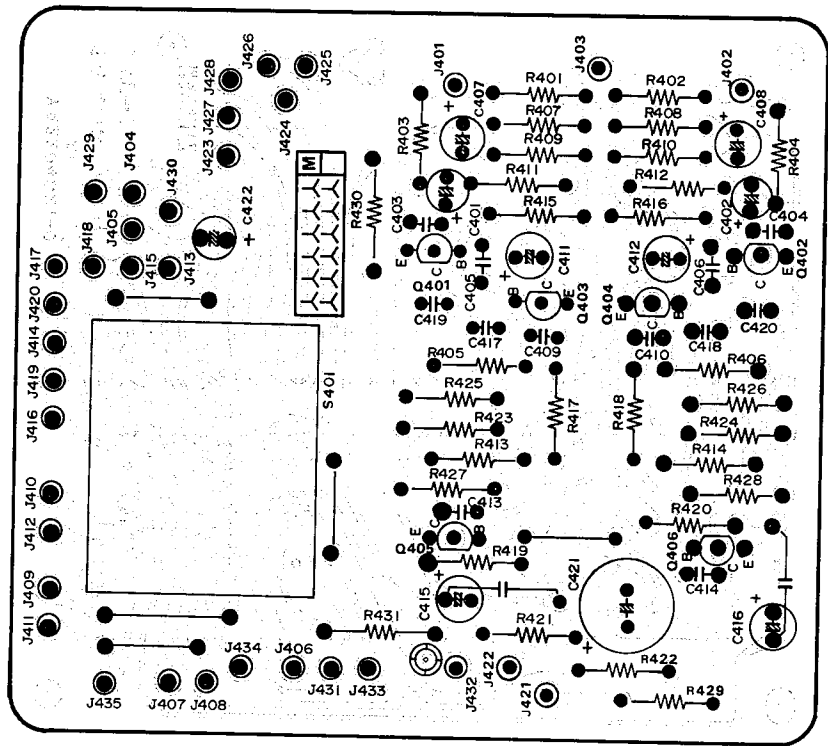



8.9 MAIN AMP. BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

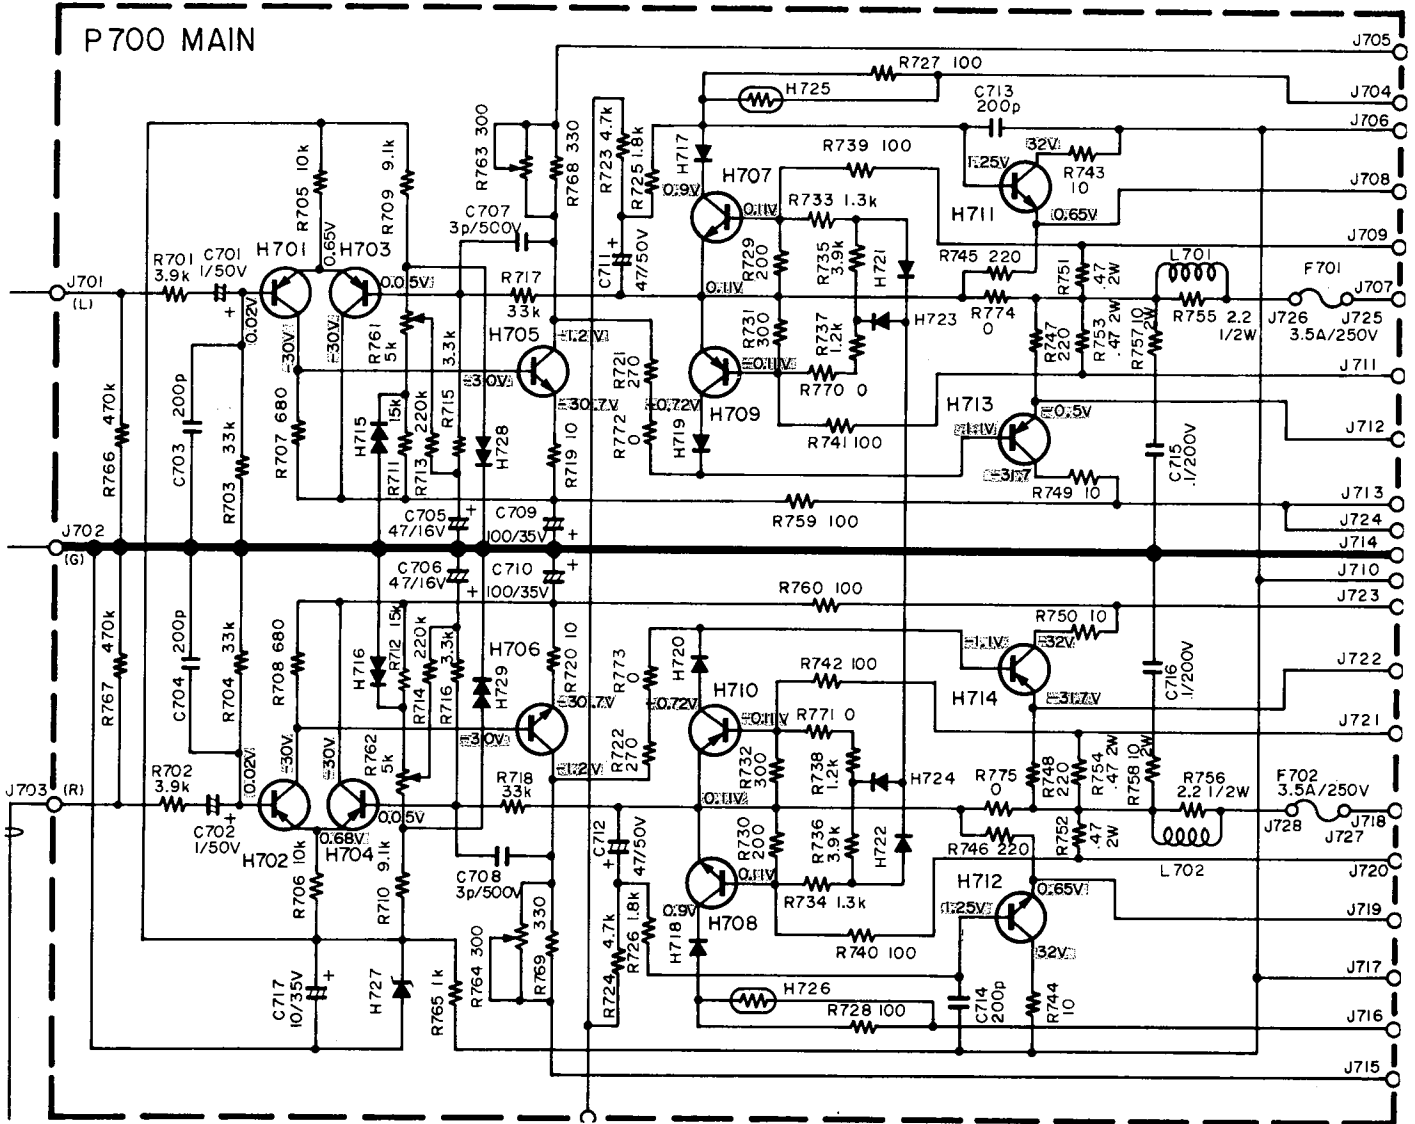



8.11 PRE, TONE AMP. BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

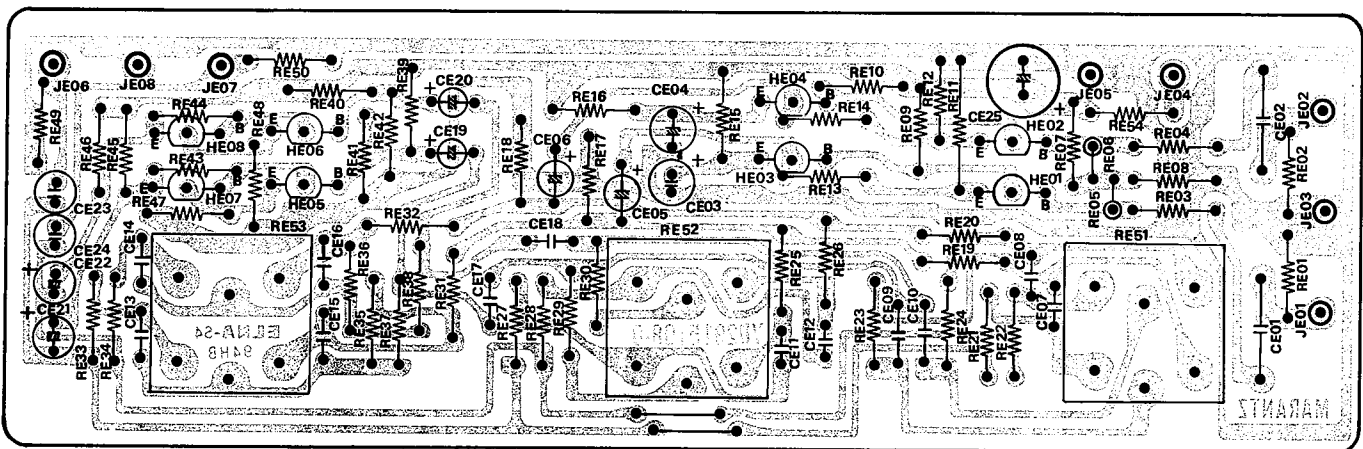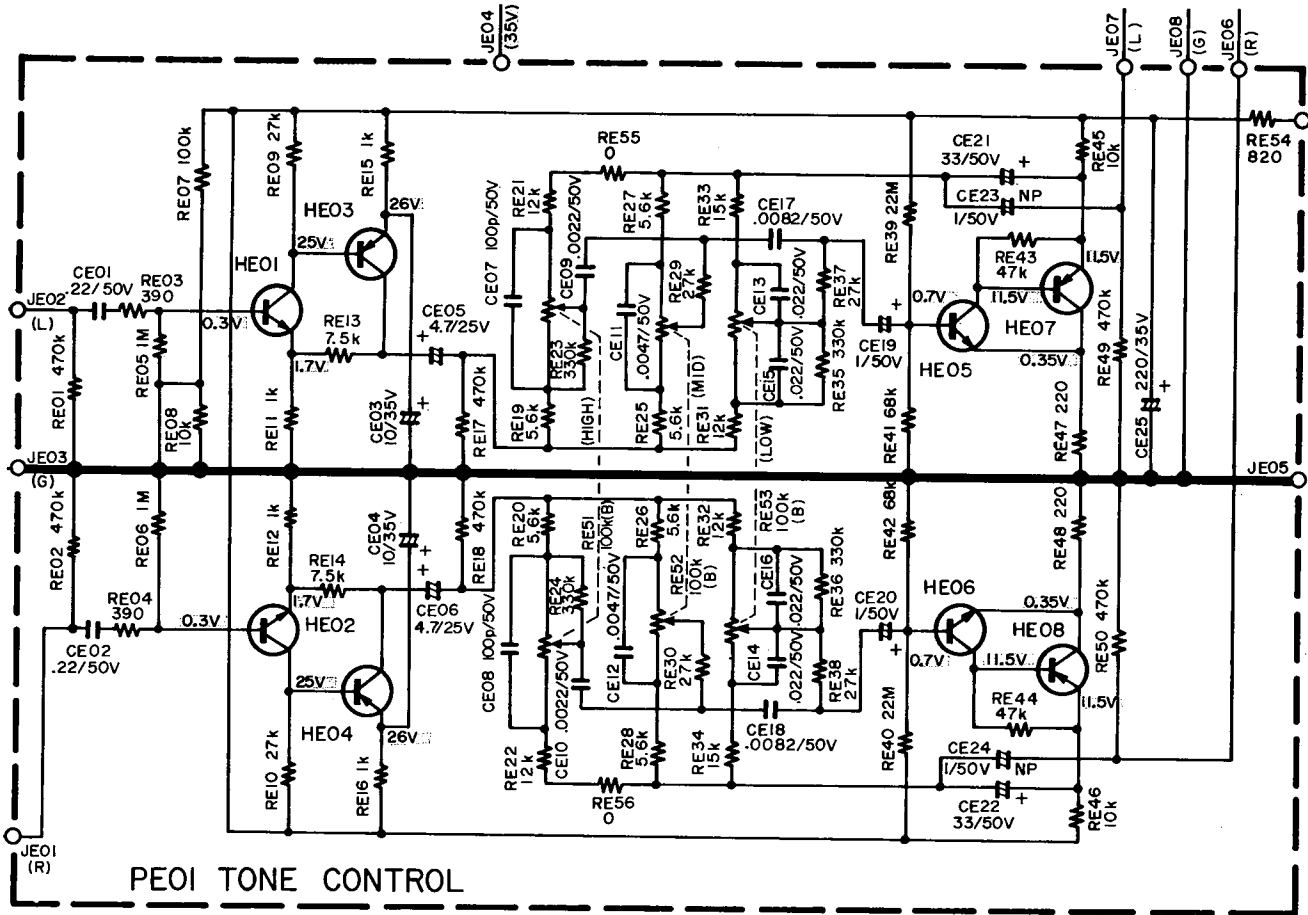


8.12 MONO, HI FILTER, TAPE 1 MON., FM 25 μ S SWITCHES BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

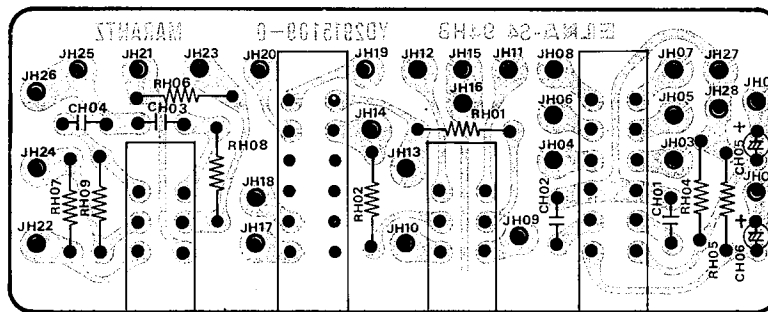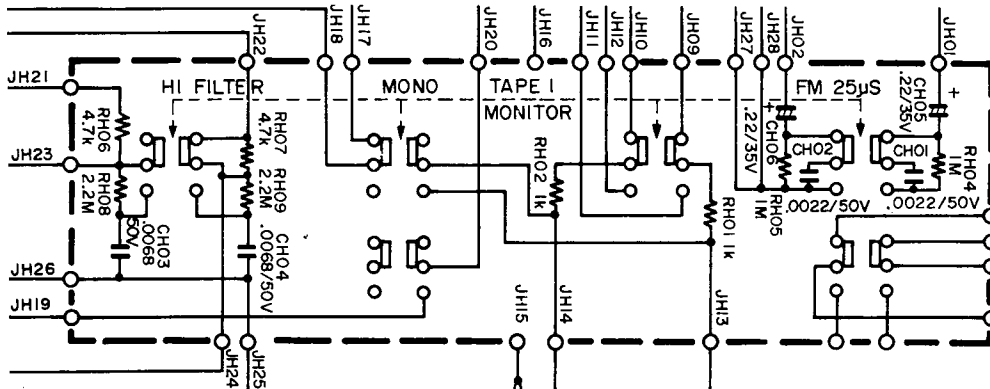


8.13 MONO, HI FILTER, TAPE 1 MON., LOW FILTER SWITCHES BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS - EUROPE

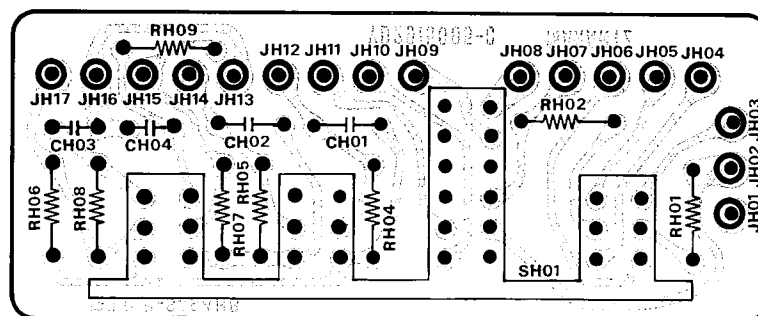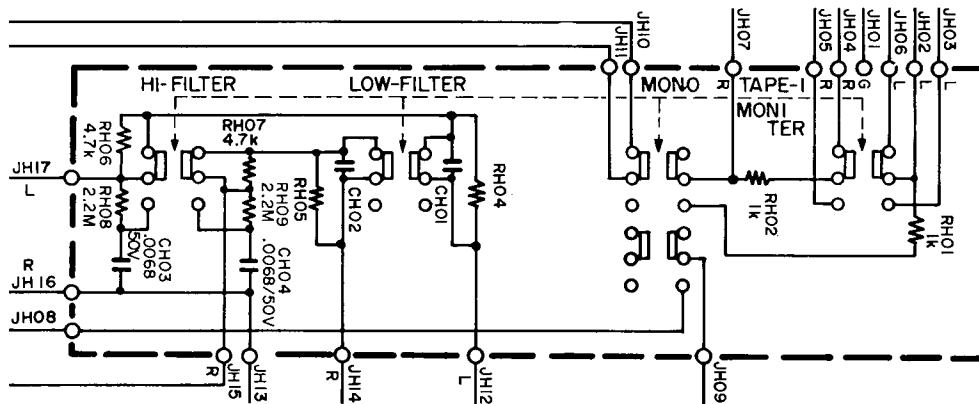


8.14 POPS NOISE MUTING BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

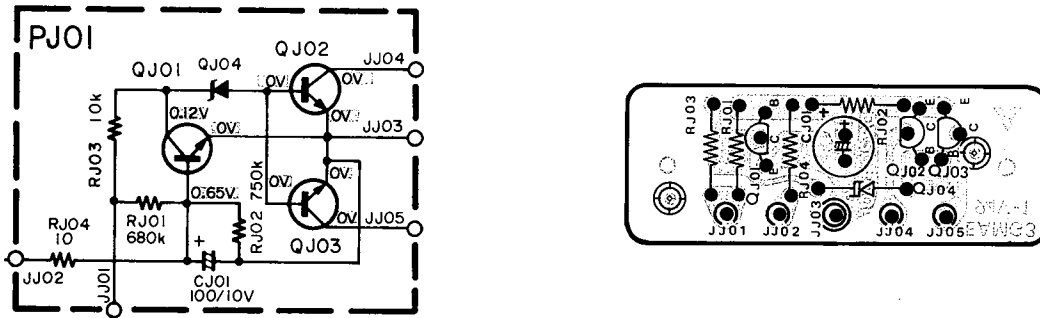

8.15 SPEAKER SWITCH BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

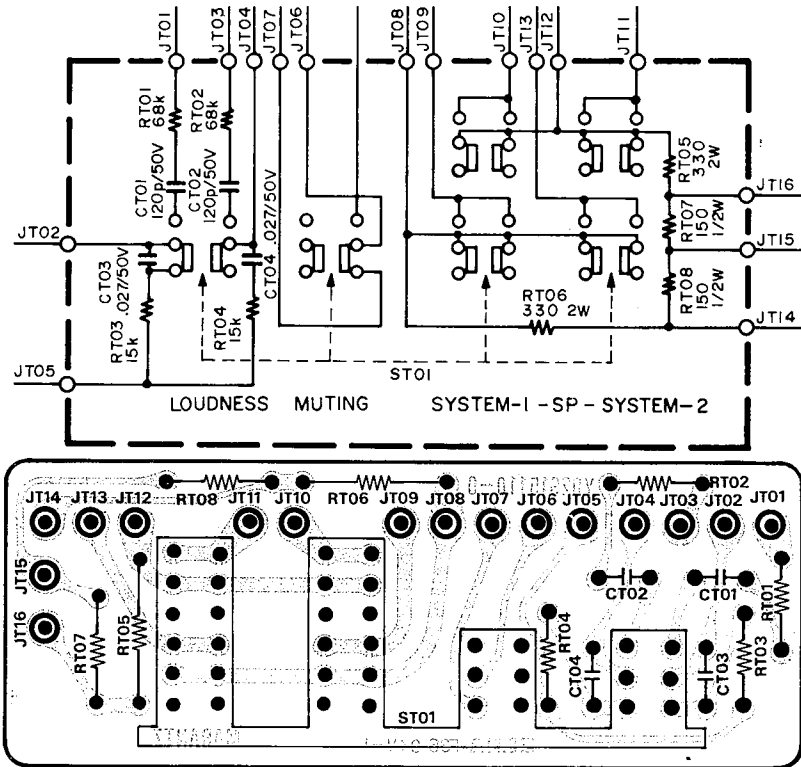


8.16 DIAL LAMP BOARD SCHEMATIC DIAGRAM AND COMPONENT LOCATIONS

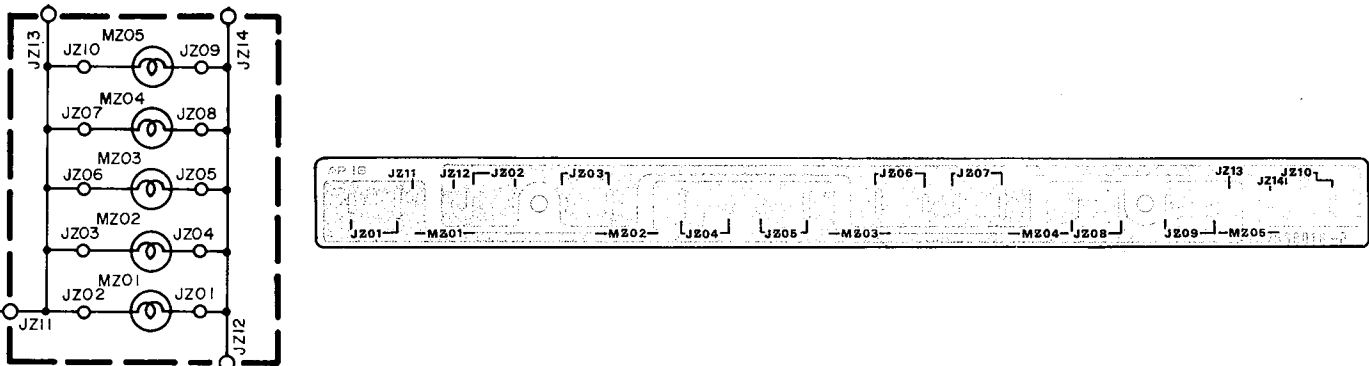


9. MAJOR COMPONENT LOCATIONS


9.1 CABINET - FRONT VIEW

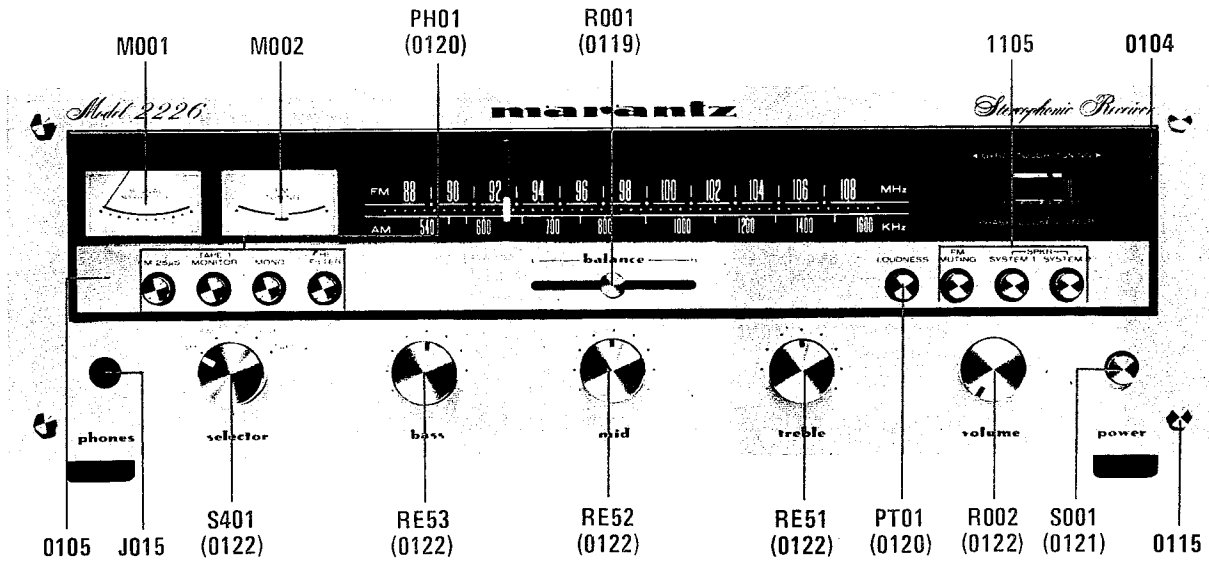


9.2 CHASSIS - TOP VIEW

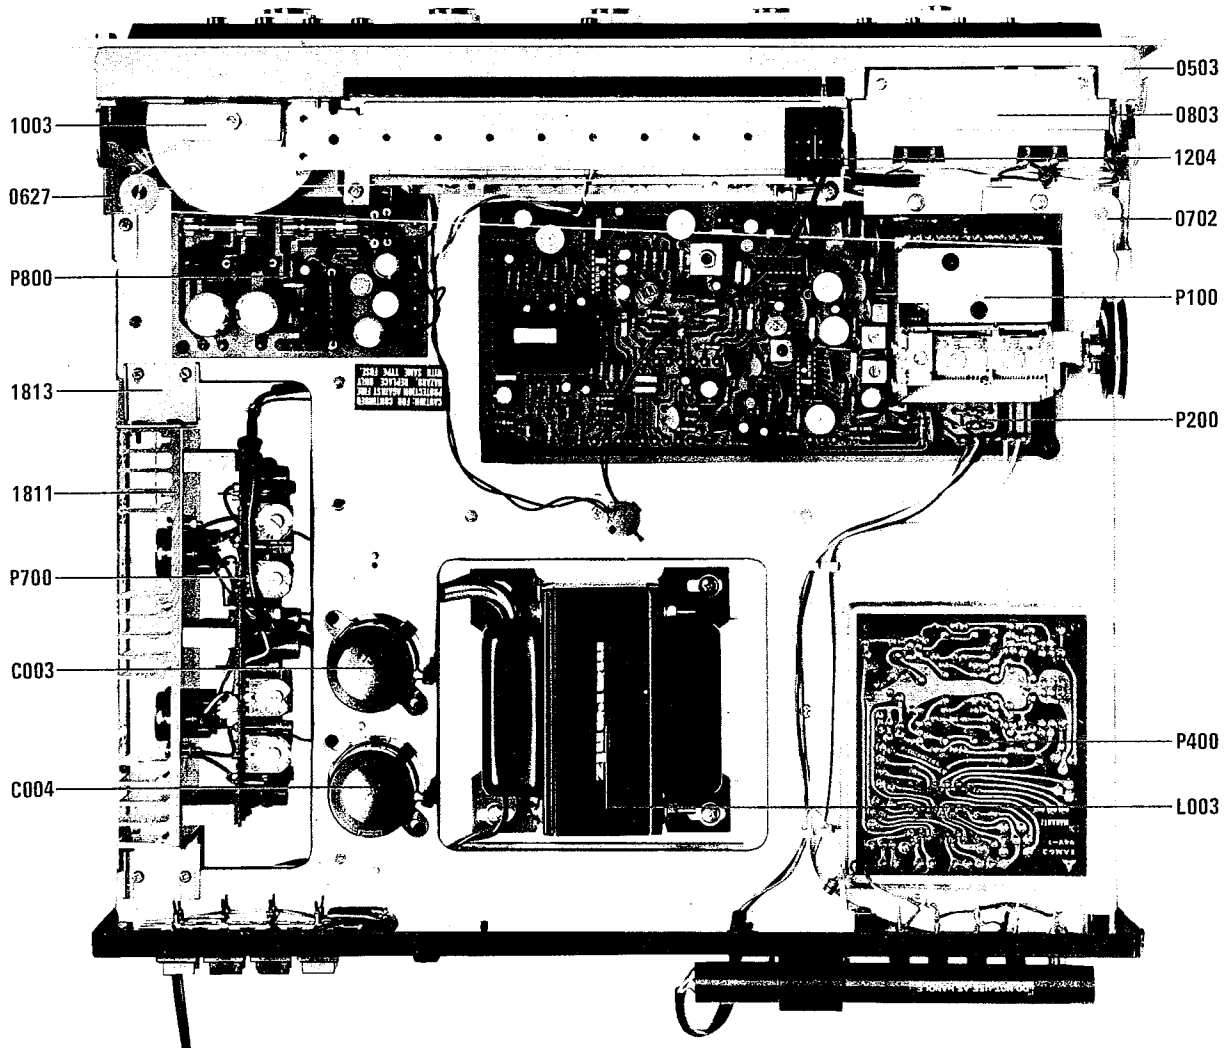


9.3 CABINET - REAR VIEW

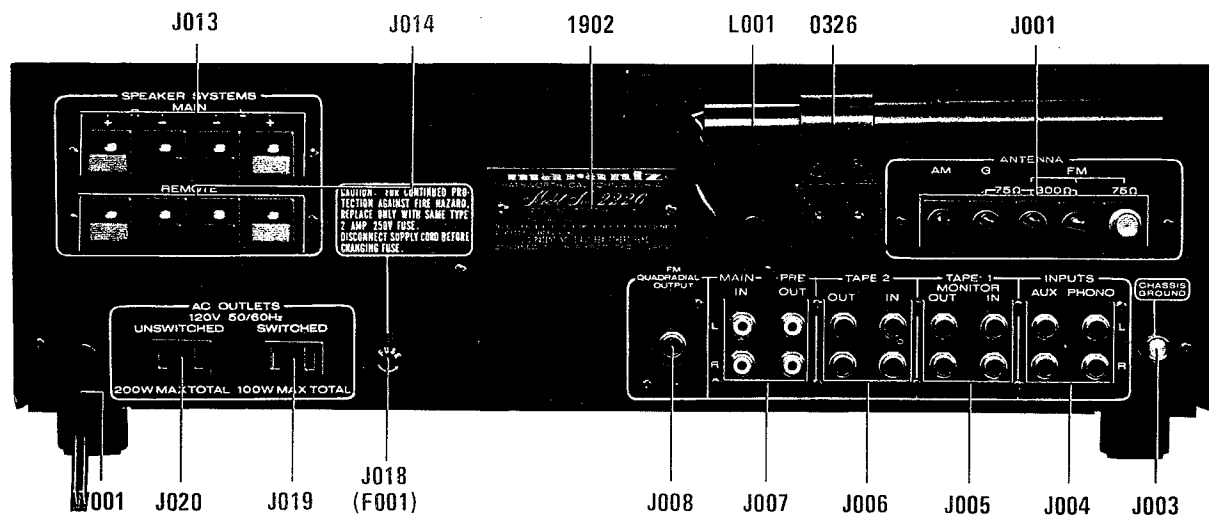


9.4 CHASSIS - BOTTOM VIEW

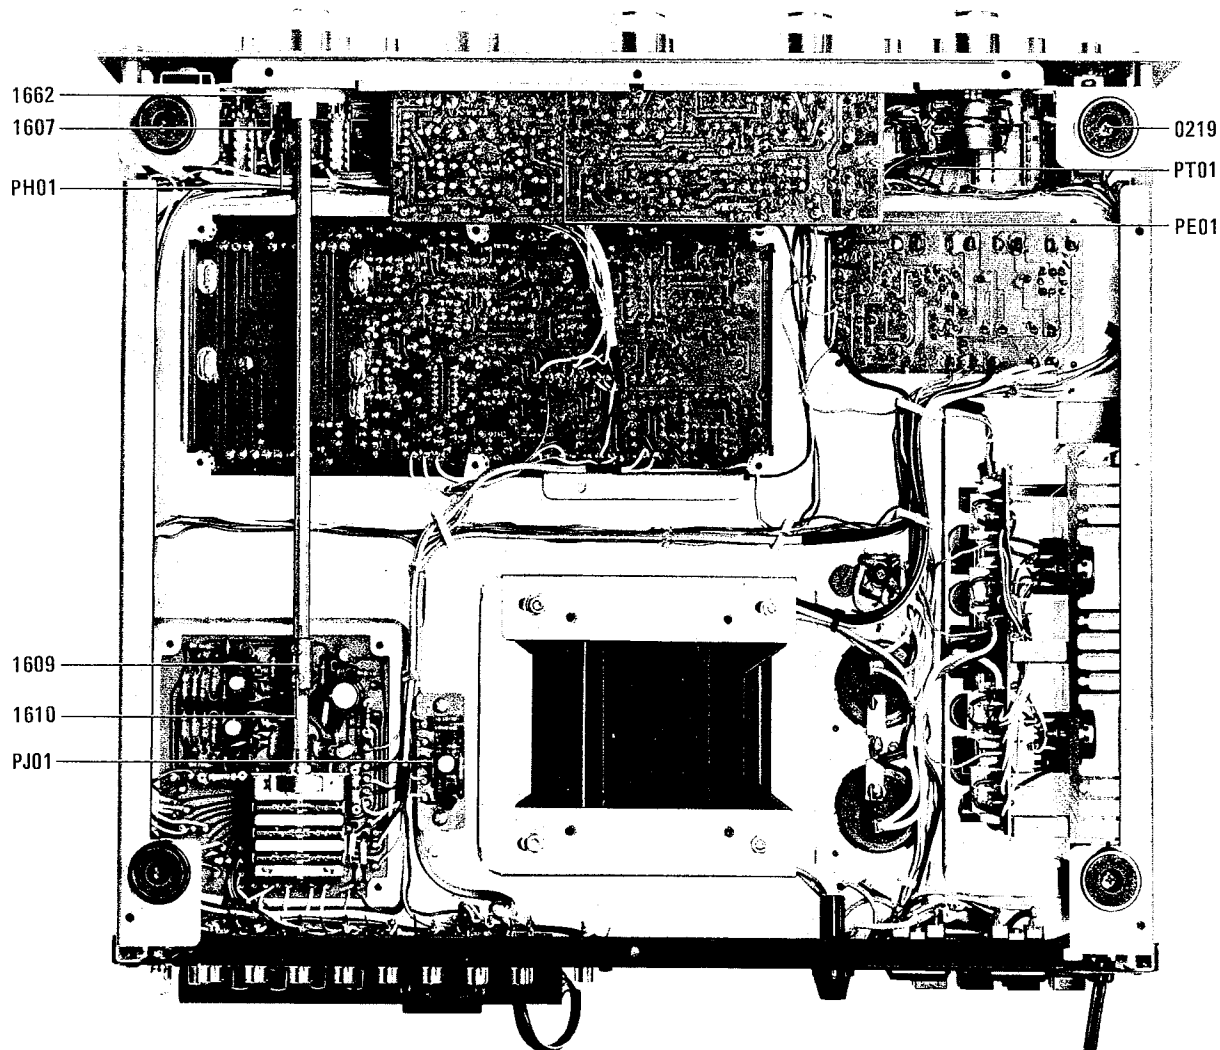


9.5 CABINET-FRONT VIEW - EUROPE

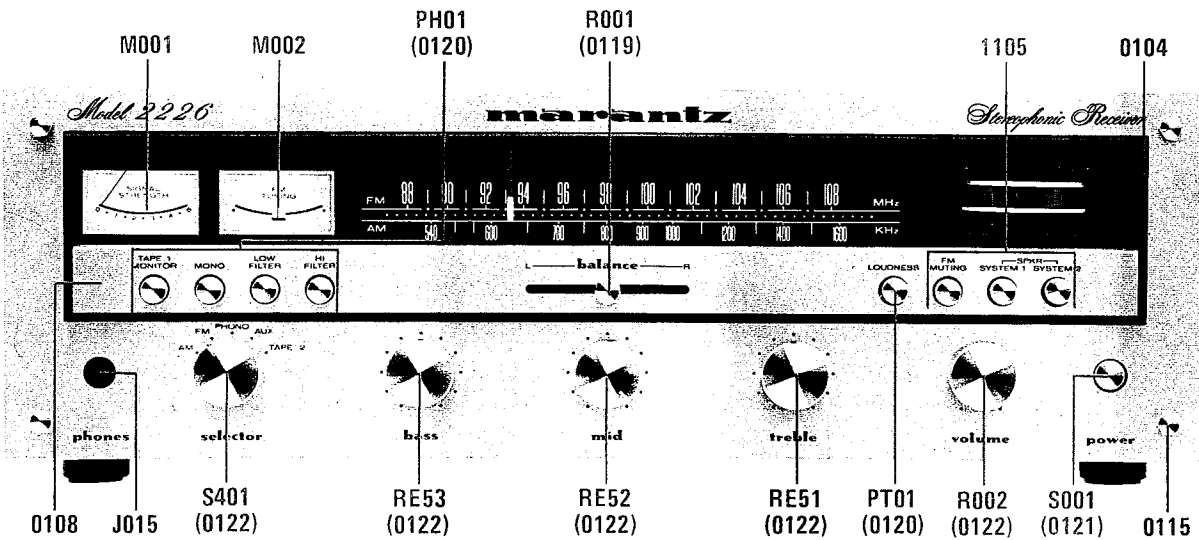

9.6 CHASSIS - TOP VIEW - EUROPE

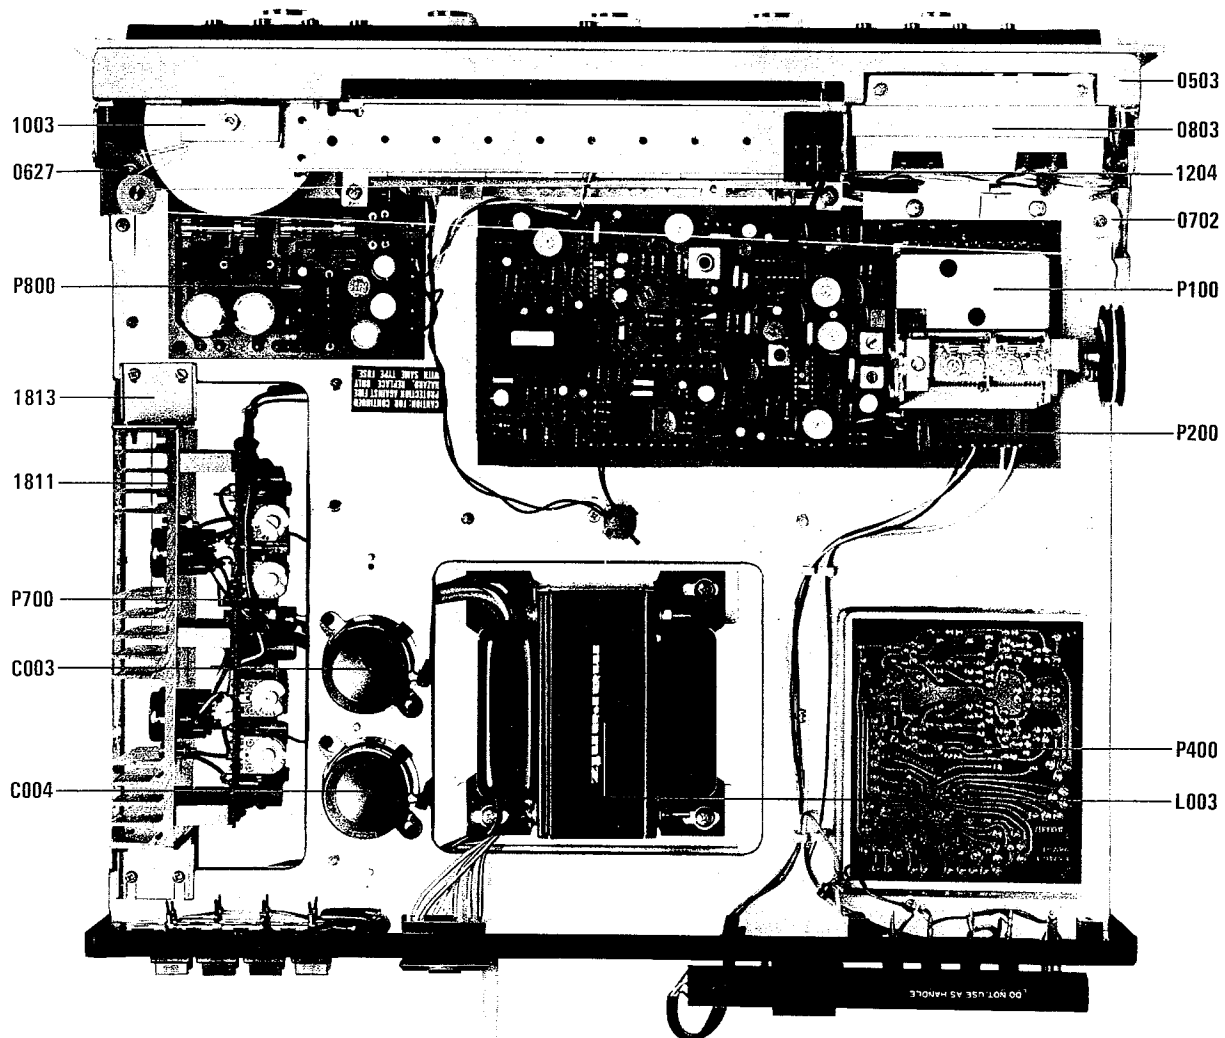


9.7 CABINET-REAR VIEW - EUROPE

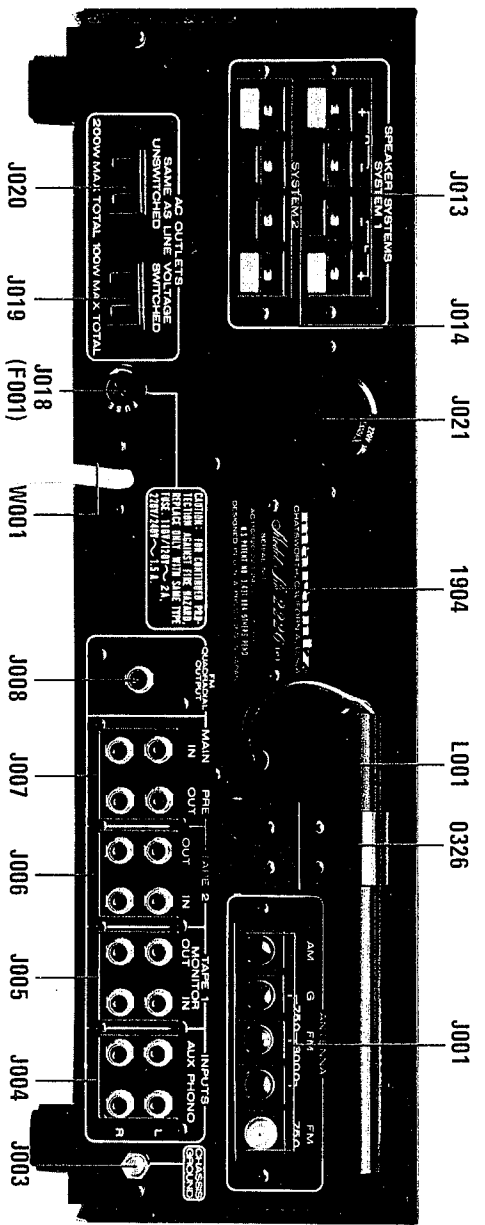

10. EXPLODED VIEW

10.1 PACKING MATERIAL EXPLODED VIEW

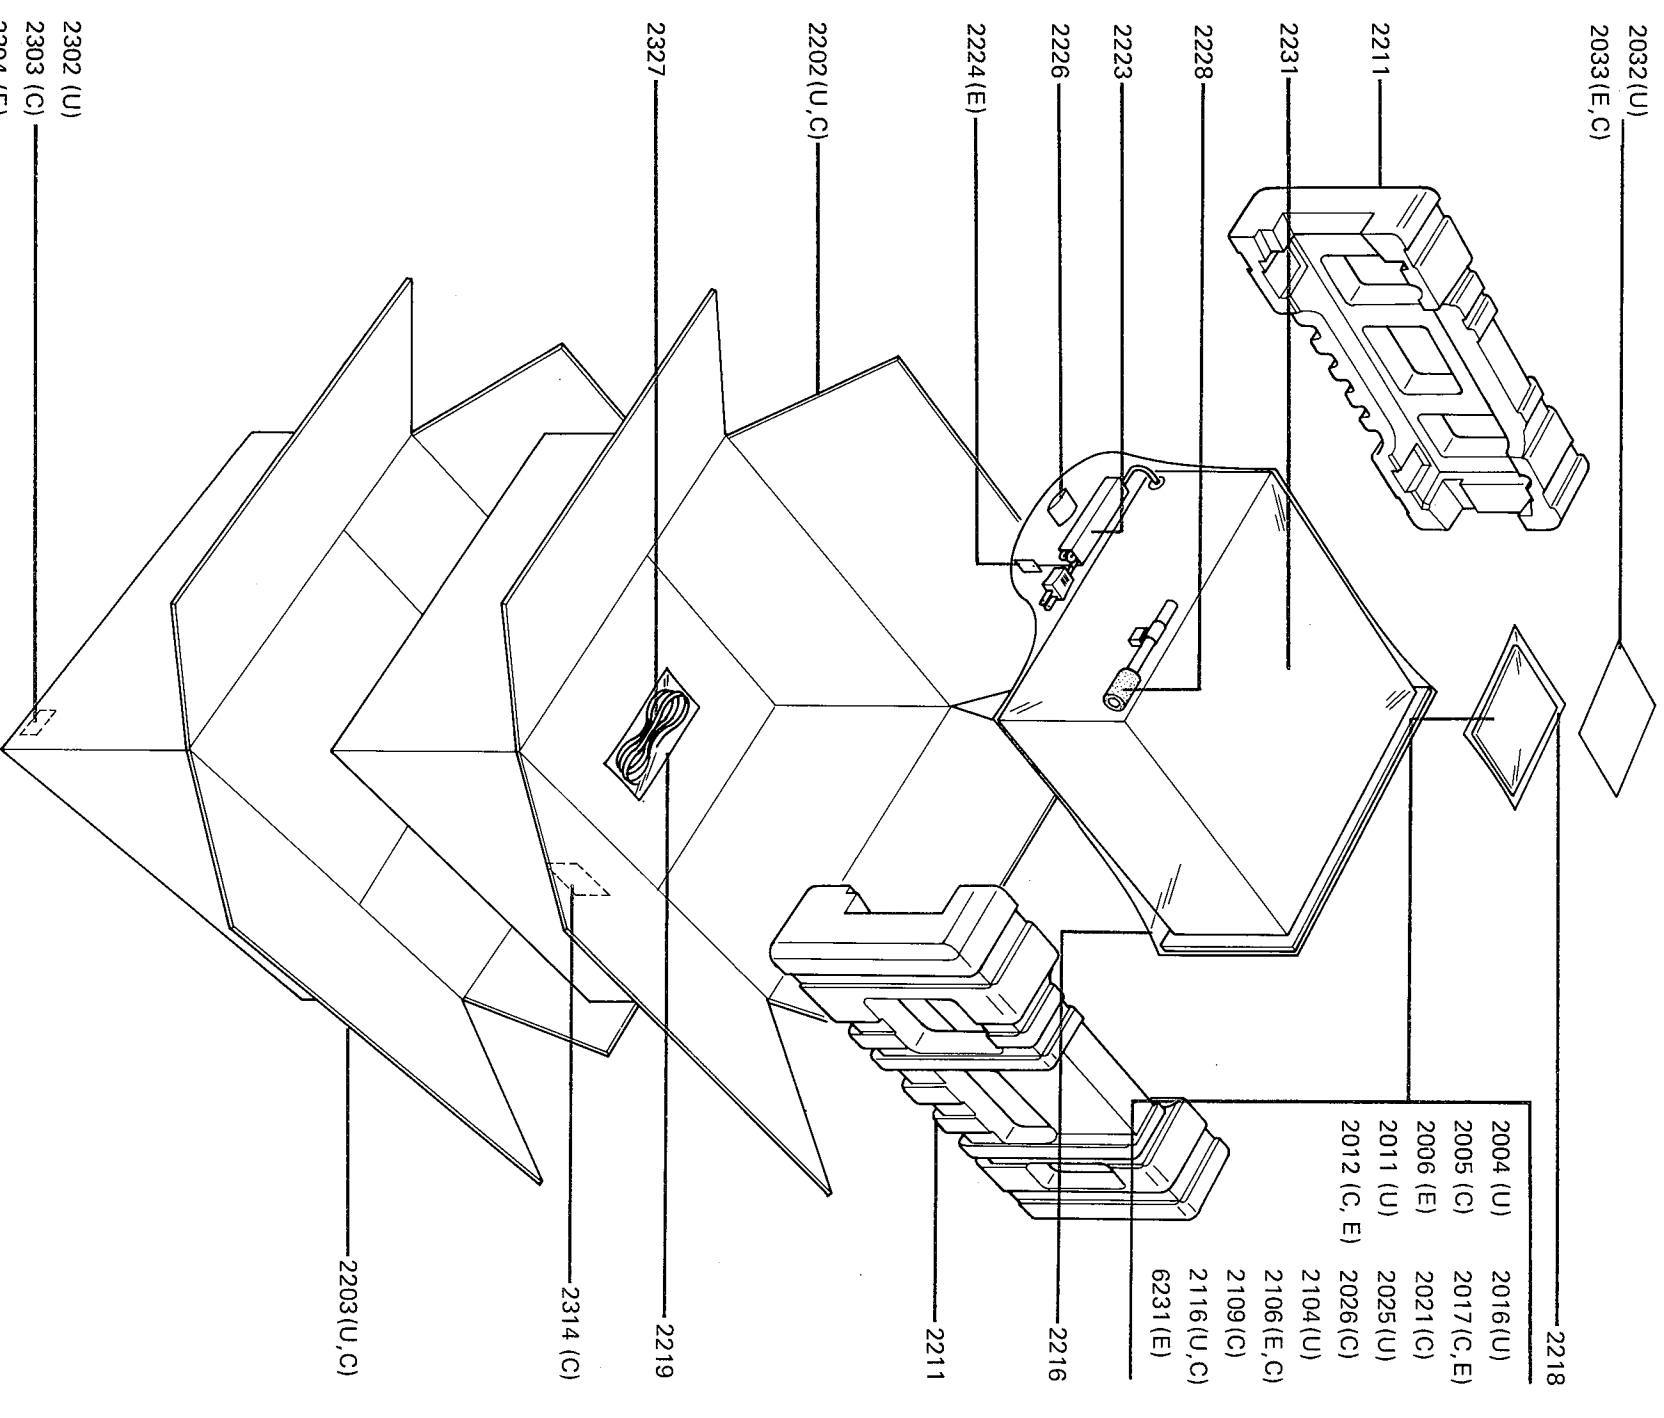

11. PARTS LIST

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	QTY			PART NO.	DESCRIPTION
	U	C	E		
A	1	1	1	2204063400	Front Panel Assembly
A1	1	1	1	2204063410	Front Panel Assembly
0103	1	1	1	2204063014	Escutcheon
0104	1	1	1	2221401012	Frame
0105	1	1	1	2204063023	Escutcheon
0106	1	1	1	2221568010	Window
0107	8	8	8	2221259012	Bushing
0108	1	1	1	2204063032	Escutcheon
0109	1	1	1	2886259010	Bushing
0113	1	1	1	2915053010	Cover
B	1	1	1	2853273400	Flywheel
1104	2	2	2	2577063022	Escutcheon
1105	1	1	1	2577273010	Flywheel
1106	1	1	1	2853112010	Shaft
1110	1	1	1	53110603E9	Hexagon Nut
1112	1	1	1	54020601E0	Flat Washer
C	1	1	1	2915103400	Pointer Assembly
1204	1	1	1	2915103012	Pointer
1205	1	1	1	2818103020	Pointer
1206	1	1	1	2915103020	Pointer
1210	1	1	1	2915267030	Heatstink
M004	1	1	1	IN10080300	Lamp, Pointer
D	1	1	1	1202006430	Hook Assembly
1304	1	1	1	1202258010	Hook
1306	1	1	1	72071605A0	String
E	1	1	1	2204159400	Drum Assembly
1703	1	1	1	2204159010	Drum
1705	1	1	1	71101689L0	Spring
1707	2	2	2	51064019A9	Set Screw
F	1	1	1	2204160400	Rear Panel Assembly
0304	1	1	1	2204160212	Bracket
0316	1	1	1	2821259010	Bushing
0318	1	1	1	54050300R0	T.L. Washer
0320	2	2	2	55060305S0	T.R. Rivet
G	1	1	1	2916257420	Lid Assembly, Upper
0210	1	1	1	2916257010	Lid
0211	4	4	4	2577118070	Spacer
H	1	1	1	2204257400	Lid Assembly, Lower
0215	1	1	1	2204257010	Lid
0216	1	1	1	2915120010	Insulator

REF. DESIG.	QTY			PART NO.	DESCRIPTION
	U	C	E		
0215	1	1	1	2204257010	Lid
0216	1	1	1	2915120010	Insulator
0217	10	10	10	51280406U0	B.H., Tapped Screw B
0219	4	4	4	2932057010	Leg
0220	4	4	4	51570410S0	P.H., Tapped Screw, P4x10ST
0303	1	1	1	2204160013	Bracket
0307	2	2	2	1455259030	Bushing
0309	4	4	4	51280308U0	B.H., Tapped Screw B
0311	2	2	2	51280308U0	B.H., Tapped Screw B
0312	1	1	1	51280308U0	B.H., Tapped Screw B
0314	10	10	10	51280308U0	B.H., Tapped Screw B
0317	1	1	1	53110303A9	Hexagon Nut
0319	2	2	2	51060316A9	P.H.M., Screw, P3x16
0322	1	1	1	62040029W0	Lug
0324	3	3	3	51100306S9	B.H.M., Screw, B3x6
0326	1	1	1	2819271130	Holder, Antenna
0327	1	1	1	2578160522	Bracket K
0332	2	2	2	51280312U0	B.H., Tapped Screw B
0334	1	1	1	62030039W0	Lug
0335	1	1	1	51280308U0	B.H., Tapped Screw B
0401	2	2	2	51280312U0	B.H., Tapped Screw B
0404	1	1	1	62030039W0	Lug
0405	1	1	1	51280308B0	B.H., Tapped Screw B
0408	1	2	2	51100308S9	B.H.M., Screw, B3x8
0411	4	4	4	51280308U0	B.H., Tapped Screw B
0503	1	1	1	2915160505	Bracket K
0509	1	1	1	2915103060	Bracket
0510	2	2	2	51100306A9	B.H.M., Screw, B3x6
0512	1	1	1	2206160020	Bracket
0513	2	2	2	51100306A9	B.H.M., Screw, B3x6
0514	2	2	2	51060306A9	P.H.M., Screw, P3x6
0516	1	1	1	2204160030	Bracket
0517	1	1	1	2204160030	Bracket
0518	4	4	4	51100406A9	B.H.M., Screw, B4x6
0519	4	4	4	51100306A9	B.H.M., Screw, B3x6
0521	4	4	4	51100306A9	B.H.M., Screw, B3x6
0522	2	2	2	51100306A9	B.H.M., Screw, B3x6
0525	1	1	1	2577106020	Spacer
0526	1	1	1	1415118010	Spacer
0527	2	2	2	51040306A9	F.H.M., Screw, F3x6
0528	2	2	2	51490306A9	B.H.M., Screw, F3
0531	2	2	2	2871053020	Cover
0532	1	1	1	2915120040	Insulator
0534	2	2	2	51570306B0	P.H., Tapped Screw, P3x6ST
0604	2	2	2	54050300R0	T.L., Washer OR
0603	2	2	2	54050300R0	T.L., Washer OR
0607	1	1	1	2819120050	Insulator
0609	1	1	1	2853269010	Protector
0610	2	2	2	51280306B0	B.H., Tapped Screw B
0613	2	2	2	51042608A0	F.H.M., Screw, F2.6x8
0620	1	1	1	2871051020	Guide
0623	4	4	4	2886120020	Insulator
0627	1	1	1	2915262502	Pulley K
0631	2	2	2	51100306A9	B.H.M., Screw, B3x6
0702	1	1	1	2204262502	Pulley K
0706	1	1	1	51100306A9	B.H.M., Screw, B3x6
0709	6	6	6	51280308B0	B.H., Tapped Screw B
0803	1	1	1	2886274012	Reflector
0804	1	1	1	2886271020	Holder
0806	2	2	2	51480306A9	B.H.M., Screw, F
0807	2	2	2	51570305B0	P.H., Tapped Screw, P3x5ST
0809	2	2	2	2886107010	Sheet
0903	1	1	1	2871274110	Reflector
0904	2	2	2	51480306A9	B.H.M., Screw F

REF. DESIG.	QTY			PART NO.	DESCRIPTION
	U	C	E		
0907	1	1	1	2871271070	Holder
0908	2	2	2	51570305B0	P.H., Tapped Screw, P3x5ST
0910	1	1	1	2874259010	Bushing, Stereo Lamp
1003	1	1	1	2853106550	Bearing K
1008	1	1	1	51640410D9	Set Screw C.P.
1009	1	1	1	54040402N0	Spring Washer
1010	1	1	1	53110403E9	Hexagon Nut
1115	1	1	1	2850112020	Shaft
1116	1	1	1	54040402N0	Spring Washer
1309	1	1	1	56382540G0	Eyelet
1402	1	1	1	2204105013	Chassis
1405	6	6	6	51280308U0	B.H., Tapped Screw B
1406	4	4	4	51280306U0	B.H., Tapped Screw B
1407	4	4	4	51280306U0	B.H., Tapped Screw B
1408	1	1	1	2854160030	Bracket
1409	2	2	2	51280306B0	B.H., Tapped Screw B
1410	2	2	2	51100306S9	B.H.M., Screw, B3x6
1416	2	2	2	2886005030	Clamper
1417	4	4	4	2886005020	Clamper
1418	3	3	3	2886005050	Clamper
1420	2	2	2	2916160070	Bracket
1424	1	1	1	1382005030	Clamper
1425	1	1	1	51280306B0	B.H., Tapped Screw B
1426	1	1	1	54050300F0	T.L. Washer OR
1428	1	1	1	1382005030	Clamper
1429	1	1	1	51280306U0	B.H., Tapped Screw B
1430	1	1	1	54050300F0	T.L. Washer OR
1502	1	1	1	2204267020	Heatstink
1503	1	1	1	51100306E9	B.H.M., Screw, B3x6
1504	1	1	1	5157031230	P.H., Tapped Screw, P3x12ST
1507	4	4	4	51490514A9	B.H.M., Screw FS
1511	1	1	1	2915160093	Bracket
1512	1	1	1	51280306B0	B.H., Tapped Screw B
1513	1	1	1	54050300F0	T.L. Washer OR
1514	4	4	4	51280306U0	B.H., Tapped Screw B
1522	1	1	1	2927160050	Bracket
1523	1	1	1	2908259010	Bushing
1524	1	1	1	51570306B0	P.H., Tapped Screw, P3x6ST
1602	1	1	1	2204112503	Shaft K
1607	1	1	1	2204005010	Clamper
1608	2	2	2	51100310A9	B.H.M., Screw, B3x10
1609	1	1	1	2896125010	Joint
1610	2	2	2	51064019A9	Screw
1802	1	1	1	2204302012	Dial
1804	1	1	1	2915269012	Protector
1805	2	2	2	51280306B0	B.H., Tapped Screw B
1811	1	1	1	2204267010	Heatstink
1813	2	2	2	2204104010	Retainer
1814	3	3	3	2204160060	Bracket
1815	4	4	4	51280306U0	B.H., Tapped Screw B
1816	6	6	6	51280306B0	B.H., Tapped Screw B
1817	6	6	6	51100306S9	B.H.M., Screw, B3x6
1818	8	8	8	51100316E9	B.H.M., Screw, B3x16
1819	8	8	8	54040302N0	Spring Washer
1821	2	2	2	51440314A9	B.H.M., Screw S
1822	2	2	2	54020301A0	Flat Washer P
6036	1	1	1	2204005030	Clamper

REF. DESIG.	QTY			PART NO.	DESCRIPTION
	U	C	E		
1823	2	2	2	53110303A9	Hexagon Nut
1825	4	4	4	51280306B0	B.H., Tapped Screw B
1828	1	1	1	1210005010	Clamper
1902	1	1	1	2204265010	Indicator
1903	1	1	1	2204265020	Indicator
1904	1	1	1	2204265030	Indicator
1912	1	1	1	2506265060	Label, Do not use as handle.
1936	1	1	1	2911861170	Label, Do not use as handle.
1937	1	1	1	2911861110	Label, UL Caution
1938	1	1	1	2911861140	Label, Do not remove cover.
1917	1	1	1	2578861010	Label, Do not remove cover.
1918	1	1	1	2932861010	Label, UL Caution
1919	1	1	1	2818861010	Label, FTC
1921	1	1	1	9510911010	Label, LL
1922	1	1	1	9510911020	Label, UL Factory
1923	1	1	1	9511101020	Label, UL
1939	1	1	1	2911861010	Label
1940	1	1	1	2911861280	Label
1929	1	1	1	2886861010	Label, Marantz
1931	2	2	2	9510221010	Label, Fuse
1941	3	3	3	2911861160	Label, Fuse
1933	1	1	1	9510611130	Label, 2.5A, 250V
2004	1	1	1	2577813010	Envelope, Orange
2005	1	1	1	2918	

U : For U.S.A.
C : For Canada
E : For Europe

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	QTY			PART NO.	DESCRIPTION
	U	C	E		
P100 A001	1	1	1	YD29910010 AV01202060	FM FRONT END CIRCUIT BOARD-P100 P.W. Board, FM Front End FM Front End Assembly
R101	1	1	1	GDO5105140	P100-RESISTORS Fixed, 1MΩ ±5%, ¼W
R102	1	1	1	GDO5101140	Fixed, 100Ω ±5%, ¼W
R103	1	1	1	GDO5101140	Fixed, 100Ω ±5%, ¼W
R104	1	1	1	GDO5101140	Fixed, 100Ω ±5%, ¼W
R105	1	1	1	GDO5223140	Fixed, 22kΩ ±5%, ¼W
R106	1	1	1	GDO5472140	Fixed, 4.7kΩ ±5%, ¼W
R107	1	1	1	GDO5102140	Fixed, 1kΩ ±5%, ¼W
R108	1	1	1	GDO5103140	Fixed, 10kΩ ±5%, ¼W
R109	1	1	1	GDO5333140	Fixed, 33kΩ ±5%, ¼W
R110	1	1	1	GDO5103140	Fixed, 10kΩ ±5%, ¼W
R111	1	1	1	GDO5101140	Fixed, 100Ω ±5%, ¼W
C101	1	1	1	DD16120020	P100-CAPACITORS Ceramic, 12pF ±10%
C102	1	1	1	DK18203030	Ceramic, 0.02µF ±80%, -20%
C103	1	1	1	DK18203030	Ceramic, 0.02µF ±80%, -20%
C104	1	1	1	DD11020010	Ceramic, 2pF ±0.5pF
C105	1	1	1	DK18203030	Ceramic, 0.02µF ±80%, -20%
C106	1	1	1	DD16150040	Ceramic, 15pF ±10%
C107	1	1	1	DD11020010	Ceramic, 2pF ±0.5pF
C108	1	1	1	DD12050010	Ceramic, 5pF ±1pF
C109	1	1	1	DD16101010	Ceramic, 100pF ±10%
C110	1	1	1	DK18203030	Ceramic, 0.02µF ±80%, -20%
C111	1	1	1	DD16101010	Ceramic, 100pF ±10%
C112	1	1	1	DK18203030	Ceramic, 0.02µF ±80%, -20%
C113	1	1	1	DD15150020	Ceramic, 15pF ±5%
C114	1	1	1	DD10050030	Ceramic, 5pF ±0.25pF
C115	1	1	1	DD12050010	Ceramic, 5pF ±1pF
C116	1	1	1	DD16330020	Ceramic, 33pF ±10%
C117	1	1	1	DD12100060	Ceramic, 10pF ±1pF
C118	1	1	1	DK18203030	Ceramic, 0.02µF ±80%, -20%
C119	1	1	1	DD11020010	Ceramic, 2pF ±0.5pF
C120	1	1	1	CA32400080	Variable
C121	1	1	1	CT14200010	Trimming
L105	1	1	1	LC12220010	P100-MISCELLANEOUS Choke Coil, 2.2µH
L106	1	1	1	LI10239010	IFT
Q101	1	1	1	HF400451B0	FET, 3SK45B
Q102	1	1	1	HT305352B0	Transistor, 2SC535
Q103	1	1	1	HT313422B0	Transistor, 2SC1342
J101	1	1	1	YP10001510	Plug
J102	1	1	1	YP10001510	Plug
J103	1	1	1	YP10001510	Plug
J105	1	1	1	YP10001510	Plug
J107	1	1	1	YP10001510	Plug
J109	1	1	1	YP10001510	Plug
J110	1	1	1	YP10001510	Plug
P208	8	8	8	2933118020	Spacer, R155, R170, R312, R339
P200	1	1	1	YD22042010 ZZ22042010 ZZ22048010	TUNER CIRCUIT BOARD- P200 P.W. Board, Tuner P.W. Board Assembly P.W. Board Assembly

REF. DESIG.	QTY			PART NO.	DESCRIPTION
	U	C	E		
R151	1	1	1	RT05201140	P200-RESISTORS Fixed, 200Ω ±5%, ¼W
R152	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R153	1	1	1	RT05202140	Fixed, 2kΩ ±5%, ¼W
R154	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R155	1	1	1	RT05151140	Fixed, 150Ω ±5%, ¼W
R156	1	1	1	RA05020200	Trimming, 5kΩ (B)
R157	1	1	1	RT05471140	Fixed, 470Ω ±5%, ¼W
R158	1	1	1	RT05124140	Fixed, 120kΩ ±5%, ¼W
R159	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R160	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R161	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R162	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R163	1	1	1	RT05301140	Fixed, 300Ω ±5%, ¼W
R164	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R165	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R166	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R167	1	1	1	RT05242140	Fixed, 2.4kΩ ±5%, ¼W
R169	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R170	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R201	1	1	1	RT05151140	Fixed, 150Ω ±5%, ¼W
R202	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R203	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R204	1	1	1	RT05271140	Fixed, 2.7kΩ ±5%, ¼W
R205	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R206	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R207	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R208	1	1	1	RT05334140	Fixed, 330kΩ ±5%, ¼W
R209	1	1	1	RA01030250	Trimming, 10kΩ (B)
R210	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R211	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R212	1	1	1	RA01030250	Trimming, 10kΩ (B)
R213	1	1	1	RT05123140	Fixed, 12kΩ ±5%, ¼W
R214	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R215	1	1	1	RA05030120	Trimming, 50kΩ (B)
R216	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R217	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R218	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R219	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R220	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R221	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R222	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R301	1	1	1	RA01030310	Trimming, 10kΩ (B)
R302	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R303	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R304	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R305	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R306	1	1	1	RT05824140	Fixed, 820kΩ ±5%, ¼W
R307	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R308	1	1	1	RC00000120	0Ω
R309	1	1	1	RT05224140	Fixed, 22kΩ ±5%, ¼W
R310	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R311	1	1	1	RT05272140	Fixed, 2.7kΩ ±5%, ¼W
R312	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R313	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R314	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R315	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R316	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R317	1	1	1	RA02540010	Trimming, 250kΩ (B)
R318	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R319	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R320	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R321	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R322	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W

REF. DESIG.	QTY			PART NO.	DESCRIPTION
	U	C	E		
R323	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R324	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R325	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R326	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R327	1	1	1	RT05394140	Fixed, 39kΩ ±5%, ¼W
R328	1	1	1	RT05394140	Fixed, 39kΩ ±5%, ¼W
R329	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
R330	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
R331	1	1	1	RT05391140	Fixed, 390Ω ±5%, ¼W
R332	1	1	1	RT05391140	Fixed, 390Ω ±5%, ¼W
R333	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R334	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R335	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R336	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R337	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R338	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R339	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R340	1	1	1	RT05201140	Fixed, 200Ω ±5%, ¼W
C151	1	1	1	DK17103040	P200-CAPACITORS Ceramic, 0.01µF ±20%
C152	1	1	1	DK17103040	Ceramic, 0.01µF ±20%
C153	1	1	1	DK17102010	Ceramic, 0.001µF ±20%
C154	1	1	1	EA10701690	Electrolytic, 100µF, 16V
C155	1	1	1	DK18403020	Ceramic, 0.04µF ±80%, -20%
C156	1	1	1	DF65391010	Film, 390pF ±5%
C157	1	1	1	DD16150070	Ceramic, 15pF ±10%
C158	1	1	1	DK17103040	Ceramic, 0.01µF ±20%
C159	1	1	1	DK17103010	Ceramic, 0.01µF ±20%
C160	1	1	1	DD15820010	Ceramic, 82pF ±5%
C161	1	1	1	DK17103040	Ceramic, 0.01µF ±20%
C162	1	1	1	DK18403020	Ceramic, 0.04µF ±80%, -20%
C163	1	1	1	EA10505090	Electrolytic, 1µF, 50V
C164	1	1	1	EA47503590	Electrolytic, 4.7µF, 35V
C165	1	1	1	EA43502590	Electrolytic, 3.3µF, 25V
C166	1	1	1	DK17102010	Ceramic, 0.001µF ±20%
C167	1	1	1	DK17103040	Ceramic, 0.01µF ±20%
C168	1	1	1	DK17502010	Ceramic, 0.005µF ±20%
C169	1	1	1	DK18403020	Ceramic, 0.04µF ±80%, -20%
C170	1	1	1	EA10701690	Electrolytic, 100µF, 16V
C171	1	1	1	DF16104010	Film, 0.1µF, 50V
C172	1	1	1	EV47501660	Electrolytic, 4.7µF, 16V
C201	1	1	1	DD15300010	Ceramic, 30pF ±5%
C202	1	1	1	DK17103040	Ceramic, 0.01µF ±20%
C203	1	1	1	DK17103040	Ceramic, 0.01µF ±20%
C204	1	1	1	DK18403020	Ceramic, 0.04µF ±80%, -20%
C205	1	1	1	DK18403020	Ceramic, 0.04µF ±80%, -20%
C206	1	1	1	DK18403020	Ceramic, 0.04µF ±80%, -20%
C207	1	1	1	DK18403020	Ceramic, 0.04µF ±80%, -20%
C208	1	1	1	EA47503590	Electrolytic, 4.7µF, 35V
C209	1	1	1	DD15400040	Ceramic, 40pF ±5%
C210	1	1	1	EA22601690	Electrolytic, 22µF, 16V
C211	1	1	1	EA47405010	Electrolytic, 4.7µF, 50V
C212	1	1	1	DK18403010	Ceramic, 0.04µF ±100%, -0%
C213	1	1	1	DK18403010	Ceramic, 0.04µF ±100%, -0%
C214	1	1	1	DK18203020	Ceramic, 0.02µF ±100%, -0%
C215	1	1	1	DK18203020	Ceramic, 0.02µF ±100%, -0%
C216	1	1	1	DK1	

U: For U.S.A.
C: For Canada
E: For Europe

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
P400-RESISTORS					
R400	1	1	1	RC00000120	Fixed, 0Ω, ¼W
R401	1	1	1	RT05913140	Fixed, 91kΩ ±5%, ¼W
R402	1	1	1	RT05913140	Fixed, 91kΩ ±5%, ¼W
R403	1	1	1	RT05471140	Fixed, 470Ω ±5%, ¼W
R404	1	1	1	RT05471140	Fixed, 470Ω ±5%, ¼W
R405	1	1	1	RN05394140	Fixed, 390kΩ ±5%, ¼W
R406	1	1	1	RN05394140	Fixed, 390kΩ ±5%, ¼W
R407	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R408	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R409	1	1	1	RT05681140	Fixed, 680Ω ±5%, ¼W
R410	1	1	1	RT05681140	Fixed, 680Ω ±5%, ¼W
R411	1	1	1	RN05104140	Fixed, 100kΩ ±5%, ¼W
R412	1	1	1	RN05104140	Fixed, 100kΩ ±5%, ¼W
R413	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R414	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R415	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R416	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R417	1	1	1	RT05182140	Fixed, 1.8kΩ ±5%, ¼W
R418	1	1	1	RT05182140	Fixed, 1.8kΩ ±5%, ¼W
R419	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
R420	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
R421	1	1	1	RT05224140	Fixed, 220kΩ ±5%, ¼W
R422	1	1	1	RT05224140	Fixed, 220kΩ ±5%, ¼W
R423	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R424	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R425	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R426	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R427	1	1	1	RN05564140	Fixed, 560kΩ ±5%, ¼W
R428	1	1	1	RN05564140	Fixed, 560kΩ ±5%, ¼W
R429	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R430	1	1	1	GJ05681010	Fixed, 680Ω ±5%, 1W
R431	1	1	1	GF05330120	Fixed, 33Ω ±5%, ¼W
P400-CAPACITORS					
C401	1	1	1	EV22502560	Electrolytic, 2.2μF ±20%, 25V
C402	1	1	1	EV22502560	Electrolytic, 2.2μF ±20%, 25V
C403	1	1	1	DD15201010	Ceramic, 200pF ±10%, 50V
C404	1	1	1	DD15201010	Ceramic, 200pF ±10%, 50V
C405	1	1	1	DD16151010	Ceramic, 150pF ±10%, 50V
C406	1	1	1	DD16151010	Ceramic, 150pF ±10%, 50V
C407	1	1	1	EV22600660	Electrolytic, 22μF ±20%, 6.3V
C408	1	1	1	EV22600660	Electrolytic, 22μF ±20%, 6.3V
C409	1	1	1	DD16300010	Ceramic, 30pF ±10%, 50V
C410	1	1	1	DD16300010	Ceramic, 30pF ±10%, 50V
C411	1	1	1	EA47601690	Electrolytic, 47μF +100%, -10%, 16V
C412	1	1	1	EA47601690	Electrolytic, 47μF +100%, -10%, 16V
C413	1	1	1	DD16101010	Ceramic, 100pF ±10%, 50V
C414	1	1	1	DD16101010	Ceramic, 100pF ±10%, 50V
C415	1	1	1	EE22503510	Electrolytic, 2.2μF ±20%, 35V
C416	1	1	1	EE22503510	Electrolytic, 2.2μF ±20%, 35V
C417	1	1	1	DF15152010	Film, 0.0015μF ±2%, 50V
C418	1	1	1	DF15152010	Film, 0.0015μF ±2%, 50V
C419	1	1	1	DF15562010	Film, 0.0056μF ±5%, 50V
C420	1	1	1	DF15562010	Film, 0.0056μF ±5%, 50V
C421	1	1	1	EA10705090	Electrolytic, 100μF +100%, -10%, 50V
C422	1	1	1	EA47601090	Electrolytic, 47μF +100%, -10%, 10V
P400-MISCELLANEOUS					
Q401	1	1	1	HT313281T0	Transistor, 2SC1328T

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
Q402	1	1	1	HT313281T0	Transistor, 2SC1328T
Q403	1	1	1	HT313282A0	Transistor, 2SC1328S, T
Q404	1	1	1	HT313282A0	Transistor, 2SC1328S, T
Q405	1	1	1	HT313281T0	Transistor, 2SC1328T
Q406	1	1	1	HT313281T0	Transistor, 2SC1328T
S401	1	1	1	SR10050120	Rotary Switch, Selector
P408	6	6	6	2933118020	Spacer, R429~R431
J401	?				
J435	35	35	35	YP10001131	Plug
MAIN AMP. CIRCUIT BOARD-P700					
P700	1	1	1	YD29110042	P.W. Board, Main Amp.
	1	1	1	ZZ22041043	P.W. Board Assembly
P700-RESISTORS					
R701	1	1	1	RT05392140	Fixed, 3.9kΩ ±5%, ¼W
R702	1	1	1	RT05392140	Fixed, 3.9kΩ ±5%, ¼W
R703	1	1	1	RT05333140	Fixed, 33kΩ ±5%, ¼W
R704	1	1	1	RT05333140	Fixed, 33kΩ ±5%, ¼W
R705	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R706	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R707	1	1	1	RT05681140	Fixed, 680Ω ±5%, ¼W
R708	1	1	1	RT05681140	Fixed, 680Ω ±5%, ¼W
R709	1	1	1	RT05912140	Fixed, 9.1kΩ ±5%, ¼W
R710	1	1	1	RT05912140	Fixed, 9.1kΩ ±5%, ¼W
R711	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R712	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R713	1	1	1	RT05224140	Fixed, 220kΩ ±5%, ¼W
R714	1	1	1	RT05224140	Fixed, 220kΩ ±5%, ¼W
R715	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R716	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R717	1	1	1	RT05333140	Fixed, 33kΩ ±5%, ¼W
R718	1	1	1	RT05333140	Fixed, 33kΩ ±5%, ¼W
R719	1	1	1	RT05100140	Fixed, 10Ω ±5%, ¼W
R720	1	1	1	RT05100140	Fixed, 10Ω ±5%, ¼W
R721	1	1	1	RT05271140	Fixed, 270Ω ±5%, ¼W
R722	1	1	1	RT05271140	Fixed, 270Ω ±5%, ¼W
R723	1	1	1	GF05472140	Fixed, 4.7kΩ ±5%, ¼W
R724	1	1	1	GF05472140	Fixed, 4.7kΩ ±5%, ¼W
R725	1	1	1	GF05182140	Fixed, 1.8kΩ ±5%, ¼W
R726	1	1	1	GF05182140	Fixed, 1.8kΩ ±5%, ¼W
R727	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R728	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R729	1	1	1	GF05201140	Fixed, 200Ω ±5%, ¼W
R730	1	1	1	GF05201140	Fixed, 200Ω ±5%, ¼W
R731	1	1	1	GF05301140	Fixed, 300Ω ±5%, ¼W
R732	1	1	1	GF05301140	Fixed, 300Ω ±5%, ¼W
R733	1	1	1	GF05132140	Fixed, 1.3kΩ ±5%, ¼W
R734	1	1	1	GF05132140	Fixed, 1.3kΩ ±5%, ¼W
R735	1	1	1	GF05392140	Fixed, 3.9kΩ ±5%, ¼W
R736	1	1	1	GF05392140	Fixed, 3.9kΩ ±5%, ¼W
R737	1	1	1	GF05122140	Fixed, 1.2kΩ ±5%, ¼W
R738	1	1	1	GF05122140	Fixed, 1.2kΩ ±5%, ¼W
R739	1	1	1	GF05101140	Fixed, 100Ω ±5%, ¼W
R740	1	1	1	GF05101140	Fixed, 100Ω ±5%, ¼W
R741	1	1	1	GF05101140	Fixed, 100Ω ±5%, ¼W

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
R742	1	1	1	GF05101140	Fixed, 100Ω ±5%, ¼W
R743	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R744	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R745	1	1	1	GF05221140	Fixed, 220Ω ±5%, ¼W
R746	1	1	1	GF05221140	Fixed, 220Ω ±5%, ¼W
R747	1	1	1	GF05221140	Fixed, 220Ω ±5%, ¼W
R748	1	1	1	GF05221140	Fixed, 220Ω ±5%, ¼W
R749	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R750	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R751	1	1	1	GW10472020	Fixed, 0.47Ω ±10%, 2W
R752	1	1	1	GW10472020	Fixed, 0.47Ω ±10%, 2W
R753	1	1	1	GW10472020	Fixed, 0.47Ω ±10%, 2W
R754	1	1	1	GW10472020	Fixed, 0.47Ω ±10%, 2W
R755	1	1	1	RC10022120	Fixed, 2.2Ω ±10%, ½W
R756	1	1	1	RC10022120	Fixed, 2.2Ω ±10%, ½W
R757	1	1	1	GJ05100020	Fixed, 10Ω ±5%, 2W
R758	1	1	1	GJ05100020	Fixed, 10Ω ±5%, 2W
R759	1	1	1	GF05101140	Fixed, 100Ω ±5%, ¼W
R760	1	1	1	GF05101140	Fixed, 100Ω ±5%, ¼W
R761	1	1	1	RA05020170	Trimming, 5kΩ ±20%
R762	1	1	1	RA05020170	Trimming, 5kΩ ±20%
R763	1	1	1	RA03010020	Trimming, 300Ω ±20%
R764	1	1	1	RA03010020	Trimming, 300Ω ±20%
R765	1	1	1	GF05102140	Fixed, 1kΩ ±5%, ¼W
R766	1	1	1	RT05474140	Fixed, 470kΩ ±5%, ¼W
R767	1	1	1	RT05474140	Fixed, 470kΩ ±5%, ¼W
R768	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R769	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R770	1	1	1	RC00000120	Fixed, 0Ω, ½W
R771	1	1	1	RC00000120	Fixed, 0Ω, ½W
R772	1	1	1	RC00000120	Fixed, 0Ω, ½W
R773	1	1	1	RC00000120	Fixed, 0Ω, ½W
R774	1	1	1	RC00000120	Fixed, 0Ω, ½W
R775	1	1	1	RC00000120	Fixed, 0Ω, ½W
P700-CAPACITORS					
C701	1	1	1	EE10505010	Electrolytic, 1μF, 50V
C702	1	1	1	EE10505010	Electrolytic, 1μF, 50V
C703	1	1	1	DD16201010	Ceramic, 200pF
C704	1	1	1	DD16201010	Ceramic, 200pF
C705	1	1	1	EE47601610	Electrolytic, 47μF, 16V
C706	1	1	1	EE47601610	Electrolytic, 47μF, 16V
C707	1	1	1	DD10030500	Ceramic, 3pF, 500V
C708	1	1	1	DD10030500	Ceramic, 3pF, 500V
C709	1	1	1	EA10703590	Electrolytic, 100μF, 35V
C710	1	1	1	EA10703590	Electrolytic, 100μF, 35V
C711	1	1	1	EA47605090	Electrolytic, 47μF, 50V
C712	1	1	1	EA47605090	Electrolytic, 47μF, 50V
C713	1	1	1	DD16201010	Ceramic, 200pF
C714	1	1	1	DD16201010	Ceramic, 200pF
C715	1	1	1	DF17104520	Ceramic, 0.1μF, 200V
C716	1	1	1	DF17104520	Ceramic, 0.1μF, 200V
C717	1	1	1	EA10603590	Electrolytic, 10μF, 35V
P700-SEMICONDUCTORS					
H701	1	1	1	HT107222A0	Transistor, 2SA722S, T
H702	1	1	1	HT107222A0	Transistor, 2SA722S, T
H703	1	1	1	HT107222A0	Transistor, 2SA722S, T
H704	1	1	1	HT107222A0	Transistor, 2SA722S, T
H705	1	1	1	HT315092B0	Transistor, 2SC1509Q, R
H706	1	1	1	HT315092B0	Transistor, 2SC1509Q, R
H707	1	1	1	HT309452A0	Transistor, 2SC945Q, R
H708	1	1	1	HT309452A0	Transistor, 2SC945Q, R
H709	1	1	1	HT107332B0	Transistor, 2SA733Q, R
H710	1	1	1	HT107332B0	Transistor, 2SA733Q, R

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
H711	1	1	1	HT315092A0	Transistor, 2SC1509P, Q
H712	1	1	1	HT315092A0	Transistor, 2SC1509P, Q
H713	1	1	1	HT107772A0	Transistor, 2SA777P, Q
H714	1	1	1	HT107772A0	Transistor, 2SA777P, Q
H715	1	1	1	HV00003120	Varistor, MV-13
H716	1	1	1	HV00003120	Varistor, MV-13
H717	1	1	1	HD20001210	Diode, 1S2473C (Ye)
H718	1	1	1	HD20001210	Diode, 1S2473C (Ye)
H719	1	1	1	HD20001210	Diode, 1S2473C (Ye)
H720	1	1	1	HD20001210	Diode, 1S2473C (Ye)
H721	1	1	1	HD20002210	Diode, 1S2472 (Gr)
H722	1	1	1	HD20002210	Diode, 1S2472 (Gr)
H723	1	1	1	HD20002210	Diode, 1S2472 (Gr)
H724	1	1	1	HD20002210	Diode, 1S2472 (Gr)
H725	1	1	1	HH00008120	Thermistor, 21D28
H726	1	1	1	HH00008120	Thermistor, 21D28
H727	1	1	1	HD30030090	Diode, WZ-177
H728	1	1	1	HV00003120	Varistor, MV-13
H729	1	1	1	HV00003120	Varistor, MV-13
H730	1	1	1	HD20005010	Diode, W06B, 100V
H731	1	1	1	HD20005010	Diode, W06B, 100V
H732	1	1	1	HD20005010	Diode, W06B, 100V
H733	1	1	1	HD20005010	Diode, W06B, 100V
P700-MISCELLANEOUS					
L701	1	1	1	LC22720010	Choke Coil, 2.7μH
L702	1	1	1	LC22720010	Choke Coil, 2.7μH
F701	1	1	1	FS10350010	Fuse, 3.5A 250V (UL)
F702	1	1	1	FS10350010	Fuse, 3.5A 250V (UL)
P707	24	24	24	3444118050	Spacer, R729~R732, R741~R744, R749, R750, R759, R760
P708	8	8	8	2933118020	Spacer
J701	?	?	?	?	?
J724	24	24	24	YP10001140	Plug
J725	?	?	?	?	?
J728	4	4	4	YJ08000210	Socket
J729	1	1	1	YP10001140	Plug
POWER SUPPLY CIRCUIT BOARD-P800					
P800	1	1	1	YA22040310	P.W. Board, Power Supply
	1	1	1	ZZ22040310	P.W. Board Assembly
	1	1	1	ZZ22048310	P.W. Board Assembly
P800-RESISTORS					
R801	1	1	1	GJ05220020	Fixed, 22Ω ±5%, 2W
R802	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R803	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R804	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R805	1	1	1	GJ05221030	Fixed, 220Ω ±5%, 3W
R806	1	1	1	RT05363140	Fixed, 36kΩ ±5%, ¼W
R807	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R808	1	1	1	RA05020130	Trimming, 5kΩ (B)
P800-CAPACITORS					
C801	1	1	1	DK18103510	Ceramic, 0.01μF, 500V
C802	1	1	1	EA47706310	Electrolytic, 470μF, 63V
C803	1	1	1	EA47705090	Electrolytic, 470μF, 50V
C804	1	1	1	EA10705090	Electrolytic, 100μF, 50V

U: For U.S.A.
C: For Canada
E: For Europe

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
C805	1	1	1	DF17473050	Film, 0.047 μ F, 50V
C806	1	1	1	DK18403020	Ceramic, 0.04 μ F, 50V
C807	1	1	1	EA33505090	Electrolytic, 3.3 μ F, 50V
C808	1	1	1	EA47701690	Electrolytic, 470 μ F, 16V
C809	1	1	1	EA10801090	Electrolytic, 1000 μ F, 10V
P800-SEMICONDUCTORS					
Q801	1	1	1	HD20012030	Diode, DS 132B
Q802	1	1	1	HD20011030	Diode, DS 131B
Q803	1	1	1	HT403302A0	Transistor, 2SD330 D or E
Q804	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q805	1	1	1	HD30021090	Diode, BZ-140, 14V
Q806	1	1	1	HD20004130	Diode, SIB01-02
P800-MISCELLANEOUS					
P808	10	10	10	2933118020	Spacer, R801, R802, R805, Q801, Q802, Q806
F801	1	1		FS10100080	Fuse, MGC 1A
F802	1	1		FS10200060	Fuse, MGC 2A
F801			1	FS10100900	Fuse, SGA 1A (20mm)
F802			1	FS10200900	Fuse, SGA 2A (20mm)
J801					
J814	14	14	14	YP10001140	Plug
J815					
J818	4	4	4	YJ08000210	Socket, Fuse
PRE & TONE AMP. CIRCUIT BOARD-PE01					
PE01	1	1	1	YD29151082	P.W. Board, Pre & Tone Amp.
	1	1	1	ZZ22041082	P.W. Board Assembly
PE01-RESISTORS					
RE01	1	1	1	RT05474140	Fixed, 470k Ω \pm 5%, $\frac{1}{4}$ W
RE02	1	1	1	RT05474140	Fixed, 470k Ω \pm 5%, $\frac{1}{4}$ W
RE03	1	1	1	RT05391140	Fixed, 390 Ω \pm 5%, $\frac{1}{4}$ W
RE04	1	1	1	RT05391140	Fixed, 390 Ω \pm 5%, $\frac{1}{4}$ W
RE05	1	1	1	RN05105140	Fixed, 1M Ω \pm 5%, $\frac{1}{4}$ W
RE06	1	1	1	RN05105140	Fixed, 1M Ω \pm 5%, $\frac{1}{4}$ W
RE07	1	1	1	RN05104140	Fixed, 100k Ω \pm 5%, $\frac{1}{4}$ W
RE08	1	1	1	RT05103140	Fixed, 10k Ω \pm 5%, $\frac{1}{4}$ W
RE09	1	1	1	RT05273140	Fixed, 27k Ω \pm 5%, $\frac{1}{4}$ W
RE10	1	1	1	RT05273140	Fixed, 27k Ω \pm 5%, $\frac{1}{4}$ W
RE11	1	1	1	RT05102140	Fixed, 1k Ω \pm 5%, $\frac{1}{4}$ W
RE12	1	1	1	RT05102140	Fixed, 1k Ω \pm 5%, $\frac{1}{4}$ W
RE13	1	1	1	RT05752140	Fixed, 7.5k Ω \pm 5%, $\frac{1}{4}$ W
RE14	1	1	1	RT05752140	Fixed, 7.5k Ω \pm 5%, $\frac{1}{4}$ W
RE15	1	1	1	RT05102140	Fixed, 1k Ω \pm 5%, $\frac{1}{4}$ W
RE16	1	1	1	RT05102140	Fixed, 1k Ω \pm 5%, $\frac{1}{4}$ W
RE17	1	1	1	RT05474140	Fixed, 470k Ω \pm 5%, $\frac{1}{4}$ W
RE18	1	1	1	RT05474140	Fixed, 470k Ω \pm 5%, $\frac{1}{4}$ W
RE19	1	1	1	RT05562140	Fixed, 5.6k Ω \pm 5%, $\frac{1}{4}$ W
RE20	1	1	1	RT05562140	Fixed, 5.6k Ω \pm 5%, $\frac{1}{4}$ W
RE21	1	1	1	RT05123140	Fixed, 12k Ω \pm 5%, $\frac{1}{4}$ W
RE22	1	1	1	RT05123140	Fixed, 12k Ω \pm 5%, $\frac{1}{4}$ W
RE23	1	1	1	RT05334140	Fixed, 330k Ω \pm 5%, $\frac{1}{4}$ W
RE24	1	1	1	RT05334140	Fixed, 330k Ω \pm 5%, $\frac{1}{4}$ W
RE25	1	1	1	RT05562140	Fixed, 5.6k Ω \pm 5%, $\frac{1}{4}$ W
RE26	1	1	1	RT05562140	Fixed, 5.6k Ω \pm 5%, $\frac{1}{4}$ W
RE27	1	1	1	RT05562140	Fixed, 5.6k Ω \pm 5%, $\frac{1}{4}$ W
RE28	1	1	1	RT05562140	Fixed, 5.6k Ω \pm 5%, $\frac{1}{4}$ W
RE29	1	1	1	RT05273140	Fixed, 27k Ω \pm 5%, $\frac{1}{4}$ W

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
RE30	1	1	1	RT05273140	Fixed, 27k Ω \pm 5%, $\frac{1}{4}$ W
RE31	1	1	1	RT05123140	Fixed, 12k Ω \pm 5%, $\frac{1}{4}$ W
RE32	1	1	1	RT05123140	Fixed, 12k Ω \pm 5%, $\frac{1}{4}$ W
RE33	1	1	1	RT05153140	Fixed, 15k Ω \pm 5%, $\frac{1}{4}$ W
RE34	1	1	1	RT05153140	Fixed, 15k Ω \pm 5%, $\frac{1}{4}$ W
RE35	1	1	1	RT05334140	Fixed, 330k Ω \pm 5%, $\frac{1}{4}$ W
RE36	1	1	1	RT05334140	Fixed, 330k Ω \pm 5%, $\frac{1}{4}$ W
RE37	1	1	1	RT05273140	Fixed, 27k Ω \pm 5%, $\frac{1}{4}$ W
RE38	1	1	1	RT05273140	Fixed, 27k Ω \pm 5%, $\frac{1}{4}$ W
RE39	1	1	1	RT05225140	Fixed, 2.2M Ω \pm 5%, $\frac{1}{4}$ W
RE40	1	1	1	RT05225140	Fixed, 2.2M Ω \pm 5%, $\frac{1}{4}$ W
RE41	1	1	1	RT05683140	Fixed, 68k Ω \pm 5%, $\frac{1}{4}$ W
RE42	1	1	1	RT05683140	Fixed, 68k Ω \pm 5%, $\frac{1}{4}$ W
RE43	1	1	1	RT05473140	Fixed, 47k Ω \pm 5%, $\frac{1}{4}$ W
RE44	1	1	1	RT05473140	Fixed, 47k Ω \pm 5%, $\frac{1}{4}$ W
RE45	1	1	1	RT05103140	Fixed, 10k Ω \pm 5%, $\frac{1}{4}$ W
RE46	1	1	1	RT05103140	Fixed, 10k Ω \pm 5%, $\frac{1}{4}$ W
RE47	1	1	1	RT05221140	Fixed, 220 Ω \pm 5%, $\frac{1}{4}$ W
RE48	1	1	1	RT05221140	Fixed, 220 Ω \pm 5%, $\frac{1}{4}$ W
RE49	1	1	1	RT05474140	Fixed, 470k Ω \pm 5%, $\frac{1}{4}$ W
RE50	1	1	1	RT05474140	Fixed, 470k Ω \pm 5%, $\frac{1}{4}$ W
RE51	1	1	1	RM01040050	Variable, 100k Ω (B), Treble
RE52	1	1	1	RM01040050	Variable, 100k Ω (B), Mid
RE53	1	1	1	RM01040050	Variable, 100k Ω (B), Bass
RE54	1	1	1	RT05821140	Fixed, 820 Ω \pm 5%, $\frac{1}{4}$ W
RE55	1	1	1	RC00000120	Fixed, 0 Ω , $\frac{1}{4}$ W
RE56	1	1	1	RC00000120	Fixed, 0 Ω , $\frac{1}{4}$ W
PE01-CAPACITORS					
CE01	1	1	1	DF17224050	Film, 0.22 μ F \pm 20%, 50V
CE02	1	1	1	DF17224050	Film, 0.22 μ F \pm 20%, 50V
CE03	1	1	1	EA10603590	Electrolytic, 10 μ F +100%, -10%, 35V
CE04	1	1	1	EA10603590	Electrolytic, 10 μ F +100%, -10%, 35V
CE05	1	1	1	EE47502510	Electrolytic, 4.7 μ F \pm 20%, 25V
CE06	1	1	1	EE47502510	Electrolytic, 4.7 μ F \pm 20%, 25V
CE07	1	1	1	DD16101010	Ceramic, 100pF \pm 10%, 50V
CE08	1	1	1	DD16101010	Ceramic, 100pF \pm 10%, 50V
CE09	1	1	1	DF16222050	Film, 0.0022 μ F \pm 10%, 50V
CE10	1	1	1	DF16222050	Film, 0.0022 μ F \pm 10%, 50V
CE11	1	1	1	DF16472050	Film, 0.0047 μ F \pm 10%, 50V
CE12	1	1	1	DF16472050	Film, 0.0047 μ F \pm 10%, 50V
CE15	1	1	1	DF16223050	Film, 0.022 μ F \pm 10%, 50V
CE14	1	1	1	DF16223050	Film, 0.022 μ F \pm 10%, 50V
CE15	1	1	1	DF16223050	Film, 0.022 μ F \pm 10%, 50V
CE16	1	1	1	DF16223050	Film, 0.022 μ F \pm 10%, 50V
CE17	1	1	1	DF16822050	Film, 0.0082 μ F \pm 10%, 50V
CE18	1	1	1	DF16822050	Film, 0.0082 μ F \pm 10%, 50V
CE19	1	1	1	EE10505010	Electrolytic, 1 μ F \pm 20%, 50V
CE20	1	1	1	EE10505010	Electrolytic, 1 μ F \pm 20%, 50V
CE21	1	1	1	EE33505010	Electrolytic, 3.3 μ F \pm 10%, 50V
CE22	1	1	1	EE33505010	Electrolytic, 3.3 μ F \pm 10%, 50V
CE23	1	1	1	EQ10505010	Electrolytic, 1 μ F \pm 30%, 50V
CE24	1	1	1	EQ10505010	Electrolytic, 1 μ F \pm 30%, 50V
CE25	1	1	1	EA22703590	Electrolytic, 220 μ F +100%, -10%, 35V
PE01-MISCELLANEOUS					
HE01	1	1	1	HT313283A0	Transistor, 2SC1328S, T, U
HE02	1	1	1	HT313283A0	Transistor, 2SC1328S, T, U
HE03	1	1	1	HT107222A0	Transistor, 2SA722S, T
HE04	1	1	1	HT107222A0	Transistor, 2SA722S, T
HE05	1	1	1	HT313283A0	Transistor, 2SC1328S, T, U

U: For U.S.A.
C: For Canada
E: For Europe

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
HE06	1	1	1	HT313283A0	Transistor, 2SC1328S, T, U
HE07	1	1	1	HT107222A0	Transistor, 2SA722S, T
HE08	1	1	1	HT107222A0	Transistor, 2SA722S, T
PE08	2	2	2	2933118020	Spacer, RE54
JE01 ? JE08	8	8	8	YP10001130	Plug
					MONO, HI FILTER, TAPE MONITOR 1 & 25μS SWITCH CIRCUIT BOARD-PH01
PH01	1	1		YD29151090	P.W. Board, Mono, Hi Filter, Tape Monitor 1 & 25μS Switches
	1	1		ZZ22041090	P.W. Board Assembly
PH01			1	YD29150050	P.W. Board, Mono, Hi & Low Filters, Tape Monitor 1 Switches
			1	ZZ22048050	P.W. Board Assembly
					PH01-RESISTORS
RH01	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
RH02	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
RH04	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
RH05	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
RH06	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
RH07	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
RH08	1	1	1	RT05225140	Fixed, 2.2MΩ ±5%, ¼W
RH09	1	1	1	RT05225140	Fixed, 2.2MΩ ±5%, ¼W
					PH01-CAPACITORS
CH01	1	1		DF15222050	Film, 0.0022μF ±10%, 50V
CH02	1	1		DF15222050	Film, 0.0022μF ±10%, 50V
CH01			1	DF16333050	Film, 0.033μF ±10%, 50V
CH02			1	DF16333050	Film, 0.033μF ±10%, 50V
CH03	1	1	1	DF16682050	Film, 0.0068μF ±10%, 50V
CH04	1	1	1	DF16682050	Film, 0.0068μF ±10%, 50V
CH05	1	1		EV22403510	Electrolytic, 0.22μF ±10%, 35V
CH06	1	1		EV22403510	Electrolytic, 0.22μF ±10%, 35V
					PH01-MISCELLANEOUS
SH01	1	1		SP04040140	Pushswitch
SH01			1	SP04040130	Pushswitch
JH01	1	1		YP10001200	Plug
JH02	1	1		YP10001200	Plug
JH09 ? JH28 JH01 ? JH17	20	20		YP10001200	Plug
			17	YP10001200	Plug
					PHONO & POPS NOISE CIRCUIT BOARD-PJ01
PJ01	1	1	1	YD22040010	P.W. Board, Phono, Pops Noise
	1	1	1	ZZ22040010	P.W. Board Assembly
					PJ01-MISCELLANEOUS
RJ01	1	1	1	RT05684140	Resistor, Fixed, 680kΩ ±5%, ¼W
RJ02	1	1	1	RT05754140	Resistor, Fixed, 750kΩ ±5%, ¼W
RJ03	1	1	1	RT05103140	Resistor, Fixed, 10kΩ ±5%, ¼W

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
RJ04	1	1	1	RT05100140	Resistor, Fixed, 10Ω ±5%, ¼W
CJ01	1	1	1	EA10701090	Capacitor, Electrolytic, 100μF, 10V
QJ01	1	1	1	HT309452B0	Transistor, 2SC945
QJ02	1	1	1	HT309452B0	Transistor, 2SC945
QJ03	1	1	1	HT309452B0	Transistor, 2SC945
QJ04	1	1	1	HD30024090	Diode, WZ-120
JJ01 ? JJ05	5	5	5	YP10001130	Plug
					SPEAKER SWITCH CIRCUIT BOARD-PT01
PT01	1	1	1	YD29151100	P.W. Board, Speaker Switch
	1	1	1	ZZ22043100	P.W. Board Assembly
					PT01-MISCELLANEOUS
RT01	1	1	1	RT05683140	Resistor, Fixed, 68kΩ ±5%, ¼W
RT02	1	1	1	RT05683140	Resistor, Fixed, 68kΩ ±5%, ¼W
RT03	1	1	1	RT05153140	Resistor, Fixed, 15kΩ ±5%, ¼W
RT04	1	1	1	RT05153140	Resistor, Fixed, 15kΩ ±5%, ¼W
RT05	1	1	1	GJ05331020	Resistor, Fixed, 330Ω ±5%, 2W
RT06	1	1	1	GJ05331020	Resistor, Fixed, 330Ω ±5%, 2W
RT07	1	1	1	GU05151120	Resistor, Fixed, 150Ω ±5%, ¼W
RT08	1	1	1	GU05151120	Resistor, Fixed, 150Ω ±5%, ¼W
CT01	1	1	1	DD16121010	Capacitor, Ceramic, 120pF ±10%, 50V
CT02	1	1	1	DD16121010	Capacitor, Ceramic, 120pF ±10%, 50V
CT03	1	1	1	DF16273050	Capacitor, Film, 0.027μF ±10%, 50V
CT04	1	1	1	DF16273050	Capacitor, Film, 0.027μF ±10%, 50V
PT07	4	4	4	3444118050	Spacer, RT05, RT06
ST01	1	1	1	SP04040110	Pushswitch
JT01 ? JT16	16	16	16	YP10001200	Plug
					DIAL LAMP CIRCUIT BOARD-PZ01
PZ01	1	1	1	YD28860160	P.W. Board, Dial Lamp
	1	1	1	ZZ22041160	P.W. Board Assembly
					PZ01-MISCELLANEOUS
MZ01 ? MZ05	5	5	5	IN10080070	Lamp

U: For U.S.A.
 C: For Canada
 E: For Europe

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
JZ01 ? JZ10 JZ11 ? JZ14	10	10	10	YJ08000170	Socket
	4	4	4	YJ08000170	Plug
GENERAL MISCELLANEOUS					
M001	1	1	1	IM11042270	DC Meter, Signal Strength
M002	1	1	1	IM11042240	DC Meter, Tuning
M003	1	1	1	IN10080340	Lamp, Stereo Indicator
M004	1	1	1	IN10080300	Lamp, Pointer
M005	1	1	1	IN10080070	Lamp, Meter Indicator
M006	1	1	1	IN10080070	Lamp, Meter Indicator
H001	1	1	1	HT106272B0	Transistor, 2SA627M, L
H002	1	1	1	HT401882B0	Transistor, 2SD188M, L
H003	1	1	1	HT106272B0	Transistor, 2SA627M, L
H004	1	1	1	HT401882B0	Transistor, 2SD188M, L
H005	1	1	1	HV00005080	Varistor, STV-3H (Y)
H006	1	1	1	HV00005080	Varistor, STV-3H (Y)
H007	1	1	1	HD20003290	Diode, S4VB
L001	1	1	1	LF11200460	Antenna Coil, AM
L002	1	1	1	LC11540020	Choke Coil
L003	1	1	1	TS19608010	Power Transformer
L003			1	TS19608020	Power Transformer
S001	1	1	1	SP02020100	Power Switch
C001	1	1	1	DK18103010	Capacitor, Ceramic, 0.01 μ F, 50V
C002	1	1	1	DK18103010	Capacitor, Ceramic, 0.01 μ F, 50V
C003	1	1	1	EC68803520	Capacitor, Electrolytic, 6800 μ F, 35V
C004	1	1	1	EC68803520	Capacitor, Electrolytic, 6800 μ F, 35V
C006		1		DF17473590	Capacitor, Film, 0.047 μ F
C006		1		DF17223800	Capacitor, Film, 0.022 μ F, 1000V
G001	1			BF10400040	Printed Comp.
R001	1	1	1	RS05040050	Resistor, Variable, 500k Ω , Balance
R002	1	1	1	RM02540220	Resistor, Variable, 250k Ω , Volume
R003	1	1		RC10225120	Resistor, Fixed, 2.2M Ω \pm 10%, 1/2W
J001	1	1	1	BY04050010	Terminal, Antenna
J002	1	1	1	YL01020030	Terminal, 2P Lug
J003	1	1	1	YT01010050	Terminal, Ground
J004	1	1	1	YT02040140	Terminal, Phono/Aux
J005	1	1	1	YT02040140	Terminal, Tape 1
J006	1	1	1	YT02040140	Terminal, Tape 2
J007	1	1	1	YT02040170	Terminal, Pre Out/Main In
J008	1	1	1	YT02010130	Terminal, Quadradial Output
J009	1	1	1	YJ05000220	Socket, Transistor
J010	1	1	1	YJ05000220	Socket, Transistor
J011	1	1	1	YJ05000220	Socket, Transistor
J012	1	1	1	YJ05000220	Socket, Transistor
J013	1	1	1	YT03040160	Terminal, System 1 Speaker
J014	1	1	1	YT03040160	Terminal, System 2 Speaker
J015	1	1	1	YJ01000980	Jack, Headphone
J016	1	1	1	YJ08000190	Socket, Meter Lamp

REF. DESIG.	Q'TY			PART NO.	DESCRIPTION
	U	C	E		
J017	1	1	1	YJ08000190	Socket, Meter Lamp
J018	1	1	1	YJ08000120	Socket, Fuse Holder
J018			1	YJ08000220	Socket, Fuse Holder
J019	1	1	1	YJ04000570	Socket, AC Outlet
J020	1	1	1	YJ04000570	Socket, AC Outlet
J021			1	BY03110010	Terminal, Voltage Conversion
W001	1	1		YC02400220	AC Cord, UL
W001			1	YC01900030	AC Cord
F001			1	FS10150900	Fuse, 1.5A SGA
F001	1	1		FS10200060	Fuse, 2A MGC
F002		1		FS20250910	Fuse, 2.5A
2121	1	1	1	2991109010	Shield
2122	1	1	1	2991053110	Cover

12. TECHNICAL SPECIFICATIONS

AMPLIFIER SECTION:

Rated Power Output, Minimum Continuous Average per Channel, both Channels Driven	26 W
Power Band	20 Hz to 20 kHz
Total Harmonic Distortion	0.3%
Load Impedance	8 ohms
Maximum Power Output, DIN 45500	
(Less than 1% THD, 10 min. test at 1 kHz)	32 W
Power Bandwidth at 1% THD, DIN 45500	10 Hz to 70 kHz
I.M. Distortion	
(I.F. method, 60 Hz and 7 kHz mixed 4:1 at rated power output)	0.3%
Damping Factor	45
Sensitivity (at MAIN IN)	1.5 V
Impedance (at MAIN IN)	30 kohms
Frequency Response for Power Amp Only	
(at 1 W output, 20 Hz to 20 kHz)	±0.5 dB

PREAMPLIFIER SECTION:

Phono	
Input Overload at 1 kHz	100 mV
Equivalent Input Noise	1.5 μV
Dynamic Range	
(Dynamic Range is the ratio of input overload to equivalent input noise.)	96 dB
Input Sensitivity	1.8 mV
Input Impedance	47 kohms
Frequency Response, RIAA 20 Hz to 20 kHz	±1.0 dB
Signal-to-Noise Ratio	
(at rated output and 7.75 mV input)	75 dB
Signal-to-Noise Ratio, unweighted (DIN 45500)	50 dB
High Level (Aux and Tape)	
Input Sensitivity	180 mV
Input Impedance	85 kohms
Frequency Response	
(includes power amp)	15 Hz to 60 kHz, ±1.5 dB
Signal-to-Noise Ratio	
(ref. to rated output and 775 mV input)	84 dB
Output Levels	
Tape Out (ref. 7.75 mV at Phono inputs)	775 mV
Pre-Out (ref. 180 mV at Aux inputs)	1.5 V
(ref. 500 mV at Aux inputs, main amp disconnected)	4.2 V
Output Impedance	
Tape Out	600 ohms
Pre-Out	900 ohms

FM TUNER SECTION:

Sensitivity	
IHF Usable	10.8 dBf (1.9 μV)
IHF 50 dB Quieting (mono)	17.3 dBf (4.0 μV)
(Stereo)	37.2 dBf (40 μV)
DIN Sensitivity (Mono, 26 dB S/N, 300 ohm input)	1.6 μV
(Stereo, 46 dB S/N, 300 ohm input)	80 μV
Quieting Slope (Mono)	
RF Input for 30 dB Quieting	9.8 dBf (1.7 μV)
Quieting at:	
20 dBf (5.5 μV)	51 dB
25 dBf (10 μV)	58 dB
40 dBf (55 μV)	65 dB
65 dBf (1000 μV)	72 dB
Quieting Slope (Stereo)	
Quieting at:	
30 dBf (17 μV)	40 dB
40 dBf (55 μV)	50 dB
50 dBf (173 μV)	56 dB
65 dBf (1000 μV)	62 dB

Distortion (Mono)	
at 50 dB Quieting, 1000 Hz	0.6%
at 65 dBf (1000 μ V), 1000 Hz	0.15%
Distortion (Stereo)	
at 50 dB Quieting, 1000 Hz	0.6%
at 65 dBf (1000 μ V), 1000 Hz	0.3%
Hum and Noise	
at 65 dBf (1000 μ V)	
Mono	70 dB
Stereo	62 dB
Frequency Response	
30 Hz to 15 kHz	
Mono	+0.2, -2.0 dB
Stereo	\pm 2.0 dB
Capture Ratio	
at 45 dBf (100 μ V)	1.5 dB
at 65 dBf (1000 μ V)	1.0 dB
Alternate Channel Selectivity	70 dB
Spurious Response Rejection	90 dB
Image Response Rejection	60 dB
I.F. Rejection (Balanced)	90 dB
A.M. Suppression	50 dB
Stereo Separation	
100 Hz	42 dB
1000 Hz	45 dB
10 kHz	32 dB
Subcarrier Rejection	60 dB

AM TUNER SECTION:

IHF Usable Sensitivity	20 μ V
Distortion (THD), 30% Modulation	0.6%
Signal-to-Noise Ratio	49 dB
Frequency Response (\pm 3 dB)	40 Hz to 2.3 kHz
Alternate Channel Selectivity	46 dB
Image Rejection	45 dB
Spurious Response Rejection	50 dB
I.F. Rejection	40 dB

GENERAL:

Power Requirements	120 V AC, 50/60 Hz (U.S.A. and Canadian Versions) 220 V AC, 50/60 Hz (European Version)
	(This unit can be converted by a qualified technician to operate on 110/120/240 V AC, 50/60 Hz.)
Power Consumption at rated output, both channels operating	147 W
Idling Power (Volume Control at zero)	27 W
Semiconductor Complement:	
Integrated Circuits	3
Transistors	45
Diodes	29
Field Effect Transistors	1
Dimensions:	
Panel Width	440 mm (17-5/16 inches)
Panel Height	137 mm (5-3/8 inches)
Depth	365 mm (14-3/8 inches)
Weight:	
Unit alone	11.5 kg (25.3 lbs)
Packed for shipment	14.5 kg (32 lbs)



marantz

MARANTZ CO., INC. • P.O. BOX 577 • CHATSWORTH, CALIFORNIA • 91311



A WHOLLY-OWNED SUBSIDIARY OF SUPERSCOPE INC., CHATSWORTH, CALIFORNIA • 91311

"DOLBY" is a trademark of Dolby Laboratories, Inc.