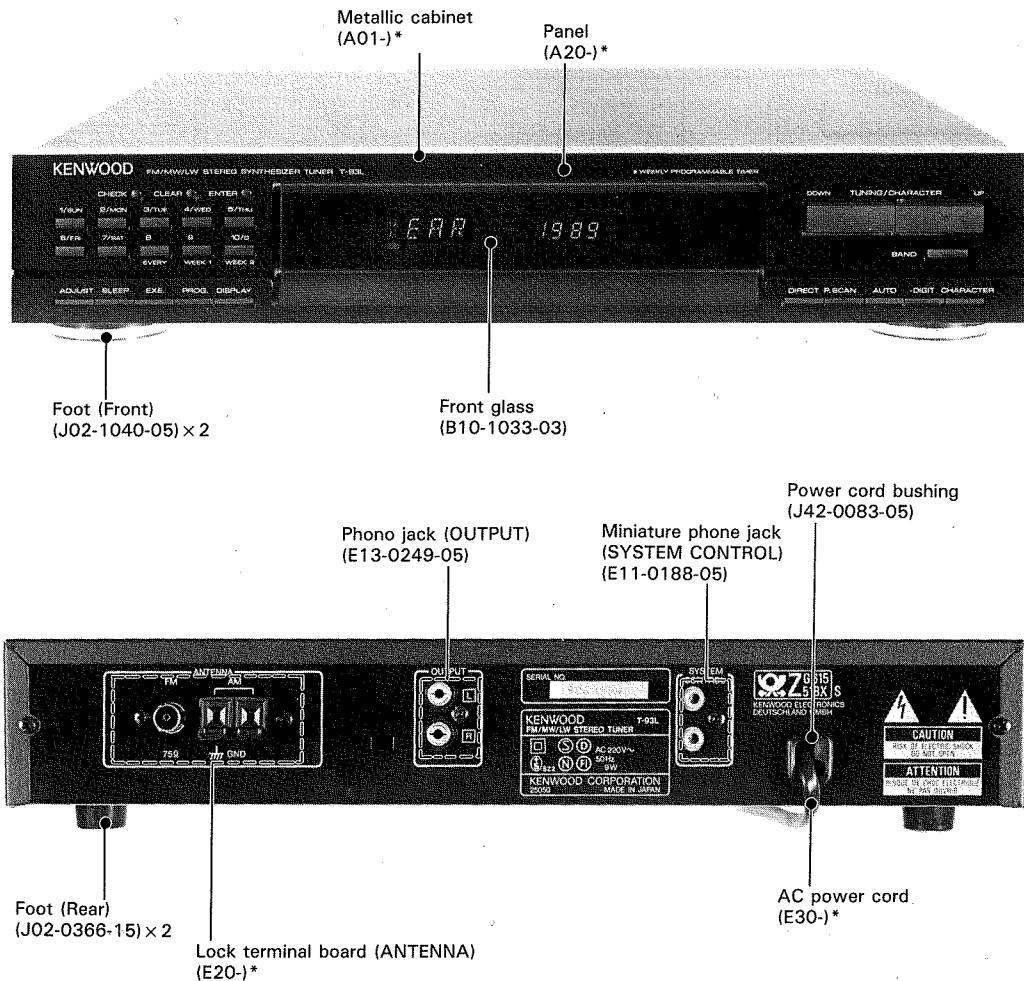


FM/AM STEREO SYNTHESIZER TUNER

T-93/93L**SERVICE MANUAL**

64818

30K2

KENWOOD©1989-8 PRINTED IN JAPAN
B51-3958-00(T)1702

* Refer to Parts List on page 44.
Photo is T-93L


MODEL NAME	TYPE	TUNER UNIT (X05)	DISPLAY UNIT (X14)	POWER TRANSFORMER (L01)	FRONT END (X86)
T-93 (J)	M	X05-3780-20	X14-2620-21	L01-5454-15	X86-1040-10
T-93 (J)	X	X05-3780-71	X14-2620-71	L01-5452-05	X86-1040-10
T-93L (J)	T,E	X05-3782-71	X14-2622-71	L01-5452-05	X86-1052-70
T-93L (J)	EF,TF	X05-3782-72	X14-2622-72	L01-5452-05	X86-1052-70
T-93 (S)	M	X05-3780-21	X14-2630-20	L01-9004-05	X86-1130-10
T-93 (S)	X	X05-3780-72	X14-2630-71	L01-9002-05	X86-1130-10
T-93L (S)	T,E	X05-3782-73	X14-2632-71	L01-9002-05	X86-1122-70

CONTENTS


CONTROLS AND INDICATORS.....	3
ANTENNA CONNECTION	4
BLOCK DIAGRAM	5
FUNCTION OF EACH IC'S.....	6
CIRCUIT DESCRIPTION	7
Operation specification.....	7
IC1: CXP50112-010Q (X14-)	
MICROPROCESSOR	8
IC1: LM7001 (X05-378X-XX)	
PLL CONTROL DATA	12
ADJUSTMENT.....	15
REGLAGES	16
ABGLEICH	17
VOLTAGE TABLES	18
PC BOARD (T-93).....	19
PC BOARD (T-93L)	27
SCHEMATIC DIAGRAM (T-93)	35
SCHEMATIC DIAGRAM (T-93L).....	39
EXPLODED VIEW	43
PARTS LIST.....	44
SPECIFICATIONS.....	Back cover

CONTROLS AND INDICATORS

Tuner

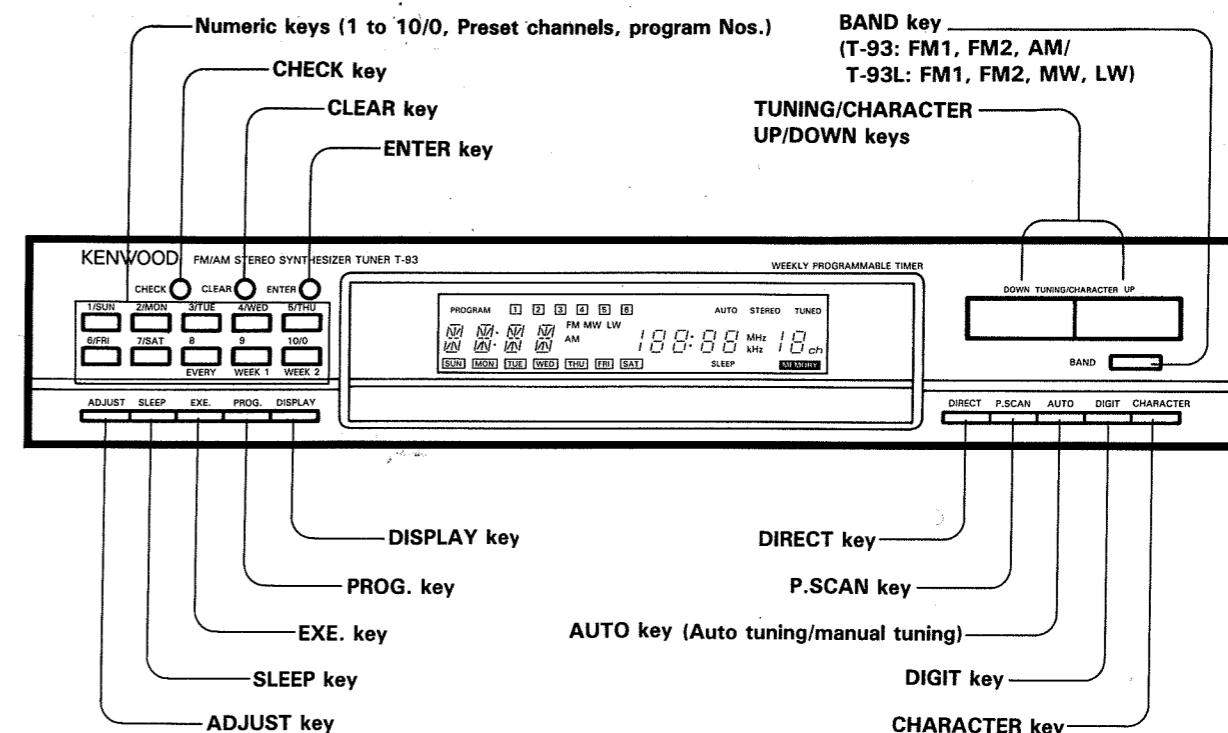


Display panel

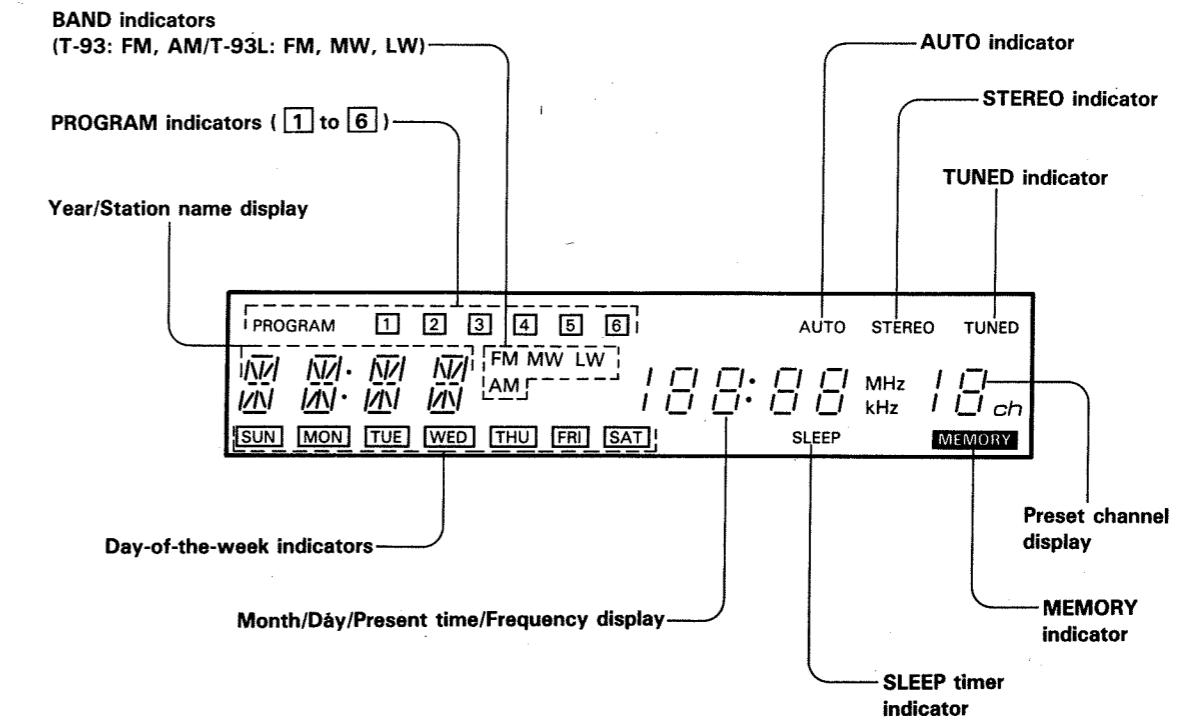


ANTENNA CONNECTION

Antenna connections

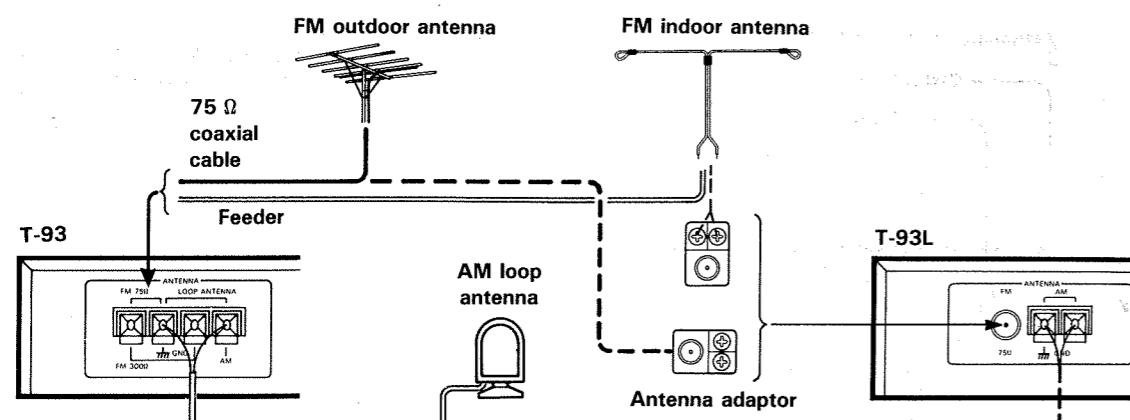

■ AM (MW, LW) loop antenna

Install the AM (MW, LW) loop antenna on the supplied loop antenna stand and place it on a shelf, etc., or install it on the rack or wall with screws. Rotate the AM (MW, LW) loop antenna to the right or left for best reception.




Keep the speaker leads and AC cords away from the AM loop antenna.

Note:

Do not place the AM (MW, LW) loop antenna on the unit. As this unit employs a computing device, placing the AM (MW, LW) loop antenna on the unit may result in noise generation. Place the AM (MW, LW) loop antenna away from the unit.


■ AM (MW, LW) outdoor antenna

In steel buildings or at a great distance from the transmitter, it may be necessary to install an outside longwire antenna. The end of this wire should be stripped of insulation and connected to the AM terminal. At this time, keep the loop antenna connected.

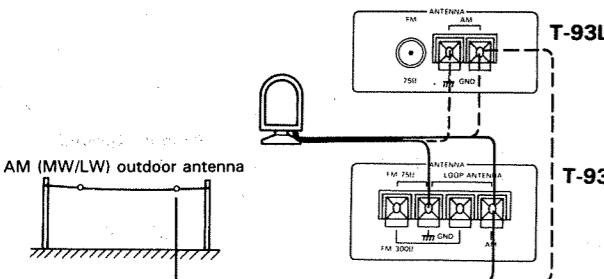


- To minimize auto-ignition noise, locate the antenna as far from heavy traffic as possible.
- Keep the feeder or coaxial cable as short as possible. Do not bundle or roll up excess cable.
- The antenna should be at least two meters (6.6 feet) from reinforced concrete walls, or metal structures.

FM outdoor antenna setting

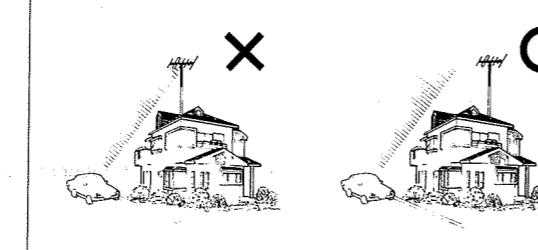

BLOCK DIAGRAM

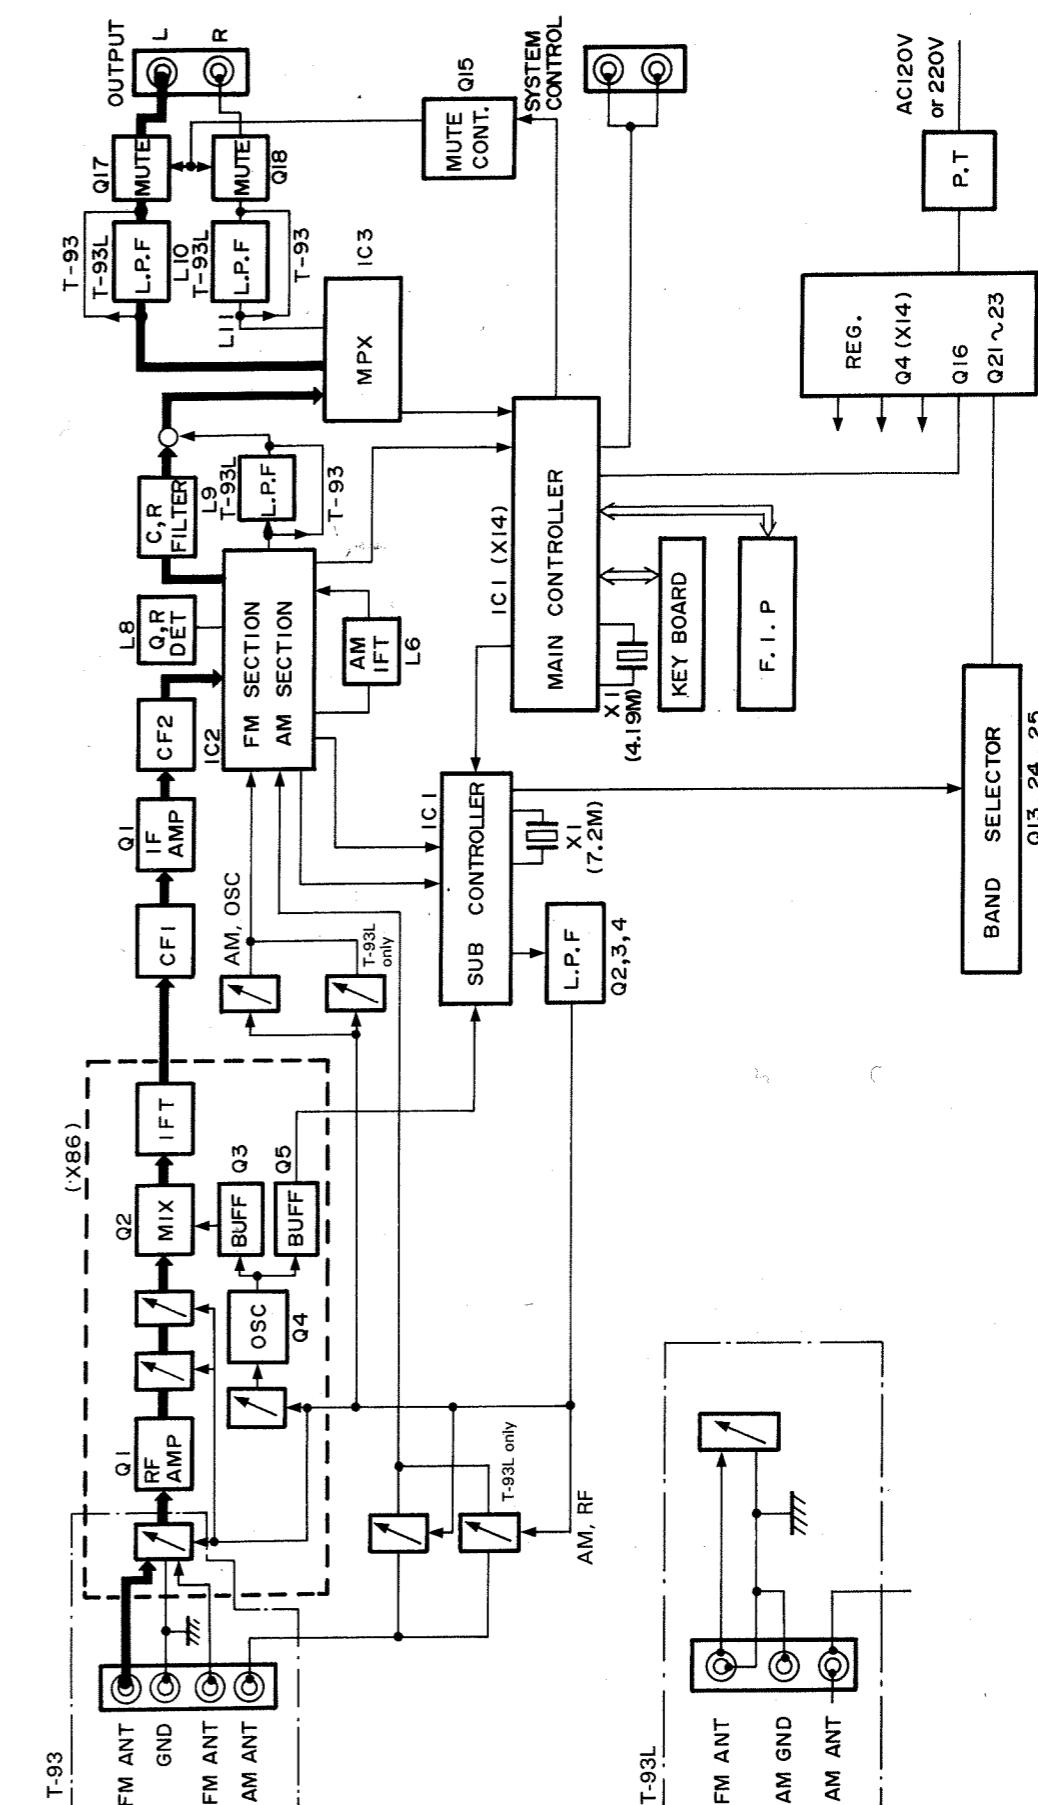

FUNCTION OF EACH IC's

TUNER UNIT (X05-378X-XX)

Ref. No.	Components	Use/Function	Operation/Condition/Compatibility
IC1	LM7001	PLL IC	Electronic tuning PLL
IC2	LA1265	FM/AM system IC	FM IF amplification, detection, and AM MIX, IF amplification, detection, control
IC3	AN7470	FM MPX IC	MPX demodulation
Q1	2SC1923	FM IF amplifier	10.7 MHz amplification
Q2	2SC1740S	L.P.F.	PLL low-pass filter JC501/2SC945(A)
Q3	2SC1845	L.P.F.	PLL low-pass filter
Q4 (T-93L)	2SK163	L.P.F. switch	Time constant selection for LW mode 2SK364
Q6 (T-93L)	2SC1740S	L.P.F. control	Control over Q4. LW position with switch ON JC501/2SC945(A)
Q7 (T-93L)	2SC1740S	Antenna coil selection	LW/MW electronic selectionz JC501/2SC945(A)
Q8 (T-93L)	2SC1740S	Buffer	Impedance change JC501/2SC945(A)
Q13	2SA733(A)	Tuner band selection	FM/MW/LW power selection JA101/2SA933S
Q24	2SA733(A)		
Q25	2SA733(A)	Mute control	Mute ON with signal "L" from microprocessor 2SA933S
Q15	2SA733(A)		
Q16	2SC2003	Constant voltage	+5.6 V regulated
Q17	2SD1302	Mute switch	ON in function selection
Q18	2SD1302		
Q19 (T-93)	2SC1740S	Deemphasis selection	Deemphasis time constant selection for FM mode 2SC945(A)
Q20 (T-93)	2SC1740S		
Q21	2SD1266	Constant voltage	+13 V regulated
Q22	2SA733(A)	Power switch	Power ON/OFF operation 2SA933S/JA101
Q23	2SC1740S	Control	Power ON with signal "H" from microprocessor JC501/2SC945(A)

DISPLAY UNIT (X14-262X-XX) JAPAN MADE
(X14-263X-XX) SINGAPORE MADE

Ref. No.	Components	Use/Function	Operation/Condition/Compatibility
IC1	CXP50112-010Q	4-bit microprocessor	Controller for PLL and display, etc.
Q1	2SC1740S	FIP Driver	FIP Indication (STEREO, TUNED, ch etc.) JC501/2SC945(A)
Q2	2SC1740S	FIP Driver	FIP Indication (FM, AM, etc.) JC501/2SC945(A)
Q3	2SA733(A)	Tr. SW	CHANNEL SPACE select 2SA933S
Q4	2SA733(A)	Constant voltage	For +5 V JA101/2SA933S
Q5	2SC1740S	Micropocessor Reset	Suplies reset pulse to microprocessor JC501/2SC945(A)

CIRCUIT DESCRIPTION

OPERATION SPECIFICATION

Functions

(1) Tuner section

a) Auto tuning

When the "AUTO" display is lighting, the tuning operation starts with the UP or DOWN key pressed. This operation continues in the direction of increasing or decreasing frequency at a rate of approx. 125 msec/step until the SD terminal becomes "L" (in which "TUNED" lights). When an input is obtained, the operation is stopped, after which, 0.5 sec later, muting is turned OFF.

b) Manual tuning

When the "AUTO" display is off, when the UP or DOWN key is pressed, the tuning operation goes in the direction of increasing or decreasing frequency at a rate of one step per key pressure.

When the UP or DOWN key is pressed continuously for more than 0.5 sec, the tuning operation continues in the direction of increasing or decreasing direction at a rate of 125 msec/step irrespective of the SD terminal level until the key is released from the finger pressure.

c) Direct tuning

The frequency whose data has been directly input from numeral keys is received. About how to input the frequency data, press the DIRECT key, then input the frequency value from numeral keys.

When the input frequency is within the specified band, this frequency is received soon after the input of its final digit. While when it is without the specified band, an error display appears for 5 seconds, after that the original display is restored.

d) Preset memory

For each band, 10 stations can be preset. Their station names, each consisting of up to 4 characters, can all be memorized at the same time.

Only the FM mode permits memory of 10 more stations. In this case, however, their station names cannot be input.

e) Preset scan

This function is to receive the preset stations successively. With a tuning signal, muting is turned OFF for 5 seconds, while with no tuning signal, the tuning operation shifts to the next station after 1 second.

f) Station name display

For a preset memory, up to 4 characters can be input for a station name. When the wanted one is called from the preset memory, that station name is displayed. Inputtable characters are alphanumeric A to Z and 0 to 9, and 6 special characters including "—" (blank). In addition, FM2 does not permit input.

(2) Timer section

a) Day timer

A timer function with the unit count of 7.8125 msec is provided. The time value is displayed in the 24-hour mode without flickering of the colon ":" after which the second data is displayed.

At first, when AC is applied, the display is initialized to "0:00".

When the power fails, all digits inclusive of the colon flicker to warn for readjustment.

b) Calendar

An auto calendar function of from January 1, 1900 to December 31, 2099 is provided. With year, month and day data is input, day-of-week setting is automatically made. When initialized, January 1 (Sunday)/1989 is engaged.

c) Calendar check

When year, month and day data is input, it is possible to know what day of the week that day is. The inputtable range of data is the same as that for the calendar function.

d) Programmable timer

Six timer systems are provided to set the day of week, ON time, OFF time, band and preset channel, independently. As to the day of week, selection is possible from 10 patterns such as each day of Sunday to Saturday, every day, Monday to Saturday, and Monday to Friday.

e) Sleep timer


The sleep timer is an auto OFF timer of max. 90 minutes, which is capable of setting in units of 10 minutes. During the sleep timer operation, the "SLEEP" display is lighting. This timer is given priority over the programmable timer. The sleep timer is operable even when the day timer is not set.

CIRCUIT DESCRIPTION

IC1: CXP50112-010Q (X14-)

4-bit MICROPROCESSOR

Pin Connections (Top View)

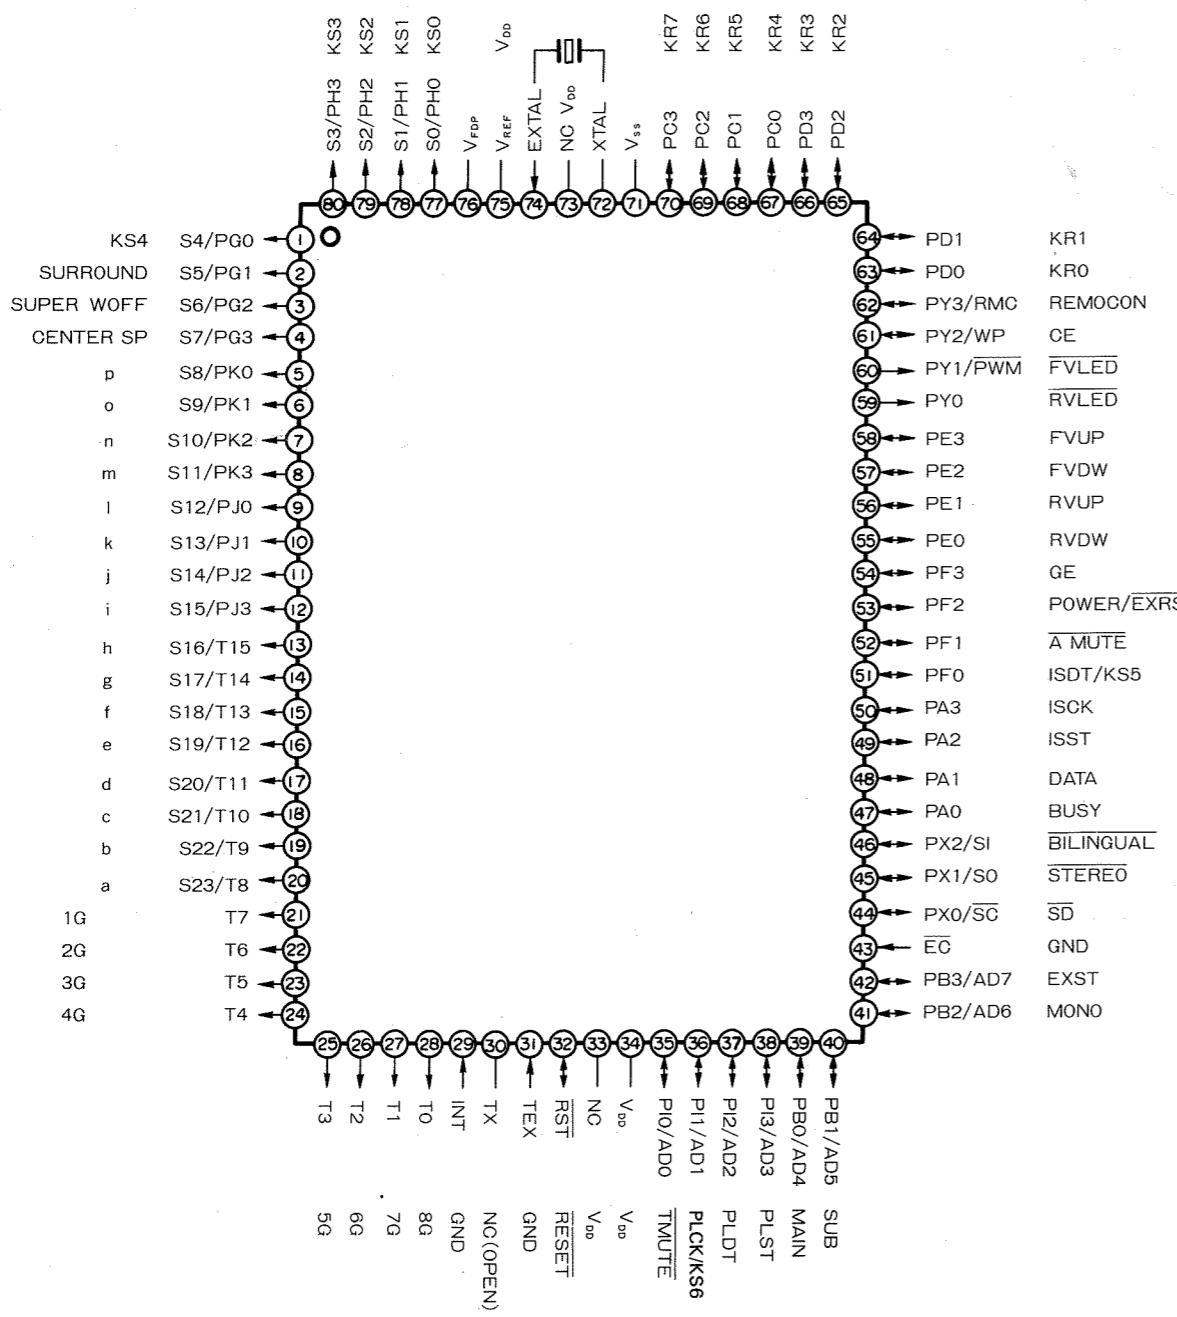

Note: The NC pins, pins 33 and 73, should be set to V_{DD}.

CIRCUIT DESCRIPTION

Pin Functions:


Pin No.	Pin name	I/O	Name	Operation description
1	S4/PG0	O	KS4	Key scan output H: ON L: OFF
2	S5/PG1	O	SURROUND	SURROUND ON/OFF H: ON L: OFF
3	S6/PG2	O	SUPER WOFFER	SUPER WOFFER ON/OFF H: ON L: OFF
4	S7/PG3	O	CENTER	CENTER OUTPUT ON/OFF H: ON L: OFF
5	S8/PK0	O	S8	FL segment output p H: ON L: OFF
6	S9/PK1	O	S9	FL segment output o H: ON L: OFF
7	S10/PK2	O	S10	FL segment output n H: ON L: OFF
8	S11/PK3	O	S11	FL segment output m H: ON L: OFF
9	S12/PJ0	O	S12	FL segment output l H: ON L: OFF
10	S13/PJ1	O	S13	FL segment output k H: ON L: OFF
11	S14/PJ2	O	S14	FL segment output j H: ON L: OFF
12	S15/PJ3	O	S15	FL segment output i H: ON L: OFF
13	S16/T15	O	S16	FL segment output h H: ON L: OFF
14	S17/T14	O	S17	FL segment output g H: ON L: OFF
15	S18/T13	O	S18	FL segment output f H: ON L: OFF
16	S19/T12	O	S19	FL segment output e H: ON L: OFF
17	S20/T11	O	S20	FL segment output d H: ON L: OFF
18	S21/T16	O	S21	FL segment output c H: ON L: OFF
19	S22/T9	O	S22	FL segment output b H: ON L: OFF
20	S23/T8	O	S23	FL segment output a H: ON L: OFF
21	T7	O	T7	FL grid output G1 H: ON L: OFF
22	T6	O	T6	FL grid output G2 H: ON L: OFF
23	T5	O	T5	FL grid output G3 H: ON L: OFF
24	T4	O	T4	FL grid output G4 H: ON L: OFF
25	T3	O	T3	FL grid output G5 H: ON L: OFF
26	T2	O	T2	FL grid output G6 H: ON L: OFF
27	T1	O	T1	FL grid output G7 H: ON L: OFF
28	T0	O	T0	FL grid output G8 H: ON L: OFF
29	INT	I	INT	External interrupt pin... unused
30	TX	O	TX	Timer oscillation pin... unused
31	TEX	I	TEX	Timer oscillation pin... unused
32	RST	I	RESET	Reset input H: Normal L: Reset
33	NC		NC	
34	V _{DD}			Power supply pin
35	PIO/AD0	O	TMUTE	Tuner section mute output H: Mute OFF L: Mute ON
36	PI1/AD1	O	PLCK/KS6	Clock to PLL and extension IC, and key scan (for diode SW)
37	PI2/AD2	O	PLDT	Data output to PLL and extension IC
38	PI3/AD3	O	PLST	PLL chip enable output
39	PB0/AD4	O	PMAIN	TV sound multiplex selection output
40	PB1/AD5	O	PSUB	TV sound multiplex selection output
41	PB2/AD6	O	PMONO	Stereo/mono selection H: Mono L: Stereo
42	PB3/AD7	O	EXIO	Extension IC strobe signal
43	EC	I	EC	Even counter input... unused
44	PX0/SC	I	SD	Tuning signal input
45	PX1/SO	I	ST	Stereo signal input H: OFF L: Tuned H: Mono L: Stereo

CIRCUIT DESCRIPTION

Pin No.	Pin name	I/O	Name	Operation description
46	PX2/SI	I	BIL	Bilingual signal input H: Normal L: Bilingual
47	PA0	I/O	BUSY	System control busy
48	PA1	I/O	DATA	System control data
49	PA2	O	ISST	Input selector IC strobe output
50	PA3	O	ISCK	Input selector IC clock output
51	PF0	O	ISDT/KS5	Input selector IC data/key scan
52	PF1	O	AMUTE	Amplifier section mute output H: Mute OFF L: Mute ON
53	PF2	O	POWER/EXRS	Power control/extension IC reset output H: ON (reset OFF) L: OFF (reset ON)
54	PF3	O	GE	Graphic equalizer display output H: Graphic equalizer ON L: Graphic equalizer OFF
55	PE0	O	RVDW	Rear volume down H: Down L: —
56	PE1	O	RVUP	Rear volume up H: Up L: —
57	PE2	O	FVDW	Master volume down H: Down L: —
58	PE3	O	FVUP	Master volume up H: Up L: —
59	PY0	O	RVLED	Rear volume LED H: OFF L: ON
60	PY1/PWM	O	FVLED	Master volume LED H: OFF L: ON
61	PY2/WP	I	CE	AC ON/OFF detection input H: ON L: OFF
62	PY3/RMC	I	RMCN	Remote control input
63	PD0	I	KR0	Key return input H: With input L: Without input
64	PD1	I	KR1	Key return input H: With input L: Without input
65	PD2	I	KR2	Key return input H: With input L: Without input
66	PD3	I	KR3	Key return input H: With input L: Without input
67	PC0	I	KR4	Key return input H: With input L: Without input
68	PC1	I	KR5	Key return input H: With input L: Without input
69	PC2	I	KR6	Key return input H: With input L: Without input
70	PC3	I	KR7	Key return input H: With input L: Without input
71	Vss			GND pin
72	XTAL	O	XTAL	Oscillator pin
73	NC			
74	EXTAL	I	EXTAL	Oscillator pin
75	VREF			Voltage detection reset pin... unused
76	VFDP		VFDP	FL pin pull-down resistor power
77	S0/PH0	O	KS0	Key scan output H: ON L: OFF
78	S1/PH1	O	KS1	Key scan output H: ON L: OFF
79	S2/PH2	O	KS2	Key scan output H: ON L: OFF
80	S3/PH3	O	KS3	Key scan output H: ON L: OFF

CIRCUIT DESCRIPTION

Blockdiagramm of surrounding microprocessor

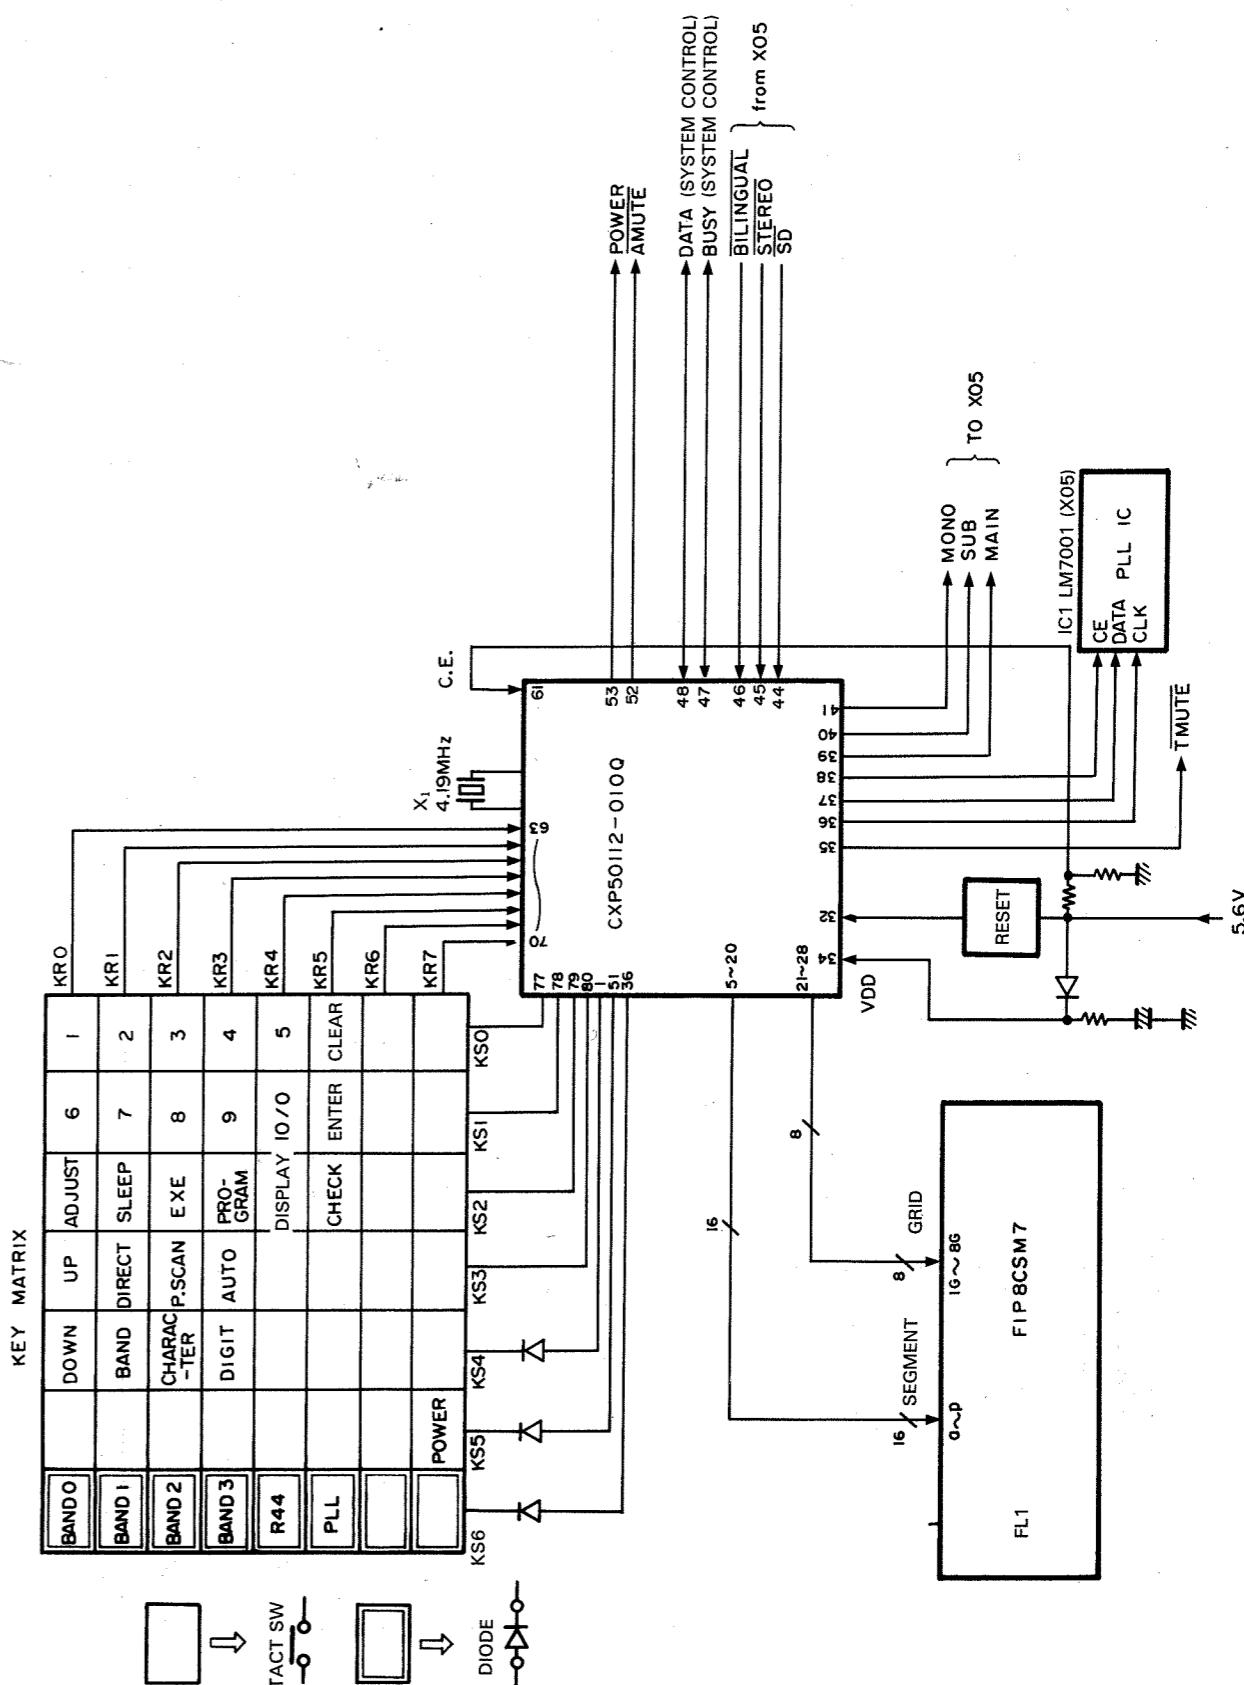

CIRCUIT DESCRIPTION

IC1: LM7001 (X05-378X-XX)
PLL CONTROL DATA

Band	Desti- nation SW	Reception frequency range	Channel space	PLL reference frequency	Local OSC frequency	PLL input terminal	PLL port			P divider di- vision ratio	Output data to PLL or memory		
							00	03	04	05	06		
FM	J	0000	76.0 MHz 90.0 MHz	25 kHz	f - 10.7 MHz	FM IN, 1/2 prescaler inside and outside	0	1	1	1	28DH 319H	01407028DH 014070319H	
	K	10XX	87.5 MHz	25 kHz	f + 10.7 MHz	FM IN, 1/2 prescaler inside	0	1	1	1	7ACH	0140707ACH	
	E	11XX	108.0 MHz	50 kHz							946H	014070946H	
AM	J	0000	531 kHz 1602 kHz	9 kHz							6DH OE4H	0090E06D0H 0090E0E40H	
	E	11XX	530 kHz	10 kHz		f + 450 kHz	AM IN	1	0	1	1	62H OCEH	0080E0620H 0080E0CE0H
	K1	1000	1610 kHz								62H OD7H	0080E0620H 0080E0D70H	
LW	K2	1010	530 kHz	1700 kHz							25BH 0D7H	00D1025B0H 00D102DB0H	
	K	1101	153 kHz 281 kHz	1 kHz	f + 450 kHz	AM IN	1	1	0	1	6A5H 795H	0121606A5H 012160795H	
	TV (V _L) 1~3		95.75 MHz 107.75 MHz	12.5 kHz		FM IN, 1/2 prescaler inside and outside	1	1	0	1	0CE5H 107DH	012260CE5H 01226107DH	
TV (V _H) 4~12	J	0000	175.75 MHz 221.75 MHz	6 MHz	f - 10.7 MHz		1	1	0	1	107DH 3H~BH	3H~BH	
	TV (UHF) 13~62		475.75 MHz 769.75 MHz	3.125 MHz		FM IN, 1/2 prescaler inside and 1/8 prescaler outside	1	1	1	0	2455H 3B4DH	016462455H 016463B4DH	
											0CH~3DH		

The output data to PLL refers to the stereo mode for FM/AM, to either the stereo or the monaural mode for TV, and to the monaural mode for LW.

Test mode

Tuner mode

- (1) Method of setting
While pressing the DOWN key, turn AC ON.

(2) Contents

- Power ON
FLL all lit
Test frequency setting (Table below)

(3) Method of canceling

- Clearing the FLL all lit state is performed by numeral key, band key, UP/DOWN key or POWER key.

Initial status setting (reset)

(1) Method

- While pressing the ENTER key, turn AC ON.

(2) Contents


- The all memory is cleared and the initial status is fully restored. At this time, however, test frequency is newly memorized in the preset memory. (This is the same as when backup data is not good.)

Destination		J	K	E
Band	Pch			
FM (FM1)	1	76.0 MHz	87.5 MHz	87.5 MHz
	2	78.0 MHz	89.1 MHz	89.1 MHz
	3	80.0 MHz	90.0 MHz	90.0 MHz
	4	82.0 MHz	92.0 MHz	92.0 MHz
	5	83.0 MHz	94.0 MHz	94.0 MHz
	6	83.5 MHz	98.0 MHz	98.0 MHz
	7	86.0 MHz	100.1 MHz	100.1 MHz
	8	88.0 MHz	102.0 MHz	102.0 MHz
	9	89.1 MHz	106.0 MHz	106.0 MHz
	10	90.0 MHz	108.0 MHz	108.0 MHz
AM	1	531 kHz	530 kHz	531 kHz
	2	630 kHz	630 kHz	630 kHz
	3	990 kHz	990 kHz	990 kHz
	4	1440 kHz	1440 kHz	1440 kHz
	5	1602 kHz	1610 kHz	1602 kHz
	6	—	(1700 kHz)	—
TV/LW	1	1ch	—	153 kHz
	2	3ch	—	162 kHz
	3	4ch	—	216 kHz
	4	8ch	—	270 kHz
	5	12ch	—	281 kHz
	6	13ch	—	—
	7	35ch	—	—
	8	62ch	—	—

CIRCUIT DESCRIPTION

ADJUSTMENT

Time chart:

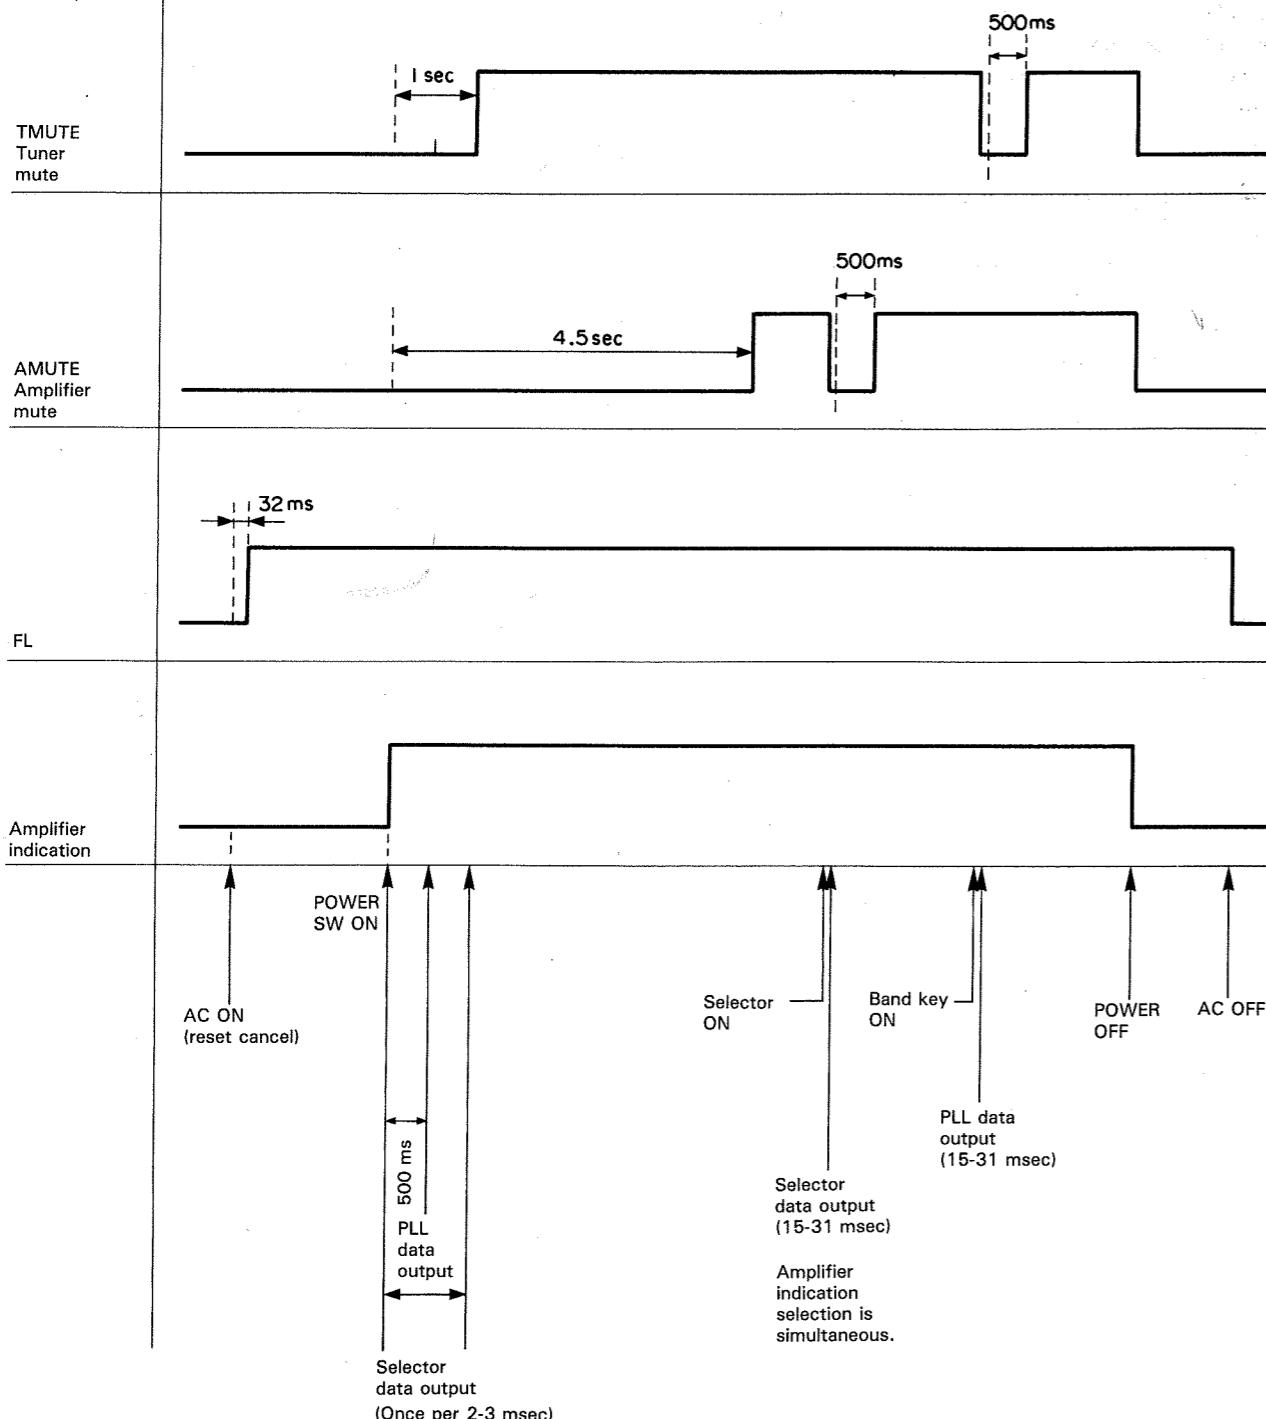

No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
FM SECTION Unless otherwise specified, the individual switches should be set as following: SELECTOR: FM MODE: FM MODE/MUTING ON							
1	BAND EDGE (1)	—	Connect a DC voltmeter between TP5(VT) and TP6(GND).	87.5MHz	L7 (Front end)	2.5V	(a)
2	BAND EDGE (2)	—	Connect a DC voltmeter between TP5(VT) and TP6(GND).	108.0MHz	TC1 (Front end)	8.0V	(a)
Repeat alignments 1 and 2 several times.							
3	RF ALIGNMENT (A) 98.0MHz 1kHz, ±75kHz dev	(B)	MONO 98.0MHz	L2,3,5* (Front end)	Maximum amplitude and symmetry of the oscilloscope display.		
4	DISCRIMINATOR (A) 98.0MHz 1kHz, ±75kHz dev 60dB μ (ANT input)	Connect a DC voltmeter between TP7 and TP8.	MONO 98.0MHz	L8	0V	(b)	
5	VCO (A) 98.0MHz 0 dev 60dB μ (ANT input)	Connect a 330k Ω resistor to TP11. Connect a frequency counter to the resistor via an AC voltmeter.	98.0MHz	VR3	19.00kHz	(c)	
6	DISTORTION (STEREO) (C) 98.0MHz 1kHz, ±68.25kHz dev Selector: L or R 60dB μ (ANT input)	(B)	98.0MHz	L6 (Front end)	Minimum distortion. (L or R)		
7	TUNING LEVEL (A) 98.0MHz 0 dev 18dB μ (ANT input)	—	98.0MHz	VR2	Adjust VR2 so that FL1(TUNED) goes off. Then, adjust VR2 and stop at the point where FL1(TUNED) goes on.		
AM-MW SECTION Keep the AM loop antenna installed. SELECTOR: AM(T-93) or MW(T-93L)							
(1)	BAND EDGE (1)	—	Connect a DC voltmeter between TP5(VT) and TP6(GND).	530kHz (531kHz)	L5	1.5V	(a)
(2)	BAND EDGE (2)	—	Connect a DC voltmeter between TP5(VT) and TP6(GND).	1610kHz (1602kHz)	TC4	8.0V	(a)
Repeat alignments (1) and (2) several times.							
(3)	RF ALIGNMENT (D) (1) 630kHz 400Hz, 30% mod	(B)	630kHz	L3	Maximum amplitude and symmetry of the oscilloscope display.		
(4)	RF ALIGNMENT (D) (2) 1440kHz 400Hz, 30% mod	(B)	1440kHz	TC2	Maximum amplitude and symmetry of the oscilloscope display.		
Repeat alignments (3) and (4) several times.							
AM-LW SECTION (T-93L only) Keep the AM loop antenna installed. SELECTOR: LW							
(5)	BAND EDGE (1)	—	Connect a DC voltmeter between TP5(VT) and TP6(GND).	153kHz	L4	1.5V	(a)
(6)	BAND EDGE (2)	—	Connect a DC voltmeter between TP5(VT) and TP6(GND).	281kHz	TC3	8.0V	(a)
Repeat alignments (5) and (6) several times.							
(7)	RF ALIGNMENT (D) (1) 162kHz 400Hz, 30% mod	(B)	162kHz	L2	Maximum amplitude and symmetry of the oscilloscope display.		
(8)	RF ALIGNMENT (D) (2) 270kHz 400Hz, 30% mod	(B)	270kHz	TC1	Maximum amplitude and symmetry of the oscilloscope display.		
Repeat alignments (7) and (8) several times.							

* L5: T-93L only

REGLAGES

N°	ITEM	REGLAGE DE L'ENTREE	REGLAGE DE LA SORTIE	REGLAGE DU TUNER	POINT DE L'ALIGNEMENT	ALIGNER POUR	FIG.
SECTION MF Sauf en cas d'indications spéciales, régler chaque commutateur comme suit: SELECTEUR: FM MODE: FM MODE/MUTING ON							
1	BORD DE BANDE (1)	—	Relier un voltmètre CC entre les TP5 (VT) et TP6 (GND).	87,5MHz	L7 (Contrôle)	2,5V	(a)
2	BORD DE BANDE (2)	—	Relier un voltmètre CC entre les TP5 (VT) et TP6 (GND).	108,0MHz	TC1 (Contrôle)	8,0V	(a)
Répéter les points 1 et 2 plusieurs fois.							
3	ALIGNEMENT HT	(A) 98,0MHz 1kHz, ±75kHz dév	(B) MONO 98,0MHz (Contrôle)	L2,3,5*	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.		
4	DISCRIMINATEUR	(A) 98,0MHz 1kHz, ±75kHz dév 60dB μ (Entrée ANT)	Relier un voltmètre CC entre les TP7 et TP8.	MONO 98,0MHz	L8	0V	(b)
5	VCO	(A) 98,0MHz 0 dév 60dB μ (Entrée ANT)	Relier une résistance de 330k Ω à TP11. Raccorder un compteur de fréquence à une résistance par l'intermédiaire d'un voltmètre CA.	98,0MHz	VR3	19,00kHz	(c)
6	DISTORSION (STEREO)	(C) 98,0MHz 1kHz, ±68,25kHz dév Selection: L ou R 60dB μ (Entrée ANT)	(B) 98,0MHz	L6 (Contrôle)	Distorsion minimale. (L ou R)		
7	NIVEAU D'ACCORDER	(A) 98,0MHz 0 dév 18dB μ (Entrée ANT)		98,0MHz	VR2	Ajuster VR2 que FL1(TUNED) est non allumé. Alors, ajuster VR2 et arrêter le mouvement de VR1 au moment où le FL1(TUNED)s'allume.	
SECTION MA Laisser l'antenne bouche MA installée. SELECTEUR: AM(T-93) ou MW(T-93L)							
(1)	BORD DE BANDE (1)	Relier un voltmètre CC entre les TP5 (VT) et TP6 (GND).	530kHz (531kHz)	L5	1,5V	(a)	
(2)	BORD DE BANDE (2)	Relier un voltmètre CC entre les TP5 (VT) et TP6 (GND).	1610kHz (1602kHz)	TC4	8,0V	(a)	
Répéter les points (1) et (2) plusieurs fois.							
(3)	ALIGNEMENT HT (1)	(D) 630kHz 400Hz, 30% mod	(B) 630kHz	L3	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.		
(4)	ALIGNEMENT HT (2)	(D) 1440kHz 400Hz, 30% mod	(B) 1440kHz	TC2	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.		
Répéter les points (3) et (4) plusieurs fois.							
SECTION GO (T-93L seulement) Laisser l'antenne bouche MA installée. SELECTEUR: LW							
(5)	BORD DE BANDE (1)	Relier un voltmètre CC entre les TP5 (VT) et TP6 (GND).	153kHz	L4	1,5V	(a)	
(6)	BORD DE BANDE (2)	Relier un voltmètre CC entre les TP5 (VT) et TP6 (GND).	281kHz	TC3	8,0V	(a)	
Répéter les points (5) et (6) plusieurs fois.							
(7)	ALIGNEMENT HT (1)	(D) 162kHz 400Hz, 30% mod	(B) 162kHz	L2	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.		
(8)	ALIGNEMENT HT (2)	(D) 270kHz 400Hz, 30% mod	(B) 270kHz	TC1	Amplitude et symétrie maximale de l'affichage de l'oscilloscope.		
Répéter les points (7) et (8) plusieurs fois.							

※ L5: T-93L seulement

ABGLEICH


NR.	GEGENSTAND	EINGANGS-EINSTELLUNG	AUSGANGS-EINSTELLUNG	TUNER-EINSTELLUNG	ABGLEICH-PUNKTE	ABGLEICHEN FÜR	ABB.
UKW-EMPFANGSABTEILUNG Außer wenn anders angegeben, die verschiedenen Schalter wie folgt einstellen: SELECTOR: FM MODE:FM MODE/MUTING ON							
1	BANDKANTE (1)	—	Einen Gleichspannungsmesser zwischen TP5 (VT) und TP6 (GND) anschließen.	87,5MHz	L7 (Eingangs-stufe)	2,5V	(a)
2	BANDKANTE (2)	—	Einen Gleichspannungsmesser zwischen TP5 (VT) und TP6 (GND) anschließen.	108,0MHz	TC1 (Eingangs-stufe)	8,0V	(a)
Abstimmungen 1 und 2 mehrere Male wiederholen.							
3	EMPFANGS-BEREICH-ABSTIMMUNGEN	(A) 98,0MHz 1kHz, ±75kHz Hub	(B)	MONO 98,0MHz	L2,3,5* (Eingangs-stufe)	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
4	DISKRIMINATOR	(A) 98,0MHz 1kHz, ±75kHz Hub 60dB μ (ANT Eingang)	Einen Gleichspannungsmesser zwischen TP8 und TP7 anschließen.	MONO 98,0MHz	L8	0V	(b)
5	SPANNUNGS-GEREGELTER OSZILLATOR	(A) 98,0MHz 0 Hub 60dB μ (ANT Eingang)	Einen 330k Ω Widerstand zu TP11 anschließen. Einen Frequenzzähler über einen Wechselspannungsmesser an den Widerstand anschließen.	98,0MHz	VR3	19,00kHz	(c)
6	KLIRRFATOR (STEREO)	(C) 98,0MHz 1kHz, ±68,25kHz Hub Wähler: L oder R 60dB μ (ANT-Eingang)	(B)	98,0MHz	L6 (Eingangs-stufe)	Minimal Klirrfactor. (L oder R)	
7	ABSTIMM PEGEL	(A) 98,0MHz 0 Hub 18dB μ (ANT-Eingang)	Den Pegel widerstand VR2 so einstellen, daß der FL1(TUNED)anzeiger nicht leuchtet. Dann der Pegel widerstand aufdrehen. und dem VR2 Halt geben wobei der FL1(TUNED)anzeiger leuchtet wird.	98,0MHz	VR2		
MW-EMPFANGSABTEILUNG Die MW-Rahmenantenne angebracht lassen. SELECTOR: AM(T-93) oder MW(T-93L)							
(1)	BANDKANTE (1)	—	Einen Gleichspannungsmesser zwischen TP5 (VT) und TP6 (GND) anschließen.	530kHz (531kHz)	L5	1,5V	(a)
(2)	BANDKANTE (2)	—	Einen Gleichspannungsmesser zwischen TP5 (VT) und TP6 (GND) anschließen.	1610kHz (1602kHz)	TC4	8,0V	(a)
Abstimmungen (1) und (2) mehrere Male wiederholen.							
(3)	HF-ABGLEICH (1)	(D) 630kHz 400Hz, 30% mod	(B)	630kHz	L3	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
(4)	HF-ABGLEICH (2)	(D) 1440kHz 400Hz, 30% mod	(B)	1440kHz	TC2	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
Abstimmungen (3) und (4) mehrere Male wiederholen.							
LW-EMPFANGSABTEILUNG (nur T-93L) Die MW-Rahmenantenne angebracht lassen. SELECTOR: LW							
(5)	BANDKANTE (1)	—	Einen Gleichspannungsmesser zwischen TP5 (VT) und TP6 (GND) anschließen.	153kHz	L4	1,5V	(a)
(6)	BANDKANTE (2)	—	Einen Gleichspannungsmesser zwischen TP5 (VT) und TP6 (GND) anschließen.	281kHz	TC3	8,0V	(a)
Abstimmungen (5) und (6) mehrere Male wiederholen.							
(7)	HF-ABGLEICH (1)	(D) 162kHz 400Hz, 30% mod	(B)	162kHz	L2	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
(8)	HF ABGLEICH (2)	(D) 270kHz 400Hz, 30% mod	(B)	270kHz	TC1	Maximal Amplitude und Symmetrie des Oszilloskopbildes.	
Abstimmungen (7) und (8) mehrere Male wiederholen.							

※ L5: nur T-93L

T-93/93L

ADJUSTMENT/REGLAGES/ARGLEICH

T-93/93L

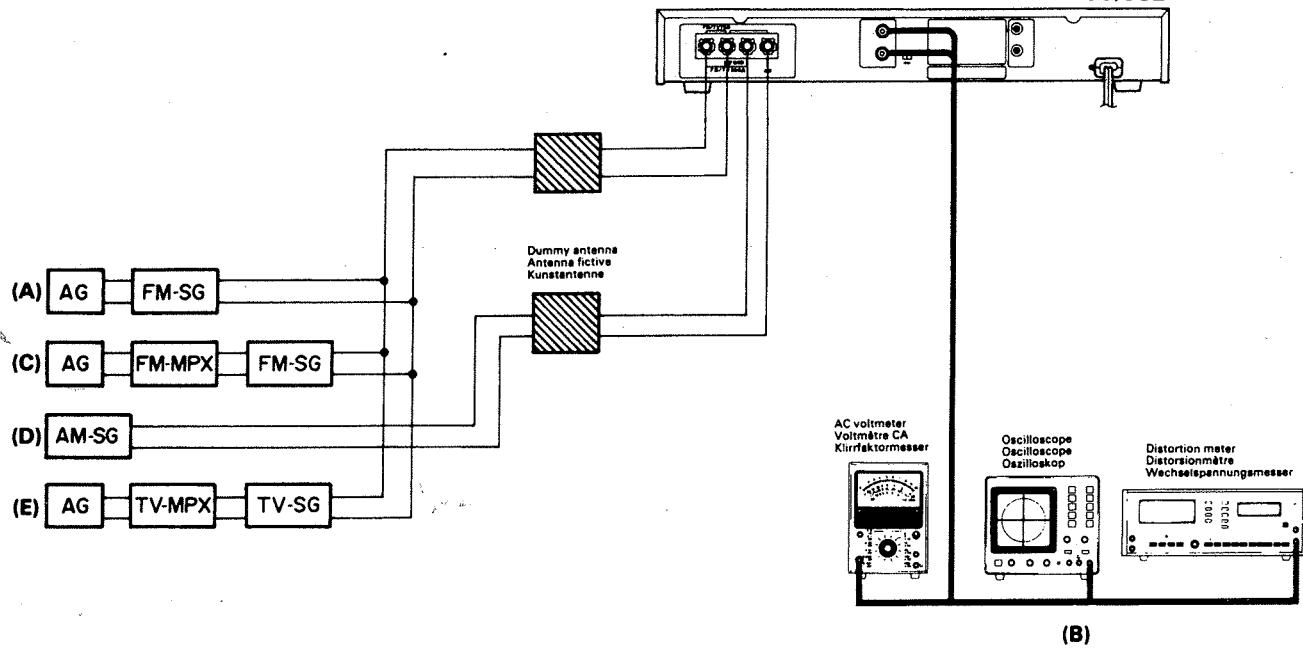

VOLTAGE TABLES

TUNER UNIT (X05-378X-XX)

IC1

1	1.1V
2	1.6V
3~6	0V
7	12.4V
8	12.5V
9	0.2V
10	0.06V
11	2.7V
12, 13	5.0V
14	1.1V
15	0.9V
16	0V

IC2

1~3	2.2V
4	0V
5~7	10.4V
8	0.02V
9	3.7V
10	3.0V
11, 12	1.4V
13, 14	0V
15	2.2V
16	1.4V
17	0V
18, 19	0.05V
20	3.8V
21	2.2V
22	1.2V

IC3

1	10.7V
2	2.5V
3	5.9V
4, 5	8.5V
6, 7	3.8V
8	0V
9	0.9V
10~14	2.5V
15	3.2V
16	0V

X05-378X-XX

Q1

E	1.2V
C	10.6V
B	1.9V

Q2

E	0V
C	2.5V
B	0.6V

Q3

E	0.6V
C	2.5V
B	1.1V

Q4 (T-93L only)

G	5.1V
D	2.5V
S	2.5V

Q6 (T-93L only)

E	0V
C	12.4V
B	0V

Q7 (T-93L only)

E	0V
C	12.5V
B	0V

Q8 (T-93L only)

E	0V
C	12.5V
B	0.07V

Q11 (T-93 only)

E	—
C	12.5V
B	3.0V

Q13

E	12.5V
C	12.3V
B	11.7V

Q15

E	3.5V
C	-1.4V
B	4.9V

Q16

E	5.5V
C	10.2V
B	6.1V

Q17, 18

E	0V
C	0V
B	-1.4V

Q21

E	12.5V
C	16.5V
B	13.1V

Q22

E	16.5V
C	16.5V
B	15.8V

Q23

E	0V
C	0.01V
B	0.6V

Q24

E	12.5V
C	0.06V
B	12.5V

Q25 (T-93L only)

E	12.5V
C	0V
B	12.5V

Q5

E	0V
C	4.9V
B	0V

Q1

G	—
D	9V
S	—

DISPLAY UNIT X14-262X-XX JAPAN MADE

G1	—
G2	—
D	11.5V

Q3 (T-93L only)

G	—
D	7V
S	—


Q4

E	5V
C	11.5V
B	—

Q5

E	—
C	—
B	—

PC BOARD (Component side view) (T-93)

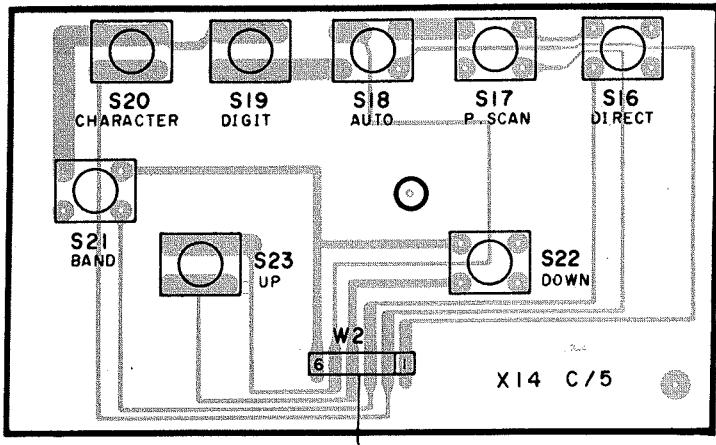

DISPLAY UNIT
(X14-2620-21) (Japan made)
(X14-2630-20) (Singapore made)

DISPLAY UNIT
(X14-2620-21) (Japan made)
(X14-2630-20) (Singapore made)


Ref. No.	Address
IC	Q
	1I
	2I
	5F
	3I
	2I
1	2H


FRONT END UNIT
(X86-1040-10) (Japan made)
(X86-1130-10) (Singapore made)

Ref. No.	Address	
IC	Q	
	1	5K
	2	4K
	4	4K
	5	4J

TUNER UNIT
(X05-378X-XX)

Ref. No.		Address
IC	Q	
	1	5N
	2	3L
	3	4L
	4	—
	6	—
	7	—
	8	—
	11	—
	13	4N
	15	6Q
	16	3O
	17	6Q
	18	6Q
	19	6R
	20	5R
	21	4P
	22	4P
	23	4O
	24	4M
	25	—
1		3M
2		5P
3		3Q

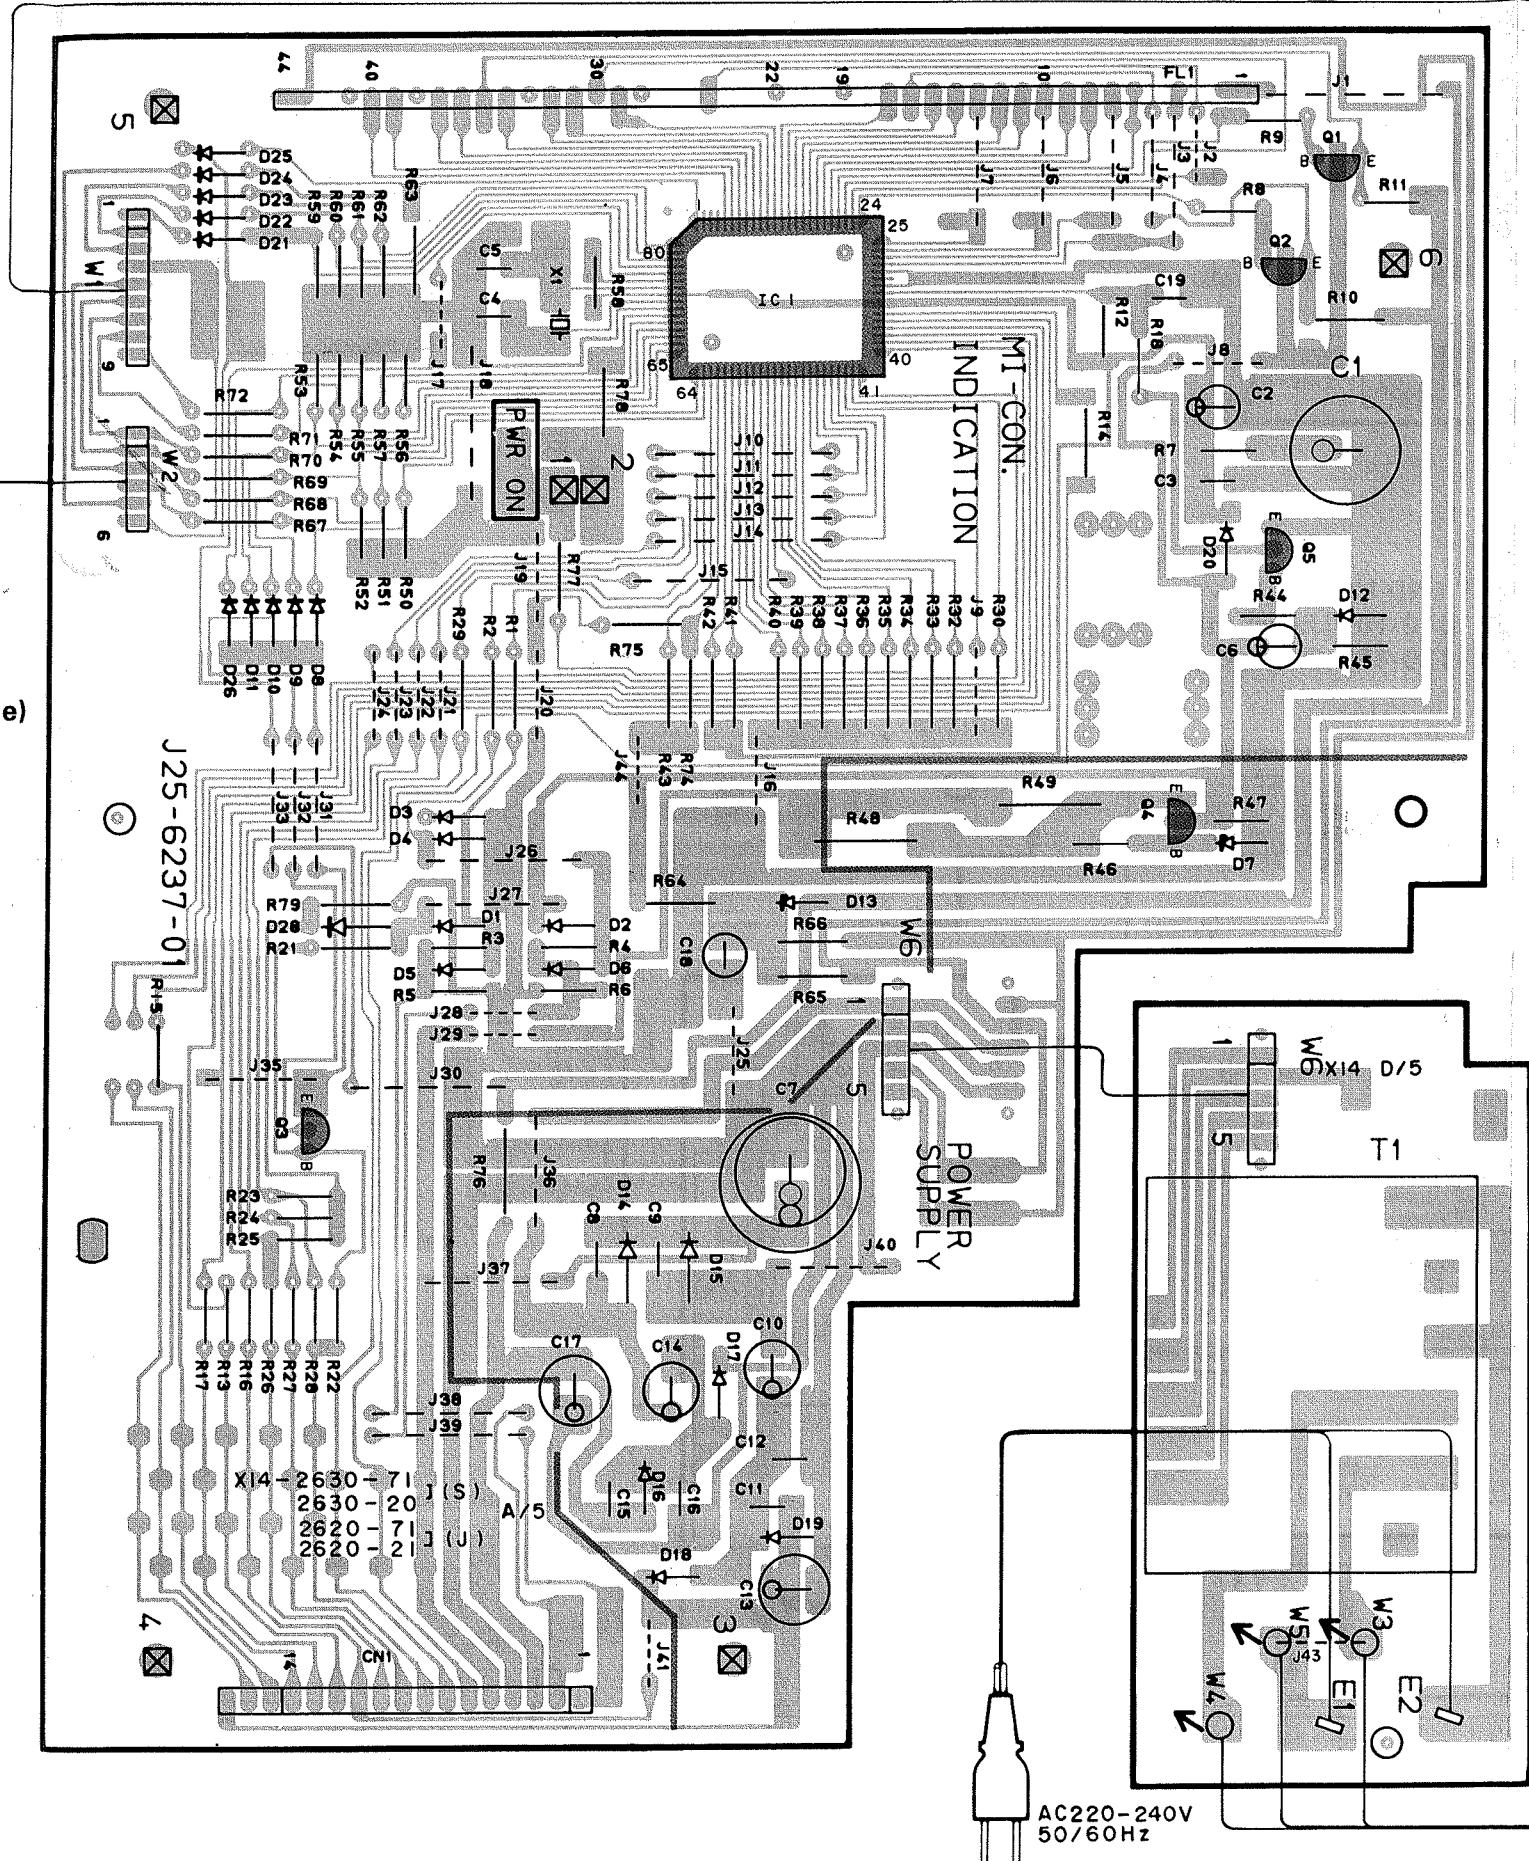

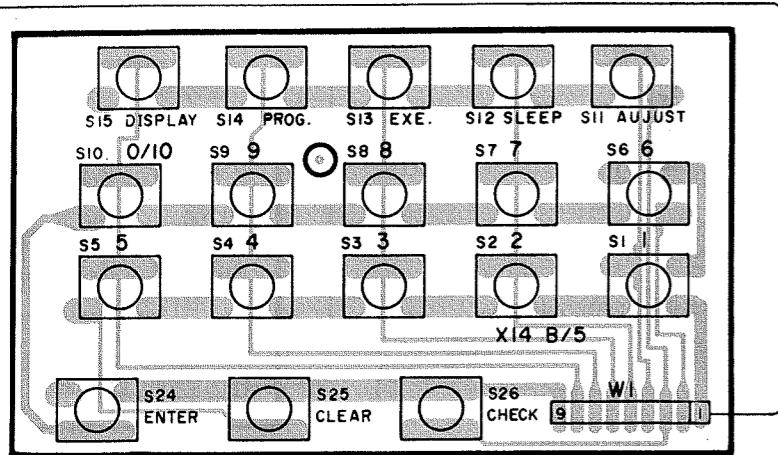

A vertical arrow pointing upwards, with the word "FRONT" written vertically along its left side.

(a) BAND EDGE
 FM1 2.5 V
 FM2 8.0 V
 AM1 1.5 V
 AM2 8.0 V

(b) DISCRIMINATOR
0 V
DC voltmeter

TUNER UNIT (X05-378X-XX)

(c) VCO


AC voltmeter

Frequency counter



19.00 kHz

FRONT END UNIT
(X86-1040-10) (Japan made)
(X86-1130-10) (Singapore made)

X86-1040-10(J)
1130-10(S)

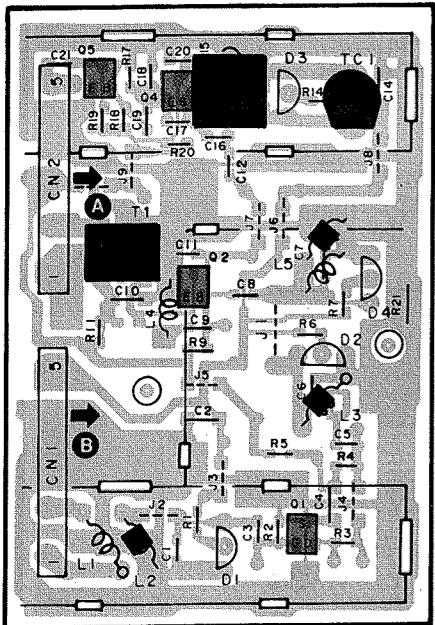

X14-2630-20(S) E/5
2620-21(J)

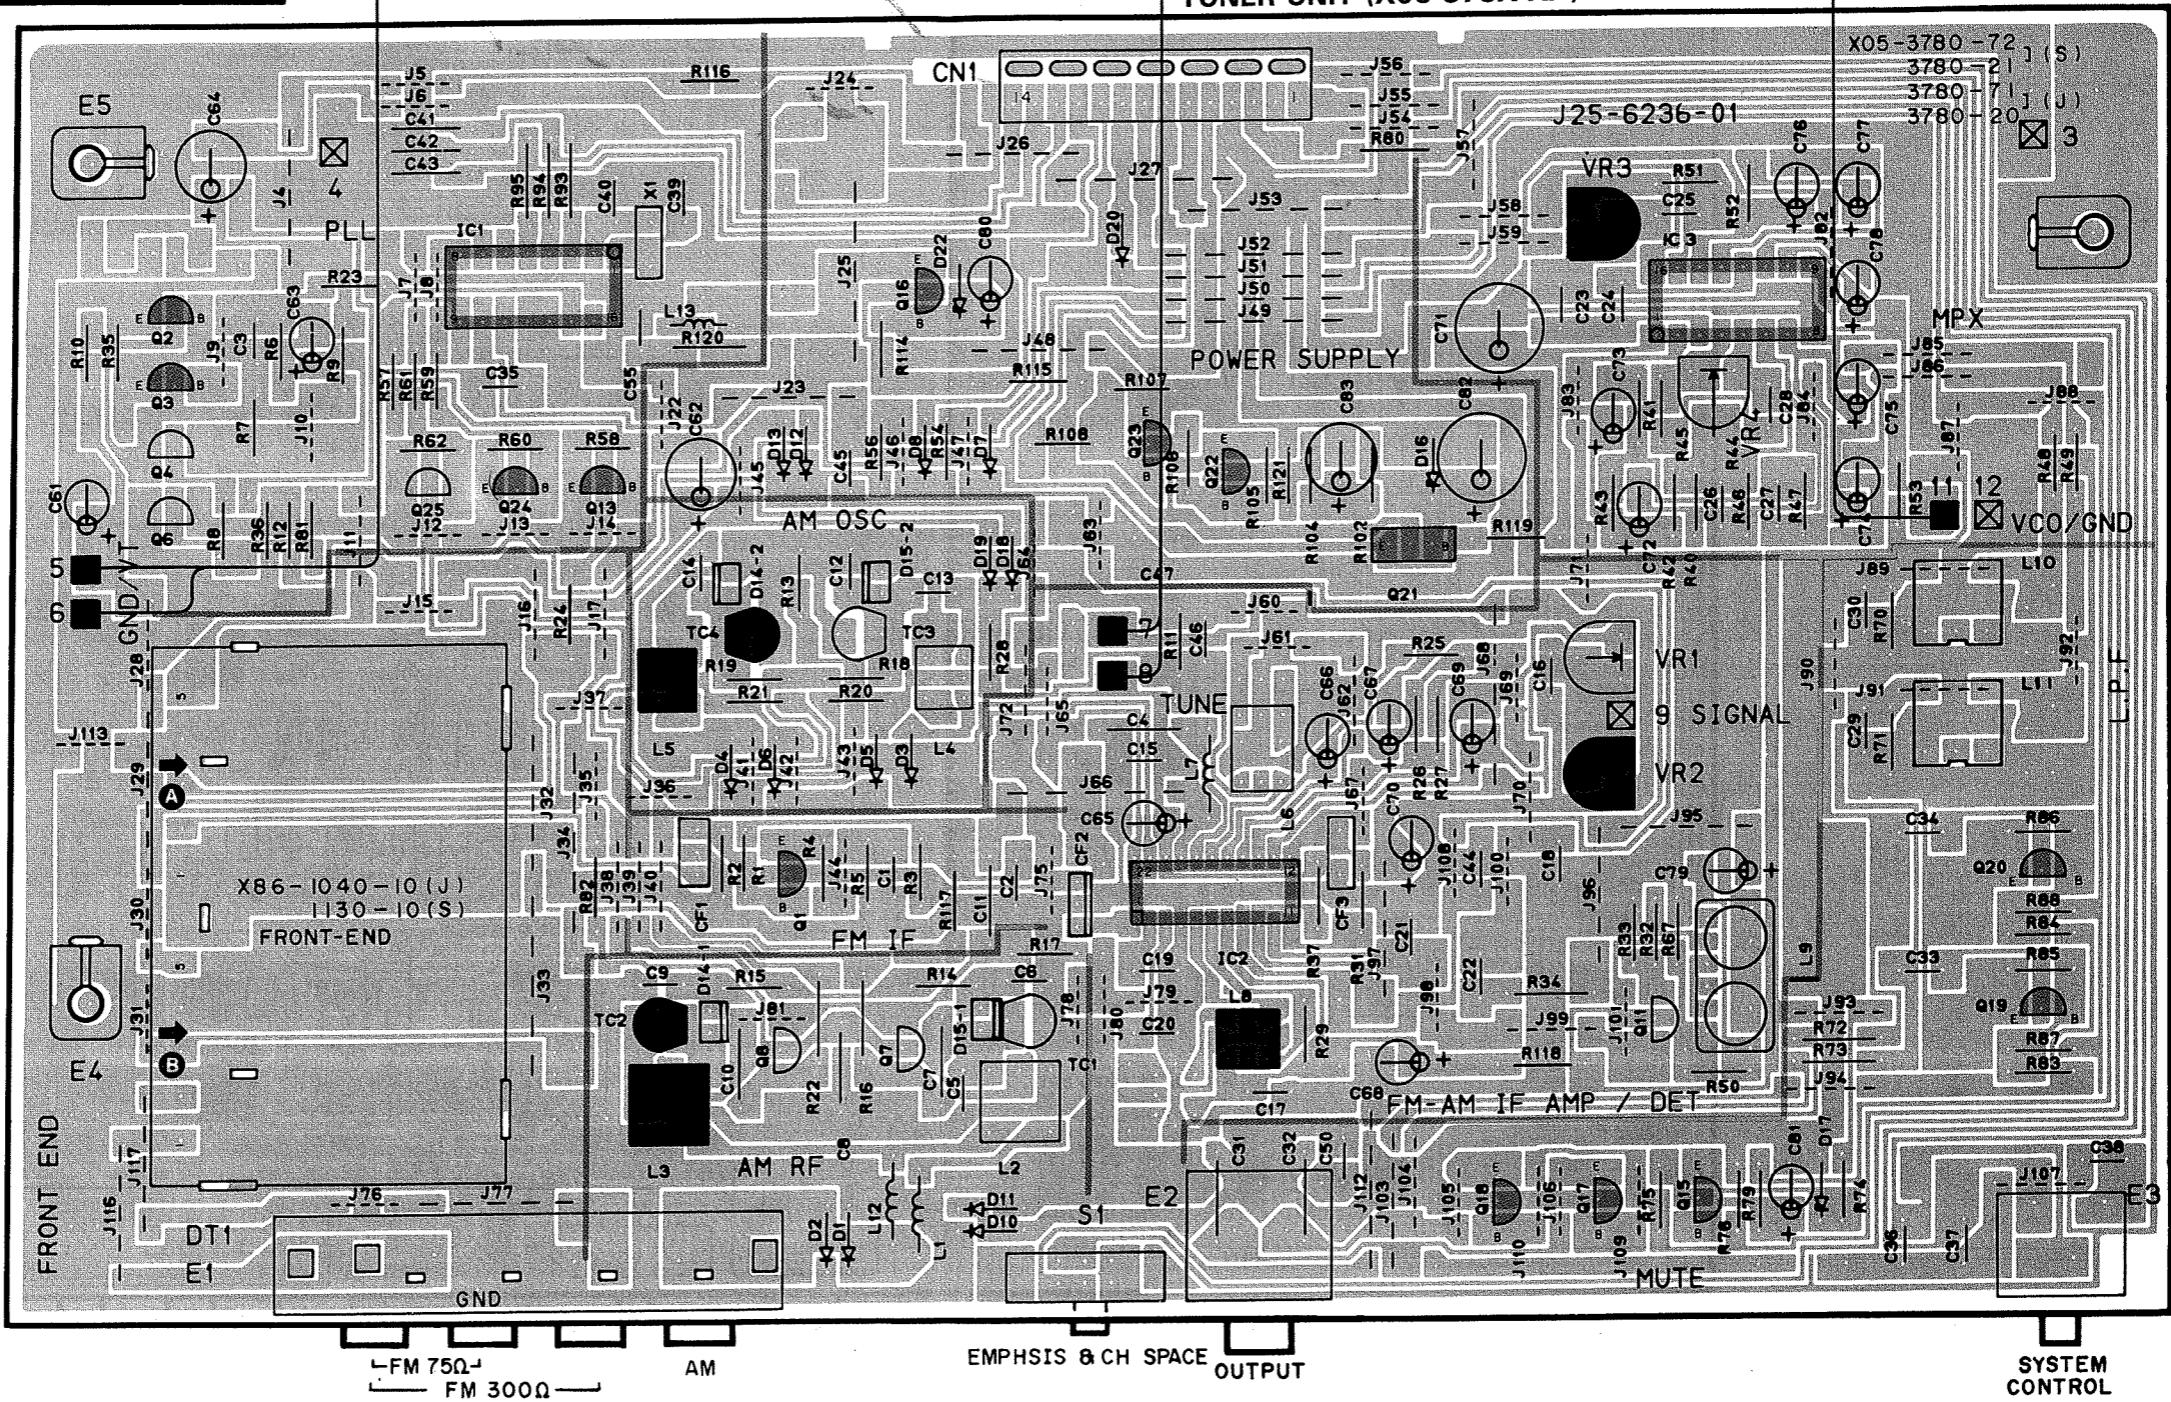

SYSTEM
CONTROL

T-93(M)

Refer to the schematic diagram for the values of resistors and capacitors.

AC

AD

AE

AF

AG


AH

AI

AJ


AK

AL


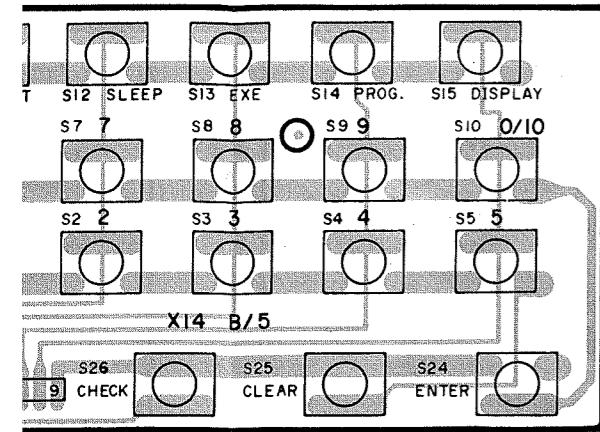


FRONT END UNIT
(X86-1040-10) (Japan made)
(X86-1130-10) (Singapore made)


X86-1040-10 (J)
1130-10 (S)

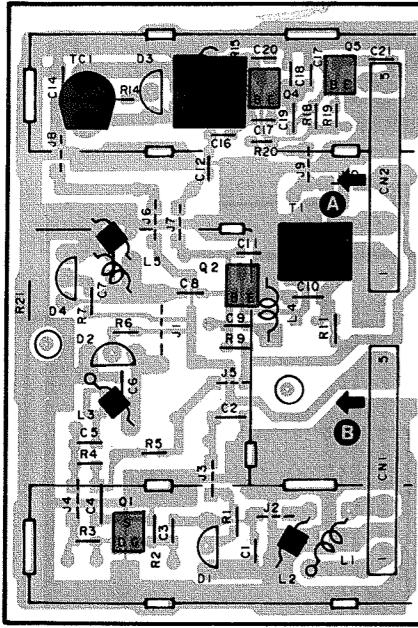

X14-2630-20 (S)
2620-21 (J) E/5

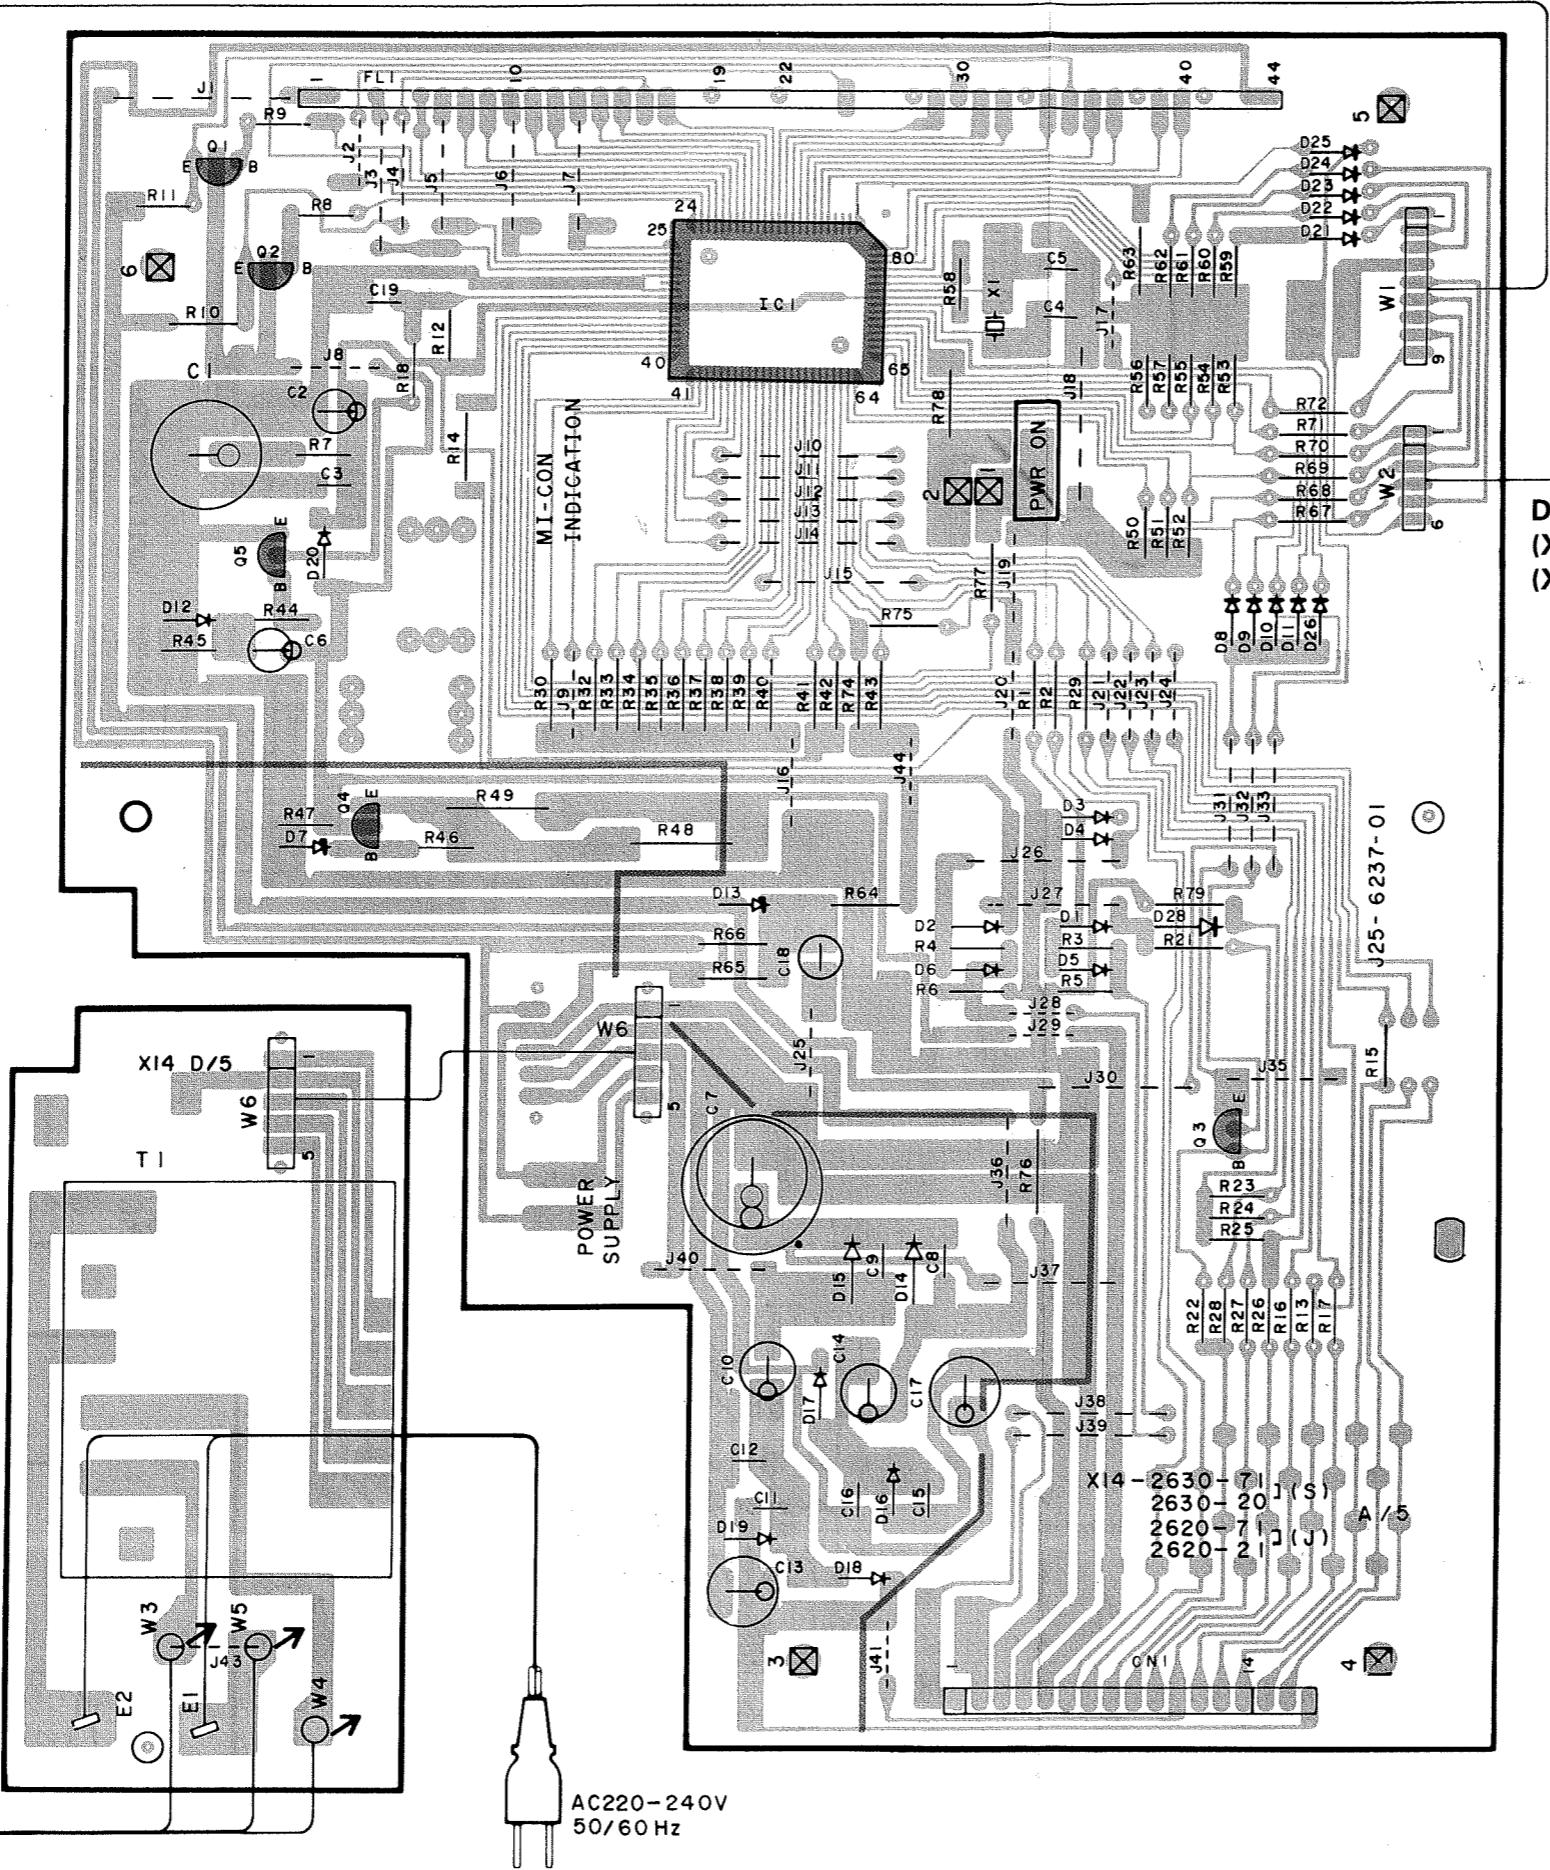

DISPLAY UNIT
(X14-2620-21) (Japan made)
(X14-2630-20) (Singapore made)

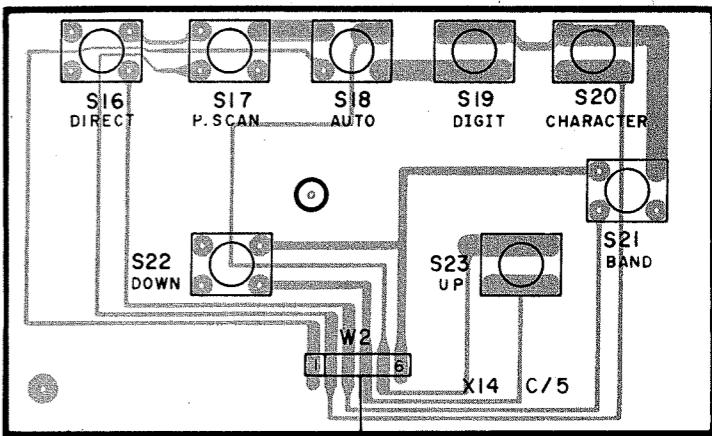

DISPLAY UNIT
(X14-2620-21) (Japan made)
(X14-2630-20) (Singapore made)

Ref. No.	Address
IC	Q
1	1AE
2	2AE
3	4AH
4	3AF
5	2AE
1	2AG

FRONT END UNIT
(X86-1040-10) (Japan made)
(X86-1130-10) (Singapore made)

Ref. No.	Address
IC	Q
1	5AC
2	4AD
4	4AD
5	3AD

TUNER UNIT
(X05-378X-XX)


Ref. No.	Address
IC	Q
1	5Z
2	3AB
3	3AB
4	—
6	—
7	—
8	—
11	—
13	4AA
15	6W
16	3Z
17	6W
18	6X
19	6V
20	5V
21	4X
22	4Y
23	4Y
24	4AA
25	—
1	3AA
2	5Y
3	3W

T - 93 (M)



Refer to the schematic diagram for the values of resistors and capacitors.

T U V W X Y Z AA AB AC

PC BOARD (Foil side view) (T-93)


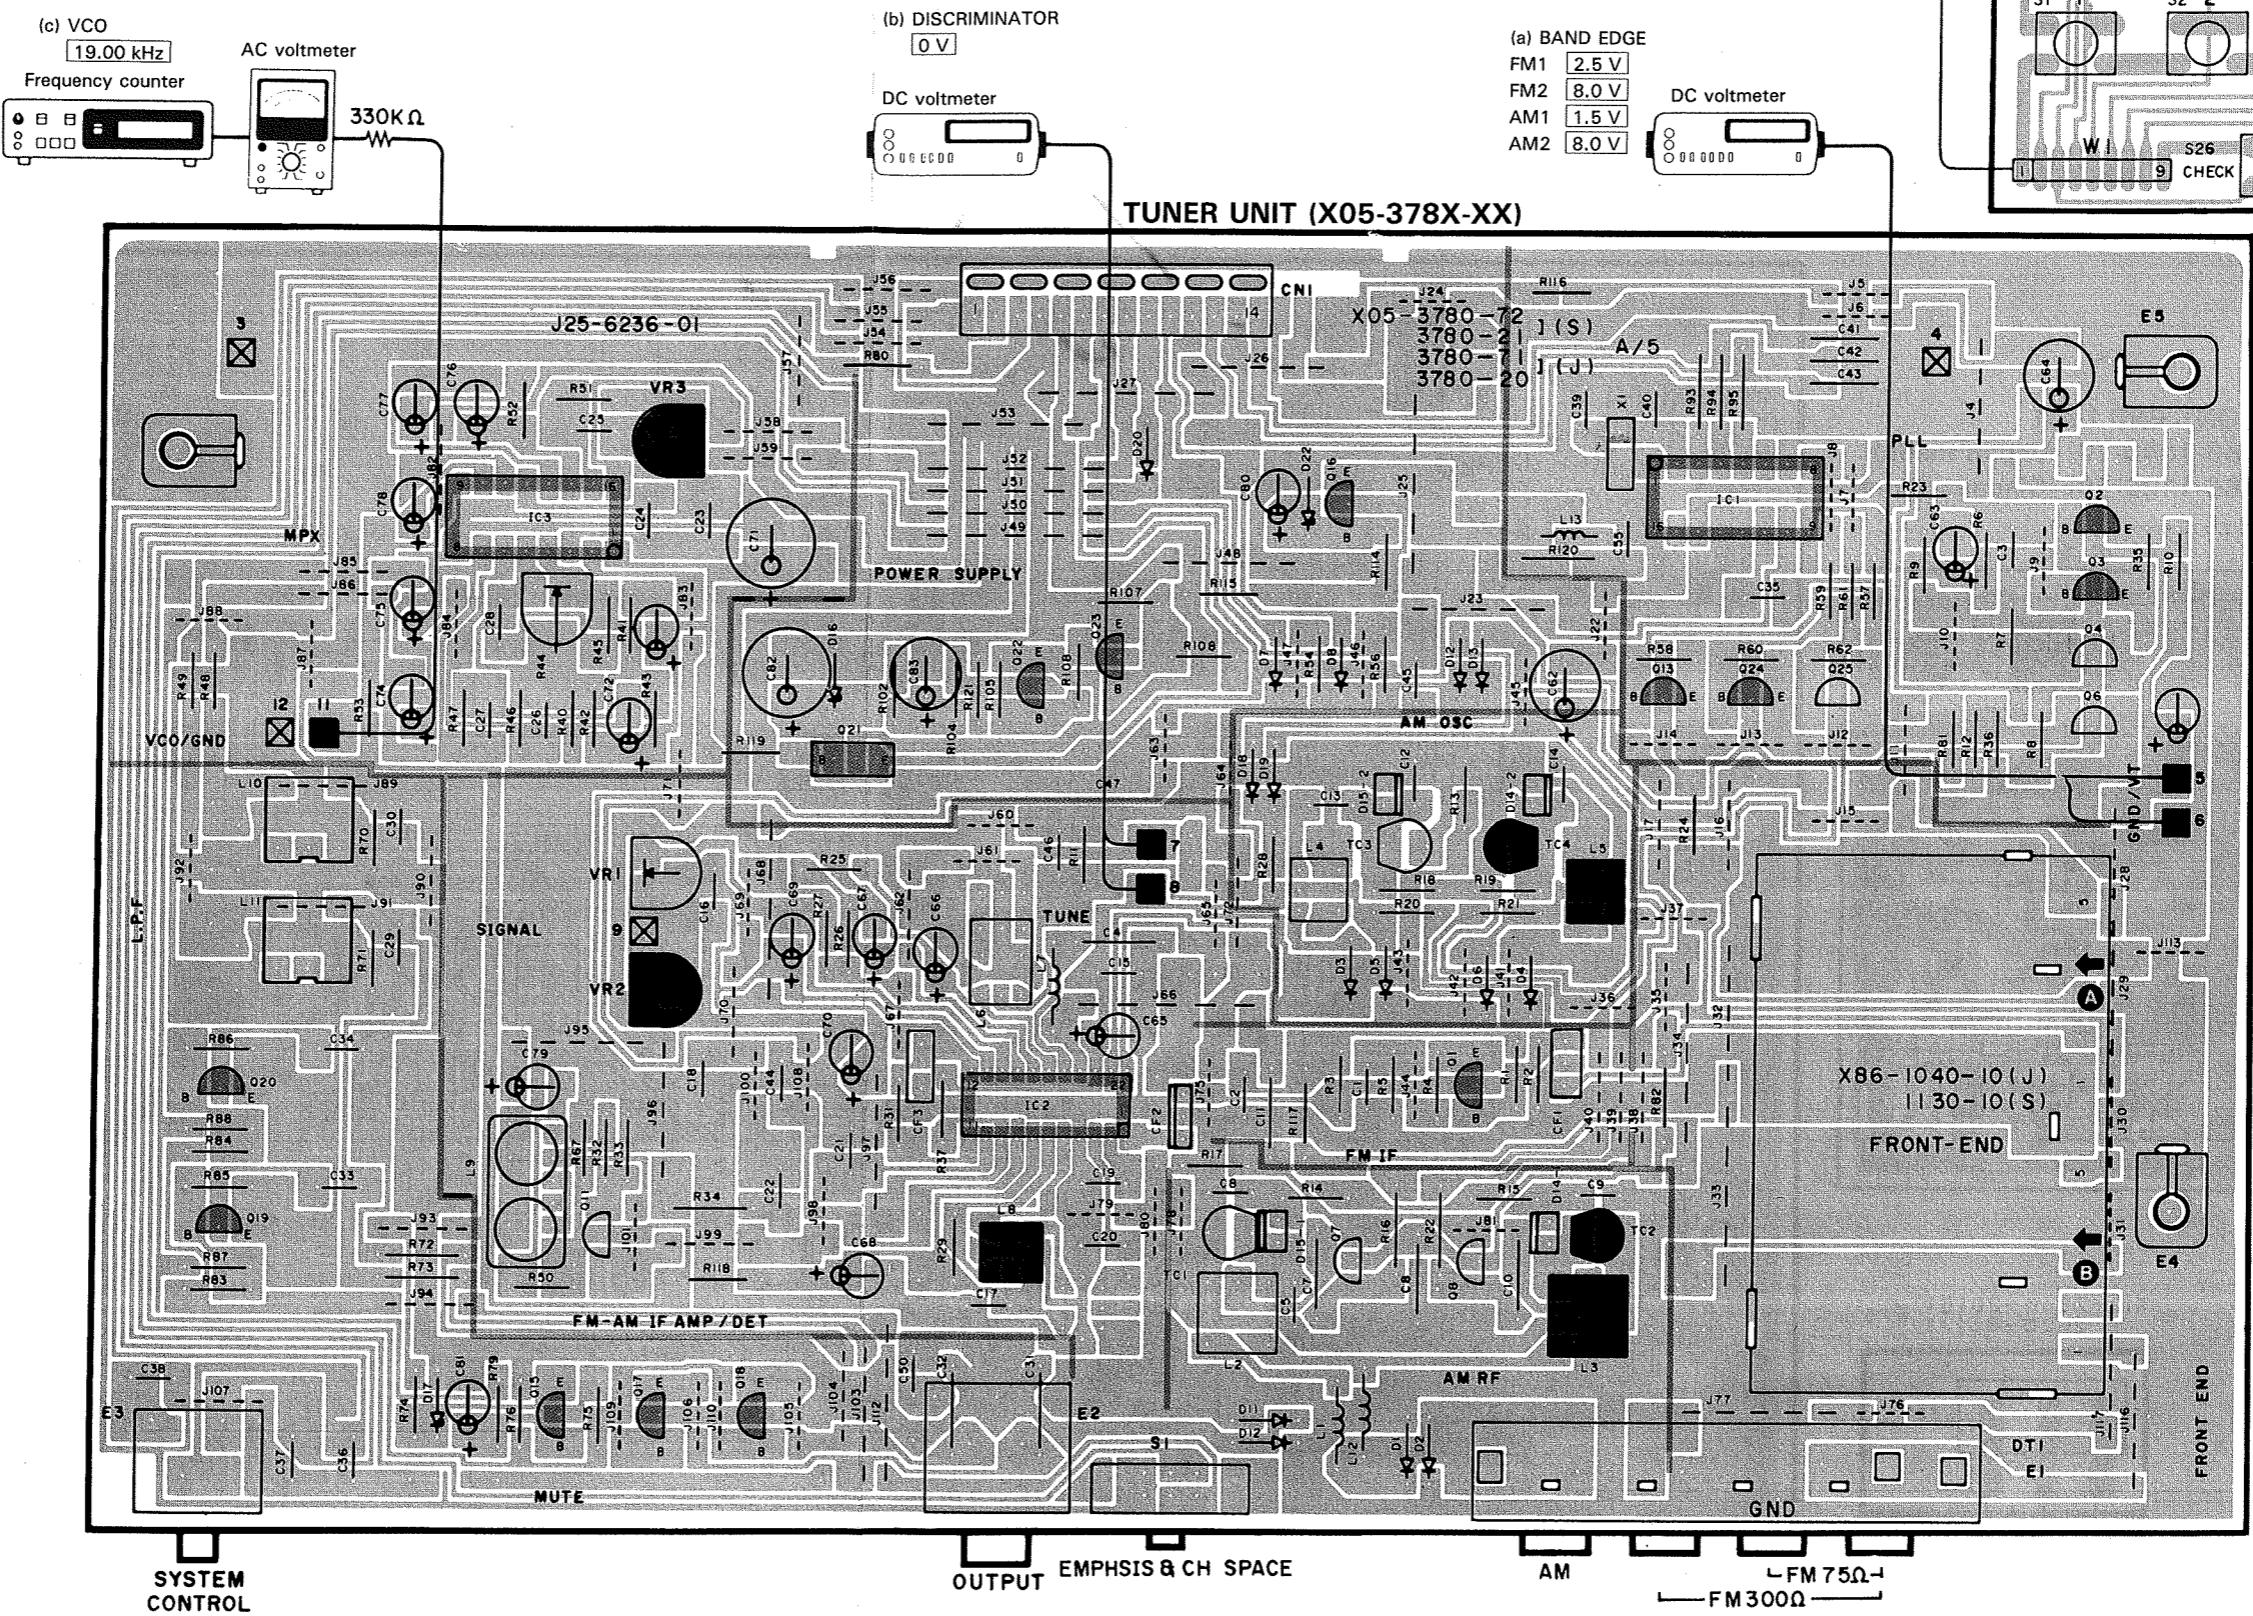


PC BOARD (Component side view) (T-93L)

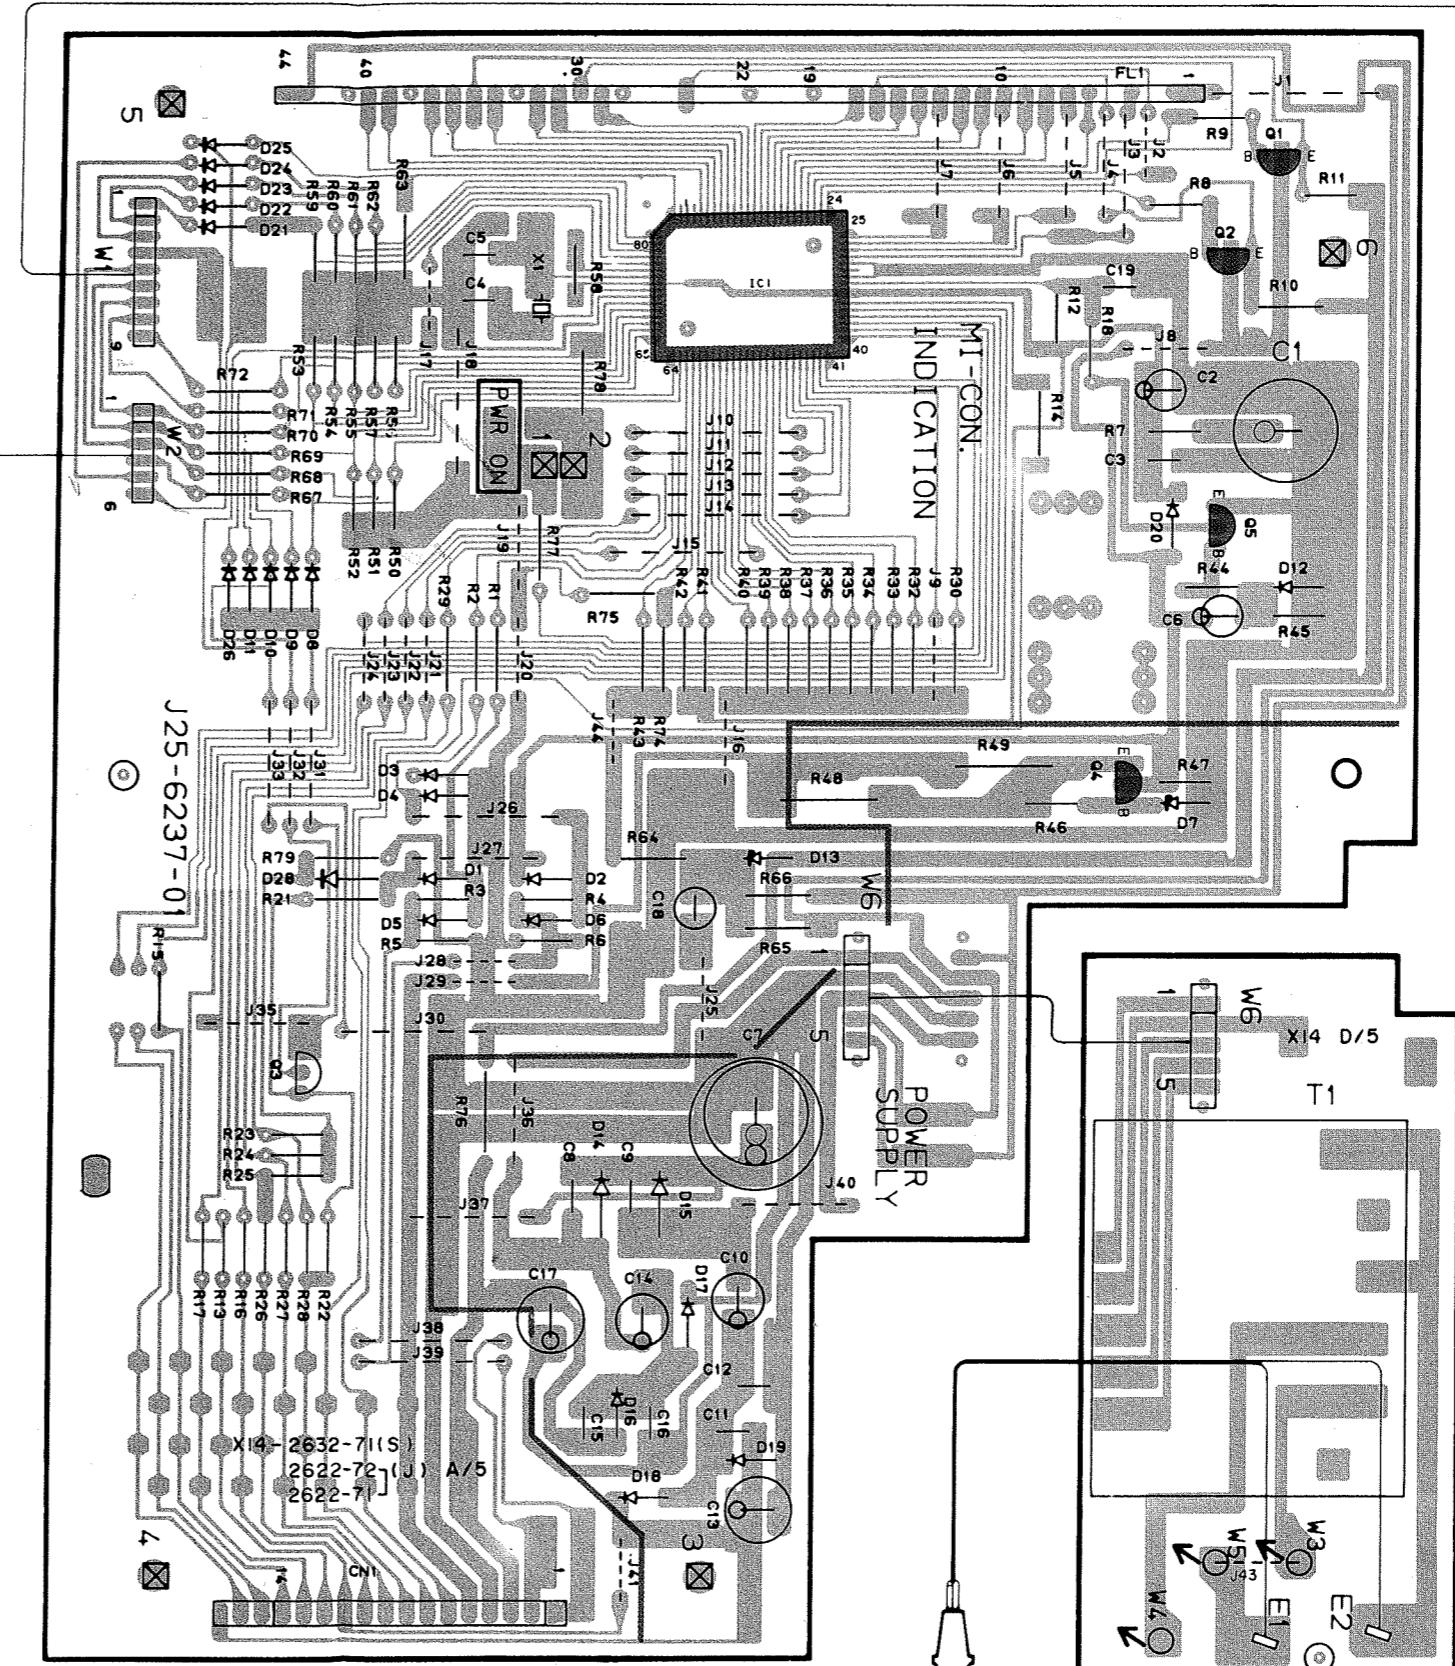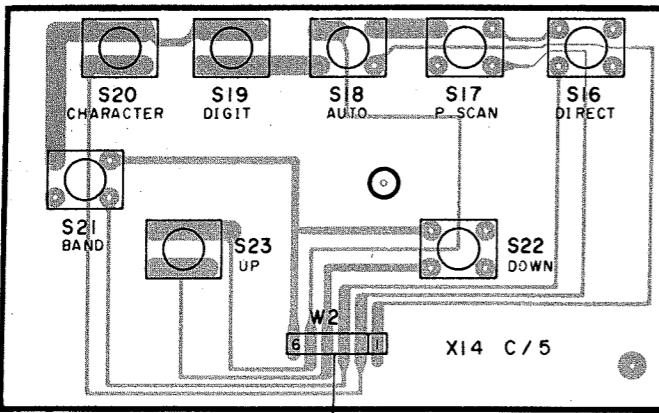

DISPLAY UNIT (X14-262X-XX) (Japan made)
(X14-263X-XX) (Singapore made)

AC220V
50Hz

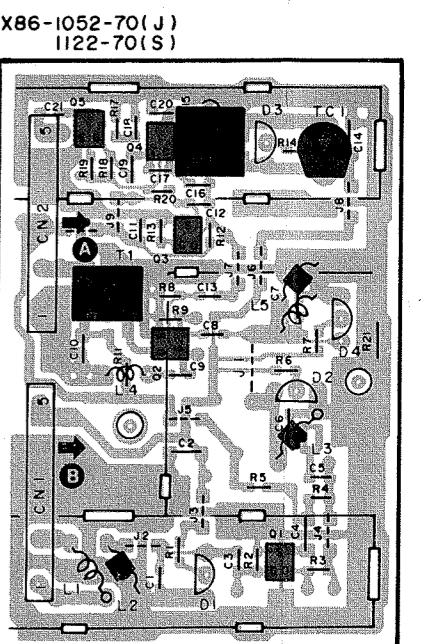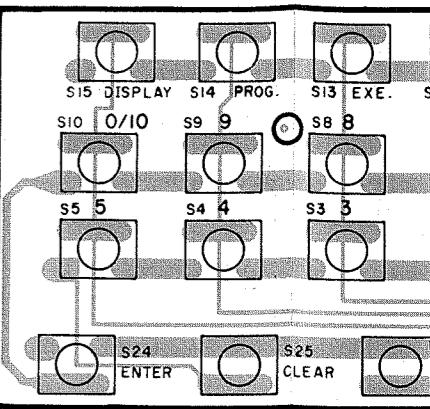

FRONT END UNIT
(X86-1052-70) (Japan made)
(X86-1122-70) (Singapore made)

BO

BP

BO

BR

BS





BT

BU

BV

BW

AL

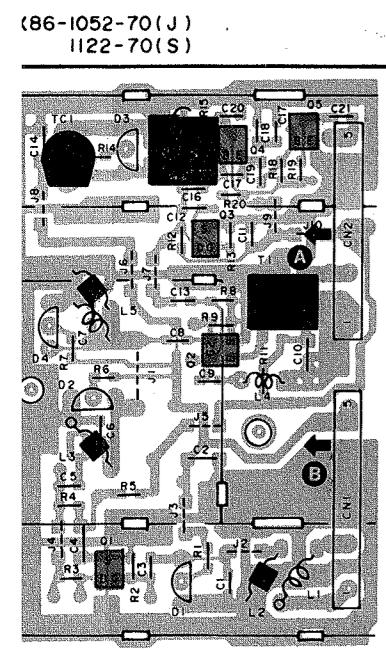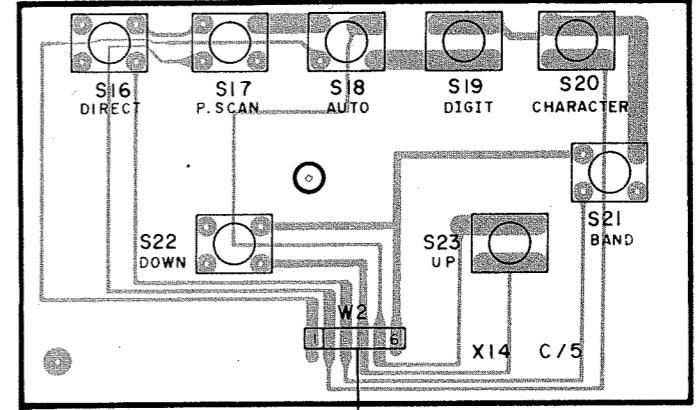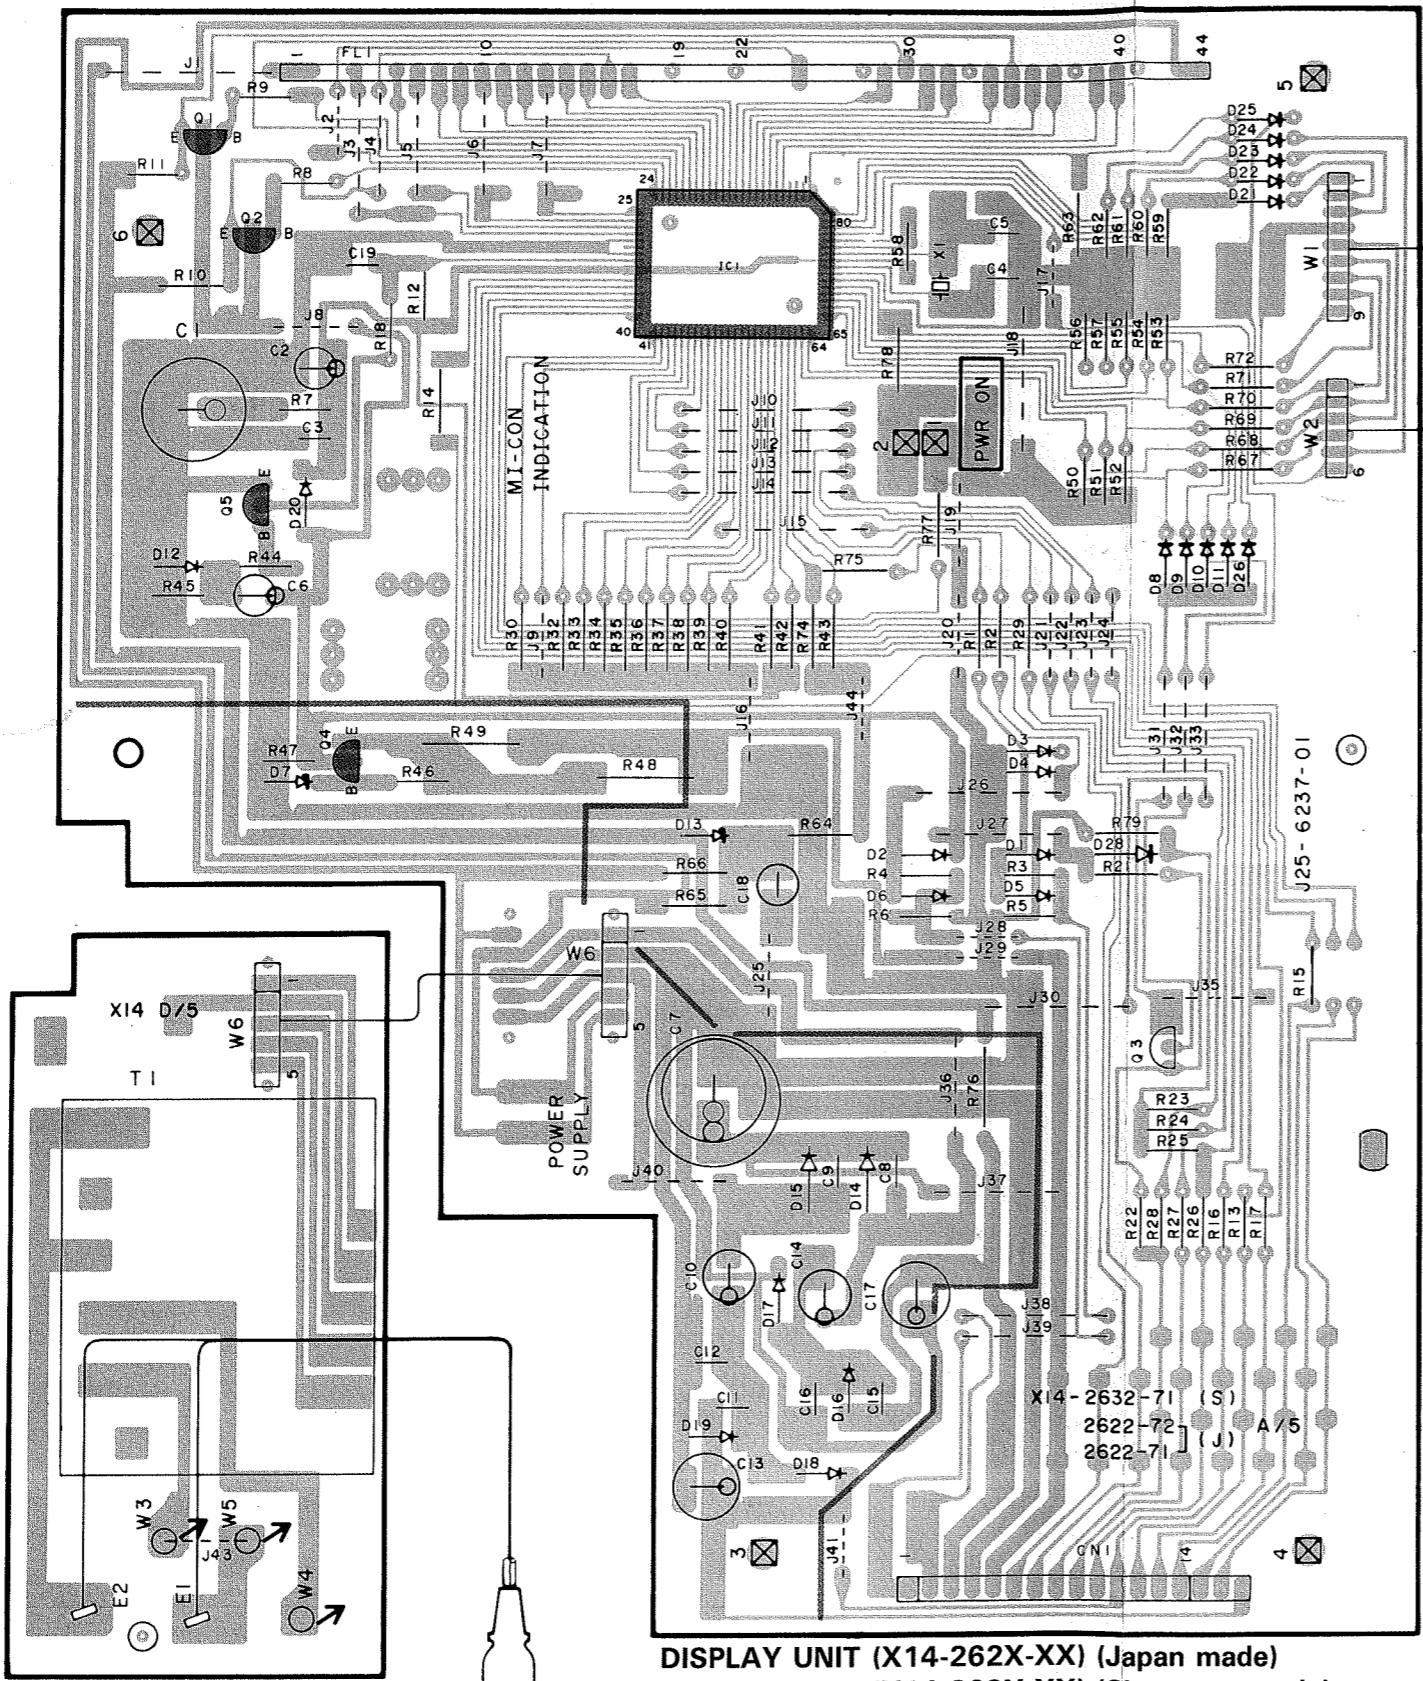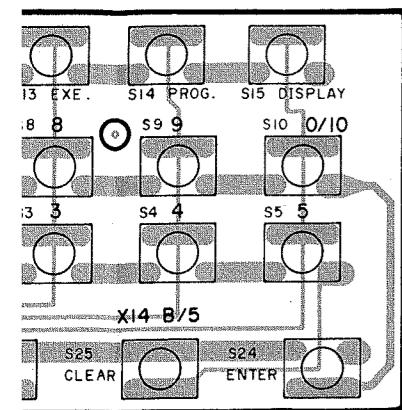

INT END UNIT
6-1052-70 (Japan made)
6-1122-70 (Singapore made)

AC220V
50Hz

DISPLAY UNIT (X14-262X-XX) (Japan made)
(X14-263X-XX) (Singapore made)

T-93L (E)


Refer to the schematic diagram for the values of resistors and capacitors.

PC BOARD (Foil side view) (T-93L)

**TUNER UNIT
(X05-378X-XX)**

Ref. No.	Address
1	5BL
2	3BN
3	4BN
4	4BN
6	4BN
7	6BL
8	6BL
11	6BI
13	4BM
15	6BI
16	3BL
17	6BI
18	6BJ
19	6BH
20	5BH
21	4BJ
22	4BK
23	4BK
24	4BM
25	4BM
1	3BM
2	5BK
3	3BI

(c) VCO

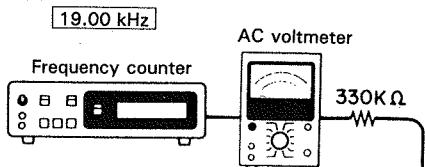

19.00 kHz

Frequency counter

AC voltmeter

330KΩ

(b) DISCRIMINATOR

0 V

DC voltmeter

(a) BAND EDGE

FM1 2.5 V

FM2 8.0 V

MW1 1.5 V


MW2 8.0 V

LW1 1.5 V

LW2 8.0 V

DC voltmeter

0 V

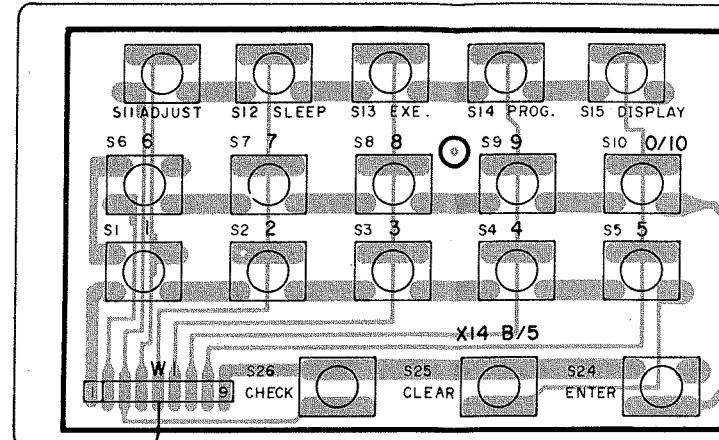


X05-3782-73 (S)

3782-72 (J)

3782-7 (I)

J25-6236-01

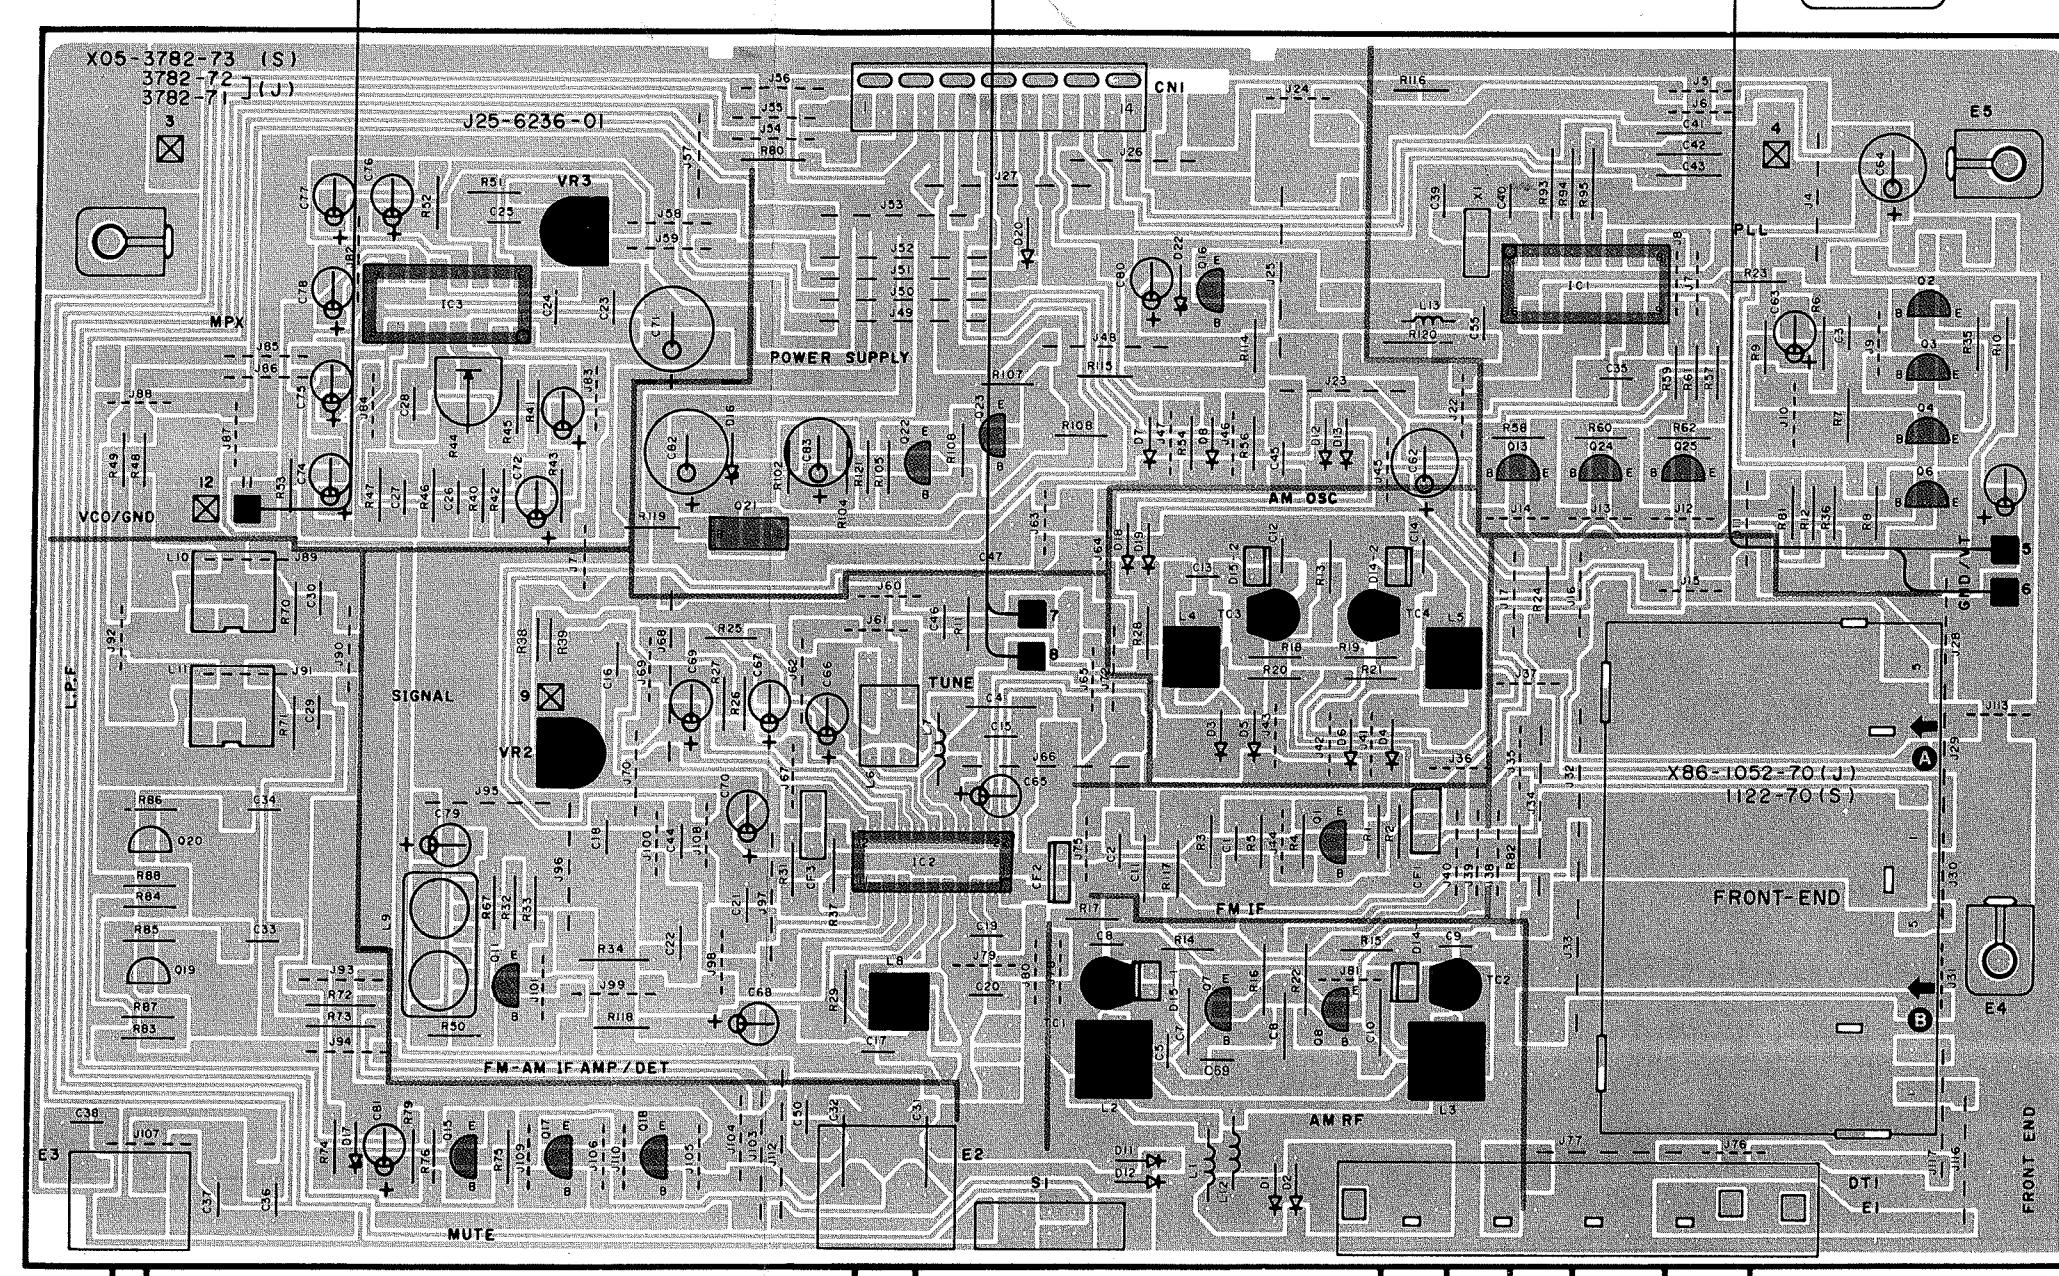

TUNER UNIT (X05-378X-XX)

SYSTEM CONTROL


OUTPUT


AM ANT.

GND


FM ANT.

75Ω

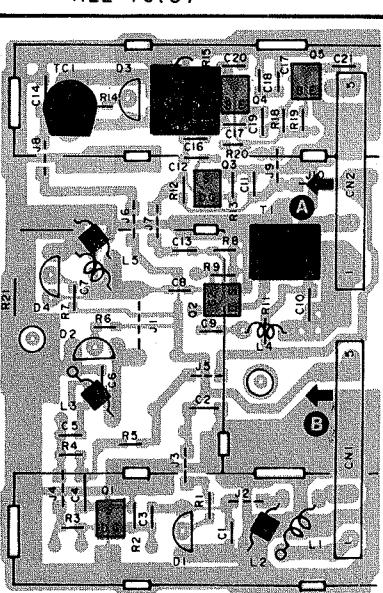
X86-1052-70 (J)
1122-70 (S)FRONT END UNIT
(X86-1052-70) (Japan made)
(X86-1122-70) (Singapore made)

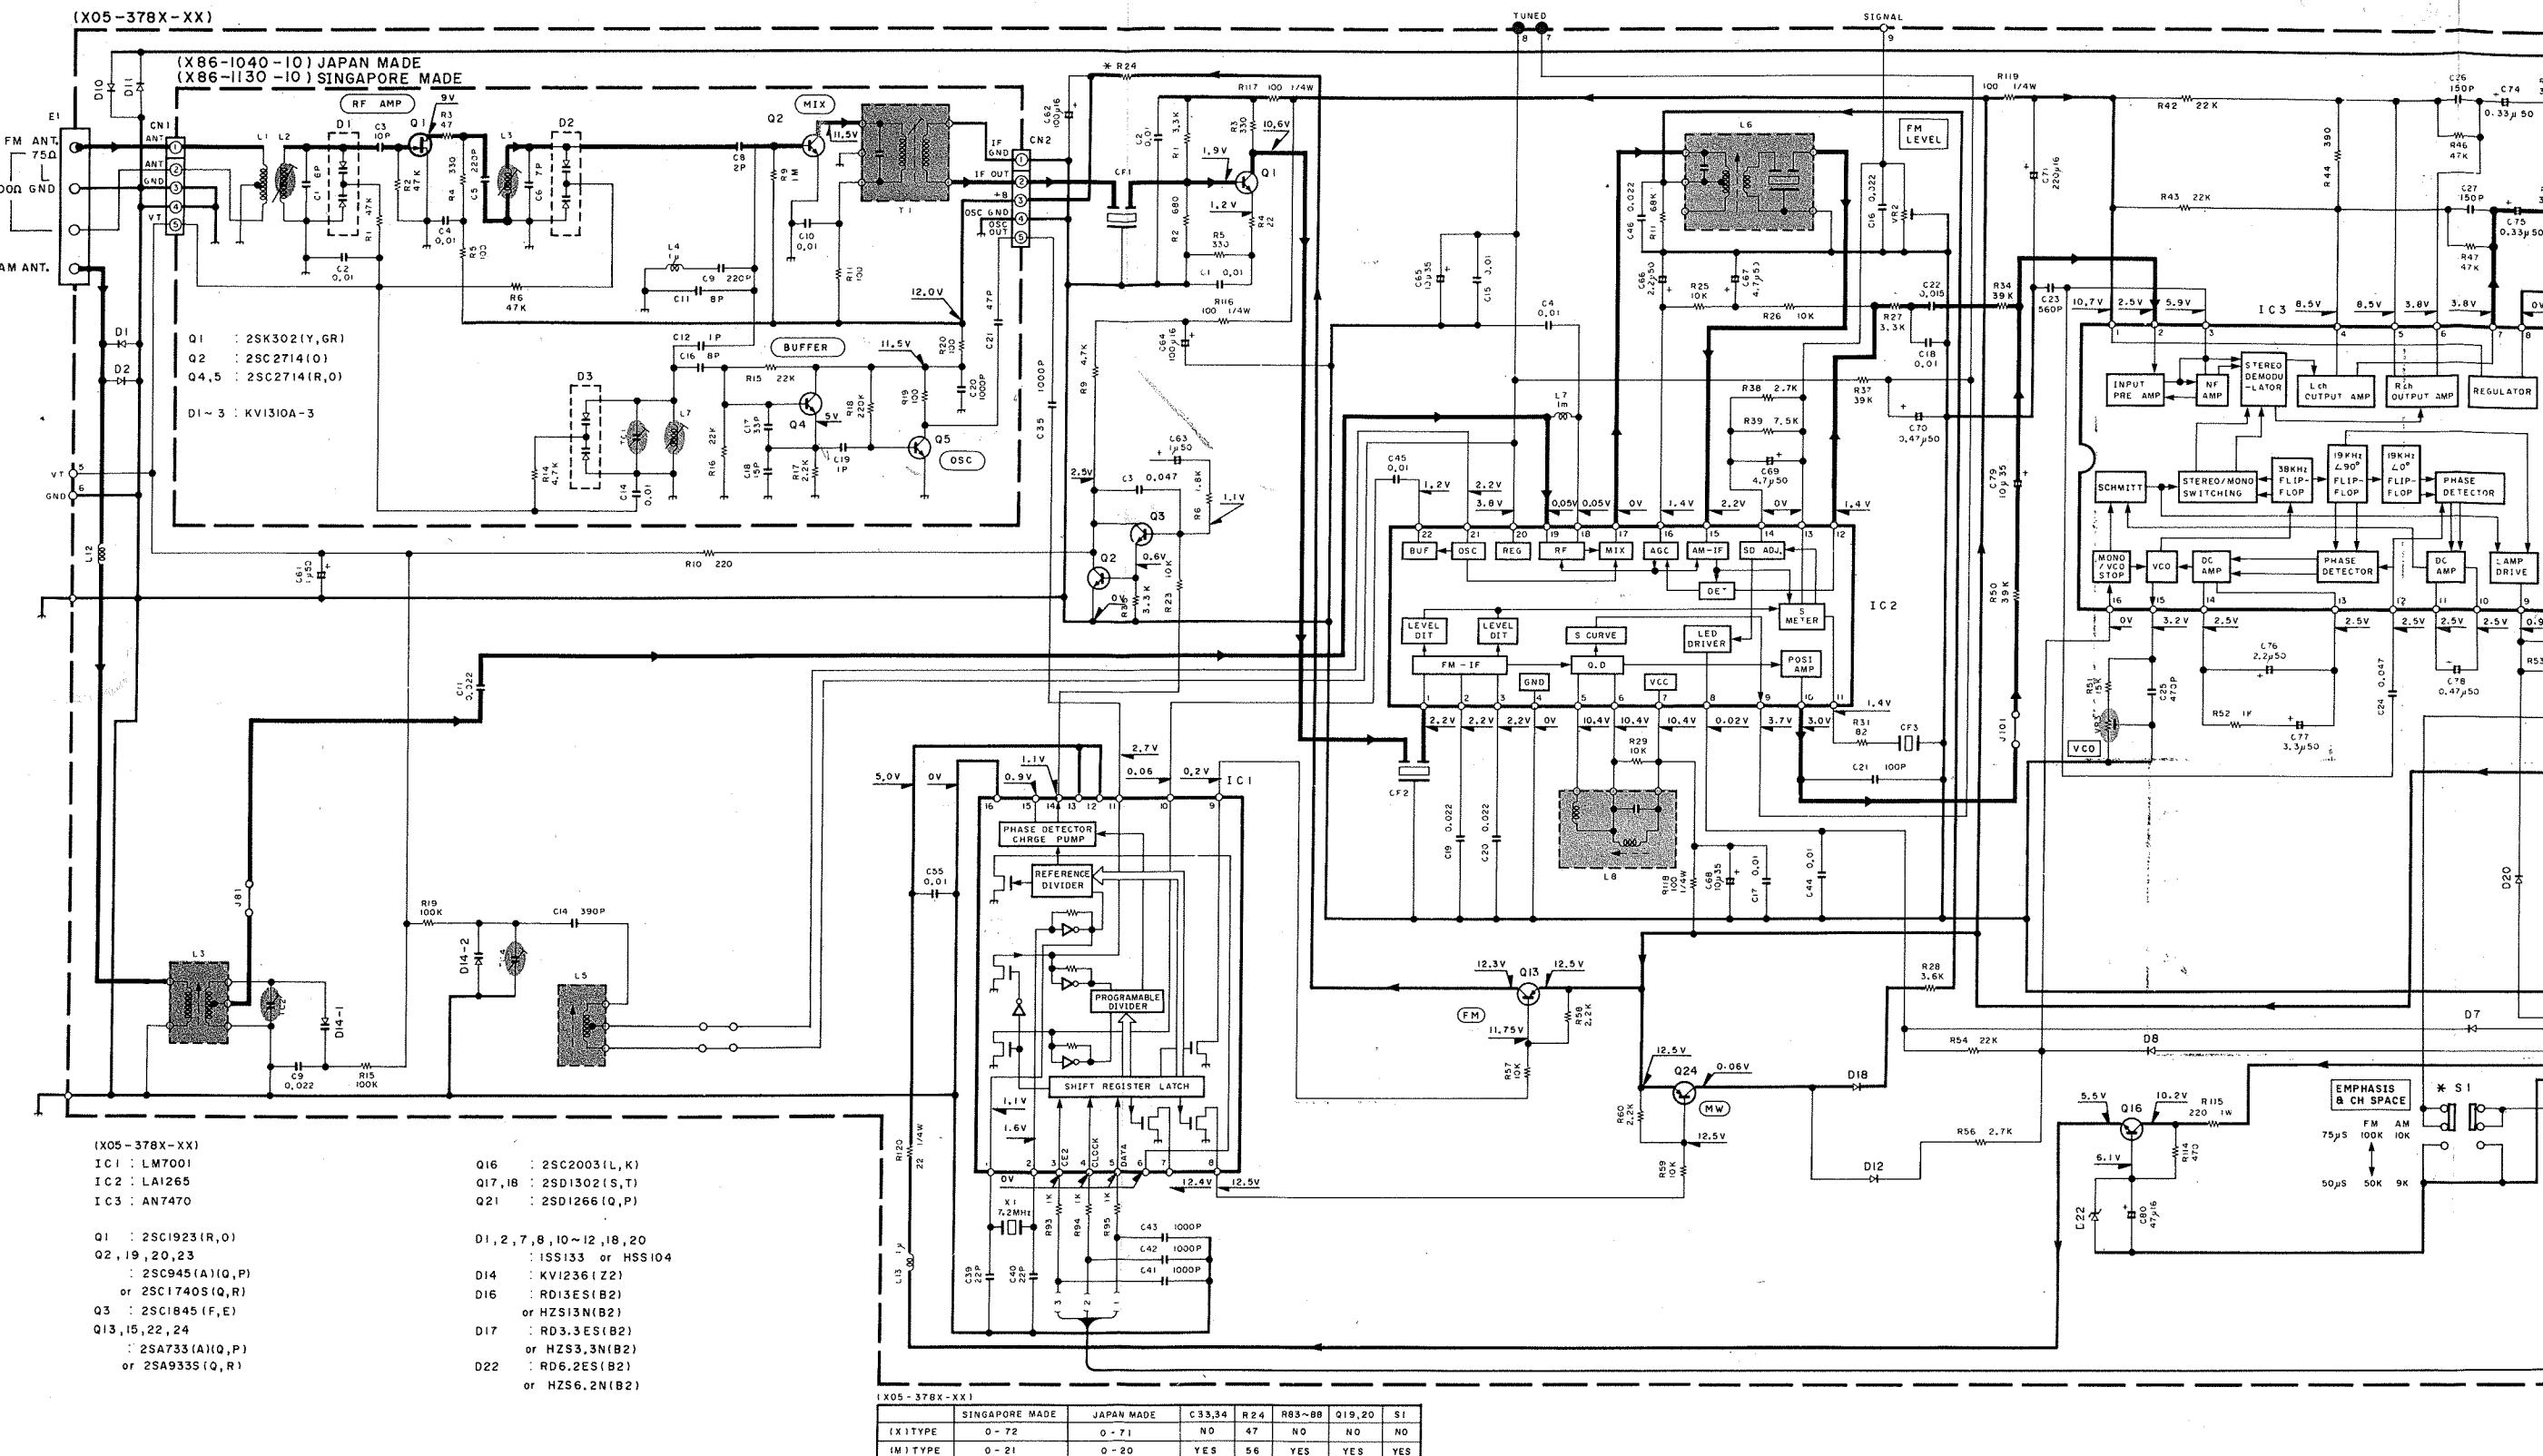


JA101
JC501
2SA733(A)
2SC1845
2SC1923
2SC2003
2SC945(A)
2SD1302




2SD1266




RSA933S
RSC1740S




2SC2714



LM700




AN7




2SK302




3SK1



LA126



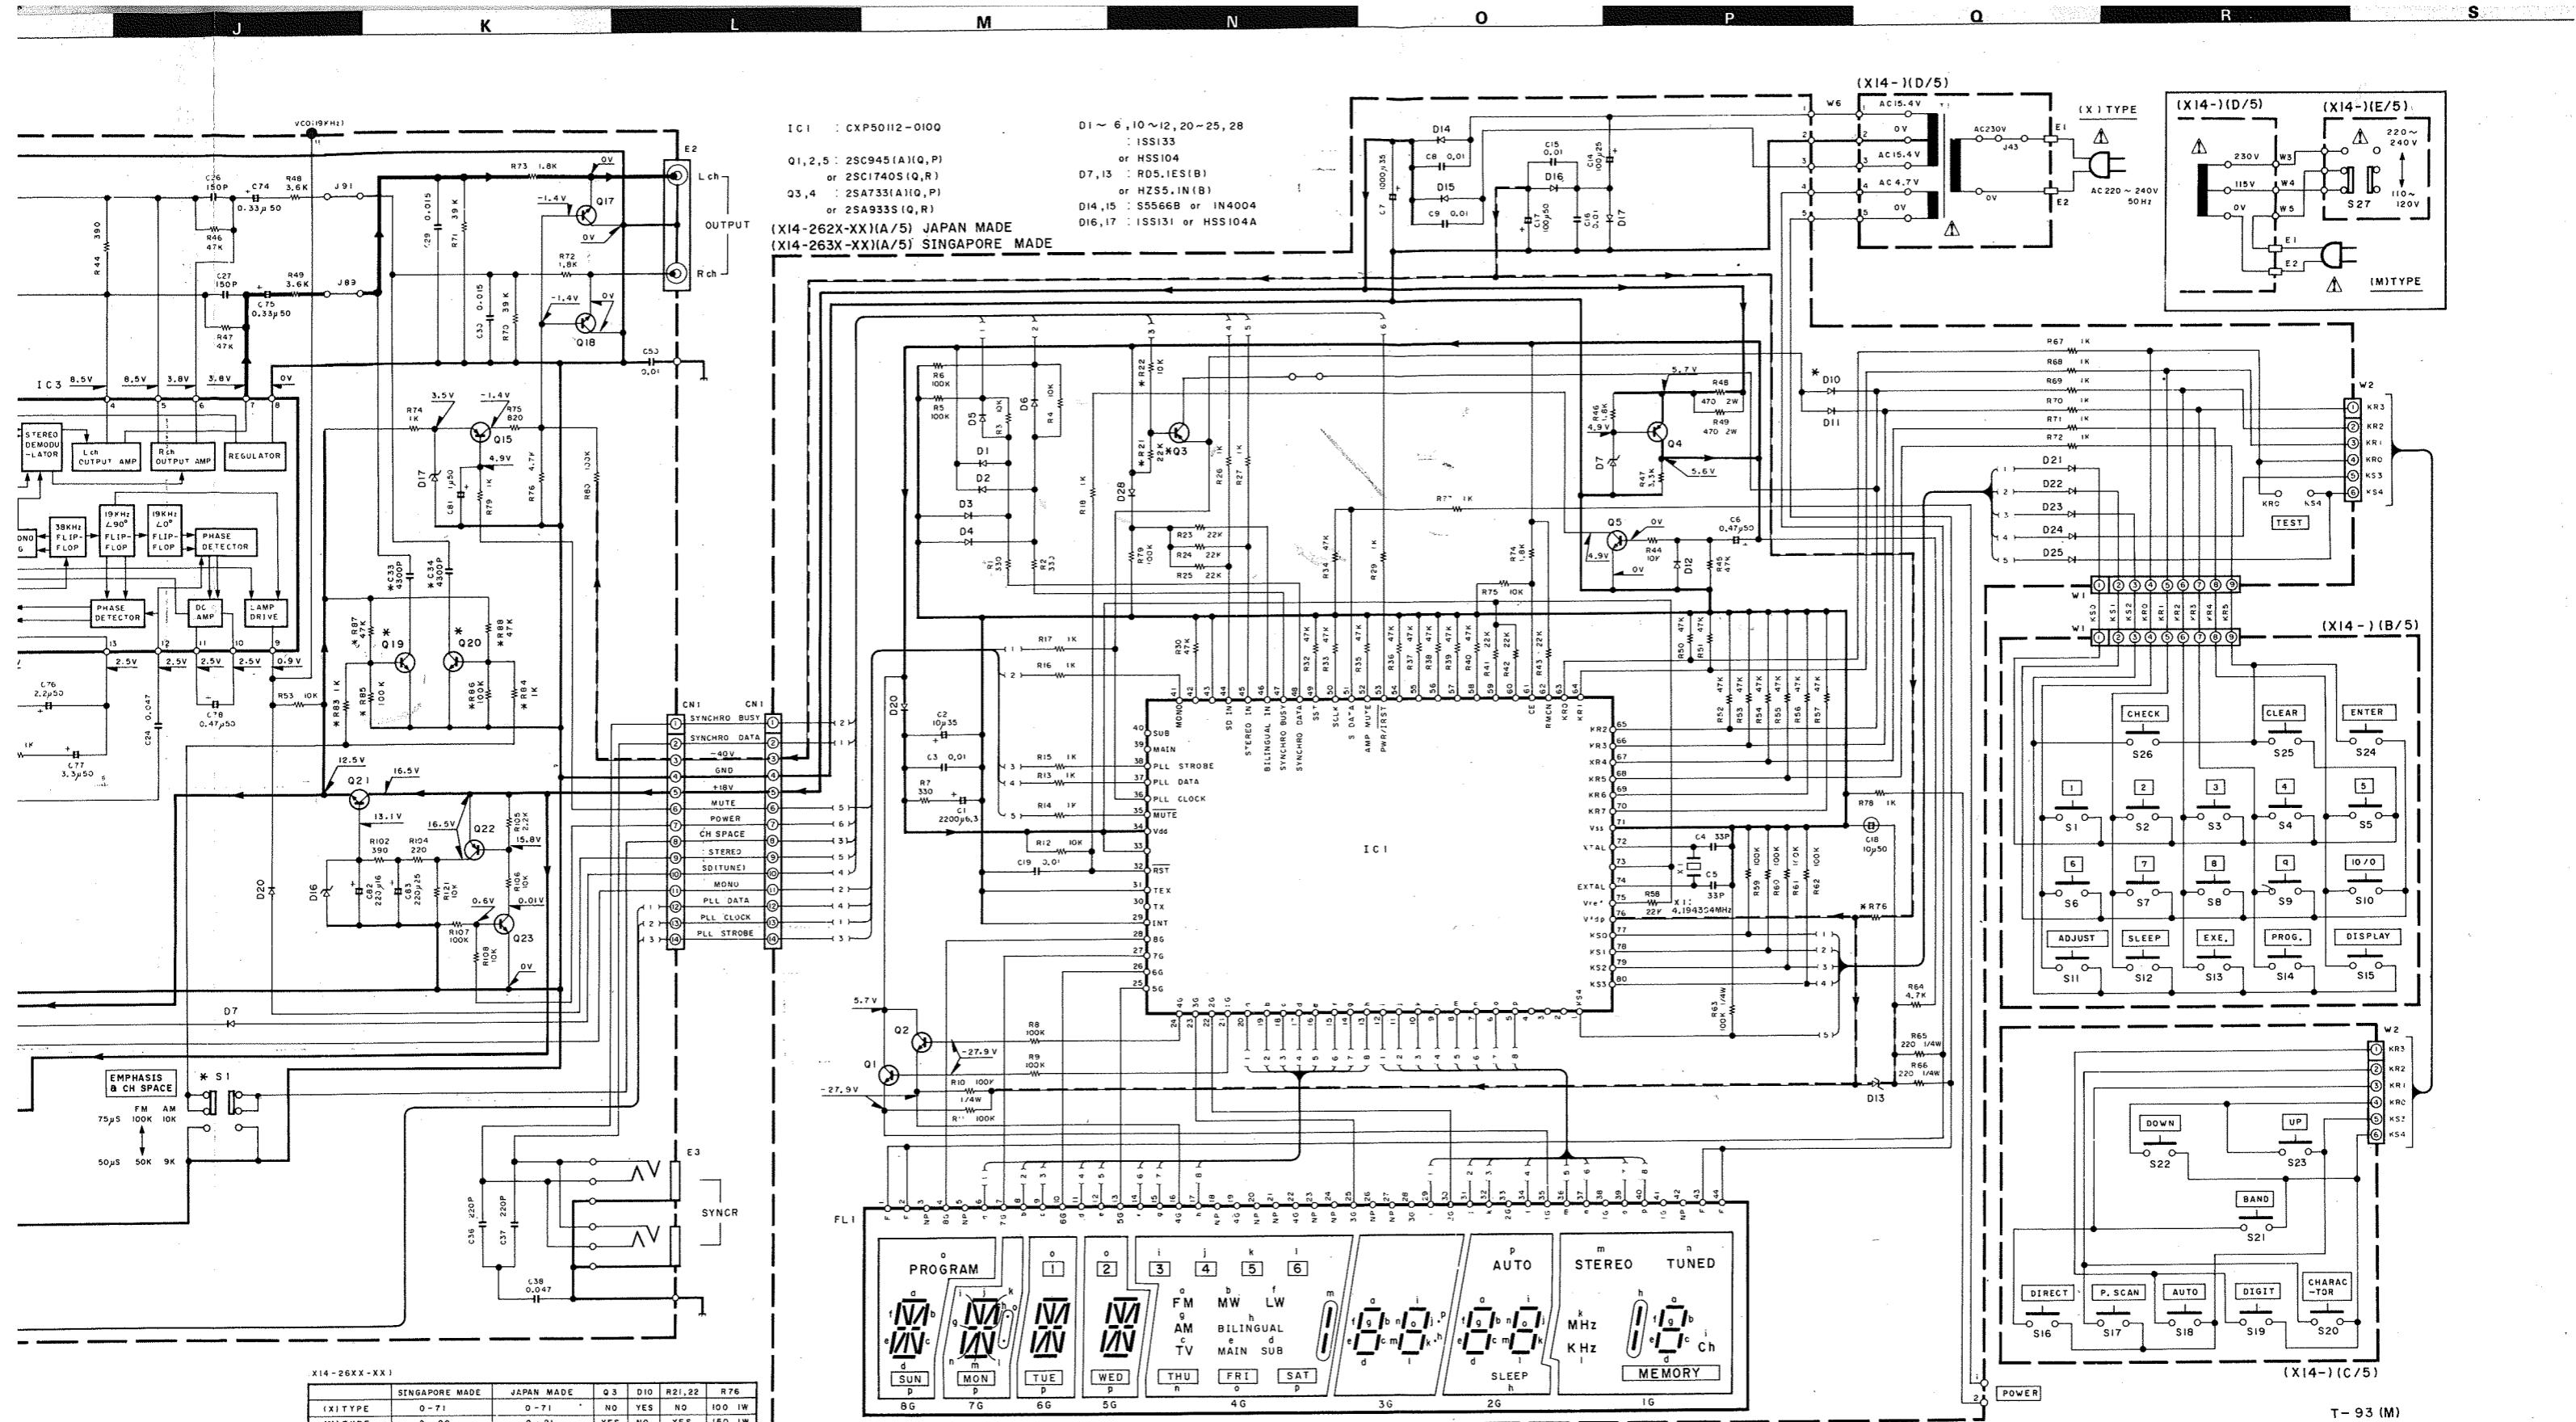

DC voltages are as measured with a high-impedance voltmeter during reception of the FM broadcast signal (with a signal strength of 60 dB at the ANT terminal). Values may vary slightly due to variations between individual instruments or/and units. Values in parentheses are as measured during reception of the AM broadcast signal (with a signal strength of 60 dB at the ANT terminal).

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance pendant la réception d'un signal de programme FM (avec une force de signal de 60 dB à la borne ANT). Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels. Les valeurs entre parenthèses doivent être mesurées pendant la réception d'un signal de programme AM avec une force de signal de 60 dB à la borne ANT.


Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser bei Empfang eines UKW-Signals (mit einer Feldstärke von 60 dB am Antennenanschluß) gemessen. Dabei schwanken die Meßwerte, aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u.U. geringfügig. Die eingeklammerten Gleichspannungswerte wurden bei Empfang eines MW-Signals (mit einer Feldstärke von 60 dB am Antennenanschluß) gemessen.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). **⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.**

SIGNAL LINE
GND LINE
+ B LINE
— B LINE

T-93

KENWOOD

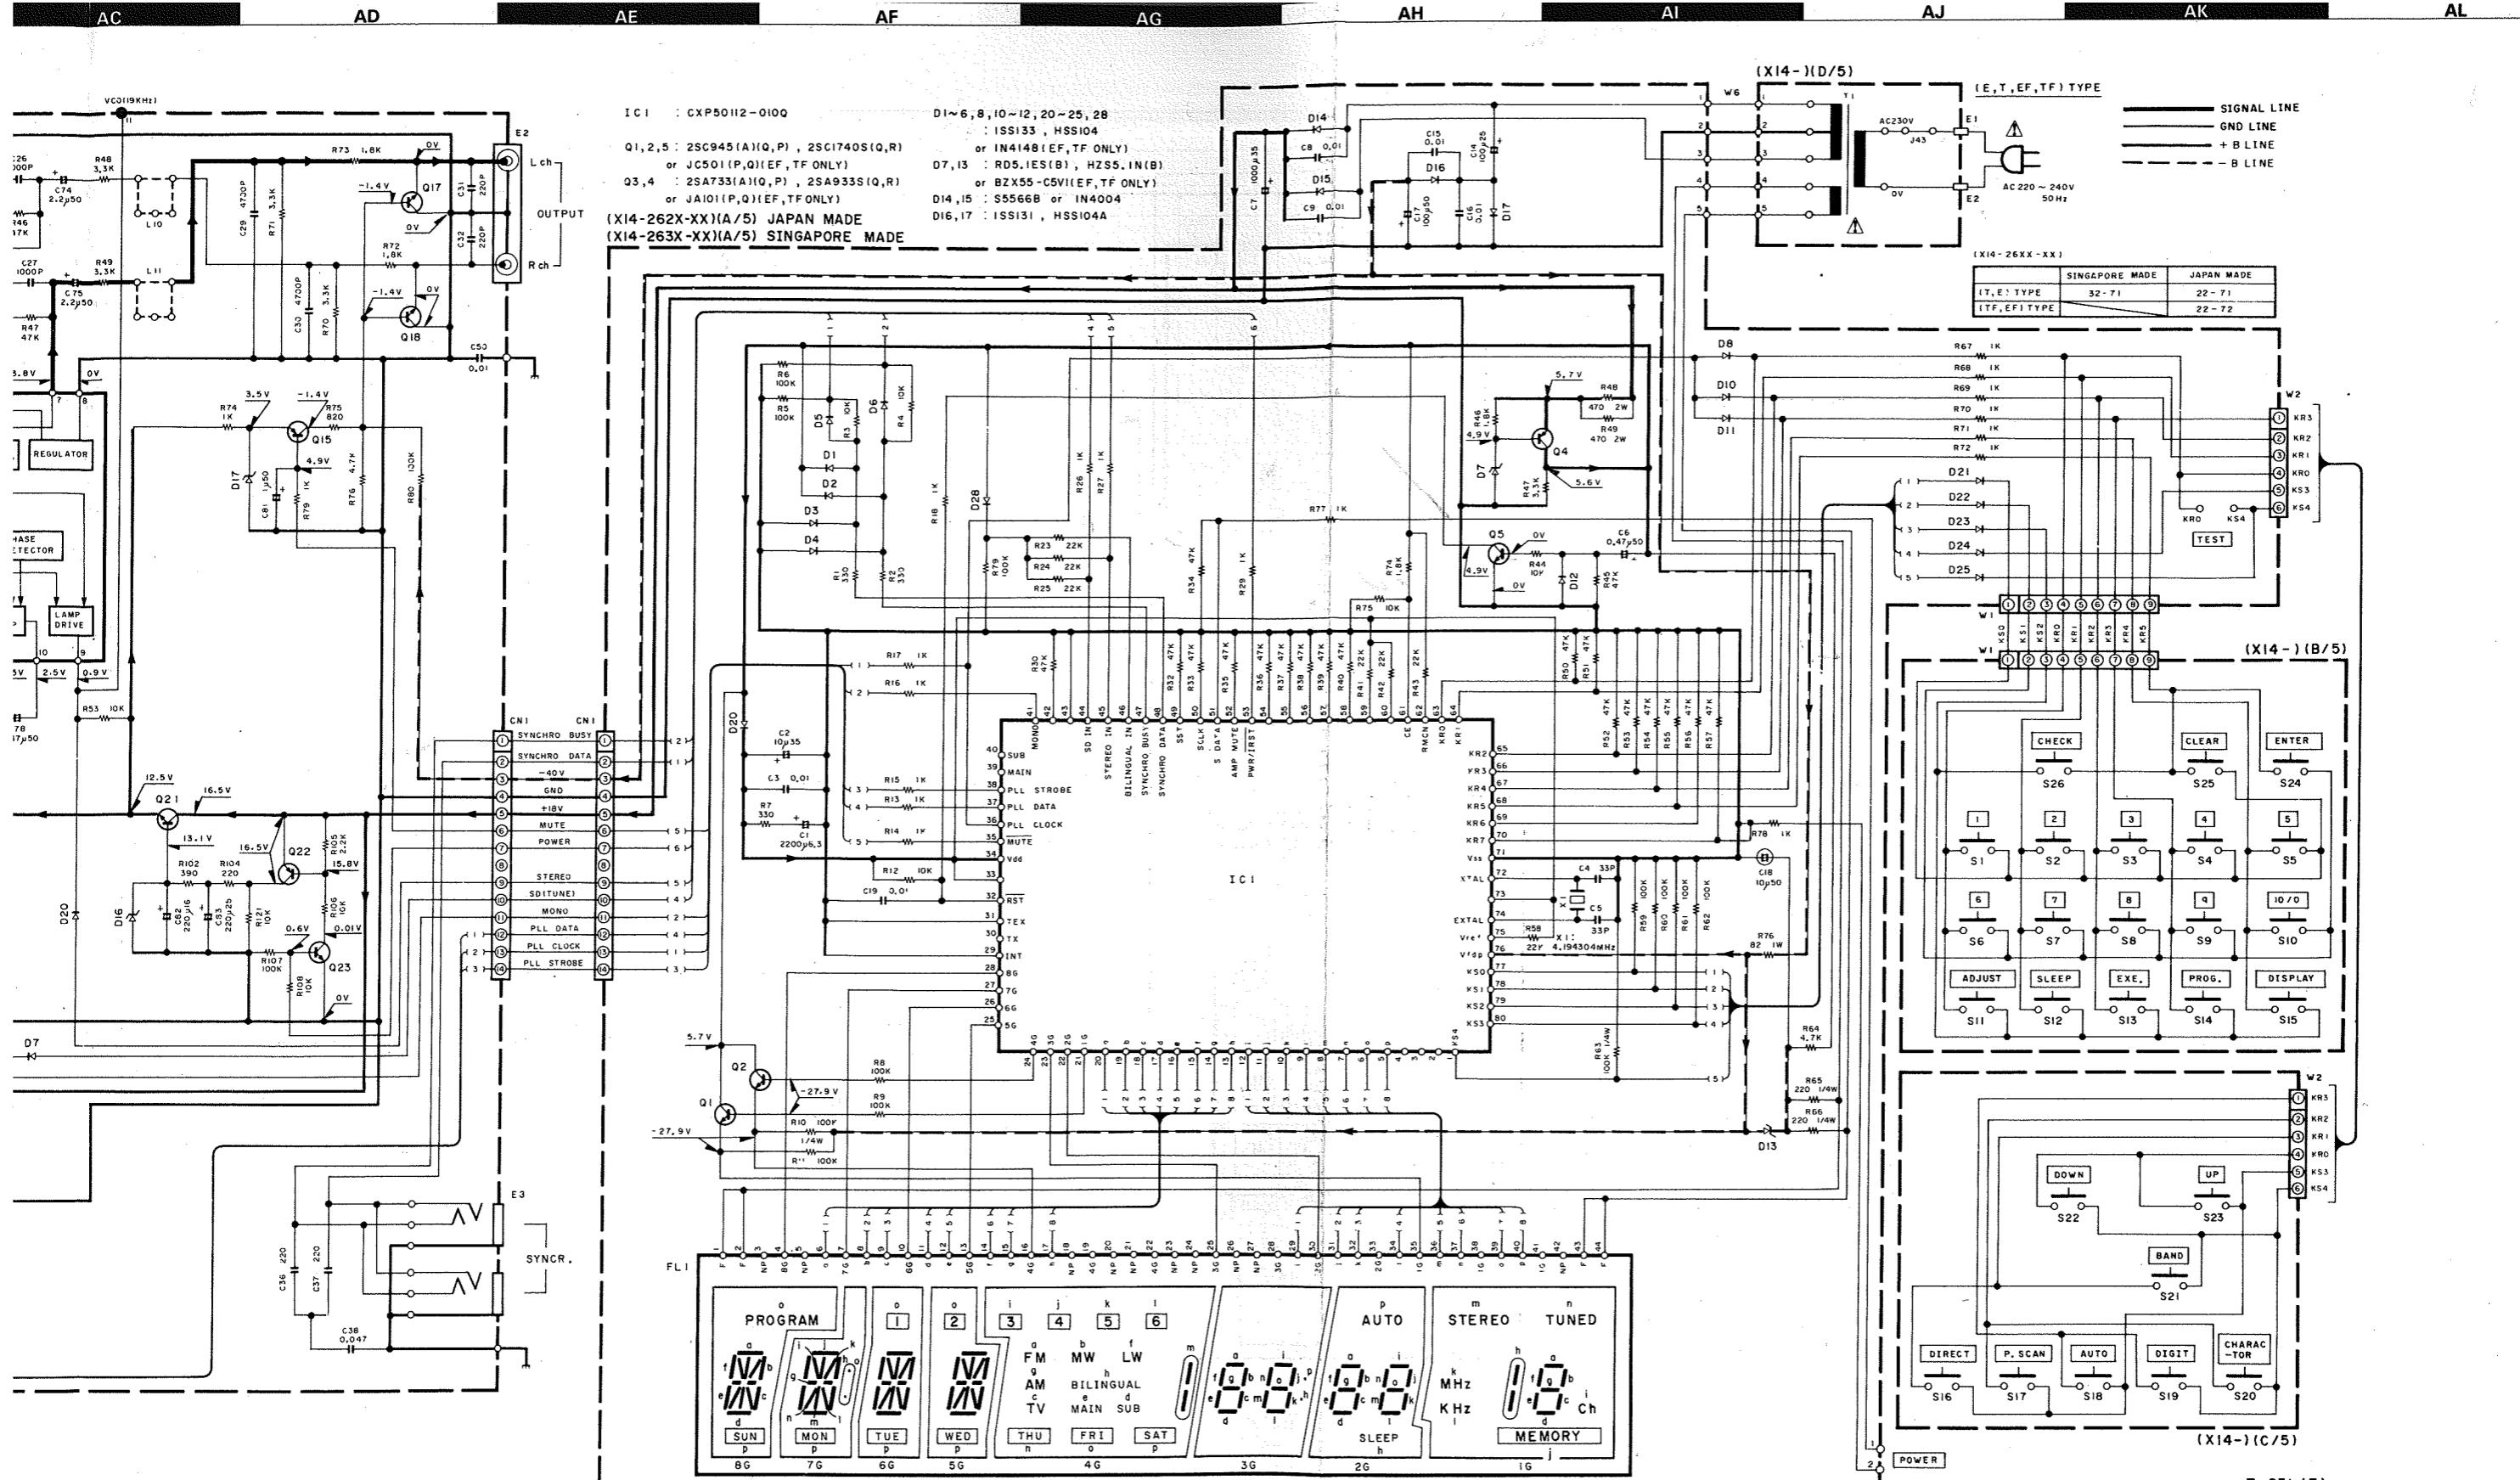

DC voltages are as measured with a high-impedance voltmeter during reception of the FM broadcast signal (with a signal strength of 60 dB at the ANT terminal). Values may vary slightly due to variations between individual instruments or/and units. Values in parentheses are as measured during reception of the AM broadcast signal (with a signal strength of 60 dB at the ANT terminal).

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance pendant la réception d'un signal de programme FM (avec une force de signal de 60 dB à la borne ANT). Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels. Les valeurs entre parenthèses doivent être mesurées pendant la réception d'un signal de programme AM avec une force de signal de 60 dB à la borne ANT.


Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser bei Empfang eines UKW-Signals (mit einer Feldstärke von 60 dB am Antennenanschluß) gemessen. Dabei schwanken die Messwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u.U. geringfügig. Die eingeklammerten Gleichspannungswerte wurden bei Empfang eines MW-Signals (mit einer Feldstärke von 60 dB am Antennenanschluß) gemessen.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). **Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.**


Y07-3232-71

T-93L

KENWOOD

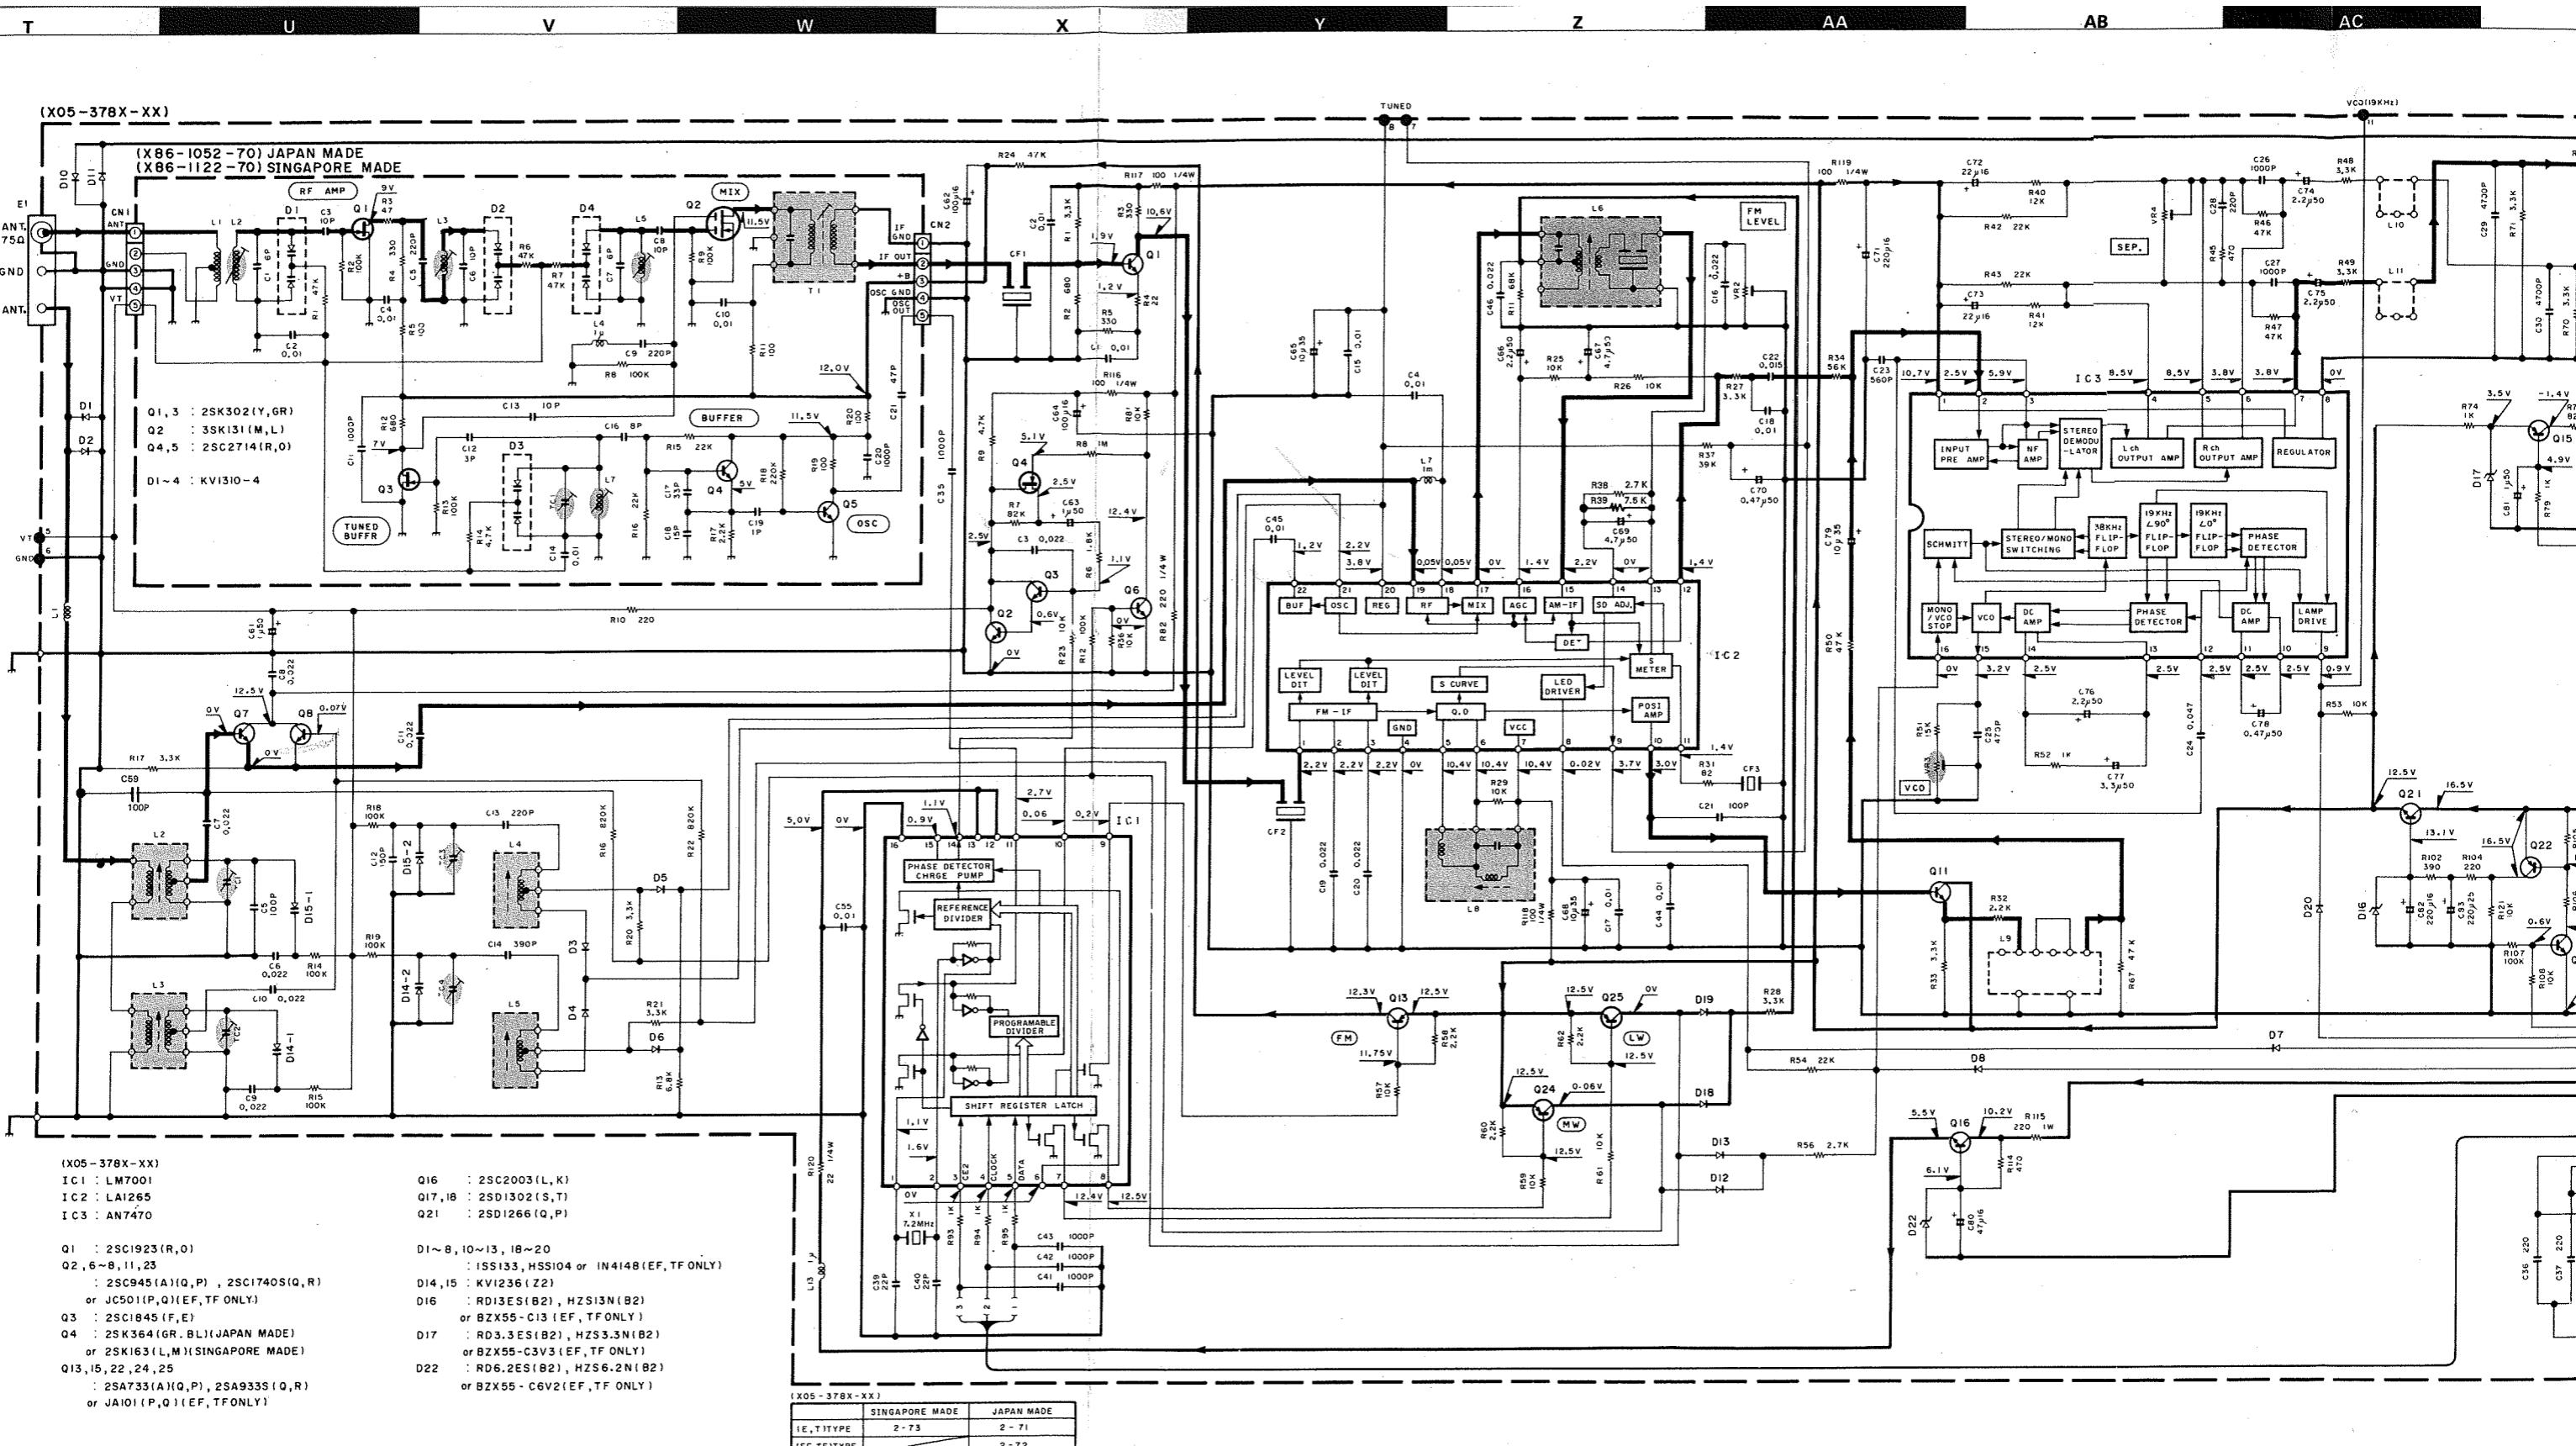

EXPLODED VIEW

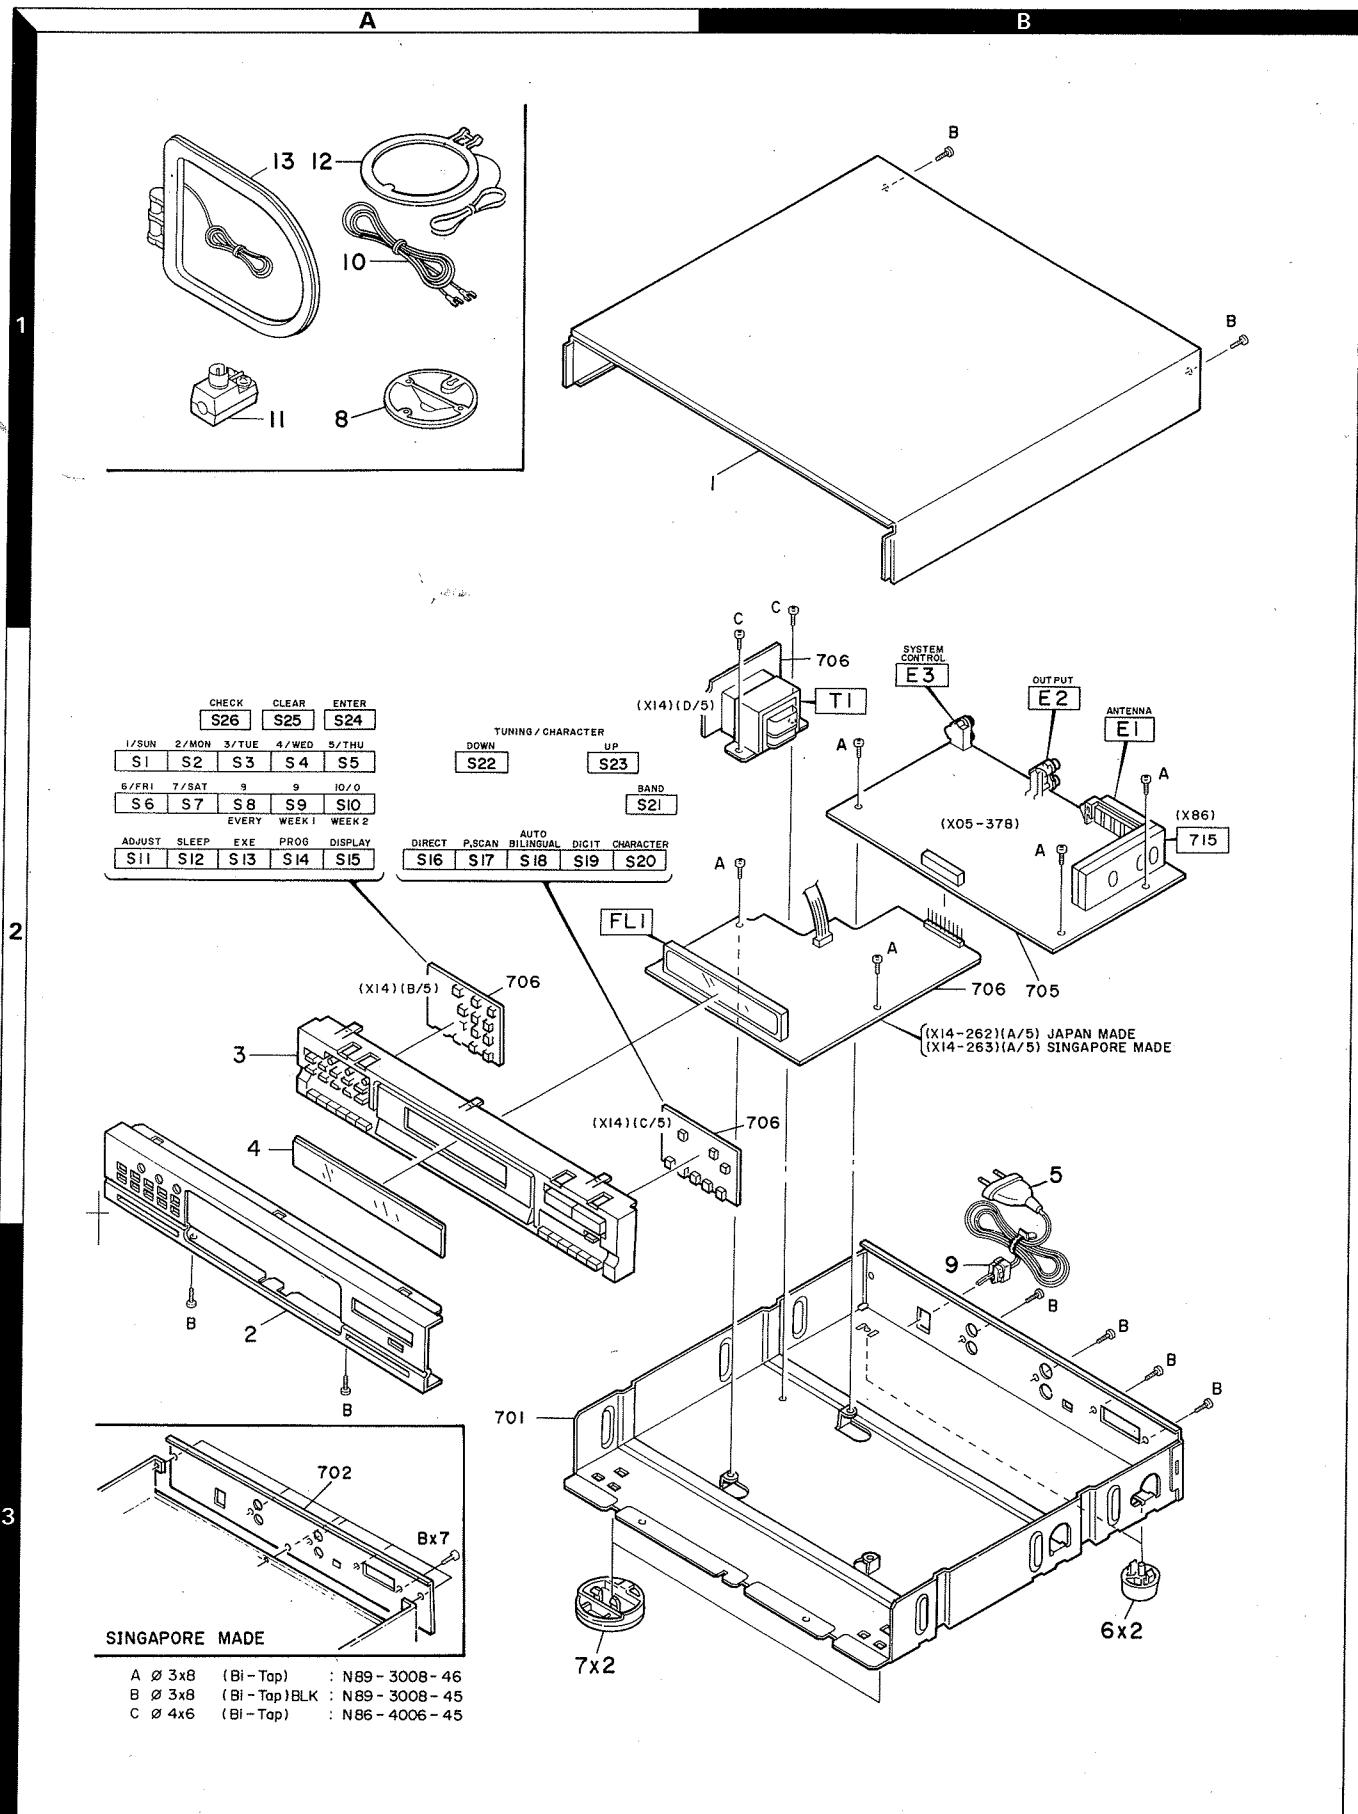

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
T-93/93L						
1	1B		A01-1683-01	METALLIC CABINET	MXTE	J
1	1B	*	A01-1699-01	METALLIC CABINET	TPEF	S
1	1B	*	A01-1714-01	METALLIC CABINET		
2	3A	*	A20-5885-02	PANEL	MX	
2	3A	*	A20-5886-02	PANEL	TETFEF	
3	2A		A22-1109-01	SUB PANEL		
4	2A		B10-1033-03	FRONT GLASS	X	
			B46-0096-13	WARRANTY CARD	EF	
			B46-0122-13	WARRANTY CARD	T	
			B46-0139-03	WARRANTY CARD		
			B46-0143-03	WARRANTY CARD		
		*	B46-0184-03	WARRANTY CARD	TF	
			B58-0803-13	CAUTION CARD	EFP	
△	5	2B	E30-0459-05	AC POWER CORD	MEEF	
△	5	2B	E30-1341-05	AC POWER CORD	X	
△	5	2B	E30-1416-05	AC POWER CORD	TTF	
		*	H01-8589-04	ITEM CARTON CASE	MX	J
		*	H01-8590-04	ITEM CARTON CASE	TE	J
		*	H01-8591-04	ITEM CARTON CASE	EFTF	J
		*	H01-8593-04	ITEM CARTON CASE	MX	S
		*	H01-8594-04	ITEM CARTON CASE	T	S
		*	H01-8595-04	ITEM CARTON CASE	E	S
			H10-3859-02	POLYSTYRENE FOAMED FIXTURE	MXTE	J
		*	H10-3860-02	POLYSTYRENE FOAMED FIXTURE	EFTF	J
		*	H10-3861-02	POLYSTYRENE FOAMED FIXTURE		S
			H25-0224-04	PROTECTION BAG (800X400X0.03)		
			H25-0232-04	PROTECTION BAG (235X350X0.03)		
△	6	3B	J02-0366-15	FOOT (REAR)		
7	3A	J02-1040-05	FOOT (FRONT)			
8	1A	J19-2815-04	ANTENNA HOLDER			
9	3B	J42-0083-05	POWER CORD BUSHING			
		J61-0307-05	WIRE BAND	XTTF		
A	2B	N89-3008-46	BINDING HEAD TAPTITE SCREW			
B	3A, 3B	N89-3008-45	BINDING HEAD TAPTITE SCREW			
C	2B	N86-4006-45	BINDING HEAD TAPTITE SCREW			
10	1A	T90-0121-05	T TYPE ANTENNA		S	
10	1A	T90-0132-05	T TYPE ANTENNA		J	
11	1A	T90-0136-05	ANTENNA ADAPTOR	TEEFTF		
12	1A	T90-0153-05	LOOP ANTENNA	EFTF	J	
13	1A	T90-0173-05	LOOP ANTENNA	MXTE	J	
13	1A	T90-0174-05	LOOP ANTENNA	MXTE	S	
TUNER UNIT (X05-378X-XX)						
C1 ,2			CK45FF1H103Z	CERAMIC 0.010UF Z		
C3			CF92FV1H223J	MF 0.022UF J	TEEFTF	
C3			CF92FV1H473J	MF 0.047UF J	MX	
C4			C91-0769-05	CERAMIC 0.01UF M		
C5			CC45FTH1H101J	CERAMIC 100PF J	TEEFTF	
C6			CK45FF1H223Z	CERAMIC 0.022UF Z	TEEFTF	
C7 ,8			C91-0085-05	CERAMIC 0.022UF N	TEEFTF	
C9			CK45FF1H223Z	CERAMIC 0.022UF Z	TEEFTF	

J: Japan Made
S: Singapore Made

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
C10 ,11			C91-0085-05	CERAMIC 0.022UF N	TEEFTF	
C11			C91-0085-05	CERAMIC 0.022UF N	MX	
C12			CC45FCH1H151J	CERAMIC 150PF J	TEEFTF	
C13			CC93FCH1H221J	CERAMIC 220PF J	TEEFTF	
C14			CC93FCH1H391J	CERAMIC 390PF J		
C15			CK45FF1H103Z	CERAMIC 0.010UF Z		
C16			CK45FF1H223Z	CERAMIC 0.022UF Z		
C17 ,18			CK45FF1H103Z	CERAMIC 0.010UF Z		
C19 ,20			CK45FF1H223Z	CERAMIC 0.022UF Z		
C21			CC45FSL1H101J	CERAMIC 100PF J		
C22			CF92FV1H153J	MF 0.015UF J		
C23			CK45FB1H561K	CERAMIC 560PF K		
C24			CF92FV1H473J	MF 0.047UF J		
C25			CC93FCH1H471J	CERAMIC 470PF J		
C26 ,27			CC45FSL1H151J	CERAMIC 150PF J	MX	
C26 ,27			CK45FB1H102K	CERAMIC 1000PF K	TEEFTF	
C28			CC45FSL1H221J	CERAMIC 220PF J	TEEFTF	
C29 ,30			CF92FV1H153J	MF 0.015UF J	MX	
C29 ,30			CF92FV1H472J	MF 4700PF J	TEEFTF	
C31 ,32			C91-0749-05	CERAMIC 220PF K	TEEFTF	
C33 ,34			CF92FV1H432J	MF 4300PF J	M	
C35			CK45FB1H102K	CERAMIC 1000PF K		
C36 ,37			CC45FSL1H221J	CERAMIC 220PF J		
C38			CK45FF1H473Z	CERAMIC 0.047UF Z		
C39 ,40			CC45FCH1H220J	CERAMIC 22PF J		
C41 ,43			C91-0757-05	CERAMIC 1000PF K		
C44 ,45			CK45FF1H103Z	CERAMIC 0.010UF Z		
C46			CK45FF1H223Z	CERAMIC 0.022UF Z		
C50			CK45FF1H103Z	CERAMIC 0.010UF Z		
C55			CK45FF1H103Z	CERAMIC 0.010UF Z		
C59			CC45FSL1H101J	CERAMIC 100PF J	TEEFTF	
C61			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C62			CE04KW1C101M	ELECTRO 100UF 16WV		
C63			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C64			CE04KW1C101M	ELECTRO 100UF 16WV		
C65			CE04KW1V100M	ELECTRO 10UF 35WV		
C66			CE04KW1H2R2M	ELECTRO 2.2UF 50WV		
C67			CE04KW1H4R7M	ELECTRO 4.7UF 50WV		
C68			CE04KW1V100M	ELECTRO 10UF 35WV		
C69			CE04KW1H4R7M	ELECTRO 4.7UF 50WV		
C70			CE04KW1HR47M	ELECTRO 0.47UF 50WV		
C71			CE04KW1C221M	ELECTRO 220UF 16WV		
C72 ,73			CE04KW1C220M	ELECTRO 22UF 16WV		
C74 ,76			CE04KW1H2R2M	ELECTRO 2.2UF 50WV	TEEFTF	
C74 ,75			CE04KW1HR33M	ELECTRO 0.33UF 50WV	MX	
C76			CE04KW1H2R2M	ELECTRO 2.2UF 50WV		
C77			CE04KW1H3R3M	ELECTRO 3.3UF 50WV		
C78			CE04KW1HR47M	ELECTRO 0.47UF 50WV		
C79			CE04KW1V100M	ELECTRO 10UF 35WV		
C80			CE04KW1C470M	ELECTRO 47UF 16WV		
C81			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C82			CE04KW1C221M	ELECTRO 220UF 16WV		
C83			CE04KW1E221M	ELECTRO 220UF 25WV		
TC1			C05-0097-05	CERAMIC TRIMMER CAPACITOR(30PF	TEEFTF	
TC2			C05-0303-05	CERAMIC TRIMMER CAPACITOR(20PF		

</

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
TC3			C05-0097-05	CERAMIC TRIMMER CAPACITOR(30PF)	TEEEFTF	
TC4			C05-0303-05	CERAMIC TRIMMER CAPACITOR(20PF)	TEEEFTF	
E1	2B		E20-0321-05	LOCK TERMINAL BOARD(ANTENNA)	TEEEFTF	
E1	2B		E20-0476-05	LOCK TERMINAL BOARD(ANTENNA)	MX	
E2	2B		E13-0249-05	PHONO JACK (OUTPUT)		
E3	2B		E11-0188-05	MINIATURE PHONE JACK		
CF1 ,2			L72-0531-05	CERAMIC FILTER	MX	
CF1 ,2			L72-0536-05	CERAMIC FILTER	TEEEFTF	
CF3			L72-0096-05	CERAMIC FILTER		
L1			L40-1091-17	SMALL FIXED INDUCTOR	TEEEFTF	
L2	*		L31-0596-05	LW-RF COIL	TEEEFTF	
L3			L31-0509-05	MW-RF COIL	TEEEFTF	
L4			L32-0288-05	LW OSCILLATING COIL		
L5			L32-0277-15	MW OSCILLATING COIL		
L6			L30-0454-15	AM IFT		
L7			L40-1021-14	SMALL FIXED INDUCTOR(1.0mH,K)		
L8	*		L30-0439-25	FM IFT		
L9			L79-0125-05	LC FILTER (B.P.F)	TEEEFTF	
L10 ,11	*		L79-0790-05	LC FILTER	TEEEFTF	
L12 ,13			L40-1091-17	SMALL FIXED INDUCTOR(1uH)	MX	
L13			L40-1091-17	SMALL FIXED INDUCTOR(1uH)	TEEEFTF	
X1			L77-1122-05	CRYSTAL RESONATOR(7.2MHz)		
R82			RD14GB2E221J	FL-PROOF RD 220 J 1/4W	TEEEFTF	
R115			RS14KB3A221J	FL-PROOF RS 220 J 1W		
R116-119			RD14GB2E101J	FL-PROOF RD 100 J 1/4W		
R120			RD14GB2E220J	FL-PROOF RD 22 J 1/4W		
VR2			R12-3130-05	TRIMMING POT.(33K,7t)		
VR3			R12-1089-05	TRIMMING POT.(4.7K 7t)		
VR4			R12-5060-05	TRIMMING POT.(220K,7t)	TEEEFTF	
S1			S31-2094-05	SLIDE SWITCH(EMPHASIS,CH SPACE	M	
D1 -8			HSS104	DIODE	TE	
D1 -8			1N4148	DIODE	EFTF	J
D1 -8			ISS133	DIODE	TE	
D1 ,2			HSS104	DIODE	MX	
D1 ,2			ISS133	DIODE	MX	
D7 ,8			HSS104	DIODE	MX	
D7 ,8			ISS133	DIODE	MX	
D10 -12			HSS104	DIODE	MX	
D10 -12			ISS133	DIODE	MX	
D10 -13			HSS104	DIODE	TE	
D10 -13			1N4148	DIODE	EFTF	J
D10 -13			ISS133	DIODE	TE	
D14 ,15			KV1236(Z2)	VARIABLE CAPACITANCE DIODE	MX	
D14 ,15			KV1236(Z2)	VARIABLE CAPACITANCE DIODE	TEEEFTF	J
D16			BZX55-C13	DIODE	EFTF	J
D16		*	HZS13N(B2)	ZENER DIODE	MXTE	
D16			RD13ES(B2)	ZENER DIODE	MXTE	
D17			BZX55-C3V3	ZENER DIODE	EFTF	
D17			HZS3.3N(B2)	ZENER DIODE	MXTE	
D17			RD3.3ES(B2)	ZENER DIODE	MXTE	
D18			HSS104	DIODE	MX	
D18			ISS133	DIODE	MX	

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

J: Japan Made

S: Singapore Made

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
D18 -20			HSS104	DIODE	TE	
D18 -20			1N4148	DIODE	EFTF	J
D18 -20			ISS133	DIODE	TE	
D20			HSS104	DIODE	MX	
D20			ISS133	DIODE	MX	
D22			BZX55-C6V2	DIODE	EFTF	J
D22			HZS6.2N(B2)	ZENER DIODE	MXTE	
D22			RD6.2ES(B2)	ZENER DIODE	MXTE	
IC1			LM7001	IC(PLL FREQUENCY SYNTHESIZER)		
IC2			LA1265	IC(FM/AM TUNER)		
IC3			AN7470	IC(FM MPX)		
Q1			2SC1923(R,0)	TRANSISTOR	EFTF	J
Q2			JC501(P,Q)	TRANSISTOR	MXTE	
Q2			2SC1740S(Q,R)	TRANSISTOR	MXTE	
Q2			2SC945(A)(Q,P)	TRANSISTOR		
Q3			2SC1845(F,E)	TRANSISTOR		
Q4			2SK163(L,M)	FET	TE	S
Q4			2SK364(GR,BL)	FET	EFTF	J
Q6 -8			JC501(P,Q)	TRANSISTOR	TE	
Q6 -8			2SC1740S(Q,R)	TRANSISTOR		
Q6 -8			JA101(P,Q)	TRANSISTOR	EFTF	J
Q11			JC501(P,Q)	TRANSISTOR	TE	
Q11			2SC1740S(Q,R)	TRANSISTOR	TE	
Q11			2SC945(A)(Q,P)	TRANSISTOR	EFTF	J
Q13			JA101(P,Q)	TRANSISTOR	MXTE	
Q13			2SA733(A)(Q,P)	TRANSISTOR	MXTE	
Q13			2SA933S(Q,R)	TRANSISTOR	EFTF	J
Q15			JA101(P,Q)	TRANSISTOR	MXTE	
Q15			2SA733(A)(Q,P)	TRANSISTOR	MXTE	
Q15			2SA933S(Q,R)	TRANSISTOR		
Q16			2SC2003(L,K)	TRANSISTOR	M	
Q17 ,18			2SD1302(S,T)	TRANSISTOR	M	
Q19 ,20			2SC1740S(Q,R)	TRANSISTOR		
Q19 ,20			2SC945(A)(Q,P)	TRANSISTOR		
Q21			2SD1266(Q,P)	TRANSISTOR		
Q22			JA101(P,Q)	TRANSISTOR	EFTF	J
Q22			2SA733(A)(Q,P)	TRANSISTOR	MXTE	
Q22			2SA933S(Q,R)	TRANSISTOR	MXTE	
Q23			JC501(P,Q)	TRANSISTOR	EFTF	J
Q23			2SC1740S(Q,R)	TRANSISTOR	MXTE	
Q23			2SC945(A)(Q,P)	TRANSISTOR		
Q24			2SA733(A)(Q,P)	TRANSISTOR	MX	
Q24			2SA933S(Q,R)	TRANSISTOR	MX	
Q24 ,25			JA101(P,Q)	TRANSISTOR	EFTF	J
Q24 ,25			2SA733(A)(Q,P)	TRANSISTOR	TE	
Q24 ,25			2SA933S(Q,R)	TRANSISTOR	TE	
DISPLAY UNIT (X14-262X-XX: Japan Made, X14-263X-XX: Singapore Made)						
C1			CE04KW0J222M	ELECTRO	2200UF	6.3WV
C2			CE04KW1V100M	ELECTRO	10UF	35WV
C3			CK45FF1H103Z	CERAMIC	0.010UF	Z
C4 ,5			CC45FCH1H330J	CERAMIC	33PF	J
C6			CB04KW1HR47M	ELECTRO	0.47UF	50WV
C7			CE04KW1V102M	ELECTRO	1000UF	35WV
C8 ,9			CK45FF1H103Z	CERAMIC	0.010UF	Z

E: Scandinavia & Europe K: USA P: Canada

U: PX(Far East, Hawaii) T: England M: Other Areas

UE: AAFES(Europe) X: Australia

J: Japan Made

S: Singapore Made

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
C14			CE04KW1E101M	ELECTRO 100UF 25WV		
C15 ,16			CK45FF1H103Z	CERAMIC 0.010UF Z		
C17			CE04KW1H101M	ELECTRO 100UF 50WV		
C18			C90-1400-05	NP-ELEC 10UF 50WV		
C19			CK45FF1H103Z	CERAMIC 0.010UF Z		
T1	2B		L01-5452-05	POWER TRANSFORMER	XTEEF J	
T1	2B		L01-5452-05	POWER TRANSFORMER	TF J	
T1	2B	*	L01-5454-15	POWER TRANSFORMER	M J	
T1	2B	*	L01-9002-05	POWER TRANSFORMER	XTE S	
T1	2B	*	L01-9004-05	POWER TRANSFORMER	M S	
X1			L77-1175-05	CRYSTAL RESONATOR(4.194304MHz)		
R48 ,49			RS14KB3D471J	FL-PREAMP RS 470 J 2W		
R76			RS14KB3A101J	FL-PREAMP RS 100 J 1W	X	
R76			RS14KB3A151J	FL-PREAMP RS 150 J 1W	M	
R76			RS14KB3A820J	FL-PREAMP RS 82 J 1W	TEEFTF	
S1 -26	2A		S40-1064-05	PUSH SWITCH (1-10/0, ADJ.)		
S27			S31-2128-05	SLIDE SWITCH (POWER TYPE)	M	
D1 -6			HSS104	DIODE	MXTE J	
D1 -6			1N4148	DIODE	EFTF	
D1 -6			1SS133	DIODE	MXTE J	
D7			BZX55-C5V1	ZENER DIODE	EFTF J	
D7			HZS5.1N(B)	ZENER DIODE	MXTE	
D7			RD5.1ES(B)	ZENER DIODE	MXTE J	
D8			HSS104	DIODE	TE J	
D8			1N4148	DIODE	EFTF J	
D8			1SS133	DIODE	TE J	
D10 -12			HSS104	DIODE	XTE J	
D10 -12			1N4148	DIODE	EFTF J	
D10 -12			1SS133	DIODE	XTE J	
D11 ,12			HSS104	DIODE	M J	
D11 ,12			1SS133	DIODE	M J	
D13			BZX55-C5V1	ZENER DIODE	EFTF J	
D13			HZS5.1N(B)	ZENER DIODE	MXTE J	
D13			RD5.1ES(B)	ZENER DIODE	MXTE J	
D14 -17			1N4004	DIODE	EFTF J	
D14 ,15			S5566B	DIODE	MXTE J	
D16 ,17			HSS104A	DIODE	MXTE J	
D16 ,17			1SS131	DIODE	MXTE J	
D20 -25			HSS104	DIODE	MXTE J	
D20 -25			1N4148	DIODE	EFTF J	
D20 -25			1SS133	DIODE	MXTE J	
D28			HSS104	DIODE	MXTE J	
D28			1N4148	DIODE	EFTF J	
FL1	2A		1SS133	DIODE	MXTE J	
IC1			FIP8CSM7	FLUORESCENT INDICATOR TUBE		
Q1 ,2			CXP50112-010Q	IC(MICROPROCESSOR)		
Q1 ,2			JC501(P, Q)	TRANSISTOR	EFTF J	
Q1 ,2			2SC1740S(Q, R)	TRANSISTOR	MXTE J	
Q1 ,2			2SC945(A)(Q, P)	TRANSISTOR	MXTE J	
Q3 ,4			2SA733(A)(Q, P)	TRANSISTOR	M J	
Q3 ,4			2SA933S(Q, R)	TRANSISTOR	M J	
Q4			JA101(P, Q)	TRANSISTOR	EFTF J	
Q4			2SA733(A)(Q, P)	TRANSISTOR	XTE J	

J: Japan Made
S: Singapore Made

E: Scandinavia & Europe K: USA

P: Canada

U: PX(Far East, Hawaii) T: England M: Other Areas

UE: AAFES(Europe) X: Australia

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
Q4			2SA933S(Q, R)	TRANSISTOR		
Q5			JC501(P, Q)	TRANSISTOR	XTE	
Q5			2SC1740S(Q, R)	TRANSISTOR	EFTF	
Q5			2SC945(A)(Q, P)	TRANSISTOR	MXTE	

T-93 FRONT END UNIT (X86-1040-10: Japan Made, X86-1130-10: Singapore Made)

C1			CC41FSL1H060D	CYLND CHIP C 6.0PF D	MX	
C2			C93-0012-05	CYLND CHIP C 0.01UF M	MX	
C3			CC41FSL1H100D	CYLND CHIP C 10PF D	MX	
C4			C93-0012-05	CYLND CHIP C 0.01UF M	MX	
C5			CK41FB1H221K	CYLND CHIP C 220PF K	MX	
C6			CC41FSL1H070D	CYLND CHIP C 7.0PF D	MX	
C8			CC41FSL1H020C	CYLND CHIP C 2.0PF C	MX	
C9			CK41FB1H221K	CYLND CHIP C 220PF K	MX	
C10			C93-0012-05	CYLND CHIP C 0.01UF M	MX	
C11			CC41FSL1H080D	CYLND CHIP C 8.0PF D	MX	
C12			CC41FSL1H010C	CYLND CHIP C 1.0PF C	MX	
C14			C93-0012-05	CYLND CHIP C 0.01UF M	MX	
C16			CC41FSL1H080D	CYLND CHIP C 8.0PF D	MX	
C17			CC41FSL1H330J	CYLND CHIP C 33PF J	MX	
C18			CC41FSL1H150J	CYLND CHIP C 15PF J	MX	
C19			CC41FSL1H010C	CYLND CHIP C 1.0PF C	MX	
C20			CK41FY1E102M	CYLND CHIP C 1000PF M	MX	
C21			CC41FSL1H470J	CYLND CHIP C 47PF J	MX	
TC1			C05-0302-05	CERAMIC TRIMMER CAPACITOR(11PF)	MX	
L1			L31-0551-05	FM-RF COIL	MX	
L2			L31-0552-05	FM-RF COIL	MX	
L3			L31-0553-05	FM-RF COIL	MX	
L4			L40-1092-16	SMALL FIXED INDUCTOR(1UH, M)	MX	
L7			L32-0318-05	FM OSCILLATING COIL	MX	
T1			L30-0427-15	FM IFT	MX	
			R92-0338-05	CYLND CHIP R 0 OHM	MX	
			R92-0350-05	JUMPER WIRE (RESISTOR TYPE)	MX	
R1 ,2			RD41FB2B473J	CYLND CHIP R 47K J 1/8W	MX	
R3			RD41FB2B470J	CYLND CHIP R 47 J 1/8W	MX	
R4			RD41FB2B331J	CYLND CHIP R 330 J 1/8W	MX	
R5			RD41FB2B101J	CYLND CHIP R 100 J 1/8W	MX	
R6			RD41FB2B473J	CYLND CHIP R 47K J 1/8W	MX	
R9			RD41FB2B105J	CYLND CHIP R 1.0M J 1/8W	MX	
R11			RD41FB2B101J	CYLND CHIP R 100 J 1/8W	MX	
R14			RD41FB2B472J	CYLND CHIP R 4.7K J 1/8W	MX	
R15 ,16			RD41FB2B223J	CYLND CHIP R 22K J 1/8W	MX	
R17			RD41FB2B222J	CYLND CHIP R 2.2K J 1/8W	MX	
R18			RD41FB2B224J	CYLND CHIP R 220K J 1/8W	MX	
R19 ,20			RD41FB2B101J	CYLND CHIP R 100 J 1/8W	MX	
D1 -3			KV1310A-3	VARIABLE CAPACITANCE DIODE	MX	
Q1			2SK302(Y, GR)	FET	MX	
Q2			2SC2714(0)	TRANSISTOR	MX	
Q4 ,5			2SC2714(R, 0)	TRANSISTOR	MX	

T-93L FRONT END UNIT (X86-1052-70: Japan Made, X86-1122-70: Singapore Made)

C1			CC41FSL1H060D	CYLND CHIP C 6.0PF D	TEEFTF	
C2			C93-0012-05	CYLND CHIP		

PARTS LIST

※ New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新 品	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
C3			CC41FSL1H100D	CYLND CHIP C 10PF D	TEEEFTF	
C4			C93-0012-05	CYLND CHIP C 0.01UF M	TEEEFTF	
C5			CK41FB1H221K	CYLND CHIP C 220PF K	TEEEFTF	
C6			CC41FSL1H100D	CYLND CHIP C 10PF D	TEEEFTF	
C7			CC41FSL1H060D	CYLND CHIP C 6.0PF D	TEEEFTF	
C8			CC41FSL1H100D	CYLND CHIP C 10PF D	TEEEFTF	
C9			CK41FB1H221K	CYLND CHIP C 220PF K	TEEEFTF	
C10			C93-0012-05	CYLND CHIP C 0.01UF M	TEEEFTF	
C11			CK41FY1E102M	CYLND CHIP C 1000PF M	TEEEFTF	
C12			CC41FSL1H030C	CYLND CHIP C 3.0PF C	TEEEFTF	
C13			CC41FSL1H100D	CYLND CHIP C 10PF D	TEEEFTF	
C14			C93-0012-05	CYLND CHIP C 0.01UF M	TEEEFTF	
C16			CC41FSL1H080D	CYLND CHIP C 8.0PF D	TEEEFTF	
C17			CC41FSL1H330J	CYLND CHIP C 33PF J	TEEEFTF	
C18			CC41FSL1H150J	CYLND CHIP C 15PF J	TEEEFTF	
C19			CC41FSL1H010C	CYLND CHIP C 1.0PF C	TEEEFTF	
C20			CK41FY1E102M	CYLND CHIP C 1000PF M	TEEEFTF	
C21			CC41FSL1H470J	CYLND CHIP C 47PF J	TEEEFTF	
TC1			C05-0302-05	CERAMIC TRIMMER CAPACITOR(11PF)	TEEEFTF	
L1			L31-0551-05	FM-RF COIL	TEEEFTF	
L2			L31-0552-05	FM-RF COIL	TEEEFTF	
L3			L31-0553-05	FM-RF COIL	TEEEFTF	
L4			L40-1092-16	SMALL FIXED INDUCTOR(1UH,M)	TEEEFTF	
L5			L31-0554-05	FM-RF COIL	TEEEFTF	
L7			L32-0318-05	FM OSCILLATING COIL	TEEEFTF	
T1			L30-0427-15	FM IFT	TEEEFTF	
R1			R92-0338-05	CLYND CHIP R 0 ΩHM	TEEEFTF	
R2			R92-0350-05	JUMPER WIRE (RESISTOR TYPE)	TEEEFTF	
R3			RD41FB2B473J	CYLND CHIP R 47K J 1/8W	TEEEFTF	
R4			RD41FB2B104J	CYLND CHIP R 100K J 1/8W	TEEEFTF	
R5			RD41FB2B470J	CYLND CHIP R 47 J 1/8W	TEEEFTF	
R6 ,7			RD41FB2B331J	CYLND CHIP R 330 J 1/8W	TEEEFTF	
R8 ,9			RD41FB2B101J	CYLND CHIP R 100 J 1/8W	TEEEFTF	
R11			RD41FB2B473J	CYLND CHIP R 47K J 1/8W	TEEEFTF	
R12			RD41FB2B104J	CYLND CHIP R 100K J 1/8W	TEEEFTF	
R13			RD41FB2B472J	CYLND CHIP R 4.7K J 1/8W	TEEEFTF	
R14			RD41FB2B223J	CYLND CHIP R 22K J 1/8W	TEEEFTF	
R15 ,16			RD41FB2B222J	CYLND CHIP R 2.2K J 1/8W	TEEEFTF	
R17			RD41FB2B224J	CYLND CHIP R 220K J 1/8W	TEEEFTF	
R18			RD41FB2B101J	CYLND CHIP R 100 J 1/8W	TEEEFTF	
D1 -4			KV1310-4	VARIABLE CAPACITANCE DIODE	TEEEFTF	
Q1			2SK302(Y,GR)	FET	TEEEFTF	
Q2			3SK131(M,L)	FET	TEEEFTF	
Q3			2SK302(Y,GR)	FET	TEEEFTF	
Q4 ,5			2SC2714(R,Ω)	TRANSISTOR	TEEEFTF	

E: Scandinavia & Europe K: USA P: Canada

J: Japan Made

U: PX(Far East, Hawaii) T: England M: Other Areas

S: Singapore Made

UE : AAFES(Europe) X: Australia

 indicates safety critical components.

T-93/93L

SPECIFICATIONS

T-93L

FM tuner section

Tuning frequency range 87.5 MHz ~ 108 MHz
Usable sensitivity (DIN at 75 Ω)

MONO 0.8 μV
STEREO 28.1 μV

Total harmonic distortion (DIN at 1 kHz, 65.2 dBf input)
MONO 0.2%

STEREO 0.5%

Signal to noise ratio (DIN weighted at 1 kHz, 65.2 dBf input)
MONO 67 dB
STEREO 63 dB

Stereo separation (DIN at 1 kHz) 46 dB

Alternate channel selectivity

(DIN ± 300 kHz) 67 dB

Frequency response

(30 Hz ~ 15 kHz) +0.5 dB, -2.5 dB

Output level/Impedance
(at 75 kHz dev.) 0.6 V/3.3 kΩ

MW Tuner Section

Tuning frequency range 531 kHz ~ 1,602 kHz
Usable sensitivity 17 μV/800 μV/m

Signal to noise ratio
(at 30% mod. 1 mV input) 49 dB

LW Tuner section

Tuning frequency range 153 kHz ~ 281 kHz

Usable sensitivity 20 μV/1000 μV/m

Signal to noise ratio
(at 30% mod. 1 mV input) 47 dB

General

Power consumption 9 W

Dimension W: 360 mm
H: 70 mm
D: 354 mm

Weight 2.7 kg

T-93

FM tuner section

Tuning frequency range 87.5 MHz ~ 108 MHz
Usable sensitivity (IHF at 75 Ω) 0.95 μV/10.8 dBf

Total harmonic distortion (at 1 kHz, 65 dBf input)

MONO 0.4%

STEREO 0.45%

Signal to noise ratio (at 1 kHz, 65 dBf input)

MONO 78 dB

STEREO 71 dB

Stereo separation (at 1 kHz) 40 dB

Alternate channel selectivity

(± 400 kHz) 56 dB

Frequency response

(30 Hz ~ 15 kHz) +0.5 dB, -2.5 dB

Output level/Impedance
(at 75 kHz dev.) 0.6 V/3.3 kΩ

AM Tuner Section

Tuning frequency range

531 kHz ~ 1,602 kHz 9 kHz step

530 kHz ~ 1,610 kHz 10 kHz step

Usable sensitivity 17 μV/800 μV/m

Signal to noise ratio
(at 30% mod. 1 mV input) 49 dB

General

Power consumption 9 W

Dimension W: 360 mm
H: 70 mm
D: 354 mm

Weight 2.7 kg

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

KENWOOD poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

KENWOOD strebt ständige, Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

KENWOOD CORPORATION

Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD U.S.A. CORPORATION

2201 East Dominguez Street, Long Beach, CA 90810;

550 Clark Drive, Mount Olive, NJ 07828, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

P.O. BOX 1075, 959 Gana Court, Mississauga, Ontario, Canada L4T 4C2

TRIO-KENWOOD U.K. LIMITED

17 Bristol Road, The Metropolitan Centre, Greenford, Middx, UB6 8UP England

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Riembrucker-Str. 15, 6056 Heusenstamm, West Germany

TRIO-KENWOOD FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD LINEAR S.p.A.

20125, MILANO-VIA ARBE, 50, Italy

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (INCORPORATED IN NSW)

4E Woodcock Place, Lane Cove, N.S.W. 2066, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Wang Kee Building, 4th Floor, 34-37 Connaught Road, Central, Hong Kong