

**SERVICE
MANUAL**

Pm-6a

marantz®

Model Pm-6a

Stereo Pre Main Amplifier

MARANTZ DESIGN AND SERVICE

Using superior design and selected high grade components, MARANTZ company has created the ultimate in stereo sound. Only original MARANTZ parts can insure that your MARANTZ product will continue to perform to the specifications for which it is famous.

Parts for your MARANTZ equipment are generally available to our National Marantz Subsidiary or Agent.

ORDERING PARTS:

Parts can be ordered either by mail or by telex. In both cases, MARANTZ part number has to be specified. If you order by mail, fulfil MARANTZ order forms.

MARANTZ S.A.
EUROPEAN PARTS DEPARTMENT
2, Avenue Léopold III
B-7120 PERONNES-lez-BINCHE
BELGIUM
TWX: 57589 SEPLT B

The following information must be supplied to eliminate delays in processing your order:

1. Complete address
2. Complete part numbers and quantities required
3. Description of parts
4. Model number for which part is required
5. Way of shipment
6. Signature: any order form or telex must be signed otherwise such part order will be considered as null and void.

PARTS ORDERING:

Parts may be ordered from the following addresses:

EUROPE

MARANTZ S.A.
European Parts Department
2, Avenue Léopold III
B-7120 Péronnes-lez-Binche
Belgium
Telex: 57589

MARANTZ NORSCHE A.S.
Refstadalleen 13
Oslo 5
Norway
Telex: 19659

MARANTZ DENMARK
Bregnerødvej 132b
3460 Birkerød
Denmark
Telex: 39137

MARANTZ GMBH AUSTRIA
Wiedner Hauptstrasse 98
1050 Wien
Austria
Telex: 113583

MARANTZ S.A.
326 Avenue Louise Bte 32
1050 Brussels
Belgium
Telex: 26602

MARANTZ FRANCE
4 Rue Bernard Palissy
92600 Asnières
France
Telex: 611651

MARANTZ BELGIUM
45 Rue Auguste Van Zande
1080 Brussels
Belgium

MARANTZ SVENSKA A.B.
Svartviksvangen 56
Traneberg - Box 12016
16112 Bromma
Sweden
Telex: 13449

MARANTZ GERMANY GMBH
Max Planckstrasse, 22
6072 DREIEICH 1
West Germany
Telex: 4185316

MARANTZ AUDIO U.K. LTD.
Unit 15/16
Saxon Way Industrial Estate
Moor Lane
Harmondsworth UB7 0LW
Great Britain
Telex: 935196

AUSTRALIA

MARANTZ AUSTRALIA PTY., LTD.
32 Cross Street
Brookvale, N.S.W. 2100
Australia
Telex: 24121

All of the above locations are fully equipped to take care of your total service needs. Because various countries have differing configuration requirements, it is necessary that you contact the service facility in your particular country. In the event that there is no service location listed for your country, please, contact the nearest facility for the necessary assistance.


In case of difficulties, do not hesitate to contact the Technical Department at abovementioned address.

marantz®

TABLE OF CONTENTS

INTRODUCTION	1
1. FEATURES	1
2. P.W. BOARDS	2
3. TEST EQUIPMENT REQUIRED FOR SERVICING	3
4. ADJUSTMENT PROCEDURES	3
5. VOLTAGE CONVERSION	4
6. BLOCK DIAGRAM	5
7. DIAGRAM AND COMPONENT LOCATIONS	6
7.1 Filter Assembly (PH00) Schematic Diagram and Component Locations	6
7.2 Speaker Switch Assembly (PW00) Schematic Diagram and Component Locations	6
7.3 Voltage Amp. Assembly (P700) Schematic Diagram and Component Locations	6
7.4 Ripple Filter Assembly (PC00) Schematic Diagram and Component Locations	6
7.5 Loudness Assembly (PF00) Schematic Diagram and Component Locations	6
7.6 ASO Protector Assembly (PN00) Schematic Diagram and Component Locations	7
7.7 Test Point Assembly (PJ00) Schematic Diagram and Component Locations	7
7.8 Tone Amp. Assembly (PE01) Schematic Diagram and Component Locations	8
7.9 Tone On-Off Assembly (PS00) Schematic Diagram and Component Locations	8
7.10 Pre-Amp. Assembly (P400) Schematic Diagram and Component Locations	9
7.11 Transistor Block Assembly (P401) Schematic Diagram and Component Locations	9
7.12 MC Transistor Block Assembly (PM01) Schematic Diagram and Component Locations	9
7.13 Head Phone Assembly (PX00) Schematic Diagram and Component Locations	10
7.14 A-B Detector Assembly (PL00) Schematic Diagram and Component Locations	11
7.15 A-B Power Switch Assembly (PK00) Schematic Diagram and Component Locations	11
7.16 Power Amp. Assembly (P600) Schematic Diagram and Component Locations	12
7.17 Mode/Balance/Vol. Assembly (PG00) Schematic Diagram and Component Locations	12
7.18 L.E.D. Power Ind. Assembly (PY00) Schematic Diagram and Component Locations	13
7.19 Phone Input Assembly (PV00) Schematic Diagram and Component Locations	13
8. EXPLODED VIEW AND PARTS LIST	14
9. ELECTRICAL PARTS LIST	21
10. TECHNICAL SPECIFICATIONS	30
11. SCHEMATIC DIAGRAM	32

MARANTZ MODEL Pm-6A STEREO PRE MAIN AMPLIFIER

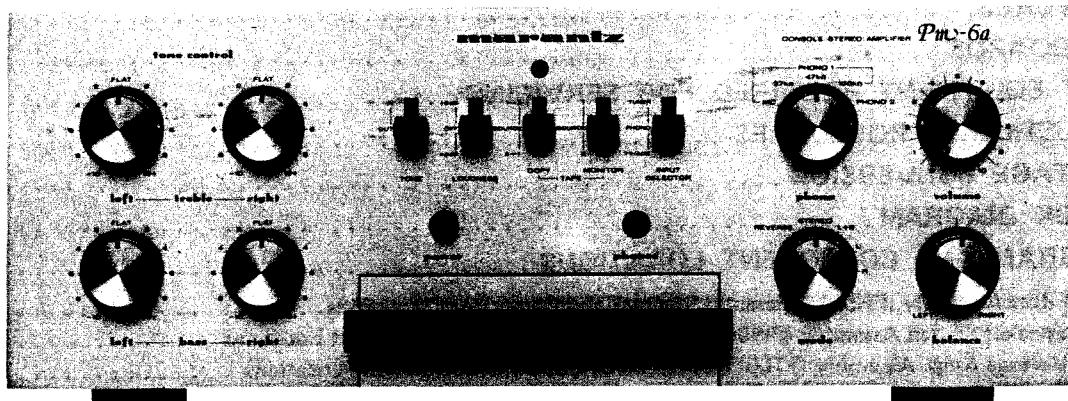

INTRODUCTION

This service manual was prepared for use by Authorized Warranty Stations and contains service information for the Marantz Model Pm-6a Stereo Pre Main Amplifier.

Servicing information and voltage data included in this manual are intended for use by knowledgeable and experienced personnel only. All instructions should be read carefully. No attempt should be made to proceed without a good understanding of circuitry operation.

The parts list furnishes complete ordering information. Most replacement parts should be ordered from the Marantz Company. However, a simple description is included for parts which can be obtained locally.

1. FEATURES

• MC Head Amplifier (13 transistors for each channel)

The first stage of the MC head amplifier is a push-pull amplifier consisting of 4 very low noise NPN transistors and 4 very low noise PNP transistors. The second stage is also a push pull amplifier, and the output stage is a SEPP amplifier.

The feedback circuit impedance is reduced as much as possible to improve the S/N ratio, and a voltage gain of 20 dB (10 times) is obtained at a rated input level of 125 μ V.

• PHONO Amplifier (11 transistors for each channel)

The PHONO amplifier uses a full push-pull circuit consisting of 11 transistors for each channel so that low TIM distortion and a high S/N ratio are obtained.

The first stage is a push-pull circuit consisting of very low noise, high Gm N and P channel FETs combined with a cascode current Miller circuit so that degradation of following stage characteristics due to input stage impedance fluctuation is prevented.

The second stage consists of an emitter follower buffer amplifier and a push-pull voltage amplifier.

The output stage uses a SEPP circuit which is adequate to drive any type of load. The equalizer elements have very low impedances compared with conventional circuits so a S/N ratio of 90 dB is obtained at the rated input level. The equalizer elements are metal film resistors with tolerances of 1% and polypropylene capacitors with tolerances of 2%; this makes it possible to obtain an RIAA phono equalization of ± 0.2 dB over the audio range from 20 Hz – 20 kHz.

Input impedances 27 kΩ, 47 kΩ and 100 kΩ are provided for different types of cartridges when the PHONO 1 input is selected.

The PHONO amplifier output circuit is provided with a relay to mute undesirable noise when the power is switched ON and OFF, and with a EQ subsonic filter to reduce turntable rumble and flutter.

• Quarter A System

The quarter A system automatically switches the bias current and supply voltage to the main amplifier by detecting the main amplifier input voltage and speaker current; thus, the main amplifier operates in class A when the power output is up to 30W/8Ω, and in class AB when the power output exceeds that level.

The phase correction circuit in the detection circuit prevents distortion from being generated even if a waveform with a sharp rising edge is applied.

Marantz's usual superb amplifier circuit has not been altered in this system, except that the detection circuit is connected to the signal system.

Voltage amplifier

The input circuit of the voltage amplifier is a source follower using a pair of FETs, so variation in the impedance of this stage does not influence following stage characteristics. The next circuit is a differential amplifier using a dual transistor, followed by an active balance loading circuit using a dual transistor.

One of the differential amplifier output signals is phase-inverted, then both signals are applied to the push-pull amplifier through the emitter follower buffer.

Power amplifier

The power amplifier employs triple Darlington connection and super high fT power transistors connected in parallel.

The power amplifier uses unique push-pull circuit with excellent open loop characteristics and a 2-pole phase compensation circuit, so the frequency response is flat even at high frequencies and TIM distortion is reduced remarkably.

Other features

The speaker protection circuit uses a high performance IC and relay. The power supply circuit uses a large transformer with high regulation and newly developed, large capacity custom electrolytic capacitors.

To obtain continuous high power output, high efficiency heat pipes are used to radiate the heat produced by the power transistors.

2. P.W. BOARDS

As can be seen from the circuit diagram the chassis of Model Pm-6a consists of the following units. Each unit mounted on a printed circuit board is described within the square enclosed by a bold dotted line on the circuit diagram.

1. Pre-Amp. mounted on P.W. Board P400
2. Transistor Block mounted on P.W. Board P401
3. Power Amp. mounted on P.W. Board P600
4. Voltage Amp. mounted on P.W. Board P700
5. Ripple Filter mounted on P.W. Board PC00
6. Tone Amp. mounted on P.W. Board PE01
7. Loudness mounted on P.W. Board PF00
8. Mode/Balance/Vol. mounted on P.W. Board PG00
9. Filter mounted on P.W. Board PH00
10. Test Point mounted on P.W. Board PJ00
11. A-B Power Switch mounted on P.W. Board PK00
12. A-B Detector mounted on P.W. Board PL00
13. MC Transistor Block mounted on P.W. Board PM01
14. ASO Protector mounted on P.W. Board PN00
15. Tone On-Off mounted on P.W. Board PS00
16. Phone Input mounted on P.W. Board PV00
17. Speaker Switch mounted on P.W. Board PW00
18. Head Phone mounted on P.W. Board PX00
19. L.E.D. Power Ind. mounted on P.W. Board PY00

3. TEST EQUIPMENT REQUIRED FOR SERVICING

This table lists the test equipment required for servicing the Model Pm-6a Stereo Pre Main Amplifier.

Item	Use
Distortion Analyzer	Distortion measurements
Audio Oscillator	Sinewave and squarewave signal source
AC VTVM	Voltage measurements (AC)
Oscilloscope	Waveform analysis and trouble shooting and ASO alignment
Circuit Tester	Trouble shooting
DC VTVM	Voltage measurements (DC)
AC Wattmeter	Monitors primary power to amplifier
Line Voltmeter	Monitors potential of primary power to amplifier
Variable Autotransformer (0 ~ 140V AC, 10A)	Adjust level of primery power to amplifier
Shorting Plug	Shorts amplifier input to eliminate noise pickup

4. ADJUSTMENT PROCEDURES

• Bias Current Adjustment

(1) Class B

Connect JL15 and JL12 with a jumper.

Parts adjusted: RL43 and RL44

Input: —

Output: 8Ω load

Adjustment: Connect a digital voltmeter between JJ01 and JJ02 (for the L channel) or between JJ03 and JJ04 (for the R channel). Wait until the voltage stabilizes (30–60 seconds), then adjust RL43 or RL44 so that the voltmeter reads 14 mV.

(2) Class A

Parts adjusted: RL39 and RL40

Input: —

Output: 8Ω load

Adjustment: Connect a digital voltmeter between JJ01 and JJ02 (for the L channel) or between JJ03 and JJ04 (for the R channel). Wait until the voltage stabilizes (30–60 seconds), then adjust RL43 or RL44 so that the voltmeter reads 370 mV.



5. VOLTAGE CONVERSION

• EUROPEAN MODEL ONLY

To convert the unit to a different power source voltage, change the position as illustrated in the drawing below.


CAUTION
DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE.

Voltage Conversion Chart

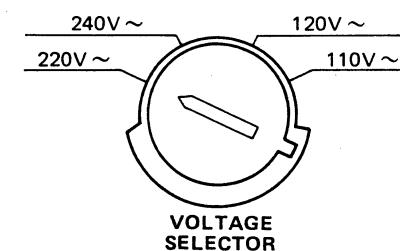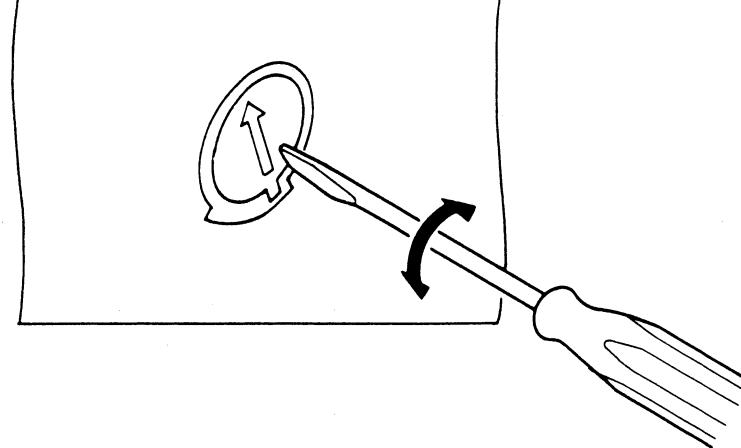


Note on safety: Symbol Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

6. BLOCK DIAGRAM

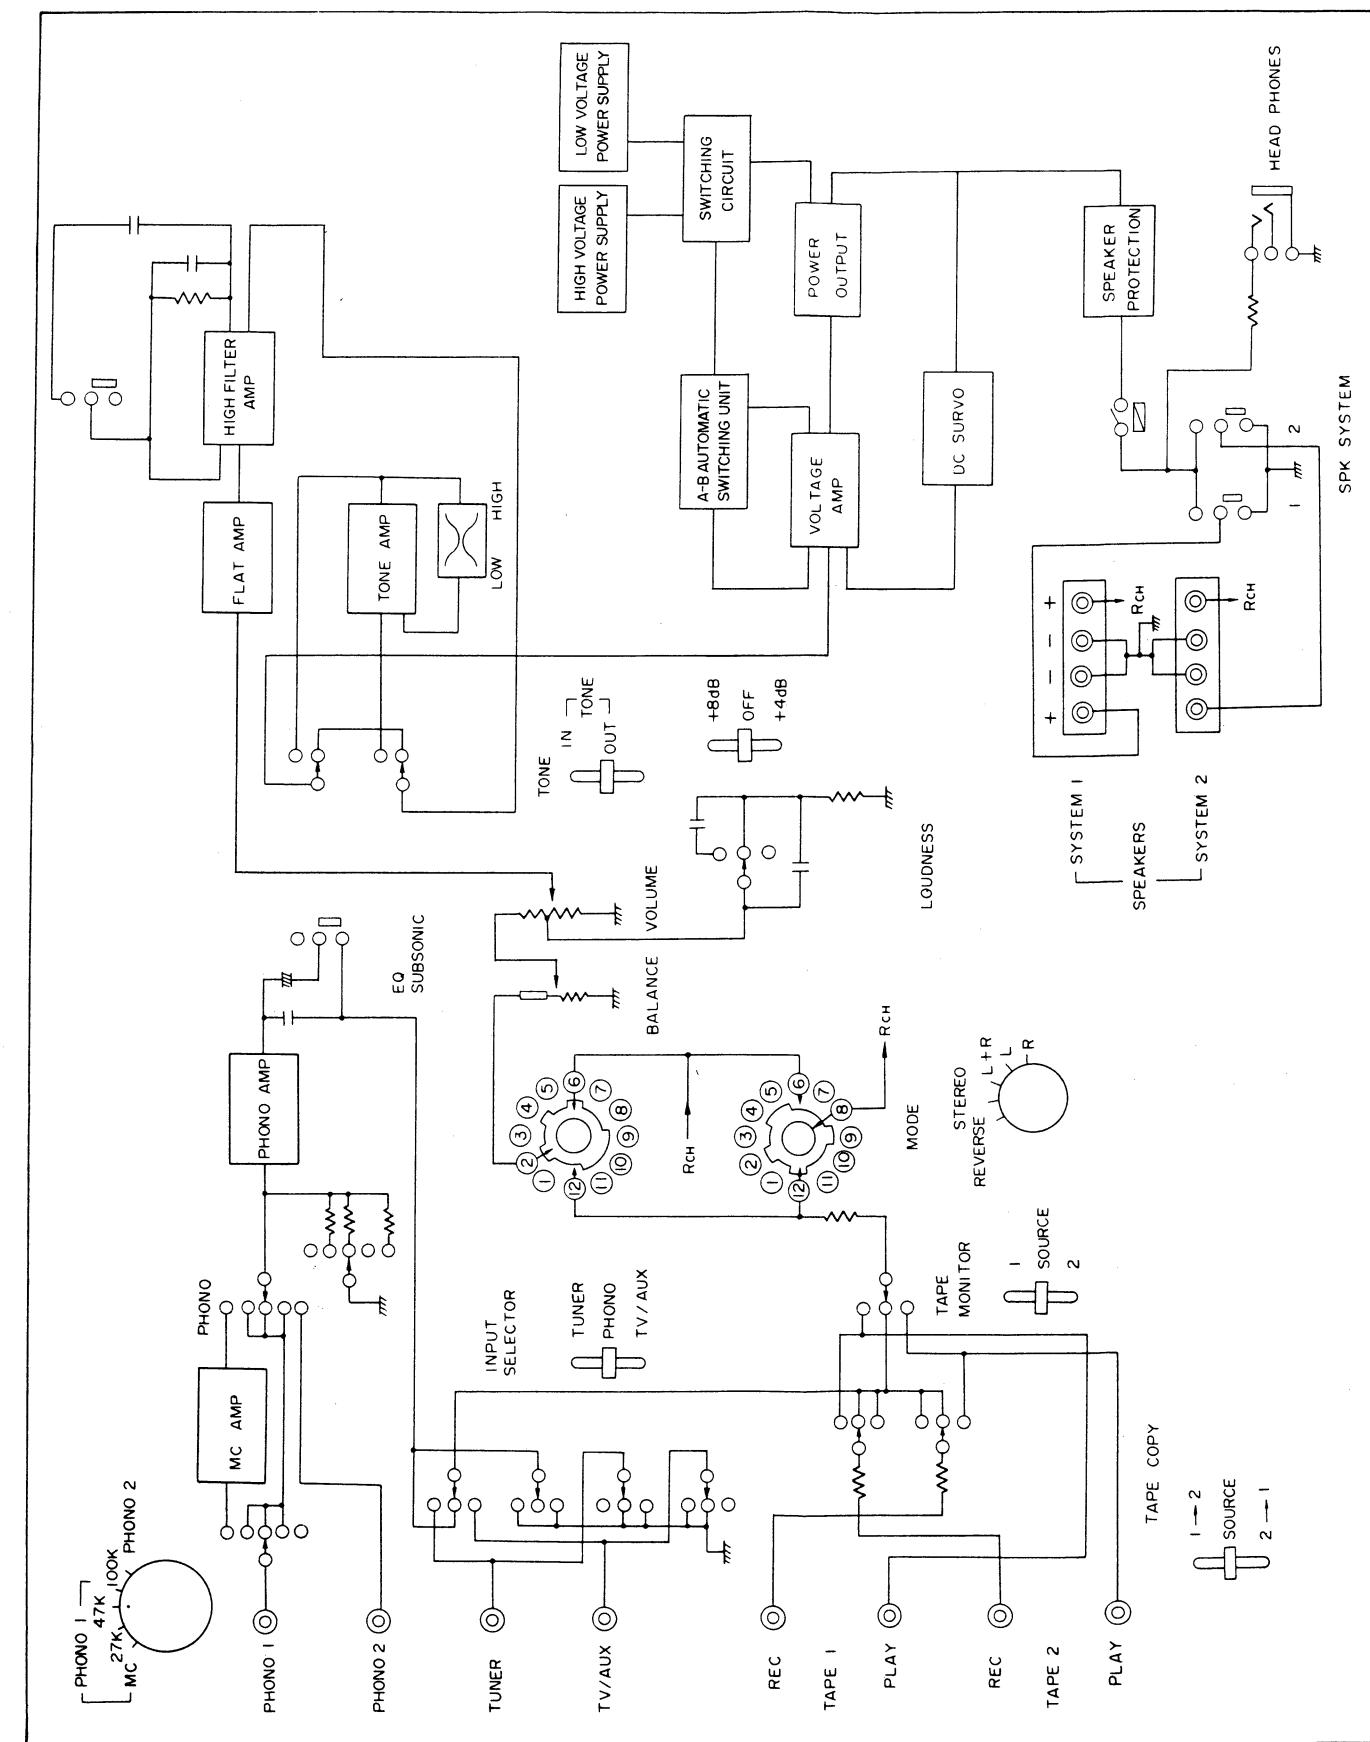


7. DIAGRAM AND COMPONENT LOCATIONS



7.1 Filter Assembly (PH00) Schematic Diagram and Component Locations

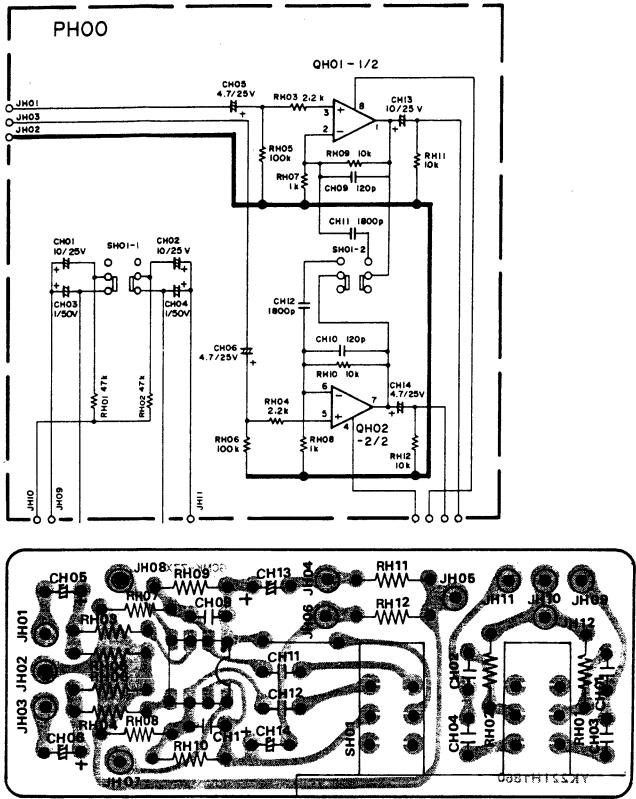


7.2 Speaker Switch Assembly (PW00) Schematic Diagram and Component Locations

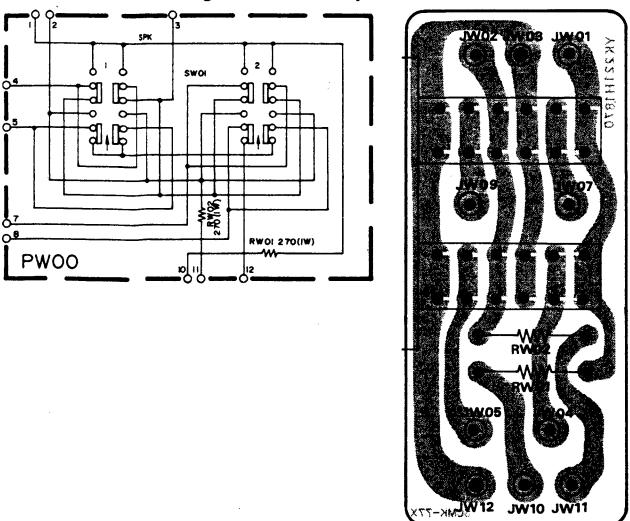


7.3 Voltage Amp. Assembly (P700) Schematic Diagram and Component Locations

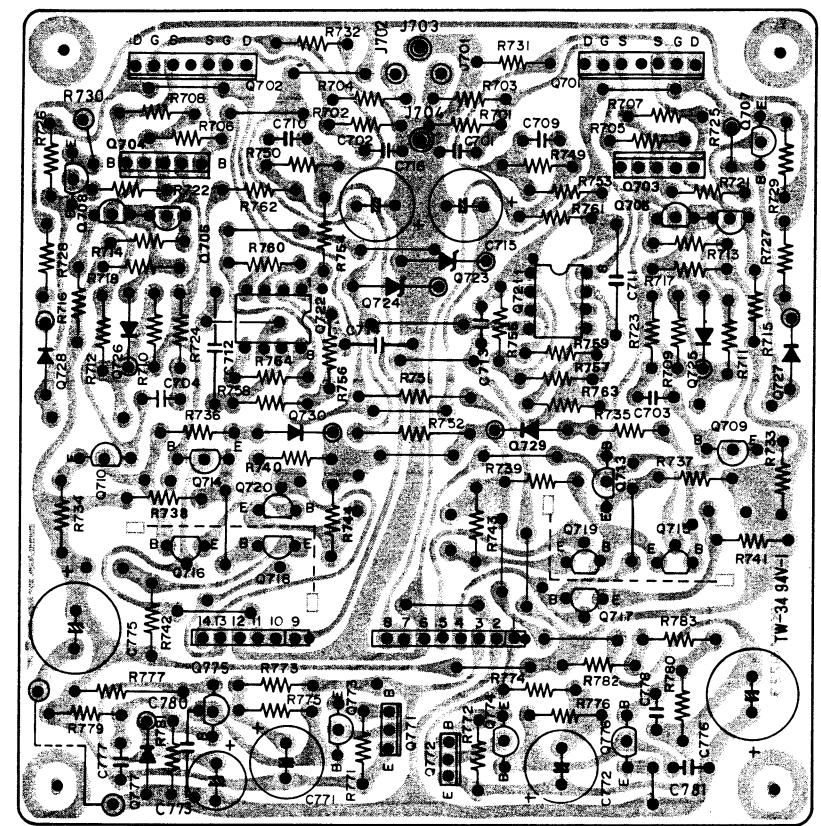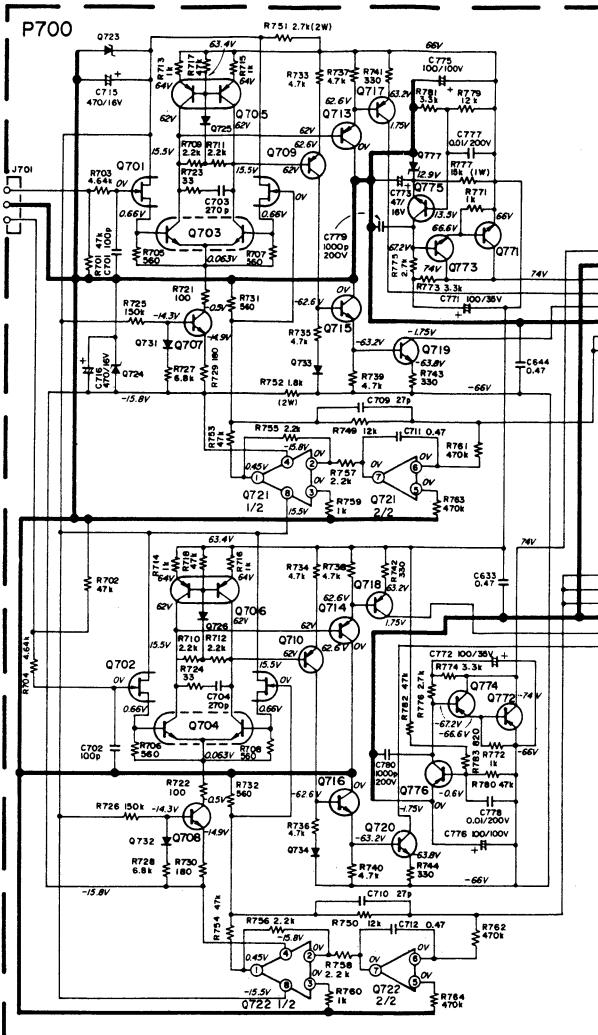


7.6 ASO Protector Assembly (PNO0) Schematic Diagram and Component Locations

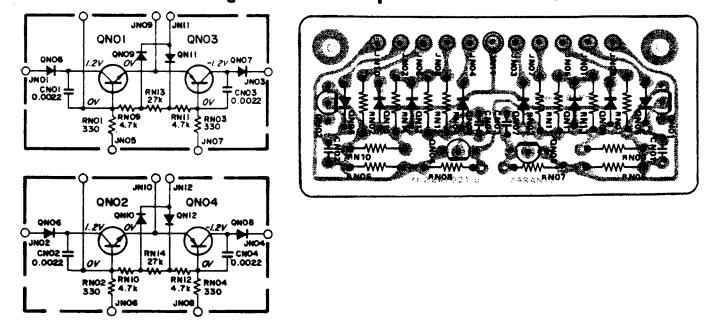


7.4 Ripple Filter Assembly (PC00) Schematic Diagram and Component Locations

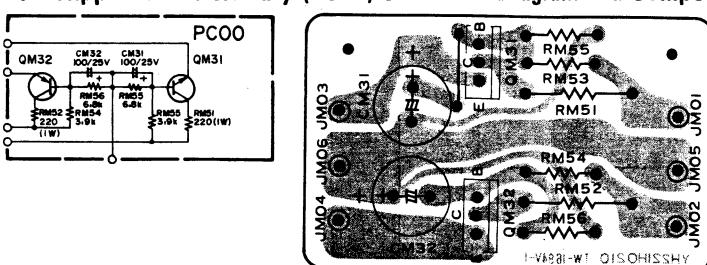


7.5 Loudness Assembly (PF00) Schematic Diagram and Component Locations

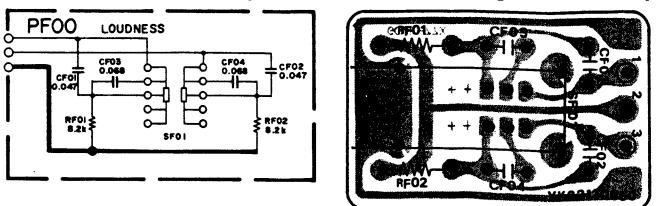


7.7 Test Point Assembly (PJ00) Schematic Diagram and Component Locations

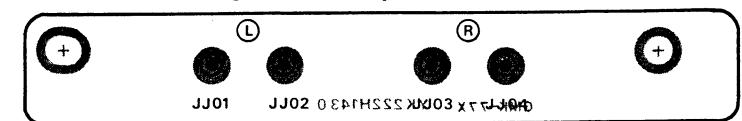


7.8 Tone Amp. Assembly (PE01) Schematic Diagram and Component Locations

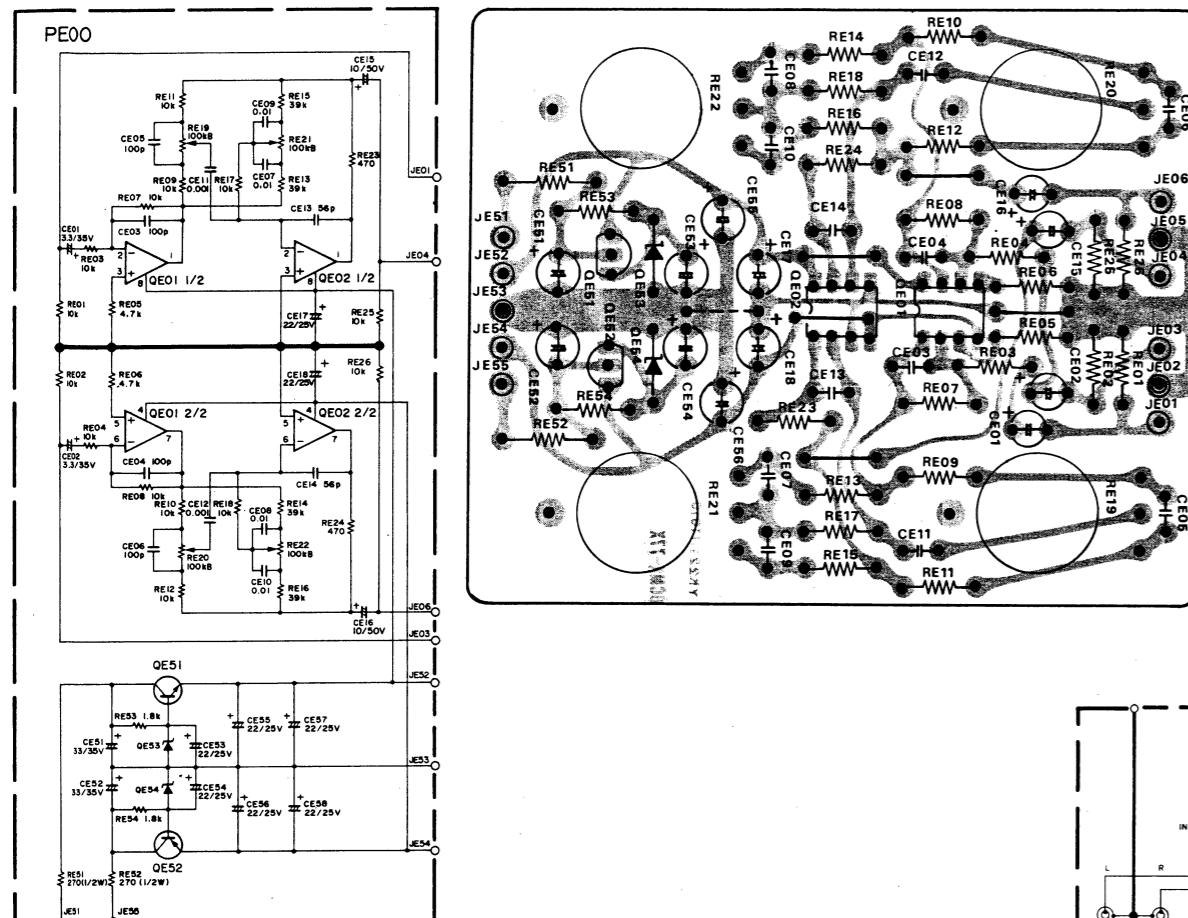


7.9 Tone On-Off Assembly (PS00) Schematic Diagram and Component Locations

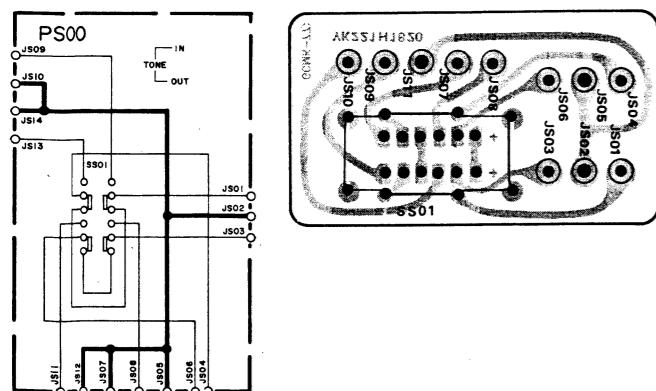


P400

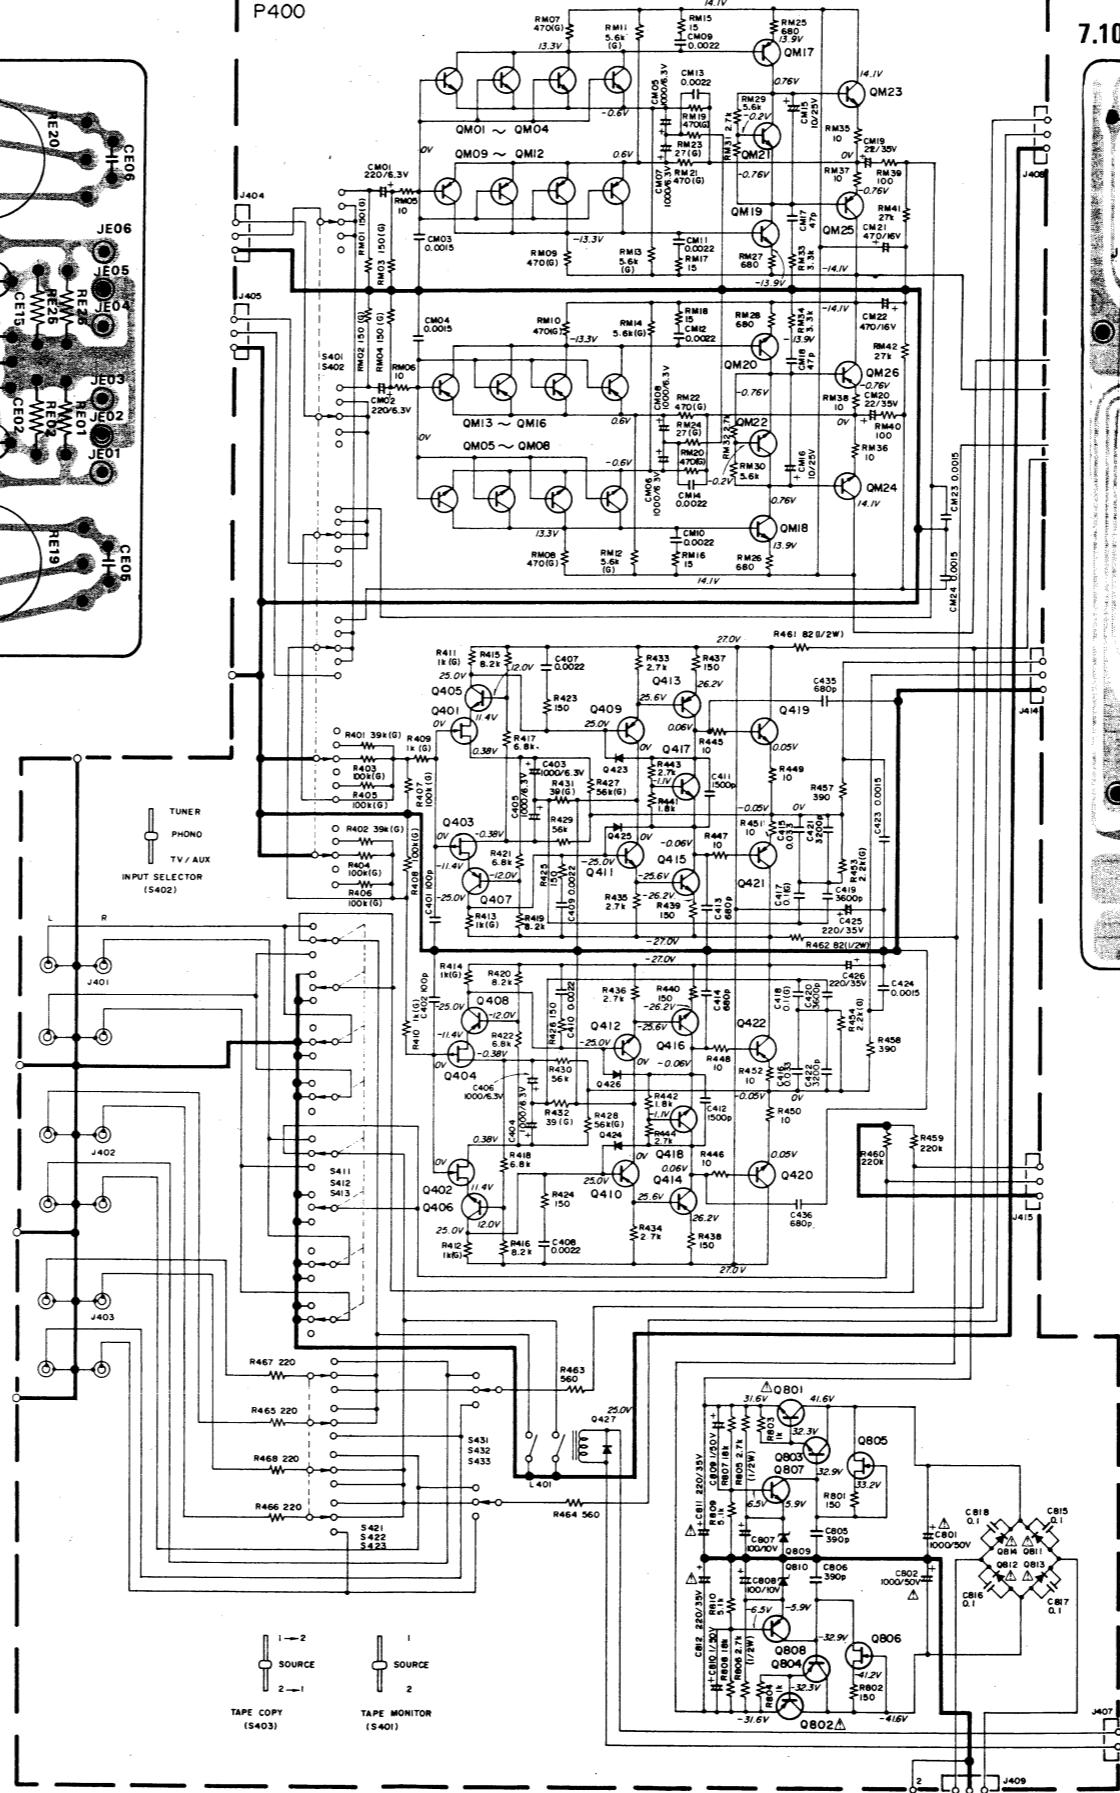


7.10 Pre-Amp. Assembly (P400) Schematic Diagram and Component Location

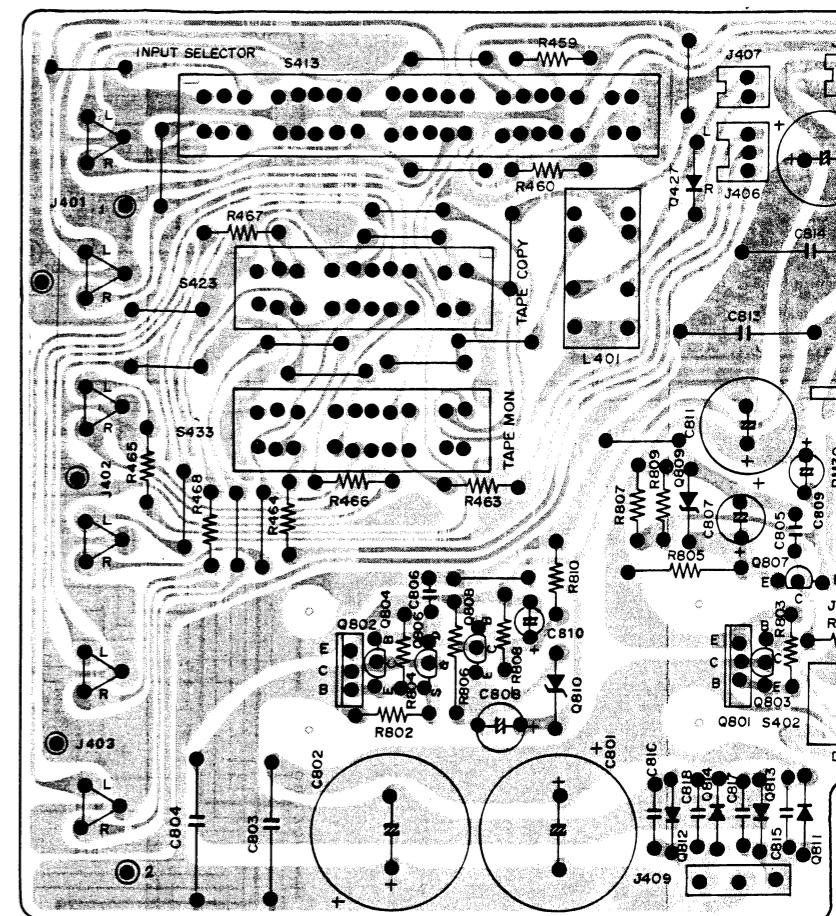


**7.11 Transistor Block Assembly (P401)
Schematic Diagram and Component Locations**

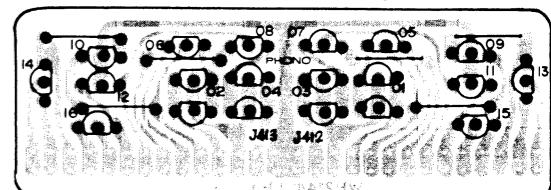


**7.12 MC Transistor Block Assembly (PM01)
Schematic Diagram and Component Locations**

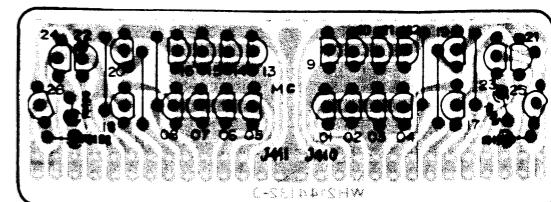


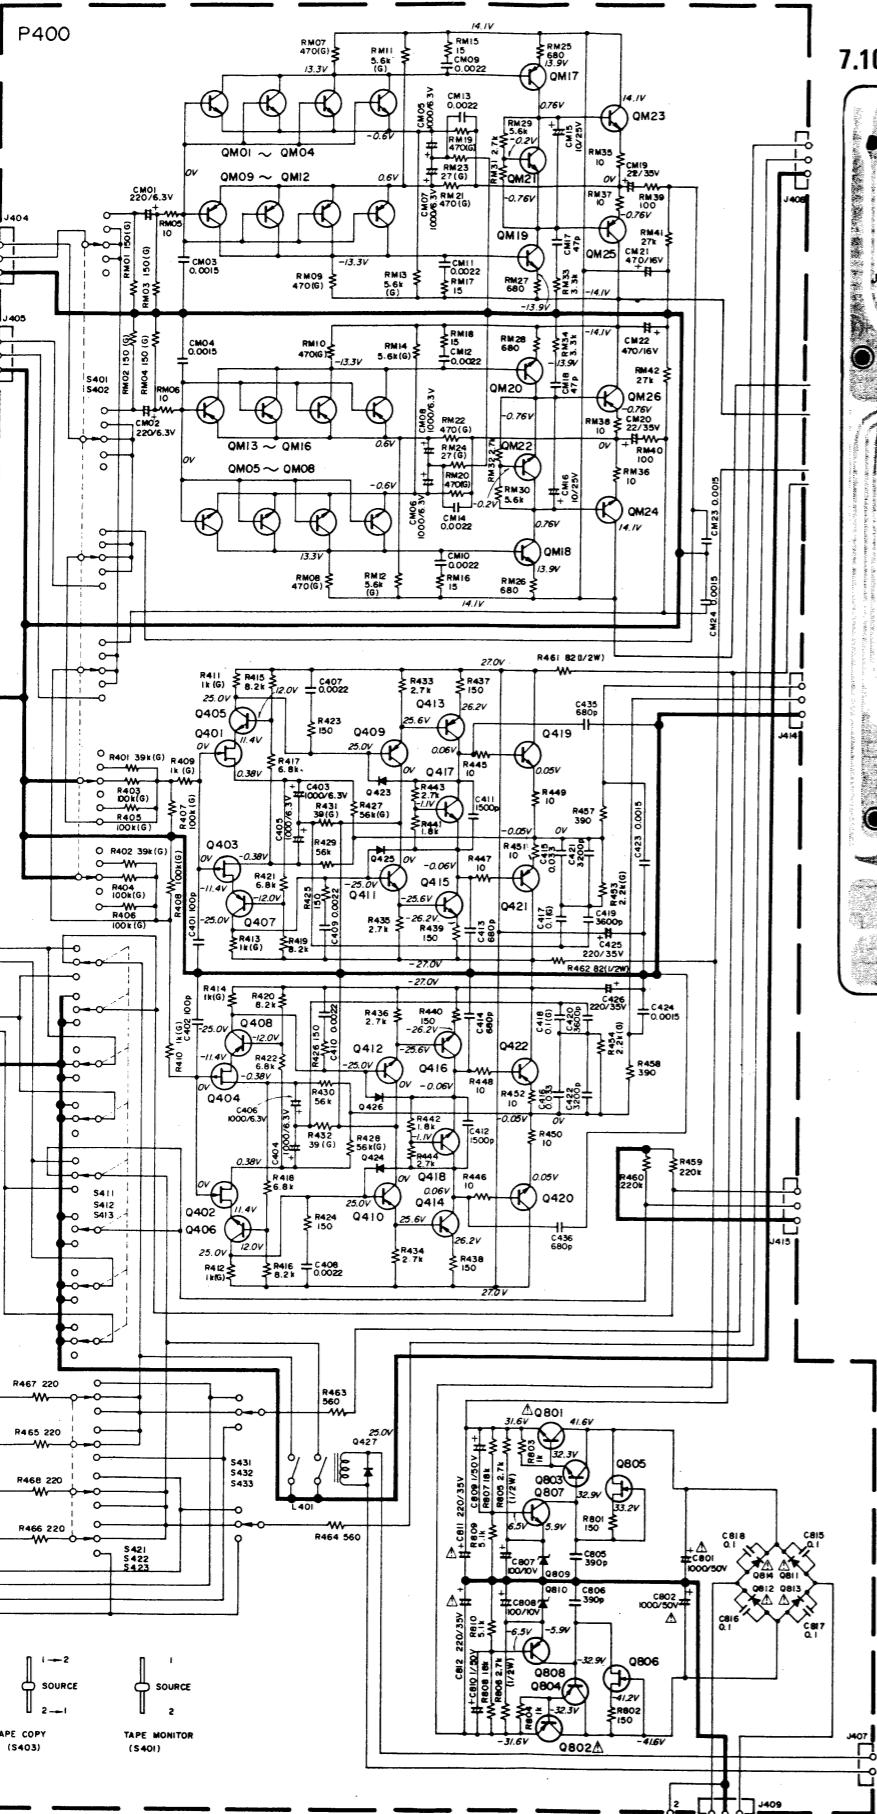


7.10 Pre-Amp. Assembly (P400) Schematic Diagram and Component Locations

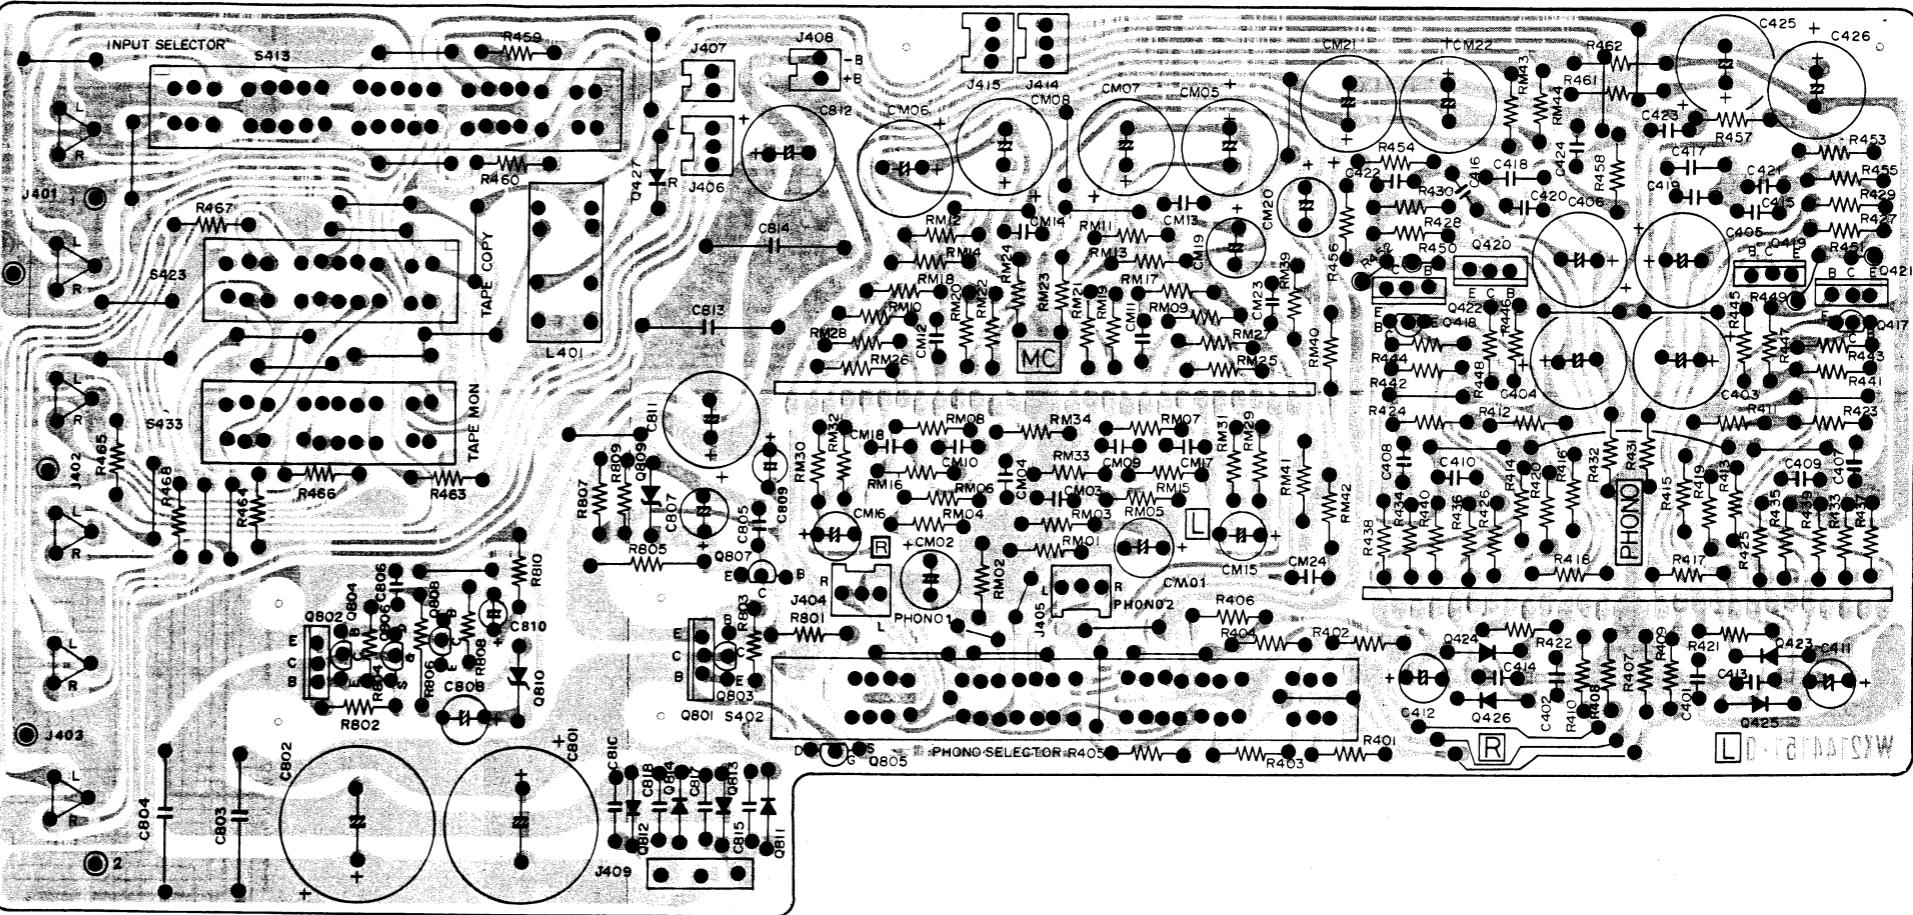


**7.11 Transistor Block Assembly (P401)
Schematic Diagram and Component Locations**

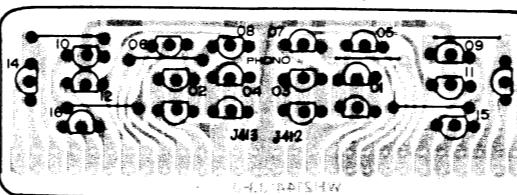



**7.12 MC Transistor Block Assembly (PM01)
Schematic Diagram and Component Locations**

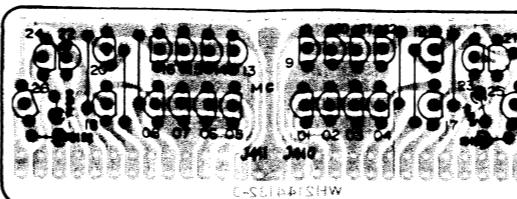



**7.13 Head Phone Assembly (PX00)
Schematic Diagram and Component Locations**

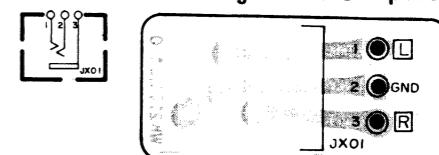



7.14 A-B Detector Assembly (PL00) Schematic Diagram and Component Locations

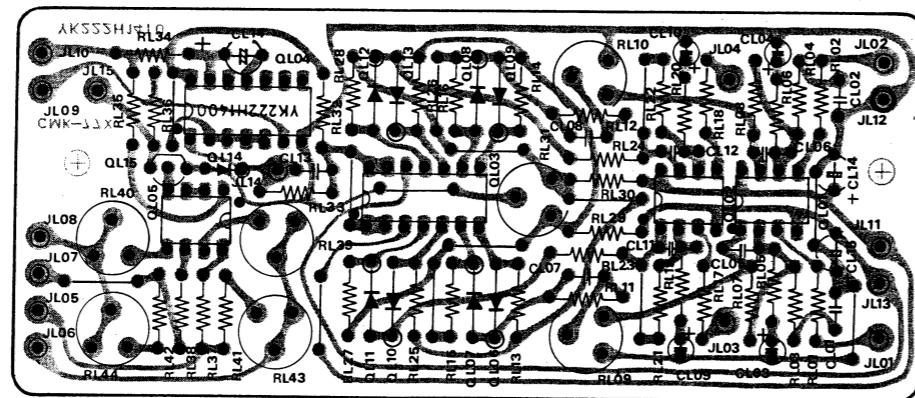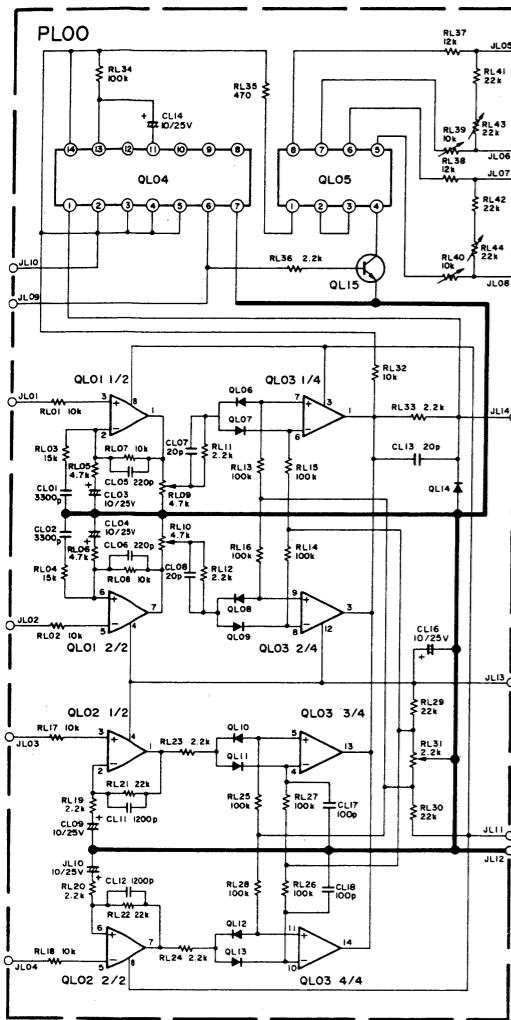



7.15 A-B Power Switch Assembly (PK00) Schematic Diagram and Component Locations

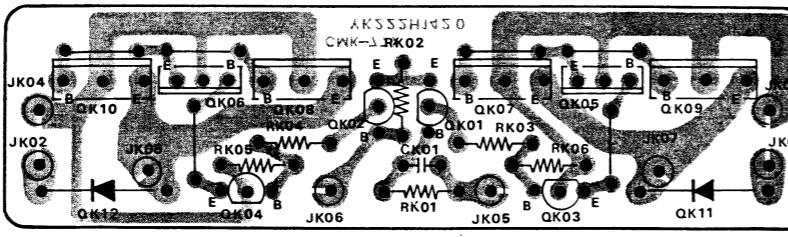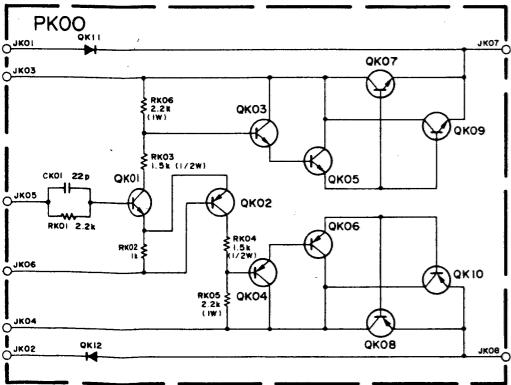


7.16 Power Amp. Assembly (P600) Schematic Diagram and Component Locations

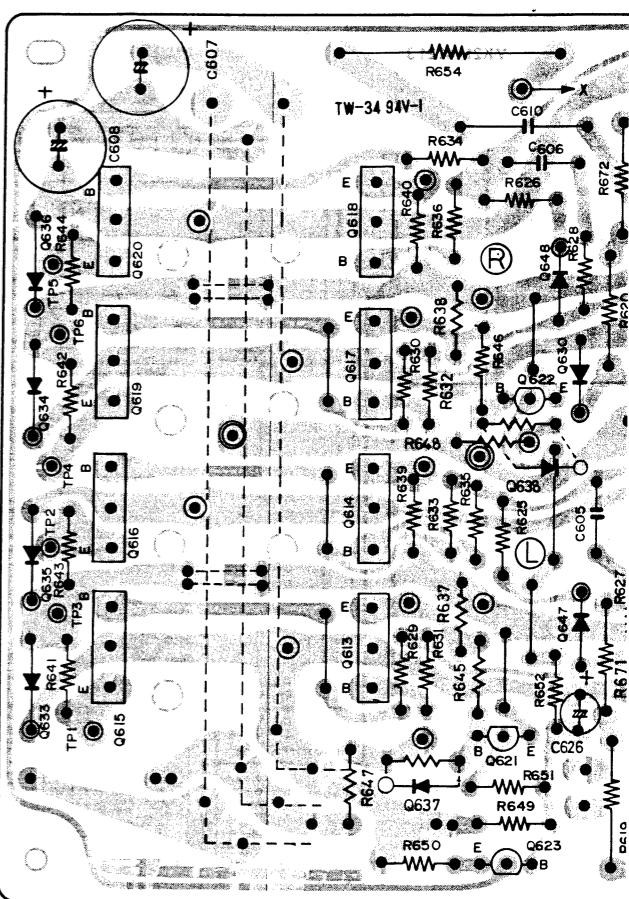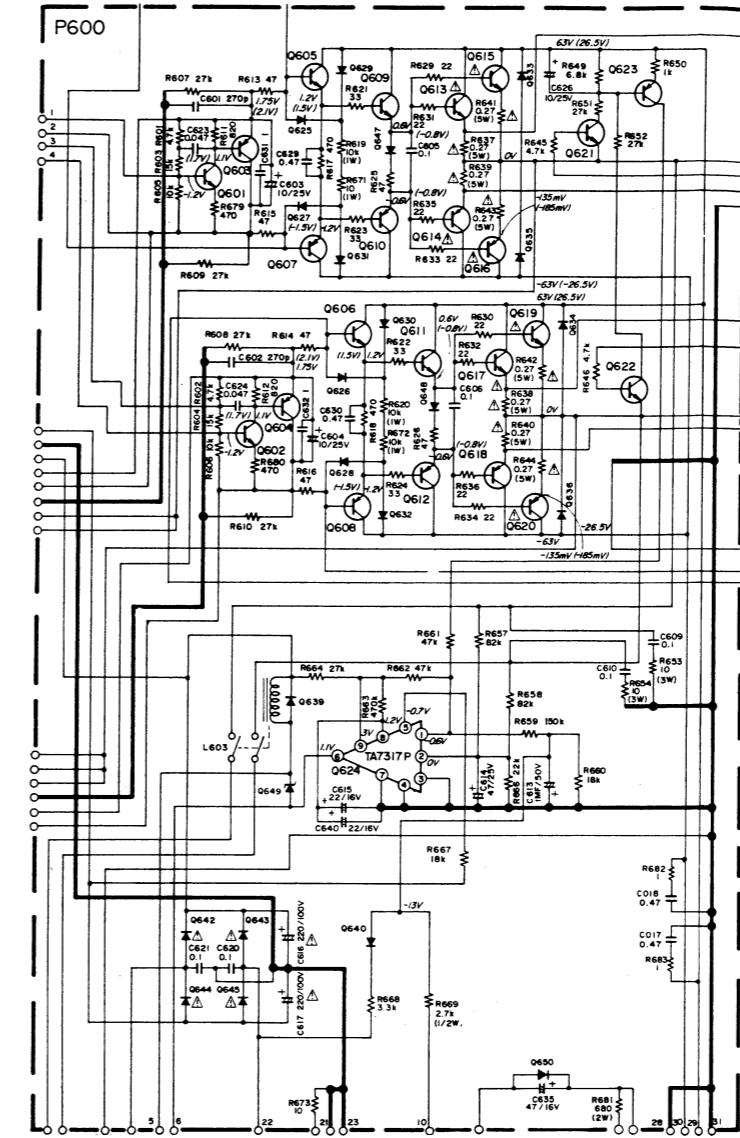


7.17 Mode/Balance/Vol. Assembly (PG00) Schematic Diagram and Component Locations

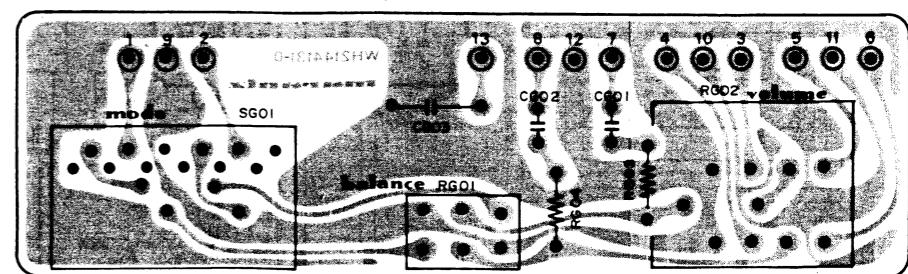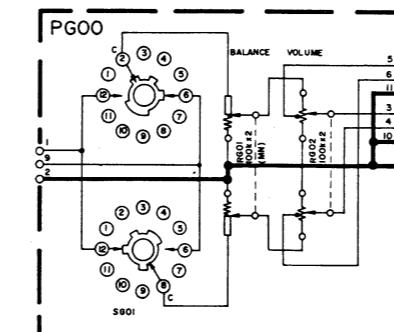


7.16 Power Amp. Assembly (P600) Schematic Diagram and Component Locations

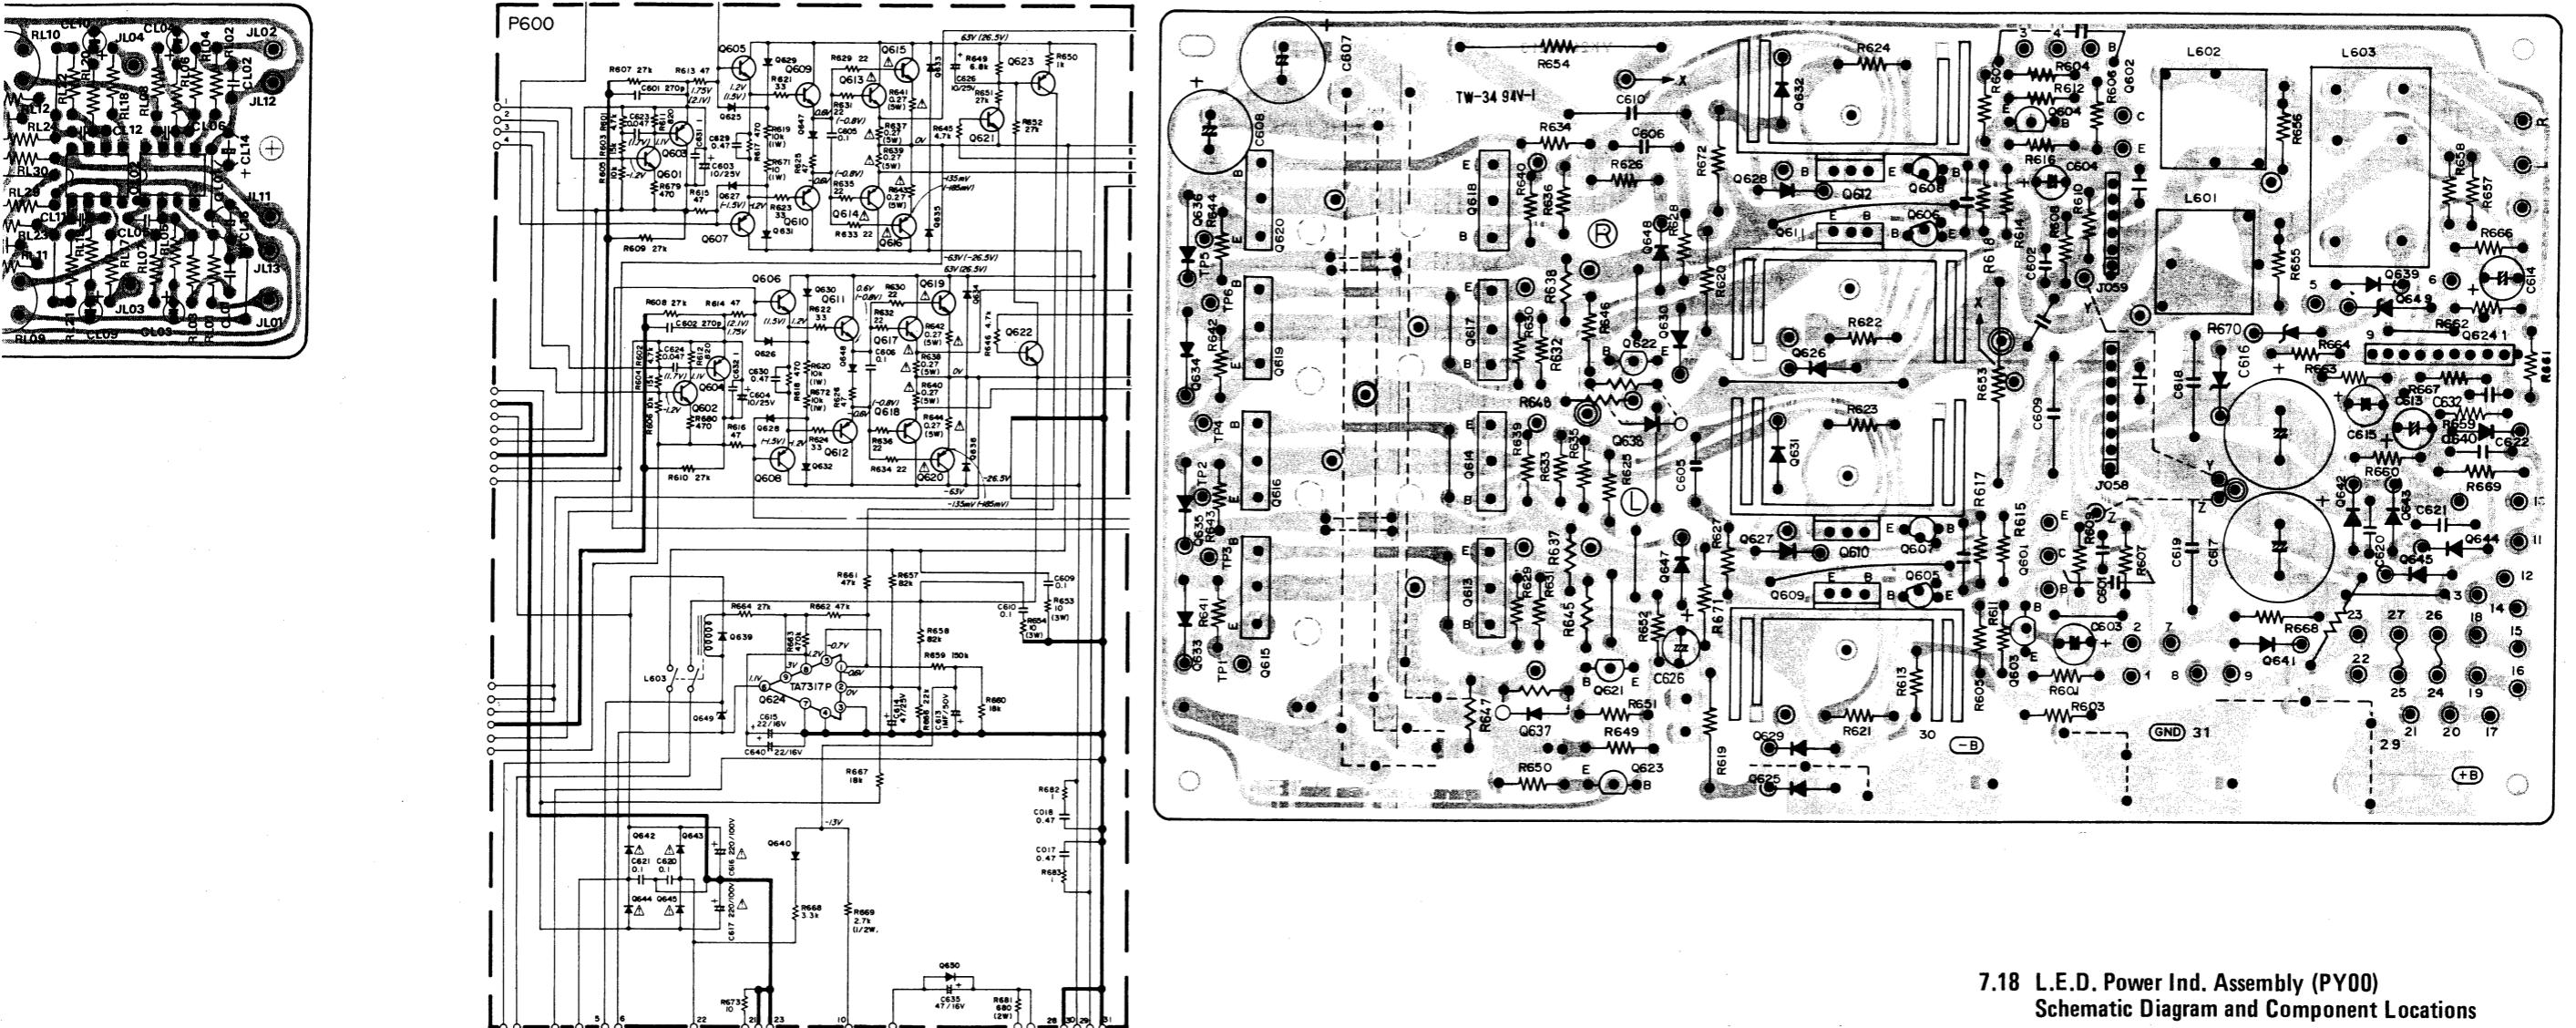


**7.18 L.E.D. Power Ind. Assembly (PY00)
Schematic Diagram and Component Locations**

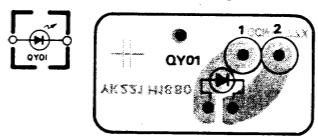

7.17 Mode/Balance/Vol. Assembly (PG00) Schematic Diagram and Component Locations

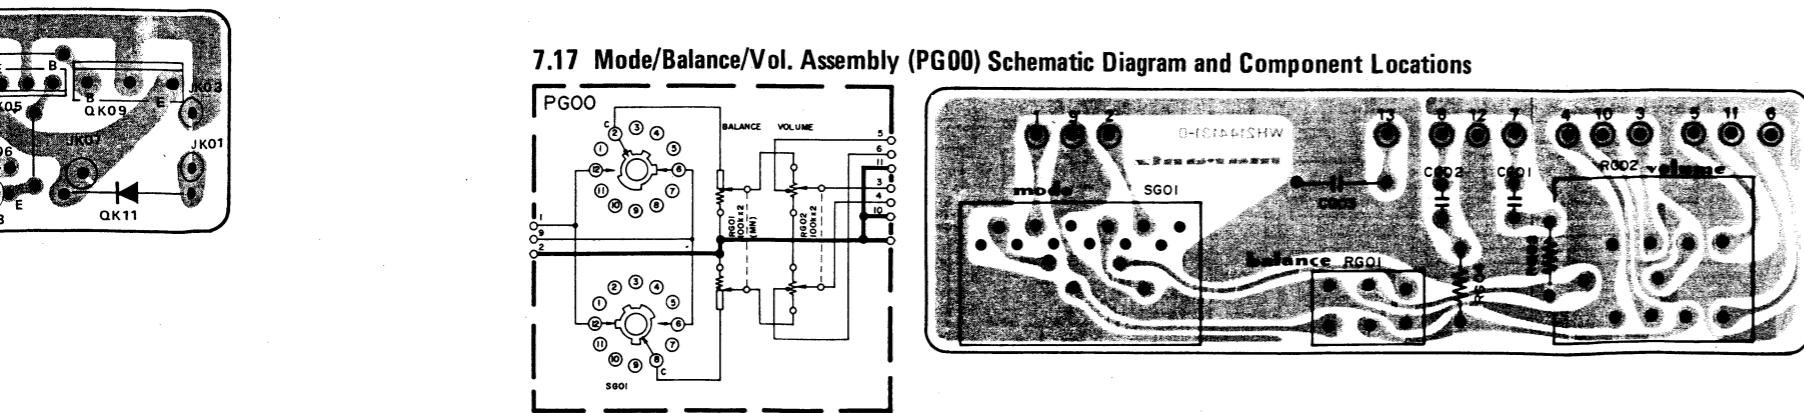


**7.19 Phone Input Assembly (PV00)
Schematic Diagram and Component Locations**

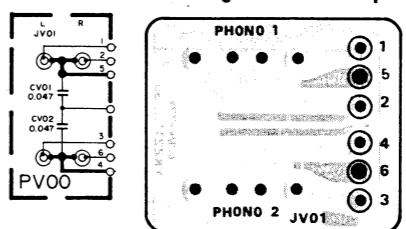

8. EXPLODED VIEW AND PARTS LIST

- [C01-99] Front Panel

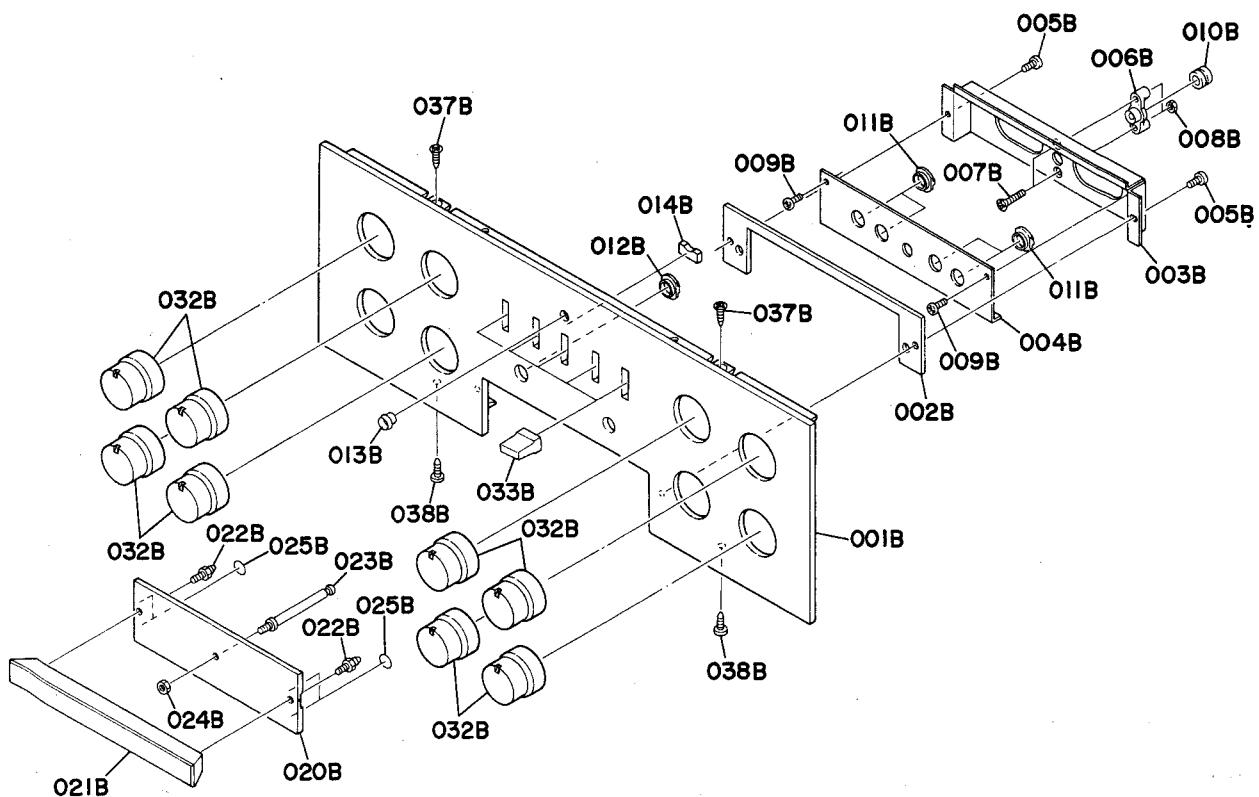


• (E): for Europe
• (F): for Japan

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
A	1	1	221H063400	Front Panel Assembly
001B	1	1	221H063010	Escutcheon, Front Panel
002B	1	1	2461063030	Escutcheon, Pocket Frame
003B	1	1	2144160020	Bracket
004B	1	1	221H063020	Escutcheon, Pocket Panel
005B	2	2	51060305A9	P.H.M. Screw P3 x 5
006B	1	1	2461271010	Holder
007B	2	2	51042610A0	F.H.M. Screw F2.6 x 10
008B	2	2	53112603A0	Hexagon Nut
009B	2	2	51100204E0	B.H.M. Screw B2 x 4
010B	1	1	1143259010	Bushing, Pin Holder
011B	4	4	2978259110	Bushing, Push Switch
012B	1	1	2978259010	Bushing, Power Switch
013B	1	1	2462259010	Bushing, LED

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
B	1	1	2461063440	Pocket Cover Assembly
020B	1	1	2461063050	Escutcheon, Pocket Cover
021B	1	1	2461253210	Handle
022B	2	2	2461254010	Pin
023B	1	1	2461254020	Pin
024B	1	1	53110303E9	Hexagon Nut
025B	4	4	2461107020	Sheet
014B	1	1	2112053030	Cover
032B	8	8	227H154010	Knob
033B	5	5	2144154010	Knob, Lever Switch
037B	2	2	51500306B0	F.H. Tapped Screw F3 x 6
038B	2	2	51280308U0	B.H. Tapped Screw B3 x 8

- [C02-99] Top Cover

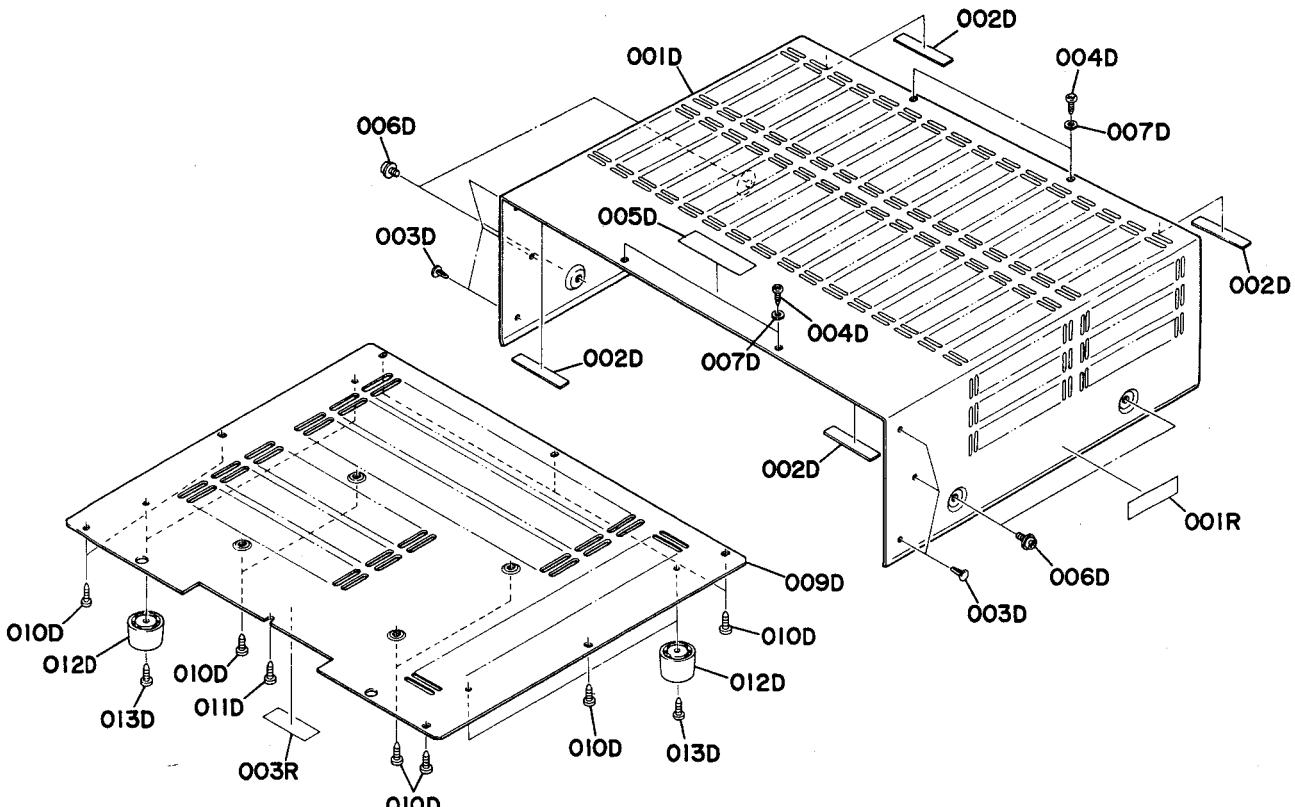


- (E): for Europe
- (F): for Japan

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	
	E	F			
001D	1	1	2461257010	Lid, Top Cover	
002D	4	4	2965118010	Spacer	
003D	6	6	2991259110	Bushing	
004D	4	4	51260308Z0	Tapped Screw	3 x 8
005D	1		222H861020	Label	
005D		1	222H861010	Label	
006D	4	4	51480406Z9	F. Washer Screw	4 x 6
007D	4	4	59030805SO	Washer	

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	
	E	F			
009D	1	1	2144257010	Lid, Bottom Cover	
010D	11	11	51280410U0	B.H. Tapped Screw	B4 x 10
011D	1	1	51280406U0	B.H. Tapped Screw	B4 x 6
012D	4	4	2759057010	Leg	
013D	4		51570410U0	P. Taptite Screw	P4 x 10
013D		4	51570410S0	P.Taptite Screw	P4 x 10
001R	1		2911861140	Label	
003R	1		2911861110	Label	

- [C03-99] Rear Panel

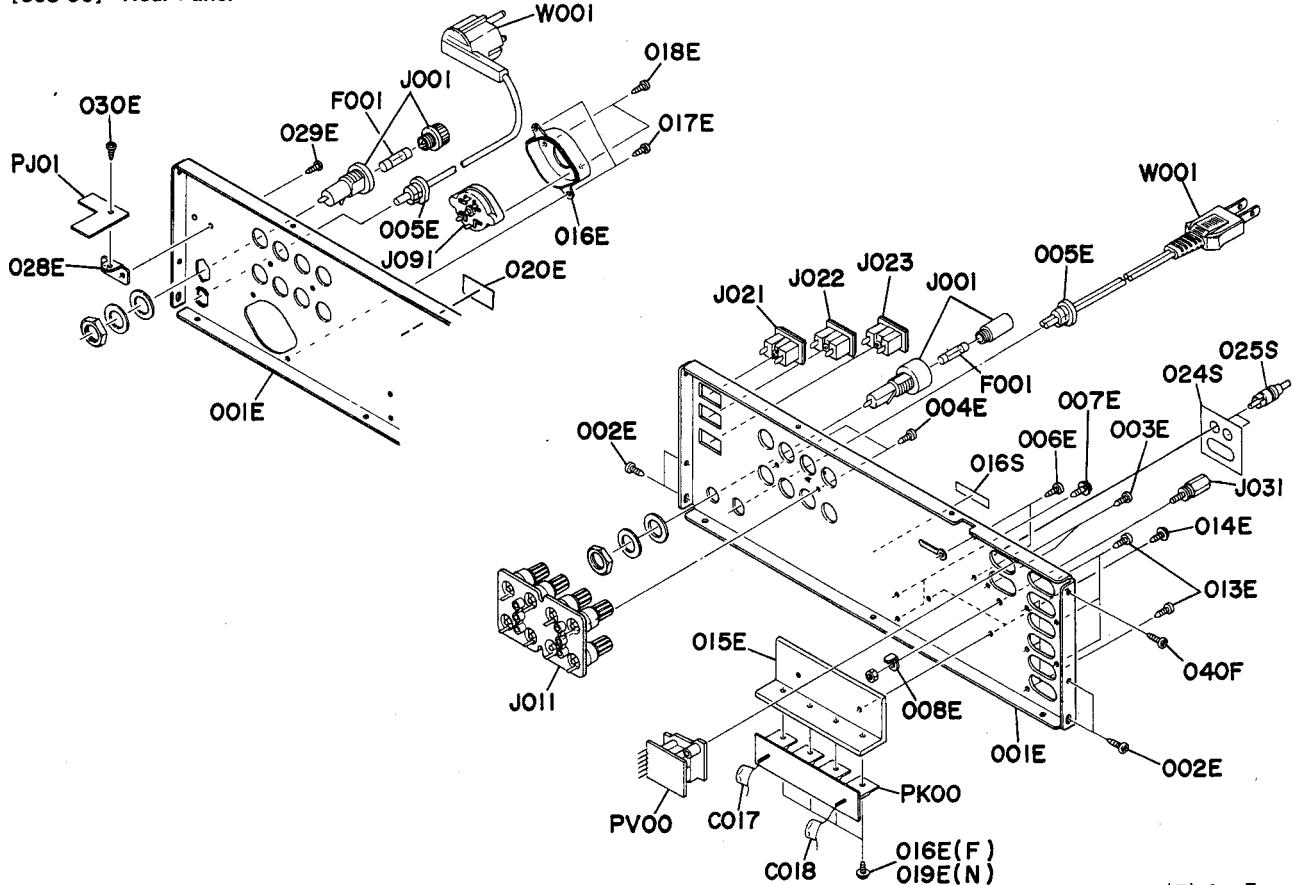


- (E): for Europe
- (F): for Japan

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	
	E	F			
001E	1		221H160220	Bracket, Rear Panel	
001E	1		221H160210	Bracket, Rear Panel	
002E	4	4	51100308S9	B.H.M. Screw	B3 x 8
003E	2	2	51280308U0	B.H. Tapped Screw	B3 x 8
004E	2	2	51280308U0	B.H. Tapped Screw	B3 x 8
005E	1		1455259040	Bushing	
005E	1		1455259090	Bushing	
006E	2	2	51280308U0	B.H. Tapped Screw	B3 x 8
007E	2	2	51260308Z0	B.T. Screw	B3 x 8
008E	1	1	62040029W0	Lug	
013E	6	6	51280308U0	B.H. Tapped Screw	B3 x 8
014E	2	2	51260308Z0	B.T. Screw	B3 x 8
015E	1	1	221H267010	Heatsink	
016E	1		201H053030	Cover, Voltage Selector	
016E	4		51780312Z0	Fin Neck B.T. Screw	B3 x 8
017E	2		51280308U0	B.H. Tapped Screw	B3 x 8
018E	2		51280310U0	B.T. Screw	B3 x 10
019E	4		51780312Z0	Fin Neck B.T. Screw	B3 x 8
020E	1		4581861010	Label	
028E	1		404H160030	Bracket	
029E	1		51280308U0	B.H. Tapped Screw	B3 x 8
030E	1		51280308B0	B.H. Tapped Screw	B3 x 8
040F	1	1	51280308B0	B.H. Tapped Screw	B3 x 8
016S	1	1	2112265010	Indicator	

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
C017	1	1	DF17474510	Film Cap. 0.47μF ±20%
C018	1	1	DF17474510	Film Cap. 0.47μF ±20%
△F001	1		FS10400600	Fuse, 4A
△F001		1	FS10800600	Fuse, 8A
△J001	1		YJ08000290	Jack, Fuse Holder
△J001		1	YJ08000300	Jack, Fuse Holder
J011	1	1	YT01080030	Terminal, Speaker System
△J021	1		YJ04000950	Jack, AC Outlet
△J022	1		YJ04000950	Jack, AC Outlet
△J023		1	YJ04000950	Jack, AC Outlet
J031	1	1	YT01010050	Terminal, GND
△J091	1		BY05080010	Voltage Selector
△W001	1		YC01800220	A.C. Power Cord
△W001		1	YC02400180	A.C. Power Cord
024S	1	1	2147863010	Hang Tag
025S	2	2	YQ01000020	Shote Plug

• [P01-99] Front Chassis and General Parts

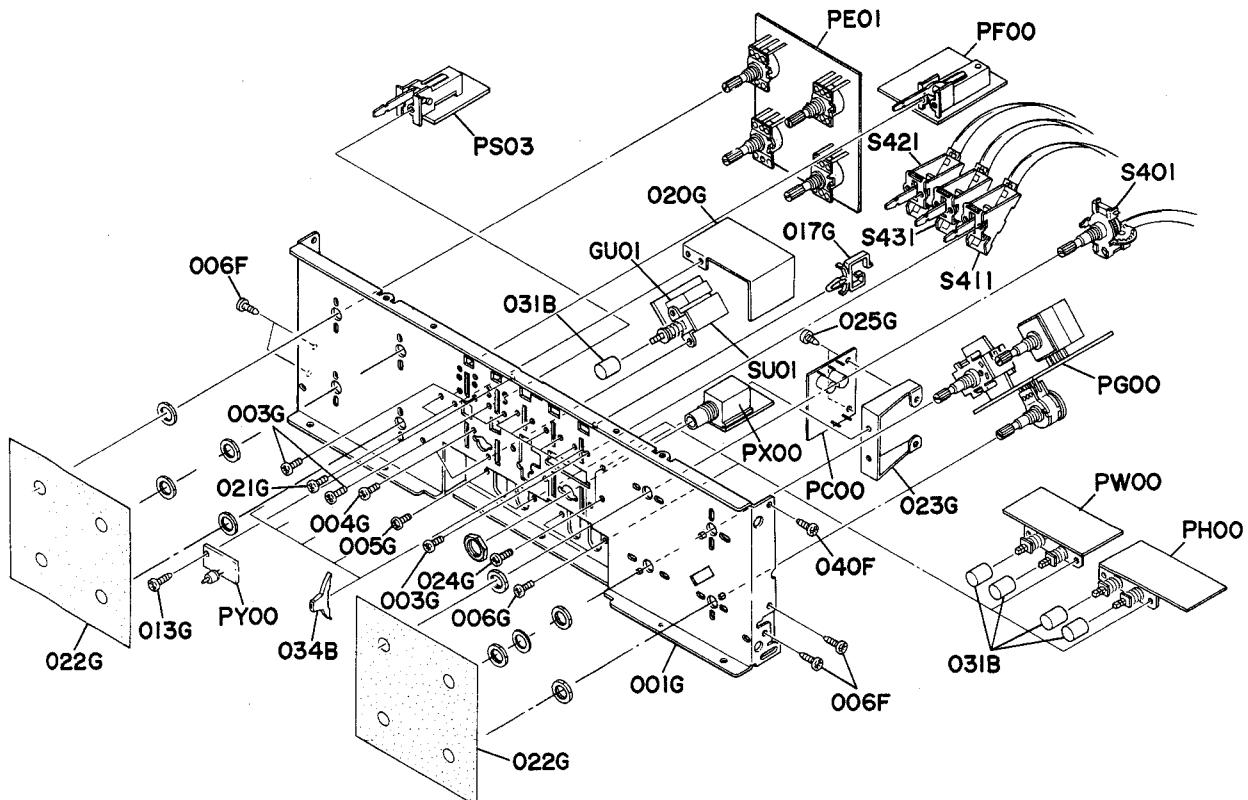


• (E): for Europe
 • (F): for Japan

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
031B	5	5	2970154630	Knob, Push Switch
034B	5	5	2144259110	Bushing, Lever Switch
006F	4	4	51260308Z0	B.T. Screw B3 x 8
040F	1	1	51280308B0	B.H. Tapped Screw B3 x 8
001G	1	1	2144160010	Bracket, Front Chassis
003G	10	10	51100306A9	B.H.M. Screw B3 x 6
004G	2	2	51100306A9	B.H.M. Screw B3 x 6
005G	2	2	51100306A9	B.H.M. Screw B3 x 6
006G	2	2	51100306A9	B.H.M. Screw B3 x 6
013G	2	2	51280308B0	B.H. Tapped Screw B3 x 8
017G	1	1	2129005010	Clamper
020G	1	1	2144109020	Shield
021G	2	2	51100306A9	B.H.M. Screw B3 x 6
022G	2	2	223H303010	Mask
023G	1	1	403H160040	Bracket
024G	2	2	51280308B0	B.H. Tapped Screw B3 x 8
025G	2	2	51280308B0	B.H. Tapped Screw B3 x 8

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
S401	1	1	SR00050110	Rotary Switch, Phone Selector
S411	1	1	SC00030010	Switch, Input Selector
S421	1	1	SC00030010	Switch, Tape Copy
S431	1	1	SC00030010	Switch, Tape Monitor
△SU01	1		SP01010410	Push Switch Power
△SU01		1	SP01010540	Push Switch Power
△GU01	1		DK18103840	Ceramic 0.01μF
△GU01		1	BF10400030	Cap. Comp. 0.1μF +120Ω


- [P02-99] Main Amp. P.W. Board and Heatsink

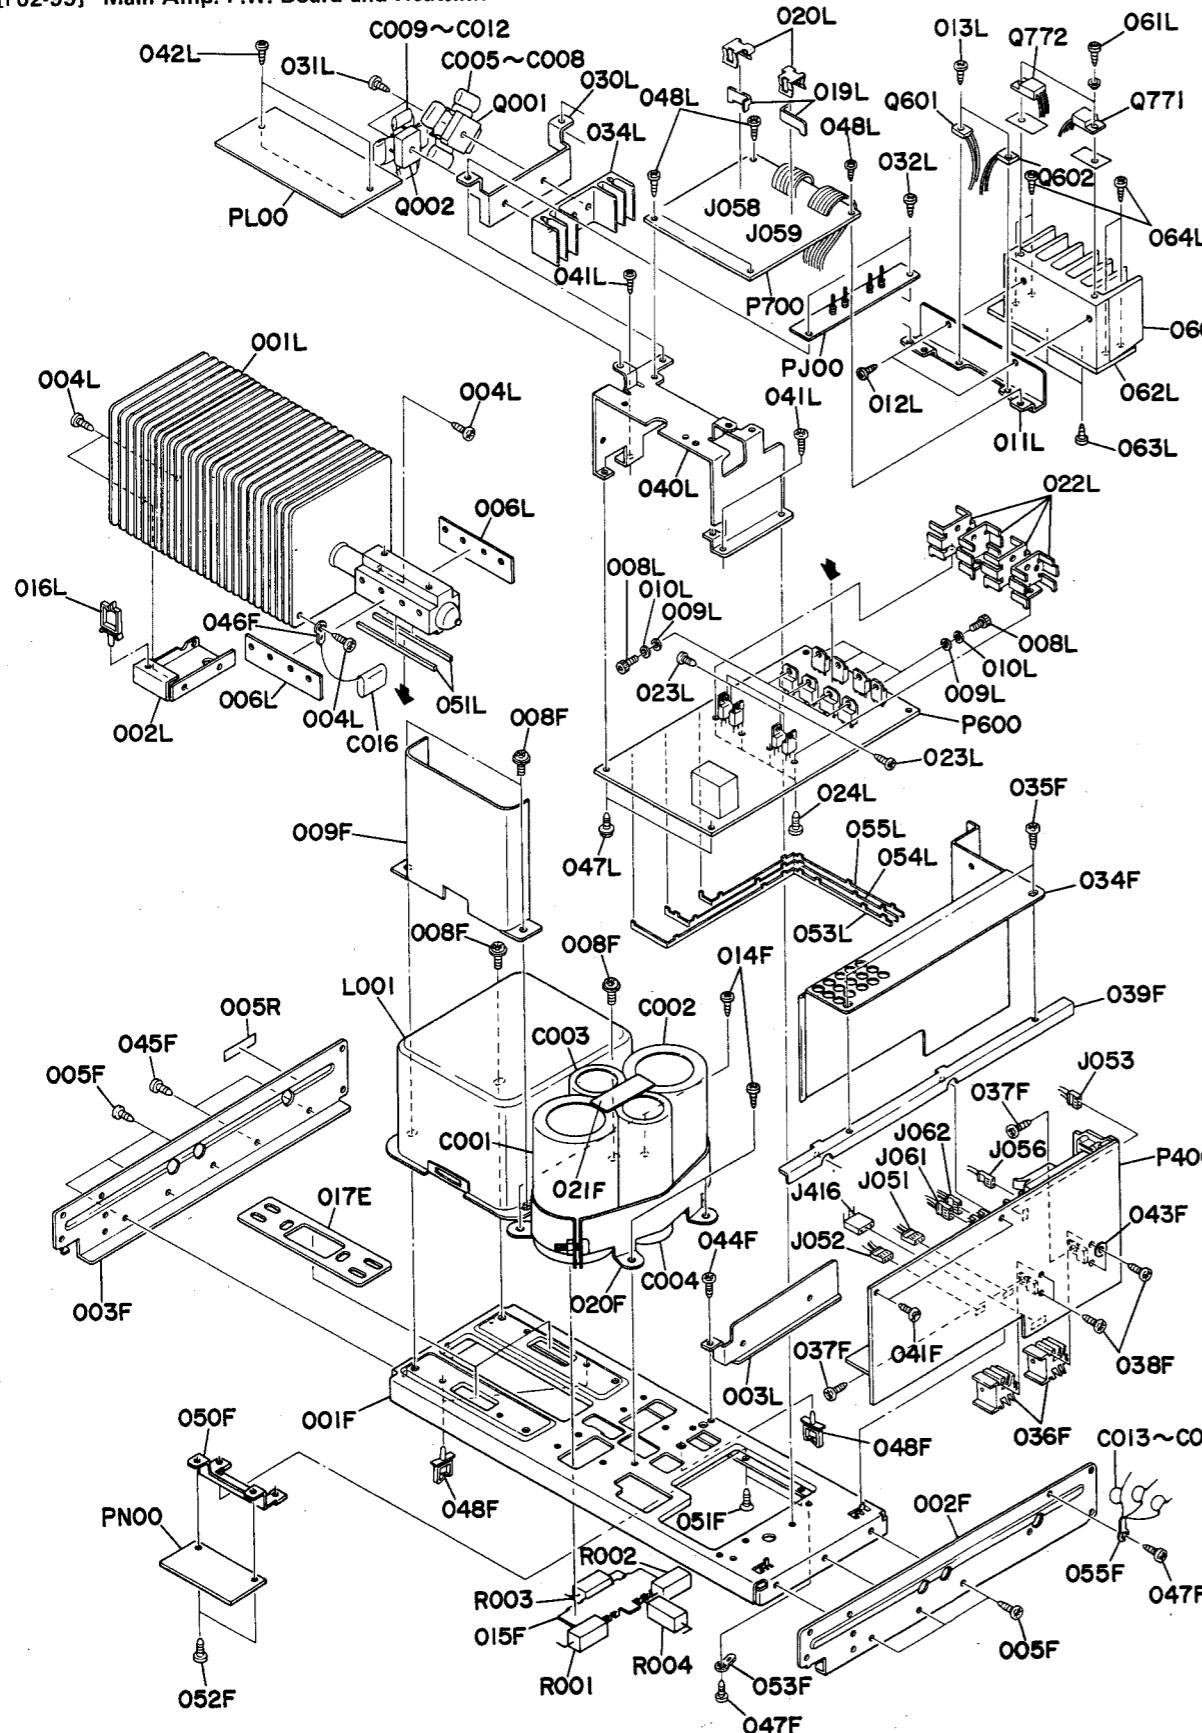

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	
	E	F			
001F	1	1	2144105010	Chassis, Center	
002F	1	1	2979105020	Chassis, Side (R)	
003F	1	1	2979105030	Chassis, Side (L)	
005F	6	6	51260408Z0	B.T. Screw	B4 x 8
008F	4	4	51480406Z9	F. Washer Screw	F4 x 6
009F	1	1	2144109030	Shield	
014F	4	4	51280308U0	B.H. Tapped Screw	B3 x 8
015F	1	1	221H123010	Contactor	
020F	1	1	221H160010	Bracket	
021F	1	1	221H067010	Cap.	
034F	1	1	2144109010	Shield	
035F	2	2	51280308U0	B.H. Tapped Screw	B3 x 8
036F	2	2	2144267030	Heatsink	
037F	2	2	51280308B0	B.H. Tapped Screw	B3 x 8
038F	4	4	51300308B0	P.H. Tapped Screw	P3 x 8
039F	1	1	2144160080	Bracket	
041F	2	2	51280308B0	B.H. Tapped Screw	B3 x 8
043F	1	1	59030805S0	Washer	
044F	1	1	51260308Z0	B.T. Screw	B3 x 8
045F	2	2	51260308Z0	B.T. Screw	B3 x 8
046F	1	1	62030039W0	Lug	
047F	2	2	51280308B0	B.H. Tapped Screw	B3 x 8
048F	3	3	2129005010	Clamper	
050F	1	1	2144160090	Bracket	
051F	2	2	51500308B0	F.H. Taptite Screw	F3 x 8
052F	2	2	51280306B0	B.H. Tapped Screw	B3 x 6
053F	1	1	62030039W0	Lug	
055F	1	1	62030049W0	Lug	
001L	1	1	222H267020	Heatsink	
002L	1	1	2144160040	Bracket	
003L	1	1	2144160050	Bracket	
004L	4	4	51260306Z0	B.T. Screw	B3 x 6
006L	2	2	201H120010	Insulator	
008L	8	8	52730310Z9	H.S. Head Bolt	H3 x 10
009L	8	8	54020301E0	Flat Washer, P.	
010L	8	8	54040302N0	Spring Washer	
011L	1	1	222H160030	Bracket	
012L	2	3	51280308Z0	B.H. Tapped Screw	B3 x 8
013L	2	2	51280308Z0	B.H. Tapped Screw	B3 x 8
016L	1	1	2886005020	Clamper	
019L	2	2	2990267080	Heatsink	
020L	2	2	2990115010	Spring	
022L	4	4	2212267020	Heatsink	
023L	4	4	51280308B0	B.H. Tapped Screw	B3 x 8
024L	4	4	51280308B0	B.H. Tapped Screw	B3 x 8
030L	1	1	2144267020	Heatsink	
031L	2	2	51280315B0	B.H. Tapped Screw	B3 x 15
032L	2	2	51260308Z0	B.T. Screw	B3 x 8
034L	1	1	2144267040	Heatsink	
040L	1	1	2144160060	Bracket	
041L	3	3	51280308Z0	B.H. Tapped Screw	B3 x 8
042L	2	2	51280308B0	B.H. Tapped Screw	B3 x 8
047L	2	2	51260308B0	B.T. Screw	B3 x 8
048L	4	4	51280308U0	B.H. Tapped Screw	B3 x 8
051L	2	2	2144118010	Spacer	
053L	1	1	2144123040	Contactor	

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION		
	E	F				
054L	1	1	2144123050	Contactor		
055L	1	1	2144123060	Contactor		
060L	1	1	222H267030	Heatsink		
061L	2	2	51100308Z9	B.H. Tapped Screw	B3 x 8	
062L	1	1	222H267040	Heatsink		
063L	3	3	51280312Z0	B.H. Tapped Screw	B3 x 12	
064L	4	4	51280312Z0	B.H. Tapped Screw	B3 x 12	
017E		2	223H120010	Insulator		
005R	1		2882861020	Label		
△C001	1	1	EC22907520	Elect Cap.	22000 μ F	75V
△C002	1	1	EC22907520	Elect Cap.	22000 μ F	75V
△C003	1	1	EC20903510	Elect Cap.	20000 μ F	35V
△C004	1	1	EC20903510	Elect Cap.	20000 μ F	35V
C005	1	1	DF17104520	Film Cap.	0.1 μ F ±20%	
C006	1	1	DF17104520	Film Cap.	0.1 μ F ±20%	
C007	1	1	DF17104520	Film Cap.	0.1 μ F ±20%	
C008	1	1	DF17104520	Film Cap.	0.1 μ F ±20%	
C009	1	1	DF17223540	Film Cap.	0.022 μ F ±20%	
C010	1	1	DF17223540	Film Cap.	0.022 μ F ±20%	
C011	1	1	DF17223540	Film Cap.	0.022 μ F ±20%	
C012	1	1	DF17223540	Film Cap.	0.022 μ F ±20%	
C013	1	1	DK18473320	Ceramic Cap.	0.047 μ F	
C014	1	1	DK18473320	Ceramic Cap.	0.047 μ F	
C015	1	1	DK18473320	Ceramic Cap.	0.047 μ F	
C016	1	1	DF16103350	Film	0.01 μ F ±10%	
J051	1	1	YJ06002200	Jack,	(3P)	
J052	1	1	YJ06002210	Jack,	(3P)	
J053	1	1	YJ06002220	Jack,	(3P)	
J056	1	1	YJ06002240	Jack,	(2P)	
J058	1	1	YU08200260	Jumper Lead,	(8P)	
J059	1	1	YU06200260	Jumper Lead,	(6P)	
J061	1	1	YJ06002300	Jack,	(3P)	
J062	1	1	YJ06002310	Jack,	(3P)	
J416	1	1	YJ06001240	Jack,	(3P)	
△L001	1		TS60508100	Power Transformer		
△L001	1		TS60508090	Power Transformer		
△Q001	1	1	HD20004290	Diode	S5VB-20	
△Q002	1	1	HD20022290	Diode	S4VB-20	
△R001	1	1	GS10222030	Resistor	2.2KΩ ±10%	3W
△R002	1	1	GS10222030	Resistor	2.2KΩ ±10%	3W
△R003	1	1	GS10222030	Resistor	2.2KΩ ±10%	3W
△R004	1	1	GS10222030	Resistor	2.2KΩ ±10%	3W

● [H01-99] Packing Materials

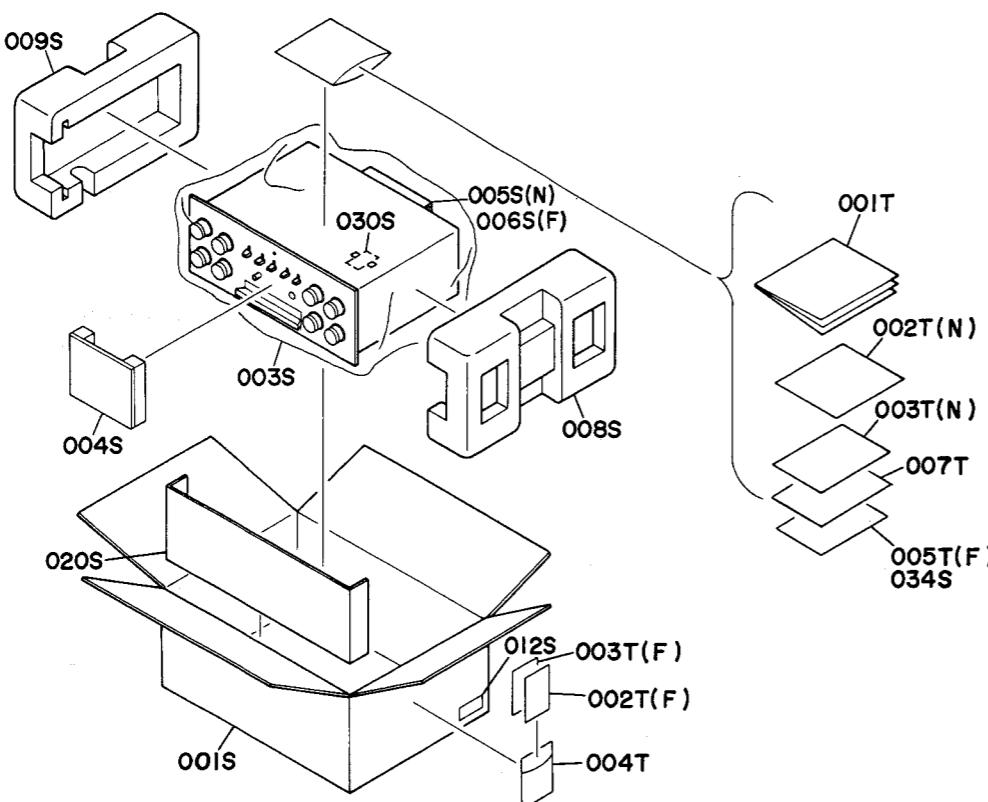

• (E): for Europe
• (F): for Japan

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
001S	1	1	221H801010	Packing Case
003S	1	1	9090909030	Polyethylene Sheet
004S	1	1	2144809020	Cushion
005S	1	1	2864804010	Sleeve
006S	1	1	2864804010	Sleeve
008S	1	1	2139809010	Cushion, (R)
009S	1	1	2139809020	Cushion, (L)
012S	2	1	9526019060	Serial No. Card
012S	2	2	9526019040	Serial No. Card
020S	1	1	2144807010	Reinforcing
030S	1	1	2731821010	Silicagel
034S	1	1	2275851370	Instructions, Flysheet

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
001T	1	1	221H851310	Instructions
001T	1	1	221H851110	Instructions
002T	1	1	221H851320	Instructions, Spec
002T	1	1	9631000130	Guarantee Card
003T	1	1	221H856010	Circuit Diagram
004T	1	1	128T854010	Guarantee Card
007T	1	1	9611000030	User's Card

9. ELECTRICAL PARTS LIST

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
P400	1	1	YK21441510	P400-PRE-AMP. CIRCUIT BOARD P.W. Board, Pre-Amp. (Phono MM. MC AMP.) P.W. Board Assembly
	1		ZZ21448510	
CM01	1	1	EQ22700610	P400-CAPACITORS Elect 220μF 6.3V
CM02	1	1	EQ22700610	Elect 220μF 6.3V
CM03	1	1	DF16152510	Film 0.0015μF ±10%
CM04	1	1	DF16152510	Film 0.0015μF ±10%
CM05	1	1	EA10800690	Elect 1000μF 6.3V
CM06	1	1	EA10800690	Elect 1000μF 6.3V
CM07	1	1	EA10800690	Elect 1000μF 6.3V
CM08	1	1	EA10800690	Elect 1000μF 6.3V
CM09	1	1	DF16222510	Film 0.0022μF ±10%
CM10	1	1	DF16222510	Film 0.0022μF ±10%
CM11	1	1	DF16222510	Film 0.0022μF ±10%
CM12	1	1	DF16222510	Film 0.0022μF ±10%
CM13	1	1	DF16222510	Film 0.0022μF ±10%
CM14	1	1	DF16222510	Film 0.0022μF ±10%
CM15	1	1	EA10602530	Elect 10μF 25V
CM16	1	1	EA10602530	Elect 10μF 25V
CM17	1	1	DF35470520	Mica. 47pF ±5%
CM18	1	1	DF35470520	Mica. 47pF ±5%
CM19	1	1	EQ22602520	Elect 22μF 25V
CM20	1	1	EQ22602520	Elect 22μF 25V
CM21	1	1	EA47701690	Elect 470μF 16V
CM22	1	1	EA47701690	Elect 470μF 16V
CM23	1	1	DF16152510	Film 0.0015μF ±10%
CM24	1	1	DF16152510	Film 0.0015μF ±10%
C401	1	1	DF35101520	Film 100pF ±5%
C402	1	1	DF35101520	Film 100pF ±5%
C403	1	1	EA10800690	Elect 1000μF 6.3V
C404	1	1	EA10800690	Elect 1000μF 6.3V
C405	1	1	EA10800690	Elect 1000μF 6.3V
C406	1	1	EA10800690	Elect 1000μF 6.3V
C407	1	1	DF16222510	Film 0.0022μF ±10%
C408	1	1	DF16222510	Film 0.0022μF ±10%
C409	1	1	DF16222510	Film 0.0022μF ±10%
C410	1	1	DF16222510	Film 0.0022μF ±10%
C411	1	1	DF16152300	Film 1500pF ±10%
C412	1	1	DF16152300	Film 1500pF ±10%
C413	1	1	DF55681090	Film 680pF ±5%
C414	1	1	DF55681090	Film 680pF ±5%
C415	1	1	DF74333010	Film 0.033μF ±2%
C416	1	1	DF74333010	Film 0.033μF ±2%
C417	1	1	DF74104010	Film 0.1μF ±2%
C418	1	1	DF74104010	Film 0.1μF ±2%
C419	1	1	DF74362510	Film 3600pF ±2%
C420	1	1	DF74362510	Film 3600pF ±2%
C421	1	1	DF64272010	Film 2700pF ±2%
C422	1	1	DF64272010	Film 2700pF ±2%
C423	1	1	DF16152510	Film 1500pF ±10%
C424	1	1	DF16152510	Film 1500pF ±10%
C425	1	1	EA22703590	Elect 220μF 35V
C426	1	1	EA22703590	Elect 220μF 35V
C435	1	1	DF55681090	Film 680pF ±5%
C436	1	1	DF55681090	Film 680pF ±5%
C801	1	1	EB10805070	Elect 1000μF 50V
△C802	1	1	EB10805070	Elect 1000μF 50V
C805	1	1	DF55391090	Film 390pF ±5%
C806	1	1	DF55391090	Film 390pF ±5%
C807	1	1	EA10701030	Elect 100μF 10V
C808	1	1	EA10701030	Elect 100μF 10V
C809	1	1	EE10505010	Elect 1μF 50V
C810	1	1	EE10505010	Elect 1μF 50V
△C811	1	1	EA22703590	Elect 220μF 35V
△C812	1	1	EA22703590	Elect 220μF 35V
C815	1	1	DK18103510	Ceramic 0.01μF
C816	1	1	DK18103510	Ceramic 0.01μF
C817	1	1	DK18103510	Ceramic 0.01μF
C818	1	1	DK18103510	Ceramic 0.01μF
P400-RESISTORS (All Resistors are ±5% and 1/4W)				
RM01	1	1	GM21415000	150Ω ±2%
RM02	1	1	GM21415000	150Ω ±2%
RM03	1	1	GM21415000	150Ω ±2%
RM04	1	1	GM21415000	150Ω ±2%
RM05	1	1	GD05010140	1Ω
RM06	1	1	GD05010140	1Ω
RM07	1	1	GM21447000	470Ω ±2%
RM08	1	1	GM21447000	470Ω ±2%
RM09	1	1	GM21447000	470Ω ±2%
RM10	1	1	GM21447000	470Ω ±2%
RM11	1	1	GM21456010	5.6KΩ ±2%
RM12	1	1	GM21456010	5.6KΩ ±2%
RM13	1	1	GM21456010	5.6KΩ ±2%
RM14	1	1	GM21456010	5.6KΩ ±2%
RM15	1	1	GD05150140	15Ω
RM16	1	1	GD05150140	15Ω
RM17	1	1	GD05150140	15Ω
RM18	1	1	GD05150140	15Ω
RM19	1	1	GM21447000	470Ω ±2%
RM20	1	1	GM21447000	470Ω ±2%
RM21	1	1	GM21447000	470Ω ±2%
RM22	1	1	GM21447000	470Ω ±2%
RM23	1	1	GM214270G0	27Ω ±2%
RM24	1	1	GM214270G0	27Ω ±2%
RM25	1	1	GD05680140	680Ω
RM26	1	1	GD05680140	680Ω
RM27	1	1	GD05680140	680Ω
RM28	1	1	GD05680140	680Ω
RM29	1	1	GD05562140	5.6KΩ
RM30	1	1	GD05562140	5.6KΩ
RM31	1	1	GD05272140	2.7KΩ
RM32	1	1	GD05272140	2.7KΩ
RM33	1	1	GD05332140	3.3KΩ
RM34	1	1	GD05332140	3.3KΩ
RM39	1	1	GD05101140	100Ω
RM40	1	1	GD05101140	100Ω
RM41	1	1	GD05273140	27KΩ
RM42	1	1	GD05273140	27KΩ
R401	1	1	GM21439020	39KΩ ±2%
R402	1	1	GM21439020	39KΩ ±2%
R403	1			

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	
	E	F			
R411	1	1	GM21410010	1KΩ	±2%
R412	1	1	GM21410010	1KΩ	±2%
R413	1	1	GM21410010	1KΩ	±2%
R414	1	1	GM21410010	1KΩ	±2%
R415	1	1	GD05822140	8.2KΩ	
R416	1	1	GD05822140	8.2KΩ	
R417	1	1	GD05682140	6.8KΩ	
R418	1	1	GD05682140	6.8KΩ	
R419	1	1	GD05822140	8.2KΩ	
R420	1	1	GD05822140	8.2KΩ	
R421	1	1	GD05682140	6.8KΩ	
R422	1	1	GD05682140	6.8KΩ	
R423	1	1	GD05151140	150Ω	
R424	1	1	GD05151140	150Ω	
R425	1	1	GD05151140	150Ω	
R426	1	1	GD05151140	150Ω	
R427	1	1	GM21456020	56KΩ	±2%
R428	1	1	GM21456020	56KΩ	±2%
R429	1	1	GM21456020	56KΩ	±2%
R430	1	1	GM21456020	56KΩ	±2%
R431	1	1	GM214390G0	39Ω	±2%
R432	1	1	GM214390G0	39Ω	±2%
R433	1	1	GD05272140	2.7KΩ	
R434	1	1	GD05272140	2.7KΩ	
R435	1	1	GD05272140	2.7KΩ	
R436	1	1	GD05272140	2.7KΩ	
R437	1	1	GD05151140	150Ω	
R438	1	1	GD05151140	150Ω	
R439	1	1	GD05151140	150Ω	
R440	1	1	GD05151140	150Ω	
R441	1	1	GD05182140	1.8KΩ	
R442	1	1	GD05182140	1.8KΩ	
R443	1	1	GD05272140	2.7KΩ	
R444	1	1	GD05272140	2.7KΩ	
R445	1	1	GD05100140	10Ω	
R446	1	1	GD05100140	10Ω	
R447	1	1	GD05100140	10Ω	
R448	1	1	GD05100140	10Ω	
R449	1	1	GF05100140	10Ω	
R450	1	1	GF05100140	10Ω	
R451	1	1	GF05100140	10Ω	
R452	1	1	GF05100140	10Ω	
R453	1	1	GM21422010	2.2KΩ	±2%
R454	1	1	GM21422010	2.2KΩ	±2%
R455	1	1	GM214680G0	68Ω	±2%
R456	1	1	GM214680G0	68Ω	±2%
R457	1	1	GD05391140	390Ω	
R458	1	1	GD05391140	390Ω	
R459	1	1	GD05224140	220KΩ	
R460	1	1	GD05224140	220KΩ	
R461	1	1	GG05820120	82Ω	½W
R462	1	1	GG05820120	82Ω	½W
R463	1	1	GD05561140	560Ω	
R464	1	1	GD05561140	560Ω	
R465	1	1	GD05221140	220Ω	
R466	1	1	GD05221140	220Ω	
R467	1	1	GD05221140	220Ω	
R468	1	1	GD05221140	220Ω	
R471	1	1	GD05222140	2.2KΩ	
R472	1	1	GD05222140	2.2KΩ	

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	
	E	F			
R801	1	1	GD05151140	150Ω	
R802	1	1	GD05151140	150Ω	
R803	1	1	GD05102140	1KΩ	
R804	1	1	GD05102140	1KΩ	
R805	1	1	GG05272120	2.7KΩ	½W
R806	1	1	GG05272120	2.7KΩ	½W
R807	1	1	GD05183140	18KΩ	
R808	1	1	GD05183140	18KΩ	
R809	1	1	GM21448710	4.87KΩ	±2%
R810	1	1	GM21448710	4.87KΩ	±2%
P400-SEMICONDUCTORS					
Q417	1	1	HT323201F0	Transistor	2SC2320(F)
Q418	1	1	HT323201F0	Transistor	2SC2320(F)
Q419	1	1	HT325912B0	Transistor	2SC2591(Q or R)
Q420	1	1	HT325912B0	Transistor	2SC2591(Q or R)
Q421	1	1	HT111112B0	Transistor	2SA1111(Q or R)
Q422	1	1	HT111112B0	Transistor	2SA1111(Q or R)
Q423	1	1	HD20014010	Diode	1SS81
Q424	1	1	HD20014010	Diode	1SS81
Q425	1	1	HD20014010	Diode	1SS81
Q426	1	1	HD20014010	Diode	1SS81
Q427	1	1	HD20014010	Diode	1SS81
△Q801	1	1	HT325912B0	Transistor	2SC2591(Q or R)
△Q802	1	1	HT111112B0	Transistor	2SA1111(Q or R)
Q803	1	1	HT322402A0	Transistor	2SC2240(GR or BL)
Q804	1	1	HT109702A0	Transistor	2SA970(GR or BL)
Q805	1	1	HF200301C0	F.E.T.	2SK30A(Y)
Q806	1	1	HF200301C0	F.E.T.	2SK30A(Y)
Q807	1	1	HT317752D0	Transistor	2SC1775A(D or E)
Q808	1	1	HT108722D0	Transistor	2SA872A(D or E)
Q809	1	1	HD30008010	Zener	HZ6B1L
Q810	1	1	HD30008010	Zener	HZ6B1L
△Q811	1	1	HD20022030	Diode	DSF-10C-BT
△Q812	1	1	HD20022030	Diode	DSF-10C-BT
△Q813	1	1	HD20022030	Diode	DSF-10C-BT
△Q814	1	1	HD20022030	Diode	DSF-10C-BT
P400-MISCELLANEOUS					
J401	1	1	YT02040330	Terminal (4P)	RCA
J402	1	1	YT02040330	Terminal (4P)	RCA
J403	1	1	YT02040330	Terminal (4P)	RCA
J404	1	1	YP01001030	Plug (3P)	
J405	1	1	YP01001030	Plug (3P)	
J406	1	1	YP01001030	Plug (3P)	
J407	1	1	YP10001980	Plug (2P)	
J408	1	1	YP10001980	Plug (2P)	
J409	1	1	YP06001040	Plug (3P)	
J414	1	1	YP01001030	Plug (3P)	
J415	1	1	YP01001030	Plug (3P)	
J416	1	1	YJ06001240	Jack (3P)	
L401	1	1	LY20240160	Relay	FRL-644D24/2BS
S401	1	1	SR00050110	Rotary Switch, Phono Selector	
S402	1	1	SS06060030	Slide Switch Phono Selector	
S411	1	1	SC00030010	Switch, Input Selector	
S412	1	1	SB13070020	Switch Band, FLX	
S413	1	1	SS08040020	Slide Switch 8-4 S Main	
S421	1	1	SC00030010	Switch, Tape Copy	
S422	1	1	SB13970010	Switch Band, FLX, Tape Copy	
S423	1	1	SS04040040	Slide Switch 4-4 NS Main	
S431	1	1	SC00030010	Switch, Tape Monitor	
S432	1	1	SB13670010	Switch Band, FLX, Tape Monitor	
S433	1	1	SS04040040	Slide Switch 4-4 NS Main	

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F				E	F		
P401	1	1	YH21441330	P401-MM TRANSISTOR BLOCK CIRCUIT BOARD	R601	1	1	GD05472140	P600-RESISTORS <i>(All Resistors are ±5% and 1/4W)</i>
	1		ZZ21448330	P.W. Board, MM Transistor Block	R602	1	1	GD05472140	4.7KΩ
				P.W. Board Assembly	R603	1	1	GD05153140	4.7KΩ
				P401-SEMICONDUCTORS	R604	1	1	GD05153140	15KΩ
Q401	1	1	HF201472B0	F.E.T. 2SK147	R605	1	1	GD05103140	15KΩ
Q402	1	1	HF201472B0	F.E.T. 2SK147	R606	1	1	GD05103140	10KΩ
Q403	1	1	HF100722B0	F.E.T. 2SJ72	R607	1	1	GD05273140	27KΩ
Q404	1	1	HF100722B0	F.E.T. 2SJ72	R608	1	1	GD05273140	27KΩ
Q405	1	1	HT322401B0	Transistor 2SC2240(BL)	R609	1	1	GD05273140	27KΩ
Q406	1	1	HT322401B0	Transistor 2SC2240(BL)	R610	1	1	GD05273140	27KΩ
Q407	1	1	HT109701B0	Transistor 2SA970(BL)	R611	1	1	GD05821140	820Ω
Q408	1	1	HT109701B0	Transistor 2SA970(BL)	R612	1	1	GD05821140	820Ω
Q409	1	1	HT109701A0	Transistor 2SA970(GR)	R613	1	1	GG05470140	47Ω
Q410	1	1	HT109701A0	Transistor 2SA970(GR)	R614	1	1	GG05470140	47Ω
Q411	1	1	HT322401A0	Transistor 2SC2240(GR)	R615	1	1	GG05470140	47Ω
Q412	1	1	HT322401A0	Transistor 2SC2240(GR)	R616	1	1	GG05470140	47Ω
Q413	1	1	HT108722D0	Transistor 2SA872A(D or E)	R617	1	1	GG05471140	470Ω
Q414	1	1	HT108722D0	Transistor 2SA872A(D or E)	R618	1	1	GG05471140	470Ω
Q415	1	1	HT317752D0	Transistor 2SC1775A(D or E)	R619	1	1	GA05562010	5.6KΩ
Q416	1	1	HT317752D0	Transistor 2SC1775A(D or E)	R620	1	1	GA05562010	5.6KΩ
J410	1	1	YP06000750	P401-PLUGS	R621	1	1	GG05330140	1W
J411	1	1	YP06000750	Plug, (14P)	R622	1	1	GG05330140	1W
J412	1	1	YP06000750	Plug, (14P)	R623	1	1	GG05330140	1W
J413	1	1	YP06000750	Plug, (14P)	R624	1	1	GG05330140	1W
P600	1	1	YK222H1310	P600-POWER AMP. CIRCUIT BOARD	R625	1	1	GG05470140	1W
	1		ZZ221H8310	P.W. Board, Power Amp.	R626	1	1	GG05470140	1W
				P.W. Board Assembly	R627	1	1	75061001PO	Jumper
					R628	1	1	75061001PO	Jumper
					R629	1	1	GG05220140	22Ω
					R630	1	1	GG05220140	22Ω
C601	1	1	DF55271510	P600-CAPACITORS	R631	1	1	GG05220140	
C602	1	1	DF55271510	Film 270pF ±5%	R632	1	1	GG05220140	
C603	1	1	EA10602530	Film 270pF ±5%	R633	1	1	GG05220140	
C604	1	1	EA10602530	Elect 10μF 25V	R634	1	1	GG05220140	
C605	1	1	DF16104350	Elect 10μF 25V	R635	1	1	GG05220140	
C606	1	1	DF16104350	Film 0.1μF ±10%	R636	1	1	GG05220140	
C609	1	1	DF16104510	Film 0.1μF ±10%	△R637	1	1	GO10272050	0.27Ω
C610	1	1	DF16104510	Film 0.1μF ±10%	△R638	1	1	GO10272050	±10%
C613	1	1	EA10505030	Elect 1μF 50V	△R639	1	1	GO10272050	5W
C614	1	1	EA47602530	Elect 47μF 25V	△R640	1	1	GO10272050	±10%
C615	1	1	EA22601630	Elect 22μF 16V	△R641	1	1	GO10272050	5W
△C616	1	1	EA22710030	Elect 220μF 100V	△R642	1	1	GO10272050	±10%
△C617	1	1	EA22710030	Elect 220μF 100V	△R643	1	1	GO10272050	5W
C620	1	1	DK18103510	Ceramic 0.01μF	R644	1	1	GO10272050	0.27Ω
C621	1	1	DK18103510	Ceramic 0.01μF	R645	1	1	GD05472140	4.7KΩ
C623	1	1	DF16473350	Film 0.047μF ±10%	R646	1	1	GD05472140	4.7KΩ
C624	1	1	DF16473350	Film 0.047μF ±10%	R649	1	1	GD05682140	6.8KΩ
C626	1	1	EA10602530	Elect 10μF 25V	R650	1	1	GD05102140	1KΩ
C629	1	1	DF16473350	Film 0.047μF ±10%	R651	1	1	GD05273140	27KΩ
C630	1	1	DF16473350	Film 0.047μF ±10%	R652	1	1	GD05273140	27KΩ
C631	1	1	DF16473300	Film 0.047μF ±10%	R653	1	1	GA05100030	10Ω
C632	1	1	DF16222350	Film 2200pF ±10%	R654	1	1	GA05100030	3W
C633	1	1	DF16474520	Film 0.47μF ±10%	R657	1	1	GD05823140	82KΩ
C634	1	1	DF16474520	Film 0.47μF ±10%	R658	1	1	GD05823140	82KΩ
C635	1	1	EA47601630	Elect 47μF 16V	R659	1	1	GD05393140	39KΩ
					R660	1	1	GD05104140	100KΩ
					R661	1	1	GD05473140	47KΩ
					R662	1	1	GD05473140	47KΩ

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
R663	1	1	GD05474140	470KΩ
R664	1	1	GD05273140	27KΩ
R666	1	1	GD05223140	22KΩ
R667	1	1	GG05183120	18KΩ
R668	1	1	GD05332140	3.3KΩ 1W
R669	1	1	GG05272120	2.7KΩ 1W
R671	1	1	GA05562010	5.6KΩ 1W
R672	1	1	GA05562010	5.6KΩ 1W
R673	1	1	GJ05100010	10Ω 1W
R681	1	1	GA05911020	910Ω 2W
R682	1	1	GD05010140	1Ω
R683	1	1	GD05010140	1Ω
P600-SEMICONDUCTORS				
Q601	1	1	HT315681S0	Transistor 2SC1568(S)
Q602	1	1	HT315681S0	Transistor 2SC1568(S)
Q603	1	1	HT110152A0	Transistor 2SA1015(O or Y)
Q604	1	1	HT110152A0	Transistor 2SA1015(O or Y)
Q605	1	1	HT326322R0	Transistor 2SC2632(R or S)
Q606	1	1	HT326322R0	Transistor 2SC2632(R or S)
Q607	1	1	HT111242R0	Transistor 2SA1124(R or S)
Q608	1	1	HT111242R0	Transistor 2SA1124(R or S)
Q609	1	1	HT325912B0	Transistor 2SC2591(Q or R)
Q610	1	1	HT111112B0	Transistor 2SA1111(Q or R)
Q611	1	1	HT325912B0	Transistor 2SC2591(Q or R)
Q612	1	1	HT111112B0	Transistor 2SA1111(Q or R)
△Q613	1	1	HT328372A0	Transistor 2SC2837(R or O)
△Q614	1	1	HT111862A0	Transistor 2SA1186(R or O)
△Q615	1	1	HT328372A0	Transistor 2SC2837(R or O)
△Q616	1	1	HT111862A0	Transistor 2SA1186(R or O)
Q617	1	1	HT328372A0	Transistor 2SC2837(R or O)
Q618	1	1	HT111862A0	Transistor 2SA1186(R or O)
△Q619	1	1	HT328372A0	Transistor 2SC2827(R or O)
△Q620	1	1	HT111862A0	Transistor 2SA1186(R or O)
Q621	1	1	HT317752D0	Transistor 2SC1775
Q622	1	1	HT317752D0	Transistor 2SC1775
Q623	1	1	HT108722D0	Transistor 2SA872
Q624	1	1	HC10042050	IC TA7317P
Q625	1	1	HD20014010	Diode 1S2471G
Q626	1	1	HD20014010	Diode 1S2471G
Q627	1	1	HD20014010	Diode 1S2471G
Q628	1	1	HD20014010	Diode 1S2471G
Q629	1	1	HD20022030	Diode DSF-10C-BT
Q630	1	1	HD20022030	Diode DSF-10C-BT
Q631	1	1	HD20022030	Diode DSF-10C-BT
Q632	1	1	HD20022030	Diode DSF-10C-BT
Q633	1	1	HD20011010	Diode W06C
Q634	1	1	HD20011010	Diode W06C
Q635	1	1	HD20011010	Diode W06C
Q636	1	1	HD20011010	Diode W06C
Q639	1	1	HD20014010	Diode 1SS81
Q640	1	1	HD20025100	Diode 10DF-2
△Q642	1	1	HD20022030	Diode DS135D
△Q643	1	1	HD20022030	Diode DS135D
△Q644	1	1	HD20022030	Diode DS135D
△Q645	1	1	HD20022030	Diode DS135D
Q647	1	1	HD20011050	Diode 1S1555
Q648	1	1	HD20011050	Diode 1S1555
Q649	1	1	HD30064090	Zener BZ-240
Q650	1	1	HD30033090	Zener WZ-052
P600-MISCELLANEOUS				
L603	1	1	LY20480060	Relay, 48V DC AR3423

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
P700	1	1	YK222H1320 ZZ221H8320	P700-VOLTAGE AMP. CIRCUIT BOARD P.W. Board, Voltage Amp. P.W. Board Assembly
C701	1	1	DF55101090	P700-CAPACITORS Film 100pF ±5%
C702	1	1	DF55101090	Film 100pF ±5%
C703	1	1	DF55271090	Film 270pF ±5%
C704	1	1	DF55271090	Film 270pF ±5%
C709	1	1	DF35270520	Mica 27pF ±10%
C710	1	1	DF35270520	Mica 27pF ±10%
C711	1	1	DF16474520	Film 0.47μF ±10%
C712	1	1	DF16474520	Film 0.47μF
C715	1	1	EA47701630	Elect 470μF 16V
C716	1	1	EA47701630	Elect 470μF 16V
C771	1	1	EA10703530	Elect 100μF 35V
C772	1	1	EA10703530	Elect 100μF 35V
C773	1	1	EA47601630	Elect 47μF 16V
C775	1	1	EA10710030	Elect 100μF 100V
C776	1	1	EA10710030	Elect 100μF 100V
C777	1	1	DF16102510	Film 1000pF ±10%
C778	1	1	DF16102510	Film 1000pF ±10%
C779	1	1	DF16102510	Film 1000pF ±10%
C780	1	1	DF16102510	Film 1000pF ±10%
C781	1	1	EQ47502530	Elect 4.7μF 25V
C782	1	1	EQ47502530	Elect 4.7μF 25V
R701	1	1	GD05473140	P700-RESISTORS (All Resistors are ±5% and 1W)
R702	1	1	GD05473140	47KΩ
R703	1	1	GM21446410	4.7KΩ
R704	1	1	GM21446410	4.7KΩ
R705	1	1	GD05561140	560Ω
R706	1	1	GD05561140	560Ω
R707	1	1	GD05561140	560Ω
R708	1	1	GD05561140	560Ω
R709	1	1	GD05222140	2.2KΩ
R710	1	1	GD05222140	2.2KΩ
R711	1	1	GD05222140	2.2KΩ
R712	1	1	GD05222140	2.2KΩ
R713	1	1	GD05102140	1KΩ
R714	1	1	GD05102140	1KΩ
R715	1	1	GD05102140	1KΩ
R716	1	1	GD05102140	1KΩ
R717	1	1	GD05473140	47KΩ
R718	1	1	GD05473140	47KΩ
R721	1	1	GD05101140	100Ω
R722	1	1	GD05101140	100Ω
R723	1	1	GD05331140	330Ω
R724	1	1	GD05331140	330Ω
R725	1	1	GD05154140	150KΩ
R726	1	1	GD05154140	150KΩ
R727	1	1	GD05682140	6.8KΩ
R728	1	1	GD05682140	6.8KΩ
R729	1	1	GD05181140	180Ω
R730	1	1	GD05181140	180Ω
R731	1	1	GD05561140	560Ω
R732	1	1	GD05561140	560Ω

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F				E	F		
R733	1	1	GD05472140	4.7KΩ	Q718	1	1	HT111242R0	Transistor 2SA1124(R or S)
R734	1	1	GD05472140	4.7KΩ	Q719	1	1	HT326322R0	Transistor 2SA2632(R or S)
R735	1	1	GD05472140	4.7KΩ	Q720	1	1	HT326322R0	Transistor 2SA2632(R or S)
R736	1	1	GD05472140	4.7KΩ	Q721	1	1	HC10007090	IC NJM4560
R737	1	1	GD05472140	4.7KΩ	Q722	1	1	HC10007090	IC NJM4560
R738	1	1	GD05472140	4.7KΩ	Q723	1	1	HD30025090	Zener WZ-150
R739	1	1	GD05472140	4.7KΩ	Q724	1	1	HD30025090	Zener WZ-150
R740	1	1	GD05472140	4.7KΩ	Q725	1	1	HD20011050	Diode 1S1555
R741	1	1	GG05331140	330Ω	Q726	1	1	HD20011050	Diode 1S1555
R742	1	1	GG05331140	330Ω	Q727	1	1	HD20011050	Diode 1S1555
R743	1	1	GG05331140	330Ω	Q728	1	1	HD20011050	Diode 1S1555
R744	1	1	GG05331140	330Ω	Q729	1	1	HD20011050	Diode 1S1555
R749	1	1	GD05123140	12KΩ	Q730	1	1	HD20011050	Diode 1S1555
R750	1	1	GD05123140	12KΩ	Q771	1	1	HT322382E0	Transistor 2SC2238(O or Y)
R751	1	1	GA05272020	2.7KΩ	Q772	1	1	HT109682E0	Transistor 2SC968(O or Y)
R752	1	1	GA05182020	1.8KΩ	Q773	1	1	HT317752D0	Transistor 2SC1775A(D or E)
R753	1	1	GD05473140	47KΩ	Q774	1	1	HT108722D0	Transistor 2SA872A(D or E)
R754	1	1	GD05473140	47KΩ	Q775	1	1	HT317752D0	Transistor 2SC1775A(D or E)
R755	1	1	GD05222140	2.2KΩ	Q776	1	1	HT108722D0	Transistor 2SA872A(D or E)
R756	1	1	GD05222140	2.2KΩ	Q777	1	1	HD30009010	Zener HZ12B2L
R757	1	1	GD05222140	2.2KΩ					PC00-RIPPLE FILTER CIRCUIT BOARD
R758	1	1	GD05222140	2.2KΩ					P.W. Board, Ripple Filter
R759	1	1	GD05102140	1KΩ					P.W. Board Assembly
R760	1	1	GD05102140	1KΩ					PC00-CAPACITORS
R761	1	1	GD05474140	470KΩ	CM31	1	1	EA10702530	Elect 100μF 25V
R762	1	1	GD05474140	470KΩ	CM32	1	1	EA10702530	Elect 100μF 25V
R763	1	1	GD05474140	470KΩ					PC00-RESISTORS
R764	1	1	GD05474140	470KΩ	RM51	1	1	GA05221010	220Ω ±5% 1W
R771	1	1	GD05102140	1KΩ	RM52	1	1	GA05221010	220Ω ±5% 1W
R772	1	1	GD05102140	1KΩ	RM53	1	1	GD05392140	3.9KΩ ±5% ¼W
R773	1	1	GD05332140	3.3KΩ	RM54	1	1	GD05392140	3.9KΩ ±5% ¼W
R774	1	1	GD05332140	3.3KΩ	RM55	1	1	GD05682140	6.8KΩ ±5% ¼W
R775	1	1	GD05272140	2.7KΩ	RM56	1	1	GD05682140	6.8KΩ ±5% ¼W
R776	1	1	GD05272140	2.7KΩ					PC00-SEMICONDUCTORS
R777	1	1	GA05153010	15KΩ	QM31	1	1	HT322382E0	Transistor 2SC2238(Q, Y)
R779	1	1	GD05123140	12KΩ	QM32	1	1	HT109682E0	Transistor 2SA968(Q, Y)
R780	1	1	GD05473140	47KΩ					PE01-TONE AMP. CIRCUIT BOARD
R781	1	1	GD05332140	3.3KΩ					P.W. Board, Tone Amp.
R782	1	1	GD05473140	47KΩ					P.W. Board Assembly
R783	1	1	GD05821140	820Ω					PE01-CAPACITORS
P700-SEMICONDUCTORS									
Q701	1	1	HC10042060	IC μPA68H	PE01	1	1	YK221H1810	PE01-TONE AMP. CIRCUIT BOARD
Q702	1	1	HC10042060	IC μPA68H					P.W. Board, Tone Amp.
Q703	1	1	HT322592F0	Transistor 2SC2259(F or G)					P.W. Board Assembly
Q704	1	1	HT322592F0	Transistor 2SC2259(F or G)					PE01-CAPACITORS
Q705	2	2	HT108722B0	Transistor 2SA872(D or E) × 2	CE01	1	1	EA33505030	Elect 3.3μF 50V
Q706	2	2	HT108722B0	Transistor 2SA872(D or E) × 2	CE03	1	1	DF35101520	Mica 100pF ±5% 250V
Q707	1	1	HT322402A0	Transistor 2SC2240(GR or BL)	CE05	1	1	DF35101520	Mica 100pF ±5% 250V
Q708	1	1	HT322402A0	Transistor 2SC2240(GR or BL)	CE07	1	1	DF15103300	Film 0.01μF ±5%
Q709	1	1	HT109702A0	Transistor 2SA970(GR or BL)	CE09	1	1	DF15103300	Film 0.01μF ±5%
Q710	1	1	HT109702A0	Transistor 2SA970(GR or BL)	CE11	1	1	DF55821090	Film 820pF ±5%
Q713	1	1	HT109702A0	Transistor 2SA970(GR or BL)	CE13	1	1	DF35560520	Mica 56pF ±5% 250V
Q714	1	1	HT109702A0	Transistor 2SA970(GR or BL)	CE15	1	1	EA10605030	Elect 10μF 50V
Q715	1	1	HT322402A0	Transistor 2SC2240(GR or BL)	CE17	1	1	EA22602530	Elect 22μF 25V
Q716	1	1	HT322402A0	Transistor 2SC2240(GR or BL)	CE51	1	1	EA33603530	Elect 33μF 35V
Q717	1	1	HT111242R0	Transistor 2SA1124(R or S)	CE53	1	1	EA22602530	Elect 22μF 25V
					CE55	1	1	EA22602530	Elect 22μF 25V

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION	REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F				E	F		
				PE01-RESISTORS (All Resistors are ±5% and 1/4W)					PF00-RESISTORS
RE01	1	1	GD05103140	10KΩ	RF01	1	1	GD05822140	8.2KΩ ±5% 1/4W
RE03	1	1	GD05103140	10KΩ	RF02	1	1	GD05822140	8.2KΩ ±5% 1/4W
RE05	1	1	GD05472140	4.7KΩ	SF01	1	1	SC02030140	PF00-SWITCH Switch, Loudness
RE07	1	1	GD05103140	10KΩ					PG00-MODE/BALANCE/VOL.
RE09	1	1	GD05103140	10KΩ					CIRCUIT BOARD
RE11	1	1	GD05103140	10KΩ	PG00	1	1	YK21441310	P.W. Board, Mode/Balance/Vol.
RE13	1	1	GD05393140	39KΩ		1		ZZ21448310	P.W. Board Assembly
RE15	1	1	GD05393140	39KΩ					PG00-RESISTORS
RE17	1	1	GD05103140	10KΩ	RG01	1	1	RM01040510	100KΩ X2 Variable
RE19	1	1	RK01040190	100KΩ(B) Variable	RG02	1	1	RM01040500	100KΩ X2 Variable
RE21	1	1	RK01040190	100KΩ(B) Variable					PG00-SWITCH
RE23	1	1	GD05470140	47Ω	SG01	1	1	SR04050250	Rotary Switch, Mode
RE25	1	1	GD05103140	10KΩ					PH00-FILTER
RE51	1	1	GG05271120	27Ω T 1/4W					CIRCUIT BOARD
RE53	1	1	GD05182140	1.8KΩ					P.W. Board, Filter
									P.W. Board Assembly
QE01	1	1	HC10007090	PE01-SEMICONDUCTORS	PH00	1	1	YK221H1860	PH00-CAPACITORS
QE51	1	1	HT405712B0	IC NJM4560		1		ZZ221H8860	Elect 10μF 25V
QE53	1	1	HD30014010	Transistor 2SD571(L or K)	CH01	1	1	EQ10602530	Elect 10μF 25V
				Zener HZ16L	CH02	1	1	EQ10602530	Elect 1μF 50V
					CH03	1	1	EQ10505030	Elect 1μF 50V
CE02	1	1	EA33505030	PE02-CAPACITORS	CH04	1	1	EQ10505030	Elect 4.7μF 25V
CE04	1	1	DF35101520	Elect 3.3μF 50V	CH05	1	1	EQ47502530	Elect 4.7μF 25V
CE06	1	1	DF35101520	Mica 100μF ±5% 250V	CH06	1	1	EQ47502530	Film 120pF ±5%
CE08	1	1	DF15103300	Mica 100μF ±5% 250V	CH09	1	1	DF55121090	Film 120pF ±5%
CE10	1	1	DF15103300	Film 0.01μF ±5%	CH10	1	1	DF55121090	Film 1800pF ±5%
CE12	1	1	DF55821090	Film 0.01μF ±5%	CH11	1	1	DF55182090	Film 1800pF ±5%
CE14	1	1	DF35560520	Film 820pF ±5%	CH12	1	1	DF55182090	Elect 10μF 25V
CE16	1	1	EA10605030	Mica 56pF ±5% 250V	CH13	1	1	EQ10602530	Elect 10μF 25V
CE18	1	1	EA22602530	Elect 10μF 50V	CH14	1	1	EQ10602530	Elect 10μF 25V
CE52	1	1	EA33603530	Elect 22μF 25V					PH00-RESISTORS
CE54	1	1	EA22602530	Elect 33μF 35V					(All Resistors are ±5% and 1/4W)
CE56	1	1	EA22602530	Elect 22μF 25V	RH01	1	1	GD05473140	47KΩ
					RH02	1	1	GD05473140	47KΩ
					RH03	1	1	GD05222140	2.2KΩ
					RH04	1	1	GD05222140	2.2KΩ
RE02	1	1	GD05103140	10KΩ	RH05	1	1	GD05104140	100KΩ
RE04	1	1	GD05103140	10KΩ	RH06	1	1	GD05104140	100KΩ
RE06	1	1	GD05472140	4.7KΩ	RH07	1	1	GD05102140	1KΩ
RE08	1	1	GD05103140	10KΩ	RH08	1	1	GD05102140	1KΩ
RE10	1	1	GD05103140	10KΩ	RH09	1	1	GD05103140	10KΩ
RE12	1	1	GD05103140	10KΩ	RH10	1	1	GD05103140	10KΩ
RE14	1	1	GD05393140	39KΩ	RH11	1	1	GD05103140	10KΩ
RE16	1	1	GD05393140	39KΩ	RH12	1	1	GD05103140	10KΩ
RE18	1	1	GD05103140	10KΩ					PH00-SEMICONDUCTOR
RE20	1	1	RK01040190	100KΩ(B) Variable	QH01	1	1	HC10007090	IC NJM4560
RE22	1	1	RK01040190	100KΩ(B) Variable					PH00-SWITCH
RE24	1	1	GD05470140	47Ω	SH01	1	1	SP02020260	Push Switch, Filter
RE26	1	1	GD05103140	10KΩ					PJ00-TEST POINT
RE52	1	1	GG05271120	27Ω T 1/4W					CIRCUIT BOARD
RE54	1	1	GD05182140	1.8KΩ	PJ00	1	1	YK222H1430	P.W. Board, Test Point
									PJ01-AC TERMINAL
QE02	1	1	HC10007090	PE02-SEMICONDUCTORS					CIRCUIT BOARD
QE52	1	1	HT206052B0	IC NJM4560					P.W. Board, AC Terminal
QE54	1	1	HD30014010	Transistor 2SB605(L, K)					
				Zener HZ16L	PJ01	1		YK222H1440	
PF00	1	1	YK221H1850	PF00-LOUDNESS					
	1		ZZ221H8850	CIRCUIT BOARD					
				P.W. Board, Loudness					
				P.W. Board Assembly					
CF01	1	1	DF15473300	PF00-CAPACITORS					
CF02	1	1	DF15473300	Film 0.047μF ±5%					
CF03	1	1	DF15683300	Film 0.047μF ±5%					
CF04	1	1	DF15683300	Film 0.068μF ±5%					
				Film 0.068μF ±5%					

• (E): for Europe
• (F): for Japan

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
PK00	1	1	YK222H1420	PK00-A-B POWER SWITCH CIRCUIT BOARD
	1	1	ZZ222H1420	P.W. Board, A-B Power SW P.W. Board Assembly
CK01	1	1	DF55471090	PK00-CAPACITOR
				Film 470pF ±5%
RK01	1	1	GD05222140	PK00-RESISTORS
RK02	1	1	GD05102140	2.2KΩ 1W
RK03	1	1	GG05152120	1KΩ 1W
RK04	1	1	GG05152120	1.5KΩ 1W
RK05	1	1	GA05222010	1.5KΩ 1W
RK06	1	1	GA05222010	2.2KΩ 1W
QK01	1	1	HT317752D0	PK00-SEMICONDUCTORS
QK02	1	1	HT108722D0	Transistor 2SC1775A(D or E)
QK03	1	1	HT309452B0	Transistor 2SA872(D or E)
QK04	1	1	HT107332A0	Transistor 2SC945(P or Q)
QK05	1	1	HT322382E0	Transistor 2SC733(P or Q)
QK06	1	1	HT109682E0	Transistor 2SC2238(O or Y)
QK07	1	1	HT328372A0	Transistor 2SA968(O or Y)
QK08	1	1	HT111862A0	Transistor 2SC2837(R or O)
QK09	1	1	HT328372A0	Transistor 2SC1186(R or O)
QK10	1	1	HT111862A0	Transistor 2SC2837(R or O)
QK11	1	1	HD20027100	Transistor 2SC1186(R or O)
QK12	1	1	HD20027100	Diode 30DF-2
				Diode 30DF-2
PL00	1	1	YK222H1410	PL00-A-B DETECTOR CIRCUIT BOARD
	1	1	ZZ222H1410	P.W. Baord, A-B Detector P.W. Board Assembly
CL01	1	1	DF16332300	PL00-CAPACITORS
CL02	1	1	DF16332300	Film 3300pF ±10%
CL03	1	1	EA10601630	Film 3300pF ±10%
CL04	1	1	EA10601630	Elect 10μF 16V
CL05	1	1	DK16221300	Elect 10μF 16V
CL06	1	1	DK16221300	Ceramic 220pF ±10% 50V
CL07	1	1	DD15220370	Ceramic 220pF ±10% 50V
CL08	1	1	DD15220370	Ceramic 22pF ±5% 50V
CL09	1	1	EA10601630	Ceramic 22pF ±5% 50V
CL10	1	1	EA10601630	Elect 10μF 16V
CL11	1	1	DF55821090	Elect 10μF 16V
CL12	1	1	DF55821090	Film 820pF ±5%
CL13	1	1	DD15220370	Film 820pF ±5%
CL14	1	1	EA10601630	Ceramic 22pF ±5% 50V
CL15	1	1	EA10602530	Elect 10μF 16V
CL16	1	1	EA10602530	Elect 10μF 25V
CL17	1	1	DD15101370	Elect 10μF 25V
CL18	1	1	DD15101370	Ceramic 100pF ±5%
				Ceramic 100pF ±5%

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
RL01	1	1	GD05103140	PL00-RESISTORS (All Resistors are ±5% and 1/4W)
RL02	1	1	GD05103140	10KΩ
RL03	1	1	GD05153140	10KΩ
RL04	1	1	GD05153140	15KΩ
RL05	1	1	GD05472140	15KΩ
RL06	1	1	GD05472140	4.7KΩ
RL07	1	1	GD05103140	4.7KΩ
RL08	1	1	GD05103140	10KΩ
RL09	1	1	RA05020130	10KΩ
RL10	1	1	RA05020130	Trimming
RL11	1	1	GD05222140	4.7KΩ
RL12	1	1	GD05222140	2.2KΩ
RL13	1	1	GD05104140	100KΩ
RL14	1	1	GD05104140	100KΩ
RL15	1	1	GD05104140	100KΩ
RL16	1	1	GD05104140	100KΩ
RL17	1	1	GD05103140	10KΩ
RL18	1	1	GD05103140	10KΩ
RL19	1	1	GD05222140	2.2KΩ
RL20	1	1	GD05222140	2.2KΩ
RL21	1	1	GD05223140	22KΩ
RL22	1	1	GD05223140	22KΩ
RL23	1	1	GD05222140	2.2KΩ
RL24	1	1	GD05222140	2.2KΩ
RL25	1	1	GD05104140	100KΩ
RL26	1	1	GD05104140	100KΩ
RL27	1	1	GD05104140	100KΩ
RL28	1	1	GD05104140	100KΩ
RL29	1	1	GD05223140	22KΩ
RL30	1	1	GD05223140	22KΩ
RL31	1	1	RA02220100	PL00-A-B DETECTOR CIRCUIT BOARD
RL32	1	1	GD05104140	P.W. Baord, A-B Detector P.W. Board Assembly
RL33	1	1	GD05473140	2.2KΩ, Trimming
RL34	1	1	GD05104140	100KΩ
RL35	1	1	GD05471140	47KΩ
RL36	1	1	GD05222140	100KΩ
RL37	1	1	GD05123140	470Ω
RL38	1	1	GD05123140	12KΩ
RL39	1	1	RA01030070	12KΩ
RL40	1	1	RA01030070	10KΩ, Trimming
RL41	1	1	GD05223140	10KΩ, Trimming
RL42	1	1	GD05223140	10KΩ, Trimming
RL43	1	1	RA02230040	22KΩ
RL44	1	1	RA02230040	22KΩ, Trimming

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
				PL00-SEMICONDUCTORS
QL01	1	1	HC10013370	IC TL4558
QL02	1	1	HC10013370	IC TL4558
QL03	1	1	HC10009090	IC NJM2901
QL04	1	1	HC712200A0	IC HD74LS122
QL05	1	1	HW10001320	Photo Unit PC627
QL06	1	1	HD20001210	Diode 1S2473
QL07	1	1	HD20001210	Diode 1S2473
QL08	1	1	HD20001210	Diode 1S2473
QL09	1	1	HD20001210	Diode 1S2473
QL10	1	1	HD20001210	Diode 1S2473
QL11	1	1	HD20001210	Diode 1S2473
QL12	1	1	HD20001210	Diode 1S2473
QL13	1	1	HD20001210	Diode 1S2473
QL14	1	1	HD20001210	Diode 1S2473
QL15	1	1	HT309452B0	Transistor 2SC945(P or Q)
				PM01-MC TRANSISTOR BLOCK CIRCUIT BOARD
PM01	1	1	YK21441320	P.W. Board, MC Transistor Block
				P.W. Board Assembly
				PM01-RESISTORS
RM35	1	1	GF05100140	10Ω ±5% ¼W
RM36	1	1	GF05100140	10Ω ±5% ¼W
RM37	1	1	GF05100140	10Ω ±5% ¼W
RM38	1	1	GF05100140	10Ω ±5% ¼W
				PM01-SEMICONDUCTORS
QM01	1	1	HT325451E0	Transistor 2SC2545(E)
QM02	1	1	HT325451E0	Transistor 2SC2545(E)
QM03	1	1	HT325451E0	Transistor 2SC2545(E)
QM04	1	1	HT325451E0	Transistor 2SC2545(E)
QM05	1	1	HT325451E0	Transistor 2SC2545(E)
QM06	1	1	HT325451E0	Transistor 2SC2545(E)
QM07	1	1	HT325451E0	Transistor 2SC2545(E)
QM08	1	1	HT325451E0	Transistor 2SC2545(E)
QM09	1	1	HT110831E0	Transistor 2SA1083(E)
QM10	1	1	HT110831E0	Transistor 2SA1083(E)
QM11	1	1	HT110831E0	Transistor 2SA1083(E)
QM12	1	1	HT110831E0	Transistor 2SA1083(E)
QM13	1	1	HT110831E0	Transistor 2SA1083(E)
QM14	1	1	HT110831E0	Transistor 2SA1083(E)
QM15	1	1	HT110831E0	Transistor 2SA1083(E)
QM16	1	1	HT110831E0	Transistor 2SA1083(E)
QM17	1	1	HT108722D0	Transistor 2SA872A(D or E)
QM18	1	1	HT108722D0	Transistor 2SA872A(D or E)
QM19	1	1	HT317752D0	Transistor 2SC1775A(D or E)
QM20	1	1	HT317752D0	Transistor 2SC1775A(D or E)

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
QM21	1	1	HT323201F0	Transistor 2SC2320(E or F)
QM22	1	1	HT323201F0	Transistor 2SC2320(E or F)
QM23	1	1	HT406661C0	Transistor 2SD666(C)
QM24	1	1	HT406661C0	Transistor 2SD666(C)
QM25	1	1	HT206461C0	Transistor 2SB646(C)
QM26	1	1	HT206461C0	Transistor 2SB646(C)
				PM01-PLUGS
J410	1	1	YP06000750	Plug, (14P)
J411	1	1	YP06000750	Plug, (14P)
				PN00-ASO PROTECTOR CIRCUIT BOARD
PN00	1	1	YK22870210	P.W. Board, ASO Protector
				ZZ22870210 P.W. Board Assembly
				PN00-CAPACITORS
CN01	1	1	DF16222350	Film 2200pF ±10%
CN02	1	1	DF16222350	Film 2200pF ±10%
CN03	1	1	DF16222350	Film 2200pF ±10%
CN04	1	1	DF16222350	Film 2200pF ±10%
				PN00-RESISTORS
				(All Resistors are ±5% and ¼W)
RN01	1	1	GD05331140	330Ω
RN02	1	1	GD05331140	330Ω
RN03	1	1	GD05331140	330Ω
RN04	1	1	GD05331140	330Ω
RN09	1	1	GD05472140	4.7KΩ
RN10	1	1	GD05472140	4.7KΩ
RN11	1	1	GD05472140	4.7KΩ
RN12	1	1	GD05472140	4.7KΩ
RN13	1	1	GD05273140	27KΩ
RN14	1	1	GD05273140	27KΩ
				PN00-SEMICONDUCTORS
QN01	1	1	HT309452C0	Transistor 2SC945(P or K)
QN02	1	1	HT309452C0	Transistor 2SC945(P or K)
QN03	1	1	HT107332C0	Transistor 2SA733(P or K)
QN04	1	1	HT107332C0	Transistor 2SA733(P or K)
QN05	1	1	HD20011050	Diode 1S1555
QN06	1	1	HD20011050	Diode 1S1555
QN07	1	1	HD20011050	Diode 1S1555
QN08	1	1	HD20011050	Diode 1S1555
QN09	1	1	HD20002210	Diode 1S2472
QN10	1	1	HD20002210	Diode 1S2472
QN11	1	1	HD20002210	Diode 1S2472
QN12	1	1	HD20002210	Diode 1S2472

• (E): for Europe
• (F): for Japan

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
PS00	1	1	YK221H1820	PS00-TONE ON-OFF CIRCUIT BOARD
	1		ZZ221H8820	P.W. Board, Tone ON-OFF P.W. Board Assembly
RS01	1	1	GD05103140	PS00-RESISTORS
RS02	1	1	GD05103140	10KΩ ±5% 1/4W 10KΩ ±5% 1/4W
SS01	1	1	SC04020200	PS00-SWITCH
				Switch, Tone ON-OFF
PV00	1	1	YK221H1830	PV00-PHONO INPUT CIRCUIT BOARD
	1		ZZ221H8830	P.W. Board, Phono Input P.W. Board Assembly
CV01	1	1	DK18473320	Ceramic Cap. 0.047μF
CV02	1	1	DK18473320	Ceramic Cap. 0.047μF
JV01	1	1	YT02040320	Terminal, (4P) RCA
PW00	1	1	YK221H1870	PW00-SPEAKER SWITCH CIRCUIT BOARD
	1		ZZ221H8870	P.W. Board, Speaker Switch P.W. Board Assembly
RW01	1	1	GA05271010	Resistor 270Ω ±5% 1W
RW02	1	1	GA05271010	Resistor 270Ω ±5% 1W
SW01	1	1	SP04020200	Push Switch, Speaker

REF. DESIG.	Q'TY		PART NO.	DESCRIPTION
	E	F		
PX00	1	1	YK21441540	PX00-HEAD PHONE CIRCUIT BOARD
	1		ZZ21448540	P.W. Board, Head Phone P.W. Board Assembly
JX01	1	1	YJ01001400	Jack, Head Phone
PY00	1	1	YK221H1880	PY00-L.E.D. POWER IND. CIRCUIT BOARD
	1		ZZ221H8880	P.W. Board, L.E.D. Power Ind. P.W. Board Assembly
QY01	1	1	HI10004030	L.E.D. SLP132B

(W01-99)	Assembly and Wiring
(T01-99)	Adjustment
(X01-00)	Correction

NOTE ON SAFETY:

Symbol Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

10. TECHNICAL SPECIFICATIONS

AUDIO SECTION

POWER OUTPUT RATING PER CHANNEL	
4 OHMS RMS (20 Hz – 20 kHz)	150 W
8 OHMS RMS (20 Hz – 20 kHz, Class AB)	120 W
TOTAL HARMONIC DISTORTION AT RMS 8 OHMS	
I.M. DISTORTION	0.03 %
DAMPING FACTOR 8 OHMS (1 kHz)	120

MM CARTRIDGE INPUT

Frequency Response (RIAA)	±0.3 dB
Signal-to-Noise Ratio ("A" Weighted 7.75 mV Input)	90 dB
Input Impedance Phono 1	47 kHz
Phono 2	100/47/27 kHz
Input Sensitivity	2.2 mV
Equivalent Noise at Input ("A" Weighted)	0.24 µV
Dynamic Range	110 dB

MC CARTRIDGE INPUT

Input Sensitivity 220 μ V
Input Impedance 75 ohms

AUX. INPUT

Input Impedance	33 k ohms
Input Sensitivity	150 mV
Frequency Response (± 1 dB Tone out)	10 Hz – 80 kHz
Signal-to-Noise Ratio ("A" Weighted Input Shorted)	98 dB

OUTPUT VOLTAGE

Tape Out 150 mV

OUTPUT IMPEDANCE

Tape Out..... 560 ohms


GENERAL

Power Requirements	110/120/220/240 V AC, 50/60 Hz (Voltage selection can be done by external voltage selector.)
Power Consumption at Rated Output, Both Channels Operating	500 W
Dimensions	
Panel Width	416 mm
Panel Height	146 mm
Depth	332 mm
Weight	
Unit alone	15.5 kg

Specifications and appearance are subject to change for modification without notice.

MEMORANDUM


11. SCHEMATIC DIAGRAM

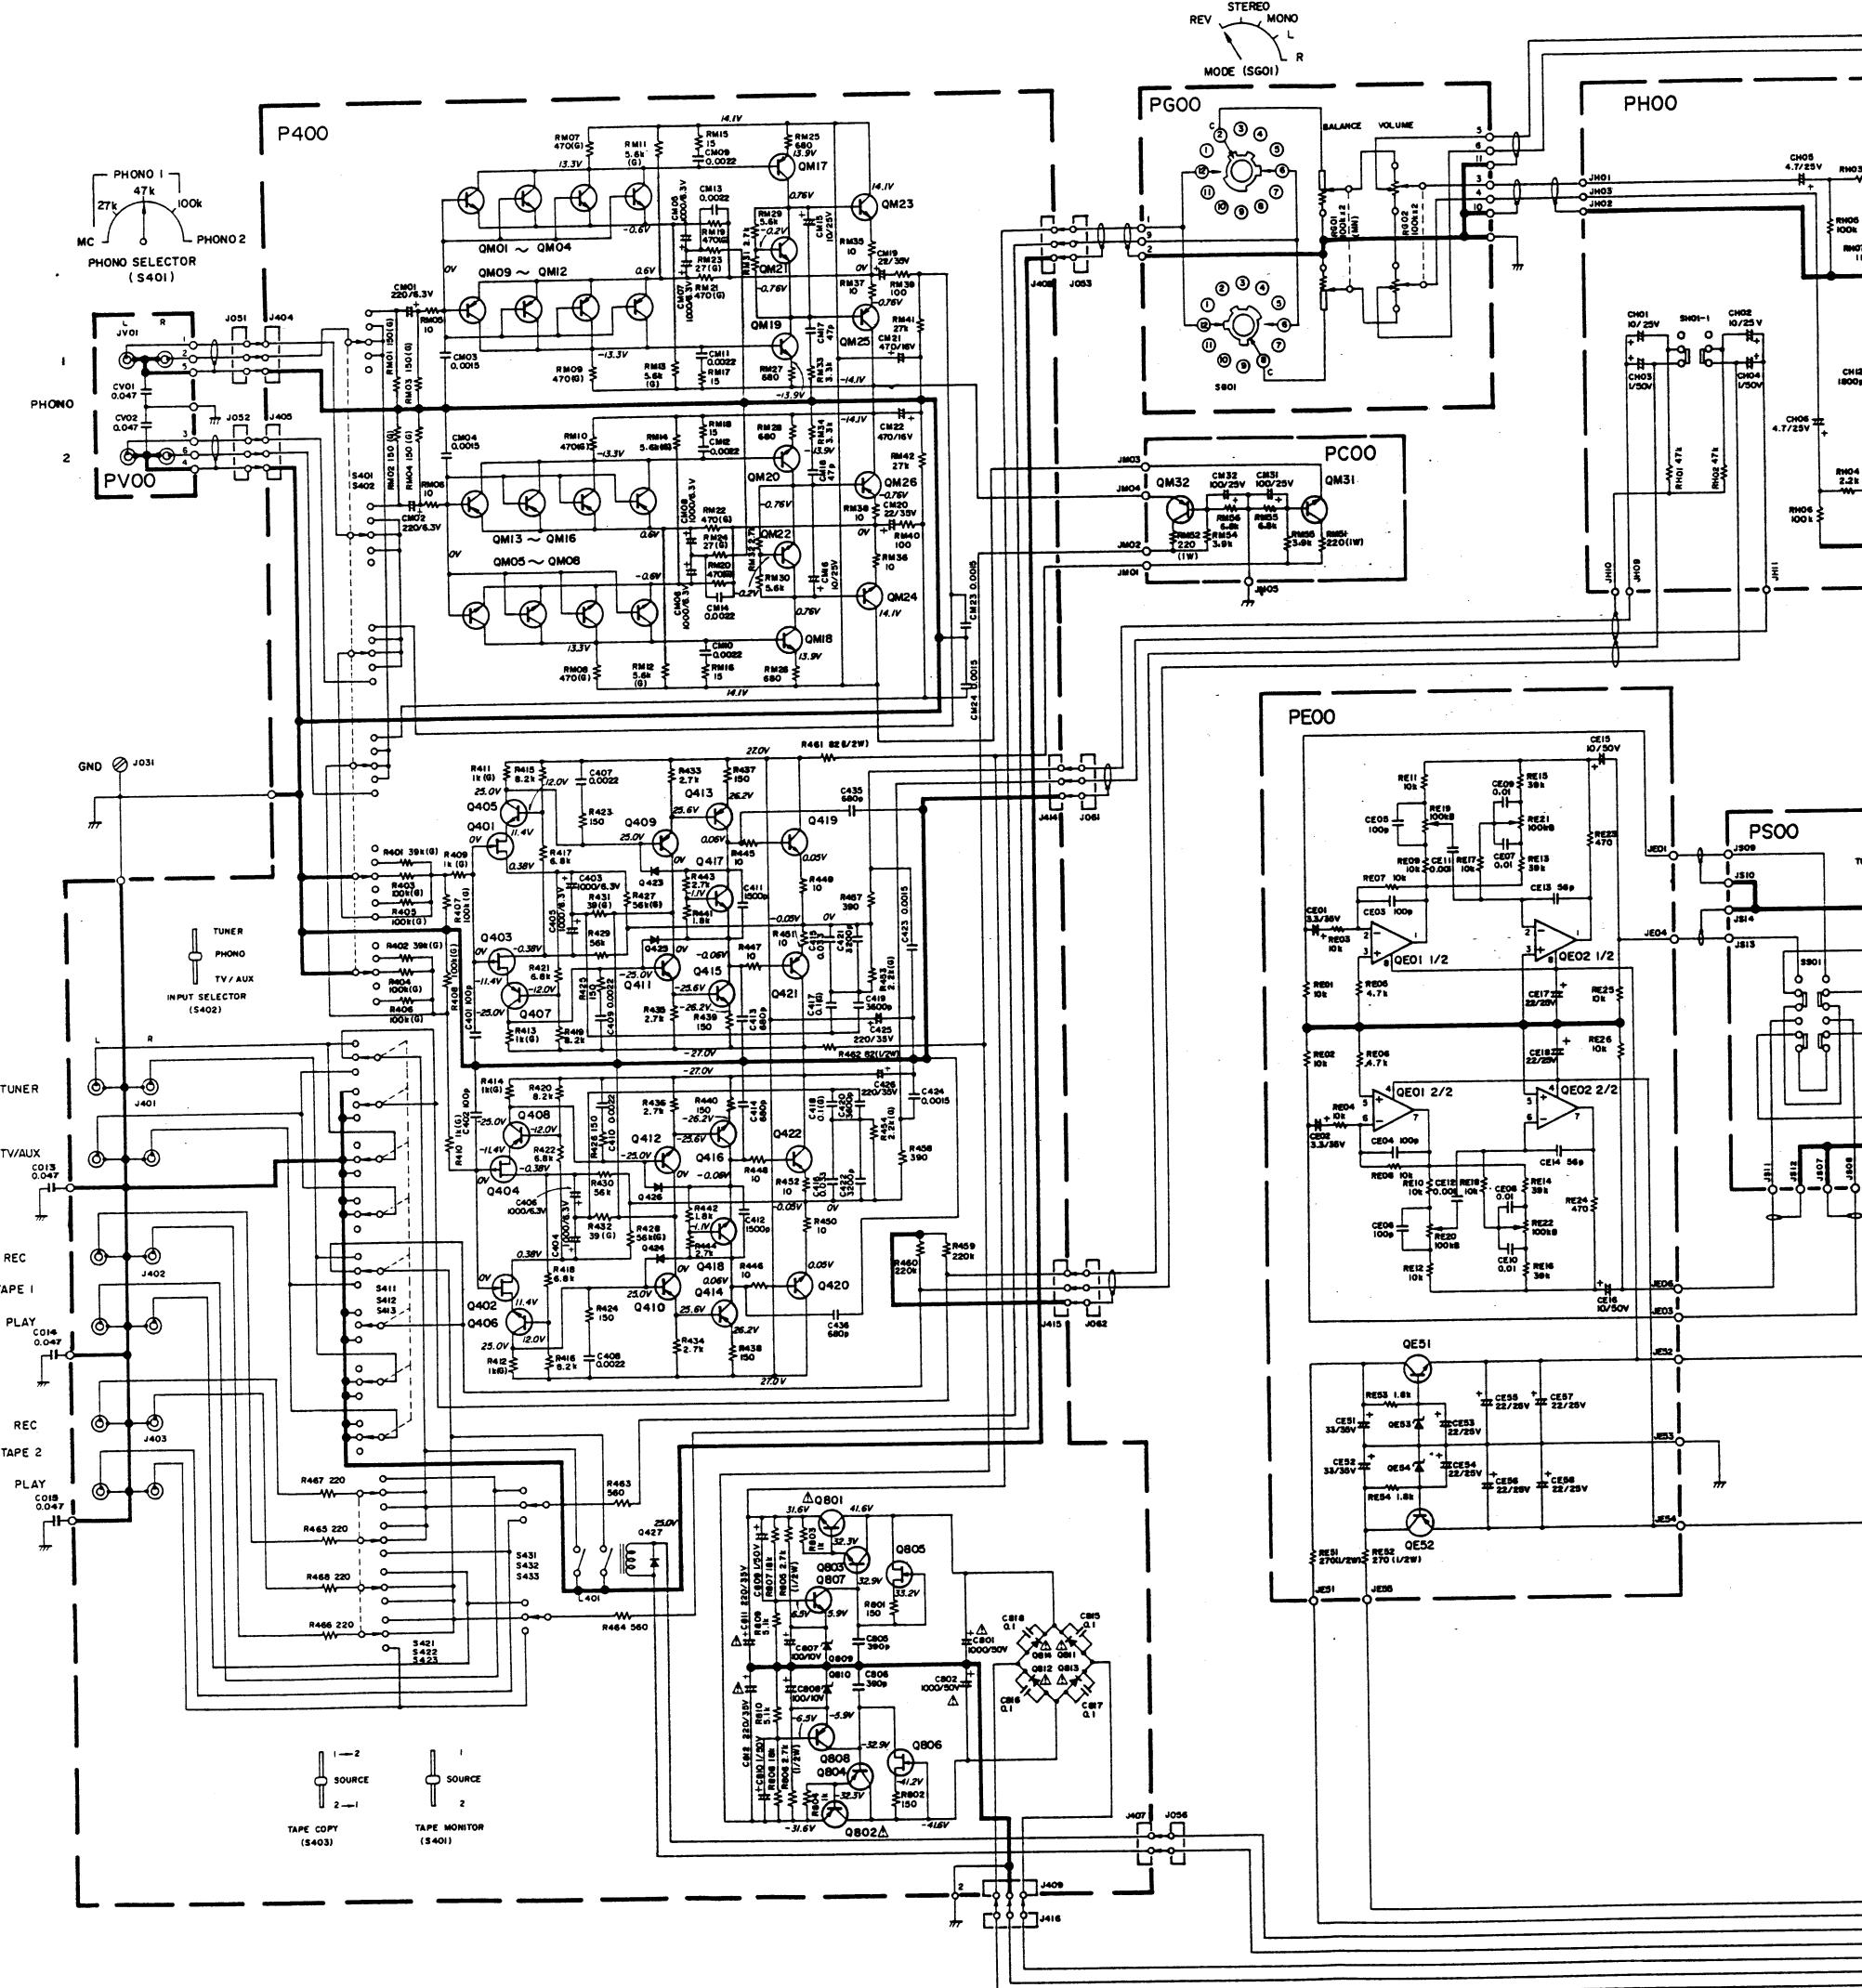


NOTE ON SAFETY :

Symbol  Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol .

Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

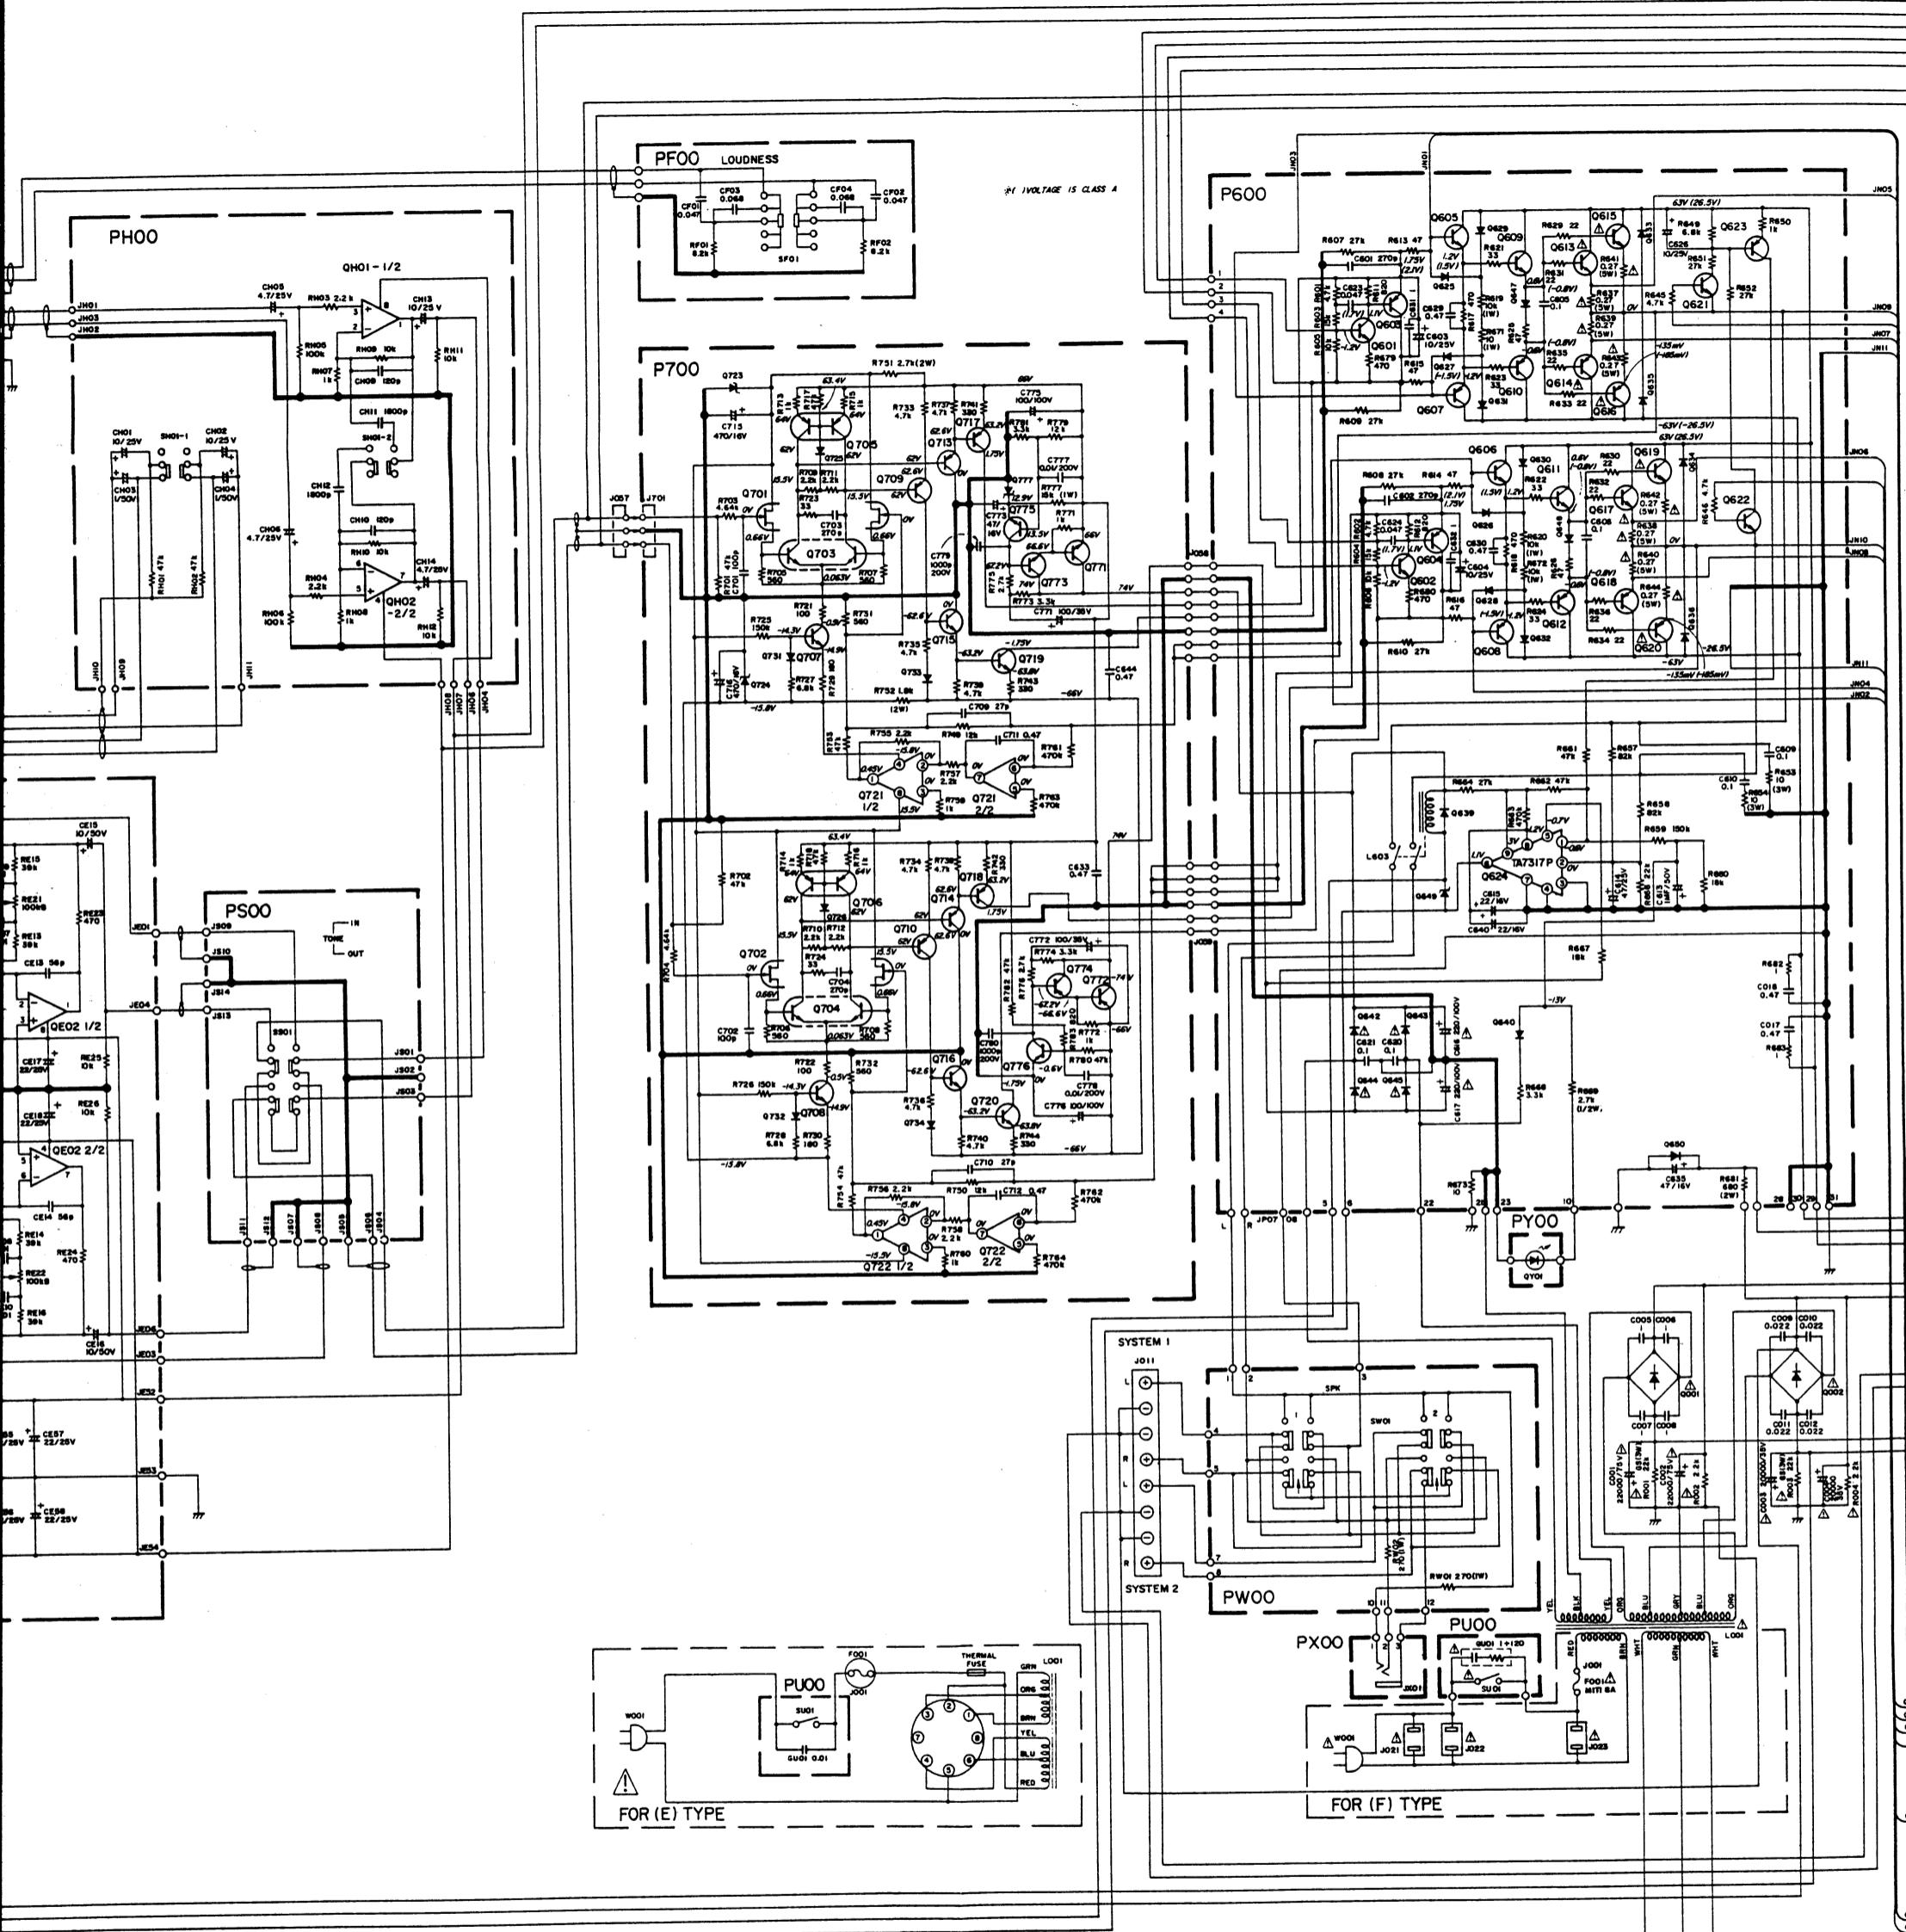


Components and wiring are subject to change for modification

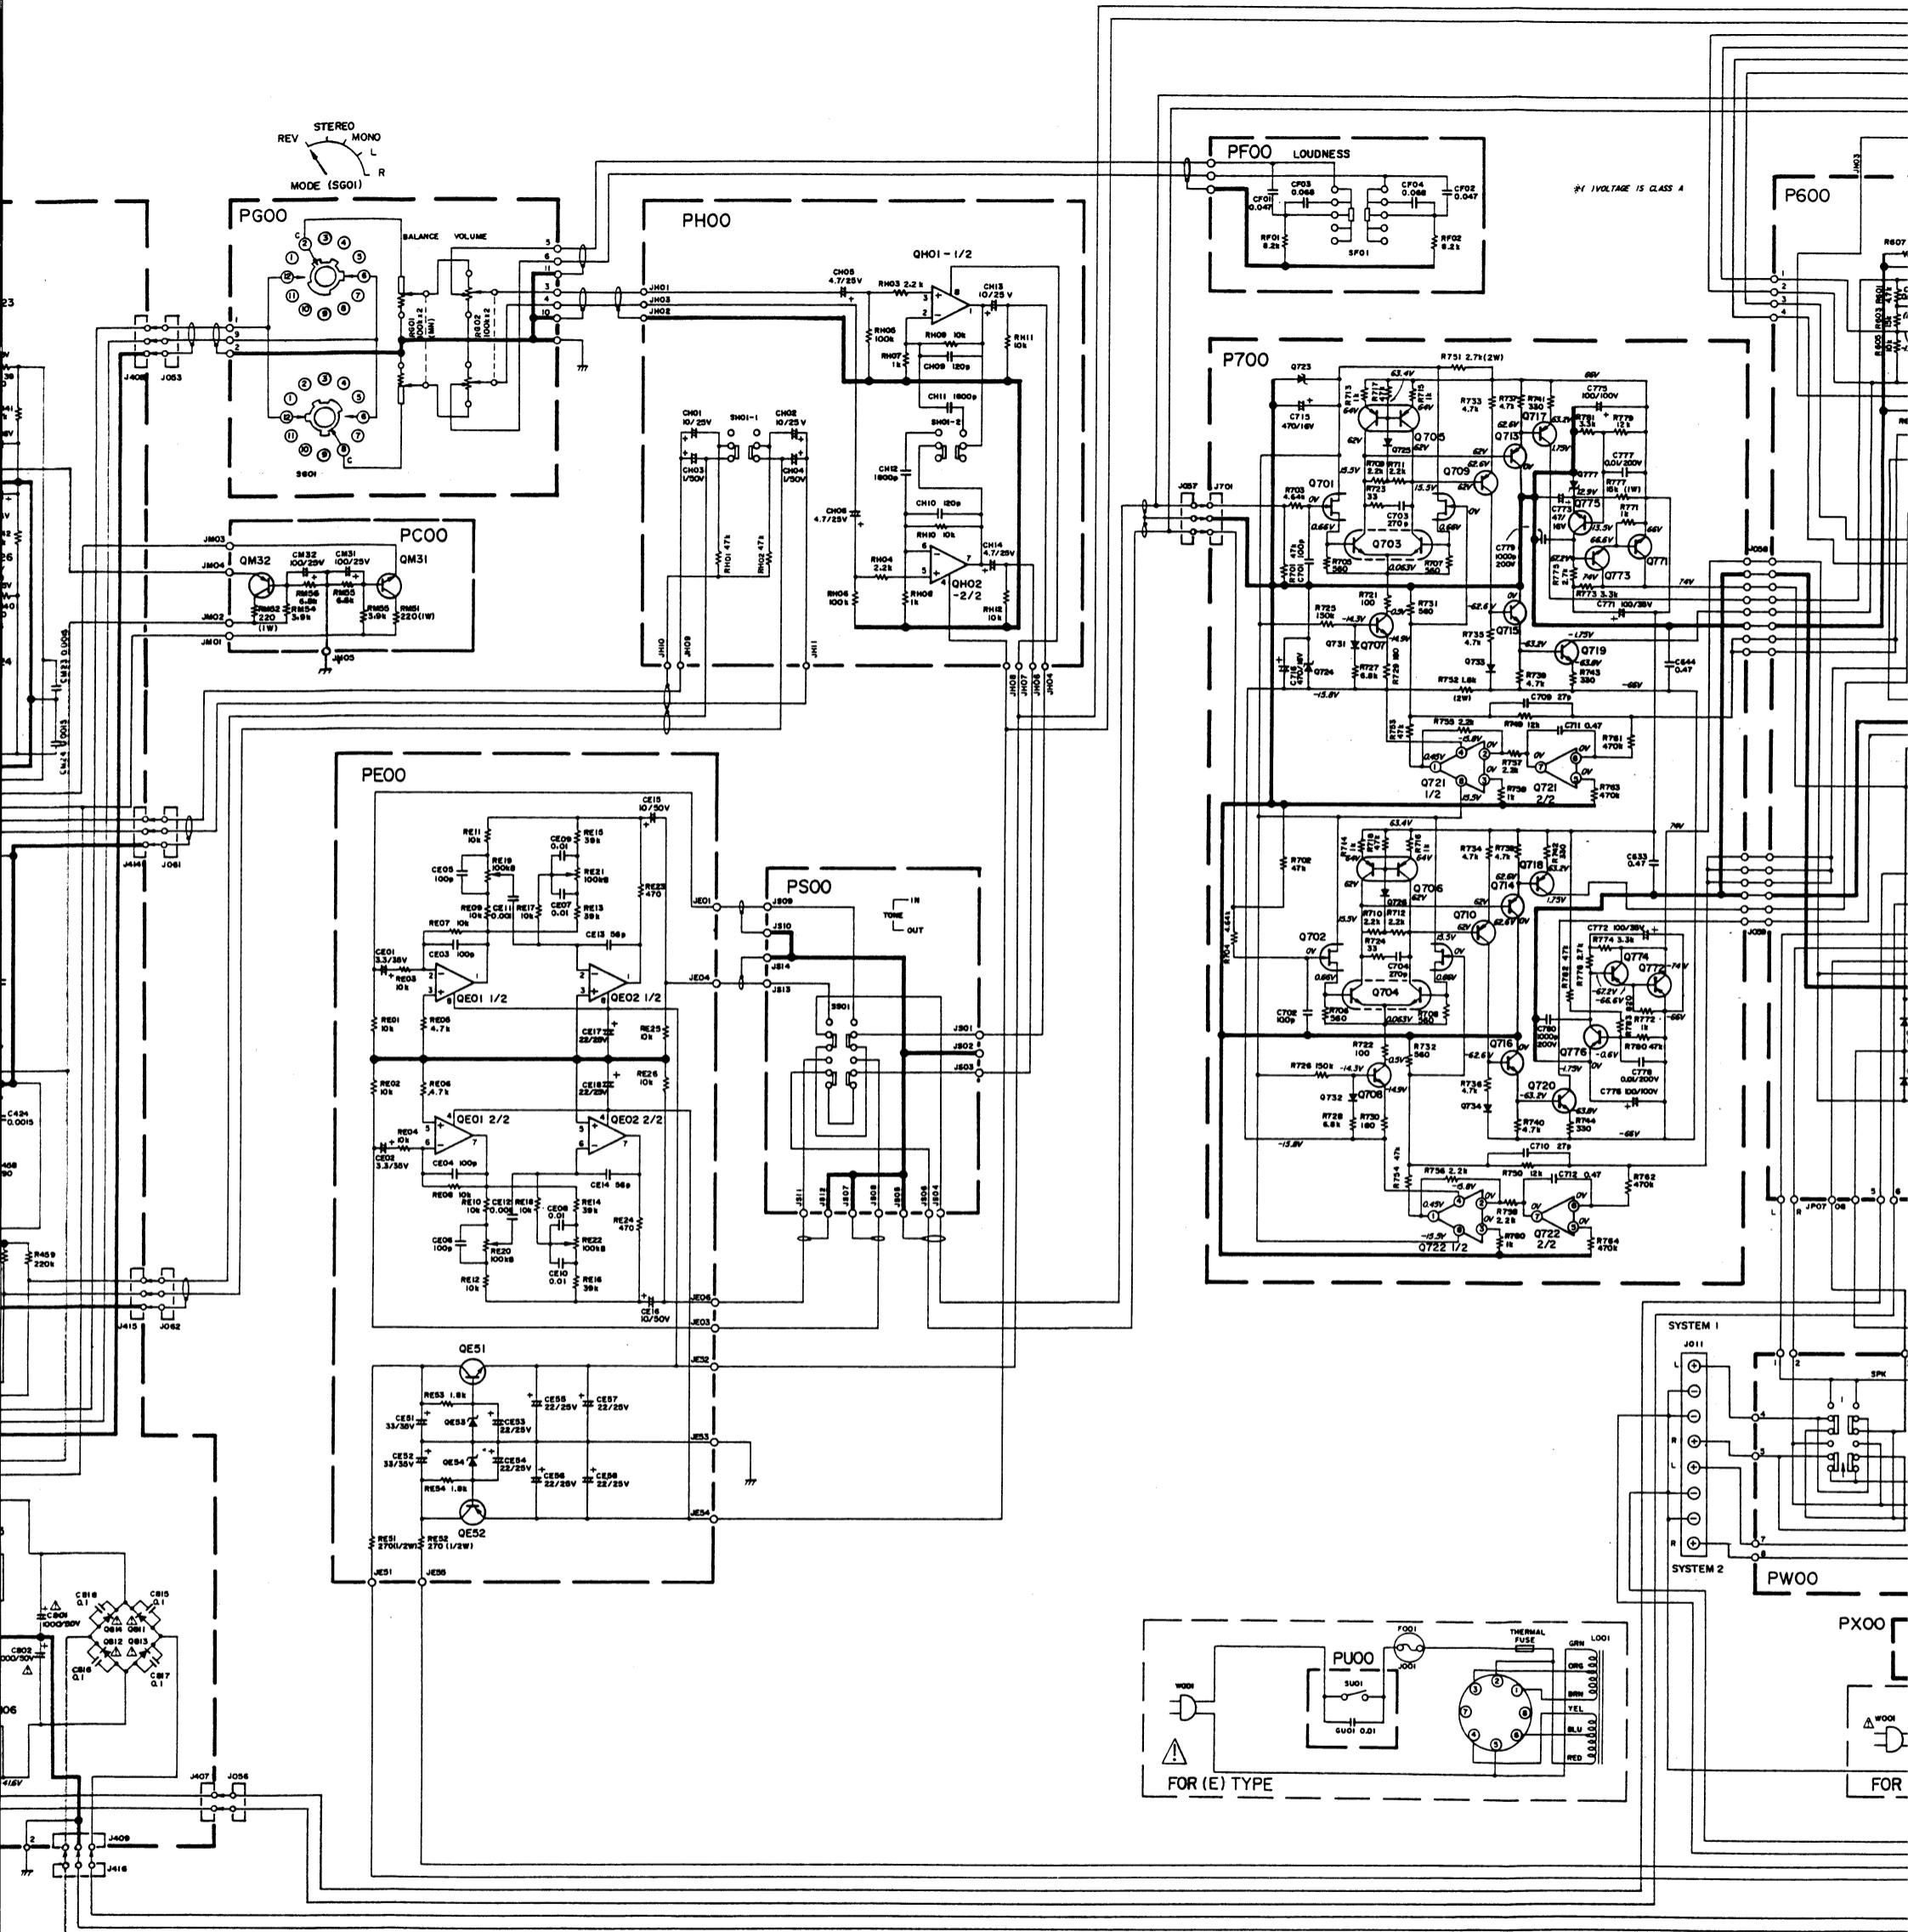

Only original parts
with symbol \triangle .
Other than original
parts may cause
a shock hazard.

Model Pm-6a

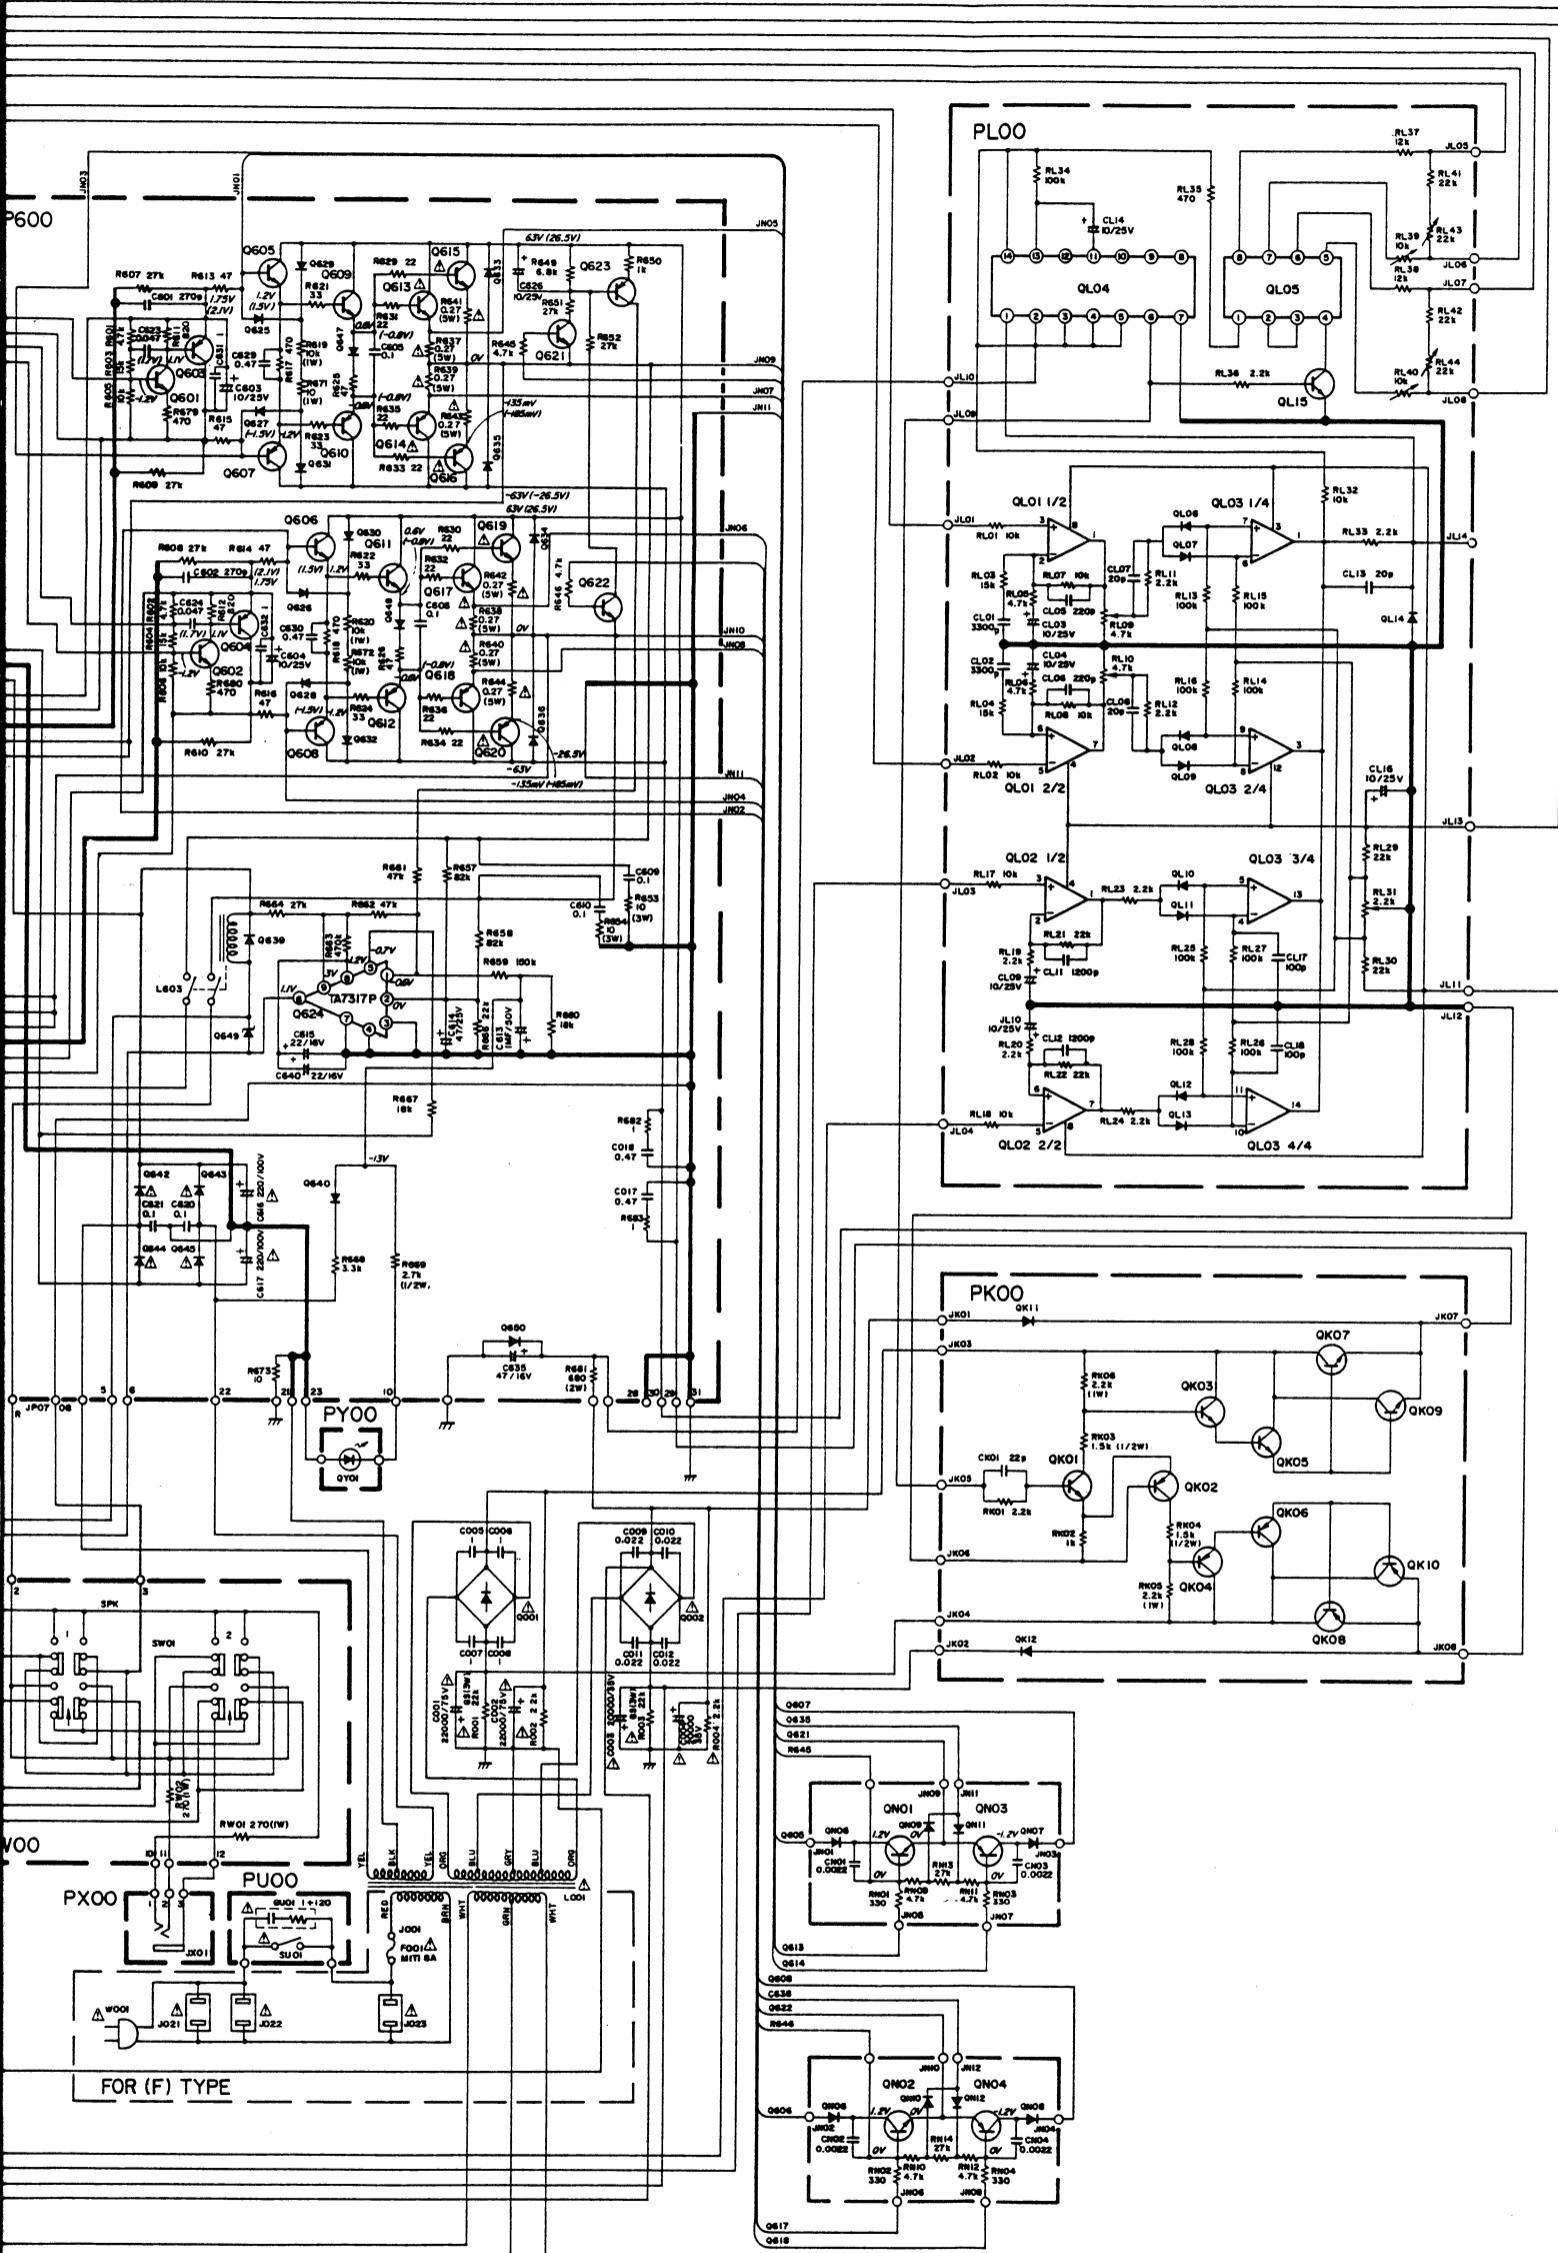

Q001 S5VB-20	Q701, Q702 ICM47F(C)
Q002 S5VB-20	Q703, Q704 2SC2259(F,G)
Q401, Q402 2SK15(F,G)	Q705, Q706 2SA995(F,G)
Q403, Q404 2SJ51(G,F)	Q707, Q708, Q715, Q716 2SC2240(GR,BL)
Q405, Q406 2SC2240(B,L)	Q709, Q710, Q713, Q714 2SA970(GR,BL)
Q407, Q408 2SA970(BL)	Q717, Q718 2SA1124(R,S)
Q409, Q410 2SA970(GR)	Q719, Q720 2SC2632(R,S)
Q411, Q412 2SC2240(GR)	Q721, Q722 IC NJM4560
Q413, Q414, Q623 2SA872A(DE)	Q723, Q724 Z,WZ150
Q417, Q418 2SC2320(F)	Q771 2SC22388
Q419, Q420 2SC2591(Q,R)	Q772 2SA9688
Q421, Q422 2SA1111(Q,R)	Q773, Q775 2SC1775A(D,E)
Q423 ~ Q427 IS581	Q774, Q776 2SA872A(D,E)
Q601, Q602 2SC1568(S)	Q777 Z,HZ12B2L
Q603, Q604, Q623 2SA1015(O,Y)	Q727 ~ Q730 IS1555
Q605, Q606 2SC2632(R,S)	Q801 2SC2591(Q,R)
Q607, Q608 2SA1124(R,S)	Q802 2SA1124(R,S)
Q609, Q611 2SC2591(Q,R)	Q803 2SC2240(GR,BL)
Q610, Q612 2SA1111(Q,R)	Q804 2SA970(GR,BL)
Q613, Q615, Q617, Q619 2SC2706(R,O)	Q805, Q806 2SK30A(Y)
Q614, Q616, Q618, Q620 2SA1146(R,O)	Q807 2SC1775A(D,E)
Q621, Q622 2SC1815(O,Y)	Q808 2SA872A(D,E)
Q624 IC TA7317P	Q809, Q810 H2681L
Q625 ~ Q628 IS2471G	Q811 ~ Q814 DS135(O)
Q629 ~ Q632 0640, Q642 ~ 0645 DS135D	Q825, Q726 IS588
Q633 ~ Q636 W06C	Q815 ~ Q818 2SC2545(E)
Q639, Q641, Q647, Q648 IS1555	Q809 ~ QM16 2SA1083(E)
Q649 BZ-240	QM17, QM18 2SA872A(D,E)
Q650 WZ052	QM19, QM20 2SC1775A(D,E)
SLP132B BZ100 R670	QM21, QM22 2SC2320(E,F)
	QM23, QM24 2SD666(C)
	QM25, QM26 2SB646(C)
	QNO1, QNO2 2SC945(P,K)
	QNO3, QNO4 2SA733(P,K)
	QNO5 ~ QNO8 IS1555
	QNO9 ~ QN12 IS2472
	OZO1 SLP132B
	QM31 2SC22388
	QM32 2SA9688