


# SERVICE MANUAL

SKANTIC


LUXOR


8101

## TYPE 110 5001

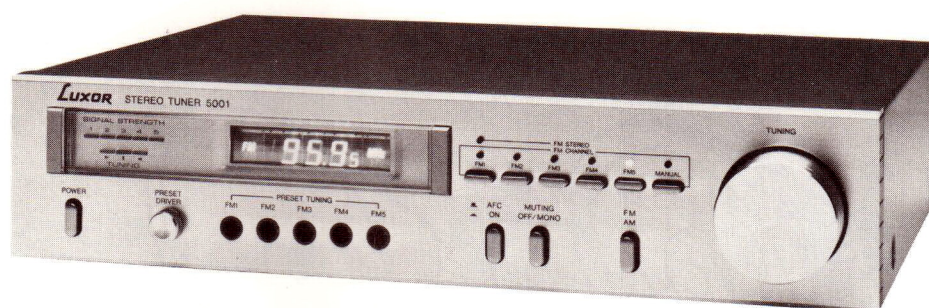

Våglängdsområden Wave ranges	FM 87.5 - 108.5 MHz AM 510 - 1650 kHz
Signal/brusförhållande Signal/noise ratio	67 dB
Distorsion Distortion	Stereo 0.2 %
Frekvensomfång Frequency range	30 - 15000 Hz
Kanalseparation Channel separation	36 dB
Känslighet Sensitivity	Mono/Stereo 2.0/26 $\mu$ V
AM-undertryckning AM-suppression	44 dB
Pilottonundersökning Pilot tone suppression	50 dB

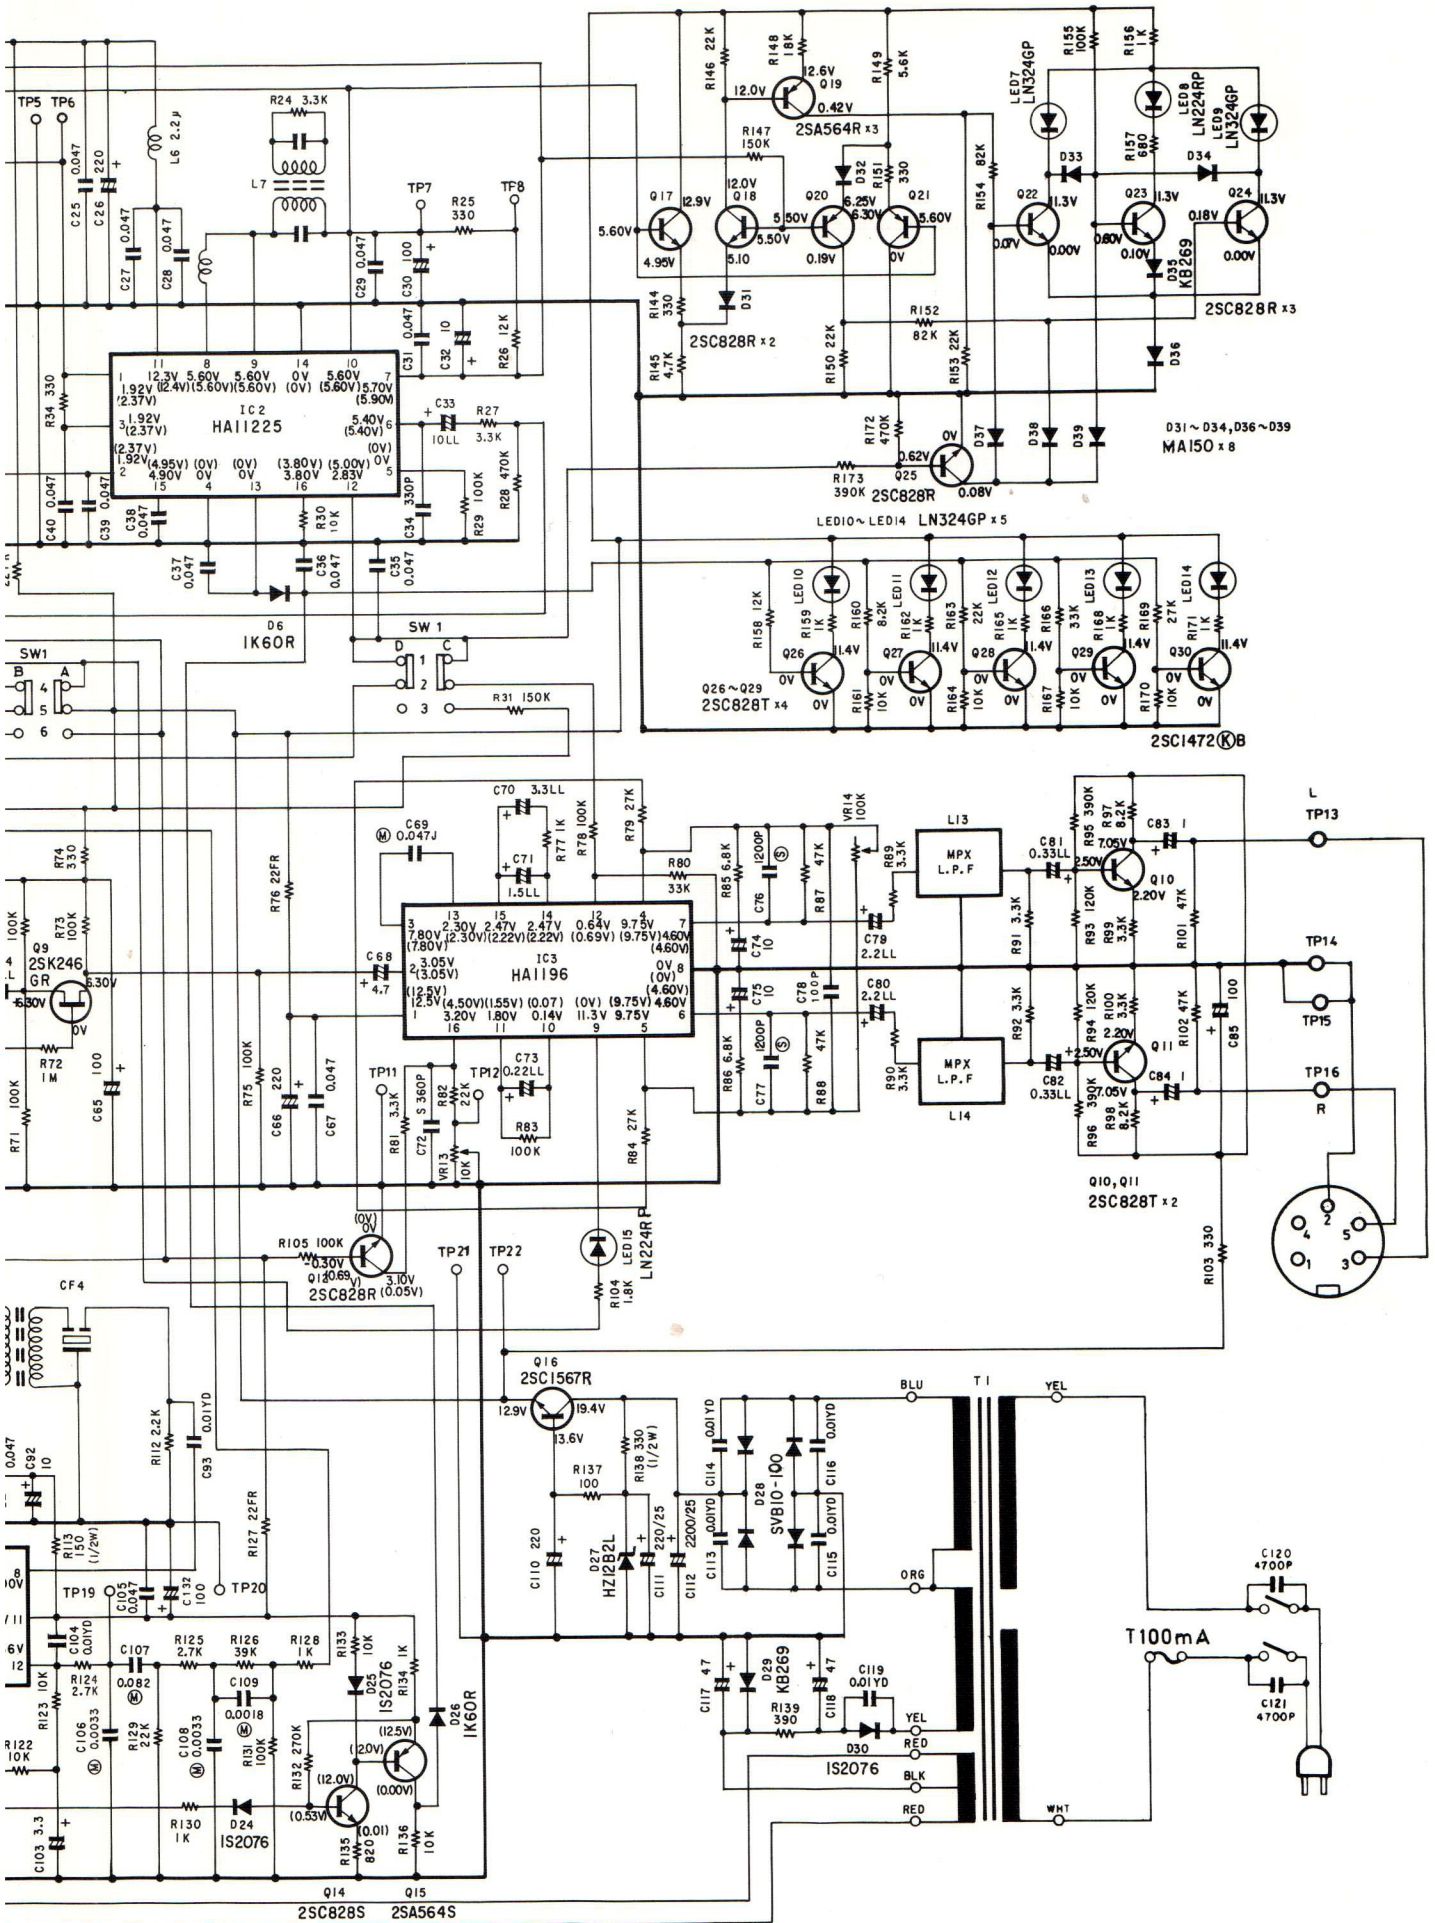

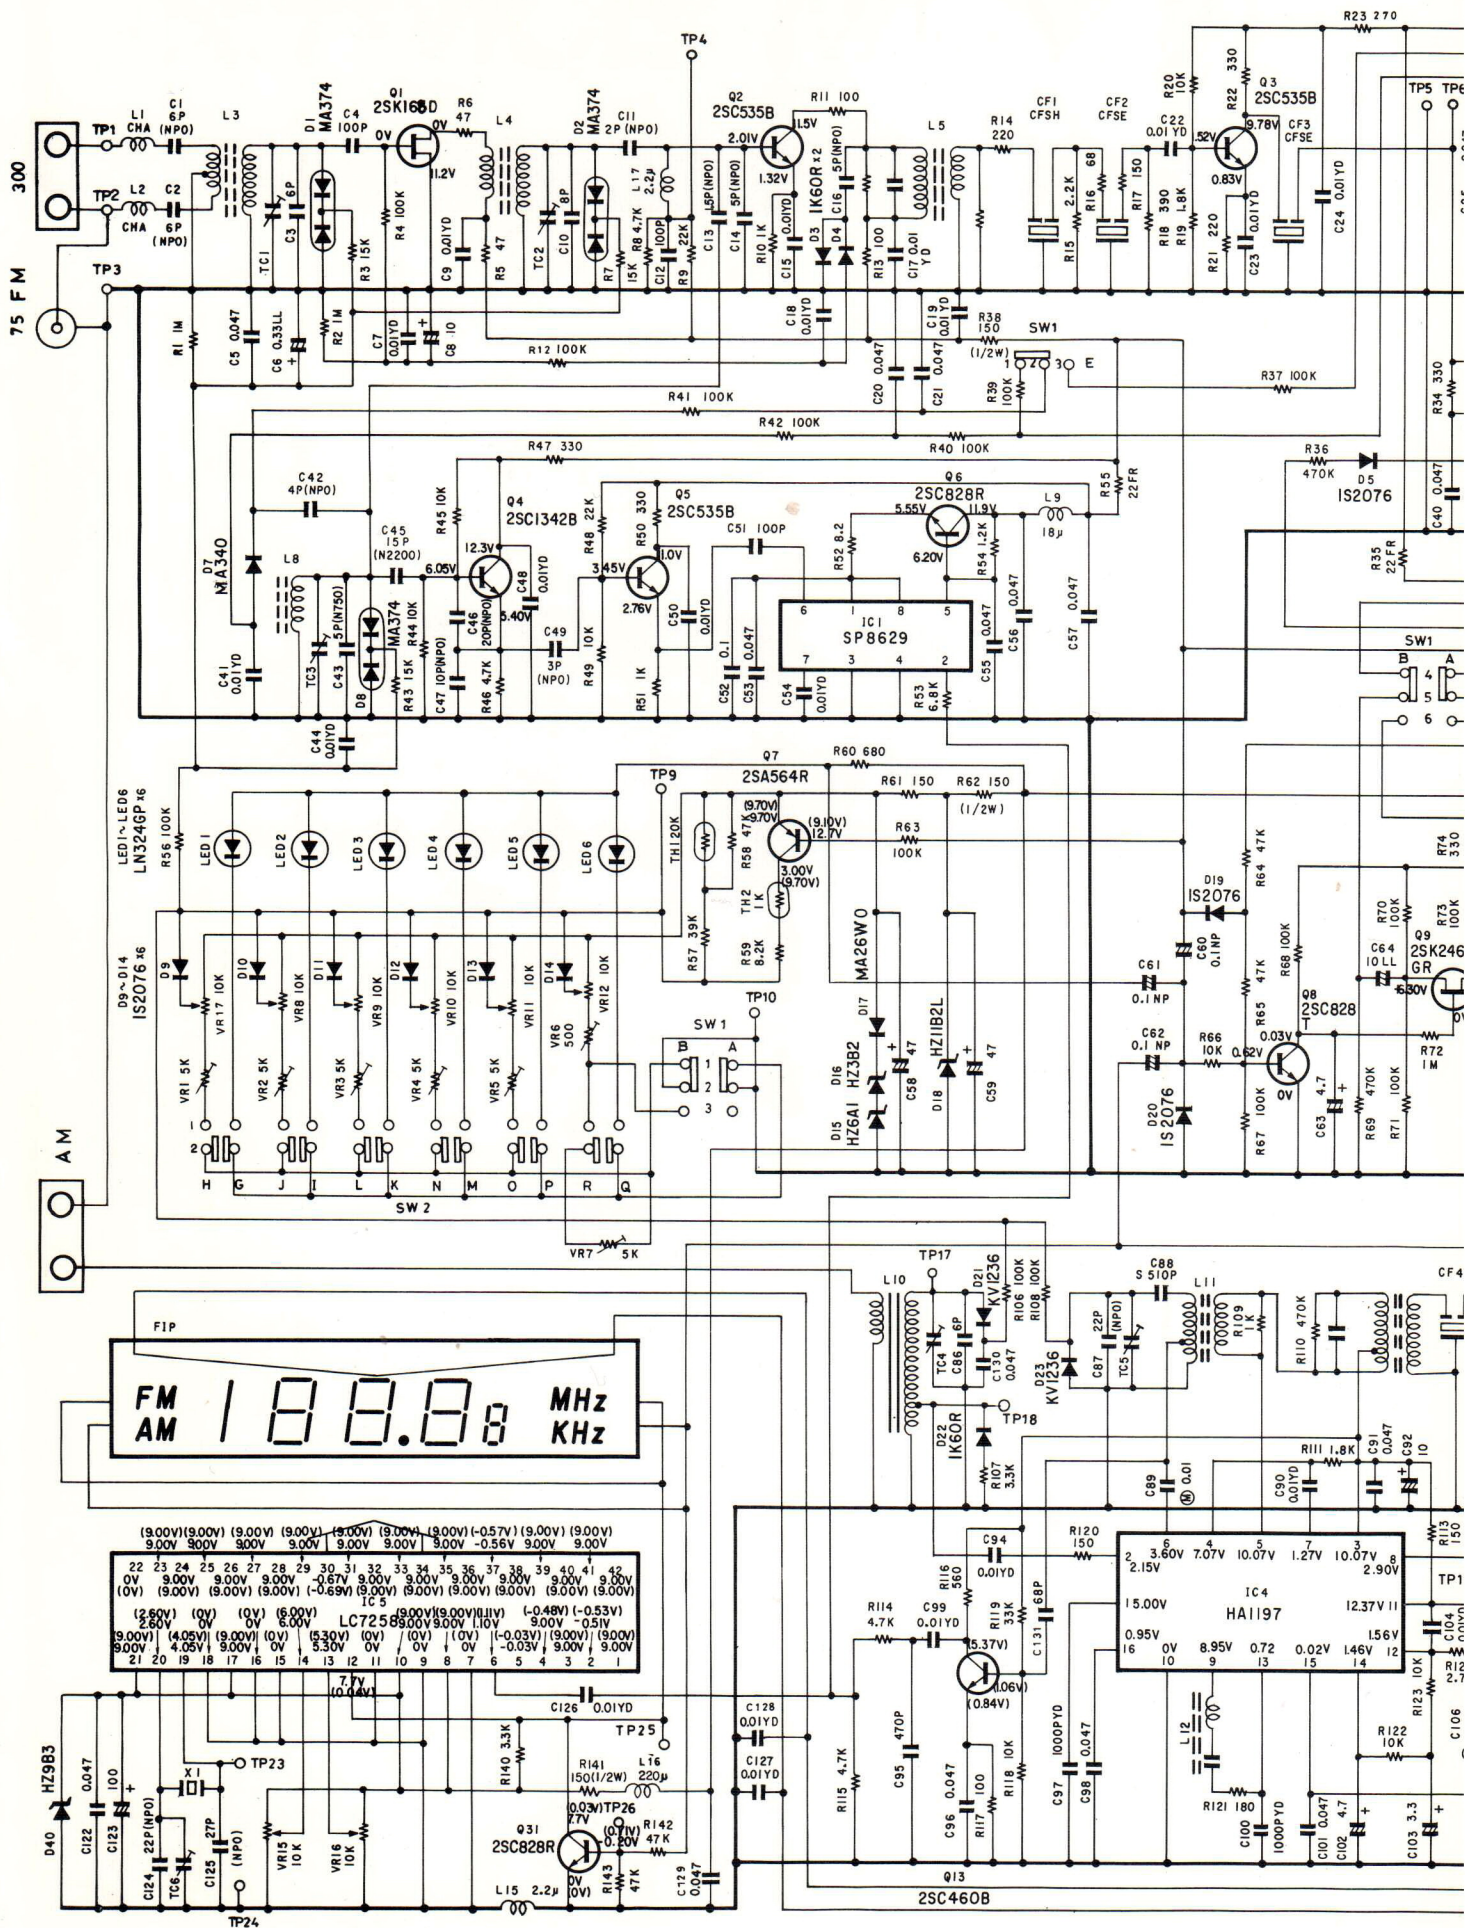

(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(-0.57V)	(9.00V)	(9.00V)										
22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
0V	9.00V	9.00V	9.00V	-0.67V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V
(0V)	(9.00V)	(9.00V)	(9.00V)	(-0.69V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)
(2.60V)	(0V)	(0V)	(6.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(-0.48V)	(-0.53V)	(2.60V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)	(9.00V)
9.00V	4.05V	9.00V	0V	5.30V	0V	0V	0V	(-0.03V)	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V
9.00V	4.05V	9.00V	0V	5.30V	0V	0V	0V	(-0.03V)	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V	9.00V
21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1