


SERVICE MANUAL

SKANTIC

LUXOR

8101

TYPE 120 9204

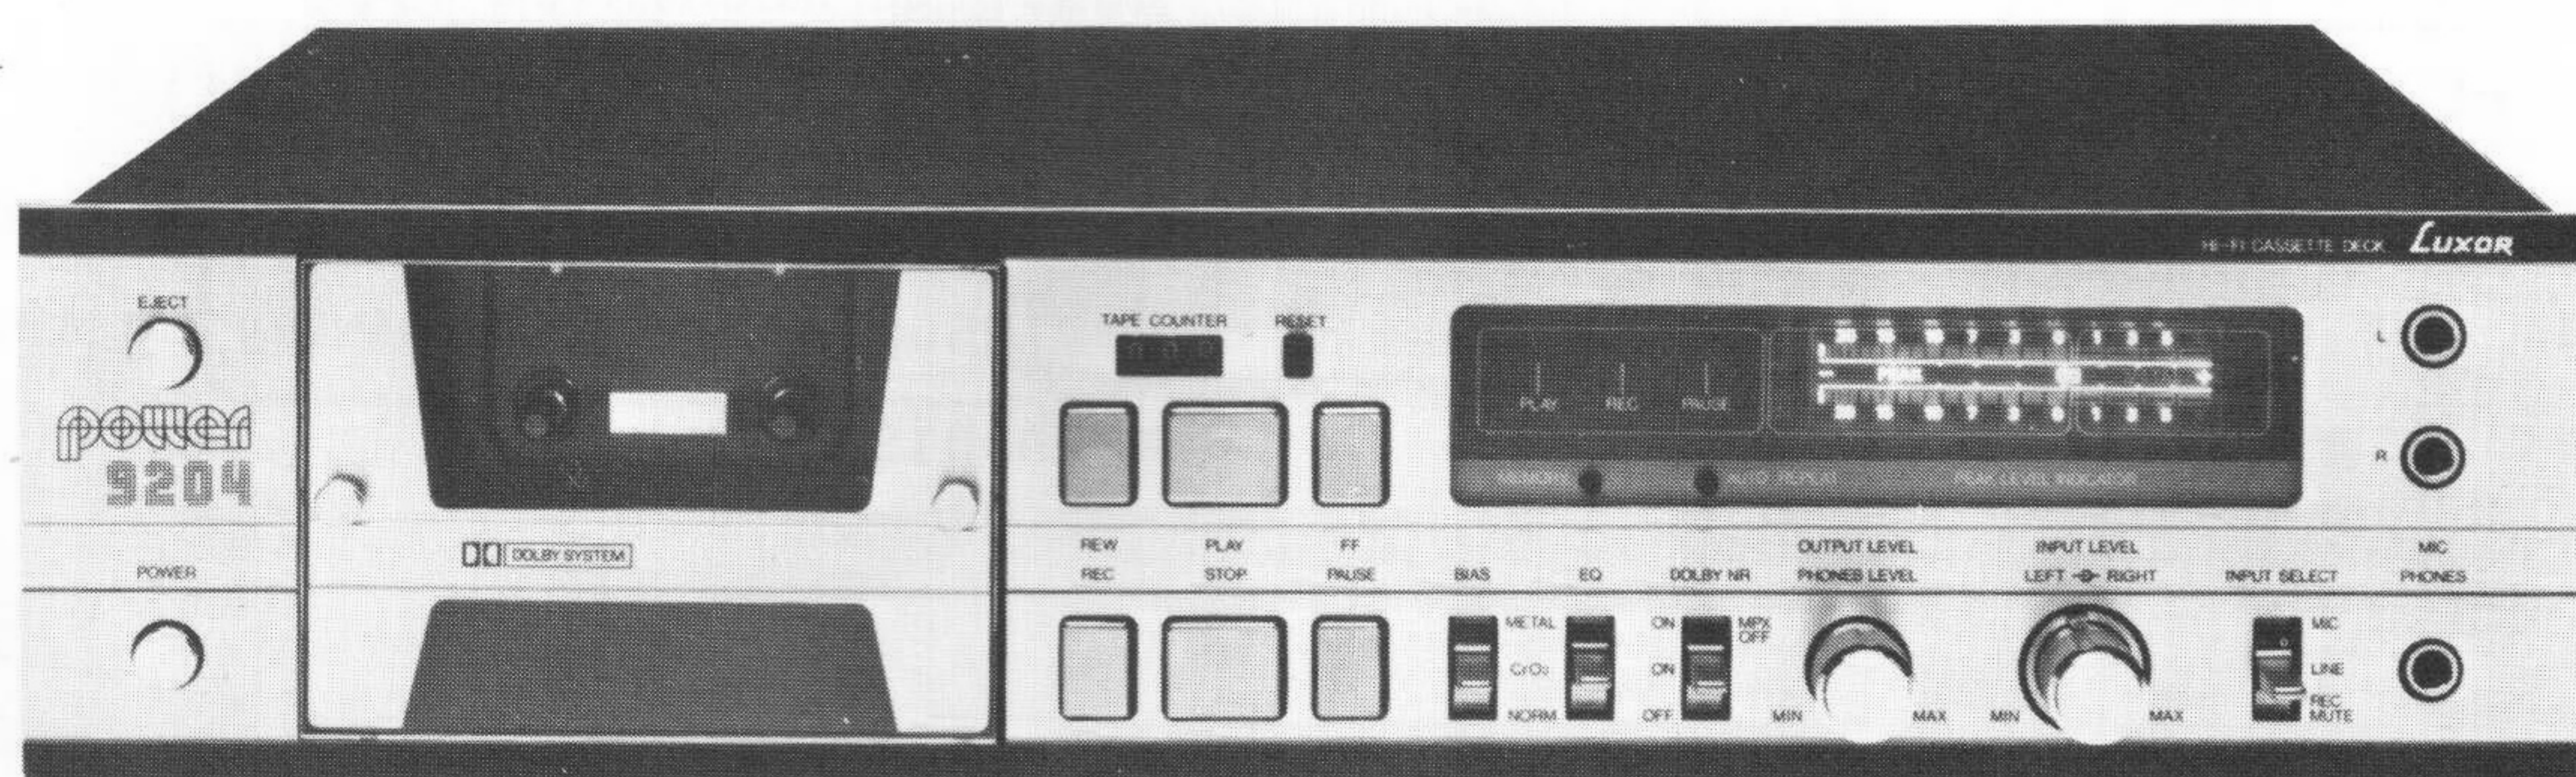

DATA

Frekvensområde Frequency range	Standard	20 - 15 000 Hz
	CrO ₂	20 - 16 000 Hz
	Metal	20 - 18 000 Hz
Dynamik (DIN) Dynamics	Standard	64 dB
	CrO ₂	64 dB
	Metal	65 dB
Svaj Wow and flutter	DIN	± 0,15 %
	VRMS	± 0,06 %
Ingångar Inputs	DIN	0.7 mV/3,3 kΩ
	Line	80 mV/50 kΩ
	Mic	0,7 mV/3,3 kΩ
Utgångar Outputs	Amp	1.600 mV/ 1 kΩ
	Phones jack	6,3 mm

