



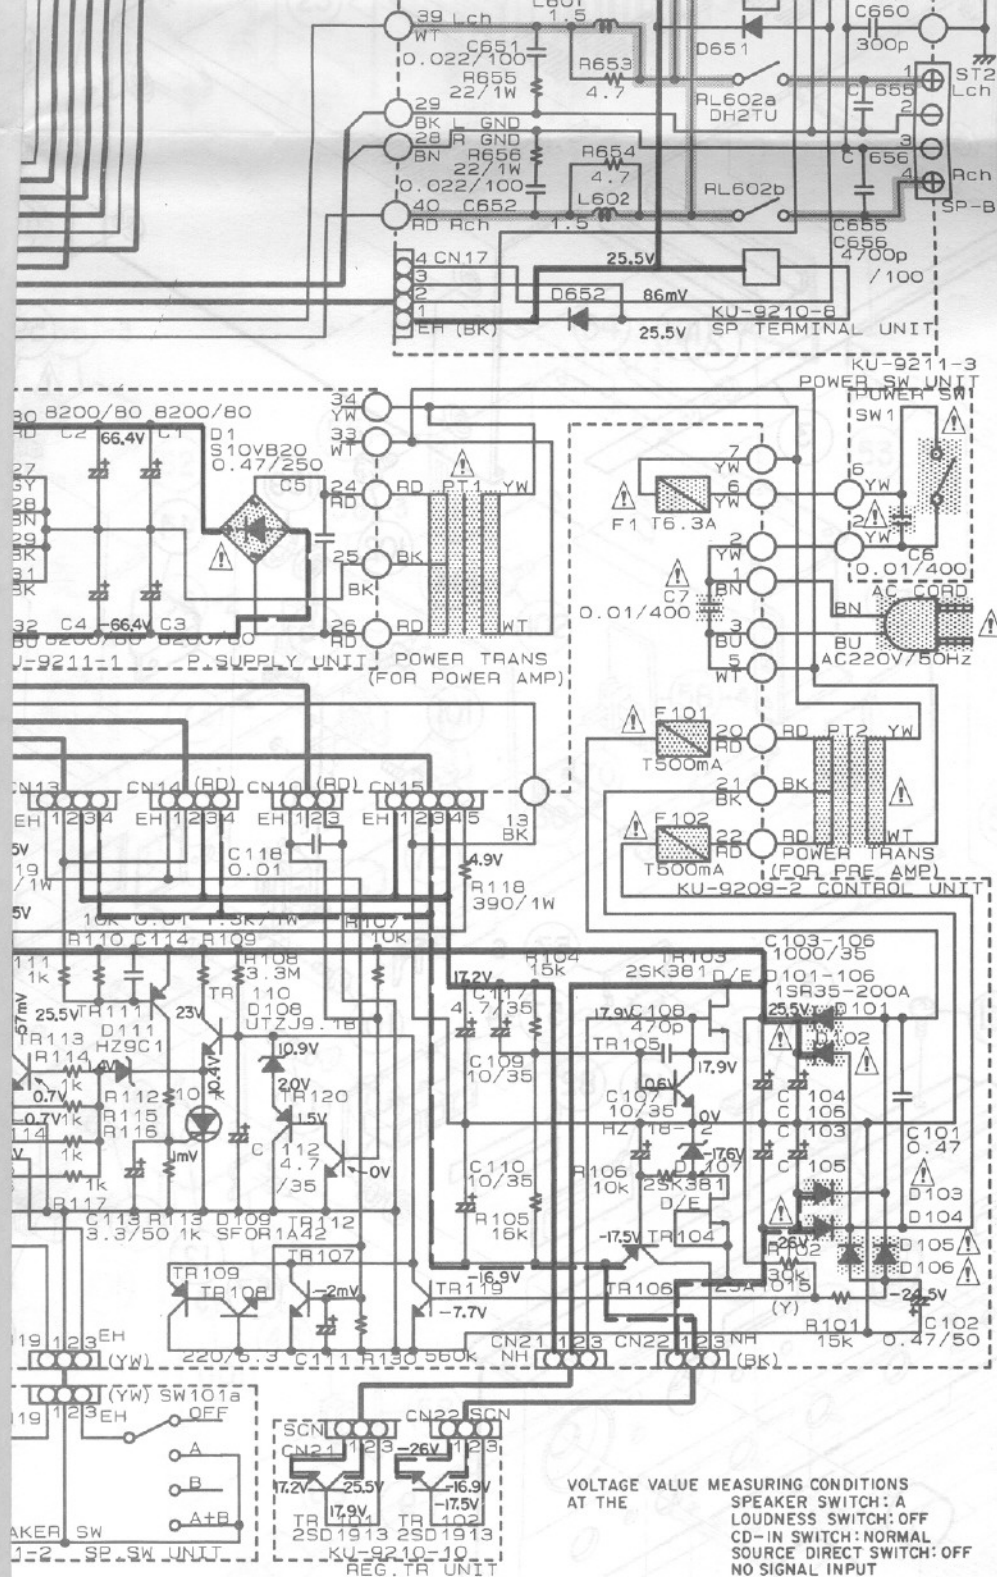

VALUES IN OHM.
 M, M=1, 000, 000 OHM.
 VALUES IN MICRO F.
 MICRO F.
 VALUES IN MICRO H.
 CODE IS 1S2076A
 PN TRANSISTOR IS 2SC2458 BL
 NP TRANSISTOR IS 2SA1048 GR

WARNING:
 DO NOT return the unit to the customer until the problem is located and corrected.


NOTES:
 Circuit and parts are subject to change without prior notice.

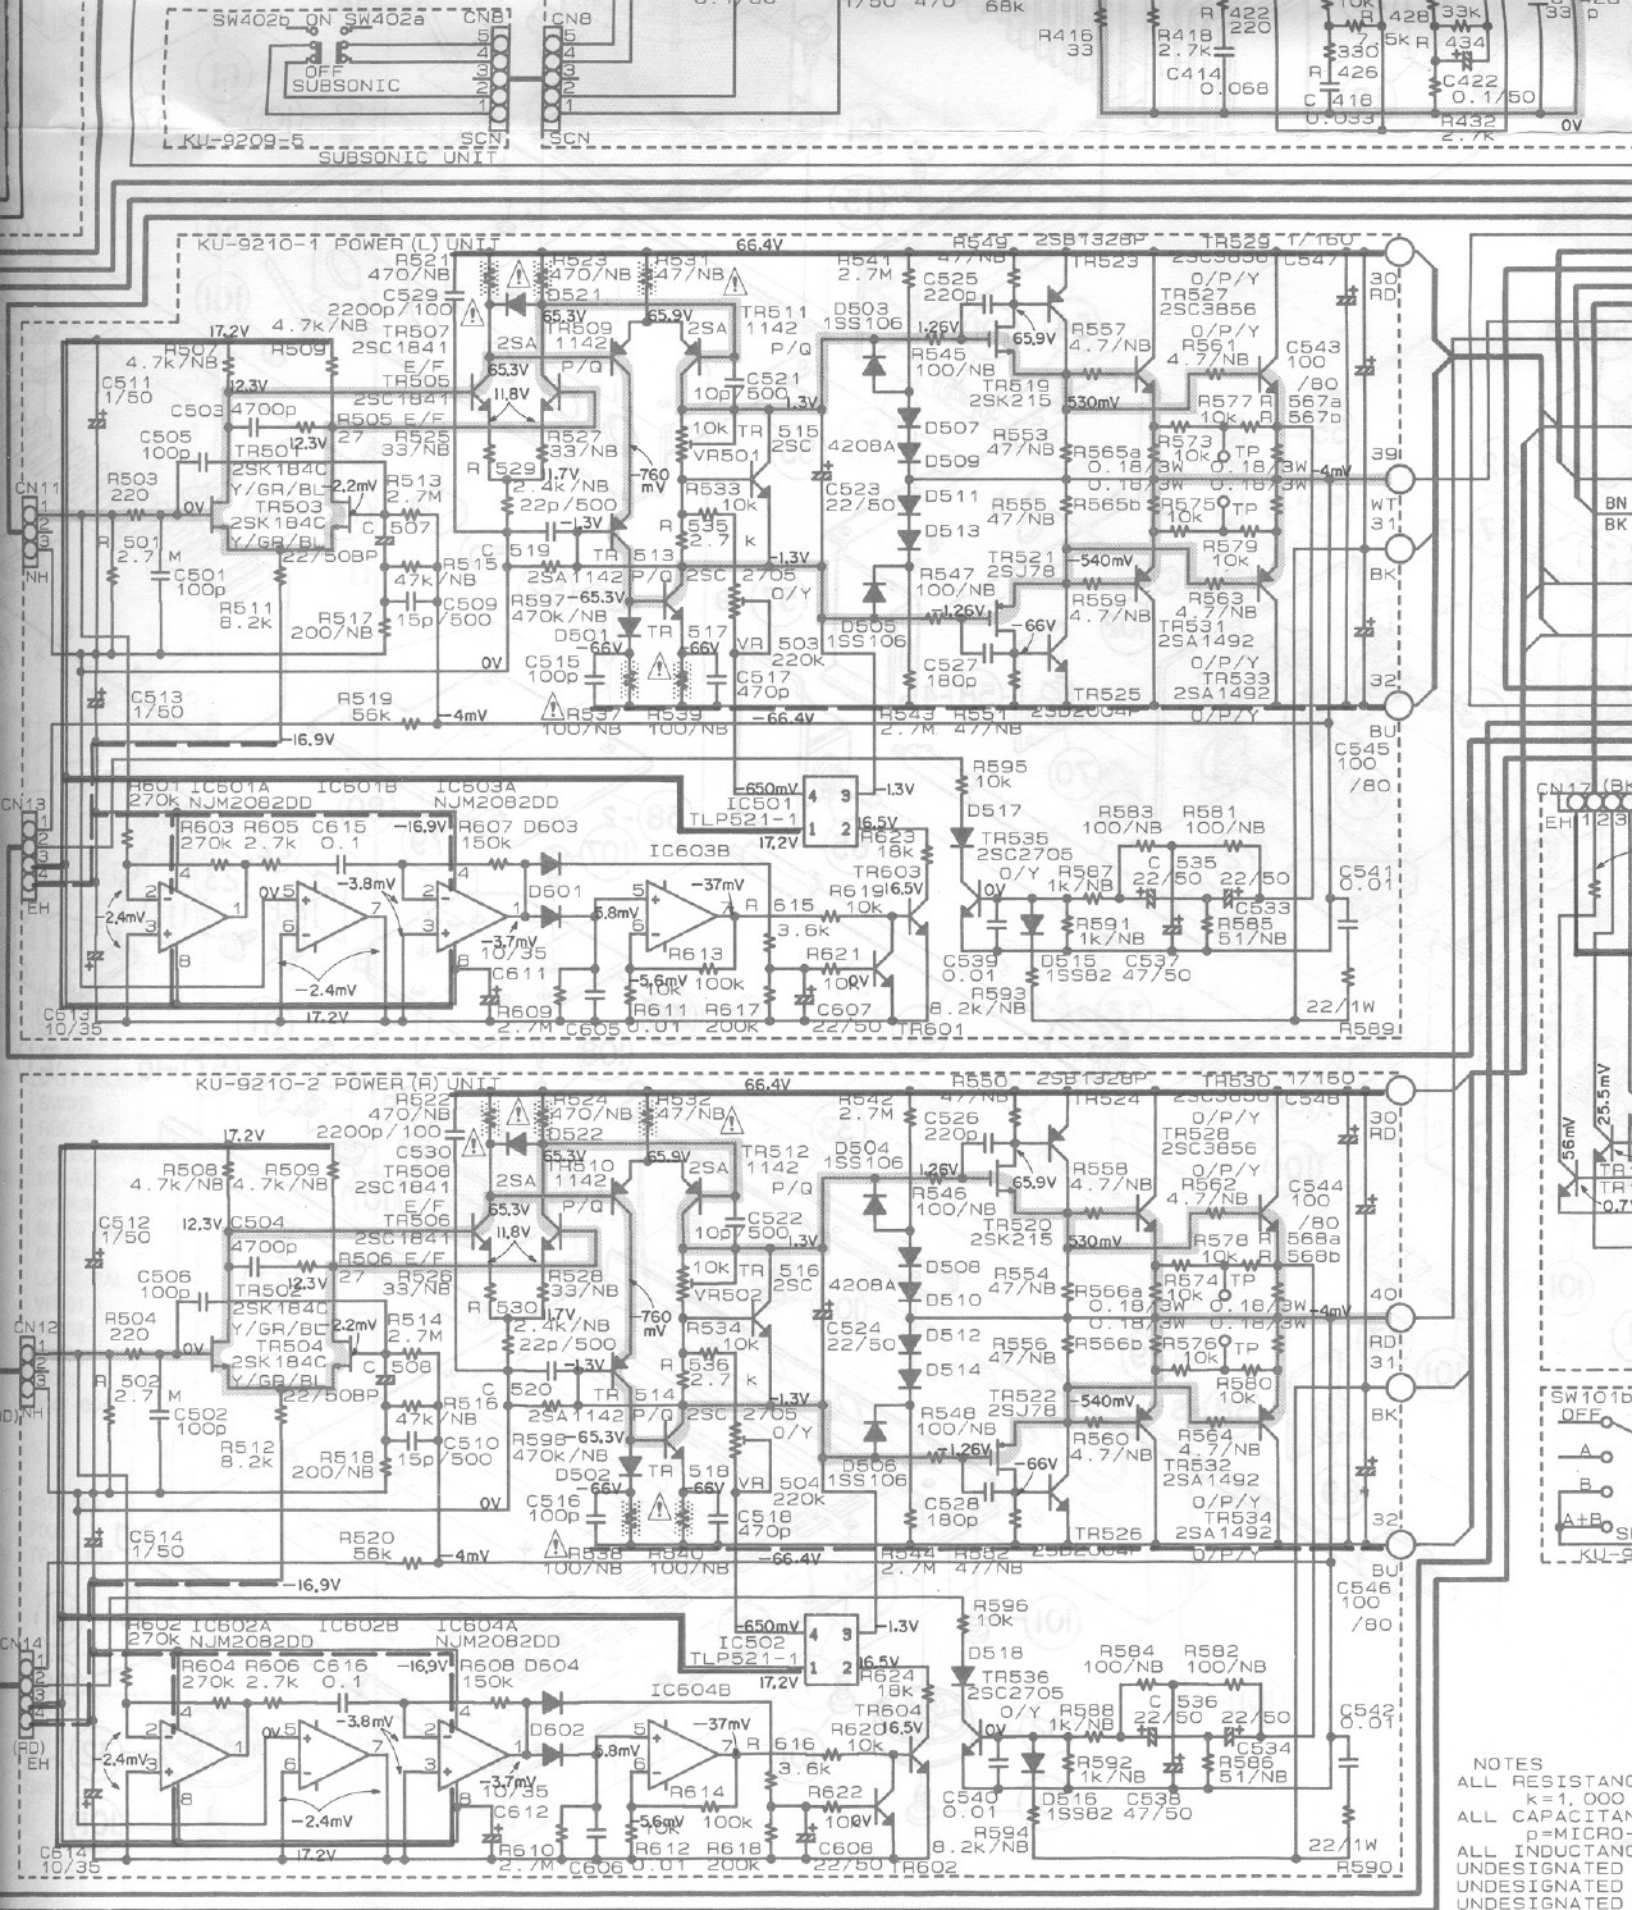

NO CURRENT ARE MEASURED AT NO SIGNAL INPUT CONDITION.
 TS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

WARNING:
 Parts marked with this symbol  have critical characteristics.
 Use ONLY replacement parts recommended by the manufacturer.

CAUTION:
 Before returning the unit to the customer, make sure you make either (1) a leakage current check or (2) a
 the leakage current exceeds 0.5 milliamperes, or if the resistance from chassis to either side of the power

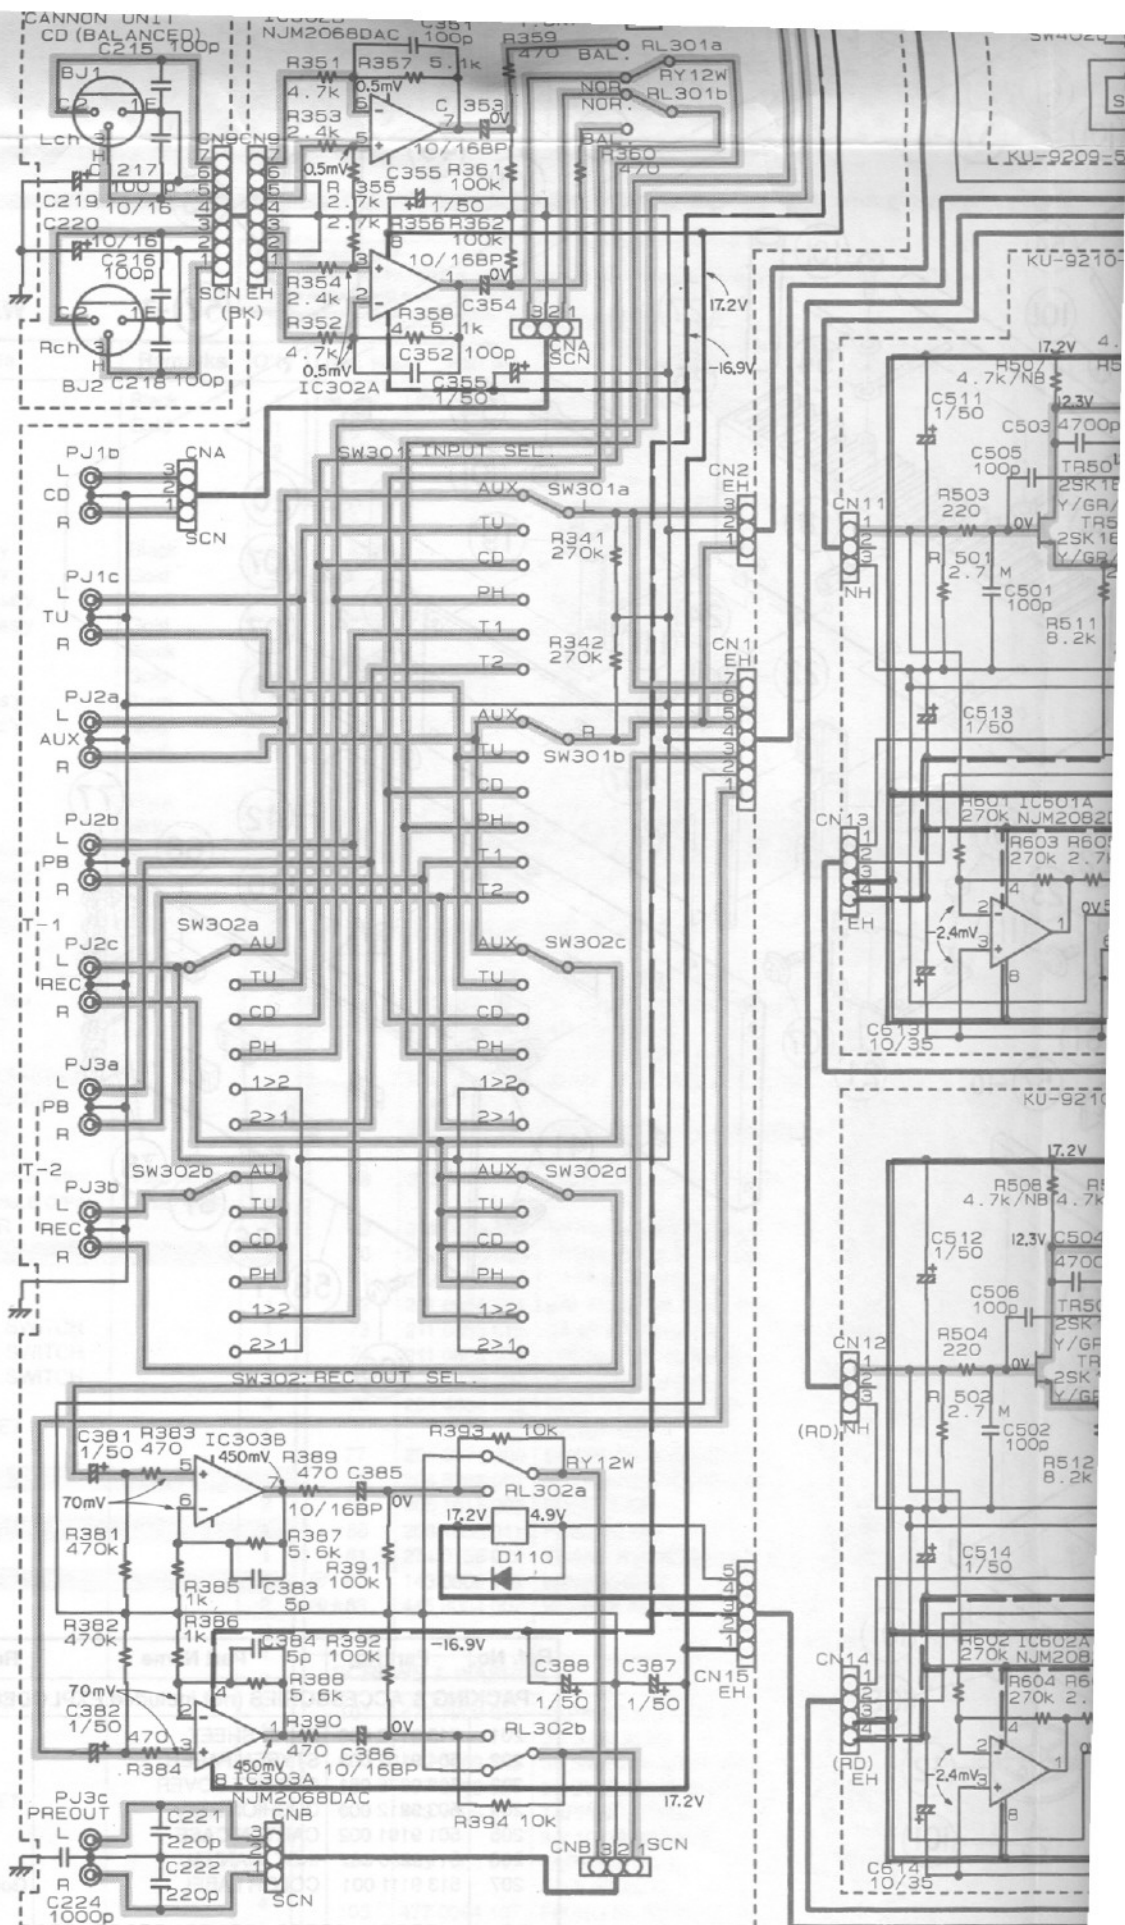

SCHEMATIC DIAGRAM

94

