

RTV servis Horvat

Kešinci, 31402 Semeljci

031-856-139

031-856-637

098-788-319

rtv-servis-horvat@os.tel.hr

Croatia

SERVICE MANUAL

This service manual explains them by extracting the different specifications from those of the SD255, based on the SD255. For both electrical and mechanical information on the after-sales service which is not stated, all information is described in the SD255 service manual. The dispatch of the parts for after-sales service has to be referred to this service manual, with the first priority.

For this reason, please use this service manual with referring to the SD255 service manual, without fail.

Different Parts between MODEL SD255 and MODEL SD275

Page	REF. DESIG.	SD255	SD275	DESCRIPTION	
18	A 001B	261T248400 260T248030	282T248400 282T248010	Front Panel Assembly Front Panel	
	021B	260T303010	282T303010	Mask, LED Meter	
	004C 005C 006C	260T053010 260T053020 177T158020	282T053010 282T053020 282T158010	Cover, Cassette Holder (A) Cover, Cassette Holder (B) Window, Cassette Cover	
	003D 001E	51260408U0 261T250020 261T250030	51706009U0 282T250010 282T250020	Spec Set Screw Rear Panel [N, A] Rear Panel [E]	
20	001S 004S 006S	261T801020 261T801030 260T809020 9014323160	282T801010 282T801020 260T807010 9014316230	Packing Case [N, A] Packing Case [E] Reinforce Polyethylene Bag	
	001T 002T 003T	261T851310 261T851320 261T856010	282T851310 282T851320 282T856010	User Manual User Manual, Spec Circuit Diagram	
	J011	_____	YJ04001240	Jack, AC Plug Adaptor	
	27	CG03 CG04	_____	DD15101300 DD15101300	Ceramic 100pF ±5% 50V Ceramic 100pF ±5% 50V
		CJ13 CJ14	_____	DF15471350 DF15471350	Film 470pF ±5% 50V Film 470pF ±5% 50V
RG13		_____	NK05101010	100Ω, ±5% 1W Metal	
RJ13 RJ14 RJ15 RJ16		RA04720600 RA04720600 RA04720600 RA04720600	RA02230600 RA02230600 RA02230600 RA02230600	22KΩ, Trimming (L) P.B. Level 22KΩ, Trimming (R) P.B. Level 22KΩ, Trimming (L) P.B. Level 22KΩ, Trimming (R) P.B. Level	
RK01 RK02 RL07 RL08		RA04730600 RA04730600 RA04730600 RA04730600	RA02230600 RA02230600 RA01040600 RA01040600	22KΩ, Trimming 22KΩ, Trimming 100KΩ, Trimming (L) Bias 100KΩ, Trimming (R) Bias	

marantz

Te

Page	REF. DESIG.	SD255	SD275	DESCRIPTION	
27	DM25 DM26	_____	HD20015210 HD20015210	Diode Diode	1SS133 1SS133
28	DT08 QM01 QM10 J601 J602	_____	HD30002000 HT106842C0 HT106842C0 YJ06002460 YJ06002460	Zener Transistor Transistor Jack, 7P Jack, 7P	MA1309M 2SA684 (R, S) 2SA684 (R, S)
29	JW02 CW51	YT02040550 _____	YT02040620 DK18103310	Terminal, RCA Jack IN/OUT Ceramic	 0.01 μ F 50V

"SERVICE INFORMATION IS FOR USE BY QUALIFIED PERSONNEL ONLY - ANY MISADJUSTMENT OR MISALIGNMENT MAY BE TREATED AS A NON-WARRANTY REPAIR BY ANY MARANTZ SERVICE CENTRE -"

Kind of Common Parts

RESISTOR

R*** (1) GD05 --- 140, Carbon film fixed resistor, $\pm 5\%$ 1/4W

R*** (2) GD05 --- 160, Carbon film fixed resistor, $\pm 5\%$ 1/6W

C*** : CERAMIC CAP.

(1) DD1 ---- 370, Ceramic condenser,
disc type (titan condenser)
Temp. coeff. P350 ~ N1000 50V

C*** : CERAMIC CAP.

(1) DK16 --- 300, High dielectric constant ceramic condenser,
disc type (titan variable)
Temp. chara. 2B4 50V

C*** : ELECTROLY CAP. (⊕) / FILM CAP. (⊕)

(1) EA ----- 10, Electrolytic condenser,
one-way lead type, tolerance $\pm 20\%$

(2) DF15 --- 350, Plastic film condenser,
one-way type, Mylar, $\pm 5\%$ 50V

*In case of ordering the common parts, please establish the correct parts number of 10 figures by the procedure "ASSIGNMENT OF COMMON PARTS CODES"

RTV servis Horvat

Kešinci, 31402-Semeljci

031-856-139


031-856-637


098-788-319









rtv-servis-horvat@os.tel.hr

Croatia

SCHEMATIC DIAGRAM

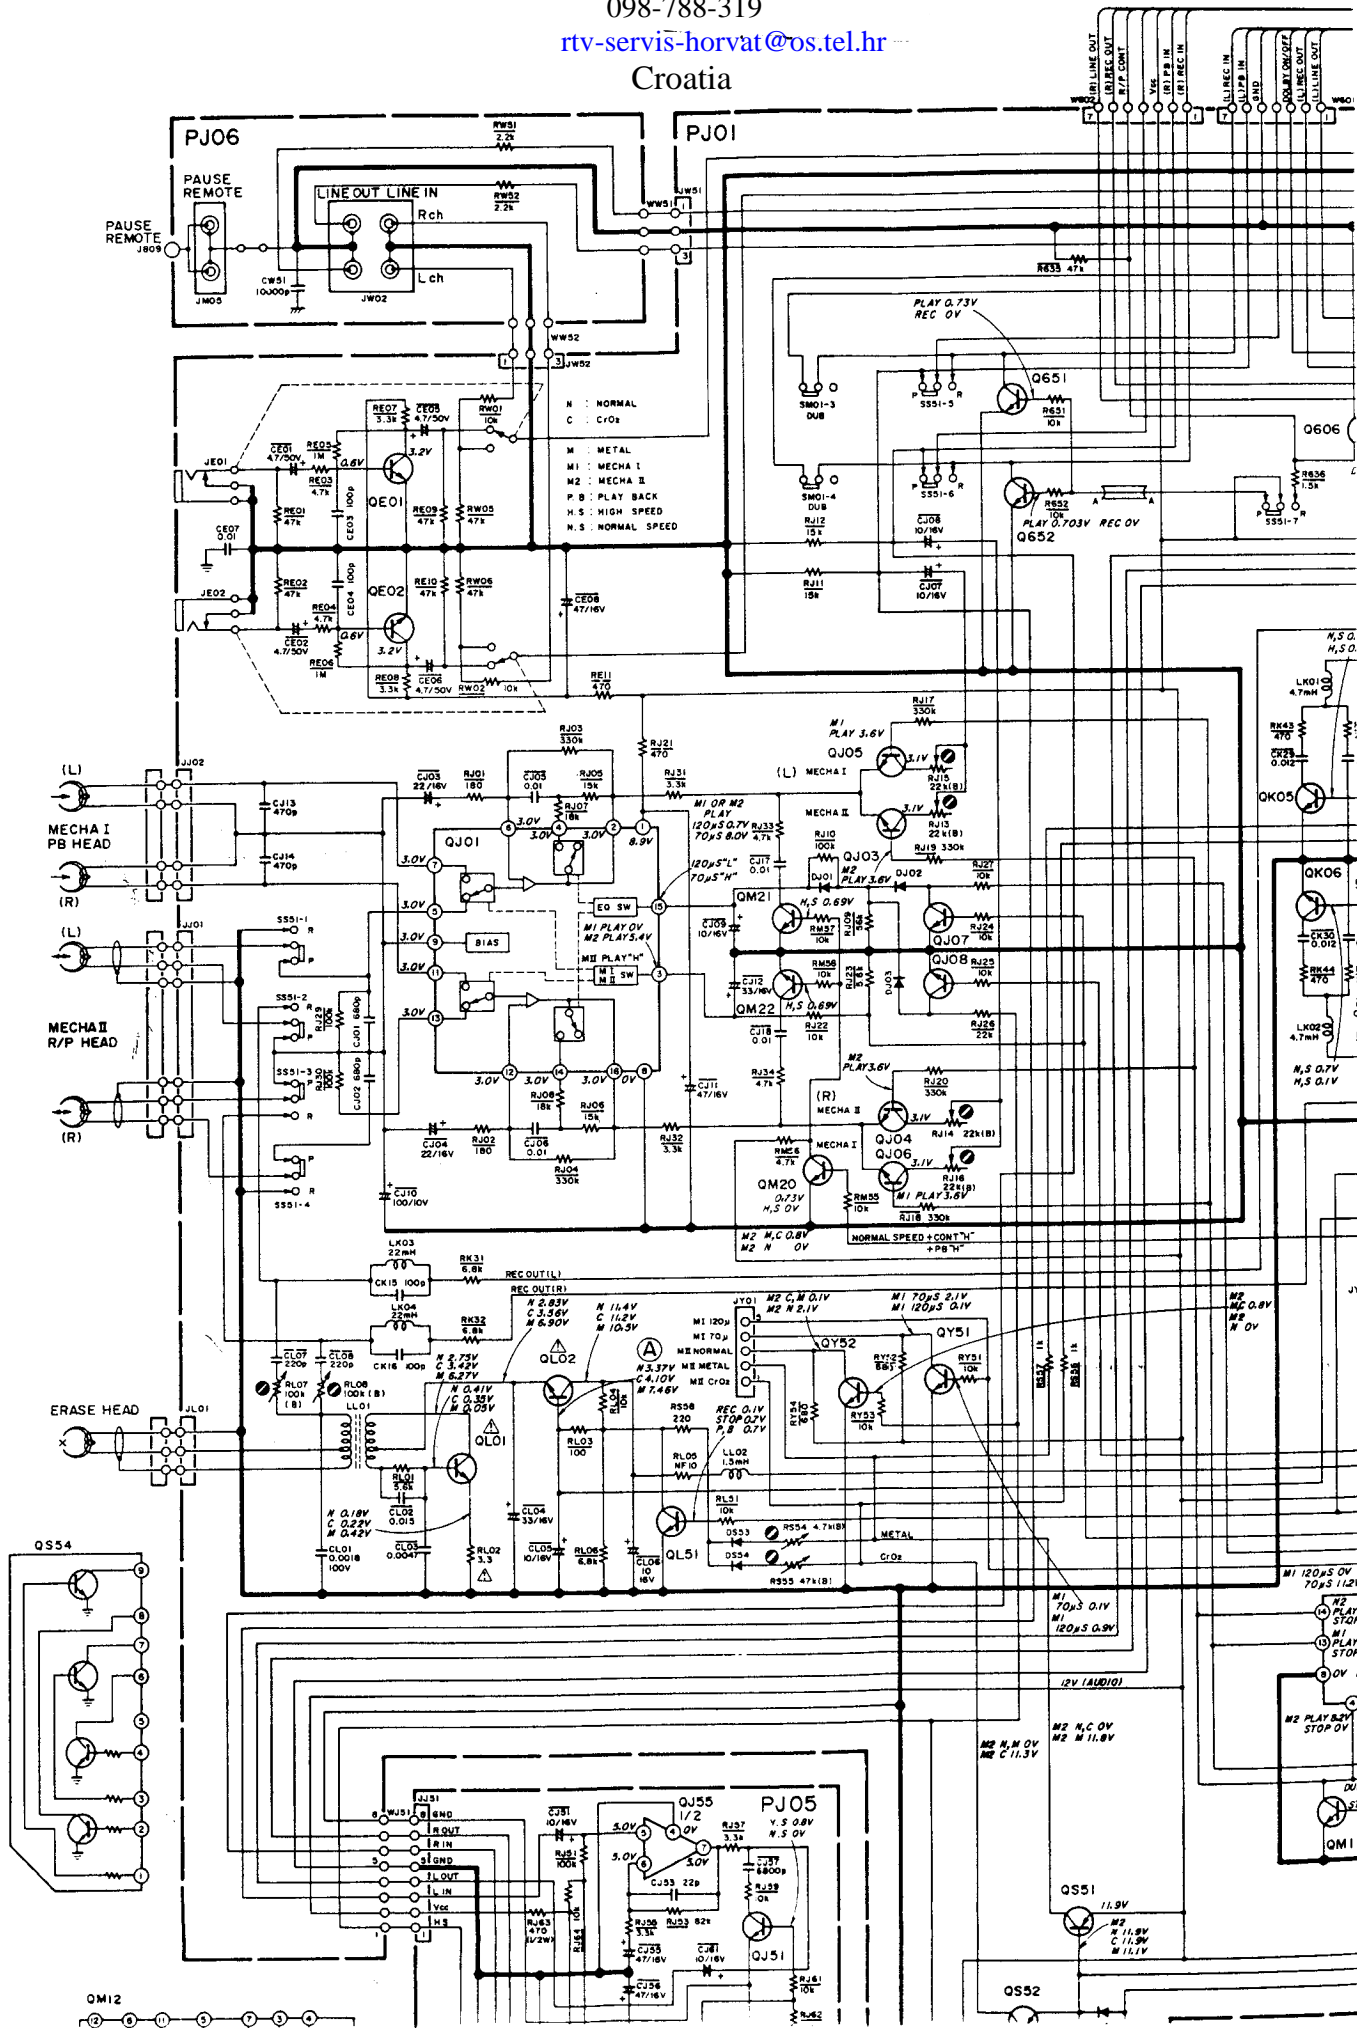

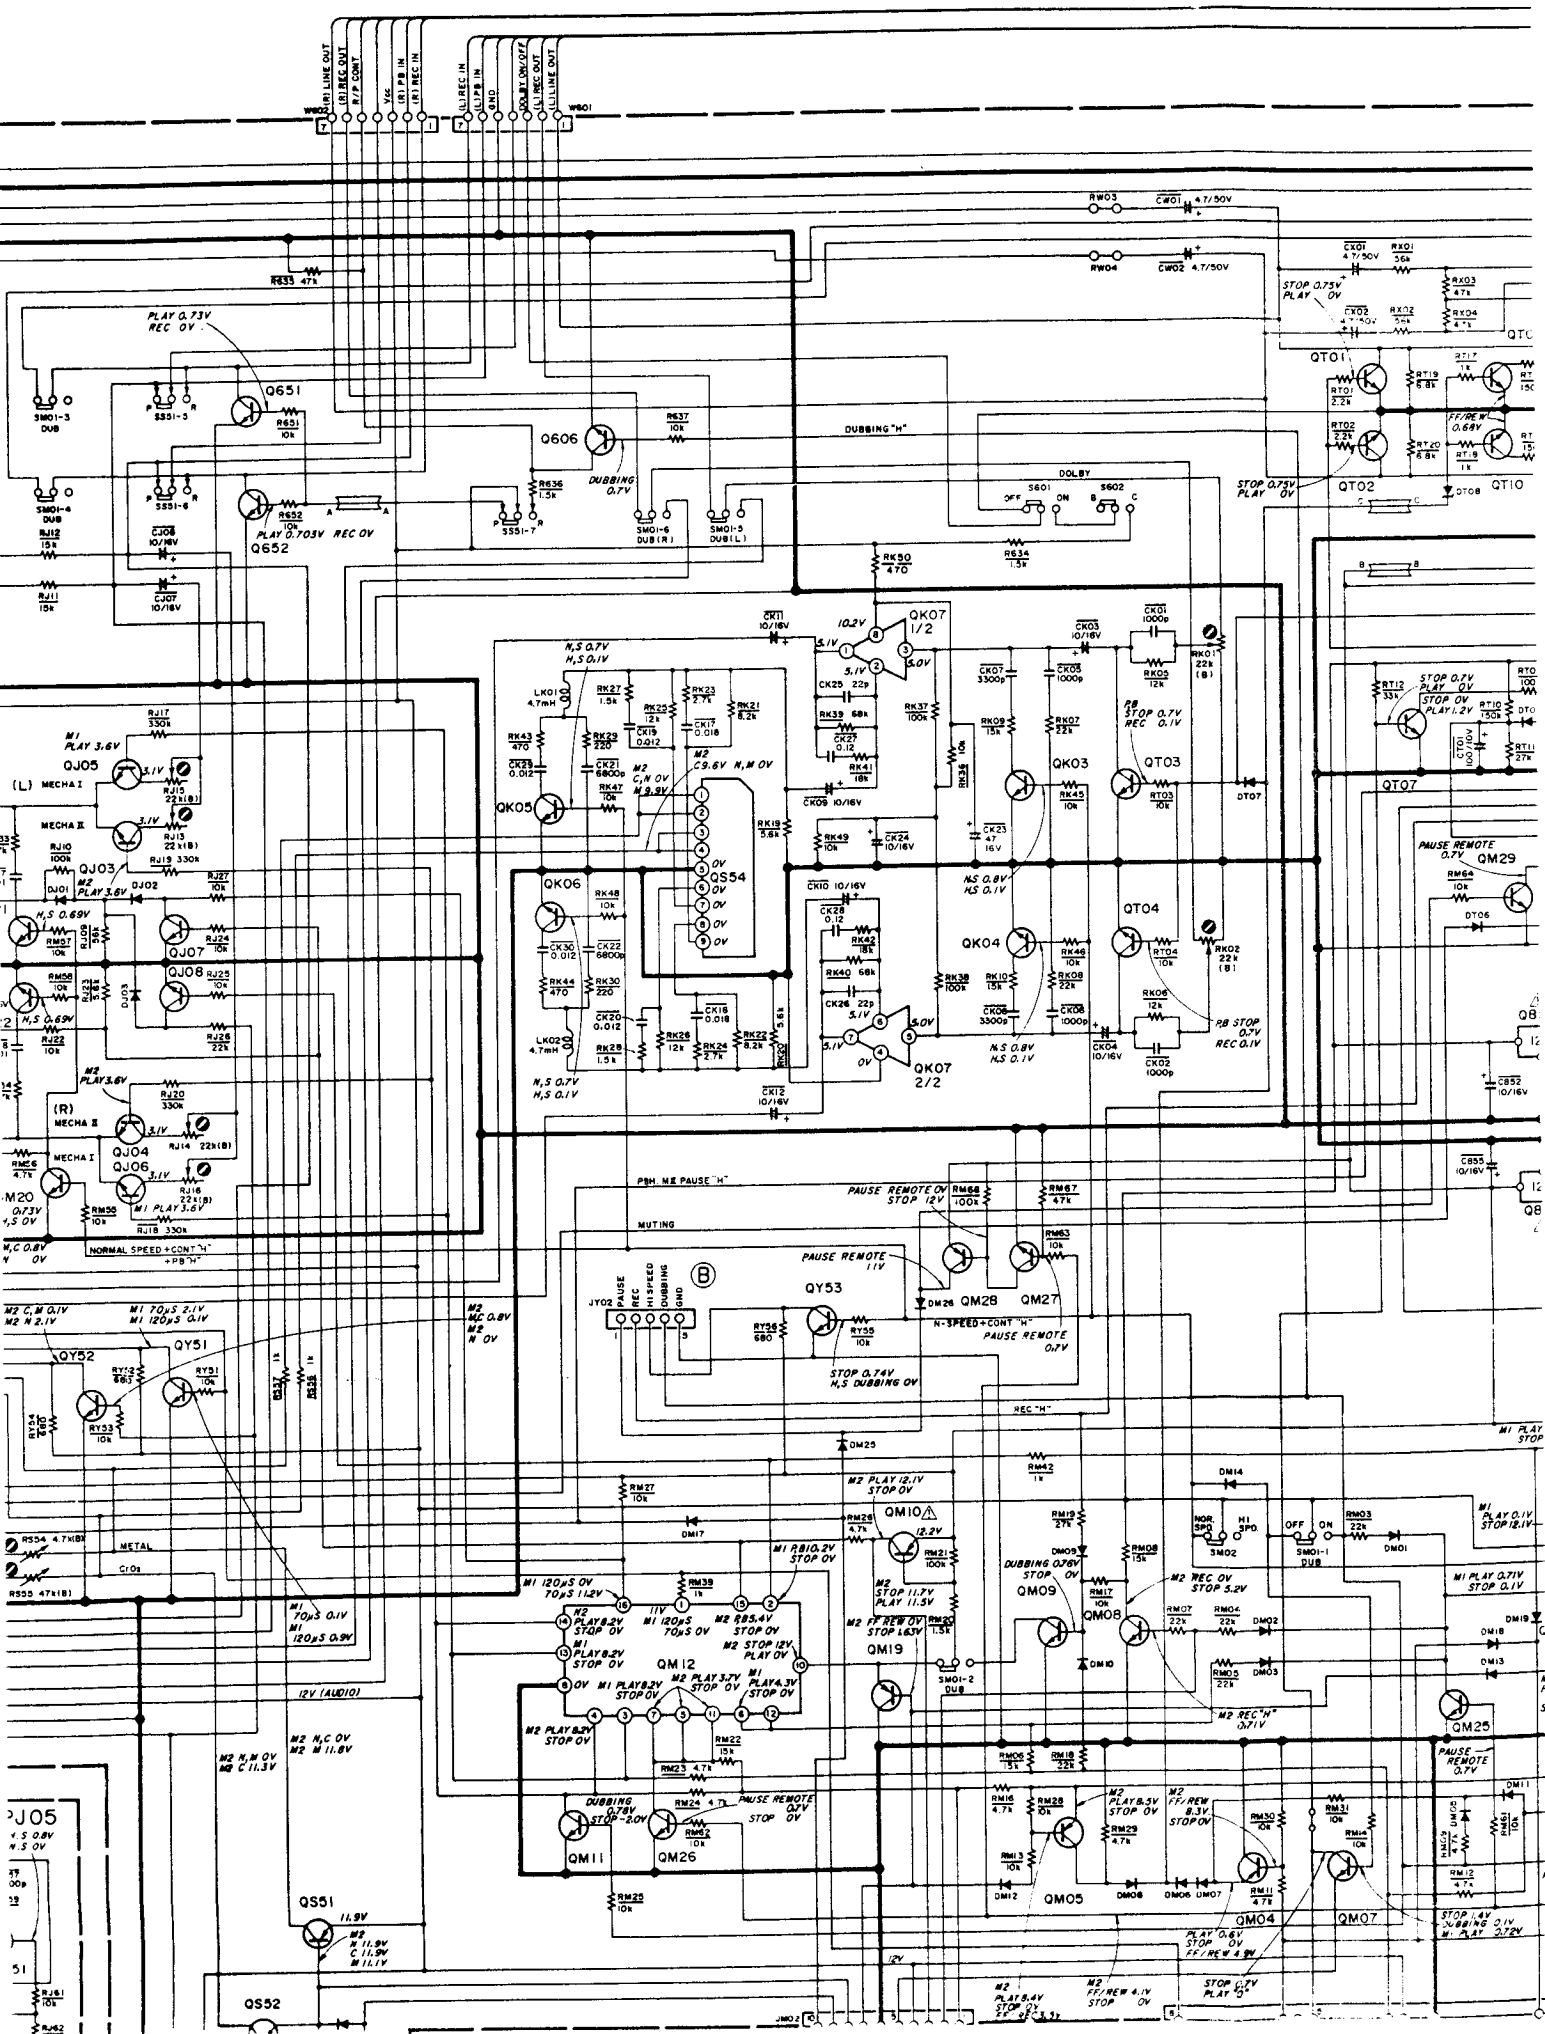

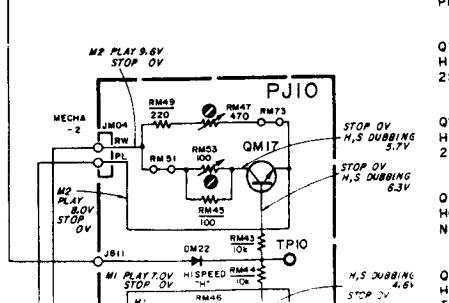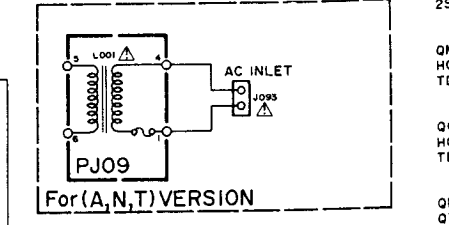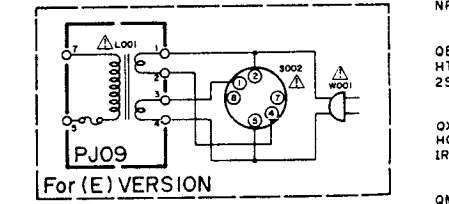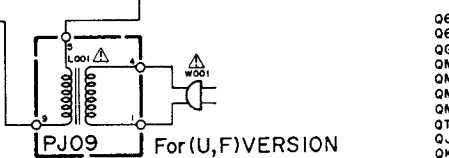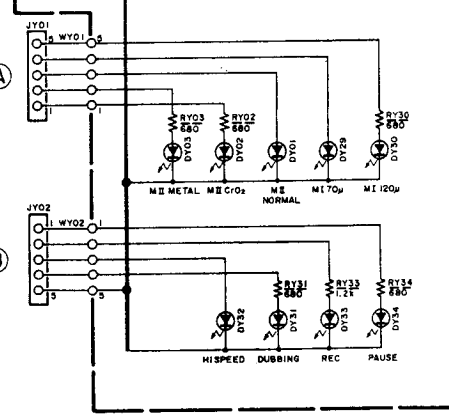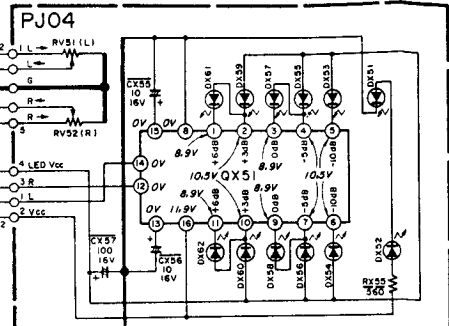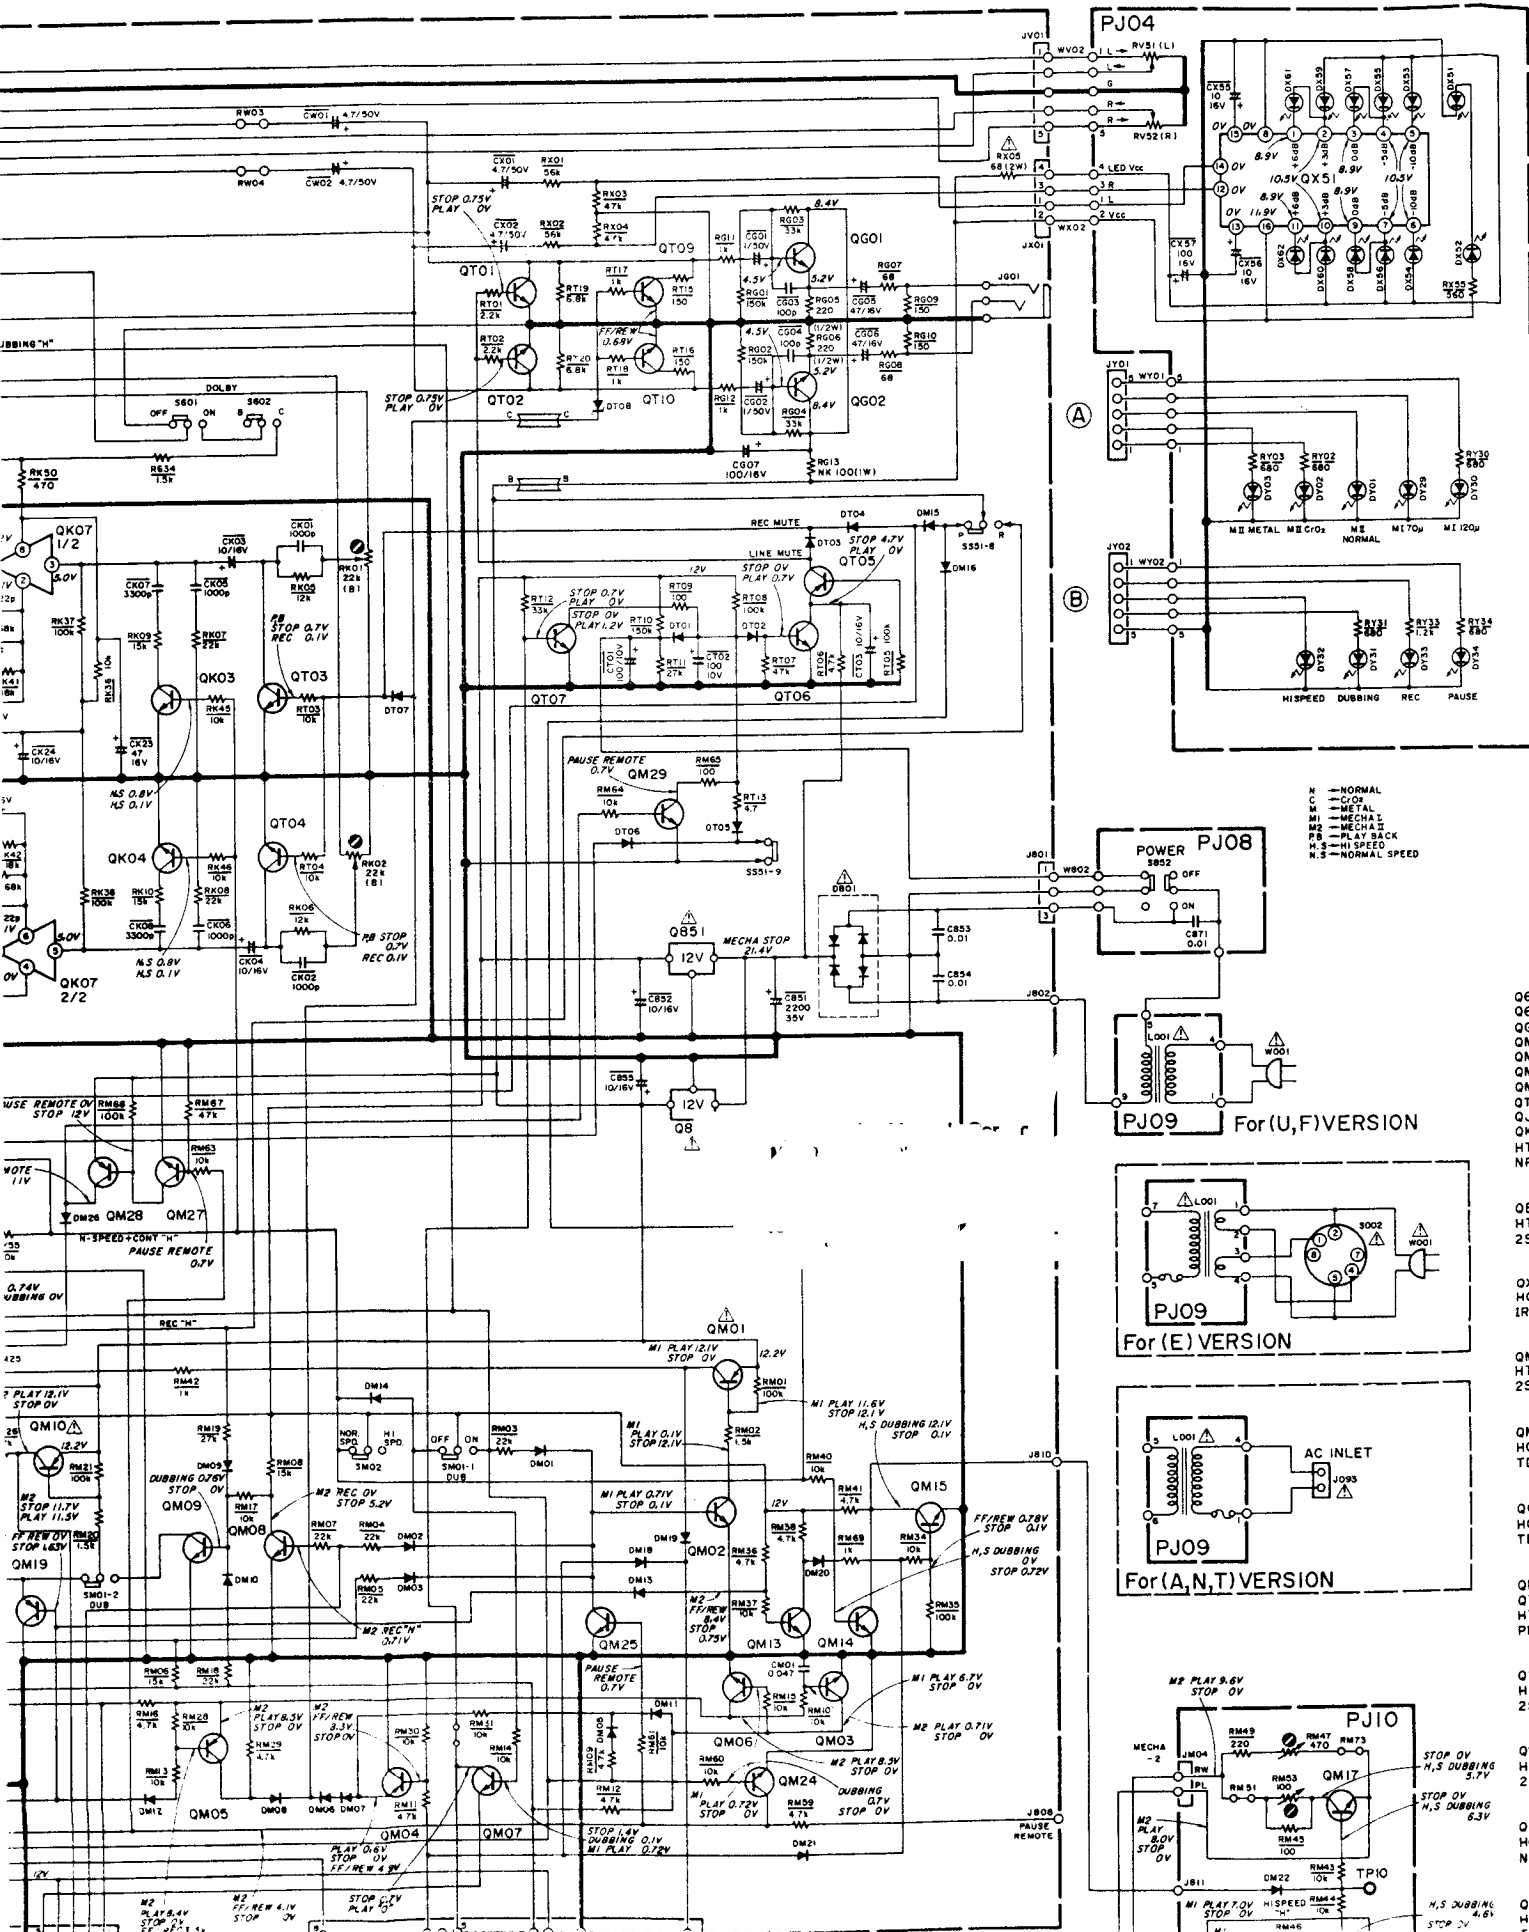

- Q60
- Q65
- Q60
- QM0
- QM1
- QM2
- QT0
- QJ5
- QK0
- HT3
- NPN
- Q60
- HT3
- 25C
- QX5
- HC1C
- IR21
- QM0
- HT1C
- 25A1
- QM1
- HC1C
- TD6
- Q60
- HC1C
- TEA
- QM0
- QT0
- HT1C
- PNP
- QL0
- HT4
- 25D
- QL0
- HT4
- 25D
- QJ5
- HC1C
- NJM
- QJC
- HC1C
- TA1

Model SD275

RTV servis Horvat

Kešinci, 31402 Semeljci



031-856-139

031-856-637






098-788-319

rtv-servis-horvat@os.tel.hr

Croatia

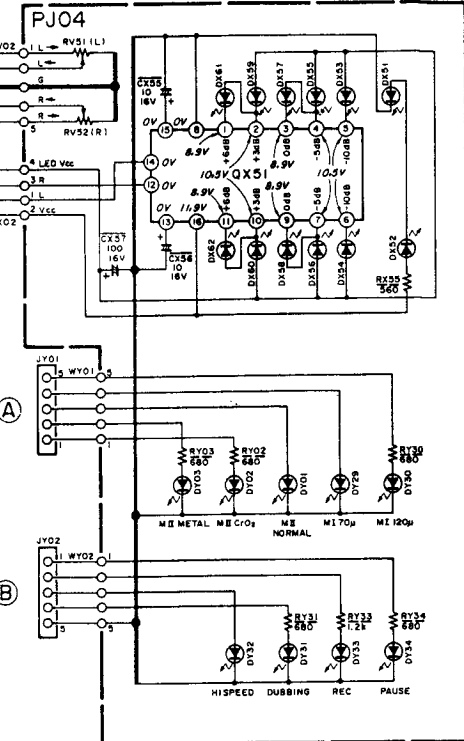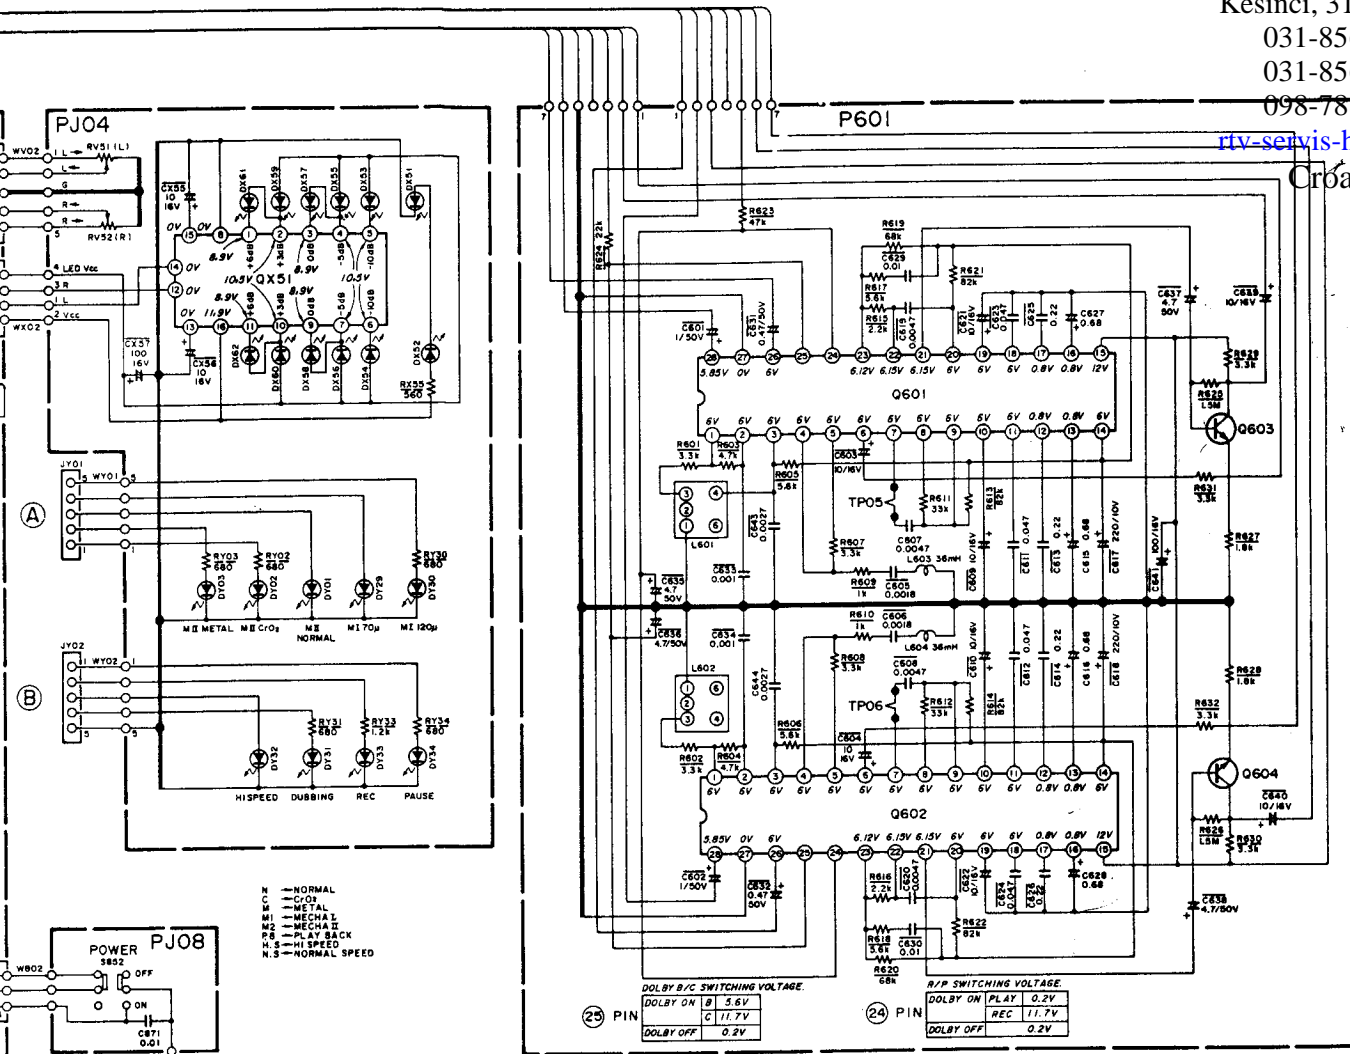

N - NORMAL
C - C-01
M - METAL
M1 - MECHAL
M2 - MECHAL
P - PLAY BACK
H.S - HISPEED
N.S - NORMAL SPEED

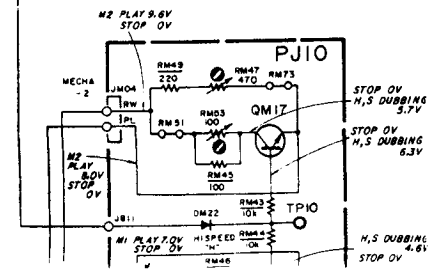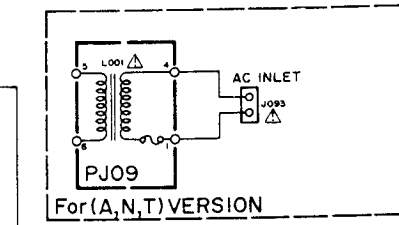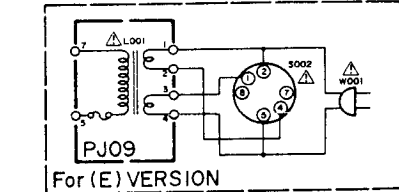

Q603, Q604, Q606
Q651, Q652, QG01
QG02, QM02, QM03
QM06 ~ QM09, QM11
QM13 ~ QM15, QM17
QM18, QM20 ~ QM22
QM24 ~ QM27, QL51
QT06, QT07, QT09, QT10
QJ51, QJ52, QJ03 ~ QJ08
QK03 ~ QK06, QY51 ~ QY53
HT30001000 QT01 ~ QT04
NPN TRANSISTOR

DM01 ~ DM03, DM05 ~ DM17
DM20 ~ DM26, DT02 ~ DT07
DJ01 ~ DJ03, DS53, DS54
HD20015210
ISS133

DT01, DS51, DS52
HD10004020
G# DIODE

DM18, DM19
HD20016210
ISR35 - 200

DX59 ~ DX62
HI10062020
LN217RPH (RED)

DX51 ~ DX58
HI10063020
LN3176PH (GRN)

DY01 ~ DY03
DY29 ~ DY32, DY34
HI10038320
GL - 9PG24 (GRN)



DY33
HI10032320
GL - 9PR24 (RED)

D801
HD20027080
RB - 152



DT08
HD30002020
MA1039M

QJ55, QK07
HC10003090
NJM4558D


QJ01
HC10109050




2SD471 (K)




2SC2784 (U)




2SD313 (E) 2SA684(R,S)



TOP VIEW




SIDE VIEW

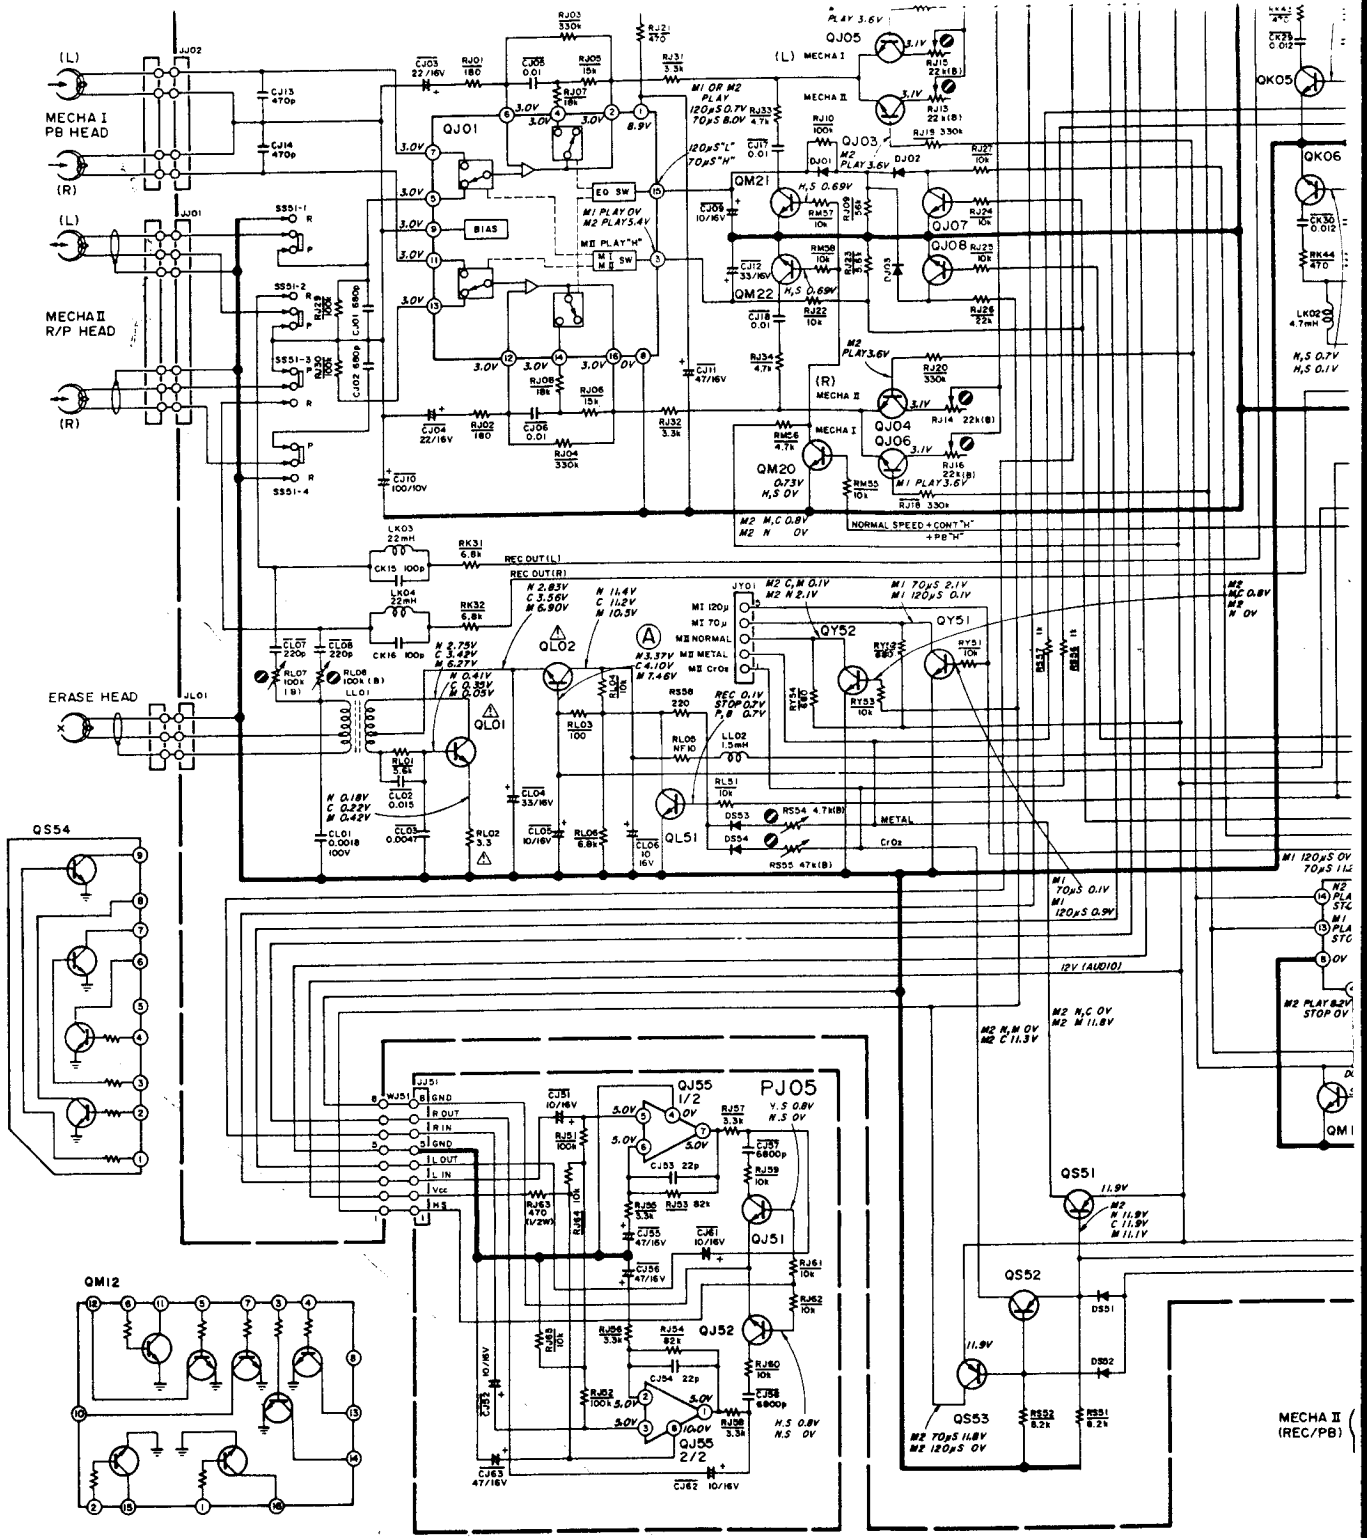


L601	LS10440010
L602	LS10440010
S601	SP02010630
S602	SP02010630
RM47	RA01010600
RM48	RA01010600
RM53	RA01010600
RM54	RA01010600
SM01	SP06010140
SM02	SP02010630
LL01	TC10140300
RL07	RA04730600
RL08	RA04730600
RJ13	RA04720600
RJ14	RA04720600
RJ15	RA04720600
RJ16	RA04720600
L001	TS14820180
L001	TS14820190
L001	TS14820170

NOTE ON SAFETY :
 Symbol Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

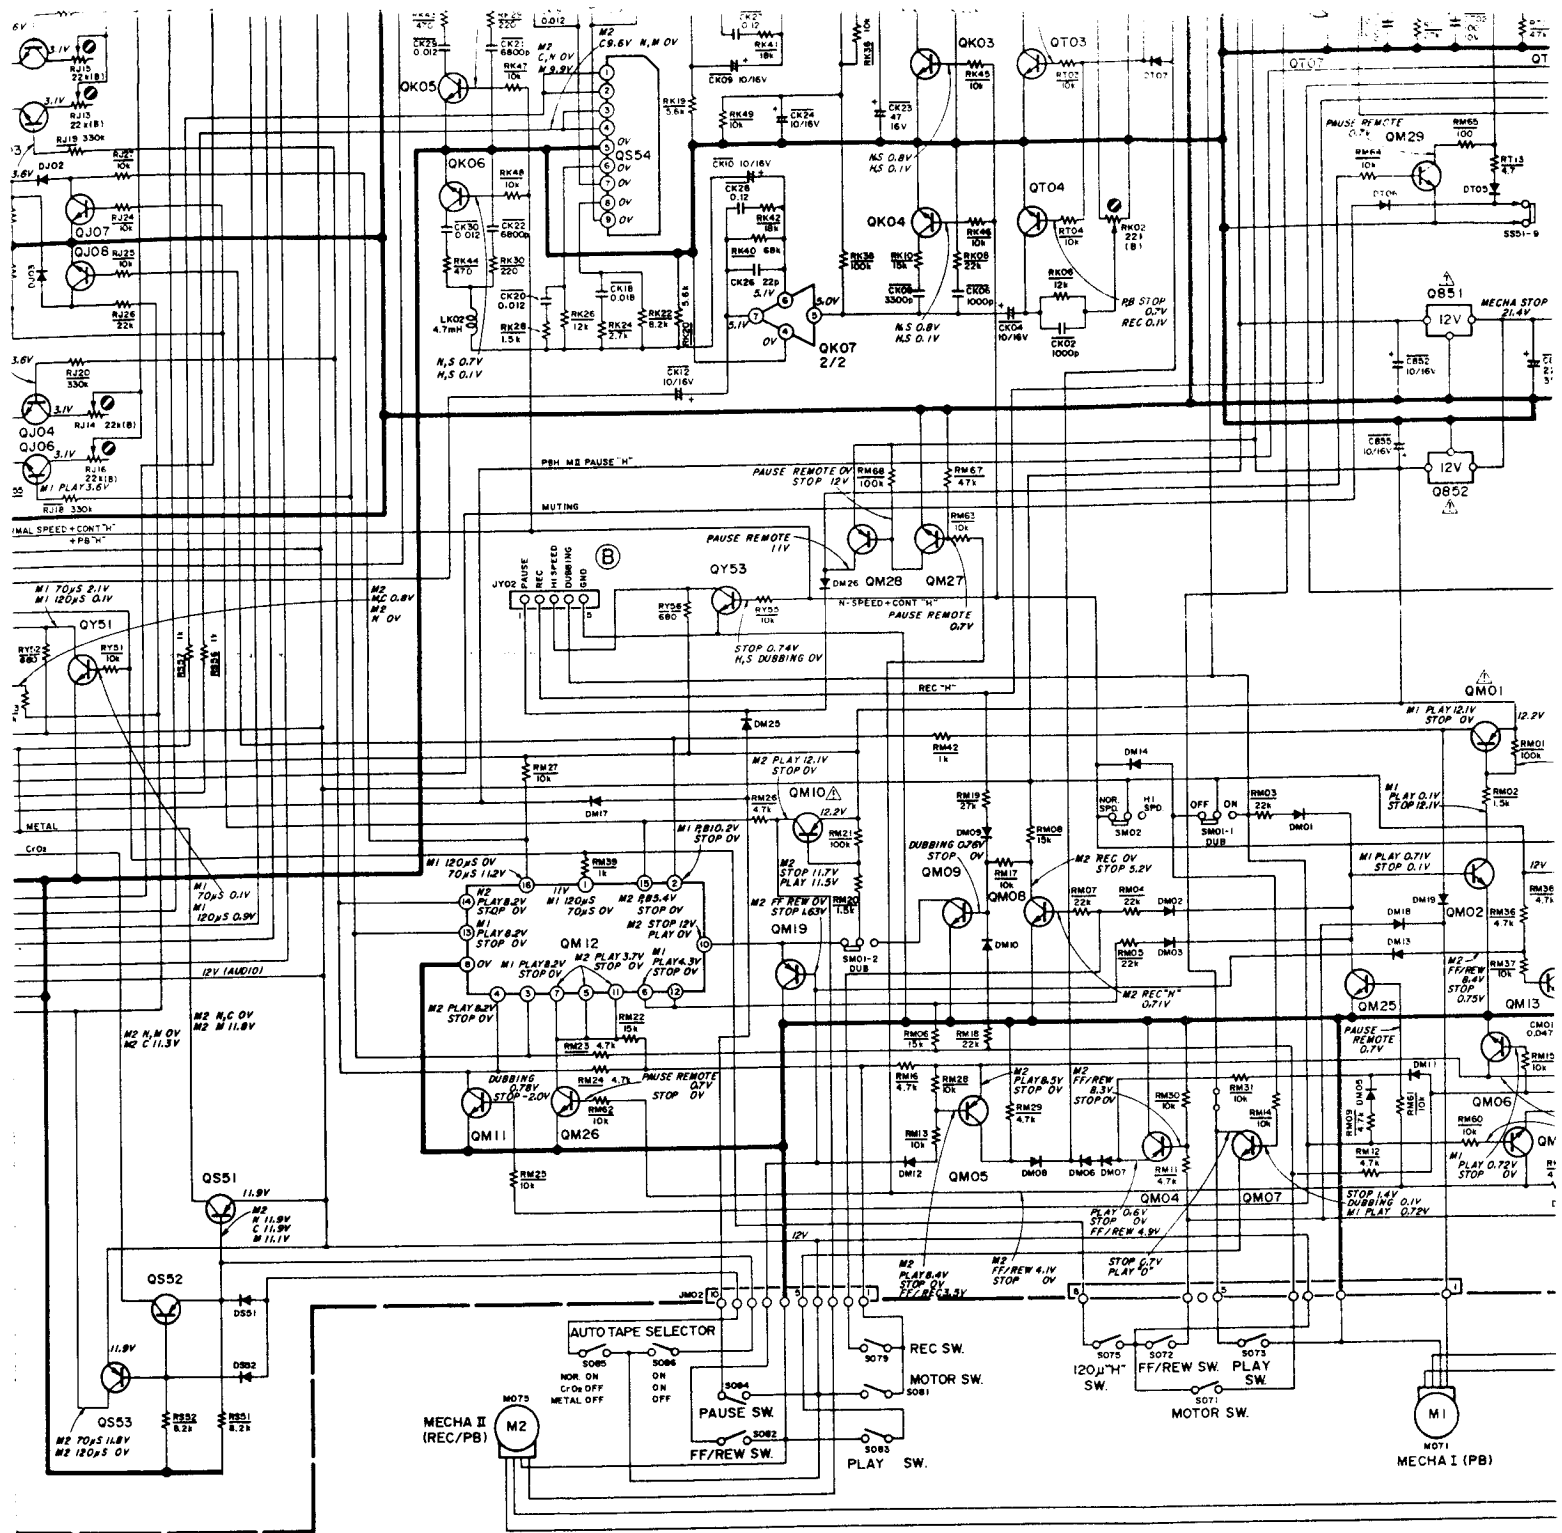


L601	LS10440010	M.P.X. COIL	S852	SP02010960	PUSH SWITCH POWER
L602	LS10440010	M.P.X. COIL	RK01	RA04730600	TRIMMING 47KΩ
S601	SP02010630	PUSH SWITCH DOLBY ON/OFF	RK02	RA04730600	TRIMMING 47KΩ
S602	SP02010630	PUSH SWITCH DOLBY B/C	SS51	SS09020180	SLIDE SWITCH REC/PLAY
RM47	RA01010600	TRIMMING 100Ω	RS54	RA04720600	TRIMMING 4.7KΩ
RM48	RA01010600	TRIMMING 100Ω	RS55	RA04730600	TRIMMING 47KΩ
RM53	RA01010600	TRIMMING 100Ω	RV51	RX05030240	VARIABLE 50KΩ REC LEVEL (L)
RM54	RA01010600	TRIMMING 100Ω	RV52	RX05030240	VARIABLE 50KΩ REC LEVEL (R)
SM01	SP06010140	PUSH SWITCH SYNCHRO START	024B	26T052010	COUNTER
SM02	SP02010630	PUSH SWITCH SPEED/DUBBING	032F	316Y264030	BELT COUNTER
LL01	TC10140300	OSC TRANSF. 105kHz	H071	LH42821050	HEAD REC/PLAY
RL07	RA04730600	TRIMMING 47KΩ	H072	LH39000030	HEAD ERASE
RL08	RA04730600	TRIMMING 47KΩ	M071	MM11205100	D.C. MOTOR
RJ13	RA04720600	TRIMMING 4.7KΩ	S071	SM01011190	MINI SWITCH MOTOR
RJ14	RA04720600	TRIMMING 4.7KΩ	S072	SM01011160	MINI SWITCH FF/REW
RJ15	RA04720600	TRIMMING 4.7KΩ	S073	SM01011190	MINI SWITCH PLAY MUTE
RJ16	RA04720600	TRIMMING 4.7KΩ	S075	SM01011300	MINI SWITCH SELECTOR
L001	TS14820180	POWER TRANSF. [N, A]			
L001	TS14820190	POWER TRANSF. [E, P]			
L001	TS14820170	POWER TRANSF. [U]			

original parts
th symbol Δ.
than original
shock hazard.






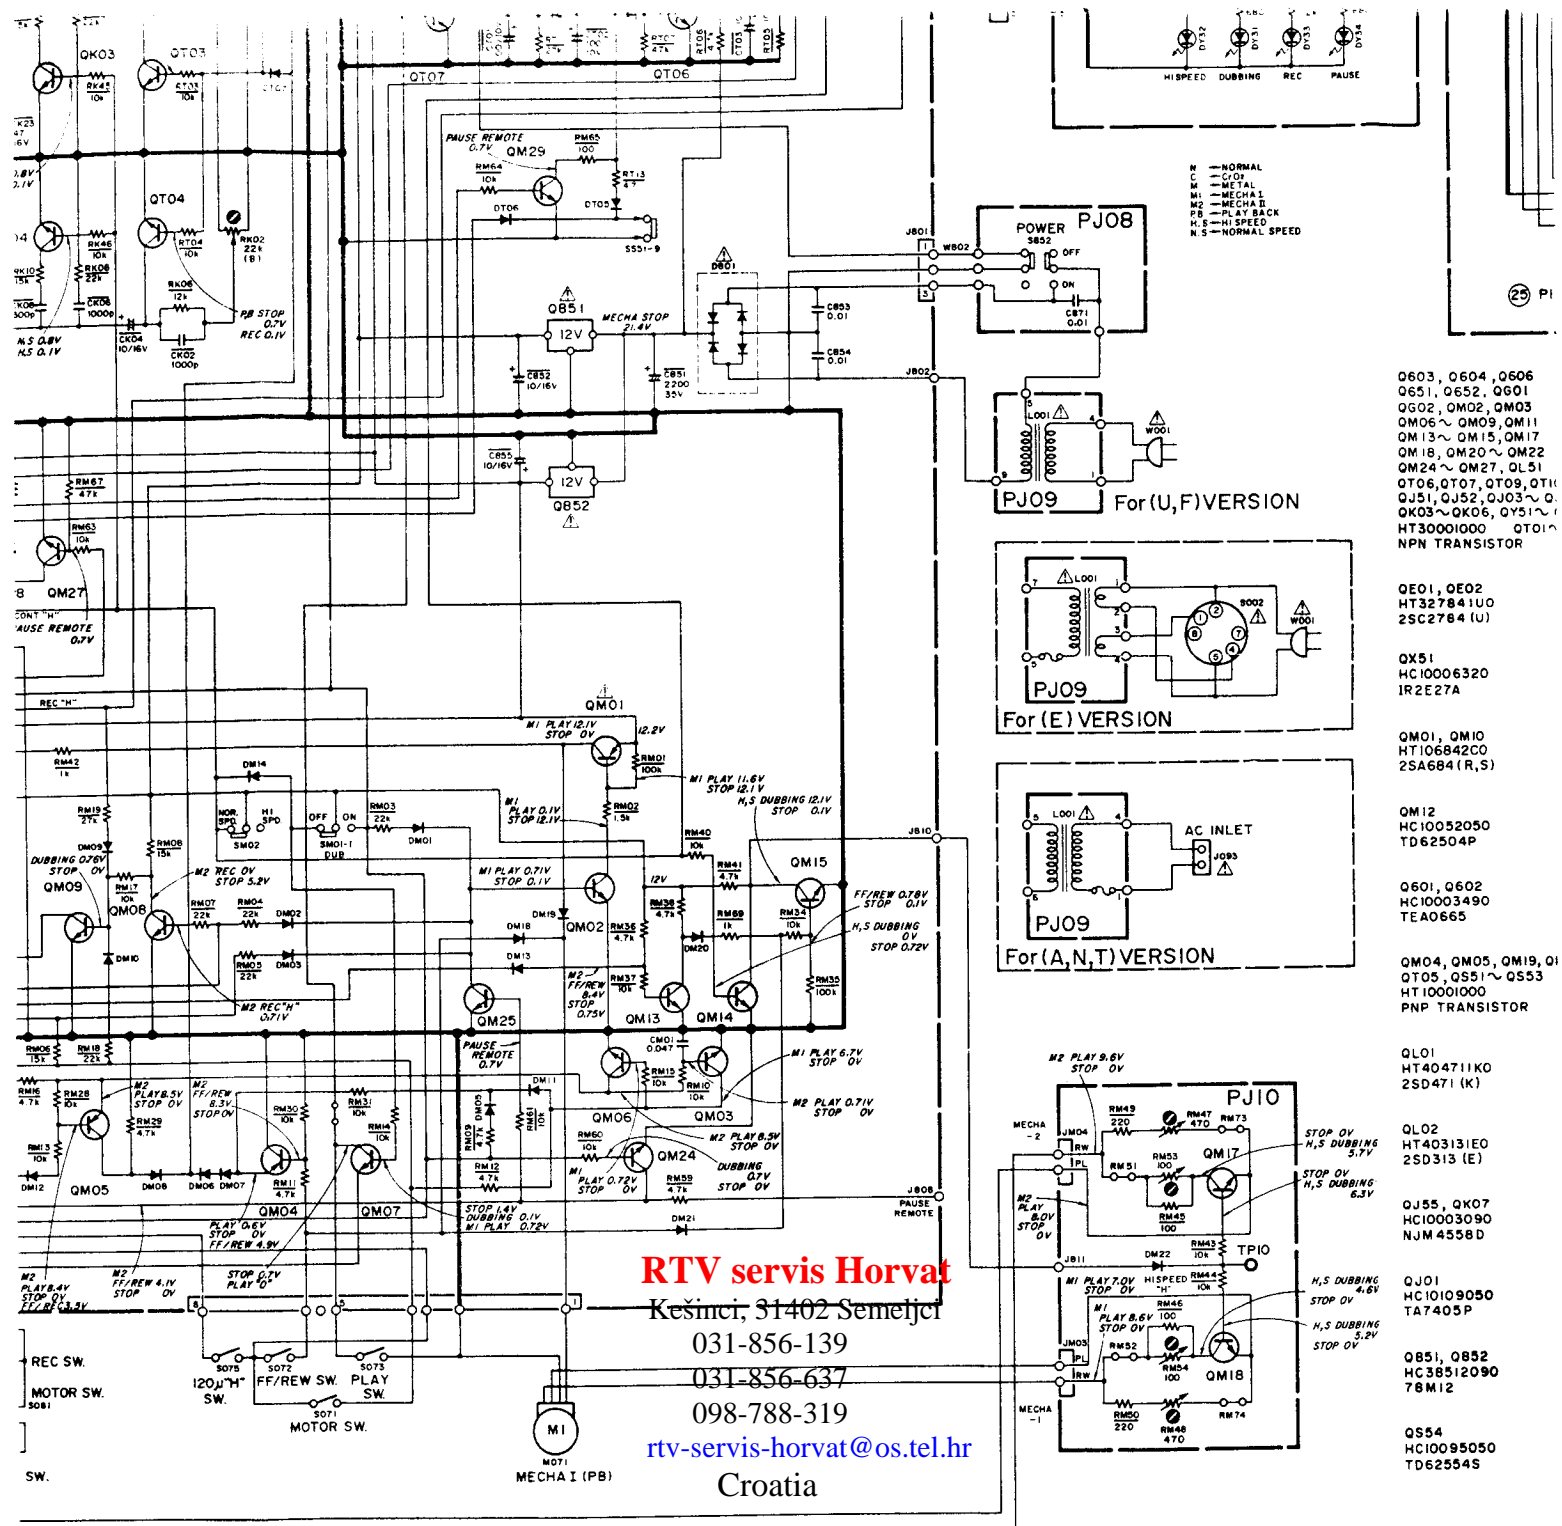


S852	SP02010960	PUSH SWITCH POWER	055M	252T354110	LEVER PINCH ROLLER	555M	252T354110
RK01	RA04730600	TRIMMING 47KΩ	106M	161T117210	SPINDLE TAKE UP	606M	161T117210
RK02	RA04730600	TRIMMING 47KΩ	110M	161T117200	SPINDLE SUPPLY	610M	161T117200
SS51	SS09020180	SLIDE SWITCH REC/PLAY	156M	252T264110	BELT AUTO STOP	656M	252T264110
RS54	RA04720600	TRIMMING 4.7KΩ	230M	185T264200	BELT MAIN	730M	185T264200
RS55	RA04730600	TRIMMING 47KΩ	231M	185T264210	BELT F/R	731M	185T264210
RV51	RX05030240	VARIABLE 50KΩ REC LEVEL (L)					
RV52	RX05030240	VARIABLE 50KΩ REC LEVEL (R)					
024B	260T052010	COUNTER	H075	LH42821050	HEAD REC/PLAY		
032F	316Y264030	BELT COUNTER	H076	LH31000580	HEAD ERASE		
			M075	MM11205100	D.C. MOTOR		
			S079	SM01011020	MINI SWITCH REC		
			S081	SM01011190	MINI SWITCH MOTOR		
			S082	SM01011160	MINI SWITCH FF/REW		
			S083	SM01011190	MINI SWITCH PLAY MUTF		
			S084	SM01011190	MINI SWITCH PAUSE		
			S085	SM01011300	MINI SWITCH SELECTOR CrO ₂		
			S086	SM01011300	MINI SWITCH SELECTOR METAL		

Components and wiring are su



N → NORMAL
C → C/O
M → METAL
M1 → MECHAL I
M2 → MECHAL II
PB → PLAY BACK
M.S → HI SPEED
N.S → NORMAL SPEED

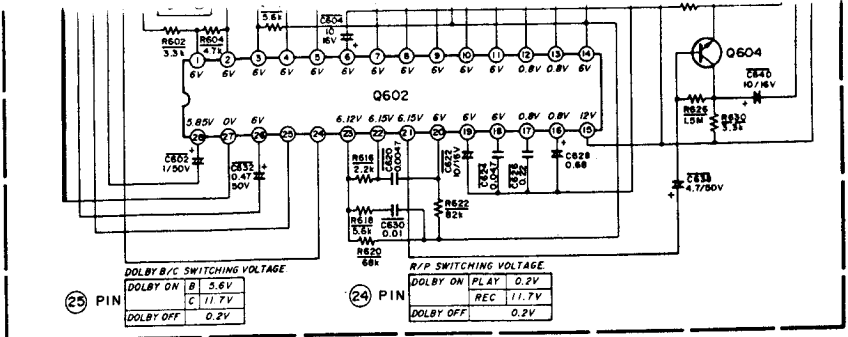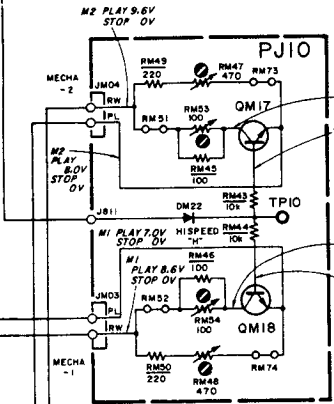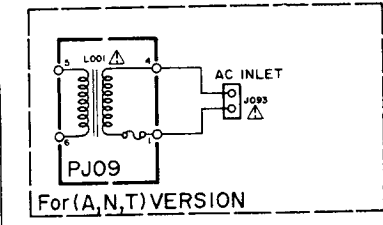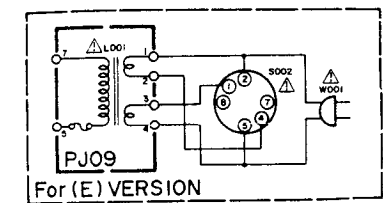

DOLBY B/C SWITCHING VOLTAGE

DOLBY ON	B	5.6V
DOLBY OFF	C	11.7V
DOLBY OFF	D	0.2V

R/P SWITCHING VOLTAGE

DOLBY ON	PLAY	0.2V
DOLBY ON	REC	11.7V
DOLBY OFF		0.2V

Q603, Q604, Q606
Q651, Q652, Q601
Q602, Q602, Q603
Q606 ~ Q609, Q611
Q613 ~ Q615, Q617
Q618, Q620 ~ Q622
Q624 ~ Q627, Q651
Q606, Q607, Q609, Q610
Q651, Q652, Q603 ~ Q608
Q603 ~ Q606, Q651 ~ Q653
HT30001000 Q601 ~ Q604
NPN TRANSISTOR

DM01 ~ DM03, DM05 ~ DM17
DM20 ~ DM26, DT02 ~ DT07
DJ01 ~ DJ03, DS53, DS54
HD20015210
ISS133

DT01, DS51, DS52
HD10004020
Ge DIODE

DM18, DM19
HD20016210
ISR35 - 200

DX59 ~ DX62
HI10062020
LN217RPH (RED)

DX51 ~ DX58
HI10063020
LN317GPH (GRN)

DY01 ~ DY03
DY29 ~ DY32, DY34
HI10038320
GL - 9PG24 (GRN)

DY33
HI10032320
GL - 9PR24 (RED)

DB01 DT08
HD20027080 HD30002020
RB - 152 MA1039M

QE01, QE02
HT327841U0
2SC2784 (U)

QX51
HC1006320
IR2E27A

QM01, QM10
HT106842C0
2SA684 (R,S)

QM12
HC10052050
TD62504P

Q601, Q602
HC10003490
TEA0665

QM04, QM05, QM19, QM28
QT05, QS1 ~ QS53
HT10001000
PNP TRANSISTOR

QL01
HT404711K0
2SD471 (K)










QL02
HT403131E0
2SD313 (E)

QJ55, QK07
HC10003090
NJM4558D

QJ01
HC10109050
TA7405P

Q851, Q852
HC38512090
78M12

QS54
HC10095050
TD62554S



- EVER PINCH ROLLER
- PINDLE TAKE UP
- PINDLE SUPPLY
- ELT AUTO STOP
- ELT MAIN
- ELT F/R
- LEAD REC/PLAY
- LEAD ERASE
- I.C. MOTOR
- 11NI SWITCH REC
- 11NI SWITCH MOTOR
- 11NI SWITCH FF/REW
- 11NI SWITCH PLAY MUTF
- 11NI SWITCH PAUSE
- 11NI SWITCH SELECTOR CrO₂
- 11NI SWITCH SELECTOR METAL

- 555M 252T354110
- 606M 161T117210
- 610M 161T117200
- 656M 252T264110
- 730M 185T264200
- 731M 185T264210

- LEVER PINCH ARM ASS'Y.
- SPINDLE REEL TAKE UP
- SPINDLE REEL SUPPLY
- BELT AUTO STOP
- BELT MAIN
- BELT F/R

Components and wiring are subject to change for modification without notice.

M5537

RTV servis Horvat

Kešinci, 31402 Semeljci

031-856-139

031-856-637

098-788-319

rtv-servis-horvat@os.tel.hr

Croatia

SERVICE

MANUAL

SD155/SD255

marantz®

model SD155/SD255

Stereo Cassette Deck

TABLE OF CONTENTS

SECTION	PAGE
INTRODUCTION	1
1. SHOCK, FIRE HAZARD SERVICE TEST:	1
2. P.W. BOARDS	1
3. TEST EQUIPMENT REQUIRED FOR SERVICING	2
4. MECHANISM CONTROL CIRCUIT	2
5. HIGH SPEED DUBBING	4
6. HIGH AND FIXED STANDARD SPEED DUBBING CIRCUIT	5
7. AUTO TAPE SELECTION	6
8. LEVEL DIAGRAMS	8
9. MEASUREMENT AND ADJUSTMENT OF THE CIRCUIT	9
9.1 Tape Speed Adjustment	10
9.2 Head Azimuth Adjustment	10
9.3 Playback Equalizer Adjustment	10
9.4 Playback Output Level Adjustment (Model SD155)	10
9.5 Playback Output Level Adjustment (Model SD255)	11
9.6 Playback Noise Adjustment	11
9.7 Recording-Playback Frequency Response Adjustment and Measurement	11
9.8 Dubbing Recording-Playback Level Measurement	12
9.9 Dubbing Recording-Playback Frequency Response Measurement	12
10. VOLTAGE CONVERSION	12
11. DISASSEMBLY	13
12. WIRING DIAGRAMS	14
13. EXPLODED VIEW AND PARTS LIST	18
14. ELECTRICAL PARTS LIST	27
15. TECHNICAL SPECIFICATIONS	31
16. SCHEMATIC DIAGRAM	32

How to use this service manual

- The "Common parts" which Marantz Japan, Inc. has established are eliminated from this service manual.
- These "Common parts" are applied to all models in the service manuals arranged and issued by MJI.
- To indicate clearly the common parts in the schematic diagram, a line is drawn above or under the Ref. Desig. No. of applicable parts.
- "Common parts" can be supplied from the Marantz service center as ever.
In case of ordering, please establish the parts number of 10 figures following the procedure mentioned in this service manual "How to establish the parts number for common parts".


(NOTE)

When you order parts to the Marantz parts center, please take notice of the following points.


- 1) Please correctly write the parts number of 10 figures following the rule.
- 2) Since ordering parts by the Ref. Desig. No. or ratings indicated in the schematic diagram does not satisfy the above conditions, the Marantz parts supply system does not work properly.
As this case is apt to cause a trouble, please pay attention to it.

M2975

MARANTZ MODEL SD155/SD255 STEREO CASSETTE DECK

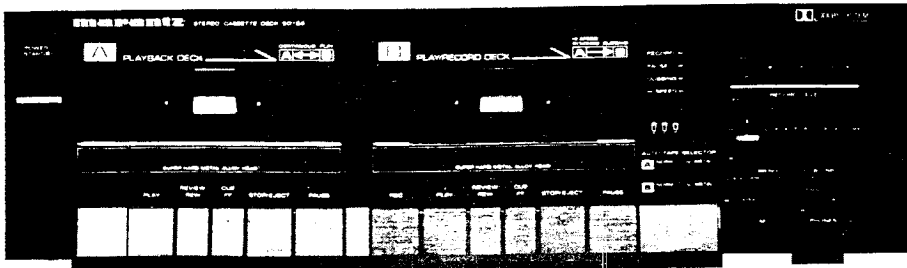

Model SD155

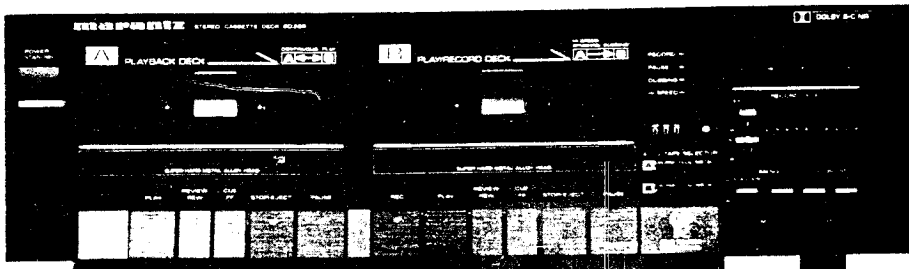

Model SD255

INTRODUCTION

This service manual are prepared for use by Authorized Warranty Station and contains service information for Marantz Model SD155/SD255 Stereo Cassette Deck.

Servicing information and voltage data included in this manual are intended for use by the knowledgeable and experienced technician only. All instructions should be read carefully. No attempt should be made to proceed without a good understanding of the operation of the Cassette Deck.

The parts list furnishes information by which replacement parts may be ordered from the Marantz Company. A simple description is included for parts which can be usually obtained through local suppliers.

1. SHOCK, FIRE HAZARD SERVICE TEST:

CAUTION: After servicing this appliance and prior to returning to customer, measure the resistance between either primary AC cord connector pins (with unit NOT connected to AC mains and its Power switch ON), and the face or front Panel of product and controls and chassis bottom.

Any resistance measurement less than 1 Megohms should cause unit to be repaired or corrected before AC power is applied, and verified before return to user/customer.

Ref. UL Standard No. 1270. Para. 66. 3. D (Mandatory Test after servicing Electrical Appliances, effective 7-1-83).

2. P.W. BOARDS

As can be seen from the circuit diagram, the chassis of your Cassette Deck consists of the following units. Each unit mounted on a printed circuit board is described within the square enclosed by a bold dotted line on the circuit diagram.

1. Dolby mounted on P.W. Board P601
2. Main mounted on P.W. Board PJ01
3. Front LED mounted on P.W. Board PJ04
4. Dubbing Flat Amp. mounted on P.W. Board PJ05
5. RCA Jack mounted on P.W. Board PJ06
6. Power SW PWB mounted on P.W. Board PJ08
7. Transf. PWB mounted on P.W. Board PJ09
8. Motor Speed ADJ mounted on P.W. Board PJ10

3. TEST EQUIPMENT REQUIRED FOR SERVICING

For measuring or checking your Cassette Deck, the following instruments and materials are necessary.

- Audio Oscillator (AF OSC)
- Attenuator (600 Ω)
- VTVM
- Distortion Meter
- Oscilloscope
- Bandpass Filter
- Wow and Flutter Meter
- Torque Meter (Cassette Type)
- Digital Frequency Counter
- Blank Tapes (Completely erased with bulk eraser)
 - AC-212 (Normal)
 - AC-512 (CrO₂)
 - AC-712 (Metal)

NOTE:

If any doubt is noted in a measured value, use new tape.

- Test Tapes (New Tape)
 - TCC-111.MTT-111 Wow and Flutter, Tape Speed
 - TCC-140.MTT-112B Signal-to-Noise Ratio
 - TCC-130.MTT-150 Adjustment of Output Level
 - TCC-161.MTT-256 Frequency Response (for Normal)
 - TCC-261.MTT-356 Frequency Response (for Special/CrO₂ and Metal)
 - TCC-192.MTT-121 Cross Talk
 - TCC-194.MTT-141 Channel Separation
 - (A-BEX) (TEAC)

4. MECHANISM CONTROL CIRCUIT

Description of Circuit

Basically, this mechanism control circuit is configured to supply voltage (12V) in each mode by the switching of transistors (QM01 and QM10).

4.1 Relay play operation TAPE A \rightleftharpoons TAPE B

The motor switch (S071) is turned ON by TAPE A playback, voltage is applied to the base of QM01 through RM06, RM05, and DM03, and the base of QM01 becomes "low". QM01 is turned ON, 12V is supplied to the motor of TAPE A, the playback mode is selected, and playback "high" is output from TAPE A. QM06 is ON during TAPE A playback and the lines of S081 are "low" after RM16. Even if there is playback indication for TAPE B, pin (7) of QM12 remains "low" and the base of QM10 is high through RM21 as the interval between pins (7) and (10) of the transistor array is OFF. There is no rotation of the motor when QM10 is OFF.

The operation buttons are in the playback standby mode. When the TAPE A playback is completed, TAPE A is shut off automatically, the base of QM06 becomes "low", and QM06 is turned OFF.

The high voltage of S081 passes through RM22, and is applied to pin (7) of QM12. QM12 pin (10) becomes "low", QM08 is turned ON, the motor of TAPE B (M075), and the playback mode is selected.

At this time, QM03 is turned ON through RM16 and even if there is TAPE A playback indication (S071 turned ON) by setting it OFF through RM12, the motor of TAPE A (M071) does not rotate and the playback standby mode is selected.

The repetition of the above operation is repeat playback.

4.2 Synchronized dubbing operation (standard speed dubbing)

When the dubbing switch (SM01) is set to the dubbing mode, the dubbing high signal passes through RM03 and DM01 and turns QM02 ON. The base of QM01 becomes "low", QM01 is turned ON, and the motor of TAPE A starts rotating. Also, voltage of 12V is supplied to the base of QM09 through RM08 and RM17, QM09 is turned ON, the base of QM10 goes to "low", and QM10 is turned ON and the motor of TAPE B starts rotating.


Setting TAPE B to the recording mode (pressing the record button) turns the REC SW (S079) ON, voltage is supplied to the base QM08 through RM07, QM08 is turned ON, and QM09 is turned OFF. S079 is turned ON before P.B/Rec Slide SW (SS51) is switched. The base of QM10 is set to "high" through RM21, QM10 is set to OFF, and the motor (M075) does not rotate.

Next, setting TAPE A to the playback mode (pressing the playback button) turns S071 ON, voltage is applied to the base the base of QM19 through RM18 and DM10, and QM09 is turned ON. The base of QM10 goes to "low", QM10 is turned ON and the motor of TAPE B starts rotating.

The slide switch (SS51) is set and the REC mode selected. When TAPE A is dubbing, the normal motor is

always activated in order to constantly apply voltage to the base of QM02 through RM03 and DM01. This is activated by setting the playback mode (pressing playback button). In other words, the synchronized dubbing mode is selected.

When the slide SW (SS51) for TAPE B is in the REC mode, REC "high" is generated, voltage is applied to RM19 and DM19 and QM09 is turned ON. TAPE B remains activated in the REC mode (muting mode) even when the playback of TAPE A ends.

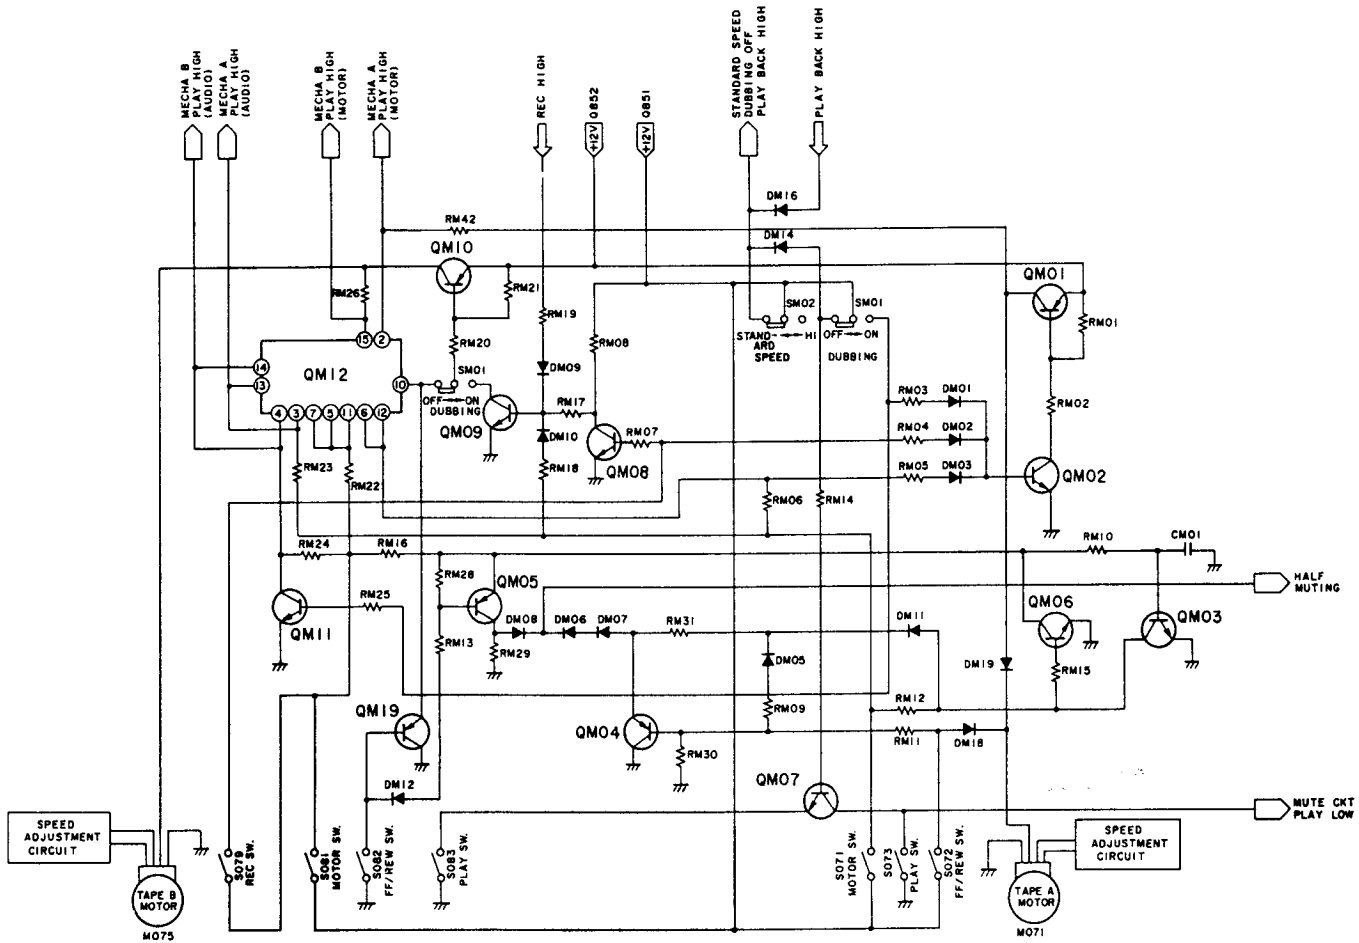


4.3 High speed dubbing operation

QM14 is the transistor which controls the rotational speed (standard/high speed) of the motors. Standard speed is selected when voltage is applied to the base, and high speed is set when the base is "low".

Voltage is applied to the base of QM14 in the following situations: when the speed selection switch (SM02) is set to STANDARD, when the dubbing ON/OFF switch (SM01) is OFF, and when the slide switch (SS51) is set to the playback mode.

4.4 Speed adjustment circuit

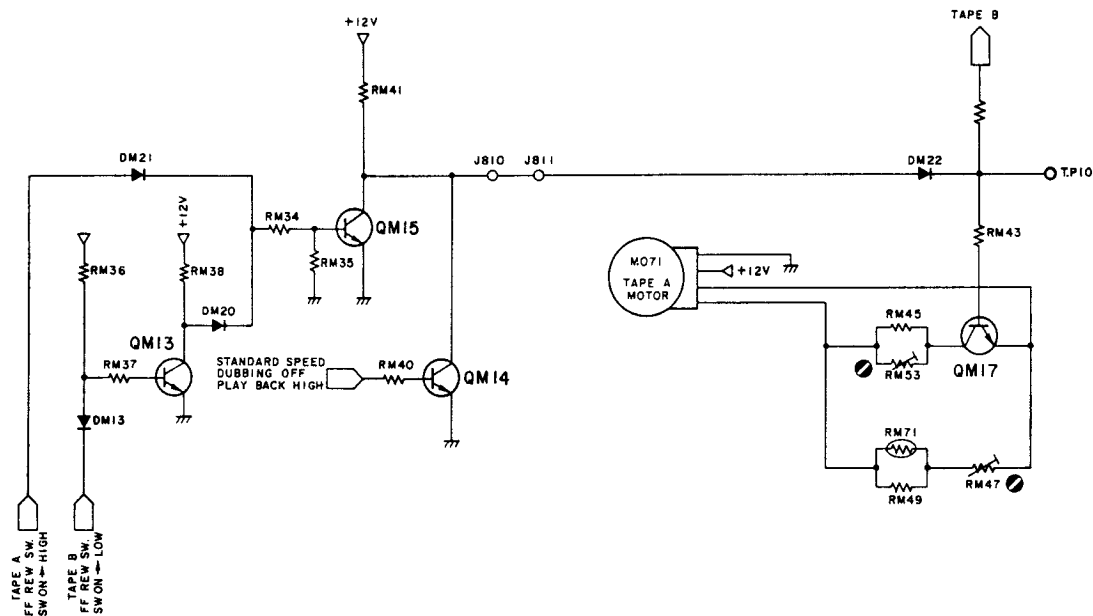

The control output pins (3) and (4) of the motor drive IC inside the high speed motor M071 (M075) are connected to the speed adjustment circuit board (PJ10) (JM03, JM04), and the speed of the motor is controlled through adjustment of the externally mounted potentiometers RM47, RM48, RM53, and RM54.

In the standard speed mode, the voltage from RM41 is low as there is voltage applied to the base of QM14. QM17 and QM18 are turned OFF through J810, J811, RM43, and RM44. The standard speed setting is adjusted through adjustment of the potentiometers RM47 (TAPE B) and RM48 (TAPE A).

Voltage of 12V is applied to TP10 when the high speed mode is selected. Voltage is applied to the bases of QM17 and QM18 through RM43 and RM44, and the high speed setting of RM53 (TAPE B) and RM54 (TAPE A).

When switching between FF and REW is performed when QM15 is set for high speed, switching is carried out in the standard mode.

5. HIGH SPEED DUBBING

High speed recording procedure

This is the signal processing when normally recorded tapes are dubbed at high speed.

5.1 High speed Playback

In order to raise the high and mid ranges during high speed playback, the high and mid range signals are lowered during dubbing at the playback AMP OUT, and flat high speed playback output is obtained.

5.2 High speed recording


The residual magnetic flux density recorded on the tape is proportional to the signal current. Thus, for high speed recording, the recording wavelength of fixed speed recordings must be equalized for high speed recording.

5.3 Gain amplifier

The level is amplified in order to make the output from the playback amplifier equal to the recording current of the recording level of fixed speed recording. 19.7 dB is the level when equalizing is set for fixed speed playback. If it is not set, the level is 25.7 dB of the gain of the Dolby circuit. When it is set, reduction of -6 dB from the ideal playback equalization curve is necessary.

H2979

6. HIGH AND STANDARD SPEED DUBBING CIRCUIT

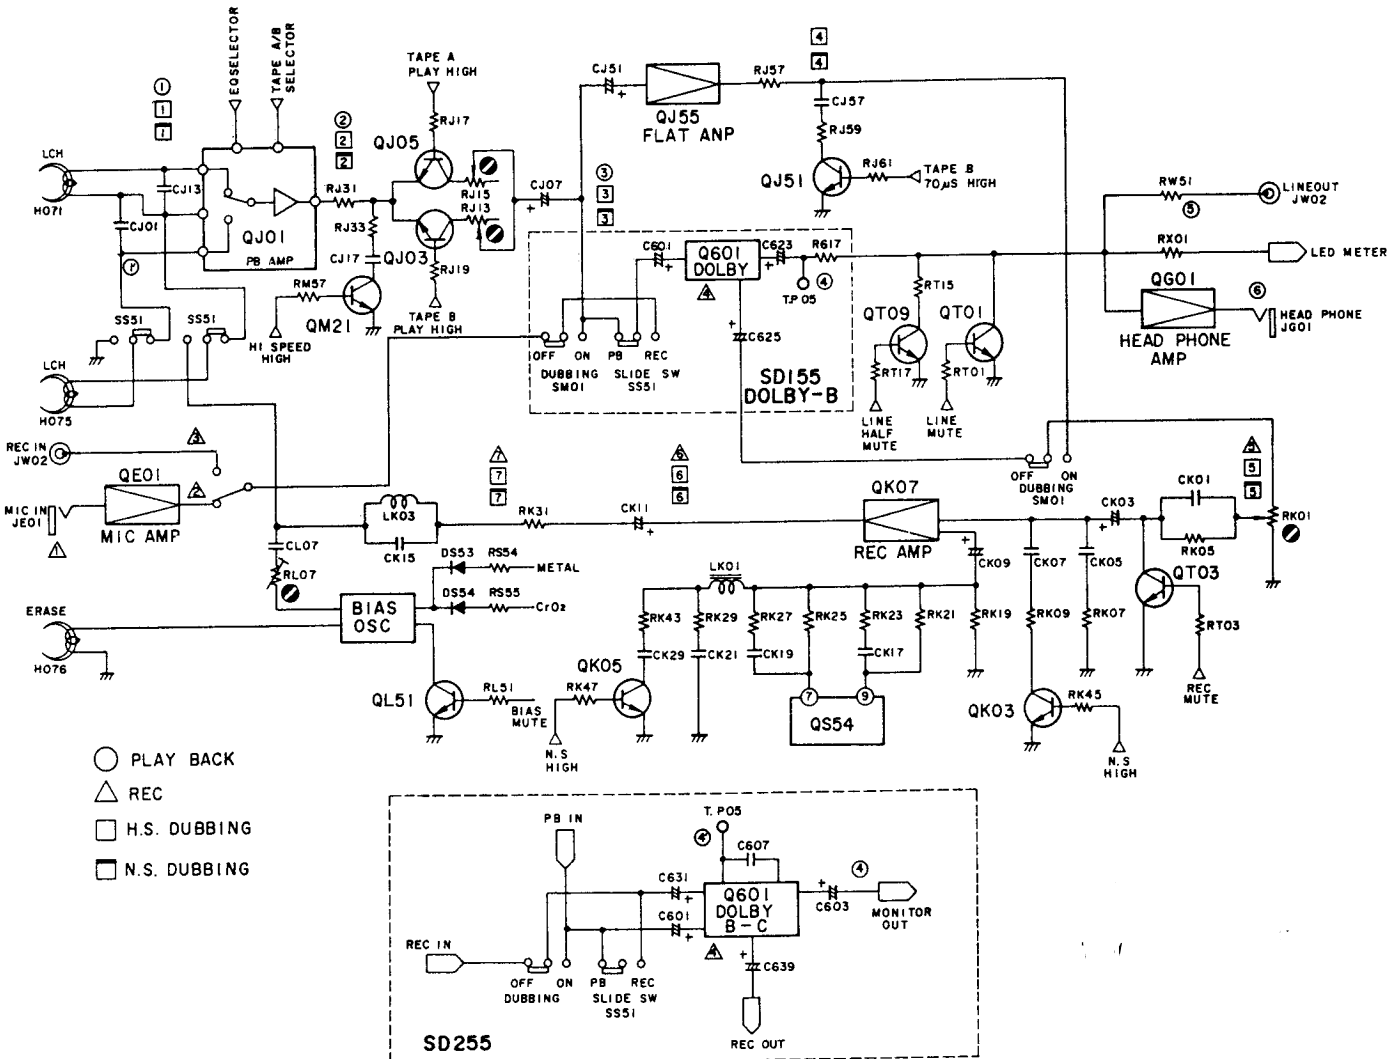

Description of circuit

6.1 Voltage is constantly applied to the base of QM20 in the standard mode, and the base voltage of QM21 and QM22 is low.

The base voltage of QM20 goes to "low" when the high speed mode is selected. Voltage of 12V is applied to the base QM21 and QM22 through RM56, and these turn ON.

RM31, RM33, and CJ17 lower the mid and high ranges during high speed, so allow for flat high speed playback output.

6.2 Gain amplifier

This amplifier perform level matching of the current for standard and high speed recording. The gain is 26 dB. The signals from TAPE B passes through RG61 when 70 μ sec, and turn QJ51 ON. Mid and high range compensation is performed by CJ57 and RG59.

6.3 Recording amplifier


The signals normally pass through SM01 from the Dolby IC Rec out output (pin (9) for SD155 and pin (21) for SD255) and are input to the recording amplifier. During high speed dubbing, the gain amplifier output passes through SM01 and is input to the recording amplifier. QK03 and QK05 are ON for standard speed, mid range compensation is performed by CK07, RK09, CK05, and RK07, and LK01, CK21, and RK29 perform high range compensation.

QK03 is OFF in the high speed mode and the mid range compensation is performed by CK05 and RK07. QK05 is switched OFF when there is high range peaking, and RK29 and CK21 perform a shift of the high range peaking. Mid range compensation for CrO₂ and metal tape in the high speed mode is performed in the standard speed EQ characteristics mode.

High speed dubbing is the same as normal line recording, with the signals passing through the QJ55 flat amplifier, and input to the recording amplifier.

The monitor signals pass through the DOLBY IC, and the Dolby recorded signals are decoded so to allow them to be heard using the monitor. During dubbing (standard and high speed) the signals are dubbed in their encoded form.

7. AUTO TAPE SELECTION

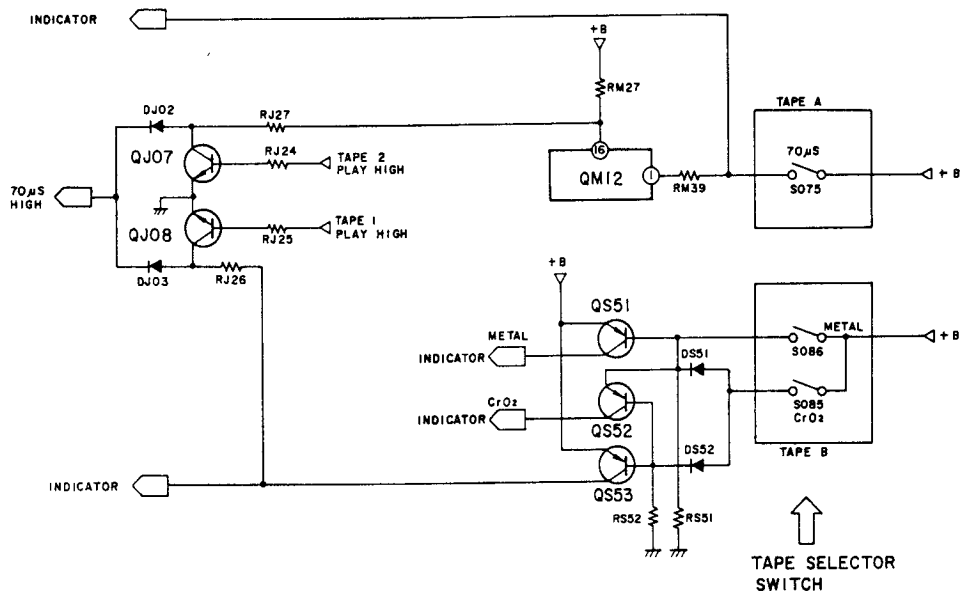

The auto tape selection function of TAPE A operates only for playback, and allows for discrimination between 70µsec or 120µsec. (LED INDICATOR)

S075 is ON for normal tape. Voltage passes through RM39 and is applied to pin (1), and pin (16) becomes "low". Pin (1) is low for QM12 and pin (16) is high.

TAPE B auto tape selector

1. Normal tape

- Both of the tape selector switches (S086 and S085) are ON.
- The base voltage of the transistor (QS51) for metal tape is set to a high level by the selector switch (S086), setting it to the OFF mode.
- The base voltage of the transistor (QS52) for CrO₂ tape is set to a high level by the selector switch (S085), and diode (DS51), setting it to the OFF mode.
- The base voltage of the 70µsec switching transistor (QS53) is set to a high level by the selector switch (S085) and diode (DS52), setting it to the OFF mode.

2. CrO₂ tape

- The tape selector switch (S086) is OPEN, and (S085) is CLOSED.
- The base voltage of the transistor (QS51) for metal tape is set to a high level by the selector switch (S085) setting it to the OFF mode.
- The base voltage of the transistor (QS52) for CrO₂ tape flows through (RS52) because the selector switch (S086) is in the OPEN state. Moreover, the emitter of (QS52) is set to the high level by the selector switch (S085), setting (QS52) ON and the emitter voltage level to high.

- The base current of the 70µsec switching transistor (QS53) flows through (RS52) because the selector switch (S086) is in the OPEN state. Thus, the transistor is set to ON, and the collector of (QS53) is set to the high level.

3. Metal tape

- Both of the tape selector switches (S086 and S085) are ON.
- The base current of the transistor (QS51) for metal tape flows through RS51 when the selector switches (S086 and S085) are ON, and QS51 is turned to ON.
- The transistor (QS52) for CrO₂ tape is set to OFF, because the selector switch (S085) is OPEN state, and because the base voltage is at the high level due to the base current of (QS53).
- The base current of the 70µsec switching transistor (QS53) flows through (RS52) because the selector switch (S086) is OPEN. (QS53) is set to ON, and the collector of (QS53) to the high level.

M2981


Mode and Switching Relationships

	Tape selector switch		Transistors			Control output		
	S085	S086	QS51	QS52	QS53	QS53(C)	QS51(C)	QS52(C)
						70 μ sec	Metal	CrO ₂
Normal	CLOSE	CLOSE	OFF	OFF	OFF	L	L	L
CrO ₂	OPEN	CLOSE	OFF	ON	ON	H	L	H
Metal	OPEN	OPEN	ON	OFF	ON	H	H	L


The EQ switching of the playback amplifier (QJ01) is "High" for 70 μ sec, and "Low" for 120 μ sec. (QJ07) and (QJ08) are used to determine the EQ of the tape being played. In terms of the operation, when a CrO₂ tape is being played by TAPE A, the TAPE A play high voltage is applied to (RJ25), (QJ08) is turned ON, and the 70 μ sec high level and 120 μ sec low level voltage of (QS53) pass through (RJ26) to become low. As (QJ07) is OFF, the 70 μ sec high level passes through (RJ27) and (DJ02), and is applied to the EQ switching terminal. This circuit causes the output of the EQ voltage of the side currently being played.

8. LEVEL DIAGRAMS


Model SD155

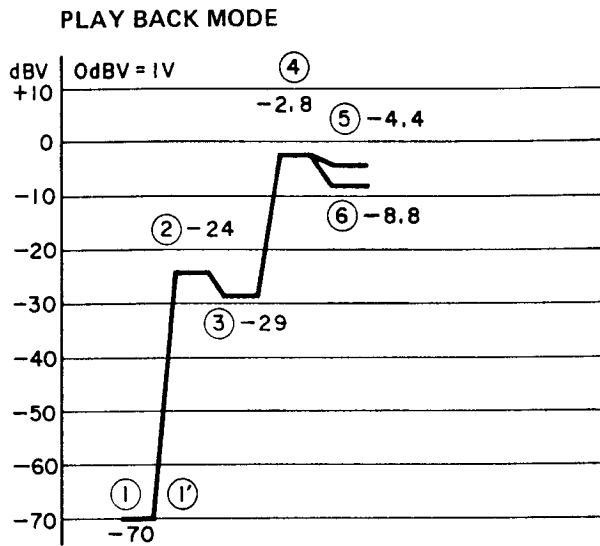


Model SD255

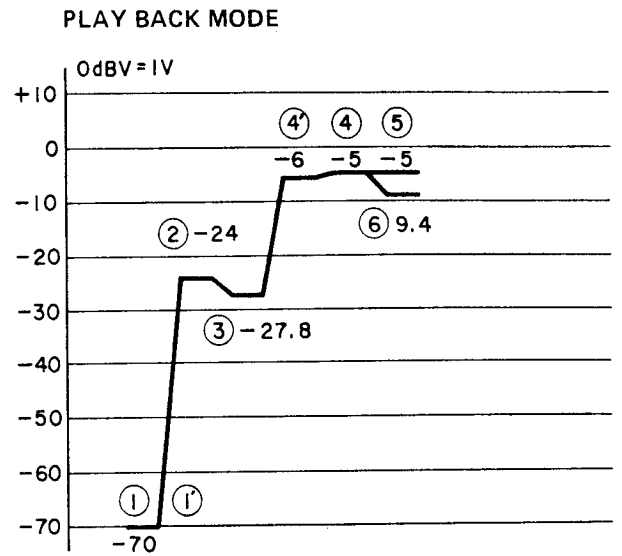

RECORDING MODE

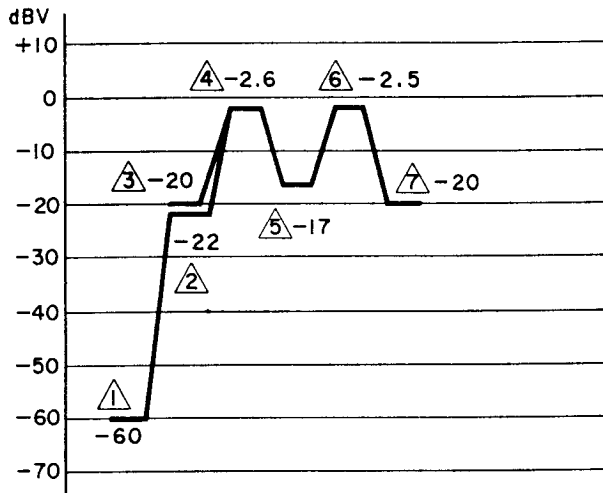


RECORDING MODE

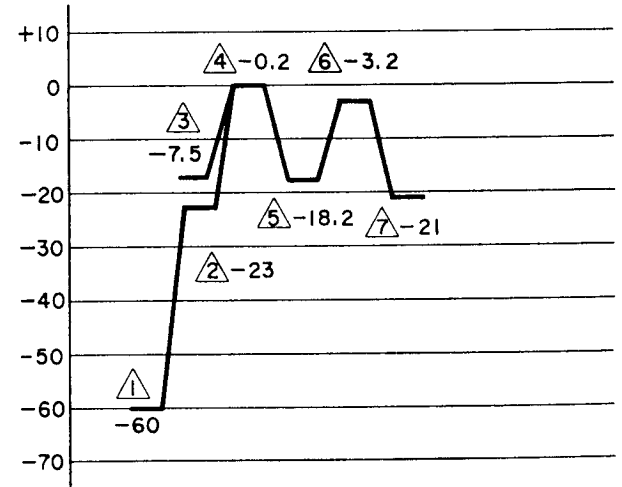


Model SD155/SD255

STANDARD SPEED DUBBING MODE

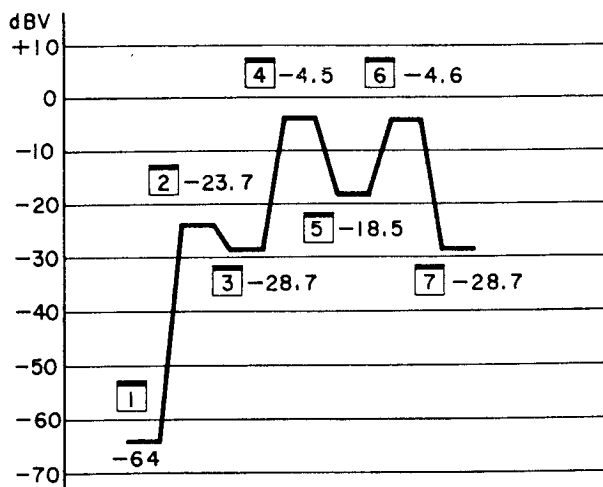

HI SPEED DUBBING MODE

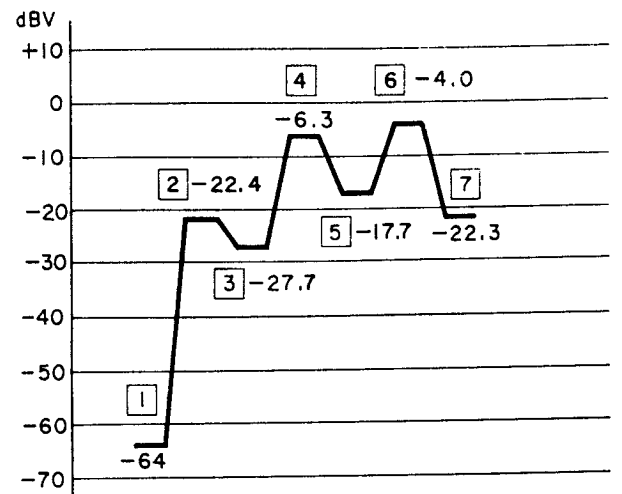


9. MEASUREMENT AND ADJUSTMENT OF THE CIRCUIT

Precautions for Adjustment and Measurement

- 1) Before playing back the test tape, thoroughly demagnetize the heads, capstan and similar metal parts using an eraser, as the test tape-recorded tone is easily erased.
- 2) Do not place the test tape on any measuring instrument.
- 3) Do not put the test tape near a place where the eraser is used.
- 4) Method of Demagnetization: Turn the eraser power switch on at a position far away from the heads. Bring the eraser close to the heads, capstan and other parts to be demagnetized, and move it up and down four or five times to demagnetize. Slowly separate the eraser far away from the parts, and turn the power switch off.
- 5) Do not use any magnetized adjusting tool. If necessary, demagnetize with a bulk eraser from time to time in the course of each adjustment.
- 6) Do not turn semi-fixed resistor or coil more than needed.
- 7) Measure speed and wow and flutter in the normal operating state.
- 8) Do not apply locking bond excessively.


Diagram of Adjustment and Test Points

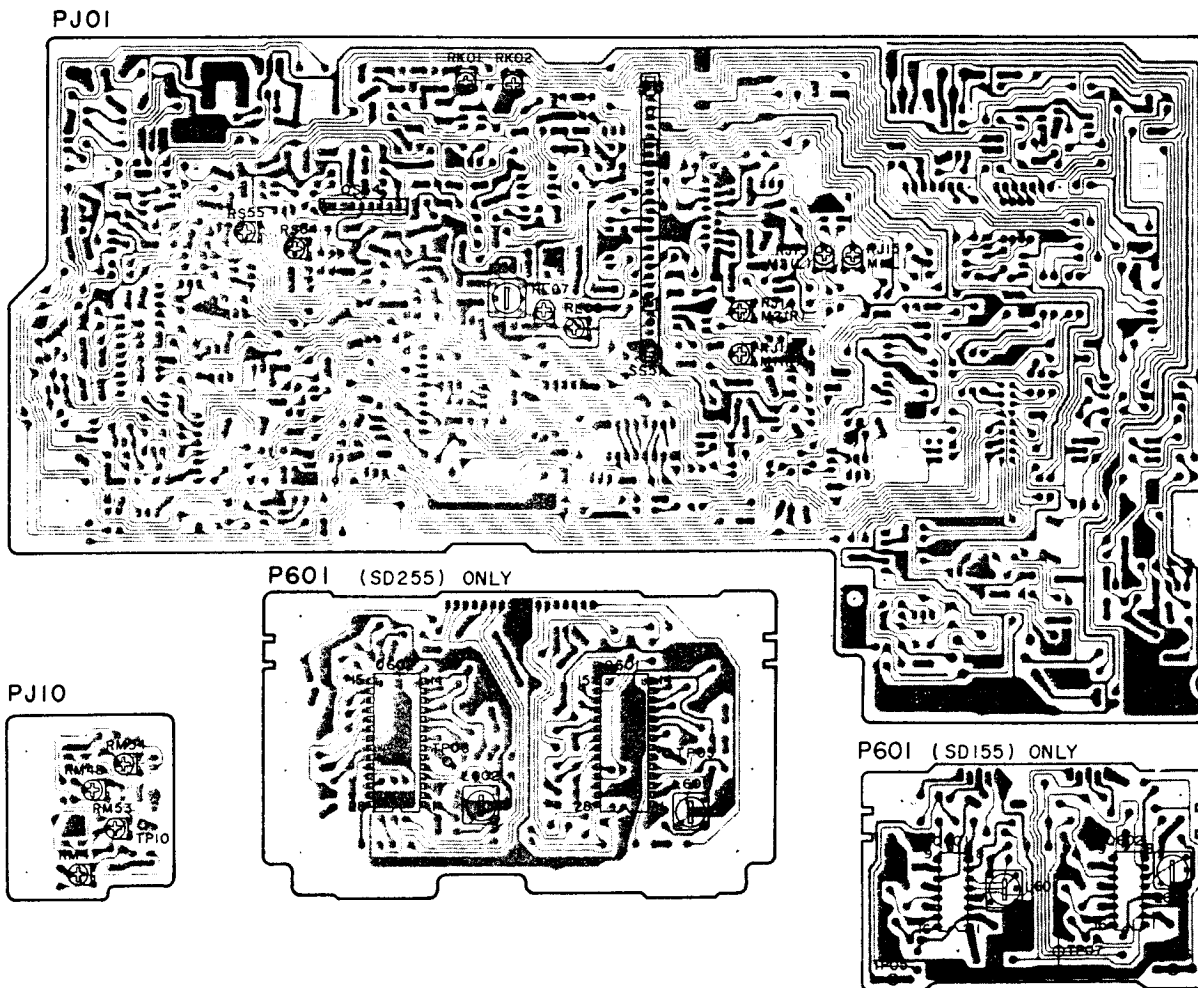

9.1 Tape Speed Adjustment


(TAPE A)

1. Play the middle portion of the TCC-111 test tape, and adjust the variable resistor for speed adjustment (RM48) until the counter indication is in the range of 2990 Hz to 3010 Hz. (Fixed speed: 4.8 cm/sec)
2. Play the middle portion of the TCC-211 test tape, and adjust the variable resistor for speed adjustment (RM54) until the counter indication is in the range of 3000 Hz to 3010 Hz. (High speed: 9.5 cm/sec)
3. In order to confirm that adjustment has been properly completed, rewind the tape, play it back, and confirm that the values are within the desired range.

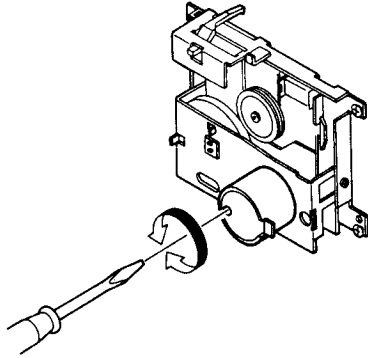

(TAPE B)

1. Play the middle portion of the TCC-111 test tape, and adjust the variable resistor for speed adjustment (RM47) until the counter indication is in the range of 2990 Hz to 3010 Hz. (Fixed speed: 4.8 cm/sec)
2. Play the middle portion of the TCC-211 test tape, and adjust the variable resistor for speed adjustment (RM53) until the counter indication is in the range of 3000 Hz to 3010 Hz. (High speed: 9.5 cm/sec)
3. In order to confirm that adjustment has been properly completed, rewind the tape, play it back, and confirm that the values are within the desired range.


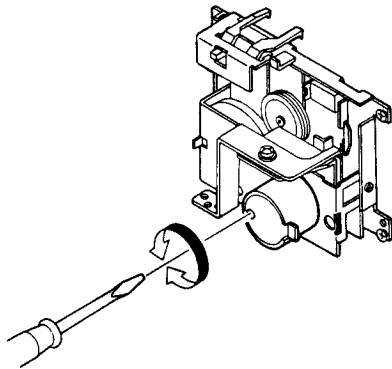


- Notes:**
1. Do not adjust the unit after subjecting it to a change in temperature.
 2. Note that the frequency counter may not be accurate if the input level is low.
 3. Adjust the unit after allowing it to idle for approximately 10 to 20 sec.
 4. Adjust high speed before low speed. The high speed mode is selected by applying 12V to TP10. This mode is selected if the unit is in the normal playback mode.

9.2 Head Azimuth Adjustment

1. Playback the 14 kHz signal of the MTT-256 test tape, and rotate the azimuth adjustment screw for maximum indication on the VTVM.
2. If the peak level of the left and right channels is different, take the lower channel as the maximum value.
3. After adjustment, repeat a playback and stop cycle several times to make sure that there is no adjustment shift.
4. Be sure to paint lock the screw after the completion of adjustment.

Note: Adjust for TAPE A and TAPE B at the same location using the same side of the tape.

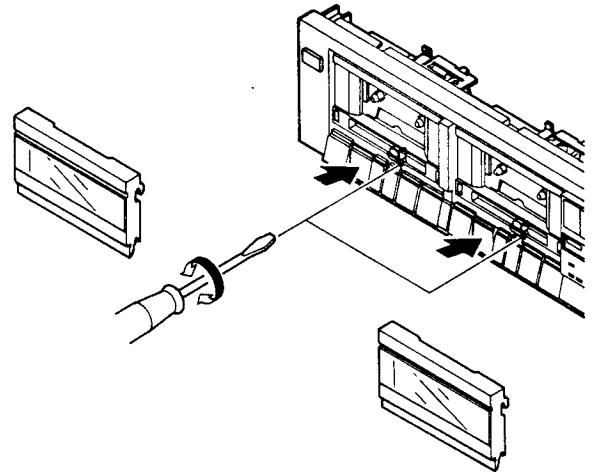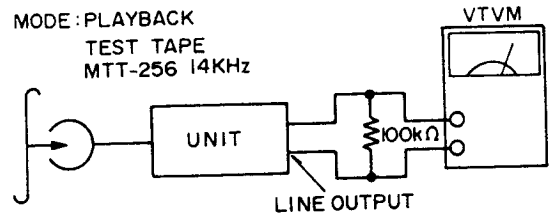

9.3 Playback Equalizer Adjustment

1. Playback the 315 Hz signal of the MTT-256 test tape. The indication of the VTVM is set to 0 dB.
2. Playback the 12.5 kHz signal of the MTT-256 test tape, and confirm that level is within 1 dB of the 315 Hz signal.
3. Perform the above for both TAPE A and TAPE B.

9.4 Playback Output Level Adjustment (Model SD155)

1. Playback the MTT-150 test tape, and adjust TAPE A (RJ15 (L) and RJ16 (R)) and TAPE B (RJ13 (L) and RJ14 (R)) until the voltage at the terminals is 580 mV at the Dolby test points (TP05-L and TP06-R).
2. Rewind the tape and confirm that the voltage is 580 mV during playback.

9.5 Playback Output Level Adjustment (Model SD255)

1. Playback the MTT-150 test tape, and adjust TAPE A (RJ15 (L) and RJ16 (R)) and TAPE B (RJ13 (L) and RJ14 (R)) until the voltage at the terminals is 387.5 mV at the Dolby test points (TP05-L and TP06-R).
2. Rewind the tape and confirm that the voltage is 387.5 mV during playback.

9.6 Playback Noise Adjustment


1. Set the NR switch to the OFF position.
2. Playback a blank portion of a normal tape, and confirm that the amount of noise is less than 1.5 mV at the LINE OUT output.

9.7 Recording-Playback Frequency Response Adjustment and Measurement

(Normal)


1. Set the AC-212 test tape to the standard recording mode (Input: 230 mV), reduce the level by 22 dB with an attenuator, and record 1 kHz and 10 kHz signals on the unrecorded section of the tape.
(Model SD155 – Dolby-B position)
(Model SD255 – Dolby-C position)
2. Rewind the tape, and adjust the RL07 (L) and RL08 (R) until the difference between the 1 kHz and 10 kHz sections is 0 – ±1.0 dB.
3. After the above adjustment is complete, record 1 kHz, 10 kHz, and 12.5 kHz signals, and confirm that the difference in levels when the various frequencies are played back meets the specifications below.
4. Next, set the DOLBY switch to the OFF position, record 1 kHz and 12.5 kHz signals, and confirm that the difference in levels meets the specifications below.
5. Confirm that the L/R channel balance of 10 kHz is within 3 dB with Dolby OFF.

Note: If a difference of more than 1 dB exists when the 1 kHz level for Dolby-B is compared with the monitor, adjust RK01 (L) and RK02 (R) until the recording level adjustment is set to within 1 dB.

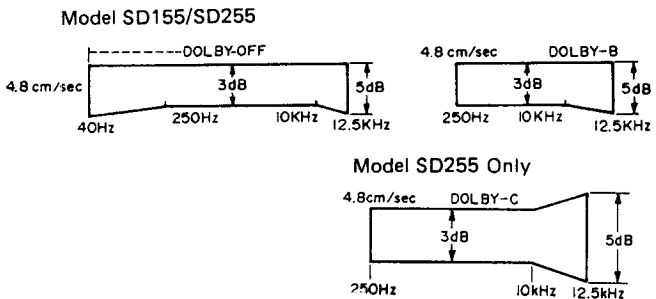


(CrO₂)

1. Set the AD-512 test tape to the standard recording mode (Input: 230 mV), reduce the level by 22 dB with an attenuator, and record 1 kHz and 10 kHz signals on the unrecorded section of the tape. (Dolby-B position)
(Model SD155 – Dolby-B position)
(Model SD255 – Dolby-C position)
2. Rewind the tape, and adjust the BIAS variable resistor RS55 until the difference between the 1 kHz and 10 kHz sections is 0 – ±1.0 dB.
3. After the above adjustment is complete, record 1 kHz, 10 kHz, and 12.5 kHz signals, and confirm that the difference in levels when the various frequencies are played back meets the specifications below.
4. Next, set the DOLBY switch to the OFF position, record 1 kHz and 12.5 kHz signals, and confirm that the difference in levels meets the specifications below.
5. Confirm that the L/R channel balance of 10 kHz is within 3 dB with Dolby OFF.

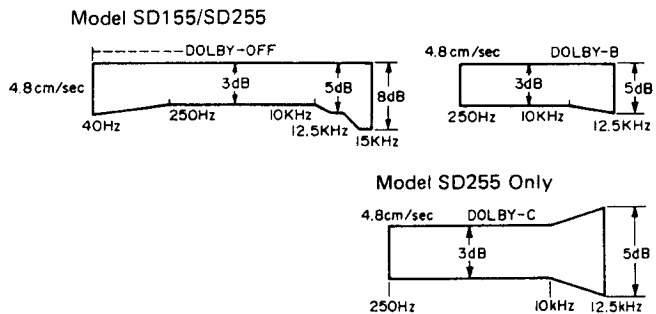

(Metal)

1. Set the AC-712 test tape to the standard recording mode (Input: 230 mV), reduce the level by 22 dB with an attenuator, and record 1 kHz and 10 kHz signals on the unrecorded section of the tape. (Dolby-B position)
(Model SD155 – Dolby-B position)
(Model SD255 – Dolby-C position)
2. Rewind the tape, and adjust the BIAS variable resistor RS54 until the difference between the 1 kHz and 10 kHz sections is 0 – ±1.0 dB.
3. After the above adjustment is complete, record 1 kHz, 10 kHz, and 12.5 kHz signals, and confirm that the difference in levels when the various frequencies are played back meets the specifications below.
4. Next, set the DOLBY switch to the OFF position, record 1 kHz and 10 kHz signals, and confirm that the difference in levels meets the specifications below.
5. Confirm that the L/R channel balance of 10 kHz is within 3 dB with Dolby OFF.

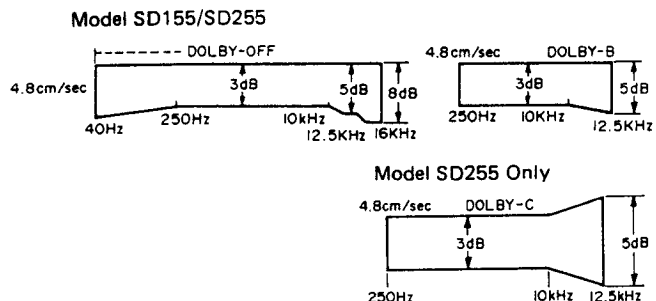


M2986

9.8 Dubbing Recording-Playback Level Measurement

1. Insert the MTT-150 test tape into TAPE A and the AC-212 tape into TAPE B.
2. Set the unit for dubbing from TAPE A to TAPE B.
3. After rewinding TAPE B, play the tape and make measurement at the Dolby test points TP05 and TP06. Confirm that the playback output level is within 580 mV \pm 1 dB.

9.9 Dubbing Recording-Playback Frequency Response Measurement

1. Insert the MTT-256 test tape into TAPE A and the AC-212 tape into TAPE B.
2. Set the unit for dubbing from TAPE A to TAPE B.
3. After rewinding TAPE B (AC-212), play the tape back. Confirm that the difference between the 1 kHz and 12.5 kHz signals meets the specifications below.




10. VOLTAGE CONVERSION

• EUROPEAN MODEL ONLY

To convert the unit to a different power source voltage, change the position as illustrated in the drawing below.

CAUTION
DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE.

Voltage Conversion Chart

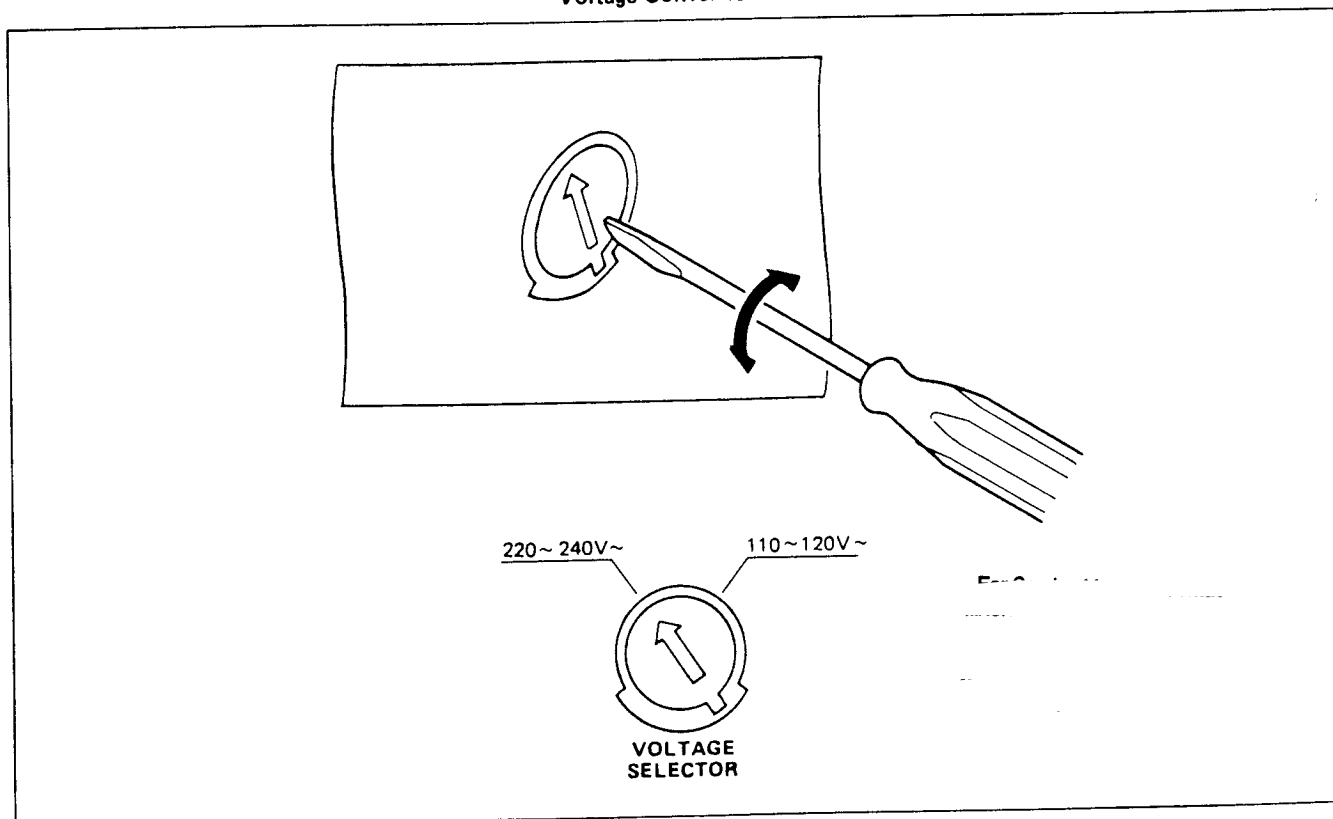


Note on safety: Symbol \triangle Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol \triangle . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

11. DISASSEMBLY


11.1 Removing the Top Cover

Remove the seven screws 1 ~ 7.

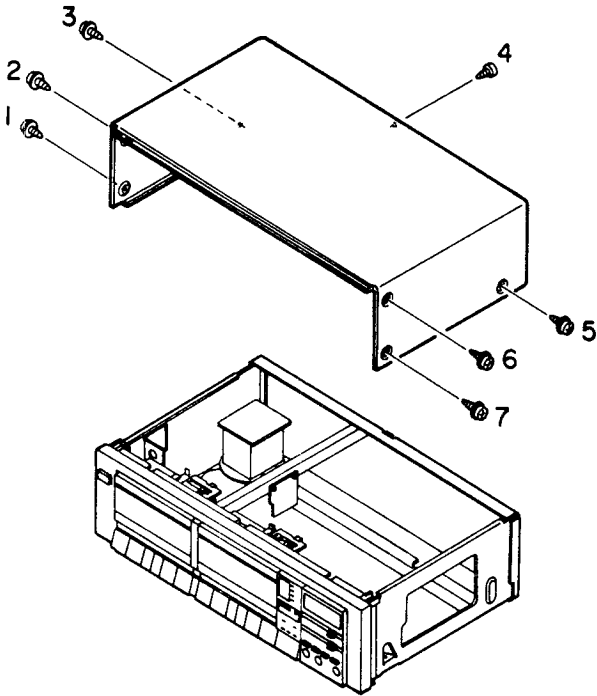


11.3 Removing the Mechanism

Remove the button A, B and C.
Remove the eight screws 1 ~ 8.

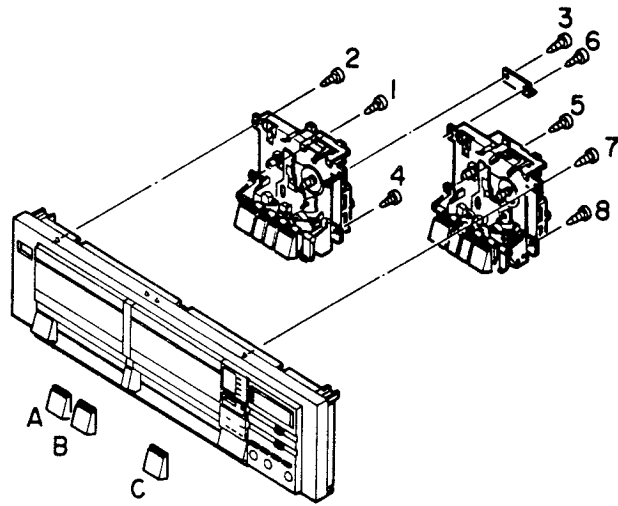


11.2 Removing the Front Panel

Remove the six screws 1 ~ 6.






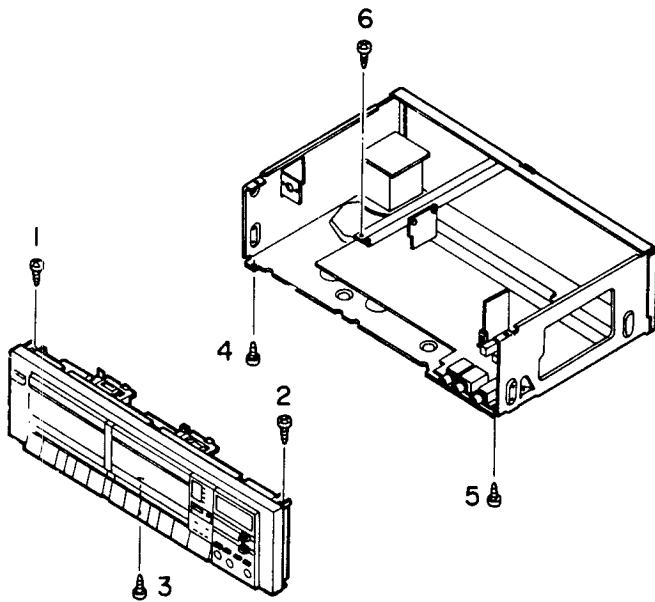


11.4 Removing the P.W. Board

Remove the four screws 1 ~ 4.





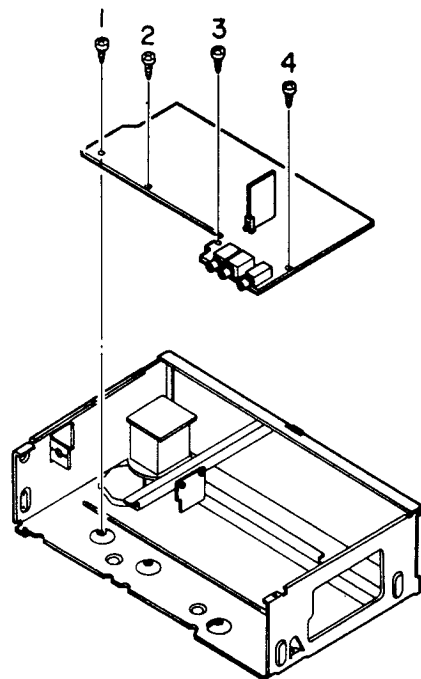



2. WIRING DIAGRAMS (Component side)

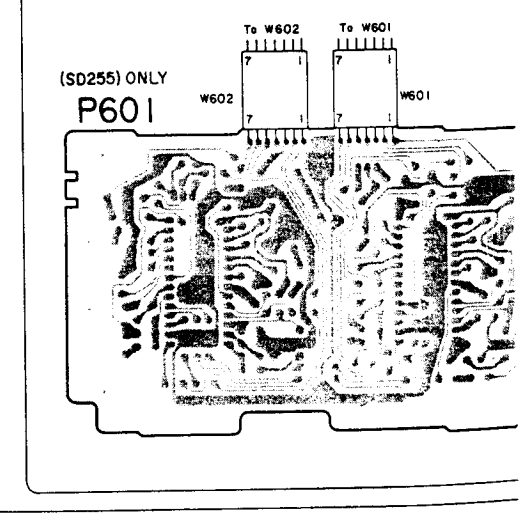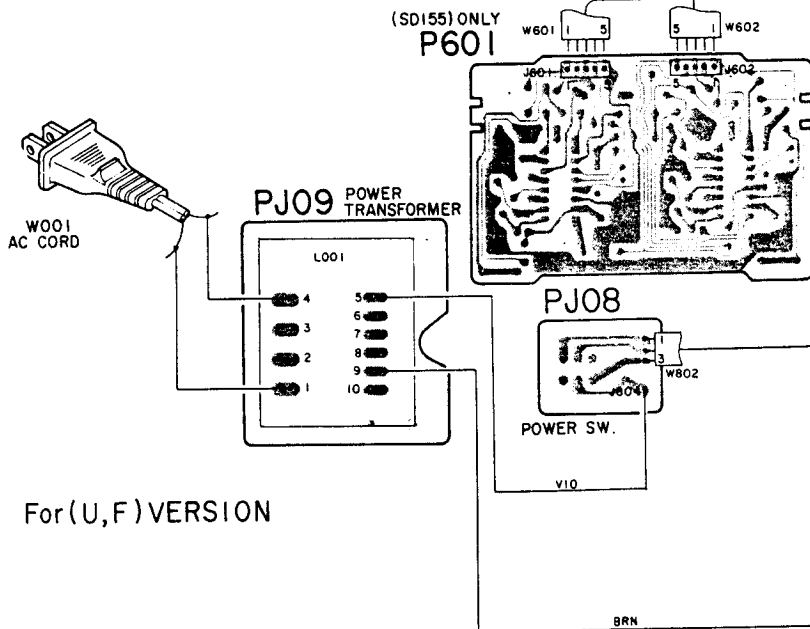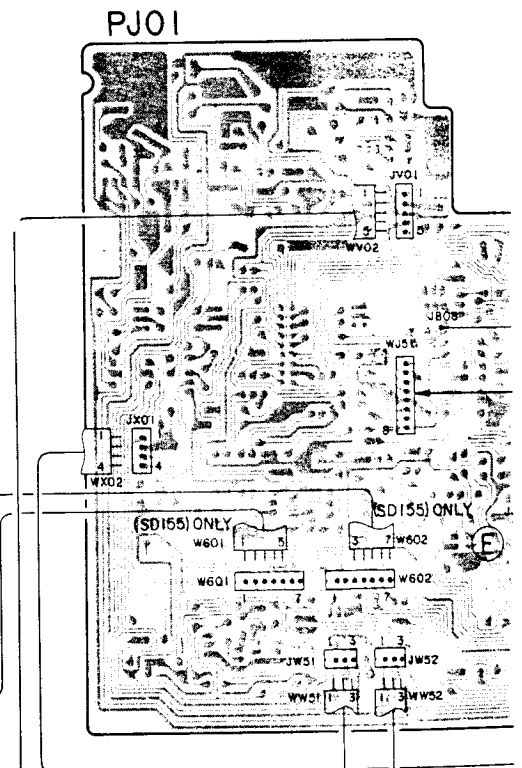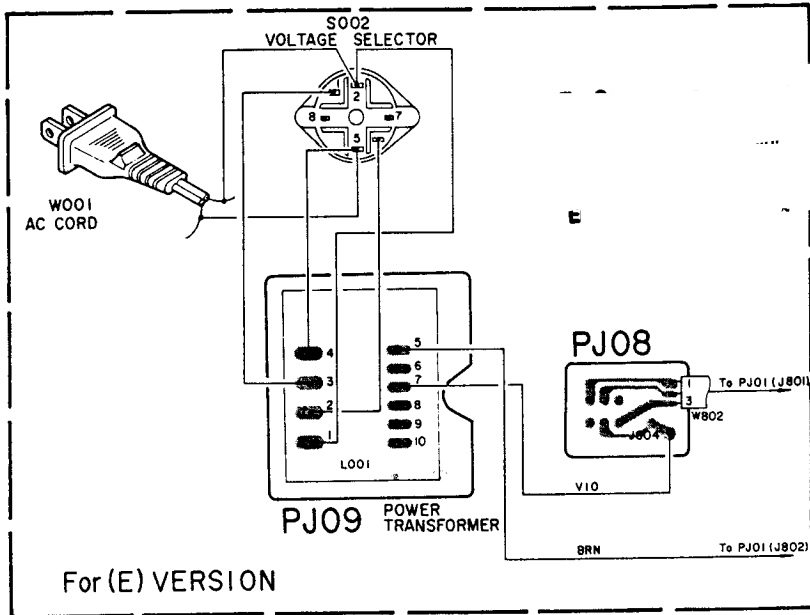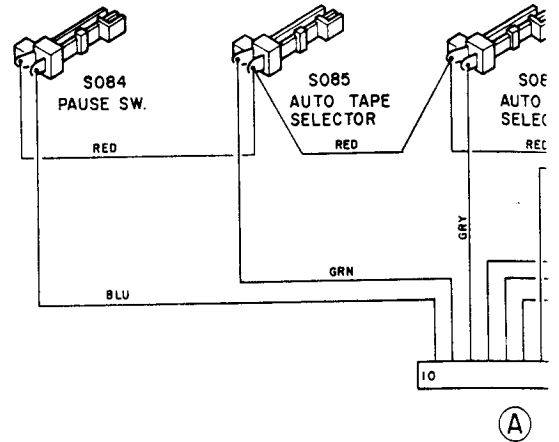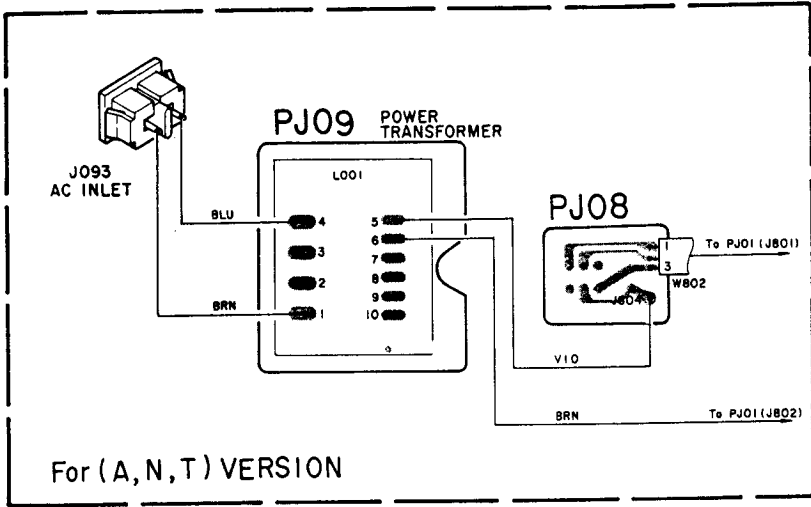

42989

nt side)

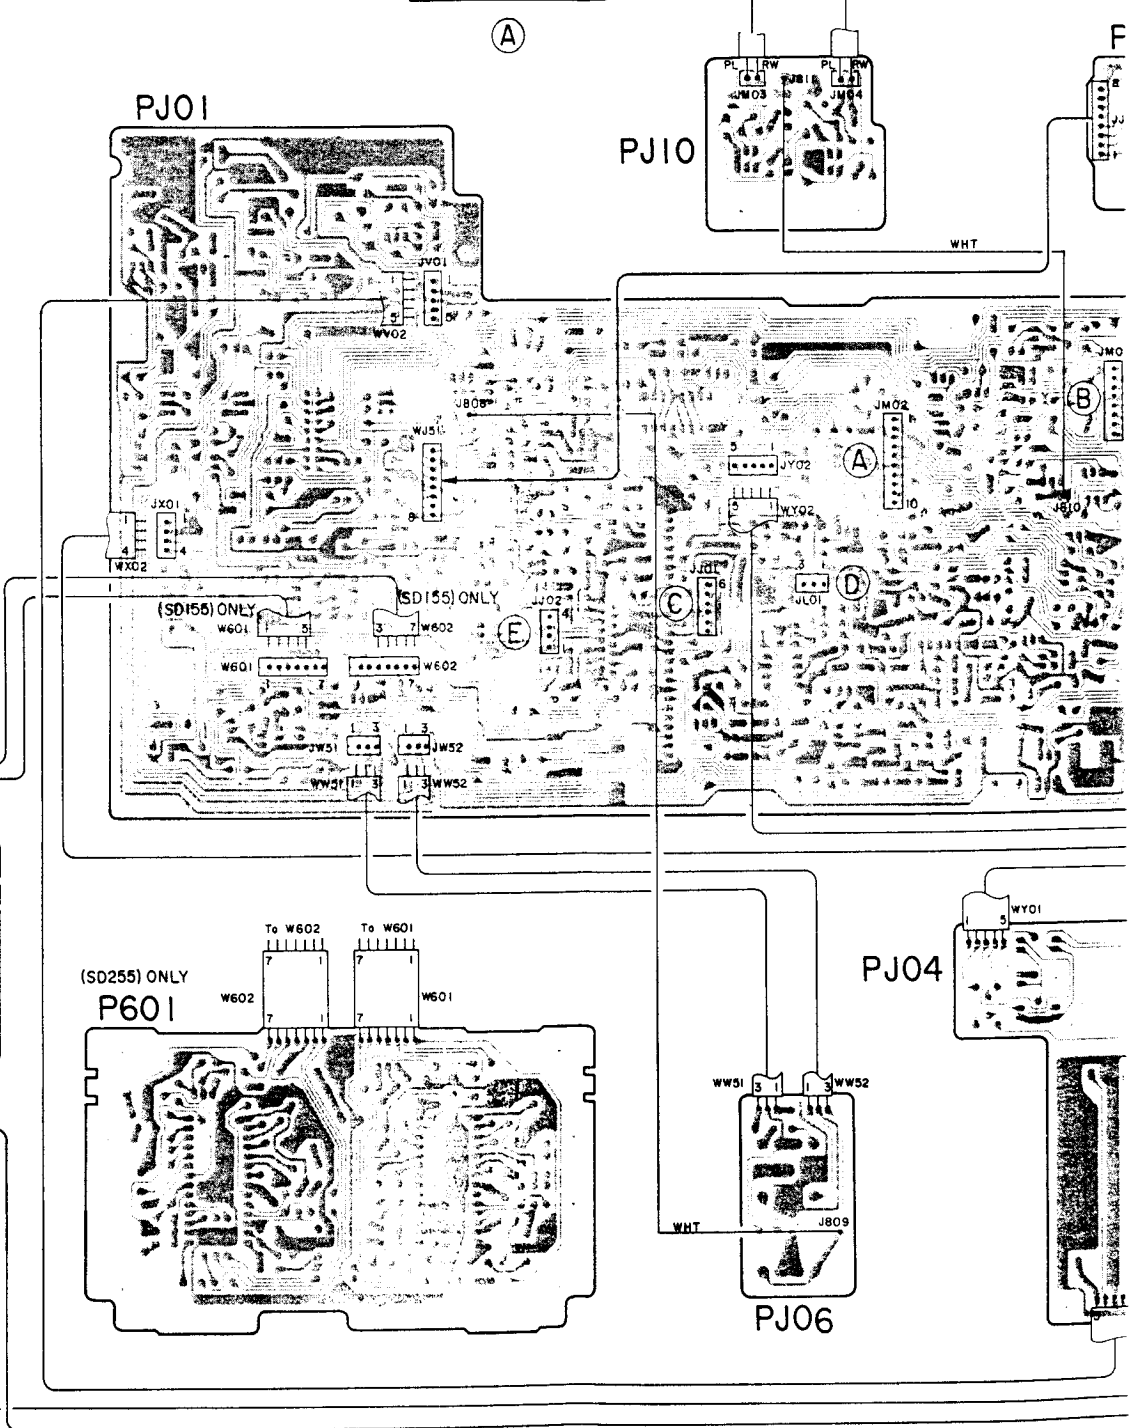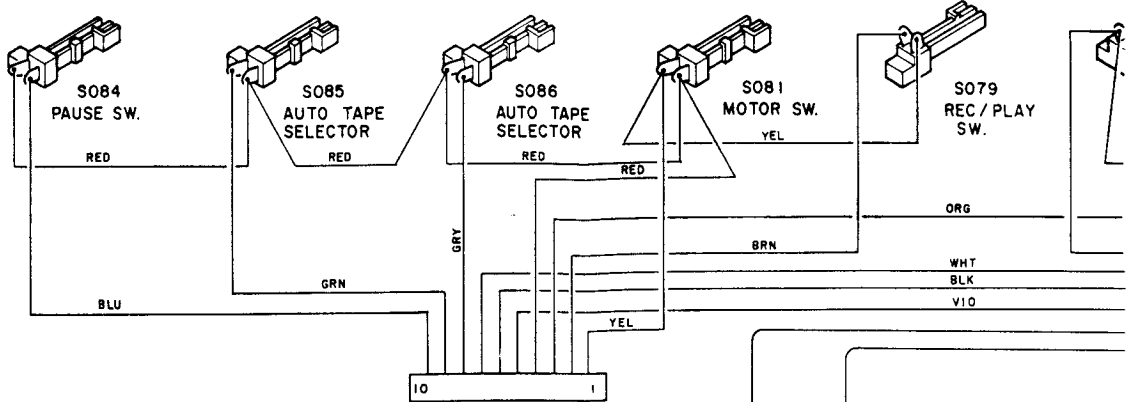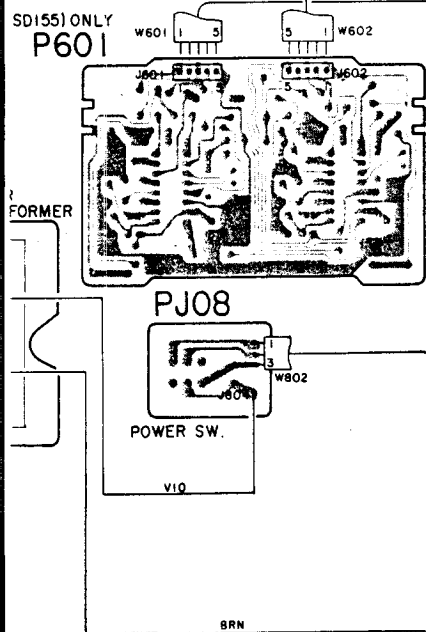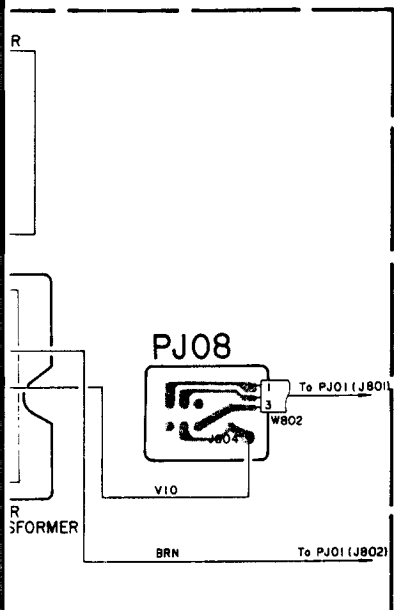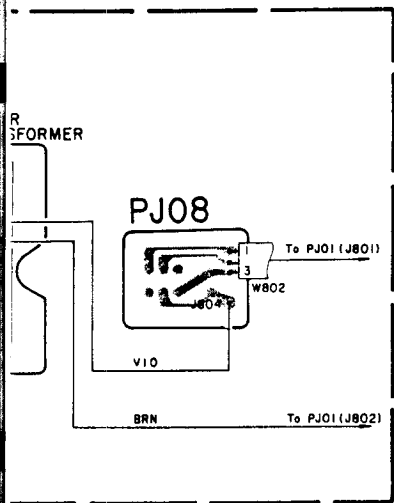

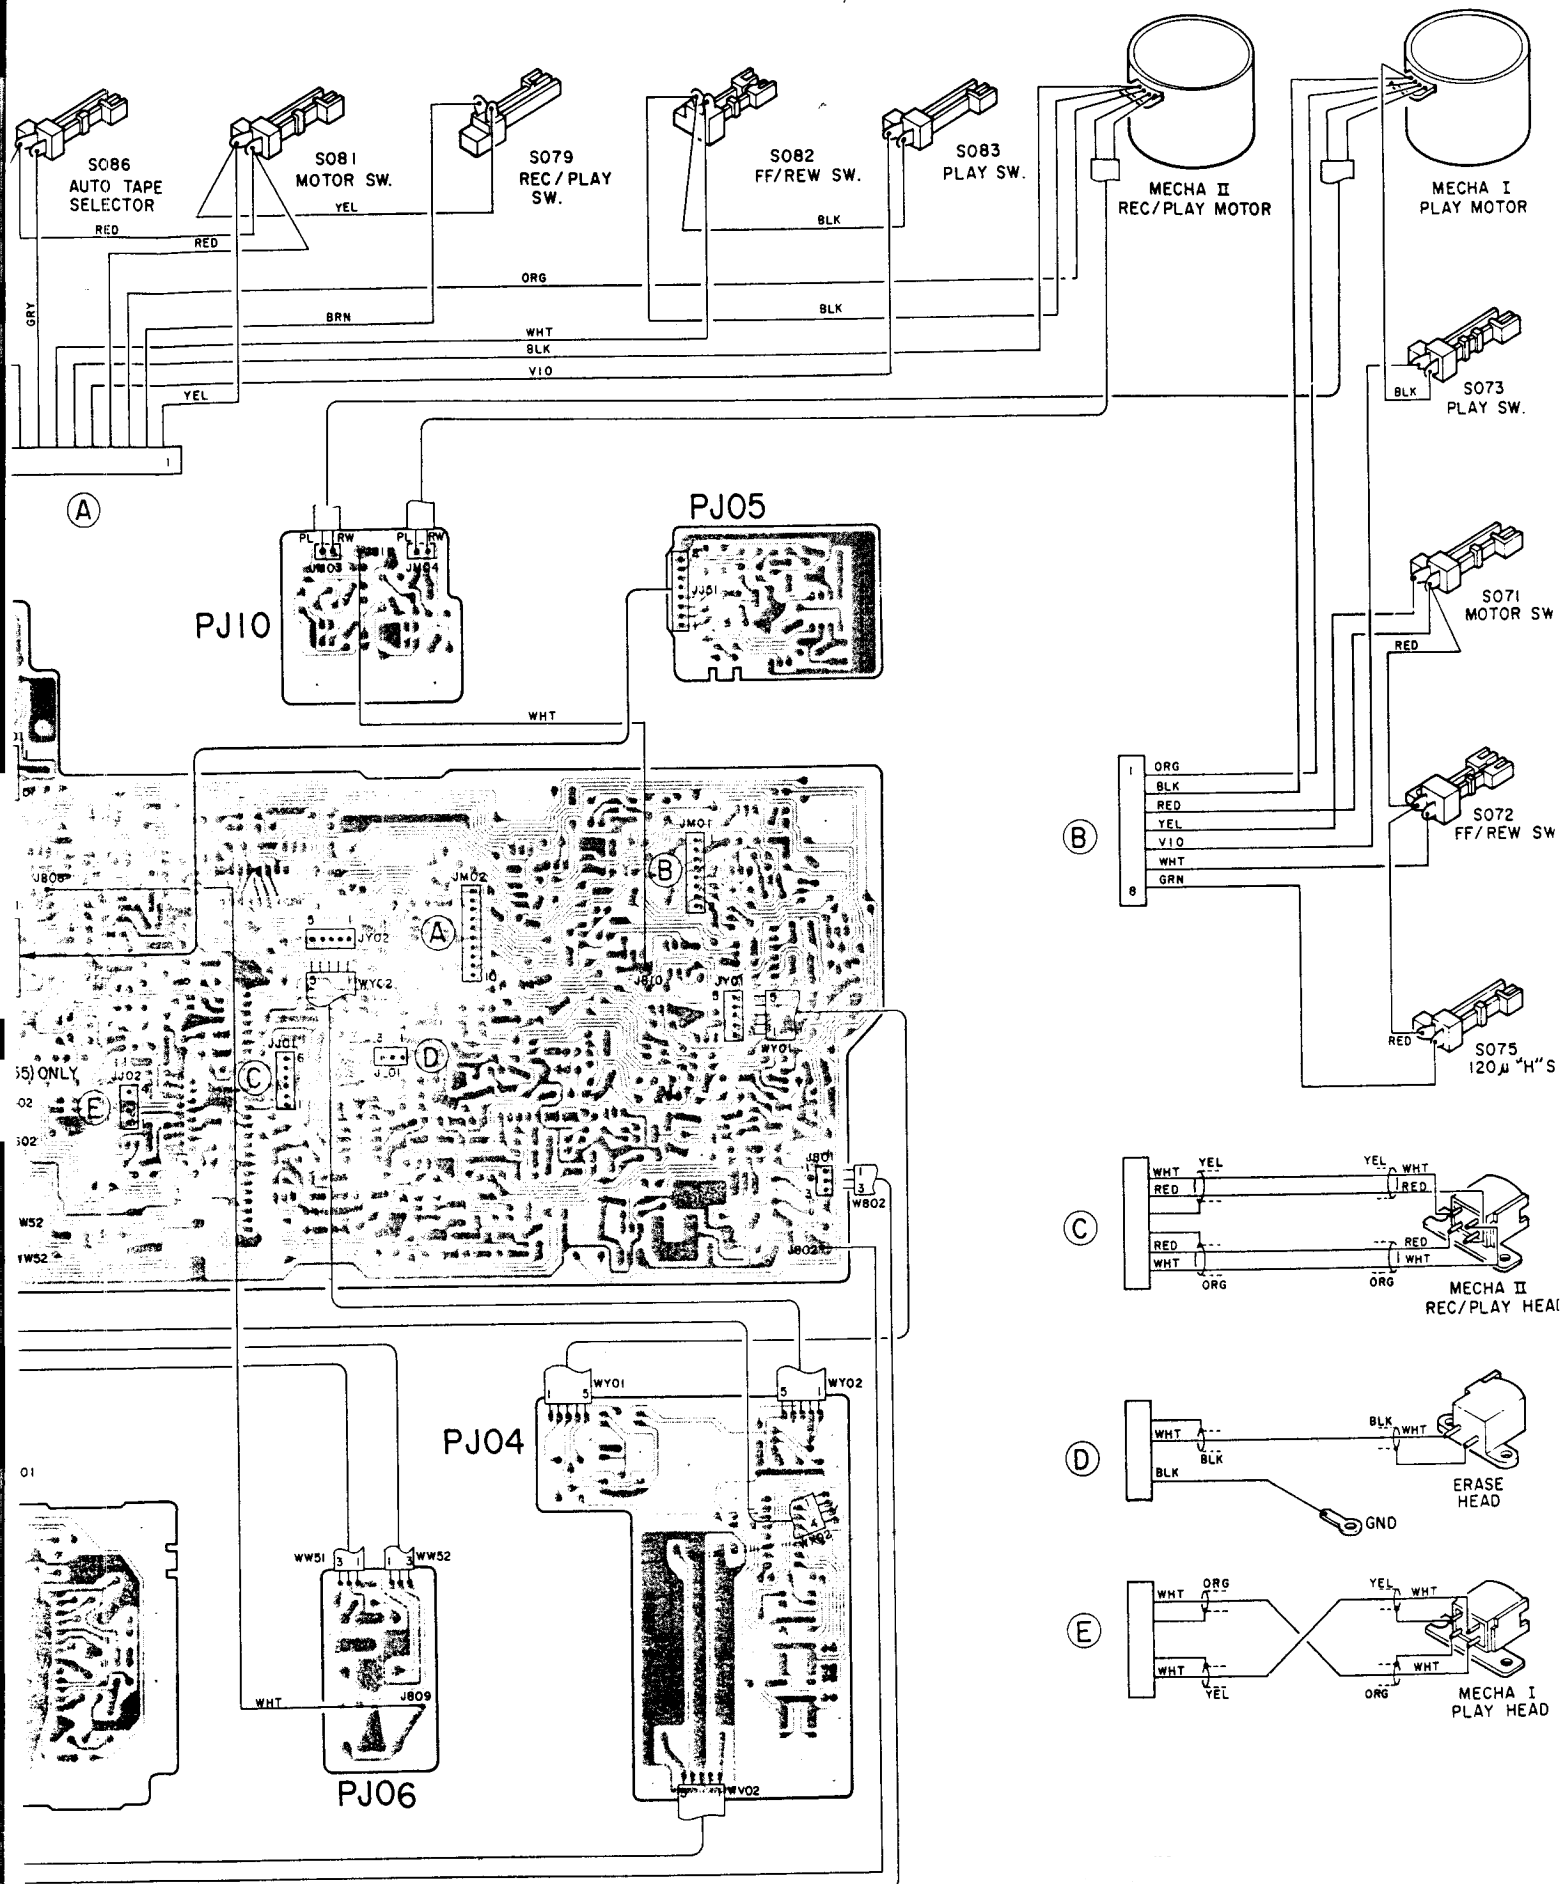

(A)

PJ05

PJ10

(B)

(B)

(A)




(C)

(D)

(E)


PJ04

PJ06




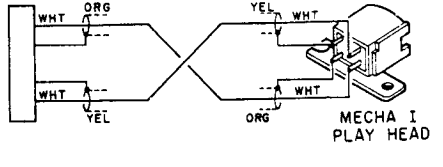
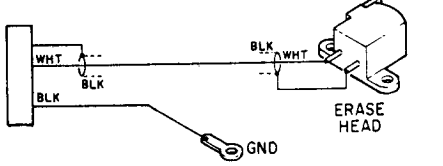
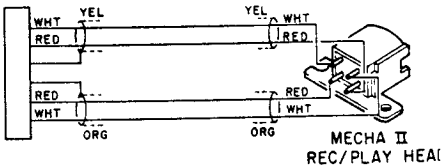







PARTS LOCATION (Pattern side)

PJ01

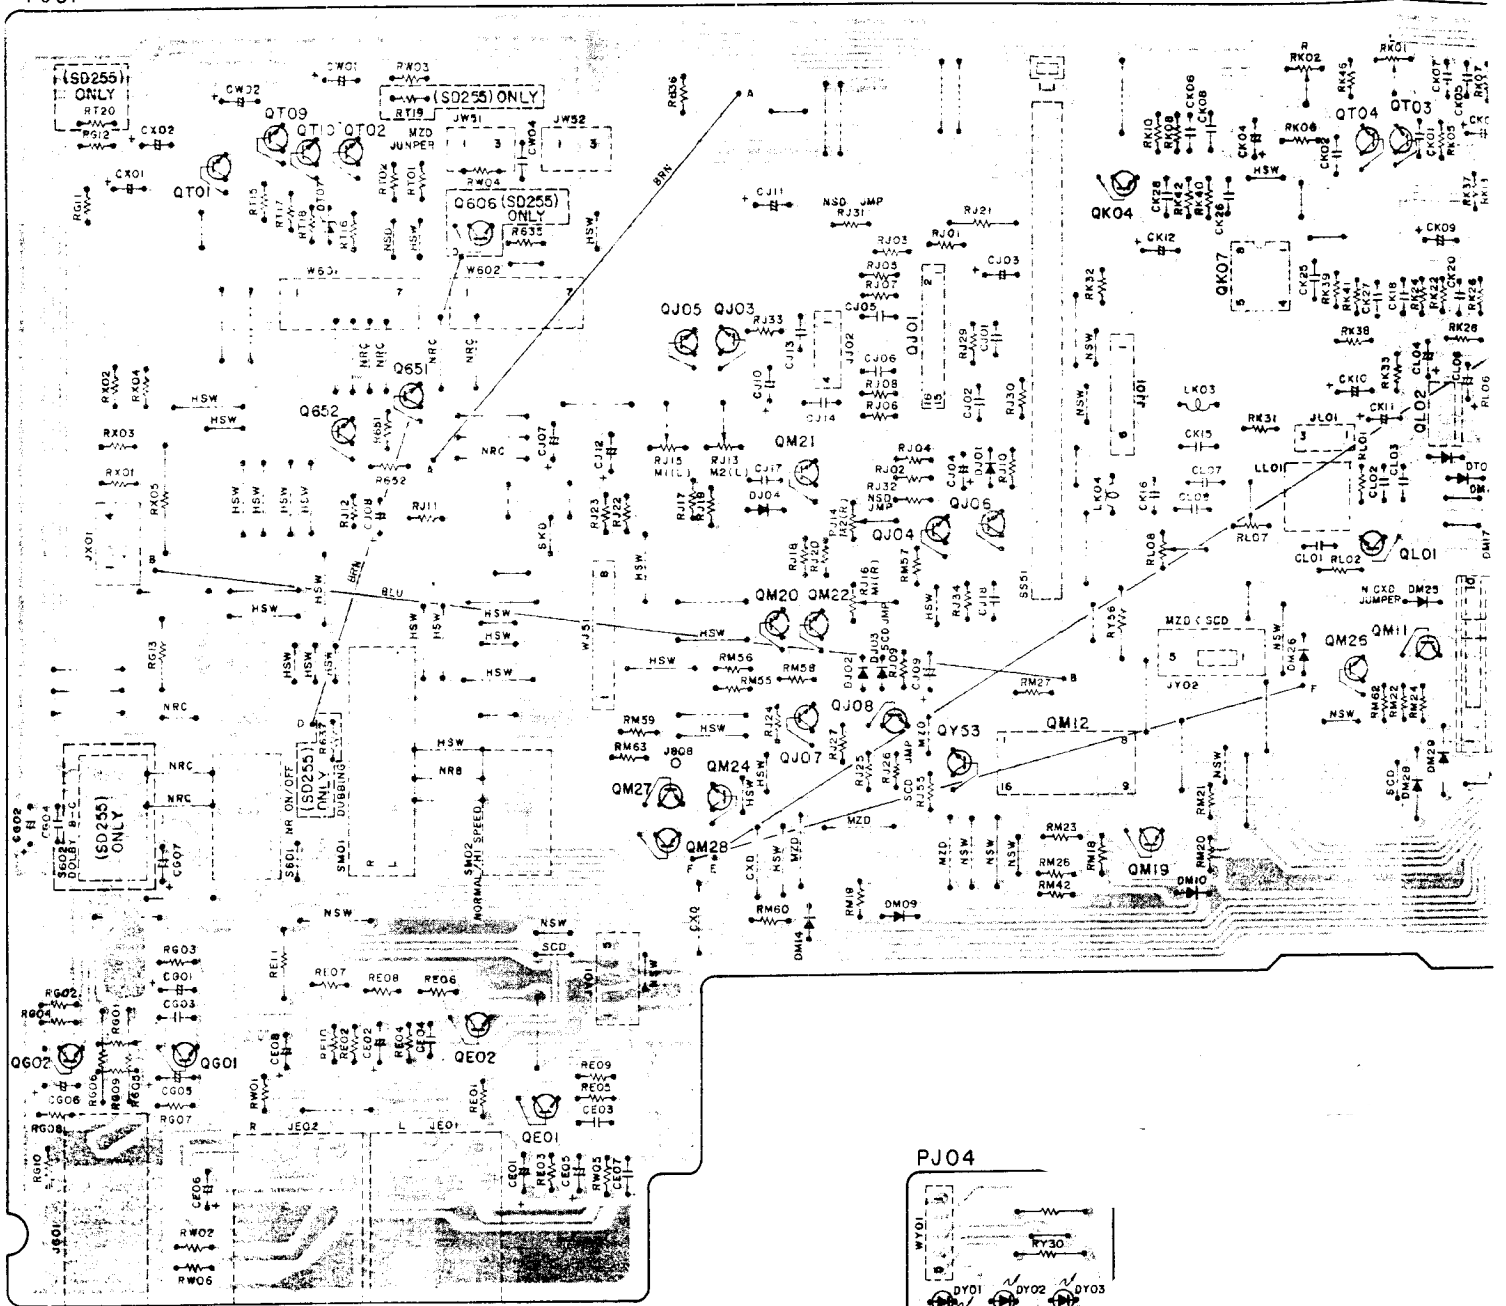


n side)

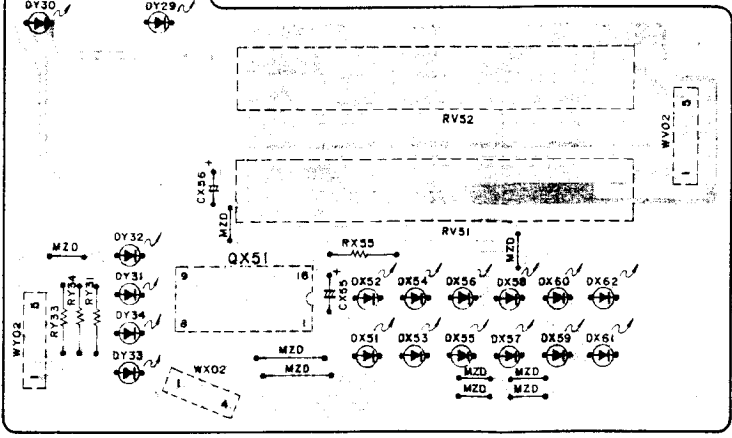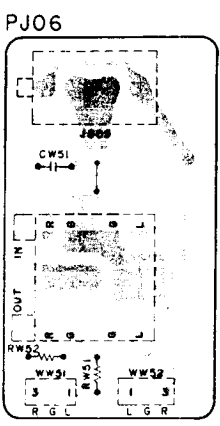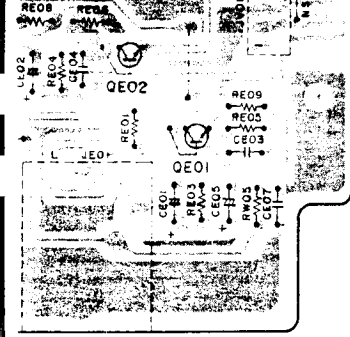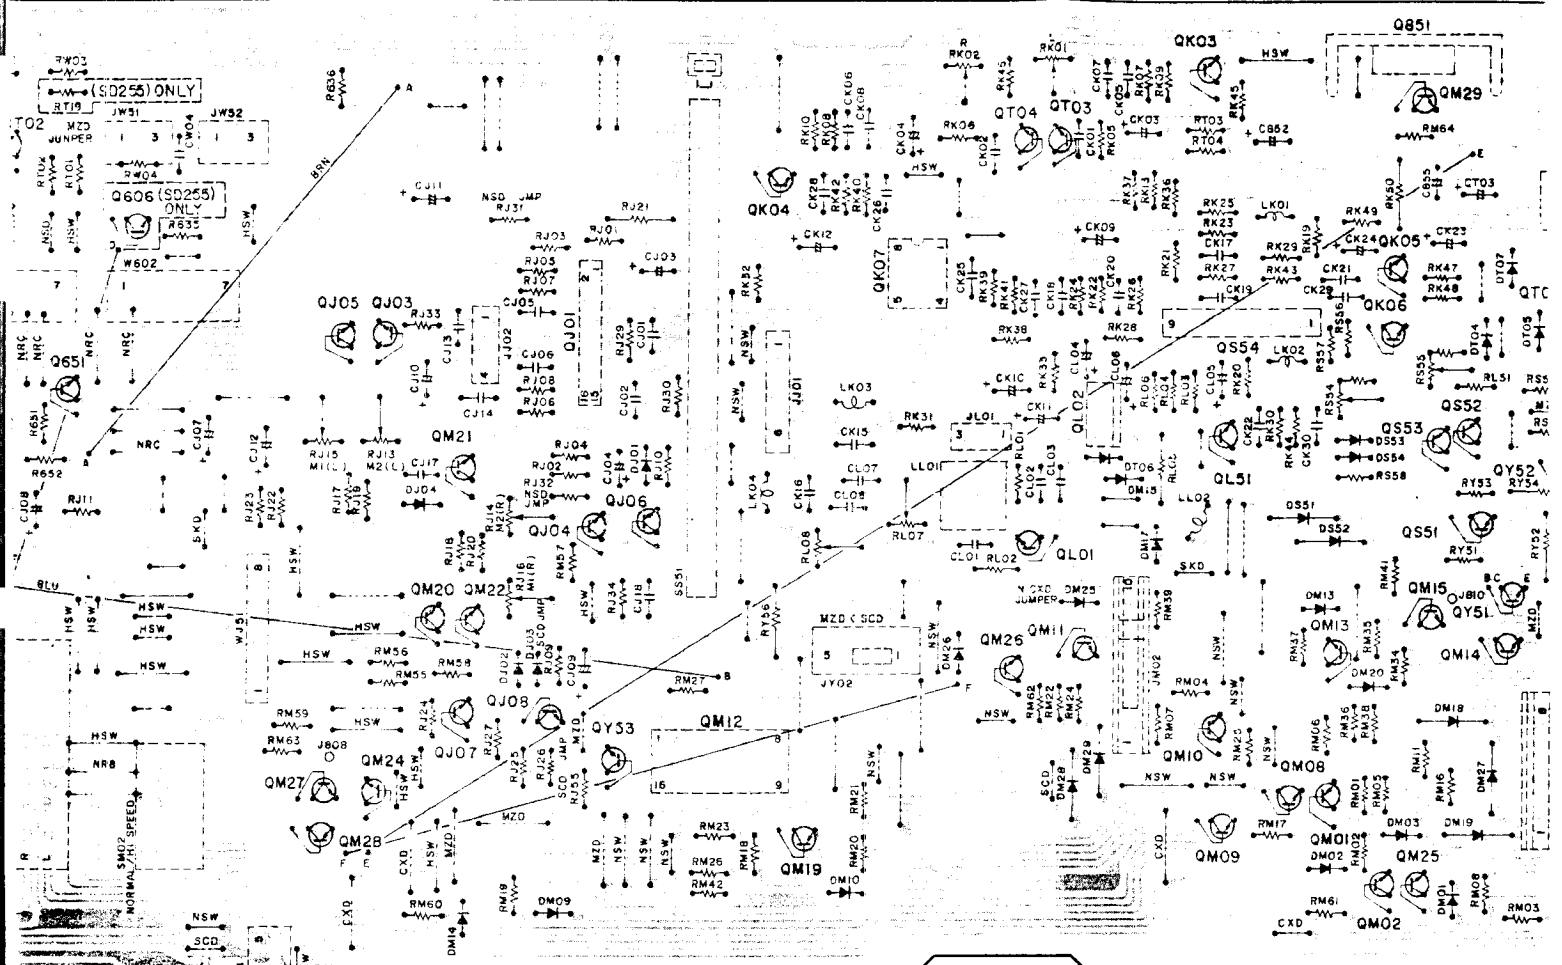

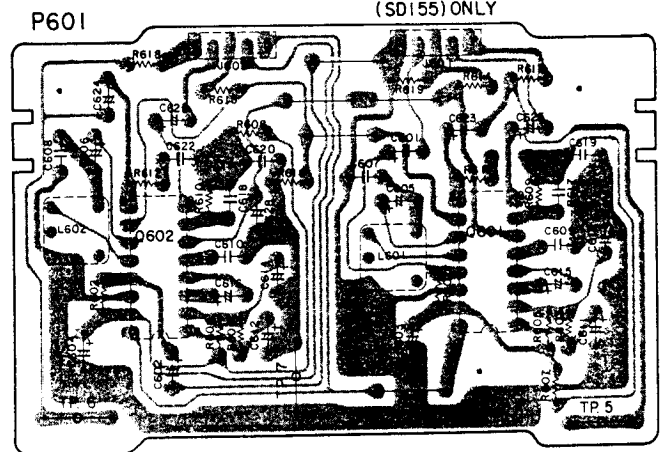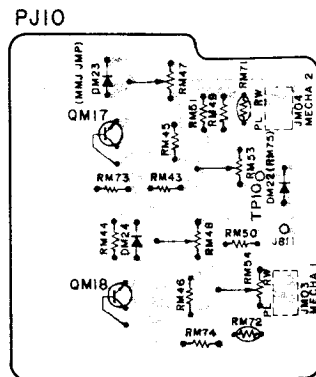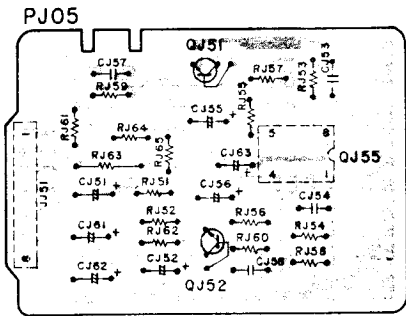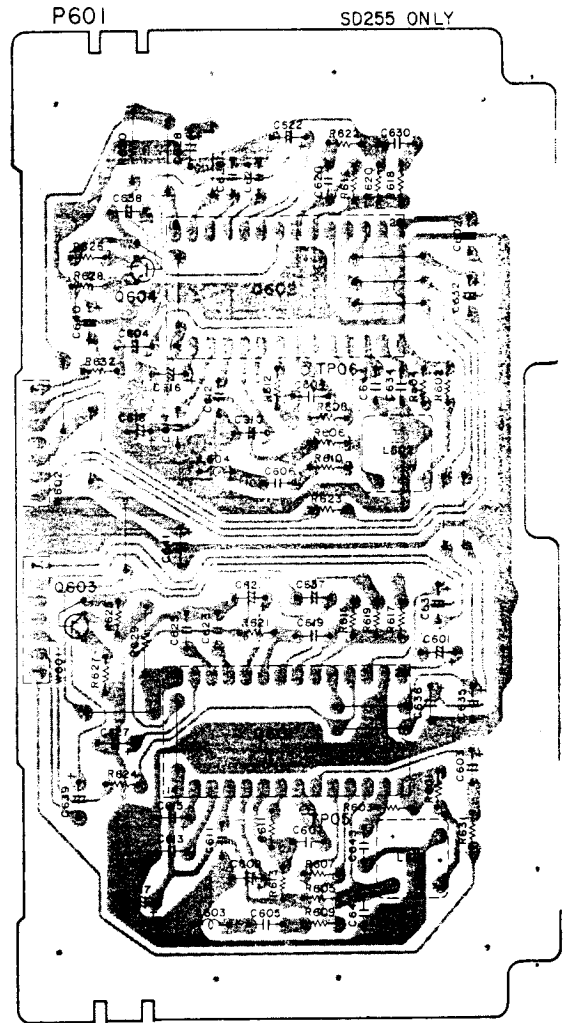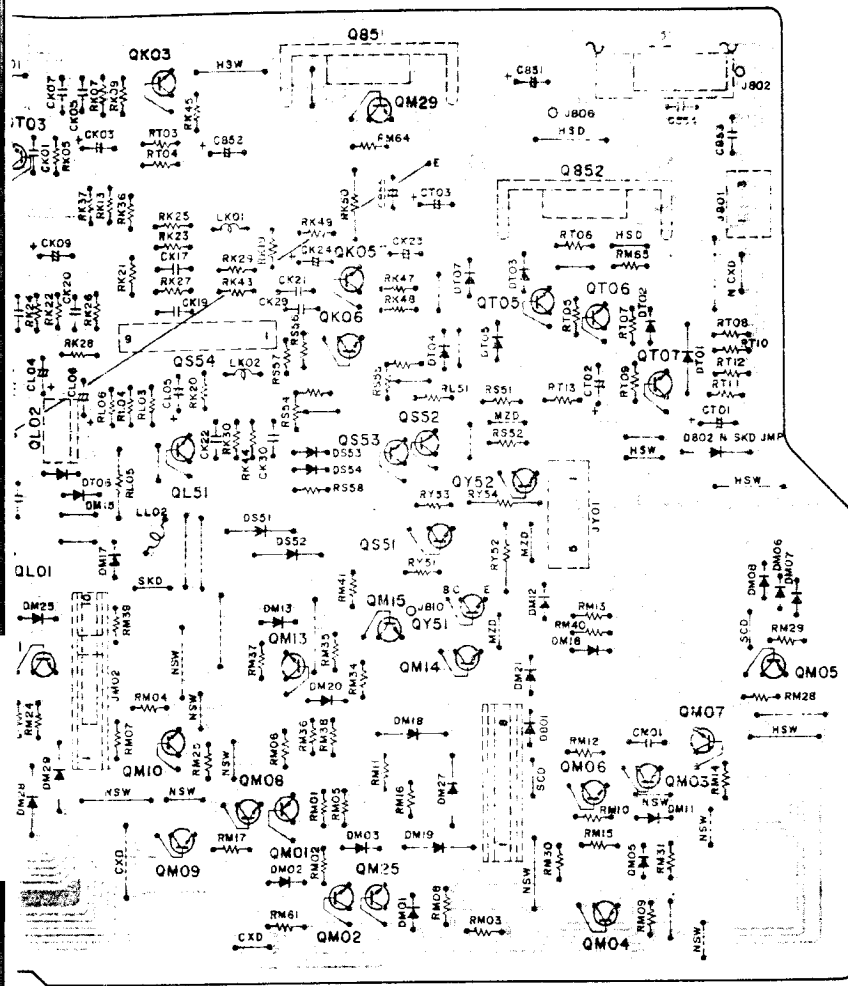

13. EXPLODED VIEW AND PARTS LIST

[C01-99] FRONT PANEL

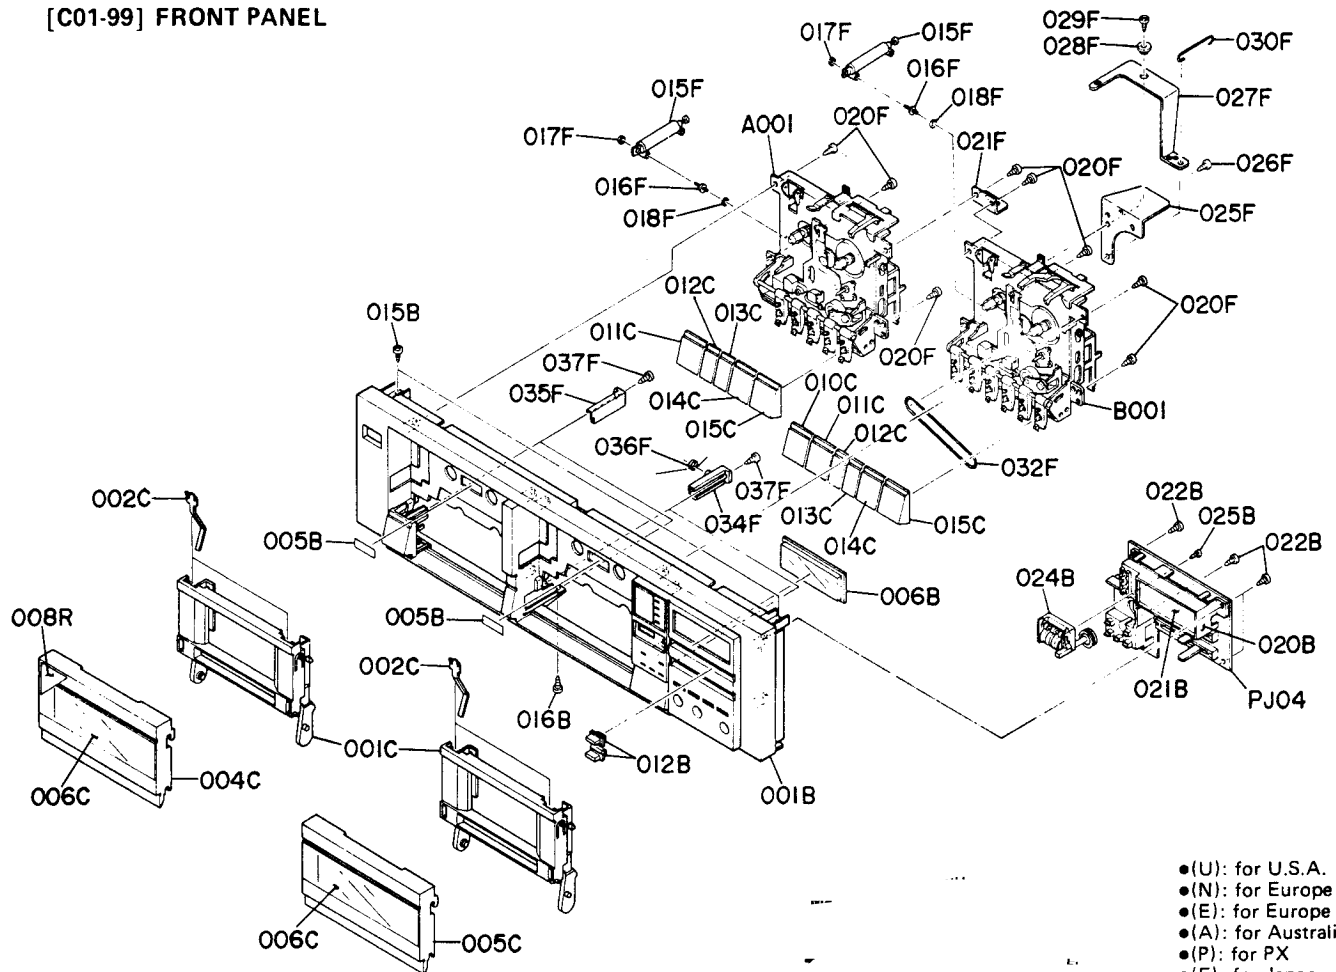


- (U): for U.S.A.
- (N): for Europe
- (E): for Europe
- (A): for Australia
- (P): for PX
- (F): for Japan

REF. DESIG.	PART NO.	DESCRIPTION
A	261T248400	Front Panel Assembly, Black (SD255)
A1	261T248410	Front Panel Assembly, Gold (SD255)
001B	260T248030	Front Panel, Black
001B	260T248070	Front Panel, Gold
005B	161T274010	Reflector, Cassette
006B	260T158010	Window, LED Meter
A	260T248400	Front Panel Assembly, Black (SD155)
A1	260T248410	Front Panel Assembly, Gold (SD155) [U]
001B	260T248010	Front Panel, Black
001B	260T248080	Front Panel, Gold [U]
005B	161T274010	Reflector, Cassette
006B	260T158010	Window, LED Meter
012B	143H154230	Knob, Rec Level; Black
	143H154330	Knob, Rec Level; Gold
015B	5128030880	B.H. Tapped Screw B3 x 8
016B	5128030880	B.H. Tapped Screw B3 x 8
020B	260T271010	Holder, LED
021B	260T303010	Mask, LED Meter; Black
	260T303030	Mask, LED Meter; Gold
022B	5128031080	B.H. Tapped Screw B3 x 10
024B	260T052010	Counter, Tape
025B	5128260680	B.H. Tapped Screw B2.6 x 6
001C	160T271110	Holder, Cassette; Black
	160T271210	Holder, Cassette; Gold
002C	150T115010	Spring, Cassette Hold
004C	260T053010	Cover, Cassette Holder; (A), Black
	260T053040	Cover, Cassette Holder; (A), Gold
005C	260T053020	Cover, Cassette Holder; (B), Black
	260T053050	Cover, Cassette Holder; (B), Gold
006C	177T158020	Window, Cassette Cover

REF. DESIG.	PART NO.	DESCRIPTION
010C	160T270610	Button, Rec; Black
	160T270310	Button, Rec; Gold
011C	160T270620	Button, Play; Black
	160T270320	Button, Play; Gold
012C	160T270630	Button, REW, Black
	160T270330	Button, REW, Gold
013C	160T270640	Button, FF; Black
	160T270340	Button, FF; Gold
014C	160T270650	Button, Stop; Black
	160T270350	Button, Stop; Gold
015C	160T270660	Button, Pause; Black
	160T270360	Button, Pause; Gold
015F	120T276010	Piston, Air Dumper
016F	160T112020	Shaft
017F	53110201E0	Hexagon Nut M2
018F	54040202A0	Spring Washer
020F	51280308B0	B.H. Tapped Screw B3 x 8
021F	260T104010	Retainer, Mecha
025F	260T104020	Retainer, Rec Arm
026F	51282606B0	B.H. Tapped Screw B2.6 x 6
027F	260T002010	Arm, Rec
028F	150T055010	Collar, Rec Arm
029F	51100308A0	B.H.M. Screw B3 x 8
030F	260T121030	Link, Rec
032F	316Y264030	Belt, Counter
034F	160T104010	Retainer, Cassette Door; (R)
035F	160T104020	Retainer, Cassette Door; (L)
036F	160T115010	Spring, Cassette Door
037F	51280308B0	B.H. Tapped Screw B3 x 8
008R	113T861010	Label, 2 Year [U]
A001	260T304500	Mechanism Assembly
B001	260T304510	Mechanism Assembly


[C02-99] TOP COVER AND MAIN CHASSIS

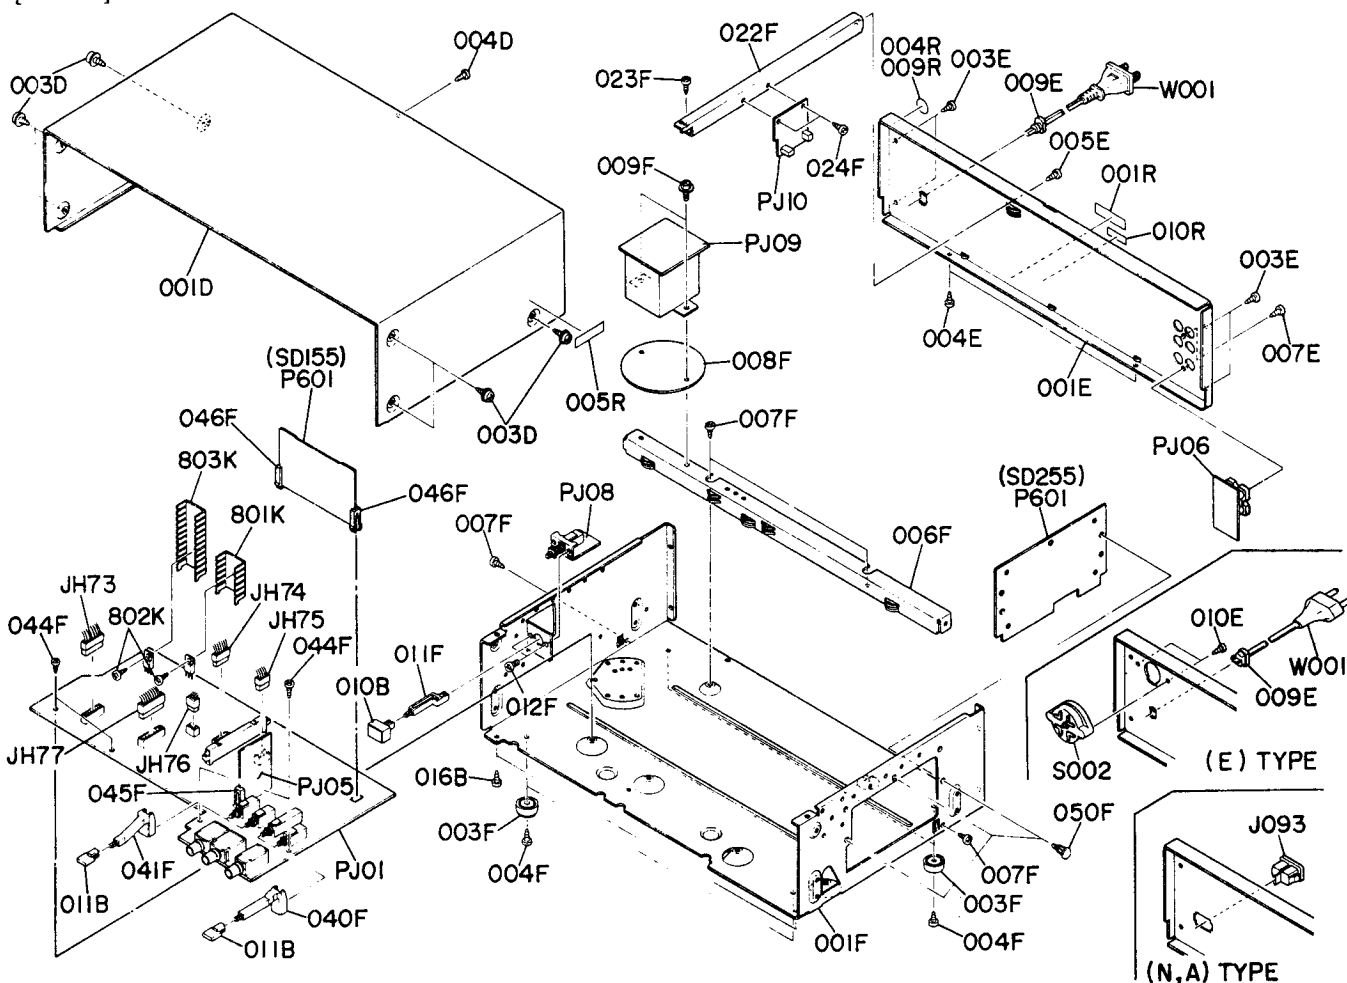

REF. DESIG.	PART NO.	DESCRIPTION
010B	135H154350 135H154150	Knob, Power Switch; Black Knob, Power Switch; Gold
011B	129T154130 129T154030	Knob, Push Switch; Black Knob, Push Switch; Gold
016B	51280308B0	B.H. Tapped Screw B3 x 8
001D	260T257010 260T257020	Lid, Top Cover; Black Lid, Top Cover; Gold
003D	51260408U0	B.T. Screw B4 x 8
004D	51280308U0	B.H. Tapped Screw B3 x 8
001E	261T250010 261T250020 261T250030 261T250040 260T250010 260T250020 260T250030 260T250040	Rear Panel, (SD255) [U] Rear Panel, (SD255) [N, A] Rear Panel, (SD255) [E, P] Rear Panel, (SD255) [F] Rear Panel, (SD155) [U] Rear Panel, (SD155) [N, A] Rear Panel, (SD155) [E] Rear Panel, (SD155) [F]
003E	51280308B0	B.H. Tapped Screw B3 x 8
004E	51280308B0	B.H. Tapped Screw B3 x 8
005E	51280308B0	B.H. Tapped Screw B3 x 8
007E	51280308B0	B.H. Tapped Screw B3 x 8
009E	1455259030	Bushing, AC Power Cord [U, E, P, F]
010E	51280308B0	B.H. Tapped Screw B3 x 8 [E, P]
001F	260T105010	Chassis, Main
003F	011T057010	Leg
004F	51280406B0	B.H. Tapped Screw B4 x 6
006F	260T160010	Bracket, Main PWB
007F	51280308B0	B.H. Tapped Screw B3 x 8

REF. DESIG.	PART NO.	DESCRIPTION
008F	158T109010	Shield, Power Transformer
009F	52040408A0	H. Head Bolt, S.F. H4 x 8
011F	289H121010	Link, Power Switch
012F	51100306A0	B.H.M. Screw B3 x 6
022F	260T126010	Stay, Mecha
023F	51280308B0	B.H. Tapped Screw B3 x 8
024F	51280308B0	B.H. Tapped Screw B3 x 8
040F	260T121010	Link, Push Switch; Dolby
041F	260T121020	Link, Push Switch; Dubbing
044F	51280308B0	B.H. Tapped Screw B3 x 8
045F	156T101030	Support, Amp PWB
046F	177T101030	Support, Dolby PWB (SD155)
050F	177T101010	Support, Dolby PWB (SD255)
801K	202H267030	Heatsink
802K	51280305B0	B.H. Tapped Screw B3 x 5
803K	203H267050	Heatsink
001R	2112265010 2112265110	Indicator, Serial No. [U] Indicator, Serial No. [N, E, A, P, F]
004R	9511101070	Label, UL
005R	2911861120	Label, Caution [N, E, A, P]
009R	2457861040	Label, CSA
010R	4581861010	Label, Made in Japan [N, A]
Δ J093	YP04000580	Plug, AC Inlet [N, A]
JH71	YB00450110	Connective Cord, 4P
JH73	YB00160220	Connective Cord, 8P
JH75	YB00250110	Connective Cord, 6P
JH76	YB00201030	Connective Cord, 3P
JH77	YB00300990	Connective Cord, 10P
Δ S002	BY05060060	Voltage, Selector [E]
Δ W001	YC01900100 YC01900080	A.C. Power Cord [U] A.C. Power Cord [E, P, F]


[H01-99] PACKING MATERIALS

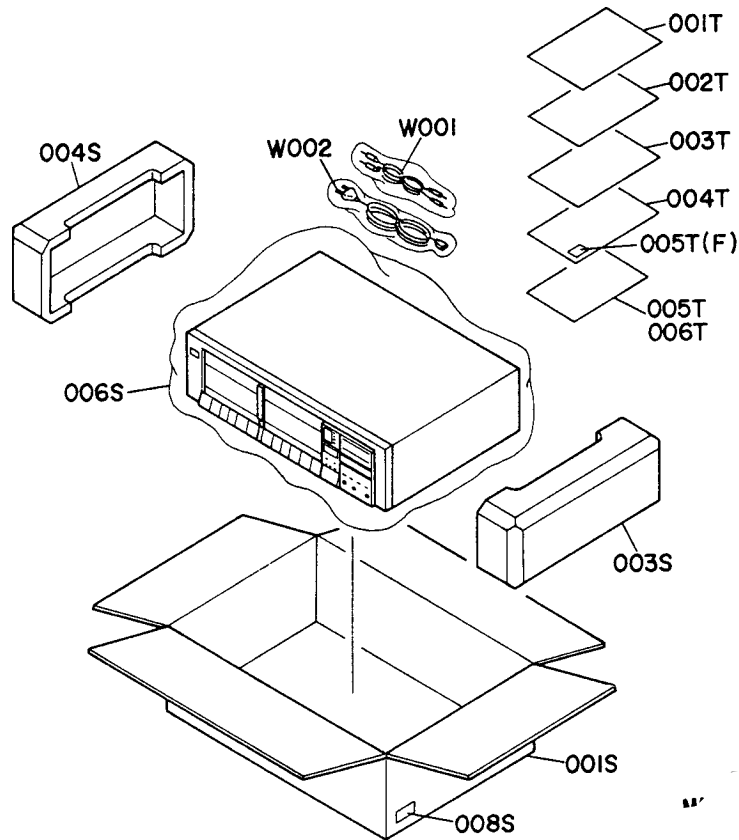

REF. DESIG.	PART NO.	DESCRIPTION
001S	261T801010	PACKING
	261T801020	Packing Case, (SD255) [U]
	261T801030	Packing Case, (SD255) [N, A, F]
	261T801040	Packing Case, (SD255) [E]
	260T801010	Packing Case, (SD255) [P]
	260T801020	Packing Case, (SD155) [U]
	260T801030	Packing Case, (SD155) [N, A, F]
003S	260T809010	Cushion, (R)
004S	260T809020	Cushion, (L)
006S	9014323160	Polyethylene Bag
008S	9526019010	Serial No. Card [U]
	9526019060	Serial No. Card [N, E]
	9526019030	Serial No. Card [A]
	9526019050	Serial No. Card [P]
	9526019040	Serial No. Card [F]
001T	261T851210	User Manual [U]
	261T851310	User Manual [N, E, A, P]
	261T851110	User Manual [F]

REF. DESIG.	PART NO.	DESCRIPTION
002T	261T851220	User Manual, Spec [U]
	261T851320	User Manual, Spec [N, E, A, P]
	9631000130	Warranty Card [F]
003T	261T856010	Circuit Diagram, (SD255) [N, E]
	260T856010	Circuit Diagram, (SD155) [N, E]
004T	128T854010	Warranty Card [F]
	103H854010	Warranty Card [U]
	9631000090	Warranty Card [A]
	416H854010	Warranty Card [P]
	9611000050	User's Card [F]
005T	3435851210	User Manual [P]
	9540000010	License [F]
	180T854010	Warranty Card (SD155) [U]
006T	180T854010	Warranty Card (SD255) [U]
W001 △ W002	ZD00400030	Connective Cord, PCA Pin
	ZC01805010	A.C. Power Cord [N]
	ZC02006020	A.C. Power Cord [A]


[P01-99] PARTS ASSEMBLED ON TOP OF CHASSIS (TAPE A)

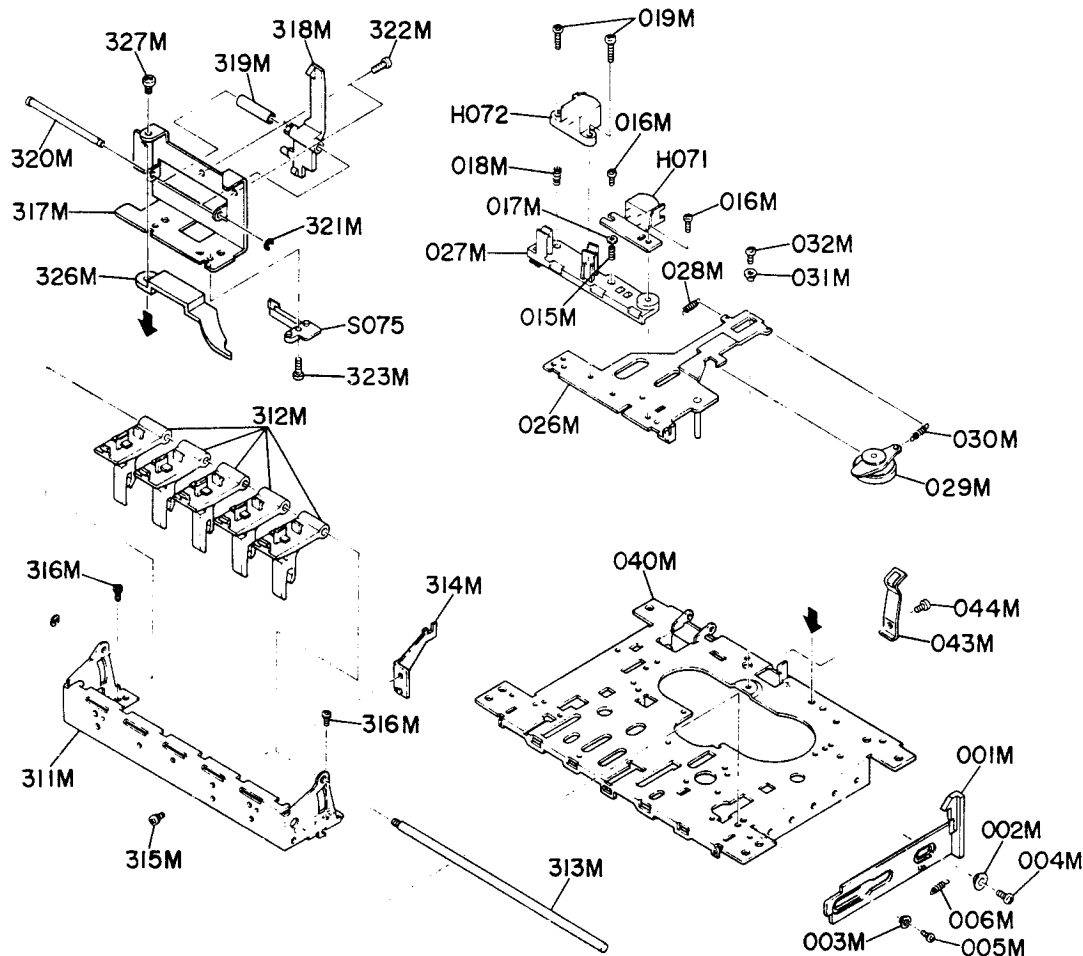

REF. DESIG.	PART NO.	DESCRIPTION
001M	160T258010	Hook, Eject
002M	252T055100	Collar, Lower
003M	252T055110	Collar, Upper
004M	5157260580	P. Taptite Screw P2.6 x 5
005M	51440206A0	L. Washer Screw L2 x 6
006M	252T115100	Spring, Eject Hook
015M	252T115110	Spring, Head Azimuth
016M	252T010100	Screw
017M	252T012100	Washer
018M	252T115110	Spring
019M	51060208A0	P.H.M. Screw P2 x 8
026M	252T105100	Chassis Assembly, Head
027M	252T160110	Bracket, Head
028M	252T115120	Spring
029M	252T266100	Wheel, Take-up Idler
030M	252T115130	Spring
031M	252T055120	Collar
032M	51102604S0	B.H.M. Screw B2.6 x 4
040M	252T105110	Chassis, Main

REF. DESIG.	PART NO.	DESCRIPTION
043M	185T116200	Leaf Spring, Cassette Hold
044M	51572603B0	P. Taptite Screw P2.6 x 3
311M	161T271200	Holder, Button
312M	161T354220	Lever, Button
313M	161T112200	Shaft, Button Lever
314M	161T126200	Stay
315M	51440204A0	L. Washer Screw L2 x 4
316M	51442604A0	L. Washer Screw L2.6 x 4
317M	185T160200	Bracket, Tape Selector
318M	185T002200	Arm, Selector CrO ₂
319M	185T055200	Collar
320M	185T112200	Shaft
321M	64001500R0	RG Ring, E Type ϕ 1.5
322M	51062603E0	P.H.M. Screw P2.6 x 3
323M	51060204A0	P.H.M. Screw P2 x 4
326M	188T002020	Arm, Tape Selector
327M	51102603A0	B.H.M. Screw B2.6 x 3
H071	LH42821050	Head, Rec/Play
H072	LH39000030	Head, Erase; Dammy
S075	SM01011300	Mini Switch, Selector

[P02-99] PARTS ASSEMBLED ON REVERSE OF CHASSIS (TAPE A)

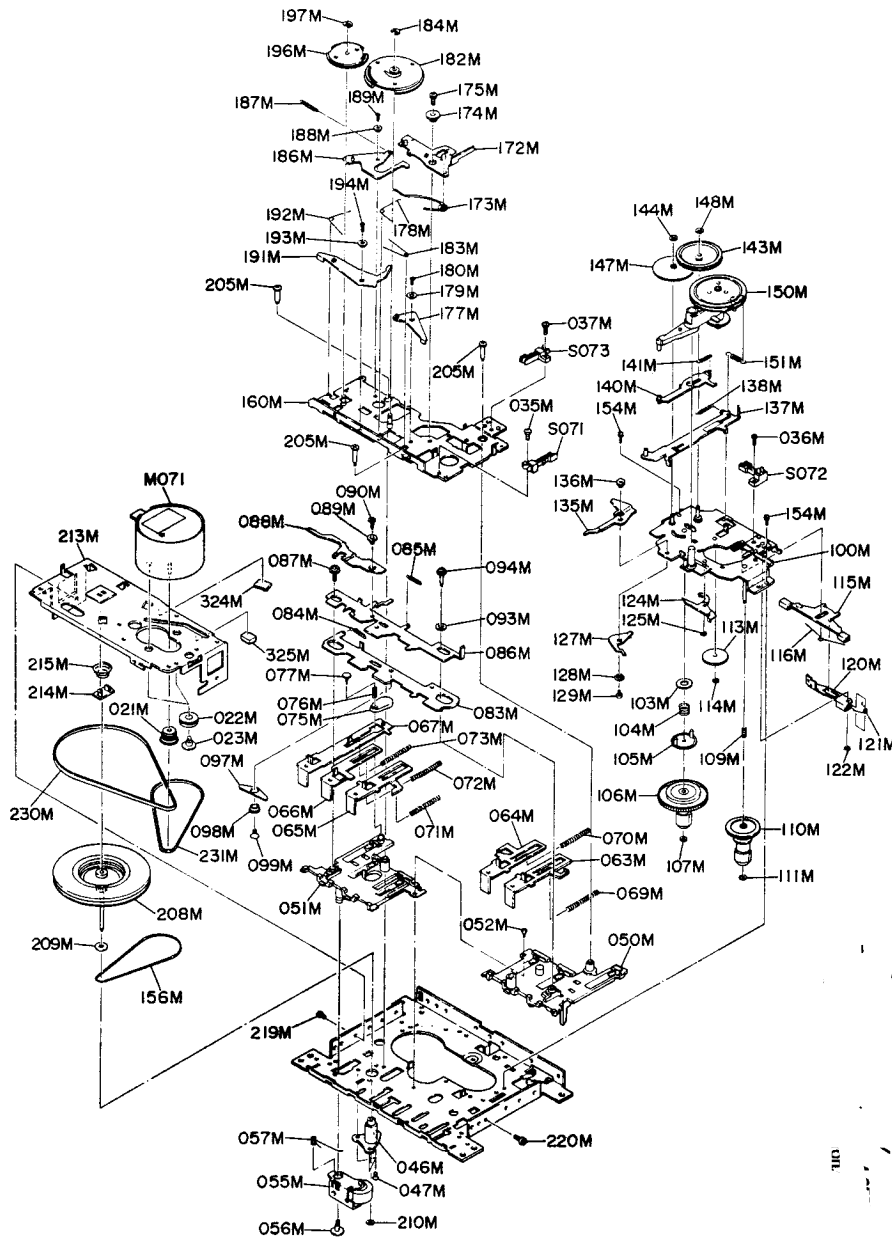


REF. DESIG.	PART NO.	DESCRIPTION
021M	260T262200	Pulley, Motor
022M	252T259100	Bushing
023M	252T010110	Screw
035M	51060204A0	P.H.M. Screw P2 x 4
036M	51060204A0	P.H.M. Screw P2 x 4
037M	51060204A0	P.H.M. Screw P2 x 4
046M	252T106100	Sustainer, Capstan
047M	5184020350	F.H.M. Screw F2 x 3
050M	252T160120	Bracket, (L)
051M	252T160130	Bracket, (R)
052M	252T010120	Screw
055M	252T354110	Lever Assembly, Pinch Arm
056M	252T114110	Stopper
057M	161T115200	Spring
063M	161T121210	Link, Play
064M	161T121220	Link, REW
065M	161T121230	Link, FF
066M	161T121240	Link, Stop
067M	161T121250	Link, Pause
069M	252T115150	Spring, Play
070M	252T115150	Spring, REW
071M	252T115160	Spring, FF
072M	252T115170	Spring, Stop
073M	252T115160	Spring, Pause
075M	252T054100	Cam, Pause Lock
076M	252T115180	Spring
077M	252T114120	Stopper
083M	252T102100	Lock, Button
084M	252T115200	Spring, Button Lock
085M	252T115210	Spring, Motor SW.
086M	252T127100	Control Board
087M	252T010130	Screw
088M	252T354140	Lever, Eject Kick
089M	252T055160	Collar
090M	51840225A0	F.H.M. Screw F2 x 2.5
093M	54020401A0	Flat Washer, P
094M	252T010140	Screw
097M	252T354250	Lever, C/R Stopper
098M	252T055180	Collar
099M	51840225A0	F.H.M. Screw F2 x 2.5
100M	161T160210	Bracket Assembly, Reel Base
103M	59050801G0	Washer
104M	252T115220	Spring
105M	252T266110	Wheel, Auto Stop Sensor
106M	161T117210	Spindle, Take-up Reel
107M	161T114200	Stopper
109M	161T115240	Spring
110M	161T117200	Spindle, Supply Reel
111M	161T114200	Stopper
113M	252T058100	Gear, FF
114M	252T114100	Stopper
115M	161T354200	Lever Assembly, Brake Arm
116M	161T115210	Spring
120M	252T354150	Lever, Auto Stop Canceler
121M	252T115240	Spring
122M	64001500R0	RG Ring, E Type $\phi 1.5$
124M	252T354170	Lever, Head Kick
125M	64001200R0	RG Ring, E Type $\phi 1.2$
127M	252T354160	Lever, Idler Kick


REF. DESIG.	PART NO.	DESCRIPTION
128M	252T055160	Collar
129M	51840245S0	F.H.M. Screw F2 x 4.5
135M	252T354190	Lever, Release
136M	252T055130	Collar
137M	252T121160	Link Assembly, F/R Slide Lever
138M	161T115300	Spring
140M	252T354180	Lever, Sensing
141M	252T115250	Spring
143M	252T262110	Pulley, Auto Stop
144M	252T114100	Stopper
147M	252T058110	Gear, Auto Stop
148M	252T114100	Stopper
150M	252T262700	Pulley, F/R Clutch
151M	161T115230	Spring
154M	51440204A0	L. Washer Screw L2 x 4
156M	252T264110	Belt, Auto Stop
160M	161T160220	Bracket Assembly, Sub Chassis
172M	252T354240	Lever, Head Lift Arm
173M	252T115350	Spring
174M	252T055140	Collar
175M	51442606A0	L. Washer Screw L2.6 x 6
177M	252T254210	Pin, Trigger
178M	252T115320	Spring
179M	252T055150	Collar
180M	51840228A0	F.H.M. Screw F2 x 2.8
182M	252T058120	Gear, Main
183M	252T115310	Spring, Main Gear
184M	64000200R0	RG Ring, E Type $\phi 2$
186M	252T354230	Lever Assembly, Pause Sift
187M	252T115340	Spring
188M	252T055160	Collar
189M	51840228A0	F.H.M. Screw F2 x 2.8
191M	252T354220	Lever, Pause Gear
192M	252T115330	Spring
193M	252T055160	Collar
194M	51840228A0	F.H.M. Screw F2 x 2.8
196M	252T058130	Gear, Pause Sift
197M	64000200R0	RG Ring, E Type $\phi 2$
205M	252T010150	Screw, Sub Chassis
208M	161T059200	Capstan, Flywheel
209M	59264705G9	Washer
210M	316Y114030	Stopper, Oil Fence
213M	161T160200	Bracket, Retainer
214M	252T164100	Adjuster
215M	252T115270	Spring
219M	51060204A0	P.H.M. Screw P2 x 4
220M	51440204A0	L. Washer Screw L2 x 4
230M	185T264200	Belt, Main
231M	185T264210	Belt, FF/REW
324M	185T056200	Buffer, Motor
325M	185T056210	Buffer, Belt
M071	MM11205100	D.C. Motor, 1600/3200 12V
S071	SM01011190	Mini Switch, Motor
S072	SM01011160	Mini Switch, FF/REW
S073	SM01011190	Mini Switch, Play Mute

42995

[P03-99] PARTS ASSEMBLED ON TOP OF CHASSIS (TAPE B)

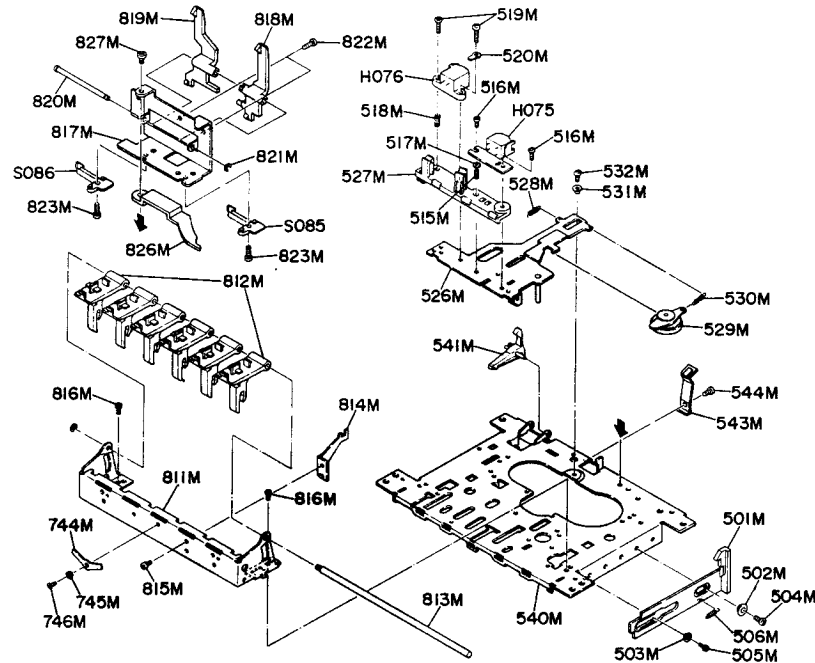

[P04-99] PARTS ASSEMBLED ON REVERSE OF CHASSIS (TAPE B)

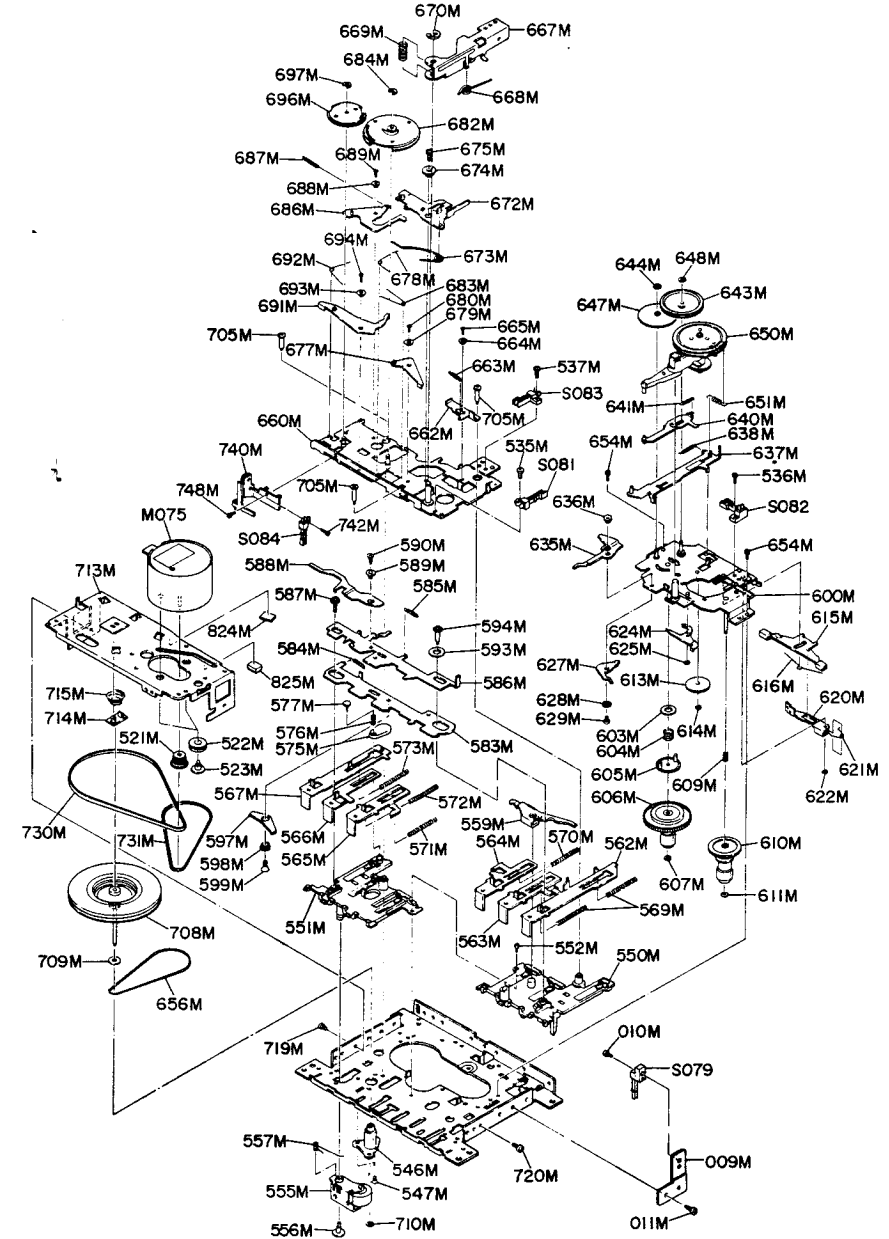

REF. DESIG.	PART NO.	DESCRIPTION
501M	160T258010	Hook, Eject
502M	252T055100	Collar, Lower
503M	252T055110	Collar, Upper
504M	5157260580	P. Taptite Screw P2.6 x 5
505M	51440206A0	L. Washer Screw L2 x 6
506M	252T115100	Spring, Eject Hook
515M	252T115110	Spring, Head Azimuth
516M	252T010100	Screw
517M	252T012100	Washer
518M	252T115110	Spring
519M	51060208A0	P.H.M. Screw P2 x 8
520M	62021030W0	Lug
526M	252T105100	Chassis Assembly, Head
527M	252T160110	Bracket, Head
528M	252T115120	Spring
529M	252T266100	Wheel, Take-up Idler
530M	252T115130	Spring
531M	252T055120	Collar
532M	51102604S0	B.H.M. Screw B2.6 x 4
540M	252T105110	Chassis, Main
541M	252T354100	Lever, Rec Arm
543M	185T116200	Leaf Spring, Cassette Hold
544M	5157260380	P. Taptite Screw P2.6 x 3
744M	161T354240	Lever, Pause Switch
745M	252T055160	Collar

REF. DESIG.	PART NO.	DESCRIPTION
746M	51840203S0	F.H.M. Screw F2 x 3
811M	161T271200	Holder, Button
812M	161T354220	Lever, Button
813M	161T112200	Shaft, Button Lever
814M	161T126200	Stay
815M	51440204A0	L. Washer Screw L2 x 4
816M	51442604A0	L. Washer Screw L2.6 x 4
817M	185T160200	Bracket, Tape Selector
818M	185T002200	Arm, Selector CrO ₂
819M	185T002210	Arm, Selector METAL
820M	185T112200	Shaft
821M	64001500R0	RG Ring, E Type $\phi 1.5$
822M	51062603E0	P.H.M. Screw P2.6 x 3
823M	51060204A0	P.H.M. Screw P2 x 4
826M	185T002020	Arm, Tape Selector
827M	51102603A0	B.H.M. Screw B2.6 x 3
H075	LH42821050	Head, Rec/Play
H076	LH31000580	Head, Erase
S085	SM01011300	Mini Switch, CrO ₂
S086	SM01011300	Mini Switch, Metal

REF. DESIG.	PART NO.	DESCRIPTION
009M	188T160040	Bracket, Rec Switch
010M	51062605A0	P.H.M. Screw P2.6 x 5
011M	51572604B0	P. Tap-tite Screw P2.6 x 4
521M	260T262200	Pulley, Motor
522M	252T259100	Bushing
523M	252T010110	Screw
535M	51060204A0	P.H.M. Screw P2 x 4
536M	51060204A0	P.H.M. Screw P2 x 4
537M	51060204A0	P.H.M. Screw P2 x 4
546M	252T106100	Sustainer, Capstan
547M	51840203S0	F.H.M. Screw F2 x 3
550M	252T160120	Bracket, (L)
551M	252T160130	Bracket, (R)
552M	252T010120	Screw
555M	252T354110	Lever Assembly, Pinch Arm
556M	252T114110	Stopper
557M	161T115200	Spring
559M	252T354120	Lever, Rec Inter Lock
562M	161T121200	Link, Rec
563M	161T121210	Link, Play
564M	161T121220	Link, REW
565M	161T121230	Link, FF
566M	161T121240	Link, Stop
567M	161T121250	Link, Pause
569M	252T115150	Spring, Rec/Play
570M	252T115150	Spring, REW
571M	252T115160	Spring, FF
572M	252T115170	Spring, Stop
573M	252T115160	Spring, Pause
575M	252T054100	Cam, Pause Lock
576M	252T115180	Spring
577M	252T114120	Stopper
583M	252T102200	Lock, Button
584M	252T115200	Spring, Button Lock
585M	252T115210	Spring, Motor SW.
586M	252T127100	Control Board
587M	252T010130	Screw
588M	252T354140	Lever, Eject Kick
589M	252T055160	Collar
590M	51840225A0	F.H.M. Screw F2 x 2.5
593M	54020401A0	Flat Washer, P.
594M	252T010140	Screw
597M	252T354250	Lever, C/R Stopper
598M	252T055180	Collar
599M	51840225A0	F.H.M. Screw F2 x 2.5
600M	161T160210	Bracket Assembly, Reel Base
603M	59050801G0	Washer
604M	252T115220	Spring
605M	252T266110	Wheel, Auto Stop Sensor
606M	161T117210	Spindle, Take-up Reel
607M	161T114200	Stopper
609M	161T115240	Spring
610M	161T117200	Spindle, Supply Reel
611M	161T114200	Stopper
613M	252T058100	Gear, FF
614M	252T114100	Stopper
615M	161T354200	Lever Assembly, Brake Arm
616M	161T115210	Spring
620M	252T354150	Lever, Auto Stop Canceler
621M	252T115240	Spring
622M	64001500R0	RG Ring, E Type ϕ 1.5
624M	252T354170	Lever, Head Kick
625M	64001200R0	RG Ring, E Type ϕ 1.2
627M	252T354160	Lever, Idler Kick
628M	252T055160	Collar
629M	51840245S0	F.H.M. Screw F2 x 4.5
635M	252T354190	Lever, Release
636M	252T055130	Collar

REF. DESIG.	PART NO.	DESCRIPTION
637M	252T121160	Link Assembly, F/R Slide Lever
638M	161T115300	Spring
640M	252T354180	Lever, Sensing
641M	252T115250	Spring
643M	252T262110	Pulley, Auto Stop
644M	252T114100	Stopper
647M	252T058110	Gear, Auto Stop
648M	252T114100	Stopper
650M	252T262700	Pulley, F/R Clutch
651M	161T115230	Spring
654M	51440204A0	L. Washer Screw L2 x 4
656M	252T264110	Belt, Auto Stop
660M	161T160220	Bracket Assembly, Sub Chassis
662M	252T121170	Link, Rec Function
663M	252T115280	Spring
664M	252T055160	Collar
665M	51840228A0	F.H.M. Screw F2 x 2.8
667M	252T354200	Lever, Rec Function Arm
668M	252T115290	Spring, Over Stroke
669M	252T115300	Spring
670M	64000300R0	RG Ring, E Type ϕ 3
672M	252T354240	Lever, Head Lift Arm
673M	252T115350	Spring
674M	252T055140	Collar
675M	51442606A0	L. Washer Screw L2.6 x 6
677M	252T354210	Lever, Trigger
678M	252T115320	Spring
679M	252T055150	Collar
680M	51840228A0	F.H.M. Screw F2 x 2.8
682M	252T058120	Gear, Main
683M	252T115310	Spring, Main Gear
684M	64000200R0	RG Ring, E Type ϕ 2
686M	252T354230	Lever Assembly, Pause Sift
687M	252T115340	Spring
688M	252T055160	Collar
689M	51840228A0	F.H.M. Screw F2 x 2.8
691M	252T354220	Lever, Pause Gear
692M	252T115330	Spring
693M	252T055160	Collar
694M	51840228A0	F.H.M. Screw F2 x 2.8
696M	252T058130	Gear, Pause Sift
697M	64000200R0	RG Ring, E Type ϕ 2
705M	252T010150	Screw, Sub Chassis
708M	161T059200	Capstan, Flywheel
709M	59264705G9	Washer
710M	316Y114030	Stopper, Oil Fence
713M	161T160200	Bracket, Retainer
714M	252T164100	Adjuster
715M	252T115270	Spring
719M	51060204A0	P.H.M. Screw P2 x 4
720M	51440204A0	L. Washer Screw L2 x 4
730M	185T264200	Belt, Main
731M	185T264210	Belt, FF/REW
740M	161T160490	Bracket Assembly, Pause Switch
742M	51060204A0	P.H.M. Screw P2 x 4
748M	51440204A0	L. Washer Screw L2 x 4
824M	185T056200	Buffer, Motor
825M	185T056210	Buffer, Belt
M075	MM11205100	D.C. Motor, 1600/3200 12V
S079	SM01011020	Mini Switch, Rec
S081	SM01011190	Mini Switch, Motor
S082	SM01011160	Mini Switch, FF/REW
S083	SM01011190	Mini Switch, Play Mute
S084	SM01011190	Mini Switch, Pause

14. ELECTRICAL PARTS LIST

- (U): for U.S.A.
- (N): for Europe
- (E): for Europe
- (A): for Australia
- (P): for PX
- (F): for Japan

ASSIGNMENT OF COMMON PARTS CODES.

RESISTOR

R*:** (1) GD05 --- 140, Carbon film fixed resistor, ±5%, 1/4W

R*:** (2) GD05 --- 160, Carbon film fixed resistor, ±5%, 1/6W

① — Resistance value


Examples

- ① Resistance value
- | | | | |
|------------|------------|-------------|--------------|
| 0.1Ω...001 | 10Ω...100 | 1kΩ...102 | 100kΩ...104 |
| 0.5Ω...005 | 18Ω...180 | 2.7kΩ...272 | 680kΩ...684 |
| 1Ω...010 | 100Ω...101 | 10kΩ...103 | 1MkΩ...105 |
| 6.8Ω...068 | 390Ω...391 | 22kΩ...223 | 4.7MkΩ...475 |

(Note) Please distinguish 1/4W from 1/6W by the shape of parts used actually.

C***: CERAMIC CAP.

- (1) DD1 --- 370, Ceramic condenser
Disc type
Temp. coeff. P350 ~ N1000, 50V



Examples


- ① Tolerance (Capacity deviation)
- ±0.25pF...0
 - ±0.5pF...1
 - ±5%...5

* Tolerance of COMMON PARTS handled here are as follows:

- 0.5pF ~ 5pF...±0.25pF
 - 6pF ~ 10pF...±0.5pF
 - 12pF ~ 560pF...±5%
- ② Capacity value
- | | | |
|-------------|------------|-------------|
| 0.5pF...005 | 3pF...030 | 100pF...101 |
| 1pF...010 | 10pF...100 | 220pF...221 |
| 1.5pF...015 | 47pF...470 | 560pF...561 |

C***: CERAMIC CAP.

- (1) DK16 --- 300, High dielectric constant ceramic condenser
Disc type
Temp. chara. 2B4, 50V




Example

- ② Capacity value
- | | | |
|-------------|--------------|---------------|
| 100pF...101 | 1000pF...102 | 10000pF...103 |
| 470pF...471 | 2200pF...222 | |

C***: ELECTROLY CAP. (⚡), FILM CAP. (⚡)

- (1) EA --- 10, Electrolytic condenser
One-way lead type, Tolerance ±20%




Examples

- ① Capacity value
- | | | |
|--------------|-------------|--------------|
| 0.1μF...104 | 4.7μF...475 | 100μF...107 |
| 0.33μF...334 | 10μF...106 | 330μF...337 |
| 1μF...105 | 22μF...226 | 1100μF...108 |
| | | 2200μF...228 |

- ② Working voltage
- | | |
|------------|-----------|
| 6.3V...006 | 25V...025 |
| 10V...010 | 35V...035 |
| 16V...016 | 50V...050 |

- (2) DF15 --- 350, Plastic film condenser
One-way type, Mylar ±5% 50V



Examples

- ① Capacity value
- | | |
|------------------------|--------------|
| 0.001μF (1000pF)...102 | 0.1μF...104 |
| 0.0018μF...182 | 0.56μF...564 |
| 0.01μF...103 | 1μF...105 |
| 0.015μF...153 | |

REF. DESIG.	PART NO.	DESCRIPTION
PJ01	YK260T10A0 ZZ261T10A0 ZZ260T10A0	PJ01-MAIN CIRCUIT BOARD P.W. Board, Main P.W. Board Assembly (SD255) P.W. Board Assembly (SD155)
		PJ01-CAPACITORS
CE03	DD15101300	Ceramic 100pF ±5% 50V
CE04	DD15101300	Ceramic 100pF ±5% 50V
CE07	DK18103310	Ceramic 0.01μF 50V
CJ01	DD15681370	Ceramic 680pF ±5% 50V
CJ02	DD15681370	Ceramic 680pF ±5% 50V
CK15	DD15101300	Ceramic 100pF ±5% 50V
CK16	DD15101300	Ceramic 100pF ±5% 50V
CK25	DD15220300	Ceramic 22pF ±5% 50V
CK26	DD15220300	Ceramic 22pF ±5% 50V
CL01	DF15182550	Film 1800pF ±5% 100V
CM01	DK18473310	Ceramic 0.047μF 100V
C853	DK18103310	Ceramic 0.01μF 50V
C854	DK18103310	Ceramic 0.01μF 50V
		PJ01-RESISTORS
RG05	GG05221120	220Ω ±5% ½W
RG06	GG05221120	220Ω ±5% ½W
RJ13	RA04720600	4.7KΩ, Trimming; P/B Level (L)
RJ14	RA04720600	4.7KΩ, Trimming; P/B Level (R)
RJ15	RA04720600	4.7KΩ, Trimming; P/B Level (L)
RJ16	RA04720600	4.7KΩ, Trimming; P/B Level (R)
RK01	RA04730600	47KΩ, Trimming
RK02	RA04730600	47KΩ, Trimming
RL02	GG05033140	3.3Ω ±5% ¼W
RL05	NF02100140	10Ω ±2% ¼W, Fuse
RL07	RA04730600	47KΩ, Trimming; Bias Adj (L)
RL08	RA04730600	47KΩ, Trimming; Bias Adj (R)
RS54	RA04720600	4.7KΩ, Trimming; Bias (Metal)
RS55	RA04730600	47KΩ, Trimming; Bias (CrO₂)
RX05	NK05680020	68Ω ±5% 2W, Metal
		PJ01-SEMICONDUCTORS
DJ01	HD20015210	Diode 1S5133
DJ02	HD20015210	Diode 1S5133
DJ03	HD20015210	Diode 1S5133
DM01	HD20015210	Diode 1S5133
DM02	HD20015210	Diode 1S5133
DM03	HD20015210	Diode 1S5133
DM05	?	Diode 1S5133
DM17		
DM18	HD20016210	Diode 1SR35-200
DM19	HD20016210	Diode 1SR35-200
DM20	HD20015210	Diode 1S5133
DM21	HD20015210	Diode 1S5133
DS51	HD10004020	Diode OA91A
DS52	HD10004020	Diode OA91A
DS53	HD20015210	Diode 1S5133
DS54	HD20015210	Diode 1S5133

REF. DESIG.	PART NO.	DESCRIPTION	
DT01	HD10004020	Diode	OA91A
DT02	HD20015210	Diode	1SS133
DT07			
△ D801	HD20027080	Diode	RB-152
QE01	HT327841U0	Transistor	2SC2784(U)
QE02	HT327841U0	Transistor	2SC2784(U)
QG01	HT30001000	Transistor	2SC2458 etc.
QG02	HT30001000	Transistor	2SC2458 etc.
QJ01	HC10109050	IC	TA7405P
QJ03	HT30001000	Transistor	2SC2458 etc.
QJ08			
QK03	HT30001000	Transistor	2SC2458 etc.
QK04	HT30001000	Transistor	2SC2458 etc.
QK05	HT30001000	Transistor	2SC2458 etc.
QK06	HT30001000	Transistor	2SC2458 etc.
QK07	HC10003090	IC	NJM4558D
△ QL01	HT404711K0	Transistor	2SD471(K)
△ QL02	HT403131E0	Transistor	2SD313(E)
QL51	HT30001000	Transistor	2SC2458 etc.
△ QM01	HT205072A0	Transistor	2SB507(D, E)
QM02	HT30001000	Transistor	2SC2458 etc.
QM03	HT30001000	Transistor	2SC2458 etc.
QM04	HT10001000	Transistor	2SA608SP etc.
QM05	HT10001000	Transistor	2SA608SP etc.
QM06	HT30001000	Transistor	2SC2458 etc.
QM09			
△ QM10	HT205072A0	Transistor	2SB507(D, E)
QM11	HT30001000	Transistor	2SC2458 etc.
QM12	HC10052050	IC	TD62504P
QM13	HT30001000	Transistor	2SC2458 etc.
QM14	HT30001000	Transistor	2SC2458 etc.
QM15	HT30001000	Transistor	2SC2458 etc.
QM19	HT10001000	Transistor	2SA608SP etc.
QM20	HT30001000	Transistor	2SC2458 etc.
QM21	HT30001000	Transistor	2SC2458 etc.
QM22	HT30001000	Transistor	2SC2458 etc.
QM24	HT30001000	Transistor	2SC2458 etc.
QM29			
QS51	HT10001000	Transistor	2SA608SP etc.
QS52	HT10001000	Transistor	2SA608SP etc.
QS53	HT10001000	Transistor	2SA608SP etc.
QS54	HC10095050	IC	TD62554S
QT01	HT30001000	Transistor	2SC2458 etc.
QT02	HT30001000	Transistor	2SC2458 etc.
QT03	HT30001000	Transistor	2SC2458 etc.
QT04	HT30001000	Transistor	2SC2458 etc.
QT05	HT10001000	Transistor	2SA608SP etc.
QT06	HT30001000	Transistor	2SC2458 etc.
QT07	HT30001000	Transistor	2SC2458 etc.
QT09	HT30001000	Transistor	2SC2458 etc.
QT10	HT30001000	Transistor	2SC2458 etc.

REF. DESIG.	PART NO.	DESCRIPTION	
QY51	HT30001000	Transistor	2SC2458 etc.
QY52	HT30001000	Transistor	2SC2458 etc.
QY53	HT30001000	Transistor	2SC2458 etc.
Q606	HT30001000	Transistor	2SC2458 etc. (SD255)
Q651	HT30001000	Transistor	2SC2458 etc.
Q652	HT30001000	Transistor	2SC2458 etc.
△ Q851	HC38512090	IC	78M12
△ Q852	HC38512090	IC	78M12
PJ01-MISCELLANEOUS			
JE01	YJ01002380	Jack, Mic (L) (Black)	
	YJ01002360	Jack, Mic (L) (Gold)	
JE02	YJ01002380	Jack, Mic (R) (Black)	
	YJ01002360	Jack, Mic (R) (Gold)	
JE03	YL01010110	Terminal, Earth	
JG01	YJ01002340	Jack, Headphones (Black)	
	YJ01002330	Jack, Headphones (Gold)	
JJ01	YP06002420	Plug, 6P; Rec/PB Head	
JJ02	YP06002400	Plug, 4P; PB Head	
JL01	YP06002360	Plug, 3P; Erase Head	
JM01	YP06002430	Plug, 8P	
JM02	YP06002450	Plug, 10P	
JV01	YJ06002390	Jack, 5P	
JW51	YJ06002430	Jack, 3P	
JW52	YJ06002430	Jack, 3P	
JX01	YJ06002440	Jack, 4P	
JY01	YJ06002390	Jack, 5P	
JY02	YJ06002390	Jack, 5P	
J801	YJ06002430	Jack, 3P	
LK01	LC24750700	Choke Coil, 4.7mH	
LK02	LC24750700	Choke Coil, 4.7mH	
LK03	LC22260700	Choke Coil, 22mH	
LK04	LC22260700	Choke Coil, 22mH	
LL01	TC10140300	OSC Transformer, 105KHz	
LL02	LC21550610	Choke Coil, 1.5mH	
SM01	SP06010140	Push Switch, Synchro Start	
SM02	SP02010630	Push Switch, Normal/High Speed	
SS51	SS09020180	Slide Switch, Rec/PB	
S601	SP02010630	Push Switch, Dolby ON/OFF	
S602	SP02010630	Push Switch, Dolby B/C (SD255)	
WM03	YU02220260	Jumper Lead, 2P	
WM04	YU02120260	Jumper Lead, 2P	

REF. DESIG.	PART NO.	DESCRIPTION
PJ04	YK260T10D0 ZZ260T10D0	PJ04-REC VOLUME/LED METER CIRCUIT BOARD P.W. Board, Rec Volume/LED Meter P.W. Board Assembly
RV51 RV52	RX05030240 RX05030240	PJ04-RESISTORS 50K Ω , Variable; Rec Level (L) 50K Ω , Variable; Rec Level (R)
DX51 } DX58 DX59 DX60 DX61 DX62	HI10063020 HI10062020 HI10062020 HI10062020 HI10062020 HI10062020	PJ04-SEMICONDUCTORS L.E.D., LN317GPH; Green L.E.D., LN217RPH; Red L.E.D., LN217RPH; Red L.E.D., LN217RPH; Red L.E.D., LN217RPH; Red
DY01 DY02 DY03 DY29 } DY32 DY33 DY34	HI10038320 HI10038320 HI10038320 HI10038320 HI10038320 HI10032320 HI10038320	L.E.D., GL-9PG24; Green L.E.D., GL-9PG24; Green L.E.D., GL-9PG24; Green L.E.D., GL-9PG24; Green L.E.D., GL-9PR24; Red L.E.D., GL-9PG24; Green
QX51	HC10006320	IC IR2E27A
WV02 WX02 WY01 WY02	YU05200260 YU04200260 YU05260260 YU05200260	PJ04-MISCELLANEOUS Jumper Lead, 5P Jumper Lead, 4P Jumper Lead, 5P Jumper Lead, 5P
PJ05	YK260T10E0 ZZ261T10E0 ZZ260T10E0	PJ05-HIGH SPEED/DUBBING CIRCUIT BOARD P.W. Board, High Speed/Dubbing P.W. Board Assembly (SD255) P.W. Board Assembly (SD155)
CJ53 CJ54	DD15220300 DD15220300	PJ05-CAPACITORS Ceramic 22pF \pm 5% Ceramic 22pF \pm 5%
RJ63	NK05471120	PJ05-RESISTOR 470 Ω \pm 5% $\frac{1}{2}$ W, Metal
QJ51 QJ52 QJ55	HT30001000 HT30001000 HC10003090	PJ05-SEMICONDUCTORS Transistor 2SC2458 etc. Transistor 2SC2458 etc. IC NJM4558D
JJ51	YP06002580	PJ05-MISCELLANEOUS Plug, 8P
PJ06	YK260T10F0 ZZ260T10F0	PJ06-RCA JACK CIRCUIT BOARD P.W. Board, RCA Jack P.W. Board Assembly
JM05 JW02	YT02020330 YT02040550	Terminal, Pause Remote Jack Terminal, RCA Jack; Line IN/OUT
WW51 WW52	YU03140260 YU03140260	Jumper Lead, 3P Jumper Lead, 3P

REF. DESIG.	PART NO.	DESCRIPTION
PJ08	YK260H10H0 ZZ260H10H0	PJ08-POWER SWITCH CIRCUIT BOARD P.W. Board, Power Switch P.W. Board Assembly
Δ C871	DK18103310	Ceramic Cap. 0.01 μ F 50V
Δ S852	SP02010960	Push Switch, Power
W802	YU03200260	Jumper Lead, 3P
PJ09	YK260H10I0 ZZ260H10I0 ZZ260H80I0 ZZ260H70I0	PJ09-POWER TRANSFORMER CIRCUIT BOARD P.W. Board, Power Transformer P.W. Board Assembly [U] P.W. Board Assembly [N, A] P.W. Board Assembly [E]
Δ L001	TS14820170 TS14820180 TS14820190 TS14820200	Power Transformer [U] Power Transformer [N, A] Power Transformer [E] Power Transformer [F]
PJ10	YK260T10J0 ZZ260T10J0	PJ10-MOTOR SPEED ADJ. CIRCUIT BOARD P.W. Board, Motor Speed Adj. P.W. Board Assembly
RM47 RM48 RM53 RM54	RA04710600 RA04710600 RA01010600 RA01010600	Resistor, Trimming 470 Ω Resistor, Trimming 470 Ω Resistor, Trimming 100 Ω Resistor, Trimming 100 Ω
DM22	HD20015210	Diode 1S5133
QM17 QM18	HT30001000 HT30001000	Transistor 2SC2458 etc. Transistor 2SC2458 etc.
JM03 JM04	YJ06004000 YJ06004000	Jack, 2P Jack, 2P
P601	YK301T0410 ZZ301T8410	P601-DOLBY B/C CIRCUIT BOARD P.W. Board, Dolby B/C (SD255) P.W. Board Assembly (SD255)
C615 C616 C627 C628	EA68405010 EA68405010 EA68405010 EA68405010	P601-CAPACITORS Elect 0.68 μ F 50V Elect 0.68 μ F 50V Elect 0.68 μ F 50V Elect 0.68 μ F 50V
Q601 Q602 Q603 Q604	HC10003490 HC10003490 HT30001000 HT30001000	P601-SEMICONDUCTORS IC TEA0665 IC TEA0665 Transistor 2SC2458 etc. Transistor 2SC2458 etc.

REF. DESIG.	PART NO.	DESCRIPTION
J601 J602	YP06002570 YP06002570	P601-MISCELLANEOUS Plug, 7P Plug, 7P
L601 L602 L603 L604	LS10440010 LS10440010 LC23660610 LC23660610	M.P.X. Coil M.P.X. Coil Choke Coil, 36mH Choke Coil, 36mH
W601 W602	YU07160260 YU07160260	Jumper Lead, 7P Jumper Lead, 7P
P601	YK193T1010 ZZ193T8010	P601-DOLBY-B CIRCUIT BOARD P.W. Board, Dolby-B (SD155) P.W. Board Assembly (SD155)
Q601 Q602	HC10058050 HC10058050	P601-SEMICONDUCTORS IC TA7629P IC TA7629P
J601 J602	YP06002550 YP06002550	P601-MISCELLANEOUS Plug, 5P Plug, 5P
L601 L602	LS10440010 LS10440010	M.P.X. Coil M.P.X. Coil

(W01-99)	Assembly and Wiring
(T01-99)	Adjustment
(X01-00)	Correction

NOTE ON SAFETY:


Symbol \triangle Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol \triangle . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.


15. TECHNICAL SPECIFICATIONS








Style	Front load
Tape Drive System	Single Capstan Drive
Cartridge	Philips type compact cassette
Track System	Compatible Stereo 4-track 2-channel
Tape Speed	4.75 cm/sec
Heads	2 Head System
Composition	Rec/Play: Super Hard Metal Alloy
	Erase: Dual Gap Ferrite
Motor	2 Motor System
	Capstan: DC Servo Motor
	Mechanism: DC Motor
Overall Frequency Response at -20 dB	(Model SD155)
Normal Tape	30 Hz ~ 15 kHz
CrO ₂ Tape	30 Hz ~ 16 kHz
Metal Tape	30 Hz ~ 17 kHz
	(Model SD255)
Normal Tape	30 Hz ~ 16 kHz
CrO ₂ Tape	30 Hz ~ 17 kHz
Metal Tape	30 Hz ~ 18 kHz
Signal-to-Noise Ratio:	(Model SD155)
Dolby B (ON)	65 dB
Dolby (OFF)	55 dB
	(Model SD255)
Dolby B/C (ON)	65/70 dB
Dolby (OFF)	55 dB
Wow and Flutter	
DIN WTD	0.15 %
Outputs	
Line Level/Impedance	500 mV/2 k ohms
Headphone Level/Matching Impedance	50 mV/8 ohms
Input (Level at 0 VU)	
Line Sensitivity/Impedance	70 mV/40 k ohms
Mic Sensitivity/Impedance	0.3 mV/10 k ohms
Fast Rewind Time	90 sec. (C-60)
Fast Forward Time	90 sec. (C-60)
Power Requirements	
N and T Versions	220/240 V AC, 50/60 Hz
E Version	110/120/220/240 V AC, 50/60 Hz
Power Consumption	23 W
Dimensions	
Panel Width	420 mm
Panel Height	110 mm
Depth	260 mm
Weight	4.7 kg

Specifications and appearance are subject to change for modification without notice.

16. SCHEMATIC DIAGRAM







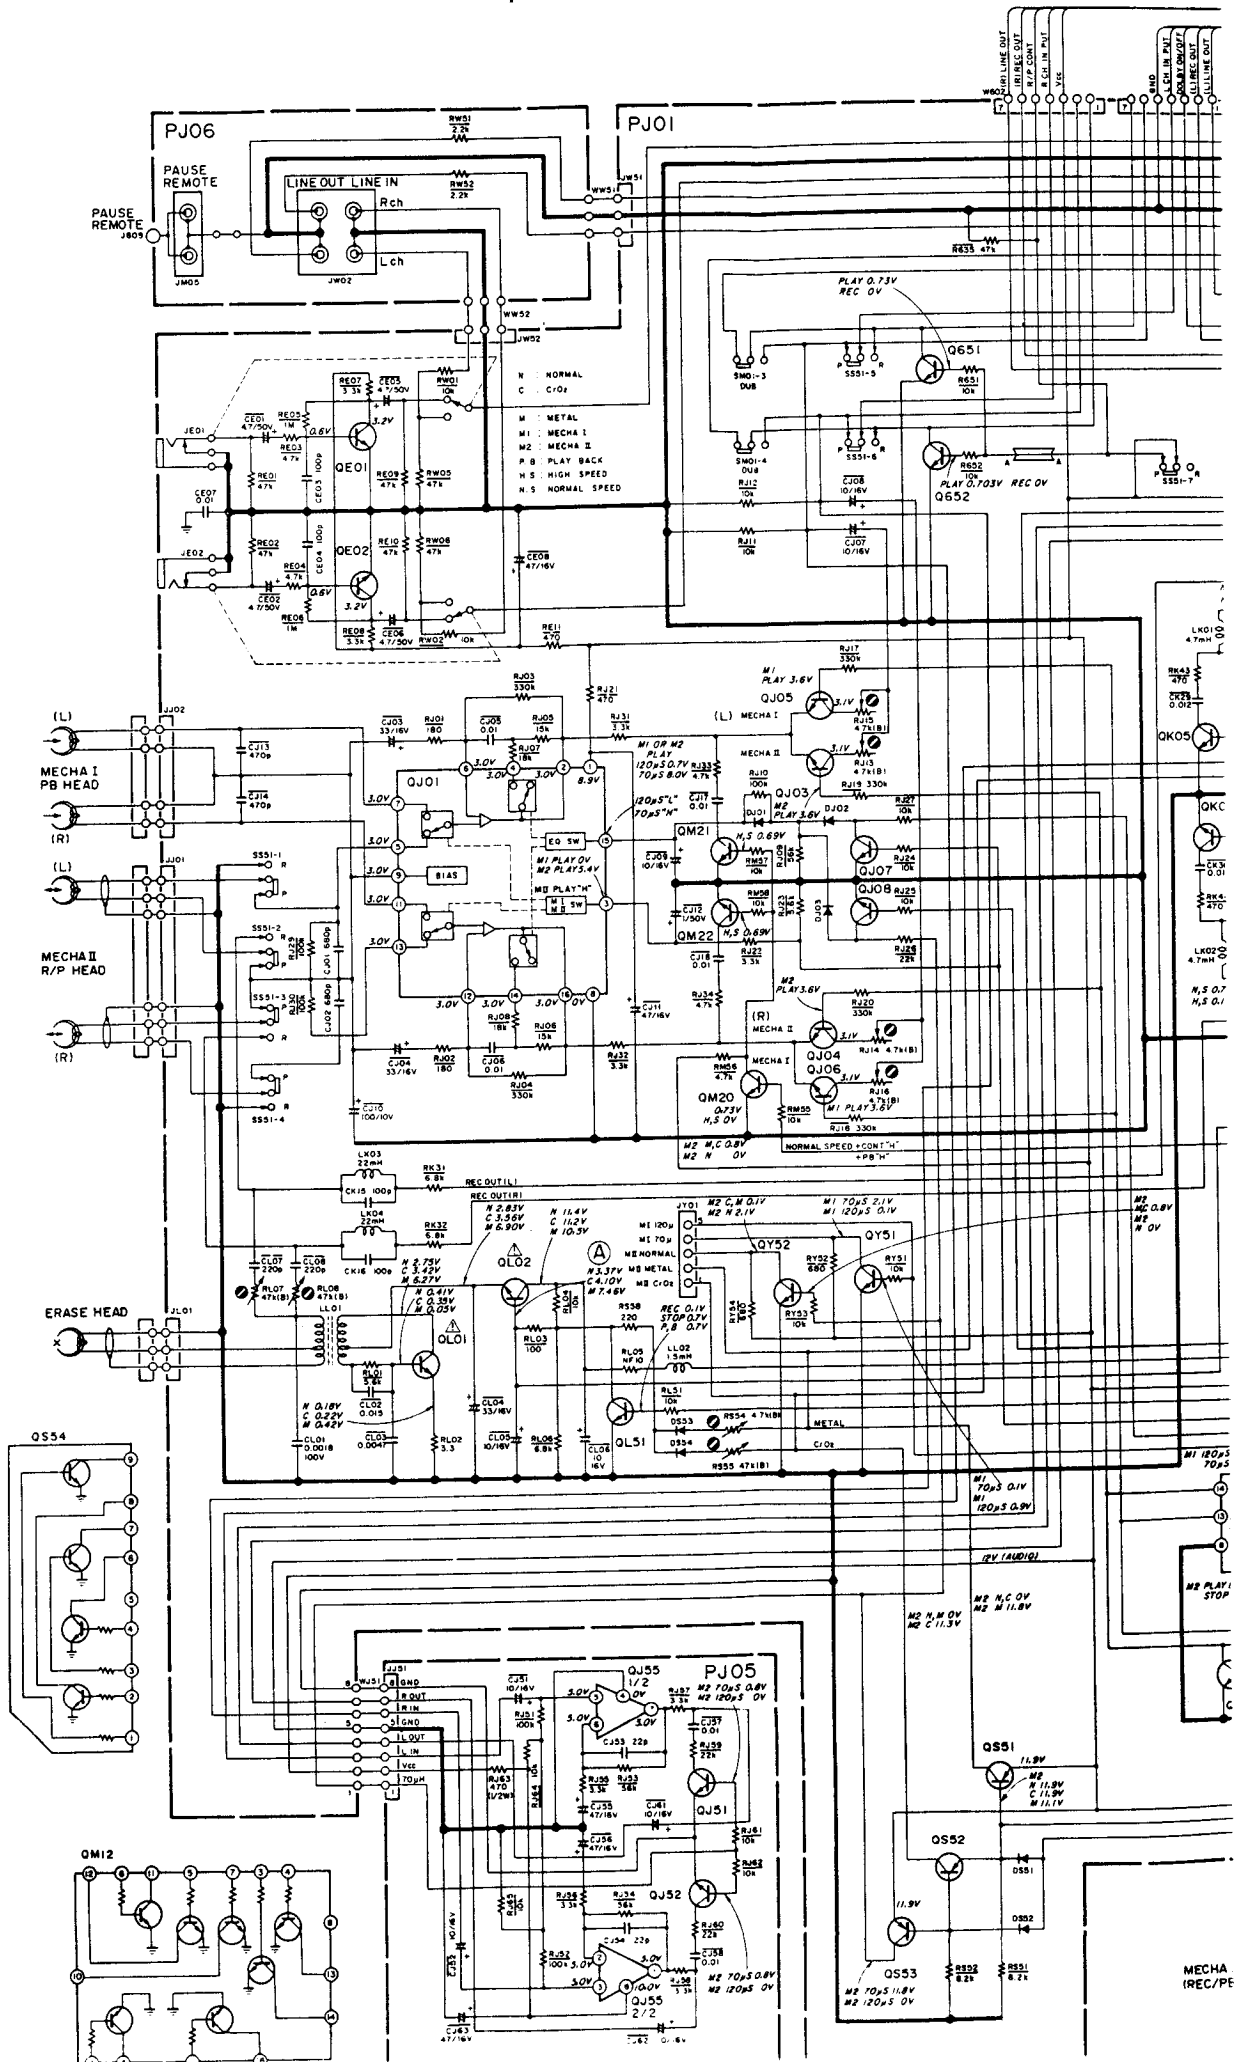


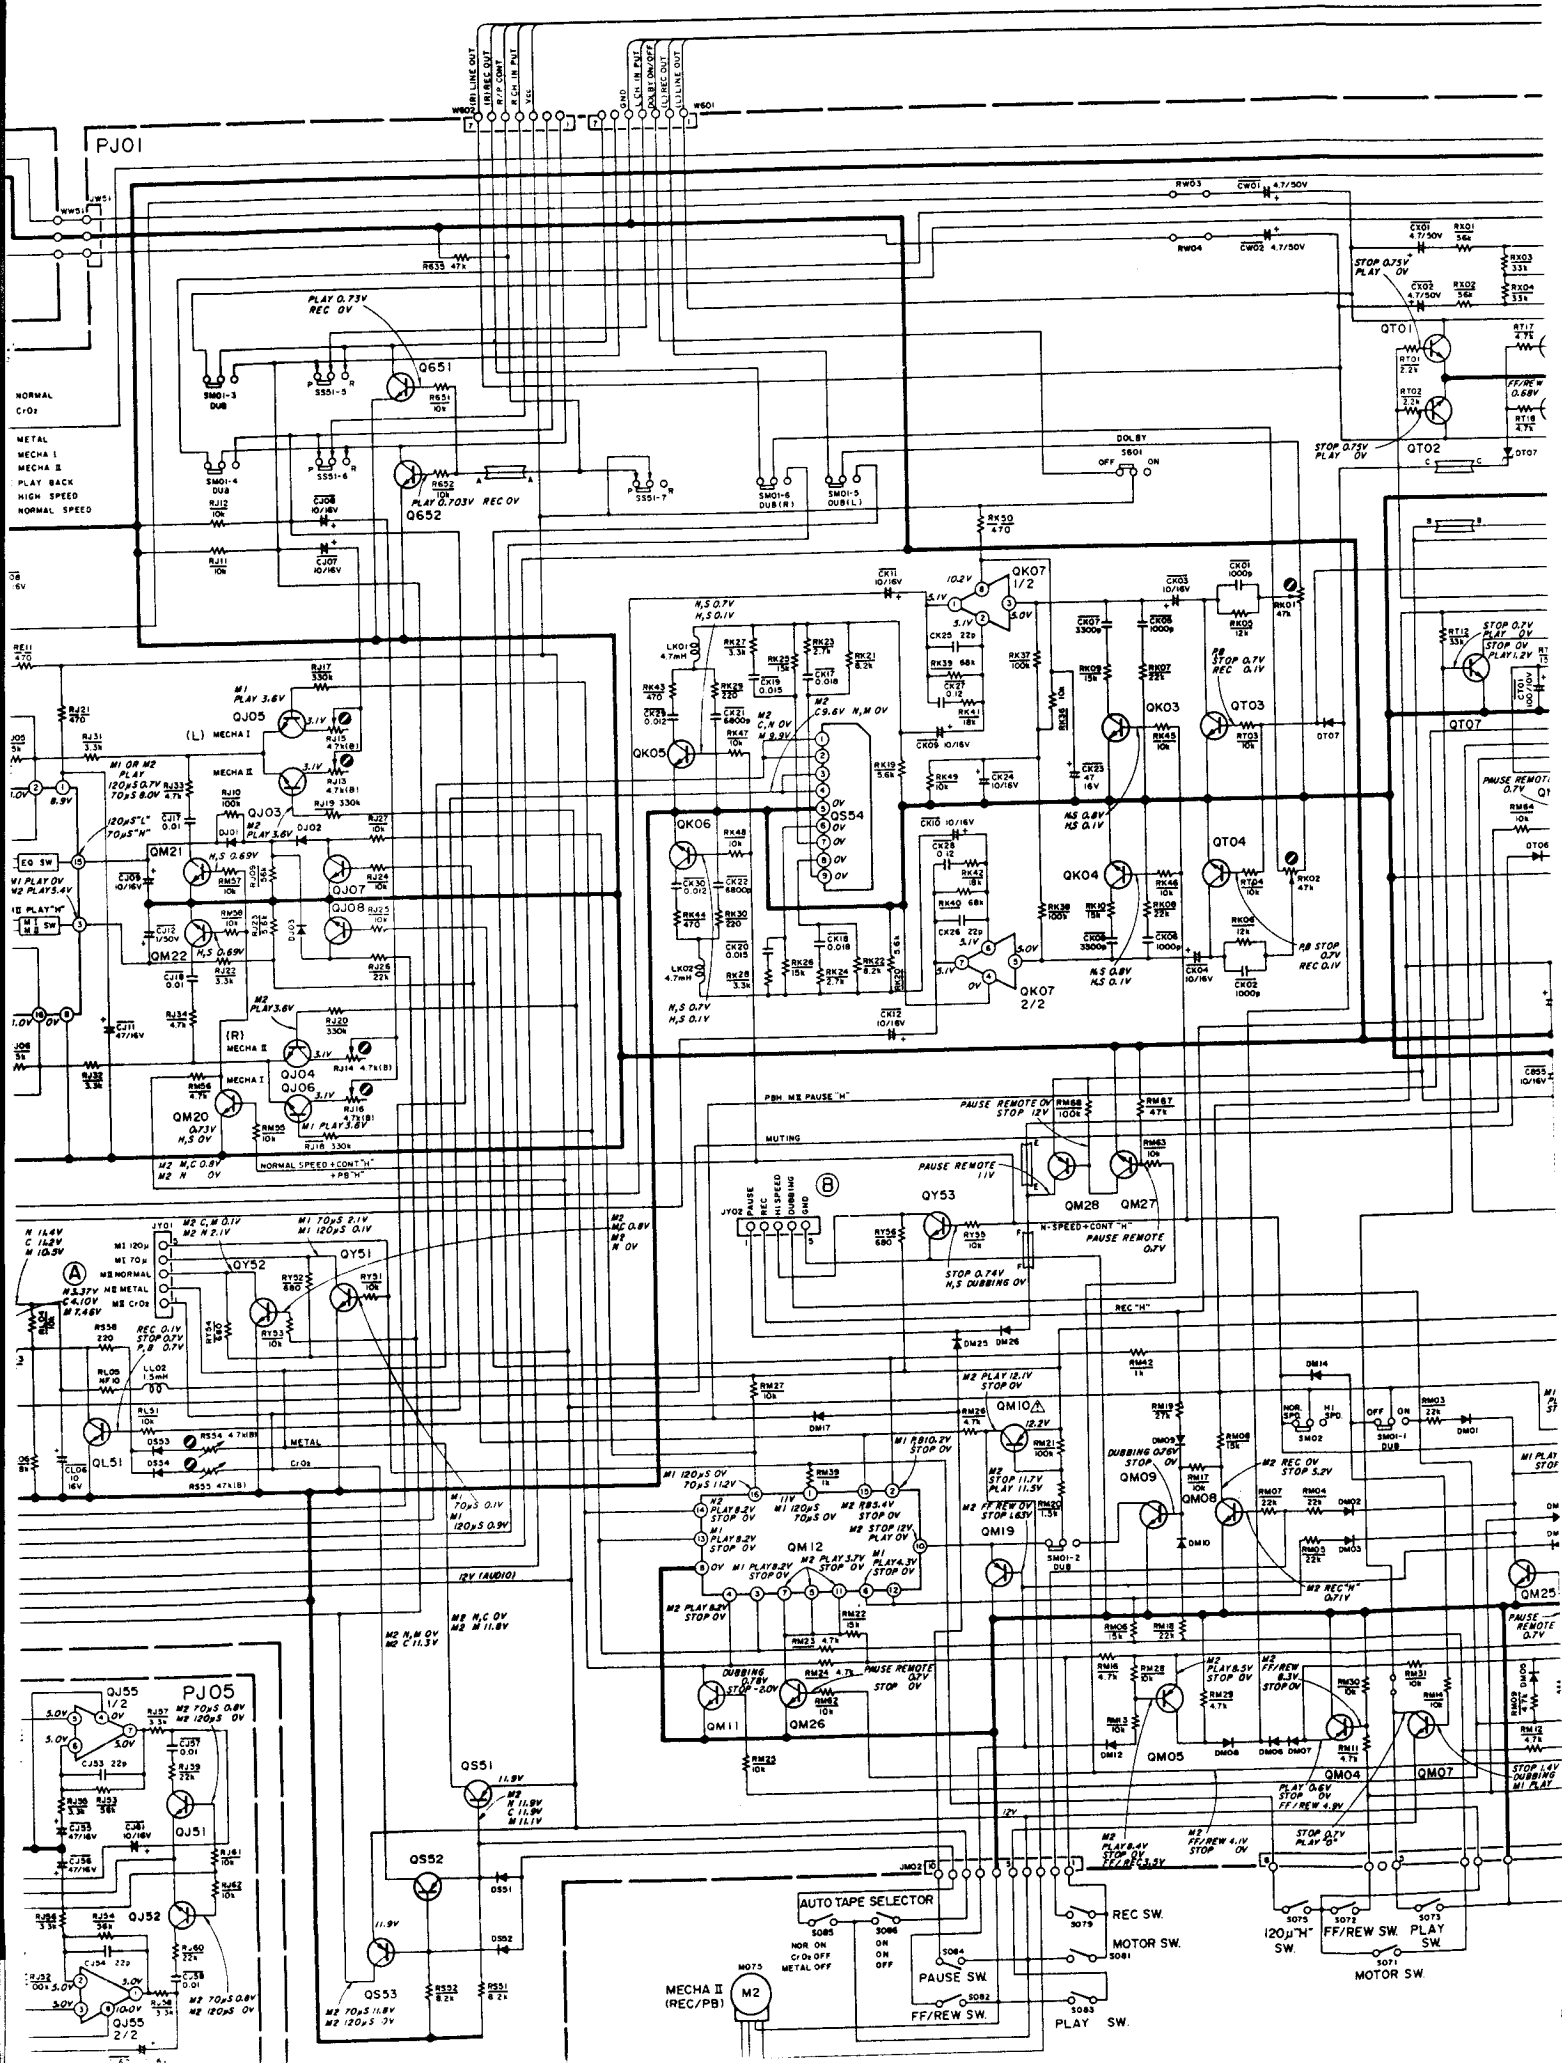

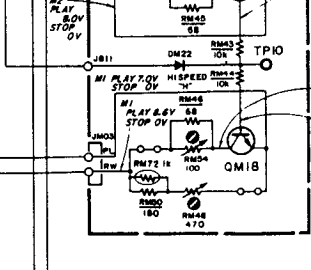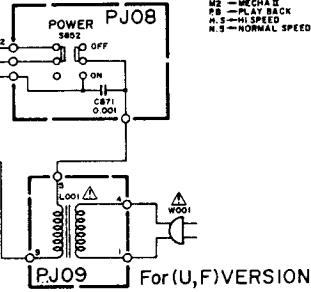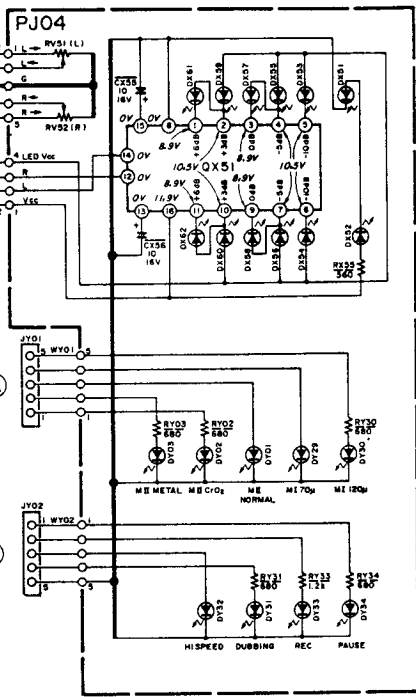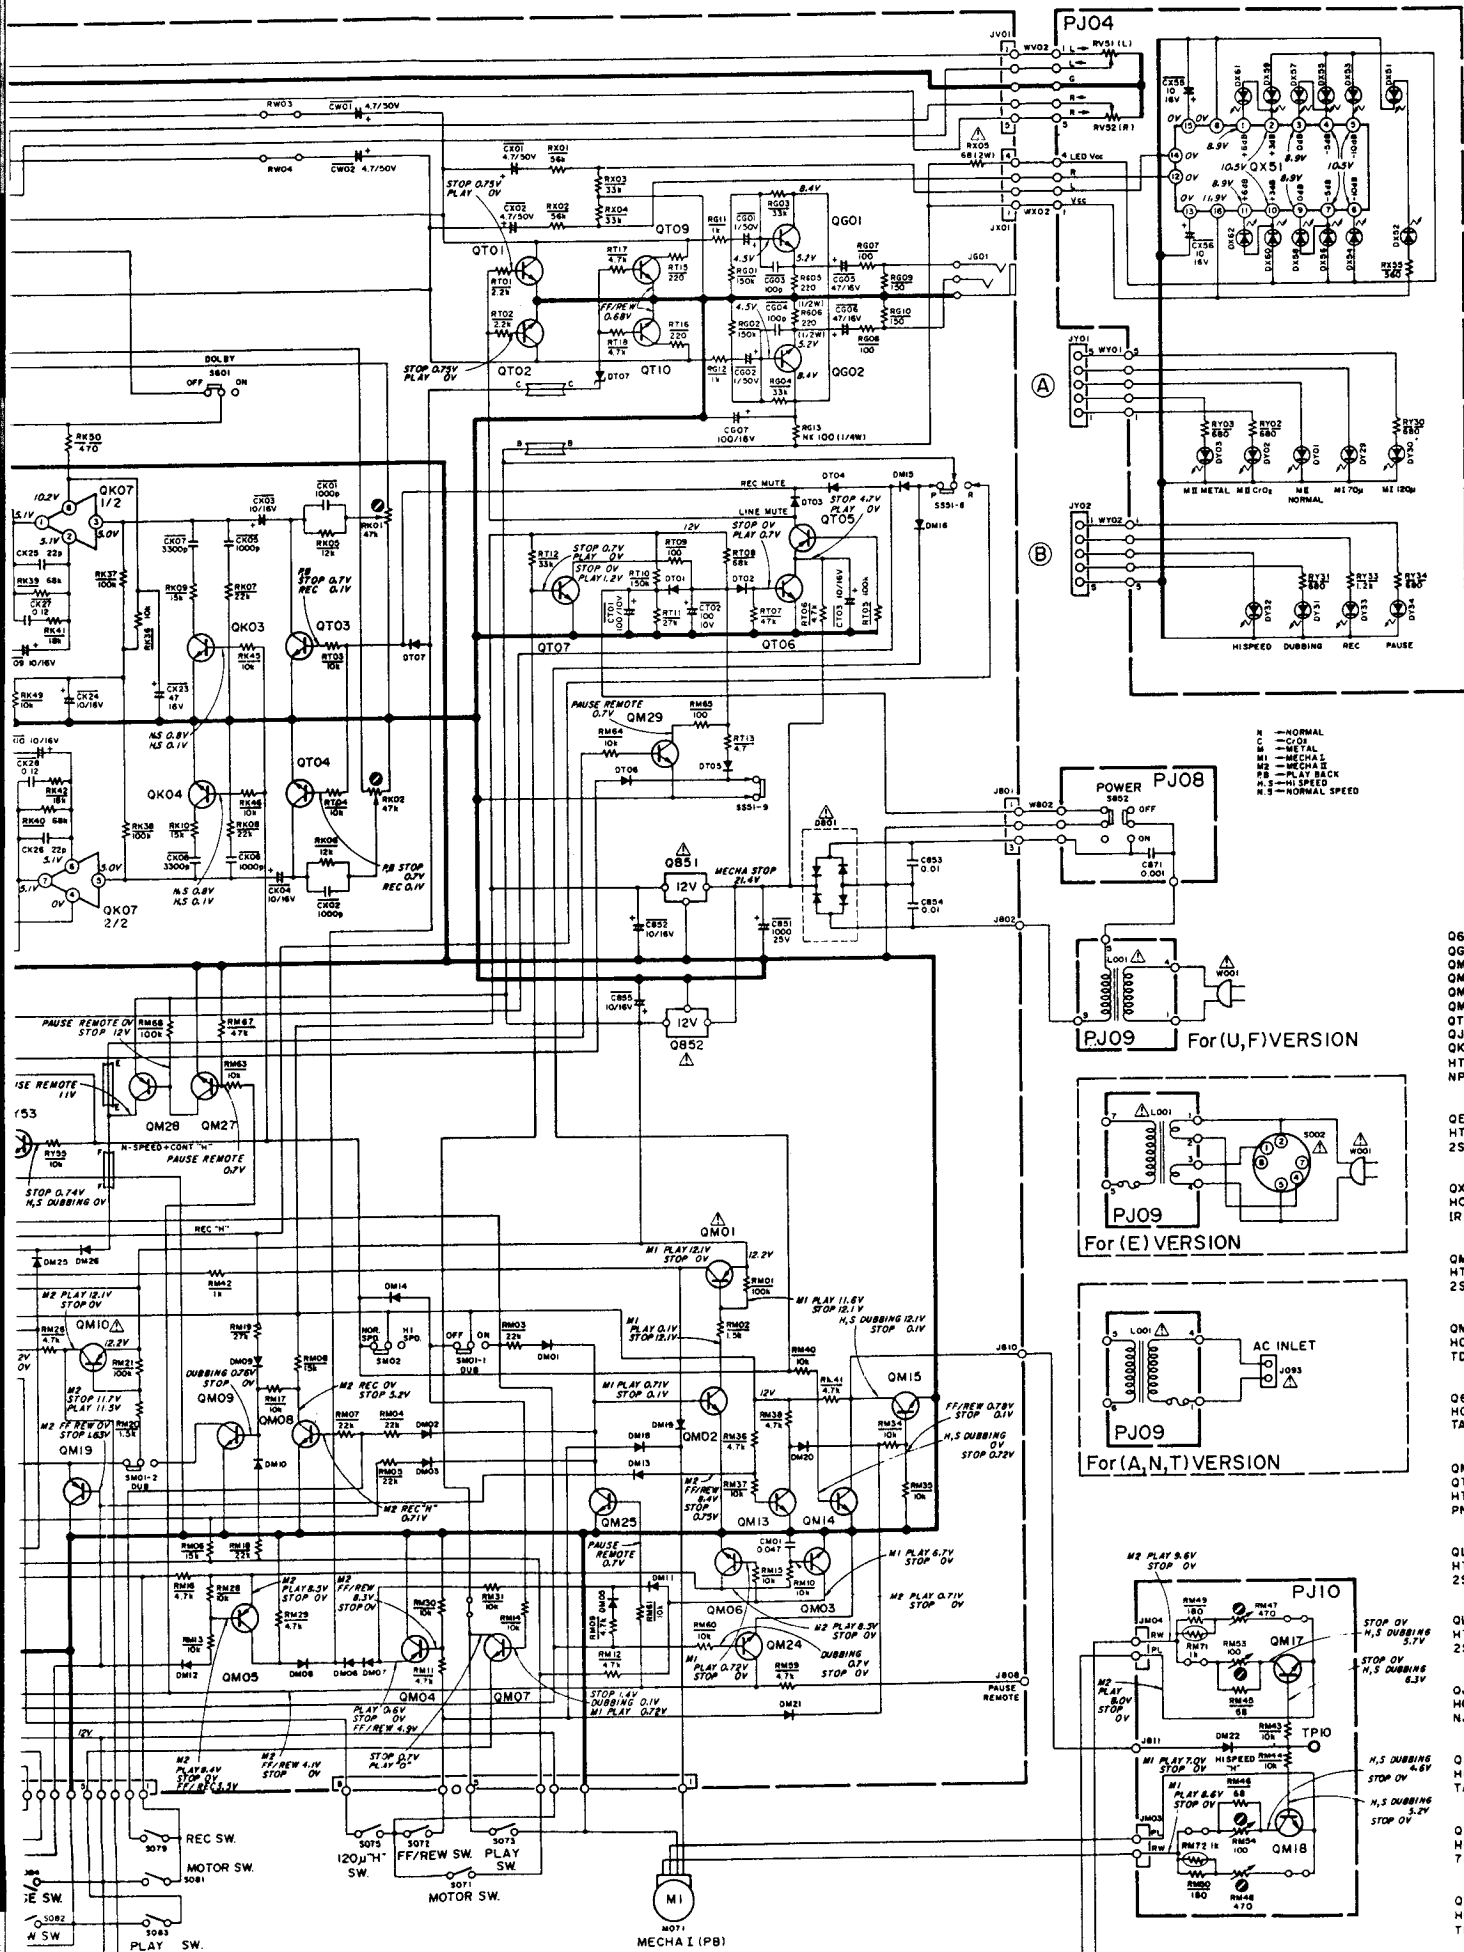

- Q651, Q652, Q6
QG02, QM02, QM
QM06 ~ QM09, Q
QM13 ~ QM15, Q
QM18, QM20 ~ C
QM24 ~ QM27, C
QT06, QT07, QT
QJ51, QJ52, QJ
QK03 ~ QK06, Q
HT30001000
NPN TRANSISTO
- QE01, QE02
HT327841U
25C2784 (U)
- QX51
HC10006320
1R2E27A
- QM01, QM10
HT205072A0
25B507 (D, E)
- QM12
HC10052050
TD62504P
- Q601, Q602
HC10038050
TA7629P
- QM04, QM05, QM
QT05, QJ51 ~ Q
HT10001000
PNP TRANSISTO
- QL01
HT404711K0
25D471 (K)
- QL02
HT403131E0
25D313 (E)
- QJ55, QK07
HC10003090
NJM4558D
- QJ01
HC10109050
TA7405P
- Q851, Q852
HC38512090
78M12
- Q554
HC10095050
T062554S

Model SD155

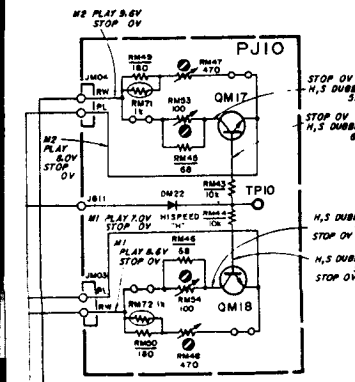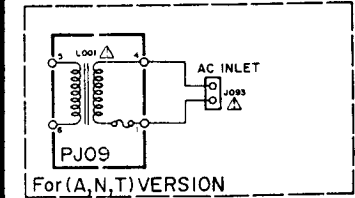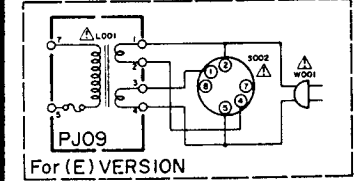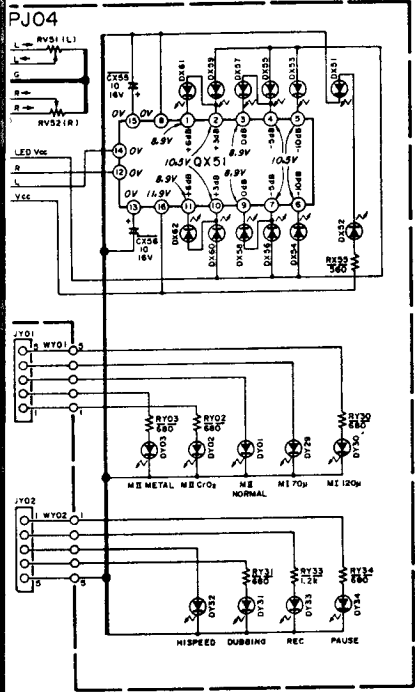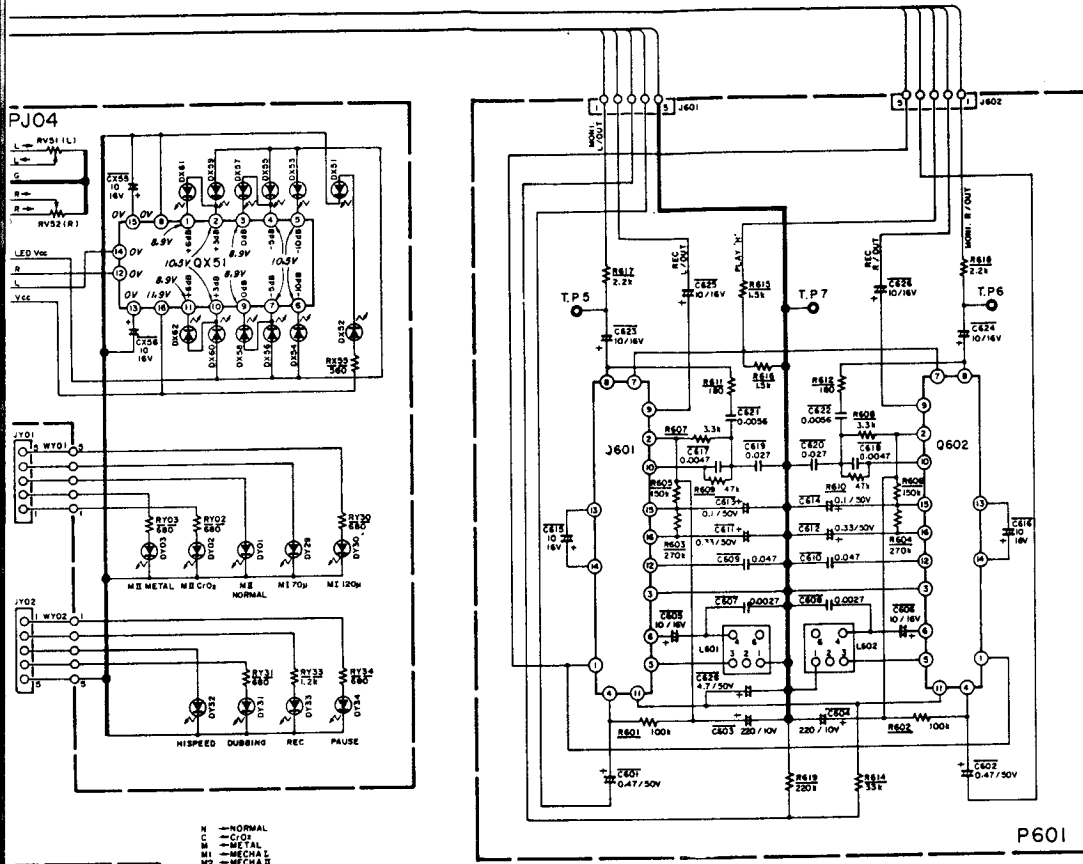

N — NORMAL
 C — C.O.V.
 M — METAL
 ME — MECHA I
 ME2 — MECHA II
 M — PLAT BACK
 H.S — H.SPEED
 N.S — NORMAL SPEED

Q651, Q652, Q601
 Q602, QM02, QM03
 QM06 ~ QM09, QM11
 QM13 ~ QM15, QM17
 QM18, QM20 ~ QM22
 QM24 ~ QM27, QL51
 QT06, QT07, QT09, QT10
 QJ51, QJ52, QJ03 ~ QJ08
 QK03 ~ QK08, QY51 ~ QY53
 HT30001000 QT01 ~ QT04
 NPN TRANSISTOR

QE01, QE02
 HT327841U0
 25C2784 (U)

QX51
 HC10006320
 IR2E27A

QM01, QM10
 HT205072A0
 25B507 (D, E)

QM12
 HC10052050
 TD62504P

Q601, Q602
 HC10058050
 TA7629P

QM04, QM05, QM19, QM28
 QT05, QS51 ~ QS53
 HT10001000
 PNP TRANSISTOR

QL01
 HT404711K0
 25D471 (K)

QL02
 HT403131E0
 25D313 (E)

QJ55, QK07
 HC10003090
 NJM4558D

QJ01
 HC100109050
 TA7405P

Q851, Q852
 HC38512090
 78M12

QS54
 HC10095050
 TD62554S

DM01 ~ DM03, DM05 ~ DM17
 DM20 ~ DM26, DT02 ~ DT07
 DJ01 ~ DJ03, DS53, DS54
 HD20015210
 ISS133

DT01, DS51, DS52
 HD10004020
 G4 DIODE

DM18, DM19
 HD20016210
 ISR35-200











DX59 ~ DX62
 HI10062020
 LN217RPH (RED)

DX51 ~ DX58
 HI10063020
 LN317GPH (GRN)


DY01 ~ DY03
 DY29 ~ DY32, DY34
 HI10038320
 GL-9PG24 (GRN)

DY33
 HI10033230
 GL-9PR24 (RED)

D801
 H020027080




NPN TRANSISTOR PNP TRANSISTOR

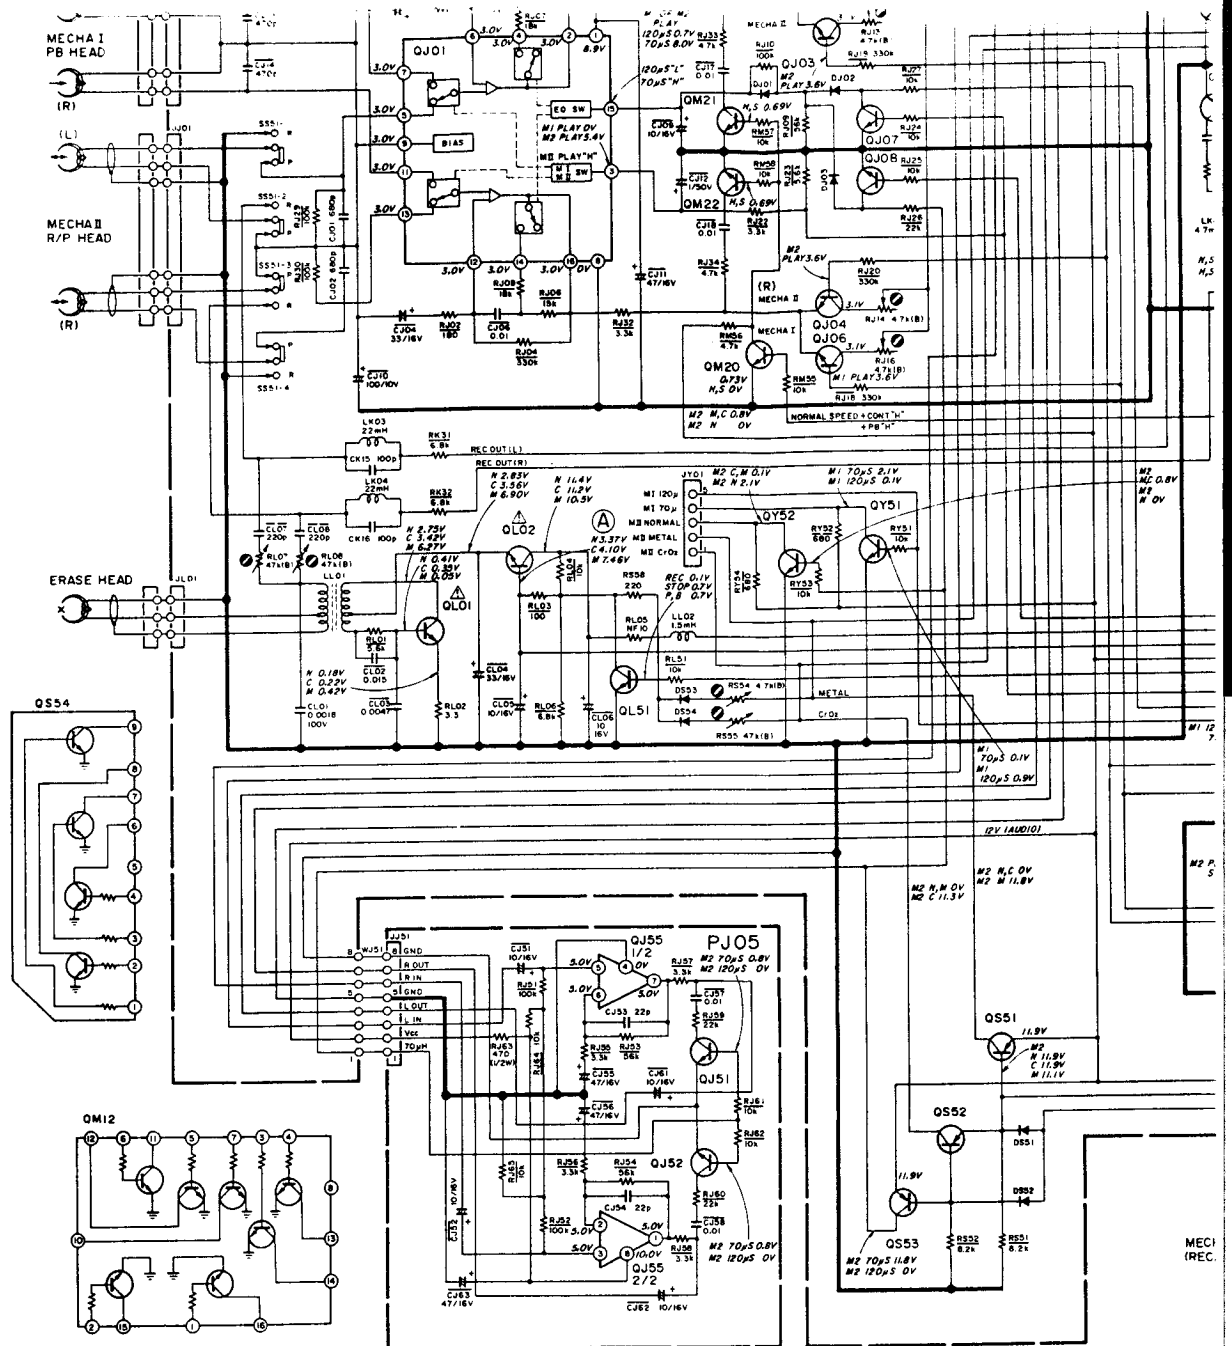

L601	LS10440010	M.P.X. COIL	SS51	SS09020180	SLIDE SWITCH REC/PLAY
L602	LS10440010	M.P.X. COIL	RS54	RA04720600	TRIMMING 4.7KΩ
S601	SP02010630	PUSH SWITCH DOLBY ON/OFF	RS55	RA04730600	TRIMMING 47KΩ
RM47	RA01010600	TRIMMING 100Ω	RV51	RX05030240	VARIABLE 50KΩ REC LEVEL
RM48	RA01010600	TRIMMING 100Ω	RV52	RX05030240	VARIABLE 50KΩ REC LEVEL
RM53	RA01010600	TRIMMING 100Ω	024B	260T052010	COUNTER
RM54	RA01010600	TRIMMING 100Ω	032F	316Y264030	BELT COUNTER
SM01	SP06010140	PUSH SWITCH SYNCHRO START	H071	LH42821050	HEAD REC/PLAY
SM02	SP02010630	PUSH SWITCH SPEED/DUBBING	H072	LH39000030	HEAD ERASE
LL01	TC10140300	OSC TRANSF. 105kHz	M071	MM11205100	D.C. MOTOR
RL07	RA04730600	TRIMMING 47KΩ	S071	SM01011190	MINI SWITCH MOTOR
RL08	RA04730600	TRIMMING 47KΩ	S072	SM01011160	MINI SWITCH FF/REW
RJ13	RA04720600	TRIMMING 4.7KΩ	S073	SM01011190	MINI SWITCH PLAY MUTE
RJ14	RA04720600	TRIMMING 4.7KΩ	S075	SM01011300	MINI SWITCH SELECTOR
RJ15	RA04720600	TRIMMING 4.7KΩ	055M	252T354110	LEVER PINCH ROLLER
RJ16	RA04720600	TRIMMING 4.7KΩ	106M	161T117210	SPINDLE TAKE UP
L001	TS14820180	POWER TRANSF. [N, A]	110M	161T117200	SPINDLE SUPPLY
L001	TS14820190	POWER TRANSF. [E, P]	156M	252T264110	BELT AUTO STOP
L001	TS14820170	POWER TRANSF. [U]	230M	185T264200	BELT MAIN
S852	SP02010960	PUSH SWITCH POWER	231M	185T264210	BELT F/R
RK01	RA04730600	TRIMMING 47KΩ			
RK02	RA04730600	TRIMMING 47KΩ			


NOTE ON SAFETY :

Symbol \triangle Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol \triangle . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

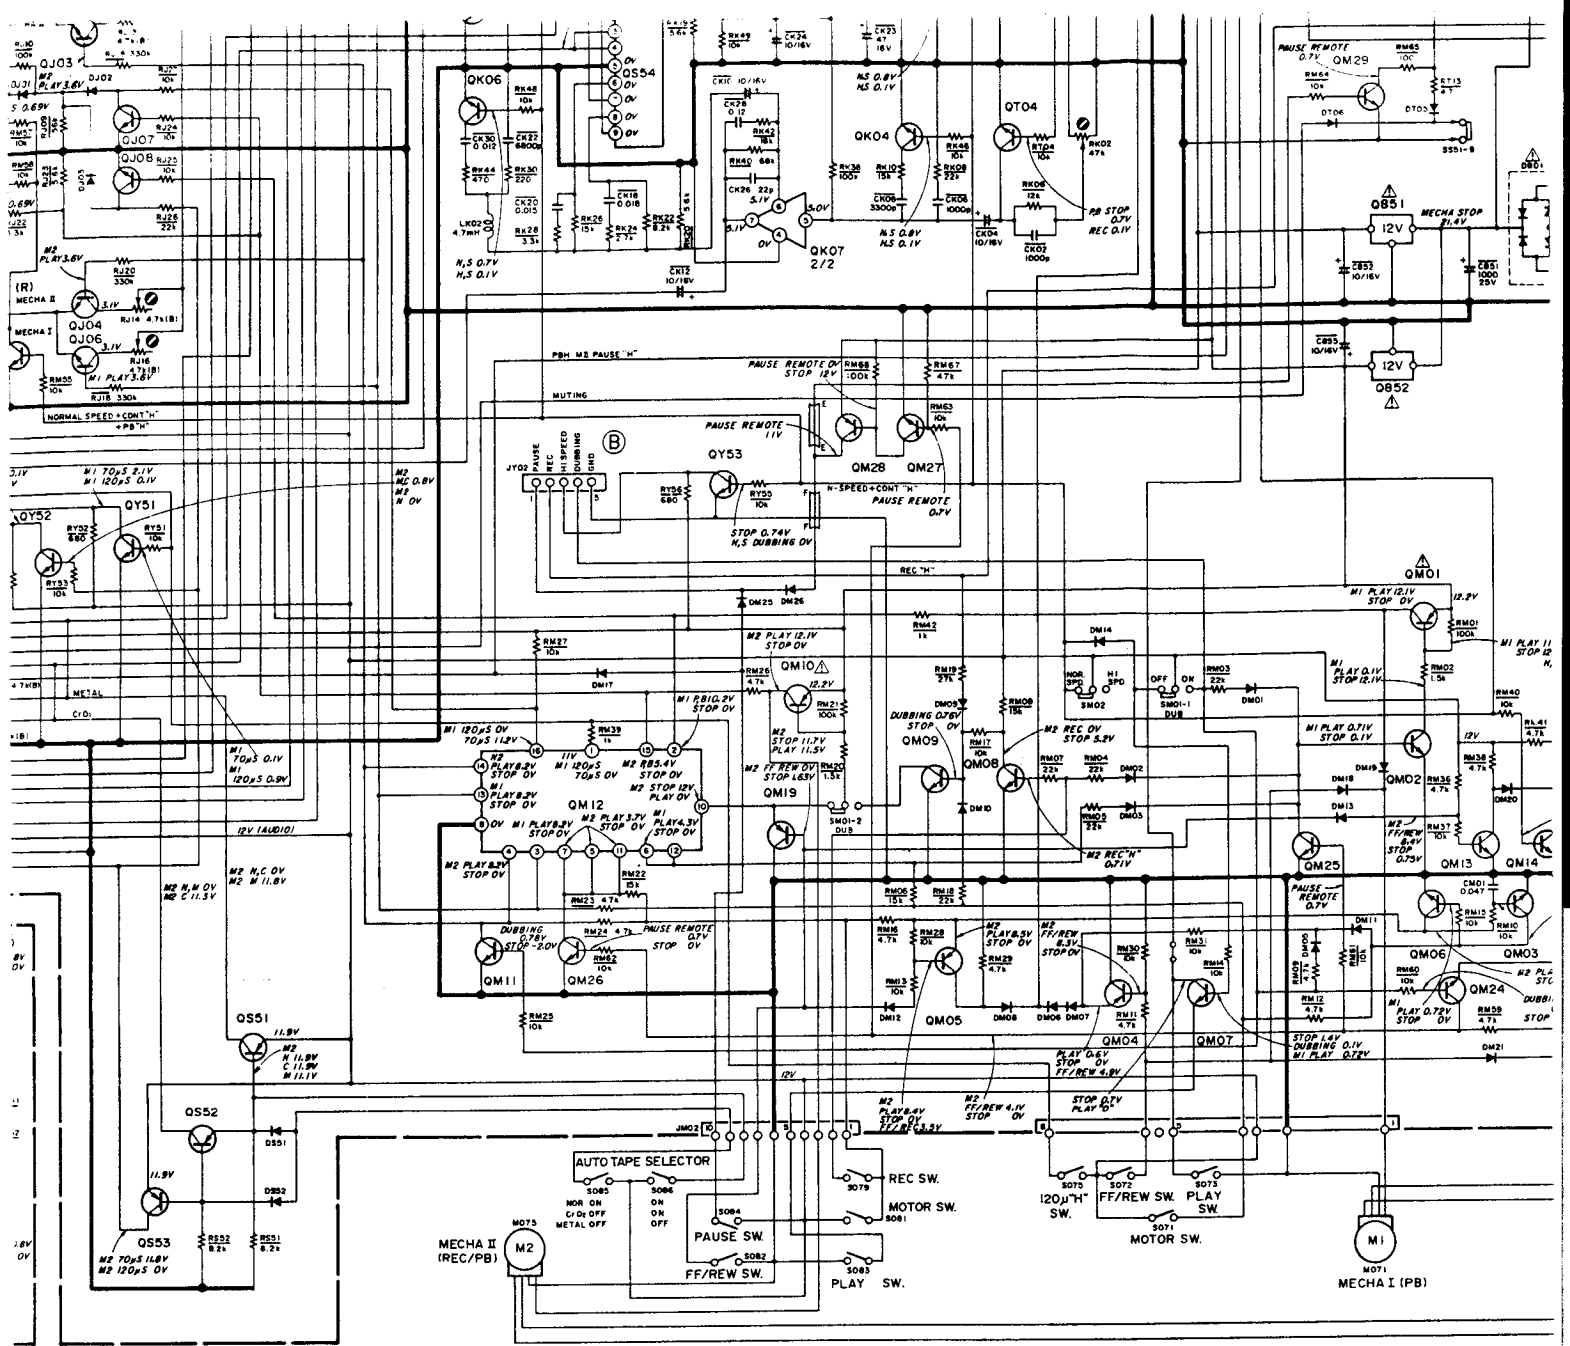



SS09020180	SLIDE SWITCH REC/PLAY	H075	LH42821050	HEAD REC/PLAY
RA04720600	TRIMMING 4.7KΩ	H076	LH31000580	HEAD ERASE
RA04730600	TRIMMING 47KΩ	M075	MM11205100	D.C. MOTOR
RX05030240	VARIABLE 50KΩ REC LEVEL (L)	S079	SM01011020	MINI SWITCH REC
RX05030240	VARIABLE 50KΩ REC LEVEL (R)	S081	SM01011190	MINI SWITCH MOTOR
		S082	SM01011160	MINI SWITCH FF/REW
		S083	SM01011190	MINI SWITCH PLAY MUTE
		S084	SM01011190	MINI SWITCH PAUSE
		S085	SM01011300	MINI SWITCH SELECTOR CrO ₂
		S086	SM01011300	MINI SWITCH SELECTOR METAL
		555M	252T354110	LEVER PINCH ARM ASS'Y.
		606M	161T117210	SPINDLE REEL TAKE UP
		610M	161T117200	SPINDLE REEL SUPPLY
		656M	252T264110	BELT AUTO STOP
		730M	185T264200	BELT MAIN
		731M	185T264210	BELT F/R
52T354110	LEVER PINCH ROLLER			RESISTOR
61T117210	SPINDLE TAKE UP			R*** (1) GD05 --- 14
61T117200	SPINDLE SUPPLY			R*** (2) GD05 --- 16
52T264110	BELT AUTO STOP			C*** : CERAMIC C
85T264200	BELT MAIN			(1) DD1 --- 37
85T264210	BELT F/R			C*** : CERAMIC C
				(1) DK16 --- 30

"SERVICE INFORMATION"
ANY MISADJUSTMENT
REPAIR BY ANY MAINTENANCE PERSONNEL

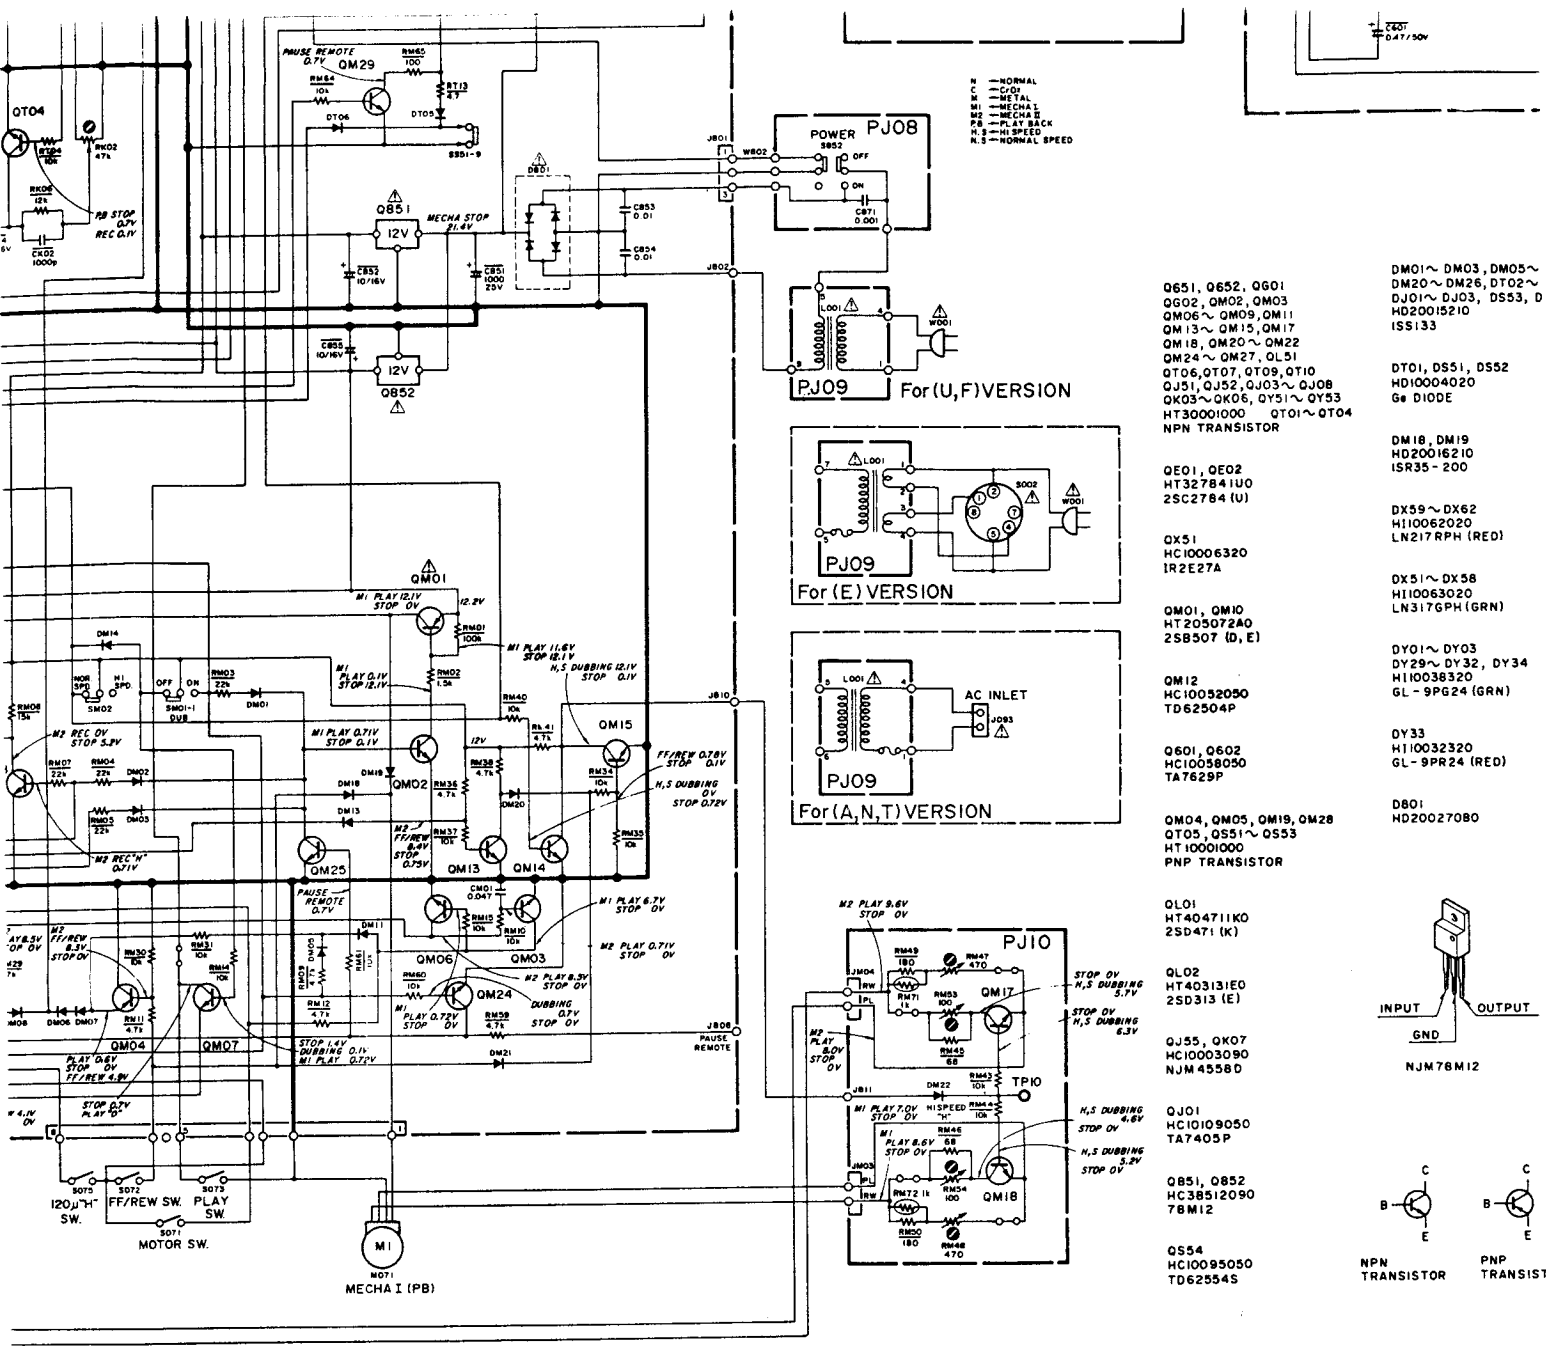

N — NORMAL
 C — C/D
 M — METAL
 M1 — MECHA 1
 M2 — MECHA 2
 PB — PLAY BACK
 H.S — HI SPEED
 N.S — NORMAL SPEED

- Q651, Q652, Q601
Q602, QM02, QM03
QM06 ~ QM09, QM11
QM13 ~ QM15, QM17
QM18, QM20 ~ QM22
QM24 ~ QM27, QL51
Q106, Q107, Q109, Q110
QJ51, QJ52, QJ03 ~ QJ08
QK03 ~ QK05, DY31 ~ DY33
HT30001000 Q101 ~ Q104
NPN TRANSISTOR
- DM01 ~ DM03, DM05 ~
DM20 ~ DM26, DT02 ~
DJ01 ~ DJ03, DS53, D
HD20015210
ISS133
- DT01, DS51, DS52
HD10004020
6d DIODE
- DM18, DM19
HD20016210
ISR35 - 210
- QEO1, QEO2
HT327841U0
25C2784 (U)
- DX59 ~ DX62
HI10062020
LN217RPH (RED)
- DX51
HC10006320
IR2E27A
- DX51 ~ DX58
HI10063020
LN3176PH (GRN)
- QMO1, QM10
HT20507240
25B507 (D, E)
- DY01 ~ DY03
DY29 ~ DY32, DY34
HI10038320
GL - 9PG24 (GRN)
- DY33
HI10032320
GL - 9PR24 (RED)
- QMI2
HC10052050
TD62504P
- Q601, Q602
HC10058050
TA7629P
- DY33
HI10032320
GL - 9PR24 (RED)
- D801
HD20027080
- QMO4, QM05, QM18, QM28
Q105, Q551 ~ Q553
HT10001000
PNP TRANSISTOR
- QL01
HT404711K0
25D471 (K)
- QL02
HT403131E0
25D313 (E)
- QJ55, QK07
HC10003090
NJM4558D
- QJ01
HC10109050
TA7405P
- Q551, Q552
HC38512090
78M12
- Q554
HC10095050
TD62554S



"SERVICE INFORMATION IS FOR USE BY QUALIFIED PERSONNEL ONLY —
 ANY MISADJUSTMENT OR MISALIGNMENT MAY BE TREATED AS A NON-WARRANTY
 REPAIR BY ANY MARANTZ SERVICE CENTRE —"

Kind of Common Parts

M ASS'Y.
 KE UP
 PPLY








- RESISTOR**
- R*** (1) GD05 --- 140, Carbon film fixed resistor, ±5% 1/4W
 - R*** (2) GD05 --- 160, Carbon film fixed resistor, ±5% 1/6W
- C*** : CERAMIC CAP.**
- (1) DD1 ---- 370, Ceramic condenser, disc type (titan condenser) Temp. coeff. P350 ~ N1000 50V
 - (2) DK16 --- 300, High dielectric constant ceramic condenser, disc type (titan variable) Temp. chara. 2B4 50V

- C*** : ELECTROLY CAP. (≡) /**
- (1) EA ----- 10, Electrolytic one-way type
 - (2) DF15 --- 350, Plastic film one-way type

* In case of ordering the common parts number of 10 figures by the COMMON PARTS CODES"

subject to change for modification without notice.

N - NORMAL
 C - CIP
 M - METAL
 M1 - MECHA I
 M2 - MECHA II
 PB - PLAT BACK
 H S - HI SPEED
 N S - NORMAL SPEED

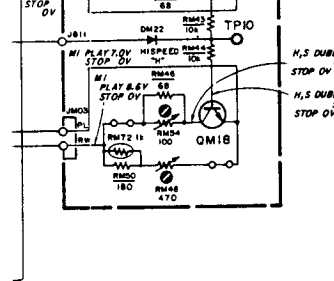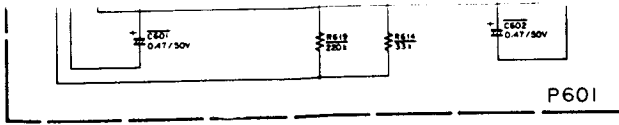

Q651, Q652, Q601
 Q602, QM02, QM03
 QM06 ~ QM09, QM11
 QM13 ~ QM15, QM17
 QM18, QM20 ~ QM22
 QM24 ~ QM27, QL51
 QT06, QT07, QT09, QT10
 QJ51, QJ52, QJ03 ~ QJ08
 QK03 ~ QK06, QY51 ~ QY53
 HT30001000 DT01 ~ QT04
 NPN TRANSISTOR

QE01, QE02
 HT327841U0
 25C2784 (U)

QX51
 HC10006320
 IR2E27A

QM01, QM10
 HT205072A0
 25B507 (D, E)

QM12
 HC10052050
 TD62504P

Q601, Q602
 HC10098050
 TA7629P

QMO4, QM05, QM19, QM28
 QT05, QS51 ~ QS53
 HT10001000
 PNP TRANSISTOR

QL01
 HT404711K0
 25D471 (K)

QL02
 HT403131E0
 25D313 (E)

QJ55, QK07
 HC10003090
 NJM4558D

QJ01
 HC10109050
 TA7405P

Q851, Q852
 HC38512090
 78M12

QS54
 HC10095050
 TD62554S

DM01 ~ DM03, DM05 ~ DM17
 DM20 ~ DM26, DT02 ~ DT07
 DJ01 ~ DJ03, DS53, DS54
 HD20015210
 ISS133

DT01, DS51, DS52
 HD10004020
 6* DIODE

DM18, DM19
 HD20016210
 ISR35-200


DX59 ~ DX62
 HI10062020
 LN217RPH (RED)

DX51 ~ DX58
 HI10063020
 LN317GPH (GRN)


DY01 ~ DY03
 DY29 ~ DY32, DY34
 HI10038320
 GL-9PG24 (GRN)

DY33
 HI10032320
 GL-9PR24 (RED)

DB01
 HD20027080




25D471 (K)




25C2784 (U)




25D313 (E) 25B507 (D or E)



NJM4558D




NJM78M12




NPN TRANSISTOR PNP TRANSISTOR

TOP VIEW




TD62504P

TOP VIEW




TA7629P

SIDE VIEW



TD62554S

SIDE VIEW



TA7405P

QUALIFIED PERSONNEL ONLY -
 NOT TO BE TREATED AS A NON-WARRANTY
 STATEMENT

5


resistor, ±5% 1/4W
 resistor, ±5% 1/6W


capacitor
 capacitor ~ N1000 50V








instantaneous ceramic capacitor,
 variable) 50V

C*** : ELECTROLY CAP. (⚡) / FILM CAP. (≡)
 (1) EA ----- 10, Electrolytic capacitor,
 one-way lead type, tolerance ±20%
 (2) DF15 --- 350, Plastic film capacitor,
 one-way type, Mylar, ±5% 50V

* In case of ordering the common parts, please establish the correct
 parts number of 10 figures by the procedure "ASSIGNMENT OF
 COMMON PARTS CODES"

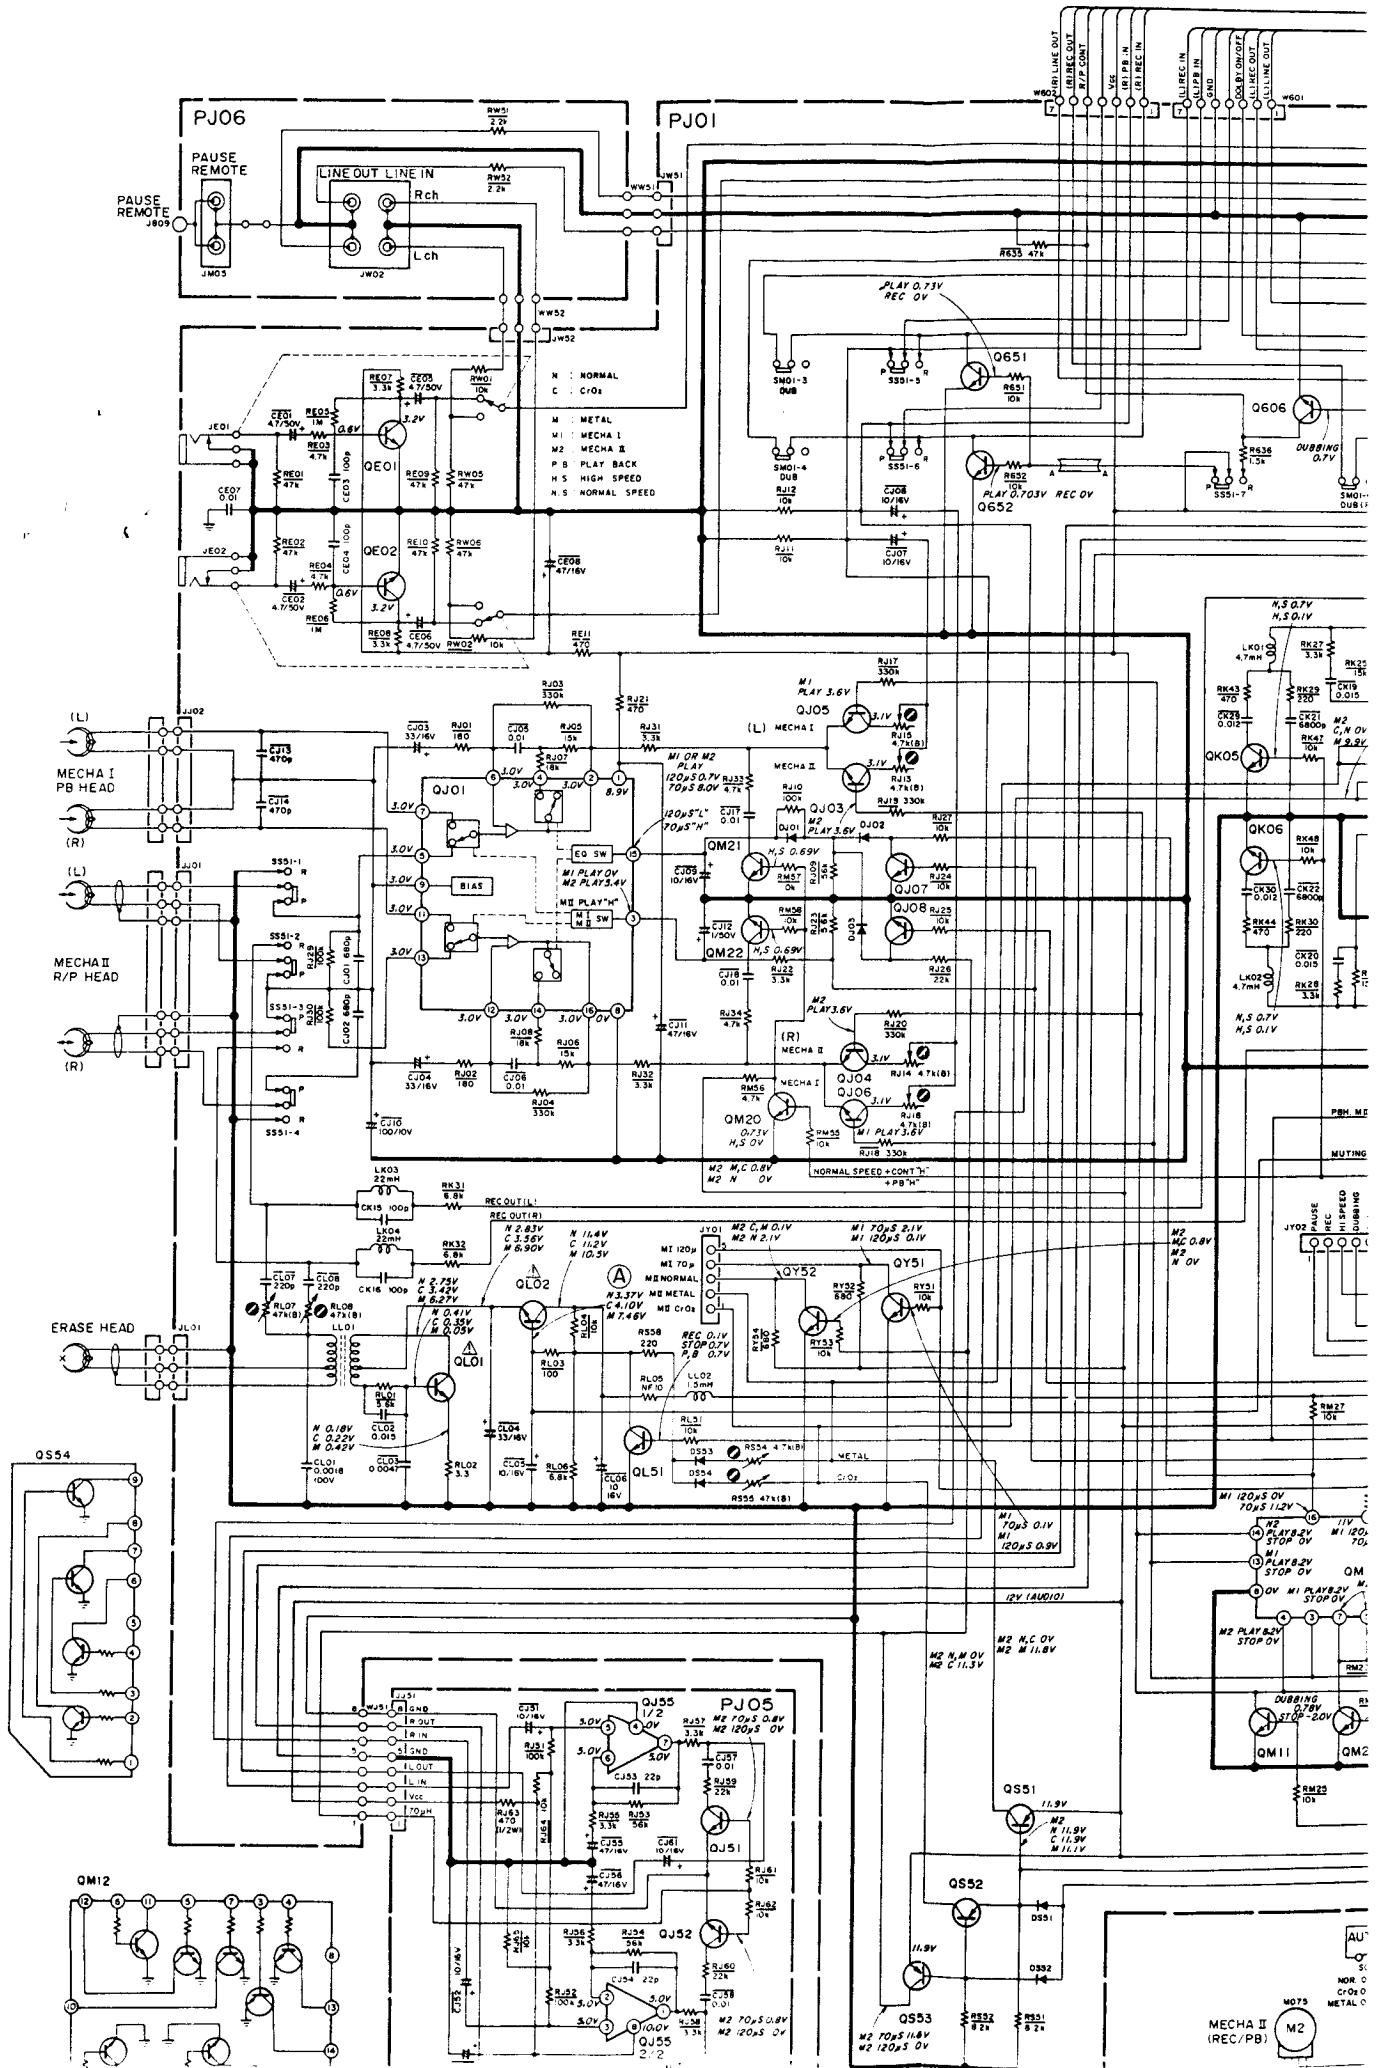

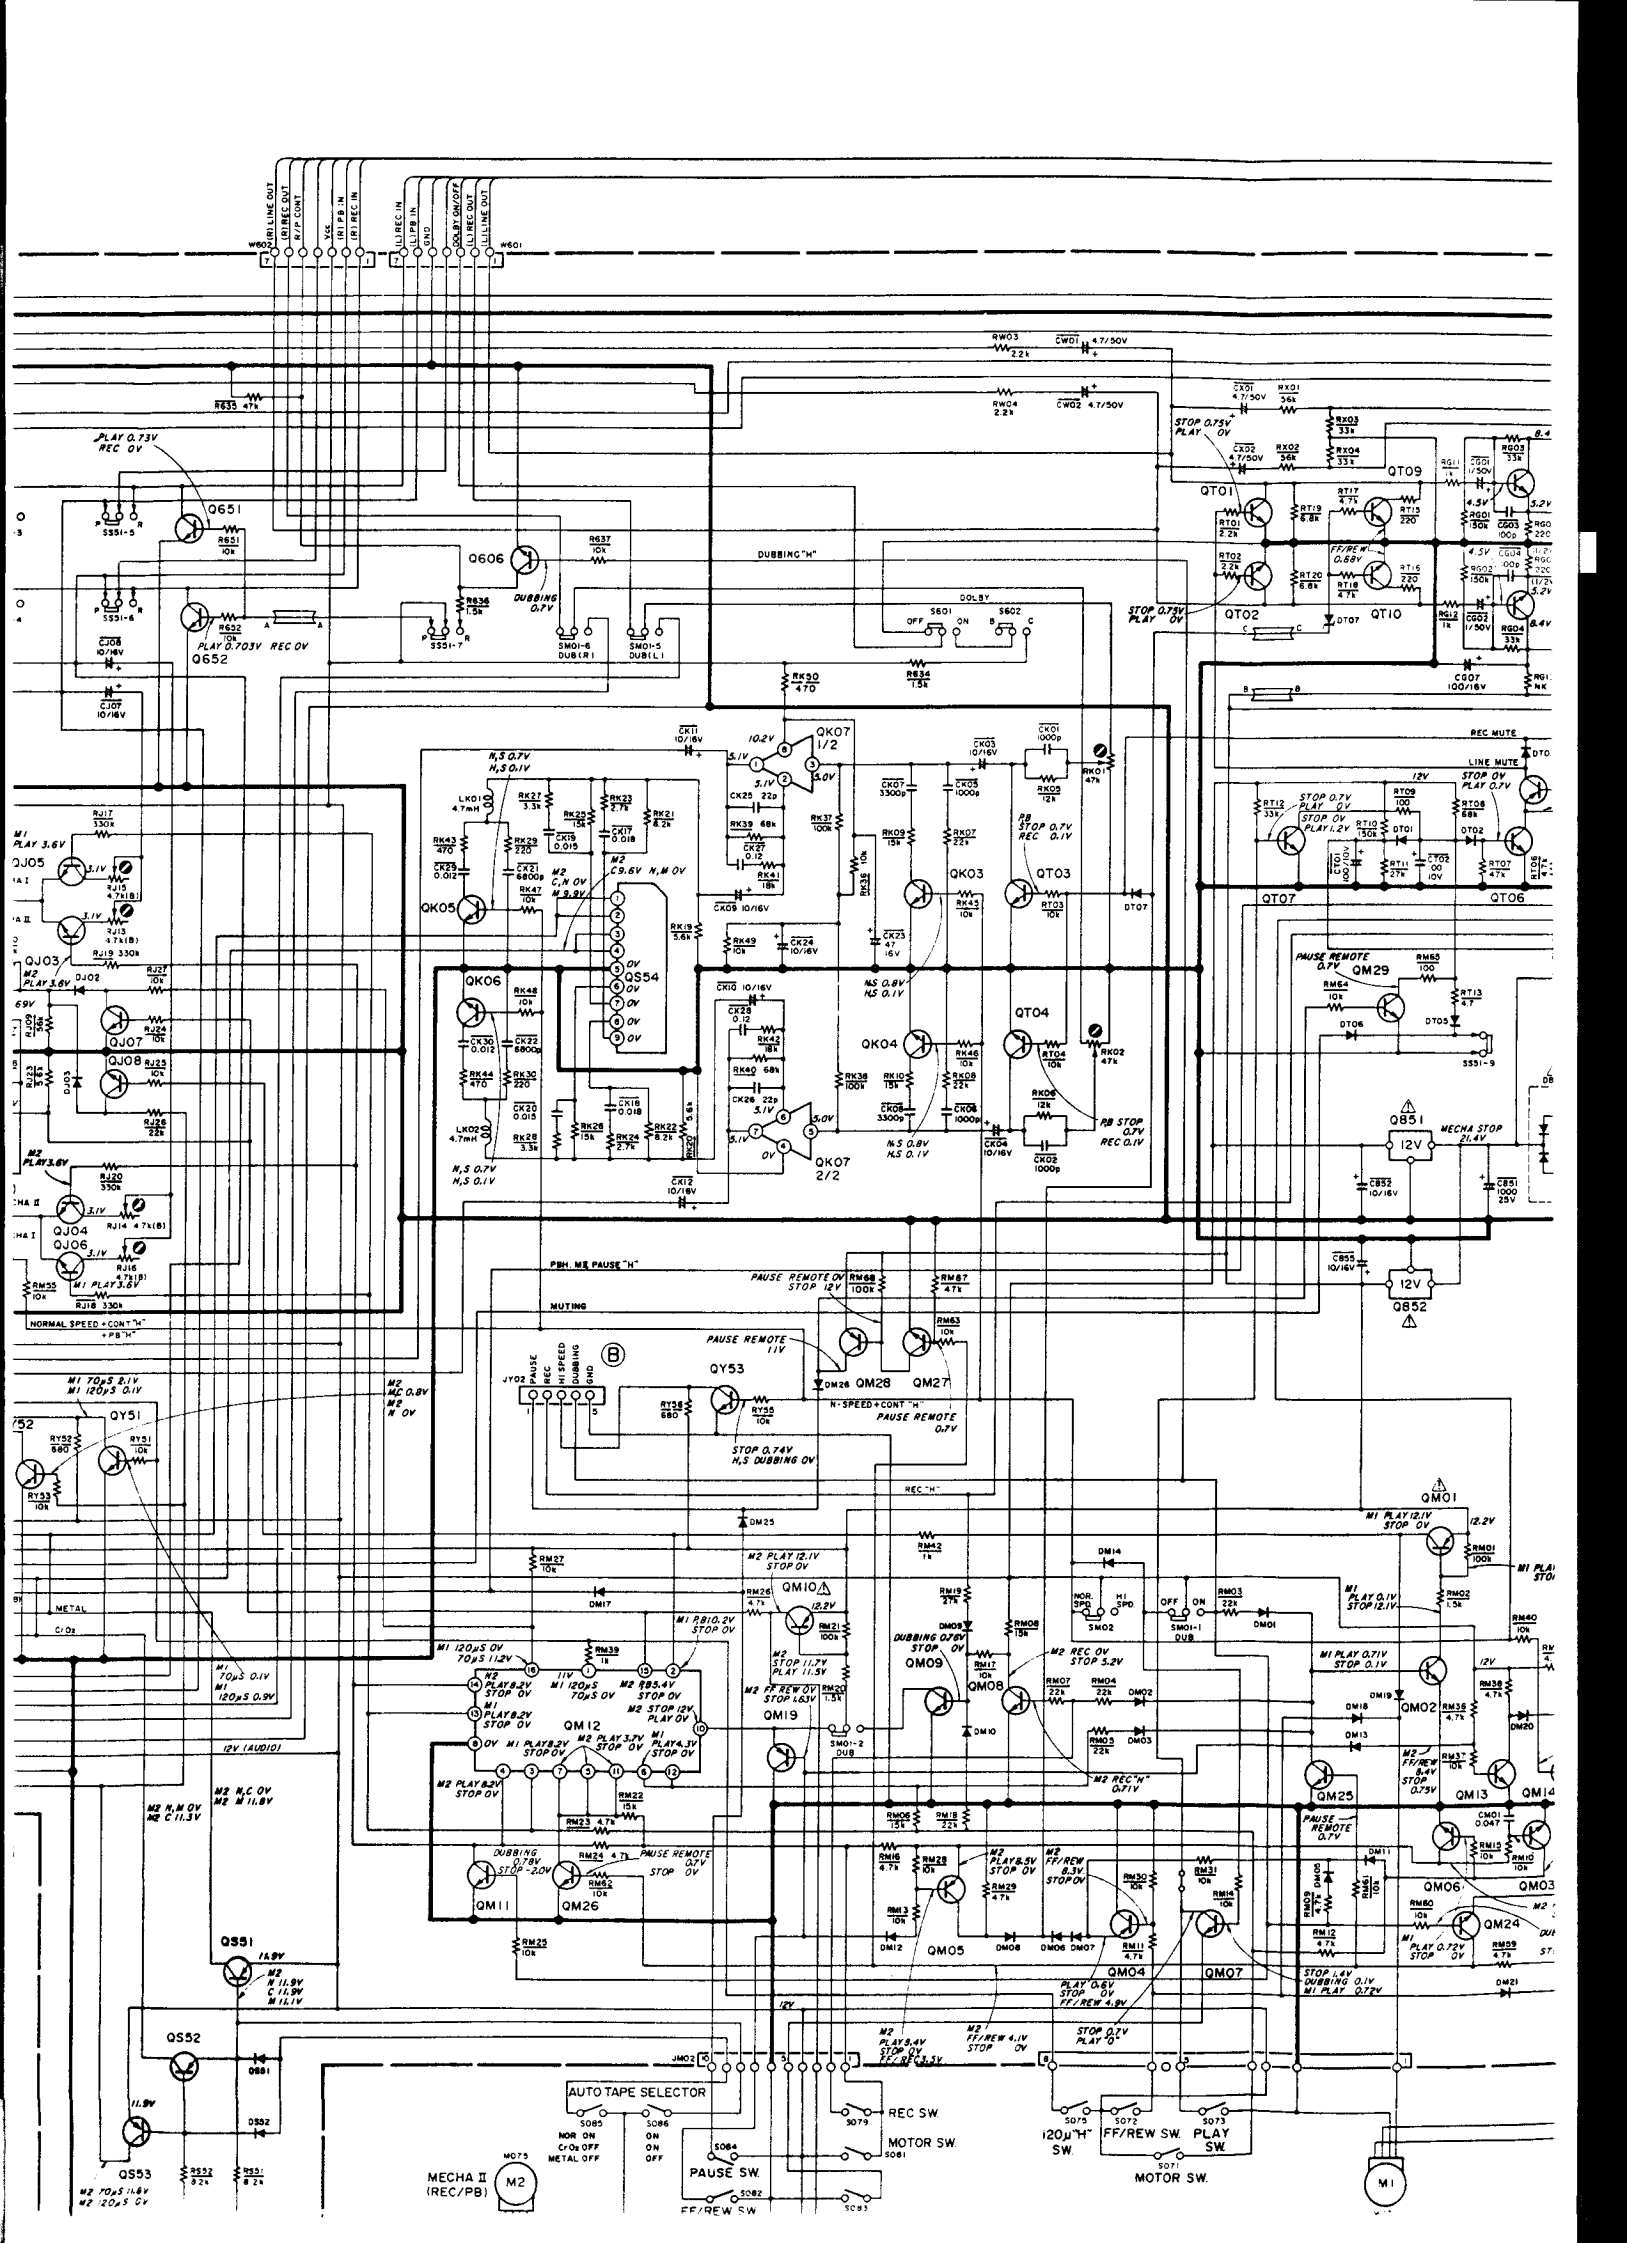

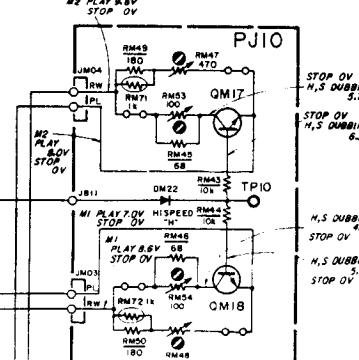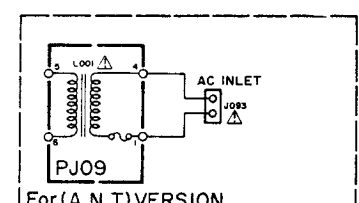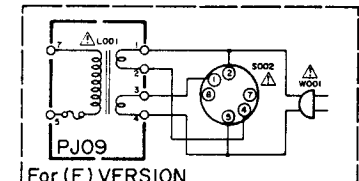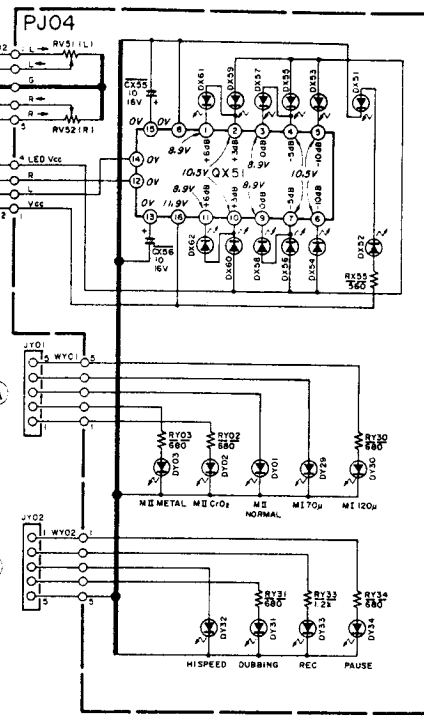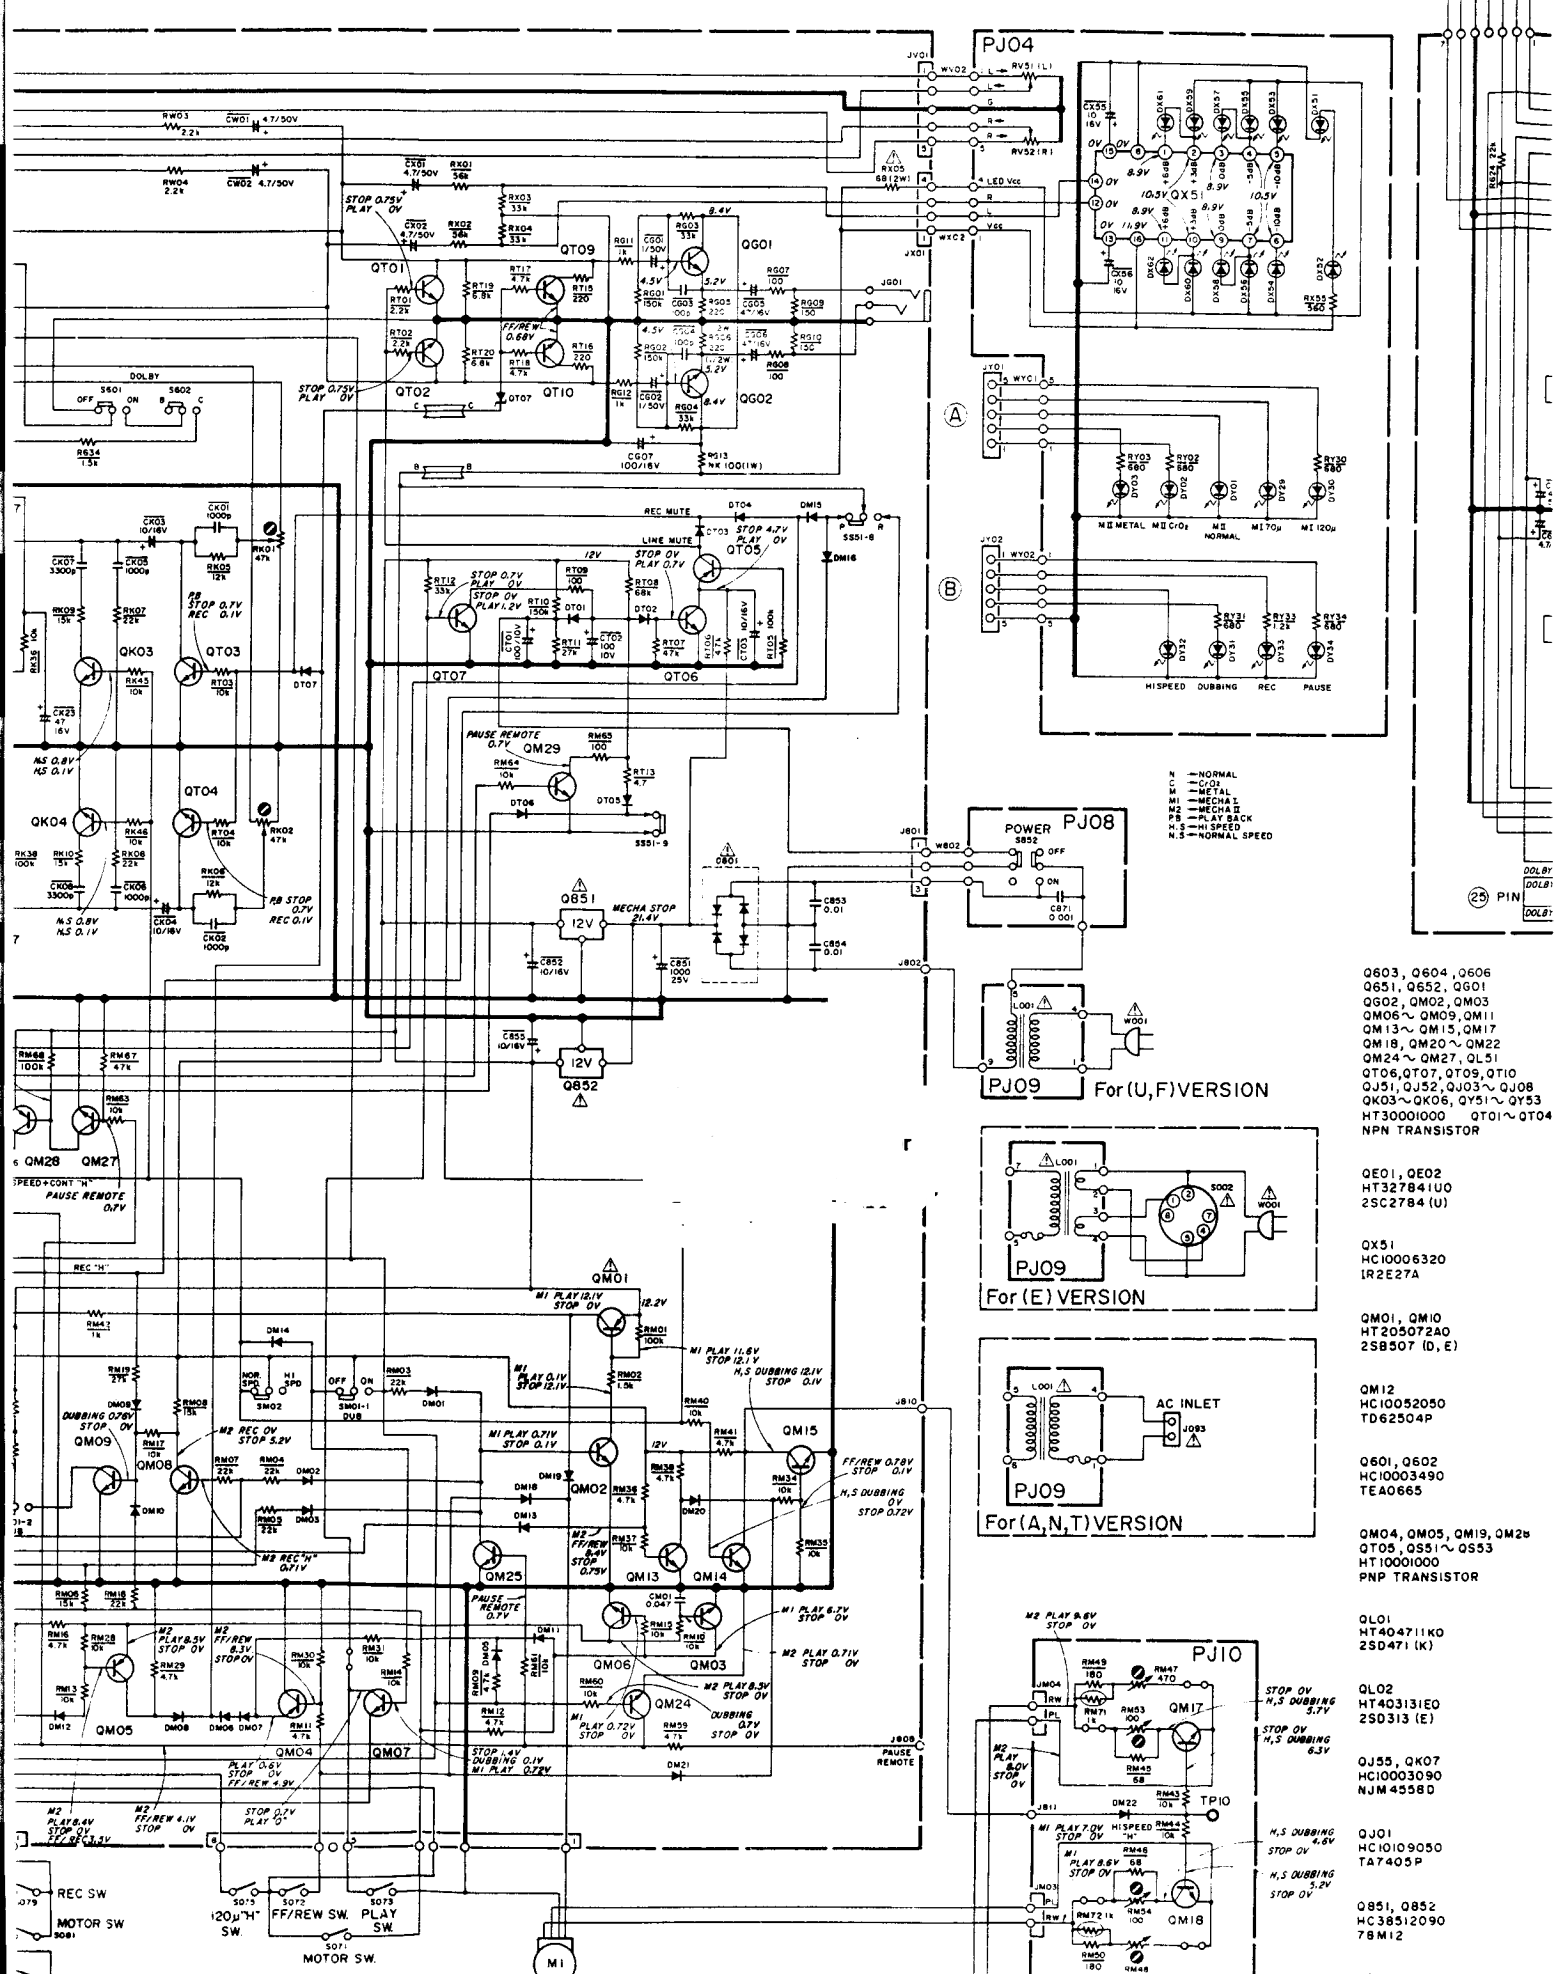

- N - NORMAL
- C - CDS
- M - METAL
- M2 - MECH II
- PB - PLAY BACK
- H.S - HI SPEED
- N.S - NORMAL SPEED

- Q603, Q604, Q606
- Q651, Q652, Q601
- Q602, QM02, QM03
- QM06 ~ QM09, QM11
- QM13 ~ QM15, QM17
- QM18, QM20 ~ QM22
- QM24 ~ QM27, Q151
- Q706, Q707, Q709, Q710
- QJ51, QJ52, QJ03 ~ QJ08
- QK03 ~ QK06, QY5 ~ QY53
- HT30001000 Q701 ~ Q704
- NPN TRANSISTOR

- QE01, QE02
- HT327841U0
- 25C2784 (U)

- QX51
- HC10006320
- IR2E27A

- QM01, QM10
- HT205072A0
- 25B507 (D, E)

- QM12
- HC10052050
- TD62504P

- Q601, Q602
- HC10003490
- TEA0665

- QM04, QM05, QM19, QM25
- Q705, Q851 ~ Q853
- HT10001000
- PNP TRANSISTOR

- QL01
- HT404711K0
- 25D471 (K)






- QL02
- HT4031310
- 25D313 (E)

- QJ55, QK07
- HC10003090
- NJM4558D


- QJ01
- HC10109050
- TA7403P


- Q851, Q852
- HC38512090
- 78M12

Model SD255

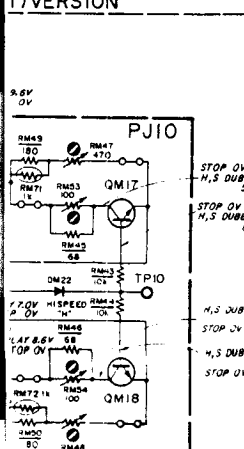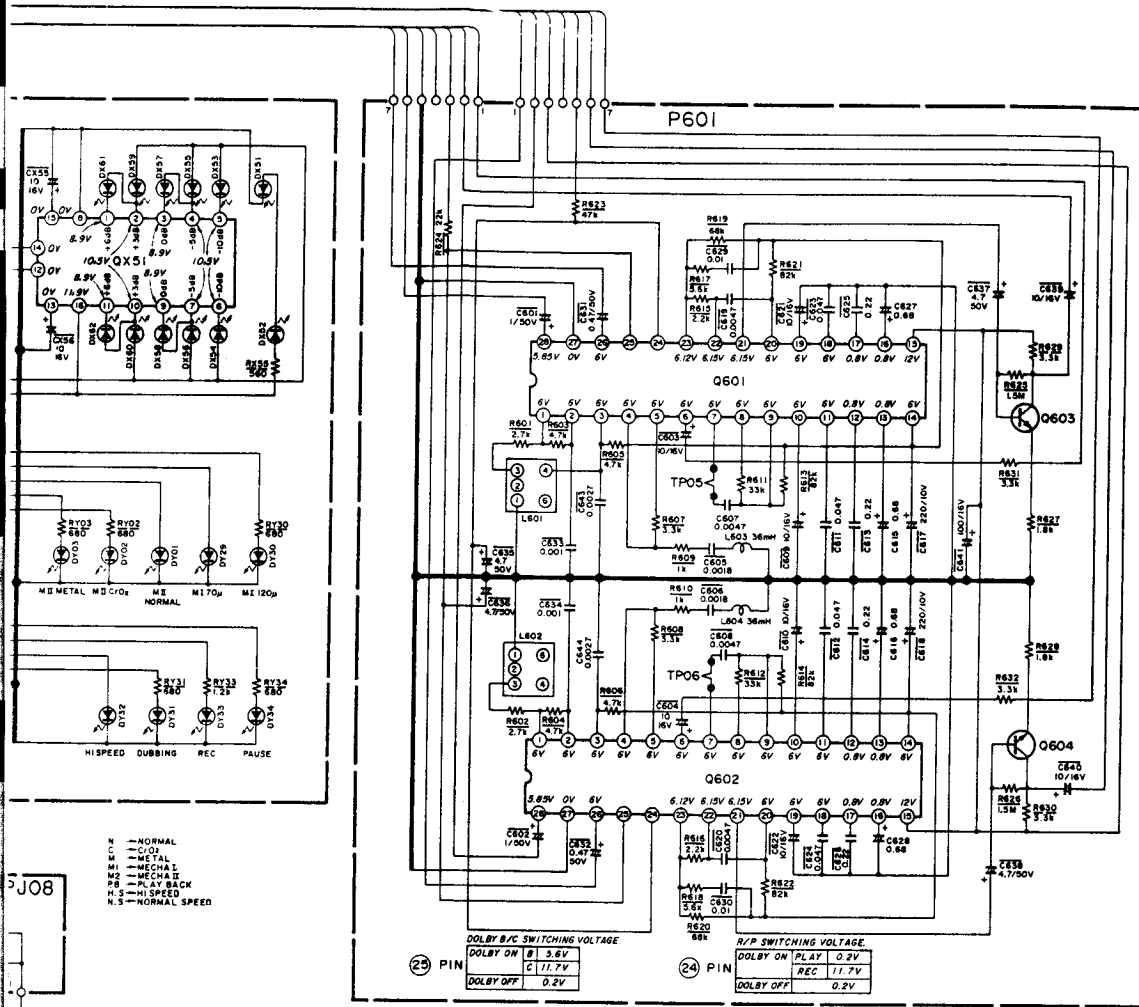

- Q603, Q604, Q606
Q651, Q652, Q601
QG02, QM02, QM03
QM06 ~ QM09, QM11
QM13 ~ QM15, QM17
QM18, QM20 ~ QM22
QM24 ~ QM27, QL51
QT06, QT07, QT09, QT10
QJ51, QJ52, QJ03 ~ QJ08
QK03 ~ QK06, QY51 ~ QY53
HT30001000 QT01 ~ QT04
NPN TRANSISTOR
- Q601, Q602
HT327841U0
2SC2784 (U)
- QX51
HC10006320
IR2E27A
- QM01, QM10
HT205072A0
2SB507 (D, E)
- QM12
HC10052050
TD62504F
- Q601, Q602
HC10003490
TEA0665
- QM04, QM05, QM19, QM26
QT05, QS51 ~ QS53
HT10001000
PNP TRANSISTOR
- QL01
HT404711KO
2SD471 (K)
- QL02
HT403131EO
2SD313 (E)
- QJ55, QK07
HC1003090
NJM4558D
- QJ01
HC10109050
TA7405P
- Q851, Q852
HC38512090
78M12
- Q554
- DM01 ~ DM03, DM05 ~ DM17
DM20 ~ DM26, DT02 ~ DT07
DJ01 ~ DJ03, DS53, DS54
HD20015210
ISS133
- DT01, DS51, DS52
HD10004020
6e DIODE
- DM18, DM19
HD20016210
ISR35-200
- DX59 ~ DX62
HI10062020
LN217RPH (RED)
- DX51 ~ DX58
HI10063020
LN317GPH (GRN)
- DY01 ~ DY03
DY29 ~ DY32, DY34
HI10058320
GL-9PR24 (GRN)
- DY33
HI10032320
GL-9PR24 (RED)
- D801
HD20027080

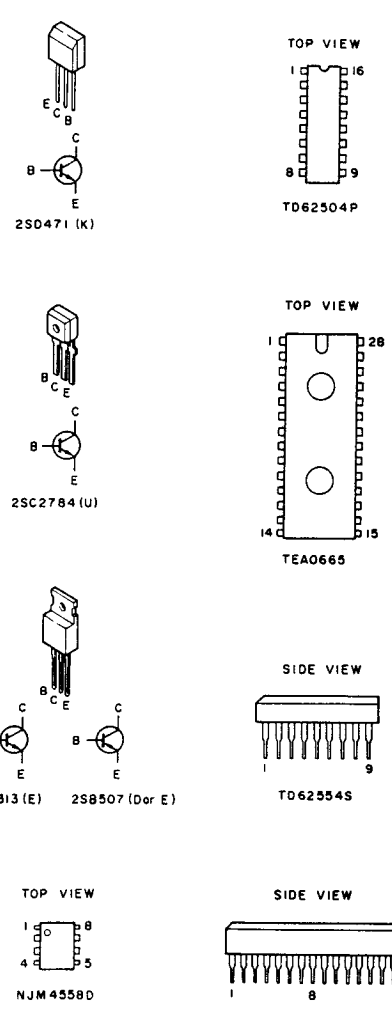


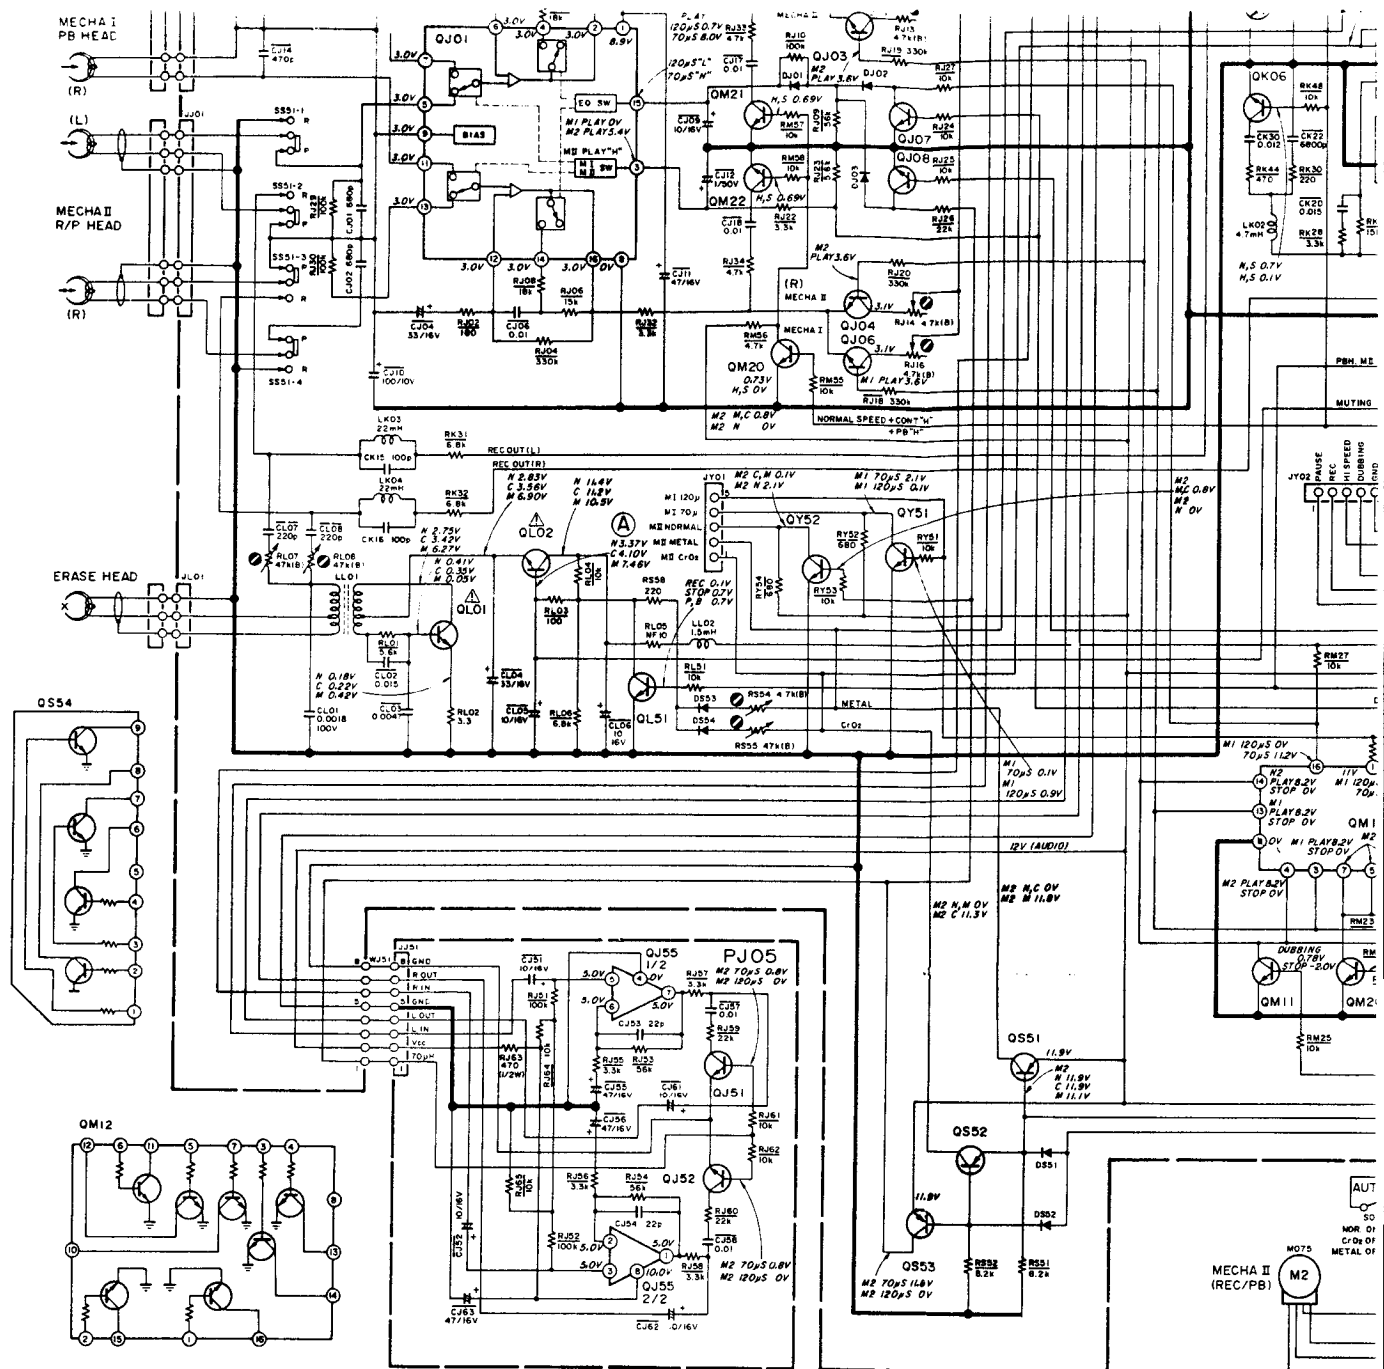

L601	LS10440010	M.P.X. COIL	S852	SP02010960	PUSH SWITCH POWER
L602	LS10440010	M.P.X. COIL	RK01	RA04730600	TRIMMING 47K Ω
S601	SP02010630	PUSH SWITCH DOLBY ON/OFF	RK02	RA04730600	TRIMMING 47K Ω
S602	SP02010630	PUSH SWITCH DOLBY B/C	SS51	SS09020180	SLIDE SWITCH REC/PLAY
RM47	RA01010600	TRIMMING 100 Ω	RS54	RA04720600	TRIMMING 4.7K Ω
RM48	RA01010600	TRIMMING 100 Ω	RS55	RA04730600	TRIMMING 47K Ω
RM53	RA01010600	TRIMMING 100 Ω	RV51	RX05030240	VARIABLE 50K Ω REC LEVEL (L)
RM54	RA01010600	TRIMMING 100 Ω	RV52	RX05030240	VARIABLE 50K Ω REC LEVEL (R)
SM01	SP06010140	PUSH SWITCH SYNCHRO START			
SM02	SP02010630	PUSH SWITCH SPEED/DUBBING	024B	260T052010	COUNTER
LL01	TC10140300	OSC TRANSF. 105kHz	032F	316Y264030	BELT COUNTER
RL07	RA04730600	TRIMMING 47K Ω	H071	LH42821050	HEAD REC/PLAY
RL08	RA04730600	TRIMMING 47K Ω	H072	LH39000030	HEAD ERASE
RJ13	RA04720600	TRIMMING 4.7K Ω	M071	MM11205100	D.C. MOTOR
RJ14	RA04720600	TRIMMING 4.7K Ω	S071	SM01011190	MINI SWITCH MOTOR
RJ15	RA04720600	TRIMMING 4.7K Ω	S072	SM01011160	MINI SWITCH FF/REW
RJ16	RA04720600	TRIMMING 4.7K Ω	S073	SM01011190	MINI SWITCH PLAY MUTE
L001	TS14820180	POWER TRANSF. [N, A]	S075	SM01011300	MINI SWITCH SELECTOR
L001	TS14820190	POWER TRANSF. [E, P]			
L001	TS14820170	POWER TRANSF. [U]			

NOTE ON SAFETY :

Symbol Δ Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol Δ . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

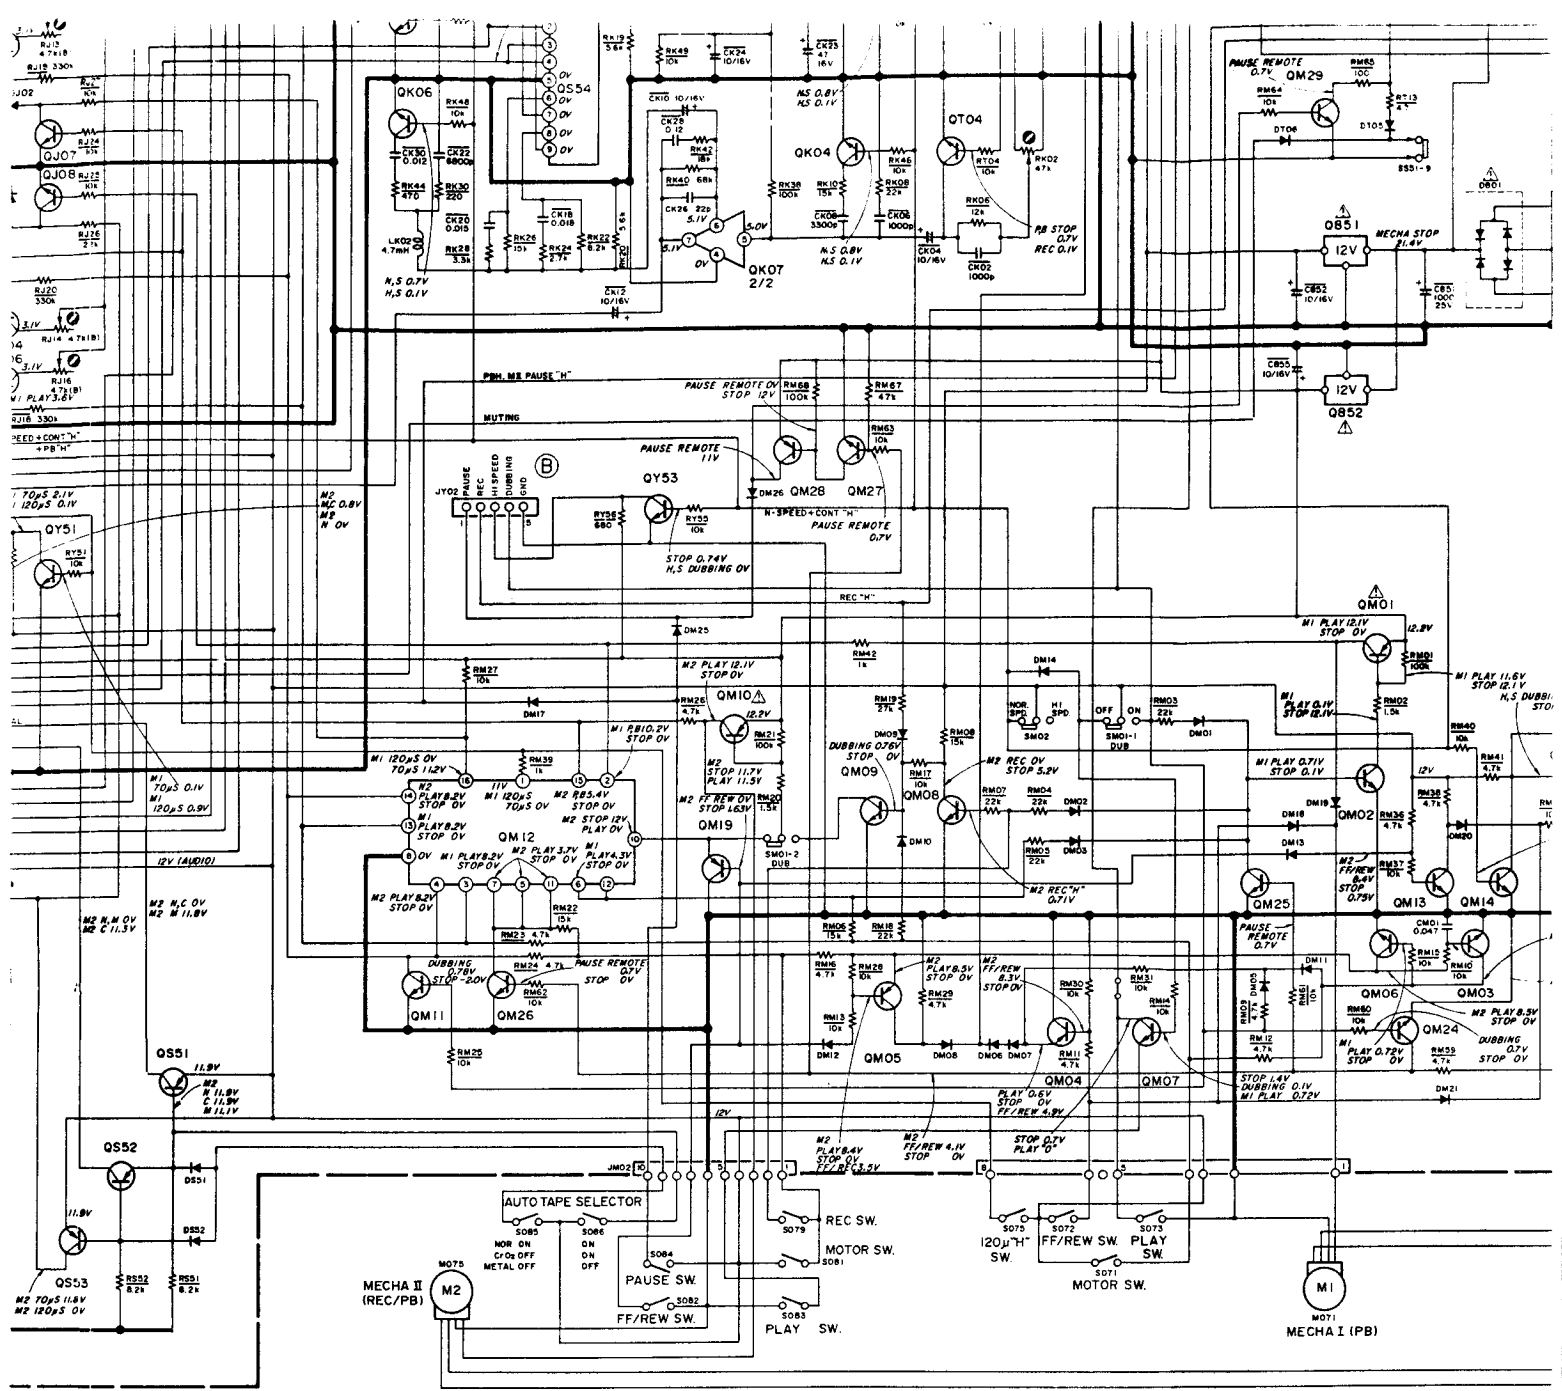

10960	PUSH SWITCH POWER	055M	252T354110	LEVER PINCH ROLLER	
730600	TRIMMING 47KΩ	106M	161T117210	SPINDLE TAKE UP	
730600	TRIMMING 47KΩ	110M	161T117200	SPINDLE SUPPLY	
20180	SLIDE SWITCH REC/PLAY	156M	252T264110	BELT AUTO STOP	
720600	TRIMMING 4.7KΩ	230M	185T264200	BELT MAIN	
730600	TRIMMING 47KΩ	231M	185T264210	BELT F/R	
030240	VARIABLE 50KΩ REC LEVEL (L)	H075	LH42821050	HEAD REC/PLAY	
030240	VARIABLE 50KΩ REC LEVEL (R)	H076	LH31000580	HEAD ERASE	
52010	COUNTER	M075	MM11205100	D.C. MOTOR	
264030	BELT COUNTER	S079	SM01011020	MINI SWITCH REC	
		S081	SM01011190	MINI SWITCH MOTOR	
821050	HEAD REC/PLAY	S082	SM01011160	MINI SWITCH FF/REW	
000030	HEAD ERASE	S083	SM01011190	MINI SWITCH PLAY MUTE	
205100	D.C. MOTOR	S084	SM01011190	MINI SWITCH PAUSE	
011190	MINI SWITCH MOTOR	S085	SM01011300	MINI SWITCH SELECTOR CrO ₂	
011160	MINI SWITCH FF/REW	S086	SM01011300	MINI SWITCH SELECTOR METAL	
011190	MINI SWITCH PLAY MUTE				
011300	MINI SWITCH SELECTOR	555M	252T354110	LEVER PINCH ARM ASS'Y.	
		606M	161T117210	SPINDLE REEL TAKE UP	
		610M	161T117200	SPINDLE REEL SUPPLY	
		656M	252T264110	BELT AUTO STOP	
		730M	185T264200	BELT MAIN	
		731M	185T264210	BELT F/R	


"SERVICE INFORMATION"
ANY MISADJUSTMENT OR
REPAIR BY ANY MARA

Kin

RESISTOR

- R*** (1) GD05 --- 140,
- R*** (2) GD05 --- 160,
- C*** : CERAMIC CAP (1) DD1 ---- 370,
- C*** : CERAMIC CAP (1) DK16 ---- 300,

Components and wiring are subject to change for modification without notice.

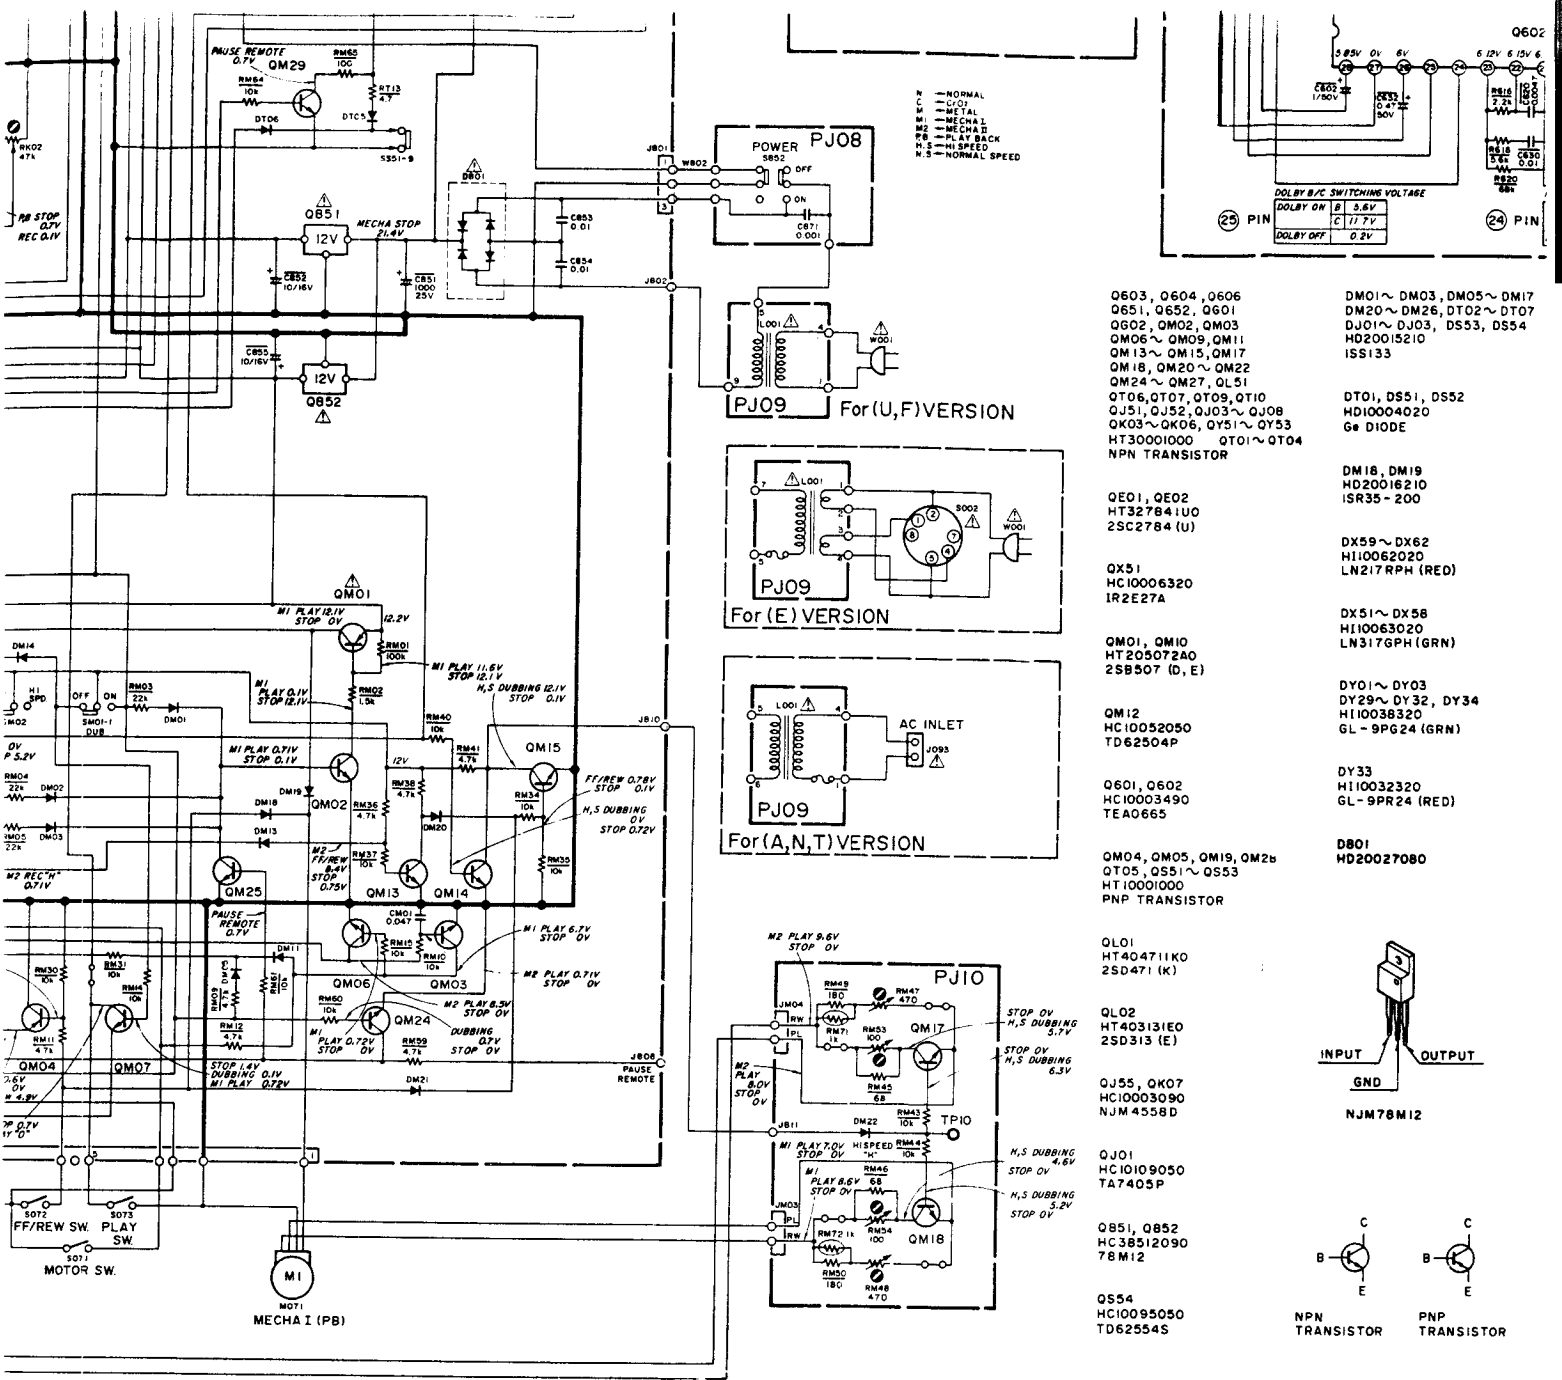

"SERVICE INFORMATION IS FOR USE BY QUALIFIED PERSONNEL ONLY - ANY MISADJUSTMENT OR MISALIGNMENT MAY BE TREATED AS A NON-WARRANTY REPAIR BY ANY MARANTZ SERVICE CENTRE -"

Kind of Common Parts





- RESISTOR**
- R*** (1) GD05 --- 140, Carbon film fixed resistor, ±5% 1/4W
 - R*** (2) GD05 --- 160, Carbon film fixed resistor, ±5% 1/6W
- C*** : CERAMIC CAP.**
- (1) DD1 ---- 370, Ceramic condenser, disc type (titan condenser) Temp. coeff. P350 ~ N1000 50V
 - (1) DK16 --- 300, High dielectric constant ceramic condenser, disc type (titan variable) Temp. chara. 2B4 50V

- C*** : ELECTROLYTIC CAP. (E) / FILM**
- (1) EA ----- 10, Electrolytic cond. one-way lead type
 - (2) DF15 --- 350, Plastic film cond. one-way type, My

* In case of ordering the common parts, please parts number of 10 figures by the procedure **COMMON PARTS CODES"**

Mo2
METAL






do not change for modification without notice.

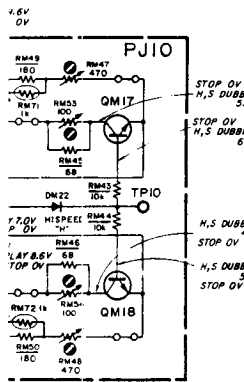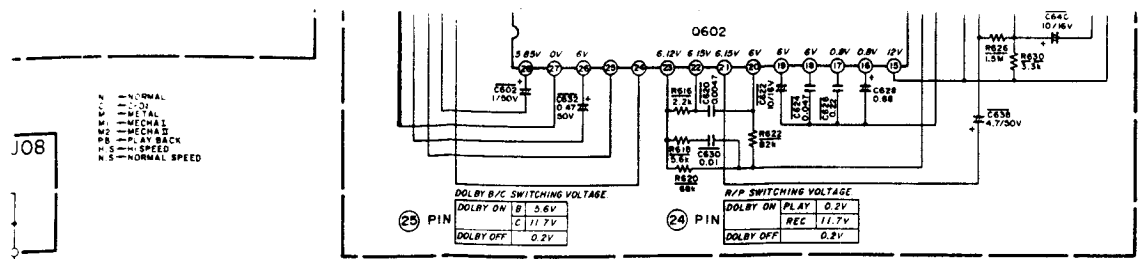

- Q603, Q604, Q606
Q651, Q652, Q601
Q602, QM02, QM03
QM05 ~ QM09, QM11
QM13 ~ QM15, QM17
QM18, QM20 ~ QM22
QM24 ~ QM27, QL51
QT06, QT07, QT09, QT10
QJ51, QJ52, QJ03 ~ QJ08
QK03 ~ QK06, QY51 ~ QY53
HT30001000, QT01 ~ QT04
NPN TRANSISTOR
- QE01, QE02
HT32784 IUO
2SC2784 (U)
- QX51
HC10006320
IR2E27A
- QM01, QM10
HT205072A0
2SB507 (D, E)
- QM12
HC10052050
TD62504P
- Q601, Q602
HC10003490
TEA0665
- QM04, QM05, QM19, QM26
QT05, Q551 ~ Q553
HT10001000
PNP TRANSISTOR

- DM01 ~ DM03, DM05 ~ DM17
DM20 ~ DM26, DT02 ~ DT07
DJ01 ~ DJ03, DS53, DS54
HD20015210
ISS133
- DT01, DS51, DS52
HD10004020
G* DIODE
- DM18, DM19
HD20016210
ISR35-200
- DX59 ~ DX62
H110062020
LN217RPH (RED)
- DX51 ~ DX58
H110063020
LN317GPH (GRN)
- DY01 ~ DY03
DY29 ~ DY32, DY34
H110036320
GL-9PG24 (GRN)
- DY33
H110032320
GL-9PR24 (RED)
- D801
HD20027080

- QLO1
HT404711K0
2SD471 (K)
- QLO2
HT403131E0
2SD313 (E)
- QJ55, QK07
HC10003090
NJM4558D
- QJ01
HC10109050
TA7405P
- Q851, Q852
HC38512090
78M12
- Q554
HC10095050
TD62554S

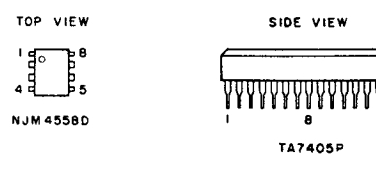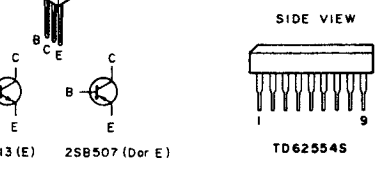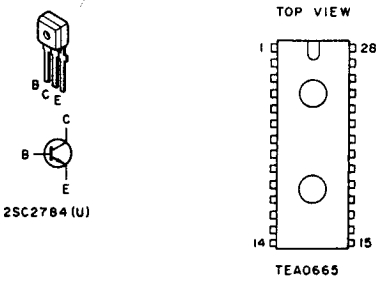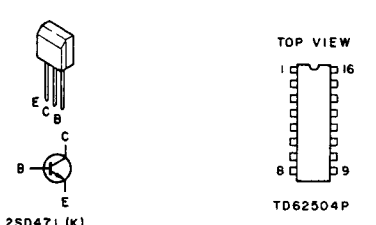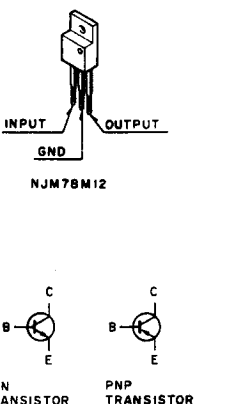

IFIED PERSONNEL ONLY –
BE TREATED AS A NON-WARRANTY

RTV servis Horvat
Kešinci, 31402 Semeljci
031-856-139
031-856-637
098-788-319
rtv-servis-horvat@os.tel.hr
Croatia

C*** : ELECTROLY CAP. (⏏) / FILM CAP. (⏏)
(1) EA - - - - - 10, Electrolytic condenser,
one-way lead type, tolerance $\pm 20\%$
(2) DF15 - - - 350, Plastic film condenser,
one-way type, Mylar, $\pm 5\%$ 50V

10 50V
amic condenser,
*In case of ordering the common parts, please establish the correct parts number of 10 figures by the procedure "ASSIGNMENT OF COMMON PARTS CODES"