
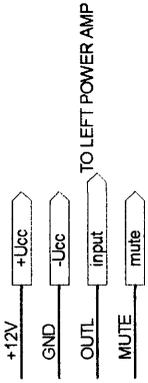


Napięcia progowe LED:

- OFF = 10.0V
- LO = 11.8V
- OK = 12.9V
- CHR on = 14.0V




Title		Revision	
1	Size	Number	Sheet of 1
2	A4		1
3	Date:	18-Jul-2003	
4	File:	F:\DOKUMENTACJA\Protal\PSS200\IPSS200A5B-01.ddb	

PSS200ASB-01

LDM Electronic


KZ-28

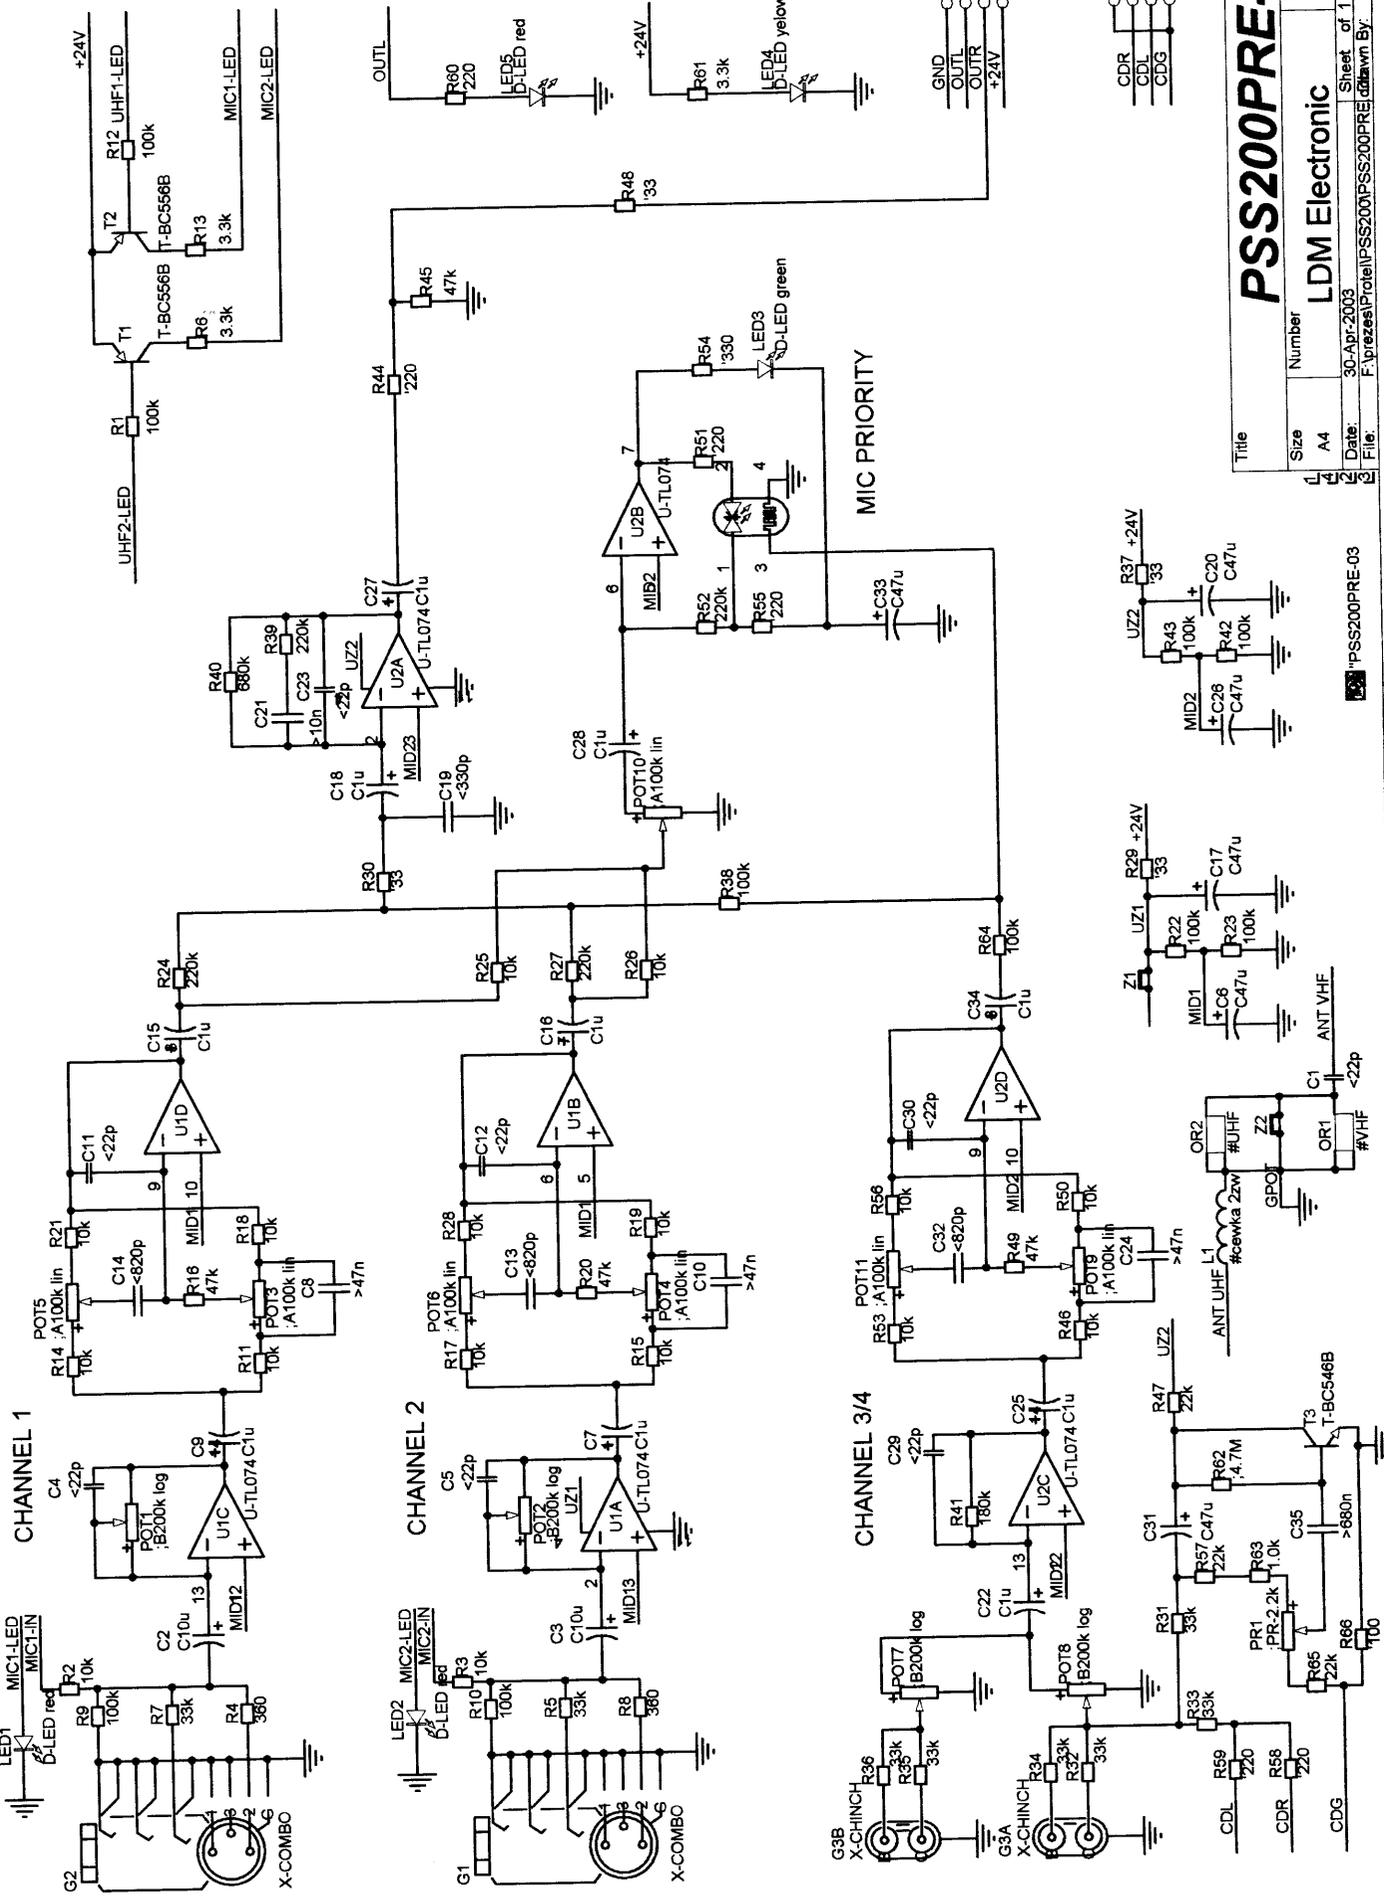

Title		PSS200PRE-03	
Size	Number	Revision	KZ16/04 30-04-2003
A4		Date:	30-Apr-2003
1	2	File:	F:\prezes\Proteln\PSS200PSS200PRE.dtbwn By:
2	3	Sheet of 1	1

Sheet of 1
1 of 1

PSS200PRE-03

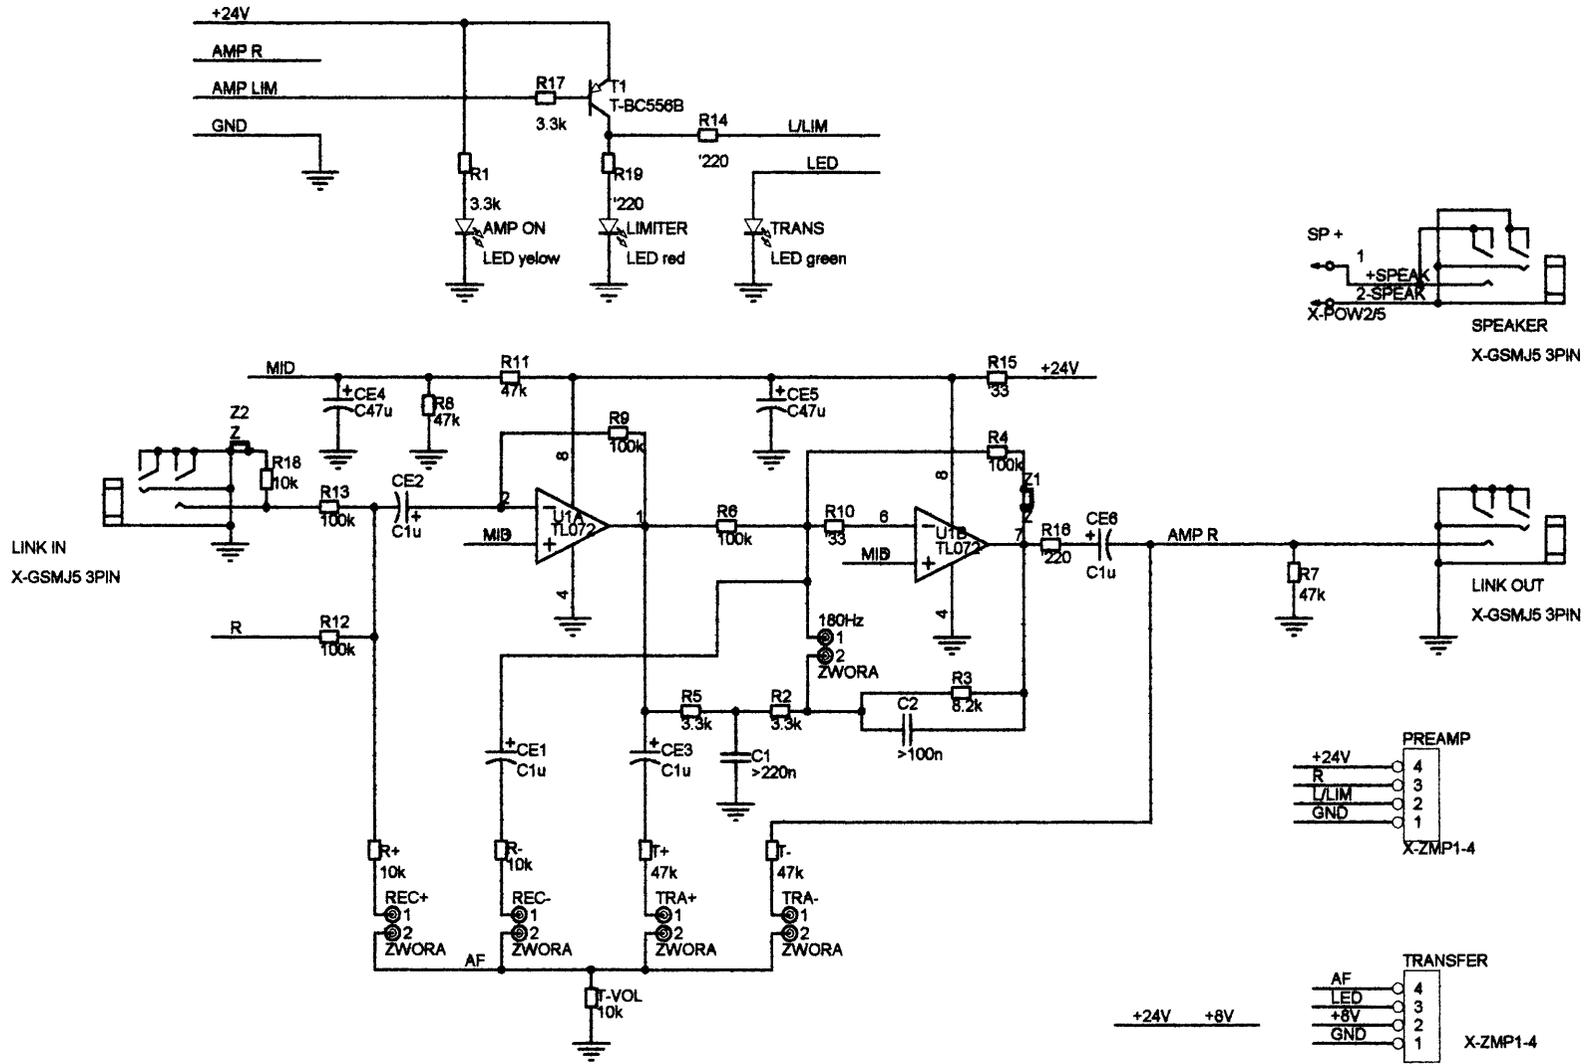

MONACOR[®]
INTERNATIONAL

TXA-600

TXA-600_1.pdf 16.05.03 / 26.08.05 Sheet 1/1

