

**NAD SERVICE
MANUAL**


4130
AM/FM STEREO TUNER

CONTENTS

| | |
|---|-------------|
| REAR PANEL CONNECTIONS..... | PAGE 3 |
| SPECIFICATIONS, (NAD 4130 STEREO TUNER) | PAGE 4 |
| ALIGNMENT METHOD | PAGE 5-7 |
| ADJUSTMENT POINTS | PAGE 8 |
| PCB LAYOUT AND WIRING DIAGRAM | PAGE 9, 10 |
| SCHEMATIC DIAGRAM..... | PAGE 11, 12 |
| TUNER, DISPLAY PCB COMPONENT LOCATION..... | PAGE 13, 14 |
| 4130 PARTS LIST..... | PAGE 15-19 |
| EXPLODED VIEW..... | PAGE 20 |
| PACKING DIAGRAM | PAGE 21 |


REAR PANEL

1. Antenna terminals.
2. AM Rod Antenna.
3. Audio Output.
4. AC line cord.

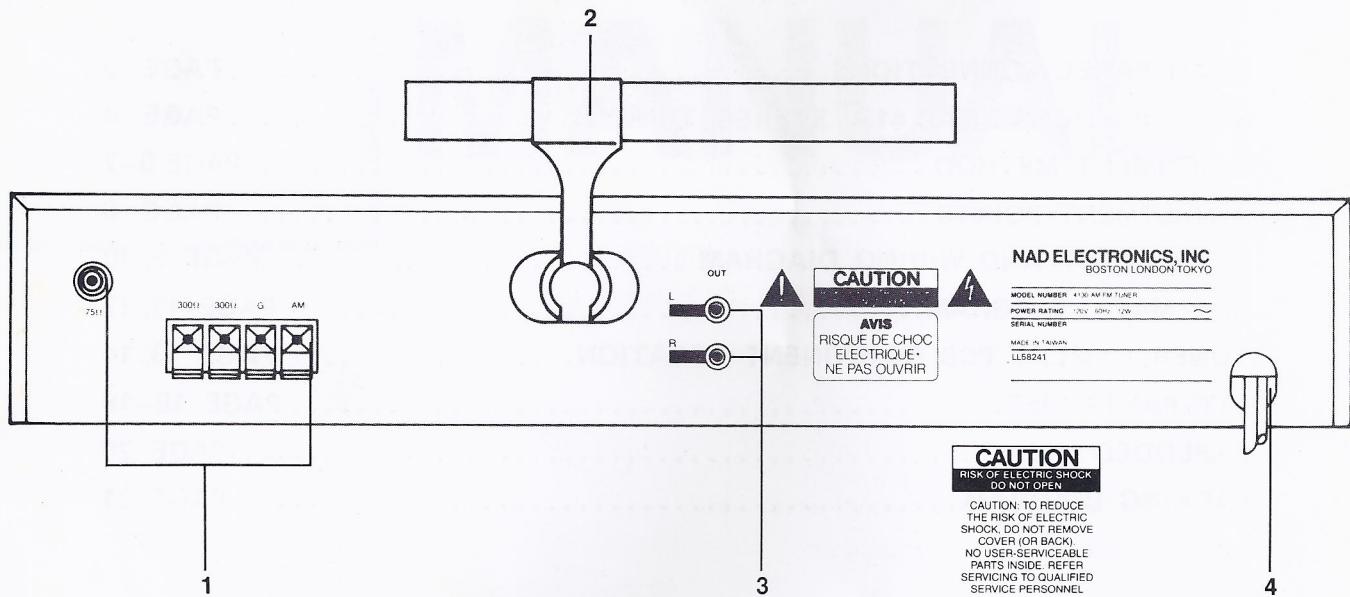

FRONT PANEL

1. Power.
2. Mono
3. FM NR Defeat.
4. Tuning Display.
5. FM Stereo Indicator.
6. Tuning Pre-sets.
7. Enter.
8. AM/FM.
9. Up/Down Tuning.
10. Search Mode (FM only).

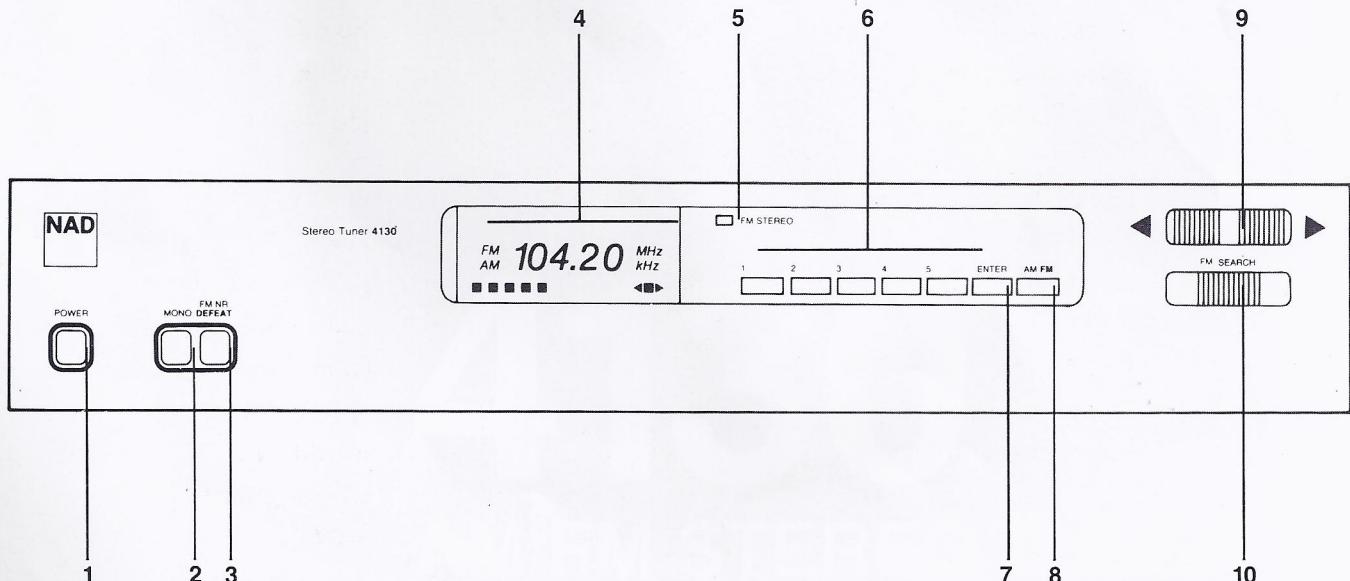

SPECIFICATIONS, NAD 4130 STEREO TUNER

Input Sensitivity

| | |
|------------------------------------|--|
| Mono, -30 dB THD +N | 10.3 dBf (1.8 μ V/300 Ω) |
| Mono, 50 dB S/N | 14.2 dBf (2.8 μ V) |
| Stereo, 50 dB S/N | 34.2 dBf (28 μ V) |
| Stereo, 60 dB S/N | 44.3 dBf (90 μ V) |
| Capture ratio at 25, 45 and 65 dBf | < 1.5 dB |
| AM rejection | > 62 dB |
| Selectivity | Altarnate channel Adjecent channel |
| | 70 dB 6dB |
| Image rejection | 75 dB |
| R.F. Intermodulation | 65 dB |
| I.F. rejection | 75 dB |
| SCA rejection | 70 dB |
| Subcarriel suppression 919+38 kHz) | 60 dB |
| THD at 100% modulation | 1 KHz 100Hz-6KHz |
| | Mono 0.09% 0.2% Stereo 0.09% 0.3% |
| Signal-to-noise ratio | Mono 82 dB |
| A-weighted, 65 dBf | Stereo 75 dB (typ. 80 dB at 75 dBf) |
| Frequency response, 30-15 kHz | ± 0.5dB |
| Stereo seperation (Dyn Sep off) | 1 kHz 50 dB 30Hz-10kHz 40dB |

AM Tuner Section

| | |
|--------------------|-------------------|
| Usable sensitivity | 300 μ V/meter |
| Selectivity | 35 dB |
| Image rejection | 50 dB |
| I.F. rejection | 50 dB |

Physical Specifications

| | |
|-------------------------------------|--|
| Dimensions (width x height x depth) | 42 x 10.8 x 38 cm. 16.5 x 4.25 x 15 in. |
| Net Weight | 4.25 Kg/9 lb, 6 oz. |
| Shipping weight | 4.7 Kg/10 lb, 5 oz. |
| Power consumption | 50/60 Hz at 120. 220 or 240 VAC 15W |

ALIGNMENT METHOD

FM ALIGNMENTS

NECESSARY INSTRUMENTATION

FM GENERATOR (less than 0.05% THD)

STEREO GENERATOR (less than 0.05% THD, more than 50 dB separation at 1 kHz).

AUDIO GENERATOR (not necessary if FM generator has built in sweep; i.e. SOUND TECHNOLOGY ST 1000A and ST 1020A)

2 AC VTVM's (or one with left/right channel switch)

THD ANALYZER (resolution better than 0.1%)

OSCILLOSCOPE (5mV or better sensitivity, X input capability)

FREQUENCY COUNTER

VOM or DMM (high impedance, must read in mV)

DIODE DETECTOR PROBE

COPPER / FERRITE INDUCTOR

IMPORTANT While all FM generator output levels hereafter are referred to the 300 ohm input, 75 ohm input can be used, but be aware of possible equipment groundloops and divide the RF output level by 2.
Before alignments commence set input selector to tuner and release tape, mono and dynsep defeat switches (out)

ALIGNMENT OF FRONTEND should only be necessary after repair to frontend or crystal oscillator circuits (pin 2 and 3 on IC7)

A TUNING VOLTAGE (OSCILLATOR)

It is essential to check tuning voltage before aligning the rest of the frontend.

1. Connect DMM between shield and pin 6 on frontend.
2. Tune to 108 MHz and adjust L 707 if voltage is incorrect.
SPECIFICATION $20.5V \pm 0.5V$
3. Tune to 87.5 MHz and read voltage, repeat step 2 and 3 if incorrect.
SPECIFICATION $3V \pm 0.5V$

B. RF ADJUSTMENT (TRACKING)

1. Connect RF generator to antenna input and detectorprobe to pin 1, IC 2 (IF DETECTOR). with ground to detectorshield. Adjust sensitivity of oscilloscope to maximum (5mV or better) and modulate FM generator sweep ± 300 kHz or more WITH modulating (sweep) signal connected to X-imput of oscilloscope.
2. Set tuner to 90 MHz, enter into preset 1, and tune generator so that curve appears on oscilloscope. Turn down RF input level so that curve covers approximately 1/2 of oscilloscope display.
3. Check alignments of L 702 – L 704 – L705 by inserting copper/ferrite inductor close to them while watching curve on oscilloscope. Curve should decrease in height with either ferrite (same as increasing inductance, i.e. more core) or with copper (same as decreasing inductance, i.e. extend size of coil). If curve increases in size more than 10%, adjust only the coil which reacts incorrectly. Adjust coils by gently extend or contract the aircoil with a non-metallic and non-static tool (i.e. plastic knit-pin or a wooden stick). Be careful not to deform coil.
4. Set tuner to 105MHz, enter into preset 2, and tune generator so that curve appears on oscilloscope.
5. Check L 702 – L 704 – L 705 again with the ferrite/copper inductor. Curve should not increase more than 10% on any of the coils.
6. Repeat step 2 + 3 + 4 + 5 if curve height is outside of tolerances, if necessary distribute the error between 90 and 105 MHz. Check tuning voltage again if tolerances not possible to achieve.

C. IF ADJUSTMENT

1. Set tuner to approximately 98 MHz (the tuner must be tuned to an unoccupied frequency) enter into preset 3, and tune FM generator to display a curve on the oscilloscope.
2. Adjust L 709 (IFT tuner frontend) to maximum and symmetrical curve on the display, using as little input signal as possible.

D. DETECTOR COARSE ADJUSTMENT (OPTIONAL, NEEDED ONLY IF DETECTOR WAS REPAIRED).

1. Reduce sweep modulation level to $+/-$ 75 kHz and set input level to 300 μ V.
2. Adjust FM generator frequency so that both legs of the inverted U-shaped curve are equally high on the display. The curve should be almost perfectly symmetrical.
3. Disconnect detectorprobe from tuner and oscilloscope. Connect either of the tape rec. outputs to the oscilloscope.
4. Adjust IFT 1 primary (closest to the rear of unit) to maximum curveheight and IFT 1 secondary (closest to the front of unit) to minimum curveheight and straightest possible line. Go back and forth between primary and secondary till both are peaked.

NOTE: Both the cores should be within 1.5 mm from the top of the form.

E. DETECTOR ALIGNMENTS (FINAL)

1. Disconnect detectorprobe and connect tape rec. outputs to VTVM's, oscilloscope and distortion analyzer.
2. Switch stereo generator to 1 kHz 100% ($+/-$ 75 kHz) mono modulation and oscilloscope to normal internal sweep 0.2 mS and 0.5 V/cm sensitivity.
3. Detector reference frequency
Reduce FM generator output level while monitoring THD from left channel. When THD increases to 3%, fine tune the FM generator frequency to minimum THD. Reduce FM generator output level and fine tune till no reduction in the 3% THD can be achieved by fine tuning. Use this frequency for all the following detector, MPX and DYN SEP adjustments.

NOTE: The typical input level for this 3% THD should be 1.6 μ V to 2.3 μ V. This is done only to "lineup" the frequency from the generator to the tuner's frequency.

If IHF usable sensitivity (-30 dB THD+N = 3.16% THD+N) is to be verified, a proper IHF band-passfilter must be used.

4. Connect DMM across TP 2 (negative) and TP 1 (positive). Set FM generator output level to 1000 μ V.
5. Adjust IFT 1 primary (closest to the rear of unit) for 0 V on DMM
TOLERANCE $+/-$ 50 mV
6. Adjust IFT 1 secondary (closest to the front of unit) for lowest THD
SPECIFICATION less than 0.1%.
7. Repeat steps 3 — 5 and 6 till no further improvements. Record the DMM's final reading for use later in the adjustment.

F. AUTOSEARCH LEVEL

1. Connect DMM between IC 2 pin 12 and ground.
2. Increase FM generator level upwards from 0 and adjust VR 1 so that DMM reading goes from 0 V to approximately 4.8 V at 10 μ V.
TOLERANCE $+/-$ 2 μ V

G. STEREO DECODER, MPX FILTERS.

1. VCO
Connect a frequency counter between IC 6 pin 11 and ground.
2. Set FM generator to 1000 μ V output and no modulation.
3. Adjust VR 3 for a 19000 Hz reading on the counter.
TOLERANCE $+/-$ 100 Hz
4. Disconnect frequency counter and press FM NR defeat switch (in).
5. Stereo switch threshold.
Modulate FM generator 1 kHz 45% left only plus 19 kHz pilot 8 — 10 %.
6. Increase FM generator level upwards from 0 and adjust VR 2 so that stereo light turns on and audio outputs as watched on VTVM and oscilloscope, switches to one channel only at 10 μ V input level.
TOLERANCE $+5$ μ V

NOTE: When turning input level down the unit will switch into mono at a lower level, typically 5 — 7 μ V.

7. Stereo separation
Set FM generator output to 1000 μ V, modulate in mono only.
8. Adjust VR 4 for identical outputs in the two channels.
TOLERANCE $+/-$ 20 mV.
9. Modulate FM generator left channel only and adjust VR 5 for minimum on right channel VTVM.
10. Modulate FM generator right channel only and adjust VR 5 for minimum on left channel VTVM.
11. If the minimum in step 9 and 10 are different, adjust VR 5 so that the readings are the same in both channels.
SPECIFICATION better than 40 dB separation.
12. MPX filter
Turn off audiomodulation, leaving pilot tone only. Disable IHF filter or external 19 kHz filter if used.
13. Adjust LPF 1 left channel and LPF 2 right channel for minimum output.
SPECIFICATION more than 60 dB suppression.
14. Release the FM NR DEFEAT switch (out).

H DYN SEP ADJUSTMENTS.

1. Turn VR 6 fully clockwise.
 2. FM NR separation effect.
Observe output from left channel with FM generator output level 1000 μ V and modulated 1 kHz left channel only.
Reduce audiomodulation only from stereo generator so that left channel output is reduced by 6 dB (50% stereo modulation).
The 19 kHz pilot signal MUST REMAIN modulated 8 – 10%.
 3. Set FM generator output to 150 μ V and adjust VR 6 for –30 dB separation left to right channel. (or right to left).
TOLERANCE $+/-$ 2 dB
- SYNTHESIZER FREQUENCY.**
1. Tune to a known accurate frequency source, i.e. broadcasting station or synthesized / digital display FM generator, preferably in the midband (95 – 100 MHz).
 2. Connect DMM across TP 2 (negative) and TP 1 (positive).
 3. Adjust VC 2 so that DMM reads the same as recorded in E – 7.
TOLERANCE $+/-$ 10 mV.

AM ALIGNMENTS

Unless repairs have been done to Oscillator Section, do not adjust AM OSC coil or Trimming Capacitor. If OSC Adjustment is needed, connect high impedance voltmeter (preferably DMM) between R35 and ground.

A. OSC ADJUSTMENT

1. Tune unit to show 1610KHz or 1602KHz on display and adjust VC3 to read 7.5V on DMM.
2. Tune unit to show 520KHz or 522KHz on display and adjust L3 to read 1V \pm 0.5V on DMM.
3. Repeat step 1 and 2 until no further improvement.


B. IF ADJUSTMENT

1. For IF adjustment and Tracking adjustment connect VTVM to loudspeaker output (or tape output), only one channel connection needed, and connect signal generator to antenna terminals. Adjust generator for 30% modulation and approx. 100 μ V input.
Tune both generator and receiver to approx. 1000KHz, and adjust generator frequency for maximum reading on VTVM. Then adjust IFT2, and IFT3 for maximum reading on meter.


C. TRACKING ADJUSTMENT

1. Tune unit and generator to show approx. 600KHz and adjust L2 to maximum reading on VTVM.
2. Tune unit and generator to show approx. 1400KHz and adjust VC1 (Trimming Capacitor) for maximum reading on VTVM.
3. Repeat step 1 and 2 until no further improvement.


ADJUSTMENT POINTS

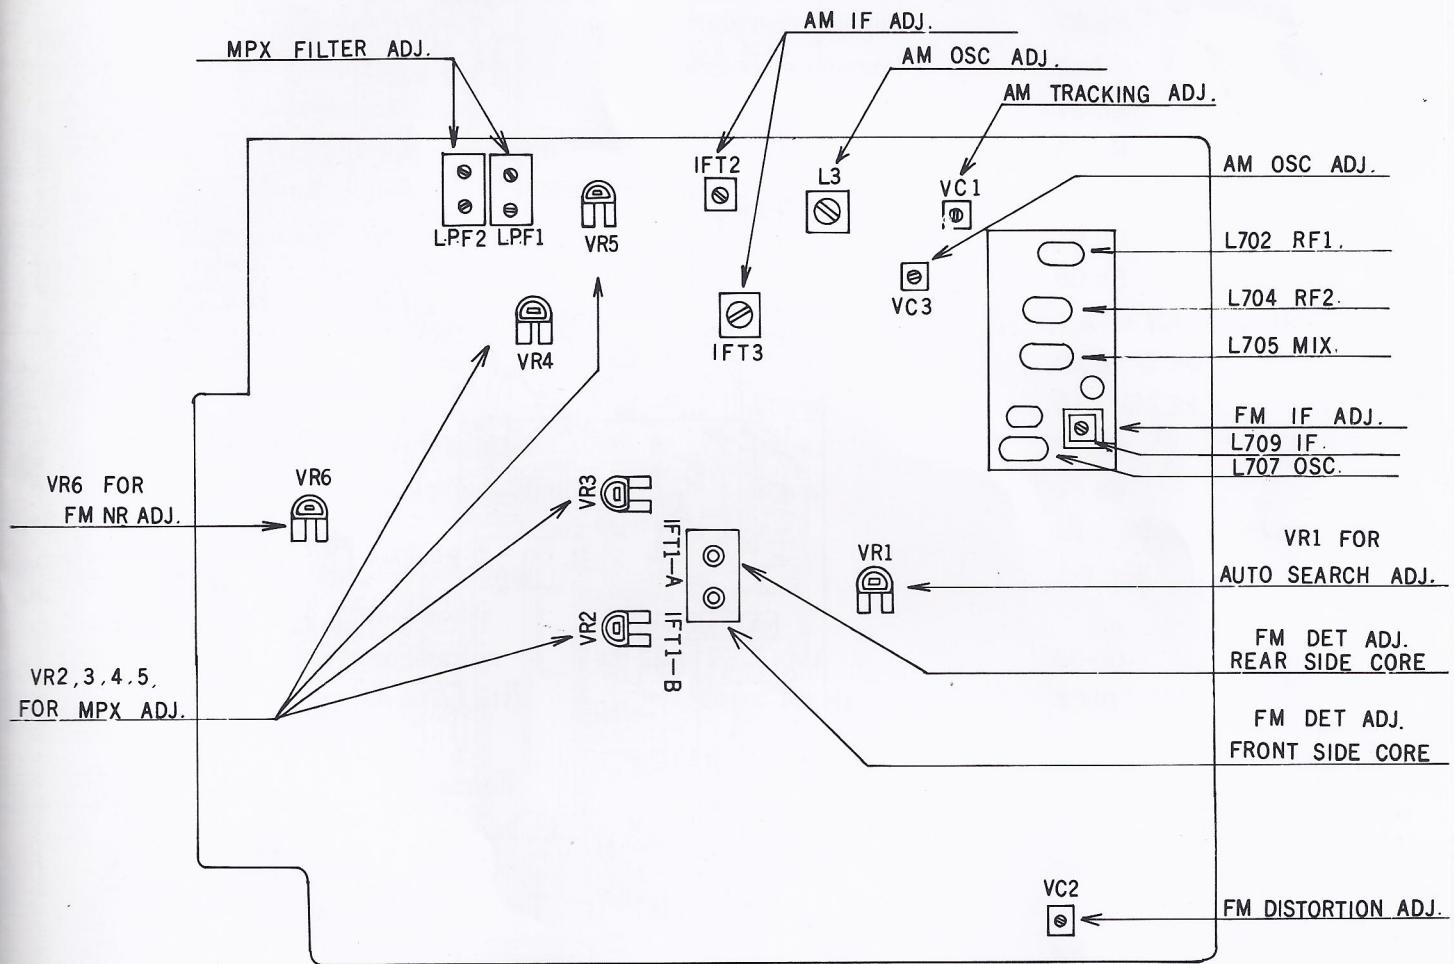


PCB LAYOUT AND WIRING DIAGRAM

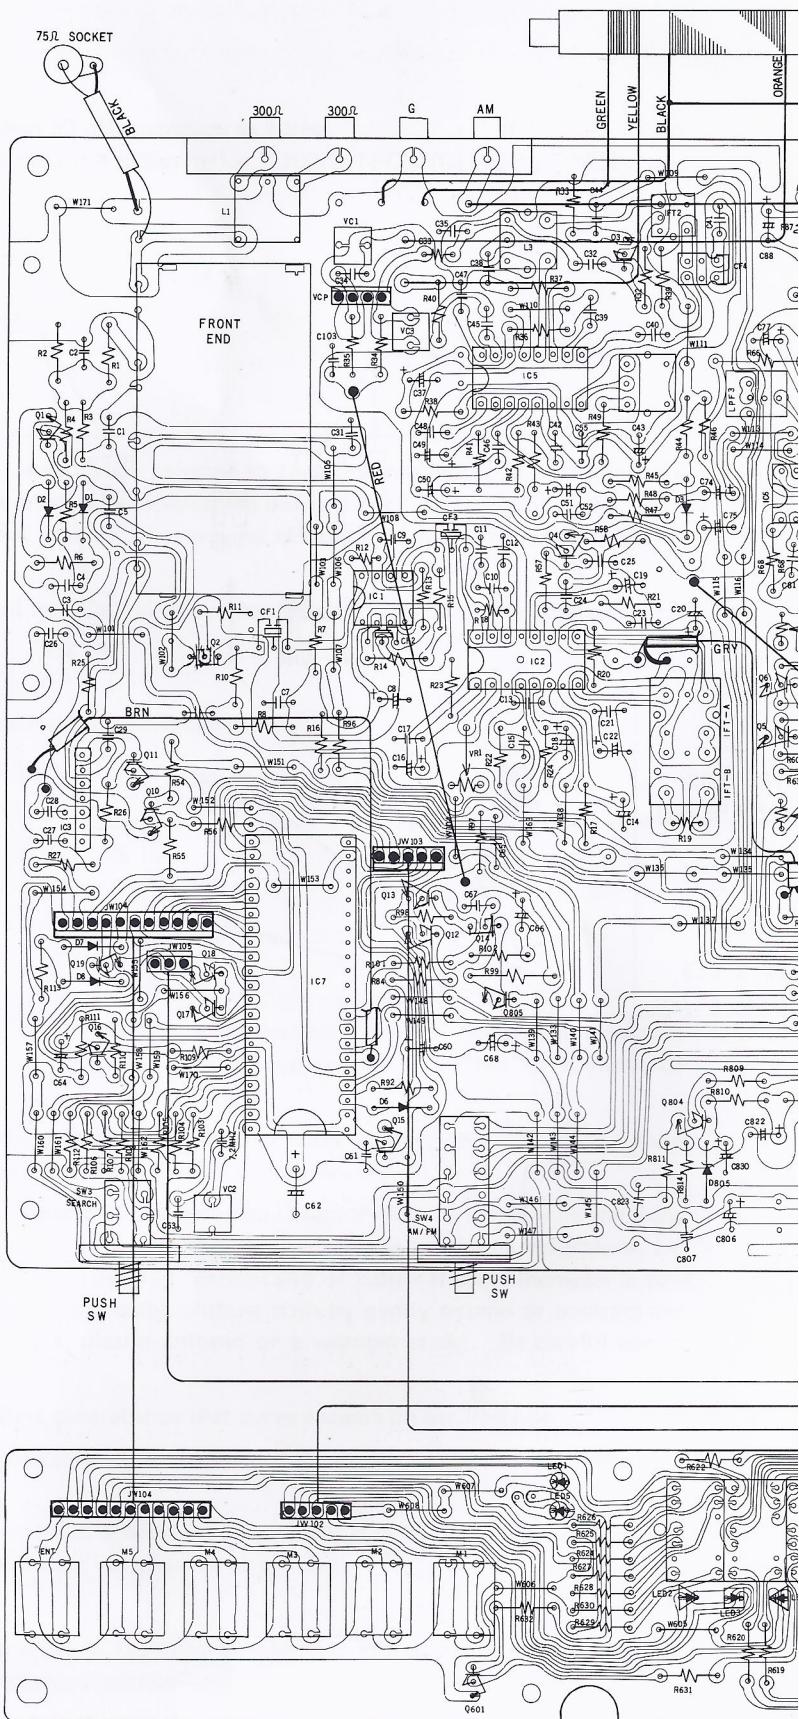


AM ANT COIL

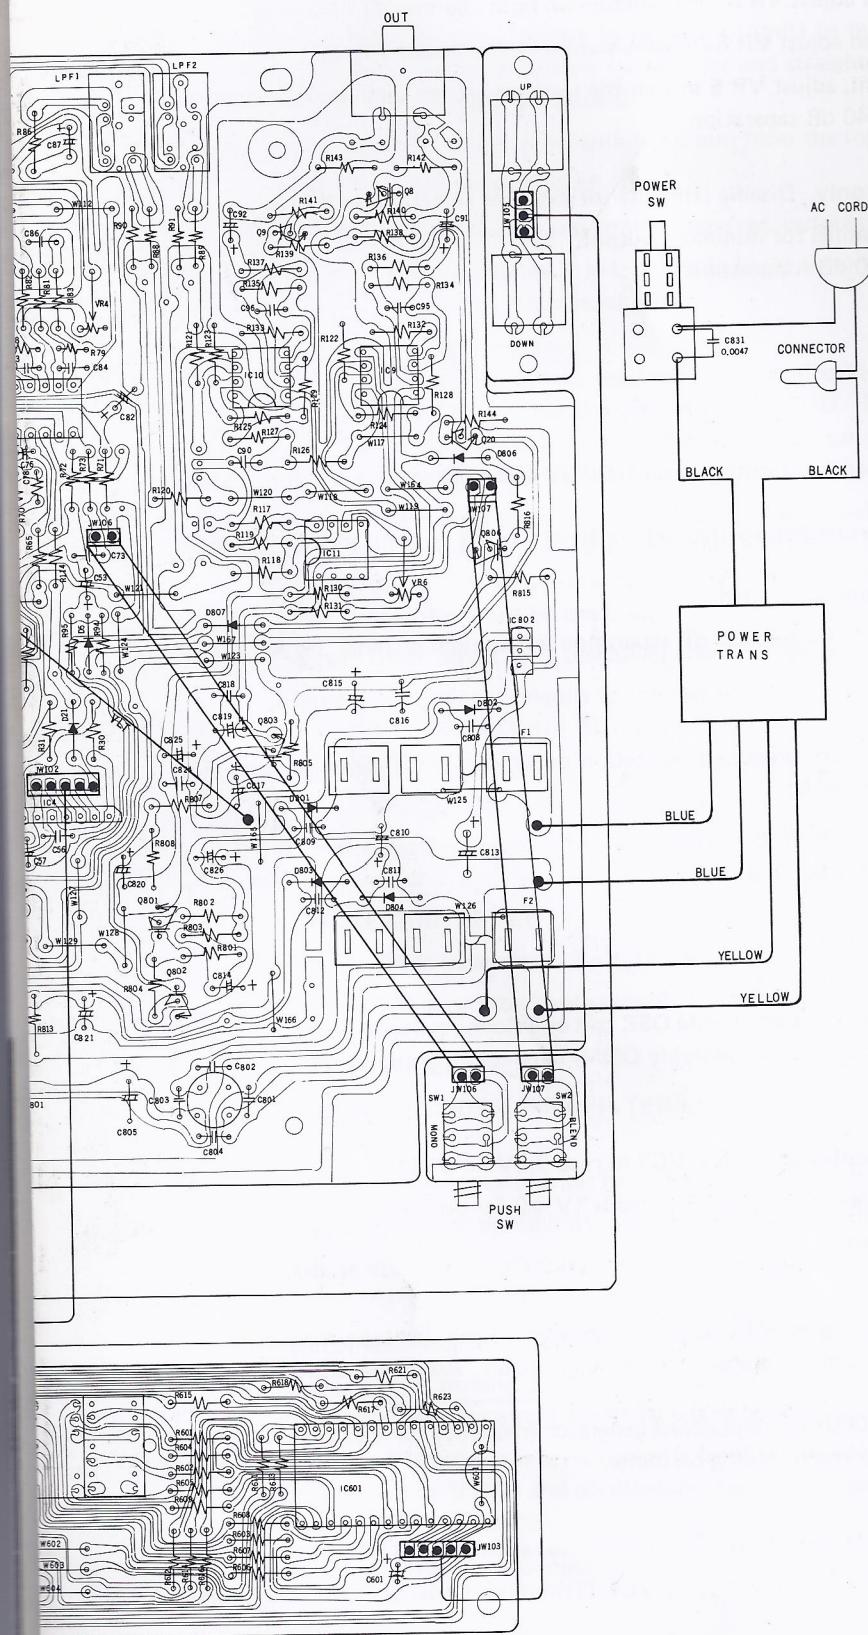




SCHEMATIC DIAGRAM

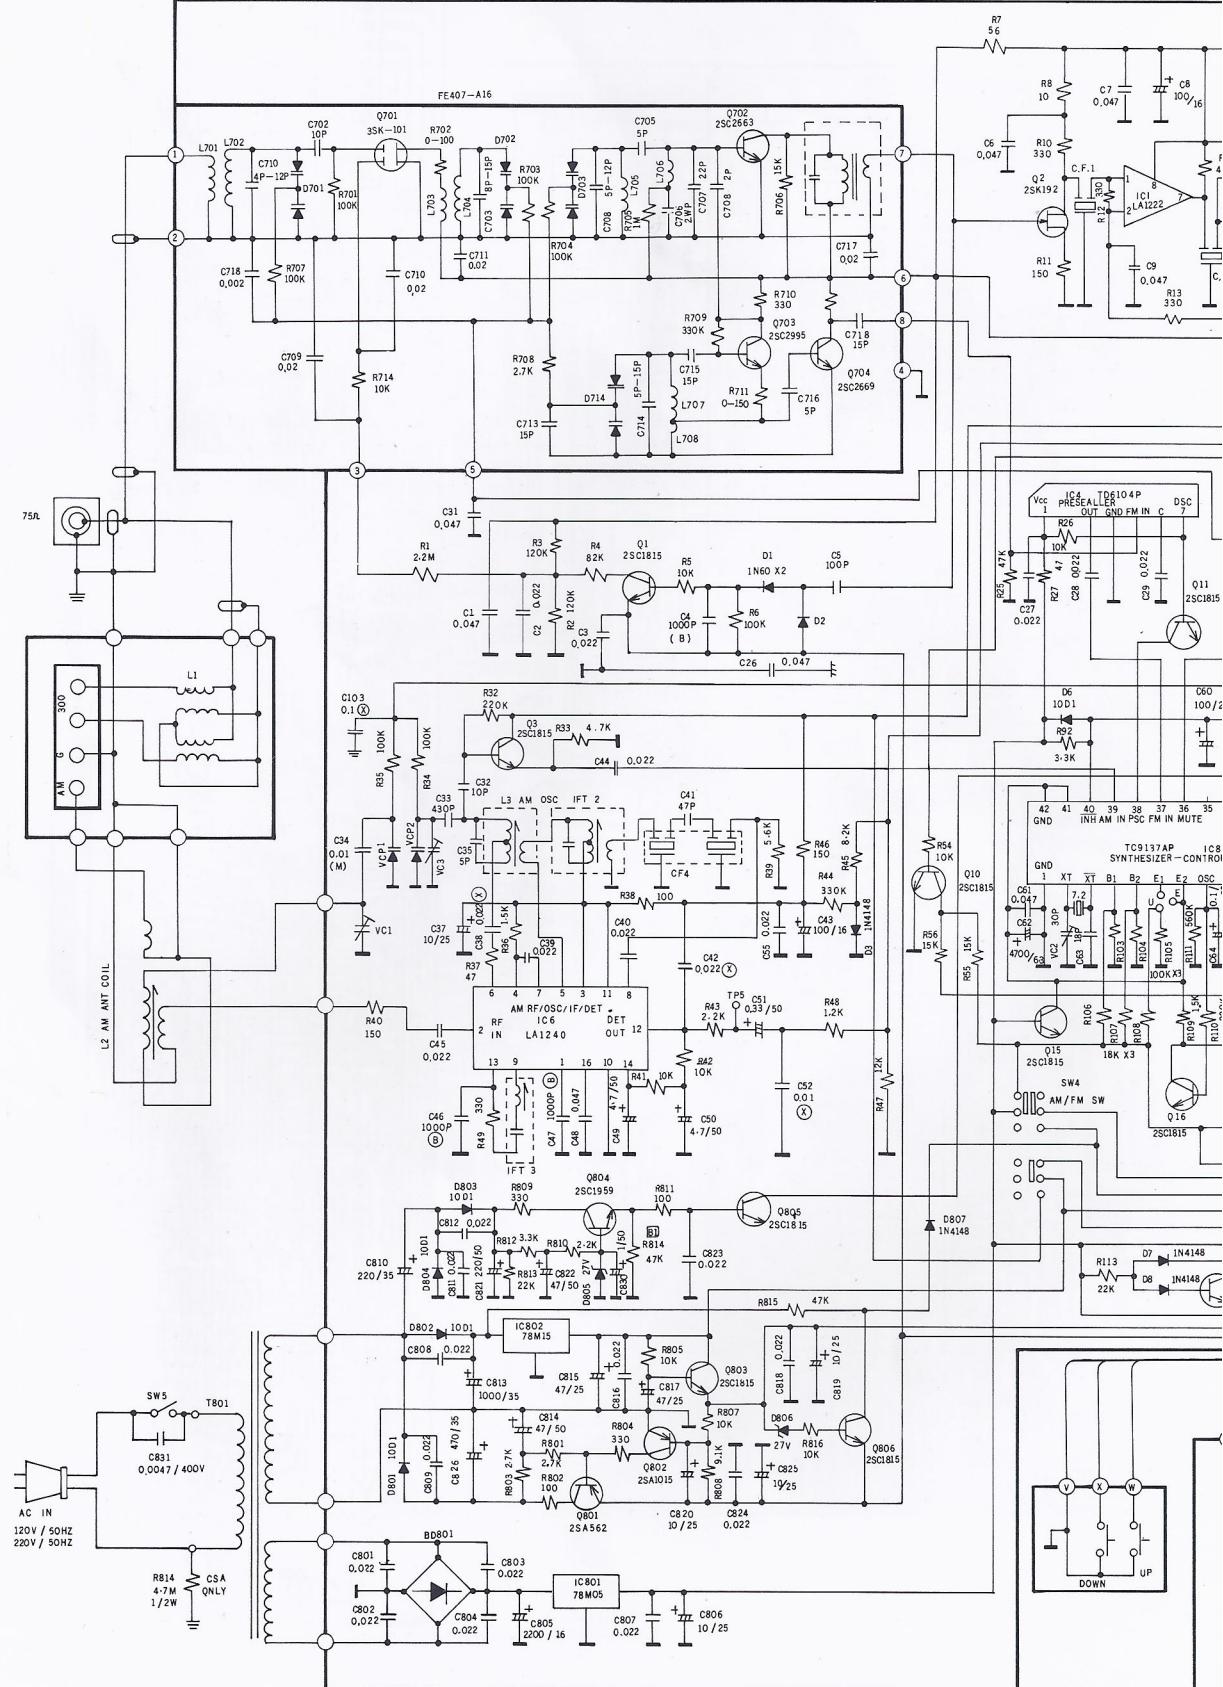

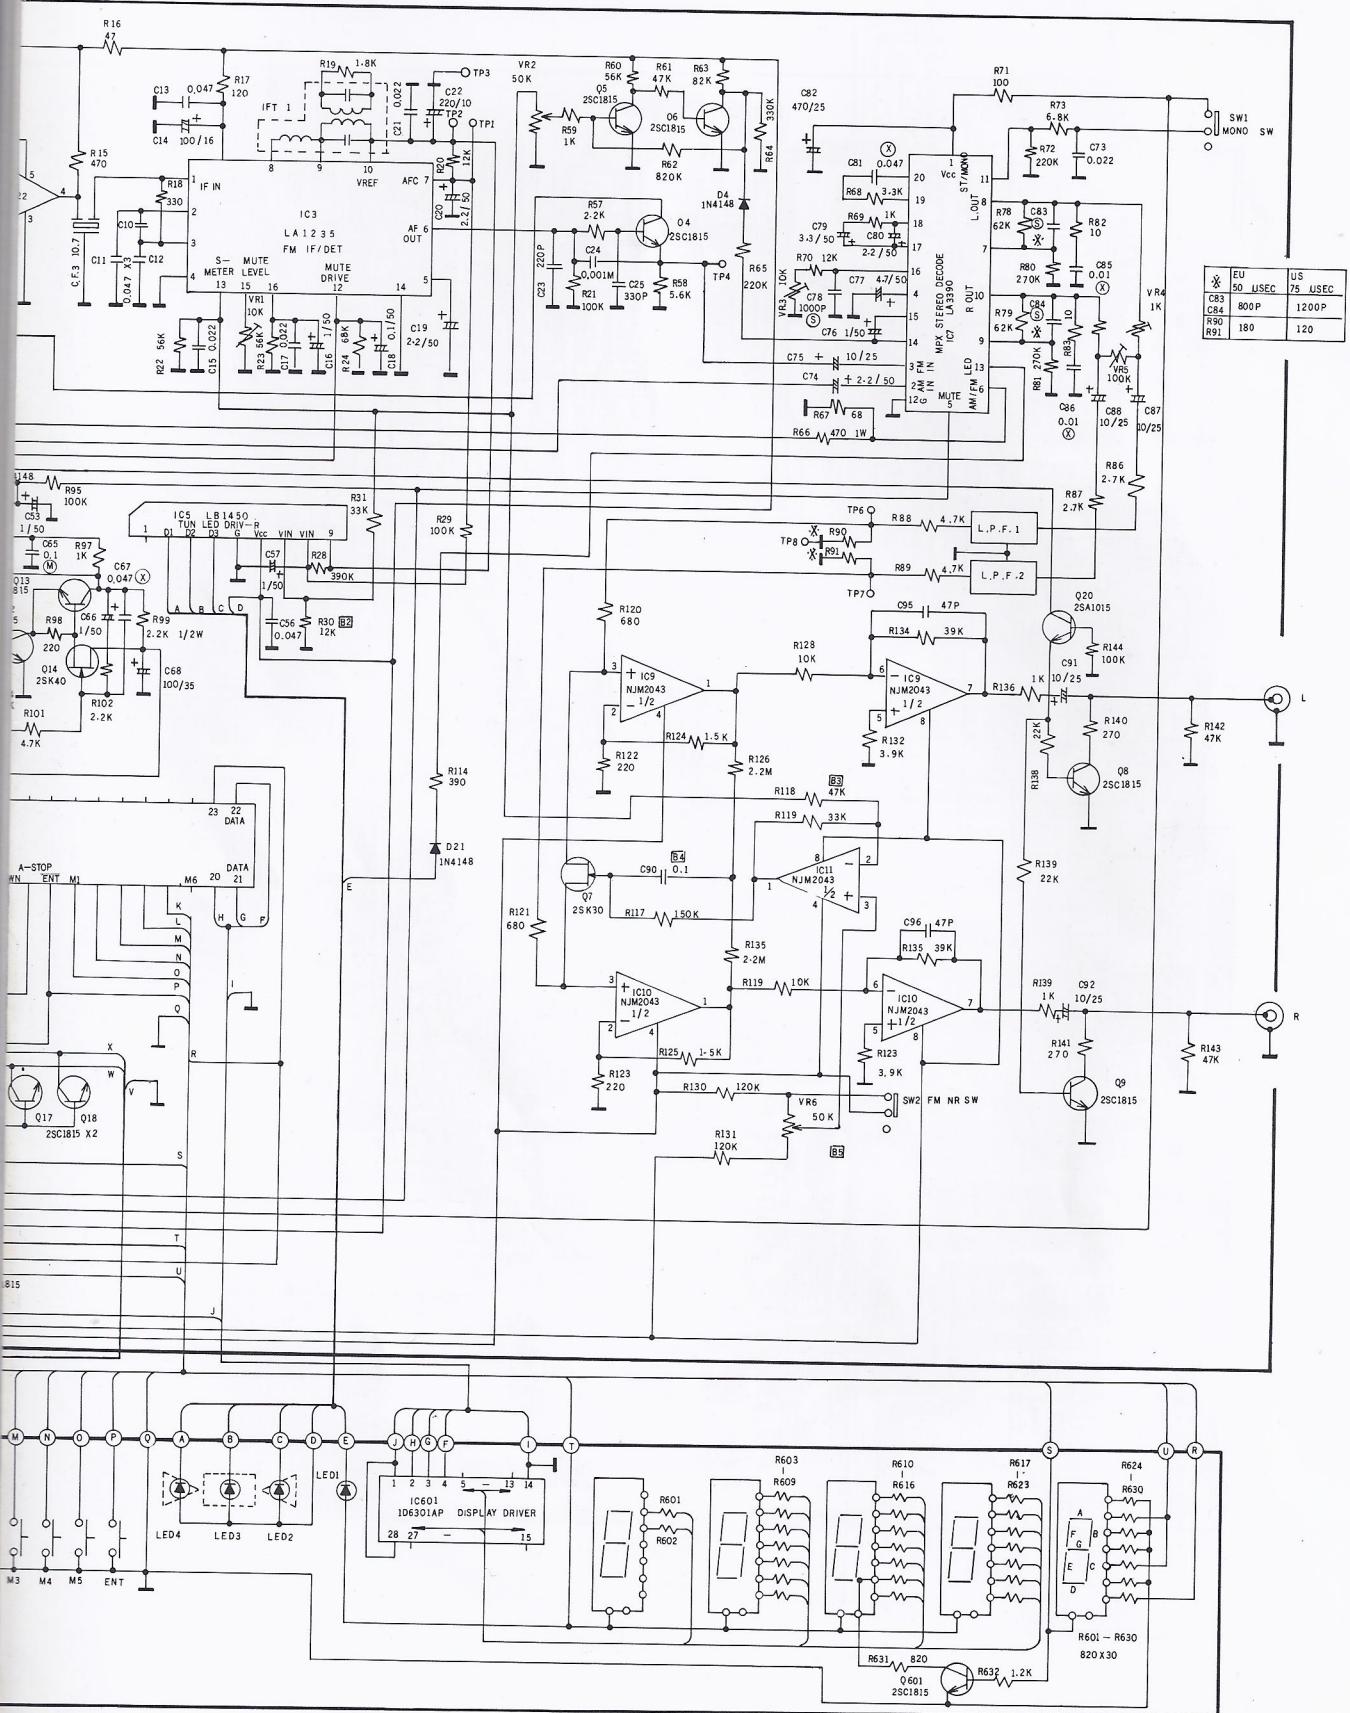

TUNER DISPLAY PCB COMPONENT LOCATION

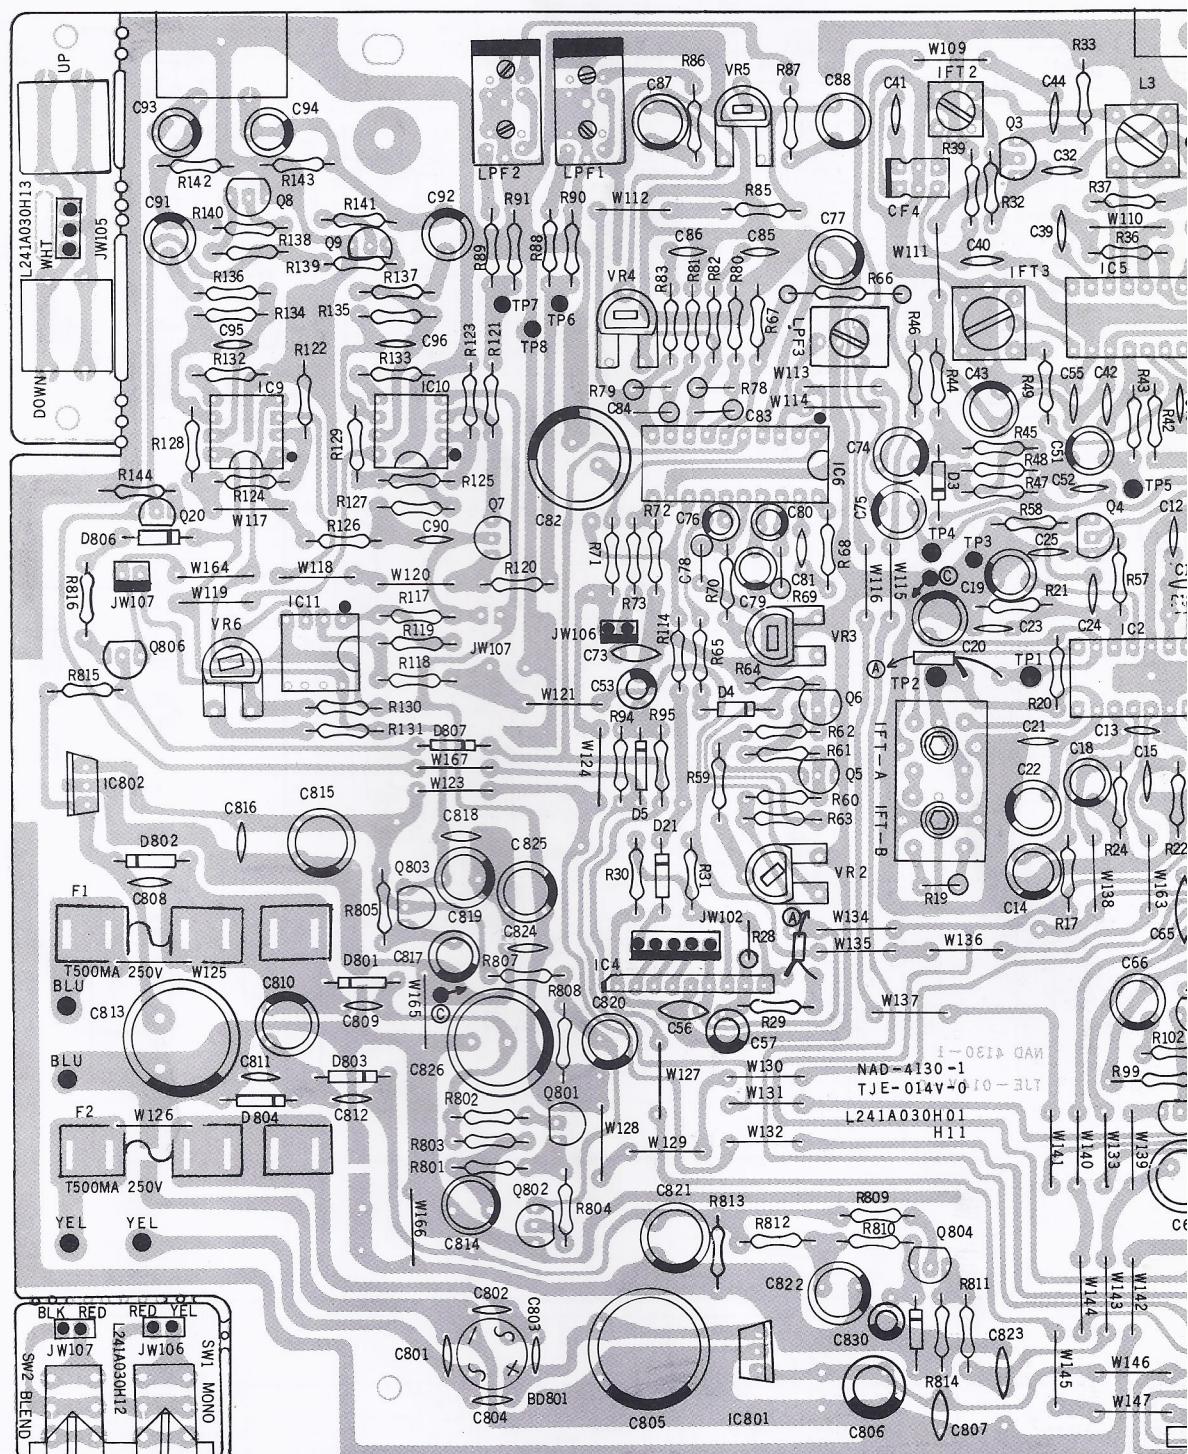

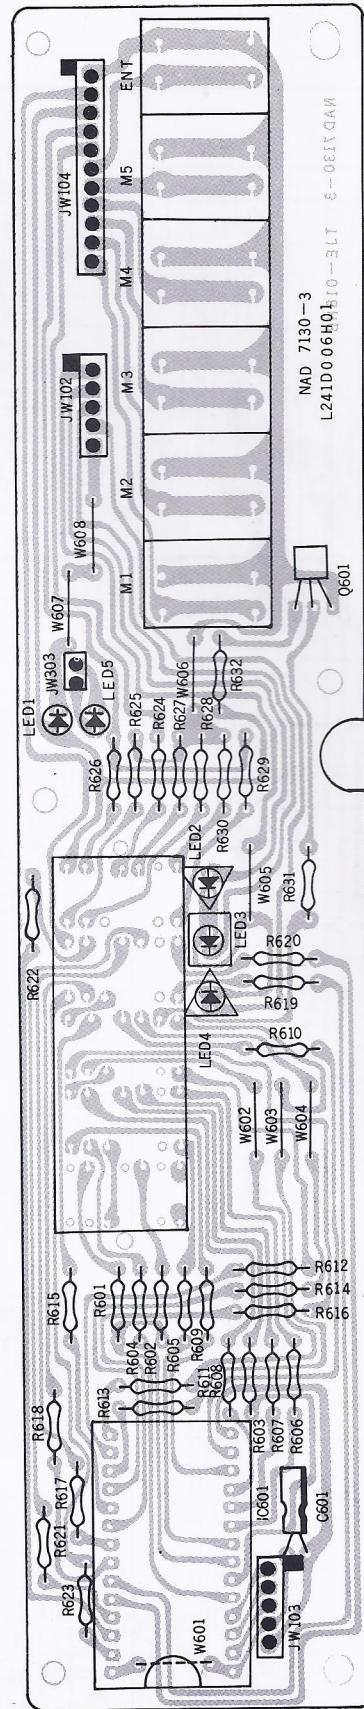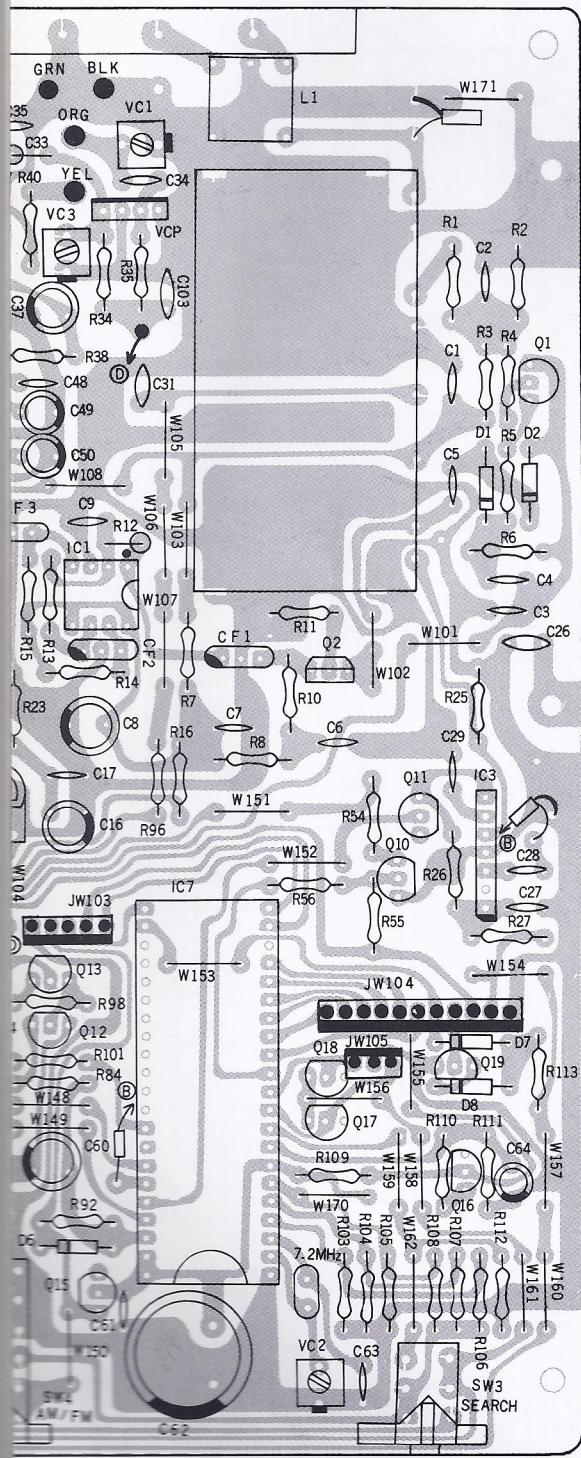

NAD 4130 PARTS LIST

| SYMBOL NO. | PART NO. | DESCRIPTION | | | | REF | SYMBOL NO. | PART NO. | DESCRIPTION | | | | REF |
|------------|-------------|-------------|------|-----|------|-----|------------|--------------|-------------|------|-----|------|-----|
| R1 | L103Y214H57 | Res, Carb. | 2.2M | +5% | 1/4W | | R71 | L103Y214H07 | Res, Carb. | 100 | ±5% | 1/4W | |
| R2 | L103Y214H44 | " | 120K | " | " | | R72 | L103Y214H29 | " | 220K | " | " | |
| R3 | L103Y214H44 | " | " | " | " | | R73 | L103Y022H29 | " | 6.8K | " | " | |
| R4 | L103Y022H42 | " | 82K | " | " | | R78 | U103S037H40 | " | 62K | " | " | |
| R5 | L103Y214H31 | " | 10K | " | " | | R79 | U103S037H40 | " | " | " | " | |
| R6 | L103Y214H43 | " | 100K | " | " | | R80 | L103Y214H48 | " | 270K | " | " | |
| R7 | L103Y022H69 | " | 56 | " | " | | R81 | L103Y214H48 | " | " | " | " | |
| R8 | L103Y214H01 | " | 10 | " | " | | R82 | L103Y214H01 | " | 10 | " | " | |
| R10 | L103Y214H13 | " | 330 | " | " | | R83 | " | " | " | " | " | |
| R11 | L103Y214H09 | " | 150 | " | " | | R84 | L103Y214H33 | " | 15K | " | " | |
| R12 | U103S017H13 | " | 330 | " | " | | R85 | L103Y214H16 | " | 560 | " | " | |
| R13 | L103Y214H13 | " | " | " | " | | R86 | L103Y214H24 | " | 2.7K | " | " | |
| R14 | L103Y214H15 | " | 470 | " | " | | R87 | L103Y214H24 | " | " | " | " | |
| R15 | " | " | " | " | " | | R88 | L103Y214H27 | " | 4.7K | " | " | |
| R16 | L103Y214H05 | " | " | " | " | | R89 | " | " | " | " | " | |
| R17 | L103Y214H08 | " | 120 | " | " | | R90 | L103Y022H08 | " | 120 | " | " | A1 |
| R18 | U103S017H13 | " | 330 | " | " | | R90 | " | " | " | " | " | A |
| R19 | L103Y214H22 | " | 1.8K | " | " | | R90 | L103Y022H10 | " | " | " | " | B |
| R20 | L103Y214H32 | " | 12K | " | " | | R90 | " | " | " | " | " | C1 |
| R21 | L103Y214H43 | " | 100K | " | " | | R90 | " | " | " | " | " | C |
| R22 | L103Y214H40 | " | 56K | " | " | | R90 | " | " | " | " | " | B1 |
| R23 | L103Y214H40 | " | " | " | " | | R90 | L103Y022H08 | " | " | " | " | C3 |
| R24 | L103Y214H41 | " | 68K | " | " | | R90 | L103Y022H10 | " | " | " | " | C2 |
| R25 | L103Y214H39 | " | 47K | " | " | | R91 | L103Y022H08 | " | " | " | " | A1 |
| R26 | L103Y214H31 | " | 10K | " | " | | R91 | " | " | " | " | " | A |
| R27 | L103Y214H05 | " | 47 | " | " | | R91 | L103Y022H10 | " | " | " | " | B |
| R28 | L103Y214H50 | " | 390K | " | " | | R91 | " | " | " | " | " | C1 |
| R29 | L103Y214H43 | " | 100K | " | " | | R91 | " | " | " | " | " | C |
| R30 | L103Y214H35 | " | 22K | " | " | | R91 | " | " | " | " | " | B1 |
| R31 | L103Y214H37 | " | 33K | " | " | | R91 | L103Y022H08 | " | " | " | " | C3 |
| R32 | L103Y214H47 | " | 220K | " | " | | R91 | L103Y022H10 | " | " | " | " | C2 |
| R33 | L103Y214H27 | " | 4.7K | " | " | | R92 | L103Y214H25 | " | 3.3K | " | " | |
| R34 | L103Y214H43 | " | 100K | " | " | | R93 | L103Y214H31 | " | 10K | " | " | |
| R35 | L103Y214H43 | " | " | " | " | | R94 | L103Y214H45 | " | 150K | " | " | |
| R36 | L103Y214H21 | " | 1.5K | " | " | | R95 | L103Y214H43 | " | 100K | " | " | |
| R37 | L103Y214H05 | " | 47 | " | " | | R96 | L103Y214H27 | " | 4.7K | " | " | |
| R38 | L103Y214H07 | " | 100 | " | " | | R97 | L103Y214H19 | " | 1K | " | " | |
| R39 | L103Y214H28 | " | 5.6K | " | " | | R98 | L103Y214H11 | " | 220 | " | " | |
| R40 | L103Y214H09 | " | 150 | " | " | | R99 | U103S024H23' | " | 2.2K | " | 1/2W | |
| R41 | L103Y214H31 | " | 10K | ±5% | " | | R100 | L103Y214H33 | " | 15K | " | 1/4W | |
| R42 | L103Y214H31 | " | " | " | " | | R101 | L103Y214H27 | " | 4.7K | " | " | |
| R43 | L103Y214H23 | " | 2.2K | " | " | | R102 | L103Y214H23 | " | 2.2K | " | " | |
| R44 | L103Y214H49 | " | 330K | " | " | | R103 | L103Y214H43 | " | 100K | " | " | |
| R45 | L103Y022H30 | " | 8.2K | " | " | | R104 | " | " | " | " | " | |
| R46 | L103Y214H09 | " | 150 | " | " | | R105 | L103Y022H43 | " | 100K | " | " | A1 |
| R47 | L103Y214H32 | " | 12K | " | " | | R105 | L103Y022H43 | " | " | " | " | A |
| R48 | L103Y022H20 | " | 1.2K | " | " | | R105 | L103Y022H43 | " | " | " | " | C3 |
| R49 | L103Y214H13 | " | 330 | " | " | | R106 | L103Y214H34 | " | 18K | " | " | |
| R54 | L103Y214H31 | " | 10K | " | " | | R107 | " | " | " | " | " | |
| R55 | L103Y214H33 | " | 15K | " | " | | R108 | L103Y022H34 | " | 18K | " | " | A1 |
| R56 | L103Y214H33 | " | " | " | " | | R108 | " | " | " | " | " | A |
| R57 | L103Y214H23 | " | 2.2K | " | " | | R108 | " | " | " | " | " | C3 |
| R58 | L103Y214H28 | " | 5.6K | " | " | | R109 | L103Y214H21 | " | 1.5K | " | " | |
| R59 | L103Y214H19 | " | 1K | " | " | | R110 | L103Y214H47 | " | 220K | " | " | |
| R60 | L103Y214H40 | " | 56K | " | " | | R111 | L103Y214H52 | " | 560K | " | " | |
| R61 | L103Y214H39 | " | 47K | " | " | | R112 | L103Y214H35 | " | 22K | " | " | |
| R62 | L103Y214H54 | " | 820K | " | " | | R113 | L103Y214H35 | " | " | " | " | |
| R63 | U103S014H42 | " | 82K | " | " | | R114 | L103Y022H14 | " | 390 | " | " | |
| R64 | L103Y214H49 | " | 330K | " | " | | R117 | L103Y214H45 | " | 150K | " | " | |
| R65 | L103Y214H47 | " | 220K | " | " | | R118 | L103Y214H39 | " | 47K | " | " | |
| R66 | U105S005H21 | Res, Metal | 470 | " | 1W | | R119 | L103Y214H37 | " | 33K | " | " | |
| R67 | L103Y214H06 | Res, Carb. | 68 | " | 1/4W | | R120 | L103Y214H17 | " | 680 | " | " | |
| R68 | L103Y214H25 | " | 3.5K | " | " | | R121 | " | " | " | " | " | |
| R69 | U103S107H19 | Res, Metal | 1K | " | " | | R122 | L103Y214H11 | " | 220 | " | " | |
| R70 | L103Y214H32 | Res, Carb. | 12K | " | " | | R123 | " | " | " | " | " | |

| SYMBOL NO. | PART NO. | DESCRIPTION | | | | REF |
|------------|-------------|-------------|---------|---------|------|-----|
| R124 | L103Y214H21 | Res, Carb. | 1.5K | ±5% | 1/4W | |
| R125 | " | " | " | " | " | |
| R126 | L103Y214H57 | " | 2.2M | " | " | |
| R127 | " | " | " | " | " | |
| R128 | L103Y214H31 | " | 10K | " | " | |
| R129 | " | " | " | " | " | |
| R130 | L103Y214H44 | " | 120K | " | " | |
| R131 | " | " | " | " | " | |
| R132 | L103Y214H26 | " | 3.9K | " | " | |
| R133 | " | " | " | " | " | |
| R134 | L103Y214H38 | " | 39K | " | " | |
| R135 | " | " | " | " | " | |
| R136 | L103Y214H19 | " | 1K | " | " | |
| R137 | " | " | " | " | " | |
| R138 | L103Y214H35 | " | 22K | " | " | |
| R139 | " | " | " | " | " | |
| R140 | L103Y214H12 | " | 270 | " | " | |
| R141 | " | " | " | " | " | |
| R142 | L103Y214H39 | " | 47K | " | " | |
| R143 | " | " | " | " | " | |
| R144 | L103Y022H43 | " | 100K | " | " | |
| R601-R631 | L103Y214H18 | " | 820 | " | " | |
| R632 | L103Y214H20 | " | 1.2K | " | " | |
| R801 | L103Y214H24 | " | 2.7K | " | " | |
| R802 | L103Y022H07 | " | 100 | " | " | |
| R803 | L103Y214H24 | " | 1.7K | " | " | |
| R804 | L103Y214H13 | " | 330 | " | " | |
| R805 | L103Y214H31 | " | 10K | " | " | |
| R806 | L103Y214H30 | " | 8.2K | " | " | |
| R807 | L103Y214H31 | " | 10K | " | " | |
| R808 | L103Y022H72 | " | 9.1K | " | " | |
| R809 | L103Y214H13 | " | 330 | " | " | |
| R810 | L103Y214H23 | " | 2.2K | " | " | |
| R311 | L103Y214H07 | " | 100 | " | " | |
| R812 | L103Y214H25 | " | 3.3K | " | " | |
| R813 | L103Y214H35 | " | 22K | " | " | |
| R814 | L103Y214H39 | " | 47K | " | " | |
| R815 | L103Y214H39 | " | " | " | " | |
| R816 | L103Y214H31 | " | 10K | " | " | |
| R820 | L103Y214H37 | " | 4.7M | " | 1/2W | |
| C1 | L140Y306H45 | Cap, Cer. | 0.047μF | +80–20% | 50WV | |
| C2 | L140Y306H39 | " | 0.022μF | " | " | |
| C3 | L140Y201H17 | " | 0.022μF | " | 25WV | |
| C4 | L140Y306H12 | " | 1000pF | ±10% | 50WV | |
| C5 | L140Y203H35 | " | 100PF | ±5% | 50WV | |
| C6 | L140Y306H45 | " | 0.047μF | +80–20% | 50WV | |
| C7 | " | " | " | " | " | |
| C8 | L182Y322H26 | Cap, El. | 100μF | +50–10% | 16V | |
| C9 | L140Y306H45 | Cap, Cer. | 0.047μF | +80–20% | 50WV | |
| C10 | " | " | " | " | " | |
| C11 | " | " | " | " | " | |
| C12 | " | " | " | " | " | |
| C13 | " | " | " | " | " | |
| C14 | U182S022H26 | Cap, El. | 100μF | +50–10% | 16V | |
| C15 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | |
| C16 | L182Y322H60 | Cap, El. | 1μF | +75–10% | 50V | |
| C17 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | |
| C18 | U182S022H55 | Cap, El. | 0.1μF | +75–10% | 50V | |
| C19 | U182S022H61 | " | 2.2μF | +75–10% | 50V | |
| C20 | L182Y322H61 | " | 2.2μF | +75–10% | 50V | |
| C21 | L140Y306H3P | Cap, Cer. | 0.022μF | +80–20% | 50WV | |
| C22 | L182Y322H15 | Cap, El. | 220μF | +50–10% | 10V | |
| C23 | L140Y306H05 | Cap, Cer. | 220P | ±5% | 50WV | |
| C24 | L172Y306H01 | Cap, Poly. | 0.001μF | ±10% | 50WV | |

| SYMBOL NO. | PART NO. | DESCRIPTION | | | | REF |
|------------|-------------|-------------|---------|---------|------|-----|
| C25 | L140Y306H07 | Cap, Poly. | 330PF | ±10% | 50WV | |
| C26 | " | " | 0.047μF | +80–20% | 50WV | |
| C27 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | |
| C28 | " | " | " | " | " | |
| C29 | " | " | " | " | " | |
| C31 | L140Y306H45 | " | 0.047μF | +80–20% | 50WV | |
| C32 | L140Y203H11 | " | 10PF | ±0.5pF | 50WV | |
| C33 | U173S006H16 | Cap, Styrol | 430PF | ±5% | 50WV | |
| C34 | L172Y306H13 | Cap, Poly | 0.01μF | " | " | |
| C35 | L140Y203H06 | Cap, Cer. | 5pF | ±0.5pF | 50WV | |
| C37 | L182Y322H34 | Cap, El. | 10μF | +50–10% | 25V | |
| C38 | L140Y203H17 | Cap, Cer. | 0.022μF | ±10% | 25WV | |
| C39 | L140Y306H39 | " | 0.022μF | +80–20% | 50WV | |
| C40 | L140Y306H39 | " | " | " | " | |
| C41 | L140Y203H27 | Cap, Cer. | 47pF | ±5% | 50WV | |
| C42 | L140Y201H17 | " | 0.022μF | ±10% | 25WV | |
| C43 | U182S022H26 | Cap, El. | 100μF | +50–10% | 16V | |
| C44 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | |
| C45 | " | " | " | " | " | |
| C46 | L140Y306H12 | " | 1000pF | ±10% | 50WV | |
| C47 | " | " | " | " | " | |
| C48 | L140Y306H45 | " | 0.047μF | +80–20% | 50WV | |
| C49 | U182S322H63 | Cap, El. | 4.7μF | +75–10% | 50V | |
| C50 | L182Y322H63 | " | " | " | " | |
| C51 | U182S022H57 | Cap, El. | 0.33μF | +75–10% | 50V | |
| C52 | L140Y201H13 | Cap, Cer. | 0.01μF | ±10% | 25WV | |
| C53 | U182S022H60 | Cap, El. | 1μF | +75–10% | 50V | |
| C54 | " | " | " | " | " | |
| C55 | U140S005H29 | Cap, Cer. | 0.022μF | ±5% | 50WV | |
| C56 | L140Y306H45 | Cap, Cer. | 0.047μF | +80–20% | 50WV | |
| C57 | U182S022H60 | Cap, El. | 1μF | +75–10% | 50V | |
| C60 | L182Y322H38 | Cap, El. | 100μF | +50–10% | 25V | |
| C61 | L140Y306H45 | " | 0.047μF | +80–20% | 50WV | |
| C62 | L180Y037H01 | " | 4700μF | +50–10% | 6.3V | |
| C63 | L140Y203H17 | cap, Cer. | 18P | ±5% | 50WV | |
| C64 | U182S022H55 | Cap, El. | 0.1μF | +75–10% | 50V | |
| C65 | U172S002H13 | Cap, Poly | 0.1μF | +50–10% | 50WV | |
| C66 | L182Y322H60 | Cap, El. | 1μF | +75–10% | 50V | |
| C67 | L140Y201H21 | Cap, Cer. | 0.047μF | ±10% | 25WV | |
| C68 | U182S022H49 | Cap, El. | k100μF | +50–10% | 35V | |
| C73 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | |
| C74 | L182Y322H61 | Cap, El. | 2.2μF | +75–10% | 50V | |
| C75 | L182Y322H34 | " | 10μF | +50–10% | 25V | |
| C76 | U182S022H61 | " | 1μF | +75–10% | 50V | |
| C77 | L182Y322H63 | " | 4.7μF | +75–10% | 50V | |
| C78 | U173S004H07 | Cap, Styrol | 0.001μF | ±5% | 50WV | |
| C79 | U182S022H62 | Cap, El. | 3.3μF | +75–10% | 50V | |
| C80 | U182S022H61 | " | 2.2μF | +75–10% | 50V | |
| C81 | L140Y201H21 | Cap, Cer. | 0.047μF | ±10% | 25WV | |
| C82 | U182S022H41 | Cap, El. | 470μF | +50–10% | 25V | |
| C83 | U173S004H18 | Cap, Styrol | 1200pF | ±5% | 50WV | A1 |
| C84 | L173D001H03 | " | 800PF | " | " | A |
| C83 | U173S004H18 | " | 1200pF | " | " | B |
| C83 | " | " | " | " | " | C1 |
| C83 | " | " | " | " | " | B1 |
| C83 | U173S004H18 | " | 1200pF | " | " | C3 |
| C83 | U173S004H18 | " | 1200pF | " | " | C2 |
| C84 | L173D001H03 | " | 800pF | " | " | A1 |
| C84 | U173S004H18 | " | 1200pF | " | " | A |
| C84 | " | " | " | " | " | B |
| C84 | L173D001H03 | " | 800pF | " | " | C1 |
| C84 | U173S004H18 | " | 1200pF | " | " | C |
| C84 | " | " | " | " | " | B1 |
| C84 | U173S004H18 | " | 1200pF | " | " | C3 |


| SYMBOL NO. | PART NO. | DESCRIPTION | | | | | REF |
|------------|-------------|------------------|--------------|---------|------|----|-----|
| C84 | U173S004H18 | Cap, Styrol | 1200pF | ±5% | 50WV | A | |
| C84 | L173D001H03 | " | 800pF | " | " | B | |
| C84 | " | " | " | " | " | C1 | |
| C84 | " | " | " | " | " | C | |
| C84 | " | " | " | " | " | B1 | |
| C84 | U173S004H18 | " | 1200pF | " | " | C3 | |
| C84 | L173D001H03 | " | 800pF | " | " | C2 | |
| C85 | L140Y201H13 | Cap, Cer. | 0.01μF | ±10% | 25WV | | |
| C86 | " | " | " | " | " | | |
| C87 | L182Y322H34 | Cap, El. | 10μF | +50–10% | 25V | | |
| C88 | " | " | " | " | " | | |
| C90 | L172Y306H25 | Cap, Poly | 0.1μF | ±5% | 50WV | | |
| C91 | L182Y322H34 | Cap, El. | 10μF | +50–10% | 25V | | |
| C92 | " | " | " | " | " | | |
| C93 | " | " | " | " | " | | |
| C94 | L182Y322H34 | " | " | " | " | | |
| C95 | L140Y203H27 | Cap, Cer. | 47pF | ±5% | 50WV | | |
| C96 | " | " | 47pF | " | " | | |
| C101 | U150S008H14 | Cap, Cer. | 0.0022μF | ±10% | 50WV | C1 | |
| C102 | " | " | " | " | " | C1 | |
| C103 | U140S020H51 | Cap, Cer. | 0.1μF | +80–20% | 25V | | |
| C601 | U182S022H34 | Cap, El. | 10μF | +50–10% | " | | |
| C801 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | | |
| C802 | " | " | " | " | " | | |
| C803 | " | " | " | " | " | | |
| C804 | " | " | " | " | " | | |
| C805 | U182S022H31 | Cap, El. | 2200μF | +50–10% | 16V | | |
| C806 | L182Y322H34 | " | 10μF | +50–10% | 25V | | |
| C807 | U140S005H29 | Cap, Cer. | 0.022μF | +80–20% | 50WV | | |
| C808 | L140Y306H39 | " | " | " | " | | |
| C809 | " | " | " | " | " | | |
| C810 | U182S022H50 | Cap, El | 220μF | +50–10% | 35V | | |
| C811 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | | |
| C812 | " | " | " | " | " | | |
| C813 | U182S022H53 | Cap, El. | 1000μF | +50–10% | 35V | | |
| C814 | L182Y322H67 | " | 47μF | +50–10% | 50V | | |
| C815 | L182Y322H37 | " | 47μF | +50–10% | 25V | | |
| C816 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | | |
| C817 | L182Y322H37 | Cap, El. | 47μF | +50–10% | 25V | | |
| C818 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | | |
| C819 | L182Y322H34 | Cap, El. | 10μF | +50–10% | 25V | | |
| C820 | L182Y322H34 | " | " | " | " | | |
| C821 | U182S022H69 | " | 220μF | " | 50V | | |
| C822 | L182Y322H67 | " | 47μF | " | " | | |
| C823 | L140Y306H39 | Cap, Cer. | 0.022μF | +80–20% | 50WV | | |
| C824 | U140S005H29 | " | " | ±5% | " | | |
| C825 | L182Y322H34 | Cap, El. | 10μF | +50–10% | 25V | | |
| C826 | U182S022H52 | Cap, El. | 470μF | +50–10% | 35V | | |
| C831 | U140Y007H07 | Cap, Cer. | 0.0047μF | ±20% | 400V | | |
| Q1 | U260S061H03 | TR, 2SC1815 (GR) | | | | | |
| Q2 | L260D026H01 | TR, 2SK192 (Y) | | | | | |
| Q3 | U260S061H03 | TR, 2SC1815 (GR) | | | | | |
| Q4 | " | " | | | | | |
| Q5 | " | " | | | | | |
| Q6 | " | " | | | | | |
| Q7 | L260D025H03 | " | 2SK30ATM (Y) | | | | |
| Q8 | U260S061H03 | " | 2SC1815 (GR) | | | | |
| Q9 | " | " | | | | | |
| Q10 | " | " | | | | | |
| Q11 | " | " | | | | | |
| Q12 | " | " | | | | | |
| Q13 | " | " | | | | | |
| Q14 | L260D032H02 | " | 2SK40(C) | | | | |
| Q15 | U260S061H03 | " | 2SC1815 (GR) | | | | |

| SYMBOL NO. | PART NO. | DESCRIPTION | | REF |
|------------|-------------|------------------------|--------|-----|
| Q16 | U260S061H03 | TR, 2SC1815 (GR) | | |
| Q17 | " | " " | | |
| Q18 | " | " " | | |
| Q19 | " | " " | | |
| Q20 | L260D020H03 | " 2SA1015 (GR) | | |
| Q601 | U260S061H03 | " 2SC1815 (GR) | | |
| Q801 | L260D019H02 | " 2SA562 (Y) | | |
| Q802 | L260D020H03 | " 2SA1015 (GR) | | |
| Q803 | L260S061H03 | " 2SA1815 (GR) | | |
| Q804 | L260D022H02 | " 2SC1959 (Y) | | |
| Q805 | U260S061H03 | " 2SC1815 (GR) | | |
| Q806 | " | " " | | |
| D1 | U264D006H11 | DIODE | IN60 | |
| D2 | " | " | " | |
| D3 | U264D037H01 | " | 1N4148 | |
| D4 | " | " | " | |
| D5 | " | " | " | |
| D6 | U264D009H11 | " | 10D1 | |
| D7 | U264D037H01 | " | 1N4148 | |
| D8 | " | " | " | |
| D21 | " | " | " | |
| D801 | U264D009H11 | DIODE | 10D1 | |
| D802 | " | " | " | |
| D803 | " | " | " | |
| D804 | U264D009H11 | DIODE | 10D1 | |
| D805 | L264C003H72 | DIODE ZENER UZ-27B (M) | | |
| D806 | " | " | " | |
| D807 | U264D037H01 | DIODE | 1N4148 | |
| BD801 | L264D017H01 | DIODE | PB153M | |
| LED1 | L268Y027H01 | LED SE-9431D | | |
| LED2 | L268Y025H01 | LED SE-7231 | | |
| LED3 | L268Y024H01 | LED SE-6721 | | |
| LED4 | L268Y025H01 | LED SE-7231 | | |
| | L268Y028H01 | LED DISPLAY | | |
| IC1 | L262C029H01 | IC, LA1222 | | |
| IC2 | L262C016H01 | IC, LA1235 | | |
| IC3 | L262C023H01 | IC, TD6104P | | |
| IC4 | L262C019H01 | IC, LB1450 | | |
| IC5 | L262C017H01 | IC, LA1240 | | |
| IC6 | L262C018H01 | IC, LA3390 | | |
| IC7 | L262C022H01 | IC, TC9137BP | | |
| IC9 | L262C020H01 | IC, NJM2043 (D) | | |
| IC10 | " | " " | | |
| IC11 | L262C020H01 | " " | | |
| IC601 | L262C024H01 | IC, TD6301AP | | |
| IC801 | L262C025H01 | IC, NJM78M05 | | |
| IC802 | L262C026H01 | IC, NJM78M15 | | |
| IFT1 | L364Y001H01 | IFT FM | | |
| IFT2 | L374Y002H01 | IFT AM | | |
| IFT3 | L374Y003H01 | IFT AM | | |
| L1 | L361/024H01 | COI-FM ANT | | |
| L1 | L361y024H01 | " " | | |
| L1 | " | " " | | A |
| L1 | " | " " | | B |
| L1 | " | " " | | C |
| L1 | " | " " | | B |
| L1 | " | " " | | C |
| L1 | " | " " | | C |

| SYMBOL NO. | PART NO. | DESCRIPTION | REF | SYMBOL NO. | PART NO. | DESCRIPTION | REF |
|------------|-------------|---------------------------|-----|------------|--------------|--------------------|-----|
| L2 | L370Y030H01 | COI-FM ANT | | VR5 | L127Y003H13 | VR SEMI B100K | C3 |
| L3 | L361Y022H01 | COIL-AM OSC | | VR5 | L127Y003H13 | " | C2 |
| LPF1 | L351Y003H01 | FILTER, LOW PASS | | VR6 | L127Y003H12 | VR SEMI B50K | |
| LPF2 | " | " | | SW | L432Y030H01 | SW PUSH SEARCH | |
| LPF3 | U351C046H01 | FILTER | C1 | SW | L432Y032H01 | SW PUSH AM/FM | |
| PT1 | L350Y028H01 | TRANS-POWER | A1 | SW | L432Y042H02 | SW PUSH BLEND/MONO | |
| PT1 | L350Y035H01 | " | A | SW | L432S066H01 | SW PUSH UP/DOWN | |
| PT1 | L350Y030H01 | " | B | SW | U432S066H01 | SW PUSH | |
| PT1 | L350Y029H01 | " | C1 | J | L440Y005H01 | JACK RCA | |
| PT1 | L350Y029H01 | " | B1 | PT1-PT11 | U685S223H01 | PIN | |
| PT1 | L350Y030H01 | " | C3 | | U565D381H02 | RADIATOR | |
| PT1 | L350Y036H01 | " | C2 | | L440Y007H01, | ANT TERMINAL | |
| PT1 | L350Y029H01 | " | | | | | |
| SW | L432Y043H01 | POWER SW | A1 | | | | |
| SW | L432Y043H01 | " | A | | | | |
| SW | L432Y044H01 | " | B | | | | |
| SW | L432Y044H01 | " | C1 | | | | |
| SW | L432Y044H01 | " | B1 | | | | |
| SW | L432Y044H01 | " | C3 | | | | |
| SW | L432Y043H01 | " | C2 | | | | |
| SW | L432Y044H01 | " | | | | | |
| FEI | L929Y001H01 | FRONT END | A1 | | | | |
| FEI | L929Y001H01 | " | A | | | | |
| FEI | L929Y001H01 | " | B | | | | |
| FEI | L929Y502H01 | " | C1 | | | | |
| FEI | L929Y001H01 | " | C | | | | |
| FEI | L929Y001H01 | " | B1 | | | | |
| FEI | L929Y001H01 | " | C3 | | | | |
| FEI | L929Y002H01 | " | C2 | | | | |
| | L230Y002H01 | CONNECTOR | | | | | |
| | U452S024H45 | " | | | | | |
| | " | " | | | | | |
| | U452S024H51 | " | | | | | |
| | U452S024H43 | " | | | | | |
| | U452S024H42 | " | | | | | |
| | U452S024H42 | " | | | | | |
| CF1 | L365Y002H01 | FILTER, CERAMIC FM 10,7Mc | | | | | |
| CF2 | " | " | | | | | |
| CF3 | " | " | | | | | |
| CF4 | L365Y001H01 | FILTER CERAMIC AM SF2450B | | | | | |
| CR1 | L285Y001H01 | CRYSTAL 7.2MHz | | | | | |
| VC1 | U202S002H04 | VC-TRIM 30N750 GREEN | | | | | |
| VC2 | " | " | | | | | |
| VC3 | " | " | | | | | |
| VCP1 | U264Y014H01 | KV12362 | | | | | |
| VCP2 | " | " | | | | | |
| VR1 | L127Y003H07 | VR SEMI B10K | | | | | |
| VR2 | L127Y003H12 | VR SEMI B50K | | | | | |
| VR3 | L127Y003H07 | VR SEMI B10K | | | | | |
| VR4 | L127Y003H02 | VR SEMI B1K | | | | | |
| VR5 | L127Y003H13 | VR SEMI B100K | A1 | | | | |
| VR5 | L127Y003H13 | " | A | | | | |
| VR5 | L127Y003H13 | " | B | | | | |
| VR5 | L127Y003H07 | " | C1 | | | | |
| VR5 | L127Y003H13 | " | C | | | | |
| VR5 | L127Y003H13 | " | B1 | | | | |


| Item | Parts No. | Name | Q'ty |
|------|-------------|-------------------|------|
| 01 | L580B004H01 | Cabinet Bottom | 1 |
| 02 | L561B006H01 | Cabinet Top | 1 |
| 03 | L702A015H01 | Panel Front | 1 |
| 04 | L703B020H01 | Cover Back | A1 |
| 04 | L703B020H02 | " | A |
| 04 | L703B020H03 | " | B |
| 04 | L703B020H04 | " | C1 |
| 04 | L703B020H05 | " | C |
| 04 | L703B020H06 | " | B1 |
| 04 | L703B020H07 | " | C3 |
| 04 | L703B020H08 | " | C2 |
| 05 | L547B008H01 | Frame (R) | 1 |
| 06 | L547B007H01 | Frame (L) | 1 |
| 07 | L547C002H01 | Frame Center | 1 |
| 08 | L704D066H01 | Knob Search | 1 |
| 09 | L704D060H01 | Knob Tuning | 1 |
| 10 | L704D059H01 | Knob AM/FM | 1 |
| 11 | L704D059H02 | Knob Enter | 1 |
| 12 | L704D061H01 | Knob Push | 2 |
| 13 | L704D061H02 | Knob Power | 1 |
| 14 | L703D022H01 | Lens | 1 |
| 15 | L541D083H01 | Holder LED | 1 |
| 16 | L704D063H01 | Chassis Knob | 1 |
| 17 | L546D053H01 | Holder | 1 |
| 18 | L525D004H01 | Level Push | 2 |
| 19 | L241A030H03 | PCB Ass'y up/down | 1 |
| 20 | L241C021G01 | PCB Ass'y Display | 1 |
| 21 | L241A030H02 | PCB Ass'y SW | 1 |
| 22 | L241B074G01 | PCB Ass'y Tuner | 1 |
| 23 | L440Y007H01 | Ant Terminal | 1 |
| 24 | L350Y044H01 | Trans Power | 1 |
| 25 | L771D006H01 | Foot Rubber | 4 |
| 26 | L370Y030H01 | Coil AM Ant | 1 |
| 27 | L452D001H01 | Connector FM Ant | 1 |
| 28 | L540D051H01 | Clamper | 2 |
| 29 | L242Y501H01 | Power Cord | A1 |
| 29 | L242Y501H01 | " | A |
| 29 | L242Y501H06 | " | B |
| 29 | L242Y501H18 | " | C1 |
| 29 | L242Y501H18 | " | C |
| 29 | L242Y501H01 | " | B1 |
| 29 | L242Y501H01 | " | C3 |
| 29 | L242Y501H18 | " | C2 |
| 30 | U656S164H24 | T-Screw 1-3x8 | 7 |
| 31 | U656S263H22 | T-Screw 2-3x5 | 2 |
| 32 | L650D005H02 | B-Screw M4x5 | 4 |
| 33 | U656S164H24 | T-Screw 1-3x8 | 6 |
| 34 | U650S025H31 | P-Screw M4x10 | 4 |
| 35 | U656S164H24 | T-Screw 1-3x8 | 6 |
| 36 | U656S263H23 | T-Screw 2-3x6 | 6 |
| 37 | U656S164H24 | T-Screw 1-3x8 | 8 |
| 38 | U656S164H24 | T-Screw 1-3x8 | 4 |
| 39 | U650S063H19 | B-Screw M3x6 | 1 |
| 40 | U656S164H24 | T-Screw 1-3x8 | 2 |
| 41 | U680S322H03 | Washer Toothed 3 | 2 |

EXPLODED VIEW

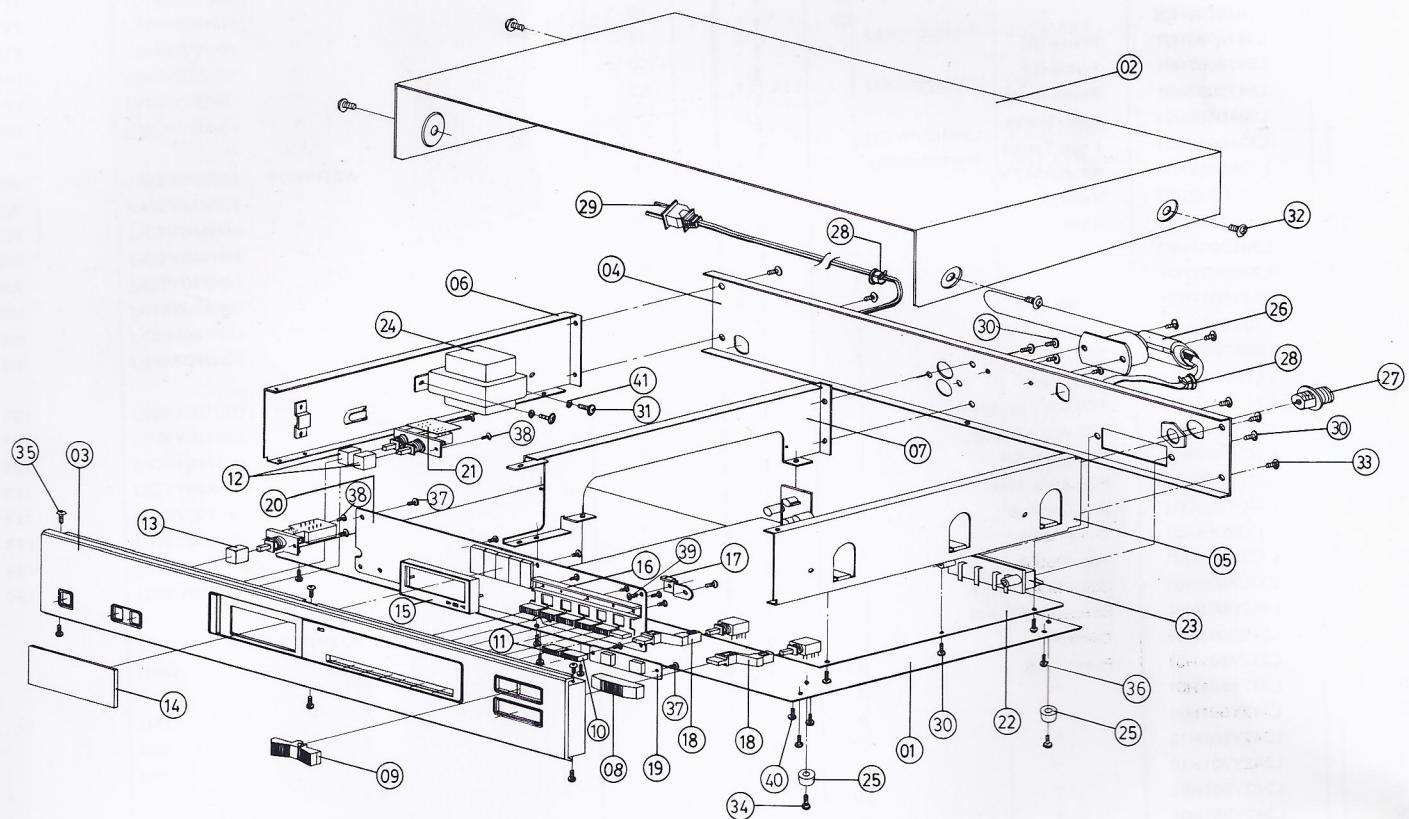

NAD ELECTRONICS, INC.

International Service Center
675 Canton Street
Norwood, Massachusetts 02062
Telephone: (617) 769-7050
Facsimile: (617) 762-3555
Telex: 6817093 NAD USA INC



SERVICE BULLETIN NO. 8602

JUNE 6, 1986

4130 LOSS OF AUDIO WHEN HOT


DESCRIPTION: Occasionally, you may receive a complaint of loss of audio at high operating temperature (tuner works correctly when cold, but sound disappears after warmup.)

This may be caused by slightly low output of regulator IC802, which, in conjunction with normal thermal drift of zener D806, results in false activation of the turn on/off muting circuit (illustrated below).

REMEDY: It is preferable to modify the tuner according to Method A. If you cannot obtain a 24V zener, it is acceptable to modify the 4130 according to Method B.

Method A: Change 27V zener D806 to 24V type, by adding the new diode in parallel with the original, on the print circuit (foil) side of the PCB.

Method B: Increase B+ slightly, by cutting the ground foil to regulator IC802, and installing a diode across the cut. Use BAW-62, 1N4148, or equivalent. Install the diode with its cathode stripe away from the IC.

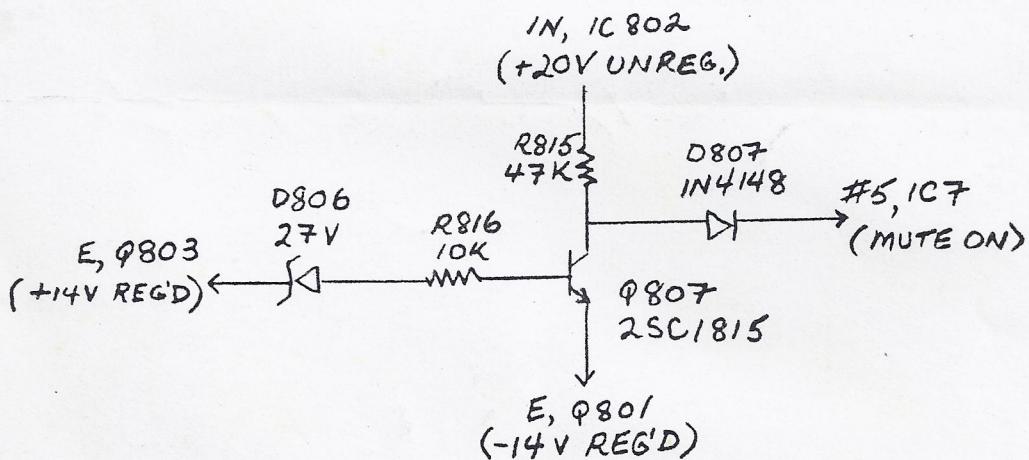

D806 will be changed in production to a 24V zener, commencing with S/N D413011280.

SERVICE MANUAL

4130

AM/FM STEREO TUNER

NAD ELECTRONICS
BOSTON/LONDON/TOKYO

© 1985 BY NAD 339 PRINTED IN TAIWAN R.O.C.