SCHEMATIC DIAGRAM

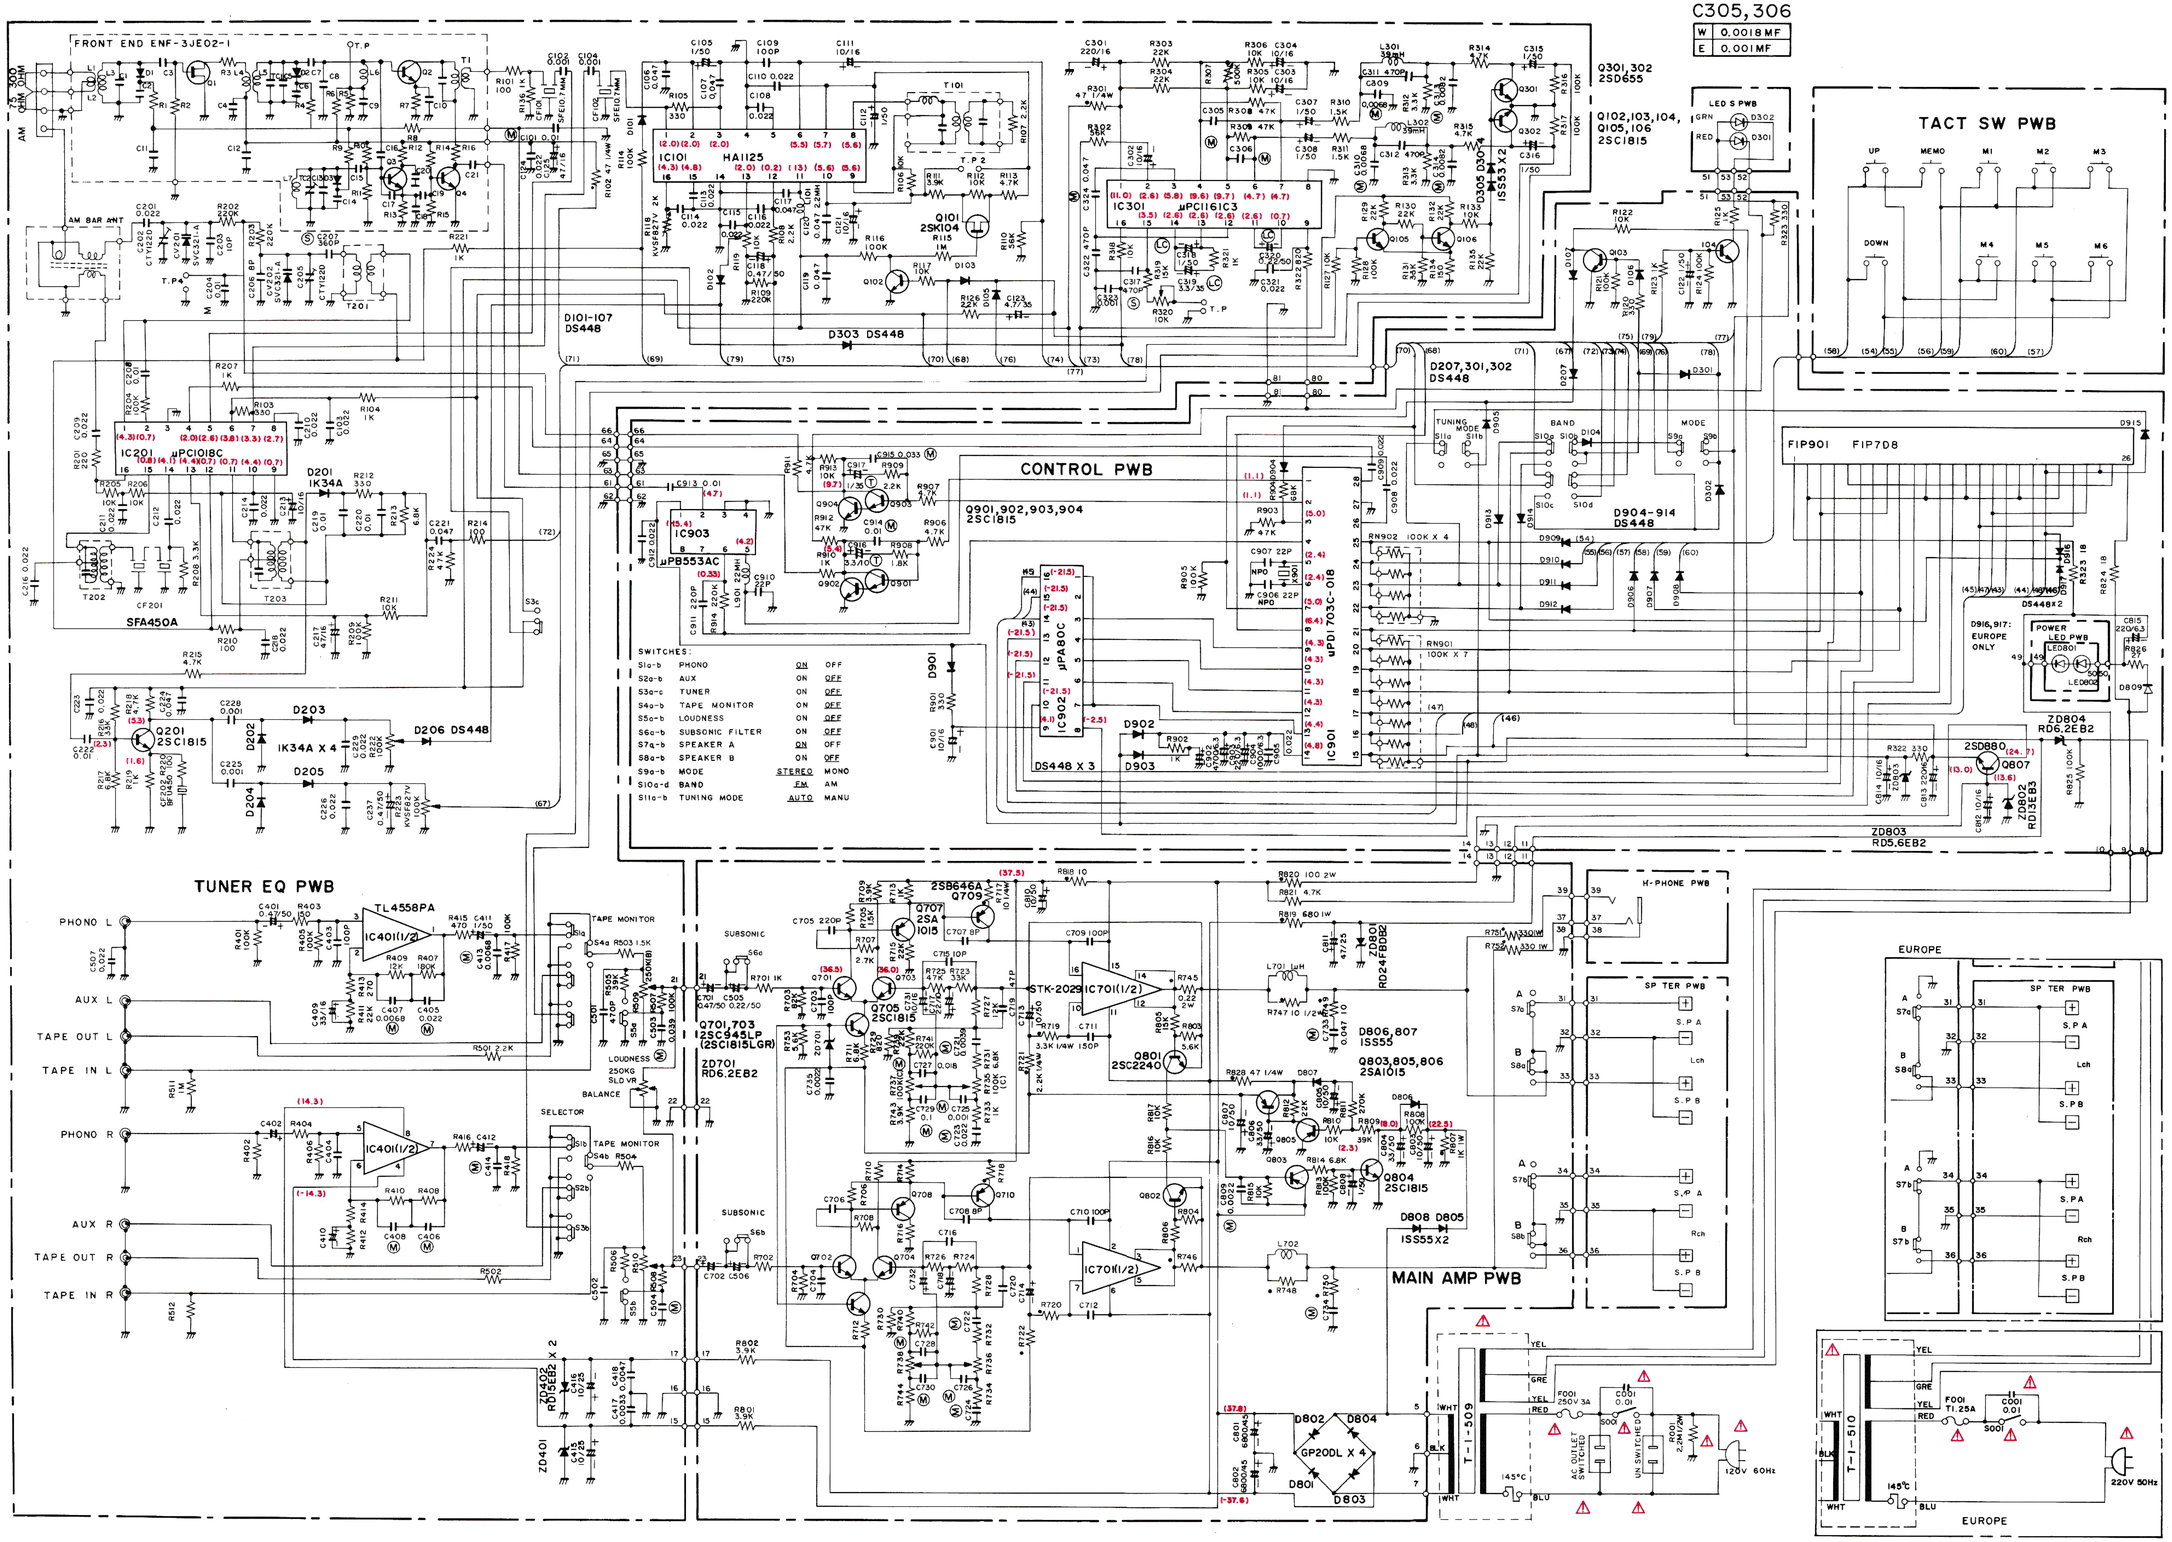

C305,306

W	0.0018MF
E	0.001MF

SEMICONDUCTORS

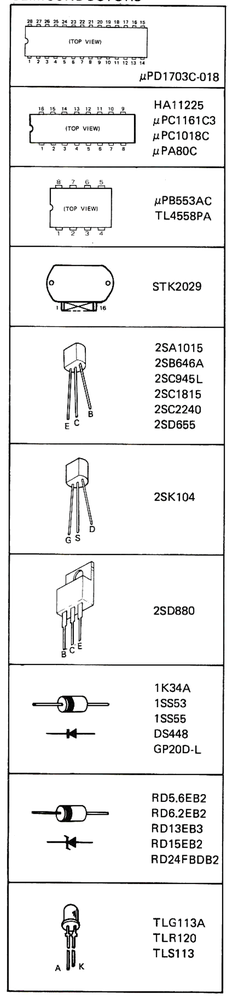

NOTES:

1. SCHEMATIC IS SUBJECT TO CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED:

2. RESISTANCE VALUES ARE IN OHMS. K=1,000 ; M=1,000,000
3. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR μF (P=pF, M=μF), LESS THAN 1.0 ARE IN μF. (ELECTROLYTIC CAPACITANCE VALUES ARE IN μF/WV.)
4. VOLTAGES ARE MEASURED TO CHASSIS GROUND WITH A "DC VOLTMETER".

SCHEMATIC SYMBOLS:

(M) POLYESTER FILM CAPACITOR
(S) POLYSTYRENE FILM CAPACITOR
(LC) LOW CURRENT LEAKAGE ELECTROLYTIC CAPACITOR
(NO MARK) CERAMIC CAPACITOR
• NONFLAMMABLE RESISTOR

SERVICE INFORMATION:

CAUTION: REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

1. EACH PRECAUTION TO BE FOLLOWED DURING SERVICING.
2. ⚠ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.
3. BEFORE RETURNING THIS APPLIANCE TO THE CUSTOMER, YOU MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT.