

# ONKYO SERVICE MANUAL

## QUARTZ SYNTHESIZED TUNER AMPLIFIER MODEL TX-7420



Black and Silver models

BUGV, UGV	220V AC, 50Hz
-----------	---------------

### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  $\Delta$  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

## TABLE OF CONTENTS

Specifications	2
Block diagram	3
Exploded view	4
Parts list	5
Circuit description	6
Pcb view/parts list	
Tone/Headphone terminal	11
Display/Volume control	12
FM/AM tuner	13
Power amplifier	15
Schematic diagram	17
Adjustment procedures	19
Service procedures	21
Packing view	22

**ONKYO**  
**AUDIO COMPONENTS**

# SPECIFICATIONS

## AMPLIFIER SECTION

Power output:	33 watts per channel, min RMS, at 8 ohms, both channels driven, from 40Hz to 20kHz, with no more than 0.3% THD.
Musical Power Output:	2 × 74 watts at 4 ohms, 1kHz (DIN) 2 × 54 watts at 8 ohms, 1kHz (DIN)
Continuous Power Output:	2 × 42 watts at 4 ohms, 1kHz (DIN) 2 × 35 watts at 8 ohms, 1kHz (DIN)
Total Harmonic Distortion:	0.1% at 25W 0.1% at 1 watt output
IM Distortion:	0.1% at 25W 0.1% at 1 watt output
Damping Factor:	35 at 8 ohms
Frequency Response:	20-30,000Hz ± 1dB
RIAA Deviation:	20-20,000Hz ± 0.8dB
Sensitivity and Impedance:	Phono: 2.5mV/50kohms CD/Tape Play: 150mV/50kohms Tape Rec: 150mV/3.5kohms (Phono)
Phono overload:	120mV RMS at 1kHz, 0.3% THD
Signal-to-Noise Ratio:	Phono: 85dB (at 10mV input, A weighted) 75dB (IHF A-202) CD/Tape: 95dB (A weighted) 80dB (IHF A-202)
Tone Controls:	Bass: ± 10dB at 100Hz Treble: ± 10dB at 10kHz
Loudness (-30dB):	+7dB at 70Hz, +5dB at 10kHz

## TUNER SECTION

### FM:

Tuning Range:	87.50-108.00MHz (50kHz steps)
Usable Sensitivity:	Mono: 12.4dBf, 2.3μV, IHF 1.2 μV, 75 ohms DIN Stereo: 2.5 μV, 75 ohms
50dB Quieting Sensitivity:	Mono: 2.2 μV, 75 ohms Stereo: 22 μV, 75 ohms
Capture Ratio:	1.5dB
Image Rejection Ratio:	80dB
IF Rejection Ratio:	90dB
Signal-to-Noise Ratio:	Mono: 70dB Stereo: 65dB
Selectivity:	50dB DIN (±300kHz, 40kHz Devi.)
AM Suppression Ratio:	50dB
Harmonic Distortion:	Mono: 0.15% Stereo: 0.30%
Frequency Response:	30-15,000Hz ± 1.5dB
Stereo Separation:	40dB at 1kHz 30dB at 100-10,000Hz
Muting level:	17.2dBf, 2μV
Stereo Threshold:	17.2dBf, 2μV

### AM:


Tuning Range:	522-1,611kHz (9kHz steps)
Usable Sensitivity:	30μV
Image Rejection Ratio:	40dB
IF Rejection Ratio:	30dB
Signal-to-Noise Ratio:	40dB
Harmonic Distortion:	0.8%

## GENERAL

Dimensions (W × H × D):	435 × 97 × 317mm 17-1/8" × 3-15/16" × 12-1/2"
Weight:	5.7kg., 12.6lbs.


Specifications and features are subject to change without notice.

# BLOCK DIAGRAM

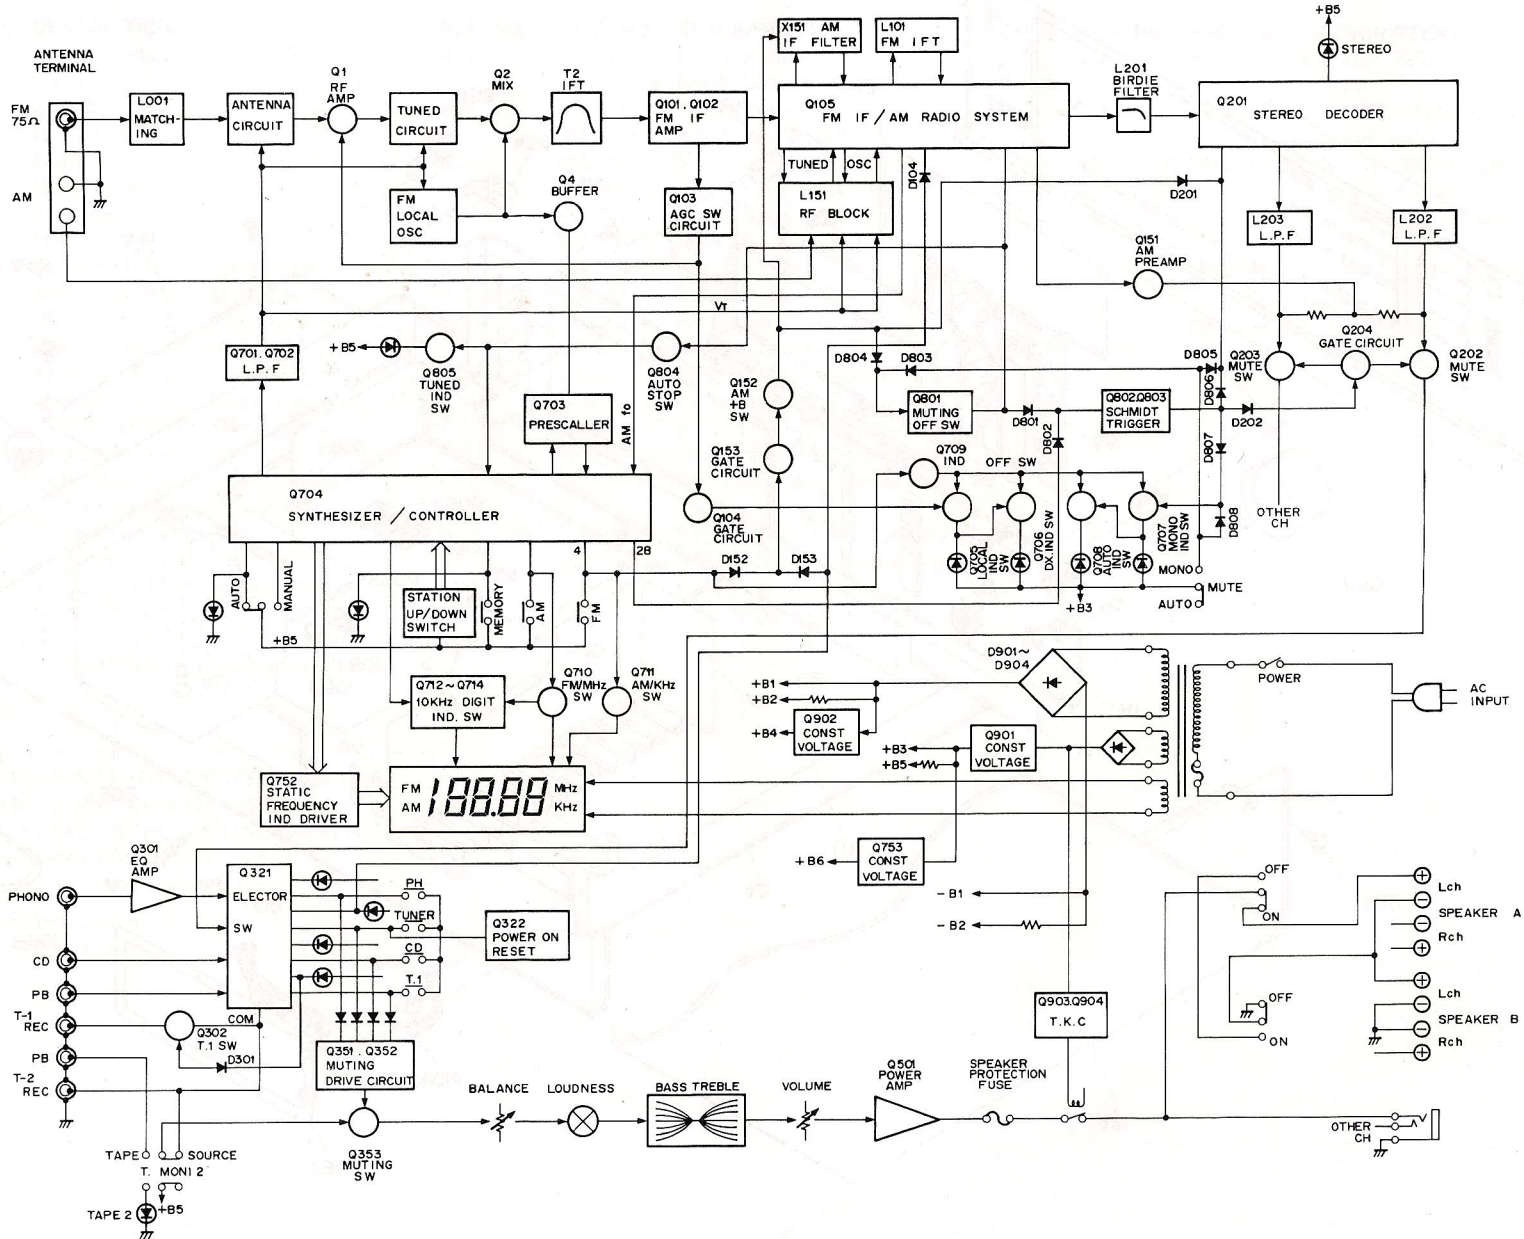

EXPLODED VIEW

# EXPLODED VIEW

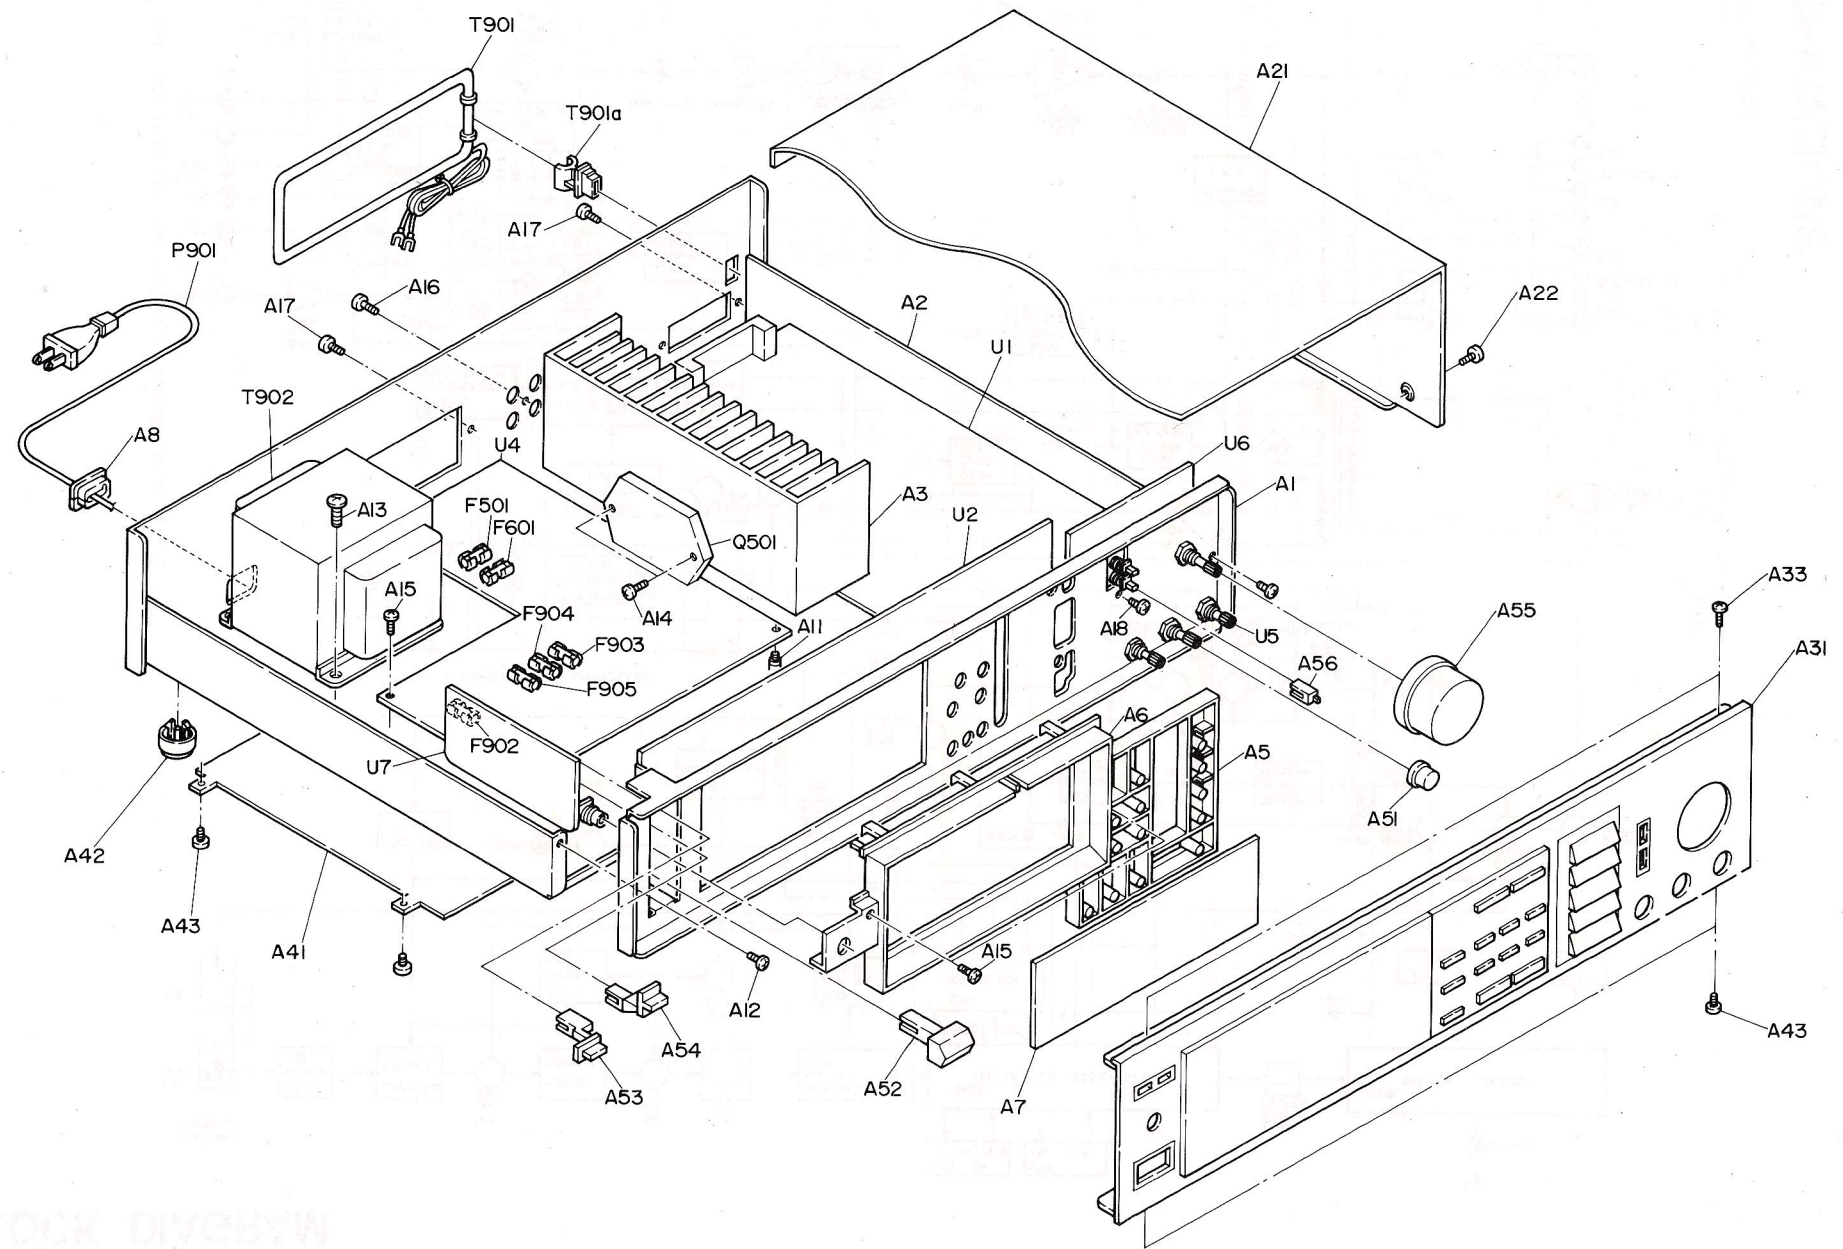

Block Diagram

# PARTS LIST

REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION
A1	27110273A	Front bracket	A51	28322008	Knob, Balance <S>	U1	18664592-1A	NARF-2592-1A, FM/AM tuner pc board ass'y
A2	27100128	Chassis		28322021-2	Knob, Balance <B>	U2	18664593-1A	NADIS-2593-1A, Display circuit pc board ass'y
A3	27160183	Radiator	A52	28322487	Knob, Power <S>	U4	18664595-1A	NAAF-2595-1A, Pri. and main amplifier pc board ass'y
A5	28322486	Holder, Knob		28322488	Knob, Power <B>	U5	18668596-1	NATC-2596-1, Tone control circuit pc board ass'y
A6	2719345B	Holder	A53	28322469	Knob, Speaker A <S>	U6	18668597-1	NAVR-2597-1, Volume control pc board ass'y
A7	28133161	Back palte		28322304-1	Knob, Speaker A <B>	U7	18668598-1	NAHP-2598-1, Headphone terminal pc board ass'y
A8	27300750	△ Strainrelief	A54	28322470	Knob, Speaker B <S>			
A11	27190266A	Holder		28322305-1	Knob, Speaker B <B>			
A12	834430088	3TTS+8B(BC), Tapping screw	A55	28322468	Knob, Volume <S>			
A13	830440089	4TTC+8C(BC), Tapping screw		28322482	Knob, Volume <B>			
A14	834430168	3TTS+16B(BC), Tapping screw	A56	28322467A	Knob, Loudness <S>			
A15	831130088	3TTW+8B, Tapping screw		28322481A	Knob, Loudness <B>			
A16	834230108	3TTS+10B(Ni), Nickel screw	F501, F601	252075	△ 2.5A-SE-EAK, Speaker fuse			
A17	834430108	3TTS+10B(BC), Tapping screw	F902	252073	△ 1.6A-SE-EAK, Primary fuse			
A18	82143006	3P+6FN(BC), Pan head screw	F903, F904	252077	△ 4A-SE-EAK, Secondary fuse			
A21	28184267A	Top cover <S>	F905	252070	△ 1A-SE-EAK, Secondary fuse			
	28184268-1	Top cover <B>	P901	253128Bor	△ AS-CEE, Power supply cord			
A22	834430068	3TTS+6B(BC), Tapping screw		253130A				
A31	1A006121	Front Panel ass'y <S>	Q501, Q601	222044	STK-4151V, Power amplifier IC			
	1A005121	Front panel ass'y <B>	T901	232119	NMA-3052, AM loop antenna			
A33	838430068	3TTB+6B(BC), Tapping screw	T901a	27190105	Holder, antenna			
A41	27170223	Bottom board	T902	2300077	△ NPT-912G, Power transformer			
A42	27175130	Leg						
A43	834430068	3TTS+6B(BC), Tapping screw						

NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBERS SPECIFIED.

NOTE: <S> : Only Silver model  
<B> : Only Black model

# CIRCUIT DESCRIPTIONS

## 1.Synthesizer and controller operation


Pin No.	Symbol	Terminal	Description
1	GND	Ground	
2	XT	X'tal	Connected to the 7.2MHz crystal oscillator for the reference frequency.
3	XT		
4	FM	FM band specification input	Mutual reset type,performs switching of each band,FM/MW/LW.
5	MW	MW band specification input	
6	LW	LW band specification input	
7	MANUAL	Manual tuning mode specification input	Mutual reset type,performs auto search and manual operation mode switching during UP/DOWN tuning.
8	AUTO	Auto search tuning mode specification input	
9	UP	UP tuning key input	Connect the push key and perform UP/DOWN tuning.
10	DOWN	DOWN tuning key input	
11	STO	Memory store command input	The preset memory is set to the write mode when the key is pressed.
12~19	M1~M8	Preset memory channel specification input	Controls the write and read out of the internal 16-station preset memory along with the MC1 and MC2 input.
20	MC-1	Memory control input	Set the 16-station preset memory to the 8 FM/8 AM station mode or the FM/AM 2-band 16-station random mode.The 16-station random mode is used in this unit.
21	MC-2		
22	OSC2	AM oscillator terminal	CR connection terminal for the oscillator that determines the scan speed during the AM search mode.
23	OSC1	FM oscillator terminal	CR connection terminal for the oscillator that determines the scan speed during the FM search mode.
24	0/5	FM 50kHz output	Output that represents the 50kHz FM band tuning step for European models. Goes to the high level for the 50kHz setting.
25	CK2	Tuned frequency data output	Outputs the serial data and timing clock to the tuned frequency display driver.
26	CK1		
27	DATA		
28	MUTE	Muting signal output	Goes to the high level during muting output.
29	E2	Region specification	See table 1.
30	E1	input	
31	STOP 3	AM IF signal input	During AM reception, this counts the IF signal and stops auto search.
32	STOP 2	Auto search stop signal input	When the stop 1 input (pin 33) is at the high level and this terminal goes to the high level, auto search is stopped.
33	STOP 1	Scan speed slow input	When the high level is input at this terminal, the auto search speed is cut in half.

Pin No.	Symbol	Terminal	Description
34	DO 1	Error output	Charge pump output of the phase detector which constitutes the PLL. High level is output when the divided oscillation frequency is high than the reference frequency. In the opposite case, low level is output. Floating occurs when the frequencies match. The output is applied to the variable capacitor diode in the front end through low pass filter Q701 and Q702. The output from both terminals is the same, but only DO1 is used.
35	DO 2		
36	TEST	Test terminal	Test mode at the high level.
37	FM IN	FM programmable counter input	Connect to the prescaler output (pin 3 of Q703)
38	PSC	Pulse swallow control output	Output to the control the division ratio of the prescaler.
39	AM IN	AM local oscillator signal input	Terminal for input of AM local oscillator signal.
40	INH	Inhibit input	Operates normally at the high level. Inhibit status at the low level.
41	INT	Initialize input	Operates normally at the high level. At the low level, the internal status is initialized.
42	Vdd	Power supply	Device power terminal: supplies 5V during the normal operation and 2.5V from the super capacitor (C715) for the memory preservation.

Table 1

E1 (Pin 30)	E2 (Pin 29)	Region	Band	Frequency range	Intermediate Frequency	Scan step	Reference Frequency
0	1	U.S.A	FM	87.5~108.0MHz	+10.7MHz	100kHz	25kHz
			AM 1	520 ~1710kHz	+450kHz	10kHz	10kHz
1	1		AM 2	522 ~1710kHz	+450kHz	9kHz	9kHz
1	0	Europe	FM	87.50 ~108.00MHz	+10.7MHz	50kHz	25kHz
			MW	522 ~1611kHz	+450kHz	9kHz	9kHz
			LW	153 ~360kHz	+450kHz	1kHz	1kHz
0	0	Japan	FM	76.0~90.0MHz	-10.7MHz	100kHz	25kHz
			AM	522 ~1611kHz	+450kHz	9kHz	9kHz

## 2.PLL tuned circuit

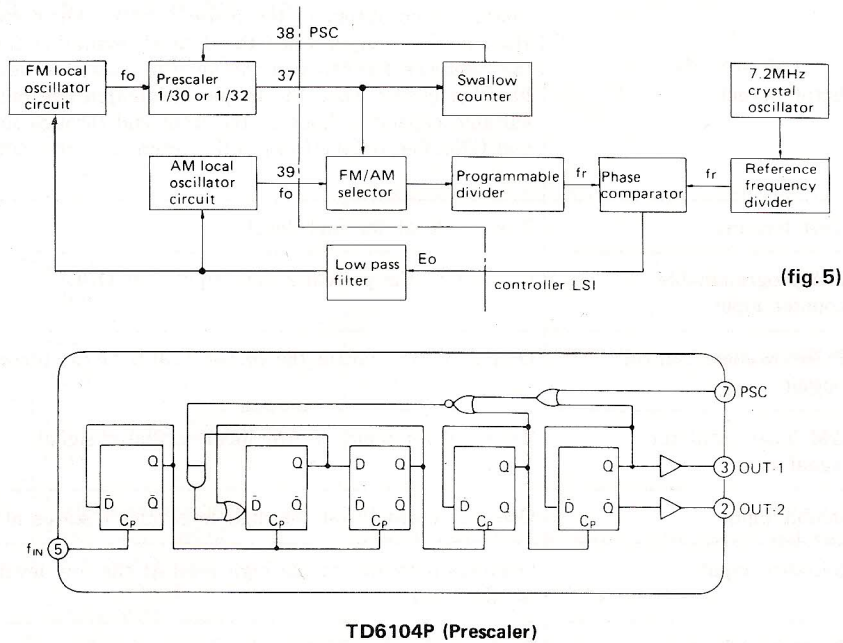

TD6104P (Prescaler)

A block diagram of the tuned of the PLL is shown in fig. 5.

**Operation during AM reception**

The reception frequency is applied to the programmable divider where it is divided to  $1/N$  and output as  $f_v$ . This is applied to the phase comparator where it is compared with frequency reference  $f_r$  (9kHz for G/W models and 10kHz for D model). If  $f_r$  and  $f_v$  differ,  $E_o$  equal to the difference in frequency is output. Since error output  $E_o$  is a pulse waveform, it is passed through the low pass filter to change it into DC voltage  $V_d$ , which is applied to the variable capacitor diode in the front end to change the reception frequency. This continues until  $f_v$  and  $f_r$  are the same and  $E_o=0$ .

**Operation during FM reception**

The pulse swallow method is used in the prescaler of this unit. In this type of prescaler, a supplementary number



(changed according to the program code input) and the divided reception frequency from the prescaler are combined in the control counter and the prescaler's division factor is switched  $1/30$  or  $1/32$  according to external control ( $1/32$  when the PSC terminal is "H" and  $1/30$  when it is "L").

The station oscillator frequency is applied to the programmable divider, but the programmable divider has an upper frequency limit of only 30MHz, so the pulse swallow-type prescaler, which can be used up to 150MHz, is inserted for division to  $1/N_p$ ;

The signal is applied to the programmable divider and divided to  $1/N$ . The result is compared with a 25kHz frequency reference in the phase detector and error is output as  $E_o$  until a match is obtained as in AM operation.



### 3. Frequency indicator circuit

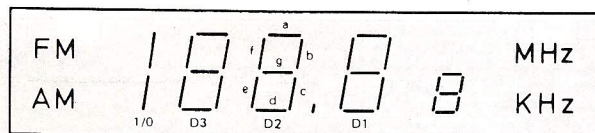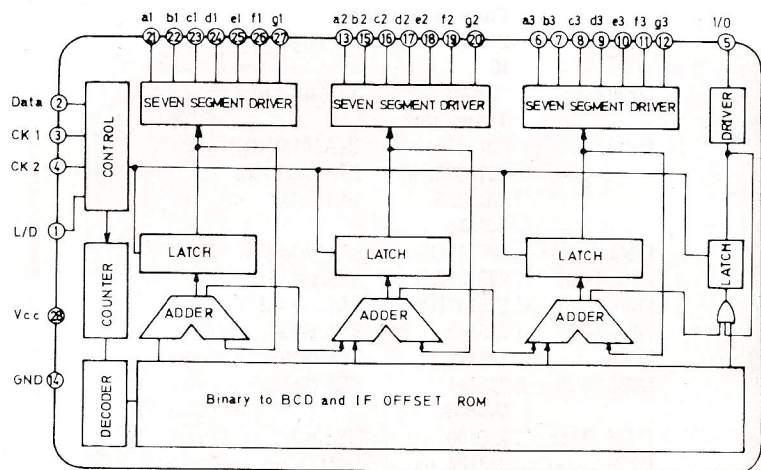


TD6301AP block diagram


Pin No.	Terminal	Description
1	L/D	Output indication switching input terminal:Fluorescent display at the low level,and LED display at the high level.
2	Data	Tuned frequency data input terminal:Input from the system controller LSI to the serial.
3,4	CK1 CK2	Tuned frequency data input control timing input terminal: Transferred simultaneously with data from the system controller LSI.
5	I/O	Segment drive output terminal:Sets the number of display digit for FM(100MHz) and AM(1000kHz) reception.
6-12	a3-g3	Seven segment drive output terminal:Sets the number of display digit for FM(10MHz) and AM(100kHz) reception.
13, 15-20	a2-g2	Seven segment drive output terminal:Sets the number of display digit for FM(1MHz) and AM(10kHz) reception.
21-27	a1-g1	Seven segment drive output terminal:Sets the number of display digit for FM(100kHz) and AM(1kHz) reception.
14	Vcc	Power source terminal
28	Gnd	Ground

# BLOCK DIAGRAM OF IC


$\mu$ PC1161C3(Stereo decoder)

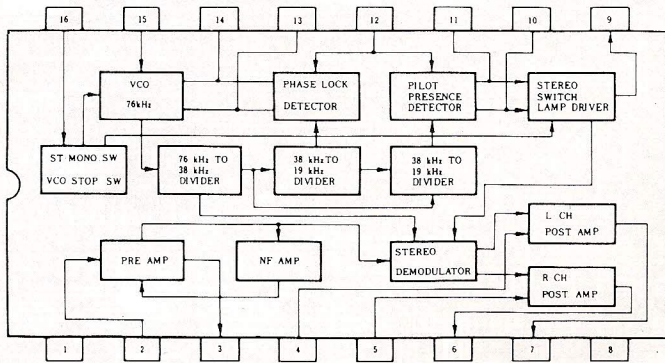


STK-4151V(Power amplifier)

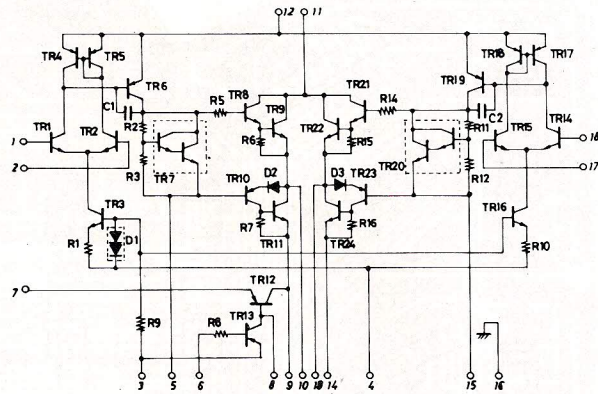


LA1265(AM radio/FM IF system)

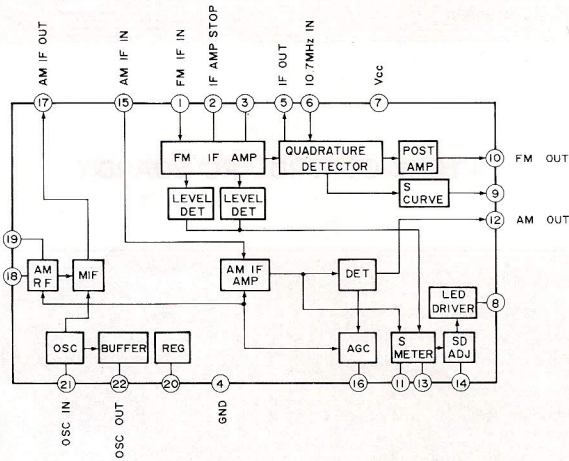

NJM4558/4559(Operational amplifier)

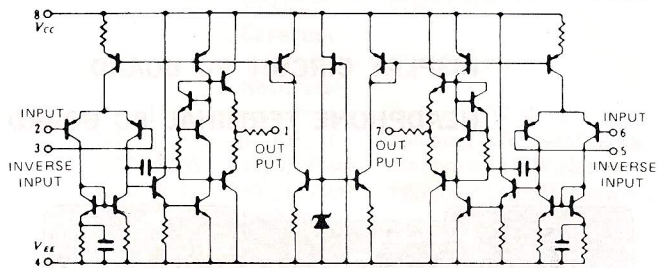


LC7816(Analog switch)

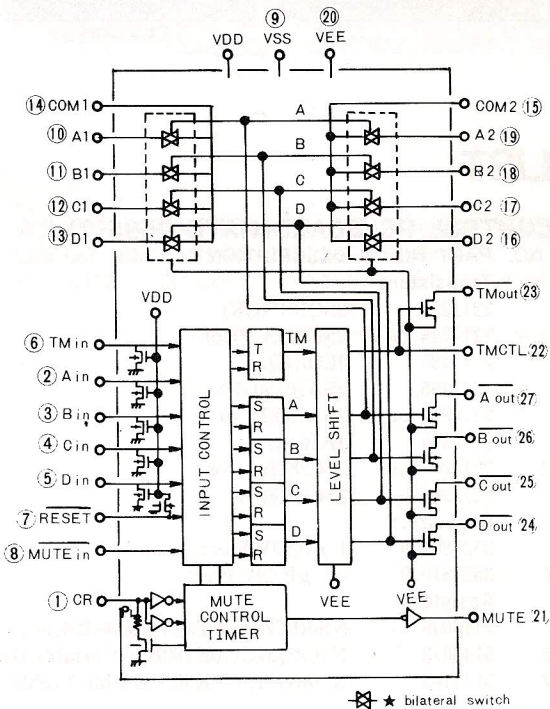


⊗ ★ bilateral switch



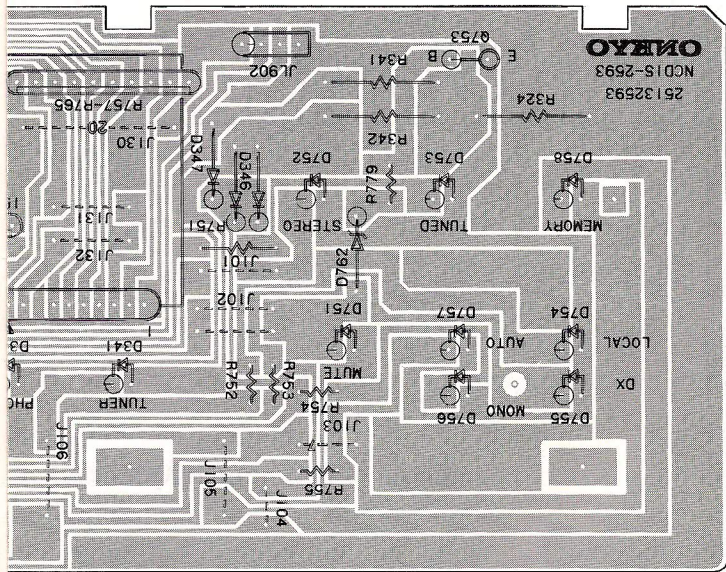

**VOLUME CONTROL PC BOARD**

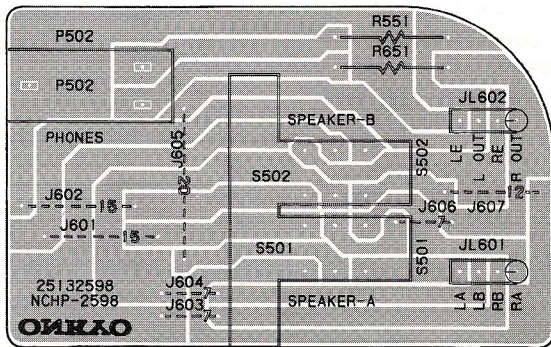


**VOLUME CONTROL PC BOARD (NAVR-2597-1)**

CIRCUIT NO.	PART NO.	DESCRIPTION
R371, R471	5104180	N16RGH100KBT30, Variable resistor, Volume
S351, S352	25035520	NPS-222-L482, Push switch

**DISPLAY PC BOARD (NADIS-2593-1A)**

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Fluorescent tube</b>		
Q751	212016	FIP7B8CS
<b>IC</b>		
Q752	222673	TD6301AP
<b>Transistor</b>		
Q753	2211455, 2210803 or 2212495	2SA1015(GR), 2SA733(P) or JA101(Q)
<b>L.E.Ds</b>		
D341-D344	225137CG,	SEL2413ECG,
D751, D753	225137DG or	SEL2413EDG or
D754, D757	225137DY	SEL2413EDY
D345, D755	225142	SEL2913K
D756	225142	SEL2913K
D752, D758	225141	SEL2213C
<b>Diodes</b>		
D346-D348	223150,	US1040,
D759	223124 or 223145	1S2473 or 1S2076TD
D760, D761	223150, 223124 or 223145	US1040, 1S2473 or 1S2076TD
D762	2243192 or 2239552	MTZ8.2A or RD8.2E-B2
<b>Capacitor</b>		
C751	352741009	10μF, 16V, Elect.
<b>Resistors</b>		
R341, R342	441522024	2kohm, 1/2W, Metal oxide film
R343	441628214	820ohm, 1/2W, Metal oxide film
R757-R765	49121333409	33kohm × 9, 1/8W, Network
R766-R778	49121333413	33kohm × 13, 1/8W, Network
<b>Switches</b>		
S321-S324	25035389	NPS-111-S353
S325	25035515	NPS-142-L477
S751-S763	25035389	NPS-111-S353
<b>Holder</b>		
	27190434	L.E.D
<b>Cushion</b>		
	28140593	3.5 × 10 × 40mm

PRINTED CIRCUIT BOARD VIEW FROM BOTTOM SIDE

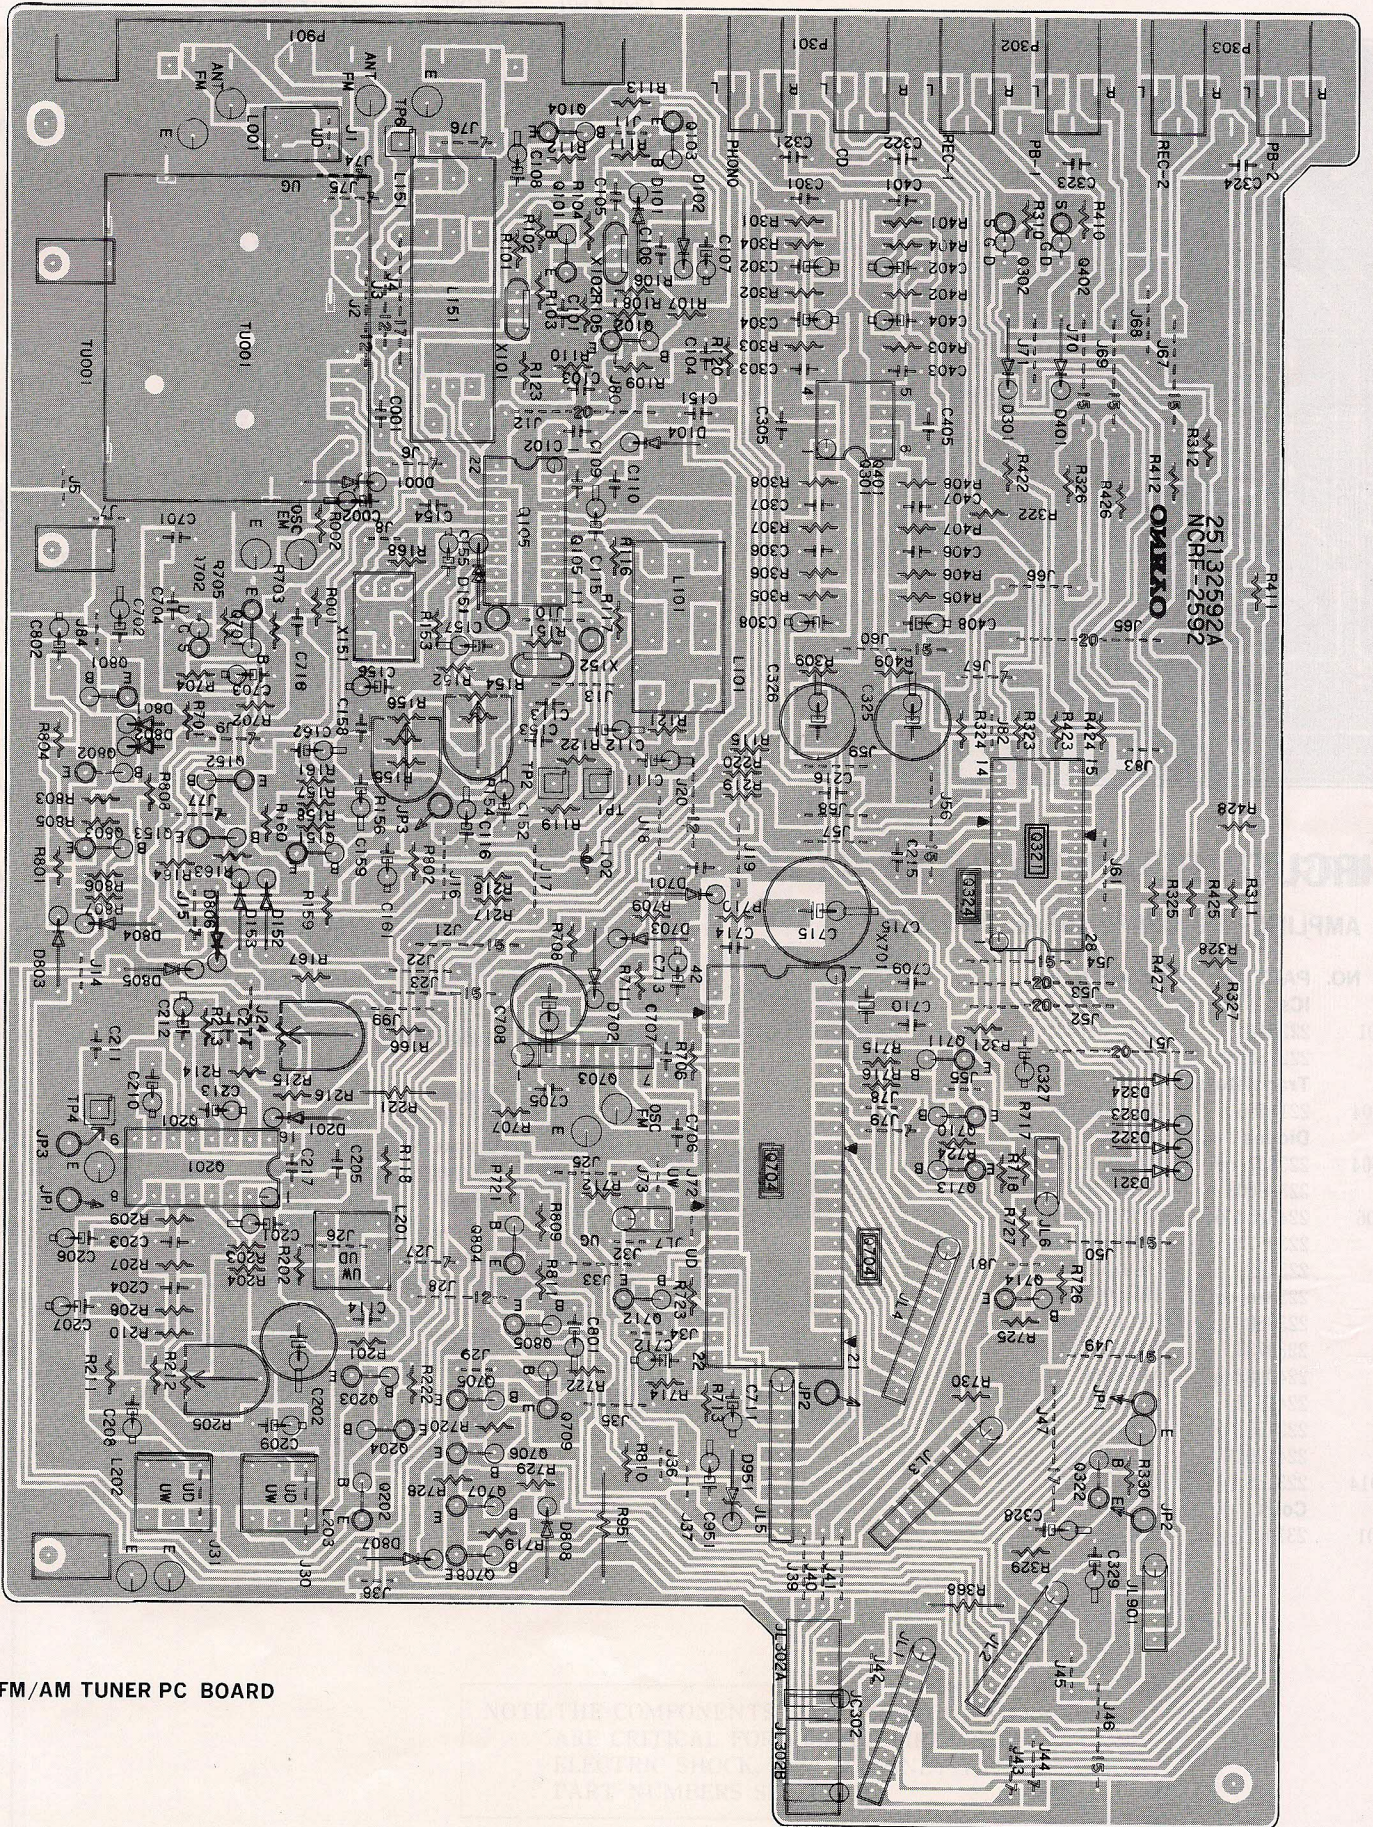


FM/AM TUNER PC BOARD

# PRINTED CIRCUIT BOARD-PARTS LIST

## FM/AM TUNER PC BOARD(NARF-2592-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
TU001	240059	FE416U33	X101	3010070	SFE10.7MS3GYA
	<b>Front end</b>		X102	3010043	SFE10.7MM
Q105	222912	LA-1265	X151	3010075	SFL450B3
Q201	222678	$\mu$ PC1161C3	X152	3010076	BFU450C
Q301,Q401	222502 or	NJM4558DX or		<b>Ceramic filters</b>	
	222534	NJM4559DX	C002	352780339	3.3 $\mu$ F,50V,Elect.
Q321	222923	LC7816	C107	352742209	22 $\mu$ F,16V,Elect.
Q703	222675	TD6104P	C108	352784799	0.47 $\mu$ F,50V,Elect.
Q704	222674	TC9147BP	C111	352741009	10 $\mu$ F,16V,Elect.
	<b>Transistors</b>		C112	352780229	2.2 $\mu$ F,50V,Elect.
Q101	2211722 or	2SC1923(R) or	C116	352782299	0.22 $\mu$ F,50V,Elect.
	2211723	2SC1923(O)	C152,C155	352741009	10 $\mu$ F,16V,Elect.
Q102	2210746	2SC945A(P)	C156	352750479	4.7 $\mu$ F,25V,Elect.
Q103,Q104	2211255,	2SC1815(GR)	C157	352741009	10 $\mu$ F,16V,Elect.
Q152	2210746 or	2SC945A(P) or	C159	352780109	1 $\mu$ F,50V,Elect.
	2212485	JC501(Q)	C161	352780229	2.2 $\mu$ F,50V,Elect.
Q151,Q153	2211256	2SC1815(BL)	C162	352721019	100 $\mu$ F, 6.3V,Elect.
Q202,Q203	2212794,	2SD1468(R),	C201	352750479	4.7 $\mu$ F,25V,Elect.
	2211705 or	2SD655(E) or	C202	352744719	470 $\mu$ F,16V,Elect.
	2211706	2SD655(F)	C206,C207	352741009	10 $\mu$ F,16V,Elect.
Q204,Q322	2211455,	2SA1015(GR),	C208,C209	352780109	1 $\mu$ F,50V,Elect.
	2210803 or	2SA733(P) or	C210	352782299	0.22 $\mu$ F,50V,Elect.
	2212495	JA101(Q)	C212	352780339	3.3 $\mu$ F,50V,Elect.
Q302,Q402	2211945	2SK246(GR)	C213	352780109	1 $\mu$ F,50V,Elect.
Q701	2211255	2SC1815(GR)	C214	370134714	470pF $\pm$ 5%,100V,APS
Q702	2212294 or	2SK108(D) or	C302	352780229	2.2 $\mu$ F,50V,Elect.
	2211293	2SK68(M)	C304	352721019	100 $\mu$ F, 6.3V,Elect.
Q705,Q707	2211255,	2SC1815(GR),	C308	352780229	2.2 $\mu$ F,50V,Elect.
Q709-Q711	2210746 or	2SC945A(P) or	C325,C326	352742219	220 $\mu$ F,16V,Elect.
Q801-Q805	2212485	JC501(Q)	C327	352784799	0.47 $\mu$ F,50V,Elect.
Q706,Q708	2211256	2SC1815(BL)	C329	352750479	4.7 $\mu$ F,25V,Elect.
Q712,Q713	2211255,	2SC1815(GR),	C402	352780229	2.2 $\mu$ F,50V,Elect.
	2210746 or	2SC945A(P) or	C404	352721019	100 $\mu$ F, 6.3V,Elect.
	2212485	JC501(Q)	C408	352780229	2.2 $\mu$ F,50V,Elect.
Q714	2211455,	2SA1015(GR),	C702	352741009	10 $\mu$ F,16V,Elect.
	2210803 or	2SA733(P) or	C703	395160107	1 $\mu$ F,35V,Tantalum
	2212495	JA101(Q)	C708	352734709	47 $\mu$ F,10V,Elect.
	<b>Diodes</b>		C711	352780109	1 $\mu$ F,50V,Elect.
D101,D102	223132	1K60	C712	352780229	2.2 $\mu$ F,50V,Elect.
D104,D152	223150,	US1040,	C713	352780479	0.47 $\mu$ F,50V,Elect.
D153,D201	223124 or	1S2473 or	C715	3020017,	0.022F,5V,
D301,D401	223145	1S2076TD		3000050 or	0.047F,5.5V or
D321-D324	223150,	US1040,		3000051	0.047F,5.5V,Super
D701-D703	223124 or	1S2473 or	C801,C802	352741009	10 $\mu$ F,16V,Elect.
D803-D808	223145	1S2076TD	C951	352741009	10 $\mu$ F,16V,Elect.
D801,D802	223155 or	1SS138 or		<b>Resistors</b>	
	223163	1SS133	R154	5215045	N08HR10KBC,Semi-fixed
D951	2243152 or	MTZ5.6B or	R156	5215062	N08HR30KBC,Semi-fixed
	2239472	RD5.6EB2	R205	5215049	N08HR500KBC,Semi-fixed
	<b>Coils</b>		R215	5215044	N08HR5KBC,Semi-fixed
L001	233312	NMA-3051	R951	441521114	110ohm,1/2W,Metal oxide film
L102	233105	NCH-1005		<b>Socket</b>	
L201	233236	NMC-6027		25050273	NSCT-9P101
L202,L203	233291	NMC-5039		<b>Terminals</b>	
	<b>Transformer</b>		P301-P303	25045171	NPJ-4PDBL-65,Input/Output
L101	233351	NFIF-4056	P901	25060087	NTM-2PDMN31,Antenna
	<b>RF block</b>			<b>Bracket</b>	
L151	232128	NMRF-7043		27141059	Ground
	<b>X'tal</b>				
X701	3010073	XTL-7.2M			

PRINTED CIRCUIT BOARD VIEW FROM BOTTOM SIDE

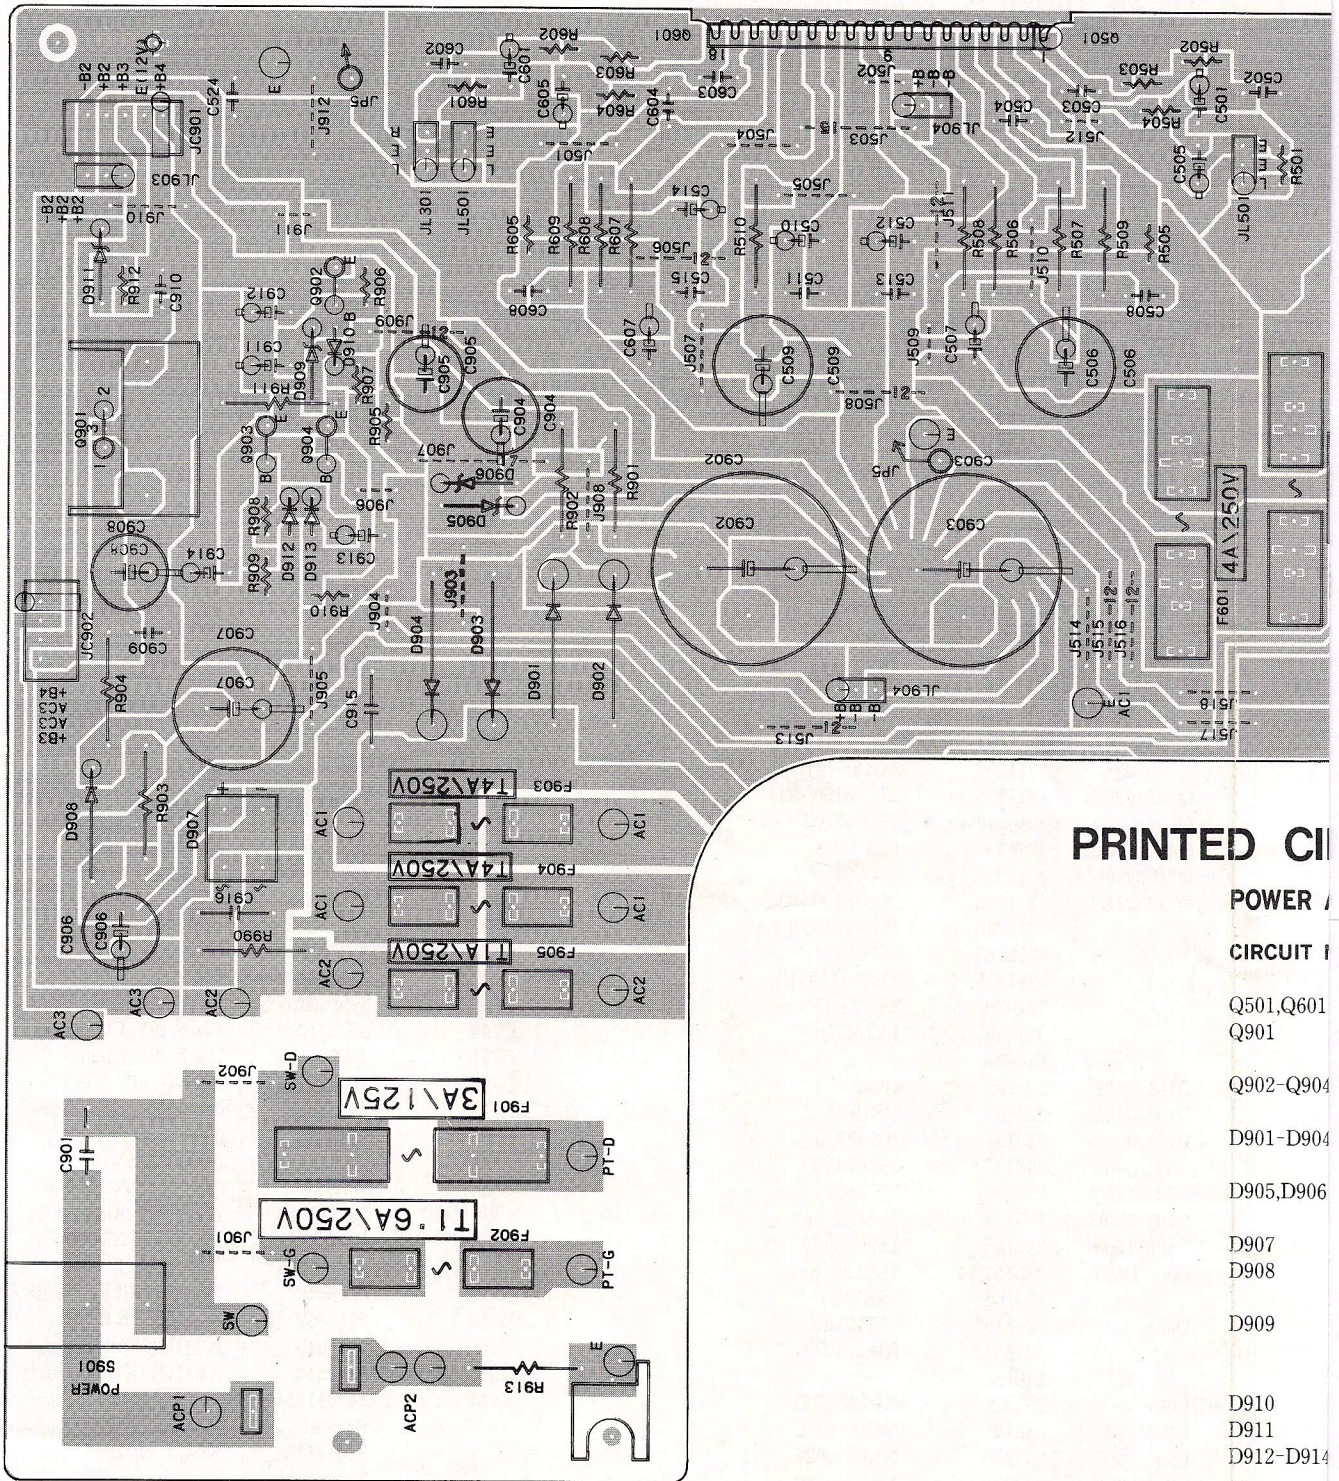


PRINTED CIRCUIT BOARD

POWER /

CIRCUIT I

- Q501, Q601
- Q901
- Q902-Q904
- D901-D904
- D905, D906
- D907
- D908
- D909
- D910
- D911
- D912-D914
- L501, L601

NOTE: THE COMPONENTS IDENTIFIED BY MARK  $\Delta$  ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBERS SPECIFIED.

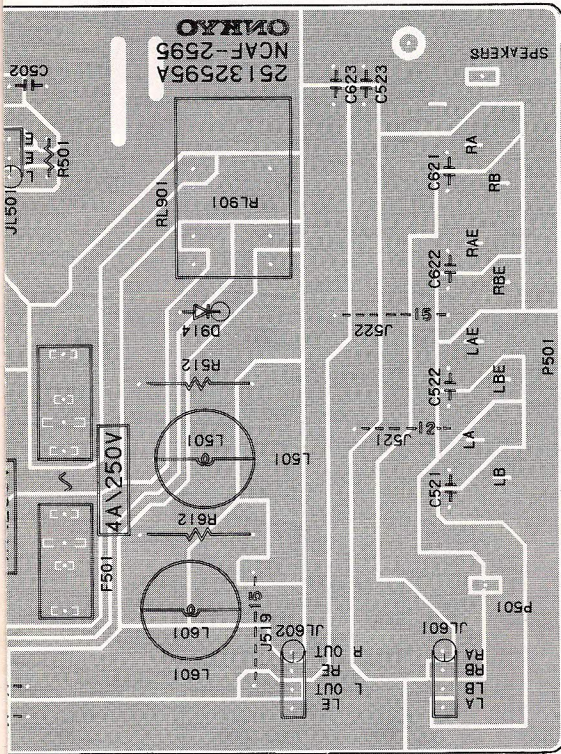

## CIRCUIT BOARD-PARTS LIST


### POWER AMPLIFIER PC BOARD (NAAF-2595-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>ICs</b>		
Q501,Q601	222044	STK-4151V
Q901	222780122	78M12
<b>Transistors</b>		
Q902-Q904	2211255	2SC1815(GR)
<b>Diodes</b>		
D901-D904	223897 or 22380003	P3000DL or 1N5402F
D905,D906	2243252 or 2239672	MTZ15B or RD15E-B2
D907	223892	DF02M
D908	223896 or 223880	1N4003F or GP101N4003
D909	2239733, 2243283 or 2241212	RD20E-B3, MTZ20C or GZA20Y
D910	223155	1SS138
D911	2241291	RD3.3E-B1
D912-D914	223155	1SS138
<b>Coils</b>		
L501,L601	231001	S-1.3B

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Capacitors</b>		
C501,C601	352780229	2.2 $\mu$ F,50V,Elect.
C505,C605	352731019	100 $\mu$ F,10V,Elect.
C506	352782219	220 $\mu$ F,50V,Elect.
C507,C607	354764709	47 $\mu$ F,35V,Elect.
C509	352782219	220 $\mu$ F,50V,Elect.
C510	352781009	10 $\mu$ F,50V,Elect.
C512,C514	352781009	10 $\mu$ F,50V,Elect.
C901	3500065A	$\Delta$ DE7150FZ103PAC400V/125V,IS
C902,C903	3504171	6,800 $\mu$ F,40V,Elect.
C904,C905	354744719	470 $\mu$ F,16V,Elect.
C906	352761019	100 $\mu$ F,35V,Elect.
C907	352752229	2,200 $\mu$ F,25V,Elect.
C908	352751019	100 $\mu$ F,25V,Elect.
C911	352780109	1 $\mu$ F,50V,Elect.
C912	352751009	10 $\mu$ F,25V,Elect.
C913	352753309	33 $\mu$ F,25V,Elect.
C914	352780339	3.3 $\mu$ F,50V,Elect.
<b>Resistors</b>		
R506	441521014	100ohm,1/2W,Metal oxide film
R507,R607	441523324	3.3kohm,1/2W,Metal oxide film
R508,R608	441523324	3.3kohm,1/2W,Metal oxide film
R509,R609	441520474	4.7ohm,1/2W,Metal oxide film
R510	441521014	100ohm,1/2W,Metal oxide film
R512,R612	441520474	4.7ohm,1/2W,Metal oxide film
R901,R902	441628214	820ohm,1W,Metal oxide film
R903	441621024	1kohm,1W,Metal oxide film
R904	441521204	12ohm,1/2W,Metal oxide film
R911	441522704	27ohm,1/2W,Metal oxide film
<b>Relay</b>		
RL901	25065108	NRL-2P3A-DC24-05
<b>Switch</b>		
S901	25035398	$\Delta$ NPS-111-L362P,Power
<b>Terminal</b>		
P501	25060094	NTM-8P-DML-35,Speaker
<b>Fuseholders</b>		
25050065		$\Delta$ YSH403T
<b>Sockets</b>		
25050269		NSCT-4P-97
25050270		NSCT-6P-98
<b>Radiator</b>		
27160176		RAD-56
<b>Screw</b>		
82143006		3P+6F(BC),Pan head screw
<b>Brackets</b>		
25060092		NTM-1S33
<b>Label</b>		
29360405		T2.5A/250V,Fuse rating
<b>Fuses</b>		
F902	252073 or 252073CC	$\Delta$ 1.6A-SE-EAK,Primary
F903,F904	252077	$\Delta$ 4A-SE-EAK,Secondary
F905	252070	$\Delta$ 1A-SE-EAK,Secondary
F501,F601	252075	$\Delta$ 2.5A-SE-EAK,Speaker






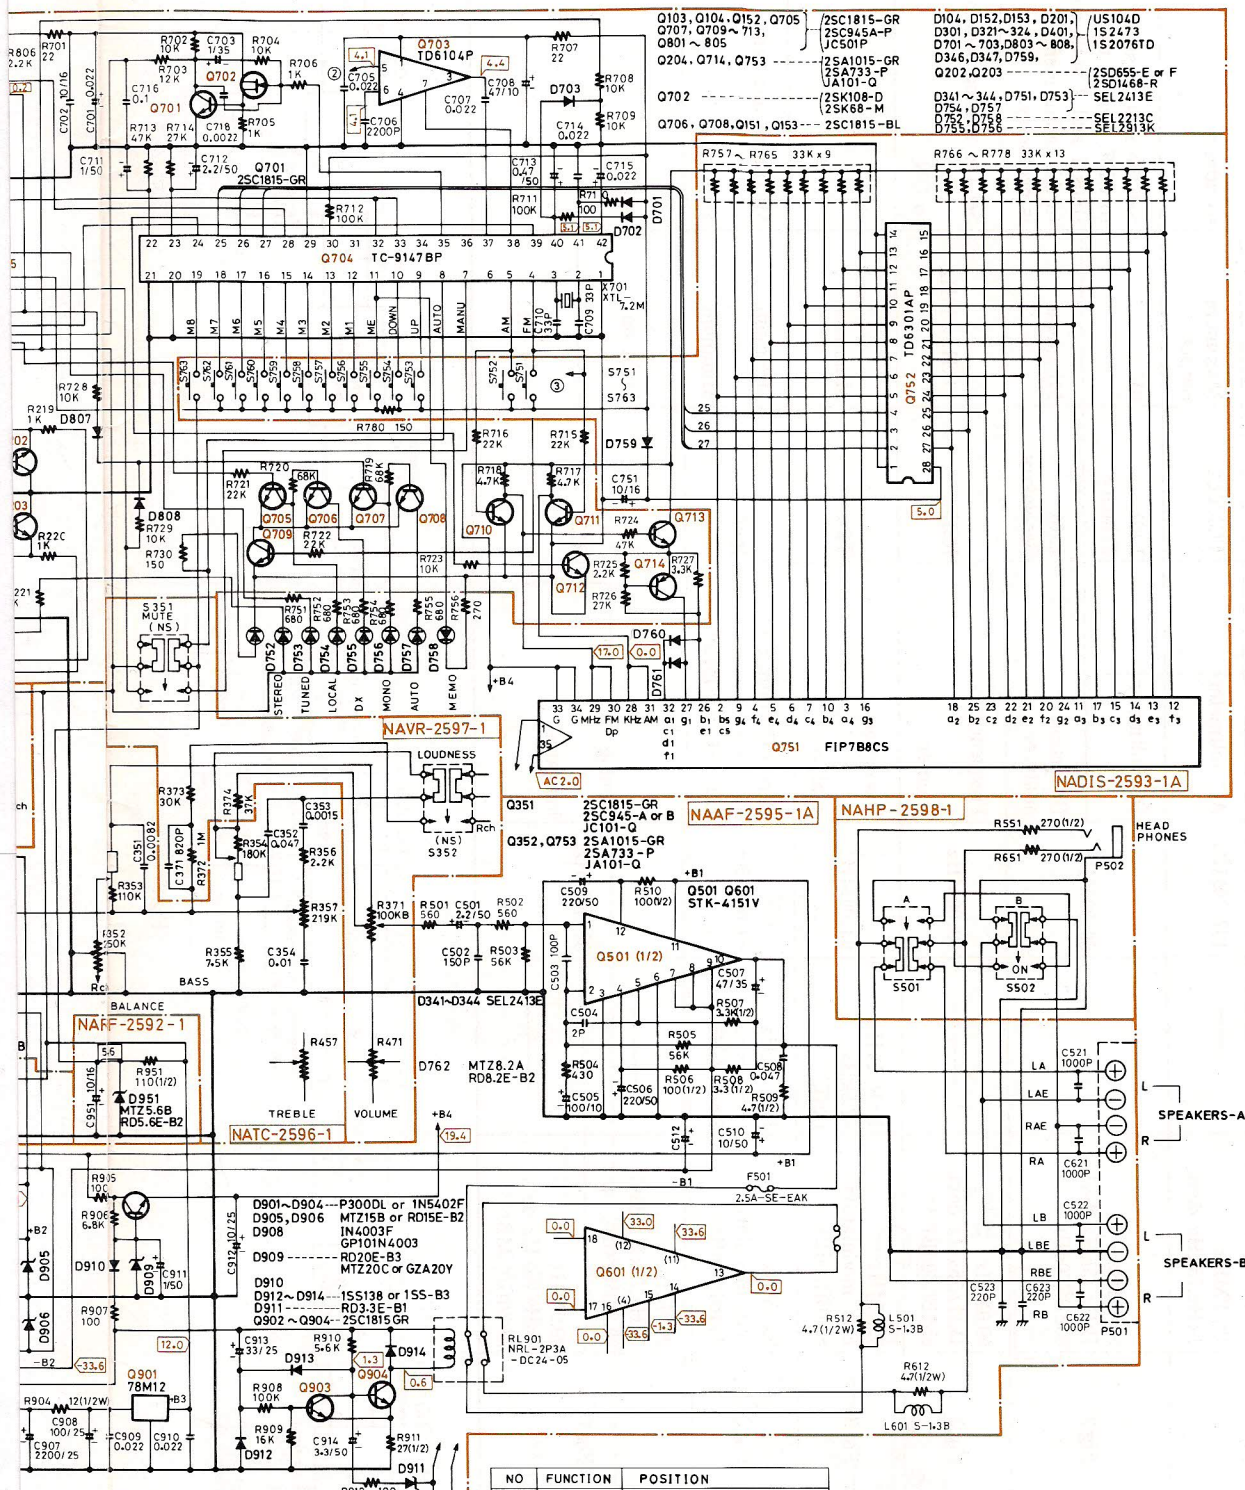

NO	FUNCTION	POSITION
S901	POWER	ON OFF
S321	SELECTOR	TUNER PH CD T1 T2
S352	LOUDNESS	ON OFF
S351	MUTO AUTO	ON / AUTO OFF / MONO

NOTES  
 • ALL RESISTORS ARE IN OHMS 1/4WATT AND 1/2WATTS UNLESS OTHERWISE NOTED.  
 • ALL CAPACITORS ARE IN JUF 50VW UNLESS OTHERWISE NOTED.  
 • ELECTROLYTIC CAPACITOR (-) ARE IN JUF/WV  
 • VOLTAGE (MEASURED WITH V.T.V.M.) 300V INPUT SIGNAL  
 • THE COMPONENTS IDENTIFIED BY MARK  $\Delta$  ARE CRITICAL FOR SAFETY.  
 • REPLACE ONLY WITH PART NUMBER SPECIFIED.




# ADJUSTMENT PROCEDURES


## FM section

Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuning frequency	Output indicator	Adjustment point	Adjust for	Remarks
Front end	1	Fig.1	————	————	88.00MHz	Digital DC voltmeter	T1(L5)	1.5V±0.4V	Usually not necessary to adjust.
	2		107.9MHz 1kHz,75kHz devi.	————	107.90MHz	AC voltmeter	TC1,TC2	Maximum output	
I F	1	Fig.2	99.0MHz 1kHz,75kHz devi. 65dBf(60dB)	————	99.00MHz	DC voltmeter	L101 Primary	0V	Set the muting switch to OFF. Repeat the steps 1 and 2 until no further adjustment is necessary.
	2		Distortion analyzer	L101 Secondary		Minimum			
V C O		Fig.3	99.0MHz 1kHz,75kHz devi. 65dBf(60dB)	————	99.00MHz	Frequency counter	R215	19kHz±10Hz	Set the muting switch to ON.
Stereo distortion		Fig.3	99.0MHz Ext. modulation 65dBf(60dB)	L+R 1kHz 67.5kHz devi.	99.00MHz	Distortion analyzer	T2	Minimum	
Stereo separation	1	Fig.3	99.0MHz Ext. modulation 65dBf(60dB)	Lch. 1kHz	99.00MHz	Rch. AC voltmeter	R205	Minimum	Maximum and same separation
	2			Rch. 1kHz		Lch. AC voltmeter		Minimum	
Tuning indicator level	1	Fig.2	99.0MHz 1kHz,75kHz devi. 29.2dBf(24dB)	————	99.00MHz	Tuning indicator	R156	Light on	
	2		99.0MHz 1kHz,75kHz devi. 28.2dBf(23dB)	————				Light off	


-19-

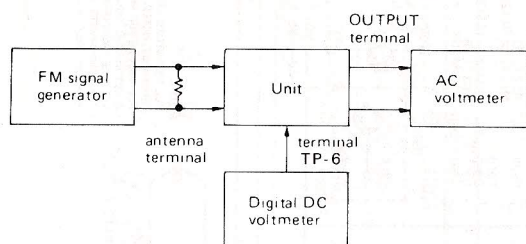

&lt;Fig.1&gt;

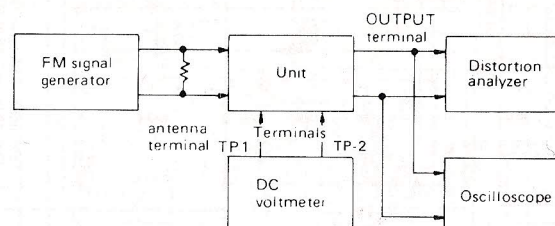


&lt;Fig.2&gt;

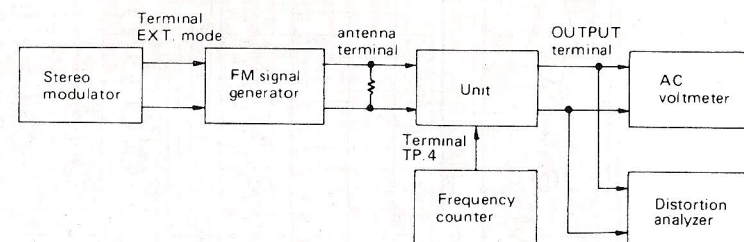


&lt;Fig.3&gt;

SCHEMATIC DIAGRAM

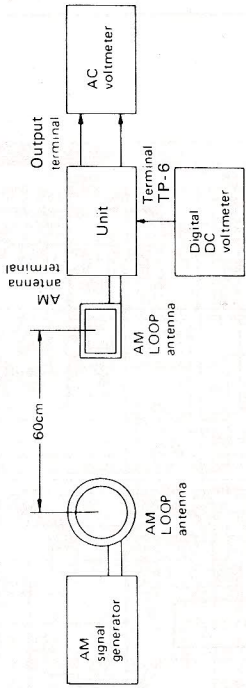

AM section		AM SG output	Tuning Frequency	Output indicator	Adjustment point	Adjust for	Remarks
1		—	522kHz	Digital DC voltmeter	L151 OSC	1.2V ± 0.1V	Usually not necessary to adjust.
2	603kHz, 60dB/m 400Hz 30% mod.	603kHz	A C voltmeter	L151 R F	Maximum		Repeat the steps 2 and 3 until no further adjustment is necessary.
3	1404kHz, 60dB/m 400Hz 30% mod.	1404kHz		L151 T C	Maximum		
4	999kHz, 30dB/m 400Hz 30% mod.	999kHz	A C voltmeter	X151	Maximum		
5	999kHz, 30dB/m 400Hz 30% mod.	999kHz	TUNED indicator	R154	Light on		

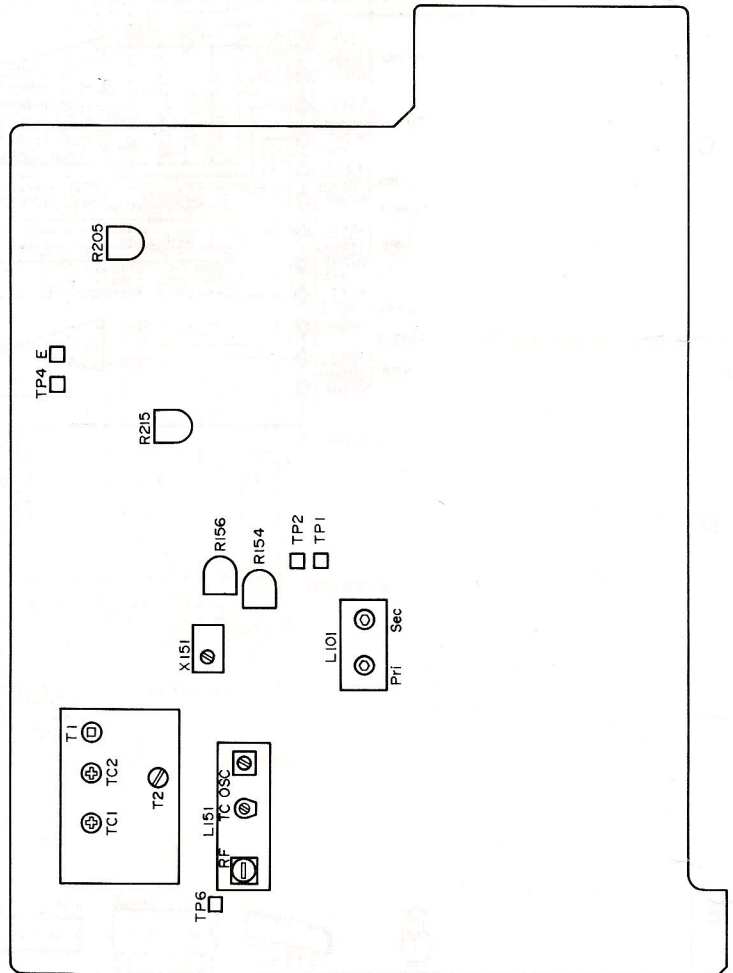

# SERVICE PROCEDURES



## 1.Replacing the fuses

For continued protection against fire hazard,replace only with same type and same rating fuse.


Circuit no.	Part no.	Description
F501,F601	252075	2.5A-SE-EAK,Speaker protection
F902	252073	1.6A-SE-EAK,Primary
F903,F904	252077	4A-SE-EAK,Secondary
F905	252070	1A-SE-EAK,Secondary

## 2.Memroy preservation

This unit does not require memory preservation batteries. A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged. The unit must be plugged in and the power switch turned on and off once in order to charge the back-up system. Note that since this is not a permanent memory,the power switch must be turned on and off a few times each month to keep the back-up system operative. The period of time during which memory contents are preserved after power has last been turned off varies depending on climate and placement of the unit. On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shorter when the unit is exposed to very high humidity or used in an area with an extremely humid climate.



# PACKING VIEW

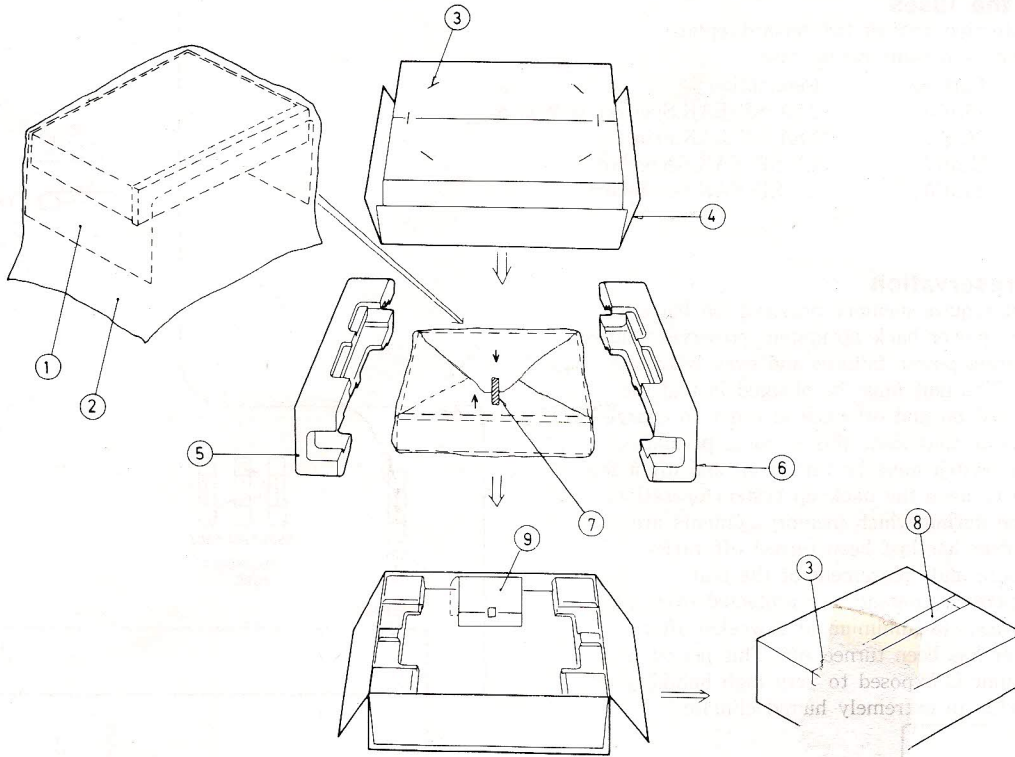

REF.NO.	PART NO.	DESCRIPTION
1	29095012-1	500 × 800mm, Protection sheet <B>
2	29100036A	550 × 850mm, Poly-vinyl bag
3	282301	Sealing hook
4	29051525	Master carton box <S>
	29051526	Master carton box <B>
5	29090690C	Pad R
6	29090691B	Pad L
7	29110032	W=15mm, Adhesive tape
8	260012	W=50mm, Damplon tape
9	Accessory bag ass'y	
	292092	FM antenna
	29341153	Instruction manual
	232119	NMA-3052, AM loop antenna
	29365020	Warranty card
	29100006A	250 × 350mm, Poly-vinyl bag

NOTE: <B>: Only black model  
<S>: Only silver model

## ONKYO CORPORATION

International Division: No 24 Mori Bldg., 23-5, 3-chome, Nishi-Shinbashi, Minato-ku, Tokyo, Japan  
Telex: 2423551 ONKYO J. Phone: 03-432-6981

## ONKYO DEUTSCHLAND GMBH, ELECTRONICS

8034 München-Germering Industriestrasse 18, West Germany. Telefon: (089)-84-9320